


Product specification

Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.42 (PeakGain XZ-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & H orizontal	
V . S .W . R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

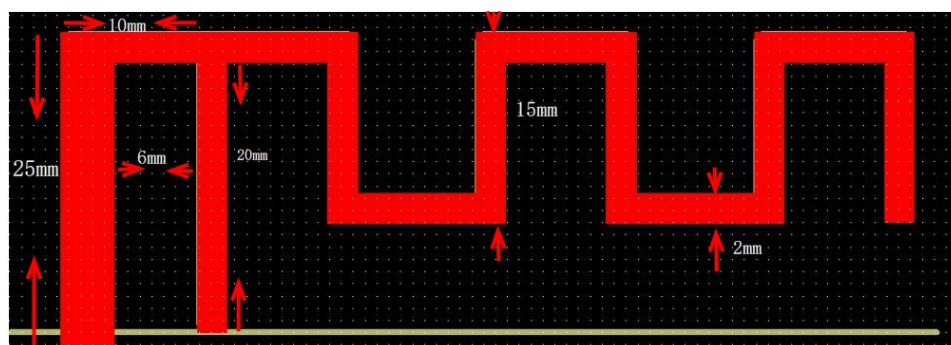

Manufacture's Name : De gao jia ju(Guangzhou) Co.

Address : GUANG DONG GUAGN ZHOU TIAN HE JIAN YE LU HUA CUI JIE

NO.68 101N


Return Loss



The Environment of Antenna Radiation Pattern



2D radiation pattern diagram

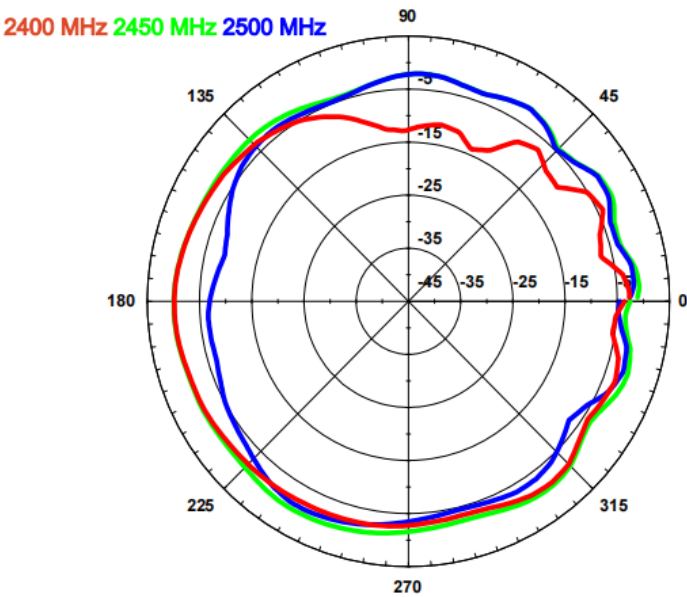

Frequency (MHz)	Gain(dB)
	Max
2400	1.42
2450	1.21
2500	-2.26