



FCC TEST REPORT

FCC ID:2BEPG-BUV7TBLT10A

Product	:	TABLET PC
Model Name	:	BUV7TBLT10A
Brand	:	V7
Report No.	:	PTC24010909601E-FC04
Prepared for		
Ingram Micro Inc.		
3351 Michelson Dr. Suite 100, Irvine, CA 92612, USA		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Ingram Micro Inc.

Address : 3351 Michelson Dr. Suite 100, Irvine, CA 92612, USA

Manufacture's name : Dongguan IProda Technology Co., Ltd.

Address : 2-6 FLOOR,C BUILDING,NO.99,YADI NAN 1 ROAD, SHANHE VILLAGE,QIAOTOU TOWN,DONGGUAN CITY,GUANGDONG PROVINCE ,CHINA

Product name : TABLET PC

Model name : BUV7TBLT10A

Standards : FCC CFR47 Part 15 Section 15.407

Test procedure : ANSI C63.10:2013

Test Date : Jan. 17, 2024 to Feb. 18, 2024

Date of Issue : Feb. 18, 2024

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE.....	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	12
5 CONDUCTED EMISSION.....	13
5.1 E.U.T. OPERATION.....	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION.....	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	18
6.2 TEST SETUP	19
6.3 SPECTRUM ANALYZER SETUP.....	20
6.4 TEST PROCEDURE.....	21
6.5 SUMMARY OF TEST RESULTS	22
6.6 BAND EDGE MEASUREMENTS	76
7 EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	89
7.1 TEST PROCEDURE.....	89
7.2 TEST RESULT	90



8	MAXIMUM CONDUCTED OUTPUT POWER	106
	8.1 TEST PROCEDURE.....	106
	8.2 TEST RESULT	107
9	POWER SPECTRAL DENSITY	108
	9.1 TEST PROCEDURE.....	109
	9.2 TEST RESULT	110
	9.3 ANTENNA REQUIREMENT	125
	9.4 RESULT	125
10	FREQUENCY STABILITY	126
	10.1 TEST PROCEDURE.....	126
	10.2 TEST RESULT	126
11	TEST SETUP	133
12	EUT PHOTOS.....	135



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.407(b)	PASS
Emission and Occupied Bandwidth	15.407(a)(e)	PASS
Maximum Conducted Output Powe	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Frequency stability	15.407 (g)	PASS
Antenna Requirement	15.203	PASS



3 General Information

3.1 General Description of E.U.T.

Product Name	:	TABLET PC
Model Name	:	BUV7TBLT10A
Additional model	:	N/A
Specification	:	802.11a/n HT20/HT40/ac20/ac40/ac80
Operation Frequency	:	5G Wifi:5150-5250 MHz 5.8G Wifi:5725MHz~5850MHz
Number of Channel	:	4 channels for 802.11a/n20/ac20 5150-5250 MHz 5 channels for 802.11a/n20/ac20 5725MHz~5850MHz 2 channels for 802.11n40/ac40 5150-5250 MHz 2 channels for 802.11n40/ac40 5725MHz~5850MHz 1 channels for 802.11 ac80
Type of Modulation	:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11n/a/ac
Antenna installation	:	FPC Antenna
Antenna Gain	:	2.58 dBi
Power supply	:	Adapter: Model: PS10UA050K2000UU Input: 100-240V~50/60Hz 0.35MAX Output:DC5V/2A Battery Model: PL32105137 3.8V by Rechargeable Li-ion Battery, 7000mAh
Hardware Version	:	N/A
Software Version	:	N/A
Test sample No.	:	PTC24010909601E-1/2, PTC24010909601E-2/2



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 6 Mbps; 802.11n (HT20): MCS0; 802.11ac: MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 a/N20/N40/AC20/AC40

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	46	5230	153	5765
38	5190	48	5240	157	5785
40	5200	149	5745	159	5795
44	5220	151	5755	161	5805
				165	5825

Frequency and Channel list for 802.11 ac80:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775	/	/



The maximum duty cycle as following table:

Test Mode	Duty Cycle(%)
802.11a	100%
802.11n/ac20	100%
802.11n/ac40	100%
802.11ac80	100%

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug.17, 2023	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug.17, 2023	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug.17, 2023	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug.17, 2023	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug. 17,2023	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Aug. 17,2023	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 17,2023	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 17,2023	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug. 17,2023	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 17,2023	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 17,2023	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 17,2023	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 19, 2023	1 Year



Report No.: PTC24010909601E-FC04

Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jul. 19, 2023	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 17, 2023	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 17, 2023	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 17, 2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 17, 2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 17, 2023	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.5 4-102808-NB	0Hz-30MHz	Aug. 16, 2023	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz-6GHz	Mar. 24, 2023	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±3.15dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~18GHz)	±4.74dB
Radiated Emission(18GHz~40GHz)	±3.20dB



Report No.: PTC24010909601E-FC04

4.3 Description of Support Units

Equipment	Model No.	Series No.
N/A	N/A	N/A

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 23.9 °C
Humidity	: 51.4 % RH
Atmospheric Pressure	: 101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

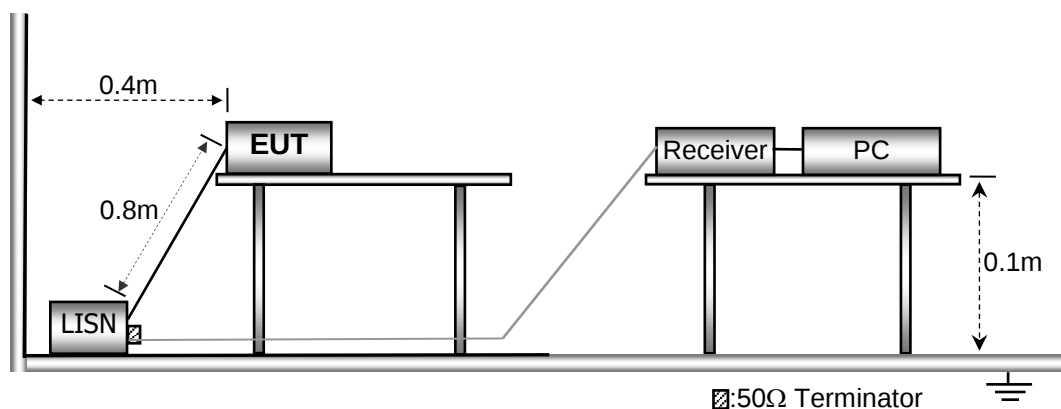

5.3 Test SET-UP (Block Diagram of Configuration)

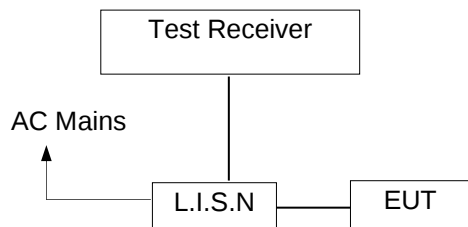

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, TX 5180MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.




Line-AC 120V/60Hz

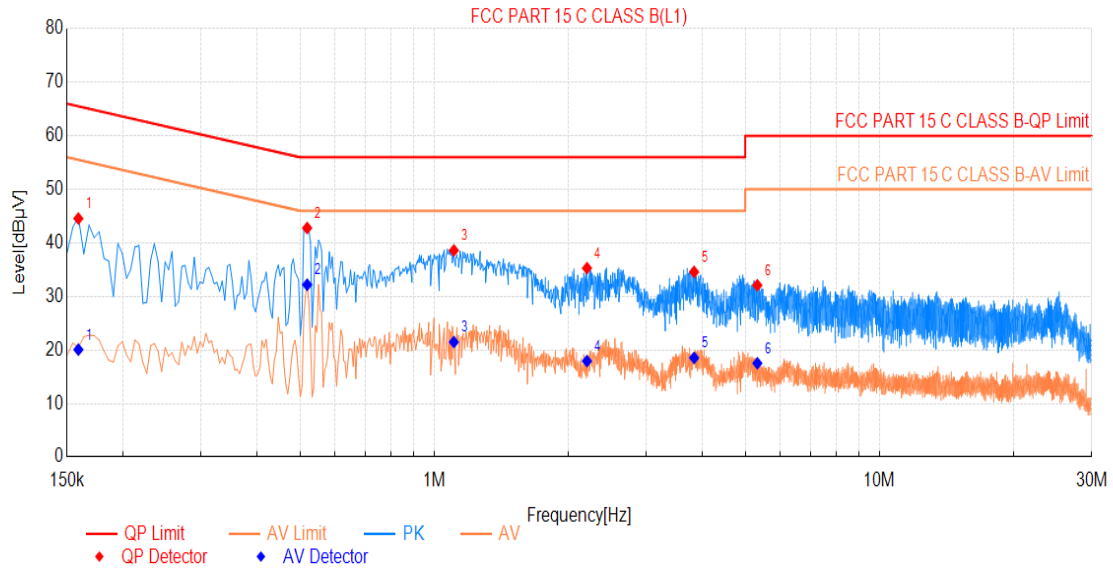

Final Data List								
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.159	44.55	65.52	20.97	20.07	55.52	35.45	PASS
2	0.519	42.78	56.00	13.22	32.18	46.00	13.82	PASS
3	1.1085	38.59	56.00	17.41	21.48	46.00	24.52	PASS
4	2.2065	35.28	56.00	20.72	17.92	46.00	28.08	PASS
5	3.84	34.58	56.00	21.42	18.52	46.00	27.48	PASS
6	5.325	32.08	60.00	27.92	17.51	50.00	32.49	PASS

Neutral-AC 120V/60Hz

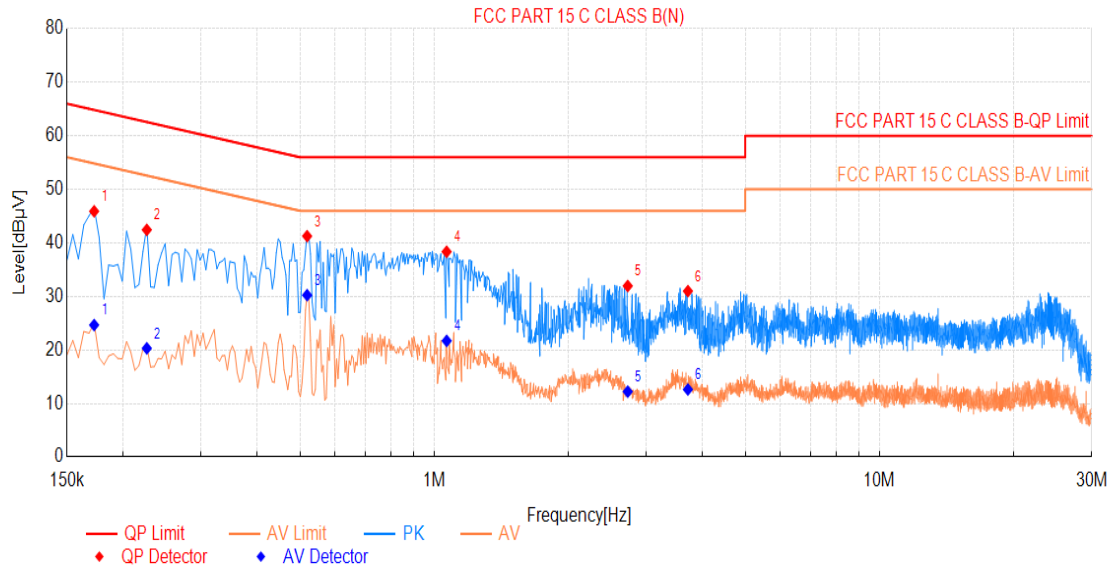

Final Data List								
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1725	45.90	64.84	18.94	24.66	54.84	30.18	PASS
2	0.2265	42.44	62.58	20.14	20.31	52.58	32.27	PASS
3	0.519	41.26	56.00	14.74	30.24	46.00	15.76	PASS
4	1.068	38.35	56.00	17.65	21.71	46.00	24.29	PASS
5	2.724	31.96	56.00	24.04	12.22	46.00	33.78	PASS
6	3.7185	30.99	56.00	25.01	12.62	46.00	33.38	PASS



6 Radiated Spurious Emissions

Test Requirement	:	FCC CFR47 Part 15 Section 15.209 & 15.407(b)
Test Method	:	ANSI C63.10:2013
Test Result	:	PASS
Measurement Distance	:	3m

Limit

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

Further.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits. As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz



As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature:	:	24.5 °C
Humidity:	:	52 % RH
Atmospheric Pressure:	:	101.3kPa
Test Voltage	:	AC 120V 60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

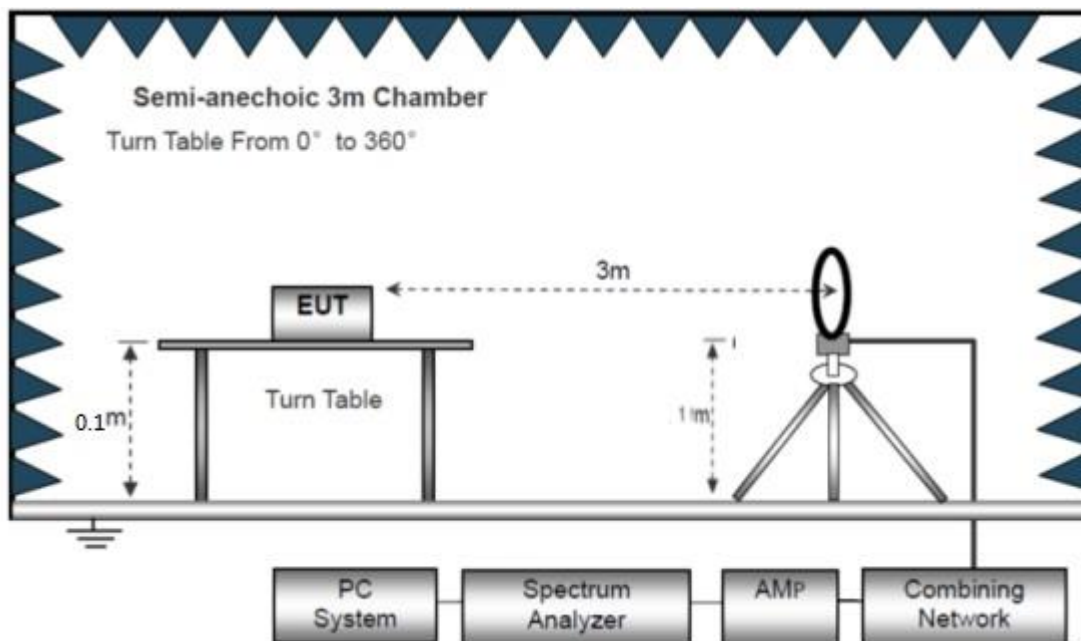

The test setup for emission measurement from 30 MHz to 1 GHz.

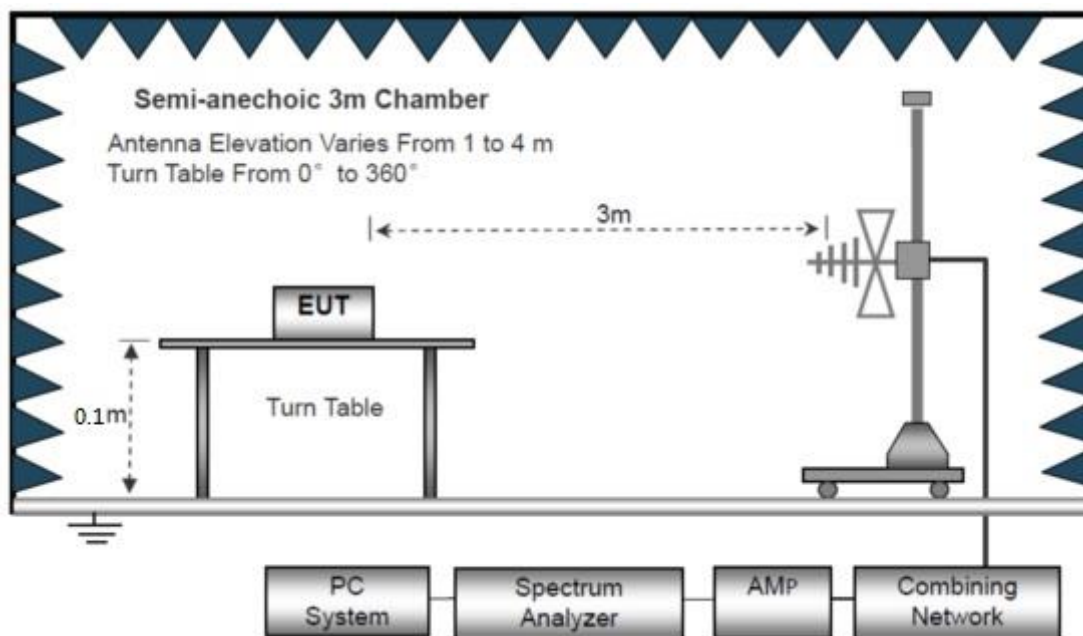

The test setup for emission measurement above 1 GHz

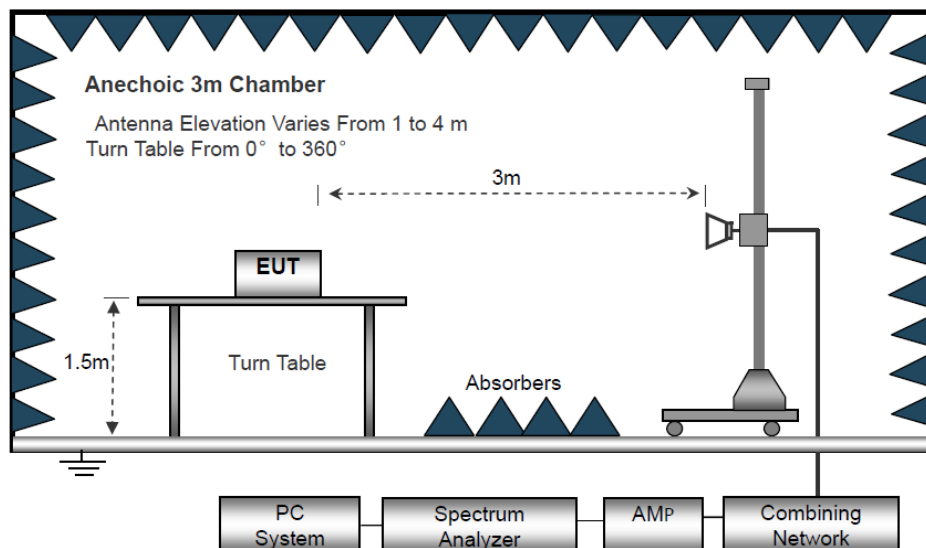

6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11a Channel 36, CH149) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal(CH36)

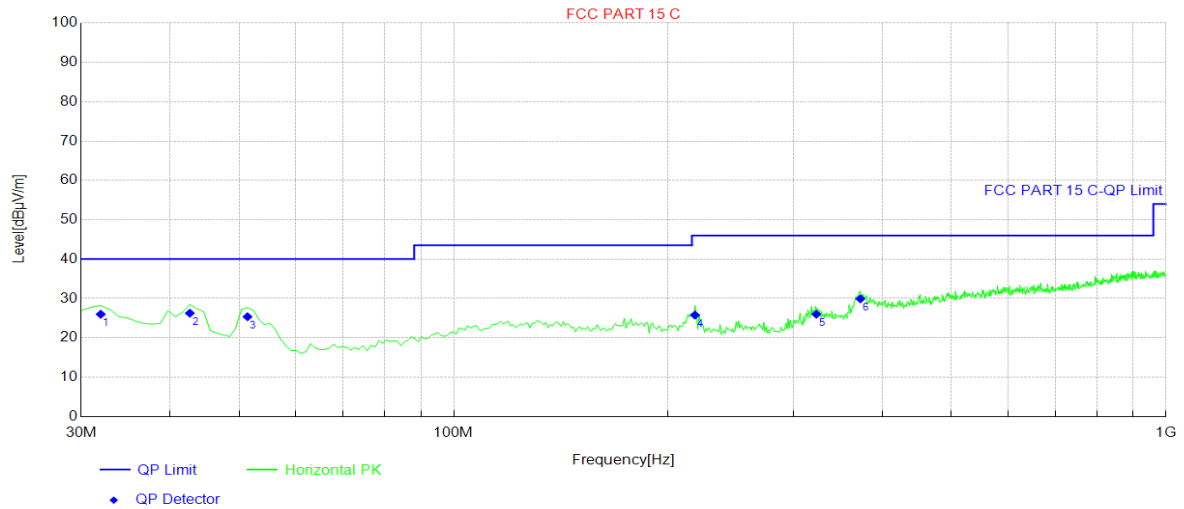


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	31.94	40.05	-14.07	25.98	40.00	14.02	Horizontal	PASS
2	42.61	45.35	-19.09	26.26	40.00	13.74	Horizontal	PASS
3	51.34	47.86	-22.51	25.35	40.00	14.65	Horizontal	PASS
4	218.18	44.96	-19.19	25.77	46.00	20.23	Horizontal	PASS
5	322.94	43.42	-17.43	25.99	46.00	20.01	Horizontal	PASS
6	372.41	44.46	-14.56	29.90	46.00	16.10	Horizontal	PASS

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical (CH36)

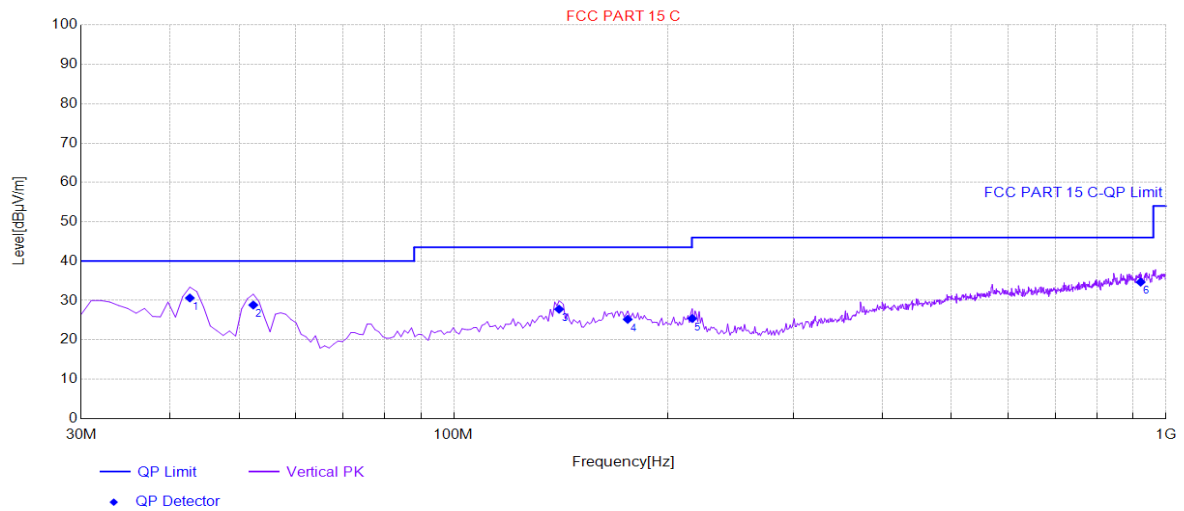

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	42.61	49.72	-19.09	30.63	40.00	9.37	Vertical	PASS
2	52.31	51.54	-22.70	28.84	40.00	11.16	Vertical	PASS
3	140.58	45.57	-17.80	27.77	43.50	15.73	Vertical	PASS
4	175.50	44.64	-19.44	25.20	43.50	18.30	Vertical	PASS
5	216.24	44.63	-19.22	25.41	46.00	20.59	Vertical	PASS
6	921.43	39.91	-5.25	34.66	46.00	11.34	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Note: only the worst case recorded in the report.



Test Frequency: From 1GHz to 40GHz

Pre-scan all test modes

Only the worst case Main test data.

802.11a

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	47.36	35.22	5.36	31.25	56.69	68.2	-11.51	V
15540	42.32	35.96	7.85	30.63	55.50	68.2	-12.70	V
20720	43.23	39.12	8.56	34.95	55.96	68.2	-12.24	V
10360	48.08	34.12	5.36	31.25	56.31	68.2	-11.89	H
15540	42.65	36.52	7.85	30.63	56.39	68.2	-11.81	H
20720	43.08	40.01	8.56	34.95	56.70	68.2	-11.50	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	32.97	35.22	5.36	31.25	42.30	54	-11.70	V
15540	30.42	35.96	7.85	30.63	43.60	54	-10.40	V
20720	27.90	39.12	8.56	34.95	40.63	54	-13.37	V
10360	32.70	34.12	5.36	31.25	40.93	54	-13.07	H
15540	24.48	36.52	7.85	30.63	38.22	54	-15.78	H
20720	27.22	40.01	8.56	34.95	40.84	54	-13.16	H



Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	47.82	35.63	5.36	31.25	57.56	68.2	-10.64	V
15600	43.20	35.91	7.85	30.63	56.33	68.2	-11.87	V
20800	44.10	39.67	8.56	34.95	57.38	68.2	-10.82	V
10400	46.94	34.25	5.36	31.25	55.30	68.2	-12.90	H
15600	41.91	37.02	7.85	30.63	56.15	68.2	-12.05	H
20800	43.28	38.88	8.56	34.95	55.77	68.2	-12.43	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	33.86	35.63	5.36	31.25	43.60	54	-10.40	V
15600	28.99	35.91	7.85	30.63	42.12	54	-11.88	V
20800	29.45	39.67	8.56	34.95	42.73	54	-11.27	V
10400	33.20	34.25	5.36	31.25	41.56	54	-12.44	H
15600	28.79	37.02	7.85	30.63	43.03	54	-10.97	H
20800	29.83	38.88	8.56	34.95	42.32	54	-11.68	H



802.11a

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.62	34.68	5.36	31.25	54.41	68.2	-13.79	V
17520	43.22	36.52	7.85	30.63	56.96	68.2	-11.24	V
20960	44.20	38.77	8.56	34.95	56.58	68.2	-11.62	V
10480	46.97	33.99	5.36	31.25	55.07	68.2	-13.13	H
17520	44.98	36.84	7.85	30.63	59.04	68.2	-9.16	H
20960	46.39	39.93	8.56	34.95	59.93	68.2	-8.27	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	33.37	34.68	5.36	31.25	42.16	54	-11.84	V
17520	28.99	36.52	7.85	30.63	42.73	54	-11.27	V
20960	30.01	38.77	8.56	34.95	42.39	54	-11.61	V
10480	32.02	33.99	5.36	31.25	40.12	54	-13.88	H
17520	26.91	36.84	7.85	30.63	40.97	54	-13.03	H
20960	29.12	39.93	8.56	34.95	42.66	54	-11.34	H



802.11a

Test Mode: 5745					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	47.56	35.26	5.42	31.75	56.49	68.23	-11.74	V
17235	42.50	36.88	7.32	30.96	55.74	68.23	-12.49	V
22980	44.22	39.14	8.85	35.25	56.96	68.23	-11.27	V
11490	49.57	34.21	5.42	31.75	57.45	68.23	-10.78	H
17235	44.21	37.52	7.32	30.96	58.09	68.23	-10.14	H
22980	44.31	39.88	8.85	35.25	57.79	68.23	-10.44	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	32.16	35.26	5.42	31.75	41.09	54	-12.91	V
17235	30.21	36.88	7.32	30.96	43.45	54	-10.55	V
22980	29.77	39.14	8.85	35.25	42.51	54	-11.49	V
11490	31.64	34.21	5.42	31.75	39.52	54	-14.48	H
17235	29.00	37.52	7.32	30.96	42.88	54	-11.12	H
22980	28.98	39.88	8.85	35.25	42.46	54	-11.54	H



802.11a

Test Mode:5785					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	48.54	35.26	5.42	31.75	57.47	68.23	-10.76	V
17355	44.54	36.88	7.32	30.96	57.78	68.23	-10.45	V
23140	45.30	39.14	8.85	35.25	58.04	68.23	-10.19	V
11570	48.60	34.21	5.42	31.75	56.48	68.23	-11.75	H
17355	42.16	37.52	7.32	30.96	56.04	68.23	-12.19	H
23140	43.15	39.88	8.85	35.25	56.63	68.23	-11.60	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	33.02	35.26	5.42	31.75	41.95	54	-12.05	V
17355	29.31	36.88	7.32	30.96	42.55	54	-11.45	V
23140	28.54	39.14	8.85	35.25	41.28	54	-12.72	V
11570	34.77	34.21	5.42	31.75	42.65	54	-11.35	H
17355	29.33	37.52	7.32	30.96	43.21	54	-10.79	H
23140	29.60	39.88	8.85	35.25	43.08	54	-10.92	H



802.11a

Test Mode:5825					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	48.76	35.26	5.42	31.75	57.69	68.23	-10.54	V
17475	44.76	36.88	7.32	30.96	58.00	68.23	-10.23	V
23300	45.45	39.14	8.85	35.25	58.19	68.23	-10.04	V
11650	49.39	34.21	5.42	31.75	57.27	68.23	-10.96	H
17475	44.38	37.52	7.32	30.96	58.26	68.23	-9.97	H
23300	44.95	39.88	8.85	35.25	58.43	68.23	-9.80	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	34.69	34.96	5.42	31.75	43.32	54	-10.68	V
17475	28.79	36.74	7.32	30.96	41.89	54	-12.11	V
23300	30.08	39.14	8.85	35.25	42.82	54	-11.18	V
11650	33.42	34.02	5.42	31.75	41.11	54	-12.89	H
17475	28.75	36.57	7.32	30.96	41.68	54	-12.32	H
23300	28.33	39.88	8.85	35.25	41.81	54	-12.19	H



802.11n20

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	45.55	34.56	5.36	31.25	54.22	68.2	-13.98	V
15540	42.77	36.22	7.85	30.63	56.21	68.2	-11.99	V
20720	44.15	38.97	8.56	34.95	56.73	68.2	-11.47	V
10360	49.11	33.57	5.36	31.25	56.79	68.2	-11.41	H
15540	40.39	36.49	7.85	30.63	54.10	68.2	-14.10	H
20720	41.75	39.92	8.56	34.95	55.28	68.2	-12.92	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	32.34	34.56	5.36	31.25	41.01	54	-12.99	V
15540	29.32	36.22	7.85	30.63	42.76	54	-11.24	V
20720	28.31	38.97	8.56	34.95	40.89	54	-13.11	V
10360	32.20	33.57	5.36	31.25	39.88	54	-14.12	H
15540	26.93	36.49	7.85	30.63	40.64	54	-13.36	H
20720	27.91	39.92	8.56	34.95	41.44	54	-12.56	H



802.11n20

Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	48.34	34.63	5.36	31.25	57.08	68.2	-11.12	V
15600	44.31	36.42	7.85	30.63	57.95	68.2	-10.25	V
20800	45.15	38.81	8.56	34.95	57.57	68.2	-10.63	V
10400	47.93	33.93	5.36	31.25	55.97	68.2	-12.23	H
15600	43.52	36.55	7.85	30.63	57.29	68.2	-10.91	H
20800	43.96	39.94	8.56	34.95	57.51	68.2	-10.69	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	32.93	34.63	5.36	31.25	41.67	54	-12.33	V
15600	28.49	36.42	7.85	30.63	42.13	54	-11.87	V
20800	29.03	38.81	8.56	34.95	41.45	54	-12.55	V
10400	33.16	33.93	5.36	31.25	41.20	54	-12.80	H
15600	28.32	36.55	7.85	30.63	42.09	54	-11.91	H
20800	29.51	39.94	8.56	34.95	43.06	54	-10.94	H



802.11n20

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.69	34.68	5.36	31.25	54.48	68.2	-13.72	V
17520	44.51	36.52	7.85	30.63	58.25	68.2	-9.95	V
20960	43.23	38.77	8.56	34.95	55.61	68.2	-12.59	V
10480	46.82	33.99	5.36	31.25	54.92	68.2	-13.28	H
17520	45.61	36.84	7.85	30.63	59.67	68.2	-8.53	H
20960	43.95	39.93	8.56	34.95	57.49	68.2	-10.71	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	31.53	34.68	5.36	31.25	40.32	54	-13.68	V
17520	27.99	36.52	7.85	30.63	41.73	54	-12.27	V
20960	28.21	38.77	8.56	34.95	40.59	54	-13.41	V
10480	30.85	33.99	5.36	31.25	38.95	54	-15.05	H
17520	27.21	36.84	7.85	30.63	41.27	54	-12.73	H
20960	29.68	39.93	8.56	34.95	43.22	54	-10.78	H



802.11n20

Test Mode: 5745					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	49.63	35.26	5.42	31.75	58.56	68.23	-9.67	V
17235	42.49	36.88	7.32	30.96	55.73	68.23	-12.50	V
22980	42.94	39.14	8.85	35.25	55.68	68.23	-12.55	V
11490	49.48	34.21	5.42	31.75	57.36	68.23	-10.87	H
17235	44.12	37.52	7.32	30.96	58.00	68.23	-10.23	H
22980	44.96	39.88	8.85	35.25	58.44	68.23	-9.79	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	33.44	35.26	5.42	31.75	42.37	54	-11.63	V
17235	29.67	36.88	7.32	30.96	42.91	54	-11.09	V
22980	29.81	39.14	8.85	35.25	42.55	54	-11.45	V
11490	33.17	34.21	5.42	31.75	41.05	54	-12.95	H
17235	28.50	37.52	7.32	30.96	42.38	54	-11.62	H
22980	29.36	39.88	8.85	35.25	42.84	54	-11.16	H



802.11n20

Test Mode:5785					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	45.64	35.26	5.42	31.75	54.57	68.23	-13.66	V
17355	43.84	36.88	7.32	30.96	57.08	68.23	-11.15	V
23140	44.92	39.14	8.85	35.25	57.66	68.23	-10.57	V
11570	48.17	34.21	5.42	31.75	56.05	68.23	-12.18	H
17355	42.94	37.52	7.32	30.96	56.82	68.23	-11.41	H
23140	41.93	39.88	8.85	35.25	55.41	68.23	-12.82	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	33.57	35.26	5.42	31.75	42.50	54	-11.50	V
17355	30.15	36.88	7.32	30.96	43.39	54	-10.61	V
23140	29.41	39.14	8.85	35.25	42.15	54	-11.85	V
11570	33.88	34.21	5.42	31.75	41.76	54	-12.24	H
17355	30.02	37.52	7.32	30.96	43.90	54	-10.10	H
23140	29.26	39.88	8.85	35.25	42.74	54	-11.26	H



802.11n20

Test Mode:5825					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	47.74	35.26	5.42	31.75	56.67	68.23	-11.56	V
17475	44.71	36.88	7.32	30.96	57.95	68.23	-10.28	V
23300	45.33	39.14	8.85	35.25	58.07	68.23	-10.16	V
11650	49.05	34.21	5.42	31.75	56.93	68.23	-11.30	H
17475	44.36	37.52	7.32	30.96	58.24	68.23	-9.99	H
23300	45.62	39.88	8.85	35.25	59.10	68.23	-9.13	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	35.48	35.26	5.42	31.75	44.41	54	-9.59	V
17475	28.85	36.88	7.32	30.96	42.09	54	-11.91	V
23300	27.93	39.14	8.85	35.25	40.67	54	-13.33	V
11650	33.28	34.21	5.42	31.75	41.16	54	-12.84	H
17475	28.70	37.52	7.32	30.96	42.58	54	-11.42	H
23300	29.14	39.88	8.85	35.25	42.62	54	-11.38	H



802.11ac20

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	47.43	35.22	5.36	31.25	56.76	68.2	-11.44	V
15540	42.39	35.96	7.85	30.63	55.57	68.2	-12.63	V
20720	43.43	39.12	8.56	34.95	56.16	68.2	-12.04	V
10360	48.49	34.12	5.36	31.25	56.72	68.2	-11.48	H
15540	42.35	36.52	7.85	30.63	56.09	68.2	-12.11	H
20720	42.90	40.01	8.56	34.95	56.52	68.2	-11.68	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	33.26	35.22	5.36	31.25	42.59	54	-11.41	V
15540	30.40	35.96	7.85	30.63	43.58	54	-10.42	V
20720	27.80	39.12	8.56	34.95	40.53	54	-13.47	V
10360	32.81	34.12	5.36	31.25	41.04	54	-12.96	H
15540	24.96	36.52	7.85	30.63	38.70	54	-15.30	H
20720	26.98	40.01	8.56	34.95	40.60	54	-13.40	H



802.11ac20

Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	47.77	35.63	5.36	31.25	57.51	68.2	-10.69	V
15600	43.16	35.91	7.85	30.63	56.29	68.2	-11.91	V
20800	44.26	39.67	8.56	34.95	57.54	68.2	-10.66	V
10400	46.71	34.25	5.36	31.25	55.07	68.2	-13.13	H
15600	42.27	37.02	7.85	30.63	56.51	68.2	-11.69	H
20800	43.33	38.88	8.56	34.95	55.82	68.2	-12.38	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	33.60	35.63	5.36	31.25	43.34	54	-10.66	V
15600	28.88	35.91	7.85	30.63	42.01	54	-11.99	V
20800	29.68	39.67	8.56	34.95	42.96	54	-11.04	V
10400	32.96	34.25	5.36	31.25	41.32	54	-12.68	H
15600	28.94	37.02	7.85	30.63	43.18	54	-10.82	H
20800	30.09	38.88	8.56	34.95	42.58	54	-11.42	H



802.11ac20

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.70	34.68	5.36	31.25	54.49	68.2	-13.71	V
17520	43.14	36.52	7.85	30.63	56.88	68.2	-11.32	V
20960	44.00	38.77	8.56	34.95	56.38	68.2	-11.82	V
10480	47.06	33.99	5.36	31.25	55.16	68.2	-13.04	H
17520	45.17	36.84	7.85	30.63	59.23	68.2	-8.97	H
20960	46.12	39.93	8.56	34.95	59.66	68.2	-8.54	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	33.26	34.68	5.36	31.25	42.05	54	-11.95	V
17520	28.68	36.52	7.85	30.63	42.42	54	-11.58	V
20960	30.28	38.77	8.56	34.95	42.66	54	-11.34	V
10480	32.07	33.99	5.36	31.25	40.17	54	-13.83	H
17520	26.97	36.84	7.85	30.63	41.03	54	-12.97	H
20960	29.46	39.93	8.56	34.95	43.00	54	-11.00	H



802.11ac20

Test Mode: 5745					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	47.90	35.26	5.42	31.75	56.83	68.23	-11.40	V
17235	42.19	36.88	7.32	30.96	55.43	68.23	-12.80	V
22980	43.97	39.14	8.85	35.25	56.71	68.23	-11.52	V
11490	49.62	34.21	5.42	31.75	57.50	68.23	-10.73	H
17235	43.96	37.52	7.32	30.96	57.84	68.23	-10.39	H
22980	44.58	39.88	8.85	35.25	58.06	68.23	-10.17	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	32.01	35.26	5.42	31.75	40.94	54	-13.06	V
17235	30.13	36.88	7.32	30.96	43.37	54	-10.63	V
22980	29.74	39.14	8.85	35.25	42.48	54	-11.52	V
11490	31.78	34.21	5.42	31.75	39.66	54	-14.34	H
17235	28.56	37.52	7.32	30.96	42.44	54	-11.56	H
22980	29.20	39.88	8.85	35.25	42.68	54	-11.32	H



802.11ac20

Test Mode:5785					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	48.43	35.26	5.42	31.75	57.36	68.23	-10.87	V
17355	44.42	36.88	7.32	30.96	57.66	68.23	-10.57	V
23140	45.05	39.14	8.85	35.25	57.79	68.23	-10.44	V
11570	48.53	34.21	5.42	31.75	56.41	68.23	-11.82	H
17355	42.55	37.52	7.32	30.96	56.43	68.23	-11.80	H
23140	43.57	39.88	8.85	35.25	57.05	68.23	-11.18	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	33.34	35.26	5.42	31.75	42.27	54	-11.73	V
17355	29.27	36.88	7.32	30.96	42.51	54	-11.49	V
23140	28.35	39.14	8.85	35.25	41.09	54	-12.91	V
11570	34.70	34.21	5.42	31.75	42.58	54	-11.42	H
17355	29.55	37.52	7.32	30.96	43.43	54	-10.57	H
23140	29.38	39.88	8.85	35.25	42.86	54	-11.14	H



802.11ac20

Test Mode:5825					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	48.69	35.26	5.42	31.75	57.62	68.23	-10.61	V
17475	44.31	36.88	7.32	30.96	57.55	68.23	-10.68	V
23300	45.34	39.14	8.85	35.25	58.08	68.23	-10.15	V
11650	49.11	34.21	5.42	31.75	56.99	68.23	-11.24	H
17475	44.49	37.52	7.32	30.96	58.37	68.23	-9.86	H
23300	45.17	39.88	8.85	35.25	58.65	68.23	-9.58	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	34.50	35.26	5.42	31.75	43.43	54	-10.57	V
17475	28.27	36.88	7.32	30.96	41.51	54	-12.49	V
23300	29.88	39.14	8.85	35.25	42.62	54	-11.38	V
11650	33.55	34.21	5.42	31.75	41.43	54	-12.57	H
17475	28.58	37.52	7.32	30.96	42.46	54	-11.54	H
23300	28.72	39.88	8.85	35.25	42.20	54	-11.80	H



802.11n40

Test Mode:5190					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	47.36	35.26	5.42	31.75	56.29	68.2	-11.91	V
15570	44.30	36.88	7.32	30.96	57.54	68.2	-10.66	V
20760	45.28	39.14	8.85	35.25	58.02	68.2	-10.18	V
10380	49.39	34.21	5.42	31.75	57.27	68.2	-10.93	H
15570	44.36	37.52	7.32	30.96	58.24	68.2	-9.96	H
20760	45.29	39.88	8.85	35.25	58.77	68.2	-9.43	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	35.38	35.26	5.42	31.75	44.31	54	-9.69	V
15570	29.10	36.88	7.32	30.96	42.34	54	-11.66	V
20760	27.83	39.14	8.85	35.25	40.57	54	-13.43	V
10380	32.88	34.21	5.42	31.75	40.76	54	-13.24	H
15570	28.26	37.52	7.32	30.96	42.14	54	-11.86	H
20760	28.93	39.88	8.85	35.25	42.41	54	-11.59	H



802.11n40

Test Mode:5230					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	47.57	35.26	5.42	31.75	56.50	68.2	-11.70	V
15690	44.71	36.88	7.32	30.96	57.95	68.2	-10.25	V
20920	45.03	39.14	8.85	35.25	57.77	68.2	-10.43	V
10460	49.06	34.21	5.42	31.75	56.94	68.2	-11.26	H
15690	44.67	37.52	7.32	30.96	58.55	68.2	-9.65	H
20920	45.11	39.88	8.85	35.25	58.59	68.2	-9.61	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	35.62	35.26	5.42	31.75	44.55	54	-9.45	V
15690	29.00	36.88	7.32	30.96	42.24	54	-11.76	V
20920	27.94	39.14	8.85	35.25	40.68	54	-13.32	V
10460	33.08	34.21	5.42	31.75	40.96	54	-13.04	H
15690	28.66	37.52	7.32	30.96	42.54	54	-11.46	H
20920	28.86	39.88	8.85	35.25	42.34	54	-11.66	H



802.11ac40

Test Mode:5190					Test channel:LOW			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	47.65	35.26	5.42	31.75	56.58	68.2	-11.62	V
15570	44.60	36.88	7.32	30.96	57.84	68.2	-10.36	V
20760	45.12	39.14	8.85	35.25	57.86	68.2	-10.34	V
10380	49.43	34.21	5.42	31.75	57.31	68.2	-10.89	H
15570	44.68	37.52	7.32	30.96	58.56	68.2	-9.64	H
20760	45.53	39.88	8.85	35.25	59.01	68.2	-9.19	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	35.64	35.26	5.42	31.75	44.57	54	-9.43	V
15570	28.94	36.88	7.32	30.96	42.18	54	-11.82	V
20760	28.08	39.14	8.85	35.25	40.82	54	-13.18	V
10380	33.34	34.21	5.42	31.75	41.22	54	-12.78	H
15570	28.77	37.52	7.32	30.96	42.65	54	-11.35	H
20760	28.87	39.88	8.85	35.25	42.35	54	-11.65	H



802.11ac40

Test Mode:5230					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	47.58	35.26	5.42	31.75	56.51	68.2	-11.69	V
15690	44.42	36.88	7.32	30.96	57.66	68.2	-10.54	V
20920	45.34	39.14	8.85	35.25	58.08	68.2	-10.12	V
10460	49.27	34.21	5.42	31.75	57.15	68.2	-11.05	H
15690	44.55	37.52	7.32	30.96	58.43	68.2	-9.77	H
20920	45.44	39.88	8.85	35.25	58.92	68.2	-9.28	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	35.82	35.26	5.42	31.75	44.75	54	-9.25	V
15690	29.02	36.88	7.32	30.96	42.26	54	-11.74	V
20920	27.58	39.14	8.85	35.25	40.32	54	-13.68	V
10460	33.37	34.21	5.42	31.75	41.25	54	-12.75	H
15690	28.66	37.52	7.32	30.96	42.54	54	-11.46	H
20920	29.09	39.88	8.85	35.25	42.57	54	-11.43	H

Note:

1. The testing has been conformed to 10*5825MHz=58250MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Undesirable emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~5140	5115.13	-39.69	≤-27	PASS
11A	Ant1	5180	5360~27000	25791.05	-33.13	≤-27	PASS
11A	Ant1	5200	30~5140	5137.62	-38.44	≤-27	PASS
11A	Ant1	5200	5360~27000	25787.44	-33.32	≤-27	PASS
11A	Ant1	5240	30~5140	3275.36	-38.37	≤-27	PASS
11A	Ant1	5240	5360~27000	25765.8	-32.49	≤-27	PASS
11A	Ant1	5745	30~5650	3052.81	-40.26	≤-27	PASS
11A	Ant1	5745	5925~27000	25101.85	-30.73	≤-27	PASS
11A	Ant1	5785	30~5650	3259.06	-39.94	≤-27	PASS
11A	Ant1	5785	5925~27000	25200.9	-29.72	≤-27	PASS
11A	Ant1	5825	30~5650	3063.86	-40.03	≤-27	PASS
11A	Ant1	5825	5925~27000	25772.03	-29.91	≤-27	PASS
11N20SISO	Ant1	5180	30~5140	3138.41	-39.64	≤-27	PASS
11N20SISO	Ant1	5180	5360~27000	25143.29	-33.26	≤-27	PASS
11N20SISO	Ant1	5200	30~5140	3181.85	-39.33	≤-27	PASS
11N20SISO	Ant1	5200	5360~27000	26221.68	-32	≤-27	PASS
11N20SISO	Ant1	5240	30~5140	2718.03	-39.1	≤-27	PASS
11N20SISO	Ant1	5240	5360~27000	25773.01	-32.43	≤-27	PASS
11N20SISO	Ant1	5745	30~5650	5635.39	-40.01	≤-27	PASS
11N20SISO	Ant1	5745	5925~27000	25786.08	-29.82	≤-27	PASS
11N20SISO	Ant1	5785	30~5650	3070.98	-40.05	≤-27	PASS
11N20SISO	Ant1	5785	5925~27000	25759.39	-29.27	≤-27	PASS
11N20SISO	Ant1	5825	30~5650	3171.21	-40.39	≤-27	PASS
11N20SISO	Ant1	5825	5925~27000	25743.23	-29.57	≤-27	PASS
11N40SISO	Ant1	5190	30~5140	3067.38	-39.84	≤-27	PASS
11N40SISO	Ant1	5190	5360~27000	25711.7	-33.03	≤-27	PASS
11N40SISO	Ant1	5230	30~5140	2419.95	-33.9	≤-27	PASS
11N40SISO	Ant1	5230	5360~27000	25775.18	-32.61	≤-27	PASS
11N40SISO	Ant1	5755	30~5650	2621.19	-40.13	≤-27	PASS
11N40SISO	Ant1	5755	5925~40000	25140.48	-29.85	≤-27	PASS
11N40SISO	Ant1	5795	30~5650	3197.24	-40.05	≤-27	PASS
11N40SISO	Ant1	5795	5925~27000	25711.62	-28.71	≤-27	PASS
11AC20SISO	Ant1	5180	30~5140	5108.66	-38.78	≤-27	PASS
11AC20SISO	Ant1	5180	5360~27000	25657.6	-32.79	≤-27	PASS
11AC20SISO	Ant1	5200	30~5140	3207.57	-39.39	≤-27	PASS
11AC20SISO	Ant1	5200	5360~27000	25703.76	-33.73	≤-27	PASS
11AC20SISO	Ant1	5240	30~5140	3183.72	-38.17	≤-27	PASS
11AC20SISO	Ant1	5240	5360~27000	25665.53	-32.29	≤-27	PASS
11AC20SISO	Ant1	5745	30~5650	2703.81	-40.37	≤-27	PASS
11AC20SISO	Ant1	5745	5925~27000	25709.51	-29.56	≤-27	PASS
11AC20SISO	Ant1	5785	30~5650	3170.27	-40.14	≤-27	PASS
11AC20SISO	Ant1	5785	5925~27000	25646.28	-29.99	≤-27	PASS
11AC20SISO	Ant1	5825	30~5650	3045.69	-39.8	≤-27	PASS
11AC20SISO	Ant1	5825	5925~27000	25693.35	-30.19	≤-27	PASS
11AC40SISO	Ant1	5190	30~5140	5131.99	-39.66	≤-27	PASS
11AC40SISO	Ant1	5190	5360~27000	25737.67	-32.65	≤-27	PASS
11AC40SISO	Ant1	5230	30~5140	2689.93	-39.11	≤-27	PASS
11AC40SISO	Ant1	5230	5360~27000	25782.39	-32.84	≤-27	PASS




11AC40SISO	Ant1	5755	30~5650	2704	-40.03	≤-27	PASS
11AC40SISO	Ant1	5755	5925~27000	25711.62	-29.47	≤-27	PASS
11AC40SISO	Ant1	5795	30~5650	3296.16	-39.2	≤-27	PASS
11AC40SISO	Ant1	5795	5925~27000	25704.59	-29.71	≤-27	PASS
11AC80SISO	Ant1	5210	30~5140	3045.92	-38.86	≤-27	PASS
11AC80SISO	Ant1	5210	5360~27000	25721.8	-32.95	≤-27	PASS
11AC80SISO	Ant1	5775	30~5650	2544.95	-40.16	≤-27	PASS
11AC80SISO	Ant1	5775	5925~27000	25088.5	-30.33	≤-27	PASS


Note: 27~40GHz at least have 20dB margin. No recording in the test report.

Test Graphs:

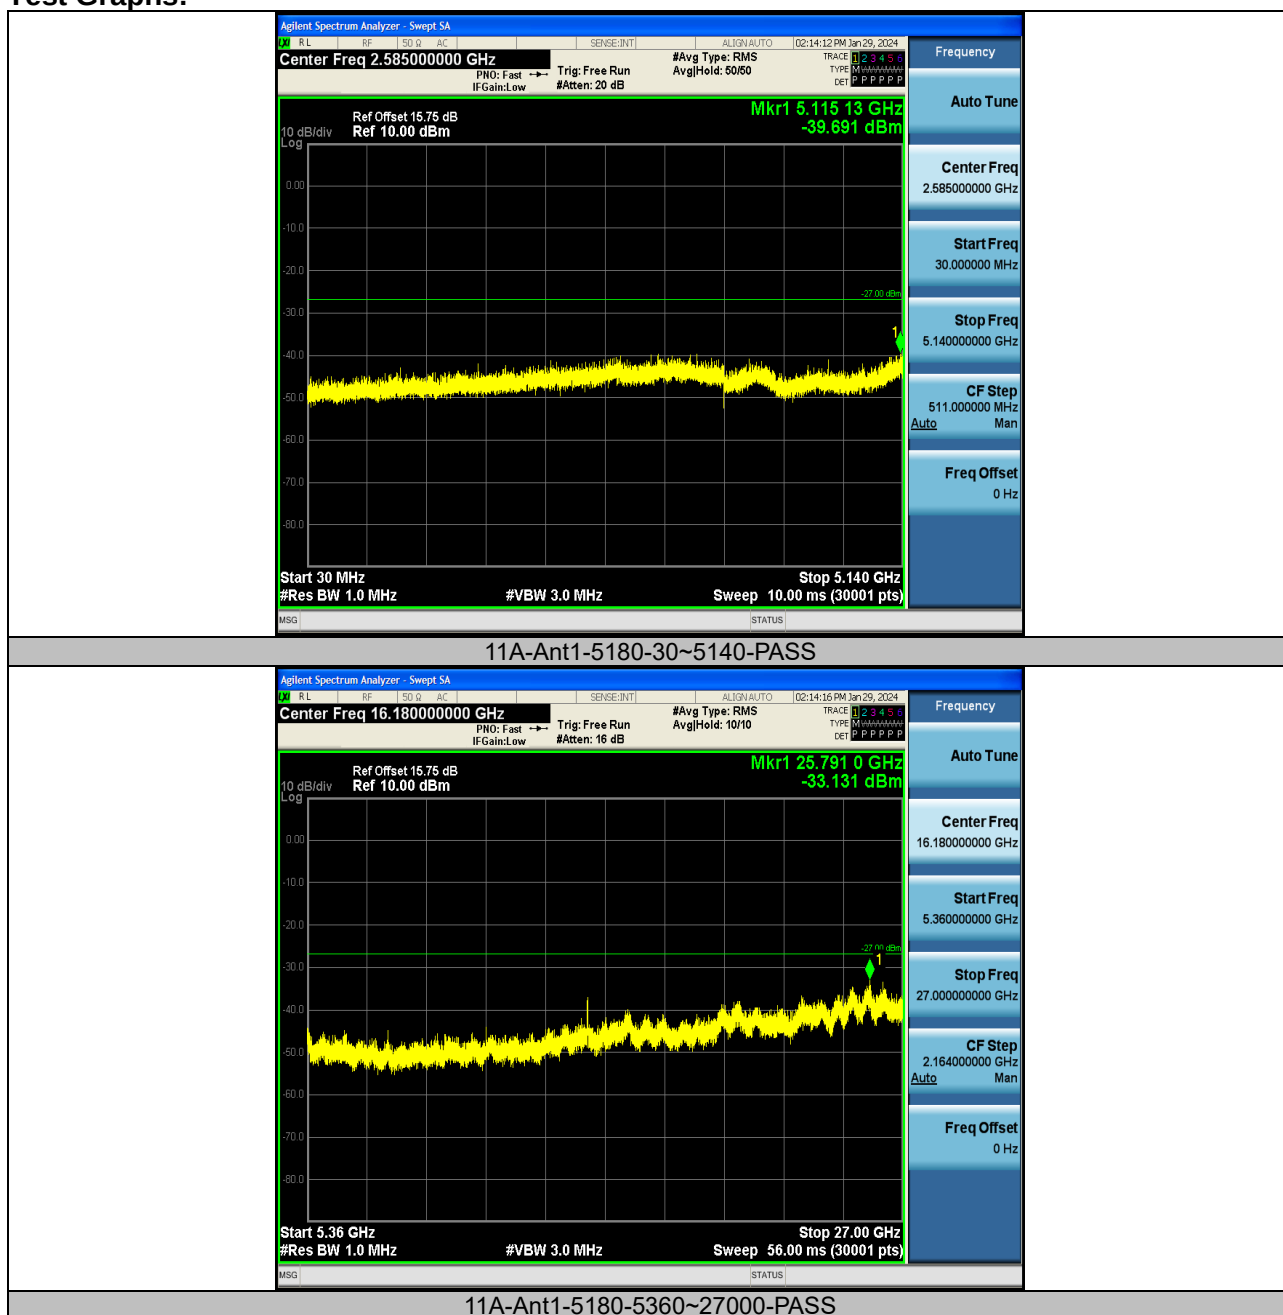

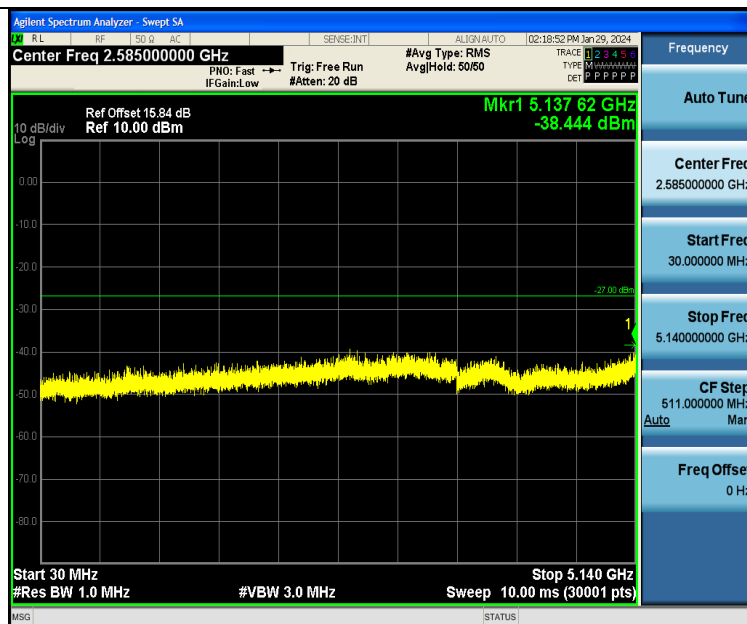


11A-Ant1-5200-30~5140-PASS

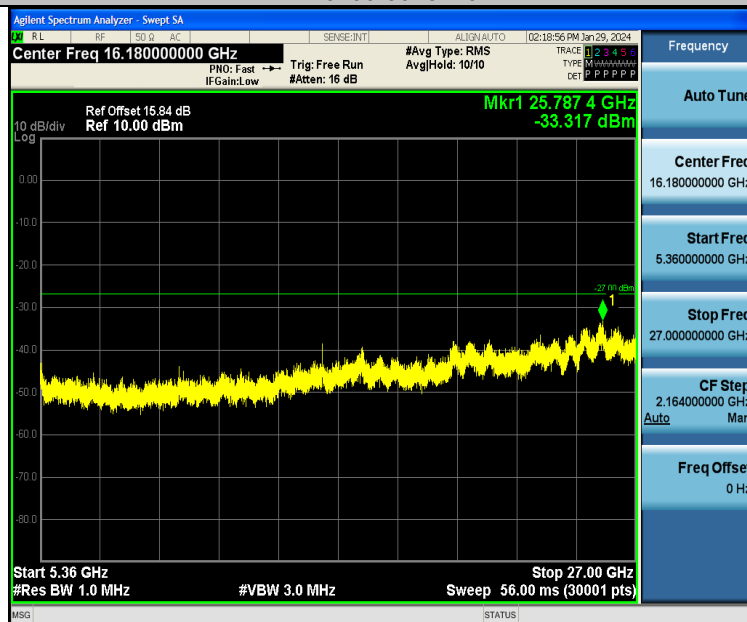


11A-Ant1-5200-5360~27000-PASS



11A-Ant1-5240-30~5140-PASS

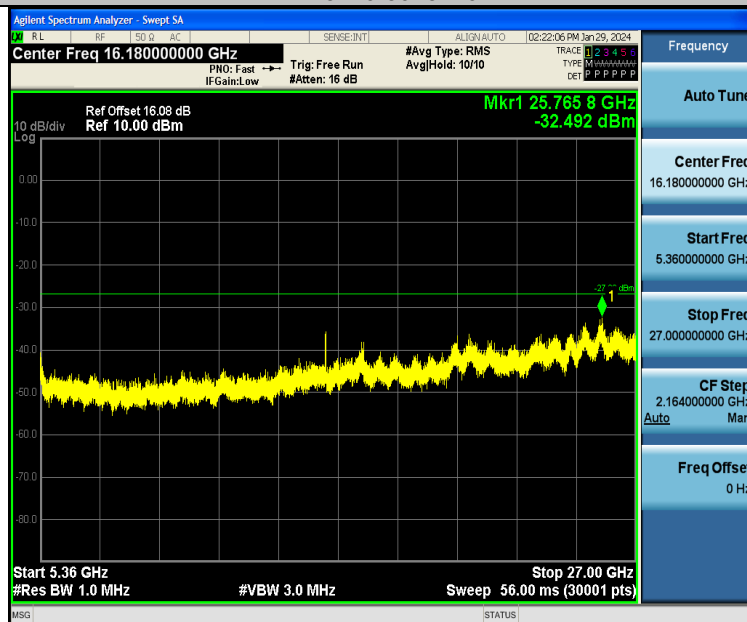


11A-Ant1-5240-5360~27000-PASS

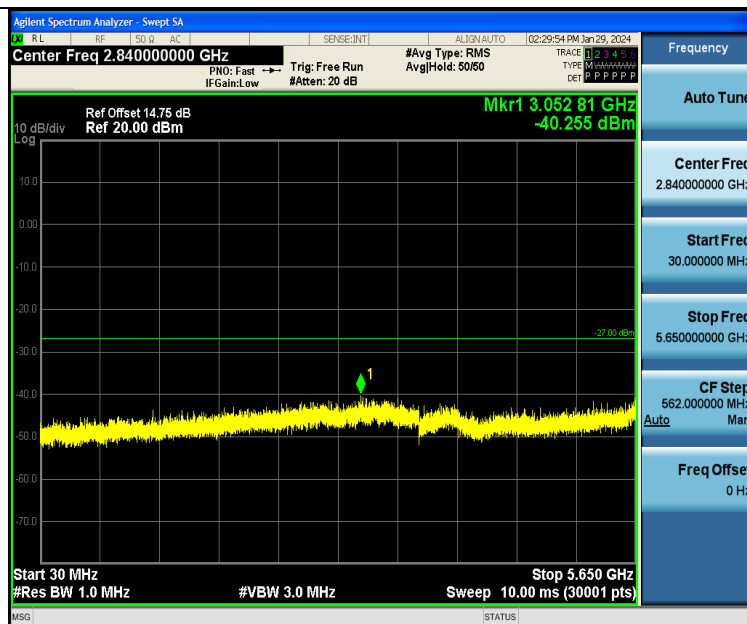


11A-Ant1-5745-30~5650-PASS




11A-Ant1-5745-5925~27000-PASS

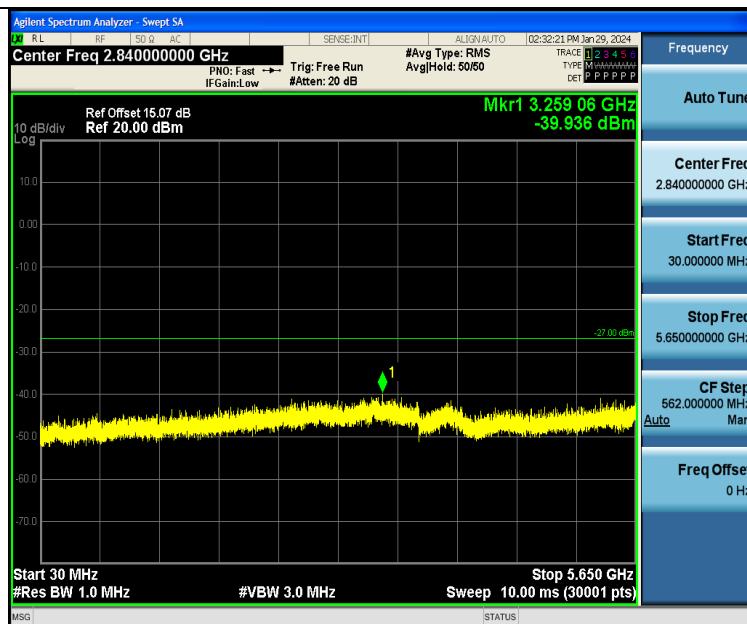


11A-Ant1-5785-30~5650-PASS

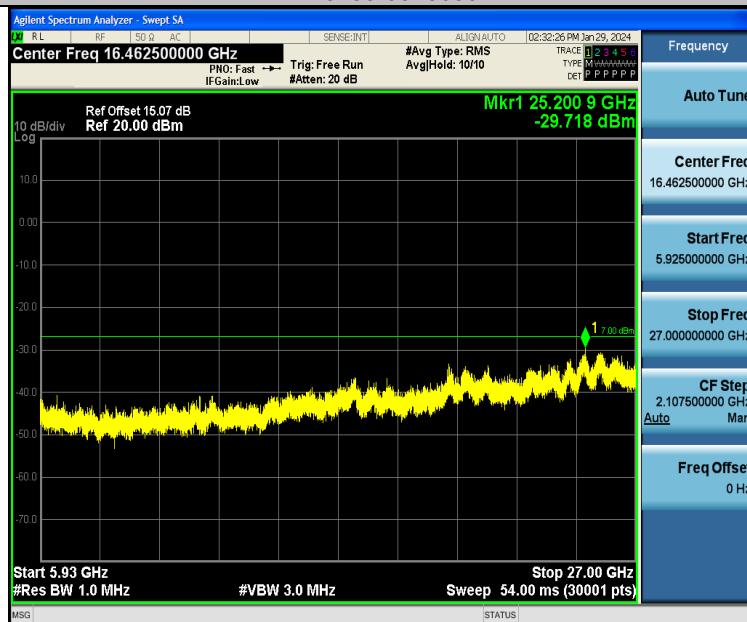


11A-Ant1-5785-5925~27000-PASS

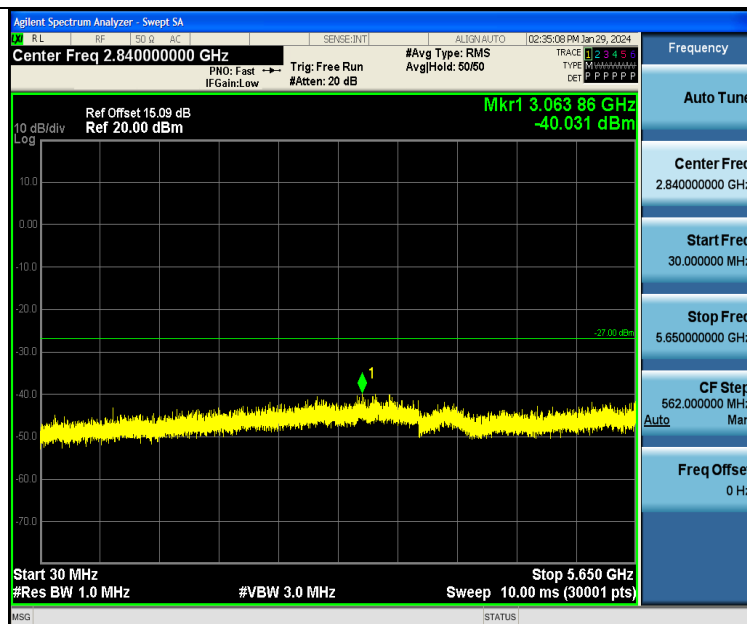


11A-Ant1-5825-30~5650-PASS

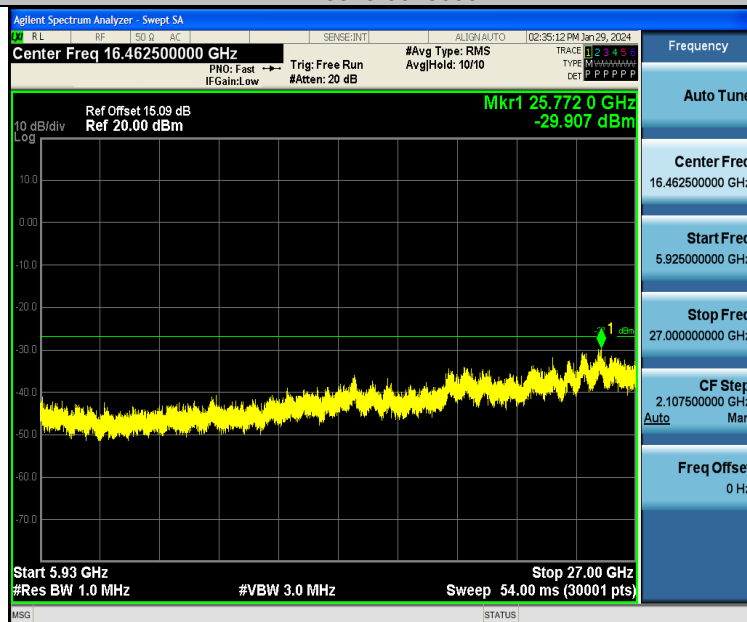


11A-Ant1-5825-5925~27000-PASS

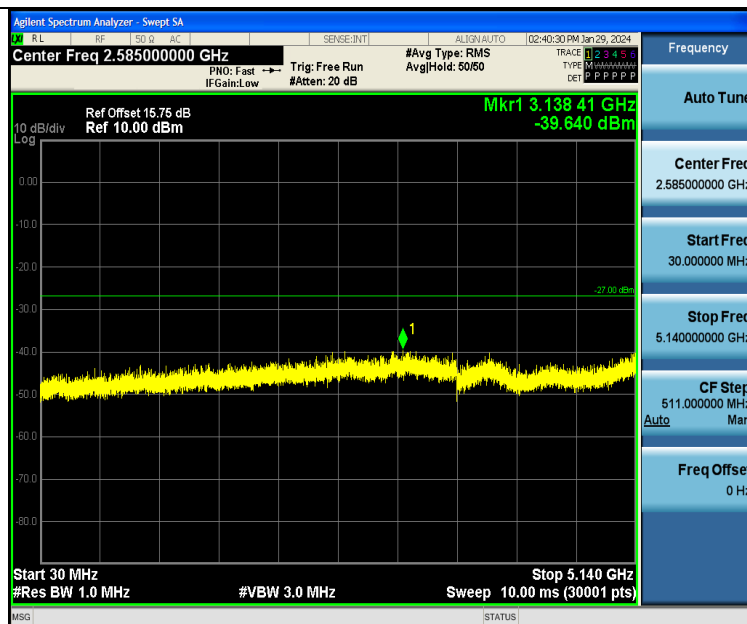


11N20SISO-Ant1-5180-30~5140-PASS

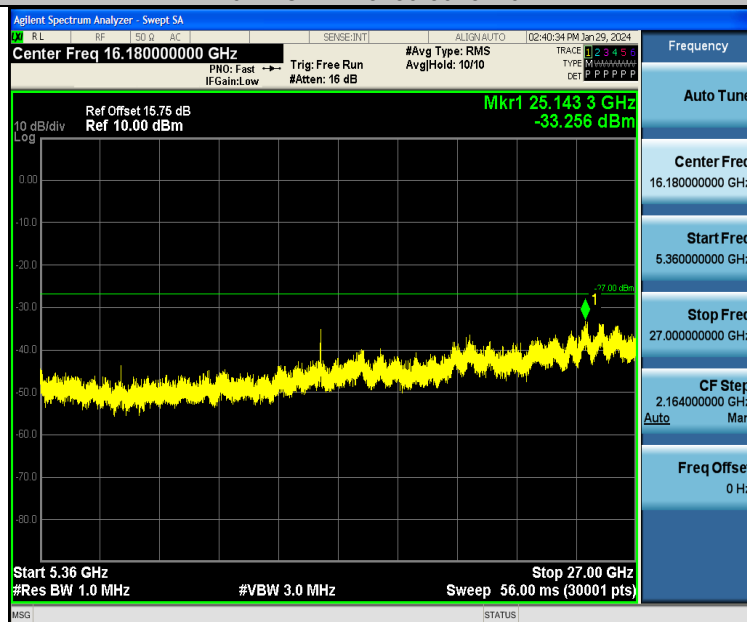

11N20SISO-Ant1-5180-5360~27000-PASS

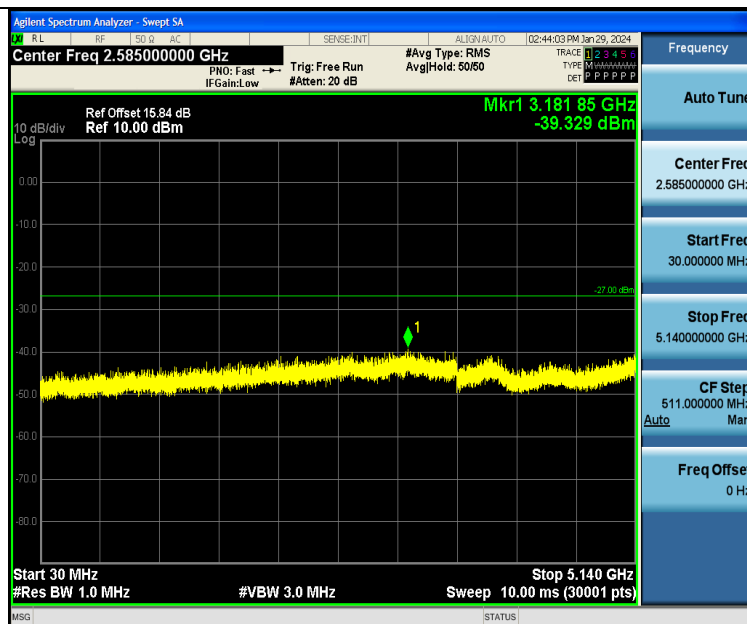


11N20SISO-Ant1-5200-30~5140-PASS

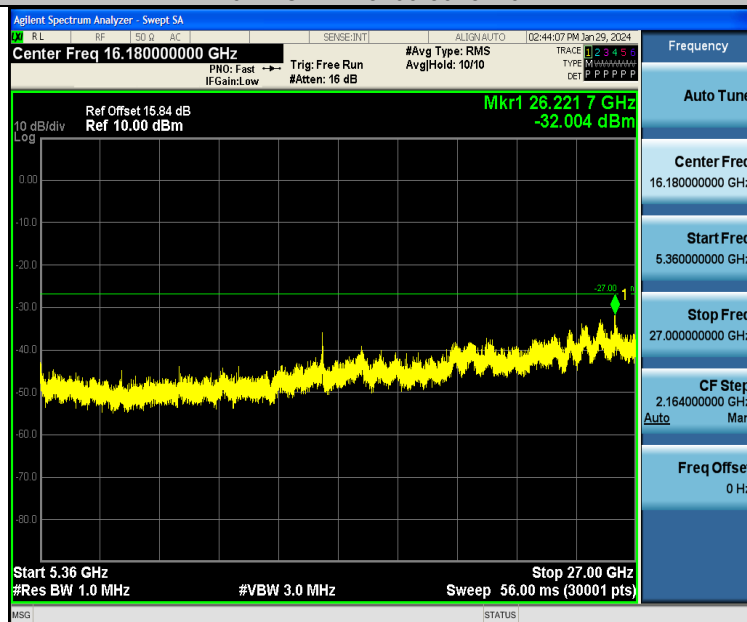


11N20SISO-Ant1-5200-5360~27000-PASS




11N20SISO-Ant1-5240-30~5140-PASS

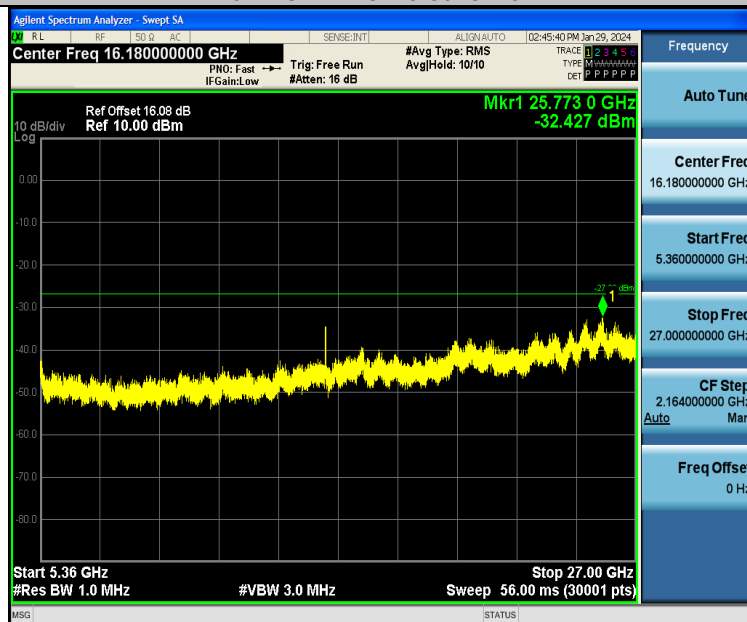


11N20SISO-Ant1-5240-5360~27000-PASS

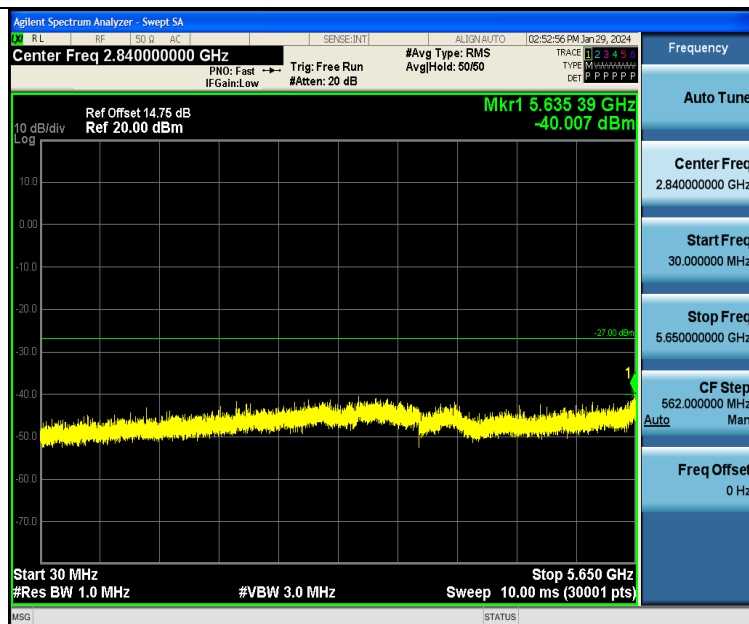


11N20SISO-Ant1-5745-30~5650-PASS

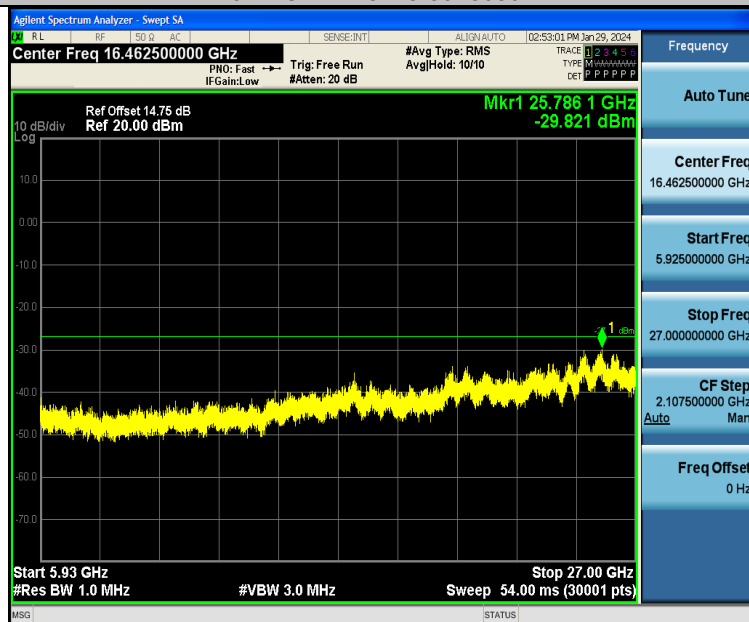


11N20SISO-Ant1-5745-5925~27000-PASS

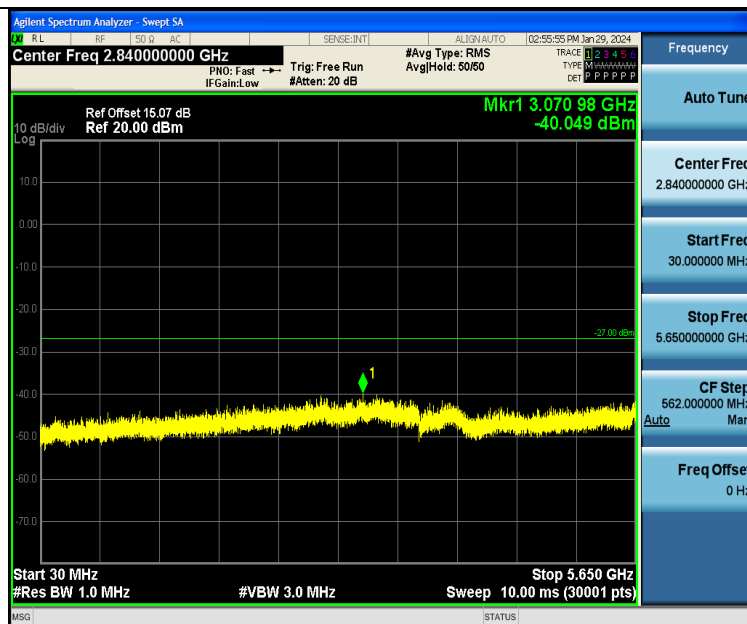

11N20SISO-Ant1-5785-30~5650-PASS

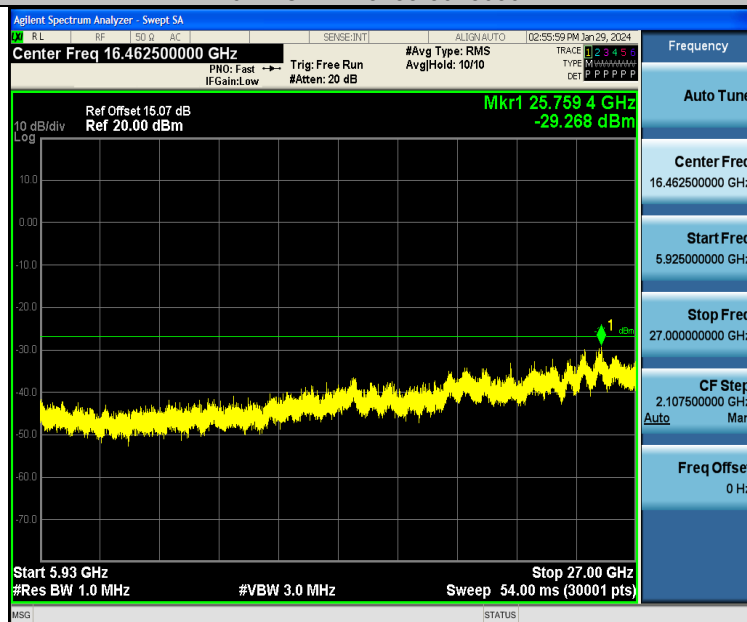


11N20SISO-Ant1-5785-5925~27000-PASS

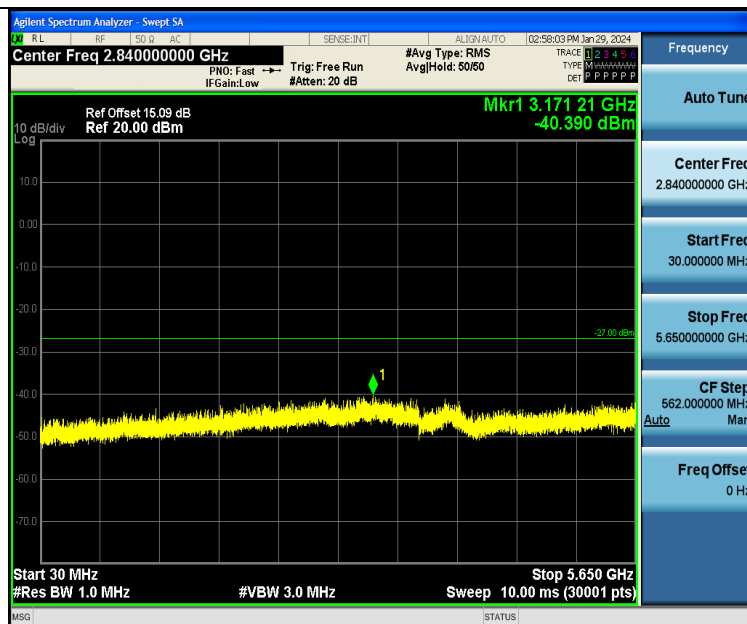


11N20SISO-Ant1-5825-30~5650-PASS



11N20SISO-Ant1-5825-5925~27000-PASS

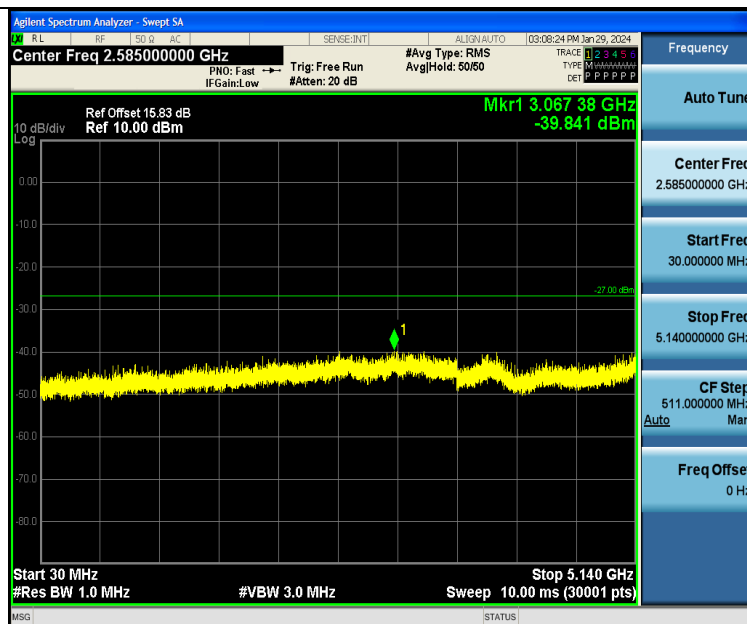


11N40SISO-Ant1-5190-30~5140-PASS

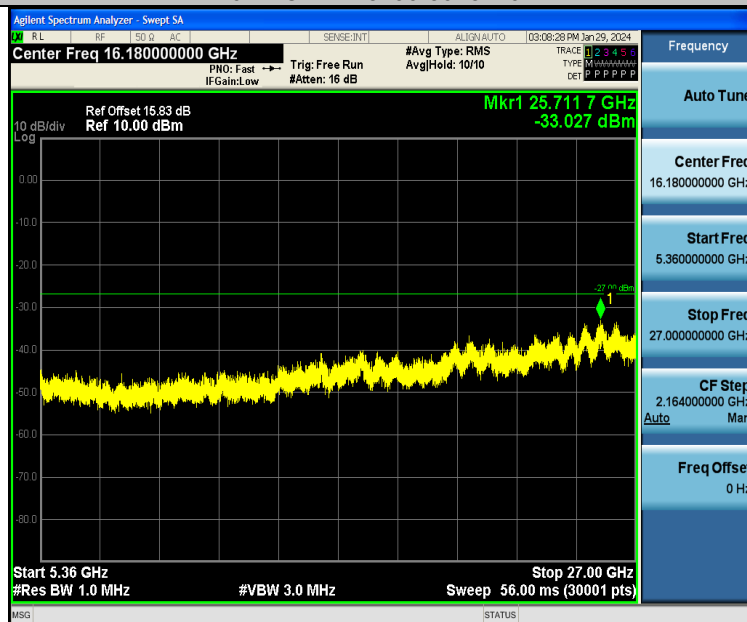


11N40SISO-Ant1-5190-5360~27000-PASS




11N40SISO-Ant1-5230-30~5140-PASS

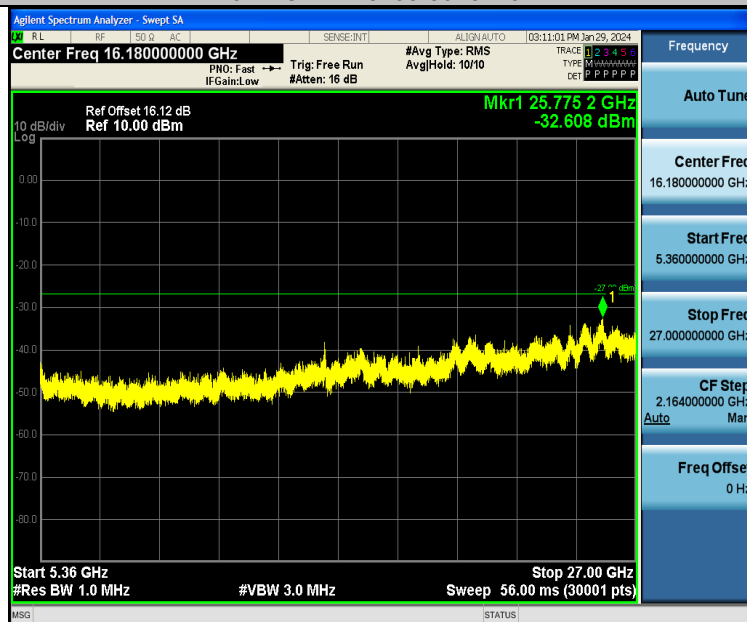


11N40SISO-Ant1-5230-5360~27000-PASS

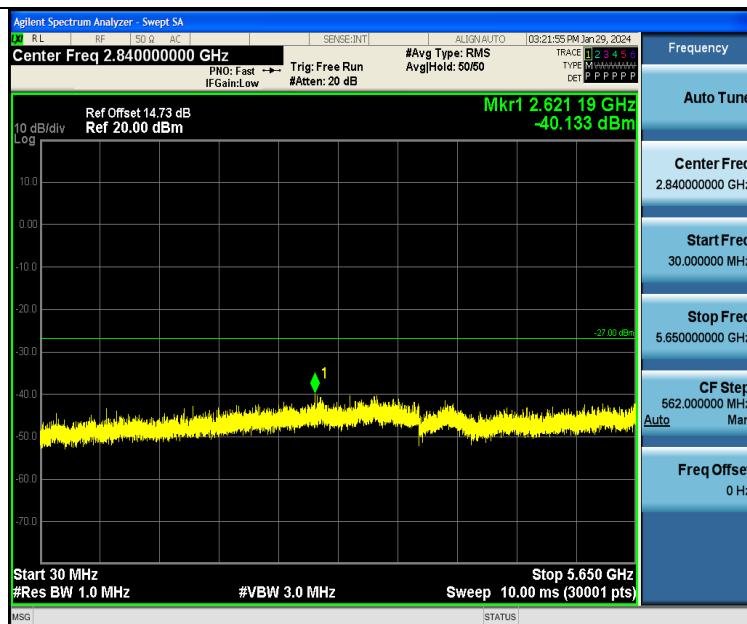


11N40SISO-Ant1-5755-30~5650-PASS

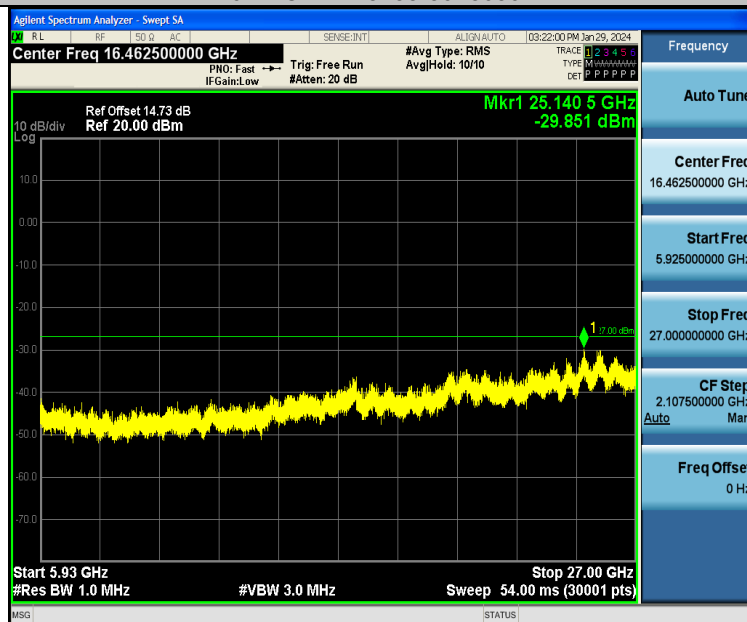


11N40SISO-Ant1-5755-5925~27000-PASS

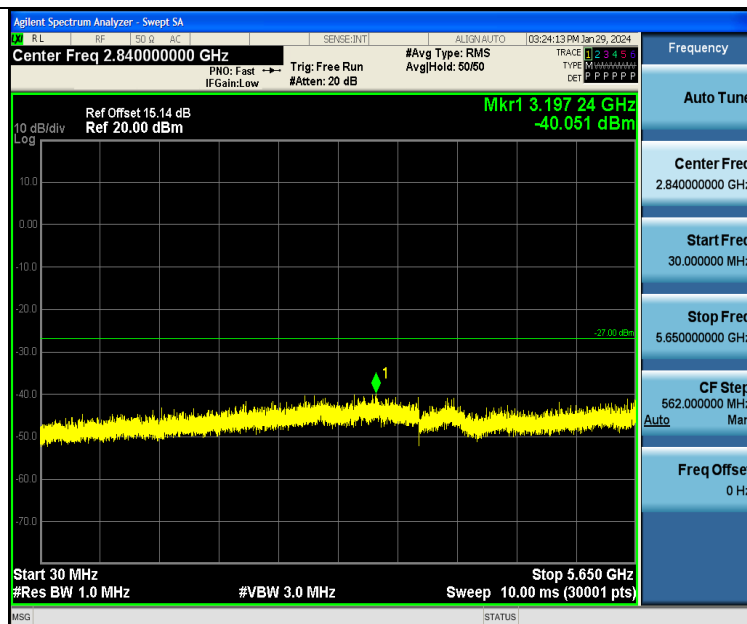


11N40SISO-Ant1-5795-30~5650-PASS

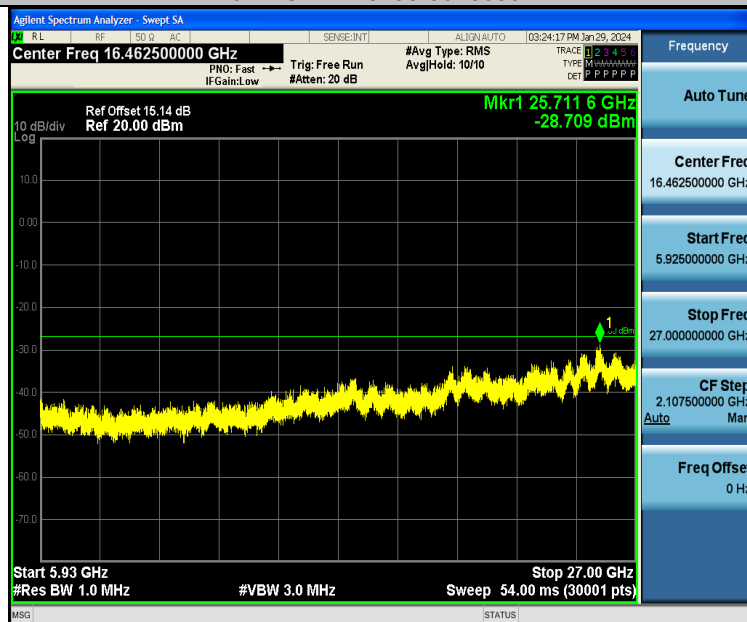


11N40SISO-Ant1-5795-5925~27000-PASS

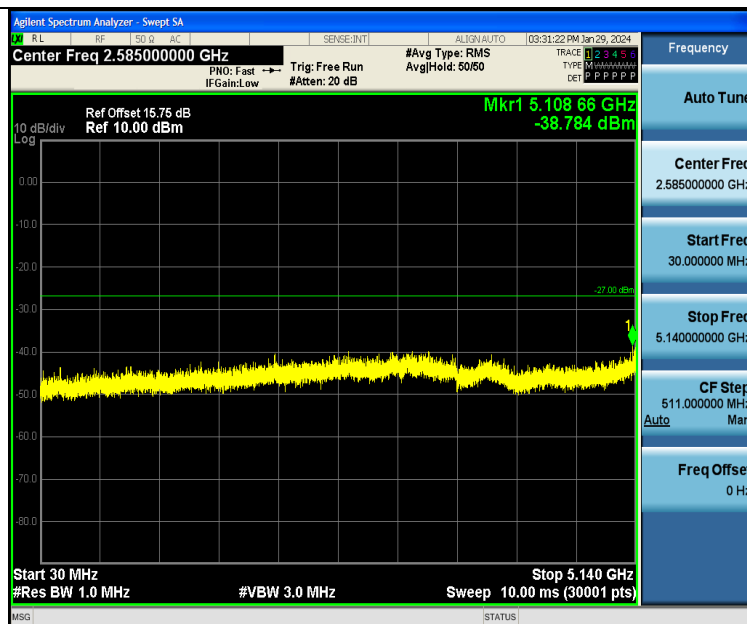


11AC20SISO-Ant1-5180-30~5140-PASS

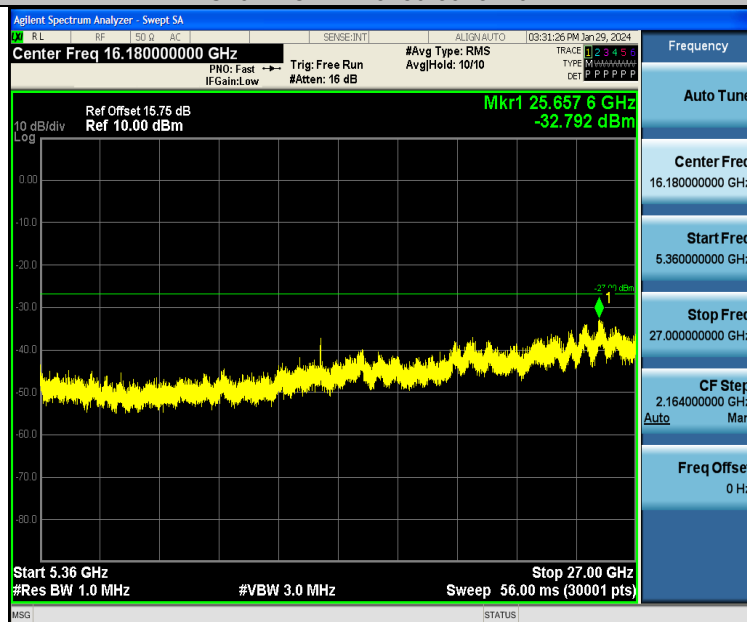


11AC20SISO-Ant1-5180-5360~27000-PASS

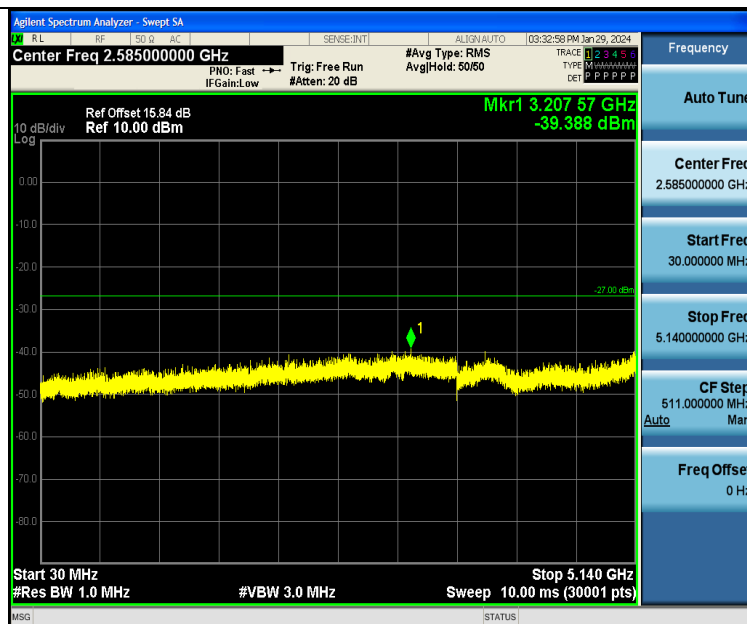

11AC20SISO-Ant1-5200-30~5140-PASS

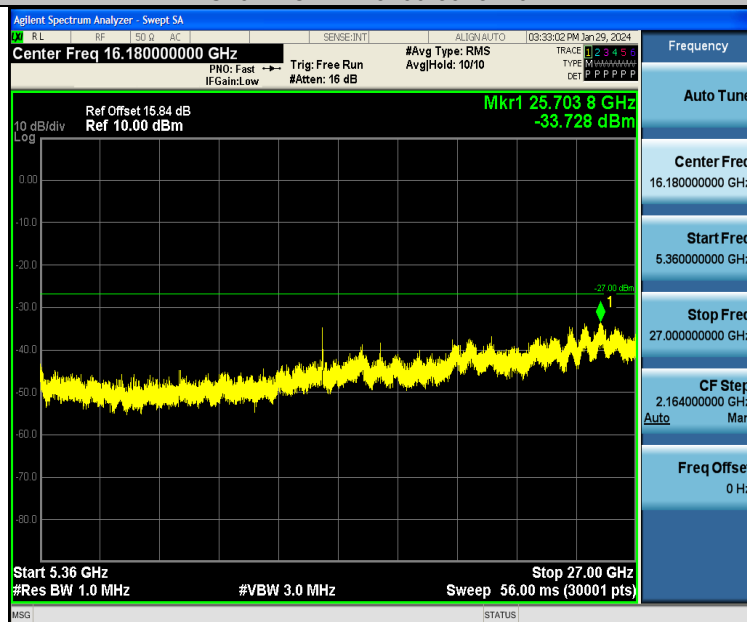


11AC20SISO-Ant1-5200-5360~27000-PASS

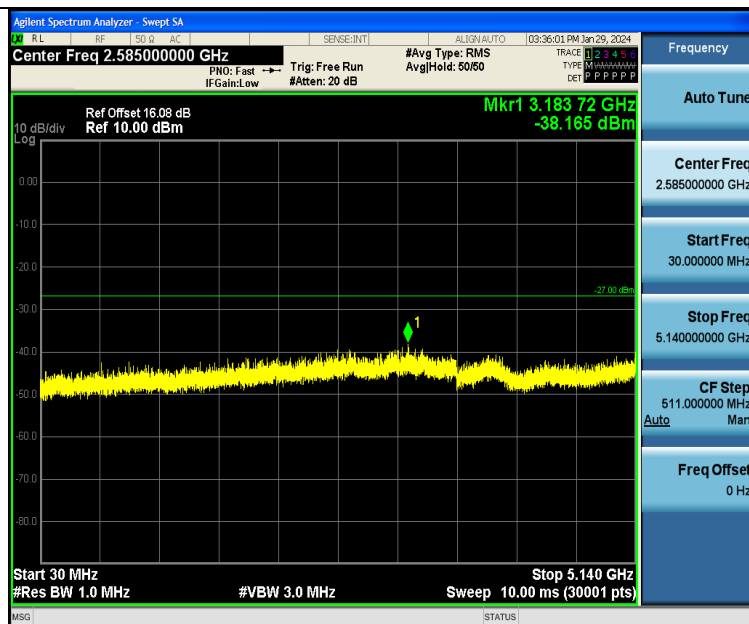


11AC20SISO-Ant1-5240-30~5140-PASS




11AC20SISO-Ant1-5240-5360~27000-PASS

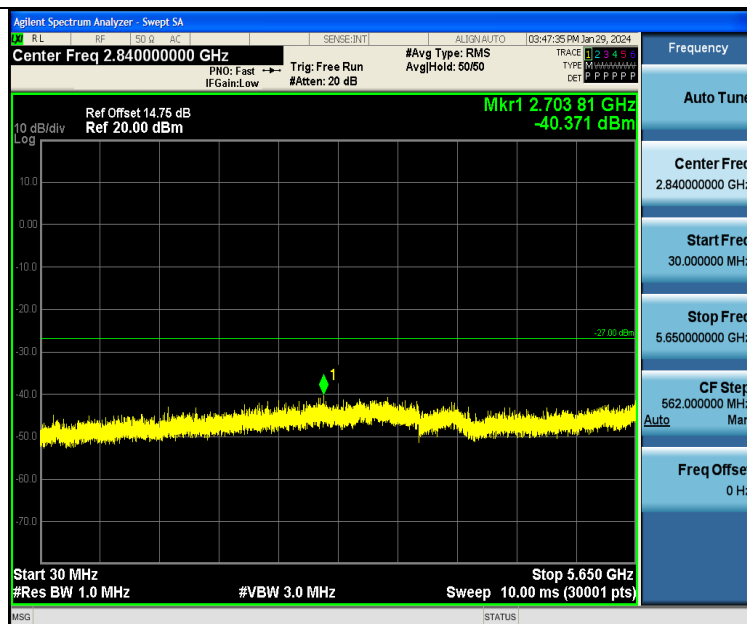

11AC20SISO-Ant1-5745-30~5650-PASS

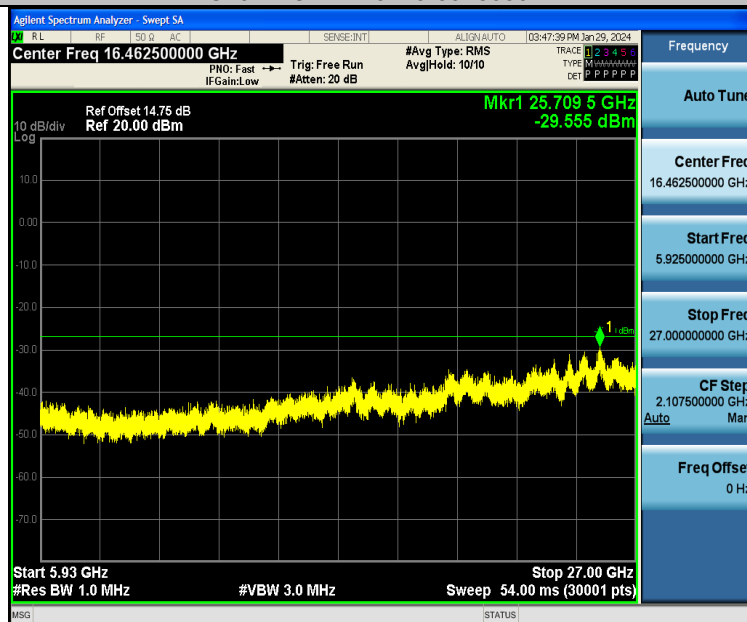


11AC20SISO-Ant1-5745-5925~27000-PASS

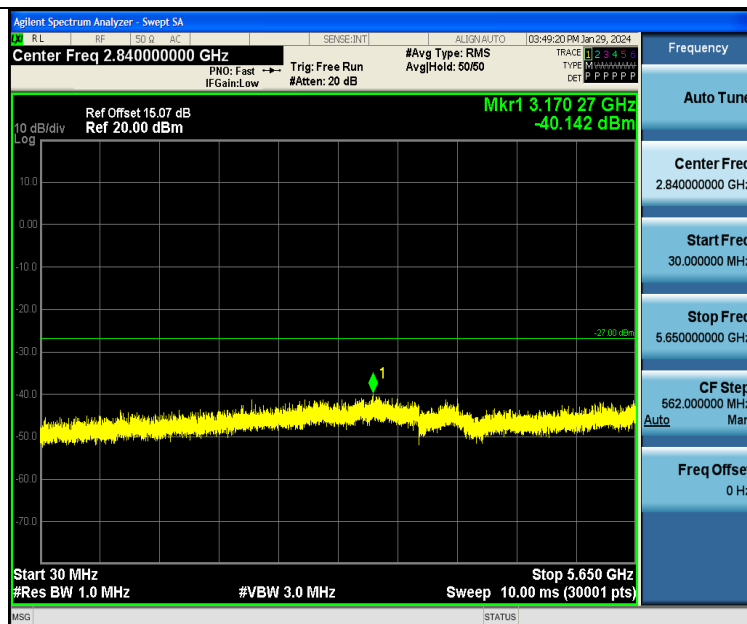


11AC20SISO-Ant1-5785-30~5650-PASS




11AC20SISO-Ant1-5785-5925~27000-PASS

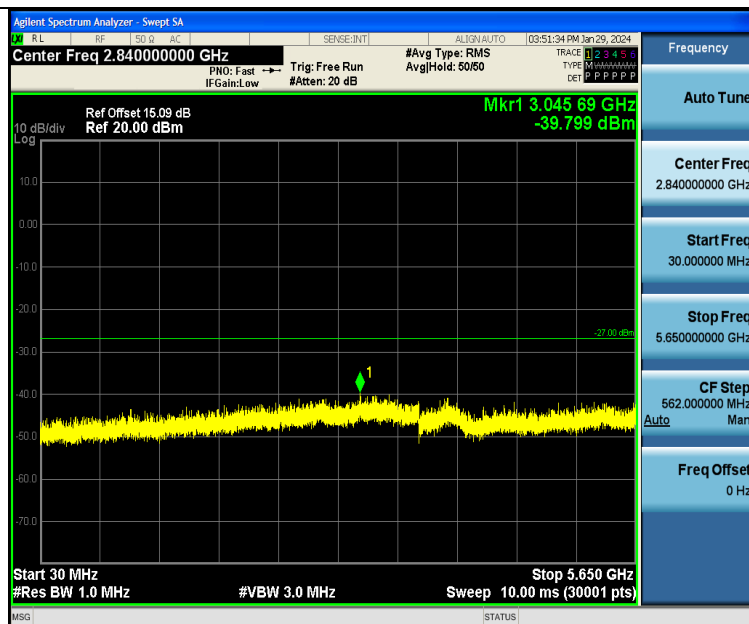


11AC20SISO-Ant1-5825-30~5650-PASS

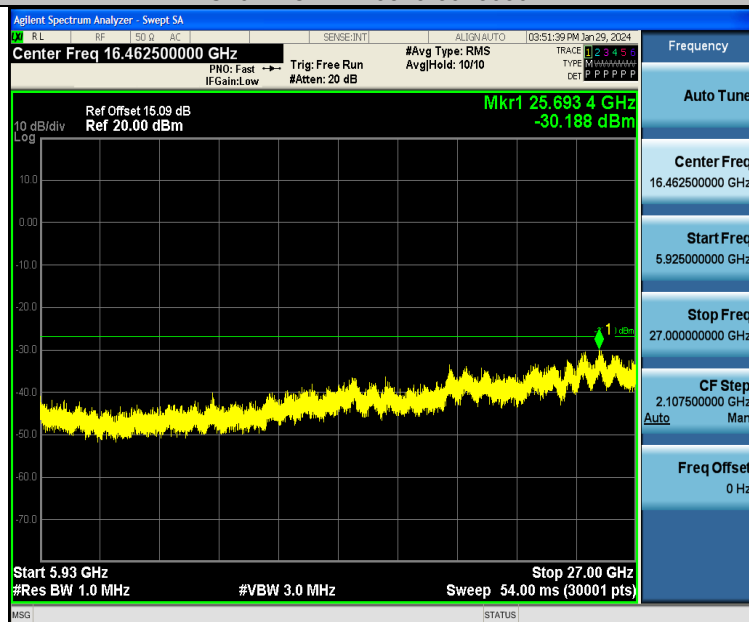

11AC20SISO-Ant1-5825-5925~27000-PASS

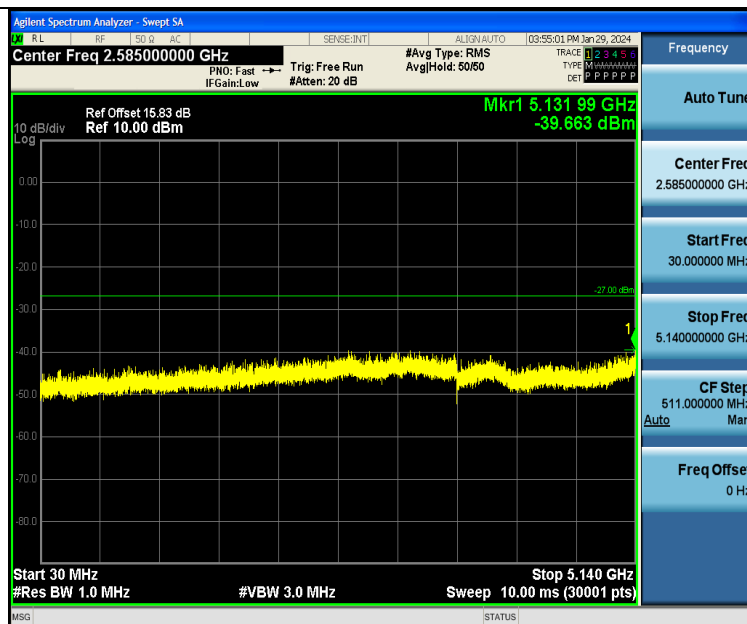

11AC40SISO-Ant1-5190-30~5140-PASS

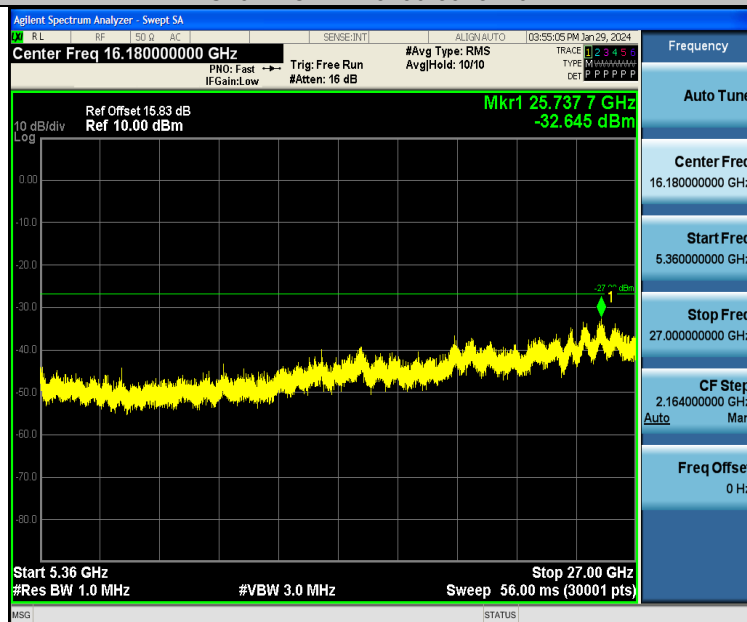


11AC40SISO-Ant1-5190-5360~27000-PASS




11AC40SISO-Ant1-5230-30~5140-PASS




11AC40SISO-Ant1-5230-5360~40000-PASS

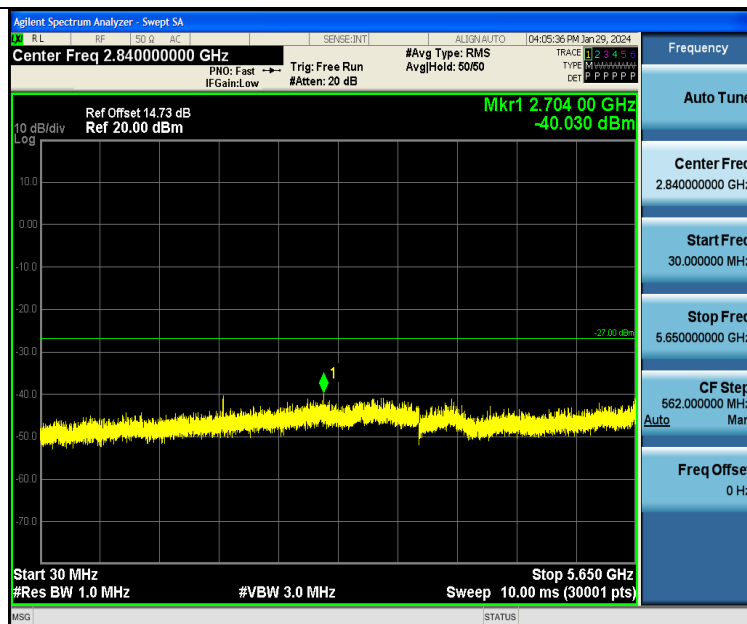


11AC40SISO-Ant1-5755-30~5650-PASS

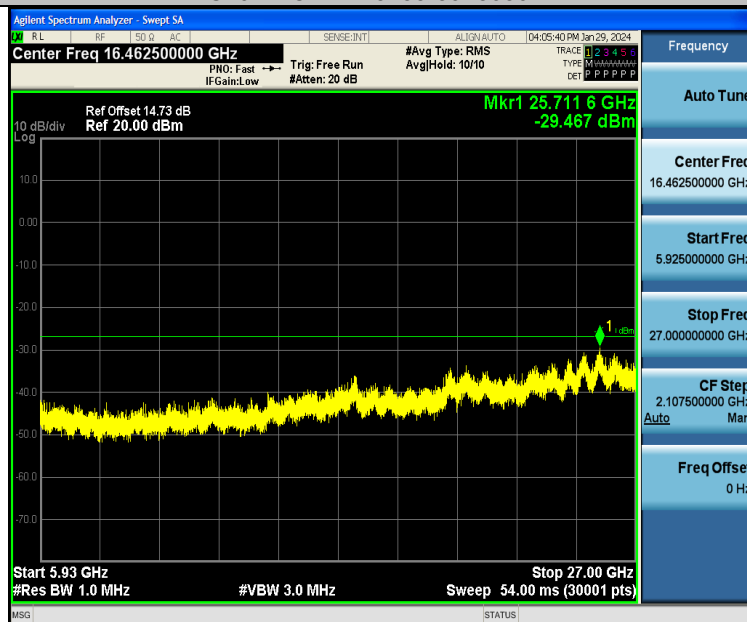


11AC40SISO-Ant1-5755-5925~27000-PASS

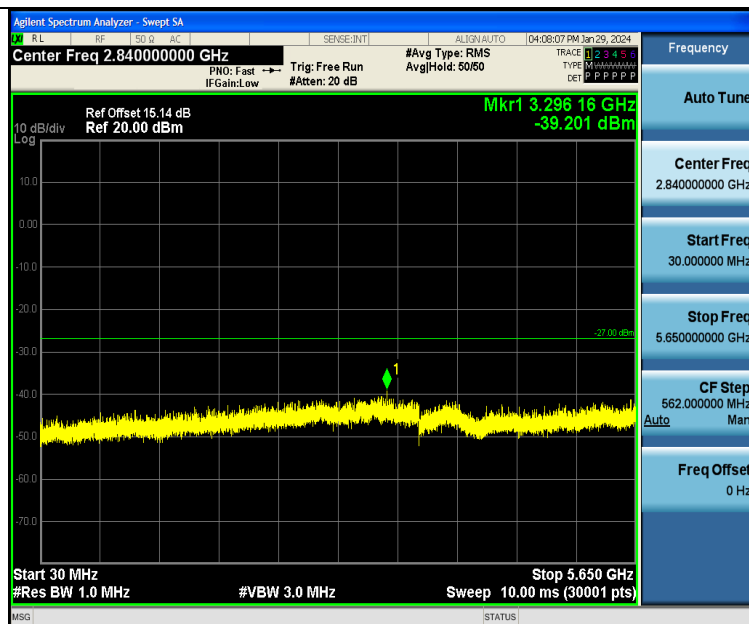


11AC40SISO-Ant1-5795-30~5650-PASS

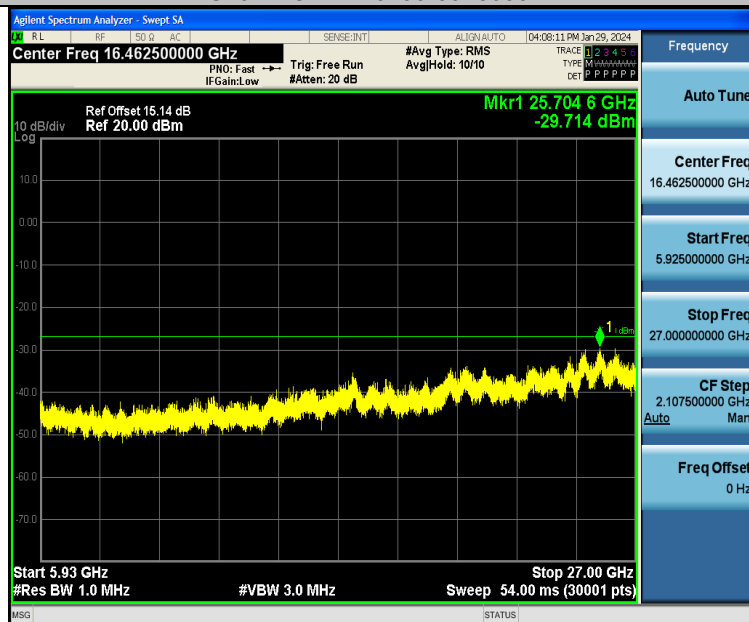

11AC40SISO-Ant1-5795-5925~27000-PASS

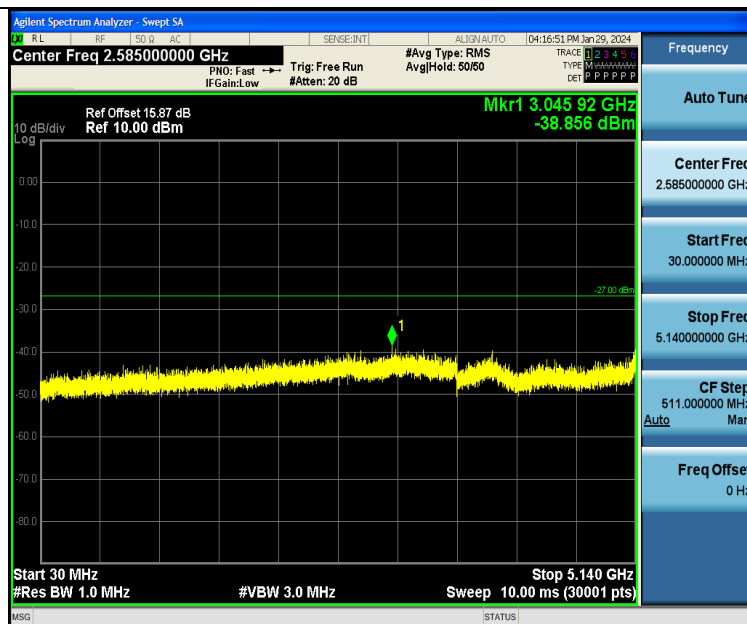

11AC80SISO-Ant1-5210-30~5140-PASS

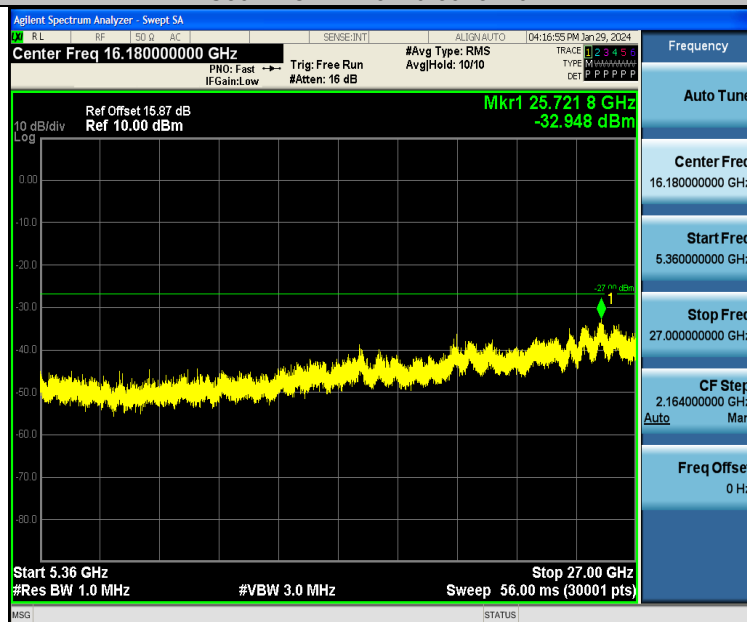

11AC80SISO-Ant1-5210-5360~27000-PASS



11AC80SISO-Ant1-5775-30~5650-PASS



11AC80SISO-Ant1-5775-5925~27000-PASS



6.6 Band edge measurements

Test Result:


TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-38.58	≤-27	PASS
11N20SISO	Ant1	Low	5180	-37.99	≤-27	PASS
11N40SISO	Ant1	Low	5190	-38.64	≤-27	PASS
11AC20SISO	Ant1	Low	5180	-37.79	≤-27	PASS
11AC40SISO	Ant1	Low	5190	-38.46	≤-27	PASS
11AC80SISO	Ant1	Low	5210	-38.03	≤-27	PASS
11A	Ant1	High	5240	-38.62	≤-27	PASS
11N20SISO	Ant1	High	5240	-37.74	≤-27	PASS
11AC20SISO	Ant1	High	5240	-38.21	≤-27	PASS
11N40SISO	Ant1	High	5230	-38.22	≤-27	PASS
11AC40SISO	Ant1	High	5230	-37.51	≤-27	PASS


TestMode	Antenna	ChName	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-31.55	≤26.83	PASS
11A	Ant1	Low	5745	5700~5720	-36.19	≤15.59	PASS
11A	Ant1	Low	5745	5650~5700	-39.95	≤3.34	PASS
11A	Ant1	Low	5745	5760~5650	-42.23	≤-27	PASS
11A	Ant1	High	5825	5850~5855	-35.65	≤15.79	PASS
11A	Ant1	High	5825	5855~5875	-37.51	≤10.02	PASS
11A	Ant1	High	5825	5875~5925	-38.04	≤-16.07	PASS
11A	Ant1	High	5825	5925~5935	-38.74	≤-27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-31.03	≤26.30	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-35.72	≤15.59	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-39.68	≤8.53	PASS
11N20SISO	Ant1	Low	5745	5760~5650	-41.66	≤-27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-35.34	≤15.79	PASS
11N20SISO	Ant1	High	5825	5855~5875	-37.78	≤10.17	PASS
11N20SISO	Ant1	High	5825	5875~5925	-38.45	≤-13.67	PASS
11N20SISO	Ant1	High	5825	5925~5935	-38.94	≤-27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-31.03	≤21.28	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-32.96	≤15.24	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-40.37	≤4.76	PASS
11N40SISO	Ant1	Low	5755	5780~5650	-39.96	≤-27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-39.15	≤16.79	PASS
11N40SISO	Ant1	High	5795	5855~5875	-38.87	≤11.01	PASS
11N40SISO	Ant1	High	5795	5875~5925	-38.77	≤-8.36	PASS
11N40SISO	Ant1	High	5795	5925~5935	-39	≤-27	PASS
11AC20SISO	Ant1	Low	5745	5720~5725	-34.95	≤26.83	PASS
11AC20SISO	Ant1	Low	5745	5700~5720	-39.02	≤15.59	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-40.31	≤-1.34	PASS
11AC20SISO	Ant1	Low	5745	5760~5650	-41.44	≤-27	PASS
11AC20SISO	Ant1	High	5825	5850~5855	-38.12	≤16.10	PASS
11AC20SISO	Ant1	High	5825	5855~5875	-38.68	≤14.71	PASS
11AC20SISO	Ant1	High	5825	5875~5925	-38.29	≤-22.56	PASS
11AC20SISO	Ant1	High	5825	5925~5935	-38.92	≤-27	PASS
11AC40SISO	Ant1	Low	5755	5720~5725	-29.34	≤21.28	PASS
11AC40SISO	Ant1	Low	5755	5700~5720	-32.7	≤15.24	PASS




11AC40SISO	Ant1	Low	5755	5650~5700	-39.08	≤ 4.36	PASS
11AC40SISO	Ant1	Low	5755	5780~5650	-41.72	≤ -27	PASS
11AC40SISO	Ant1	High	5795	5850~5855	-39.39	≤ 16.41	PASS
11AC40SISO	Ant1	High	5795	5855~5875	-38.42	≤ 11.98	PASS
11AC40SISO	Ant1	High	5795	5875~5925	-38.52	≤ 23.99	PASS
11AC40SISO	Ant1	High	5795	5925~5935	-39.08	≤ -27	PASS
11AC80SISO	Ant1	Low	5775	5720~5725	-33.99	≤ 26.95	PASS
11AC80SISO	Ant1	Low	5775	5700~5720	-31.72	≤ 15.26	PASS
11AC80SISO	Ant1	Low	5775	5650~5700	-37.5	≤ 8.64	PASS
11AC80SISO	Ant1	Low	5775	5800~5650	-41.59	≤ -27	PASS
11AC80SISO	Ant1	High	5775	5850~5855	-39.18	≤ 23.39	PASS
11AC80SISO	Ant1	High	5775	5855~5875	-38.36	≤ 11.06	PASS
11AC80SISO	Ant1	High	5775	5875~5925	-38.81	≤ 2.07	PASS
11AC80SISO	Ant1	High	5775	5925~5935	-39.7	≤ -27	PASS

Test Graphs:

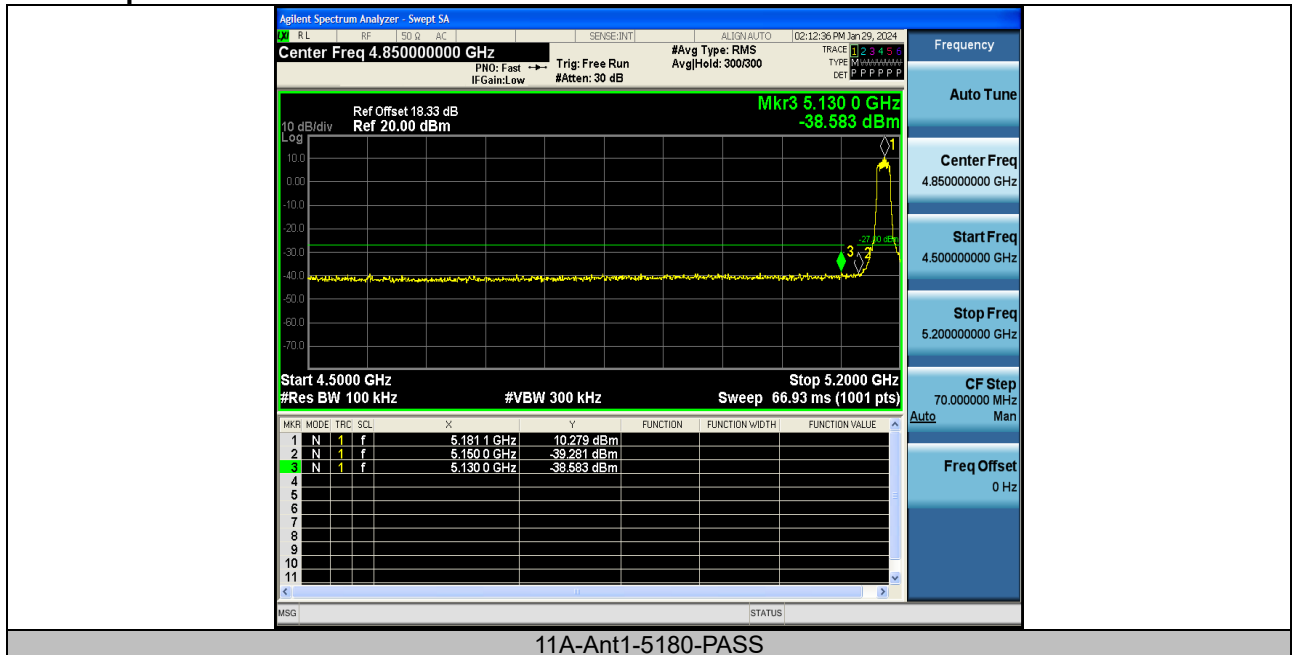


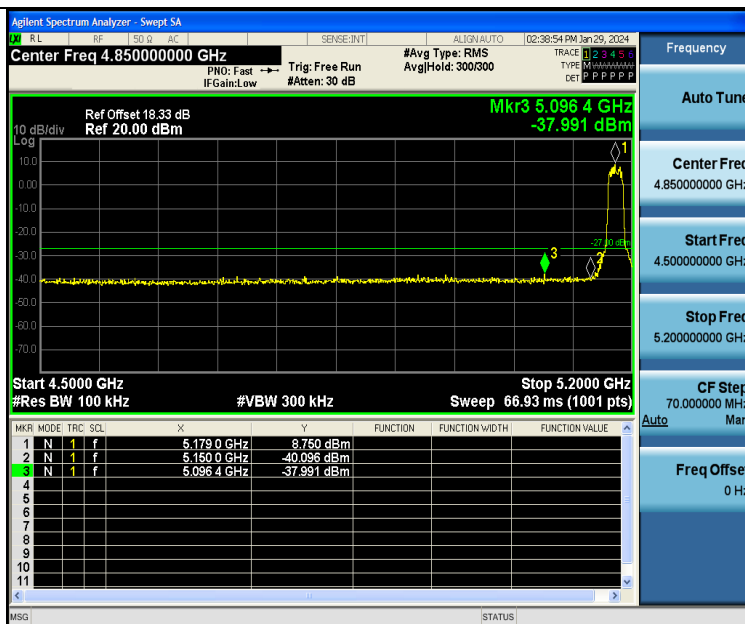


11N20SISO-Ant1-5180-PASS

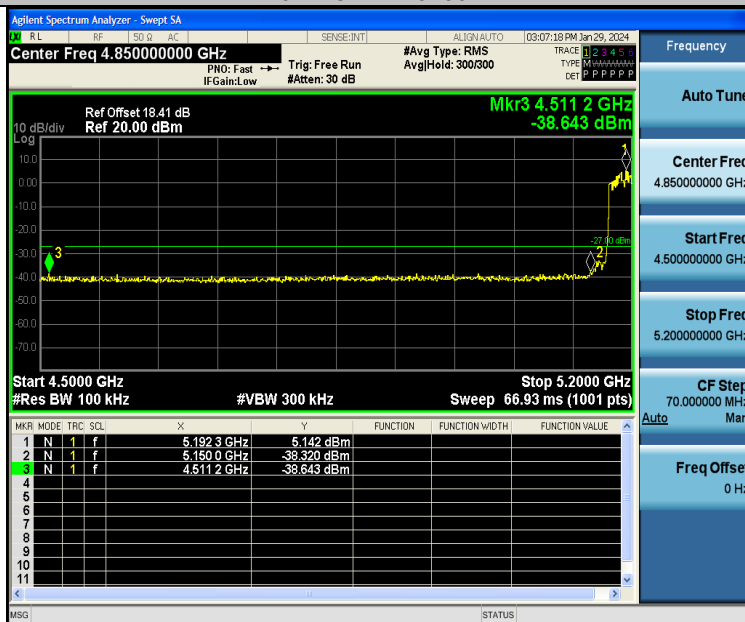


11N40SISO-Ant1-5190-PASS

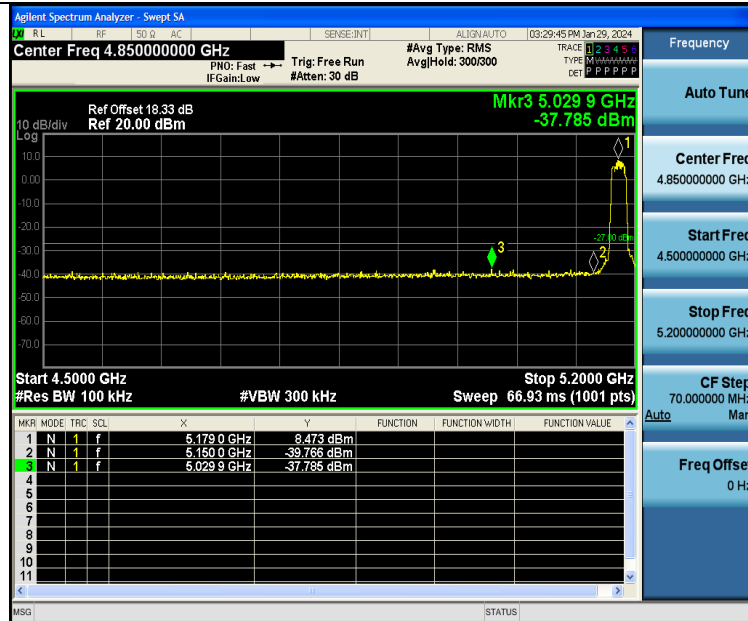

11AC20SISO-Ant1-5180-PASS

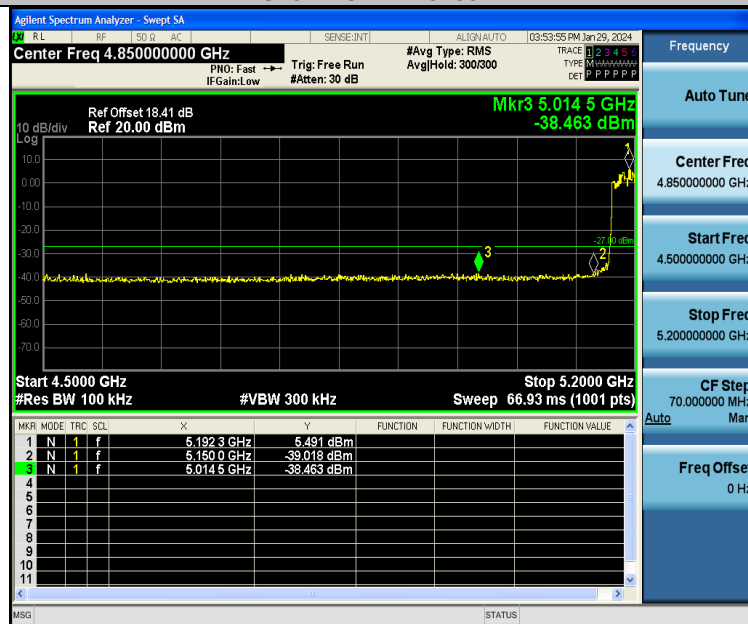


11AC40SISO-Ant1-5190-PASS

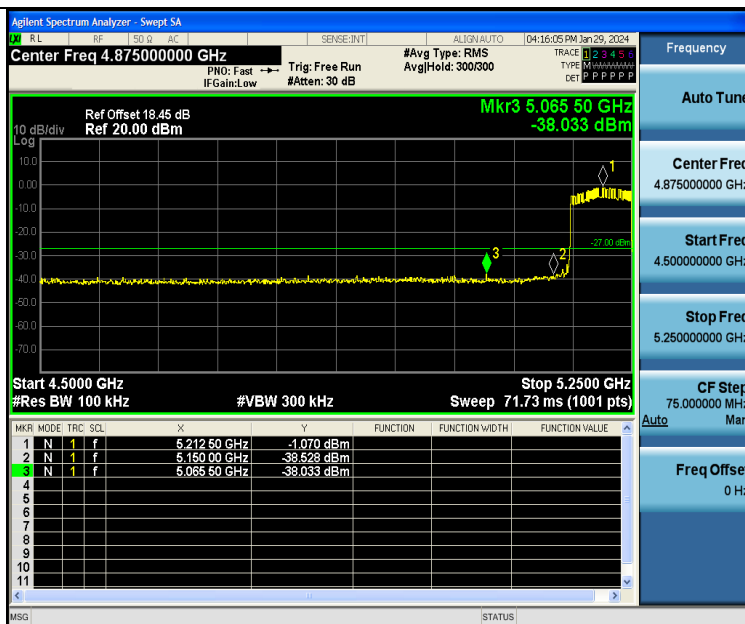


11AC80SISO-Ant1-5210-PASS




11A-Ant1-5240-PASS

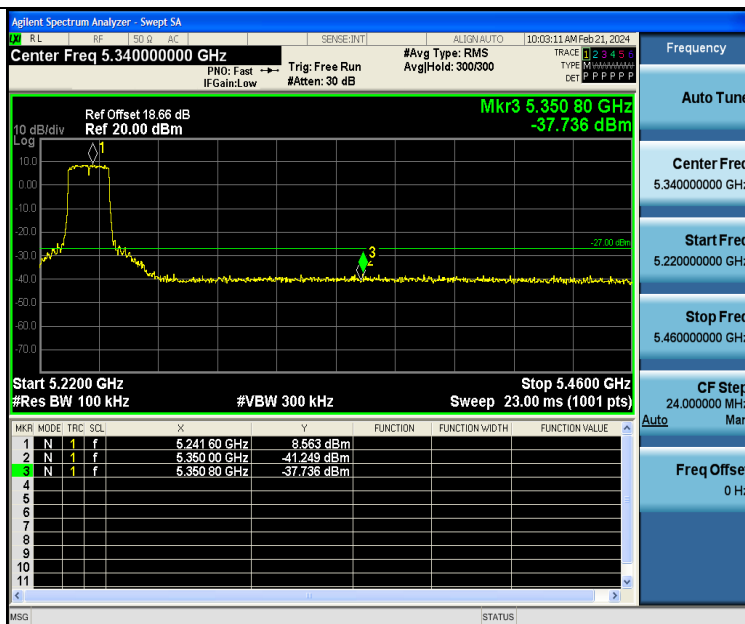


11N20SISO-Ant1-5240-PASS

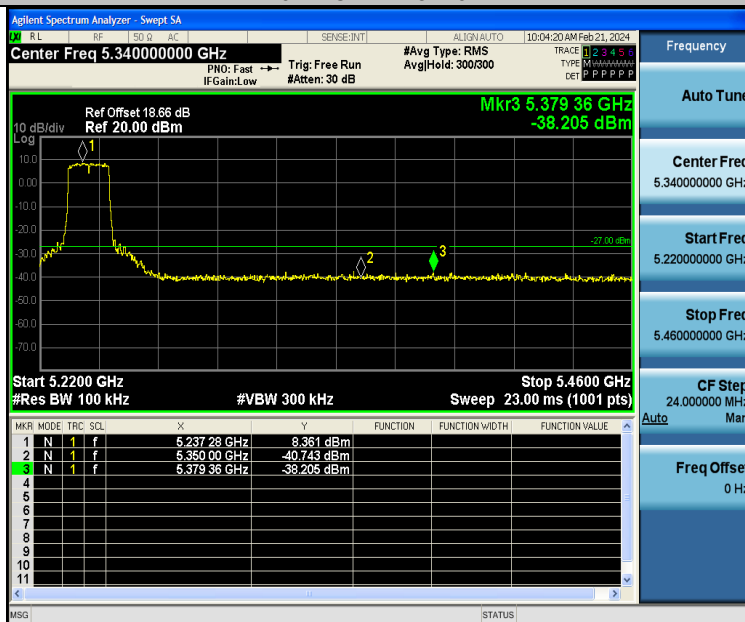

11A20SISO-Ant1-5240-PASS

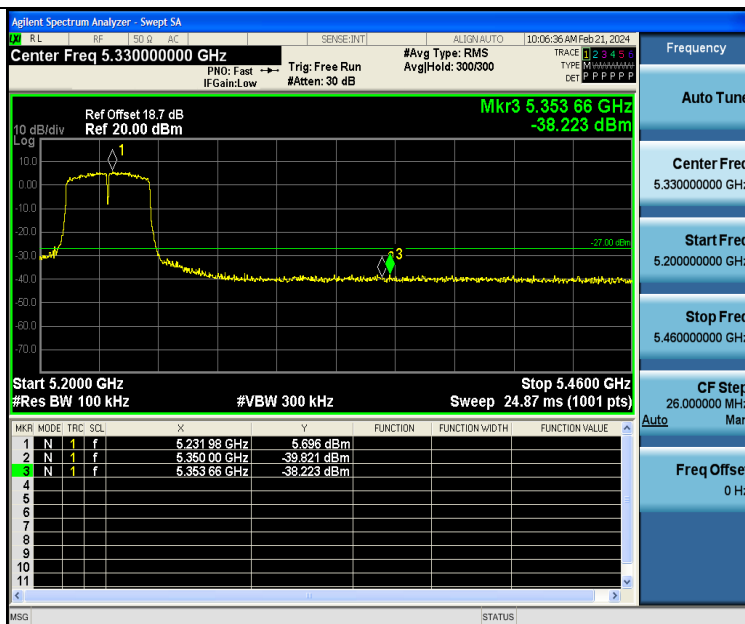


11N40SISO-Ant1-5230-PASS

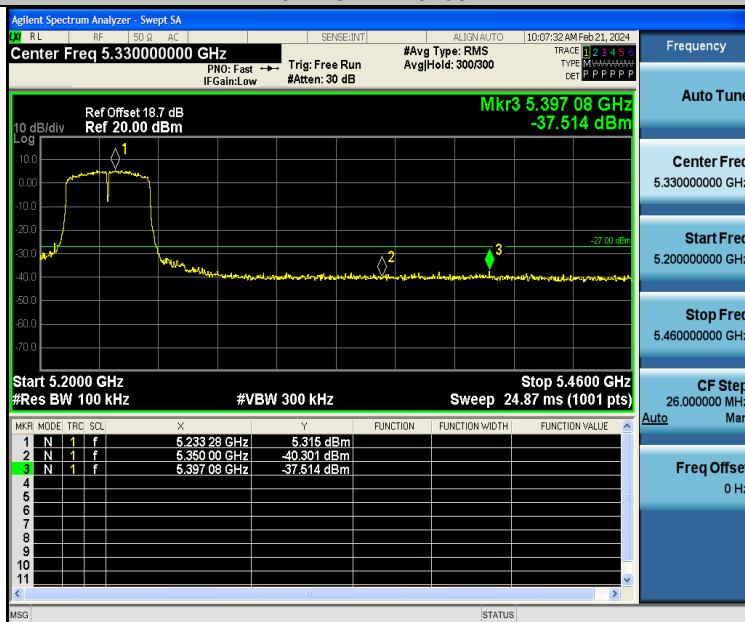


11AC40SISO-Ant1-5230-PASS




Test plots B4:

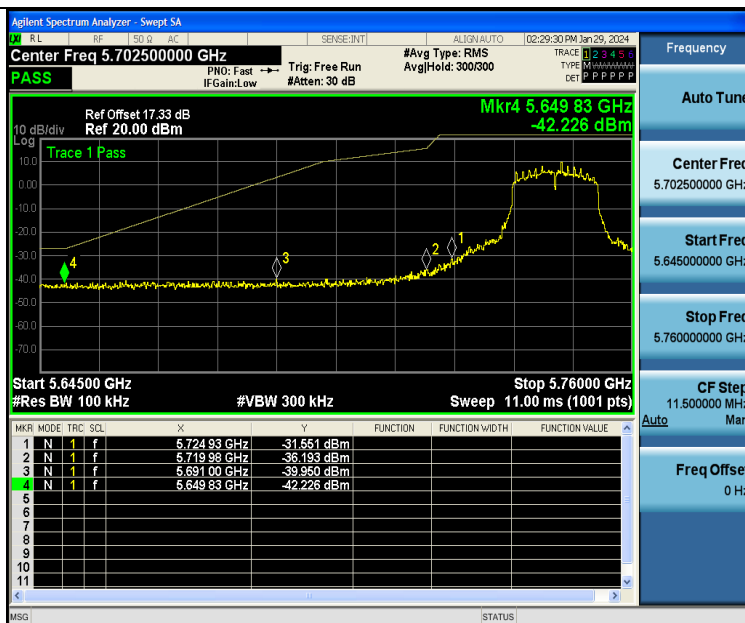

11A-Ant1-5745-PASS

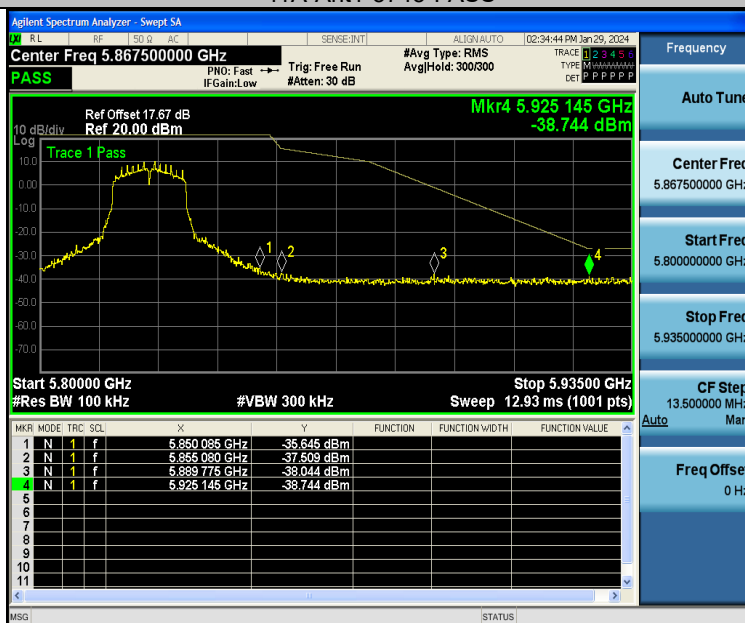

11A-Ant1-5825-PASS

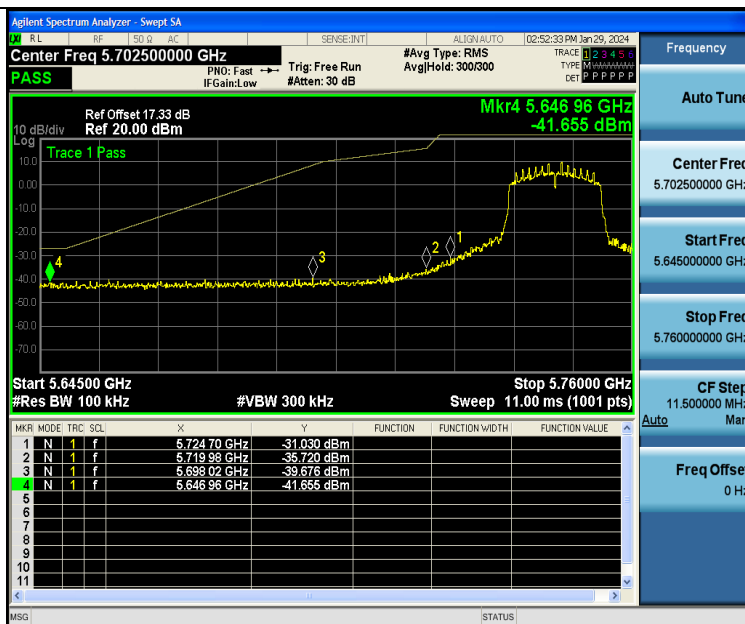

11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS



11AC20SISO-Ant1-5745-PASS




11AC20SISO-Ant1-5825-PASS




11AC40SISO-Ant1-5755-PASS



11AC40SISO-Ant1-5795-PASS

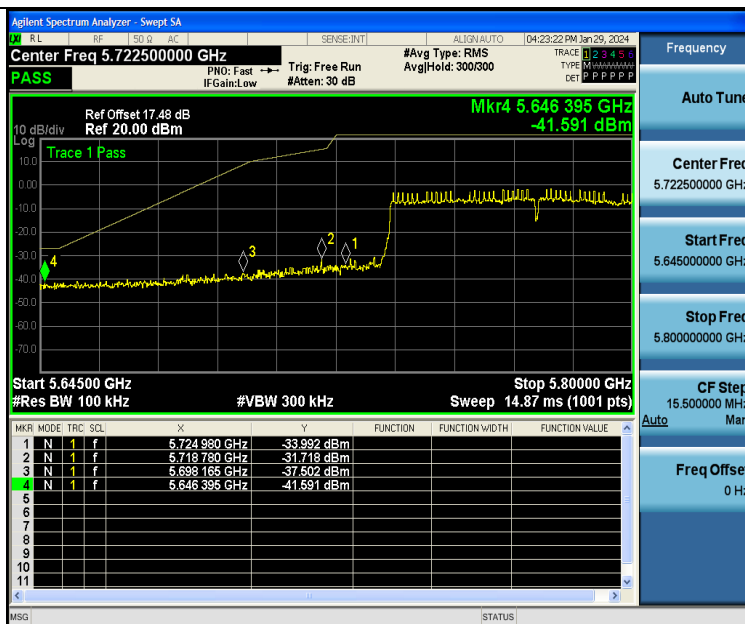

11AC80SISO-Ant1-5775-PASS

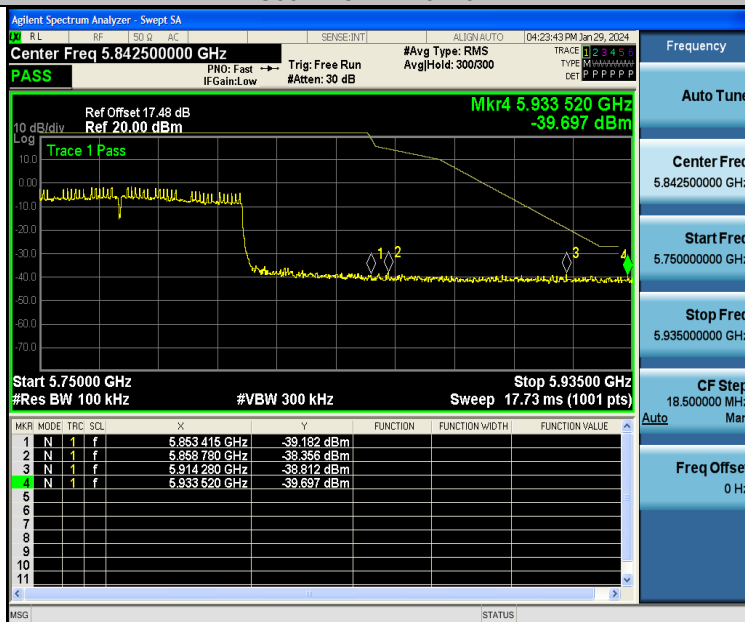

11AC80SISO-Ant1-5775-PASS



7 Emission Bandwidth and Occupied Bandwidth

Test Requirement	: FCC CFR47 Part 15 Section 15.407(a)(e)
Test Method	: ANSI C63.10:2013 According to FCC §15.407(a), The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.
Test Limit	Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth. As per FCC §15.407(e): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

7.1 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01,
Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth; b) Set the VBW > RBW; c) Detector = Peak; d) Trace mode = max hold; e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%; 99% Occupied Bandwidth
The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set $VBW \geq 3 \cdot RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are



placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.2 Test Result

PASS

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations / data rates and antenna ports. Following channel was selected for the final test as listed below.

26 dB emission bandwidth:


TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.080	5169.880	5189.960	---	---
11A	Ant1	5200	19.640	5190.200	5209.840	---	---
11A	Ant1	5240	20.120	5229.920	5250.040	---	---
11N20SISO	Ant1	5180	20.040	5170.080	5190.120	---	---
11N20SISO	Ant1	5200	20.160	5190.000	5210.160	---	---
11N20SISO	Ant1	5240	19.920	5230.040	5249.960	---	---
11N40SISO	Ant1	5190	40.400	5169.840	5210.240	---	---
11N40SISO	Ant1	5230	40.320	5209.840	5250.160	---	---
11AC20SISO	Ant1	5180	19.840	5170.080	5189.920	---	---
11AC20SISO	Ant1	5200	19.920	5190.000	5209.920	---	---
11AC20SISO	Ant1	5240	20.120	5229.920	5250.040	---	---
11AC40SISO	Ant1	5190	40.080	5170.240	5210.320	---	---
11AC40SISO	Ant1	5230	40.160	5210.000	5250.160	---	---
11AC80SISO	Ant1	5210	81.440	5169.520	5250.960	---	---



minimum 6 dB bandwidth:

TestMode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.120	5737.440	5752.560	0.5	PASS
11A	Ant1	5785	12.520	5779.960	5792.480	0.5	PASS
11A	Ant1	5825	15.080	5817.440	5832.520	0.5	PASS
11N20SISO	Ant1	5745	13.880	5737.440	5751.320	0.5	PASS
11N20SISO	Ant1	5785	13.840	5778.680	5792.520	0.5	PASS
11N20SISO	Ant1	5825	15.040	5817.520	5832.560	0.5	PASS
11N40SISO	Ant1	5755	33.760	5737.480	5771.240	0.5	PASS
11N40SISO	Ant1	5795	35.040	5777.480	5812.520	0.5	PASS
11AC20SISO	Ant1	5745	13.840	5738.720	5752.560	0.5	PASS
11AC20SISO	Ant1	5785	13.880	5777.440	5791.320	0.5	PASS
11AC20SISO	Ant1	5825	13.800	5817.440	5831.240	0.5	PASS
11AC40SISO	Ant1	5755	30.160	5738.680	5768.840	0.5	PASS
11AC40SISO	Ant1	5795	33.760	5778.760	5812.520	0.5	PASS
11AC80SISO	Ant1	5775	75.520	5737.080	5812.600	0.5	PASS

Test Graphs:

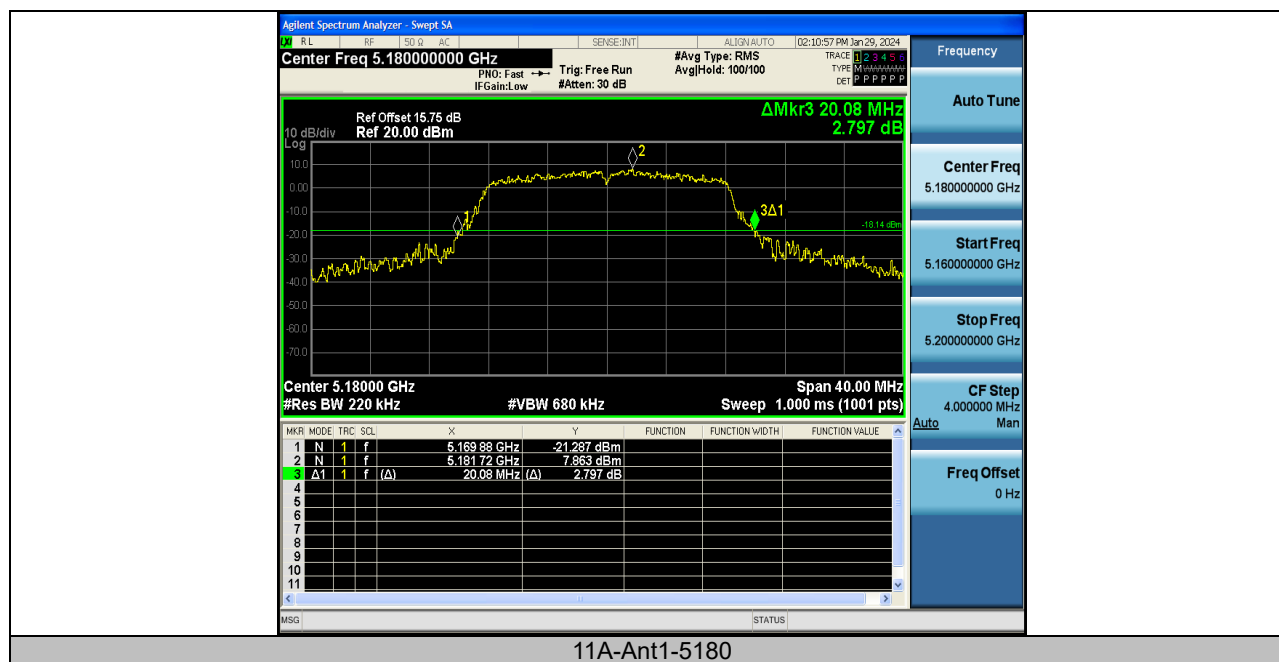

11A-Ant1-5180



11A-Ant1-5200



11A-Ant1-5240



11N20SISO-Ant1-5180



11A-Ant1-5240



11N20SISO-Ant1-5200



11N40SISO-Ant1-5190



11N40SISO-Ant1-5230



11AC20SISO-Ant1-5180




11AC20SISO-Ant1-5200



11AC20SISO-Ant1-5240




11AC40SISO-Ant1-5190

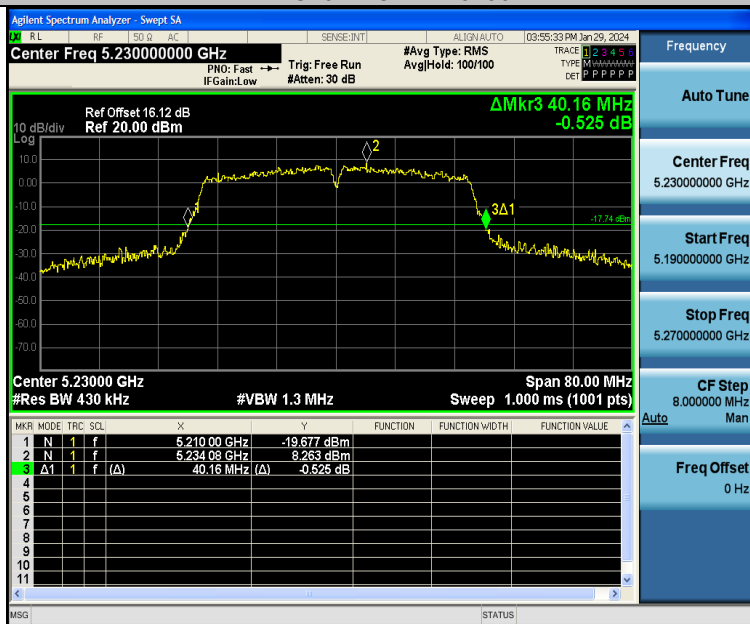

11AC40SISO-Ant1-5230




Report No.: PTC24010909601E-FC04

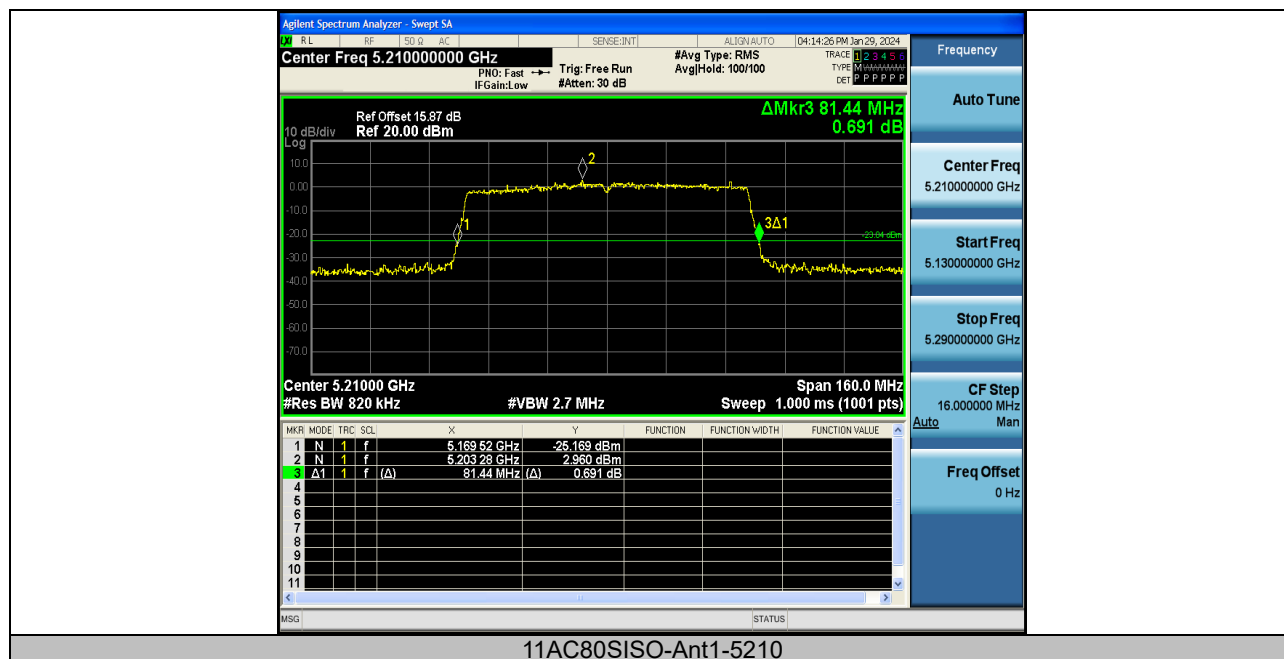




Min emission bandwidth Test Graphs:



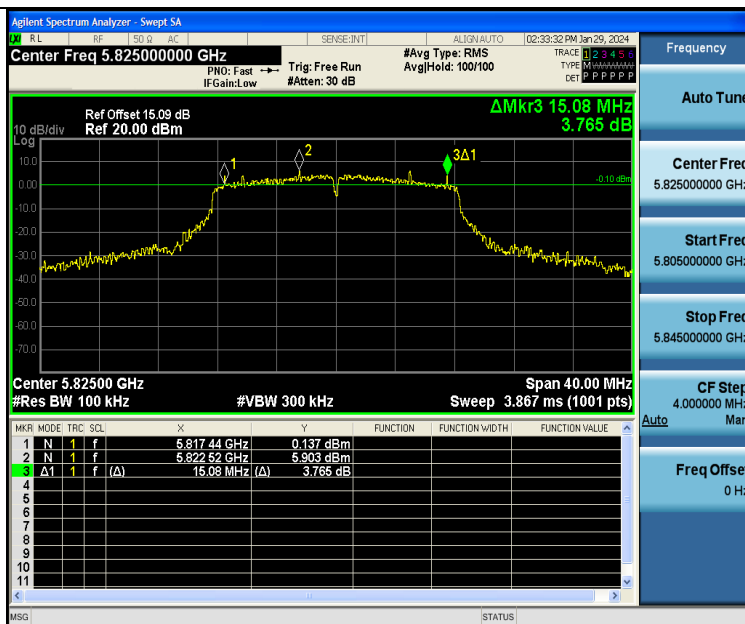

11A-Ant1-5825-PASS

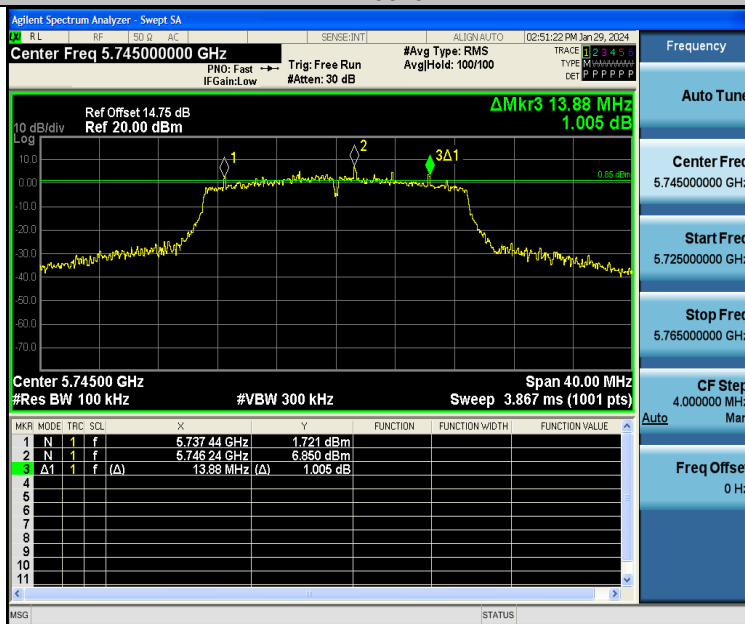

11N20SISO-Ant1-5745-PASS