


802.11ac-HT20

Test Channel

5745MHz(worst case)


Polarity:

Vertical

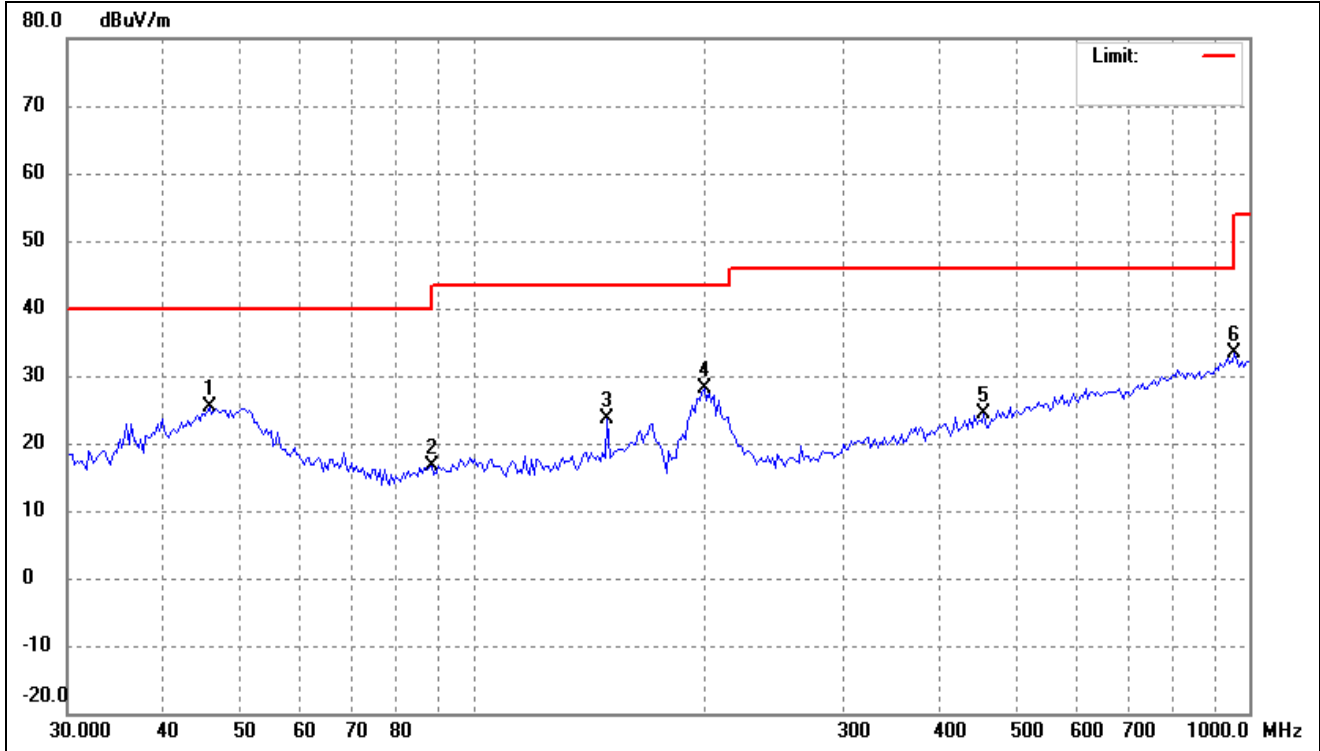


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	33.69	-8.41	25.28	40.00	-14.72	-	-	peak
2	88.5336	29.84	-13.09	16.75	43.50	-26.75	-	-	peak
3	148.9175	32.22	-8.68	23.54	43.50	-19.96	-	-	peak
4	198.6424	40.03	-11.91	28.12	43.50	-15.38	-	-	peak
5	455.1888	28.93	-4.52	24.41	46.00	-21.59	-	-	peak
6	958.7135	31.02	2.26	33.28	46.00	-12.72	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

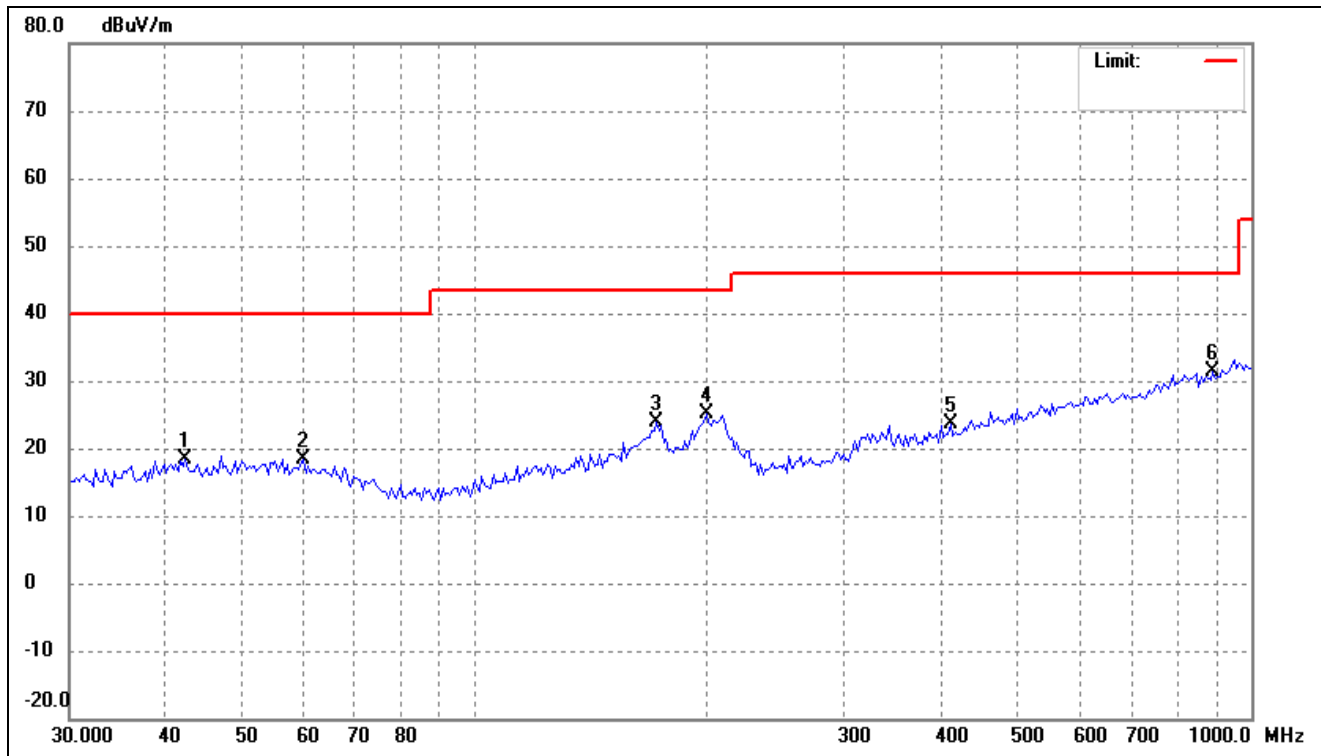


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.3314	26.92	-8.48	18.44	40.00	-21.56	-	-	peak
2	60.1528	27.42	-8.97	18.45	40.00	-21.55	-	-	peak
3	171.3890	32.86	-9.08	23.78	43.50	-19.72	-	-	peak
4	198.6424	36.96	-11.91	25.05	43.50	-18.45	-	-	peak
5	409.6506	29.45	-5.70	23.75	46.00	-22.25	-	-	peak
6	893.6557	30.16	1.13	31.29	46.00	-14.71	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

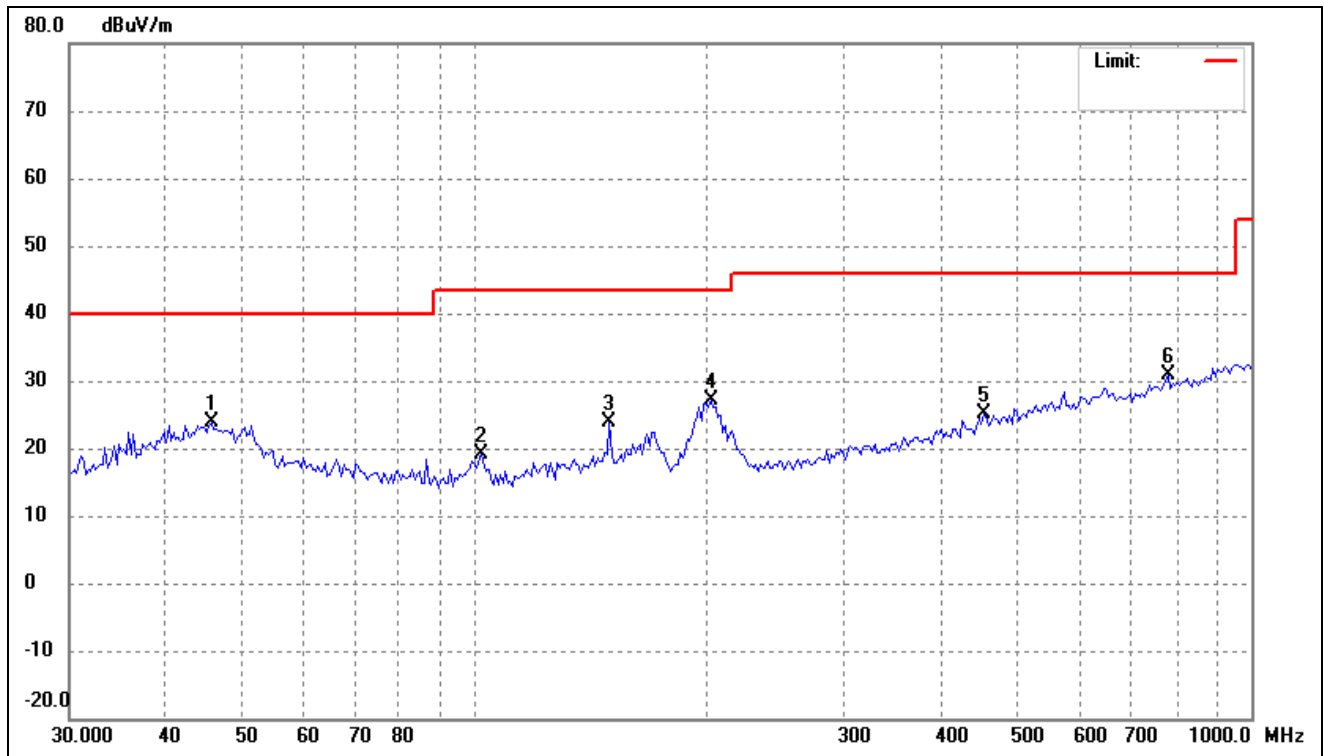


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	32.32	-8.41	23.91	40.00	-16.09	-	-	peak
2	101.8932	31.41	-12.32	19.09	43.50	-24.41	-	-	peak
3	148.9175	32.62	-8.68	23.94	43.50	-19.56	-	-	peak
4	201.4539	39.18	-12.01	27.17	43.50	-16.33	-	-	peak
5	452.0013	29.59	-4.56	25.03	46.00	-20.97	-	-	peak
6	781.9606	30.76	0.13	30.89	46.00	-15.11	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

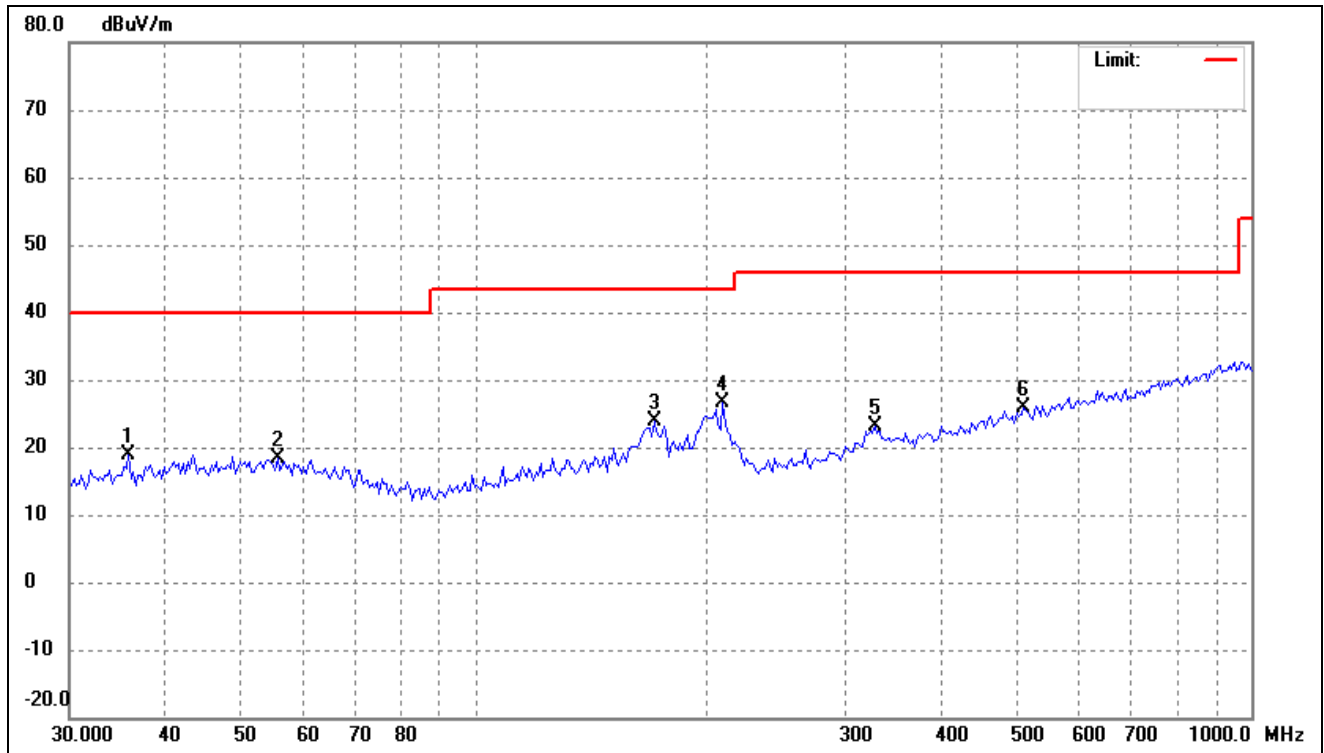


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	35.7617	28.21	-9.39	18.82	40.00	-21.18	-	-	peak
2	55.6782	26.98	-8.67	18.31	40.00	-21.69	-	-	peak
3	170.1888	32.81	-8.91	23.90	43.50	-19.60	-	-	peak
4	208.6580	38.80	-12.17	26.63	43.50	-16.87	-	-	peak
5	327.1554	30.74	-7.51	23.23	46.00	-22.77	-	-	peak
6	509.3559	29.65	-3.76	25.89	46.00	-20.11	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

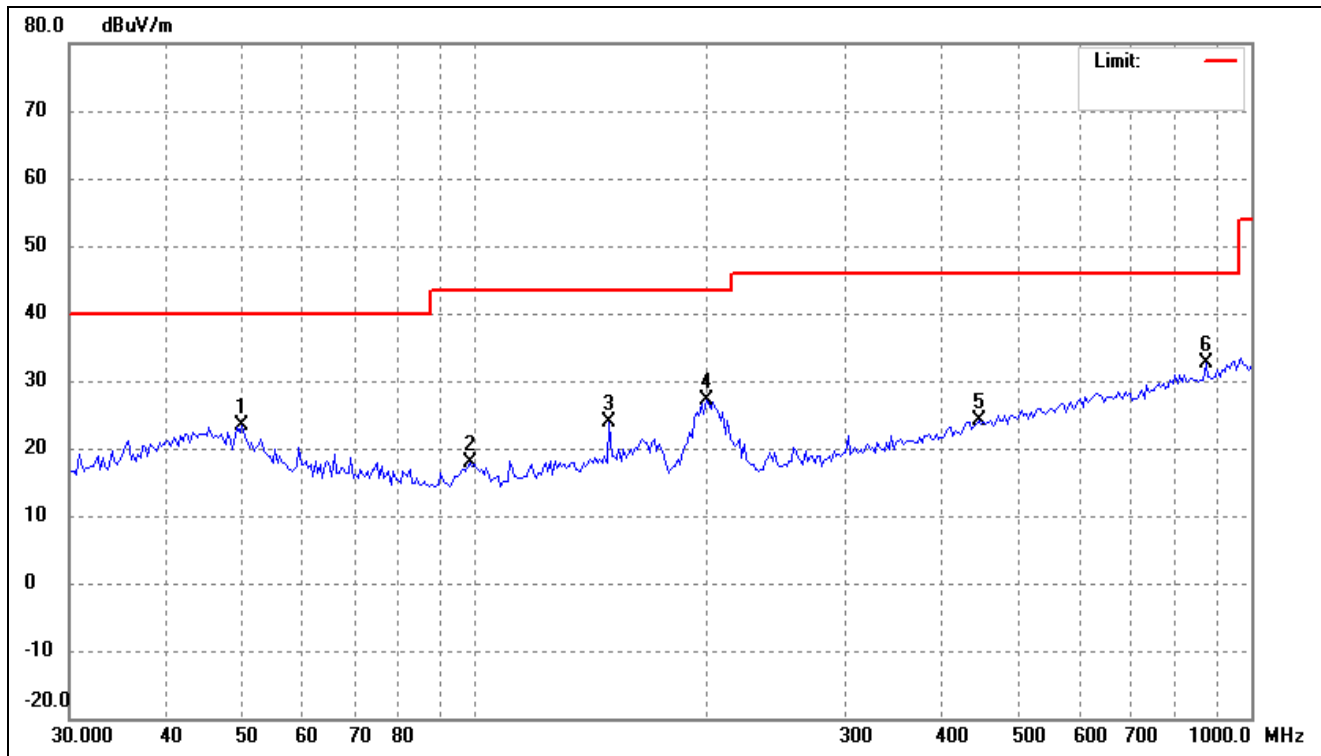


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	50.1080	31.58	-8.09	23.49	40.00	-16.51	-	-	peak
2	98.3752	30.41	-12.59	17.82	43.50	-25.68	-	-	peak
3	148.9175	32.46	-8.68	23.78	43.50	-19.72	-	-	peak
4	198.6424	39.06	-11.91	27.15	43.50	-16.35	-	-	peak
5	445.6932	28.80	-4.71	24.09	46.00	-21.91	-	-	peak
6	875.0133	31.66	0.97	32.63	46.00	-13.37	-	-	peak

802.11ac-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

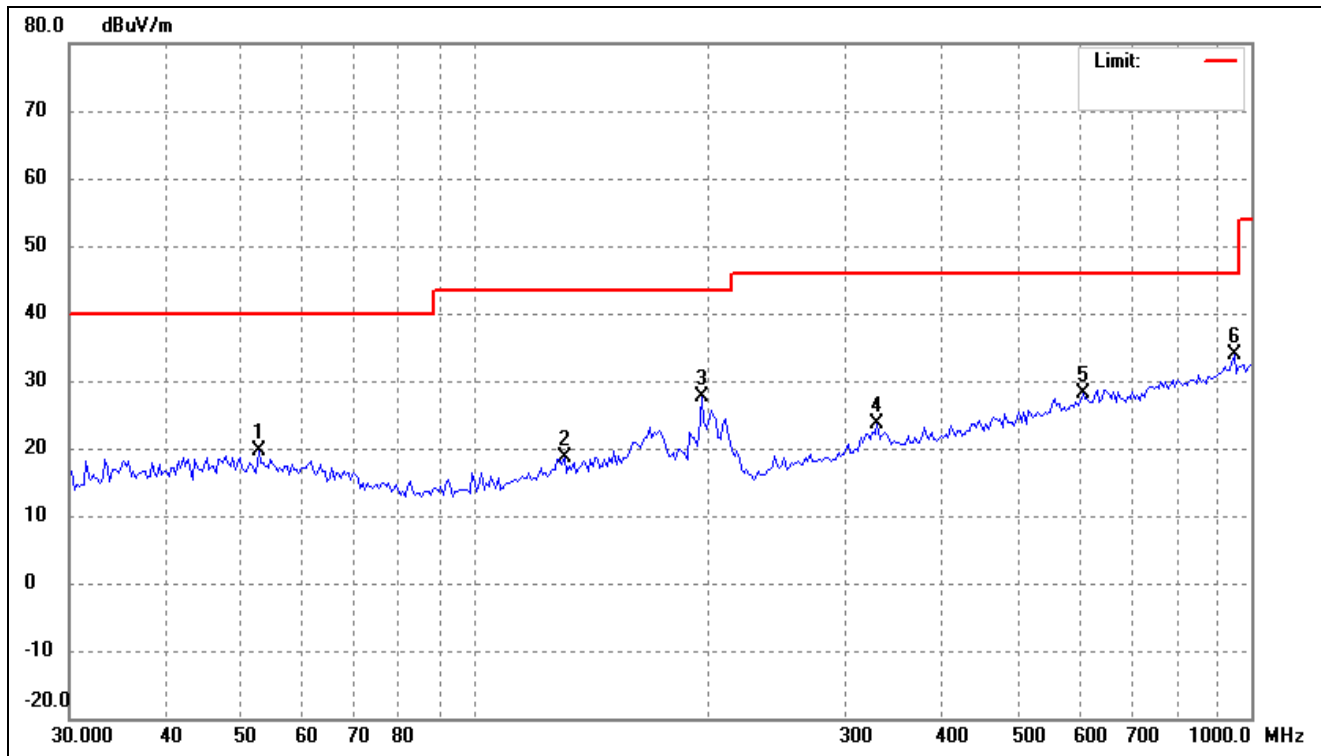


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	52.6345	27.92	-8.37	19.55	40.00	-20.45	-	-	peak
2	130.3048	28.38	-9.84	18.54	43.50	-24.96	-	-	peak
3	195.8701	39.30	-11.75	27.55	43.50	-15.95	-	-	peak
4	329.4625	31.11	-7.47	23.64	46.00	-22.36	-	-	peak
5	607.1806	29.70	-1.64	28.06	46.00	-17.94	-	-	peak
6	952.0001	31.73	2.25	33.98	46.00	-12.02	-	-	peak

802.11ac-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

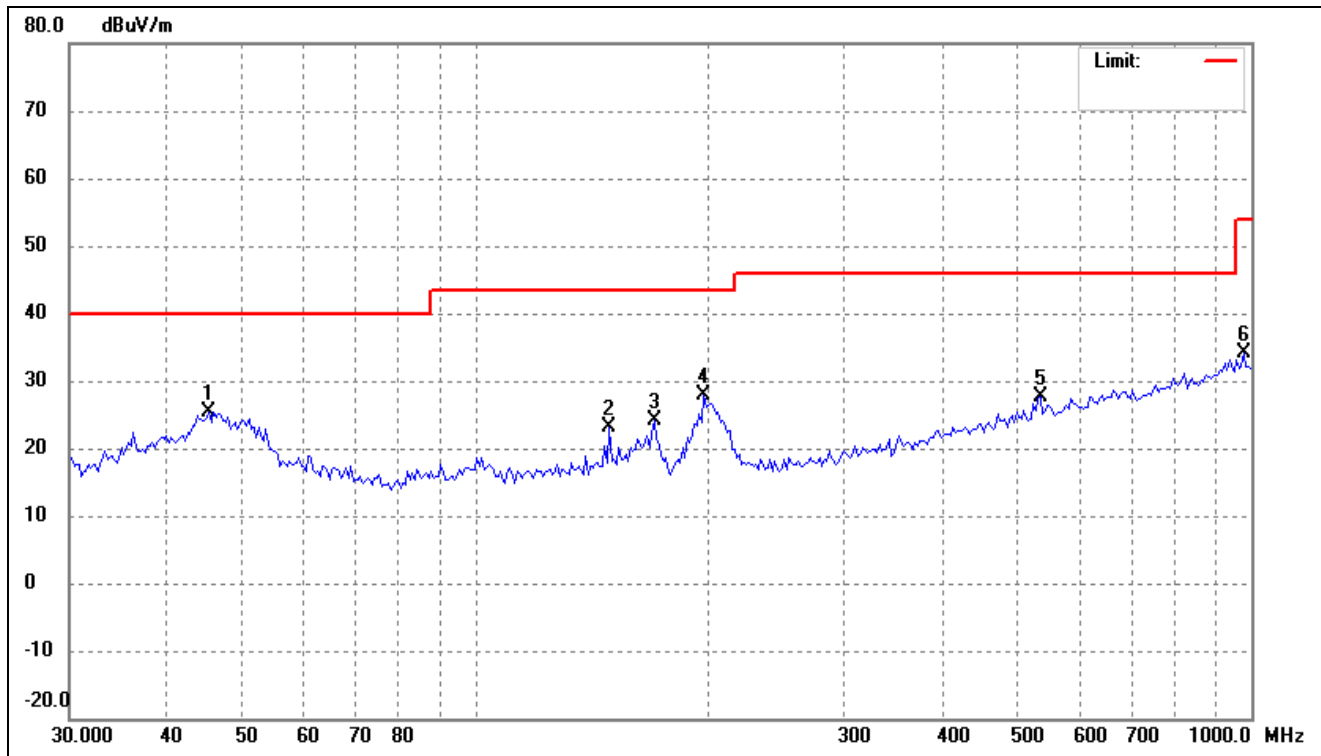


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	33.77	-8.43	25.34	40.00	-14.66	-	-	peak
2	148.9175	31.86	-8.68	23.18	43.50	-20.32	-	-	peak
3	170.1888	32.99	-8.91	24.08	43.50	-19.42	-	-	peak
4	197.2514	39.70	-11.83	27.87	43.50	-15.63	-	-	peak
5	535.0377	30.91	-3.25	27.66	46.00	-18.34	-	-	peak
6	979.1392	31.79	2.28	34.07	54.00	-19.93	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

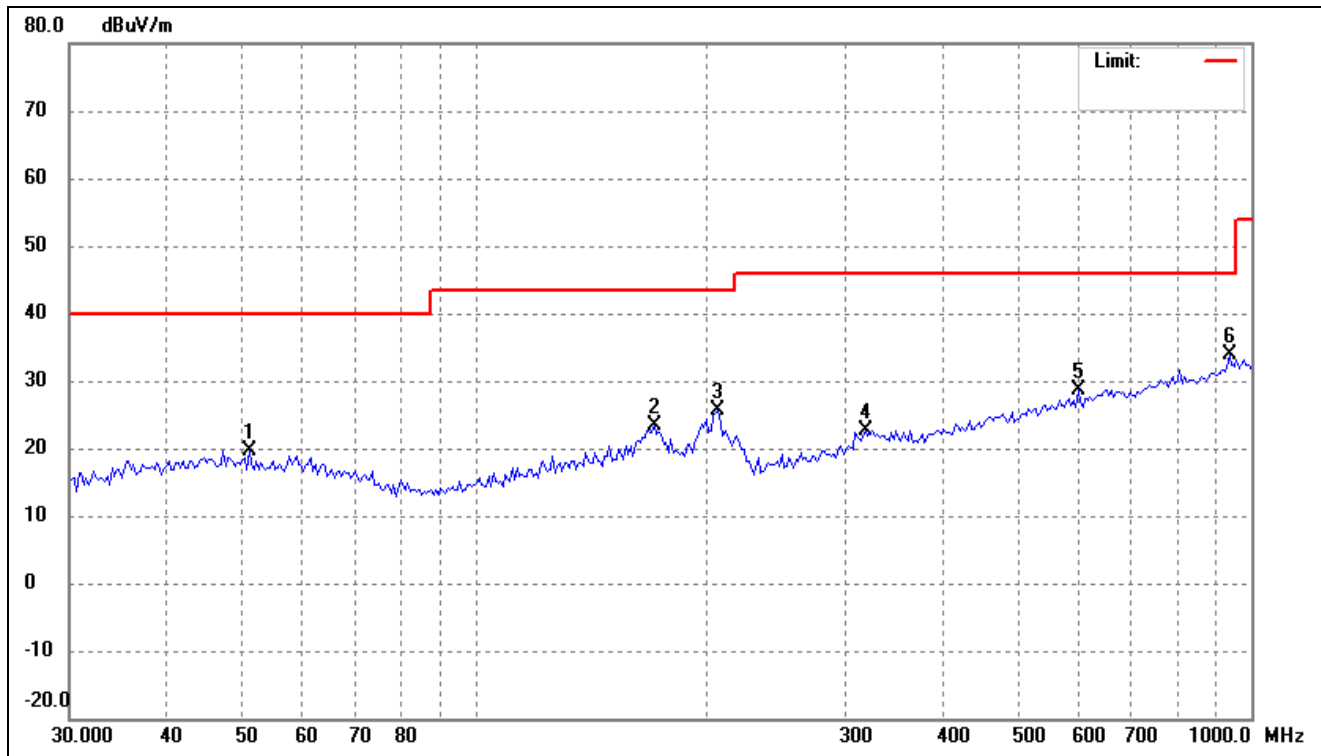


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	51.1756	27.97	-8.22	19.75	40.00	-20.25	-	-	peak
2	170.1888	32.31	-8.91	23.40	43.50	-20.10	-	-	peak
3	205.7459	37.78	-12.10	25.68	43.50	-17.82	-	-	peak
4	318.0875	30.41	-7.75	22.66	46.00	-23.34	-	-	peak
5	598.7067	30.40	-1.77	28.63	46.00	-17.37	-	-	peak
6	938.7139	31.87	2.01	33.88	46.00	-12.12	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

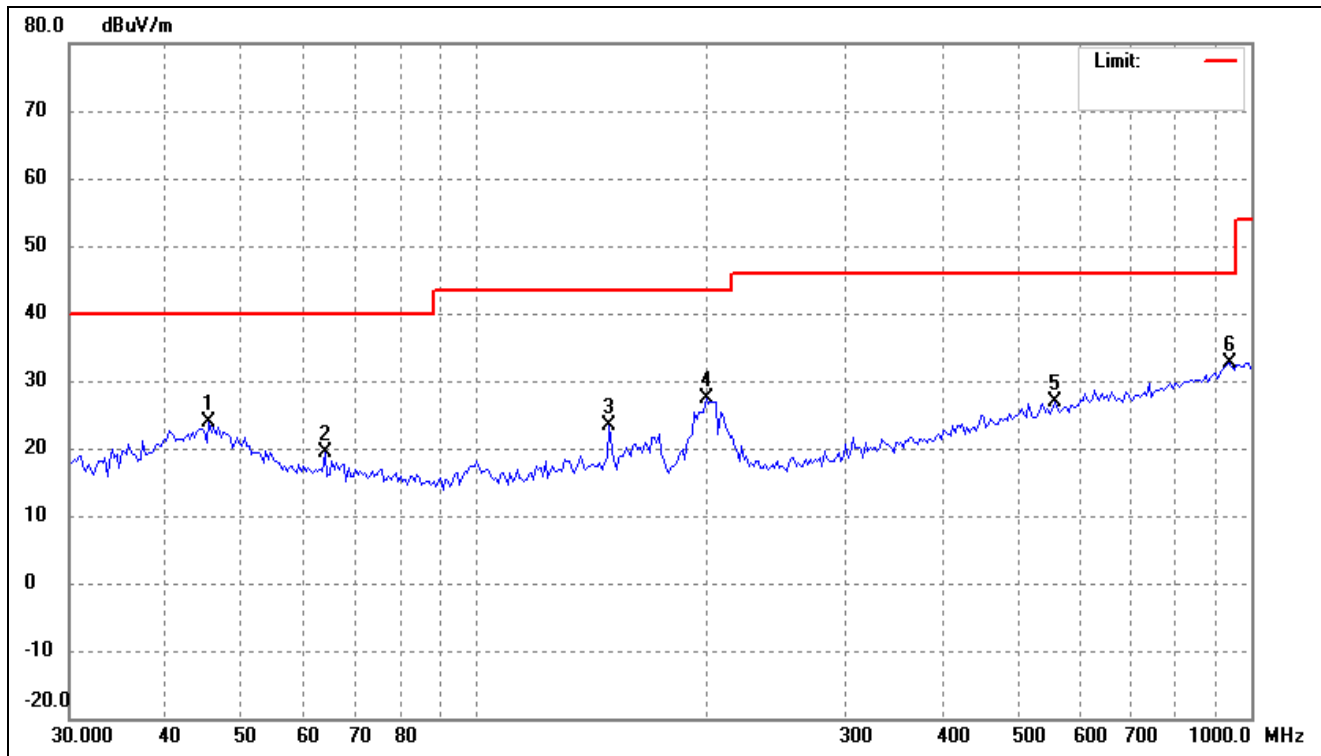


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	32.31	-8.43	23.88	40.00	-16.12	-	-	peak
2	64.0800	29.09	-9.68	19.41	40.00	-20.59	-	-	peak
3	148.9175	32.16	-8.68	23.48	43.50	-20.02	-	-	peak
4	198.6424	39.22	-11.91	27.31	43.50	-16.19	-	-	peak
5	558.0788	29.58	-2.66	26.92	46.00	-19.08	-	-	peak
6	938.7139	30.56	2.01	32.57	46.00	-13.43	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

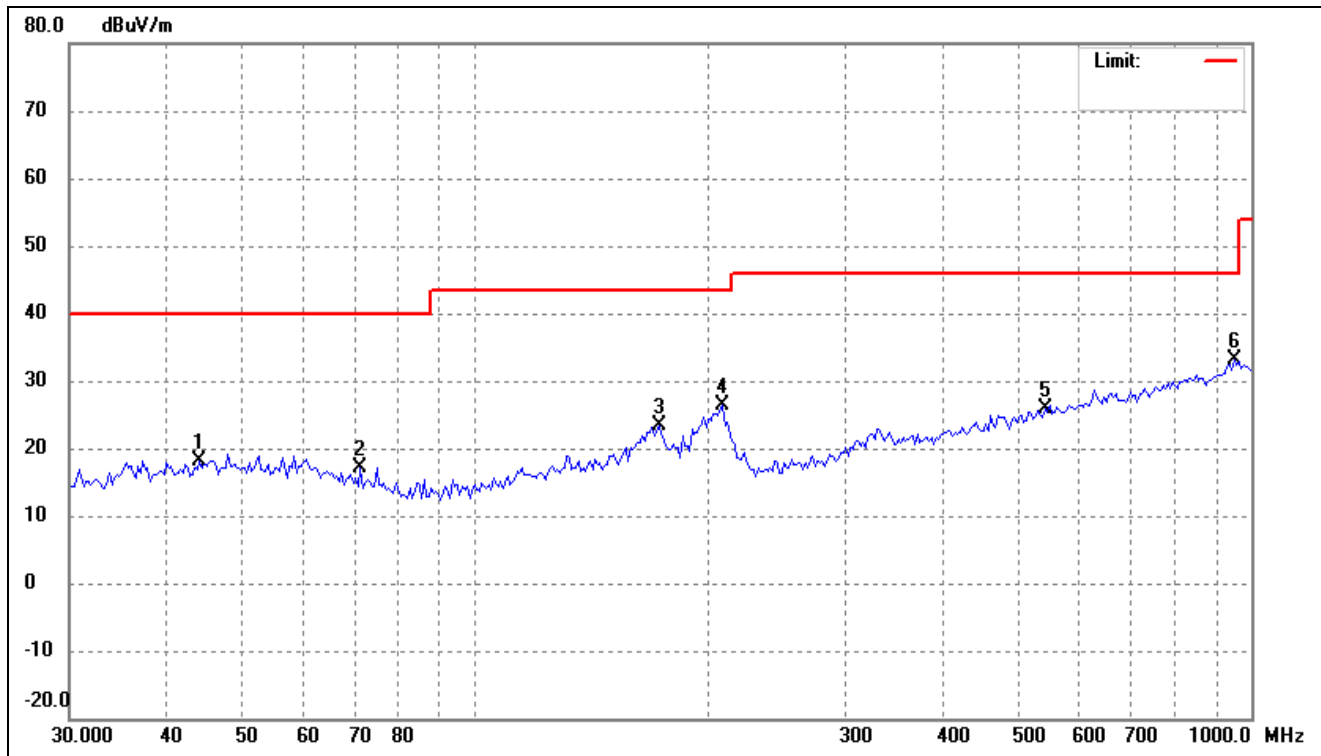


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.1544	26.61	-8.47	18.14	40.00	-21.86	-	-	peak
2	71.2033	28.18	-11.03	17.15	40.00	-22.85	-	-	peak
3	172.5976	32.69	-9.25	23.44	43.50	-20.06	-	-	peak
4	208.6580	38.47	-12.17	26.30	43.50	-17.20	-	-	peak
5	542.6104	28.96	-3.05	25.91	46.00	-20.09	-	-	peak
6	952.0001	30.83	2.25	33.08	46.00	-12.92	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

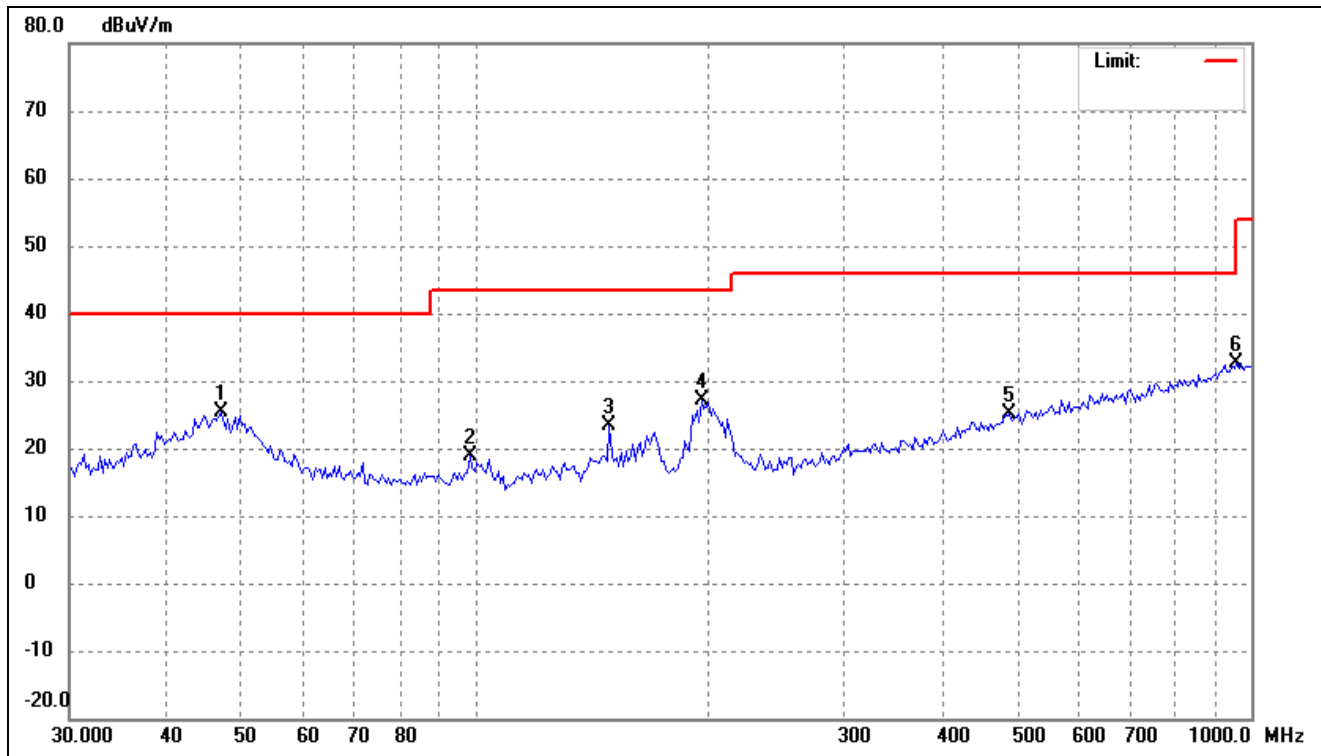


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	47.0371	33.78	-8.32	25.46	40.00	-14.54	-	-	peak
2	98.3752	31.52	-12.59	18.93	43.50	-24.57	-	-	peak
3	148.9175	31.96	-8.68	23.28	43.50	-20.22	-	-	peak
4	195.8701	38.98	-11.75	27.23	43.50	-16.27	-	-	peak
5	488.3263	29.29	-4.06	25.23	46.00	-20.77	-	-	peak
6	958.7135	30.49	2.26	32.75	46.00	-13.25	-	-	peak

802.11ax-HE80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

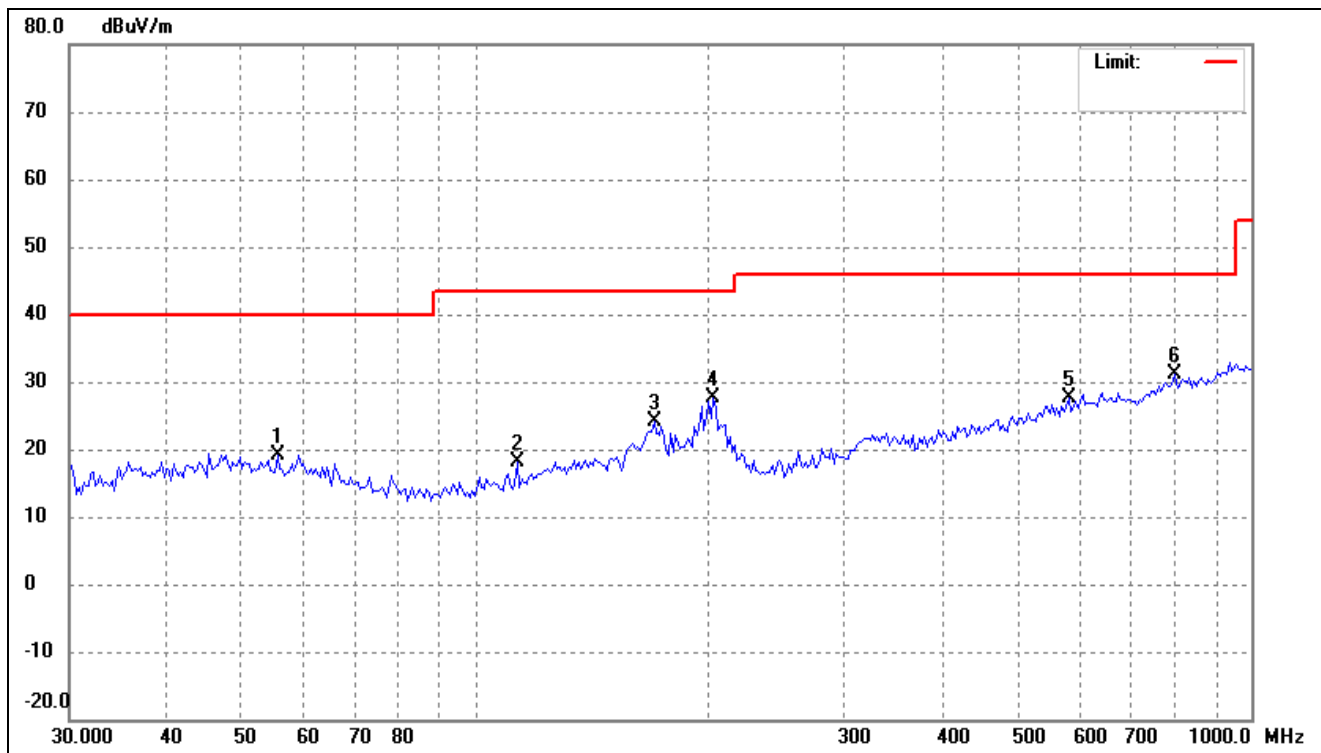

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	55.6782	27.74	-8.67	19.07	40.00	-20.93	-	-	peak
2	113.2200	29.31	-11.24	18.07	43.50	-25.43	-	-	peak
3	170.1888	32.93	-8.91	24.02	43.50	-19.48	-	-	peak
4	202.8745	39.57	-12.04	27.53	43.50	-15.97	-	-	peak
5	582.1122	29.70	-2.11	27.59	46.00	-18.41	-	-	peak
6	798.6205	30.79	0.29	31.08	46.00	-14.92	-	-	peak


802.11ax-HE80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

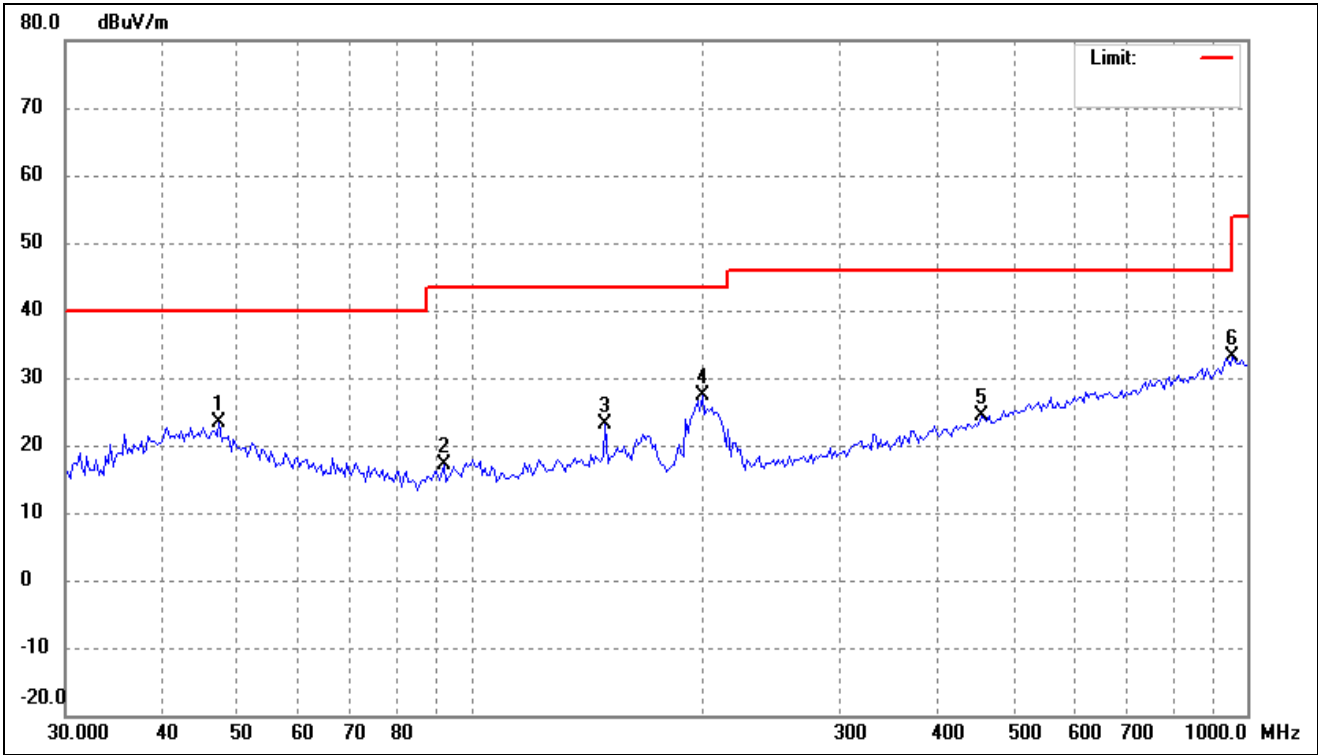

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	47.3688	31.55	-8.29	23.26	40.00	-16.74	-	-	peak
2	92.3462	30.00	-12.96	17.04	43.50	-26.46	-	-	peak
3	148.9175	31.84	-8.68	23.16	43.50	-20.34	-	-	peak
4	198.6424	39.24	-11.91	27.33	43.50	-16.17	-	-	peak
5	455.1888	28.87	-4.52	24.35	46.00	-21.65	-	-	peak
6	958.7135	30.76	2.26	33.02	46.00	-12.98	-	-	peak


- Antenna 1
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

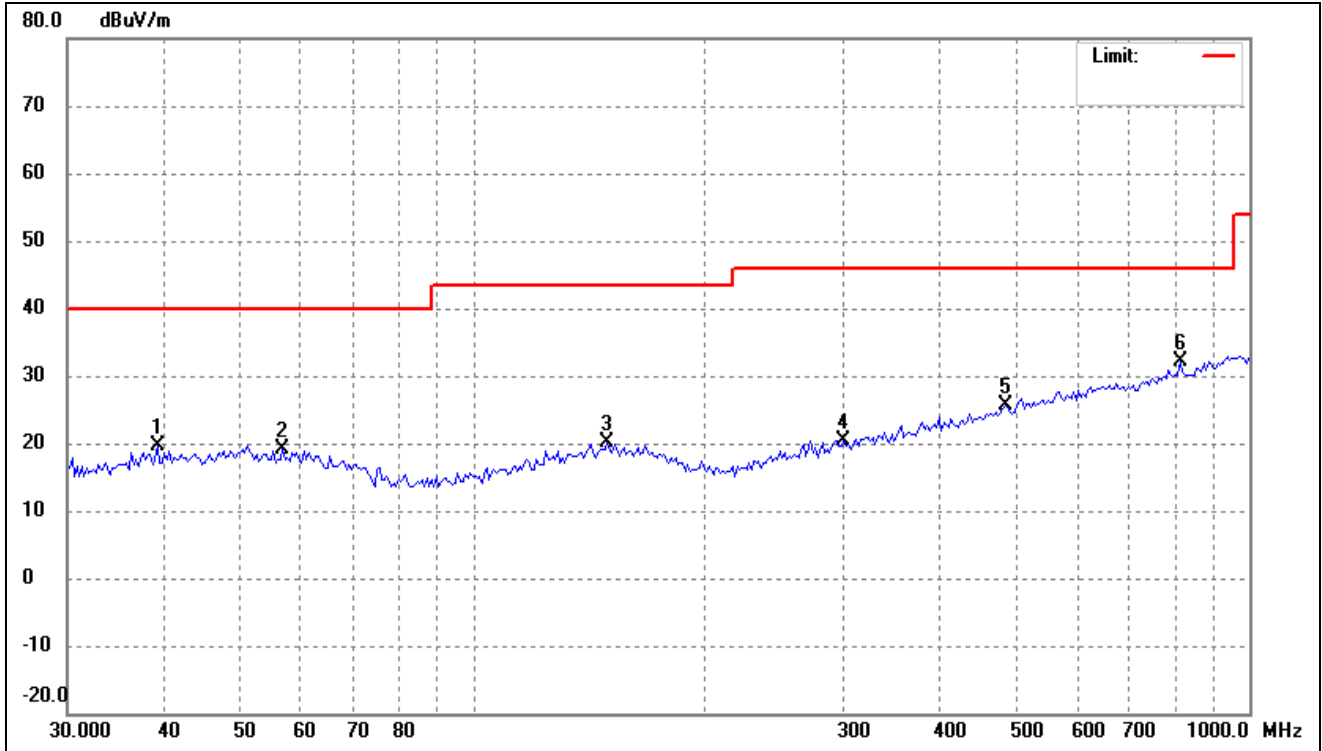


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.1825	28.34	-8.65	19.69	40.00	-20.31	-	-	peak
2	56.8644	27.81	-8.75	19.06	40.00	-20.94	-	-	peak
3	148.9175	28.89	-8.68	20.21	43.50	-23.29	-	-	peak
4	300.6988	28.73	-8.24	20.49	46.00	-25.51	-	-	peak
5	484.9068	29.70	-4.11	25.59	46.00	-20.41	-	-	peak
6	815.6353	31.74	0.44	32.18	46.00	-13.82	-	-	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

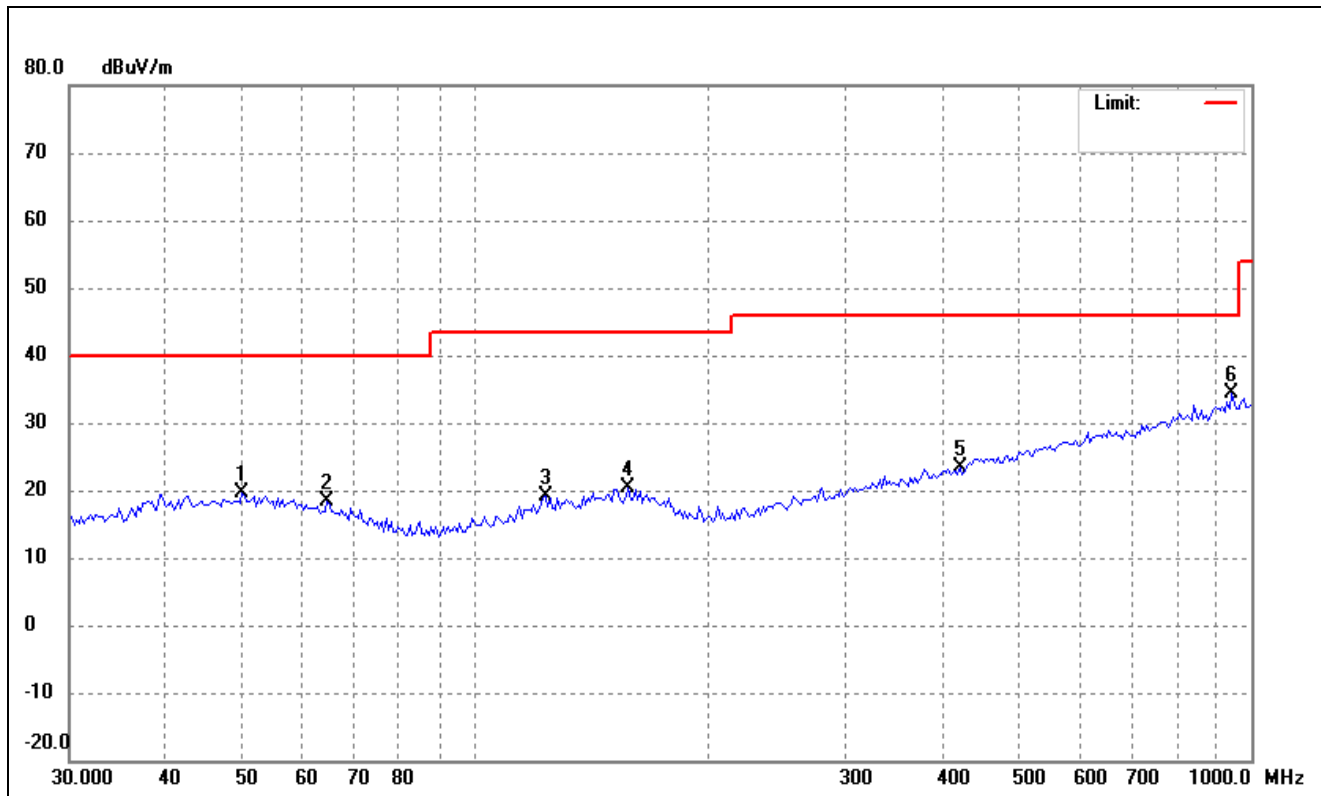


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	50.1080	27.66	-8.09	19.57	40.00	-20.43	-	-	peak
2	64.5318	28.21	-9.76	18.45	40.00	-21.55	-	-	peak
3	123.1814	29.46	-10.32	19.14	43.50	-24.36	-	-	peak
4	157.5289	28.92	-8.61	20.31	43.50	-23.19	-	-	peak
5	421.3287	28.71	-5.38	23.33	46.00	-22.67	-	-	peak
6	945.3336	32.19	2.15	34.34	46.00	-11.66	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

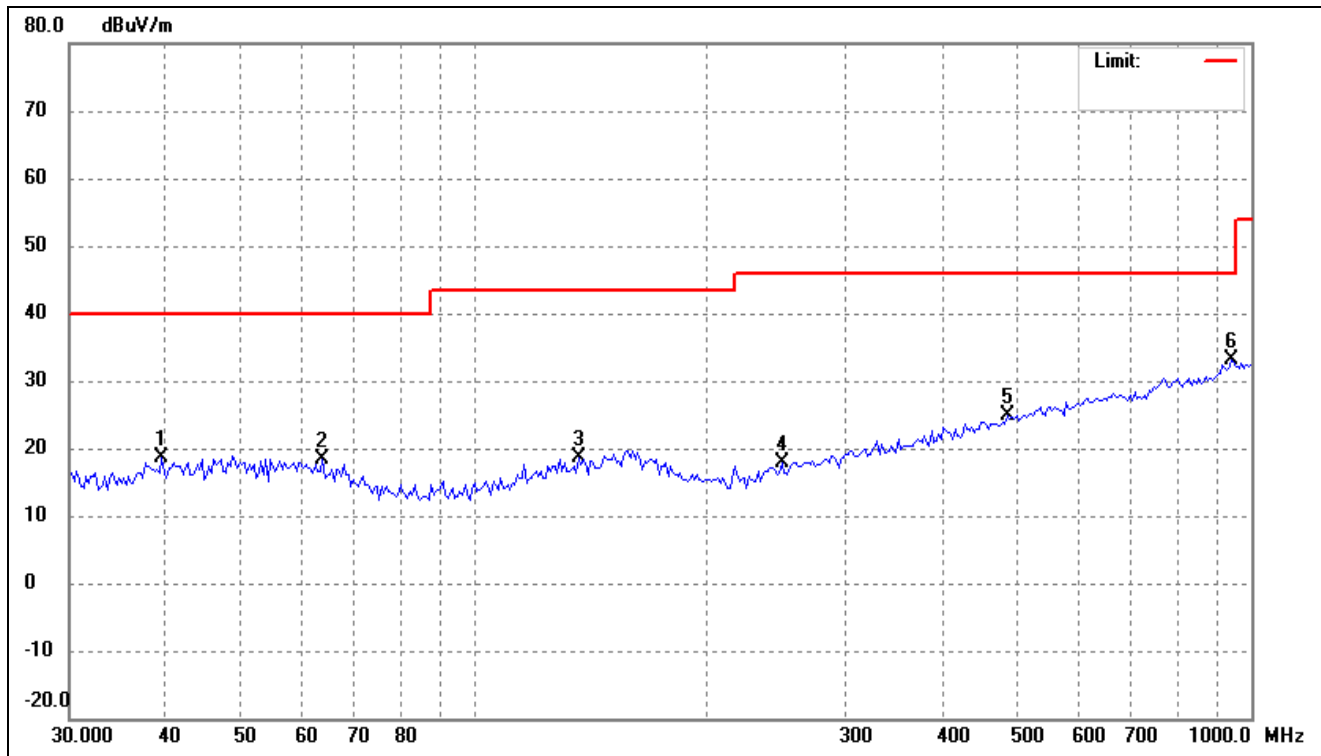


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.4588	27.19	-8.60	18.59	40.00	-21.41	-	-	peak
2	63.6312	28.03	-9.59	18.44	40.00	-21.56	-	-	peak
3	135.9163	28.14	-9.61	18.53	43.50	-24.97	-	-	peak
4	248.7319	28.19	-10.26	17.93	46.00	-28.07	-	-	peak
5	484.9068	28.99	-4.11	24.88	46.00	-21.12	-	-	peak
6	945.3336	31.00	2.15	33.15	46.00	-12.85	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

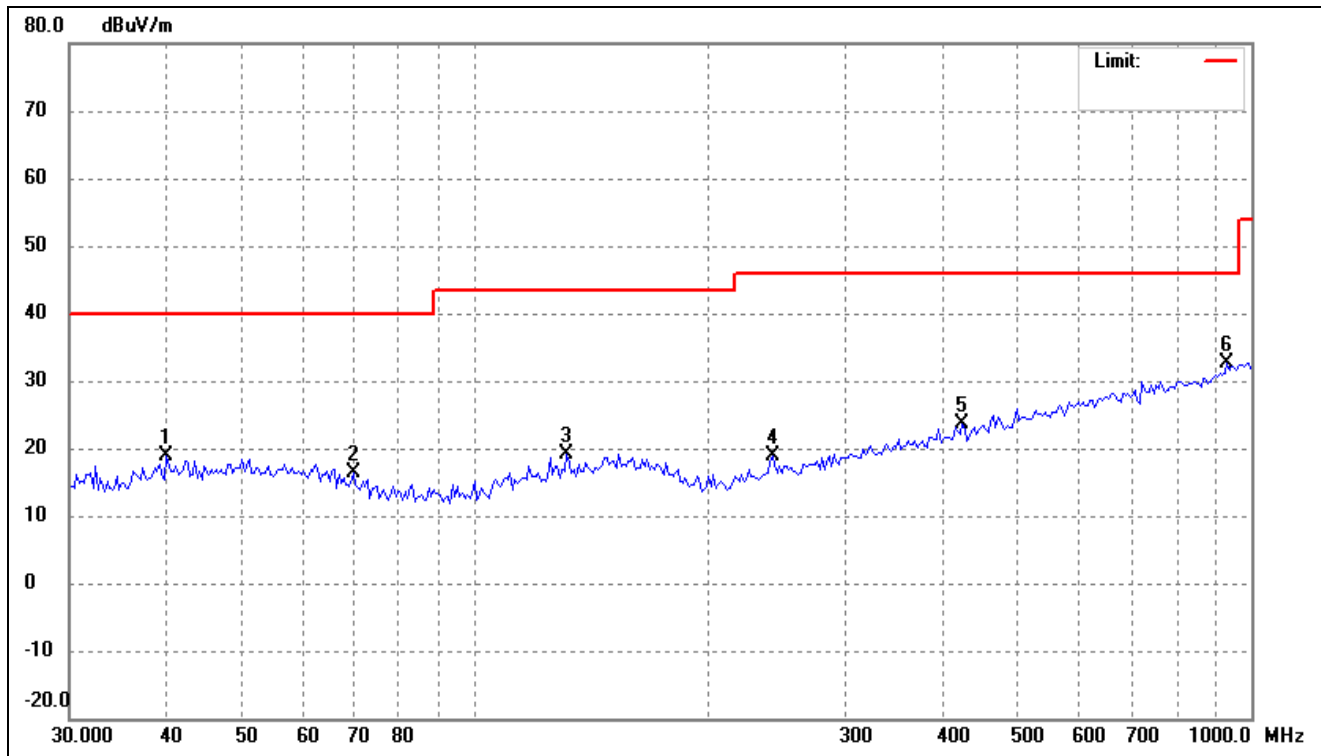


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.0173	27.25	-8.47	18.78	40.00	-21.22	-	-	peak
2	69.7179	27.21	-10.71	16.50	40.00	-23.50	-	-	peak
3	131.2236	28.92	-9.80	19.12	43.50	-24.38	-	-	peak
4	241.8377	29.30	-10.48	18.82	46.00	-27.18	-	-	peak
5	424.2999	28.83	-5.30	23.53	46.00	-22.47	-	-	peak
6	932.1405	30.82	1.87	32.69	46.00	-13.31	-	-	peak

802.11ac-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

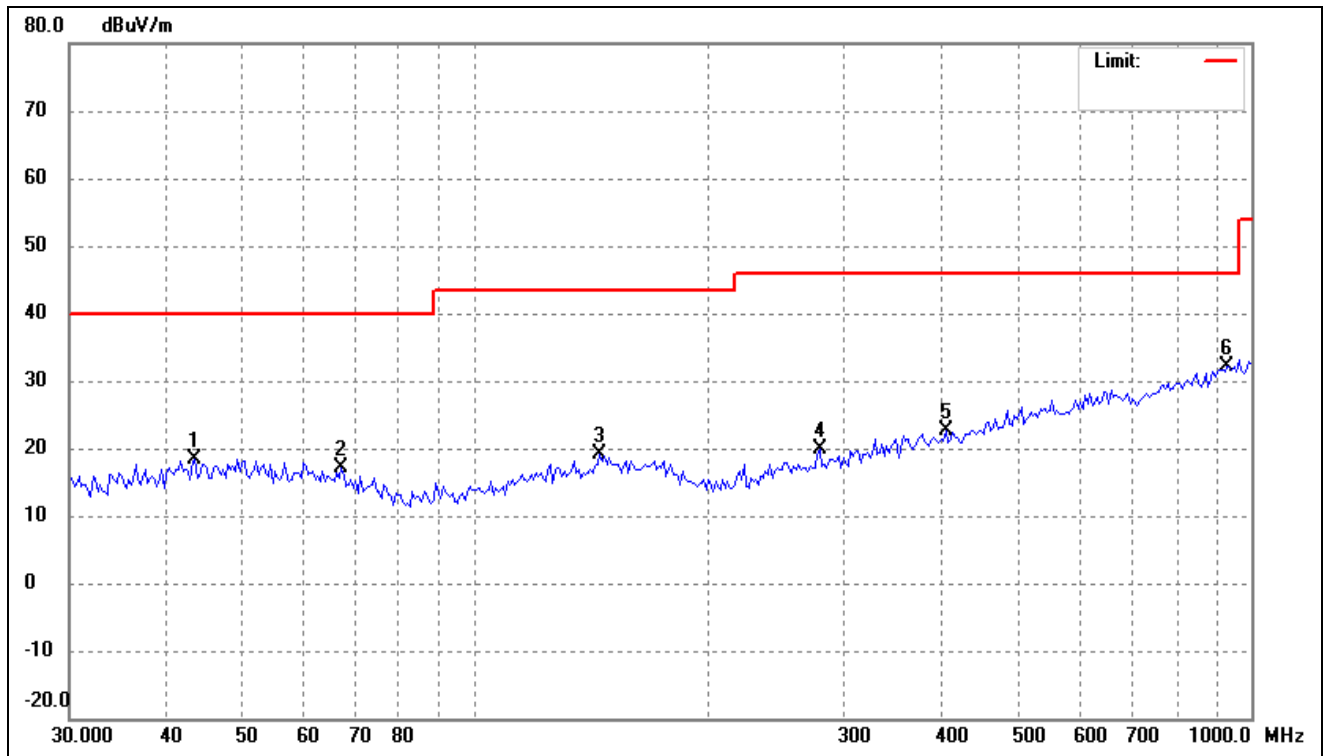


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	43.5381	26.79	-8.47	18.32	40.00	-21.68	-	-	peak
2	67.3109	27.41	-10.27	17.14	40.00	-22.86	-	-	peak
3	144.7899	28.14	-9.03	19.11	43.50	-24.39	-	-	peak
4	278.3308	28.77	-9.00	19.77	46.00	-26.23	-	-	peak
5	403.9335	28.52	-5.85	22.67	46.00	-23.33	-	-	peak
6	932.1405	30.19	1.87	32.06	46.00	-13.94	-	-	peak

802.11ac-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

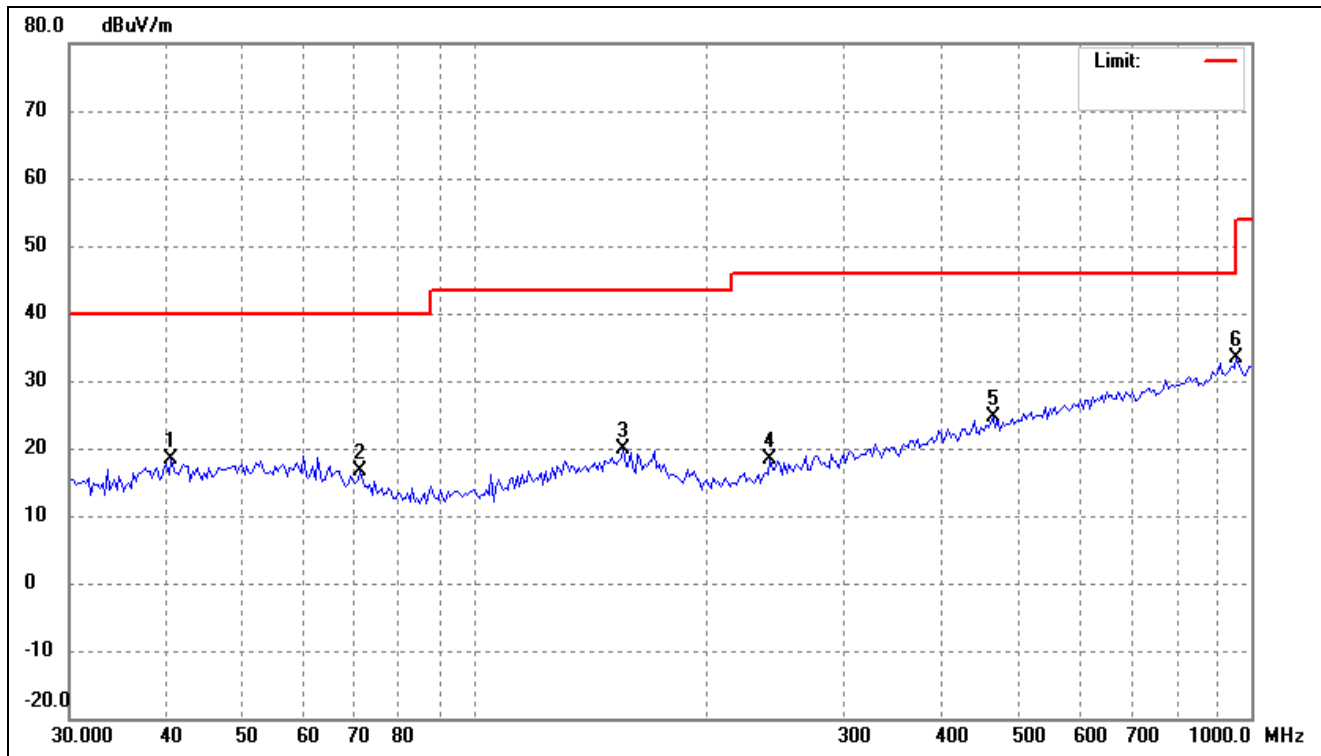


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.5837	26.76	-8.48	18.28	40.00	-21.72	-	-	peak
2	71.2033	27.72	-11.03	16.69	40.00	-23.31	-	-	peak
3	155.3305	28.43	-8.61	19.82	43.50	-23.68	-	-	peak
4	240.1442	28.98	-10.54	18.44	46.00	-27.56	-	-	peak
5	464.8867	28.97	-4.37	24.60	46.00	-21.40	-	-	peak
6	958.7135	31.05	2.26	33.31	46.00	-12.69	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

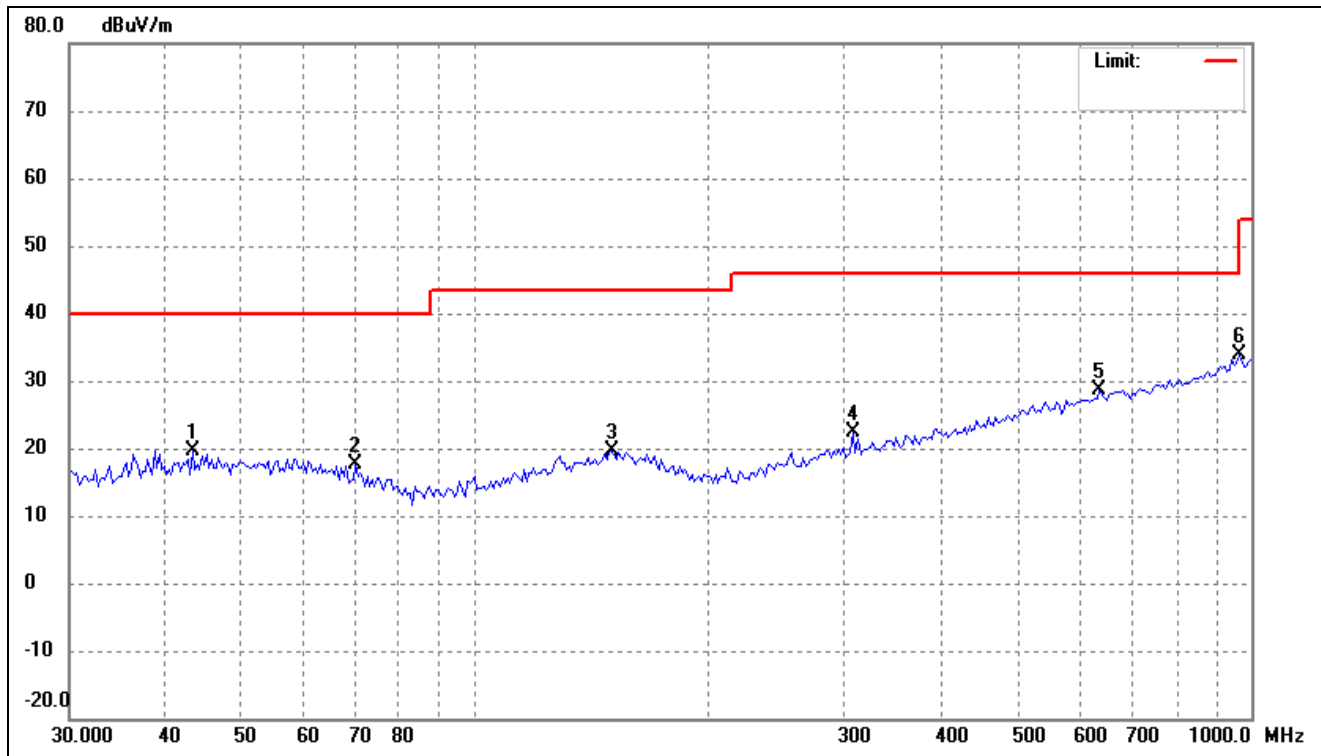


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	43.2333	28.05	-8.47	19.58	40.00	-20.42	-	-	peak
2	70.2096	28.33	-10.81	17.52	40.00	-22.48	-	-	peak
3	149.9676	28.13	-8.59	19.54	43.50	-23.96	-	-	peak
4	307.1053	30.39	-8.06	22.33	46.00	-23.67	-	-	peak
5	637.7947	29.87	-1.36	28.51	46.00	-17.49	-	-	peak
6	965.4742	31.49	2.27	33.76	54.00	-20.24	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

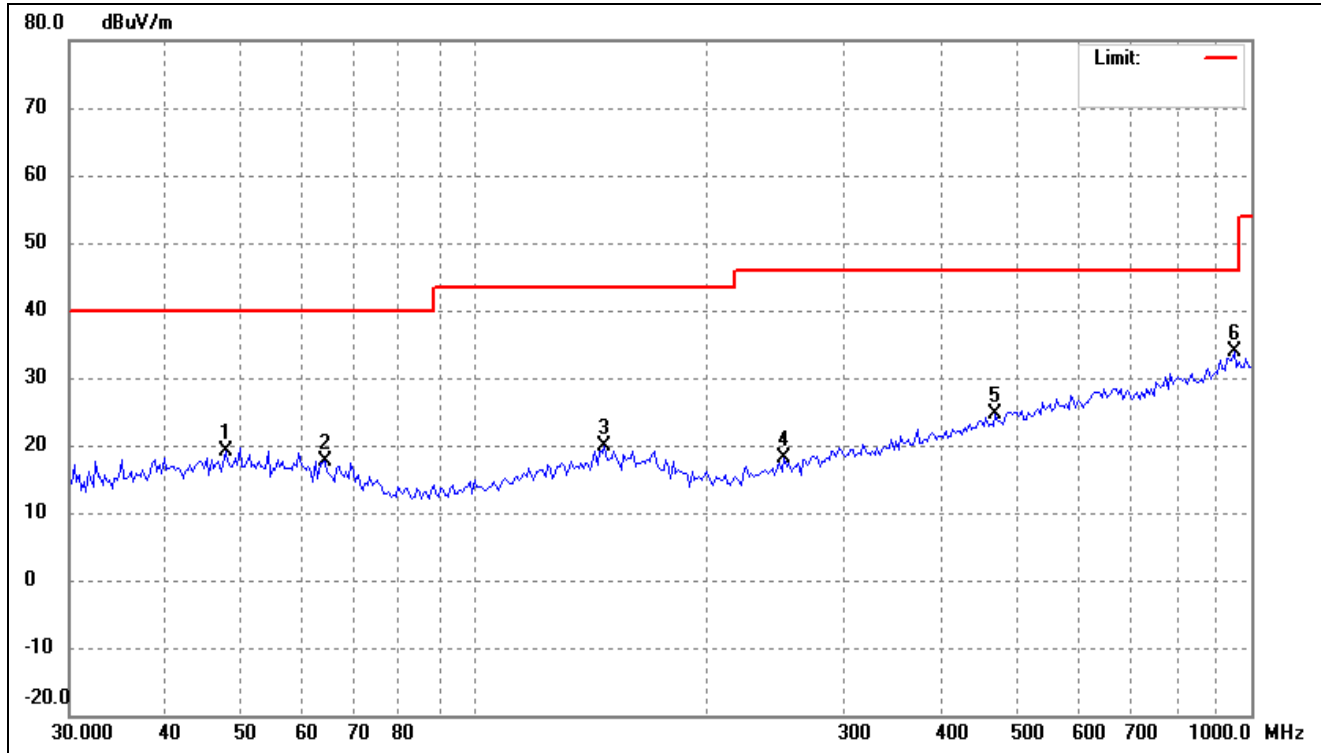


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	47.7028	27.30	-8.27	19.03	40.00	-20.97	-	-	peak
2	64.0800	27.25	-9.68	17.57	40.00	-22.43	-	-	peak
3	146.8392	28.65	-8.85	19.80	43.50	-23.70	-	-	peak
4	250.4859	28.20	-10.18	18.02	46.00	-27.98	-	-	peak
5	468.1651	28.90	-4.34	24.56	46.00	-21.44	-	-	peak
6	952.0001	31.70	2.25	33.95	46.00	-12.05	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

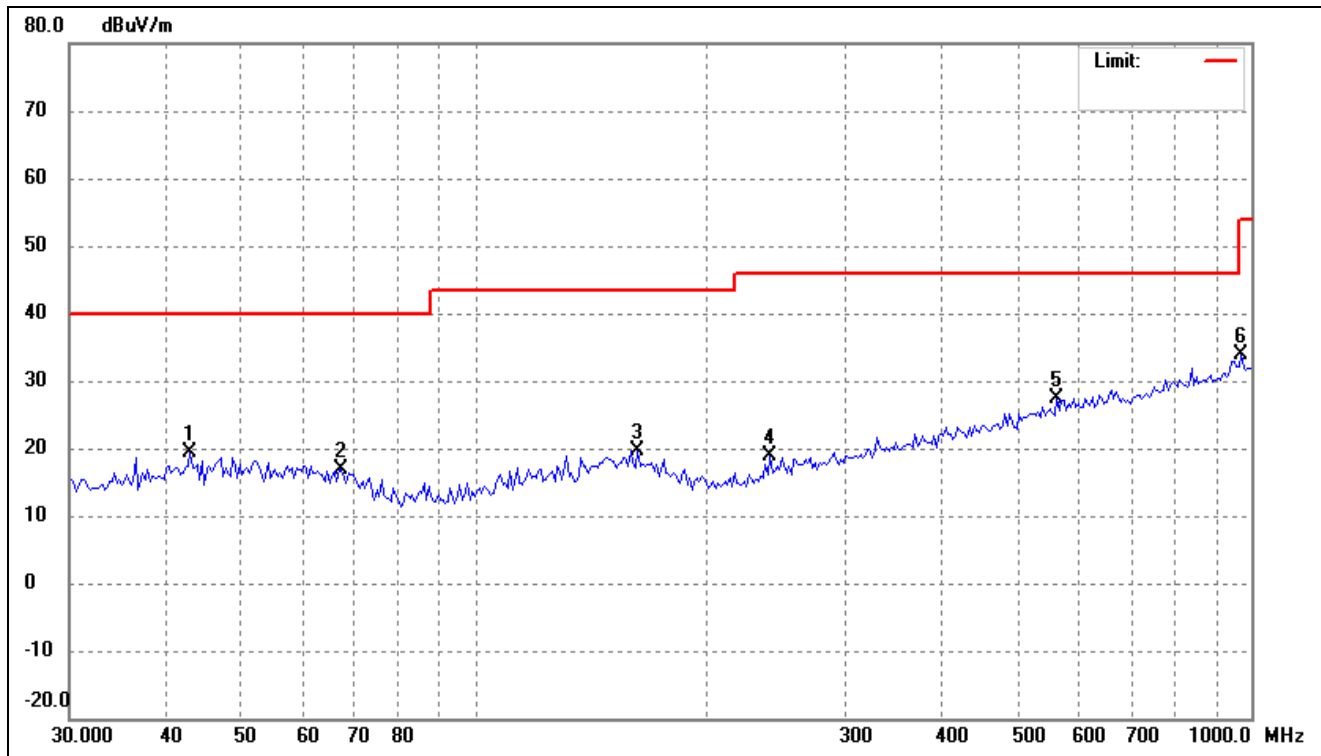


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.9305	27.75	-8.48	19.27	40.00	-20.73	-	-	peak
2	67.3109	27.11	-10.27	16.84	40.00	-23.16	-	-	peak
3	162.0197	28.21	-8.66	19.55	43.50	-23.95	-	-	peak
4	240.1442	29.52	-10.54	18.98	46.00	-27.02	-	-	peak
5	562.0143	29.92	-2.55	27.37	46.00	-18.63	-	-	peak
6	972.2827	31.56	2.27	33.83	54.00	-20.17	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

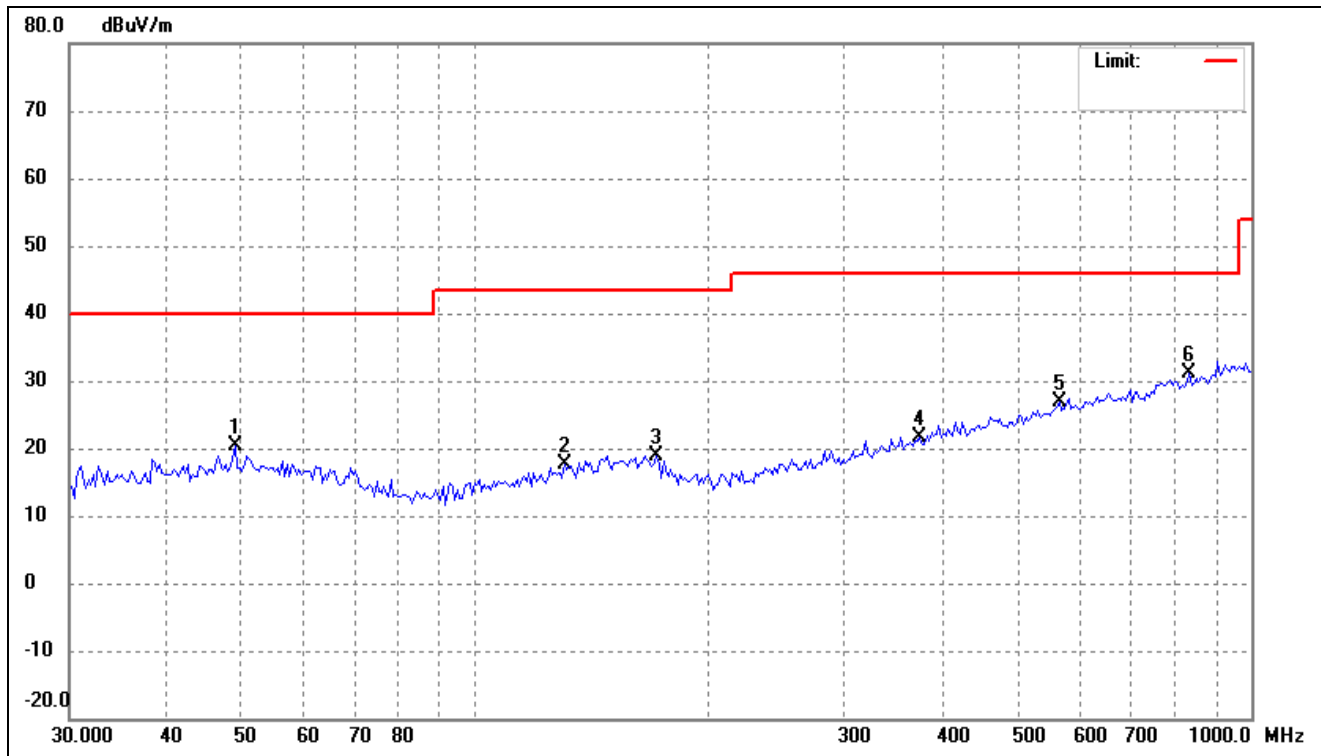


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	49.0627	28.53	-8.15	20.38	40.00	-19.62	-	-	peak
2	130.3048	27.43	-9.84	17.59	43.50	-25.91	-	-	peak
3	171.3890	27.88	-9.08	18.80	43.50	-24.70	-	-	peak
4	373.8862	28.22	-6.50	21.72	46.00	-24.28	-	-	peak
5	565.9776	29.46	-2.47	26.99	46.00	-19.01	-	-	peak
6	833.0127	30.52	0.59	31.11	46.00	-14.89	-	-	peak

802.11ac-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

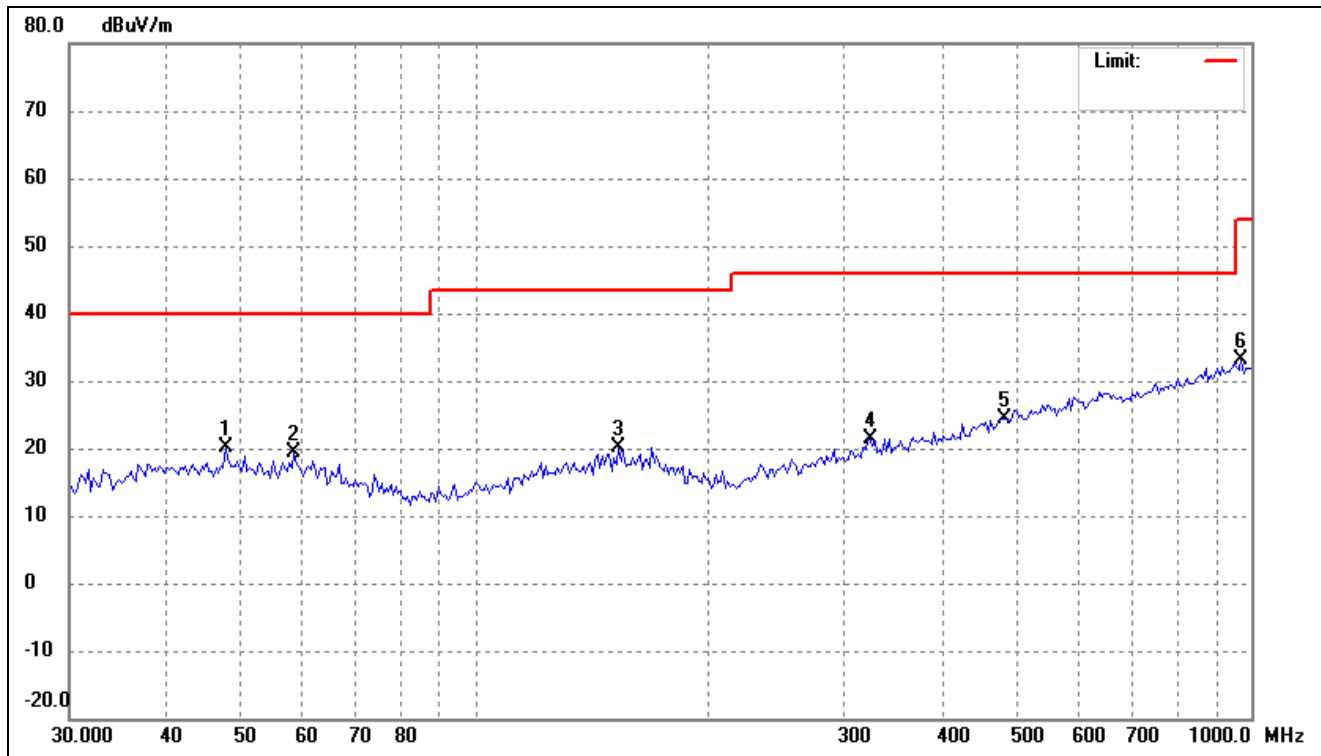


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	47.7028	28.41	-8.27	20.14	40.00	-19.86	-	-	peak
2	58.4855	28.17	-8.84	19.33	40.00	-20.67	-	-	peak
3	153.1627	28.85	-8.61	20.24	43.50	-23.26	-	-	peak
4	322.5896	28.95	-7.62	21.33	46.00	-24.67	-	-	peak
5	481.5112	28.51	-4.15	24.36	46.00	-21.64	-	-	peak
6	972.2827	30.81	2.27	33.08	54.00	-20.92	-	-	peak

802.11ac-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

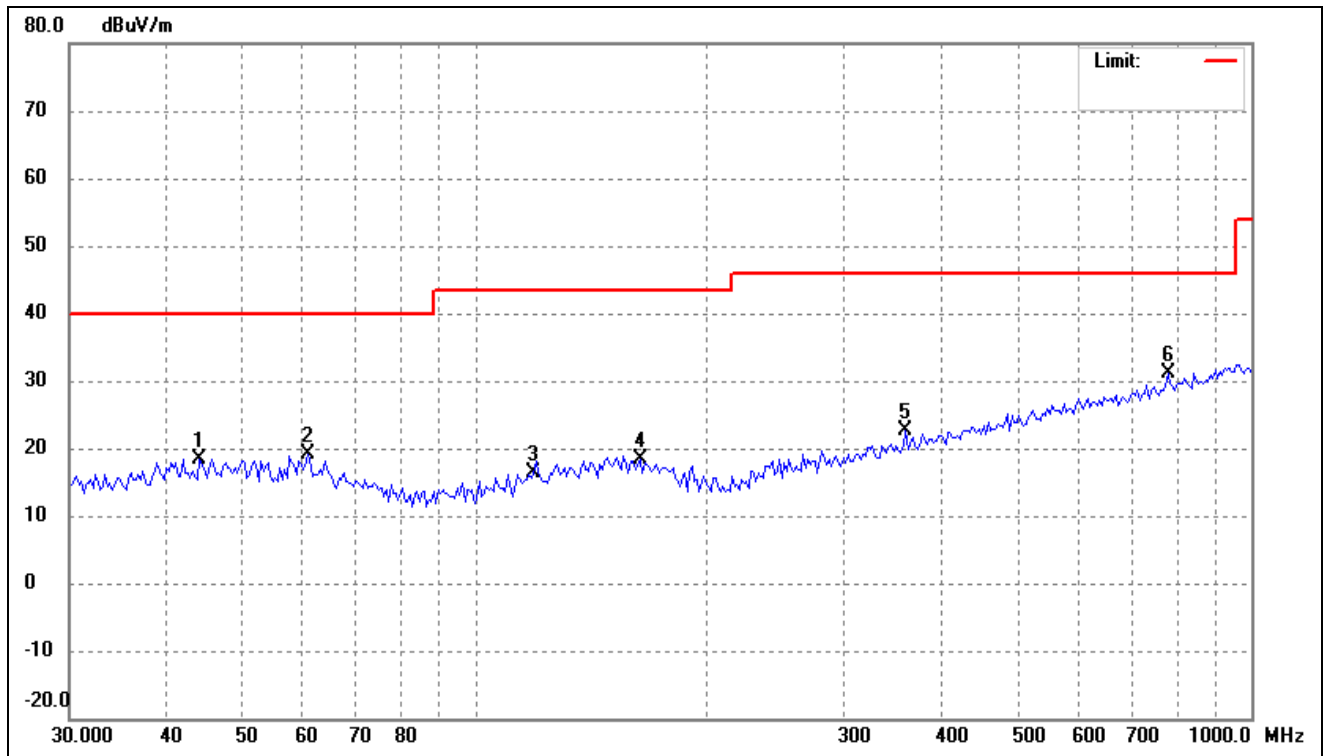


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.1544	26.93	-8.47	18.46	40.00	-21.54	-	-	peak
2	61.0041	28.26	-9.11	19.15	40.00	-20.85	-	-	peak
3	118.9285	27.14	-10.64	16.50	43.50	-27.00	-	-	peak
4	163.1623	27.17	-8.70	18.47	43.50	-25.03	-	-	peak
5	358.4497	29.57	-6.89	22.68	46.00	-23.32	-	-	peak
6	781.9606	31.05	0.13	31.18	46.00	-14.82	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

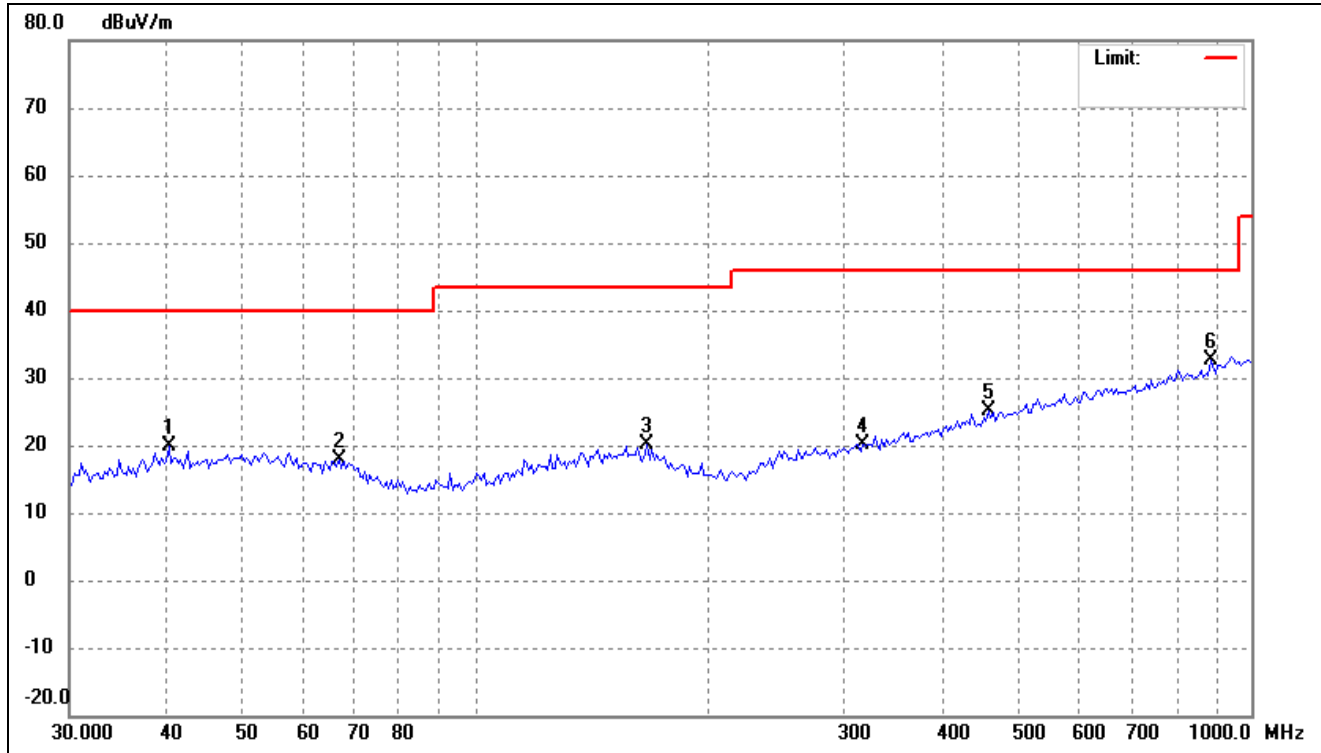


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.2995	28.45	-8.48	19.97	40.00	-20.03	-	-	peak
2	66.8395	28.01	-10.18	17.83	40.00	-22.17	-	-	peak
3	166.6385	28.89	-8.79	20.10	43.50	-23.40	-	-	peak
4	315.8601	27.91	-7.81	20.10	46.00	-25.90	-	-	peak
5	458.3987	29.71	-4.47	25.24	46.00	-20.76	-	-	peak
6	887.3978	31.53	1.08	32.61	46.00	-13.39	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

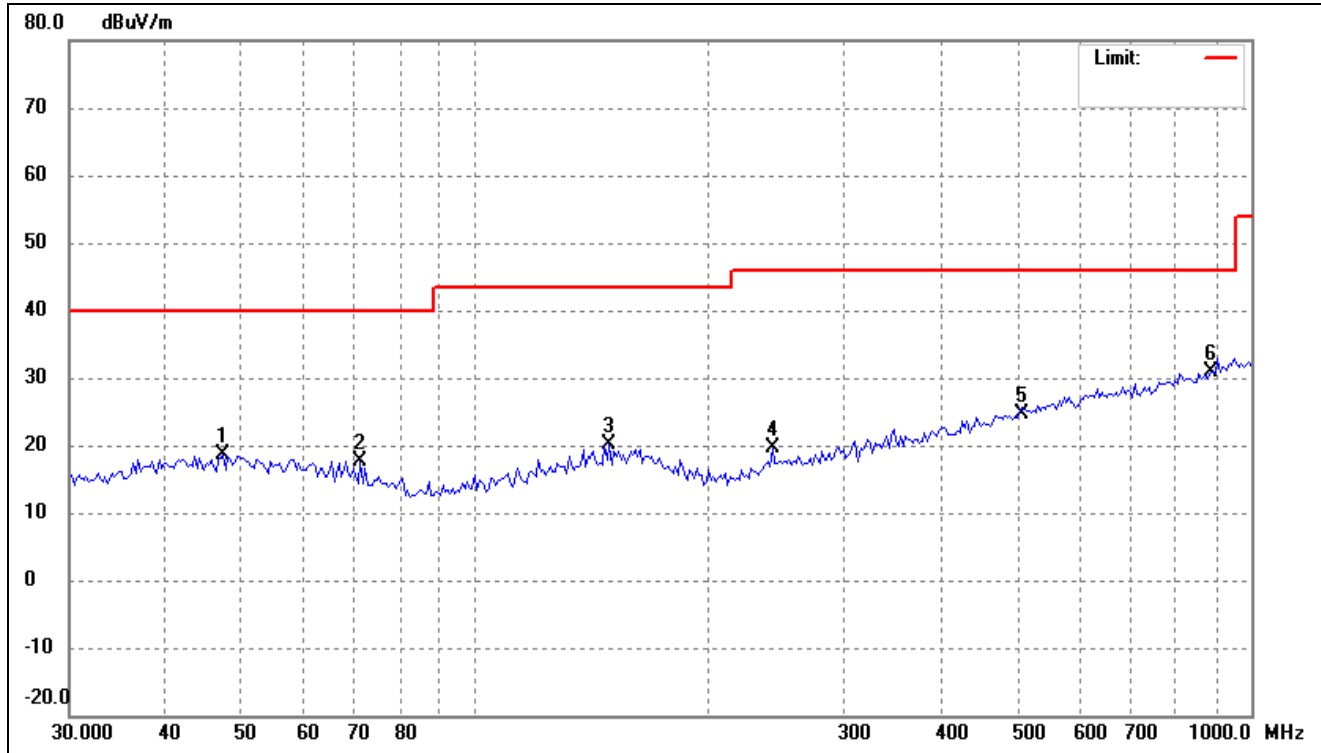


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	47.3688	26.84	-8.29	18.55	40.00	-21.45	-	-	peak
2	71.2033	28.71	-11.03	17.68	40.00	-22.32	-	-	peak
3	148.9175	28.88	-8.68	20.20	43.50	-23.30	-	-	peak
4	241.8377	30.11	-10.48	19.63	46.00	-26.37	-	-	peak
5	502.2473	28.38	-3.87	24.51	46.00	-21.49	-	-	peak
6	887.3978	29.79	1.08	30.87	46.00	-15.13	-	-	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

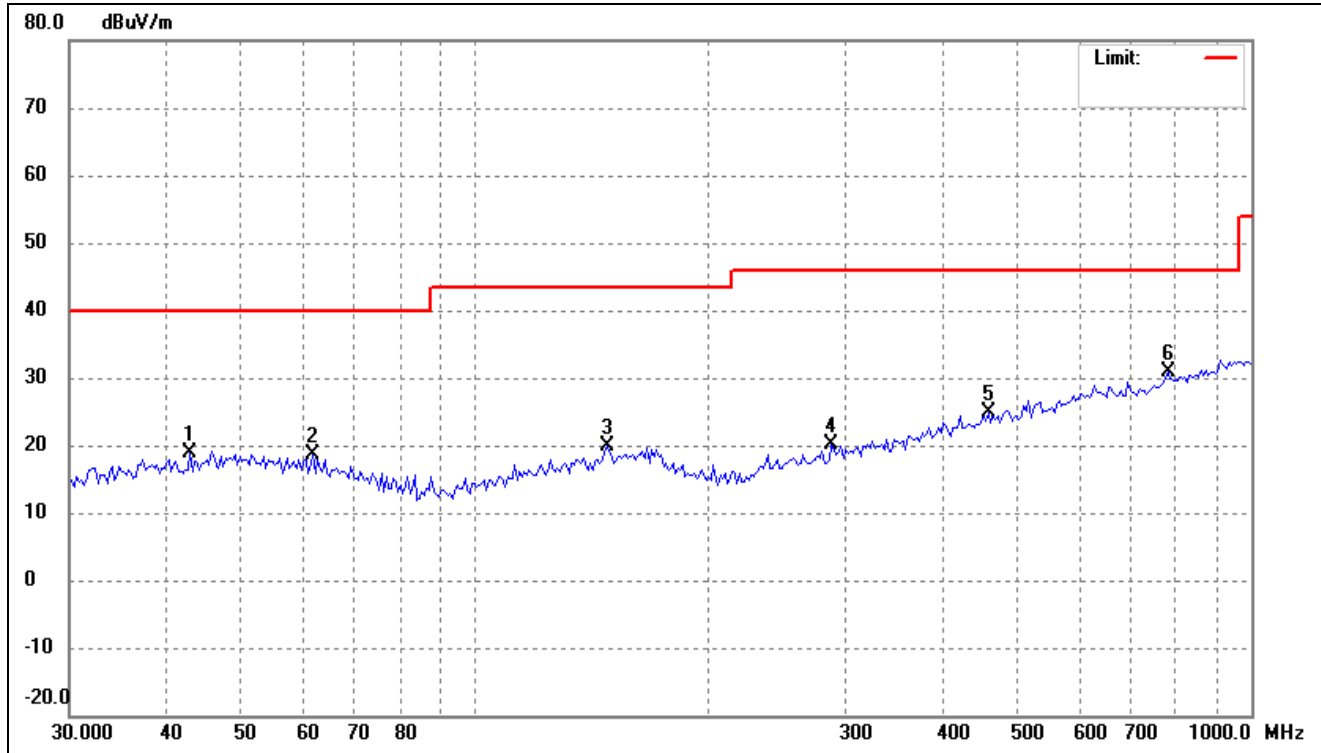


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.9305	27.25	-8.48	18.77	40.00	-21.23	-	-	peak
2	61.8676	27.95	-9.28	18.67	40.00	-21.33	-	-	peak
3	147.8747	28.54	-8.77	19.77	43.50	-23.73	-	-	peak
4	288.2840	28.75	-8.66	20.09	46.00	-25.91	-	-	peak
5	458.3987	29.26	-4.47	24.79	46.00	-21.21	-	-	peak
6	781.9606	30.78	0.13	30.91	46.00	-15.09	-	-	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

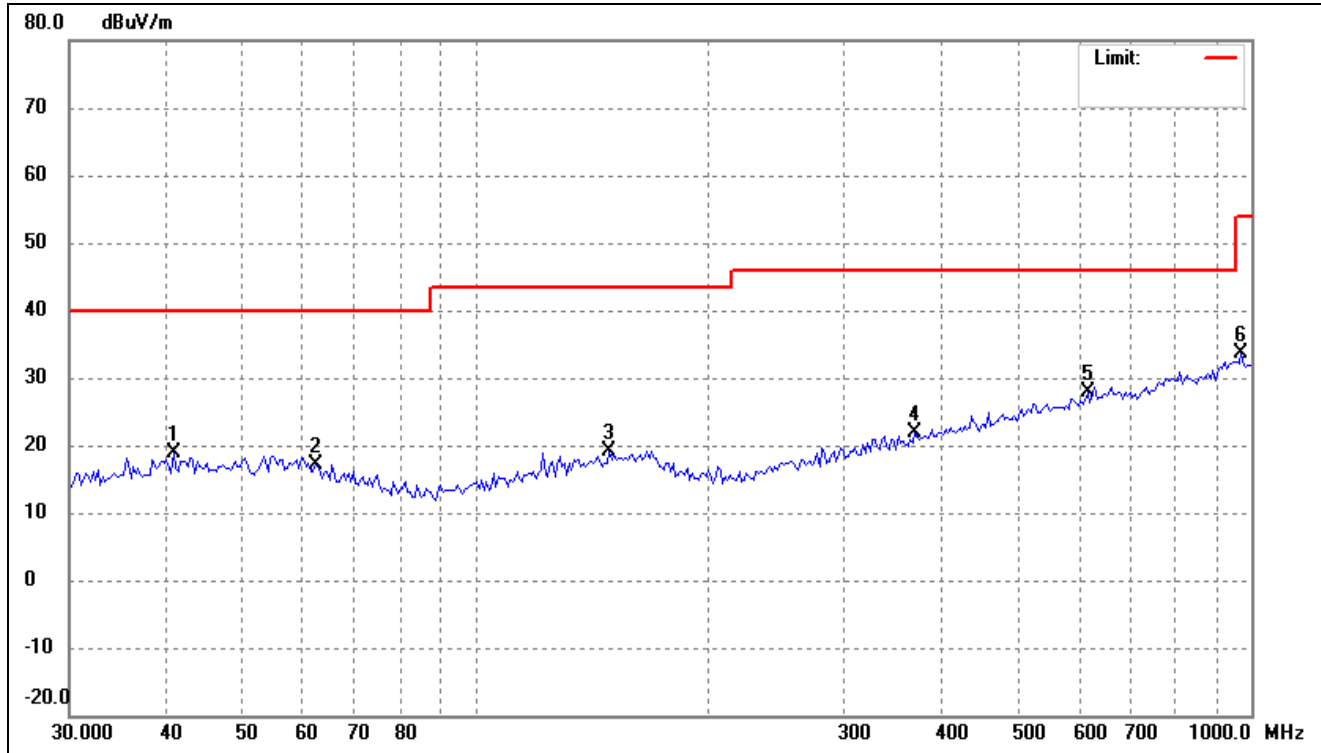


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.8699	27.34	-8.47	18.87	40.00	-21.13	-	-	peak
2	62.3038	26.58	-9.35	17.23	40.00	-22.77	-	-	peak
3	148.9175	27.74	-8.68	19.06	43.50	-24.44	-	-	peak
4	368.6682	28.47	-6.63	21.84	46.00	-24.16	-	-	peak
5	615.7743	29.42	-1.53	27.89	46.00	-18.11	-	-	peak
6	972.2827	31.32	2.27	33.59	54.00	-20.41	-	-	peak

802.11ax-HE80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

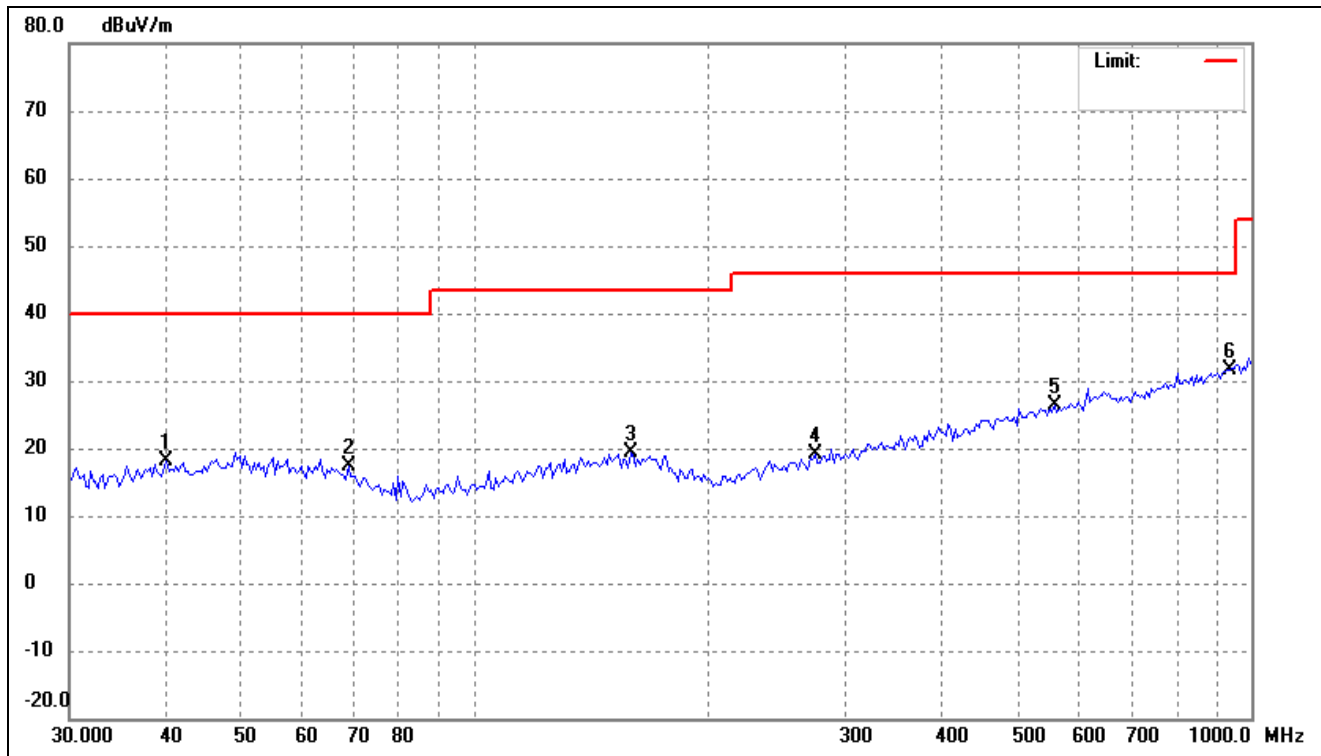

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.0173	26.52	-8.47	18.05	40.00	-21.95	-	-	peak
2	68.7450	27.89	-10.54	17.35	40.00	-22.65	-	-	peak
3	158.6399	28.11	-8.61	19.50	43.50	-24.00	-	-	peak
4	274.4464	28.20	-9.13	19.07	46.00	-26.93	-	-	peak
5	558.0788	29.11	-2.66	26.45	46.00	-19.55	-	-	peak
6	938.7139	29.70	2.01	31.71	46.00	-14.29	-	-	peak


802.11ax-HE80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

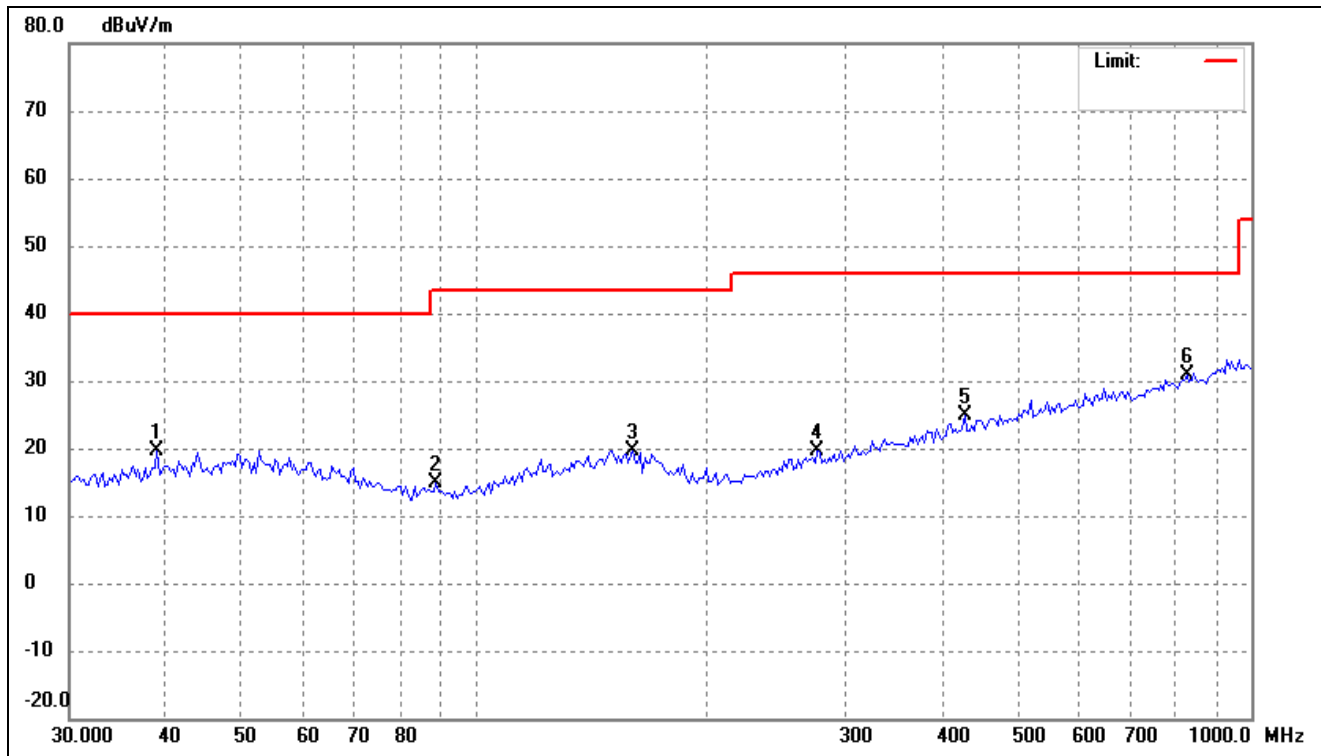

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	38.9081	28.41	-8.72	19.69	40.00	-20.31	-	-	peak
2	89.1579	27.98	-13.09	14.89	43.50	-28.61	-	-	peak
3	159.7586	28.26	-8.61	19.65	43.50	-23.85	-	-	peak
4	276.3818	28.71	-9.06	19.65	46.00	-26.35	-	-	peak
5	427.2920	30.08	-5.22	24.86	46.00	-21.14	-	-	peak
6	827.1795	30.45	0.54	30.99	46.00	-15.01	-	-	peak


➤ 5250-5350MHz

802.11a			
Test Channel	5260MHz(Worst case)	Polarity:	Horizontal

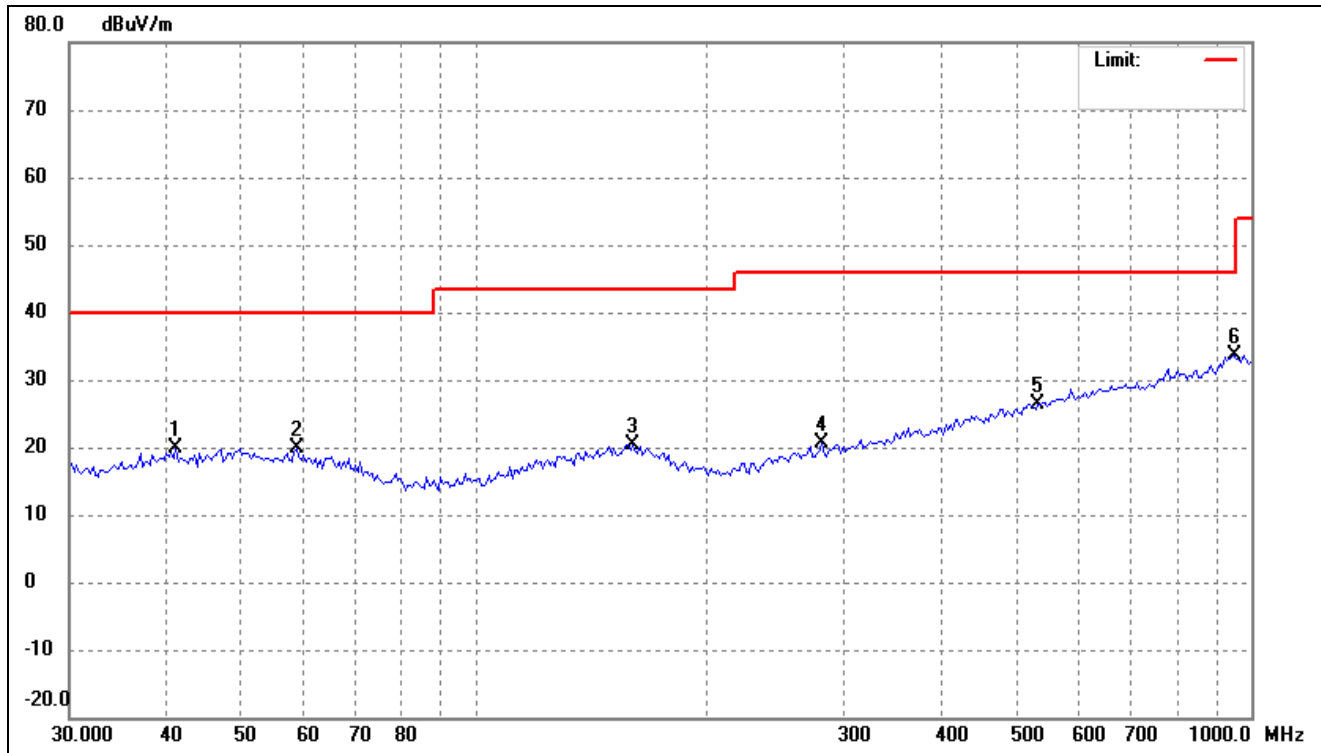


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	41.1581	28.28	-8.48	19.80	40.00	-20.20	-	-	peak
2	58.8979	28.68	-8.87	19.81	40.00	-20.19	-	-	peak
3	159.7586	29.08	-8.61	20.47	43.50	-23.03	-	-	peak
4	280.2936	29.53	-8.93	20.60	46.00	-25.40	-	-	peak
5	531.2910	29.72	-3.35	26.37	46.00	-19.63	-	-	peak
6	952.0001	31.29	2.25	33.54	46.00	-12.46	-	-	peak

802.11a			
Test Channel	5260MHz(Worst case)	Polarity:	Vertical

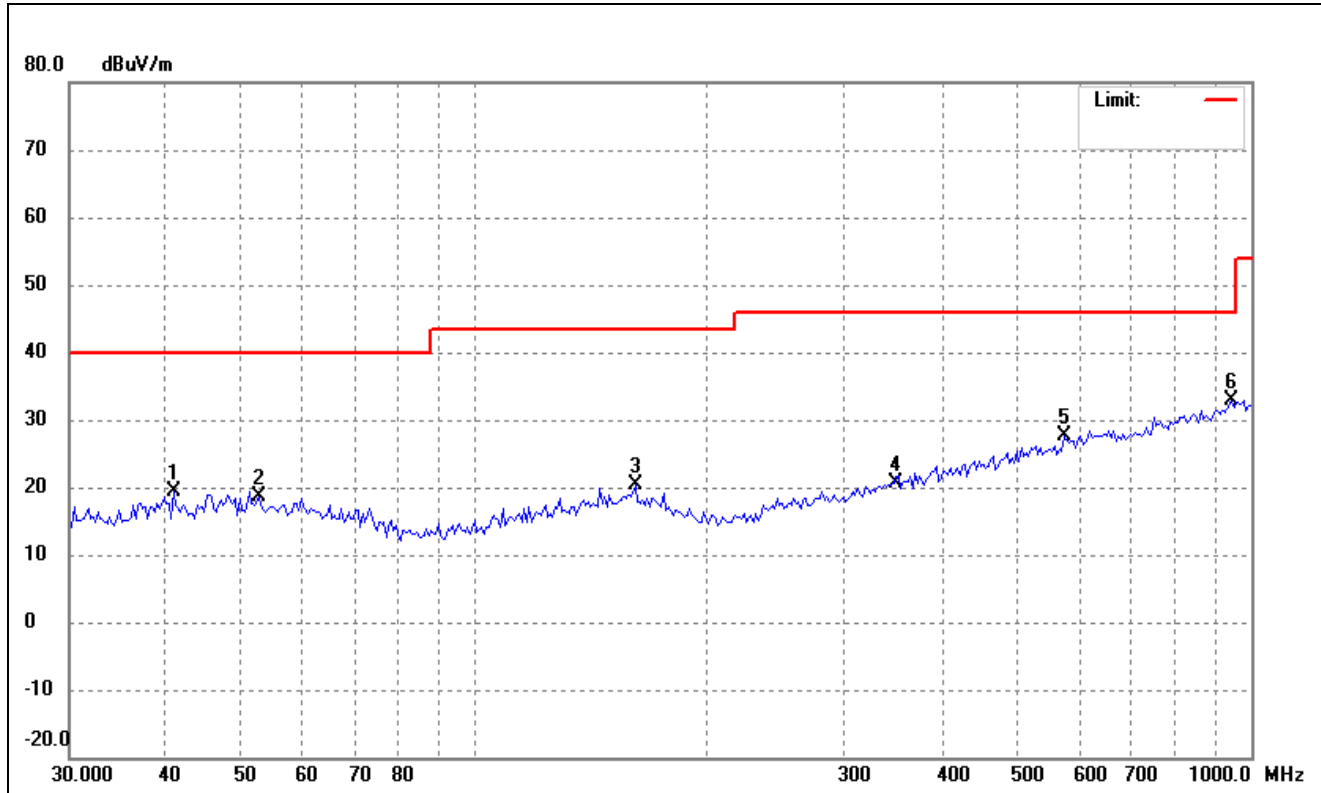


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.8699	27.91	-8.47	19.44	40.00	-20.56	-	-	peak
2	52.6345	26.99	-8.37	18.62	40.00	-21.38	-	-	peak
3	160.8852	28.91	-8.64	20.27	43.50	-23.23	-	-	peak
4	346.0740	27.83	-7.18	20.65	46.00	-25.35	-	-	peak
5	573.9882	29.95	-2.27	27.68	46.00	-18.32	-	-	peak
6	945.3336	30.78	2.15	32.93	46.00	-13.07	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(Worst case)	Polarity:	Horizontal

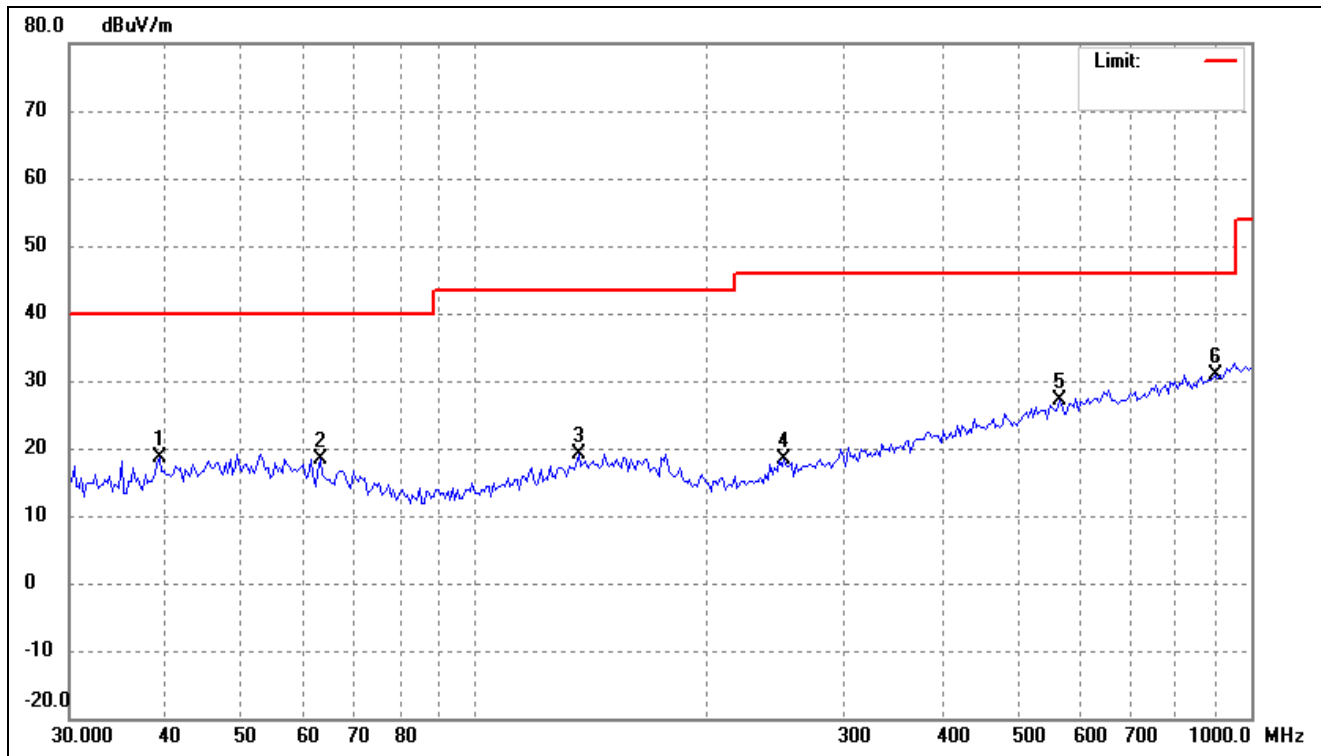


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.1825	27.16	-8.65	18.51	40.00	-21.49	-	-	peak
2	63.1857	27.88	-9.52	18.36	40.00	-21.64	-	-	peak
3	135.9163	28.77	-9.61	19.16	43.50	-24.34	-	-	peak
4	250.4859	28.48	-10.18	18.30	46.00	-27.70	-	-	peak
5	565.9776	29.49	-2.47	27.02	46.00	-18.98	-	-	peak
6	899.9577	29.75	1.19	30.94	46.00	-15.06	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(Worst case)	Polarity:	Vertical

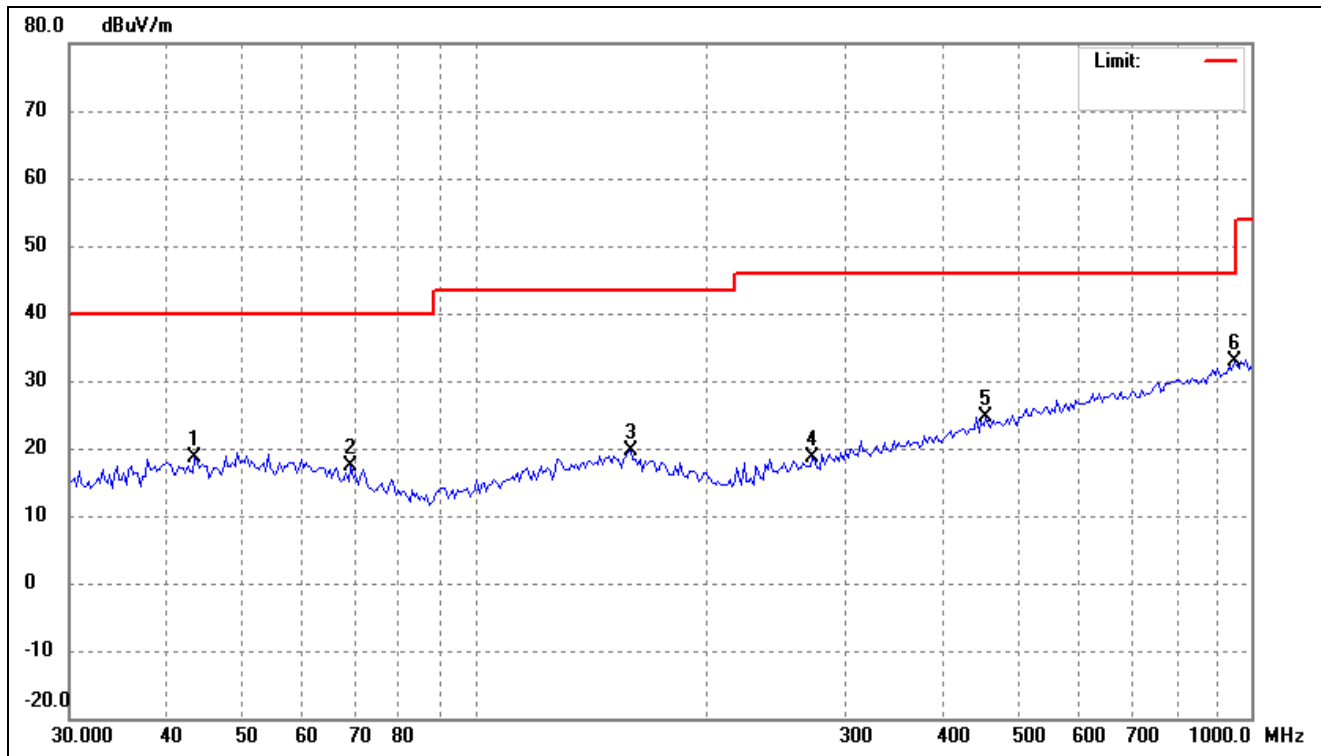


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	43.5381	27.03	-8.47	18.56	40.00	-21.44	-	-	peak
2	69.2297	27.99	-10.63	17.36	40.00	-22.64	-	-	peak
3	158.6399	28.31	-8.61	19.70	43.50	-23.80	-	-	peak
4	272.5246	27.93	-9.22	18.71	46.00	-27.29	-	-	peak
5	455.1888	29.25	-4.52	24.73	46.00	-21.27	-	-	peak
6	952.0001	30.72	2.25	32.97	46.00	-13.03	-	-	peak

802.11ac-HT20			
Test Channel	5260MHz(Worst case)	Polarity:	Horizontal

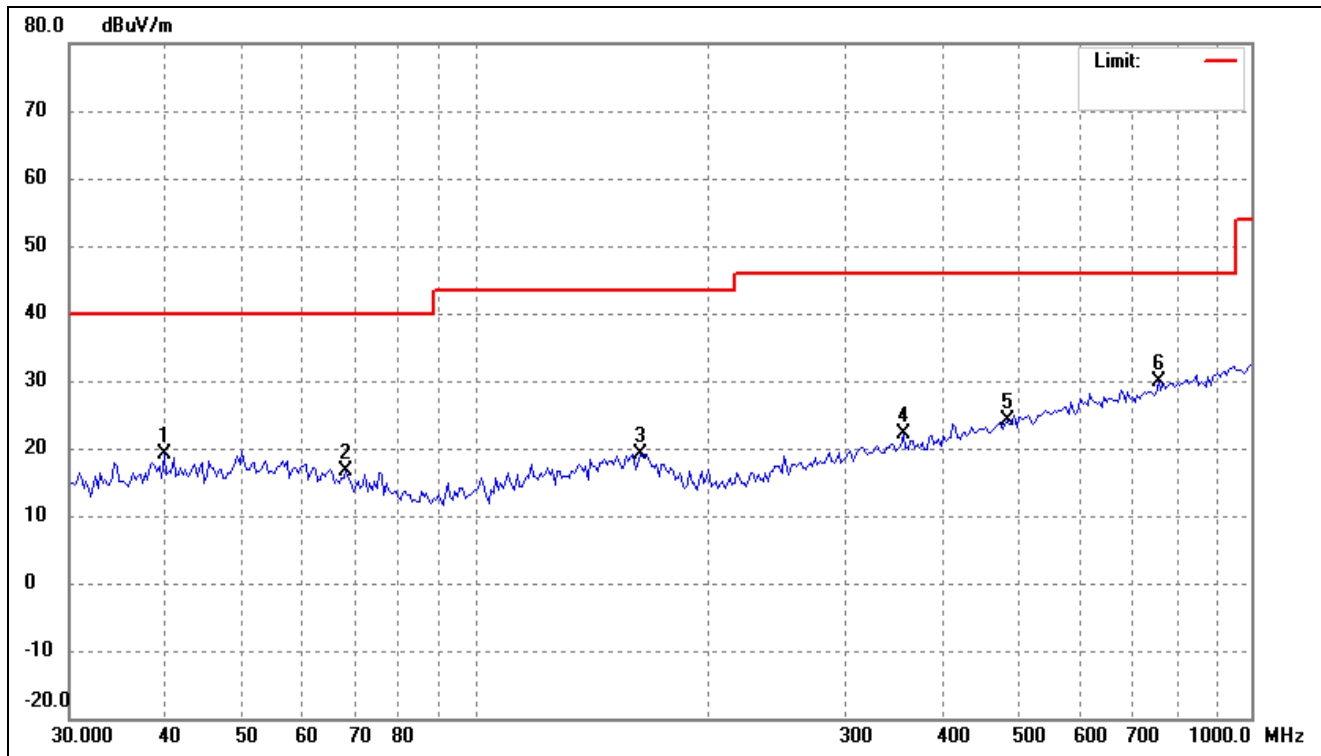


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.7371	27.61	-8.54	19.07	40.00	-20.93	-	-	peak
2	68.2636	27.13	-10.45	16.68	40.00	-23.32	-	-	peak
3	163.1623	27.94	-8.70	19.24	43.50	-24.26	-	-	peak
4	355.9397	29.08	-6.96	22.12	46.00	-23.88	-	-	peak
5	484.9068	28.36	-4.11	24.25	46.00	-21.75	-	-	peak
6	760.2867	29.85	-0.07	29.78	46.00	-16.22	-	-	peak

802.11ac-HT20			
Test Channel	5260MHz(Worst case)	Polarity:	Vertical

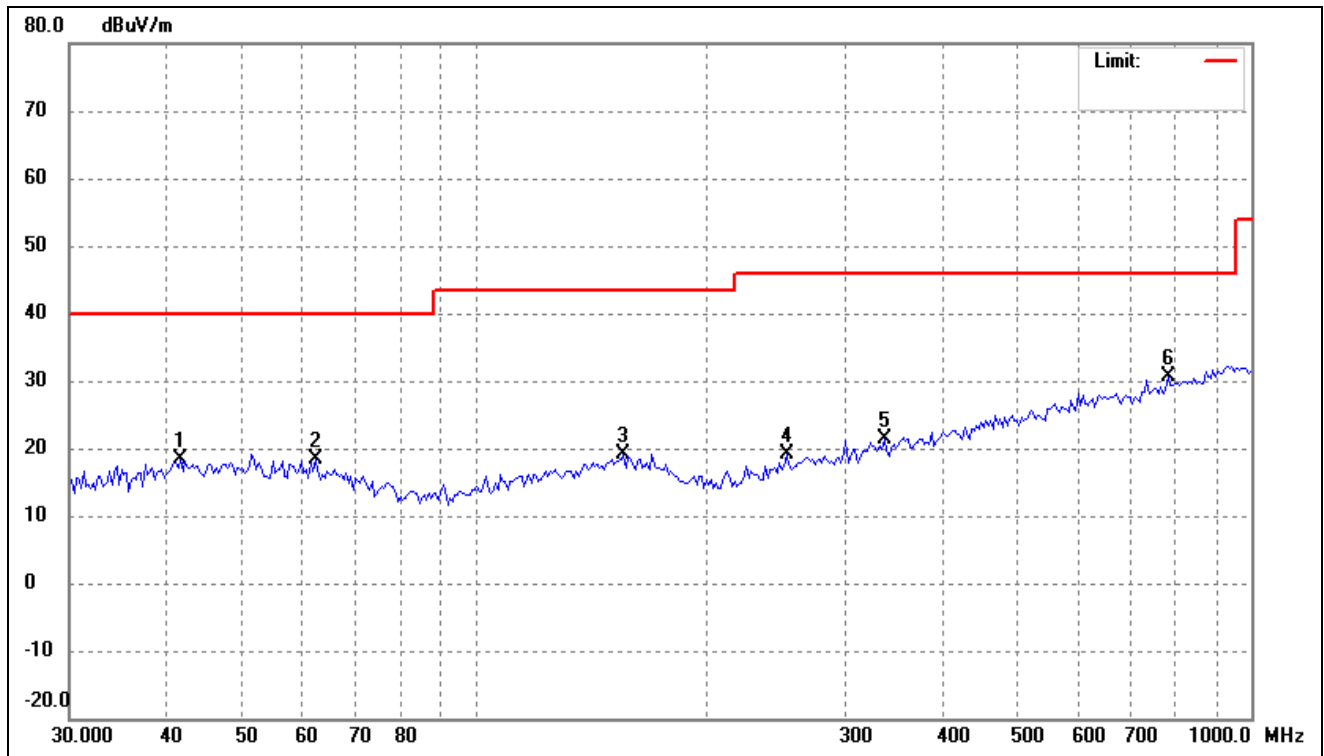


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	41.7406	26.75	-8.47	18.28	40.00	-21.72	-	-	peak
2	62.3038	27.69	-9.35	18.34	40.00	-21.66	-	-	peak
3	155.3305	27.77	-8.61	19.16	43.50	-24.34	-	-	peak
4	252.2523	29.29	-10.10	19.19	46.00	-26.81	-	-	peak
5	336.4817	28.70	-7.35	21.35	46.00	-24.65	-	-	peak
6	781.9606	30.41	0.13	30.54	46.00	-15.46	-	-	peak

802.11ax-HE20			
Test Channel	5260MHz(Worst case)	Polarity:	Horizontal

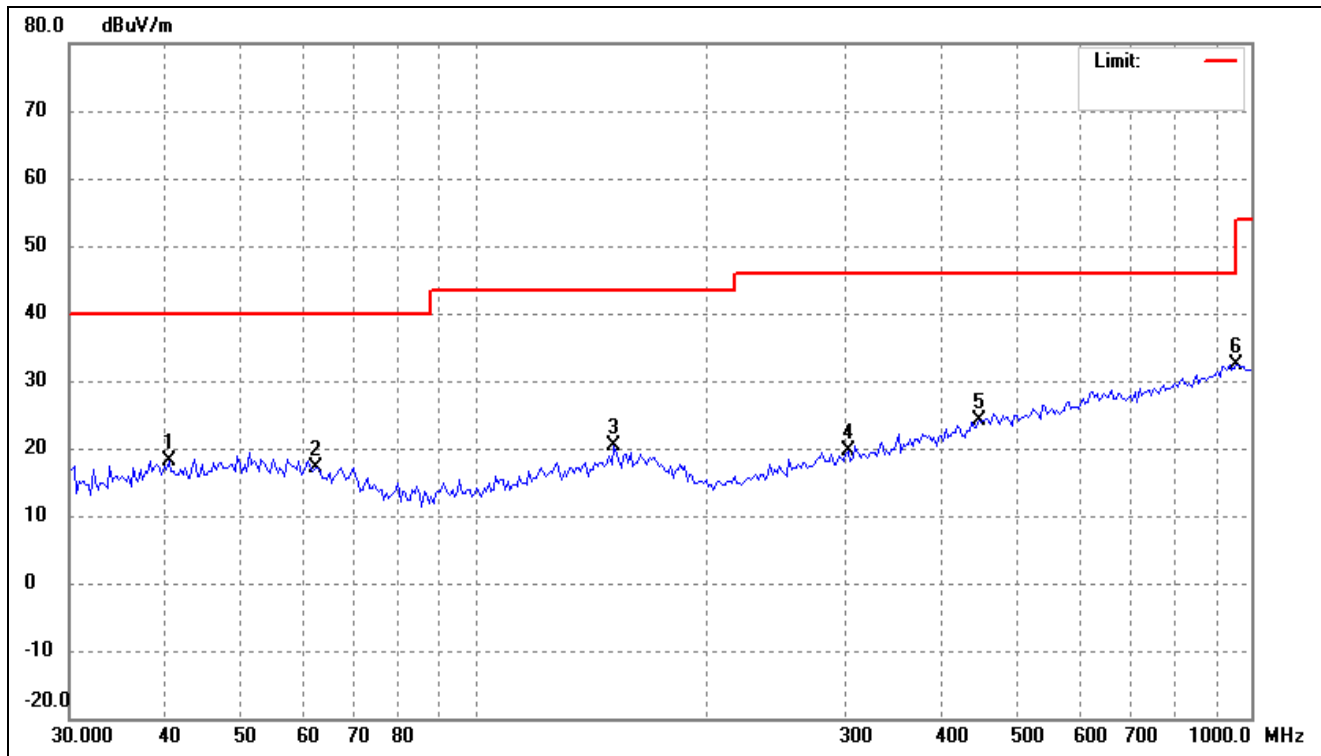


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.2995	26.70	-8.48	18.22	40.00	-21.78	-	-	peak
2	62.3038	26.55	-9.35	17.20	40.00	-22.80	-	-	peak
3	151.0252	28.91	-8.61	20.30	43.50	-23.20	-	-	peak
4	302.8193	27.86	-8.18	19.68	46.00	-26.32	-	-	peak
5	445.6932	28.79	-4.71	24.08	46.00	-21.92	-	-	peak
6	958.7135	30.16	2.26	32.42	46.00	-13.58	-	-	peak

802.11ax-HE20			
Test Channel	5260MHz(Worst case)	Polarity:	Vertical

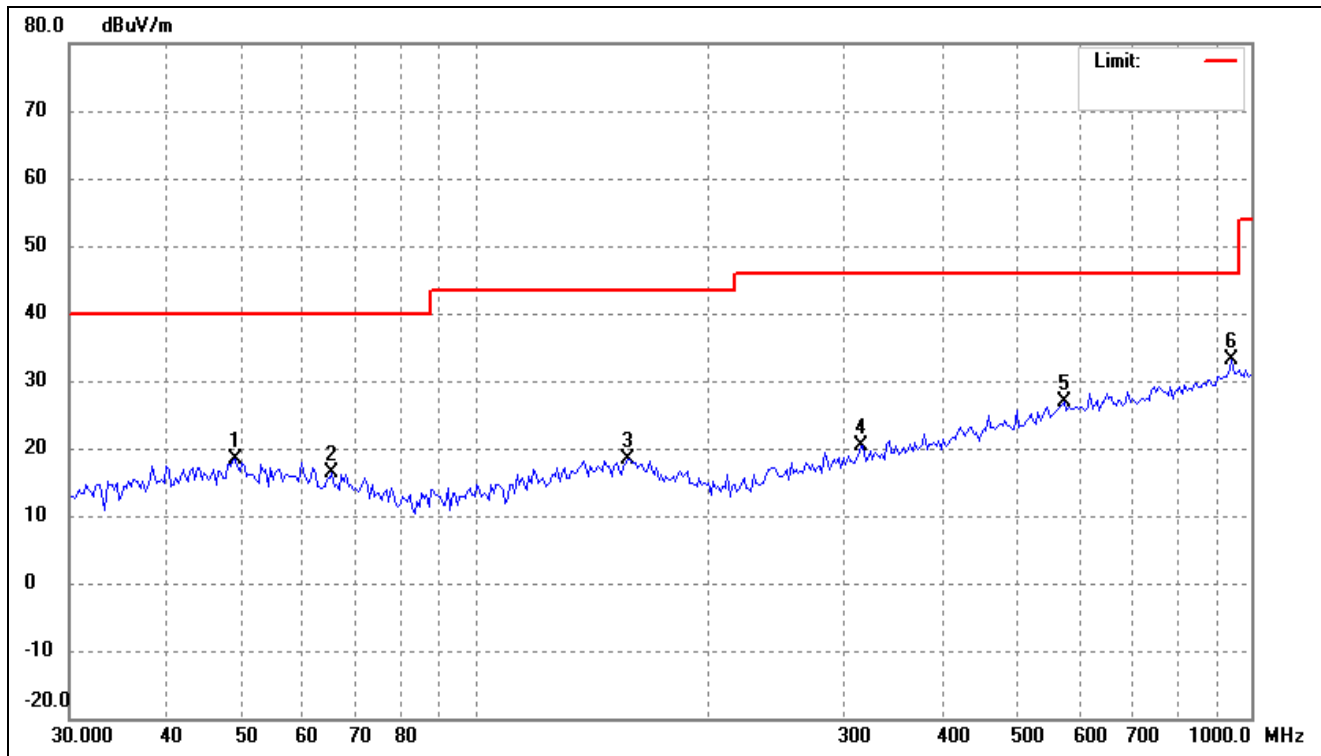


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	49.0627	26.64	-8.15	18.49	40.00	-21.51	-	-	peak
2	65.4452	26.19	-9.93	16.26	40.00	-23.74	-	-	peak
3	157.5290	26.89	-8.61	18.28	43.50	-25.22	-	-	peak
4	313.6483	28.36	-7.87	20.49	46.00	-25.51	-	-	peak
5	573.9882	29.05	-2.27	26.78	46.00	-19.22	-	-	peak
6	945.3336	30.97	2.15	33.12	46.00	-12.88	-	-	peak

802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Horizontal

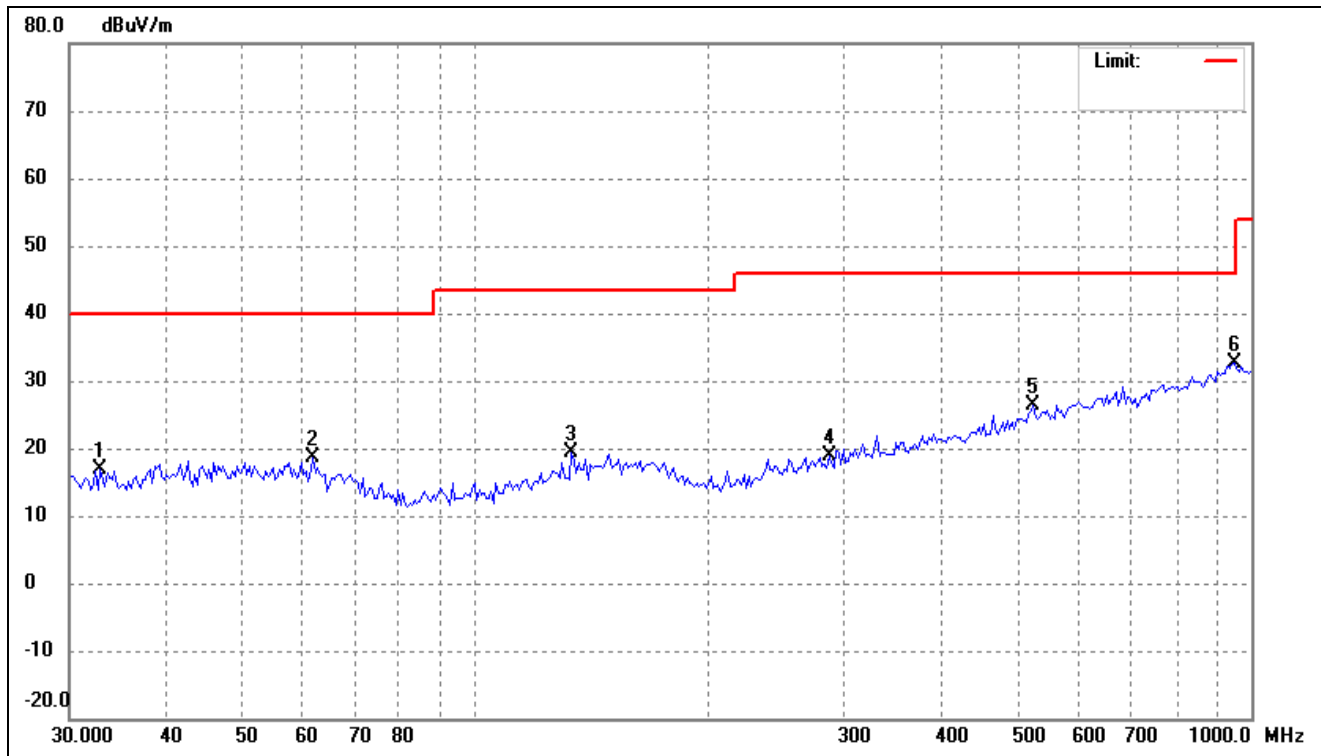


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	32.8697	26.75	-9.82	16.93	40.00	-23.07	-	-	peak
2	61.8676	27.82	-9.28	18.54	40.00	-21.46	-	-	peak
3	133.0809	29.02	-9.72	19.30	43.50	-24.20	-	-	peak
4	286.2653	27.54	-8.72	18.82	46.00	-27.18	-	-	peak
5	523.8763	29.93	-3.53	26.40	46.00	-19.60	-	-	peak
6	952.0001	30.45	2.25	32.70	46.00	-13.30	-	-	peak

802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Vertical

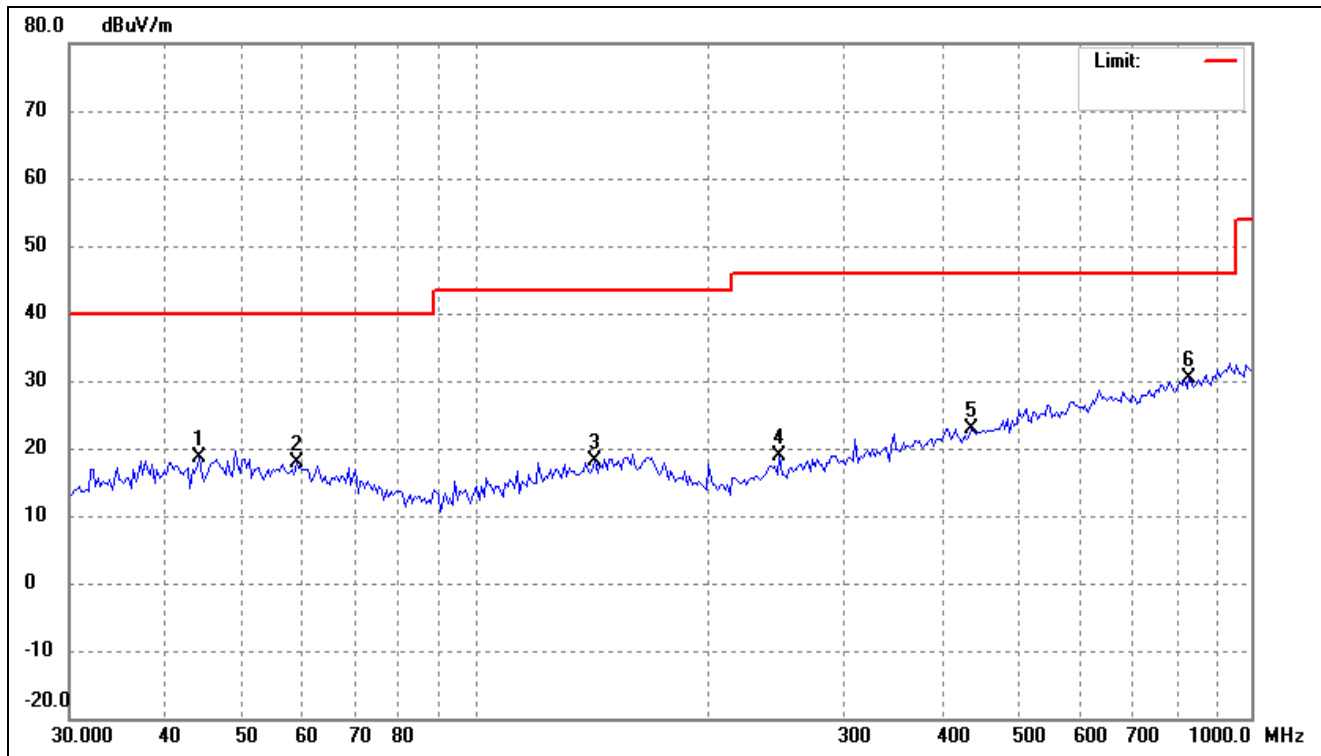


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.1544	27.12	-8.47	18.65	40.00	-21.35	-	-	peak
2	58.8979	26.82	-8.87	17.95	40.00	-22.05	-	-	peak
3	142.7692	27.22	-9.20	18.02	43.50	-25.48	-	-	peak
4	246.9901	29.10	-10.30	18.80	46.00	-27.20	-	-	peak
5	436.3956	27.95	-4.96	22.99	46.00	-23.01	-	-	peak
6	833.0127	29.68	0.59	30.27	46.00	-15.73	-	-	peak

802.11ac-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Horizontal

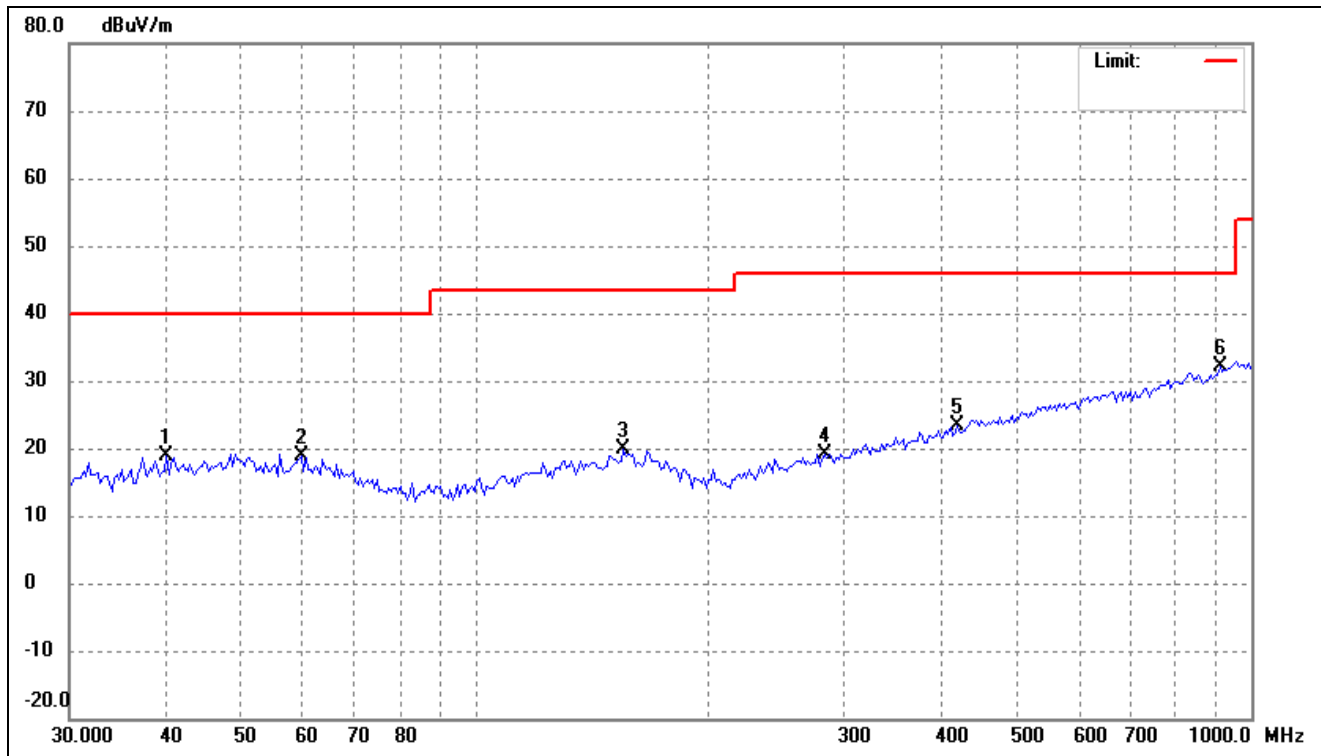


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.0173	27.42	-8.47	18.95	40.00	-21.05	-	-	peak
2	59.7315	27.89	-8.92	18.97	40.00	-21.03	-	-	peak
3	155.3305	28.44	-8.61	19.83	43.50	-23.67	-	-	peak
4	282.2702	28.09	-8.86	19.23	46.00	-26.77	-	-	peak
5	418.3784	28.88	-5.47	23.41	46.00	-22.59	-	-	peak
6	912.6953	30.75	1.46	32.21	46.00	-13.79	-	-	peak

802.11ac-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Vertical

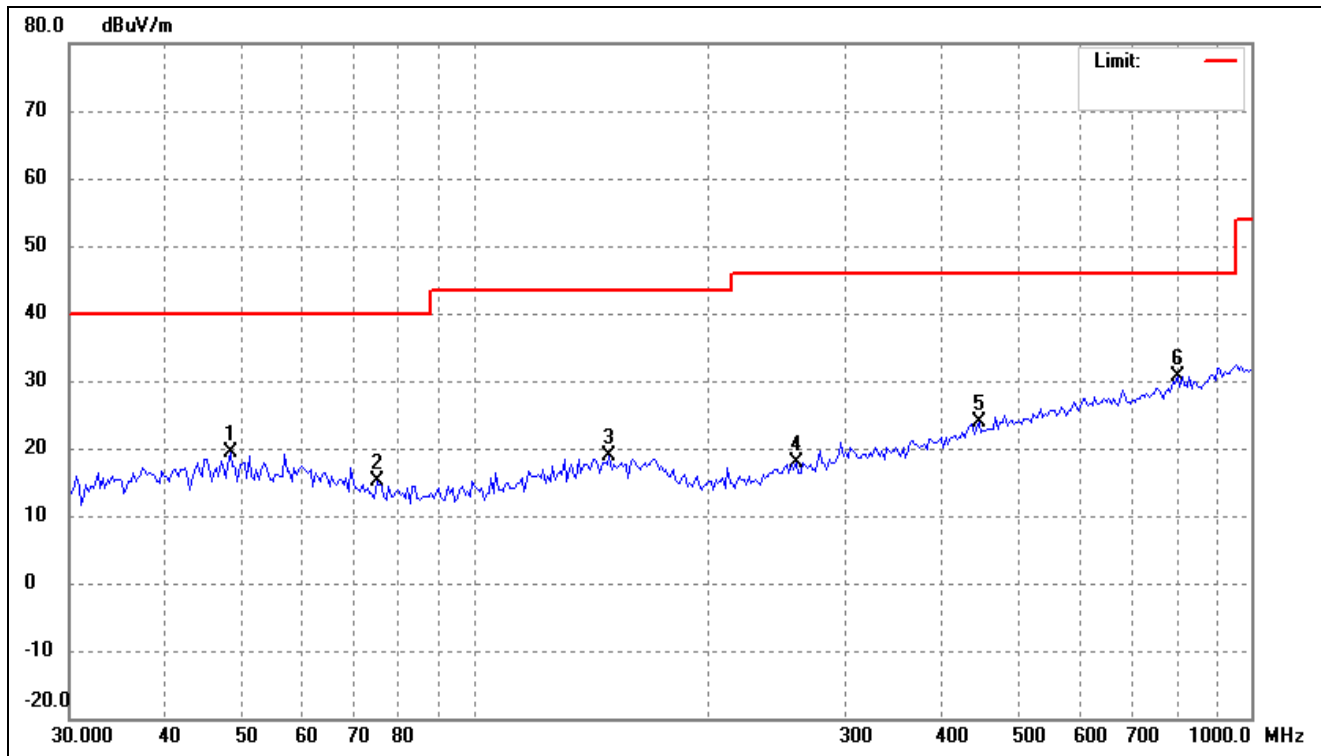


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.3780	27.68	-8.21	19.47	40.00	-20.53	-	-	peak
2	74.7934	26.91	-11.82	15.09	40.00	-24.91	-	-	peak
3	148.9175	27.55	-8.68	18.87	43.50	-24.63	-	-	peak
4	259.4434	27.65	-9.79	17.86	46.00	-28.14	-	-	peak
5	445.6932	28.66	-4.71	23.95	46.00	-22.05	-	-	peak
6	804.2523	30.35	0.34	30.69	46.00	-15.31	-	-	peak

802.11ax-HE40			
Test Channel	5270MHz(worst case)	Polarity:	Horizontal

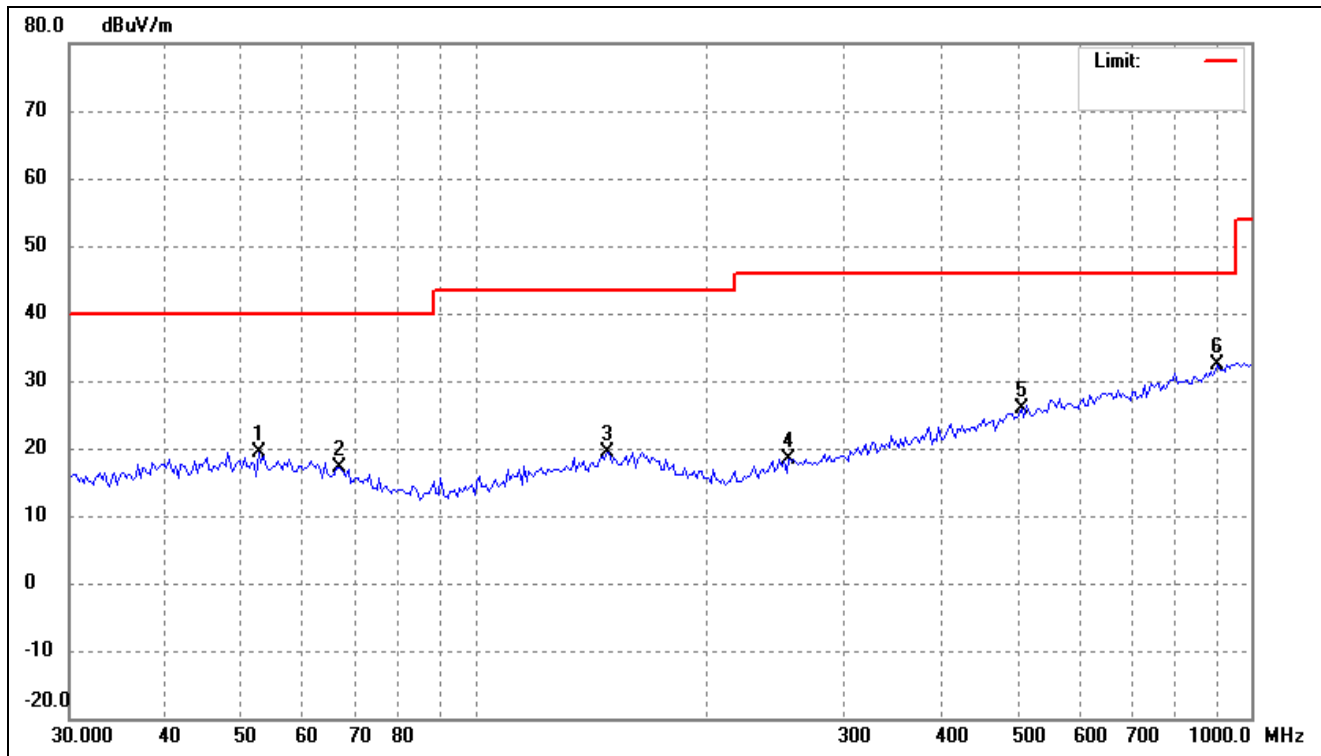


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	52.6345	27.65	-8.37	19.28	40.00	-20.72	-	-	peak
2	66.8395	27.39	-10.18	17.21	40.00	-22.79	-	-	peak
3	147.8747	28.24	-8.77	19.47	43.50	-24.03	-	-	peak
4	254.0312	28.38	-10.03	18.35	46.00	-27.65	-	-	peak
5	505.7891	29.62	-3.80	25.82	46.00	-20.18	-	-	peak
6	906.3041	31.00	1.32	32.32	46.00	-13.68	-	-	peak

802.11ax-HE40			
Test Channel	5270MHz(worst case)	Polarity:	Vertical

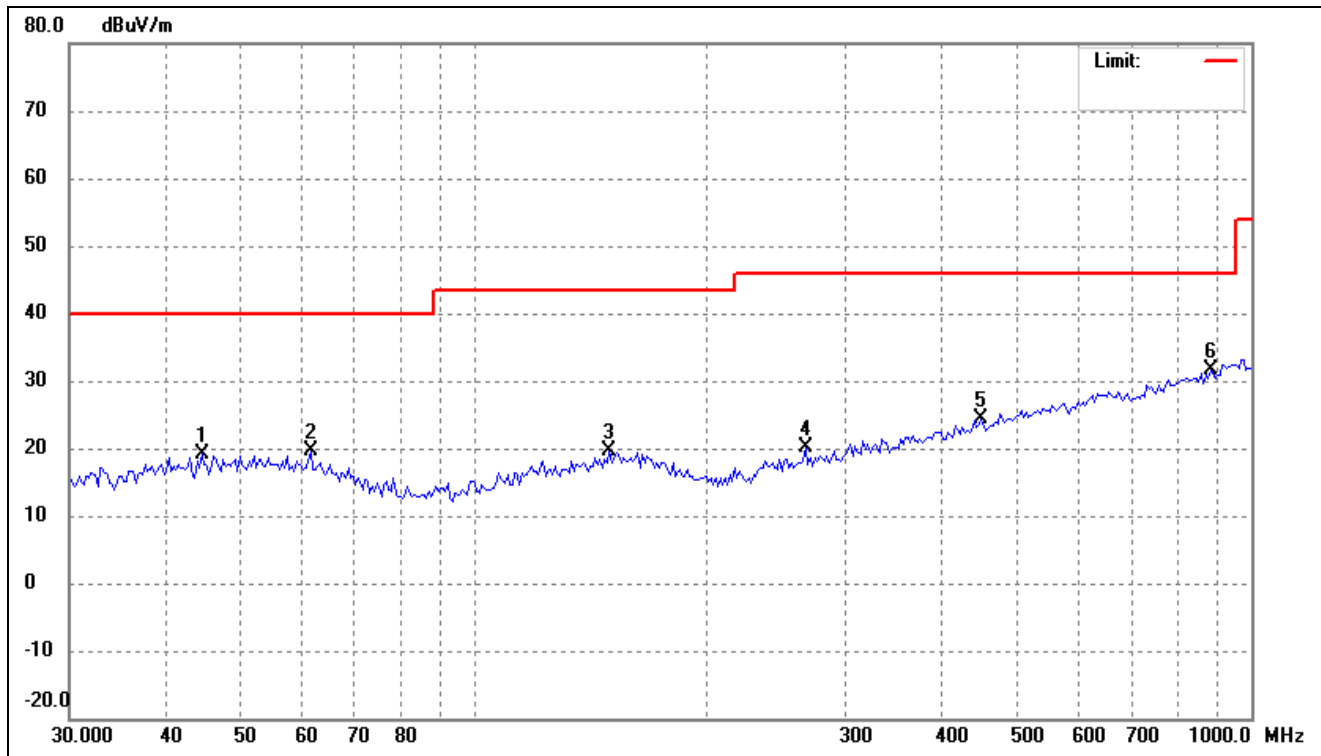


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.4657	27.52	-8.47	19.05	40.00	-20.95	-	-	peak
2	61.4343	28.81	-9.20	19.61	40.00	-20.39	-	-	peak
3	148.9175	28.27	-8.68	19.59	43.50	-23.91	-	-	peak
4	266.8395	29.55	-9.46	20.09	46.00	-25.91	-	-	peak
5	448.8361	29.05	-4.61	24.44	46.00	-21.56	-	-	peak
6	887.3978	30.60	1.08	31.68	46.00	-14.32	-	-	peak

802.11ac-HT80			
Test Channel	5290MHz(worst case)	Polarity:	Horizontal

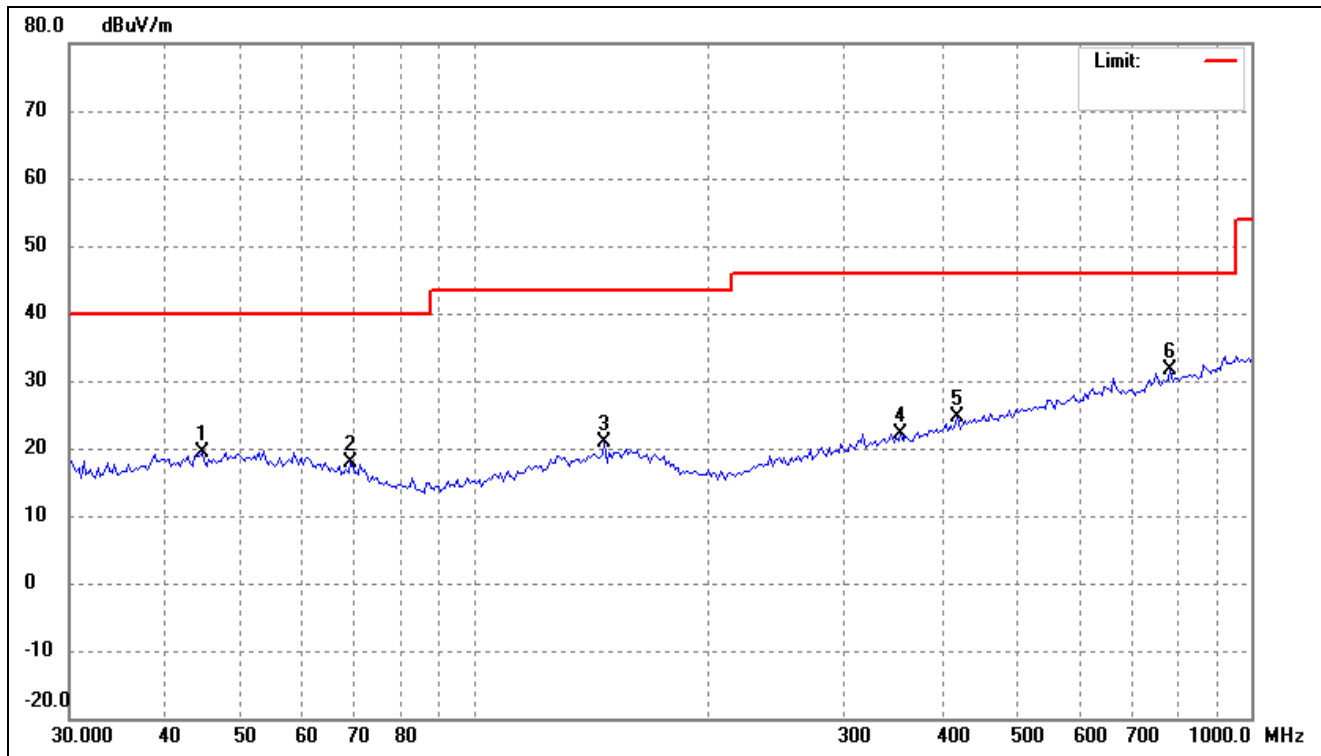


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.4657	27.88	-8.47	19.41	40.00	-20.59	-	-	peak
2	69.2297	28.45	-10.63	17.82	40.00	-22.18	-	-	peak
3	146.8392	29.73	-8.85	20.88	43.50	-22.62	-	-	peak
4	353.4472	29.24	-7.02	22.22	46.00	-23.78	-	-	peak
5	418.3784	30.20	-5.47	24.73	46.00	-21.27	-	-	peak
6	787.4749	31.43	0.19	31.62	46.00	-14.38	-	-	peak

802.11ac-HT80			
Test Channel	5290MHz(worst case)	Polarity:	Vertical

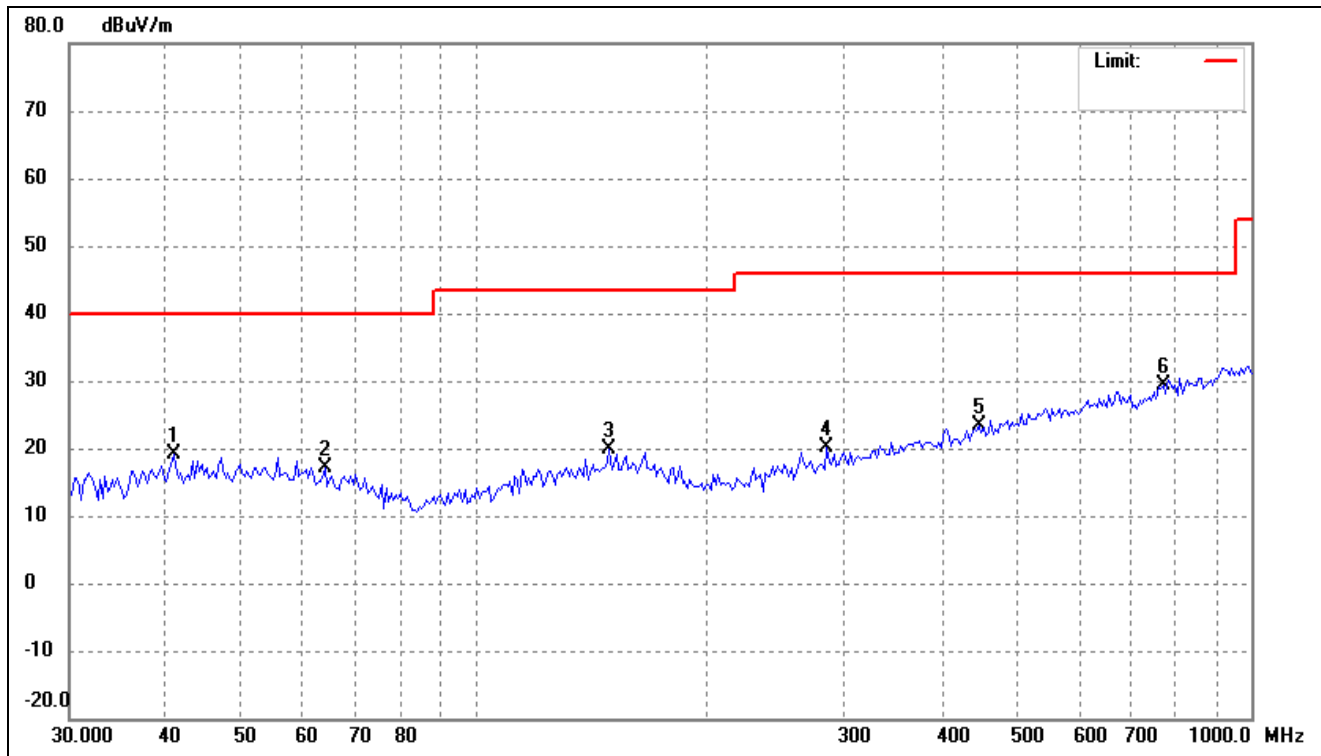


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.8699	27.49	-8.47	19.02	40.00	-20.98	-	-	peak
2	64.0800	26.81	-9.68	17.13	40.00	-22.87	-	-	peak
3	148.9175	28.63	-8.68	19.95	43.50	-23.55	-	-	peak
4	284.2607	28.80	-8.79	20.01	46.00	-25.99	-	-	peak
5	445.6932	27.98	-4.71	23.27	46.00	-22.73	-	-	peak
6	771.0475	29.31	0.03	29.34	46.00	-16.66	-	-	peak

802.11ax-HE80			
Test Channel	5290MHz(worst case)	Polarity:	Horizontal

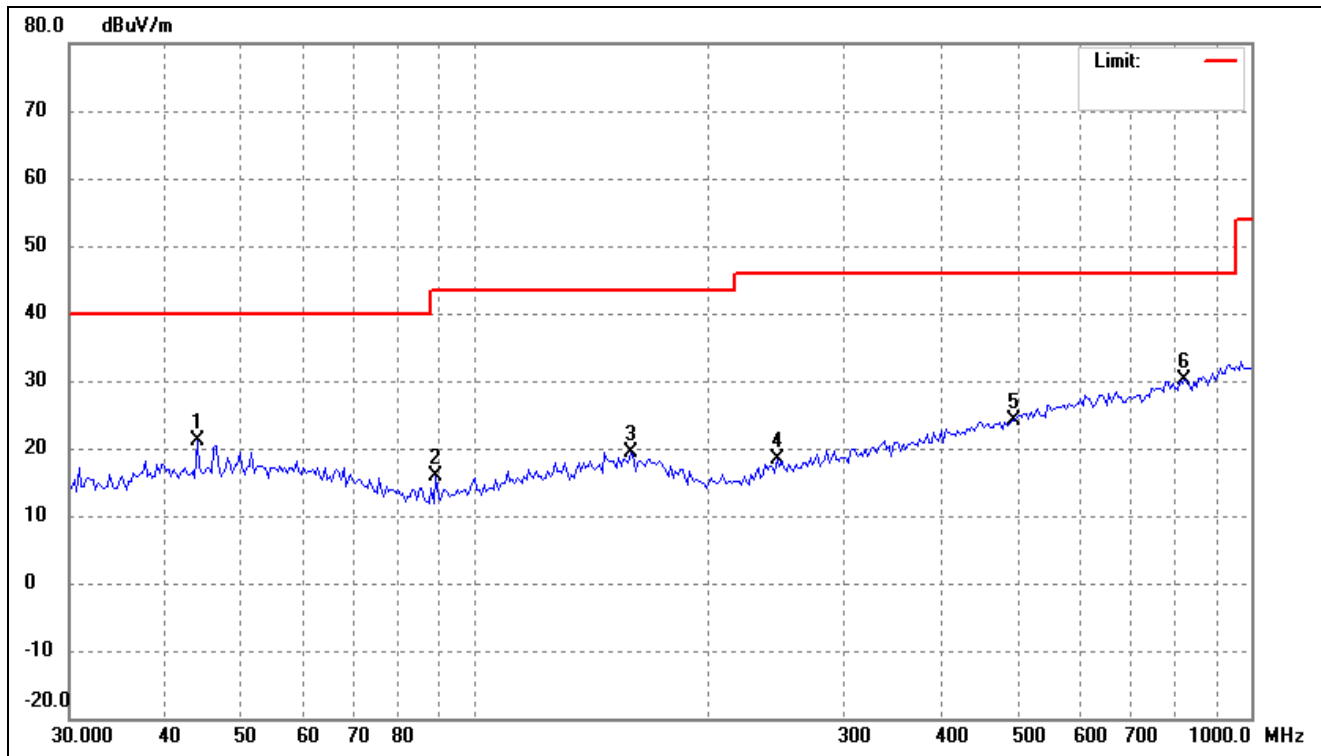

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	43.8452	29.54	-8.48	21.06	40.00	-18.94	-	-	peak
2	89.1579	28.85	-13.09	15.76	43.50	-27.74	-	-	peak
3	158.6399	28.04	-8.61	19.43	43.50	-24.07	-	-	peak
4	245.2606	28.66	-10.36	18.30	46.00	-27.70	-	-	peak
5	495.2379	28.13	-3.97	24.16	46.00	-21.84	-	-	peak
6	821.3871	29.73	0.49	30.22	46.00	-15.78	-	-	peak

802.11ax-HE80			
Test Channel	5290MHz(worst case)	Polarity:	Vertical

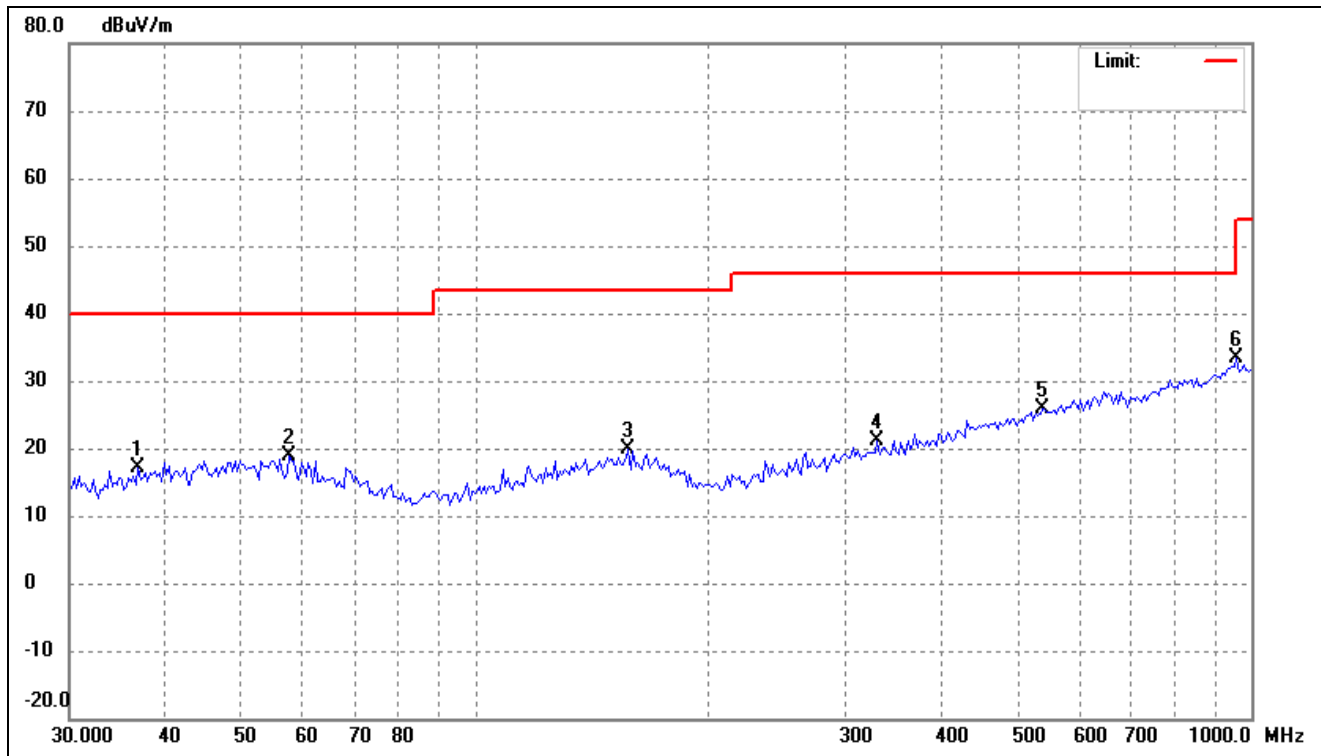


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	36.7811	26.23	-9.17	17.06	40.00	-22.94	-	-	peak
2	57.6693	27.67	-8.79	18.88	40.00	-21.12	-	-	peak
3	157.5290	28.43	-8.61	19.82	43.50	-23.68	-	-	peak
4	329.4625	28.48	-7.47	21.01	46.00	-24.99	-	-	peak
5	538.8107	29.15	-3.15	26.00	46.00	-20.00	-	-	peak
6	958.7135	31.08	2.26	33.34	46.00	-12.66	-	-	peak

➤ 5470-5725MHz


802.11a

Test Channel	5500MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

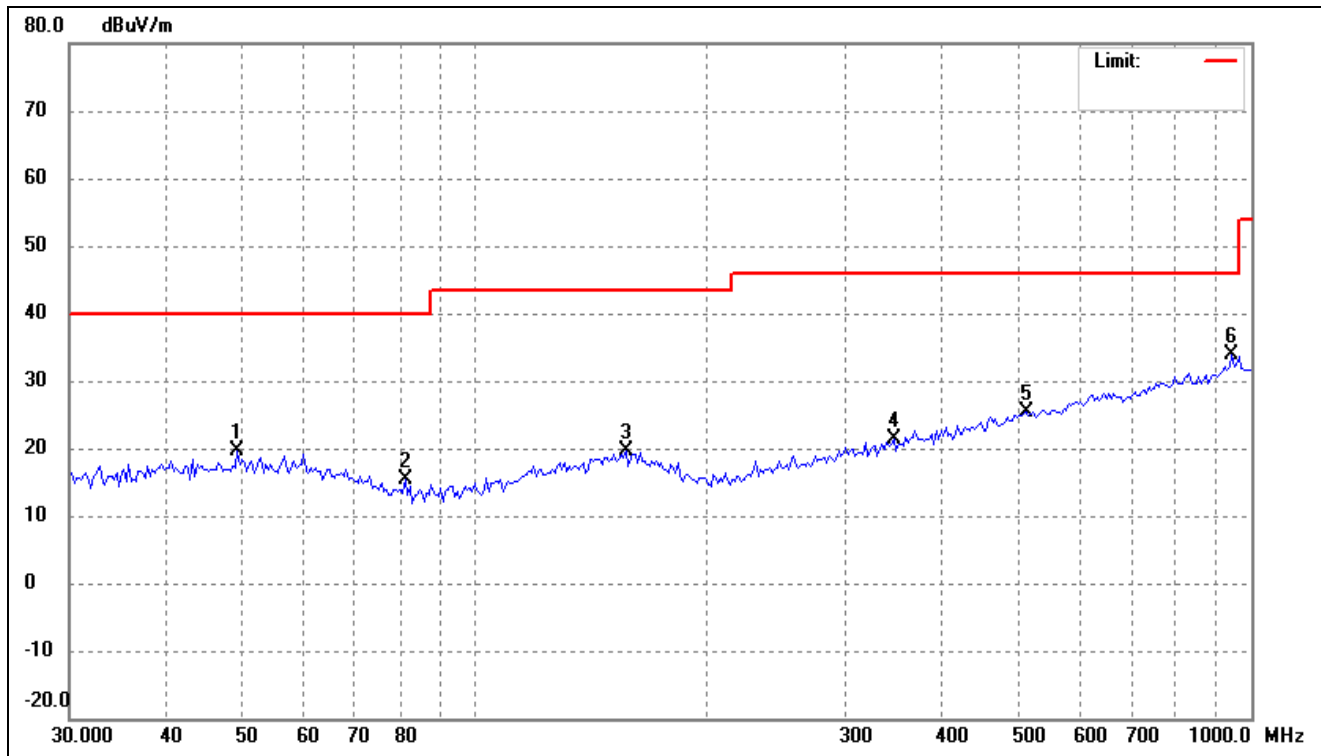


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	49.4087	27.86	-8.13	19.73	40.00	-20.27	-	-	peak
2	81.3740	28.41	-12.97	15.44	40.00	-24.56	-	-	peak
3	156.4259	28.21	-8.60	19.61	43.50	-23.89	-	-	peak
4	346.0740	28.47	-7.18	21.29	46.00	-24.71	-	-	peak
5	512.9478	29.02	-3.70	25.32	46.00	-20.68	-	-	peak
6	945.3336	31.78	2.15	33.93	46.00	-12.07	-	-	peak

802.11a			
Test Channel	5500MHz(Worst case)	Polarity:	Vertical

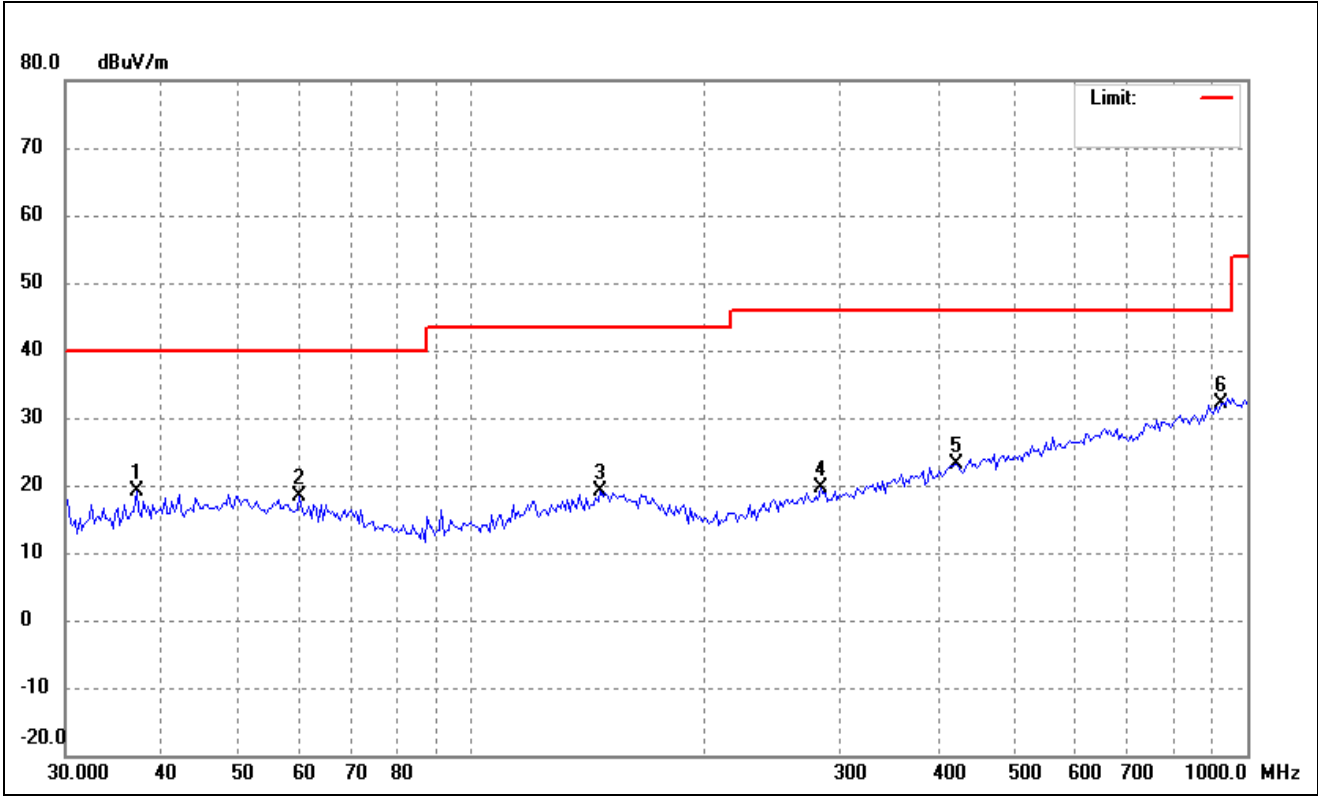


No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	37.0405	28.20	-9.11	19.09	40.00	-20.91	-	-	peak
2	60.1528	27.46	-8.97	18.49	40.00	-21.51	-	-	peak
3	146.8392	27.87	-8.85	19.02	43.50	-24.48	-	-	peak
4	282.2702	28.47	-8.86	19.61	46.00	-26.39	-	-	peak
5	421.3287	28.43	-5.38	23.05	46.00	-22.95	-	-	peak
6	925.6132	30.46	1.74	32.20	46.00	-13.80	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(Worst case)	Polarity:	Horizontal

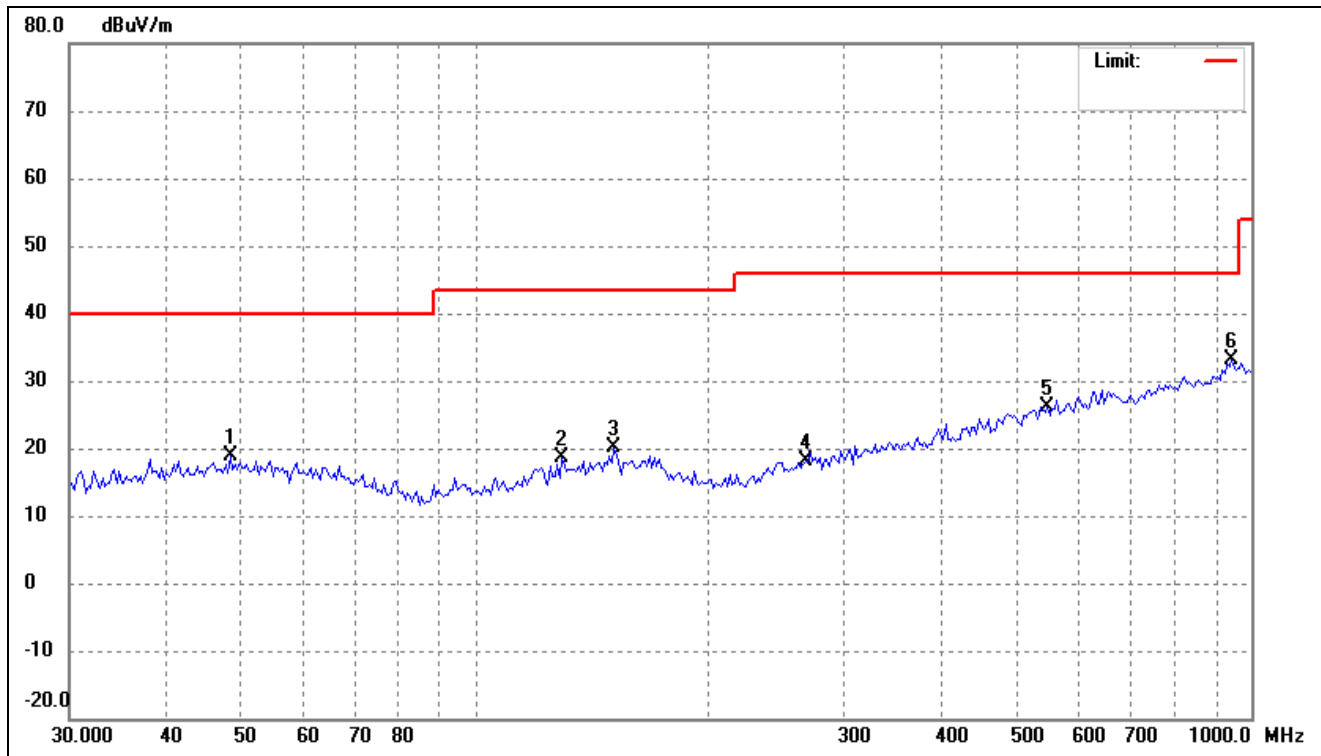


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.3780	27.02	-8.21	18.81	40.00	-21.19	-	-	peak
2	129.3923	28.50	-9.89	18.61	43.50	-24.89	-	-	peak
3	151.0252	28.78	-8.61	20.17	43.50	-23.33	-	-	peak
4	266.8395	27.71	-9.46	18.25	46.00	-27.75	-	-	peak
5	546.4368	29.11	-2.94	26.17	46.00	-19.83	-	-	peak
6	945.3336	30.88	2.15	33.03	46.00	-12.97	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(Worst case)	Polarity:	Vertical

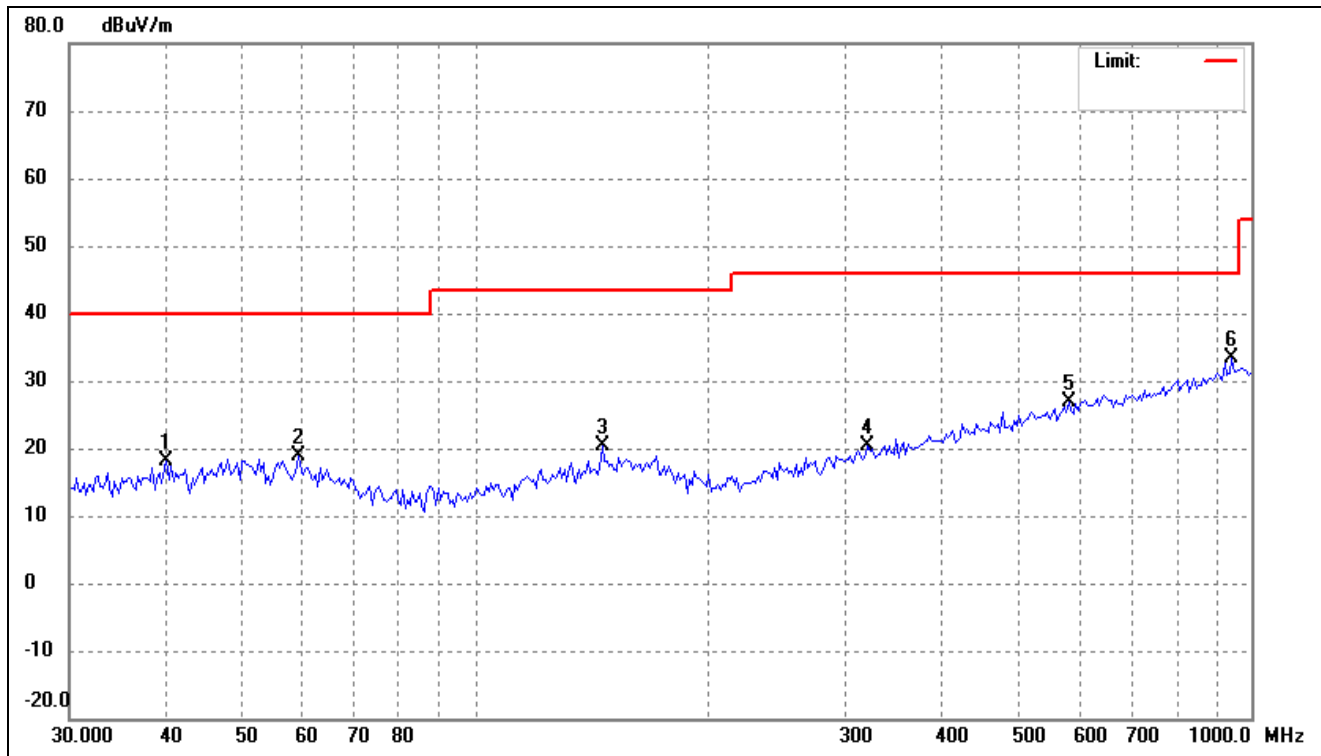


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.0173	26.59	-8.47	18.12	40.00	-21.88	-	-	peak
2	59.3133	27.84	-8.90	18.94	40.00	-21.06	-	-	peak
3	145.8109	29.33	-8.95	20.38	43.50	-23.12	-	-	peak
4	320.3306	28.00	-7.68	20.32	46.00	-25.68	-	-	peak
5	582.1122	29.10	-2.11	26.99	46.00	-19.01	-	-	peak
6	945.3336	31.31	2.15	33.46	46.00	-12.54	-	-	peak

802.11ac-HT20			
Test Channel	5500MHz(Worst case)	Polarity:	Horizontal

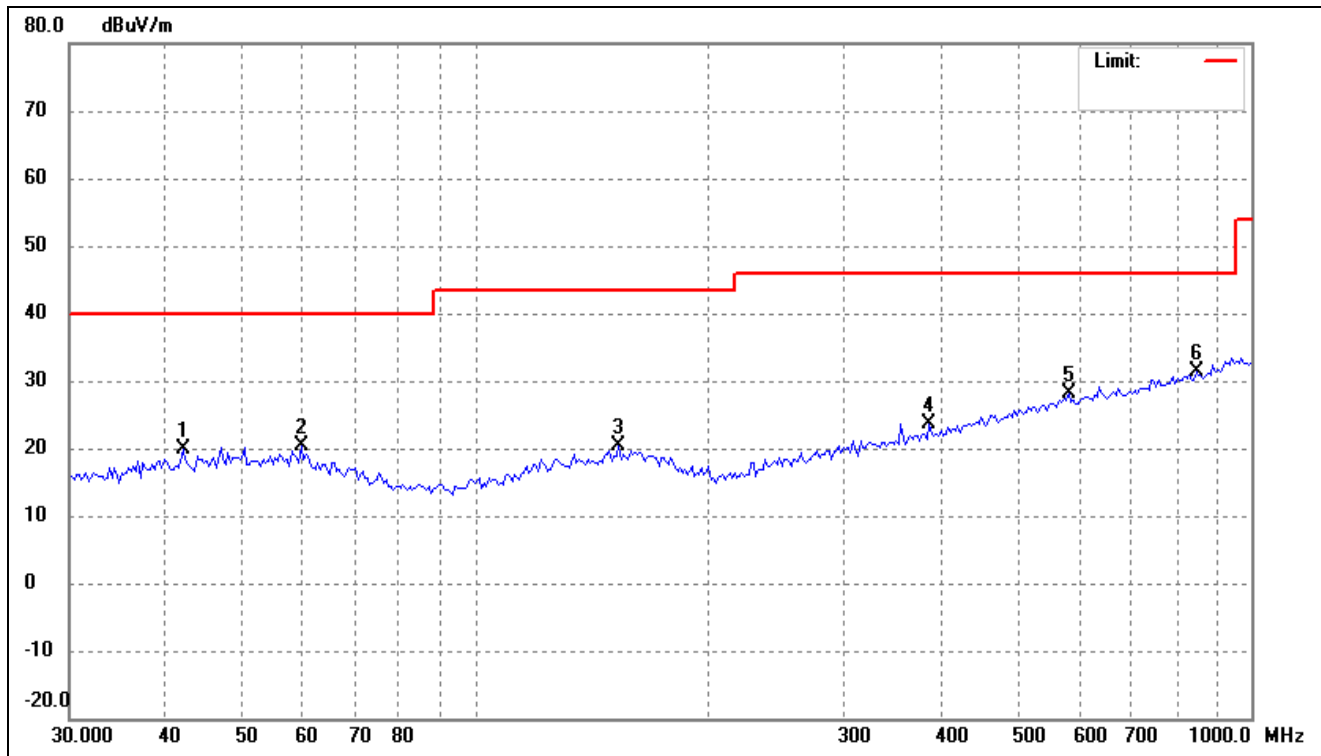


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.0350	28.26	-8.47	19.79	40.00	-20.21	-	-	peak
2	59.7315	29.25	-8.92	20.33	40.00	-19.67	-	-	peak
3	153.1627	28.95	-8.61	20.34	43.50	-23.16	-	-	peak
4	384.5447	29.87	-6.28	23.59	46.00	-22.41	-	-	peak
5	582.1122	30.18	-2.11	28.07	46.00	-17.93	-	-	peak
6	850.7603	30.73	0.75	31.48	46.00	-14.52	-	-	peak

802.11ac-HT20			
Test Channel	5500MHz(Worst case)	Polarity:	Vertical

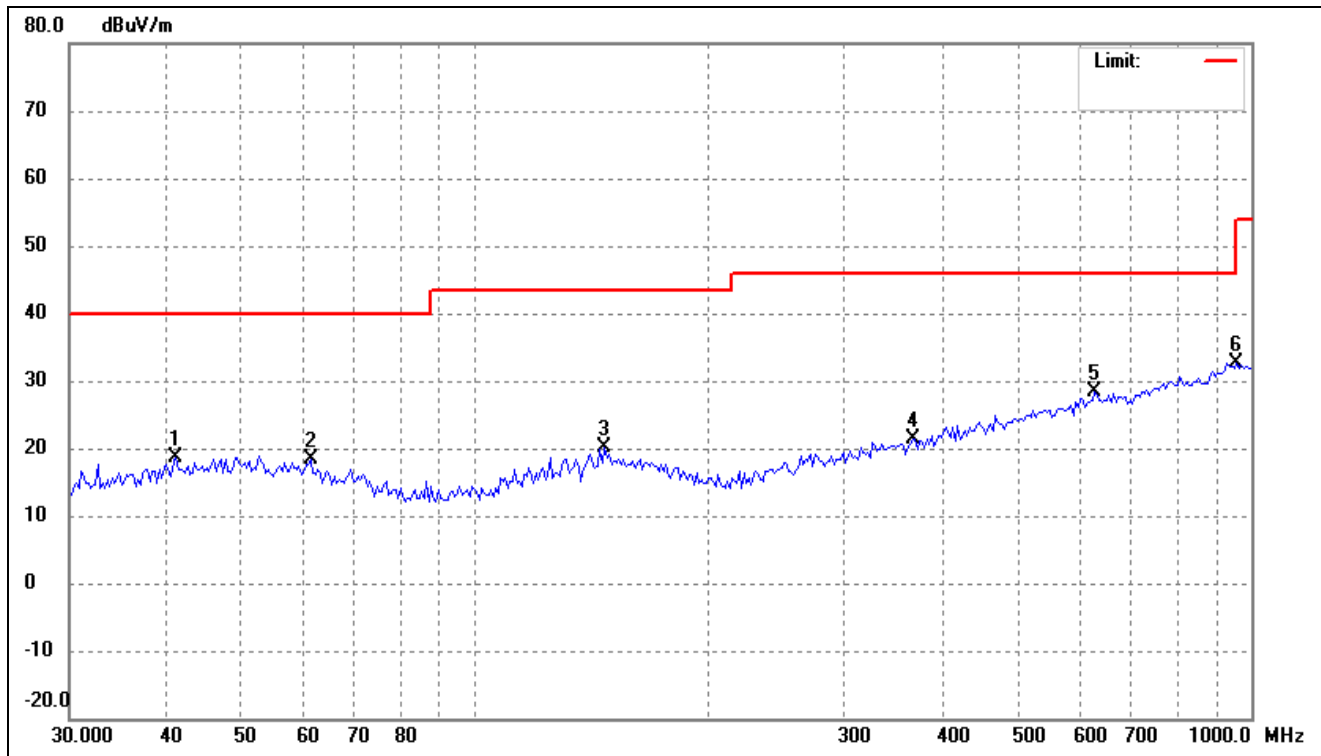


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	41.1581	27.00	-8.48	18.52	40.00	-21.48	-	-	peak
2	61.4343	27.48	-9.20	18.28	40.00	-21.72	-	-	peak
3	146.8392	28.91	-8.85	20.06	43.50	-23.44	-	-	peak
4	366.0866	27.98	-6.70	21.28	46.00	-24.72	-	-	peak
5	628.8936	29.65	-1.38	28.27	46.00	-17.73	-	-	peak
6	958.7135	30.36	2.26	32.62	46.00	-13.38	-	-	peak

802.11ax-HE20			
Test Channel	5500MHz(Worst case)	Polarity:	Horizontal

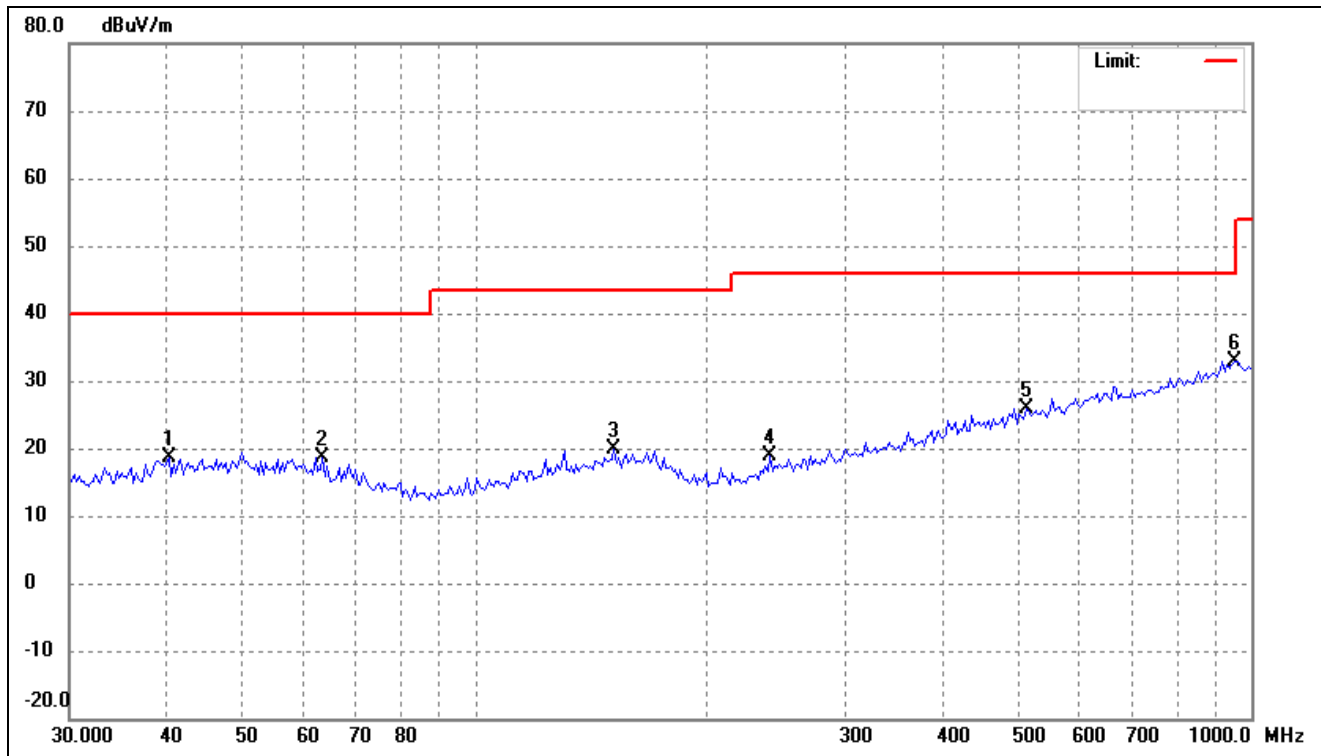


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.2995	27.02	-8.48	18.54	40.00	-21.46	-	-	peak
2	63.6312	28.28	-9.59	18.69	40.00	-21.31	-	-	peak
3	151.0252	28.49	-8.61	19.88	43.50	-23.62	-	-	peak
4	240.1442	29.51	-10.54	18.97	46.00	-27.03	-	-	peak
5	512.9478	29.57	-3.70	25.87	46.00	-20.13	-	-	peak
6	952.0001	30.68	2.25	32.93	46.00	-13.07	-	-	peak

802.11ax-HE20			
Test Channel	5500MHz(Worst case)	Polarity:	Vertical

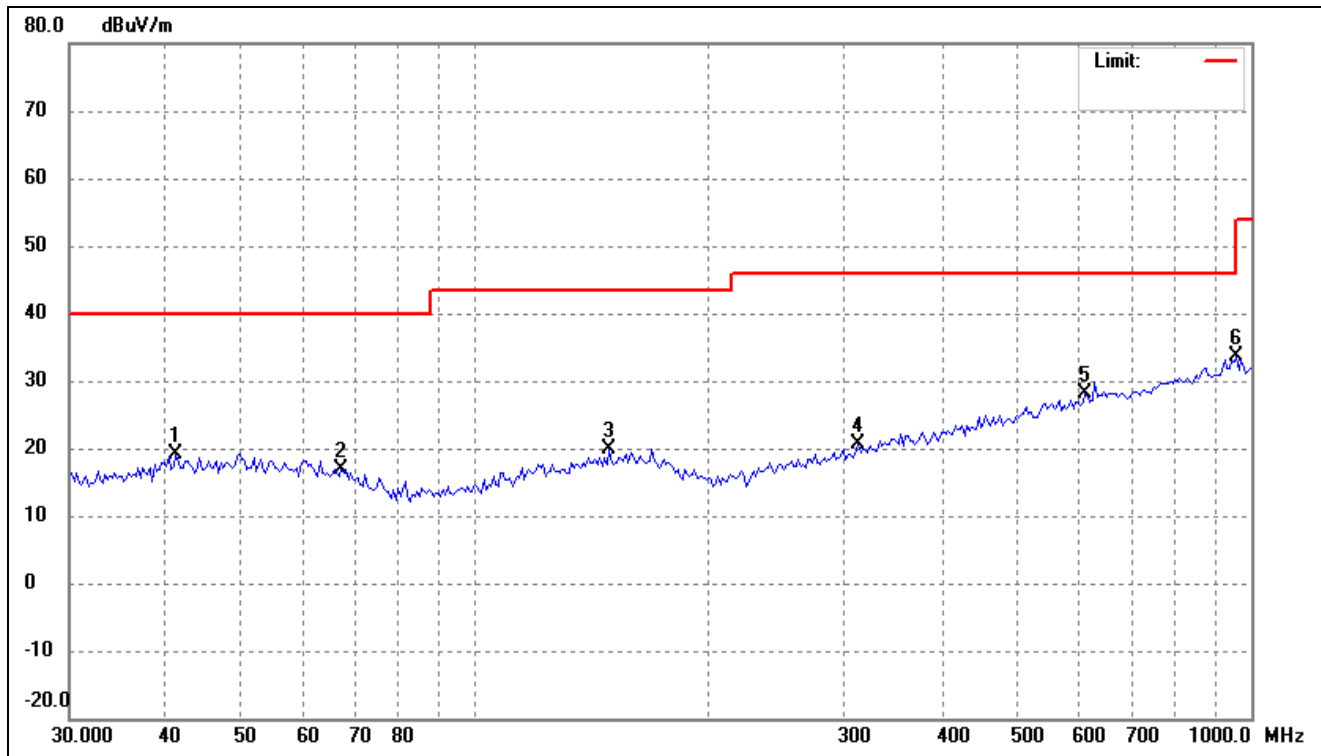


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	41.1581	27.68	-8.48	19.20	40.00	-20.80	-	-	peak
2	67.3109	27.14	-10.27	16.87	40.00	-23.13	-	-	peak
3	148.9175	28.62	-8.68	19.94	43.50	-23.56	-	-	peak
4	311.4519	28.47	-7.93	20.54	46.00	-25.46	-	-	peak
5	611.4623	29.70	-1.59	28.11	46.00	-17.89	-	-	peak
6	958.7135	31.26	2.26	33.52	46.00	-12.48	-	-	peak

802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Horizontal

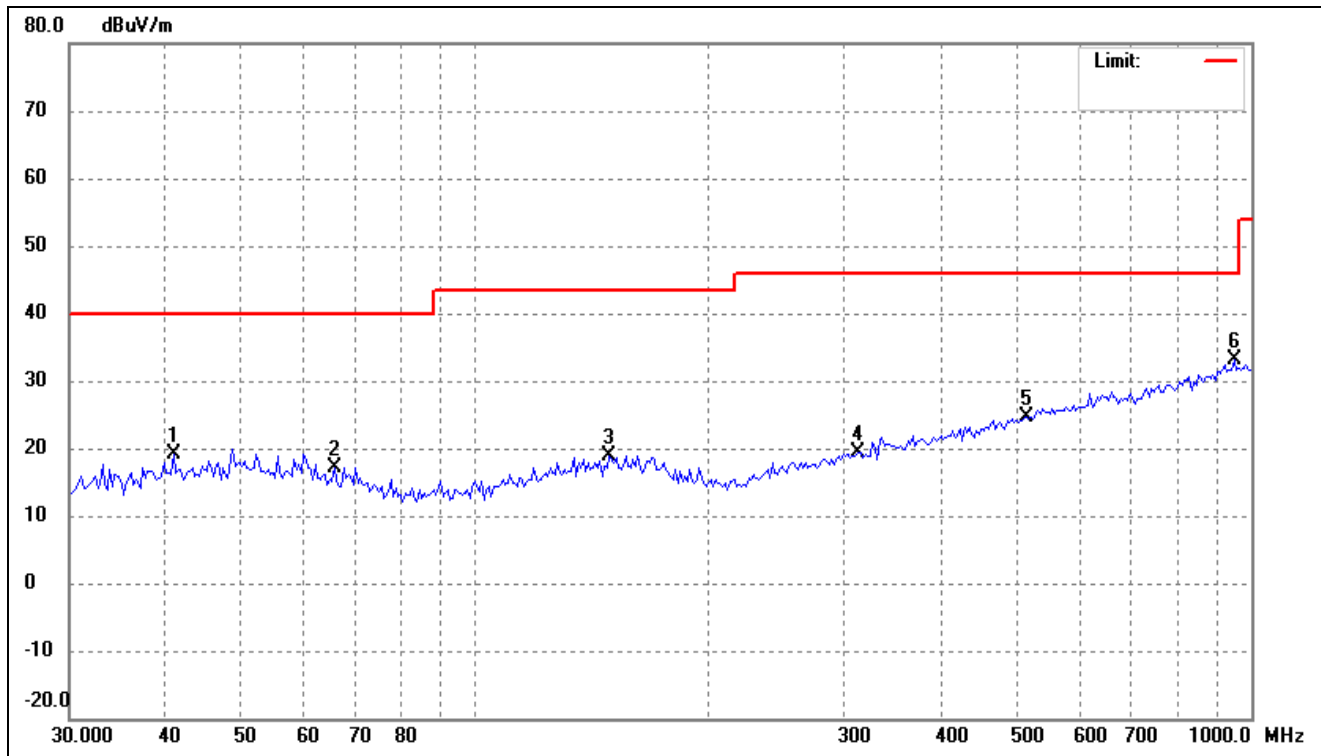


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.8699	27.65	-8.47	19.18	40.00	-20.82	-	-	peak
2	65.9067	27.27	-10.02	17.25	40.00	-22.75	-	-	peak
3	148.9175	27.66	-8.68	18.98	43.50	-24.52	-	-	peak
4	311.4519	27.40	-7.93	19.47	46.00	-26.53	-	-	peak
5	512.9478	28.32	-3.70	24.62	46.00	-21.38	-	-	peak
6	952.0001	30.96	2.25	33.21	46.00	-12.79	-	-	peak

802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Vertical

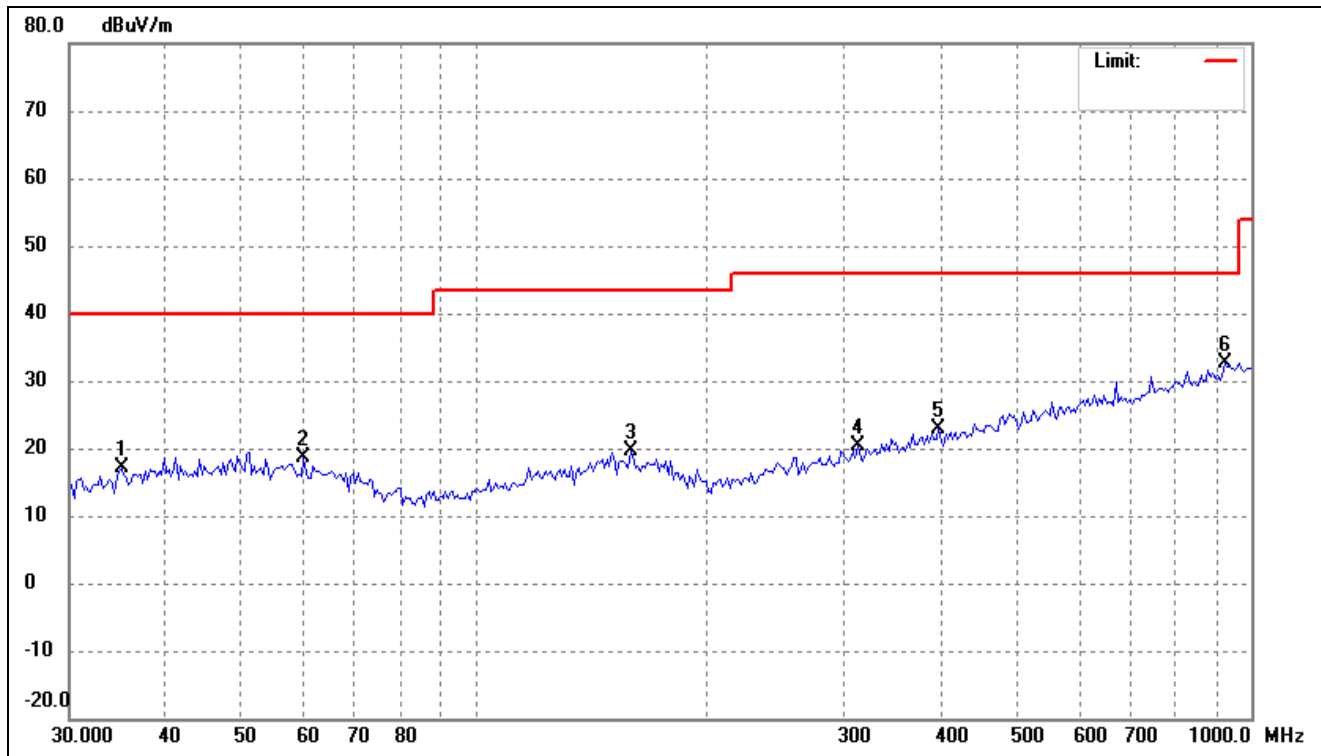


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	35.0157	26.67	-9.55	17.12	40.00	-22.88	-	-	peak
2	60.1528	27.68	-8.97	18.71	40.00	-21.29	-	-	peak
3	158.6399	28.19	-8.61	19.58	43.50	-23.92	-	-	peak
4	311.4519	28.39	-7.93	20.46	46.00	-25.54	-	-	peak
5	395.5071	28.85	-6.05	22.80	46.00	-23.20	-	-	peak
6	925.6132	31.01	1.74	32.75	46.00	-13.25	-	-	peak

802.11ac-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Horizontal

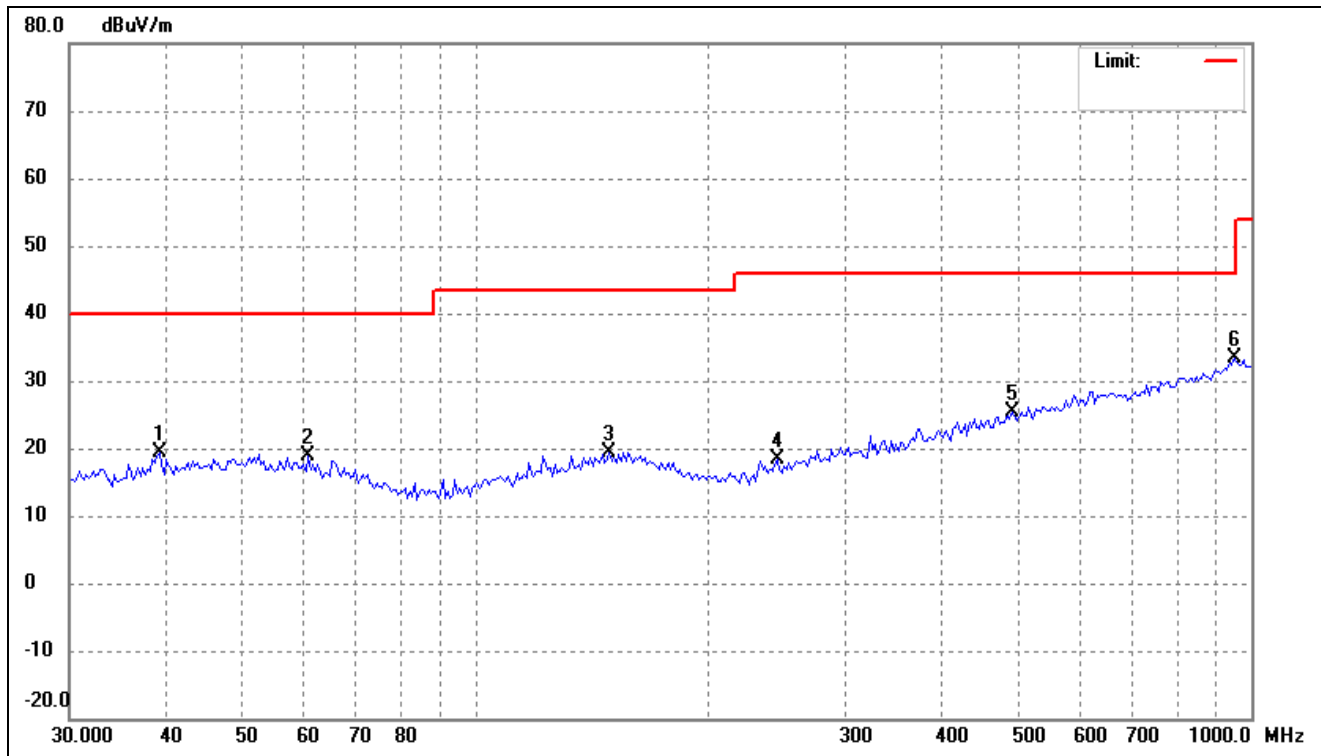


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.1825	28.07	-8.65	19.42	40.00	-20.58	-	-	peak
2	61.0041	27.96	-9.11	18.85	40.00	-21.15	-	-	peak
3	148.9175	28.10	-8.68	19.42	43.50	-24.08	-	-	peak
4	245.2606	28.70	-10.36	18.34	46.00	-27.66	-	-	peak
5	491.7700	29.35	-4.01	25.34	46.00	-20.66	-	-	peak
6	952.0001	31.13	2.25	33.38	46.00	-12.62	-	-	peak

802.11ac-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Vertical

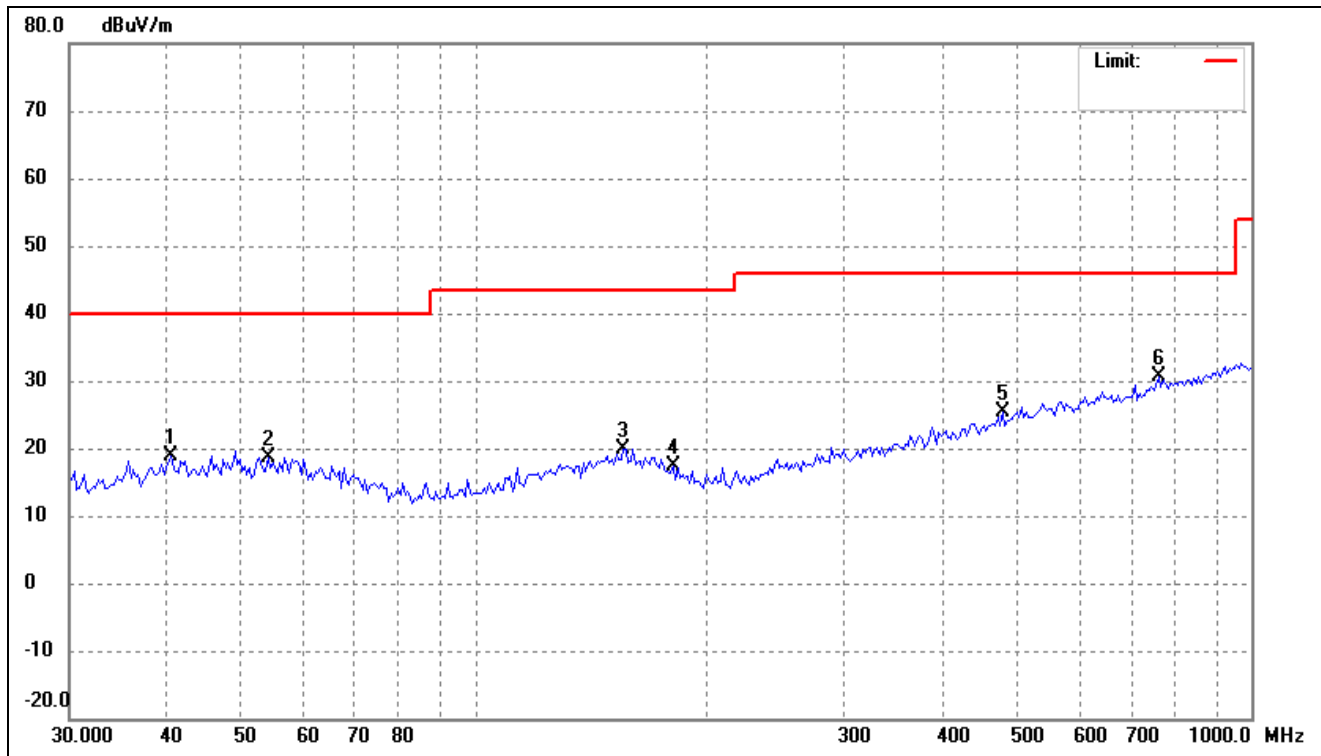


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.5837	27.42	-8.48	18.94	40.00	-21.06	-	-	peak
2	54.1349	27.19	-8.54	18.65	40.00	-21.35	-	-	peak
3	155.3305	28.58	-8.61	19.97	43.50	-23.53	-	-	peak
4	180.0304	27.82	-10.32	17.50	43.50	-26.00	-	-	peak
5	478.1394	29.46	-4.20	25.26	46.00	-20.74	-	-	peak
6	760.2867	30.61	-0.07	30.54	46.00	-15.46	-	-	peak

802.11ax-HE40			
Test Channel	5510MHz(worst case)	Polarity:	Horizontal

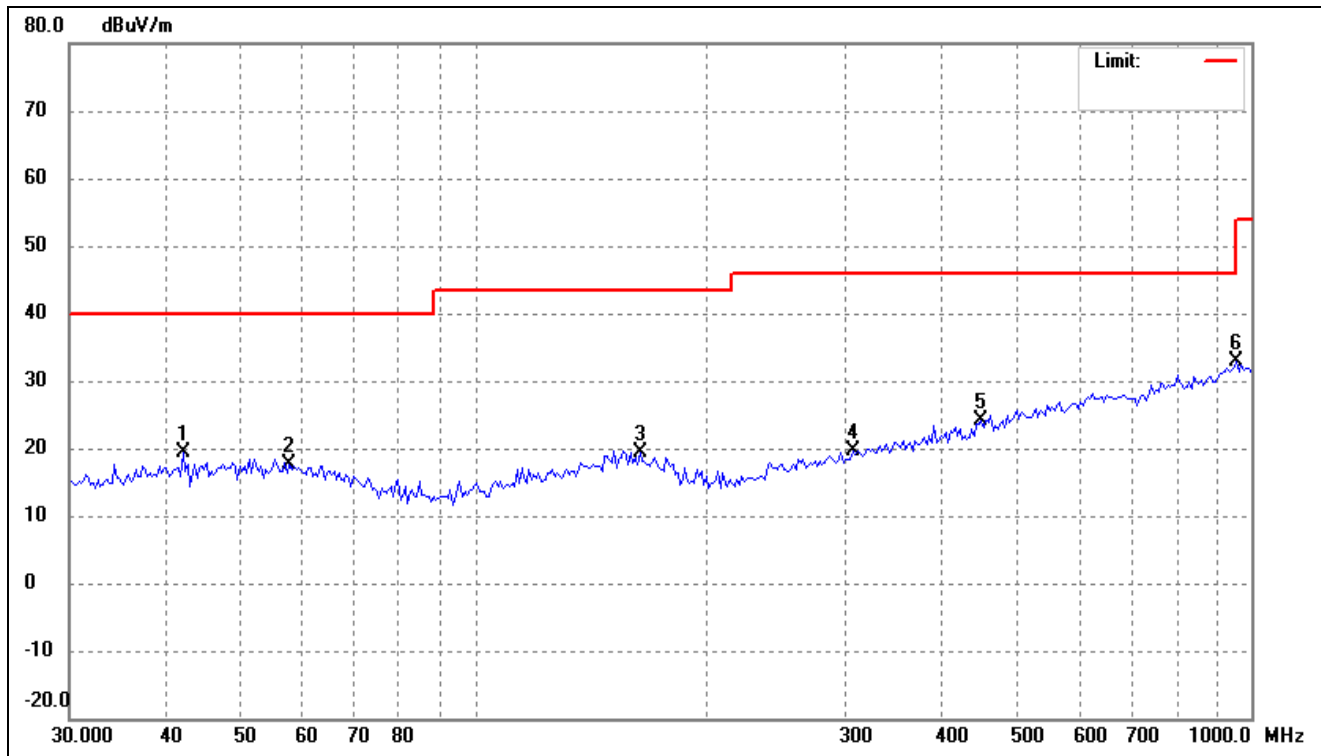


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.0350	27.89	-8.47	19.42	40.00	-20.58	-	-	peak
2	57.6693	26.51	-8.79	17.72	40.00	-22.28	-	-	peak
3	163.1623	28.19	-8.70	19.49	43.50	-24.01	-	-	peak
4	307.1053	27.60	-8.06	19.54	46.00	-26.46	-	-	peak
5	448.8361	28.78	-4.61	24.17	46.00	-21.83	-	-	peak
6	958.7135	30.55	2.26	32.81	46.00	-13.19	-	-	peak

802.11ax-HE40			
Test Channel	5510MHz(worst case)	Polarity:	Vertical

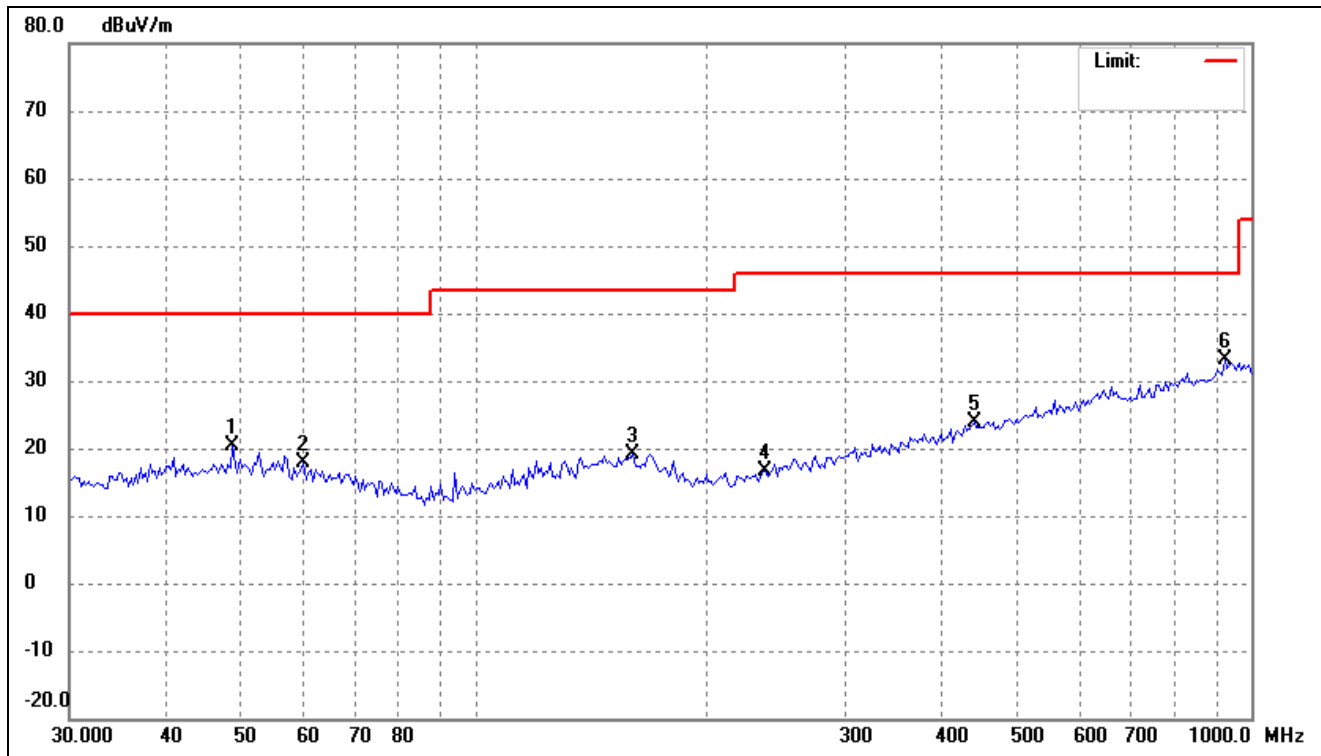


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.7191	28.47	-8.18	20.29	40.00	-19.71	-	-	peak
2	60.1528	26.75	-8.97	17.78	40.00	-22.22	-	-	peak
3	159.7586	27.75	-8.61	19.14	43.50	-24.36	-	-	peak
4	236.7928	27.61	-10.88	16.73	46.00	-29.27	-	-	peak
5	439.4730	28.84	-4.88	23.96	46.00	-22.04	-	-	peak
6	925.6132	31.35	1.74	33.09	46.00	-12.91	-	-	peak

802.11ac-HT80			
Test Channel	5530MHz(worst case)	Polarity:	Horizontal

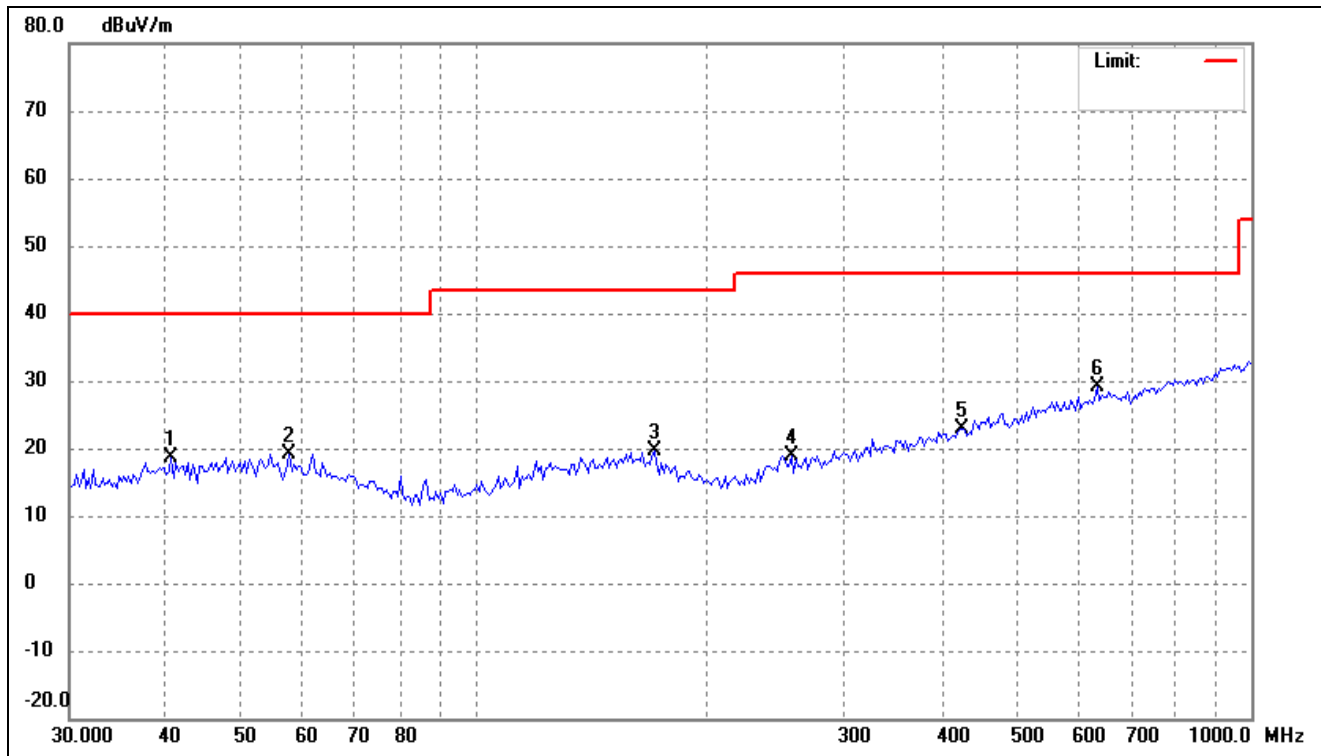


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.5837	27.15	-8.48	18.67	40.00	-21.33	-	-	peak
2	57.6693	28.01	-8.79	19.22	40.00	-20.78	-	-	peak
3	170.1888	28.44	-8.91	19.53	43.50	-23.97	-	-	peak
4	255.8226	28.90	-9.96	18.94	46.00	-27.06	-	-	peak
5	424.2999	28.29	-5.30	22.99	46.00	-23.01	-	-	peak
6	633.3285	30.46	-1.37	29.09	46.00	-16.91	-	-	peak

802.11ac-HT80			
Test Channel	5530MHz(worst case)	Polarity:	Vertical

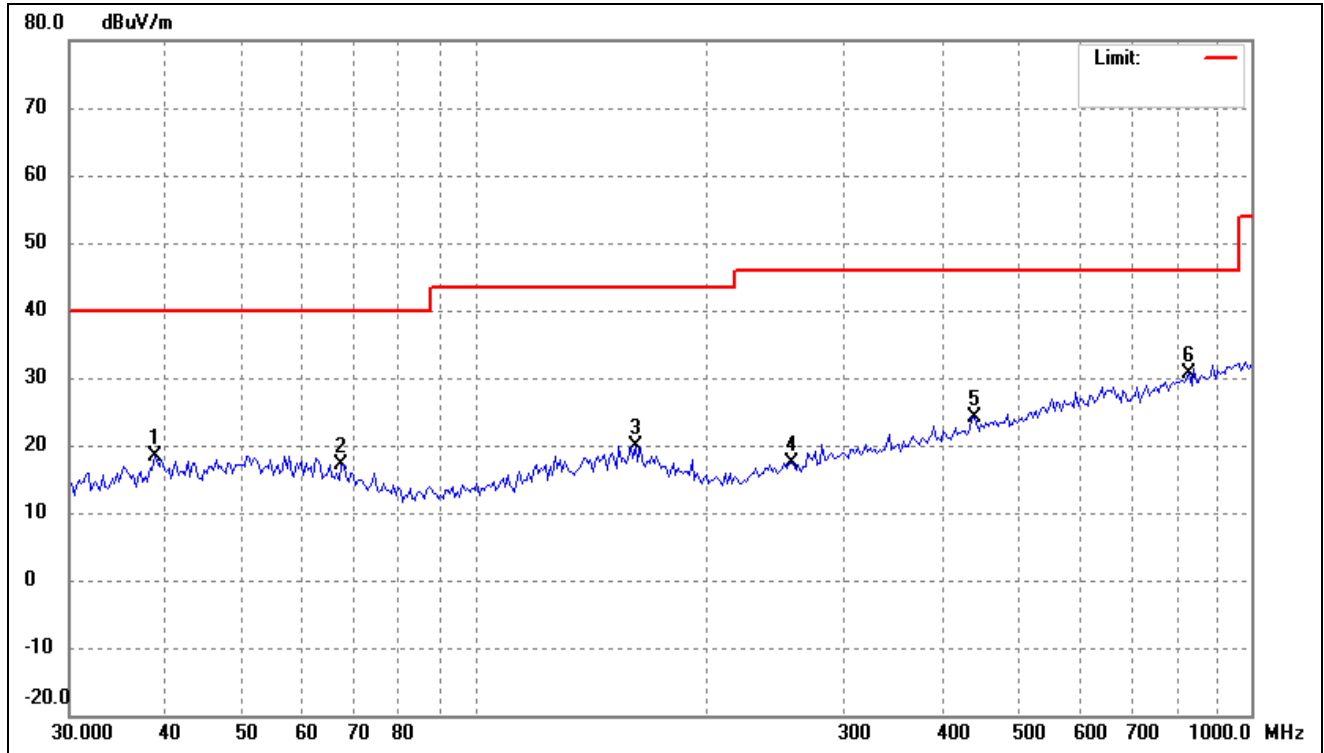


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	38.6357	27.17	-8.78	18.39	40.00	-21.61	-	-	peak
2	67.3109	27.52	-10.27	17.25	40.00	-22.75	-	-	peak
3	160.8852	28.46	-8.64	19.82	43.50	-23.68	-	-	peak
4	255.8226	27.39	-9.96	17.43	46.00	-28.57	-	-	peak
5	439.4730	29.13	-4.88	24.25	46.00	-21.75	-	-	peak
6	833.0127	30.13	0.59	30.72	46.00	-15.28	-	-	peak

802.11ax-HE80			
Test Channel	5530MHz(worst case)	Polarity:	Horizontal

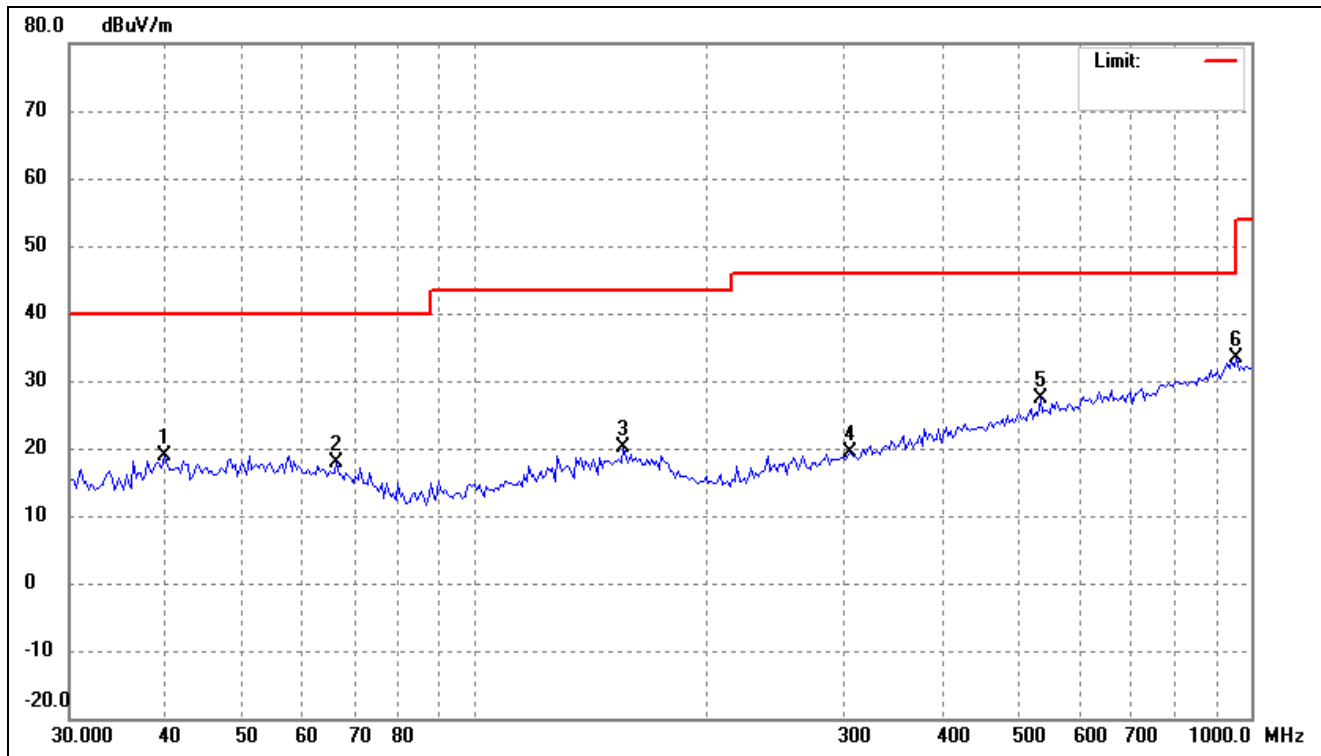

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.7371	27.46	-8.54	18.92	40.00	-21.08	-	-	peak
2	66.3715	27.94	-10.11	17.83	40.00	-22.17	-	-	peak
3	155.3305	28.77	-8.61	20.16	43.50	-23.34	-	-	peak
4	304.9548	27.39	-8.12	19.27	46.00	-26.73	-	-	peak
5	535.0377	30.59	-3.25	27.34	46.00	-18.66	-	-	peak
6	958.7135	31.00	2.26	33.26	46.00	-12.74	-	-	peak

802.11ax-HE80			
Test Channel	5530MHz(worst case)	Polarity:	Vertical

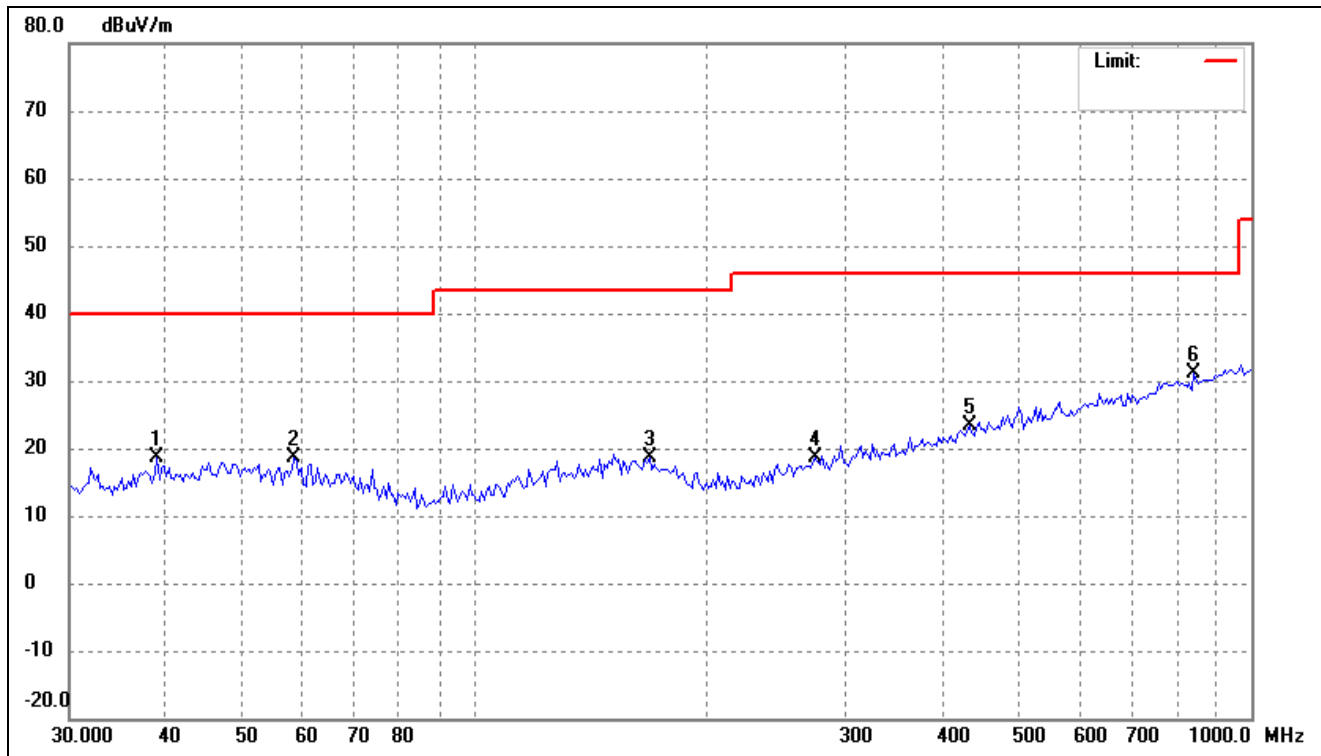


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	38.9081	27.26	-8.72	18.54	40.00	-21.46	-	-	peak
2	58.4855	27.51	-8.84	18.67	40.00	-21.33	-	-	peak
3	167.8136	27.48	-8.82	18.66	43.50	-24.84	-	-	peak
4	274.4464	27.86	-9.13	18.73	46.00	-27.27	-	-	peak
5	433.3397	28.42	-5.05	23.37	46.00	-22.63	-	-	peak
6	844.8028	30.38	0.69	31.07	46.00	-14.93	-	-	peak

➤ 5725-5850MHz


802.11a

Test Channel	5745MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

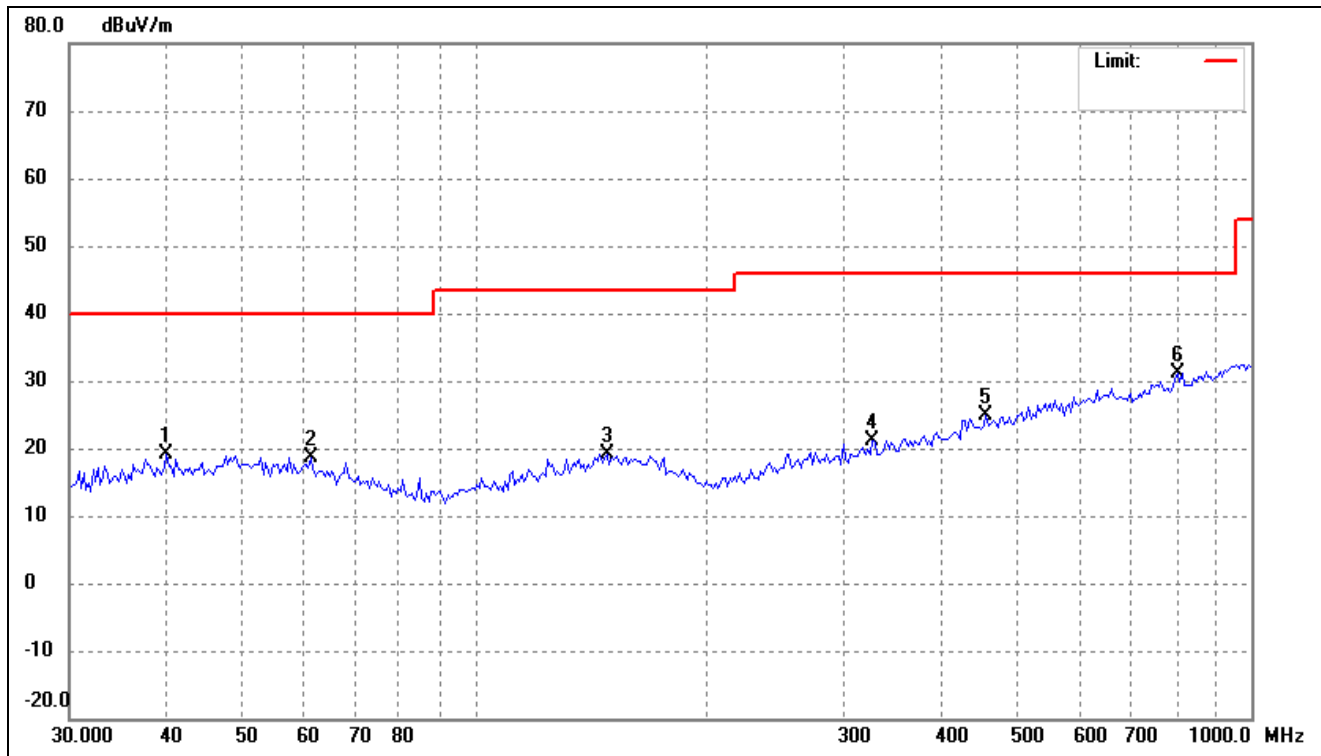


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.0173	27.65	-8.47	19.18	40.00	-20.82	-	-	peak
2	61.4343	27.81	-9.20	18.61	40.00	-21.39	-	-	peak
3	147.8747	27.94	-8.77	19.17	43.50	-24.33	-	-	peak
4	324.8645	28.67	-7.55	21.12	46.00	-24.88	-	-	peak
5	455.1888	29.38	-4.52	24.86	46.00	-21.14	-	-	peak
6	804.2523	30.80	0.34	31.14	46.00	-14.86	-	-	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

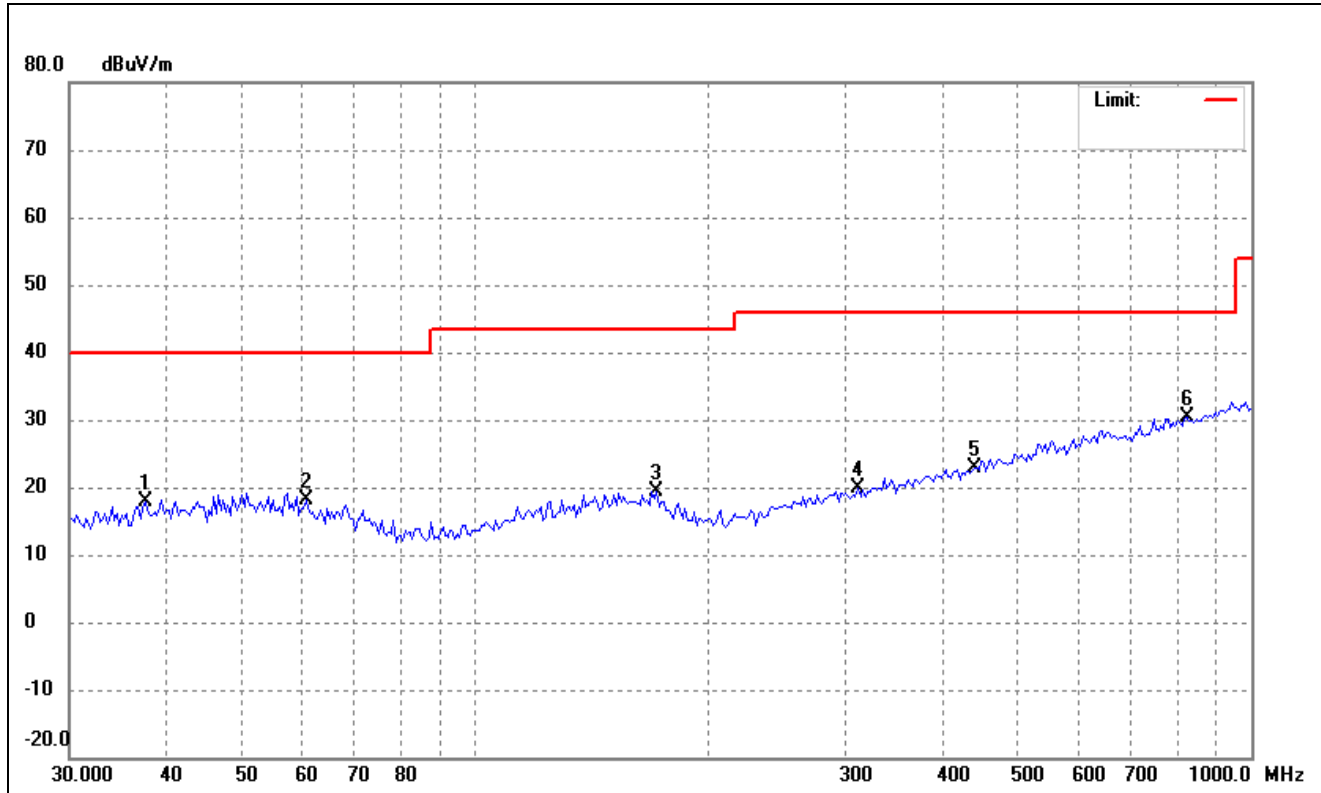


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	37.5648	26.77	-9.00	17.77	40.00	-22.23	-	-	peak
2	60.5769	27.14	-9.04	18.10	40.00	-21.90	-	-	peak
3	171.3890	28.50	-9.08	19.42	43.50	-24.08	-	-	peak
4	311.4519	27.80	-7.93	19.87	46.00	-26.13	-	-	peak
5	439.4730	27.84	-4.88	22.96	46.00	-23.04	-	-	peak
6	827.1795	29.81	0.54	30.35	46.00	-15.65	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

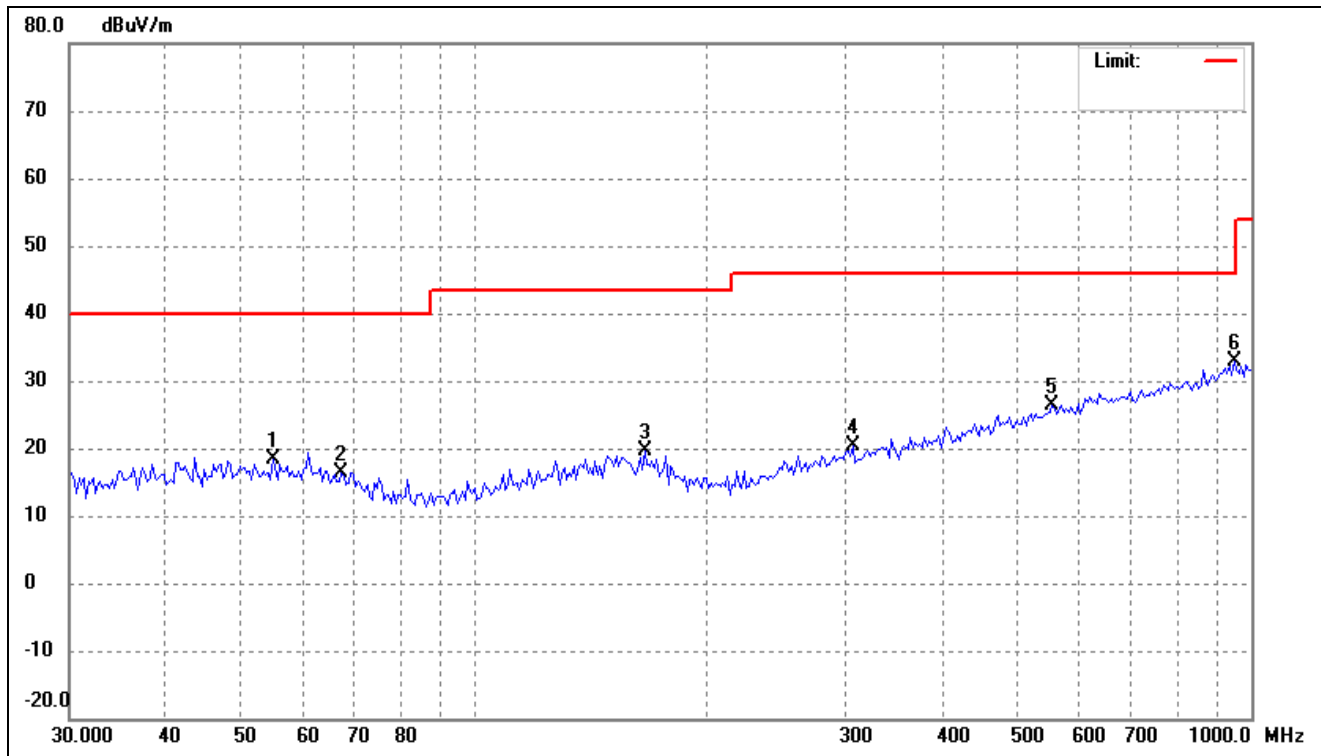


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	54.9011	26.88	-8.62	18.26	40.00	-21.74	-	-	peak
2	67.3109	26.63	-10.27	16.36	40.00	-23.64	-	-	peak
3	165.4716	28.45	-8.76	19.69	43.50	-23.81	-	-	peak
4	307.1053	28.42	-8.06	20.36	46.00	-25.64	-	-	peak
5	554.1708	29.13	-2.75	26.38	46.00	-19.62	-	-	peak
6	952.0001	30.62	2.25	32.87	46.00	-13.13	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

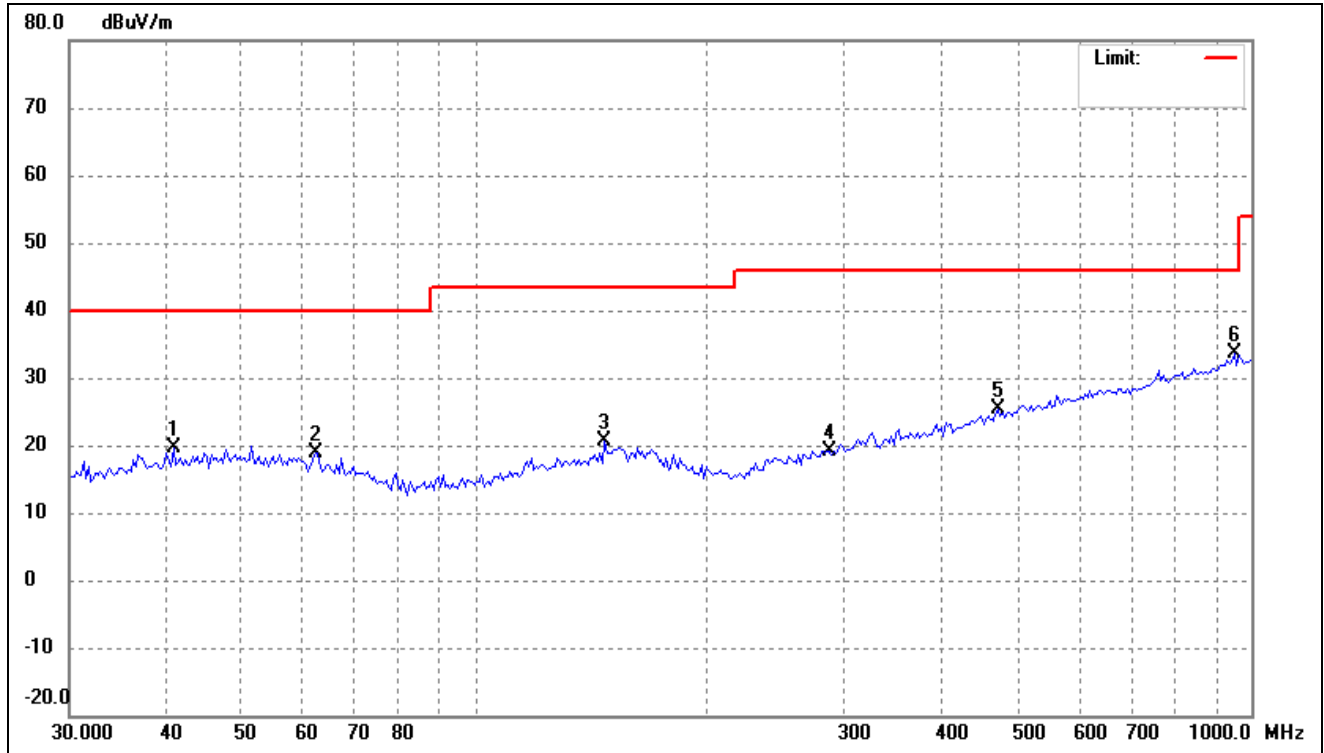


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	40.8699	28.21	-8.47	19.74	40.00	-20.26	-	-	peak
2	62.3038	28.29	-9.35	18.94	40.00	-21.06	-	-	peak
3	146.8392	29.56	-8.85	20.71	43.50	-22.79	-	-	peak
4	286.2653	27.96	-8.72	19.24	46.00	-26.76	-	-	peak
5	471.4665	29.64	-4.29	25.35	46.00	-20.65	-	-	peak
6	952.0001	31.34	2.25	33.59	46.00	-12.41	-	-	peak

802.11ac-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

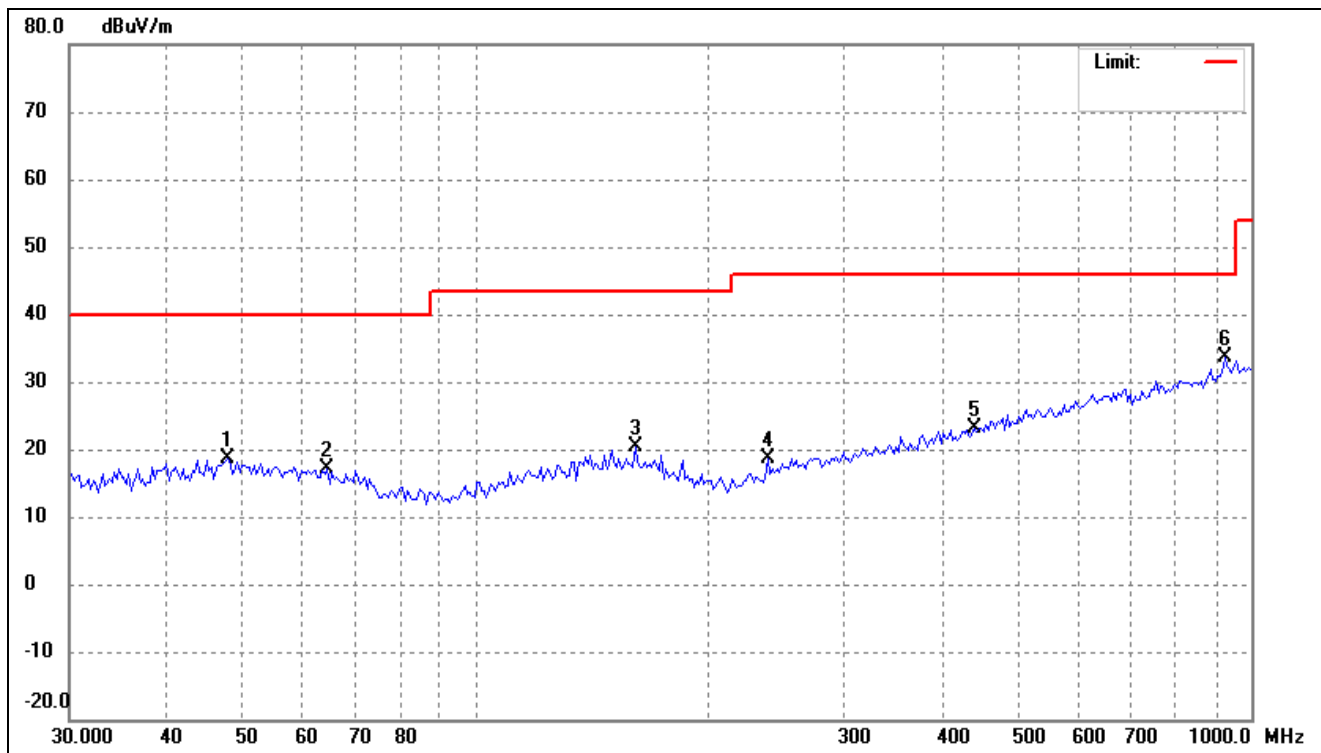


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.0392	26.81	-8.23	18.58	40.00	-21.42	-	-	peak
2	64.5319	27.00	-9.76	17.24	40.00	-22.76	-	-	peak
3	160.8852	28.92	-8.64	20.28	43.50	-23.22	-	-	peak
4	238.4626	29.45	-10.71	18.74	46.00	-27.26	-	-	peak
5	439.4730	28.13	-4.88	23.25	46.00	-22.75	-	-	peak
6	925.6132	31.84	1.74	33.58	46.00	-12.42	-	-	peak

802.11ac-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

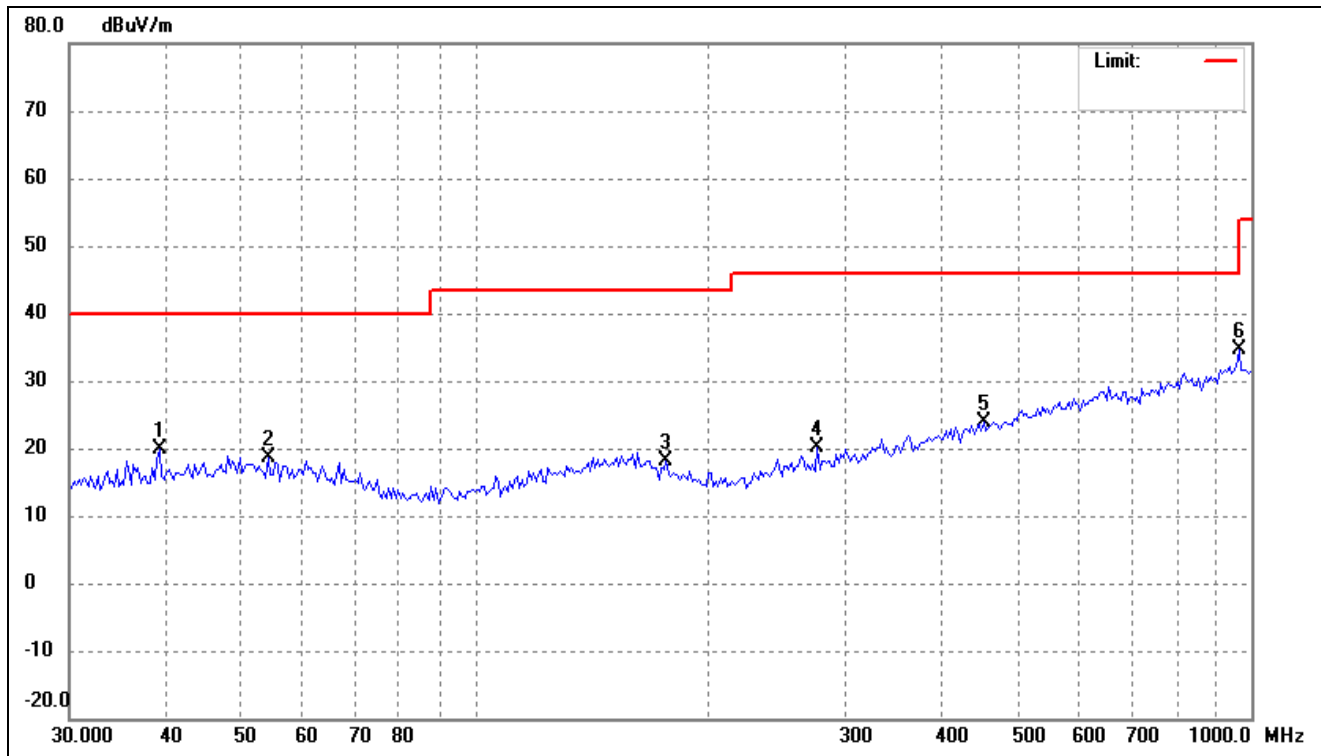


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	39.1825	28.54	-8.65	19.89	40.00	-20.11	-	-	peak
2	54.1349	27.05	-8.54	18.51	40.00	-21.49	-	-	peak
3	176.2748	28.02	-9.78	18.24	43.50	-25.26	-	-	peak
4	276.3818	29.24	-9.06	20.18	46.00	-25.82	-	-	peak
5	452.0013	28.44	-4.56	23.88	46.00	-22.12	-	-	peak
6	965.4742	32.26	2.27	34.53	54.00	-19.47	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

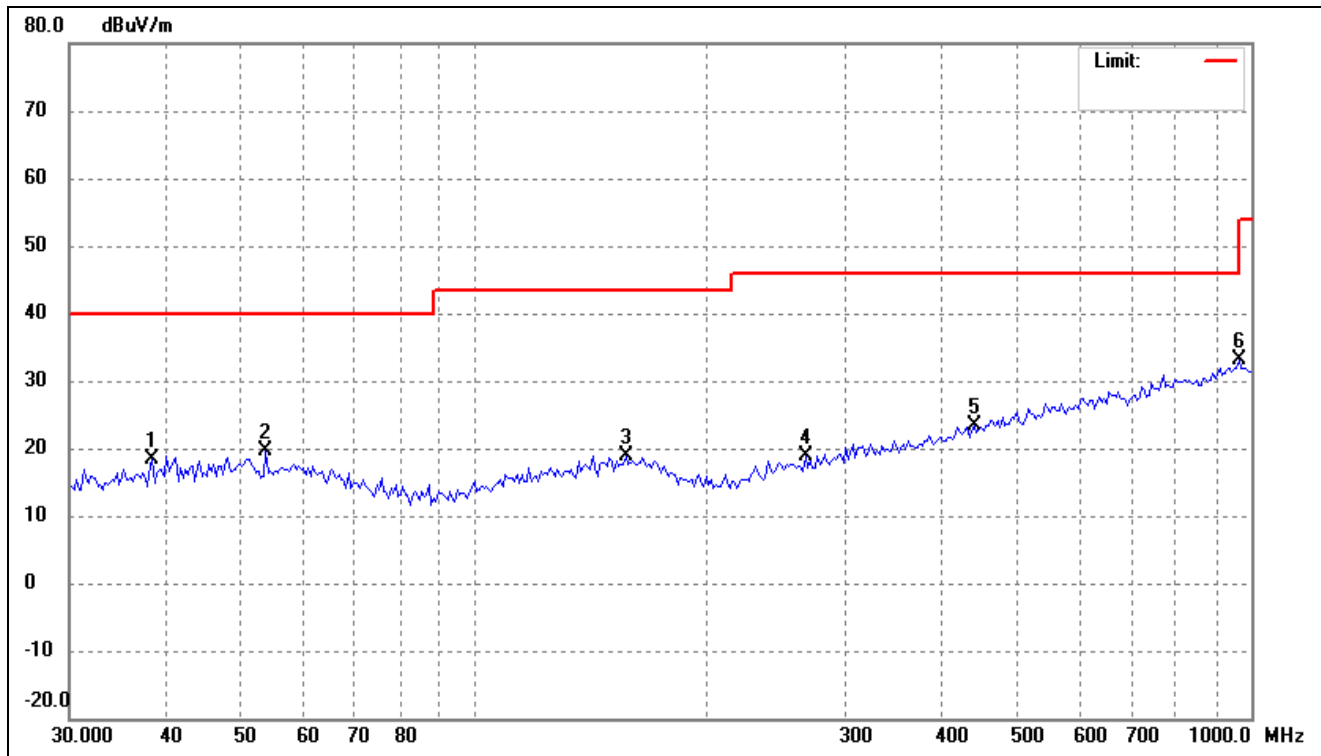


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	38.3651	27.28	-8.83	18.45	40.00	-21.55	-	-	peak
2	53.7559	28.07	-8.50	19.57	40.00	-20.43	-	-	peak
3	156.4259	27.39	-8.60	18.79	43.50	-24.71	-	-	peak
4	266.8395	28.42	-9.46	18.96	46.00	-27.04	-	-	peak
5	439.4730	28.20	-4.88	23.32	46.00	-22.68	-	-	peak
6	965.4742	30.79	2.27	33.06	54.00	-20.94	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

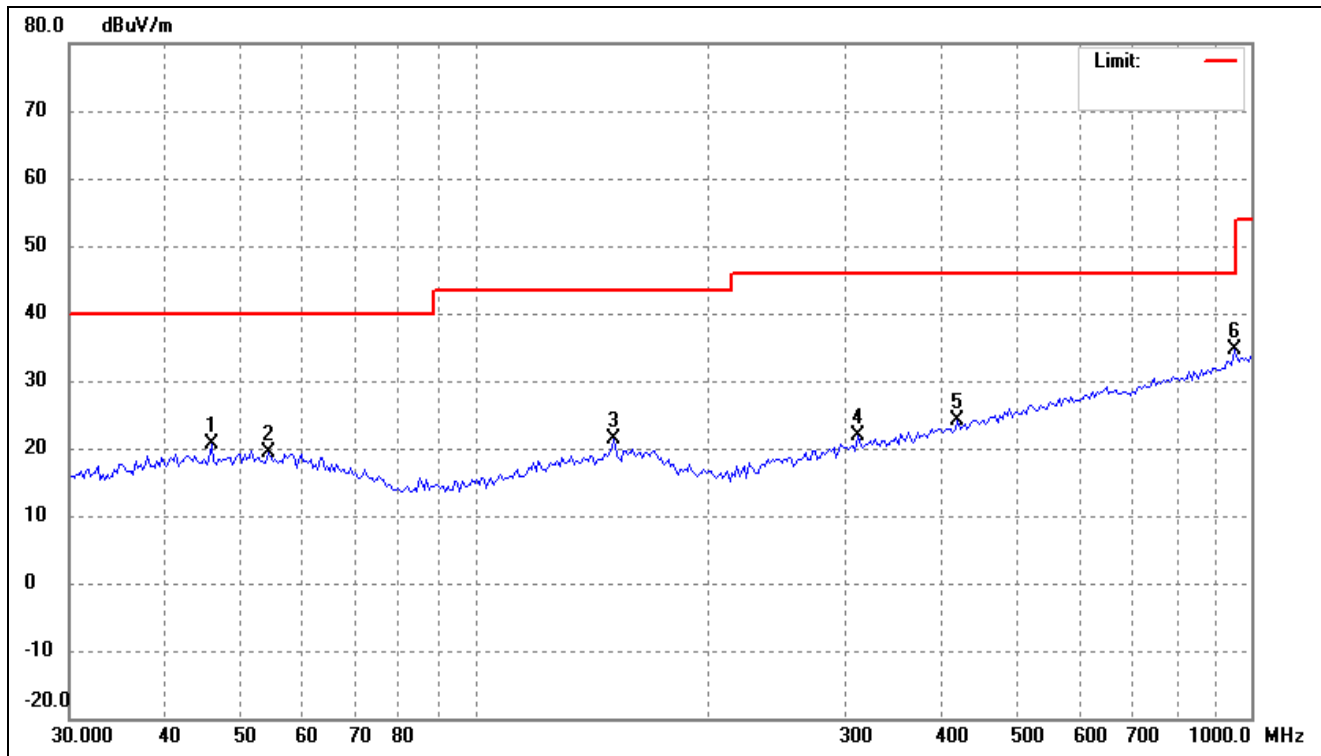


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	28.98	-8.41	20.57	40.00	-19.43	-	-	peak
2	54.1349	27.82	-8.54	19.28	40.00	-20.72	-	-	peak
3	151.0252	29.98	-8.61	21.37	43.50	-22.13	-	-	peak
4	311.4519	29.81	-7.93	21.88	46.00	-24.12	-	-	peak
5	418.3784	29.60	-5.47	24.13	46.00	-21.87	-	-	peak
6	952.0001	32.40	2.25	34.65	46.00	-11.35	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

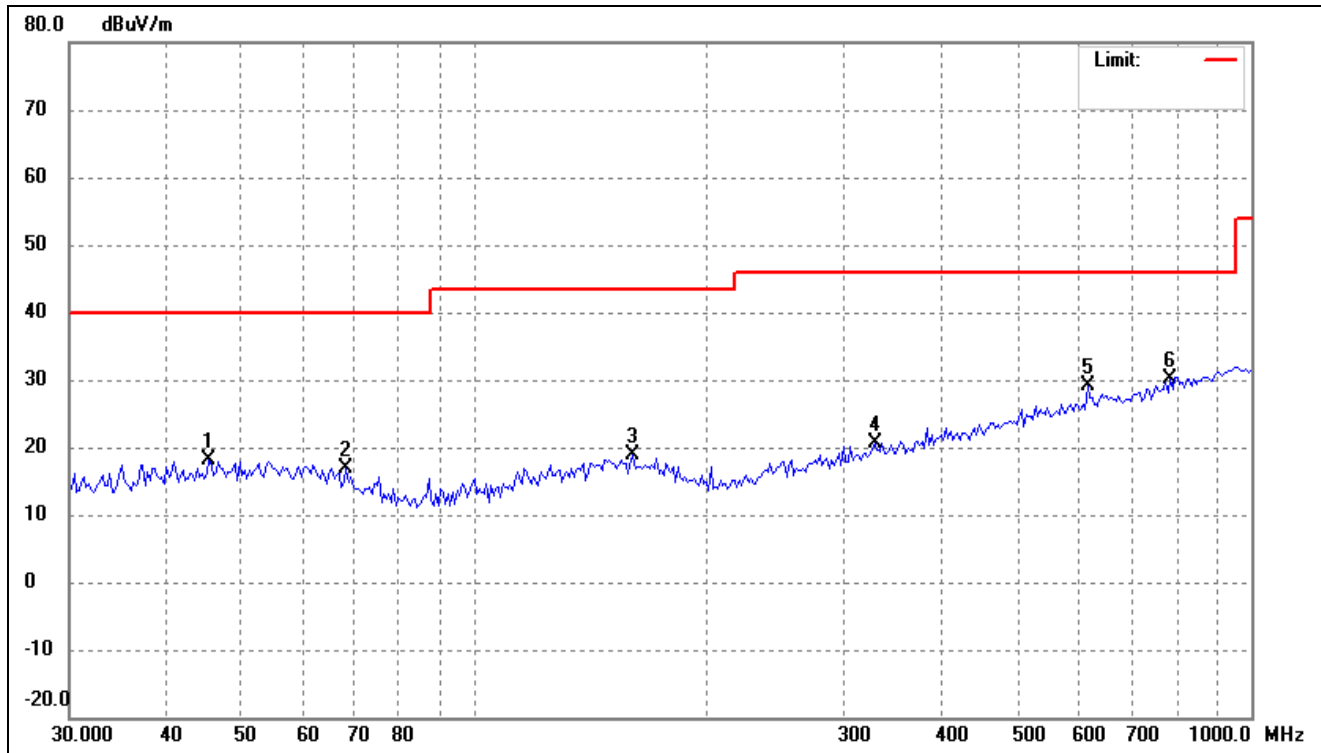


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	26.58	-8.43	18.15	40.00	-21.85	-	-	peak
2	68.2636	27.40	-10.45	16.95	40.00	-23.05	-	-	peak
3	159.7586	27.46	-8.61	18.85	43.50	-24.65	-	-	peak
4	327.1554	28.19	-7.51	20.68	46.00	-25.32	-	-	peak
5	615.7743	30.69	-1.53	29.16	46.00	-16.84	-	-	peak
6	787.4749	29.92	0.19	30.11	46.00	-15.89	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

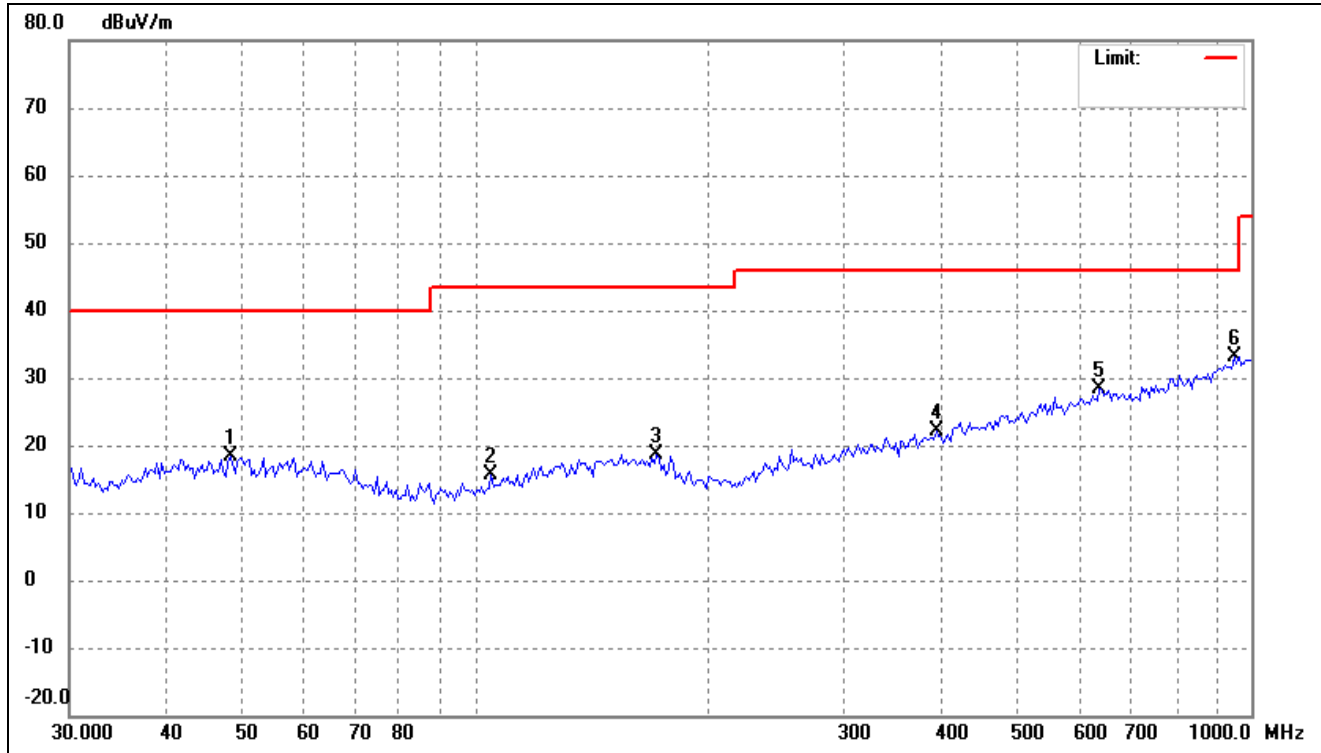


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.3780	26.48	-8.21	18.27	40.00	-21.73	-	-	peak
2	104.7979	27.71	-12.05	15.66	43.50	-27.84	-	-	peak
3	171.3890	27.62	-9.08	18.54	43.50	-24.96	-	-	peak
4	392.7376	28.14	-6.11	22.03	46.00	-23.97	-	-	peak
5	637.7947	29.78	-1.36	28.42	46.00	-17.58	-	-	peak
6	952.0001	30.91	2.25	33.16	46.00	-12.84	-	-	peak

802.11ac-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

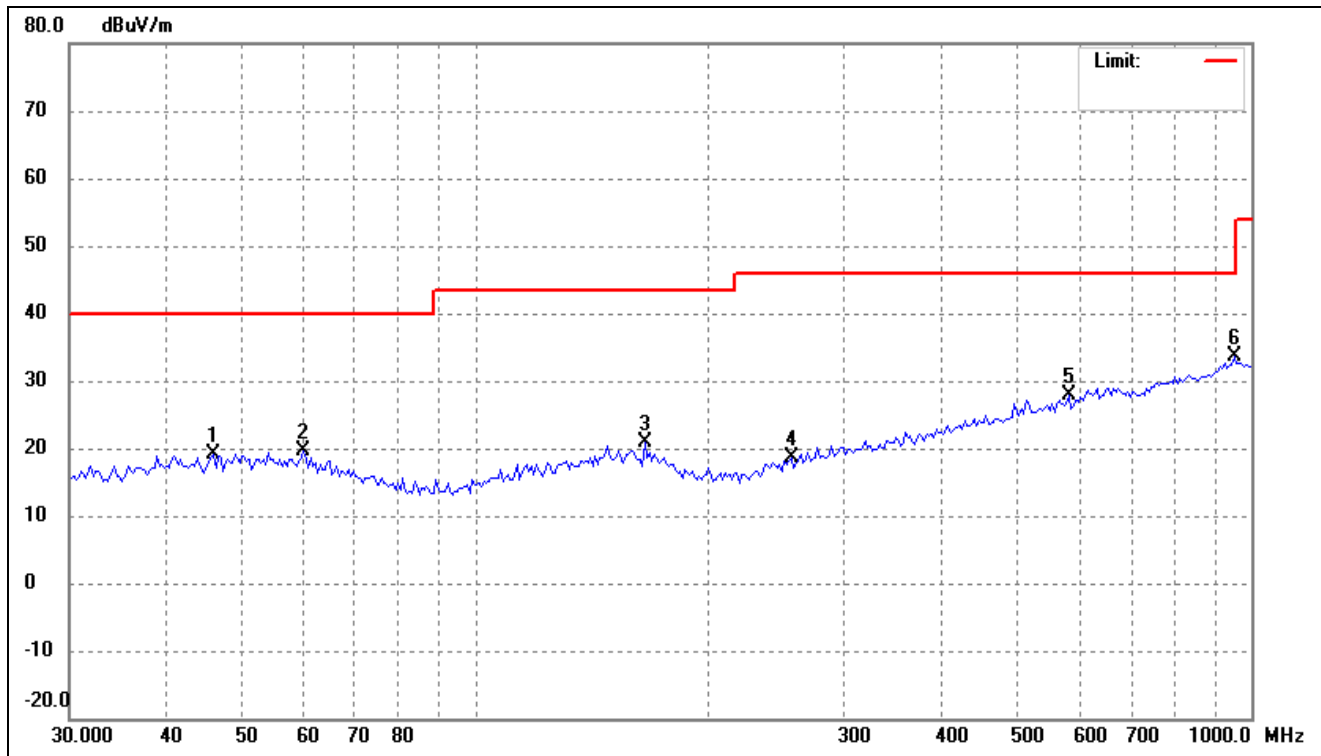


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	46.0558	27.55	-8.38	19.17	40.00	-20.83	-	-	peak
2	60.1528	28.53	-8.97	19.56	40.00	-20.44	-	-	peak
3	165.4716	29.62	-8.76	20.86	43.50	-22.64	-	-	peak
4	255.8226	28.57	-9.96	18.61	46.00	-27.39	-	-	peak
5	582.1122	29.99	-2.11	27.88	46.00	-18.12	-	-	peak
6	952.0001	31.31	2.25	33.56	46.00	-12.44	-	-	peak

802.11ac-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

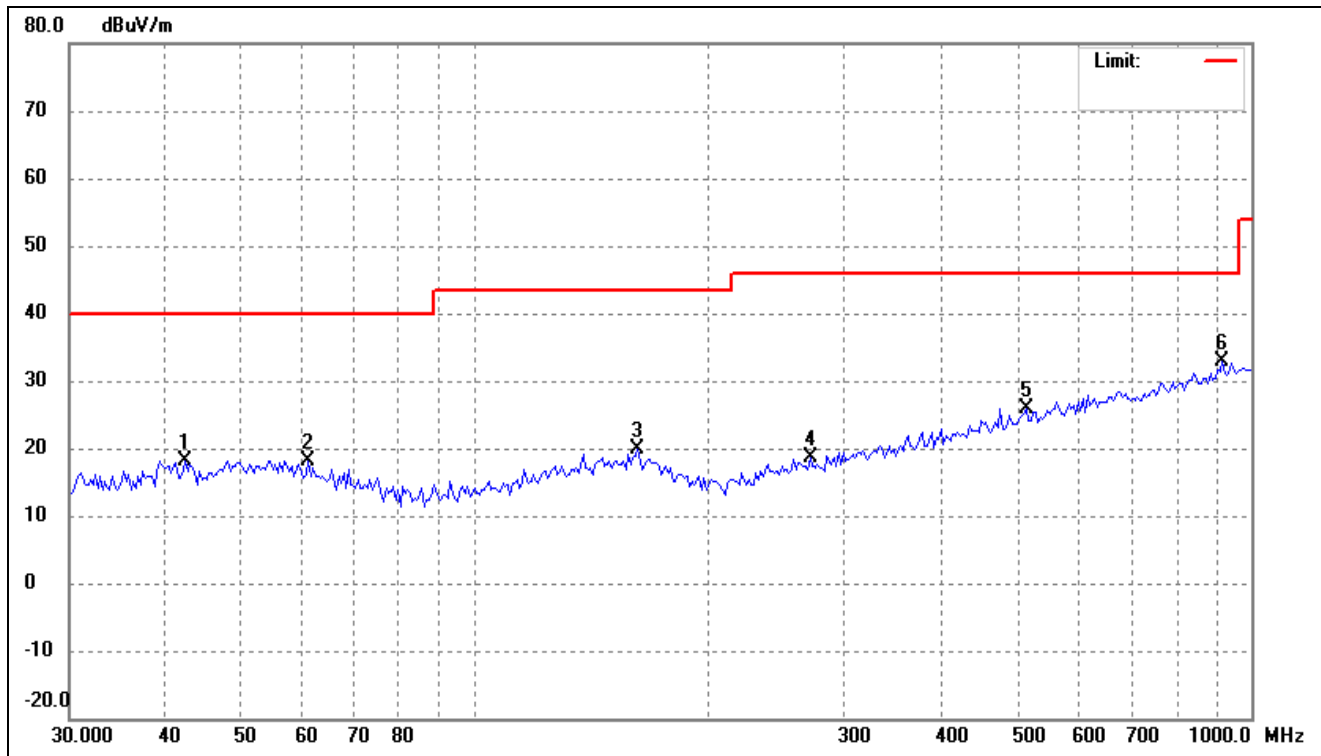


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.3314	26.71	-8.48	18.23	40.00	-21.77	-	-	peak
2	61.0041	27.19	-9.11	18.08	40.00	-21.92	-	-	peak
3	162.0197	28.45	-8.66	19.79	43.50	-23.71	-	-	peak
4	270.6162	28.00	-9.30	18.70	46.00	-27.30	-	-	peak
5	512.9478	29.68	-3.70	25.98	46.00	-20.02	-	-	peak
6	919.1315	31.30	1.59	32.89	46.00	-13.11	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

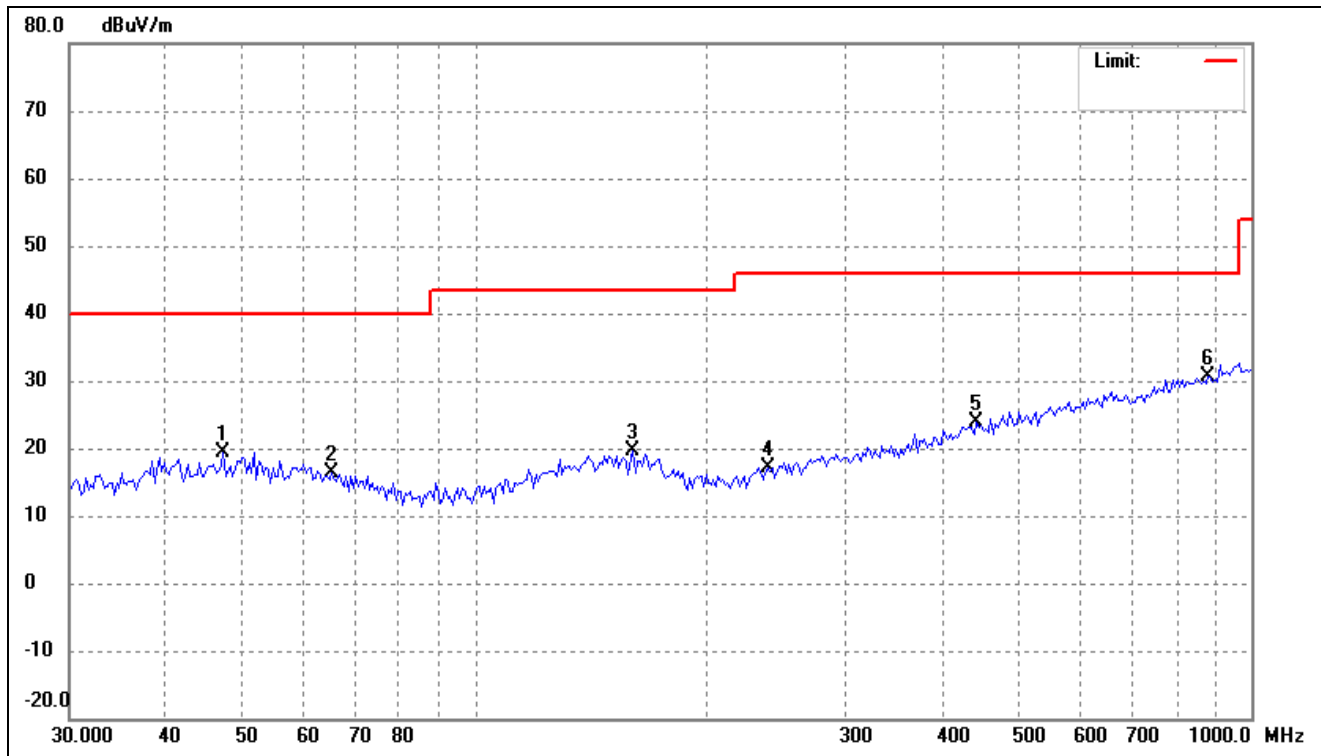


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	47.3688	27.66	-8.29	19.37	40.00	-20.63	-	-	peak
2	65.4452	26.39	-9.93	16.46	40.00	-23.54	-	-	peak
3	159.7586	28.19	-8.61	19.58	43.50	-23.92	-	-	peak
4	238.4626	27.96	-10.71	17.25	46.00	-28.75	-	-	peak
5	442.5722	28.55	-4.79	23.76	46.00	-22.24	-	-	peak
6	881.1838	29.65	1.02	30.67	46.00	-15.33	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

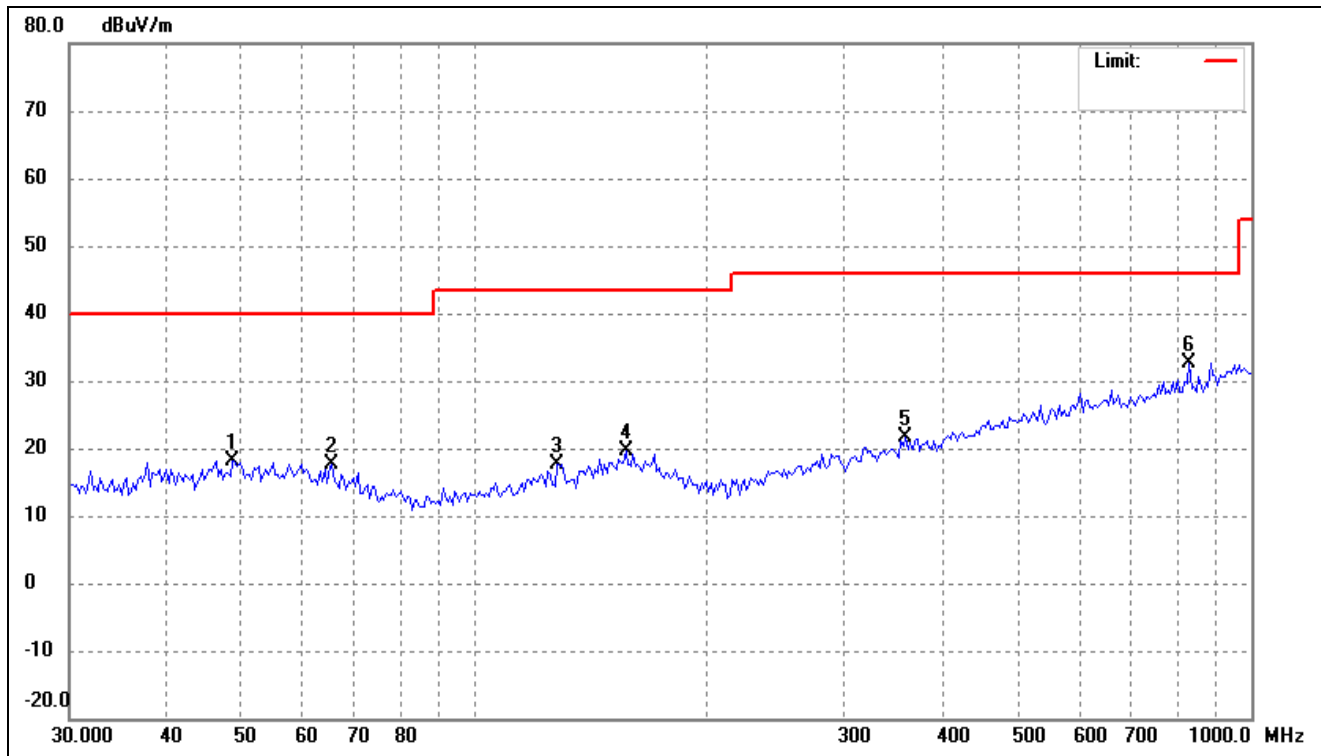


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.7191	26.41	-8.18	18.23	40.00	-21.77	-	-	peak
2	65.4452	27.63	-9.93	17.70	40.00	-22.30	-	-	peak
3	127.5865	27.67	-10.01	17.66	43.50	-25.84	-	-	peak
4	156.4259	28.16	-8.60	19.56	43.50	-23.94	-	-	peak
5	358.4497	28.43	-6.89	21.54	46.00	-24.46	-	-	peak
6	833.0127	31.93	0.59	32.52	46.00	-13.48	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

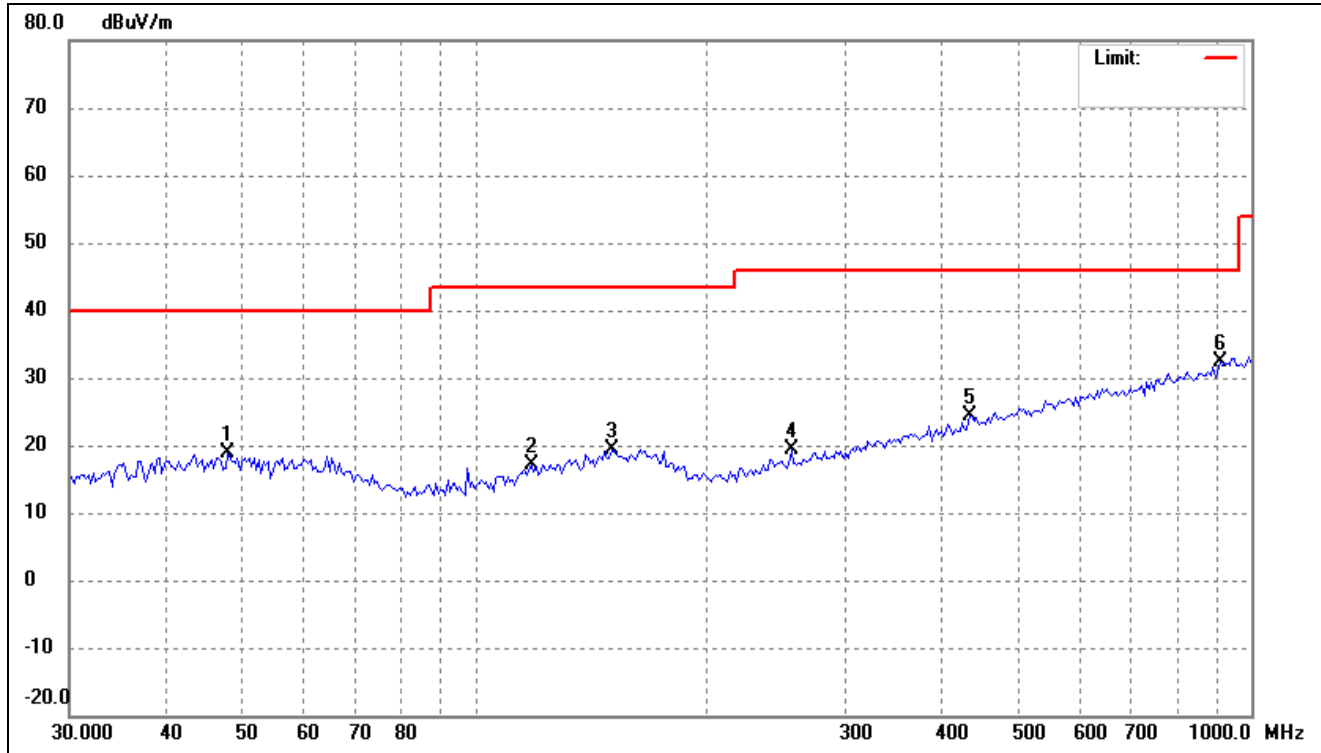


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	48.0392	27.08	-8.23	18.85	40.00	-21.15	-	-	peak
2	118.0957	27.79	-10.73	17.06	43.50	-26.44	-	-	peak
3	149.9676	27.99	-8.59	19.40	43.50	-24.10	-	-	peak
4	255.8226	29.33	-9.96	19.37	46.00	-26.63	-	-	peak
5	433.3397	29.43	-5.05	24.38	46.00	-21.62	-	-	peak
6	912.6953	30.95	1.46	32.41	46.00	-13.59	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

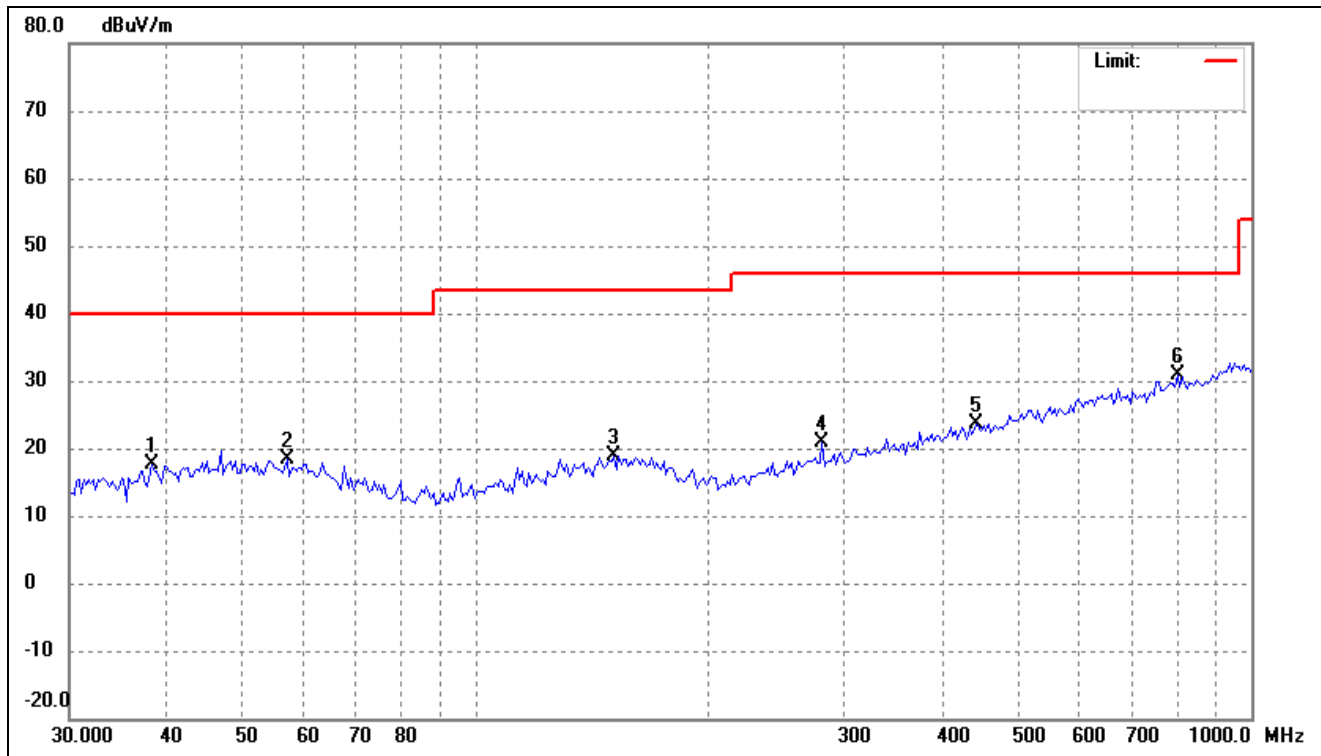

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	38.3651	26.47	-8.83	17.64	40.00	-22.36	-	-	peak
2	57.2654	27.03	-8.77	18.26	40.00	-21.74	-	-	peak
3	151.0252	27.60	-8.61	18.99	43.50	-24.51	-	-	peak
4	280.2936	29.71	-8.93	20.78	46.00	-25.22	-	-	peak
5	442.5722	28.50	-4.79	23.71	46.00	-22.29	-	-	peak
6	804.2523	30.63	0.34	30.97	46.00	-15.03	-	-	peak

802.11ax-HE80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

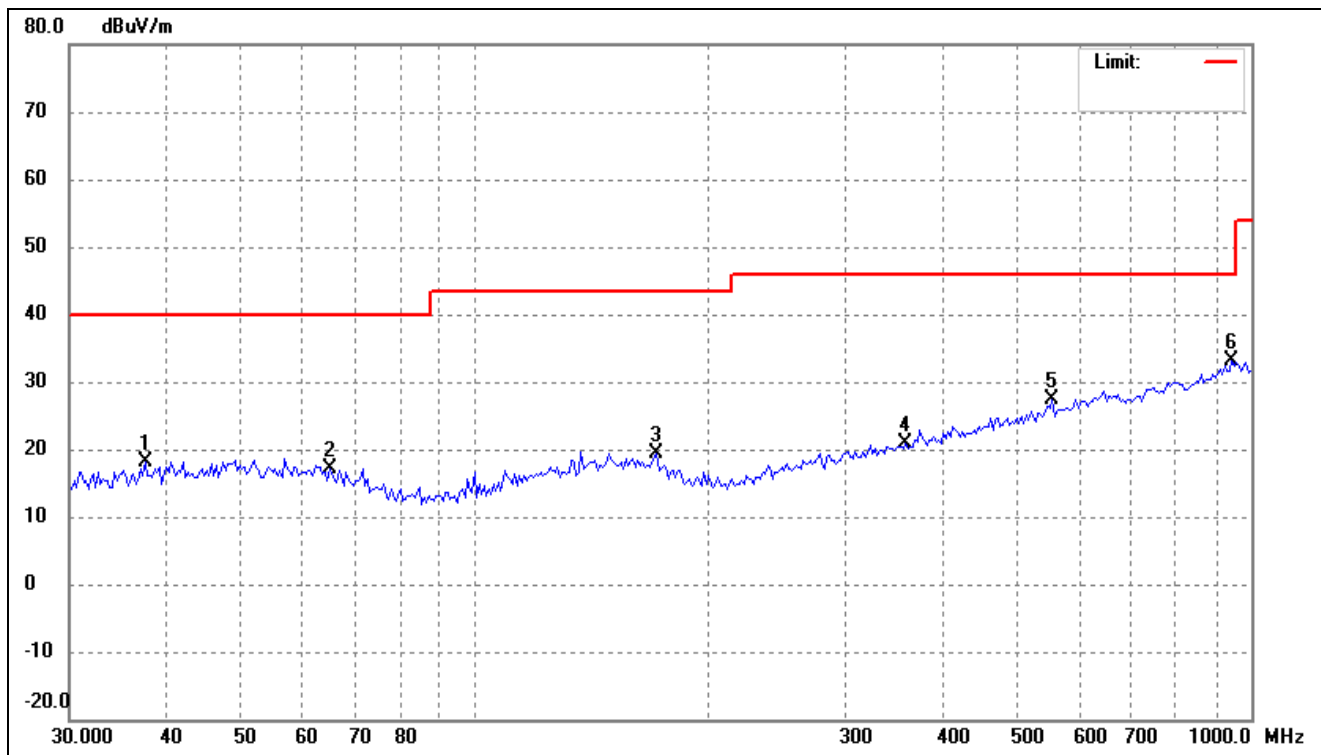

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	37.5648	27.05	-9.00	18.05	40.00	-21.95	-	-	peak
2	64.9869	27.06	-9.84	17.22	40.00	-22.78	-	-	peak
3	171.3890	28.40	-9.08	19.32	43.50	-24.18	-	-	peak
4	358.4497	27.79	-6.89	20.90	46.00	-25.10	-	-	peak
5	554.1708	30.18	-2.75	27.43	46.00	-18.57	-	-	peak
6	945.3336	31.10	2.15	33.25	46.00	-12.75	-	-	peak