

Appendix D. SAR Test Setup Photos

Head Exposure Condition



Right Cheek, Test Separation 0 mm



Right Tilted, Test Separation 0 mm



Left Cheek, Test Separation 0 mm



Left Tilted, Test Separation 0 mm

Body-worn Exposure Condition



Front, Test Separation 5 mm




Back, Test Separation 5 mm

Product Specific 10g SAR



Front, Test Separation 0 mm

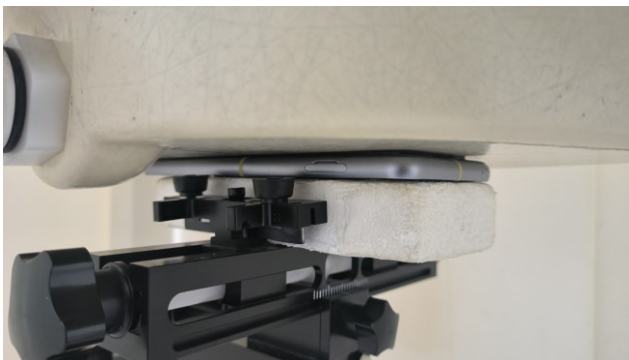

Back, Test Separation 0 mm



Left Side, Test Separation 0 mm



Right Side, Test Separation 0 mm



Top Side, Test Separation 0 mm

Appendix D. PD Test Setup Photos



Right Side, Test Separation 2 mm



Right Side, Test Separation 10 mm




Right Side, Test Separation 8.59 mm



Front, Test Separation 2 mm



Back, Test Separation 2 mm

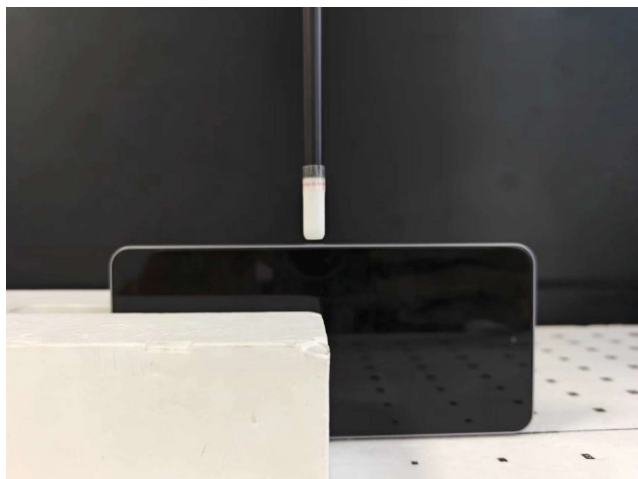


Left Side, Test Separation 2 mm



Top Side, Test Separation 2 mm

Antenna Location

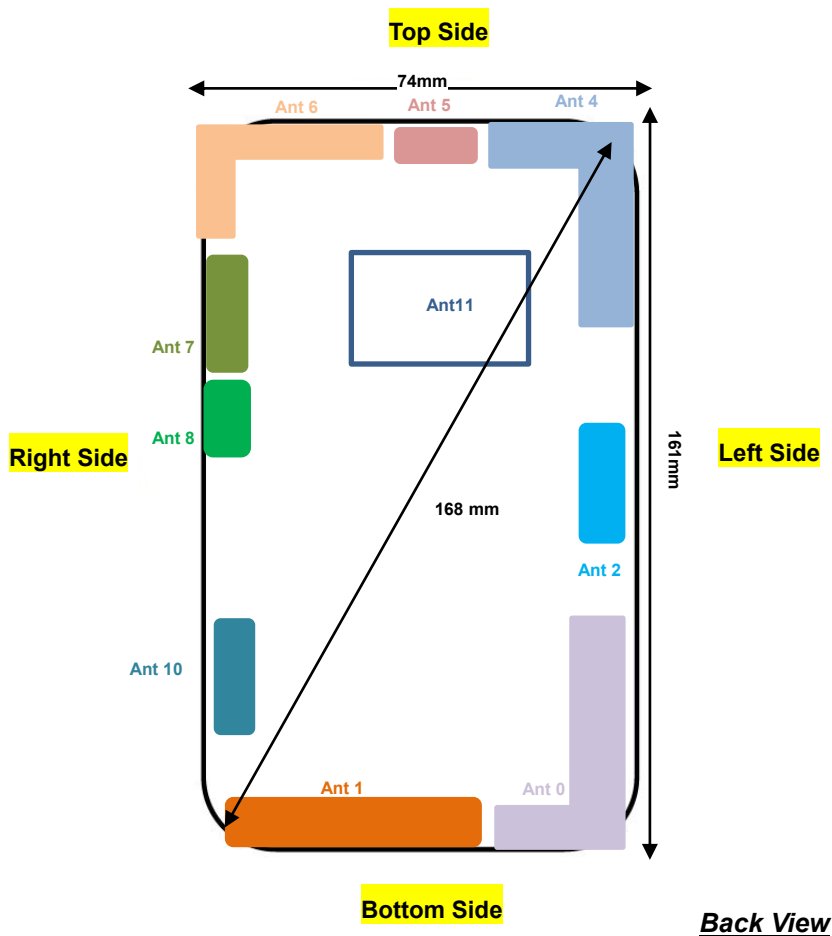

Antenna	Support Band
Antenna 5	WLAN 6GHz<TX/RX>
Antenna 7	WLAN 6GHz<TX/RX>

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm
Antenna 7	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 5	Yes	Yes	Yes	No	No	No
Antenna 7	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge