



FCC Test Report

APPLICANT : FCNT LLC.
EQUIPMENT : Mobile cellular phone
BRAND NAME : FCNT LLC.
MODEL NAME : F-41F
FCC ID : 2BEPUFMP202
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Mar. 16, 2025 ~ Mar. 19, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang



Approved by: Fly Liang

Sportun International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION.....	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Test Location.....	7
1.7. Test Software	7
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	10
2.3. Support Unit used in test configuration and system.....	10
2.4. EUT Operation Test Setup	11
3. TEST RESULT.....	12
3.1. Test of AC Conducted Emission Measurement	12
3.2. Test of Radiated Emission Measurement	16
4. LIST OF MEASURING EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.60 dB at 0.43 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.36 dB at 37.76 MHz for Quasi-Peak

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

FCNT LLC.

Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

1.2. Manufacturer

FCNT LLC.

Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile cellular phone
Brand Name	FCNT LLC.
Model Name	F-41F
FCC ID	2BEPUFMP202
EUT supports Radios application	WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE GNSS/FM
IMEI Code	Conduction: 358658860030249 for Sample 1 358658860037632 for Sample 2 Radiation: 358658860030058 for Sample 1 358658860038671 for Sample 2
HW Version	DVT2
SW Version	V00R030A
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, for the differences please refer the product equality declaration exhibit submitted. According to the difference, we choose sample 1 to full test and the sample 2 is verified for the difference.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 5 : 824 MHz ~ 849 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Rx Frequency	WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 5 : 869 MHz ~ 894 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : Coupling type (LDS) Antenna WLAN : Monopole Antenna Bluetooth : Monopole Antenna GNSS: Monopole Antenna FM : External Earphone Antenna
Type of Modulation	WCDMA : BPSK HSPA : QPSK DC-HSDPA : 64QAM LTE: QPSK / 16QAM 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Test Location

Sportun International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sportun International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ ; 03CH05-SZ	CN1256	421272

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: WCDMA B5 Idle(Middle CH) + Camera(Rear) + Earphone 1 + Adapter + USB Cable 1 + Charging Dock + Battery 1 + SIM 1 for Sample 1 Mode 2: LTE Band 5 Idle(Low CH) + FM RX(98M) + Earphone 1 + Adapter + USB Cable 1 + Charging Dock + Battery 1 + SIM 1 for Sample 1 Mode 3: WCDMA B5 Idle(Middle CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + Battery 1 + EUT (eMMC) USB Data Link to NB + SIM 1 for Sample 1 Mode 4: WCDMA B5 Idle (Middle CH) + GNSS RX + Adapter + USB Cable 1 + Charging Dock + Battery 1 + NB USB Data Link to EUT (eMMC) + SIM 1 for Sample 1 Mode 5: WCDMA B5 Idle (Middle CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + Battery 1 + EUT (SD Card) USB Data Link to NB + SIM 1 for Sample 1 Mode 6: WCDMA B5 Idle(Middle CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + Battery 1 + EUT USB Data Link NB to (SD Card) + SIM 1 for Sample 1 Mode 7: WCDMA B5 Idle(Middle CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + EUT (eMMC) USB Data Link to NB + SIM 1 + Battery 1 for Sample 2 Mode 8: WCDMA B5 Idle(Middle CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + SIM 1 + Battery 1 for Sample 1



Radiated Emissions	<p>Mode 1: WCDMA B5 Idle(Middle CH) + Camera(Rear) + Earphone 1 + Adapter + USB Cable 1 +Charging Dock + Battery 1 + SIM 1 for Sample 1</p> <p>Mode 2: LTE Band 5 Idle(Low CH) + FM RX(98M) + Earphone 1 + Adapter+ USB Cable 1 +Charging Dock + Battery 1 + SIM 1 for Sample 1</p> <p>Mode 3: LTE Band 5 Idle (Low CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + Battery 1 + EUT (eMMC) USB Data Link to NB + SIM 1 for Sample 1</p> <p>Mode 4: LTE Band 5 Idle (Low CH) + GNSS RX + Adapter + USB Cable 1 + Charging Dock + Battery 1 + NB USB Data Link to EUT (eMMC) + SIM 1 for Sample 1</p> <p>Mode 5: LTE Band 5 Idle (Low CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + Battery 1 + EUT (SD Card) USB Data Link to NB + SIM 1 for Sample 1</p> <p>Mode 6: LTE Band 5 Idle (Low CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Charging Dock + Battery 1 + EUT USB Data Link NB to (SD Card) + SIM 1 for Sample 1</p> <p>Mode 7: LTE Band 5 Idle (Low CH) + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + + SIM 1 for Sample 1</p> <p>Mode 8: LTE Band 5 Idle (Low CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 +Charging Dock + Battery 1 + EUT (SD Card) USB Data Link to NB + SIM 1 for Sample 2</p> <p>Mode 9: LTE Band 5 Idle (Low CH) + MPEG4(Run Color Bar) + Adapter + USB Cable 1 + Battery 1 + SIM 1 for Sample 1</p>
Remark:	<ol style="list-style-type: none">1. The worst case of AC is mode 3; only the test data of this mode is reported.2. The worst case of RE is mode 5; only the test data of this mode is reported.3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.4. Pre-scanned Low/Middle/High channel for WCDMA Band V/LTE Band 5 and FM Rx, the worst channel was recorded in this report.

2.2. Connection Diagram of Test System

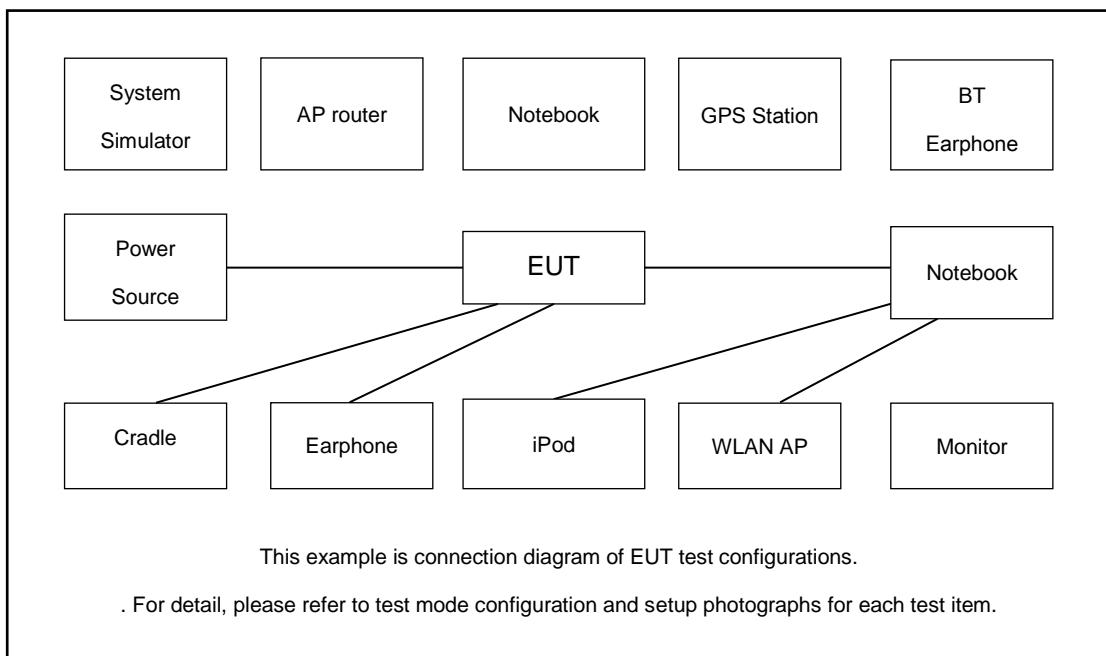

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	GPS Station	Labsat	RLLS03-2P	N/A	N/A	Unshielded, 1.8m
3.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 2.7m with Core
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
5.	Notebook	Thinkpad	Thinkpad E14	N/A	N/A	N/A
6.	Notebook	DELL	Latitude 3400	N/A	N/A	Unshielded, 1.8m
7.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8m
8.	SD Card	Kingston	3300-10000-078	Fcc DoC	N/A	N/A
9.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A
10.	IPod	Apple	MC525 ZP/A	Fcc DoC	N/A	Shielded, 1.0m
11.	Earphone	apple	N/A	N/A	N/A	N/A
12.	FM Base Station	R&S	SMB100A	Fcc DoC	N/A	Shielded, 1.5m
13.	Adapter	N/A	N/A	N/A	N/A	N/A
14.	USB Cable	N/A	N/A	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

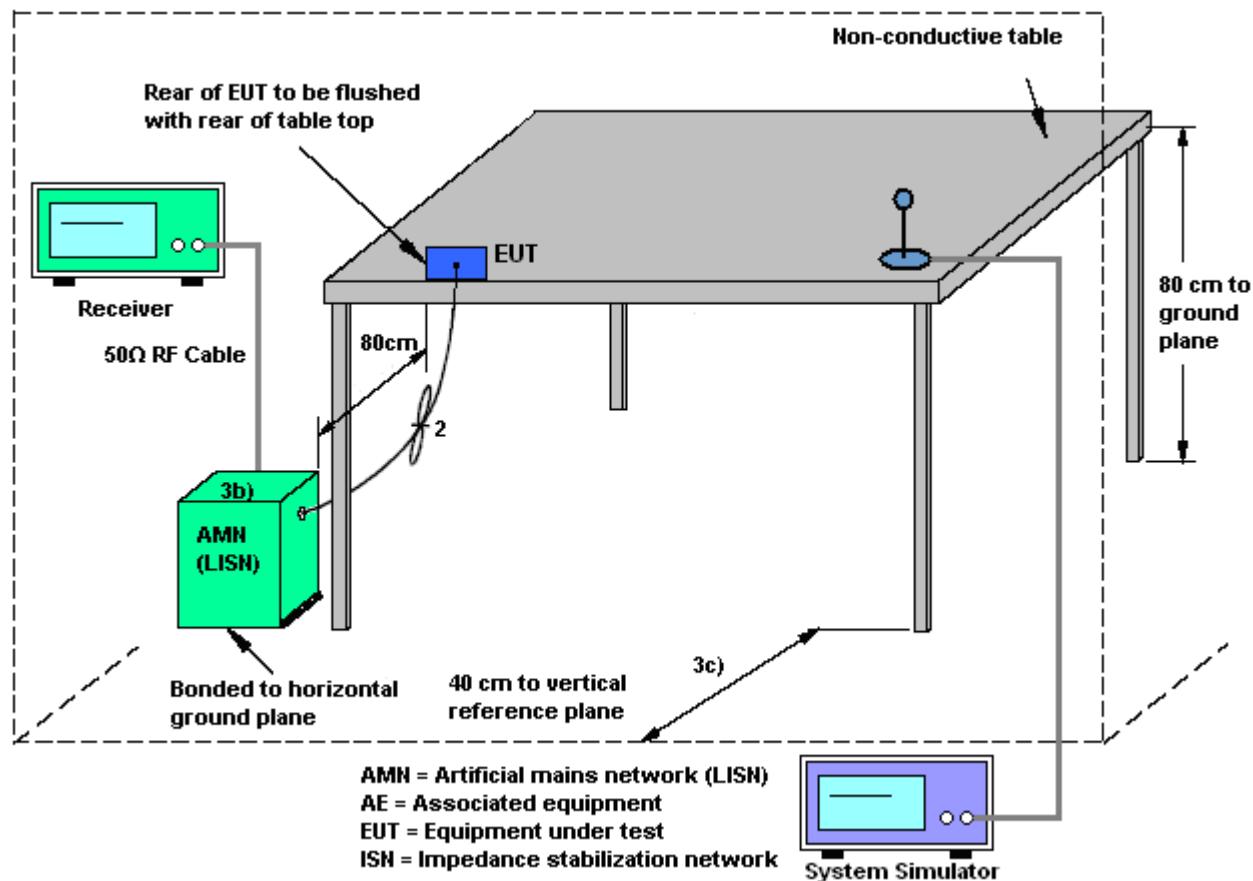



3.1.5 Test Result of AC Conducted Emission

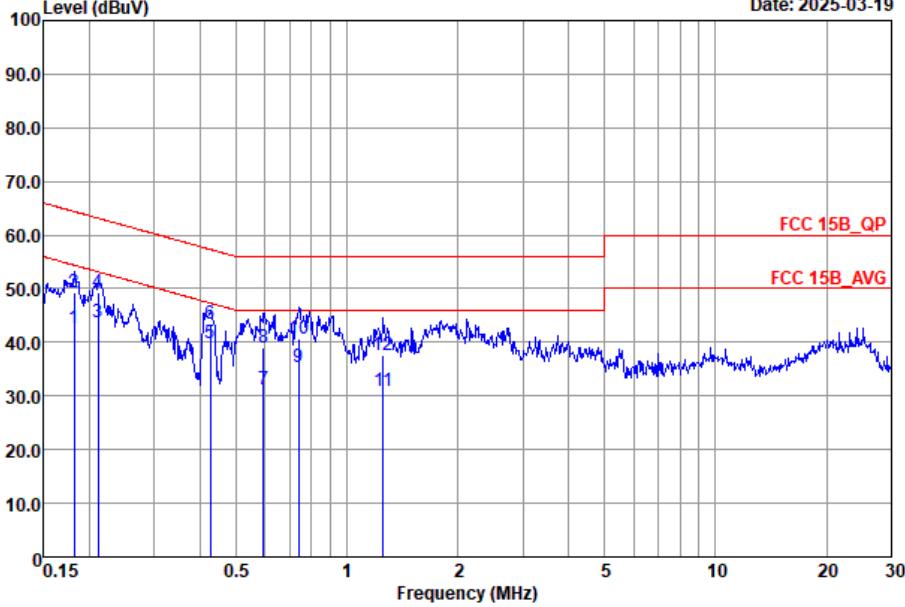Test Engineer :	Yuki	Temperature :	22~24°C																																																																																																																														
		Relative Humidity :	44~50%																																																																																																																														
Test Voltage :	120Vac / 60Hz	Phase :	Line																																																																																																																														
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																
																																																																																																																																	
Site	: C002-SZ																																																																																																																																
Condition	: FCC 15B_QP LISN_2025-L LINE																																																																																																																																
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>LISN Factor</th><th>Cable Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.18</td><td>42.58</td><td>-11.79</td><td>54.37</td><td>22.71</td><td>9.69</td><td>10.18</td><td>Average</td></tr><tr><td>2</td><td>0.18</td><td>49.38</td><td>-14.99</td><td>64.37</td><td>29.51</td><td>9.69</td><td>10.18</td><td>QP</td></tr><tr><td>3</td><td>0.21</td><td>43.60</td><td>-9.54</td><td>53.14</td><td>23.71</td><td>9.71</td><td>10.18</td><td>Average</td></tr><tr><td>4 *</td><td>0.21</td><td>49.40</td><td>-13.74</td><td>63.14</td><td>29.51</td><td>9.71</td><td>10.18</td><td>QP</td></tr><tr><td>5</td><td>0.43</td><td>39.73</td><td>-7.60</td><td>47.33</td><td>19.80</td><td>9.70</td><td>10.23</td><td>Average</td></tr><tr><td>6</td><td>0.43</td><td>43.43</td><td>-13.90</td><td>57.33</td><td>23.50</td><td>9.70</td><td>10.23</td><td>QP</td></tr><tr><td>7</td><td>0.59</td><td>31.30</td><td>-14.70</td><td>46.00</td><td>11.40</td><td>9.66</td><td>10.24</td><td>Average</td></tr><tr><td>8</td><td>0.59</td><td>38.90</td><td>-17.10</td><td>56.00</td><td>19.00</td><td>9.66</td><td>10.24</td><td>QP</td></tr><tr><td>9</td><td>0.74</td><td>35.41</td><td>-10.59</td><td>46.00</td><td>15.51</td><td>9.67</td><td>10.23</td><td>Average</td></tr><tr><td>10</td><td>0.74</td><td>40.71</td><td>-15.29</td><td>56.00</td><td>20.81</td><td>9.67</td><td>10.23</td><td>QP</td></tr><tr><td>11</td><td>1.26</td><td>30.81</td><td>-15.19</td><td>46.00</td><td>10.90</td><td>9.67</td><td>10.24</td><td>Average</td></tr><tr><td>12</td><td>1.26</td><td>37.71</td><td>-18.29</td><td>56.00</td><td>17.80</td><td>9.67</td><td>10.24</td><td>QP</td></tr></tbody></table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.18	42.58	-11.79	54.37	22.71	9.69	10.18	Average	2	0.18	49.38	-14.99	64.37	29.51	9.69	10.18	QP	3	0.21	43.60	-9.54	53.14	23.71	9.71	10.18	Average	4 *	0.21	49.40	-13.74	63.14	29.51	9.71	10.18	QP	5	0.43	39.73	-7.60	47.33	19.80	9.70	10.23	Average	6	0.43	43.43	-13.90	57.33	23.50	9.70	10.23	QP	7	0.59	31.30	-14.70	46.00	11.40	9.66	10.24	Average	8	0.59	38.90	-17.10	56.00	19.00	9.66	10.24	QP	9	0.74	35.41	-10.59	46.00	15.51	9.67	10.23	Average	10	0.74	40.71	-15.29	56.00	20.81	9.67	10.23	QP	11	1.26	30.81	-15.19	46.00	10.90	9.67	10.24	Average	12	1.26	37.71	-18.29	56.00	17.80	9.67	10.24	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.18	42.58	-11.79	54.37	22.71	9.69	10.18	Average																																																																																																																									
2	0.18	49.38	-14.99	64.37	29.51	9.69	10.18	QP																																																																																																																									
3	0.21	43.60	-9.54	53.14	23.71	9.71	10.18	Average																																																																																																																									
4 *	0.21	49.40	-13.74	63.14	29.51	9.71	10.18	QP																																																																																																																									
5	0.43	39.73	-7.60	47.33	19.80	9.70	10.23	Average																																																																																																																									
6	0.43	43.43	-13.90	57.33	23.50	9.70	10.23	QP																																																																																																																									
7	0.59	31.30	-14.70	46.00	11.40	9.66	10.24	Average																																																																																																																									
8	0.59	38.90	-17.10	56.00	19.00	9.66	10.24	QP																																																																																																																									
9	0.74	35.41	-10.59	46.00	15.51	9.67	10.23	Average																																																																																																																									
10	0.74	40.71	-15.29	56.00	20.81	9.67	10.23	QP																																																																																																																									
11	1.26	30.81	-15.19	46.00	10.90	9.67	10.24	Average																																																																																																																									
12	1.26	37.71	-18.29	56.00	17.80	9.67	10.24	QP																																																																																																																									

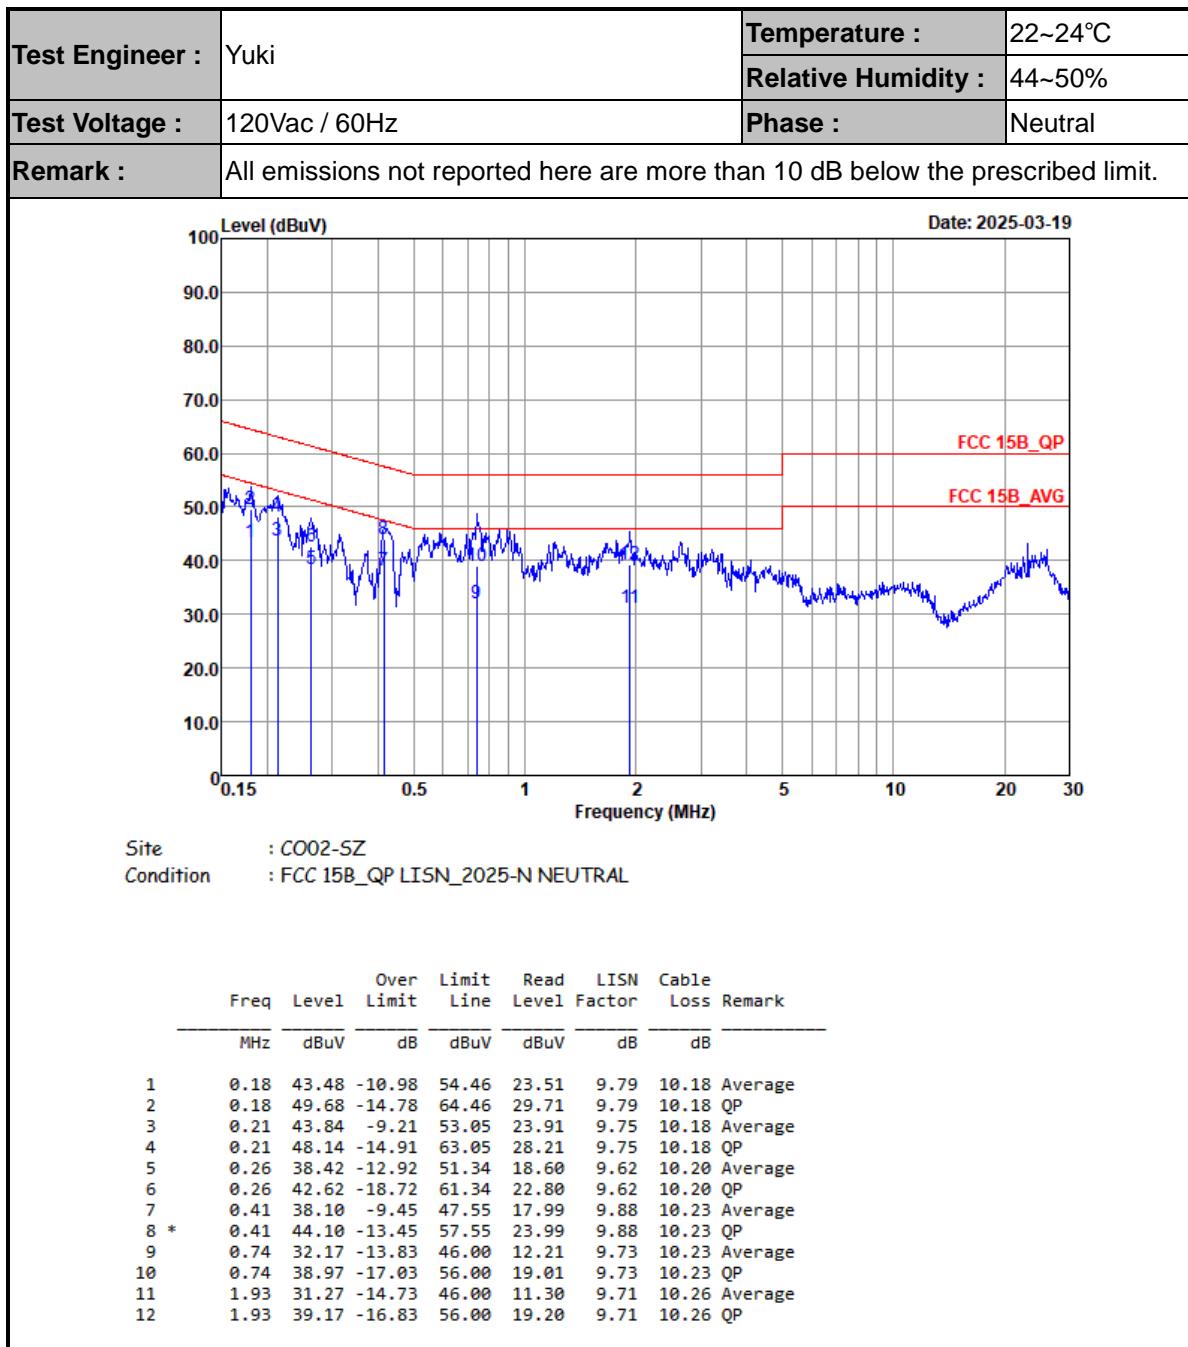

Note:

1. Level(dB μ V) = Read Level(dB μ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB μ V) – Limit Line(dB μ V)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

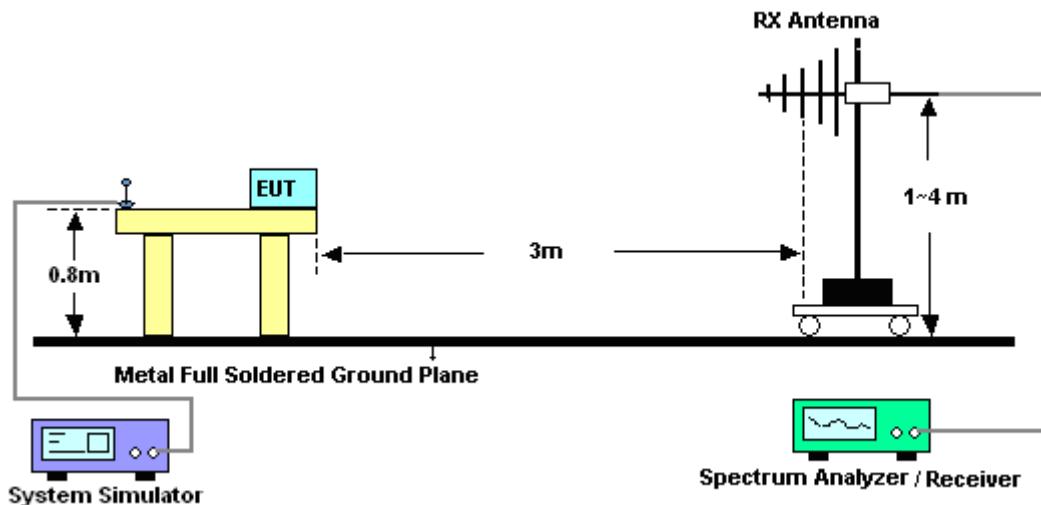

For radiated emissions above 1GHz

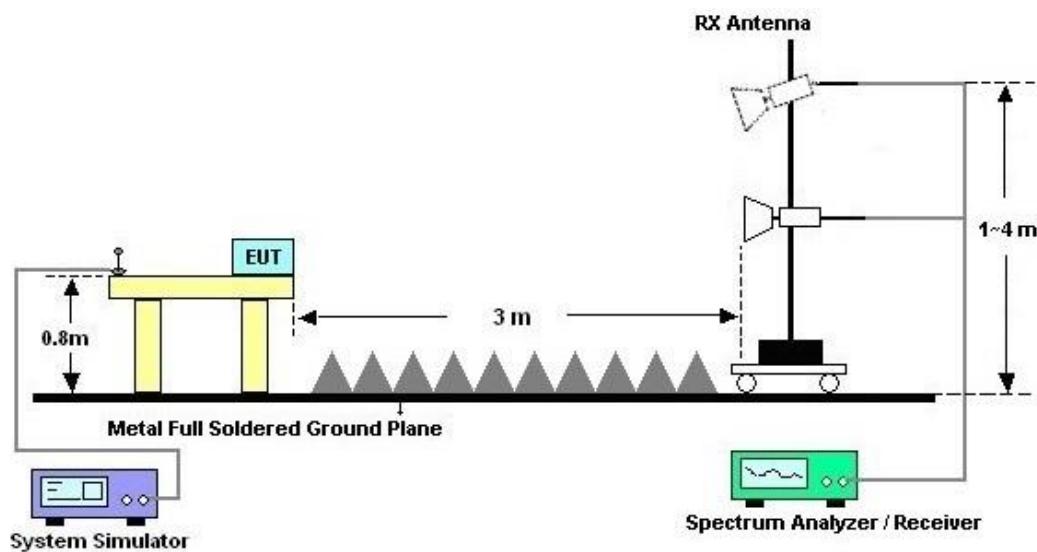



3.2.5. Test Result of Radiated Emission

Test Engineer :	TaoZhang	Temperature :	24~25°C																																																																																																																																																																														
		Relative Humidity :	48~49%																																																																																																																																																																														
Test Distance :	3m	Polarization :	Horizontal																																																																																																																																																																														
Remark :	#7 is system simulator signal which can be ignored.																																																																																																																																																																																
Site : 03CH05-SZ Condition : FCC CLASS-B 3m VULB9168--01003 HORIZONTAL																																																																																																																																																																																	
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>40.67</td> <td>24.14</td> <td>-15.86</td> <td>40.00</td> <td>37.88</td> <td>19.30</td> <td>1.37</td> <td>34.41</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>133.79</td> <td>24.52</td> <td>-18.98</td> <td>43.50</td> <td>39.15</td> <td>18.21</td> <td>2.23</td> <td>35.07</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>3</td> <td>266.68</td> <td>28.04</td> <td>-17.96</td> <td>46.00</td> <td>41.46</td> <td>18.27</td> <td>3.08</td> <td>34.77</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>4</td> <td>480.08</td> <td>34.38</td> <td>-11.62</td> <td>46.00</td> <td>42.14</td> <td>23.40</td> <td>3.42</td> <td>34.58</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>5</td> <td>592.60</td> <td>28.16</td> <td>-17.84</td> <td>46.00</td> <td>33.15</td> <td>25.84</td> <td>3.58</td> <td>34.41</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>6</td> <td>798.24</td> <td>33.26</td> <td>-12.74</td> <td>46.00</td> <td>33.70</td> <td>29.10</td> <td>4.37</td> <td>33.91</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>7 *</td> <td>874.00</td> <td>47.58</td> <td></td> <td></td> <td>48.34</td> <td>28.79</td> <td>4.40</td> <td>33.95</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>8</td> <td>2176.00</td> <td>42.42</td> <td>-31.58</td> <td>74.00</td> <td>56.40</td> <td>32.40</td> <td>6.83</td> <td>53.21</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>9</td> <td>4992.00</td> <td>44.89</td> <td>-29.11</td> <td>74.00</td> <td>52.85</td> <td>35.38</td> <td>9.47</td> <td>52.81</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>10</td> <td>8840.00</td> <td>47.11</td> <td>-26.89</td> <td>74.00</td> <td>49.57</td> <td>36.92</td> <td>12.24</td> <td>51.62</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>11</td> <td>9981.00</td> <td>47.65</td> <td>-26.35</td> <td>74.00</td> <td>48.07</td> <td>38.10</td> <td>13.46</td> <td>51.98</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>12</td> <td>14562.00</td> <td>47.40</td> <td>-26.60</td> <td>74.00</td> <td>43.24</td> <td>40.02</td> <td>15.11</td> <td>50.97</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>13</td> <td>17082.00</td> <td>47.07</td> <td>-26.93</td> <td>74.00</td> <td>42.71</td> <td>42.35</td> <td>15.23</td> <td>53.22</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>				Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Limit	Line	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	40.67	24.14	-15.86	40.00	37.88	19.30	1.37	34.41	---	--- Peak	2	133.79	24.52	-18.98	43.50	39.15	18.21	2.23	35.07	---	--- Peak	3	266.68	28.04	-17.96	46.00	41.46	18.27	3.08	34.77	---	--- Peak	4	480.08	34.38	-11.62	46.00	42.14	23.40	3.42	34.58	---	--- Peak	5	592.60	28.16	-17.84	46.00	33.15	25.84	3.58	34.41	---	--- Peak	6	798.24	33.26	-12.74	46.00	33.70	29.10	4.37	33.91	---	--- Peak	7 *	874.00	47.58			48.34	28.79	4.40	33.95	---	--- Peak	8	2176.00	42.42	-31.58	74.00	56.40	32.40	6.83	53.21	---	--- Peak	9	4992.00	44.89	-29.11	74.00	52.85	35.38	9.47	52.81	---	--- Peak	10	8840.00	47.11	-26.89	74.00	49.57	36.92	12.24	51.62	---	--- Peak	11	9981.00	47.65	-26.35	74.00	48.07	38.10	13.46	51.98	---	--- Peak	12	14562.00	47.40	-26.60	74.00	43.24	40.02	15.11	50.97	---	--- Peak	13	17082.00	47.07	-26.93	74.00	42.71	42.35	15.23	53.22	---	--- Peak
Freq	Level	Over	Limit			Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																					
		Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	40.67	24.14	-15.86	40.00	37.88	19.30	1.37	34.41	---	--- Peak																																																																																																																																																																							
2	133.79	24.52	-18.98	43.50	39.15	18.21	2.23	35.07	---	--- Peak																																																																																																																																																																							
3	266.68	28.04	-17.96	46.00	41.46	18.27	3.08	34.77	---	--- Peak																																																																																																																																																																							
4	480.08	34.38	-11.62	46.00	42.14	23.40	3.42	34.58	---	--- Peak																																																																																																																																																																							
5	592.60	28.16	-17.84	46.00	33.15	25.84	3.58	34.41	---	--- Peak																																																																																																																																																																							
6	798.24	33.26	-12.74	46.00	33.70	29.10	4.37	33.91	---	--- Peak																																																																																																																																																																							
7 *	874.00	47.58			48.34	28.79	4.40	33.95	---	--- Peak																																																																																																																																																																							
8	2176.00	42.42	-31.58	74.00	56.40	32.40	6.83	53.21	---	--- Peak																																																																																																																																																																							
9	4992.00	44.89	-29.11	74.00	52.85	35.38	9.47	52.81	---	--- Peak																																																																																																																																																																							
10	8840.00	47.11	-26.89	74.00	49.57	36.92	12.24	51.62	---	--- Peak																																																																																																																																																																							
11	9981.00	47.65	-26.35	74.00	48.07	38.10	13.46	51.98	---	--- Peak																																																																																																																																																																							
12	14562.00	47.40	-26.60	74.00	43.24	40.02	15.11	50.97	---	--- Peak																																																																																																																																																																							
13	17082.00	47.07	-26.93	74.00	42.71	42.35	15.23	53.22	---	--- Peak																																																																																																																																																																							



Test Engineer :	TaoZhang	Temperature :		24~25°C																													
		Relative Humidity :		48~49%																													
Test Distance :	3m	Polarization :		Vertical																													
Remark :	#7 is system simulator signal which can be ignored.																																
Site	: 03CH05-SZ																																
Condition	: FCC CLASS-B 3m VULB9168--01003 VERTICAL																																
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th rowspan="2">Over Limit</th> <th rowspan="2">Limit Line</th> <th rowspan="2">ReadAntenna</th> <th colspan="2">Cable</th> <th rowspan="2">A/Pos</th> <th rowspan="2">T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> </tbody> </table>										Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable		A/Pos	T/Pos	Remark	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable		A/Pos	T/Pos	Remark																								
					Level	Factor				Loss	Factor																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																								
1	37.76	35.64	-4.36	40.00	49.64	19.04	1.32	34.36	100	142 QP																							
2	82.38	29.22	-10.78	40.00	47.98	14.31	1.93	35.00	---	--- Peak																							
3	153.19	27.76	-15.74	43.50	41.56	18.95	2.34	35.09	---	--- Peak																							
4	266.68	29.03	-16.97	46.00	42.45	18.27	3.08	34.77	---	--- Peak																							
5	480.08	37.61	-8.39	46.00	45.37	23.40	3.42	34.58	---	--- Peak																							
6	800.18	36.24	-9.76	46.00	36.60	29.15	4.39	33.90	---	--- Peak																							
7 *	874.00	47.12			47.88	28.79	4.40	33.95	---	--- Peak																							
8	3120.00	43.91	-30.09	74.00	55.68	32.94	8.69	53.40	---	--- Peak																							
9	5576.00	45.61	-28.39	74.00	53.21	35.70	9.37	52.67	---	--- Peak																							
10	8544.00	46.85	-27.15	74.00	49.92	36.79	12.18	52.04	---	--- Peak																							
11	9603.00	47.53	-26.47	74.00	48.06	37.91	13.16	51.60	---	--- Peak																							
12	14472.00	46.49	-27.51	74.00	42.43	39.93	15.00	50.87	---	--- Peak																							
13	16821.00	46.88	-27.12	74.00	42.74	41.84	15.28	52.98	---	--- Peak																							

 | | | | | | | | |

Note:

1. Level(dB μ V/m) = Read Level(dB μ V) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
2. Over Limit(dB) = Level(dB μ V/m) - Limit Line(dB μ V/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2024	Mar. 16, 2025	Jul. 07, 2025	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz ~3000MHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-2206	1GHz~18GHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060781	1GHz~18GHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 09, 2024	Mar. 16, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	Mar. 16, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Mar. 16, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Mar. 16, 2025	NCR	Radiation (03CH05-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Mar. 19, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Mar. 19, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Mar. 19, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.1 dB
--	--------

----- THE END -----