




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 291 of 422

802.11n20 MIMO\_Channel 02

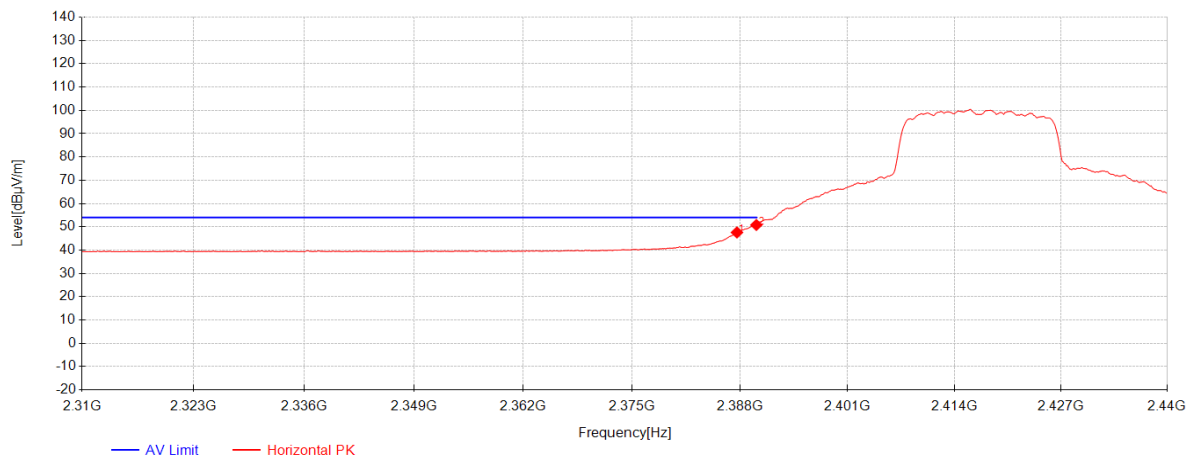


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2387.61         | 43.75          | 27.15     | -23.31      | 47.59          | 54.00          | 6.41        | Horizontal |
| 2         | 2389.95         | 46.95          | 27.16     | -23.31      | 50.79          | 54.00          | 3.21        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 292 of 422

802.11n20 MIMO\_Channel 02

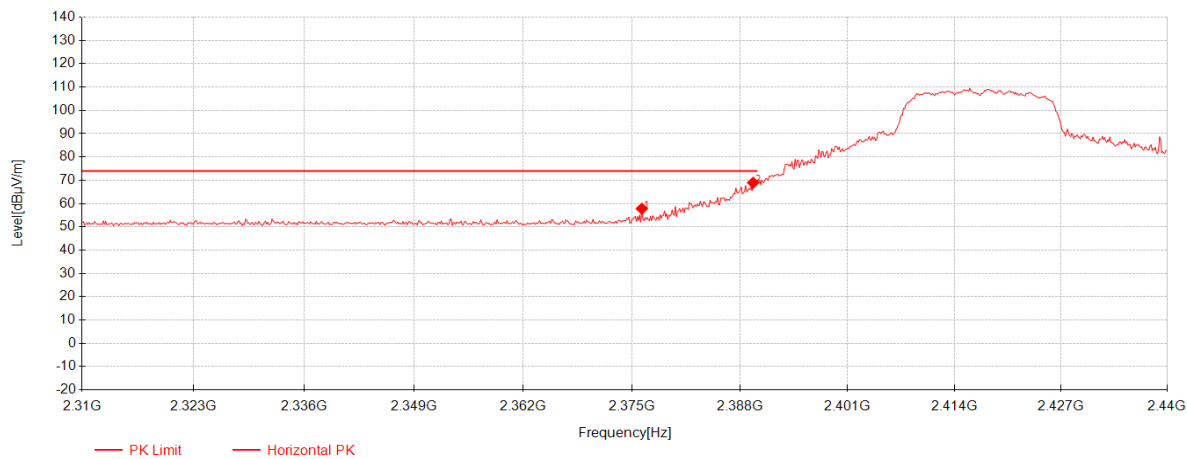

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2376.17         | 53.99          | 27.13     | -23.30      | 57.81          | 74.00          | 16.19       | Horizontal |
| 2         | 2389.56         | 65.11          | 27.16     | -23.31      | 68.95          | 74.00          | 5.05        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 293 of 422

### 802.11n20 MIMO\_Channel 02

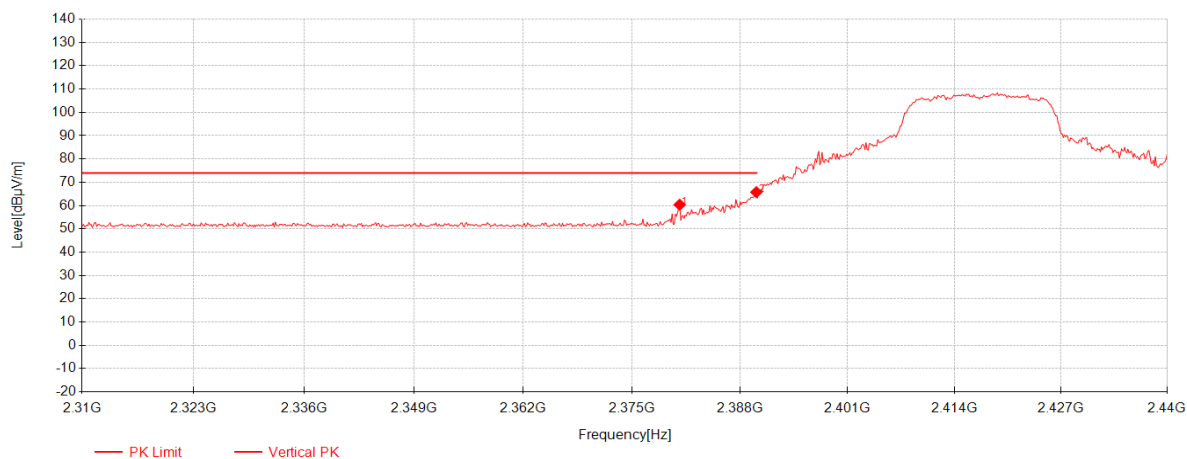


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2380.72         | 56.52          | 27.14     | -23.31      | 60.35          | 74.00          | 13.65       | Vertical |
| 2         | 2389.95         | 61.90          | 27.16     | -23.31      | 65.74          | 74.00          | 8.26        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 294 of 422

802.11n20 MIMO\_Channel 02

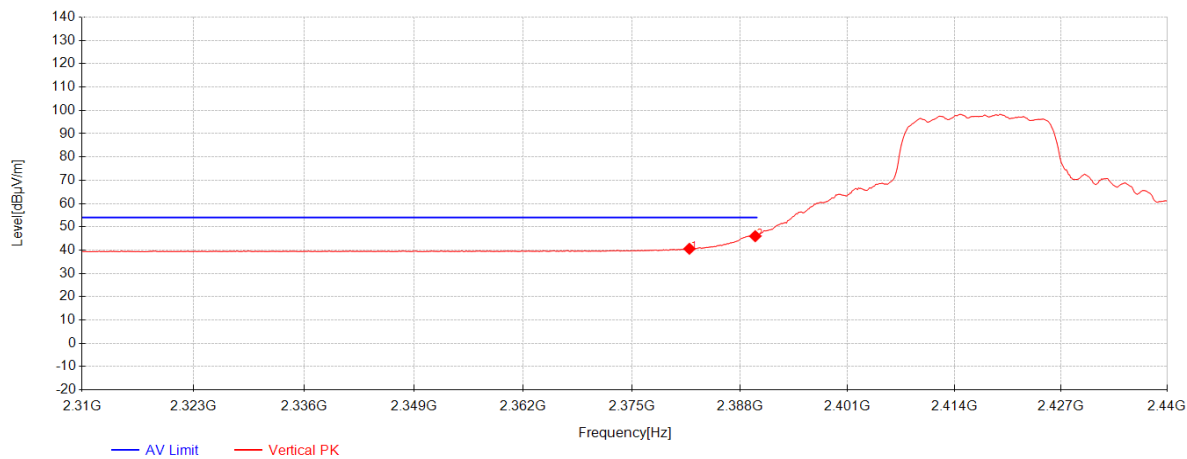


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2381.89         | 36.76          | 27.14     | -23.31      | 40.59          | 54.00          | 13.41       | Vertical |
| 2         | 2389.82         | 42.15          | 27.16     | -23.31      | 45.99          | 54.00          | 8.01        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 295 of 422

802.11n20 MIMO\_Channel 03

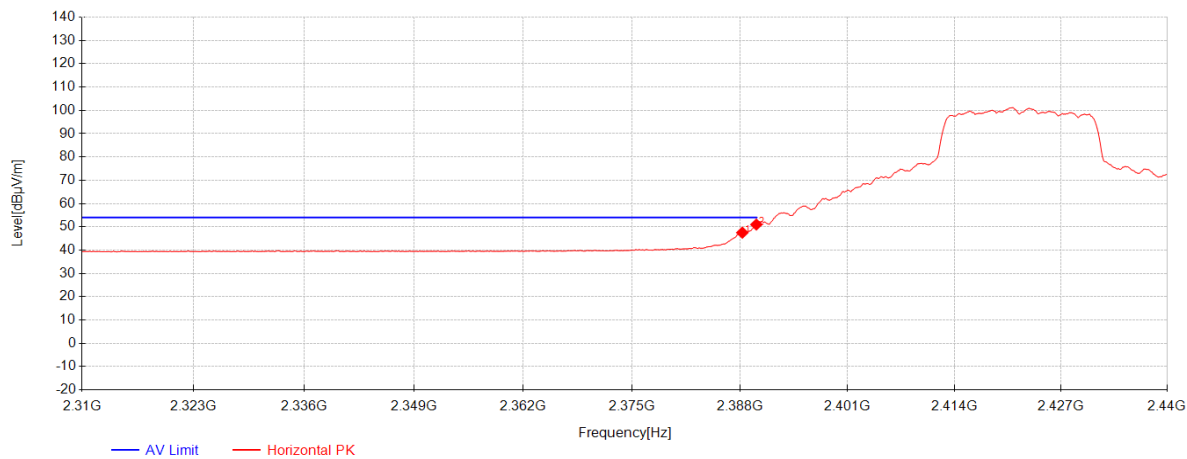


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.26         | 43.66          | 27.15     | -23.31      | 47.50          | 54.00          | 6.50        | Horizontal |
| 2         | 2389.95         | 47.13          | 27.16     | -23.31      | 50.97          | 54.00          | 3.03        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 296 of 422

802.11n20 MIMO\_Channel 03

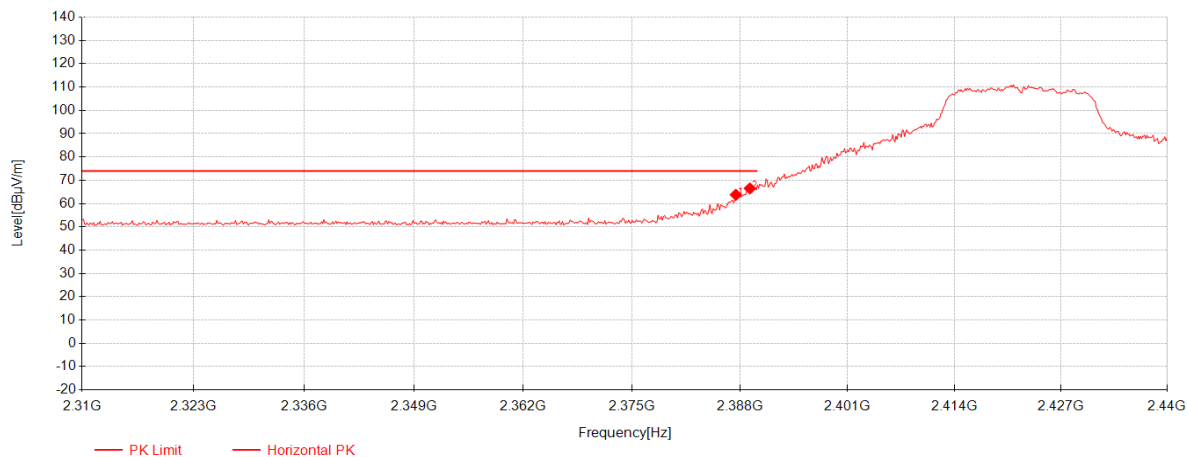


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2387.48         | 59.93          | 27.15     | -23.31      | 63.77          | 74.00          | 10.23       | Horizontal |
| 2         | 2389.17         | 62.66          | 27.16     | -23.31      | 66.50          | 74.00          | 7.50        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 297 of 422

802.11n20 MIMO\_Channel 03

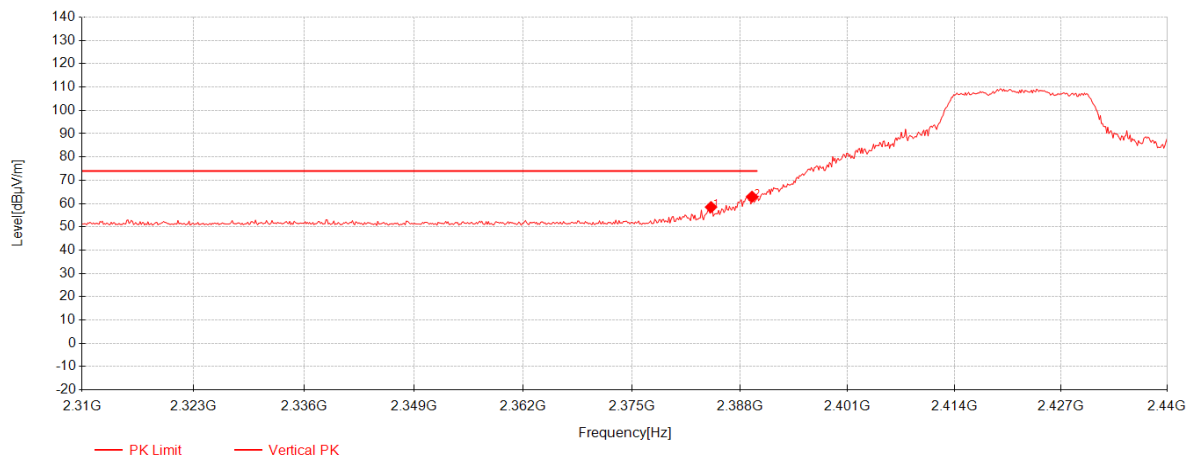


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2384.49         | 54.63          | 27.15     | -23.31      | 58.47          | 74.00          | 15.53       | Vertical |
| 2         | 2389.43         | 59.11          | 27.16     | -23.31      | 62.95          | 74.00          | 11.05       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 298 of 422

802.11n20 MIMO\_Channel 03

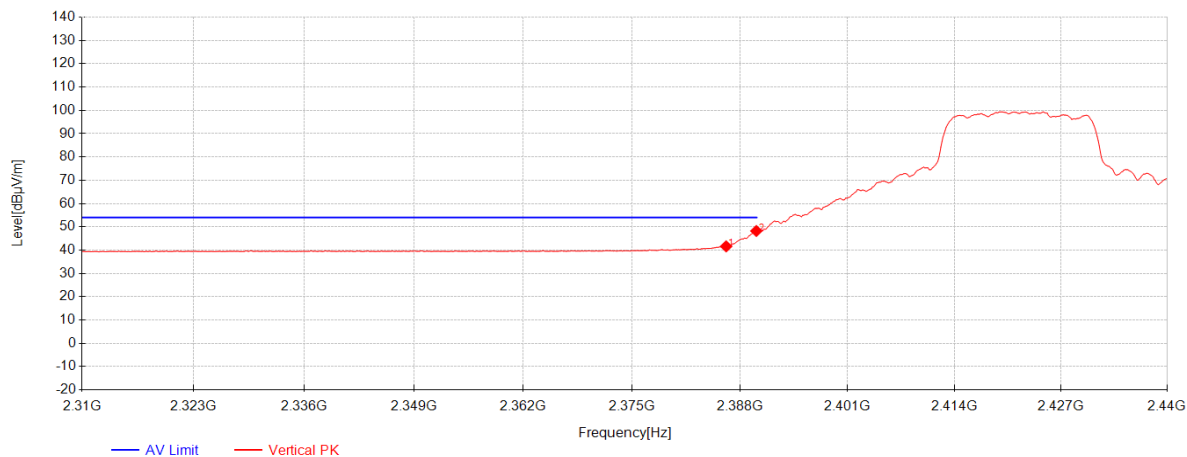


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2386.31         | 37.79          | 27.15     | -23.31      | 41.63          | 54.00          | 12.37       | Vertical |
| 2         | 2389.95         | 44.39          | 27.16     | -23.31      | 48.23          | 54.00          | 5.77        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 299 of 422

802.11n20 MIMO\_Channel 10

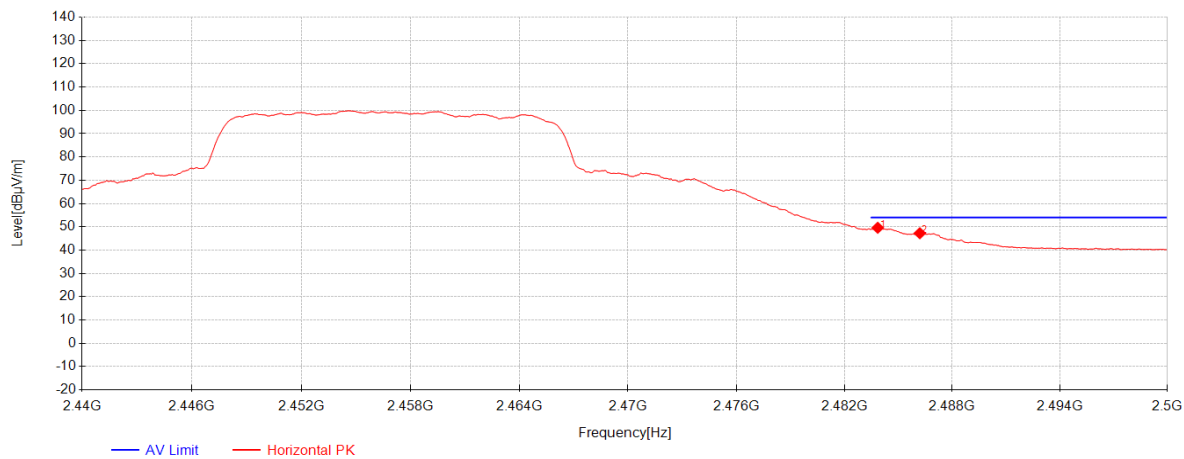


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.86         | 45.51          | 27.36     | -23.27      | 49.60          | 54.00          | 4.40        | Horizontal |
| 2         | 2486.2          | 43.15          | 27.37     | -23.27      | 47.25          | 54.00          | 6.75        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 300 of 422

802.11n20 MIMO\_Channel 10

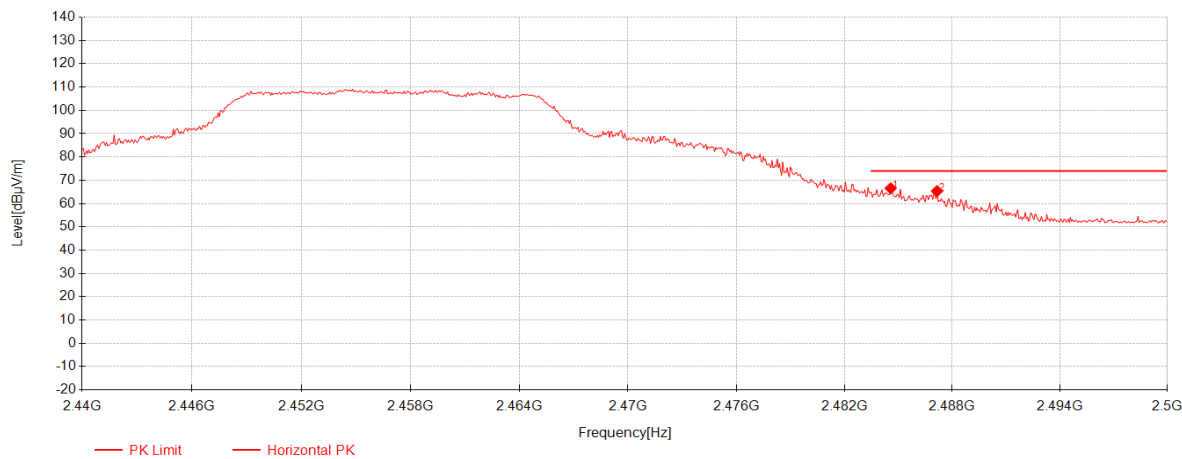


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.58         | 62.46          | 27.37     | -23.27      | 66.56          | 74.00          | 7.44        | Horizontal |
| 2         | 2487.16         | 61.27          | 27.37     | -23.27      | 65.37          | 74.00          | 8.63        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 301 of 422

802.11n20 MIMO\_Channel 10

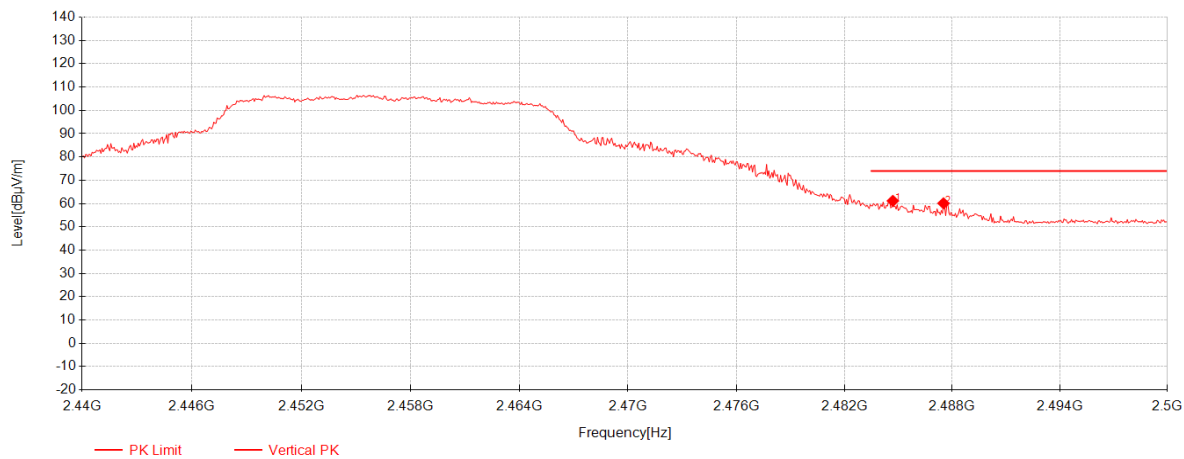


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.7          | 57.04          | 27.37     | -23.27      | 61.14          | 74.00          | 12.86       | Vertical |
| 2         | 2487.52         | 56.00          | 27.37     | -23.27      | 60.11          | 74.00          | 13.89       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 302 of 422

802.11n20 MIMO\_Channel 10

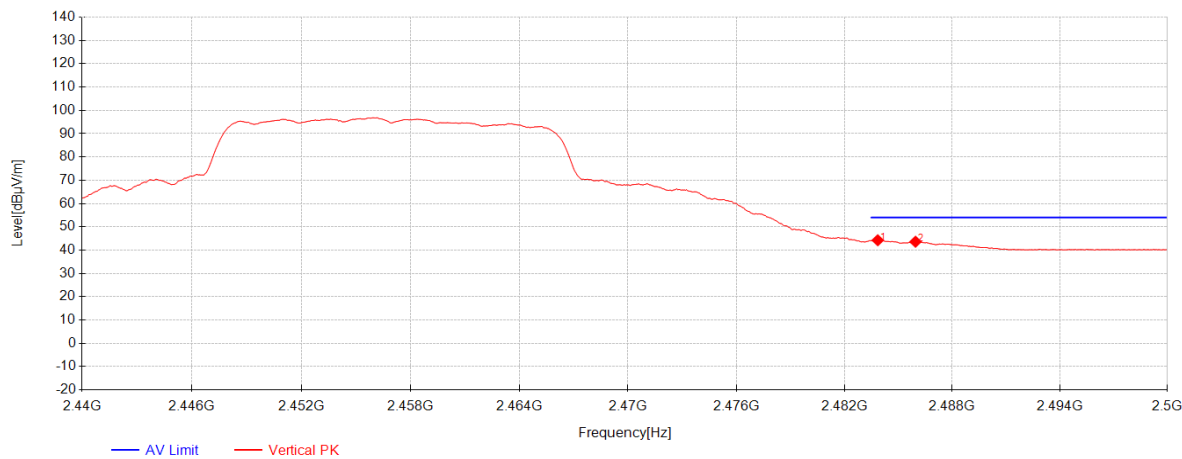


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.86         | 40.15          | 27.36     | -23.27      | 44.24          | 54.00          | 9.76        | Vertical |
| 2         | 2485.96         | 39.51          | 27.37     | -23.27      | 43.61          | 54.00          | 10.39       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 303 of 422

802.11n20 MIMO\_Channel 09

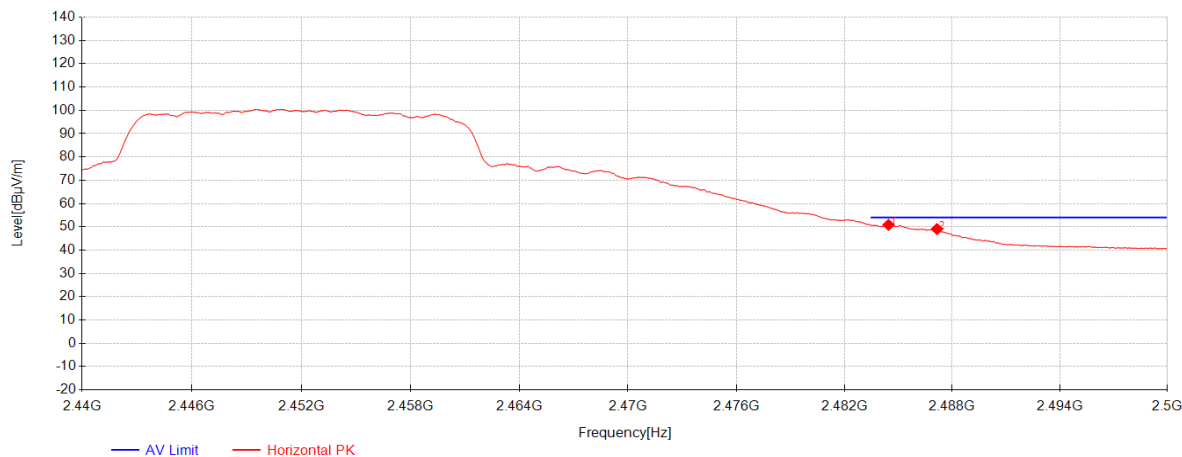

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.46         | 46.73          | 27.37     | -23.27      | 50.83          | 54.00          | 3.17        | Horizontal |
| 2         | 2487.16         | 44.94          | 27.37     | -23.27      | 49.04          | 54.00          | 4.96        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 304 of 422

### 802.11n20 MIMO\_Channel 09

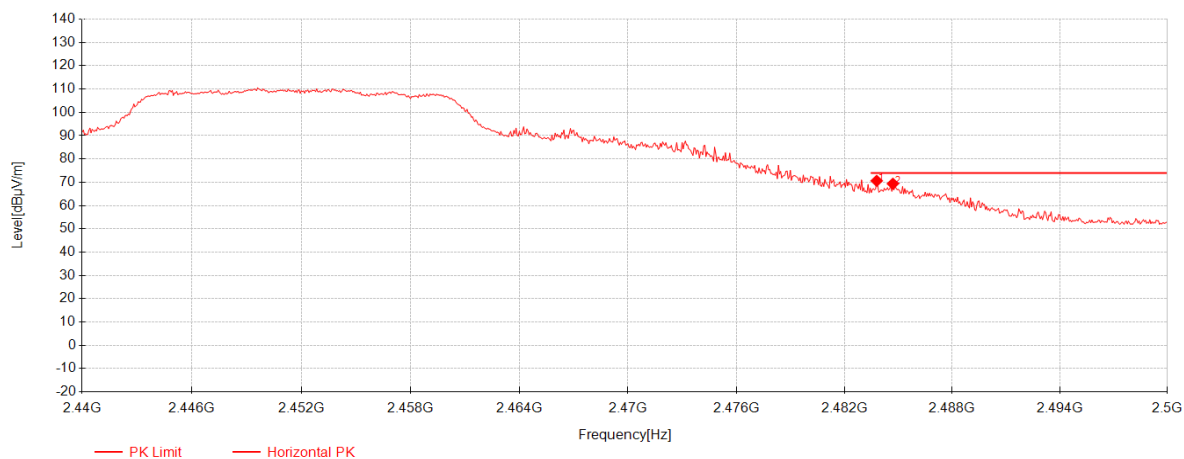


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.8          | 66.52          | 27.36     | -23.27      | 70.61          | 74.00          | 3.39        | Horizontal |
| 2         | 2484.7          | 65.29          | 27.37     | -23.27      | 69.39          | 74.00          | 4.61        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 305 of 422

802.11n20 MIMO\_Channel 09

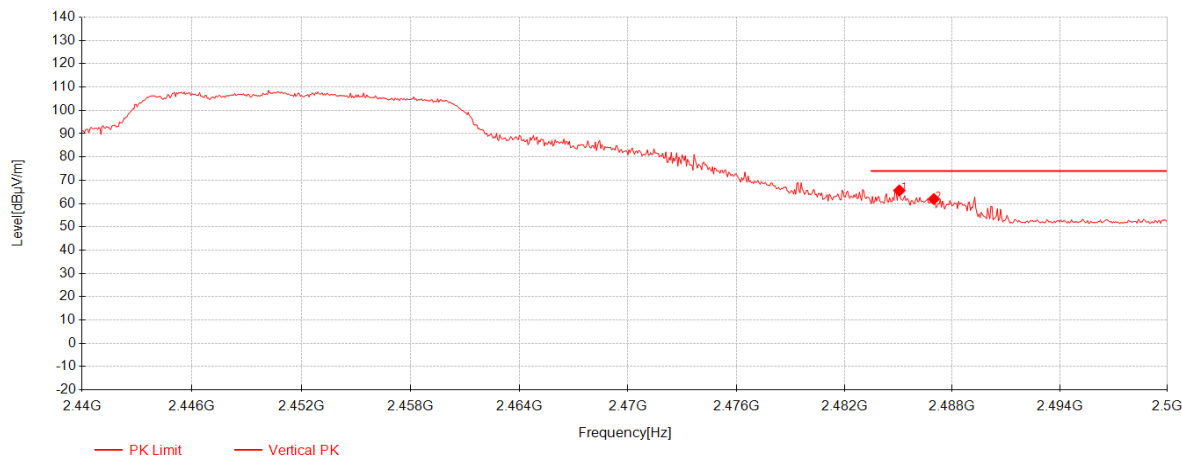


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2485.06         | 61.51          | 27.37     | -23.27      | 65.61          | 74.00          | 8.39        | Vertical |
| 2         | 2486.98         | 57.82          | 27.37     | -23.27      | 61.92          | 74.00          | 12.08       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 306 of 422

802.11n20 MIMO\_Channel 09

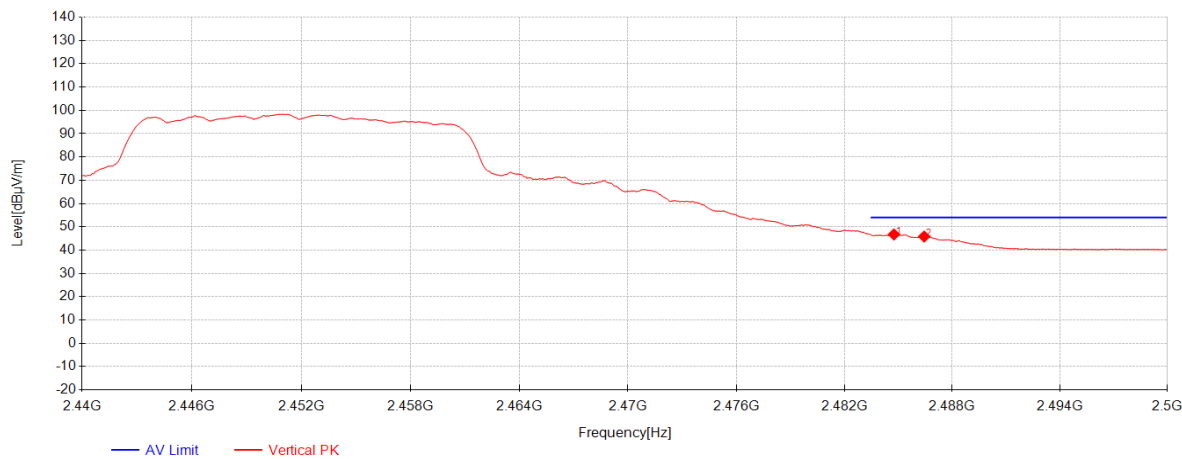

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.76         | 42.63          | 27.37     | -23.27      | 46.73          | 54.00          | 7.27        | Vertical |
| 2         | 2486.44         | 41.73          | 27.37     | -23.27      | 45.83          | 54.00          | 8.17        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 307 of 422

### 802.11n20 MIMO\_Channel 08

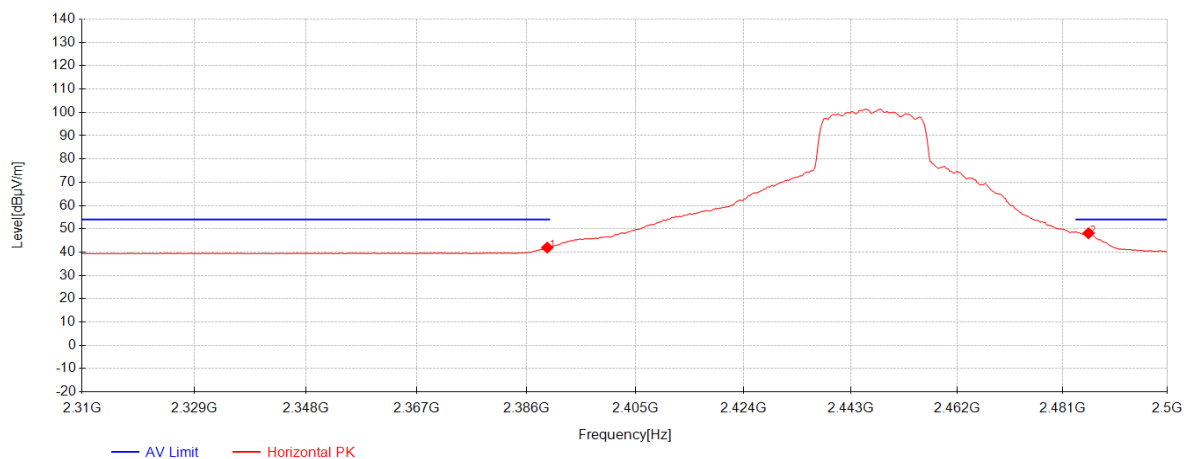

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.61         | 38.09          | 27.16     | -23.31      | 41.93          | 54.00          | 12.07       | Horizontal |
| 2         | 2485.75         | 44.03          | 27.37     | -23.27      | 48.13          | 54.00          | 5.87        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 308 of 422

### 802.11n20 MIMO\_Channel 08

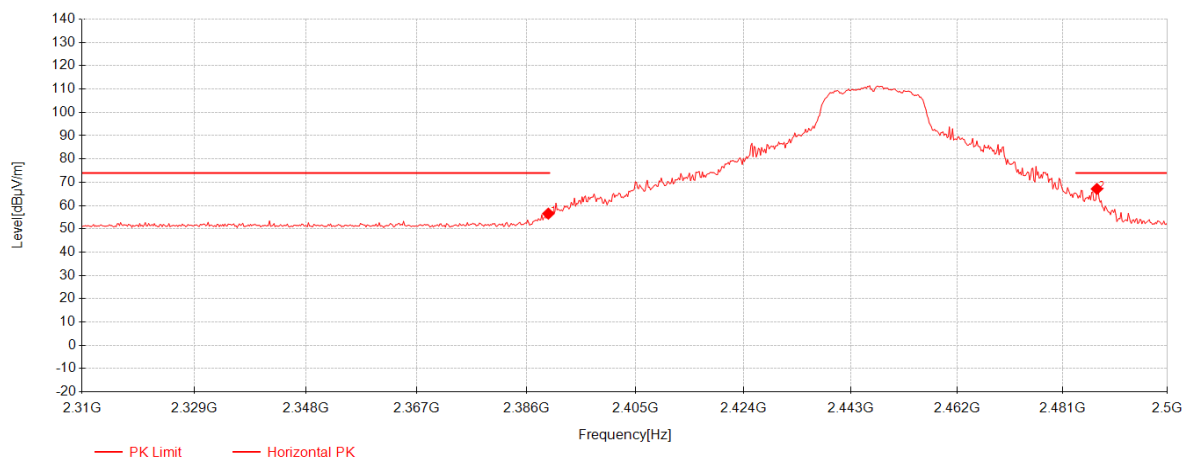


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 52.68          | 27.16     | -23.31      | 56.52          | 74.00          | 17.48       | Horizontal |
| 2         | 2487.27         | 63.03          | 27.37     | -23.27      | 67.13          | 74.00          | 6.87        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 309 of 422

802.11n20 MIMO\_Channel 08

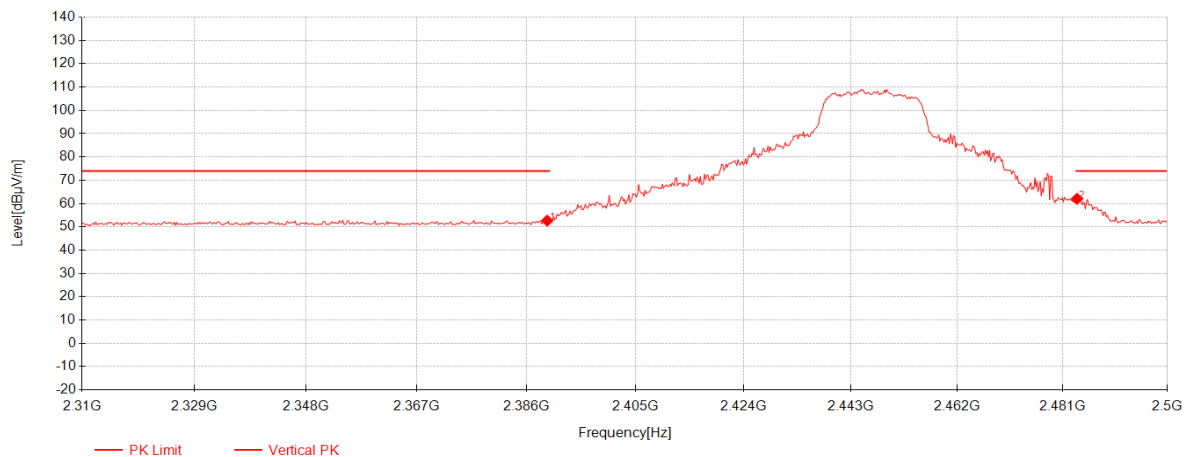

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.61         | 48.82          | 27.16     | -23.31      | 52.66          | 74.00          | 21.34       | Vertical |
| 2         | 2483.66         | 57.94          | 27.36     | -23.27      | 62.03          | 74.00          | 11.97       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 310 of 422

### 802.11n20 MIMO\_Channel 08

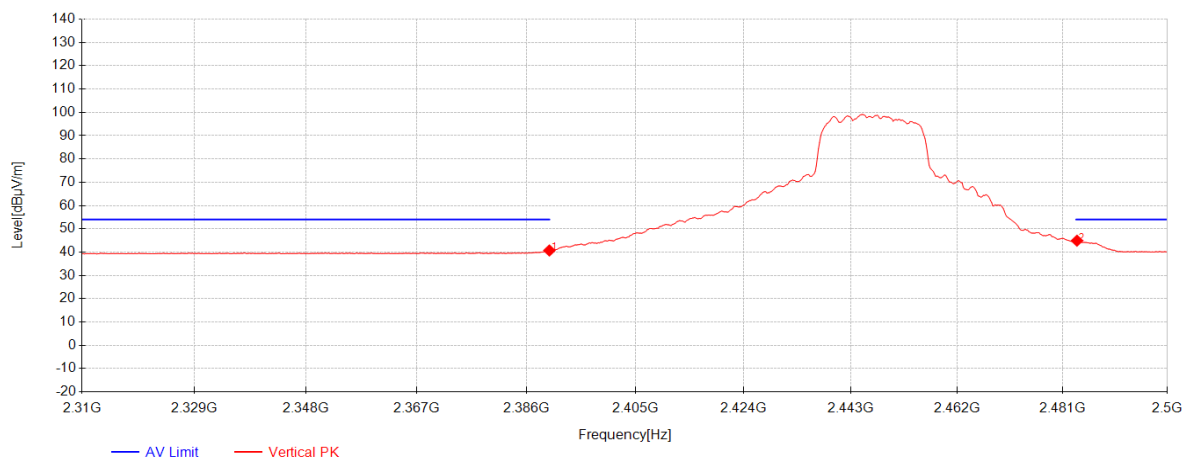


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.99         | 36.87          | 27.16     | -23.31      | 40.71          | 54.00          | 13.29       | Vertical |
| 2         | 2483.66         | 40.83          | 27.36     | -23.27      | 44.92          | 54.00          | 9.08        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 311 of 422

802.11n40 MIMO\_Channel 03

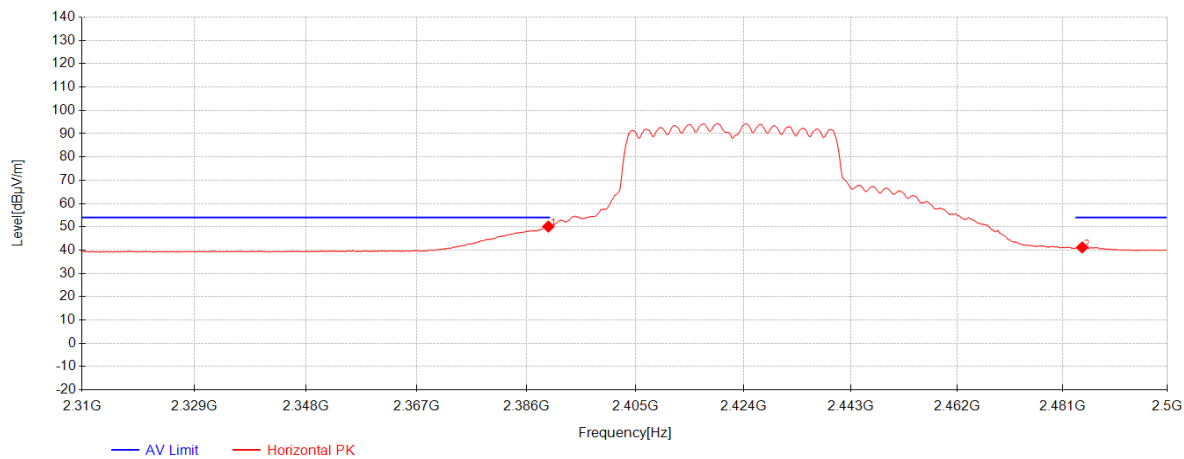

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 46.28          | 27.16     | -23.31      | 50.12          | 54.00          | 3.88        | Horizontal |
| 2         | 2484.61         | 37.06          | 27.37     | -23.27      | 41.16          | 54.00          | 12.84       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 312 of 422

### 802.11n40 MIMO\_Channel 03

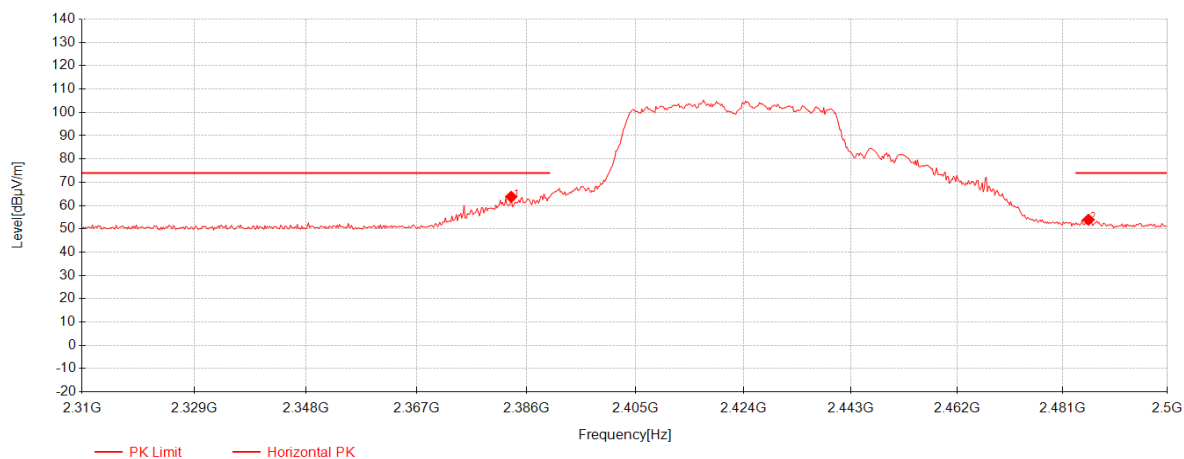


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2383.34         | 59.92          | 27.14     | -23.31      | 63.76          | 74.00          | 10.24       | Horizontal |
| 2         | 2485.75         | 49.82          | 27.37     | -23.27      | 53.92          | 74.00          | 20.08       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 313 of 422

802.11n40 MIMO\_Channel 03

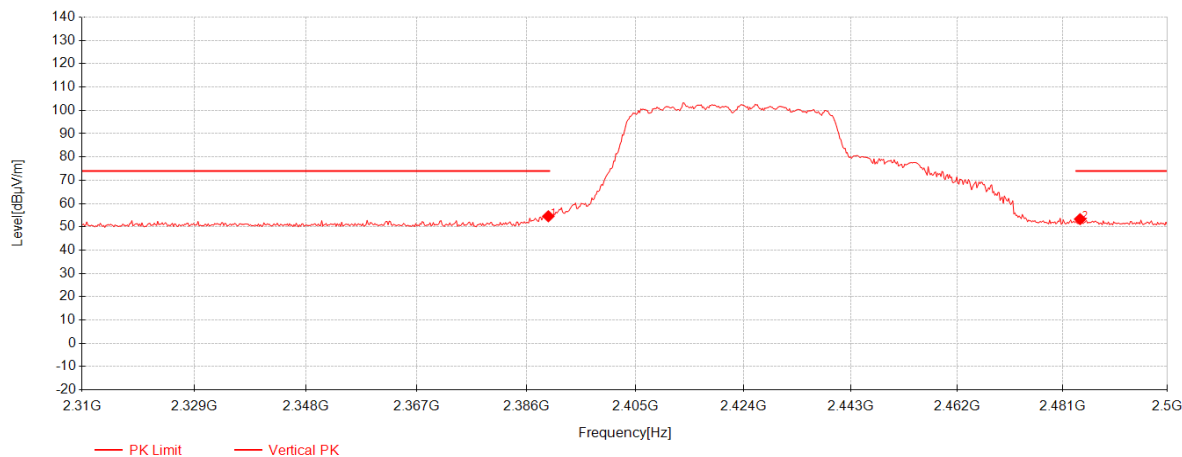

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.8          | 50.70          | 27.16     | -23.31      | 54.54          | 74.00          | 19.46       | Vertical |
| 2         | 2484.23         | 49.21          | 27.37     | -23.27      | 53.31          | 74.00          | 20.69       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 314 of 422

### 802.11n40 MIMO\_Channel 03

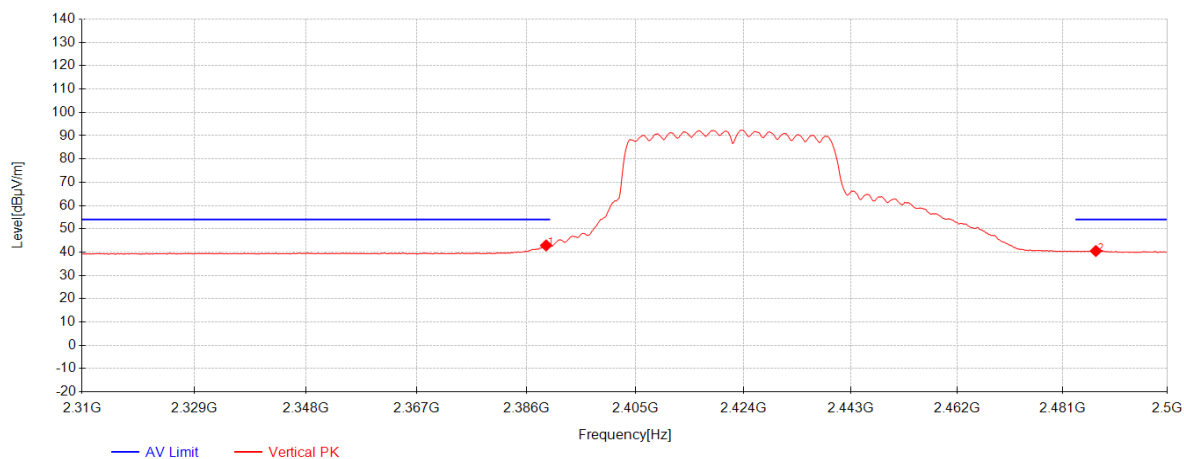

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.42         | 39.04          | 27.16     | -23.31      | 42.88          | 54.00          | 11.12       | Vertical |
| 2         | 2487.08         | 36.38          | 27.37     | -23.27      | 40.48          | 54.00          | 13.52       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 315 of 422

### 802.11n40 MIMO\_Channel 06

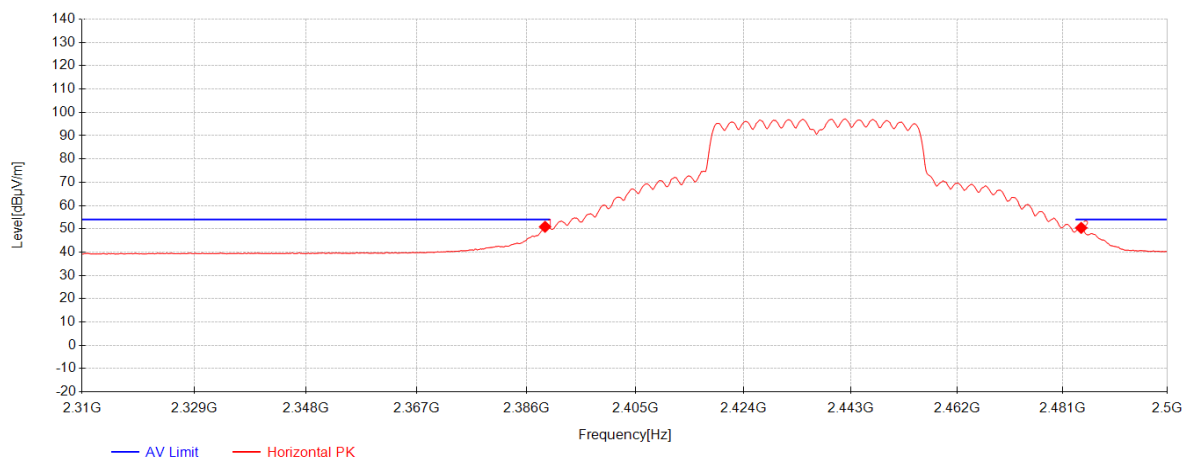


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.23         | 47.03          | 27.16     | -23.31      | 50.87          | 54.00          | 3.13        | Horizontal |
| 2         | 2484.42         | 46.31          | 27.37     | -23.27      | 50.41          | 54.00          | 3.59        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 316 of 422

802.11n40 MIMO\_Channel 06

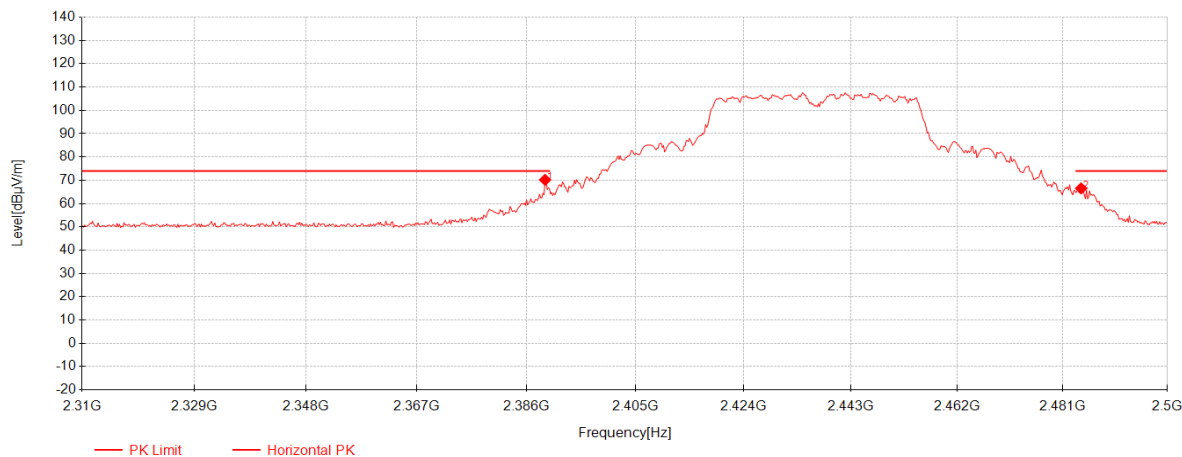

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.23         | 66.33          | 27.16     | -23.31      | 70.17          | 74.00          | 3.83        | Horizontal |
| 2         | 2484.42         | 62.41          | 27.37     | -23.27      | 66.51          | 74.00          | 7.49        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 317 of 422

### 802.11n40 MIMO\_Channel 06

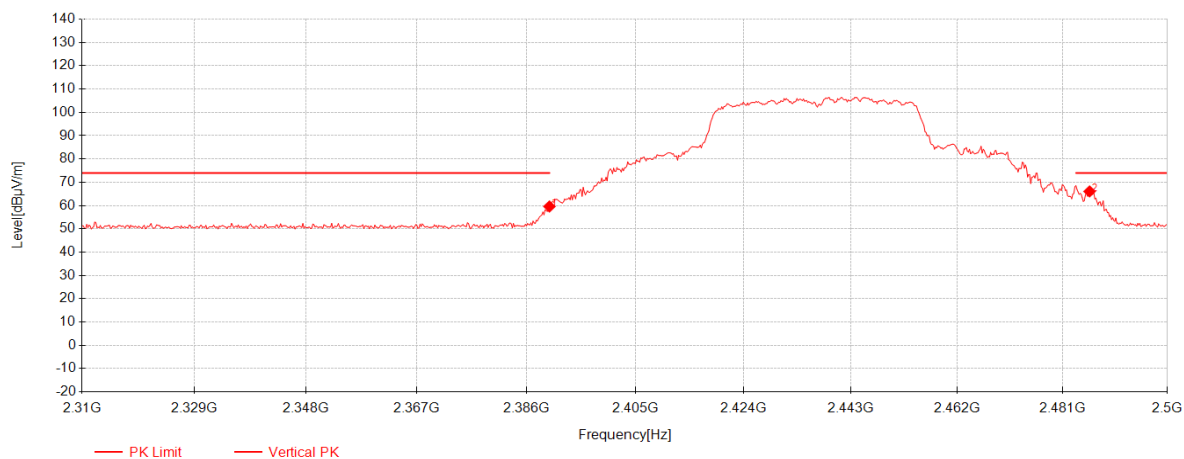


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.99         | 55.77          | 27.16     | -23.31      | 59.61          | 74.00          | 14.39       | Vertical |
| 2         | 2485.94         | 61.97          | 27.37     | -23.27      | 66.07          | 74.00          | 7.93        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 318 of 422

802.11n40 MIMO\_Channel 06

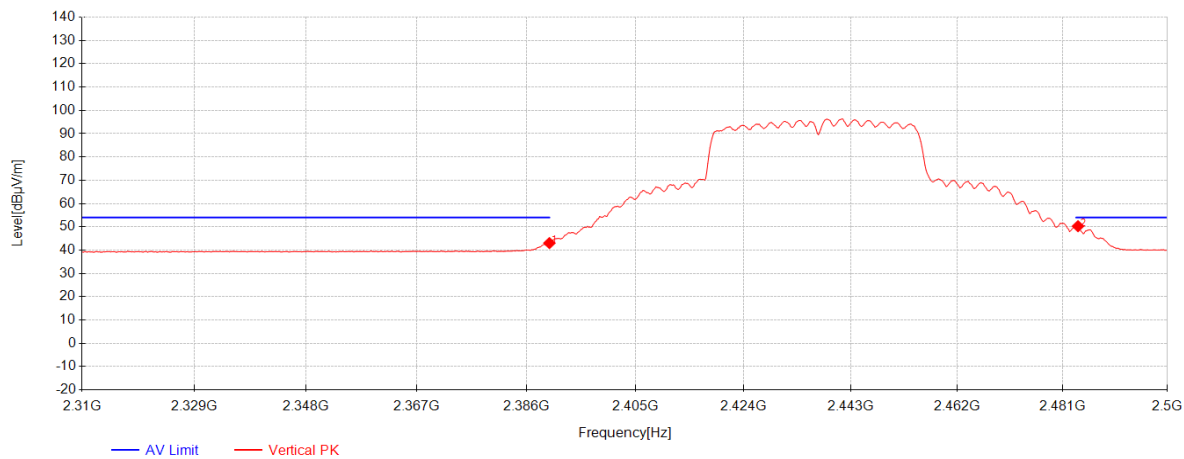


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.99         | 39.18          | 27.16     | -23.31      | 43.02          | 54.00          | 10.98       | Vertical |
| 2         | 2483.85         | 46.19          | 27.36     | -23.27      | 50.28          | 54.00          | 3.72        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 319 of 422

802.11n40 MIMO\_Channel 09

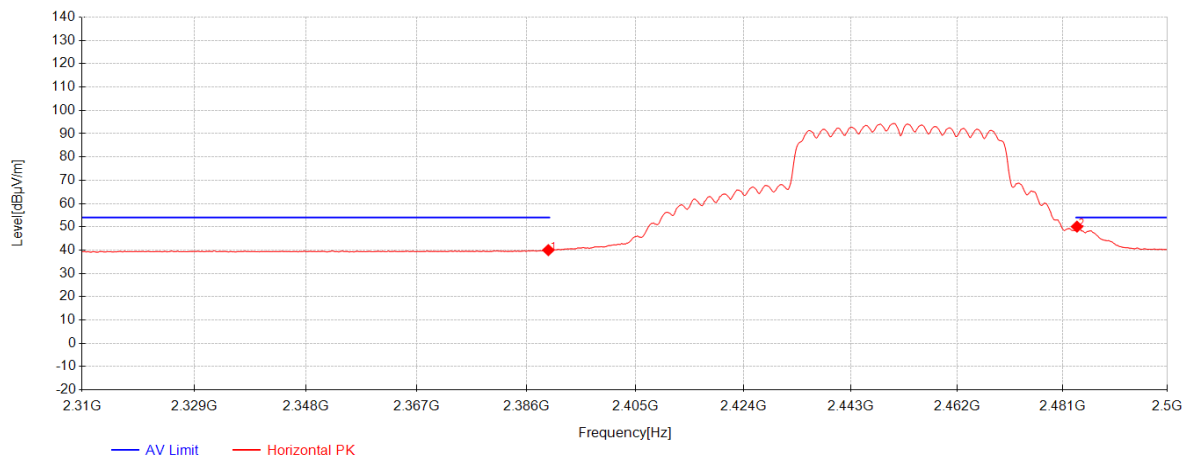

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 36.17          | 27.16     | -23.31      | 40.01          | 54.00          | 13.99       | Horizontal |
| 2         | 2483.66         | 45.99          | 27.36     | -23.27      | 50.08          | 54.00          | 3.92        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 320 of 422

### 802.11n40 MIMO\_Channel 09

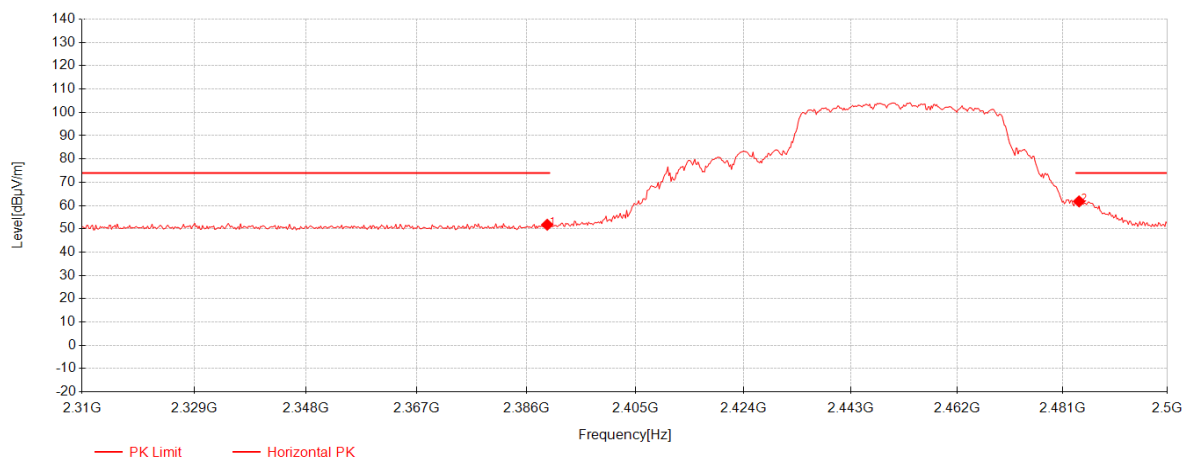


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.61         | 47.93          | 27.16     | -23.31      | 51.77          | 74.00          | 22.23       | Horizontal |
| 2         | 2484.04         | 57.67          | 27.36     | -23.27      | 61.77          | 74.00          | 12.23       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 321 of 422

802.11n40 MIMO\_Channel 09

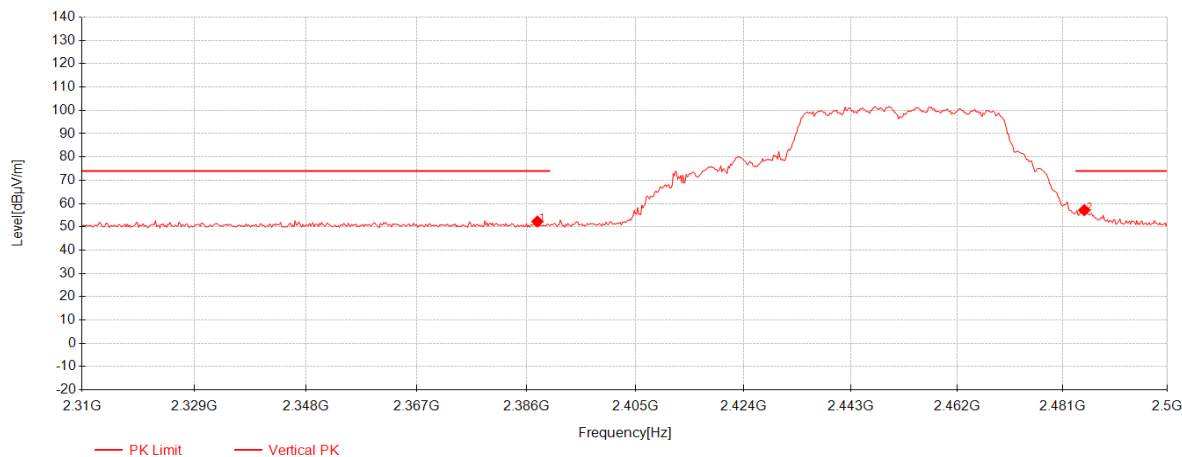

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2387.9          | 48.45          | 27.15     | -23.31      | 52.29          | 74.00          | 21.71       | Vertical |
| 2         | 2484.99         | 53.07          | 27.37     | -23.27      | 57.17          | 74.00          | 16.83       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 322 of 422

### 802.11n40 MIMO\_Channel 09

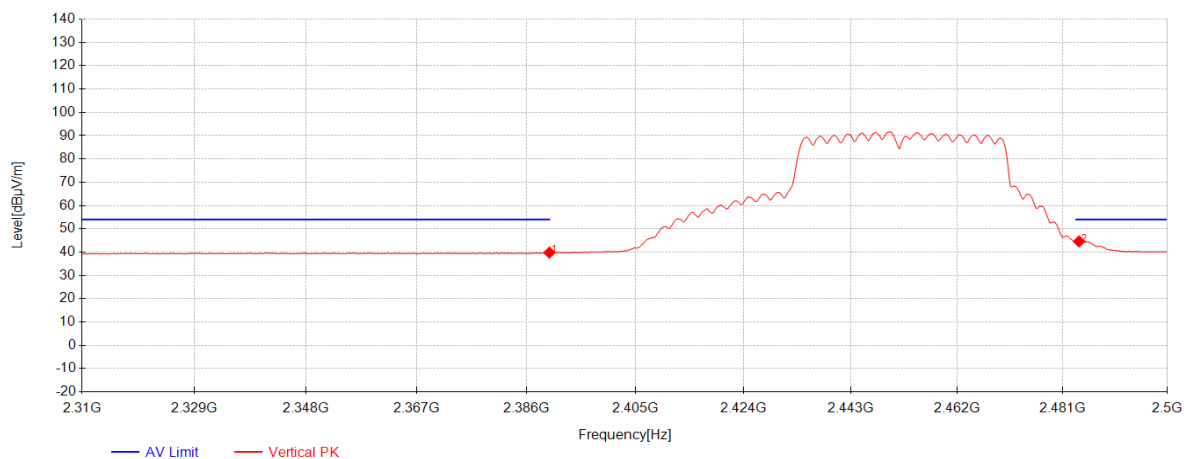

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.99         | 35.96          | 27.16     | -23.31      | 39.80          | 54.00          | 14.20       | Vertical |
| 2         | 2484.04         | 40.51          | 27.36     | -23.27      | 44.61          | 54.00          | 9.39        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 323 of 422

### 802.11n40 MIMO\_Channel 04

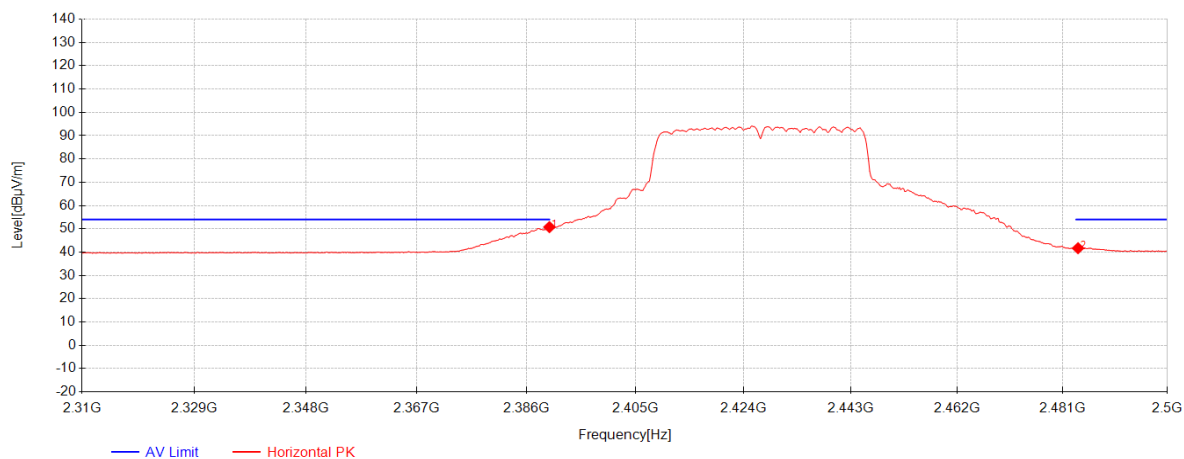

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.99         | 46.92          | 27.16     | -23.31      | 50.76          | 54.00          | 3.24        | Horizontal |
| 2         | 2483.85         | 37.60          | 27.36     | -23.27      | 41.69          | 54.00          | 12.31       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 324 of 422

### 802.11n40 MIMO\_Channel 04

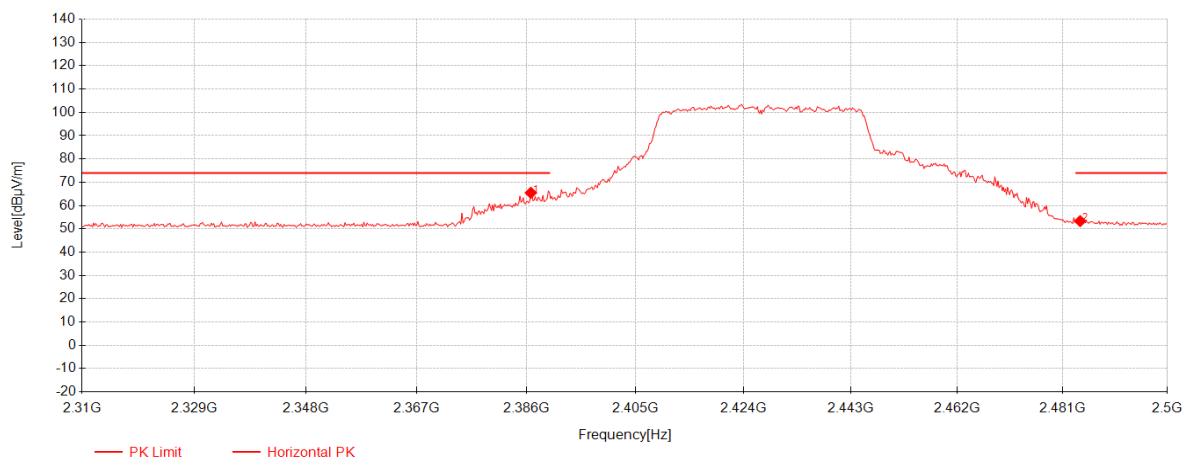


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2386.76         | 61.62          | 27.15     | -23.31      | 65.46          | 74.00          | 8.54        | Horizontal |
| 2         | 2484.23         | 49.22          | 27.37     | -23.27      | 53.32          | 74.00          | 20.68       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 325 of 422

802.11n40 MIMO\_Channel 04

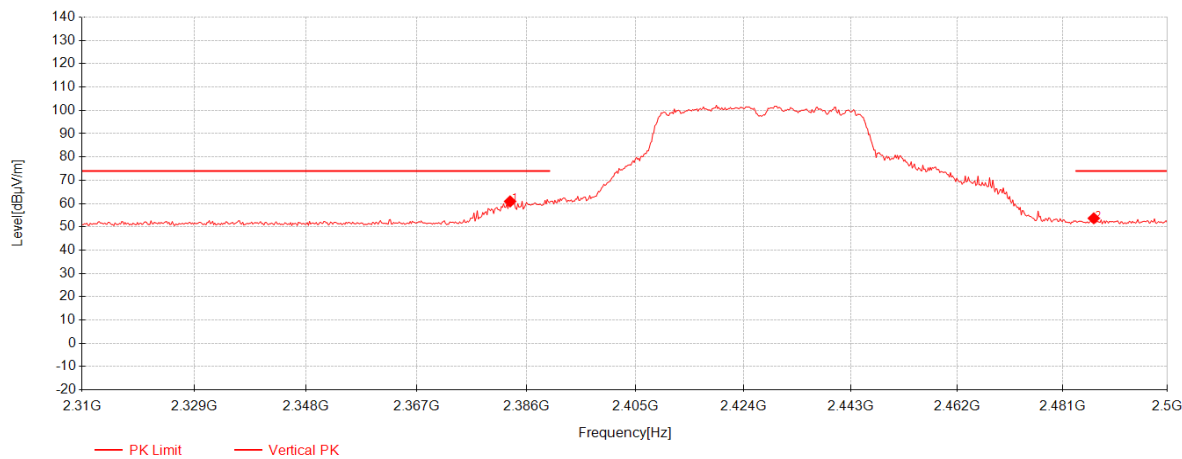


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2383.15         | 57.07          | 27.14     | -23.31      | 60.90          | 74.00          | 13.10       | Vertical |
| 2         | 2486.7          | 49.56          | 27.37     | -23.27      | 53.66          | 74.00          | 20.34       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 326 of 422

802.11n40 MIMO\_Channel 04

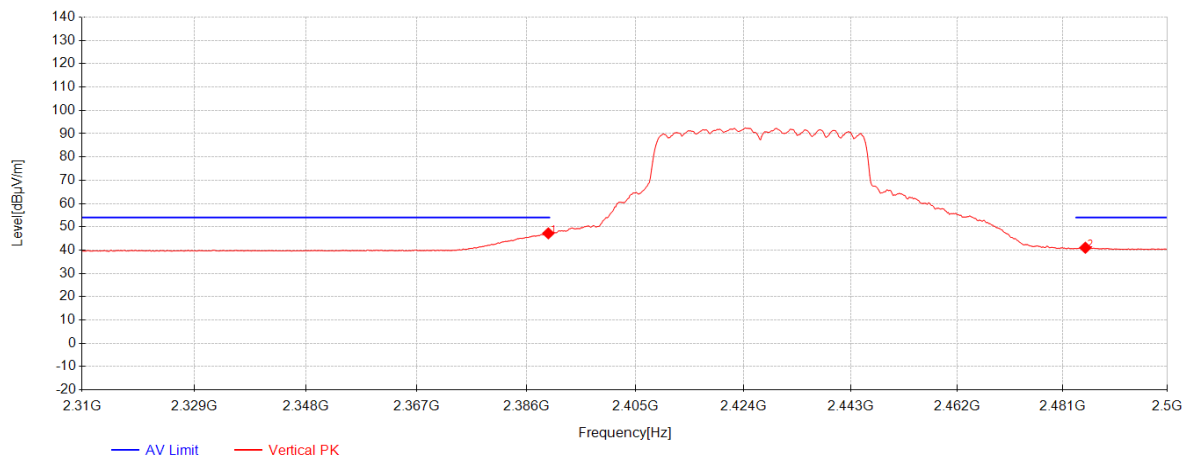


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.8          | 43.36          | 27.16     | -23.31      | 47.20          | 54.00          | 6.80        | Vertical |
| 2         | 2485.18         | 36.93          | 27.37     | -23.27      | 41.03          | 54.00          | 12.97       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 327 of 422

802.11n40 MIMO\_Channel 05

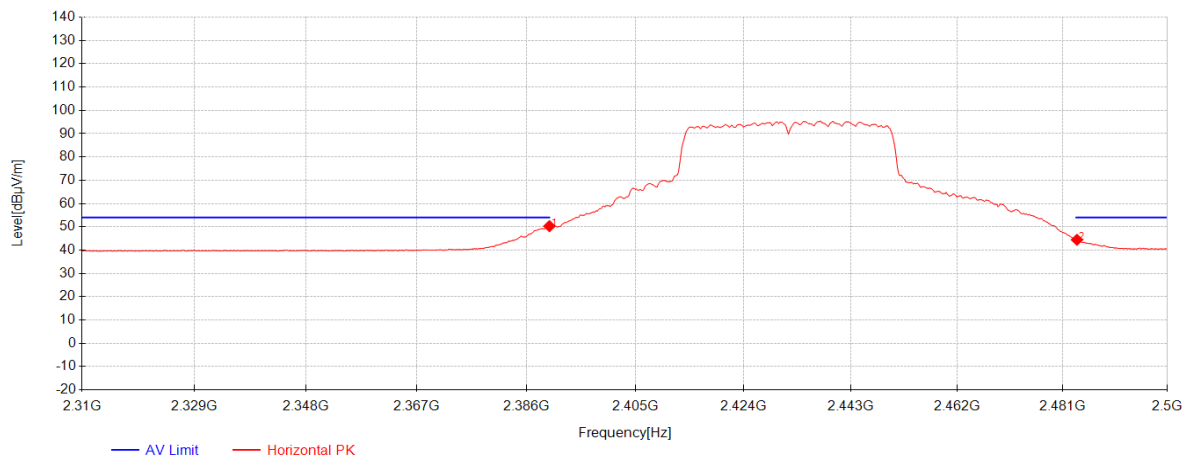


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.99         | 46.45          | 27.16     | -23.31      | 50.29          | 54.00          | 3.71        | Horizontal |
| 2         | 2483.66         | 40.35          | 27.36     | -23.27      | 44.44          | 54.00          | 9.56        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 328 of 422

802.11n40 MIMO\_Channel 05

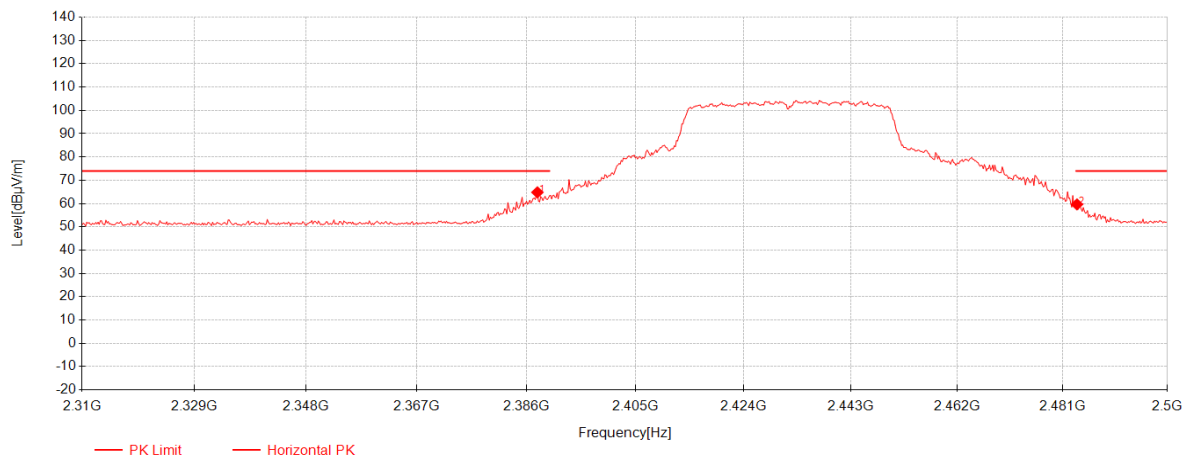


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2387.9          | 60.97          | 27.15     | -23.31      | 64.81          | 74.00          | 9.19        | Horizontal |
| 2         | 2483.66         | 55.54          | 27.36     | -23.27      | 59.63          | 74.00          | 14.37       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 329 of 422

802.11n40 MIMO\_Channel 05

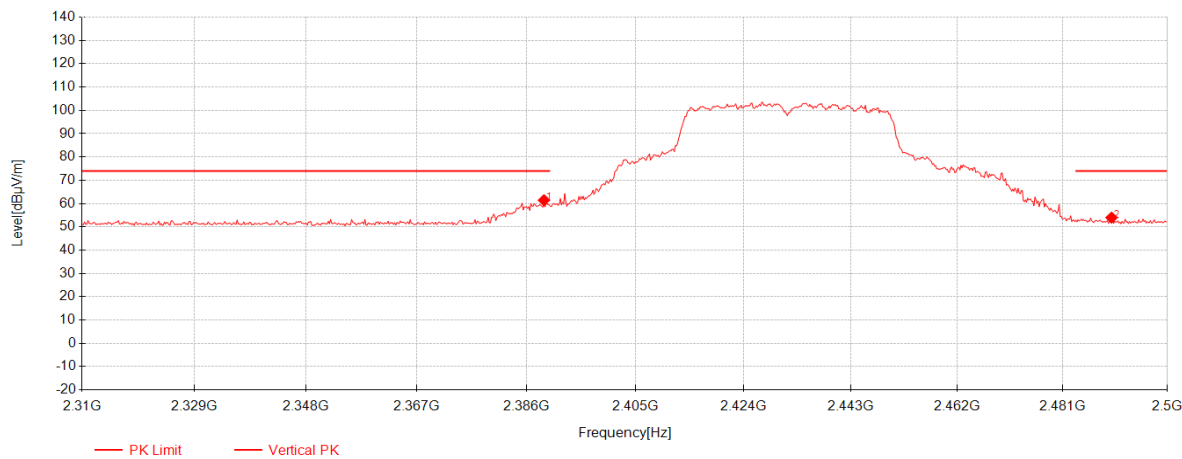


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.04         | 57.60          | 27.16     | -23.31      | 61.44          | 74.00          | 12.56       | Vertical |
| 2         | 2489.93         | 49.84          | 27.38     | -23.27      | 53.95          | 74.00          | 20.05       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 330 of 422

802.11n40 MIMO\_Channel 05

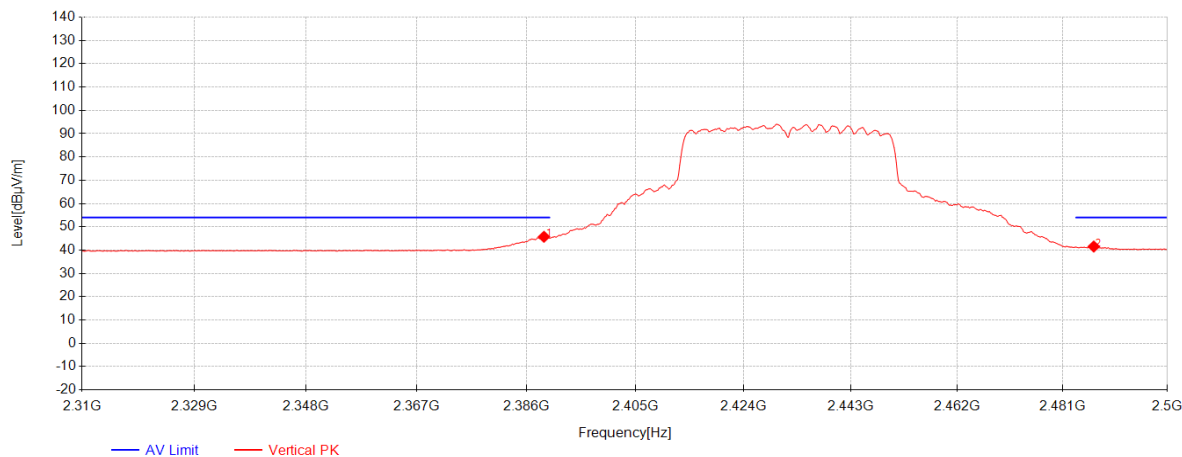

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.04         | 41.89          | 27.16     | -23.31      | 45.73          | 54.00          | 8.27        | Vertical |
| 2         | 2486.7          | 37.44          | 27.37     | -23.27      | 41.54          | 54.00          | 12.46       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 331 of 422

### 802.11n40 MIMO\_Channel 07

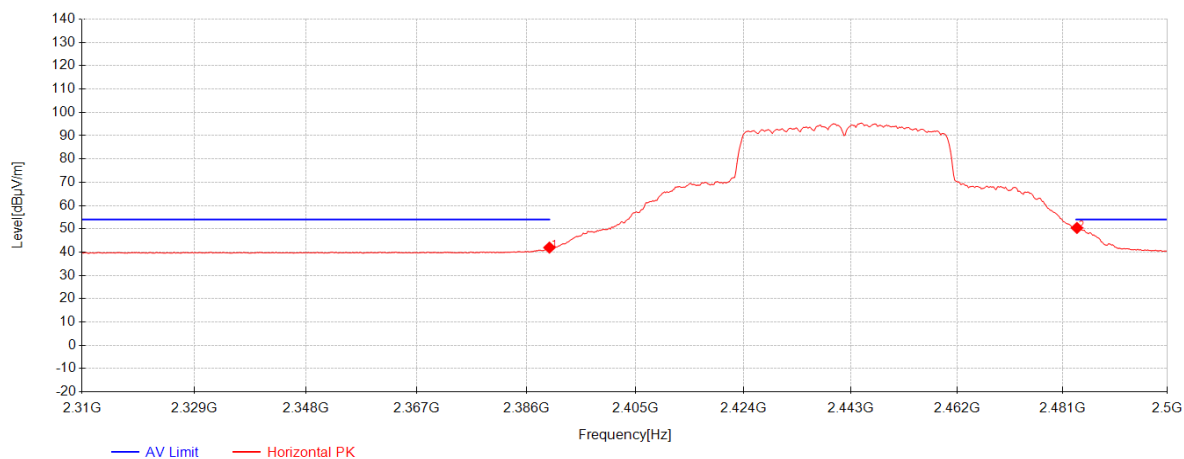


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.99         | 38.10          | 27.16     | -23.31      | 41.94          | 54.00          | 12.06       | Horizontal |
| 2         | 2483.66         | 46.30          | 27.36     | -23.27      | 50.39          | 54.00          | 3.61        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 332 of 422

802.11n40 MIMO\_Channel 07

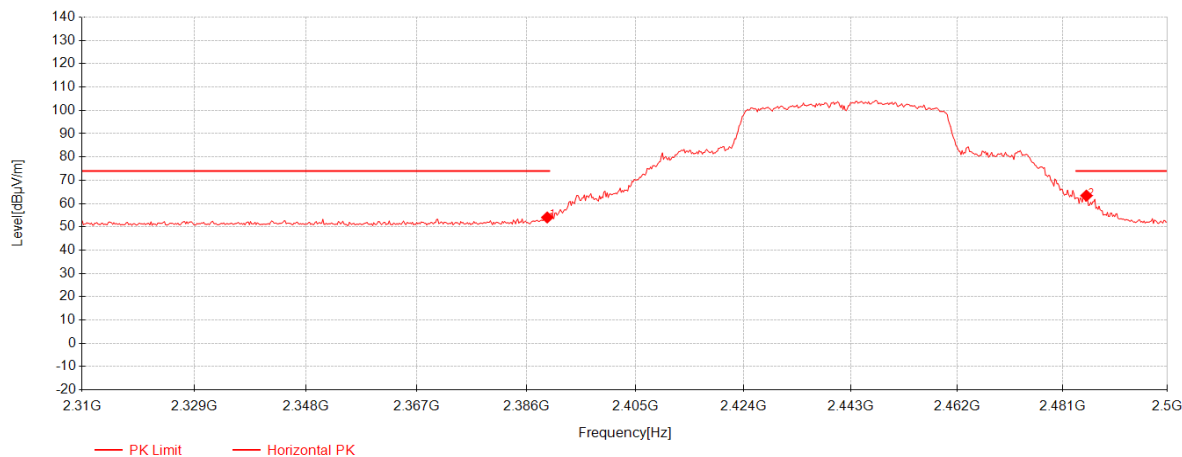

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.61         | 50.19          | 27.16     | -23.31      | 54.03          | 74.00          | 19.97       | Horizontal |
| 2         | 2485.37         | 59.30          | 27.37     | -23.27      | 63.40          | 74.00          | 10.60       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 333 of 422

### 802.11n40 MIMO\_Channel 07

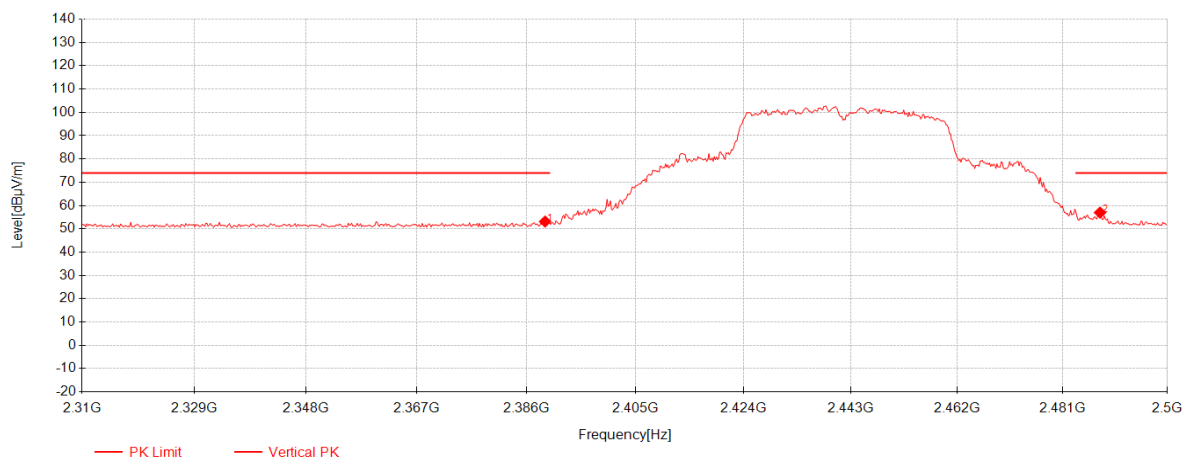

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.23         | 49.29          | 27.16     | -23.31      | 53.13          | 74.00          | 20.87       | Vertical |
| 2         | 2487.84         | 52.87          | 27.37     | -23.27      | 56.98          | 74.00          | 17.02       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 334 of 422

### 802.11n40 MIMO\_Channel 07

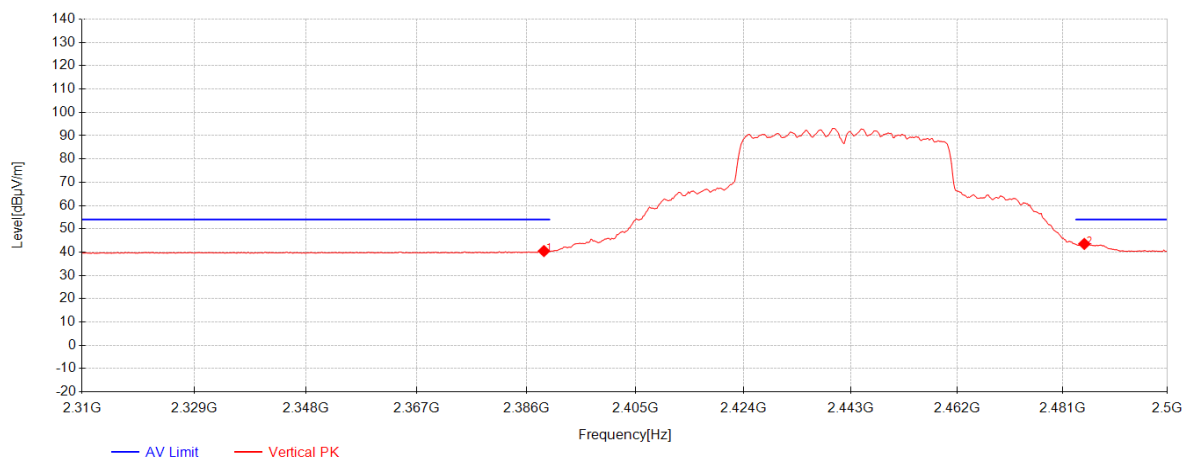

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.04         | 36.62          | 27.16     | -23.31      | 40.46          | 54.00          | 13.54       | Vertical |
| 2         | 2484.99         | 39.44          | 27.37     | -23.27      | 43.54          | 54.00          | 10.46       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 335 of 422

### 802.11n40 MIMO\_Channel 08

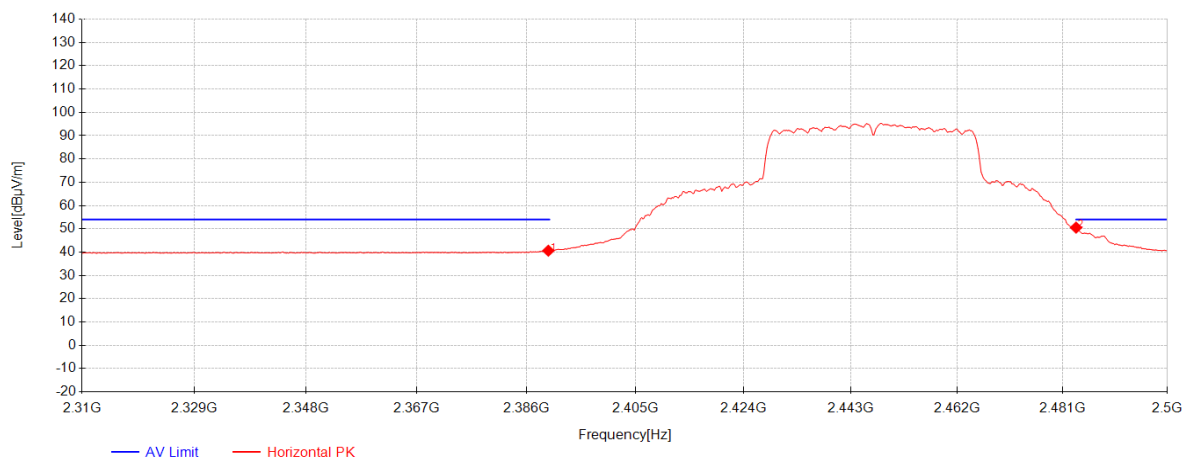

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 36.79          | 27.16     | -23.31      | 40.63          | 54.00          | 13.37       | Horizontal |
| 2         | 2483.5          | 46.44          | 27.36     | -23.27      | 50.53          | 54.00          | 3.47        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 336 of 422

### 802.11n40 MIMO\_Channel 08

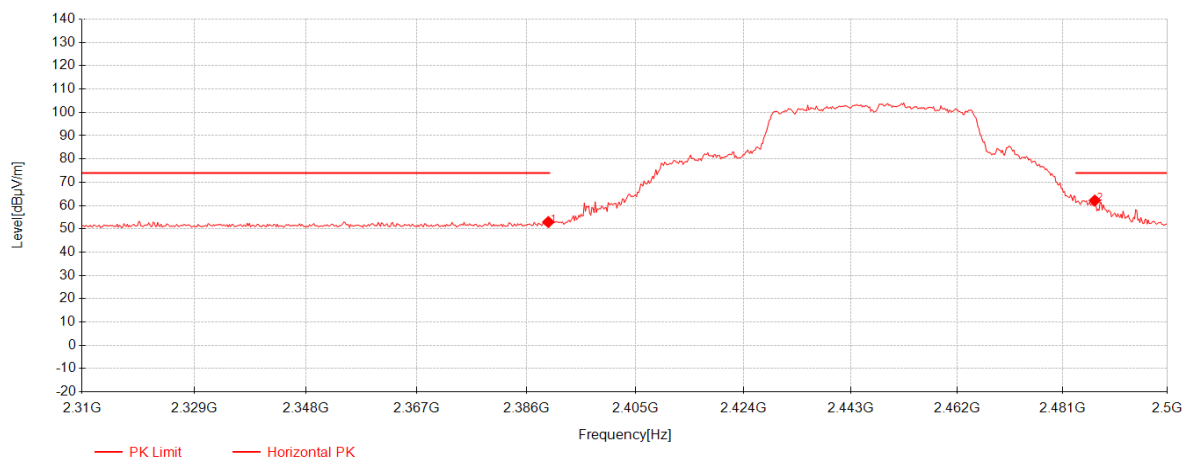


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 49.07          | 27.16     | -23.31      | 52.91          | 74.00          | 21.09       | Horizontal |
| 2         | 2486.89         | 58.07          | 27.37     | -23.27      | 62.17          | 74.00          | 11.83       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 337 of 422

802.11n40 MIMO\_Channel 08

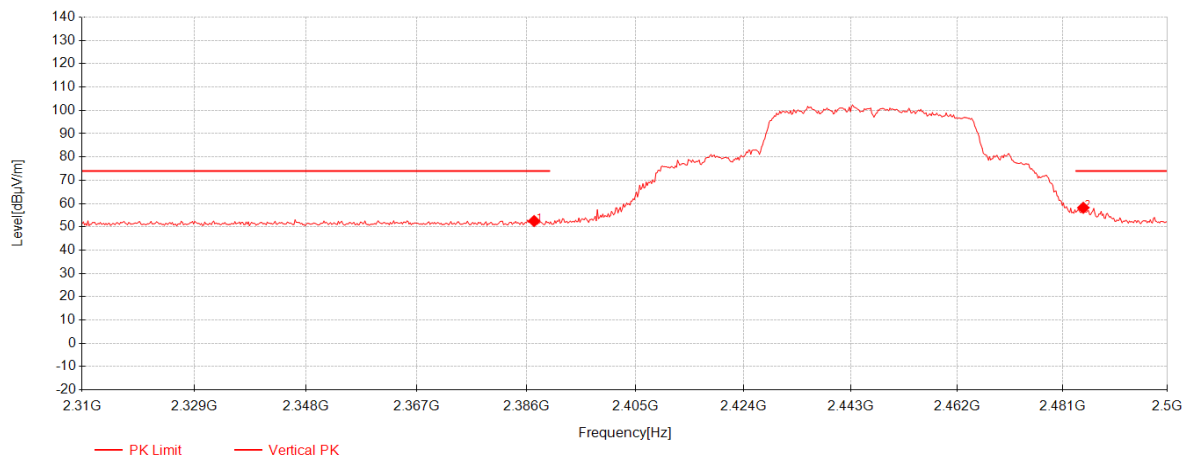

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2387.33         | 48.65          | 27.15     | -23.31      | 52.49          | 74.00          | 21.51       | Vertical |
| 2         | 2484.8          | 54.08          | 27.37     | -23.27      | 58.18          | 74.00          | 15.82       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 338 of 422

### 802.11n40 MIMO\_Channel 08

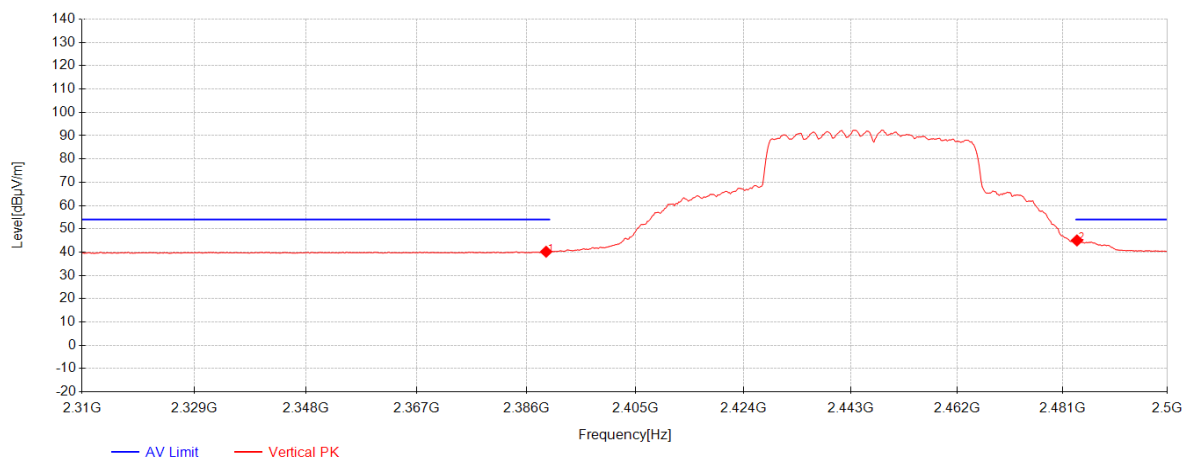

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.42         | 36.32          | 27.16     | -23.31      | 40.16          | 54.00          | 13.84       | Vertical |
| 2         | 2483.66         | 40.93          | 27.36     | -23.27      | 45.02          | 54.00          | 8.98        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 339 of 422

### 802.11ax HE20 MIMO\_Channel 01

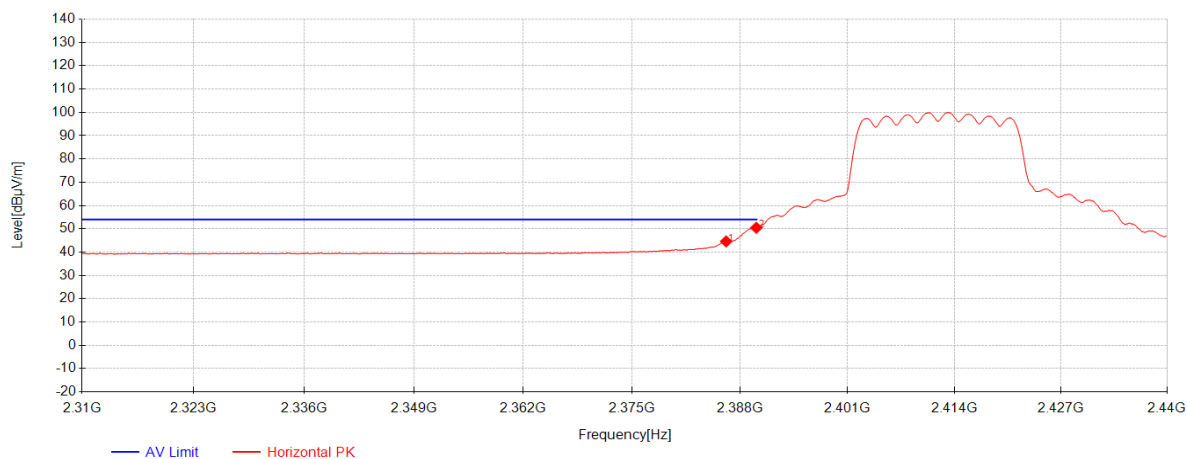

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2386.31         | 40.75          | 27.15     | -23.31      | 44.59          | 54.00          | 9.41        | Horizontal |
| 2         | 2389.95         | 46.63          | 27.16     | -23.31      | 50.47          | 54.00          | 3.53        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 340 of 422

### 802.11ax HE20 MIMO\_Channel 01

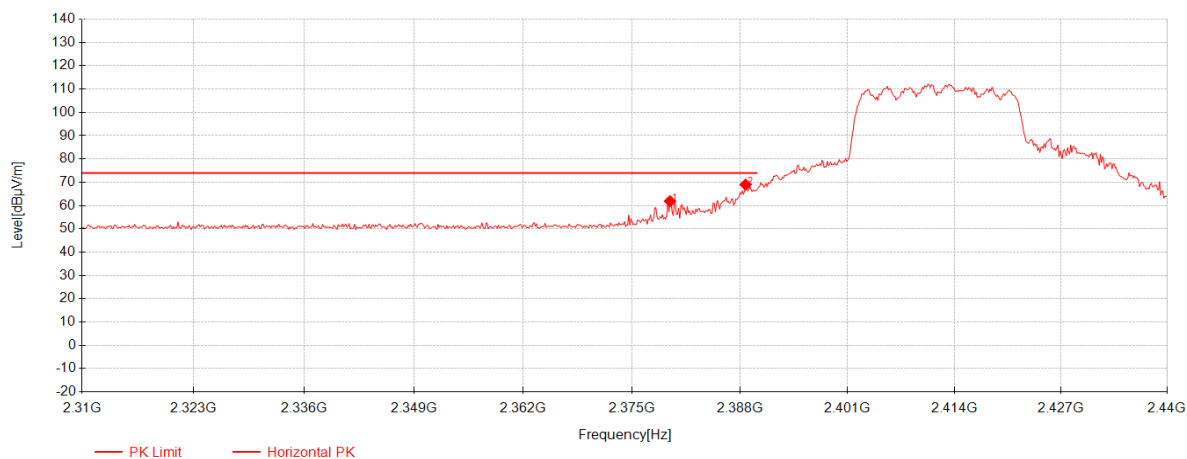


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2379.55         | 58.03          | 27.14     | -23.31      | 61.86          | 74.00          | 12.14       | Horizontal |
| 2         | 2388.65         | 65.15          | 27.16     | -23.31      | 68.99          | 74.00          | 5.01        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 341 of 422

802.11ax HE20 MIMO\_Channel 01

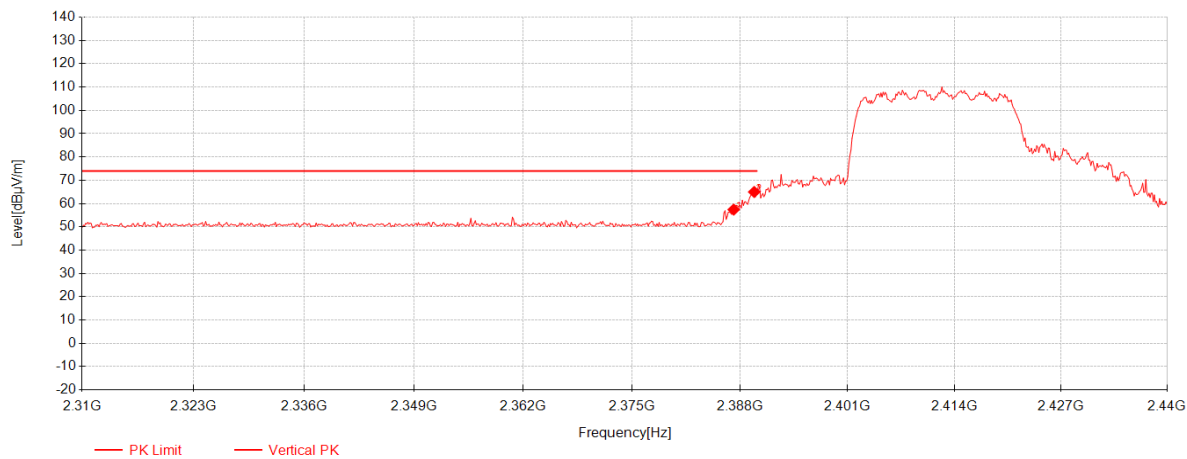

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2387.22         | 53.58          | 27.15     | -23.31      | 57.42          | 74.00          | 16.58       | Vertical |
| 2         | 2389.69         | 61.12          | 27.16     | -23.31      | 64.96          | 74.00          | 9.04        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 342 of 422

### 802.11ax HE20 MIMO\_Channel 01

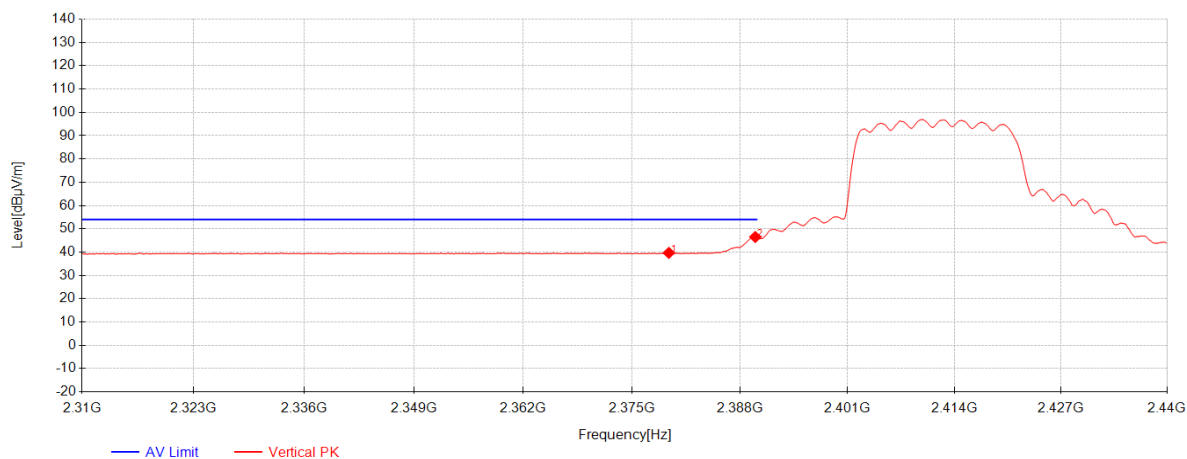


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2379.42         | 35.86          | 27.13     | -23.31      | 39.69          | 54.00          | 14.31       | Vertical |
| 2         | 2389.82         | 42.66          | 27.16     | -23.31      | 46.50          | 54.00          | 7.50        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 343 of 422

802.11ax HE20 MIMO\_Channel 11

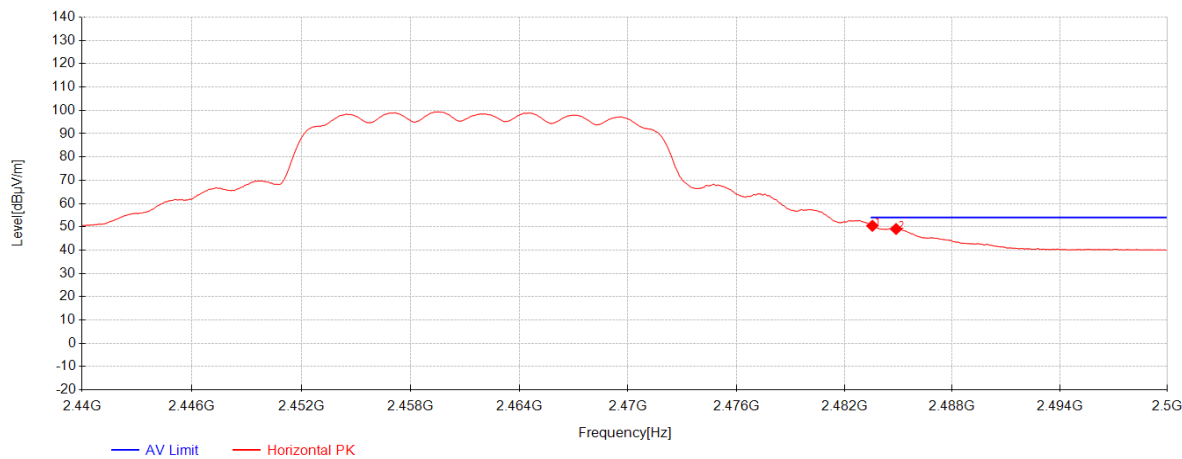

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.56         | 46.36          | 27.36     | -23.27      | 50.45          | 54.00          | 3.55        | Horizontal |
| 2         | 2484.88         | 44.98          | 27.37     | -23.27      | 49.08          | 54.00          | 4.92        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 344 of 422

### 802.11ax HE20 MIMO\_Channel 11

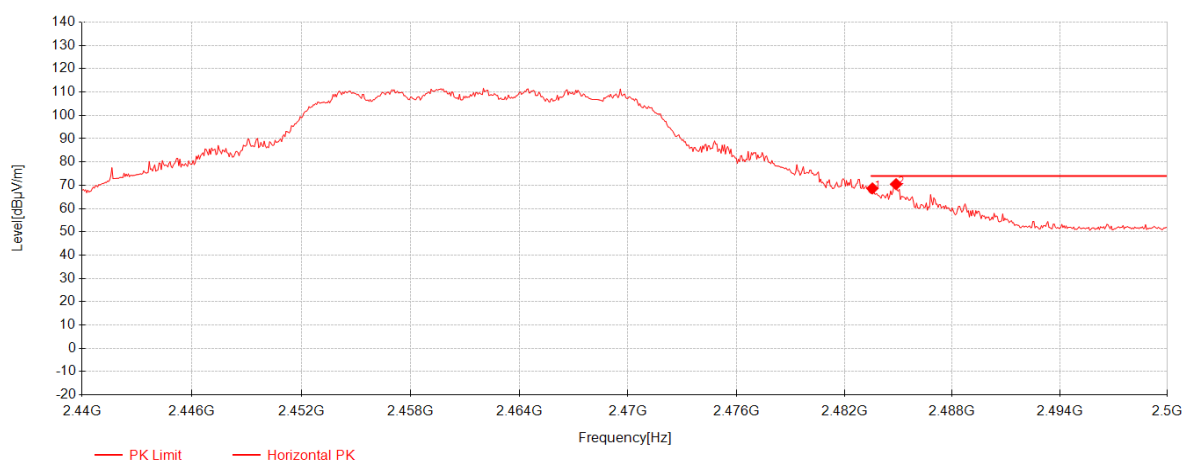

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.56         | 64.54          | 27.36     | -23.27      | 68.63          | 74.00          | 5.37        | Horizontal |
| 2         | 2484.88         | 66.36          | 27.37     | -23.27      | 70.46          | 74.00          | 3.54        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 345 of 422

### 802.11ax HE20 MIMO\_Channel 11

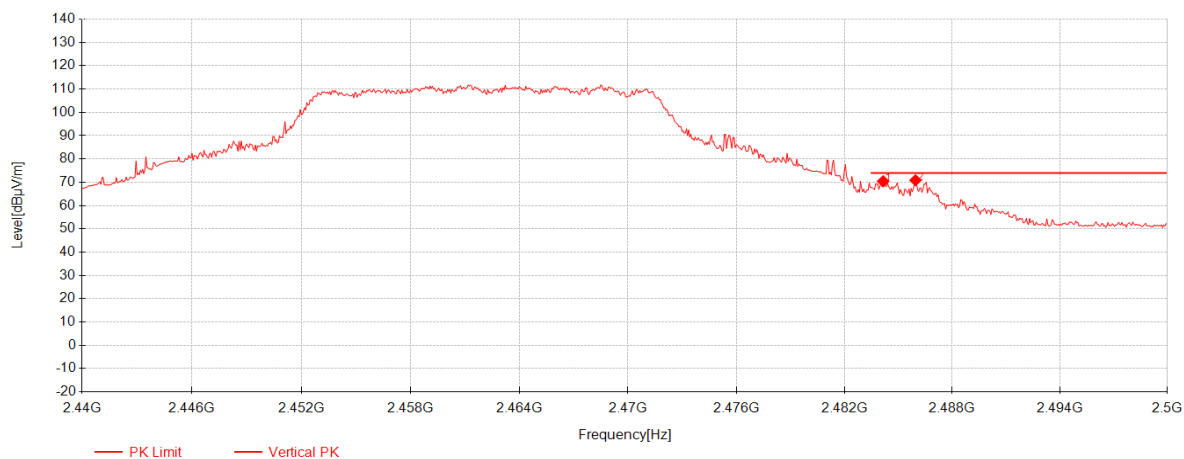


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.16         | 66.34          | 27.37     | -23.27      | 70.44          | 74.00          | 3.56        | Vertical |
| 2         | 2485.96         | 66.75          | 27.37     | -23.27      | 70.85          | 74.00          | 3.15        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 346 of 422

802.11ax HE20 MIMO\_Channel 11

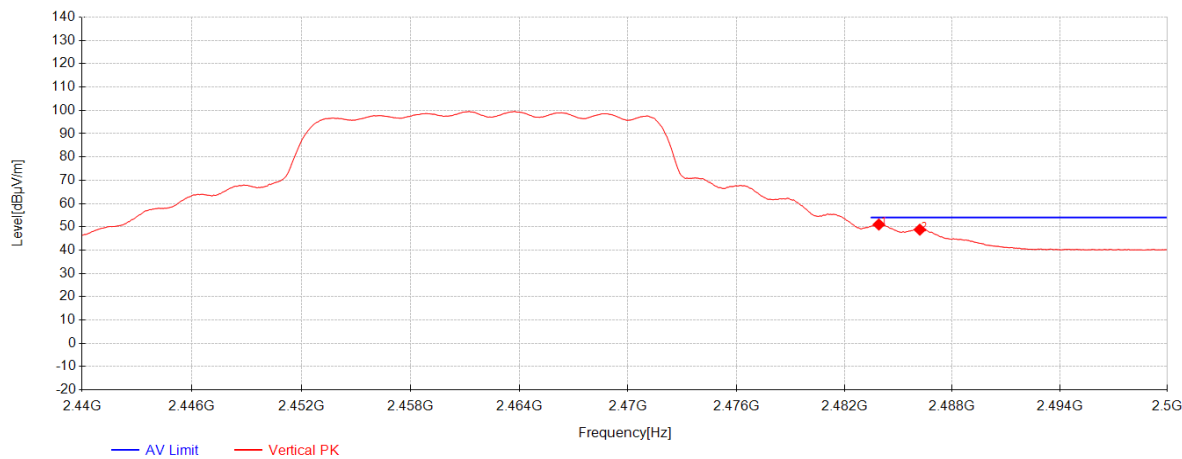


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.92         | 46.90          | 27.36     | -23.27      | 50.99          | 54.00          | 3.01        | Vertical |
| 2         | 2486.2          | 44.69          | 27.37     | -23.27      | 48.79          | 54.00          | 5.21        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 347 of 422

802.11ax20 MIMO\_Channel 02

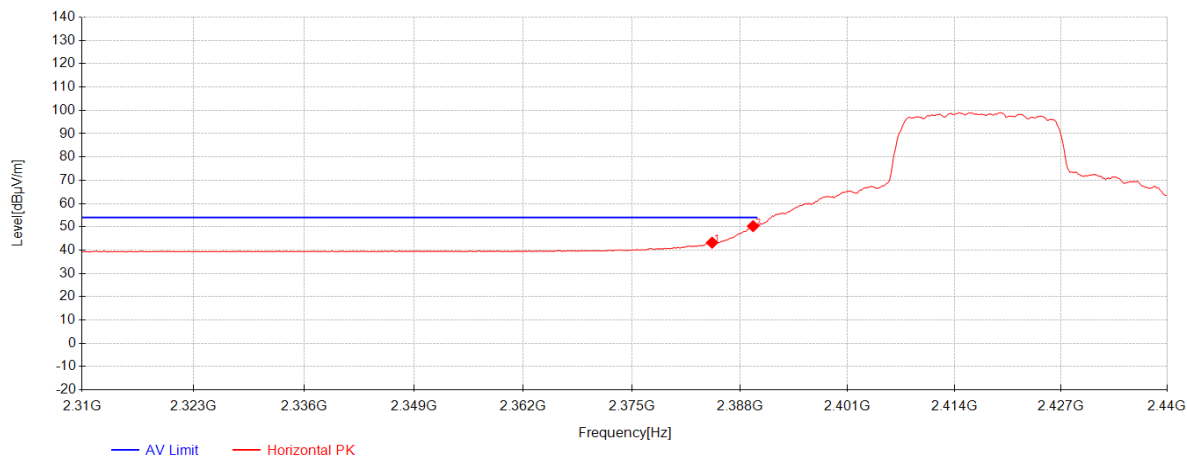


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2384.62         | 39.38          | 27.15     | -23.31      | 43.22          | 54.00          | 10.78       | Horizontal |
| 2         | 2389.56         | 46.46          | 27.16     | -23.31      | 50.30          | 54.00          | 3.70        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 348 of 422

802.11ax20 MIMO\_Channel 02

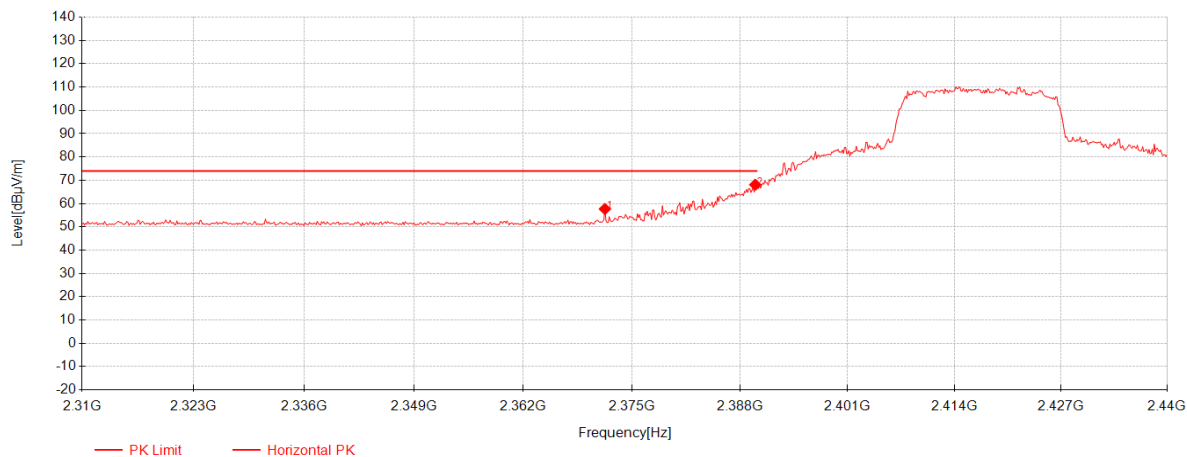


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2371.75         | 53.83          | 27.12     | -23.30      | 57.65          | 74.00          | 16.35       | Horizontal |
| 2         | 2389.82         | 64.24          | 27.16     | -23.31      | 68.08          | 74.00          | 5.92        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 349 of 422

802.11ax20 MIMO\_Channel 02

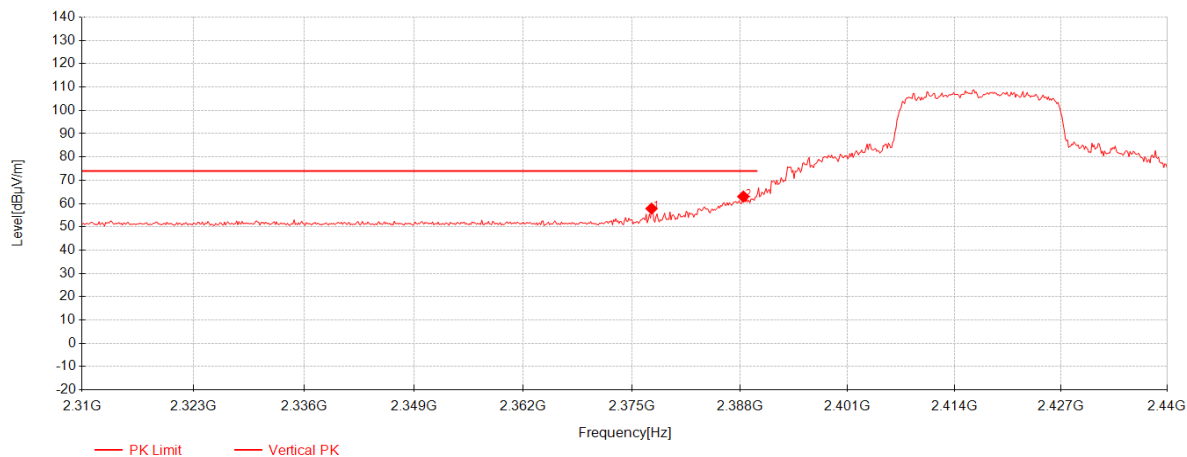

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2377.34         | 54.02          | 27.13     | -23.30      | 57.85          | 74.00          | 16.15       | Vertical |
| 2         | 2388.39         | 59.17          | 27.15     | -23.31      | 63.01          | 74.00          | 10.99       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 350 of 422

### 802.11ax20 MIMO\_Channel 02

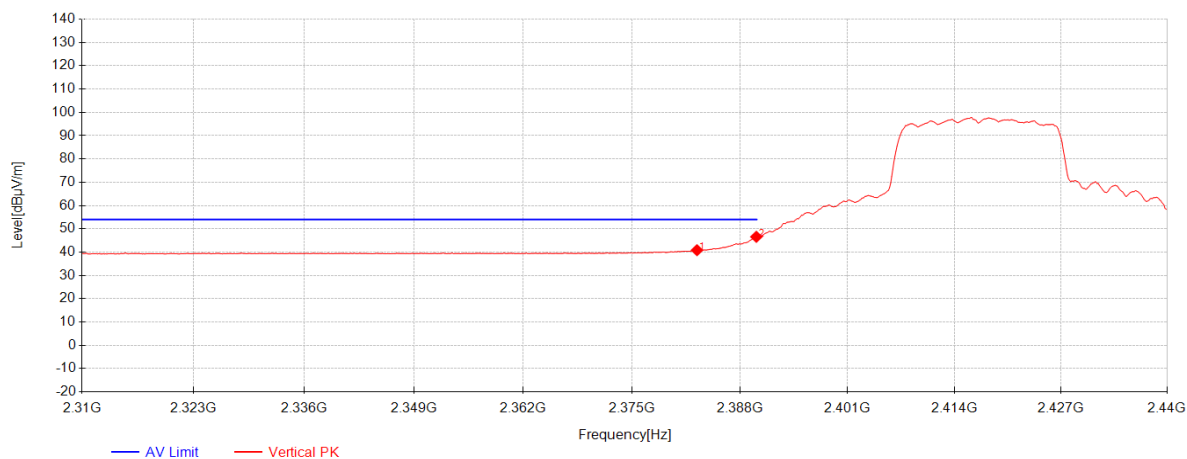


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2382.8          | 37.01          | 27.14     | -23.31      | 40.84          | 54.00          | 13.16       | Vertical |
| 2         | 2389.95         | 42.74          | 27.16     | -23.31      | 46.58          | 54.00          | 7.42        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 351 of 422

802.11ax20 MIMO\_Channel 03

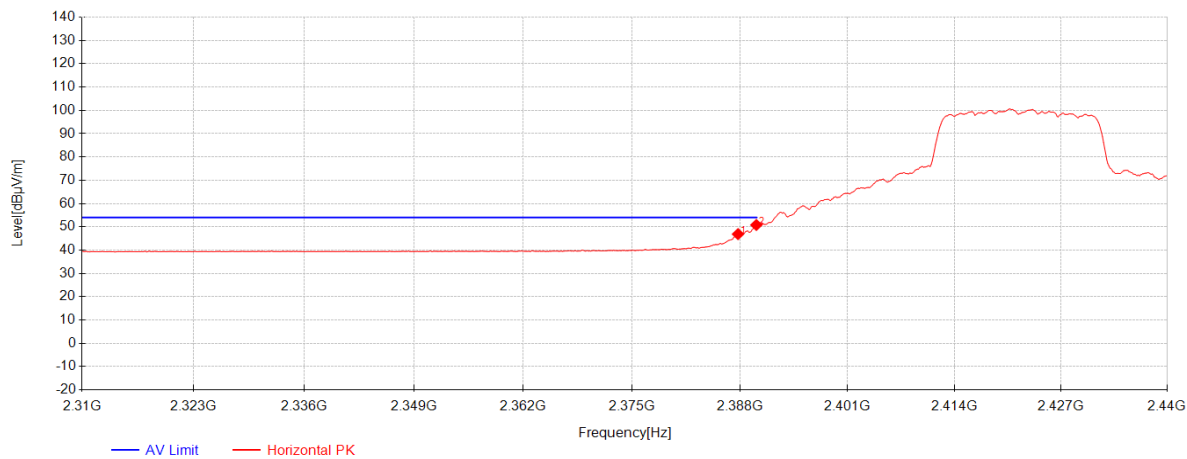

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2387.74         | 43.05          | 27.15     | -23.31      | 46.89          | 54.00          | 7.11        | Horizontal |
| 2         | 2389.95         | 46.95          | 27.16     | -23.31      | 50.79          | 54.00          | 3.21        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 352 of 422

### 802.11ax20 MIMO\_Channel 03

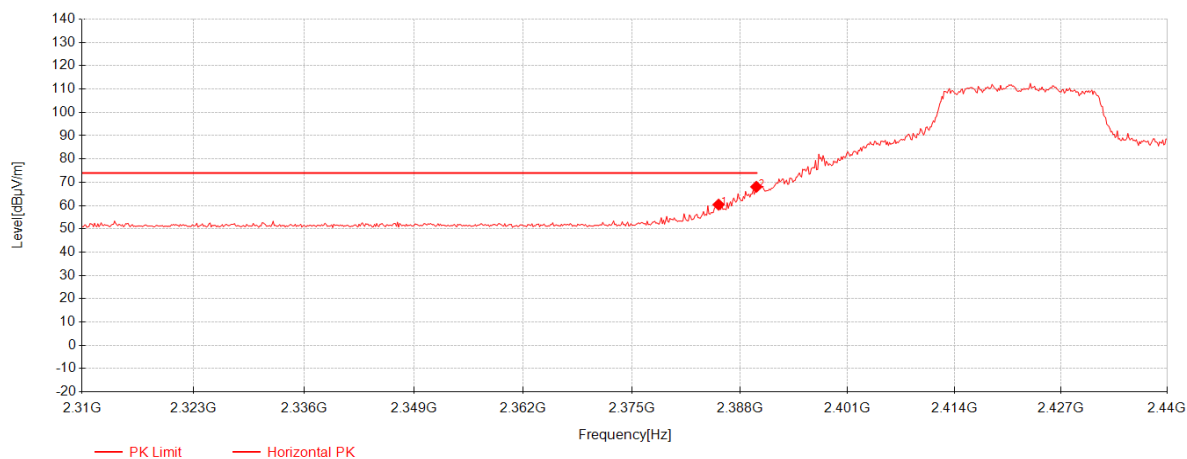

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2385.4          | 56.55          | 27.15     | -23.31      | 60.39          | 74.00          | 13.61       | Horizontal |
| 2         | 2389.95         | 64.19          | 27.16     | -23.31      | 68.03          | 74.00          | 5.97        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 353 of 422

### 802.11ax20 MIMO\_Channel 03

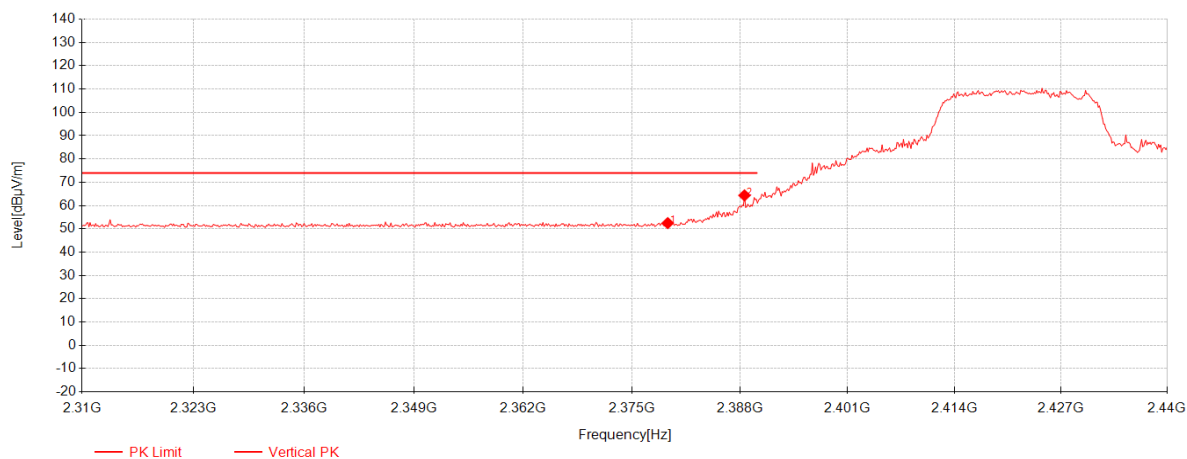


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2379.29         | 48.64          | 27.13     | -23.31      | 52.47          | 74.00          | 21.53       | Vertical |
| 2         | 2388.52         | 60.52          | 27.15     | -23.31      | 64.36          | 74.00          | 9.64        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 354 of 422

802.11ax20 MIMO\_Channel 03

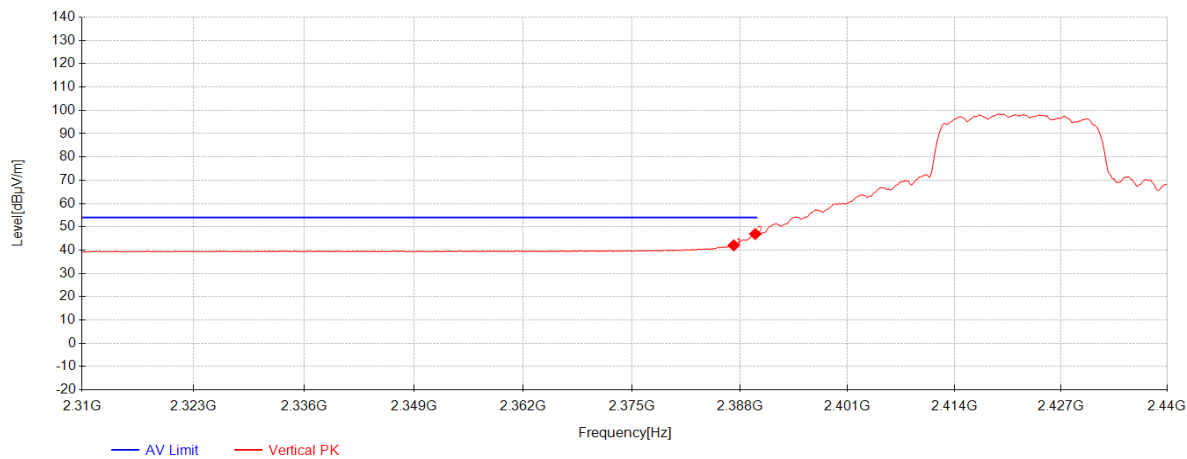

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2387.22         | 38.20          | 27.15     | -23.31      | 42.04          | 54.00          | 11.96       | Vertical |
| 2         | 2389.82         | 43.08          | 27.16     | -23.31      | 46.92          | 54.00          | 7.08        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 355 of 422

### 802.11ax20 MIMO\_Channel 04

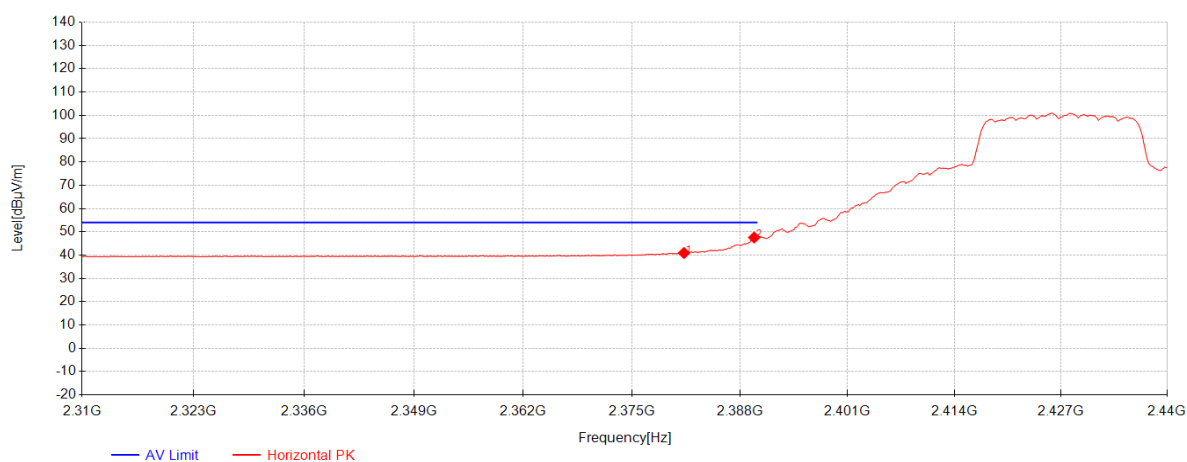


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2381.24         | 37.10          | 27.14     | -23.31      | 40.93          | 54.00          | 13.07       | Horizontal |
| 2         | 2389.69         | 43.72          | 27.16     | -23.31      | 47.56          | 54.00          | 6.44        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 356 of 422

802.11ax20 MIMO\_Channel 04

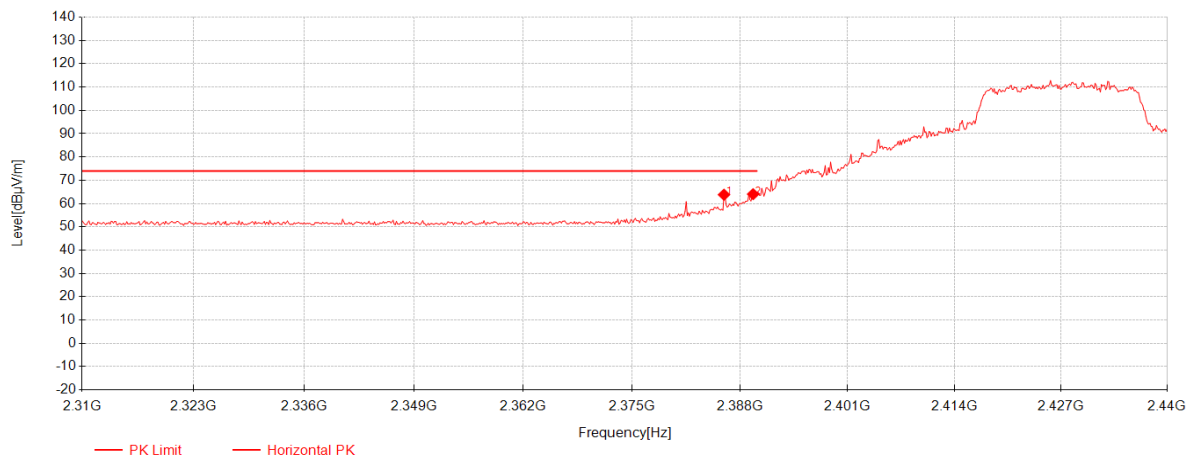

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2386.05         | 59.95          | 27.15     | -23.31      | 63.79          | 74.00          | 10.21       | Horizontal |
| 2         | 2389.56         | 60.20          | 27.16     | -23.31      | 64.04          | 74.00          | 9.96        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 357 of 422

### 802.11ax20 MIMO\_Channel 04

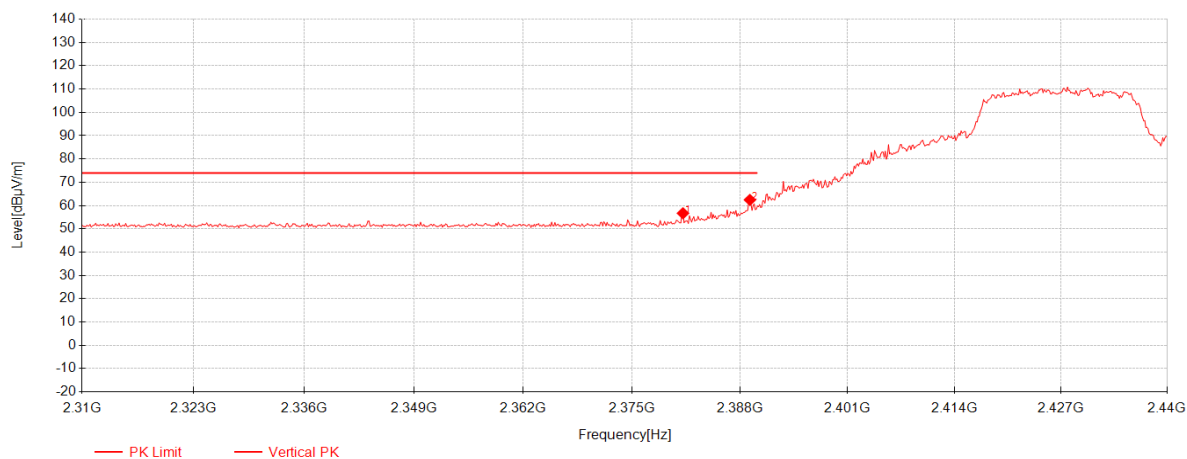


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2381.11         | 52.86          | 27.14     | -23.31      | 56.69          | 74.00          | 17.31       | Vertical |
| 2         | 2389.17         | 58.59          | 27.16     | -23.31      | 62.43          | 74.00          | 11.57       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 358 of 422

802.11ax20 MIMO\_Channel 04

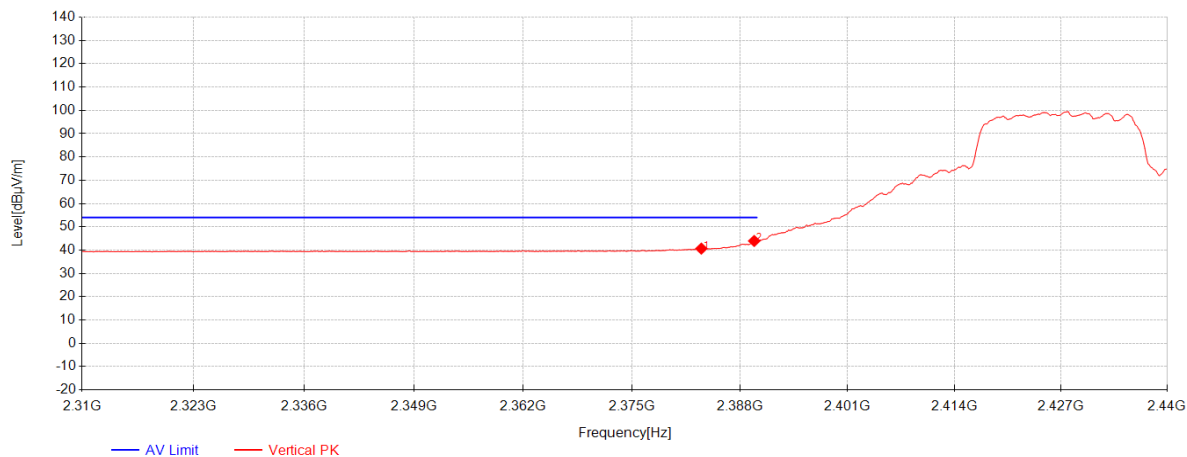


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2383.32         | 36.82          | 27.14     | -23.31      | 40.65          | 54.00          | 13.35       | Vertical |
| 2         | 2389.69         | 40.10          | 27.16     | -23.31      | 43.94          | 54.00          | 10.06       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 359 of 422

802.11ax20 MIMO\_Channel 10

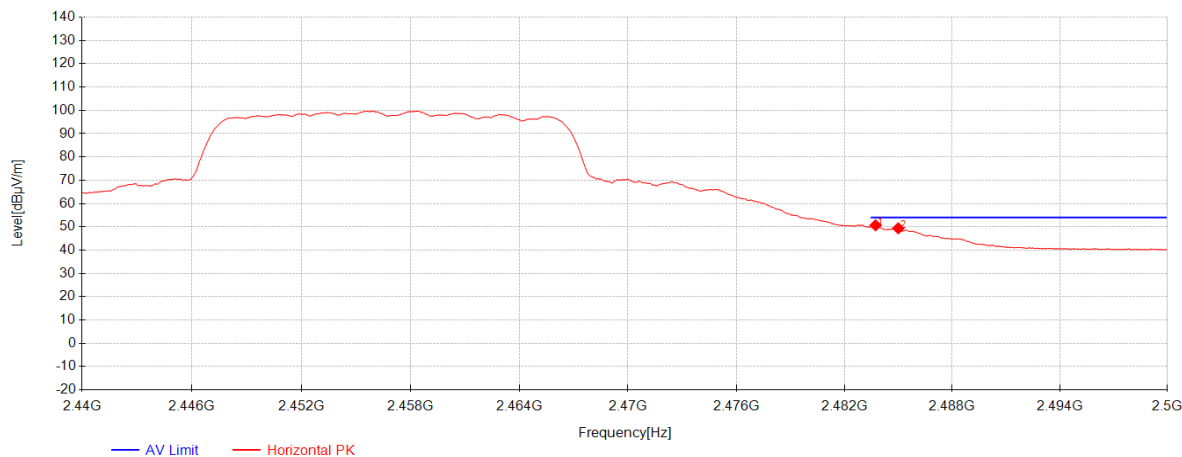


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.74         | 46.58          | 27.36     | -23.27      | 50.67          | 54.00          | 3.33        | Horizontal |
| 2         | 2485            | 45.27          | 27.37     | -23.27      | 49.37          | 54.00          | 4.63        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 360 of 422

802.11ax20 MIMO\_Channel 10

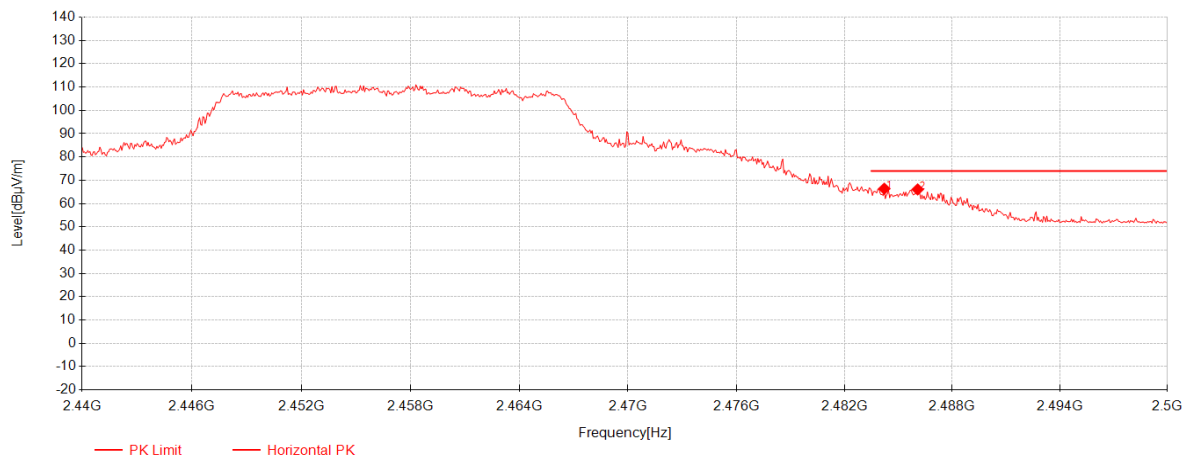

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.22         | 62.27          | 27.37     | -23.27      | 66.37          | 74.00          | 7.63        | Horizontal |
| 2         | 2486.08         | 61.96          | 27.37     | -23.27      | 66.06          | 74.00          | 7.94        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 361 of 422

### 802.11ax20 MIMO\_Channel 10

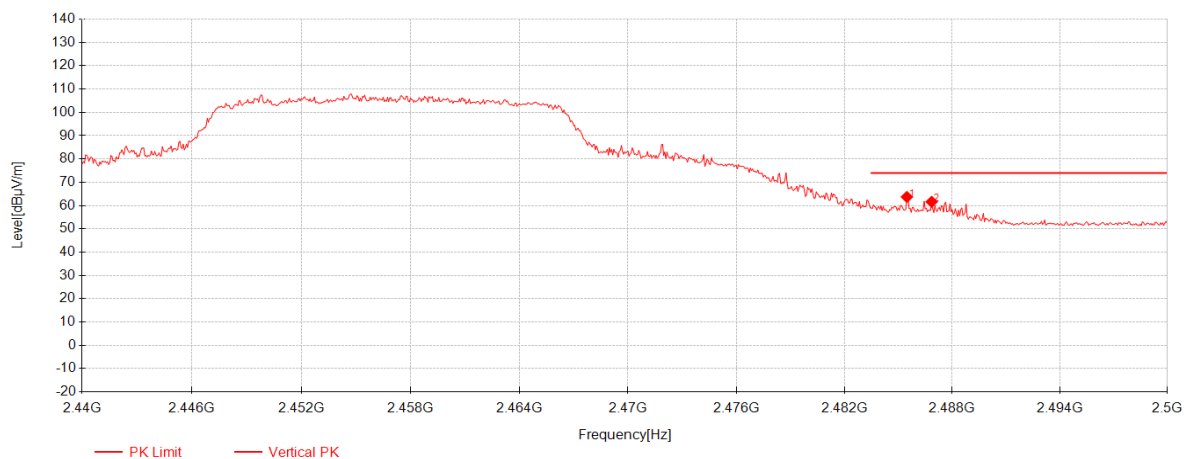


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2485.48         | 59.59          | 27.37     | -23.27      | 63.69          | 74.00          | 10.31       | Vertical |
| 2         | 2486.86         | 57.52          | 27.37     | -23.27      | 61.62          | 74.00          | 12.38       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 362 of 422

802.11ax20 MIMO\_Channel 10

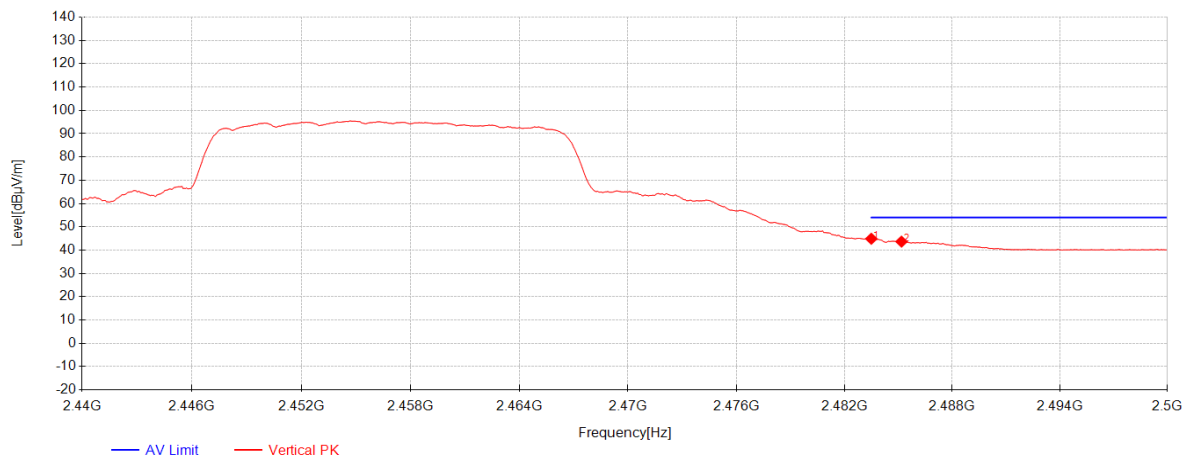


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.5          | 40.79          | 27.36     | -23.27      | 44.88          | 54.00          | 9.12        | Vertical |
| 2         | 2485.18         | 39.55          | 27.37     | -23.27      | 43.65          | 54.00          | 10.35       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 363 of 422

802.11ax20 MIMO\_Channel 09

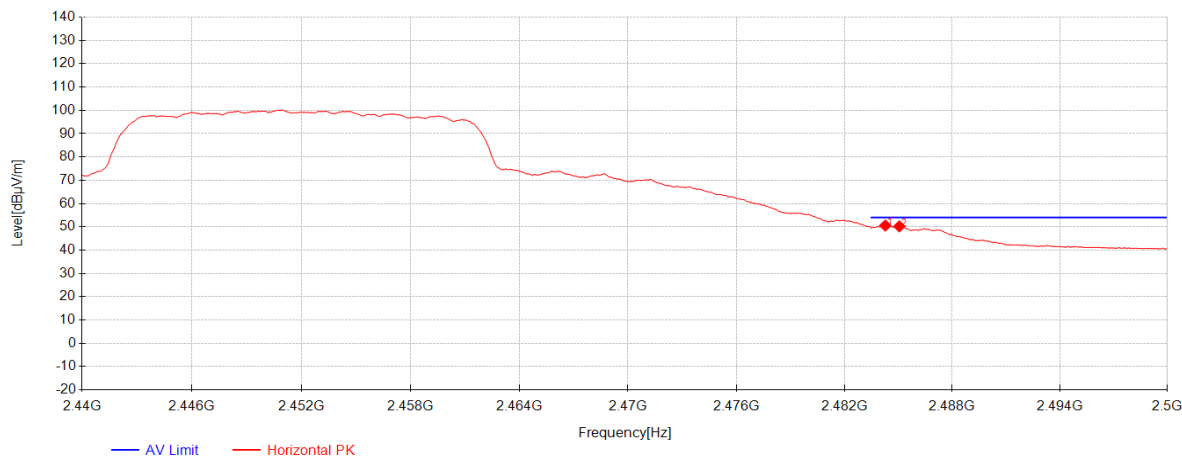


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.28         | 46.45          | 27.37     | -23.27      | 50.55          | 54.00          | 3.45        | Horizontal |
| 2         | 2485.06         | 46.12          | 27.37     | -23.27      | 50.22          | 54.00          | 3.78        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 364 of 422

802.11ax20 MIMO\_Channel 09

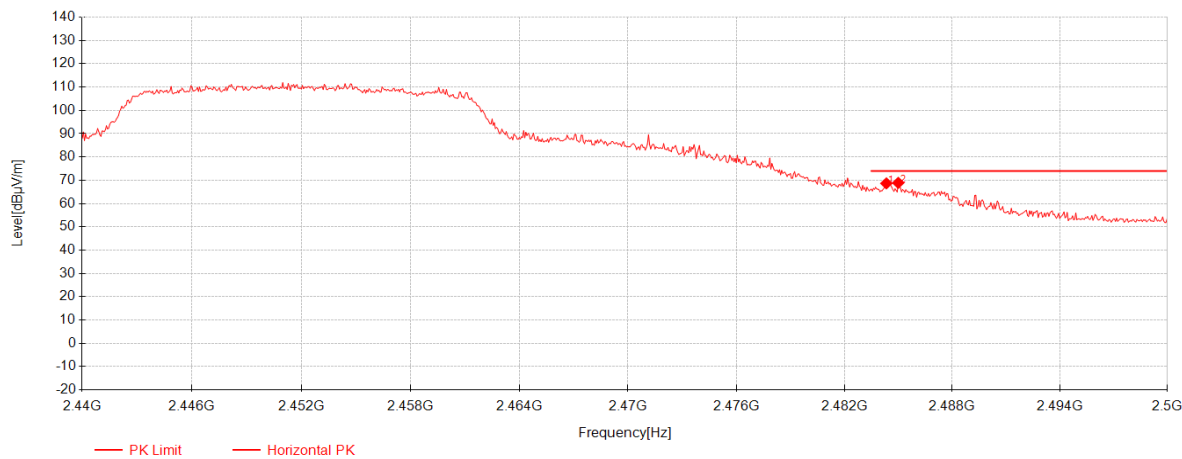


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.34         | 64.56          | 27.37     | -23.27      | 68.66          | 74.00          | 5.34        | Horizontal |
| 2         | 2485            | 64.78          | 27.37     | -23.27      | 68.88          | 74.00          | 5.12        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 365 of 422

802.11ax20 MIMO\_Channel 09

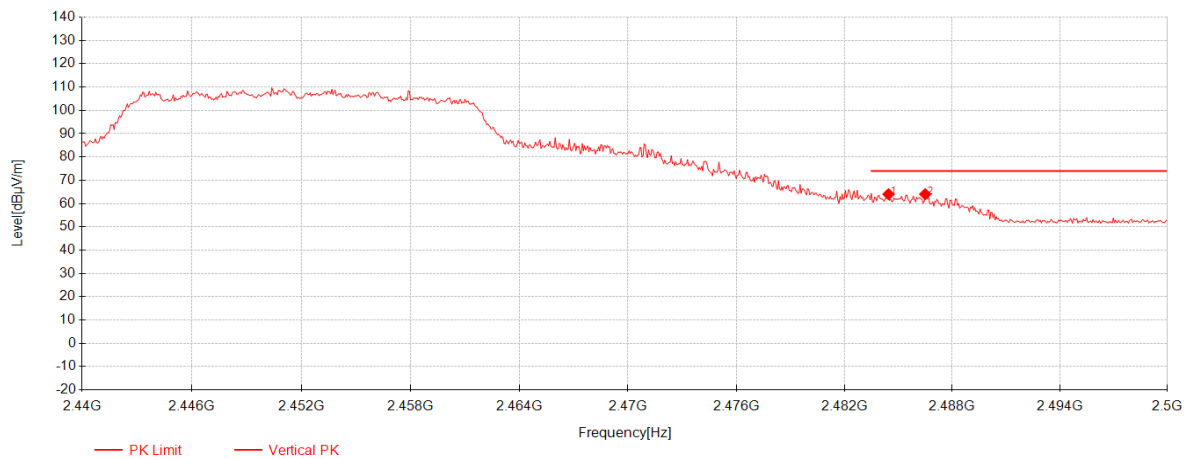


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.46         | 59.91          | 27.37     | -23.27      | 64.01          | 74.00          | 9.99        | Vertical |
| 2         | 2486.5          | 59.93          | 27.37     | -23.27      | 64.03          | 74.00          | 9.97        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 366 of 422

802.11ax20 MIMO\_Channel 09

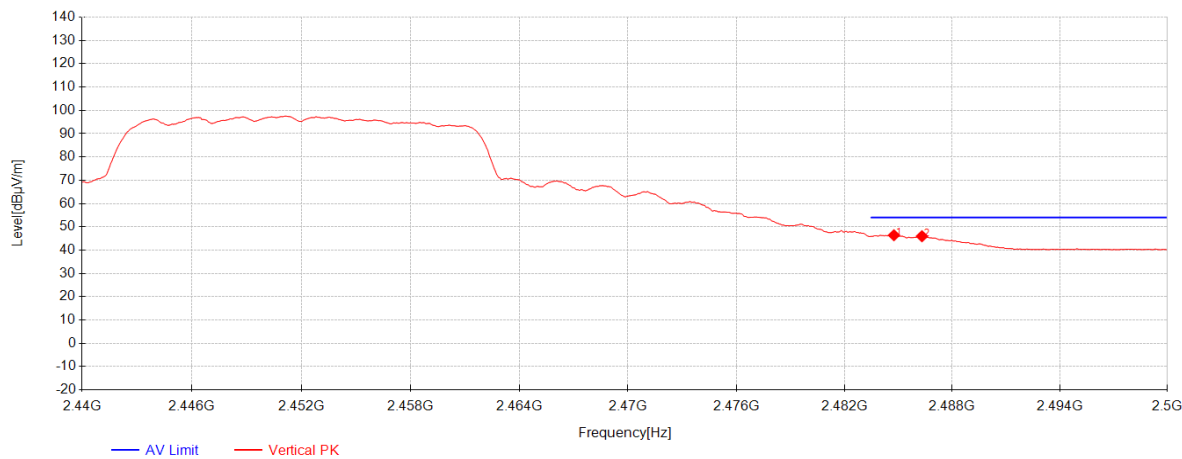


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.76         | 42.30          | 27.37     | -23.27      | 46.40          | 54.00          | 7.60        | Vertical |
| 2         | 2486.32         | 41.86          | 27.37     | -23.27      | 45.96          | 54.00          | 8.04        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 367 of 422

802.11ax20 MIMO\_Channel 08

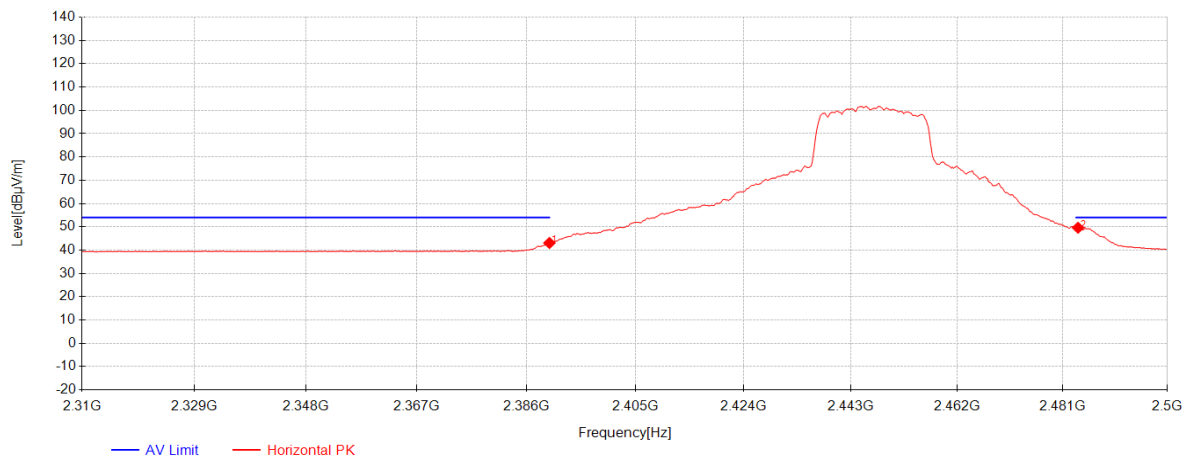

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.99         | 39.25          | 27.16     | -23.31      | 43.09          | 54.00          | 10.91       | Horizontal |
| 2         | 2483.85         | 45.52          | 27.36     | -23.27      | 49.61          | 54.00          | 4.39        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 368 of 422

### 802.11ax20 MIMO\_Channel 08

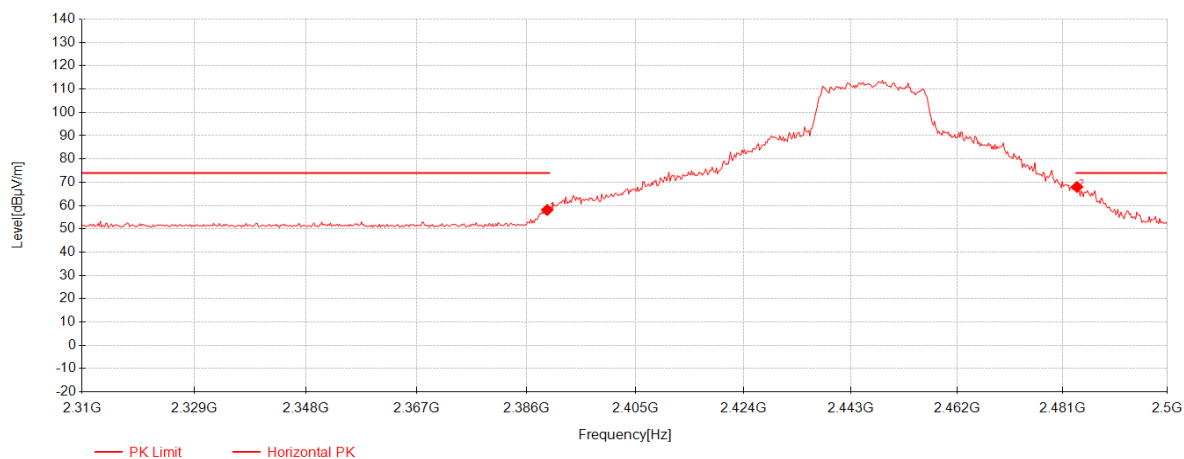


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.61         | 54.28          | 27.16     | -23.31      | 58.12          | 74.00          | 15.88       | Horizontal |
| 2         | 2483.66         | 63.92          | 27.36     | -23.27      | 68.01          | 74.00          | 5.99        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 369 of 422

802.11ax20 MIMO\_Channel 08

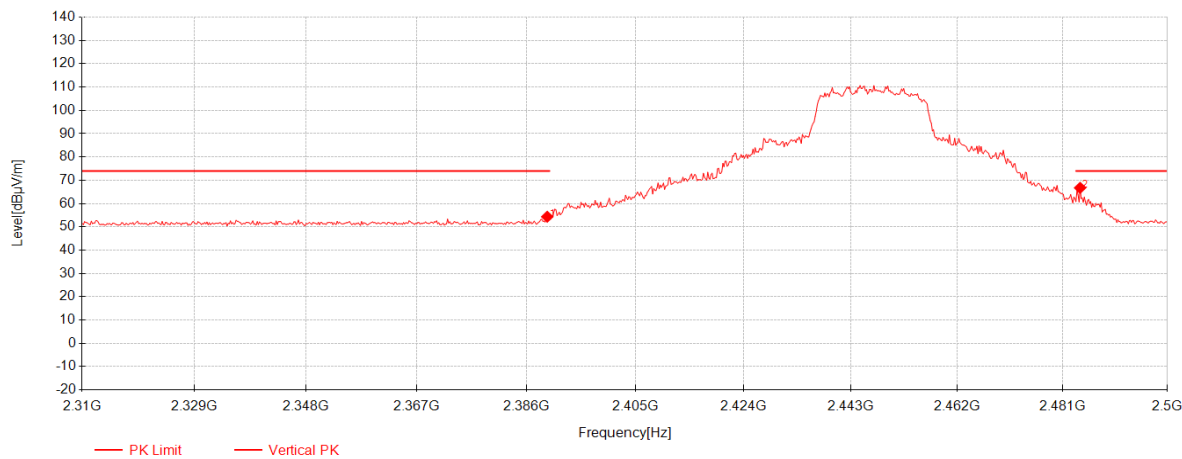

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.61         | 50.50          | 27.16     | -23.31      | 54.34          | 74.00          | 19.66       | Vertical |
| 2         | 2484.23         | 62.65          | 27.37     | -23.27      | 66.75          | 74.00          | 7.25        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 370 of 422

### 802.11ax20 MIMO\_Channel 08

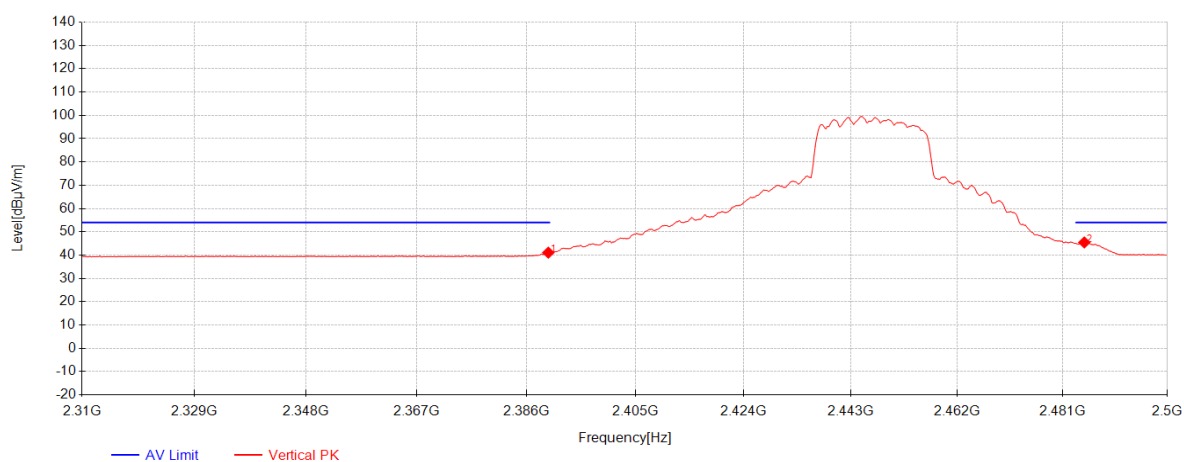

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.8          | 37.24          | 27.16     | -23.31      | 41.08          | 54.00          | 12.92       | Vertical |
| 2         | 2484.99         | 41.35          | 27.37     | -23.27      | 45.45          | 54.00          | 8.55        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 371 of 422

### 802.11ax HE40 MIMO\_Channel 03

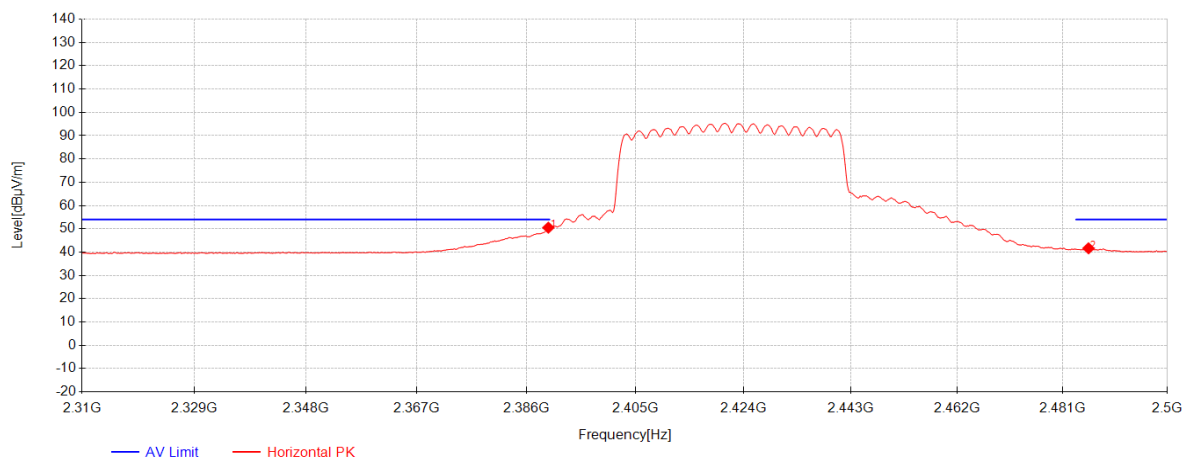


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 46.67          | 27.16     | -23.31      | 50.51          | 54.00          | 3.49        | Horizontal |
| 2         | 2485.75         | 37.55          | 27.37     | -23.27      | 41.65          | 54.00          | 12.35       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 372 of 422

802.11ax HE40 MIMO\_Channel 03

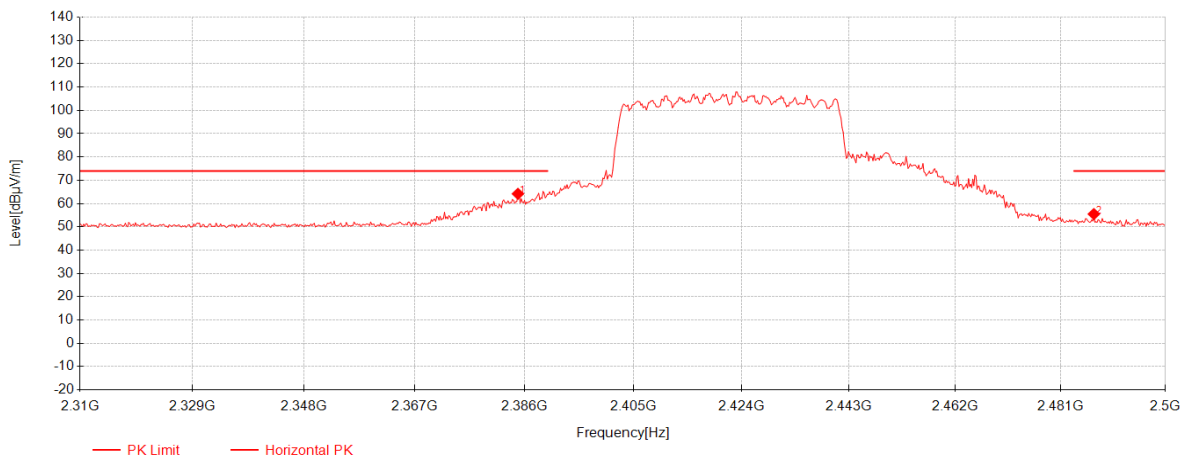

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2384.86         | 60.33          | 27.15     | -23.31      | 64.17          | 74.00          | 9.83        | Horizontal |
| 2         | 2487.08         | 51.39          | 27.37     | -23.27      | 55.49          | 74.00          | 18.51       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 373 of 422

### 802.11ax HE40 MIMO\_Channel 03

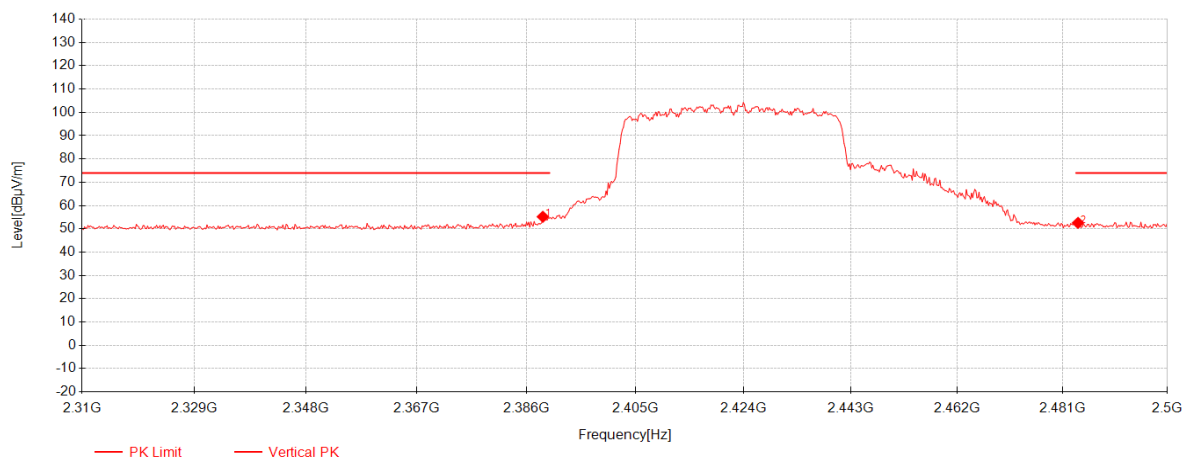


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2388.85         | 51.35          | 27.16     | -23.31      | 55.19          | 74.00          | 18.81       | Vertical |
| 2         | 2483.85         | 48.48          | 27.36     | -23.27      | 52.57          | 74.00          | 21.43       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 374 of 422

802.11ax HE40 MIMO\_Channel 03

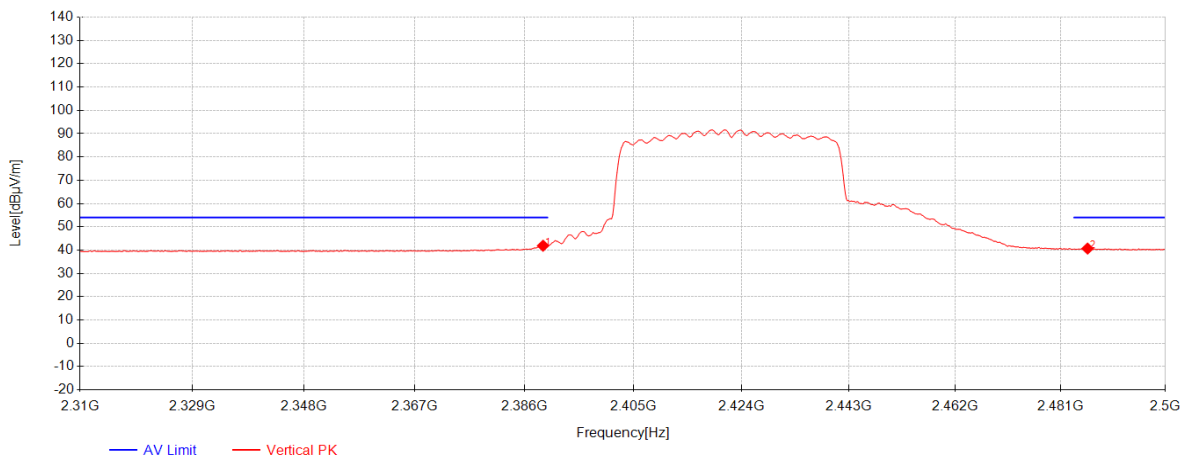


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.23         | 38.05          | 27.16     | -23.31      | 41.89          | 54.00          | 12.11       | Vertical |
| 2         | 2485.94         | 36.58          | 27.37     | -23.27      | 40.68          | 54.00          | 13.32       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 375 of 422

802.11ax HE40 MIMO\_Channel 06

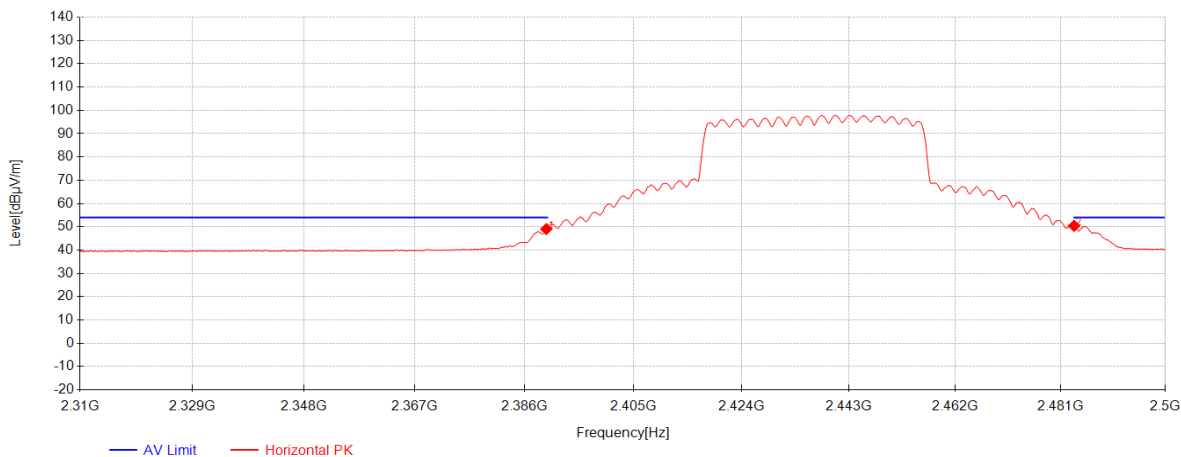


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 45.21          | 27.16     | -23.31      | 49.05          | 54.00          | 4.95        | Horizontal |
| 2         | 2483.5          | 46.34          | 27.36     | -23.27      | 50.43          | 54.00          | 3.57        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 376 of 422

802.11ax HE40 MIMO\_Channel 06

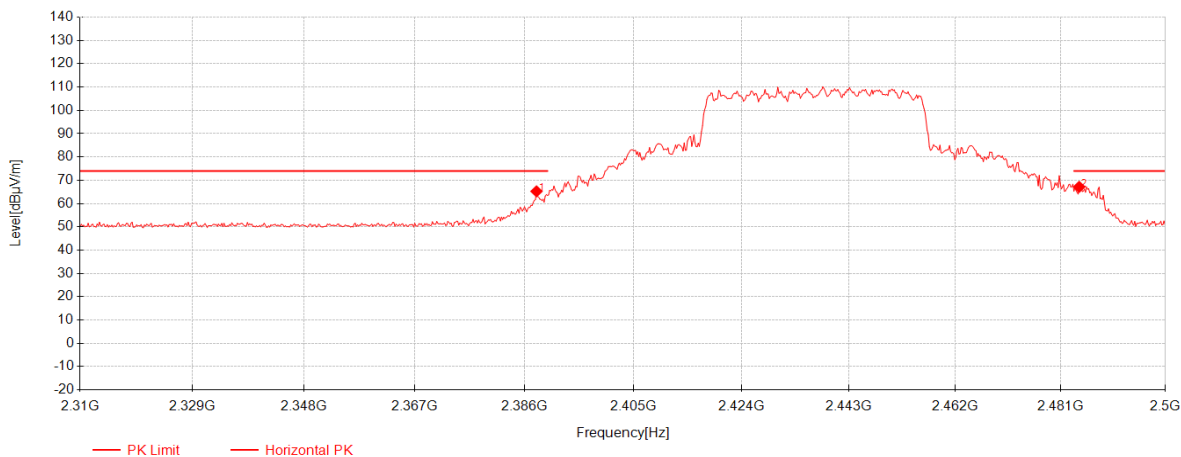

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.09         | 61.41          | 27.15     | -23.31      | 65.25          | 74.00          | 8.75        | Horizontal |
| 2         | 2484.42         | 63.05          | 27.37     | -23.27      | 67.15          | 74.00          | 6.85        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 377 of 422

### 802.11ax HE40 MIMO\_Channel 06

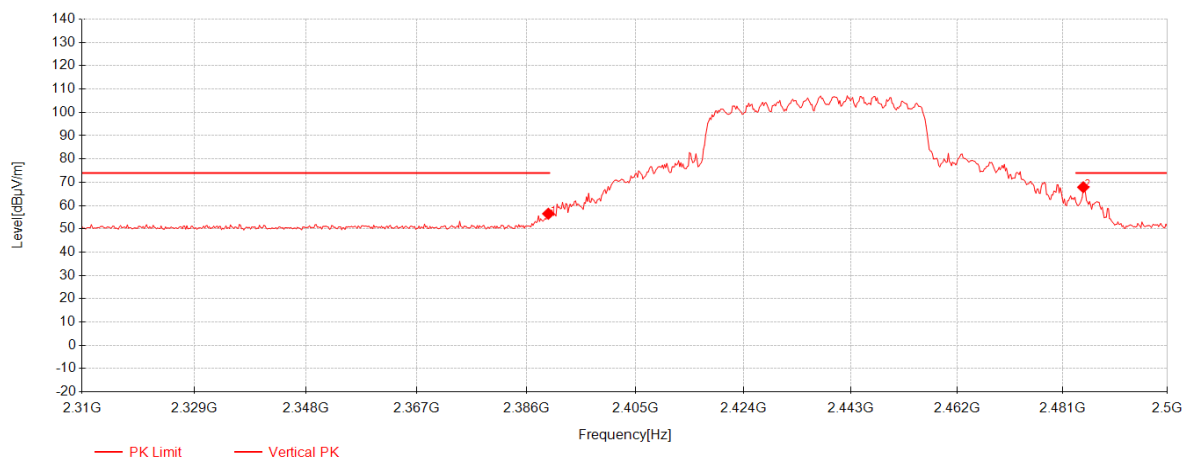


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.8          | 52.64          | 27.16     | -23.31      | 56.48          | 74.00          | 17.52       | Vertical |
| 2         | 2484.8          | 63.77          | 27.37     | -23.27      | 67.87          | 74.00          | 6.13        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 378 of 422

802.11ax HE40 MIMO\_Channel 06

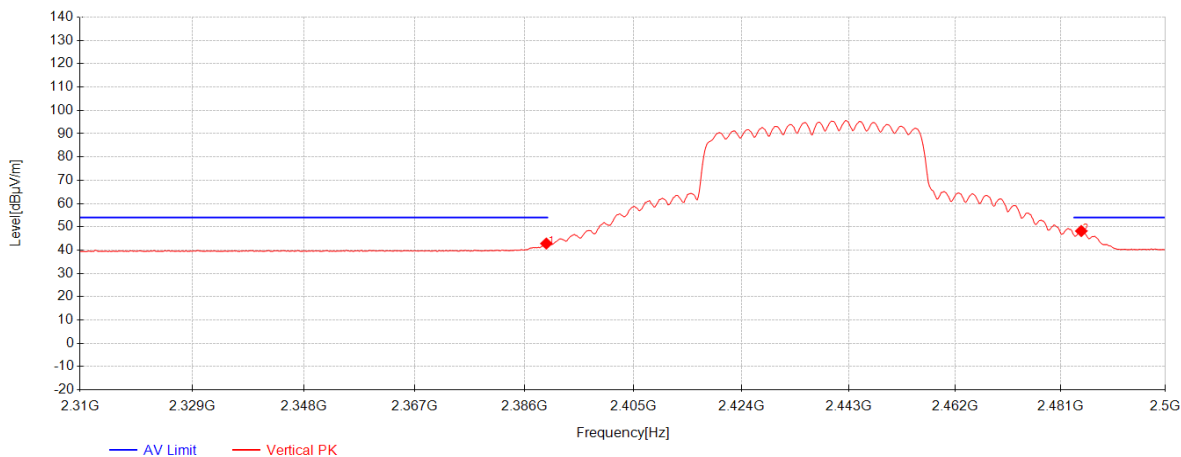

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.8          | 38.98          | 27.16     | -23.31      | 42.82          | 54.00          | 11.18       | Vertical |
| 2         | 2484.8          | 44.11          | 27.37     | -23.27      | 48.21          | 54.00          | 5.79        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 379 of 422

### 802.11ax HE40 MIMO\_Channel 09

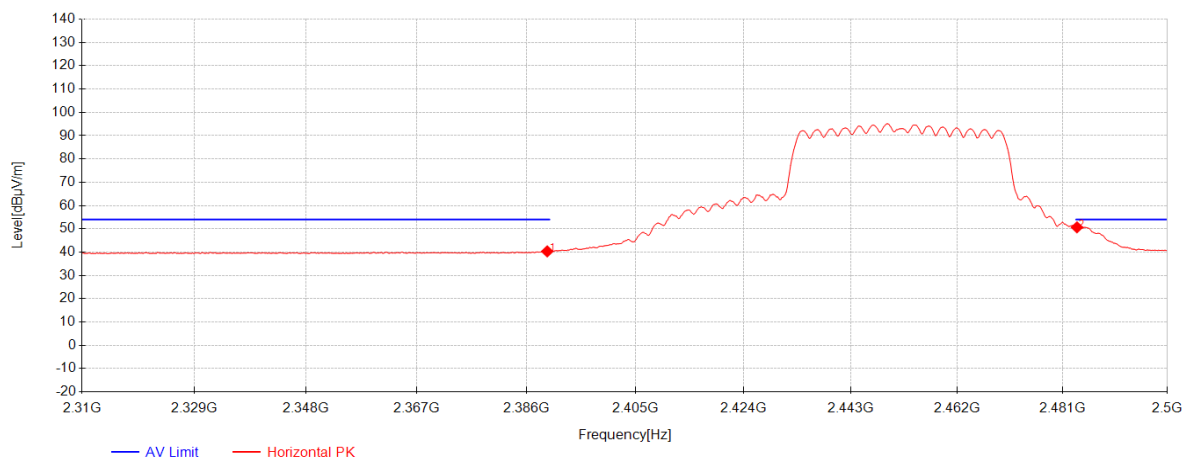


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.61         | 36.49          | 27.16     | -23.31      | 40.33          | 54.00          | 13.67       | Horizontal |
| 2         | 2483.66         | 46.56          | 27.36     | -23.27      | 50.65          | 54.00          | 3.35        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 380 of 422

802.11ax HE40 MIMO\_Channel 09

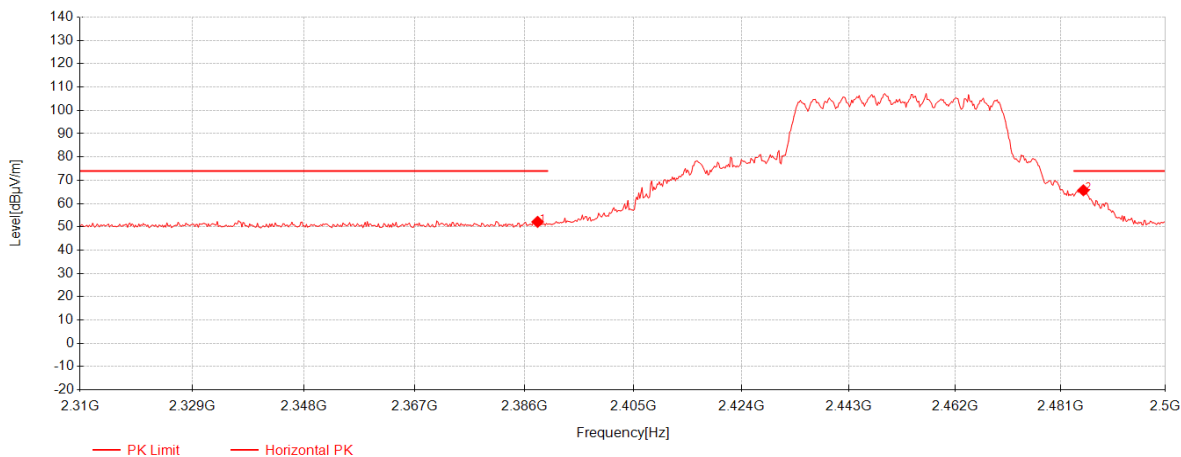


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.28         | 48.29          | 27.15     | -23.31      | 52.13          | 74.00          | 21.87       | Horizontal |
| 2         | 2485.18         | 61.60          | 27.37     | -23.27      | 65.70          | 74.00          | 8.30        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 381 of 422

802.11ax HE40 MIMO\_Channel 09

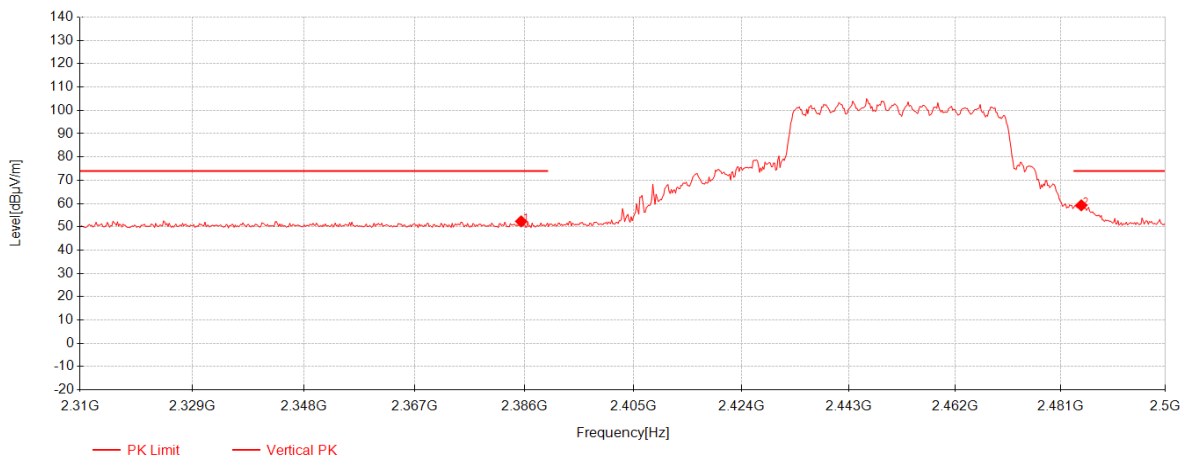

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2385.43         | 48.50          | 27.15     | -23.31      | 52.34          | 74.00          | 21.66       | Vertical |
| 2         | 2484.8          | 55.14          | 27.37     | -23.27      | 59.24          | 74.00          | 14.76       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 382 of 422

### 802.11ax HE40 MIMO\_Channel 09

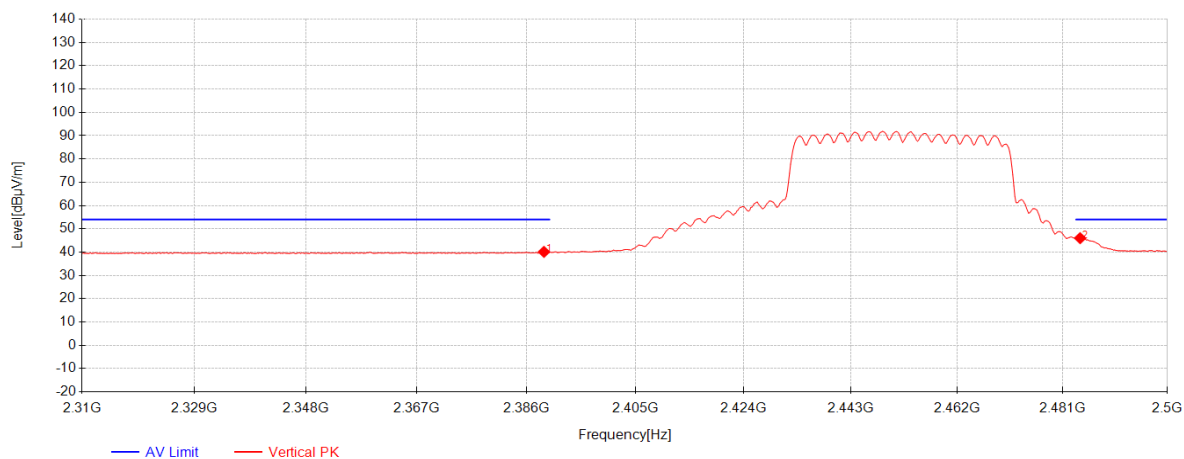

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.04         | 36.27          | 27.16     | -23.31      | 40.11          | 54.00          | 13.89       | Vertical |
| 2         | 2484.23         | 41.90          | 27.37     | -23.27      | 46.00          | 54.00          | 8.00        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 383 of 422

### 802.11ax40 MIMO\_Channel 04

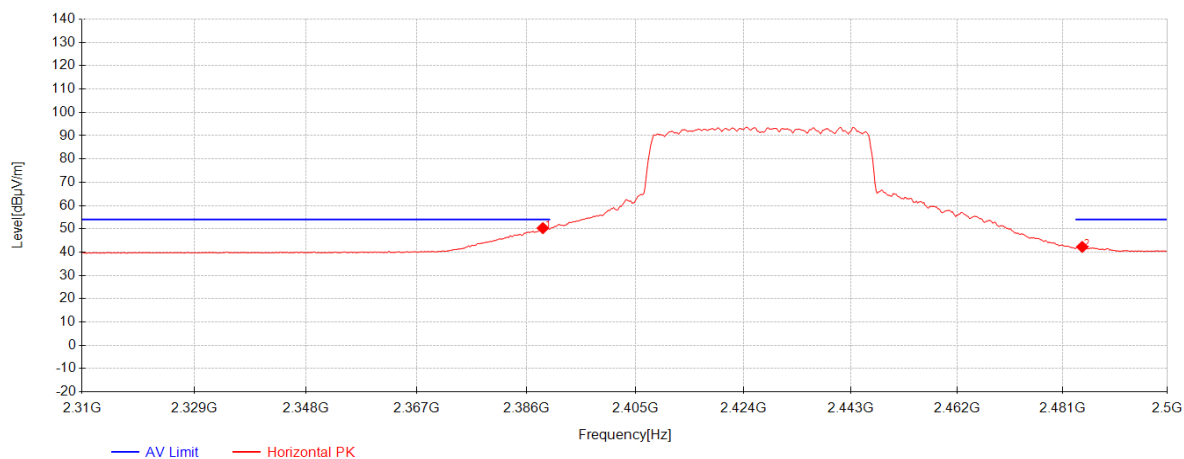


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.85         | 46.46          | 27.16     | -23.31      | 50.30          | 54.00          | 3.70        | Horizontal |
| 2         | 2484.61         | 38.15          | 27.37     | -23.27      | 42.25          | 54.00          | 11.75       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 384 of 422

802.11ax40 MIMO\_Channel 04

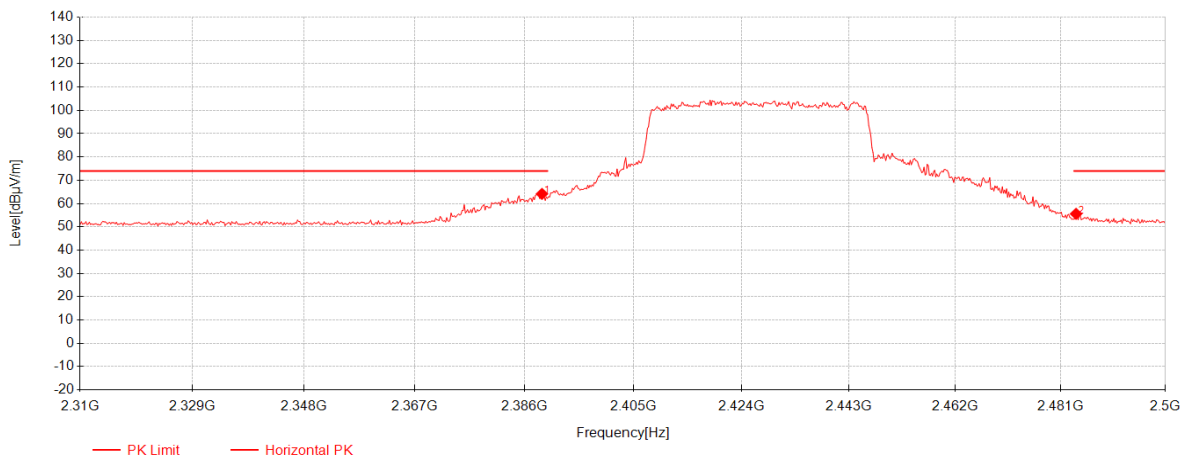


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.04         | 60.30          | 27.16     | -23.31      | 64.14          | 74.00          | 9.86        | Horizontal |
| 2         | 2483.85         | 51.49          | 27.36     | -23.27      | 55.58          | 74.00          | 18.42       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 385 of 422

802.11ax40 MIMO\_Channel 04

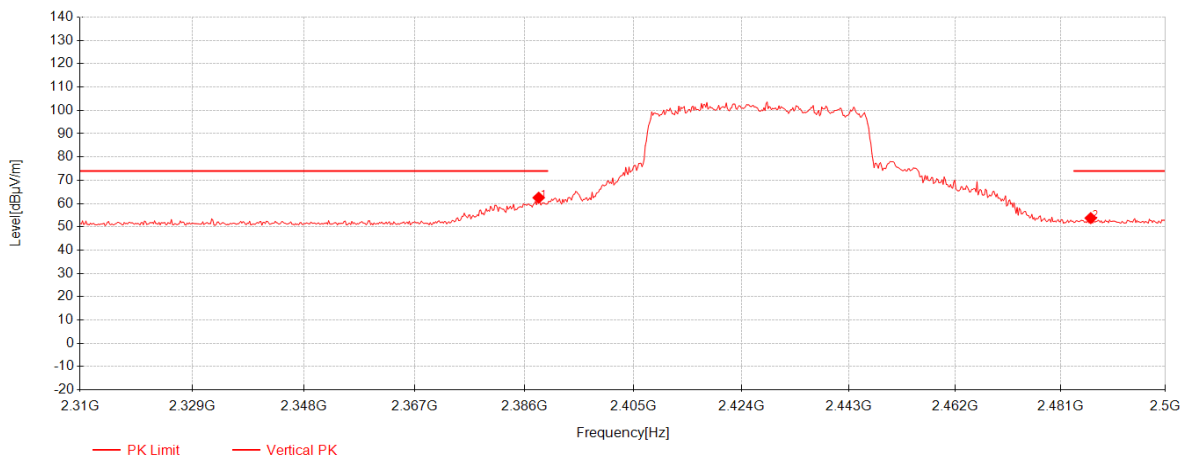


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2388.47         | 58.66          | 27.15     | -23.31      | 62.50          | 74.00          | 11.50       | Vertical |
| 2         | 2486.51         | 49.66          | 27.37     | -23.27      | 53.76          | 74.00          | 20.24       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 386 of 422

802.11ax40 MIMO\_Channel 04

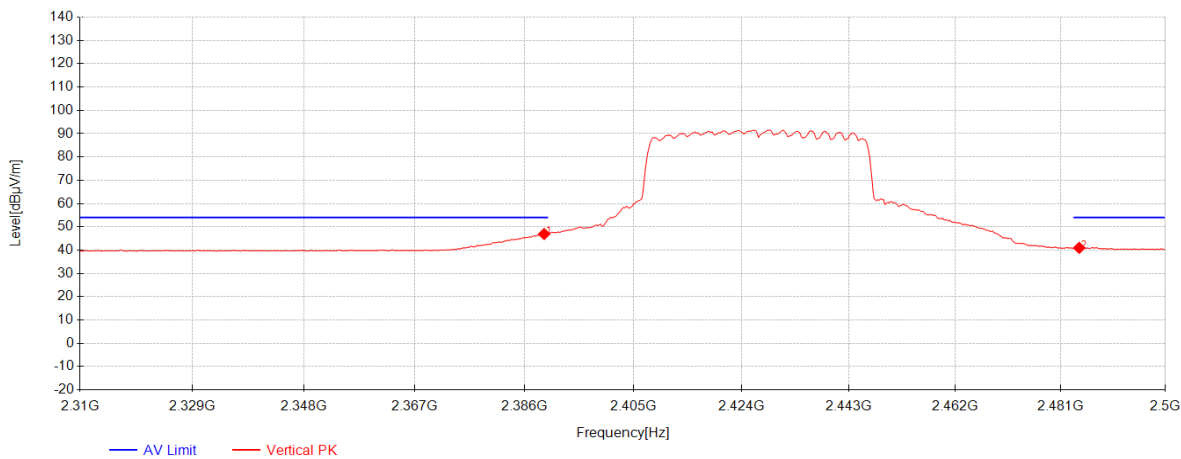

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.42         | 43.07          | 27.16     | -23.31      | 46.91          | 54.00          | 7.09        | Vertical |
| 2         | 2484.42         | 36.88          | 27.37     | -23.27      | 40.98          | 54.00          | 13.02       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 387 of 422

### 802.11ax40 MIMO\_Channel 05

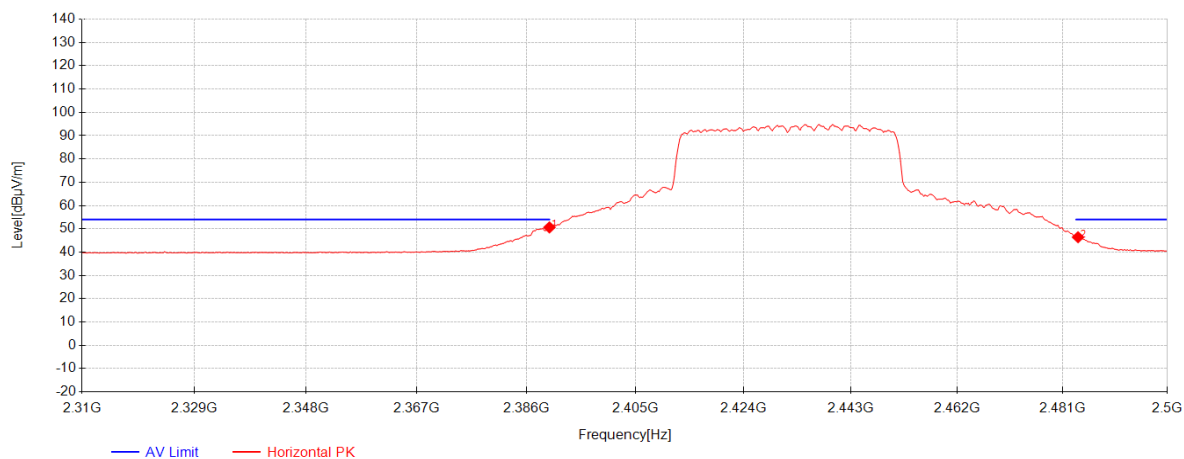


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.99         | 46.78          | 27.16     | -23.31      | 50.62          | 54.00          | 3.38        | Horizontal |
| 2         | 2483.85         | 42.31          | 27.36     | -23.27      | 46.40          | 54.00          | 7.60        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 388 of 422

802.11ax40 MIMO\_Channel 05

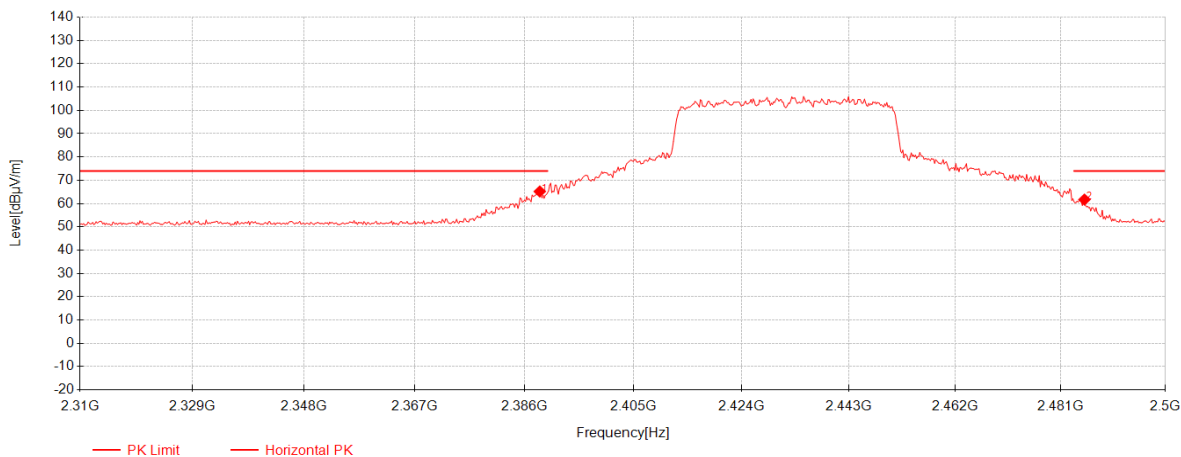


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.66         | 61.35          | 27.16     | -23.31      | 65.19          | 74.00          | 8.81        | Horizontal |
| 2         | 2485.37         | 57.61          | 27.37     | -23.27      | 61.71          | 74.00          | 12.29       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 389 of 422

802.11ax40 MIMO\_Channel 05

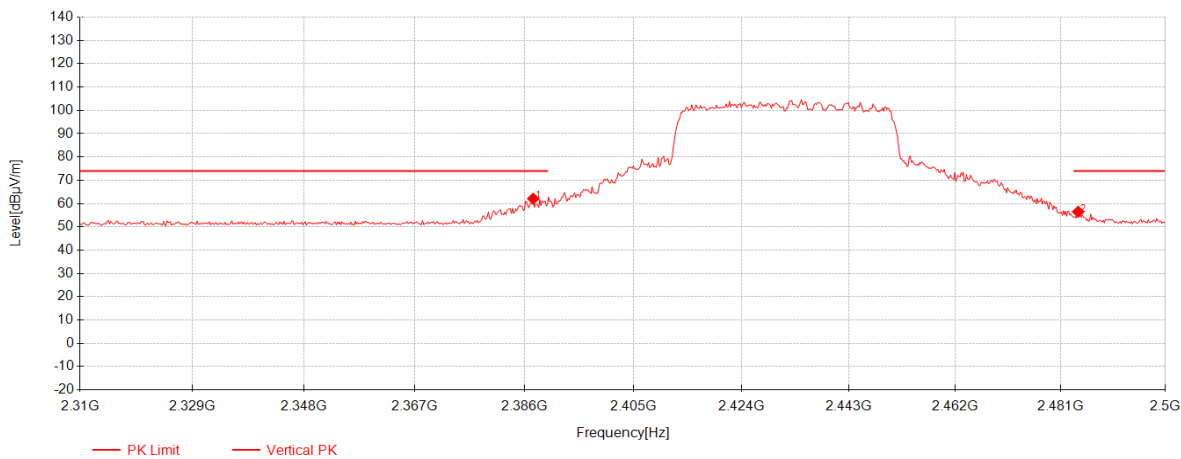


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2387.52         | 58.23          | 27.15     | -23.31      | 62.07          | 74.00          | 11.93       | Vertical |
| 2         | 2484.23         | 52.39          | 27.37     | -23.27      | 56.49          | 74.00          | 17.51       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 390 of 422

802.11ax40 MIMO\_Channel 05

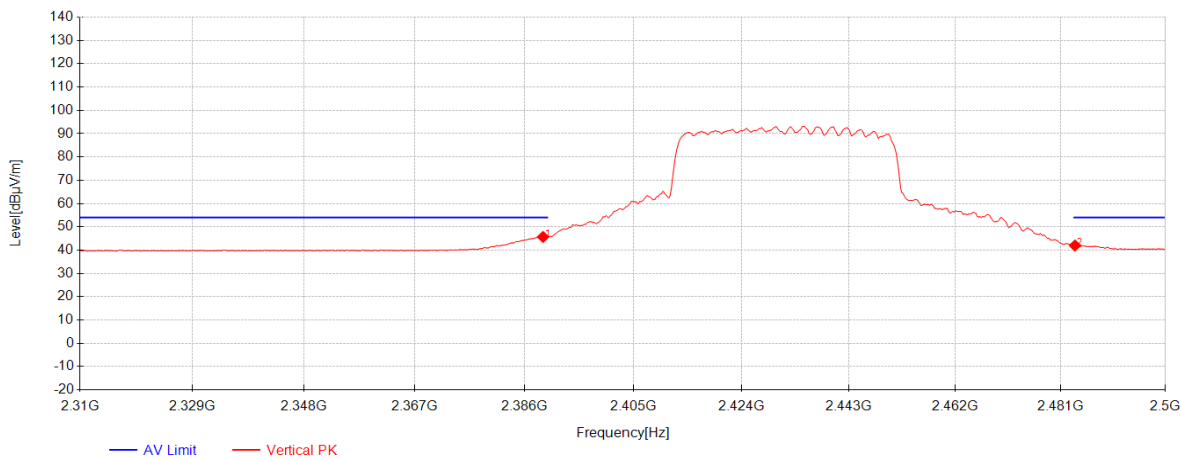

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.23         | 41.82          | 27.16     | -23.31      | 45.66          | 54.00          | 8.34        | Vertical |
| 2         | 2483.66         | 37.89          | 27.36     | -23.27      | 41.98          | 54.00          | 12.02       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 391 of 422

### 802.11ax40 MIMO\_Channel 07

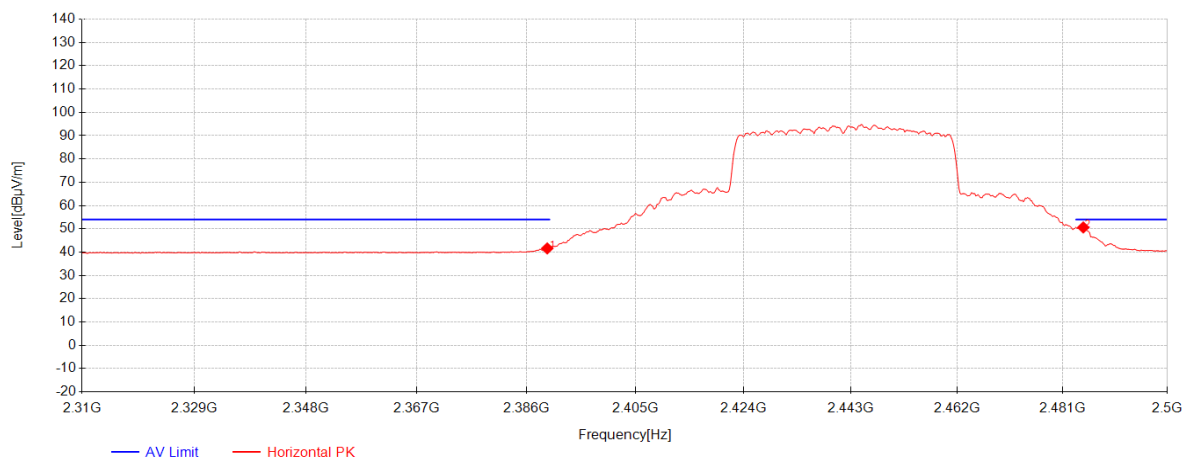


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.61         | 37.74          | 27.16     | -23.31      | 41.58          | 54.00          | 12.42       | Horizontal |
| 2         | 2484.8          | 46.50          | 27.37     | -23.27      | 50.60          | 54.00          | 3.40        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 392 of 422

802.11ax40 MIMO\_Channel 07

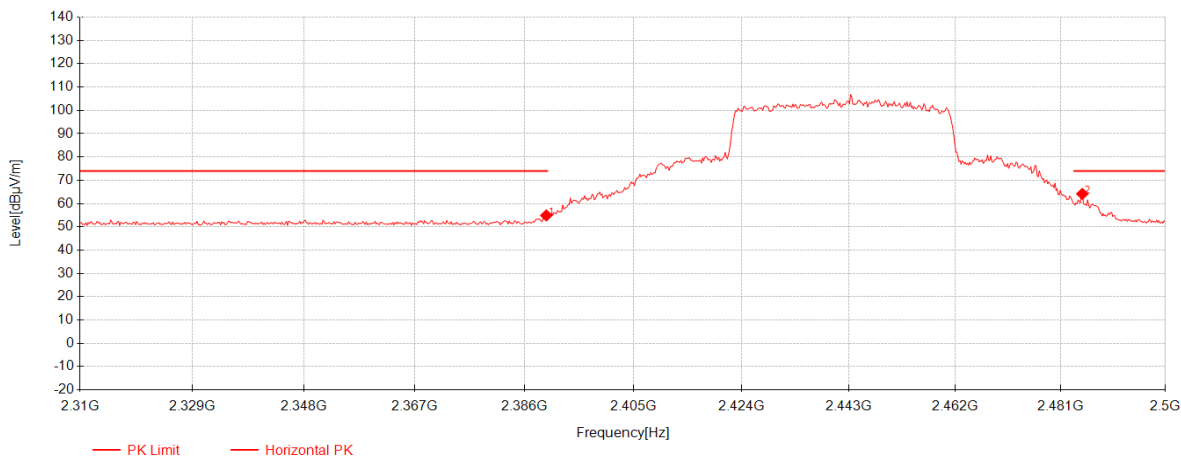


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.8          | 51.06          | 27.16     | -23.31      | 54.90          | 74.00          | 19.10       | Horizontal |
| 2         | 2484.99         | 60.05          | 27.37     | -23.27      | 64.15          | 74.00          | 9.85        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 393 of 422

802.11ax40 MIMO\_Channel 07

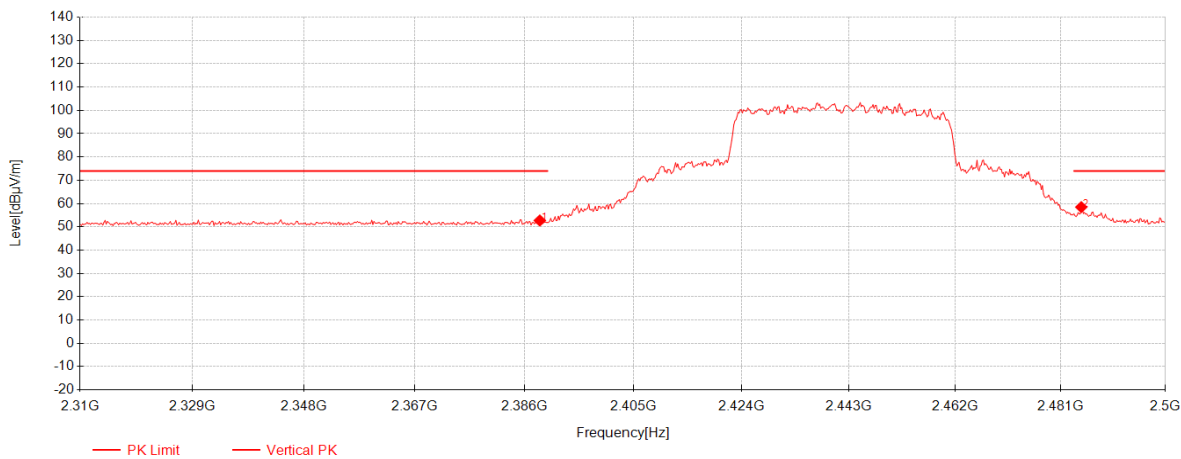


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2388.66         | 48.87          | 27.16     | -23.31      | 52.71          | 74.00          | 21.29       | Vertical |
| 2         | 2484.8          | 54.36          | 27.37     | -23.27      | 58.46          | 74.00          | 15.54       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 394 of 422

802.11ax40 MIMO\_Channel 07

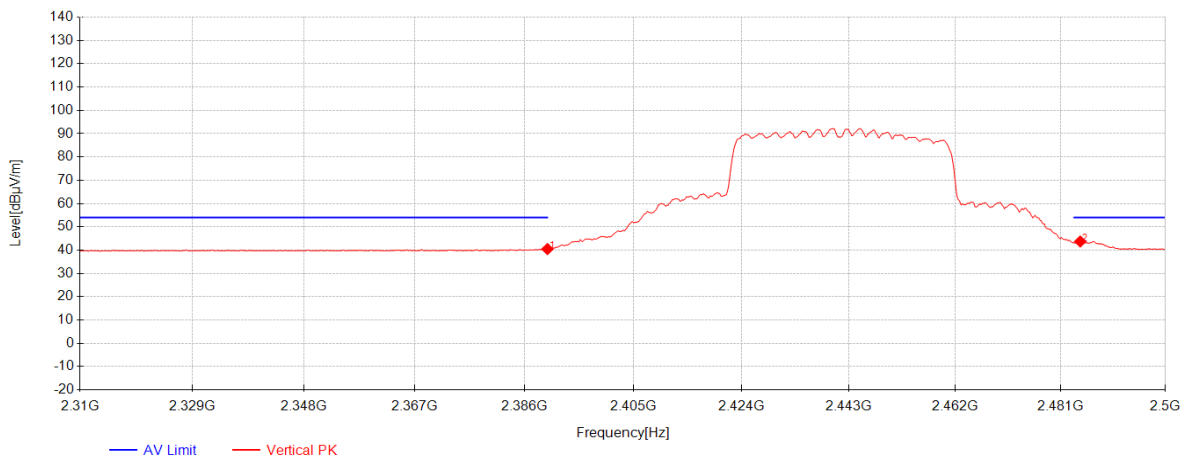


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2389.99         | 36.63          | 27.16     | -23.31      | 40.47          | 54.00          | 13.53       | Vertical |
| 2         | 2484.61         | 39.62          | 27.37     | -23.27      | 43.72          | 54.00          | 10.28       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 395 of 422

802.11ax40 MIMO\_Channel 08

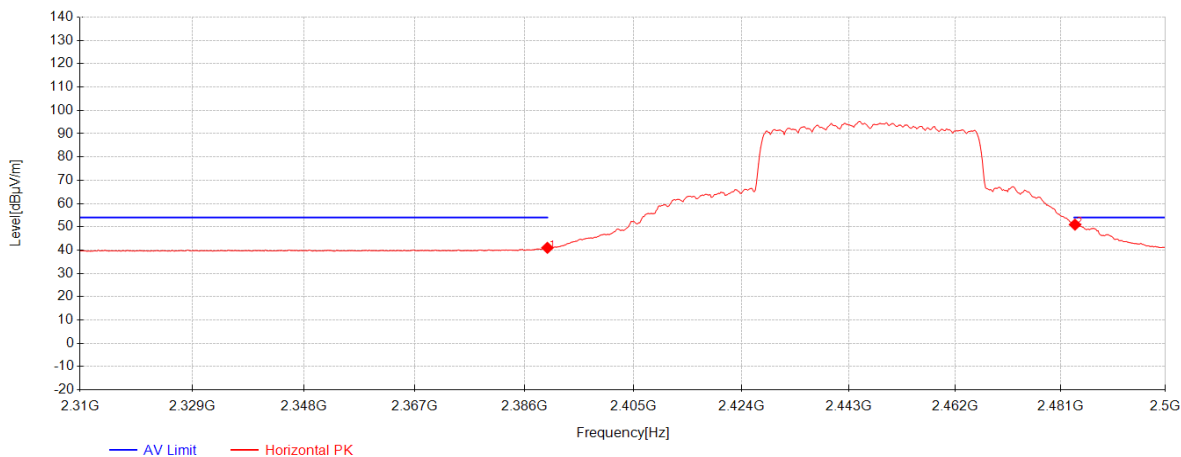


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2389.99         | 37.15          | 27.16     | -23.31      | 40.99          | 54.00          | 13.01       | Horizontal |
| 2         | 2483.66         | 46.85          | 27.36     | -23.27      | 50.94          | 54.00          | 3.06        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 396 of 422

802.11ax40 MIMO\_Channel 08

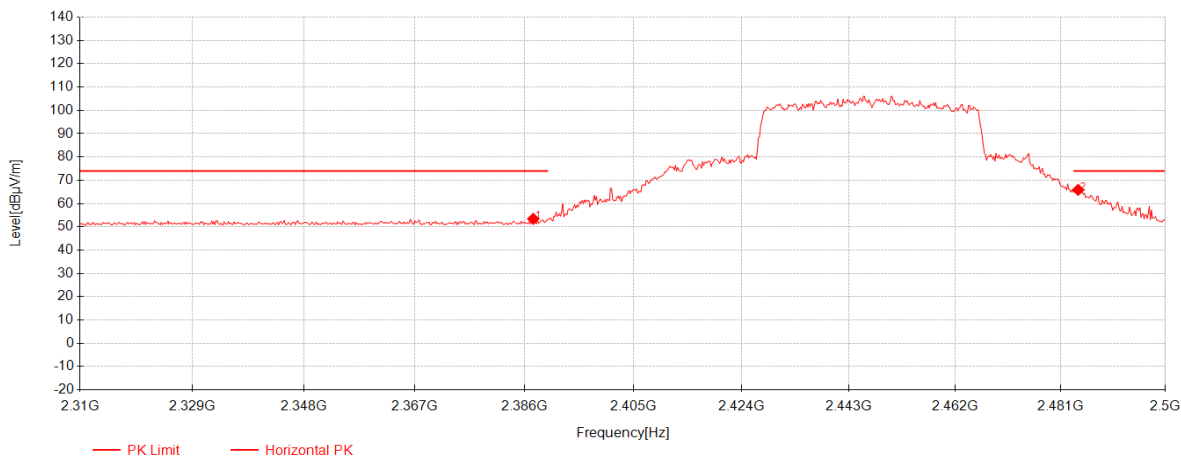


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2387.52         | 49.58          | 27.15     | -23.31      | 53.42          | 74.00          | 20.58       | Horizontal |
| 2         | 2484.23         | 61.77          | 27.37     | -23.27      | 65.87          | 74.00          | 8.13        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 397 of 422

802.11ax40 MIMO\_Channel 08

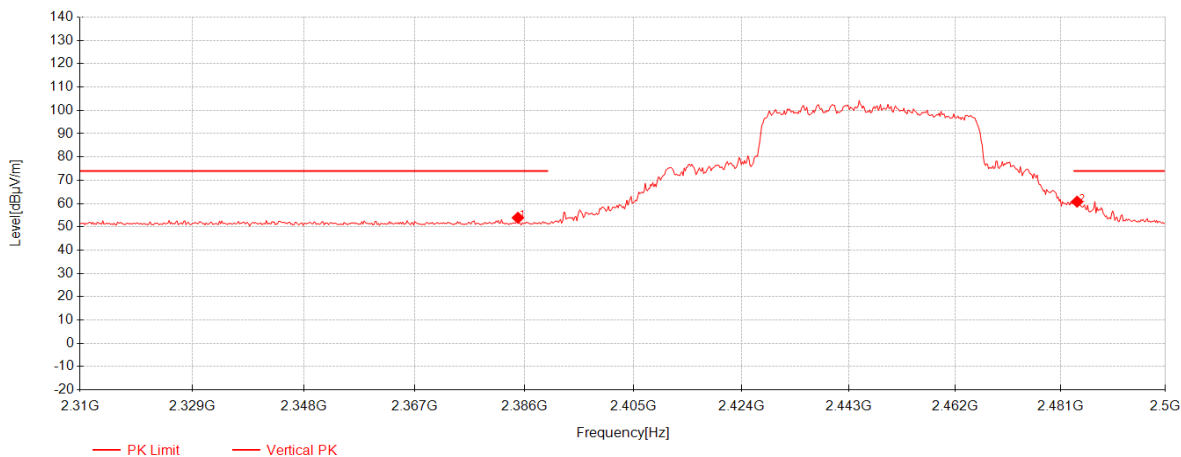


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2384.86         | 50.06          | 27.15     | -23.31      | 53.90          | 74.00          | 20.10       | Vertical |
| 2         | 2484.04         | 56.70          | 27.36     | -23.27      | 60.80          | 74.00          | 13.20       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 398 of 422

802.11ax40 MIMO\_Channel 08

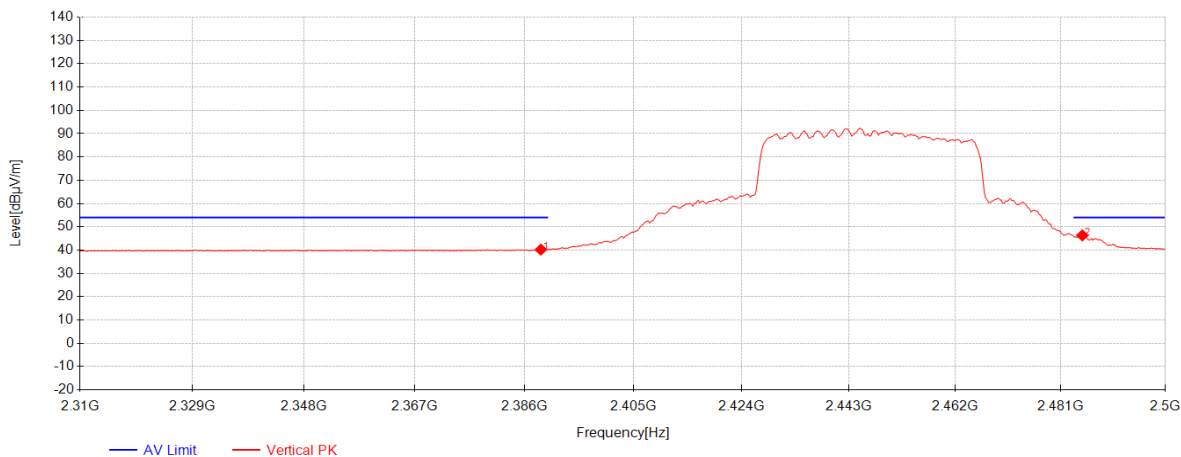

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2388.85         | 36.38          | 27.16     | -23.31      | 40.22          | 54.00          | 13.78       | Vertical |
| 2         | 2484.99         | 42.22          | 27.37     | -23.27      | 46.32          | 54.00          | 7.68        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 399 of 422

### 802.11ax20 MIMO RU26 Left\_Channel 1

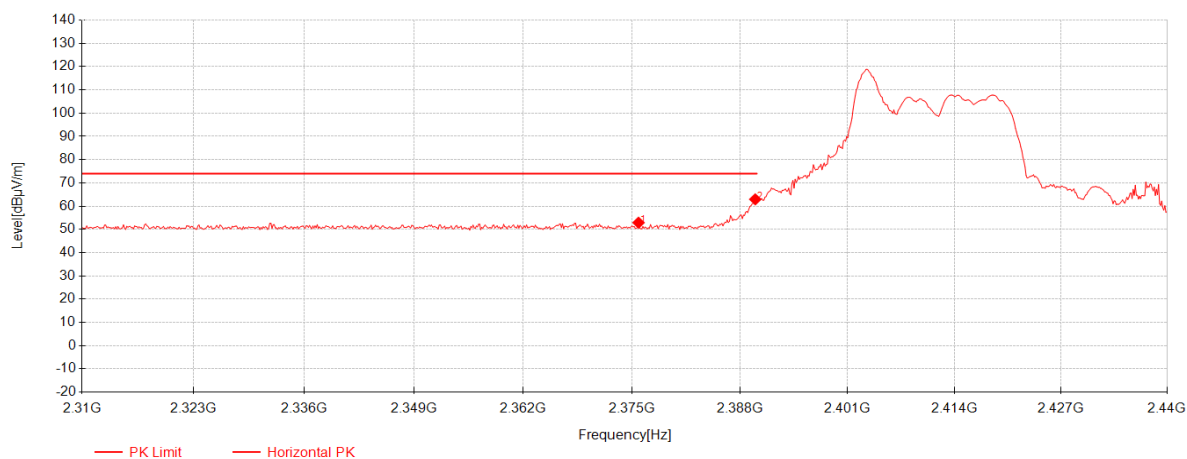


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2375.78         | 49.06          | 27.13     | -23.30      | 52.88          | 74.00          | 21.12       | Horizontal |
| 2         | 2389.82         | 59.09          | 27.16     | -23.31      | 62.93          | 74.00          | 11.07       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 400 of 422

802.11ax20 MIMO RU26 Left\_Channel 1

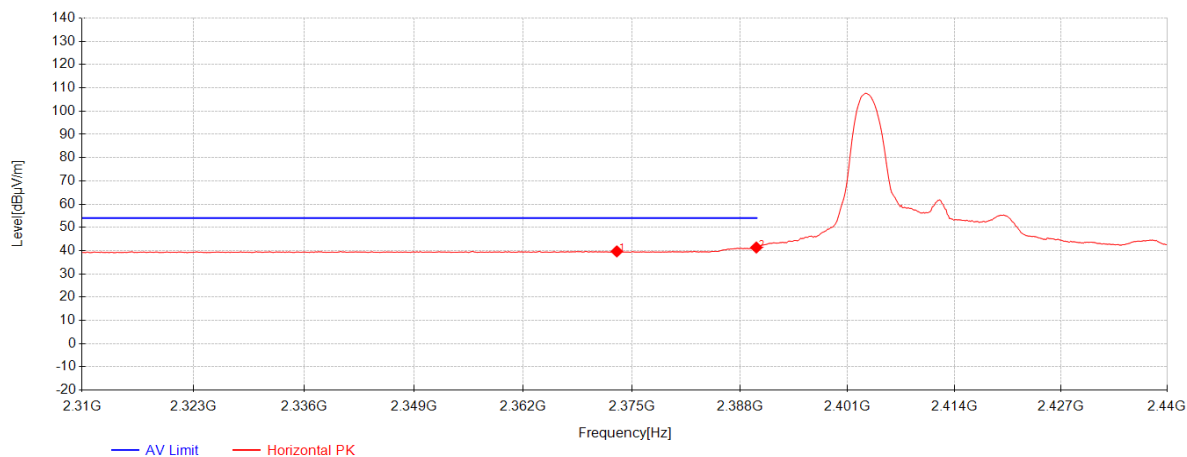

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2373.18         | 35.85          | 27.12     | -23.30      | 39.67          | 54.00          | 14.33       | Horizontal |
| 2         | 2389.95         | 37.49          | 27.16     | -23.31      | 41.33          | 54.00          | 12.67       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 401 of 422

### 802.11ax20 MIMO RU26 Left\_Channel 1

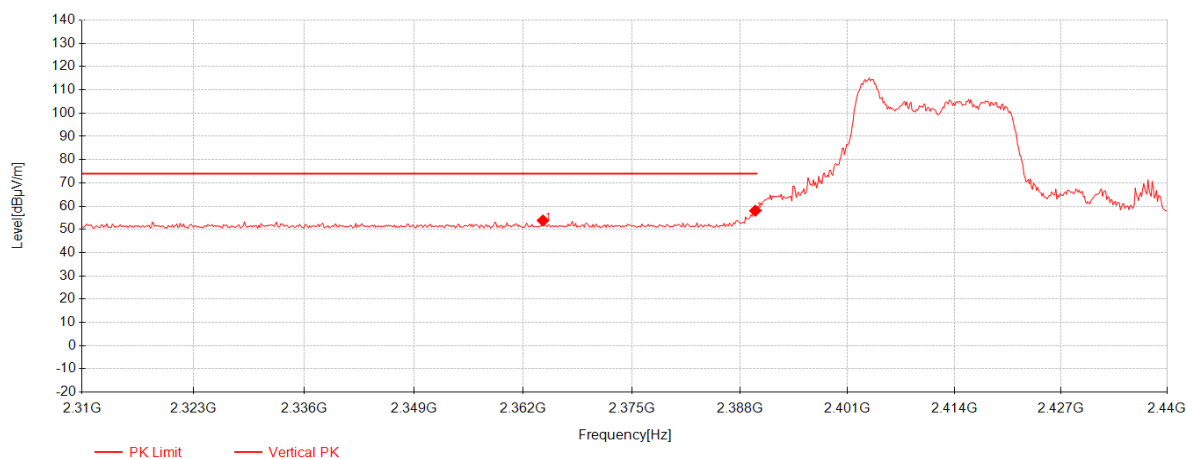

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2364.34         | 50.01          | 27.10     | -23.30      | 53.82          | 74.00          | 20.18       | Vertical |
| 2         | 2389.82         | 54.19          | 27.16     | -23.31      | 58.03          | 74.00          | 15.97       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 402 of 422

### 802.11ax20 MIMO RU26 Left\_Channel 1

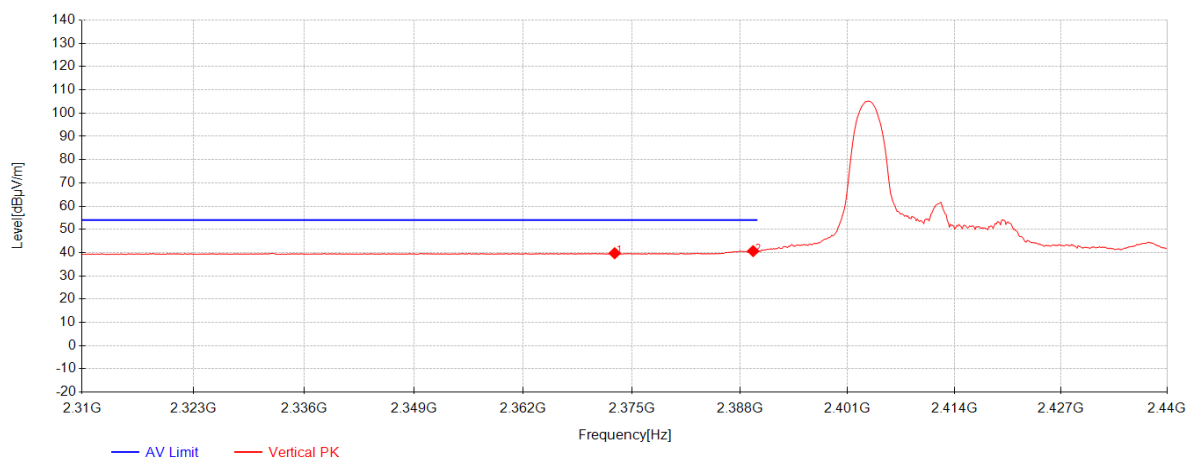


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2372.92         | 35.91          | 27.12     | -23.30      | 39.73          | 54.00          | 14.27       | Vertical |
| 2         | 2389.56         | 36.82          | 27.16     | -23.31      | 40.66          | 54.00          | 13.34       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 403 of 422

802.11ax20 MIMO RU26 Right\_Channel 11

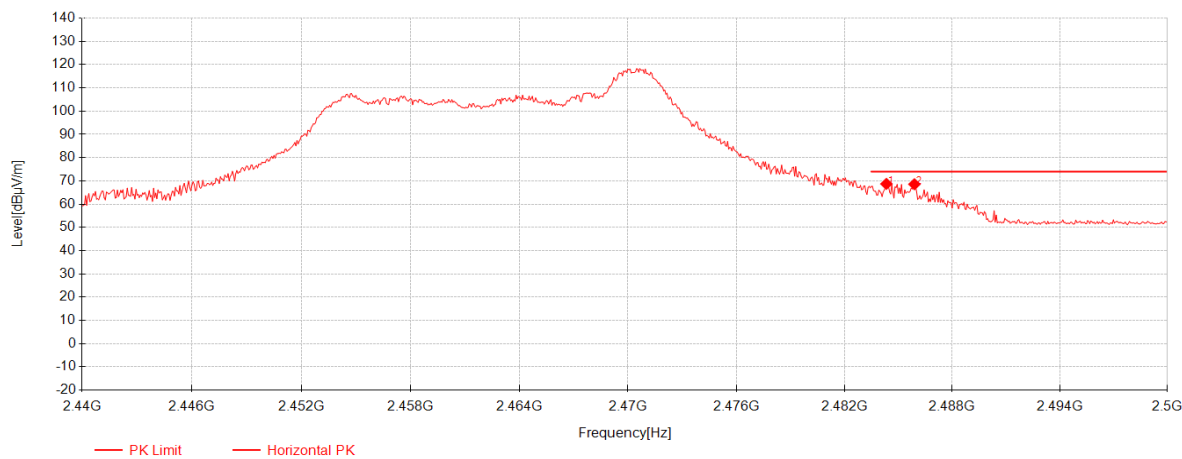

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.34         | 64.60          | 27.37     | -23.27      | 68.70          | 74.00          | 5.30        | Horizontal |
| 2         | 2485.9          | 64.45          | 27.37     | -23.27      | 68.55          | 74.00          | 5.45        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 404 of 422

### 802.11ax20 MIMO RU26 Right\_Channel 11

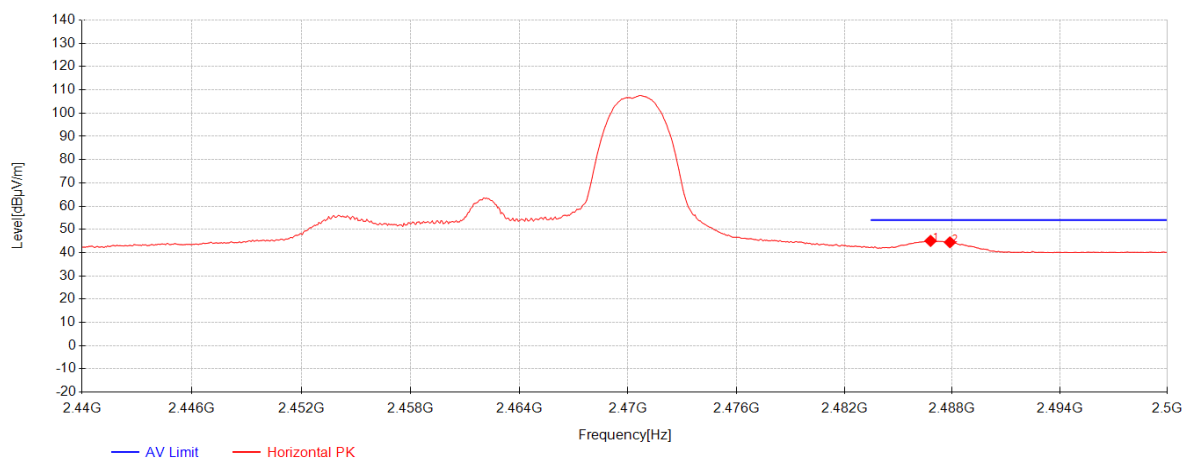


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2486.8          | 40.94          | 27.37     | -23.27      | 45.04          | 54.00          | 8.96        | Horizontal |
| 2         | 2487.88         | 40.34          | 27.37     | -23.27      | 44.45          | 54.00          | 9.55        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 405 of 422

802.11ax20 MIMO RU26 Right\_Channel 11

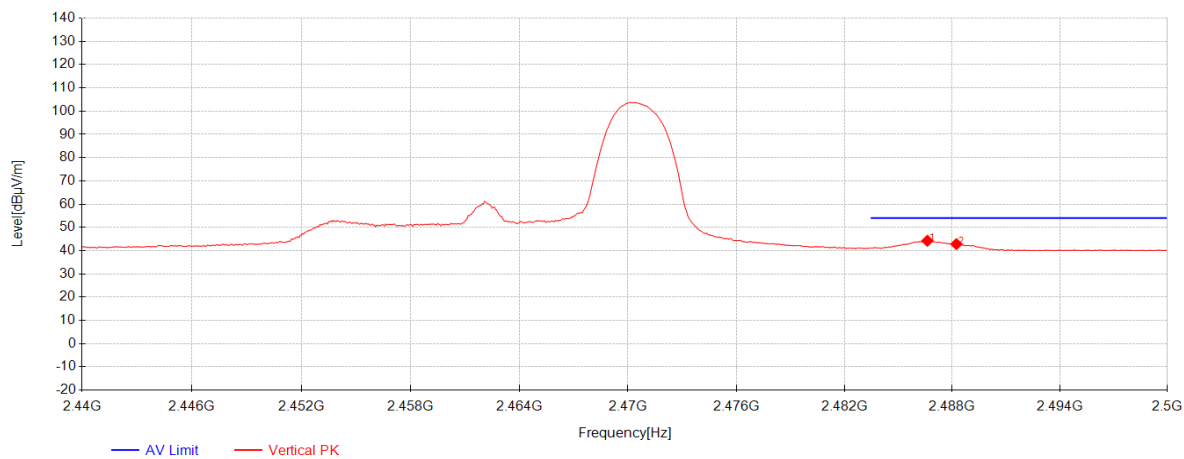


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2486.62         | 40.14          | 27.37     | -23.27      | 44.24          | 54.00          | 9.76        | Vertical |
| 2         | 2488.24         | 38.71          | 27.37     | -23.27      | 42.82          | 54.00          | 11.18       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 406 of 422

802.11ax20 MIMO RU26 Right\_Channel 11

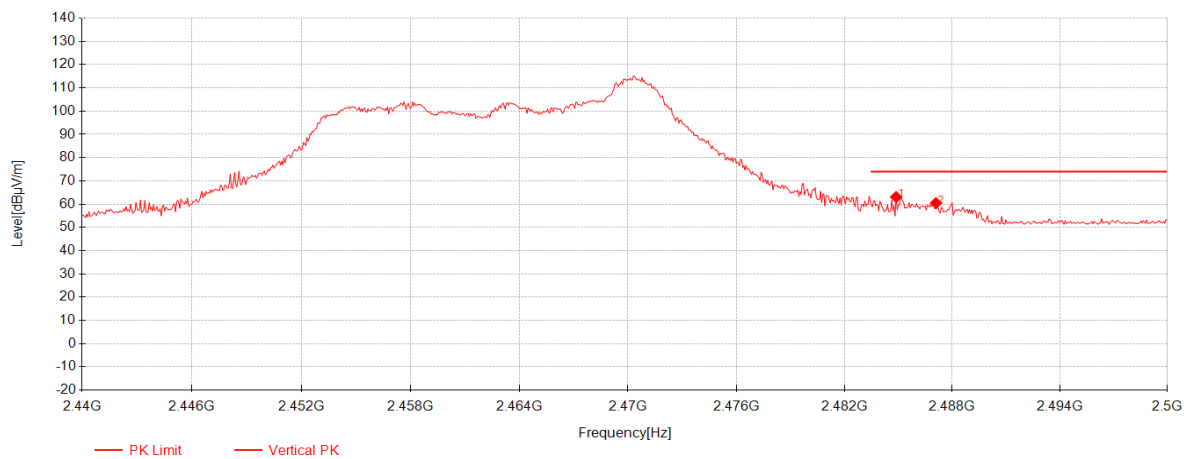

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.88         | 58.98          | 27.37     | -23.27      | 63.08          | 74.00          | 10.92       | Vertical |
| 2         | 2487.1          | 56.36          | 27.37     | -23.27      | 60.46          | 74.00          | 13.54       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 407 of 422

### 802.11ax20 MIMO RU52 Left\_Channel 1

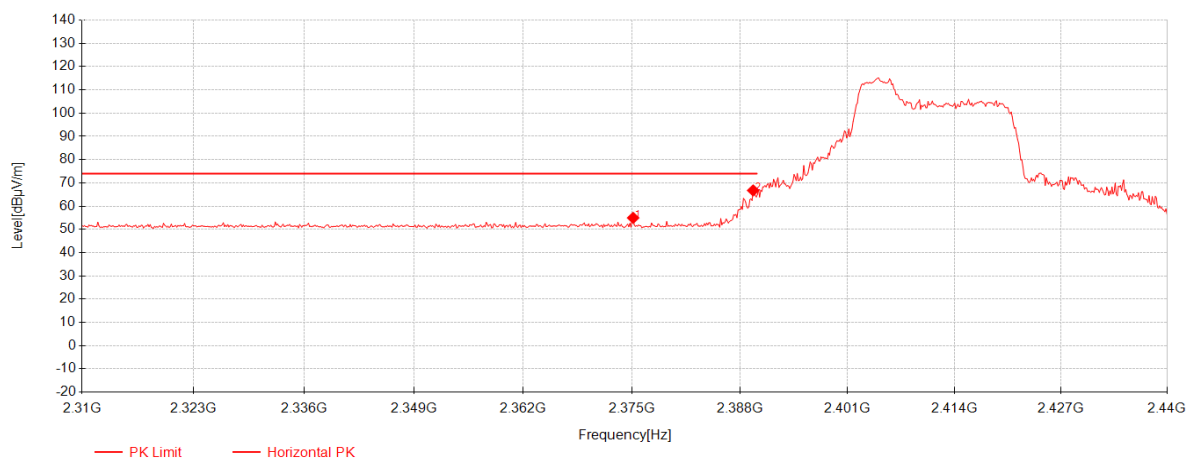


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2375.13         | 51.12          | 27.13     | -23.30      | 54.94          | 74.00          | 19.06       | Horizontal |
| 2         | 2389.56         | 62.93          | 27.16     | -23.31      | 66.77          | 74.00          | 7.23        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 408 of 422

802.11ax20 MIMO RU52 Left\_Channel 1

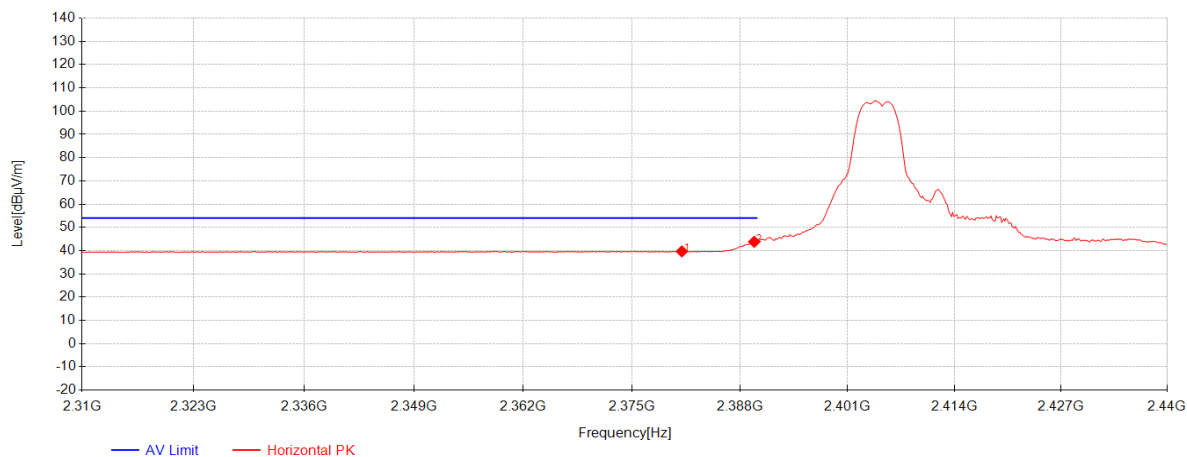


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2380.98         | 35.84          | 27.14     | -23.31      | 39.67          | 54.00          | 14.33       | Horizontal |
| 2         | 2389.69         | 39.95          | 27.16     | -23.31      | 43.79          | 54.00          | 10.21       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 409 of 422

802.11ax20 MIMO RU52 Left\_Channel 1

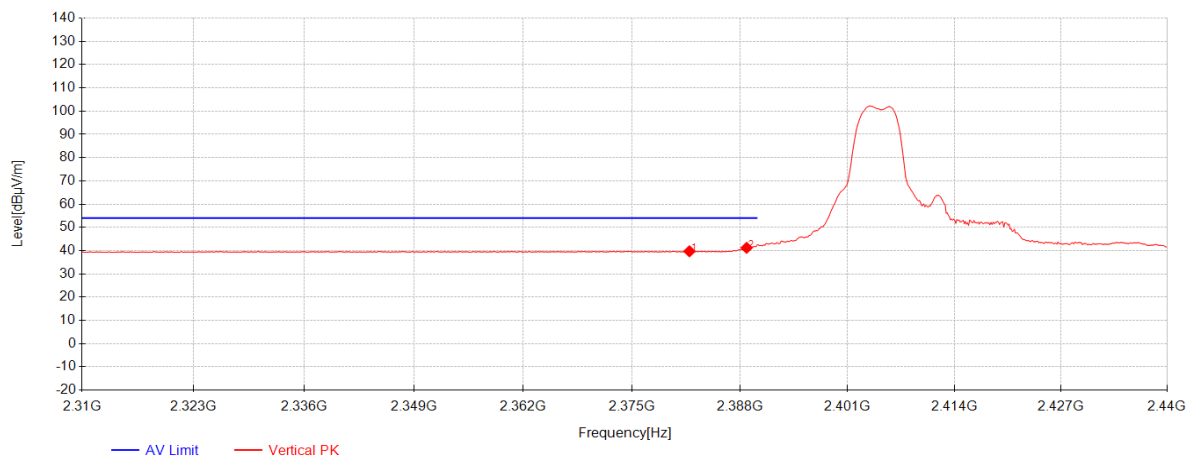

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2381.89         | 35.89          | 27.14     | -23.31      | 39.72          | 54.00          | 14.28       | Vertical |
| 2         | 2388.78         | 37.37          | 27.16     | -23.31      | 41.21          | 54.00          | 12.79       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 410 of 422

### 802.11ax20 MIMO RU52 Left\_Channel 1

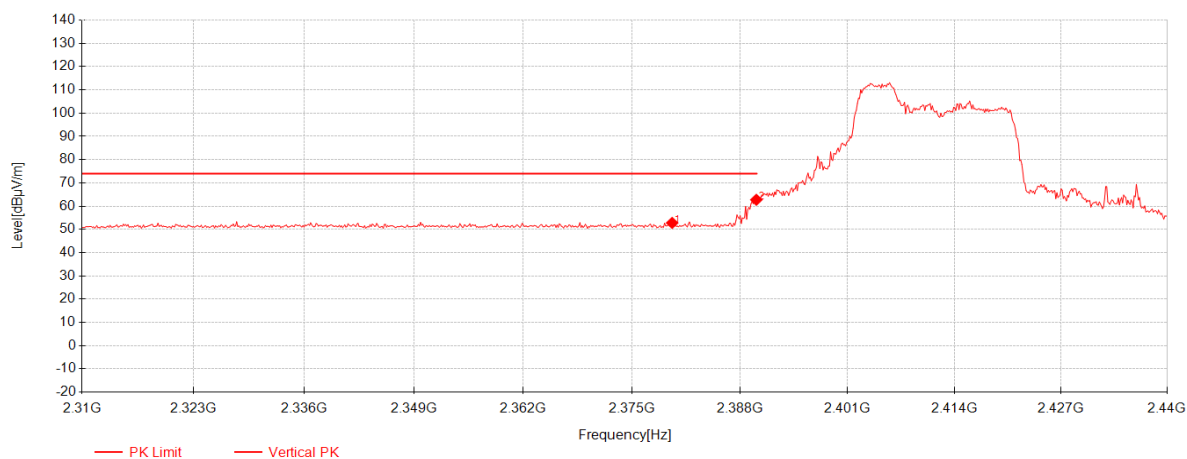

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2379.81         | 48.95          | 27.14     | -23.31      | 52.78          | 74.00          | 21.22       | Vertical |
| 2         | 2389.95         | 58.89          | 27.16     | -23.31      | 62.73          | 74.00          | 11.27       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 411 of 422

### 802.11ax20 MIMO RU52 Right\_Channel 11

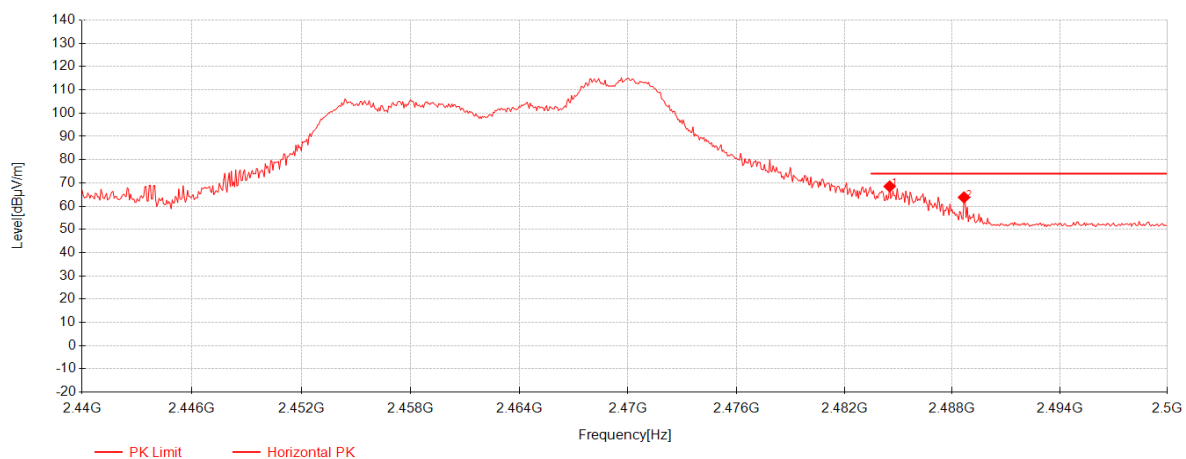


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.52         | 64.39          | 27.37     | -23.27      | 68.49          | 74.00          | 5.51        | Horizontal |
| 2         | 2488.66         | 59.66          | 27.38     | -23.27      | 63.77          | 74.00          | 10.23       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 412 of 422

802.11ax20 MIMO RU52 Right\_Channel 11

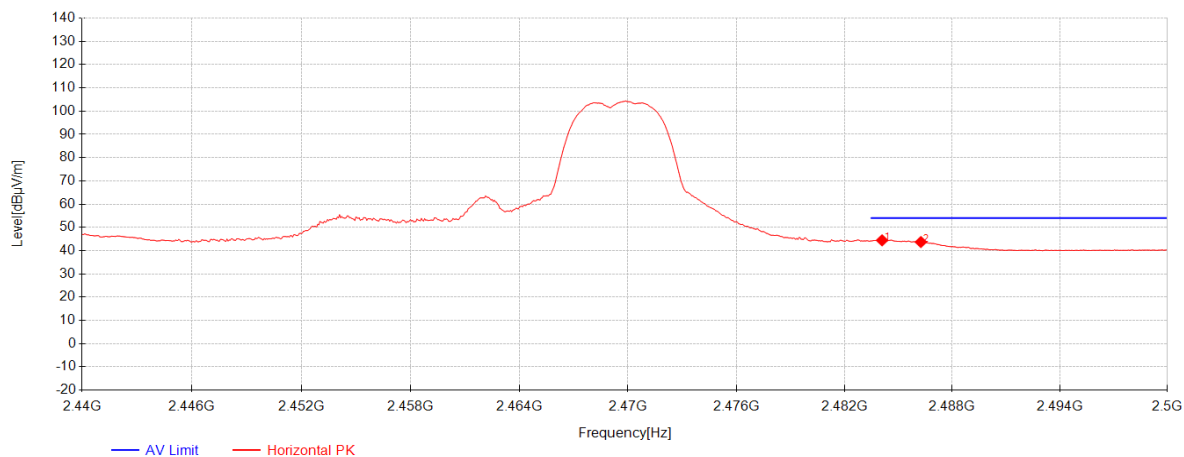


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.1          | 40.33          | 27.37     | -23.27      | 44.43          | 54.00          | 9.57        | Horizontal |
| 2         | 2486.26         | 39.60          | 27.37     | -23.27      | 43.70          | 54.00          | 10.30       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 413 of 422

802.11ax20 MIMO RU52 Right\_Channel 11

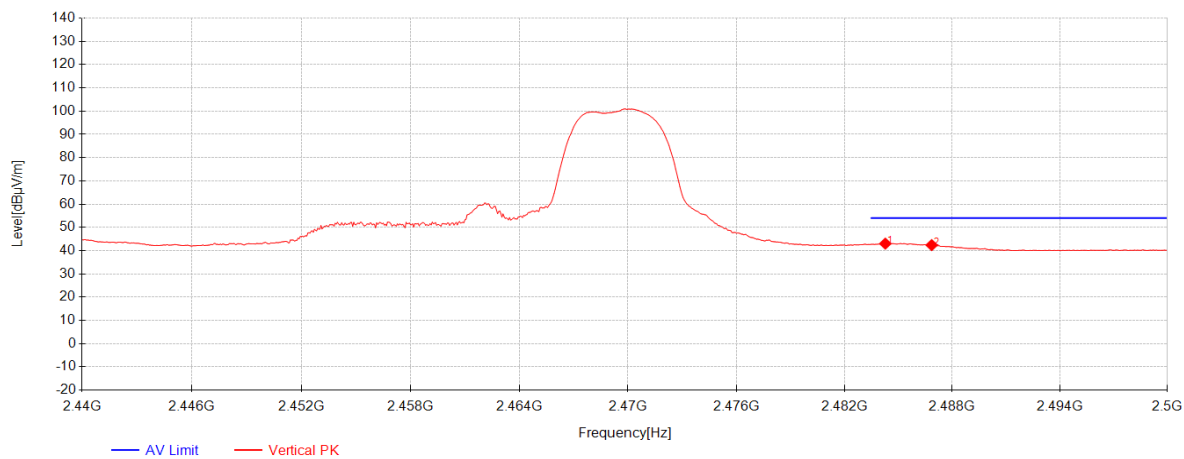


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.28         | 38.92          | 27.37     | -23.27      | 43.02          | 54.00          | 10.98       | Vertical |
| 2         | 2486.86         | 38.29          | 27.37     | -23.27      | 42.39          | 54.00          | 11.61       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 414 of 422

802.11ax20 MIMO RU52 Right\_Channel 11

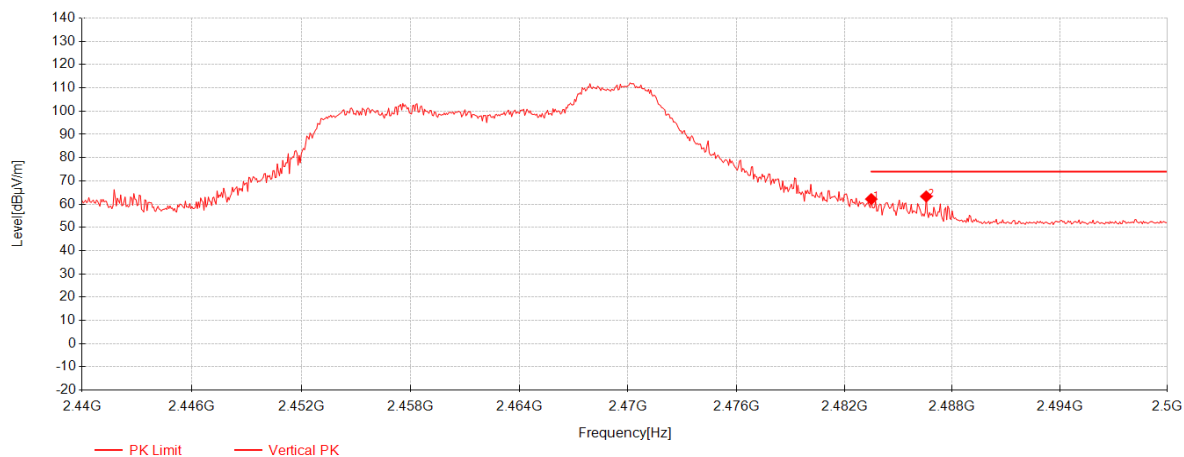

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.5          | 58.07          | 27.36     | -23.27      | 62.16          | 74.00          | 11.84       | Vertical |
| 2         | 2486.56         | 59.21          | 27.37     | -23.27      | 63.31          | 74.00          | 10.69       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 415 of 422

### 802.11ax20 MIMO RU106 Left\_Channel 1

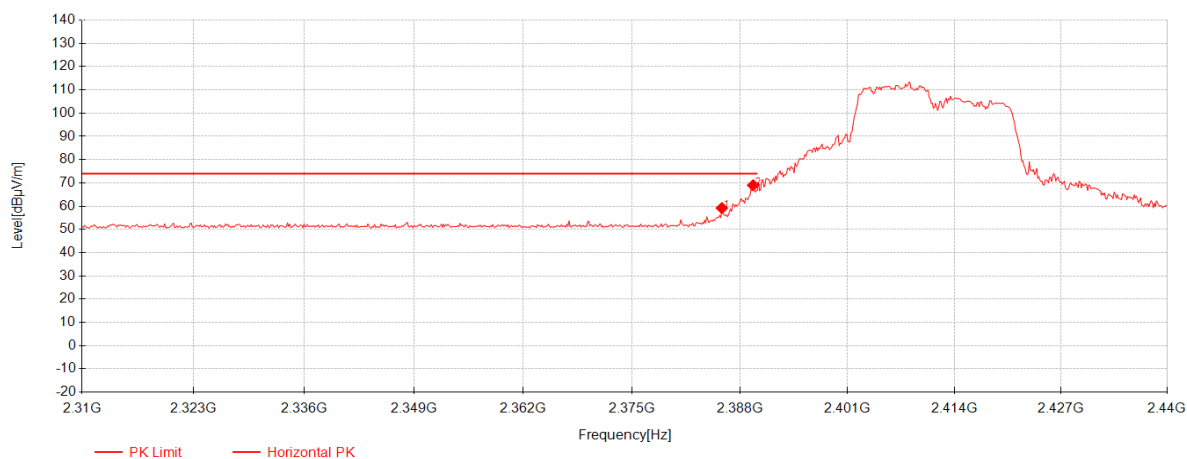

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2385.79         | 55.34          | 27.15     | -23.31      | 59.18          | 74.00          | 14.82       | Horizontal |
| 2         | 2389.56         | 65.15          | 27.16     | -23.31      | 68.99          | 74.00          | 5.01        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 416 of 422

### 802.11ax20 MIMO RU106 Left\_Channel 1

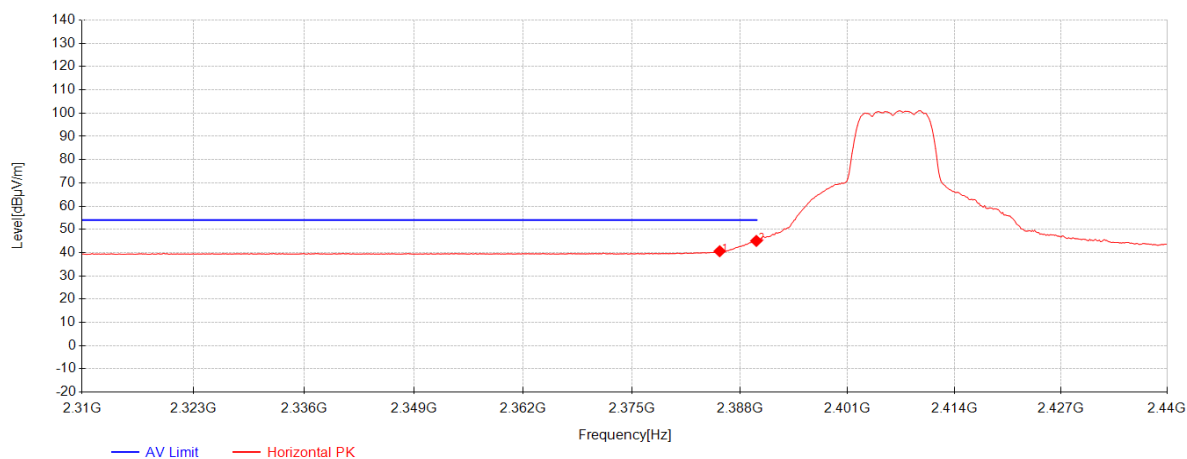


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2385.53         | 36.77          | 27.15     | -23.31      | 40.61          | 54.00          | 13.39       | Horizontal |
| 2         | 2389.95         | 41.21          | 27.16     | -23.31      | 45.05          | 54.00          | 8.95        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 417 of 422

802.11ax20 MIMO RU106 Left\_Channel 1

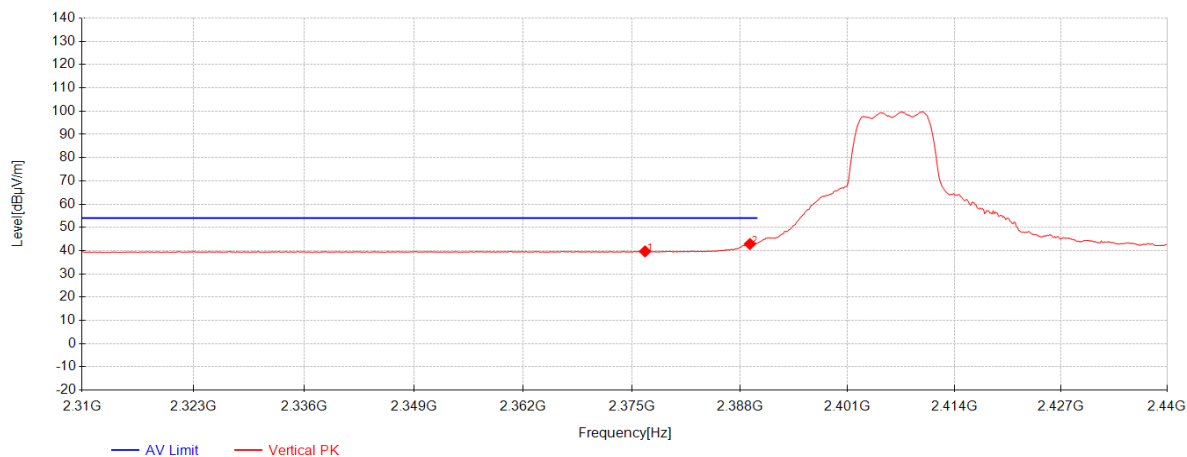


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2376.56         | 35.85          | 27.13     | -23.30      | 39.67          | 54.00          | 14.33       | Vertical |
| 2         | 2389.17         | 39.03          | 27.16     | -23.31      | 42.87          | 54.00          | 11.13       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 418 of 422

802.11ax20 MIMO RU106 Left\_Channel 1

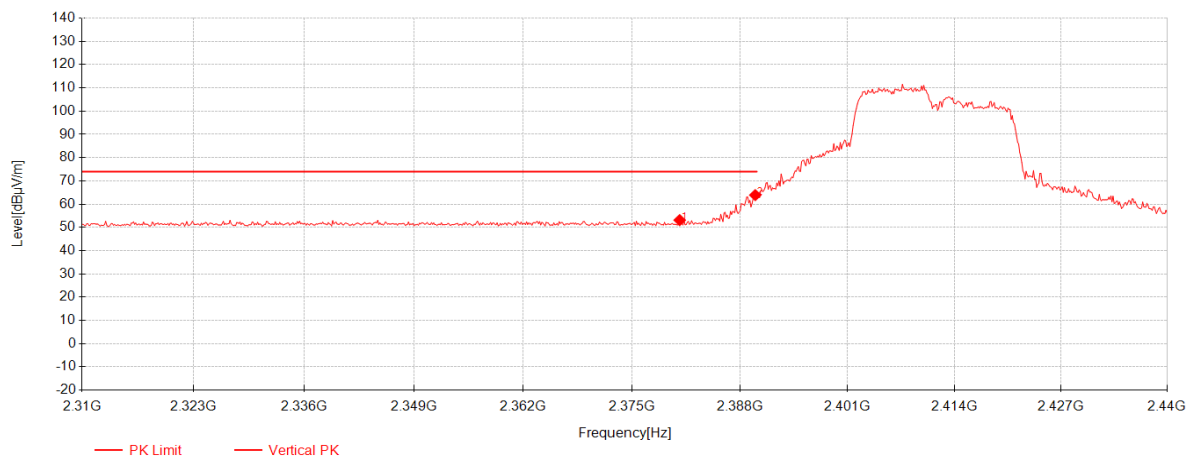


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2380.72         | 49.29          | 27.14     | -23.31      | 53.12          | 74.00          | 20.88       | Vertical |
| 2         | 2389.82         | 60.04          | 27.16     | -23.31      | 63.88          | 74.00          | 10.12       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 419 of 422

802.11ax20 MIMO RU106 Right\_Channel 11

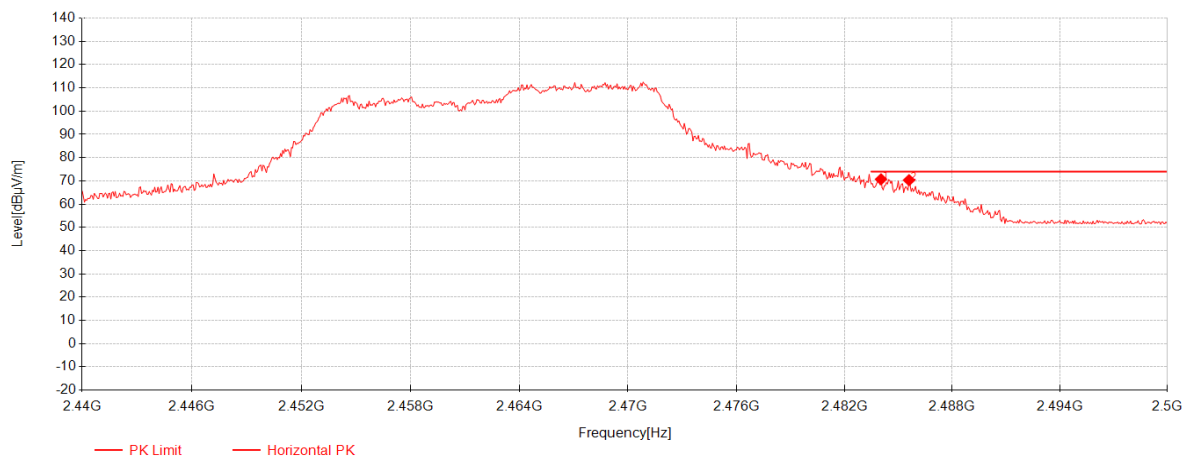

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.04         | 66.60          | 27.36     | -23.27      | 70.70          | 74.00          | 3.30        | Horizontal |
| 2         | 2485.6          | 66.23          | 27.37     | -23.27      | 70.33          | 74.00          | 3.67        | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 420 of 422

### 802.11ax20 MIMO RU106 Right\_Channel 11

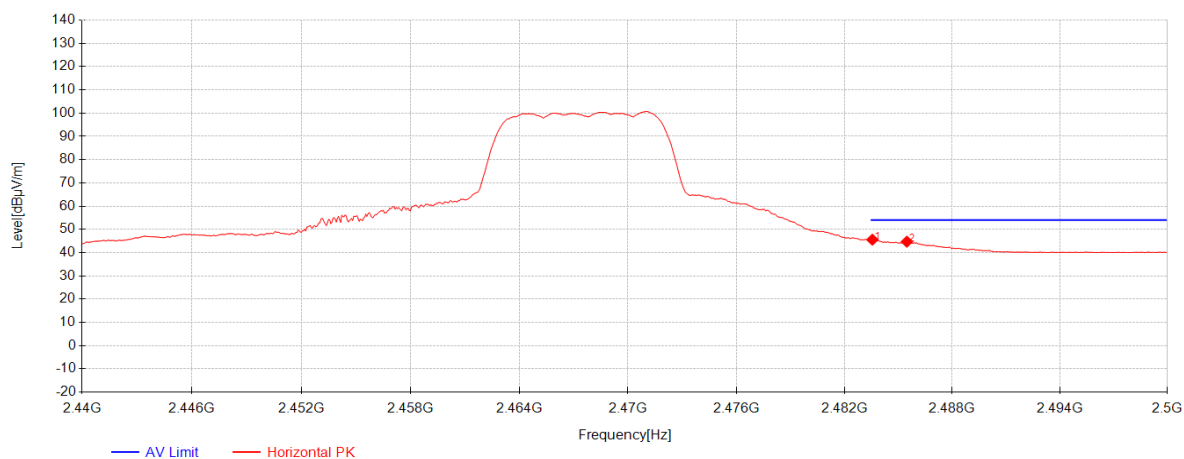


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.56         | 41.49          | 27.36     | -23.27      | 45.58          | 54.00          | 8.42        | Horizontal |
| 2         | 2485.48         | 40.61          | 27.37     | -23.27      | 44.71          | 54.00          | 9.29        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204  
Rev.: 01  
Page: 421 of 422

802.11ax20 MIMO RU106 Right\_Channel 11

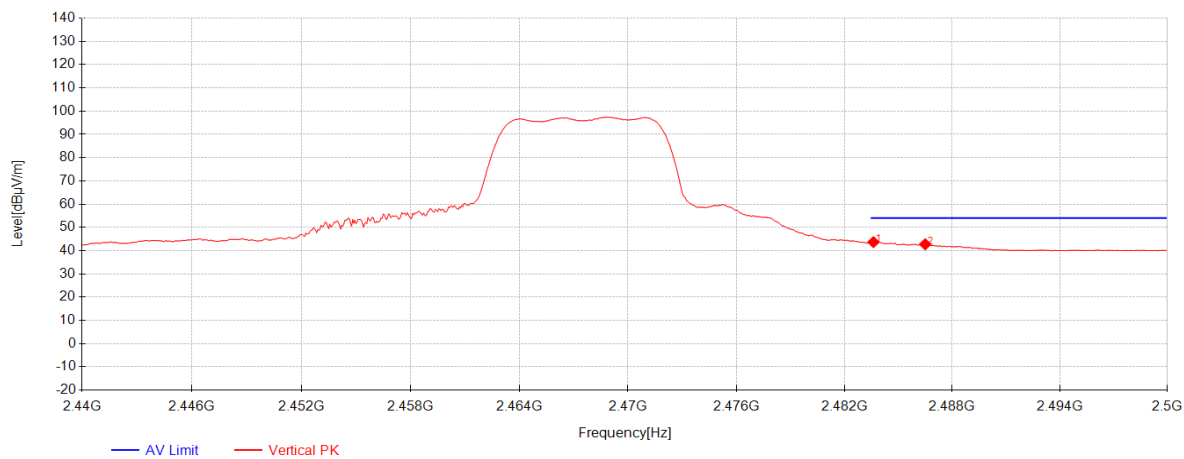

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.62         | 39.58          | 27.36     | -23.27      | 43.67          | 54.00          | 10.33       | Vertical |
| 2         | 2486.5          | 38.63          | 27.37     | -23.27      | 42.73          | 54.00          | 11.27       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034204

Rev.: 01

Page: 422 of 422

### 802.11ax20 MIMO RU106 Right\_Channel 11

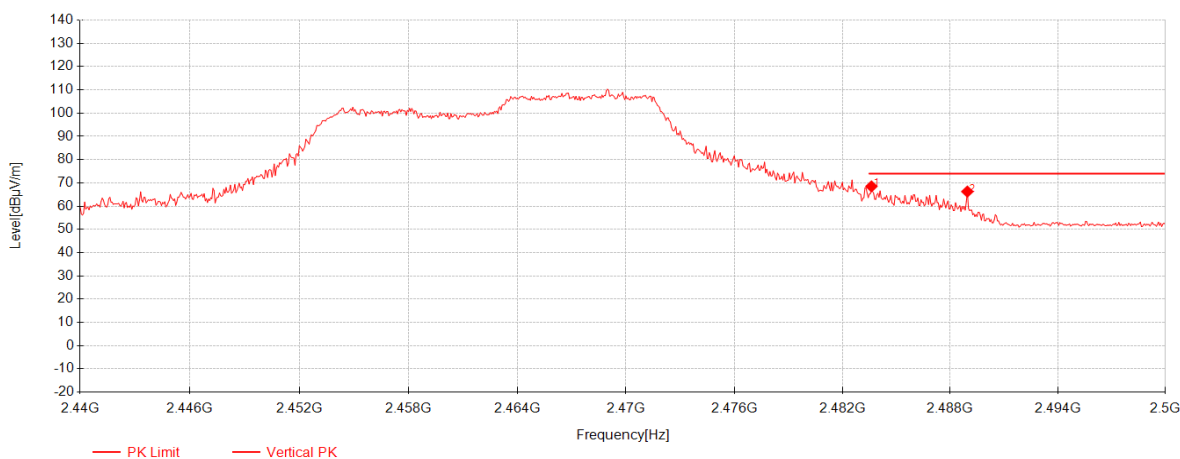

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.62         | 64.40          | 27.36     | -23.27      | 68.49          | 74.00          | 5.51        | Vertical |
| 2         | 2488.96         | 62.15          | 27.38     | -23.27      | 66.26          | 74.00          | 7.74        | Vertical |

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading(dBμV) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dBμV/m) – Level(dBμV/m)

- 2) Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---