



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 1 of 708

TEST REPORT

Application No.: SUCR2504000342WM
Applicant: FCNT LLC.
Address of Applicant: Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
Manufacturer: FCNT LLC.
Address of Manufacturer: Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
EUT Description: Mobile Cellular Phone
Model No.: M08, F-51F -----♣
♣ Please refer to section 2.4 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: FCNT LLC.
FCC ID: 2BEPUFMP203
Standards: FCC 47 CFR Part 15, Subpart E
Date of Receipt: April 18, 2025
Date of Test: April 25, 2025 to May 26, 2025
Date of Issue: June 6, 2025

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 2 of 708

Version

Revision Record			
Version	Description	Date	Remark
01	Original	May 26, 2025	/
02	Revise the comments raised by TCB	June 6, 2025	/

Authorized for issue by:				
Tested By				
		Nature Shen / Project Manager		
Approved By				
		Cloud Peng/Technical Manager		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 3 of 708

Contents

Version	2
1 Test Summary	4
2 General Information	5
2.1 Details of Client	5
2.2 Test Location	5
2.3 Test Facility	5
2.4 General Description of EUT	6
2.5 Test Environment and Mode	9
2.6 Description of Support Units	9
2.7 Worst-case configuration and mode	9
3 Equipment List	10
4 Measurement Uncertainty (95% confidence levels, k=2)	12
5 Test results and Measurement Data	13
5.1 Antenna Requirement	13
5.2 AC Power Line Conducted Emissions	15
5.3 Duty Cycle	19
5.4 Maximum e.i.r.p.	20
5.5 26dB Emission Bandwidth	21
5.6 99% Occupied Bandwidth	22
5.7 Power Spectral Density	23
5.8 In-Band Emissions	24
5.9 Contention Based Protocol	25
5.10 Radiated Spurious Emissions	27
5.11 Restricted bands around fundamental frequency	29
6 Photographs - Setup Photos	31
7 Appendix	32



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 4 of 708

1 Test Summary

Test Item	FCC Rule No.	Test Requirements	Test Result	Result
Antenna Requirement	15.203/15.407(a)	--	Clause 5.1	PASS
AC Power Line Conducted Emissions	15.407(b)(8)	< FCC 15.207 limits	Clause 5.2	PASS
Duty Cycle	--	No limit.	Clause 5.3	For Report Purpose
Maximum e.i.r.p.	15.407(a)(8)	< 24dBm over the frequency band of Operation, e.i.r.p.	Clause 5.4	PASS
26dB Emission Bandwidth	15.407(a)(11)	The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.	Clause 5.5	PASS
99% Occupied Bandwidth	-	No limit.	Clause 5.6	For Report Purpose
Maximum Power Spectral Density	15.407(a)(8)	< -1dBm/MHz e.i.r.p.	Clause 5.7	PASS
In-Band Emissions	15.407(b)(7)	EUT must meet the limits detailed in 15.407(b)(7)	Clause 5.8	PASS
Contention Based Protocol	15.407(d)(6)	EUT must detect AWGN signal with 90% (or better) certainty	Clause 5.9	PASS
Unwanted Emissions that fall Out of the Restricted Bands (Radiated)	15.407(b)(6) 15.205, 15.209	< -27dBm/MHz e.i.r.p. outside of the 5.925 - 7.125GHz band	Clause 5.10	PASS
Unwanted Emissions in the Restricted Bands (Radiated)	15.407(b)(6) 15.205, 15.209	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Clause 5.11	PASS



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 5 of 708

2 General Information

2.1 Details of Client

Applicant:	FCNT LLC.
Address of Applicant:	Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
Manufacturer:	FCNT LLC.
Address of Manufacturer:	Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Tizzy Song, Ives Cheng

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 6 of 708

2.4 General Description of EUT

EUT Description:	Mobile Cellular Phone	
Model No.:	M08, F-51F	
Trade Mark:	FCNT LLC.	
Hardware Version:	DVT2	
Software Version:	V2VH35.58-5	
IMEI:	RF Conducted	354977560034184
	RSE & AC power line	354977560034887
IEEE 802.11 WLAN Mode Supported:	☒ 802.11a (20 MHz channel bandwidth), ☒ 802.11ax (20 MHz channel bandwidth) ☒ 802.11ax (40 MHz channel bandwidth) ☒ 802.11ax (80 MHz channel bandwidth) ☒ 802.11ax (160 MHz channel bandwidth)	
Operation Frequency:	IEEE 802.11 a/ax(HE20/40/80/160): 5925 MHz ~ 6425 MHz IEEE 802.11 a/ax(HE20/40/80/160): 6425 MHz ~ 6525 MHz IEEE 802.11 a/ax(HE20/40/80/160): 6525 MHz ~ 6875 MHz IEEE 802.11 a/ax(HE20/40/80/160): 6875 MHz ~ 7125 MHz	
Type of Modulation:	OFDM/OFDMA	
FCC Classification:	6GHz Low Power Indoor Client (6XD)	
Antenna Type:	IFA Antenna	
Smart System:	☐ SISO	802.11a/ax
	☒ MIMO	802.11a/ax: 2Tx & 2Rx
	☐ Diversity	802.11a: Tx & Rx
Antenna Gain:	ANT4: UNII-5: -4.3dBi; UNII-6: -3.6dBi; UNII-7: -2.0dBi; UNII-8: -3.0dBi; ANT5: UNII-5: -1.3dBi; UNII-6: -0.8dBi; UNII-7: -0.8dBi; UNII-8: -2.3dBi;	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
RF Cable*:	2dB	

Note:

1. Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

2. 802.11ax/be support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power > partial RU, therefore the full RU perform full test to cover partial RU except for PSD/Duty cycle/BE.

3. The two models named M08, F-51F are the same product except that their model names are different for different market segments.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 7 of 708

Accessories Information				
AC Adapter	Brand Name	Motorola (AOHAI)	Model Name	MC-901
	Power Rating	I/P: 100 - 240 Vac, 2000 mA, O/P: 5/9/15/20/5-15/5-20 Vdc, 3000/3000/3000/4500/3000~6000/3000~4500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
Battery	Brand Name	ATL	Model Name	SA18E67963
	Power Rating	3.91Vdc, 5000 mAh	Type	Li-ion
USB Cable 1	Brand Name	Saibao	Model Name	SC18D71644
	Signal Line	1 meter, shielded cable, w/o ferrite core		
USB Cable 2	Brand Name	Luxshare	Model Name	SC18E08104
	Signal Line	1 meter, shielded cable, w/o ferrite core		

Remark:

In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:

Frequency range over which device operates	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near centre, 1 near low end

For UNII-5:

Mode	Channel	Frequency(MHz)
IEEE 802.11a/ax 20MHz	1	5955
	45	6175
	93	6415
IEEE 802.11ax 40MHz	3	5965
	43	6165
	91	6405
IEEE 802.11ax 80MHz	7	5985
	39	6145
	87	6385
IEEE 802.11ax160MHz	15	6025
	47	6185
	79	6345



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 8 of 708

For UNII-6:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/ax 20MHz	97	6435
	105	6475
	113	6515
IEEE 802.11ax 40MHz	99	6445
	107	6485
	115	6525
IEEE 802.11ax 80MHz	103	6465
IEEE 802.11ax160MHz	111	6505

For UNII-7:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/ax 20MHz	117	6535
	149	6695
	181	6855
	185	6875
IEEE 802.11ax 40MHz	123	6565
	147	6685
	179	6845
IEEE 802.11ax 80MHz	119	6545
	135	6625
	151	6705
	167	6785
	183	6865
IEEE 802.11ax160MHz	143	6665
	175	6825

For UNII-8:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/ax 20MHz	189	6895
	209	6995
	233	7115
IEEE 802.11ax 40MHz	187	6885
	195	6925
	211	7005
	227	7085
IEEE 802.11ax 80MHz	199	6945
	215	7025
IEEE 802.11ax160MHz	207	6985



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 9 of 708

2.5 Test Environment and Mode

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	3.91
Remark: NV: Normal Voltage NT: Normal Temperature		

2.6 Description of Support Units

The EUT has been tested as an independent unit.

2.7 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

Modulation Type	SISO - Data Rate	MIMO - Data Rate
802.11a	6 Mbps	12 Mbps
802.11ax (HE 20)	MCS0 (8 Mbps)	MCS0 (16 Mbps)
802.11ax (HE 40)	MCS0 (16 Mbps)	MCS0 (32 Mbps)
802.11ax (HE 80)	MCS0 (34 Mbps)	MCS0 (68 Mbps)
802.11ax (HE 160)	MCS0 (68 Mbps)	MCS0 (136 Mbps)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 10 of 708

3 Equipment List

RF Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	Brilliant-emc	N/A	SUWI-04-08-01	11/9/2022	11/8/2025
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
Measurement Software	Tonscend	TST272 V2.0	SUWI-03-55-03	NCR	NCR
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-02	5/9/2024 5/7/2025	5/8/2025 5/6/2026
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	1/21/2025	1/20/2026
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/19/2024	11/18/2025
Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/19/2024	11/18/2025
MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/15/2025	1/14/2026
Router	ASUS	GT-AXE11000(FCC ID MSQ-RTAXJF00)	SUWI-03-14-02	NCR	NCR
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/19/2024	11/18/2025



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 11 of 708

CE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2/13/2025	2/12/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	5/6/2024 5/4/2025	5/5/2025 5/3/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	5/6/2024 5/4/2025	5/5/2025 5/3/2026
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR

RSE Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2024	11/20/2025
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	5/13/2023 05/07/2025	5/12/2025 05/06/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/13/2023 05/07/2025	5/12/2025 05/06/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/12/2023 05/07/2025	5/11/2025 05/06/2027
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/13/2023 05/07/2025	5/12/2025 05/06/2027
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	11/19/2024	11/24/2025
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	11/19/2024	11/24/2025
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	11/19/2024	11/24/2025
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

Remark: NCR=No Calibration Requirement.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 12 of 708

4 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.54\text{dB}$
2	RF power density, conducted	$\pm 1.03\text{dB}$
3	Spurious emissions, conducted	$\pm 0.54\text{dB}$
4	Radio Frequency	1%
5	Duty Cycle	$\pm 0.37\%$
6	Occupied Bandwidth	1%
7	Conduction Emission	$\pm 2.9\text{dB}$ (150kHz to 30MHz)
8	Radiated Emission(966-01)	$\pm 3.13\text{dB}$ (9k -30MHz)
		$\pm 4.88\text{dB}$ (30M -1GHz)
		$\pm 4.75\text{dB}$ (1GHz to 18GHz)
		$\pm 4.77\text{dB}$ (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 13 of 708

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15 Section 15.203
The antenna is IFA Antenna and no consideration of replacement. The best case gain of the antenna is: ANT4: UNII-5: -4.3dBi; UNII-6: -3.6dBi; UNII-7: -2.0dBi; UNII-8: -3.0dBi; ANT5: UNII-5: -1.3dBi; UNII-6: -0.8dBi; UNII-7: -0.8dBi; UNII-8: -2.3dBi; <i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i> <i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i>	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 14 of 708

Cyclic Delay Diversity (CDD) System:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 $Array\ Gain = 10 \log(N_{ANT}/N_{SS} = 1) \text{ dB}$.
- For power measurements on IEEE 802.11 devices:
 $Array\ Gain = 0 \text{ dB}$ (i.e., no array gain) for $N_{ANT} \leq 4$;

For power, the directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The Power and PSD limit should be modified if the directional gain of eut is over 6dbi.

The EUT supports CDD System.

Operation Frequency	ANT Gain0 (dBi)	ANT Gain1 (dBi)	Directional gain For Power (dBi)	Directional gain For PSD (dBi)
5925 MHz to 6425 MHz	-4.30	-1.30	-1.30	0.34
6425 MHz to 6525 MHz	-3.60	-0.80	-0.80	0.92
6525 MHz to 6875 MHz	-2.00	-0.80	-0.80	1.63
6875 MHz to 7125 MHz	-3.00	-2.30	-2.30	0.37



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207

Rev.: 02

Page: 15 of 708

5.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range (MHz)	Limit (dBUV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

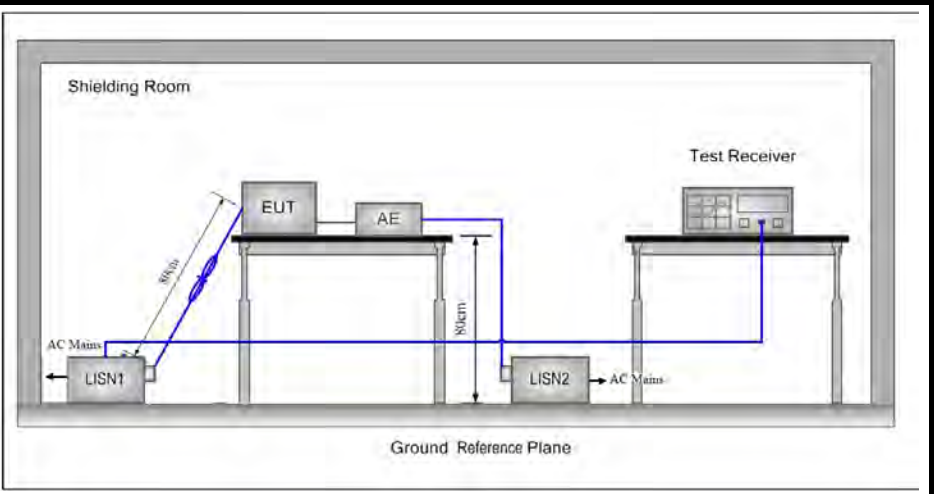Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Refer to section 2.7 for details. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207


Rev.: 02

Page: 17 of 708

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

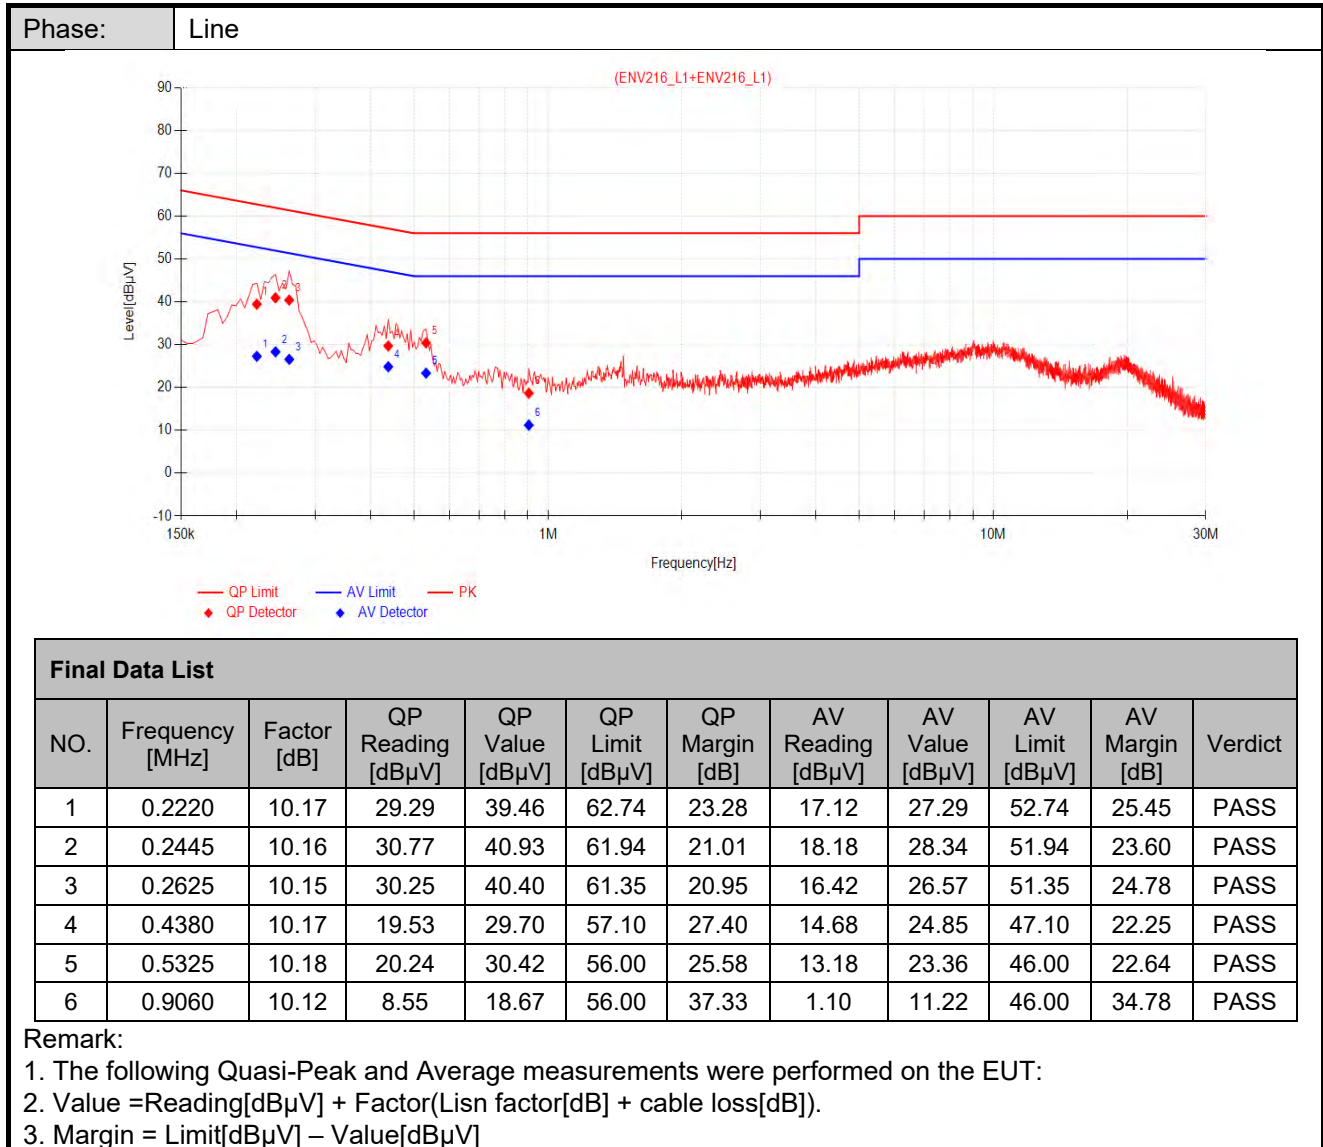




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 18 of 708

Phase: Neutral

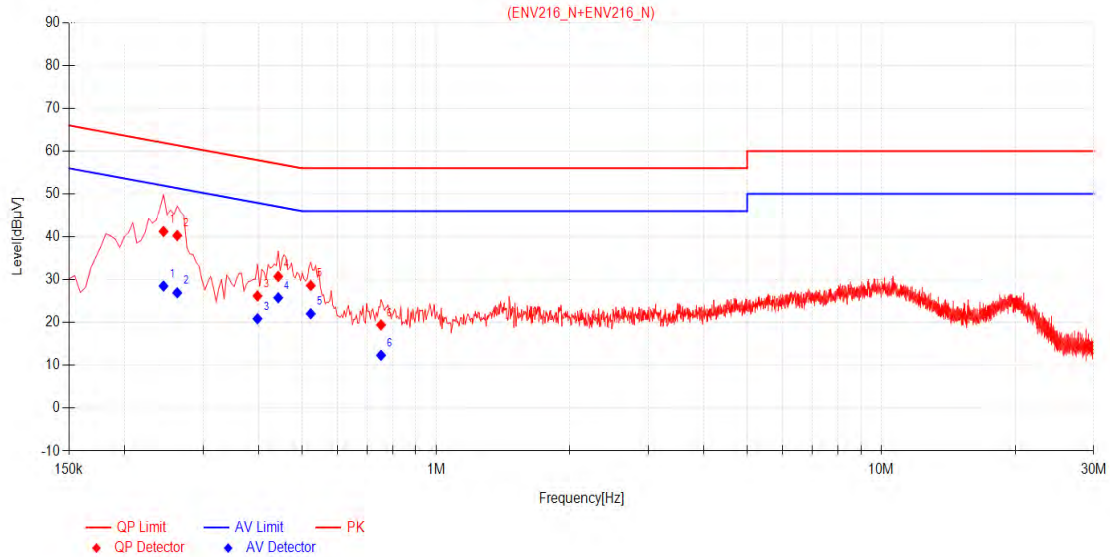


Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2445	10.16	31.10	41.26	61.94	20.68	18.36	28.52	51.94	23.42	PASS
2	0.2625	10.16	30.15	40.31	61.35	21.04	16.78	26.94	51.35	24.41	PASS
3	0.3975	10.16	16.04	26.20	57.91	31.71	10.72	20.88	47.91	27.03	PASS
4	0.4425	10.16	20.60	30.76	57.01	26.25	15.62	25.78	47.01	21.23	PASS
5	0.5235	10.17	18.46	28.63	56.00	27.37	11.88	22.05	46.00	23.95	PASS
6	0.7530	10.18	9.26	19.44	56.00	36.56	2.17	12.35	46.00	33.65	PASS


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value = Reading[dBμV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBμV] – Value[dBμV]


5.3 Duty Cycle

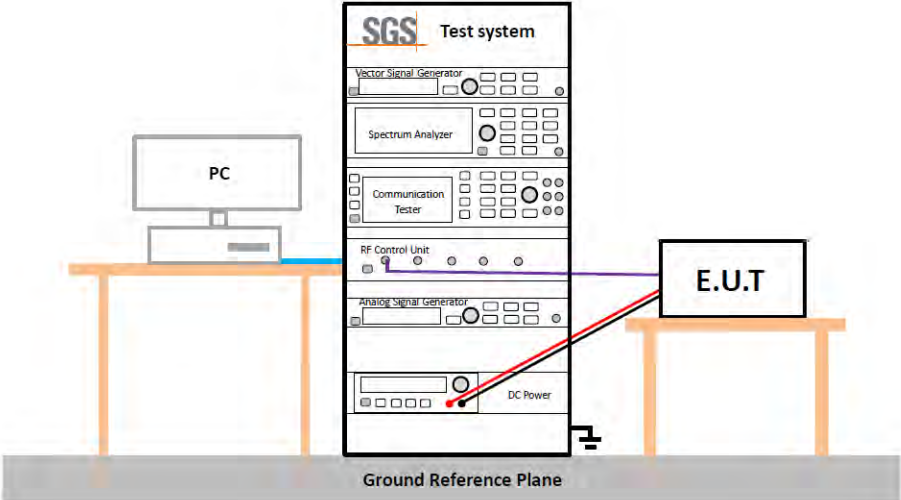Test Requirement:	ANSI C63.10 :2013 Section 12.2
Test Method:	ANSI C63.10 :2013 Section 12.2
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 2.7 for details.
Limit:	No restriction limits
Test Results:	For report purpose
The detailed test data see: Appendix	


5.4 Maximum e.i.r.p.

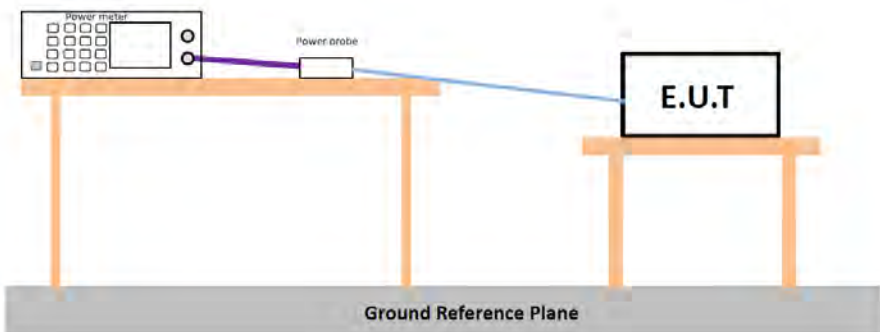Test Requirement:	47 CFR Part 15 Section 15.407(a)
Test Method:	ANSI C63.10 :2013 Section 11.9.2.3
Test Setup:	 * Test with power meter (Detector function: Average)
Test Instruments:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 2.7 for details.
Limit:	For client devices operating under the control of an indoor access point in the 5.925-7.125GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.
Test Results:	Pass
The detailed test data see: Appendix	


5.5 26dB Emission Bandwidth

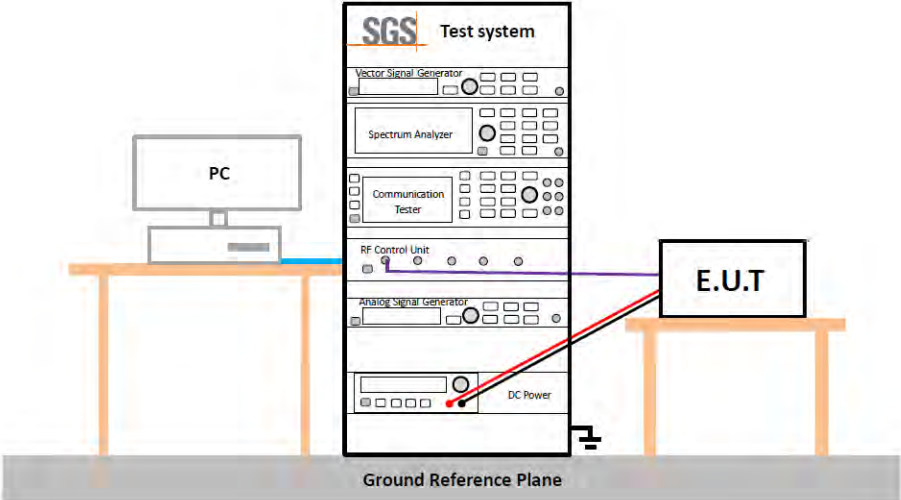Test Requirement:	47 CFR Part 15 Section 15.407(a), KDB 789033 D02
Test Method:	ANSI C63.10: 2013 Section 12.4.1
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 2.7 for details.
Limit:	The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.
Test Results:	Pass
The detailed test data see: Appendix	


5.6 99% Occupied Bandwidth

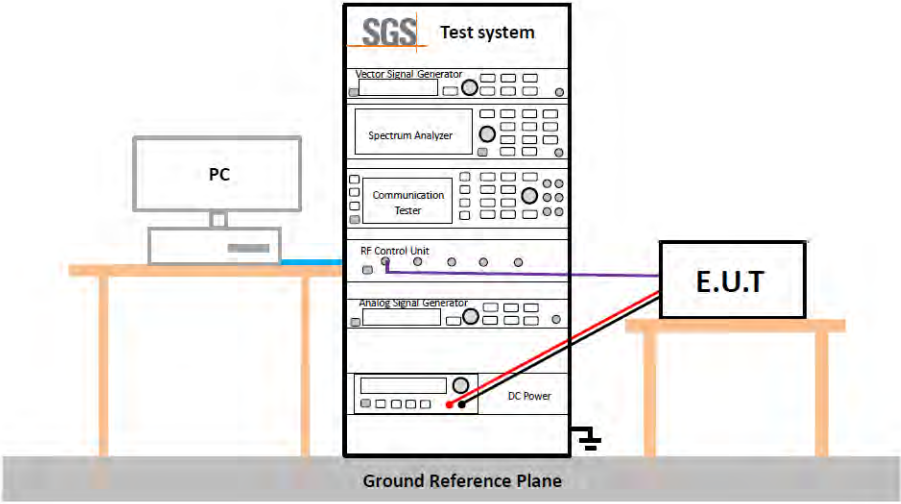Test Requirement:	KDB 789033 D02§ D
Test Method:	ANSI C63.10: 2013 Section 6.9.3
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 2.7 for details.
Limit:	No restriction limits
Test Results:	For report purpose
The detailed test data see: Appendix	

5.7 Power Spectral Density

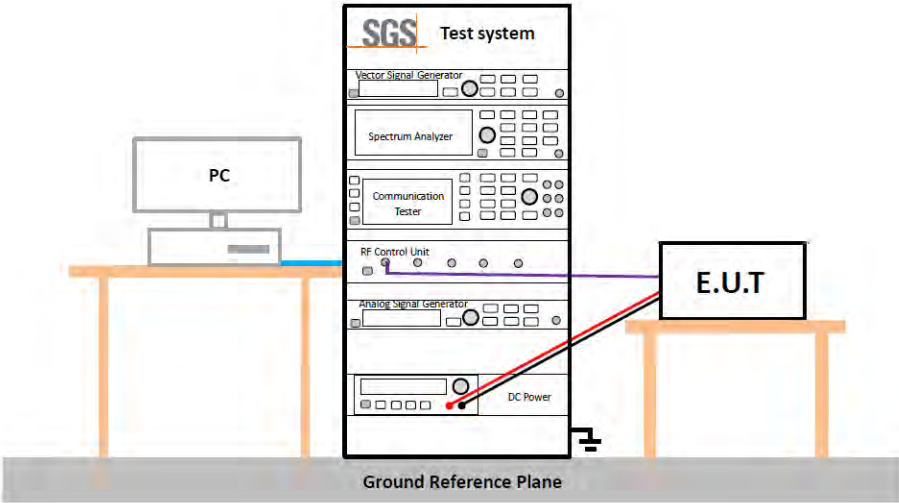Test Requirement:	47 CFR Part 15 Section 15.407(a)
Test Method:	ANSI C63.10: 2013 Section 12.5 KDB 789033 D02 v02r01, Section F.
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 2.7 for details.
Limit:	For client devices operating under the control of an indoor access point in the 5.925-7.125GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.
Test Results:	Pass
The detailed test data see: Appendix	

5.8 In-Band Emissions

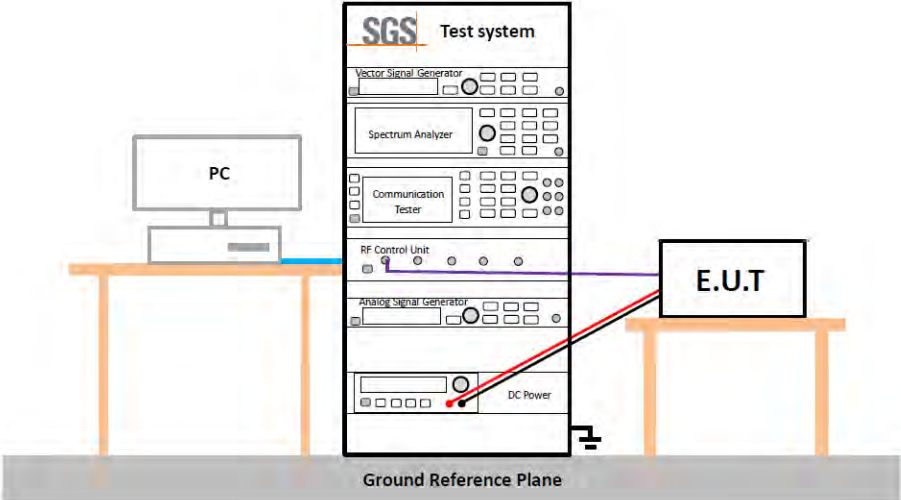Test Requirement:	47 CFR Part 15 Section 15.407(b)(7)
Test Method:	KDB 987594 D02 U-NII 6GHz EMC Measurement v01
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 2.7 for details. Only the worst case is recorded in the report.
Limit:	For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.
Test Results:	Pass
The detailed test data see: Appendix	

5.9 Contention Based Protocol

Test Requirement:	47 CFR Part 15 Section 15.407(d)
Test Method:	ANSI C63.10: 2013 KDB 987594 D02 U-NII 6GHz EMC Measurement v01
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Test Procedure:	1) Configure the EUT to transmit with a constant duty cycle. 2) Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth. 3) Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver. 4) Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two. 5) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10MHz AWGN signal relative to the EUT's channel bandwidth and center frequency. 6) Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2. 7) Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1. 8) Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting. 9) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty. 10) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.
Limit:	Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 26 of 708

	reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.
Test Results:	Pass
The detailed test data see: Appendix	

5.10 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.205 and 15.209
Test Method:	ANSI C63.10: 2013 Section 6.4 / 6.5 / 6.6
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)
Test frequency:	9kHz ~ 40GHz(or 10 Harmonic)

Test Setup:

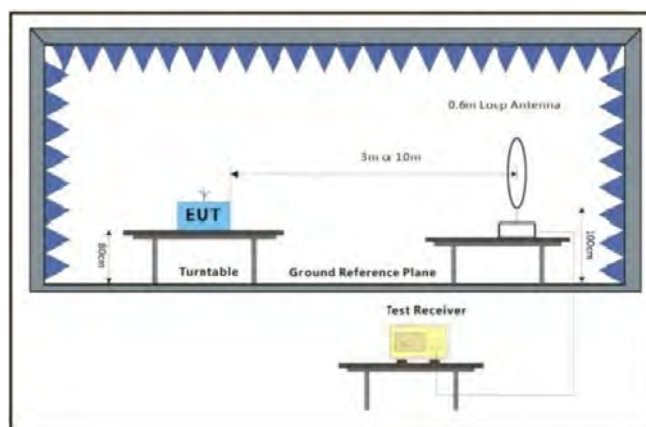


Figure 1. 9kHz to 30MHz

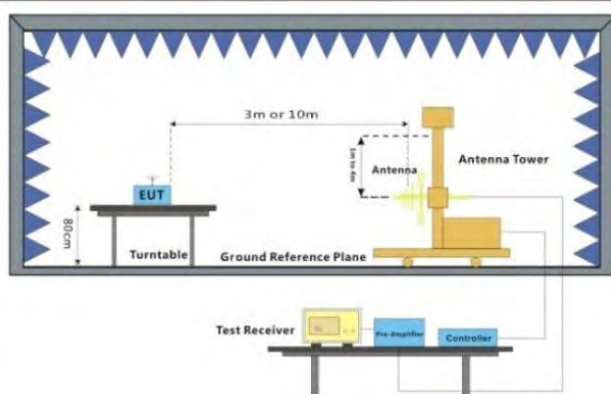


Figure 1. 30MHz to 1GHz

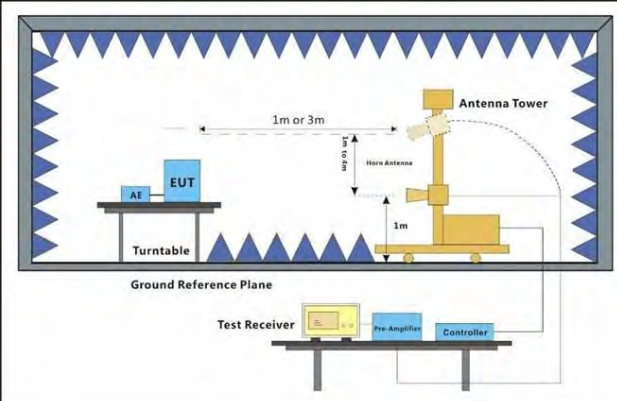


Figure 2. Above 1 GHz

Test Procedure:

- For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02


Page: 28 of 708

	maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete. j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. l. At a measurement distance of 1 meter the limit line was increased by $20 \times \text{LOG}(3/1) = 9.54$ dB.
Test Configuration:	Measurements below 30MHz • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Value = Reading + Factor(Antenna Factor + Cable loss – Preamplifier Factor).
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 2.7 for details. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass
The detailed test data see: Appendix	

5.11 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013 Section 12.7		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

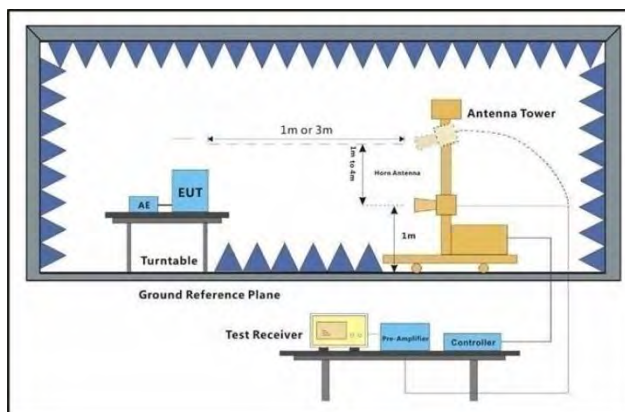

Test Procedure:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
- Test the EUT in the outermost channels.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Test Configuration:

Measurements Below 1000MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 30 of 708

	• RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Value = Reading + Factor(Antenna Factor + Cable loss).
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 2.7 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass
The detailed test data see: Appendix	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 31 of 708

6 Photographs - Setup Photos

Refer to Appendix A.2 BT&WLAN&NFC Setup Photos.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 32 of 708

7 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant4

Ant4										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	5955	/	/	1.393	1.435	97.07	0.13	0.00
	802.11ax (HEW20)	MIMO	5955	SU	/	1.013	1.057	95.84	0.18	0.07
	802.11ax (HEW40)	MIMO	5965	SU	/	0.534	0.577	92.55	0.34	0.03
	802.11ax (HEW80)	MIMO	5985	SU	/	0.290	0.330	87.88	0.56	0.06
	802.11ax (HEW160)	MIMO	6025	SU	/	0.288	0.331	87.01	0.60	0.21

1.1.2 Ant5

Ant5										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	5955	/	/	1.393	1.435	97.07	0.13	0.03
	802.11ax (HEW20)	MIMO	5955	SU	/	1.015	1.058	95.94	0.18	0.03
	802.11ax (HEW40)	MIMO	5965	SU	/	0.534	0.577	92.55	0.34	0.07
	802.11ax (HEW80)	MIMO	5985	SU	/	0.289	0.331	87.31	0.59	0.35
	802.11ax (HEW160)	MIMO	6025	SU	/	0.288	0.330	87.27	0.59	0.09




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 33 of 708

1.2 Test Graph

1.2.1 Ant4

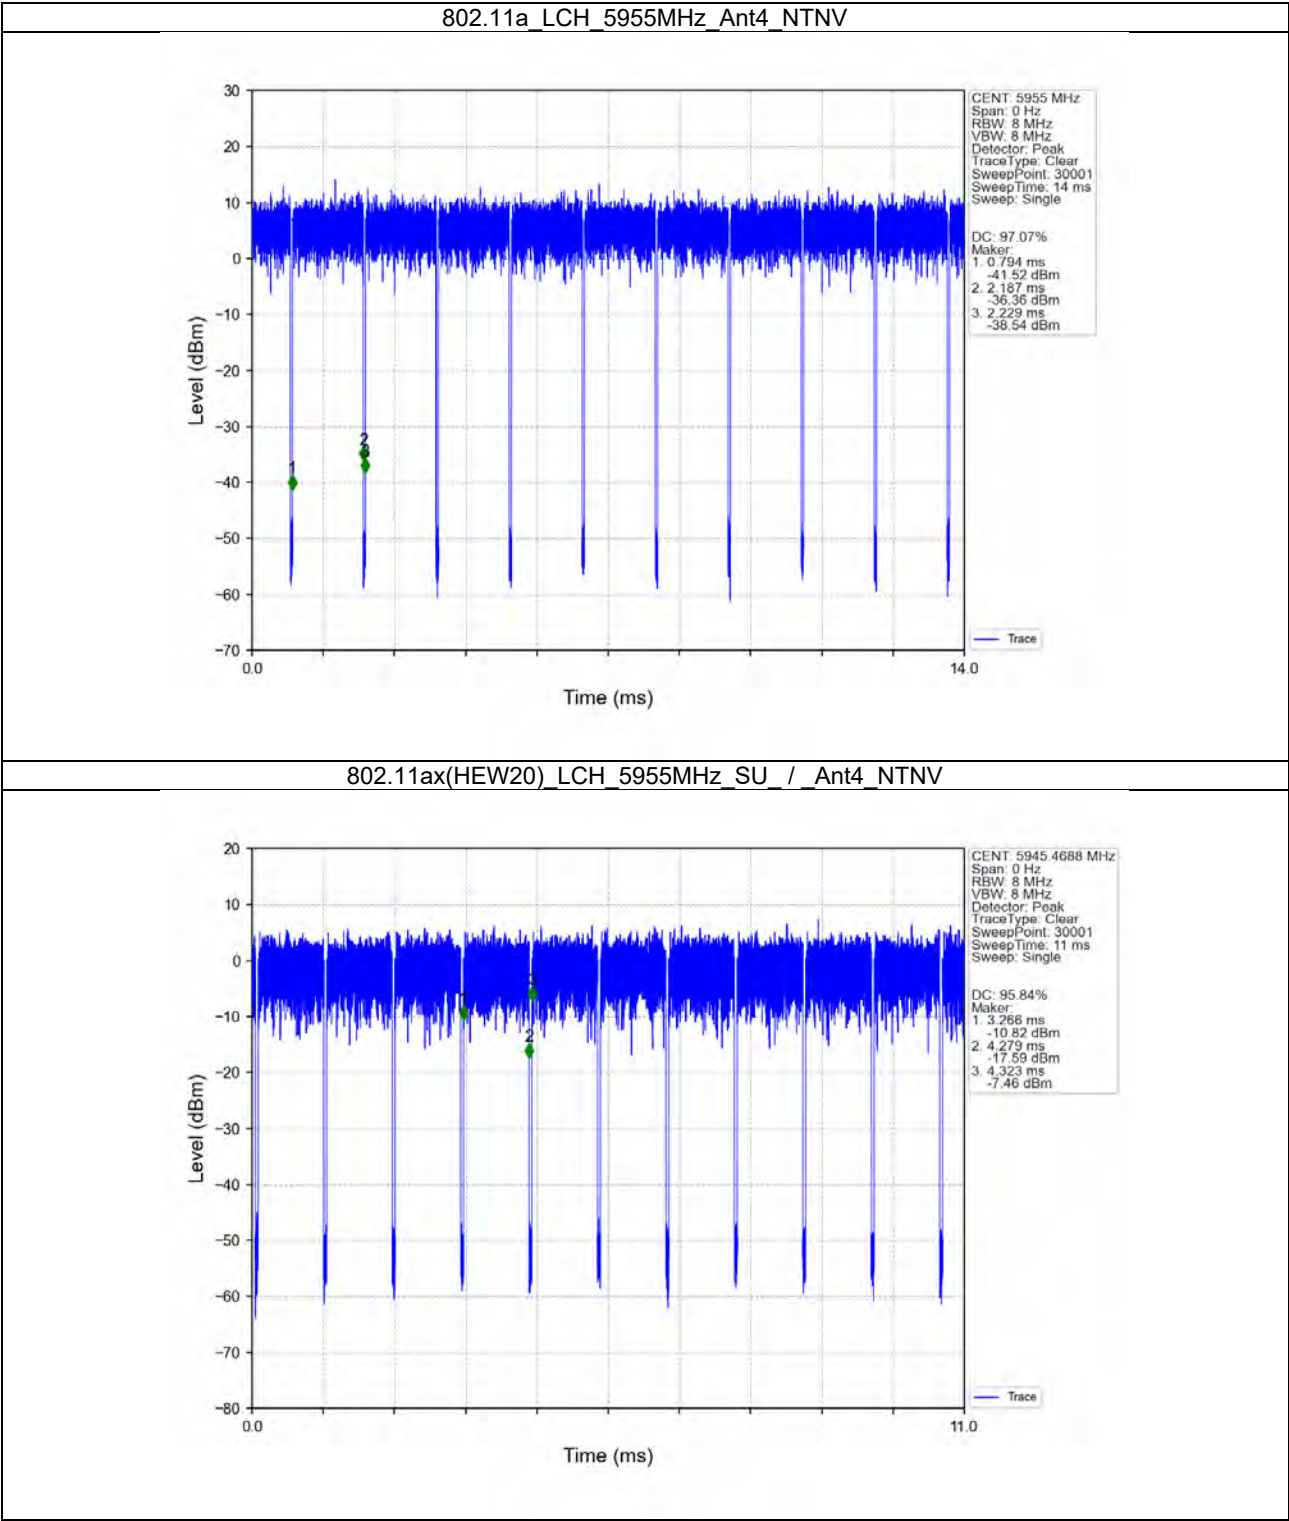





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 34 of 708

802.11ax(HEW40)_LCH_5965MHz_SU_/_Ant4_NTNV

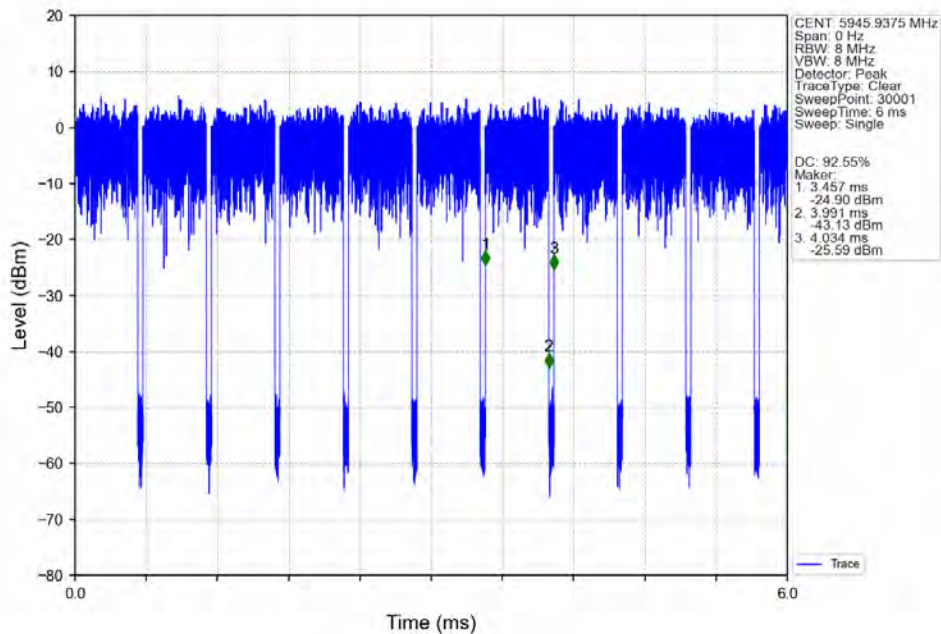


802.11ax(HEW80)_LCH_5985MHz_SU_/_Ant4_NTNV

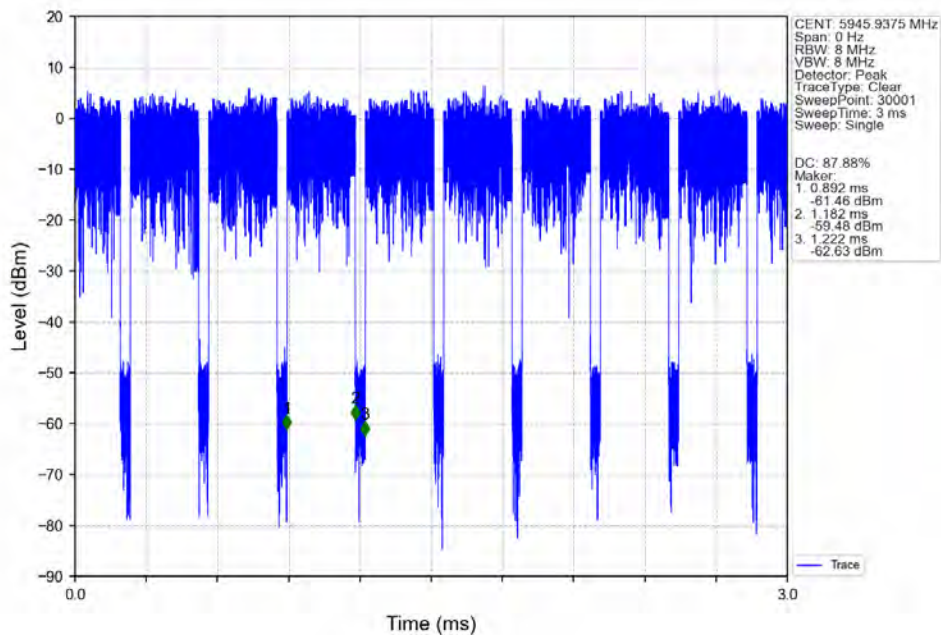



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 35 of 708

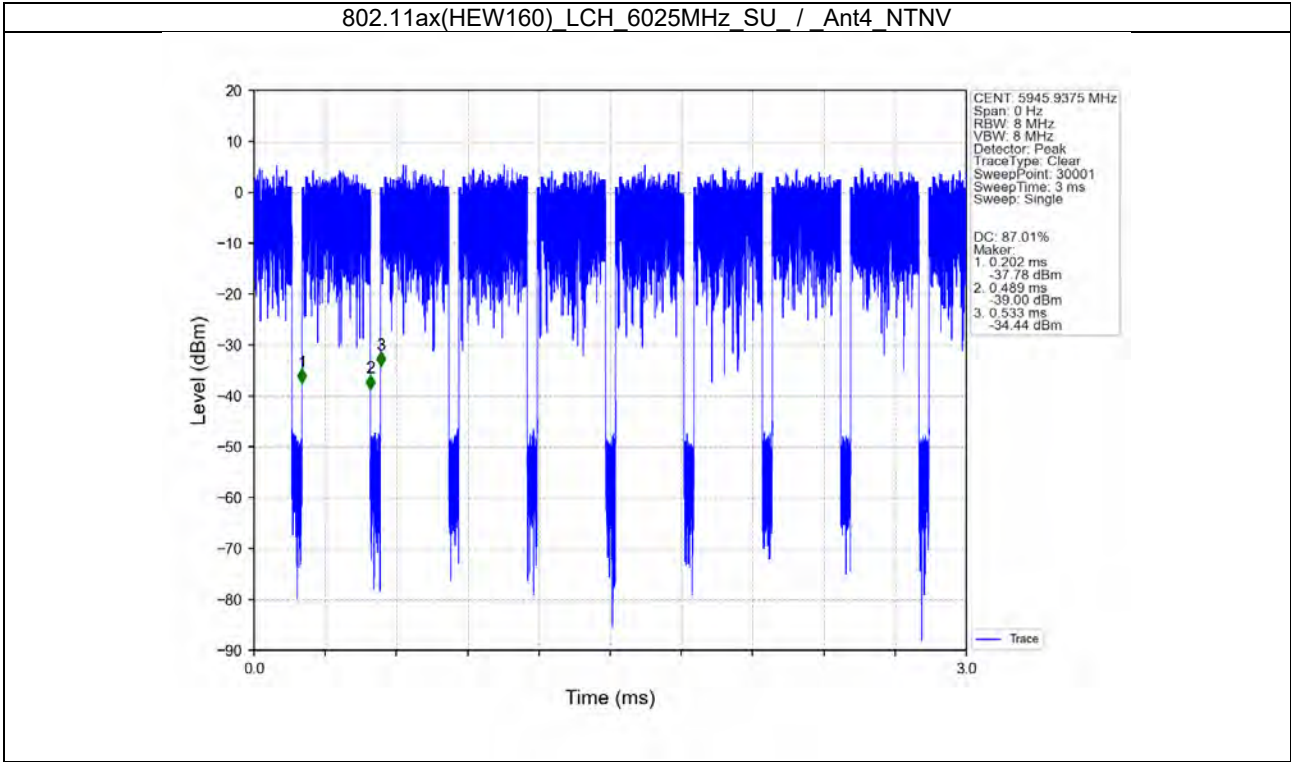




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 36 of 708


1.2.2 Ant5

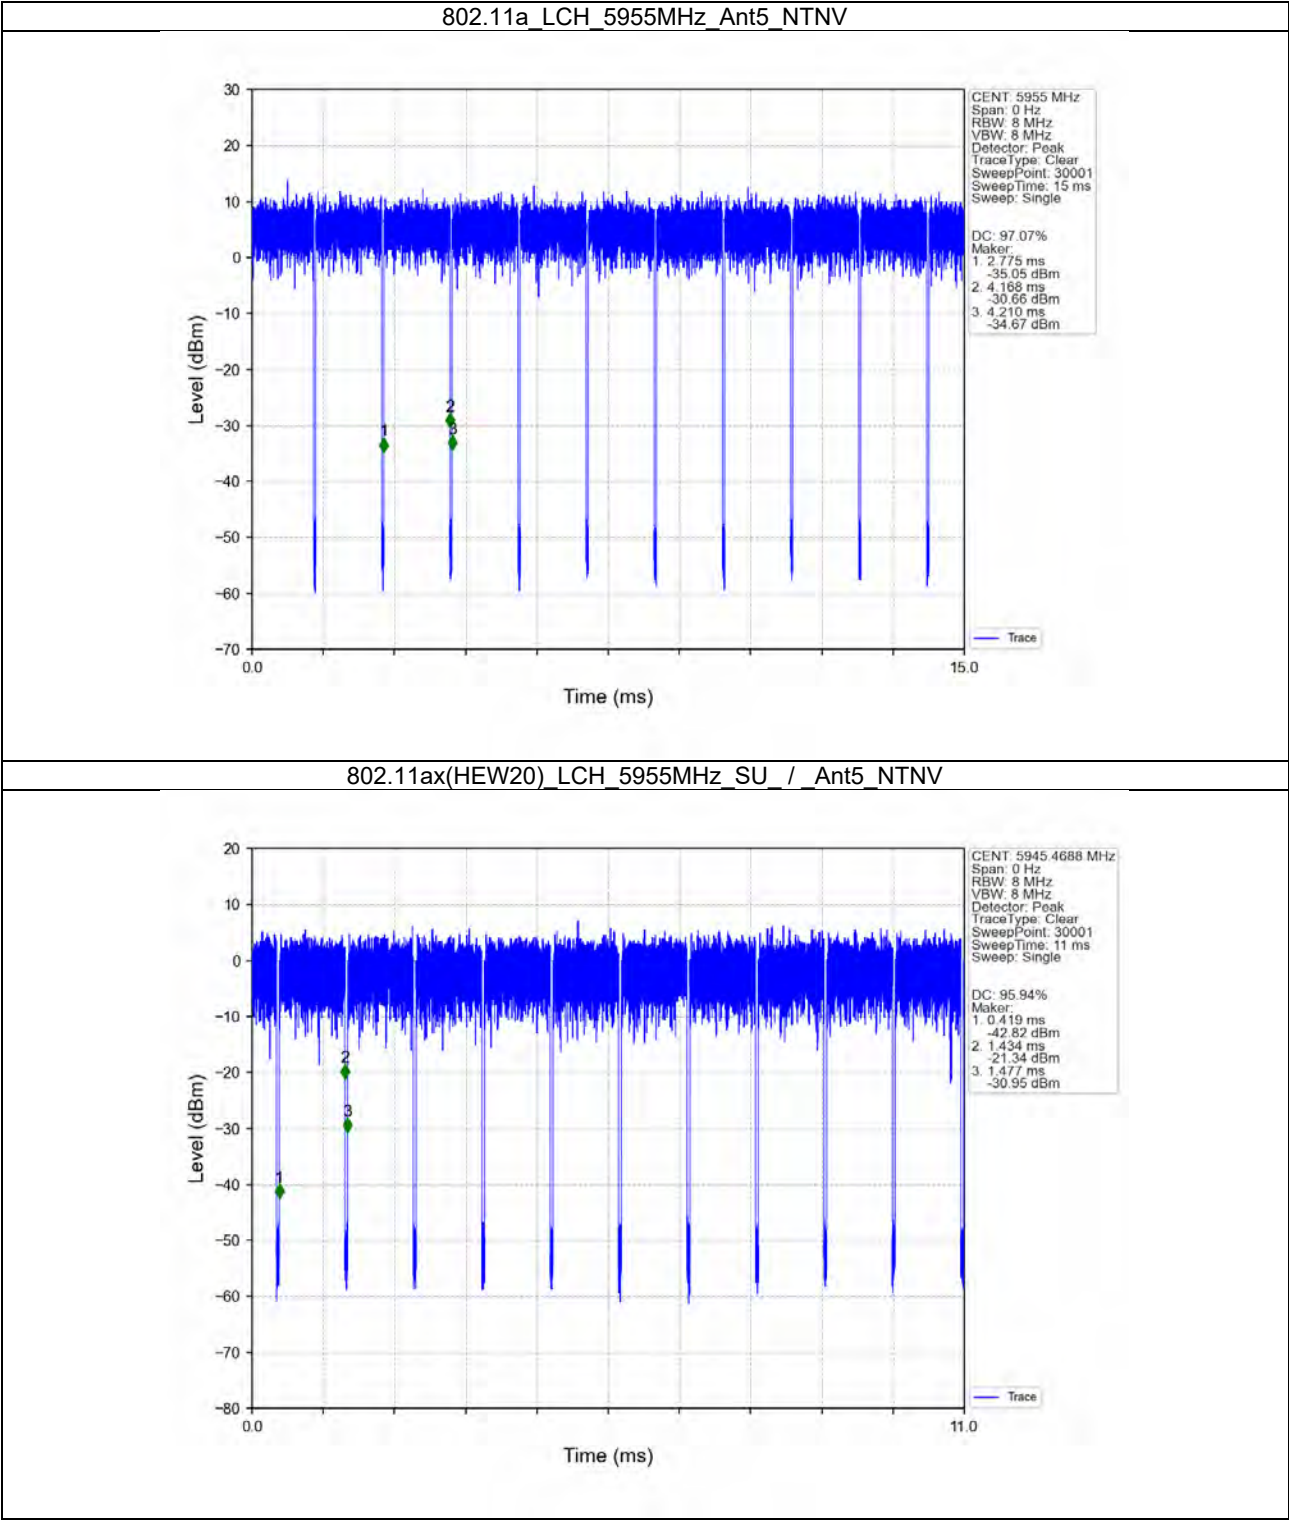



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 37 of 708

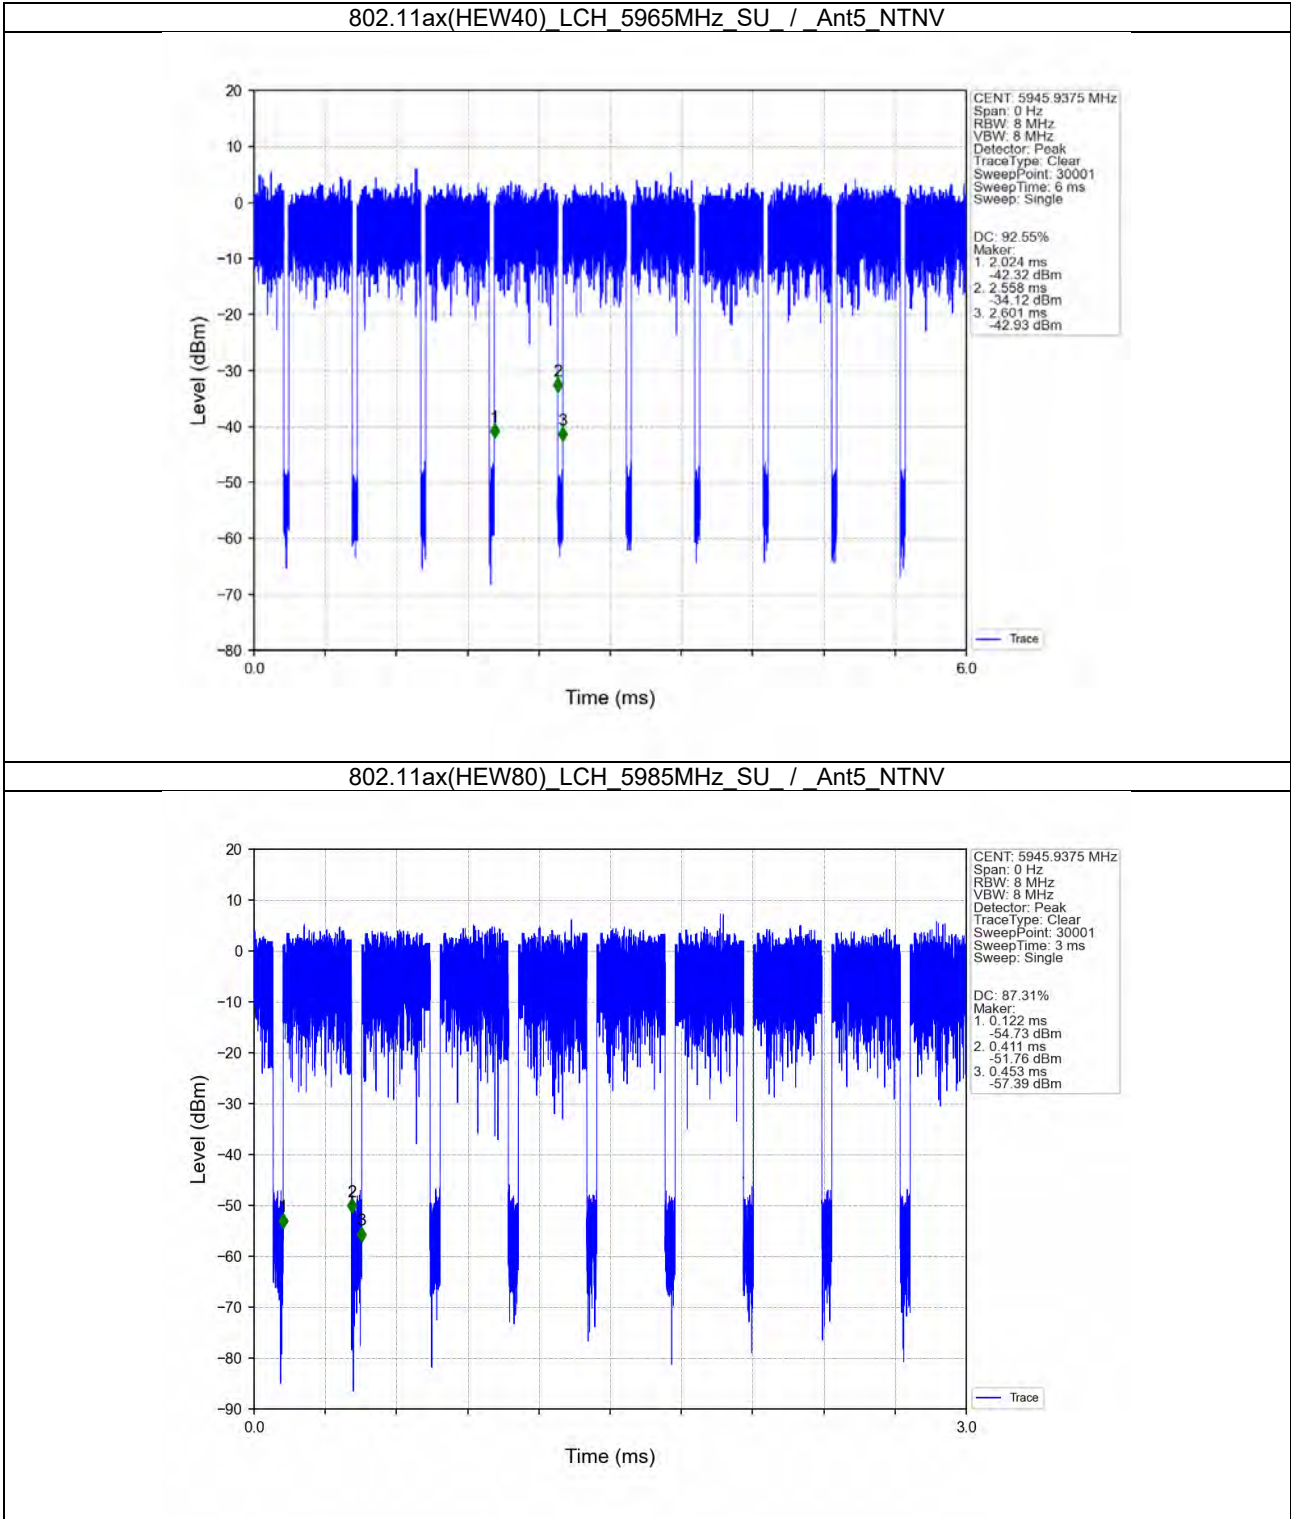



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 38 of 708

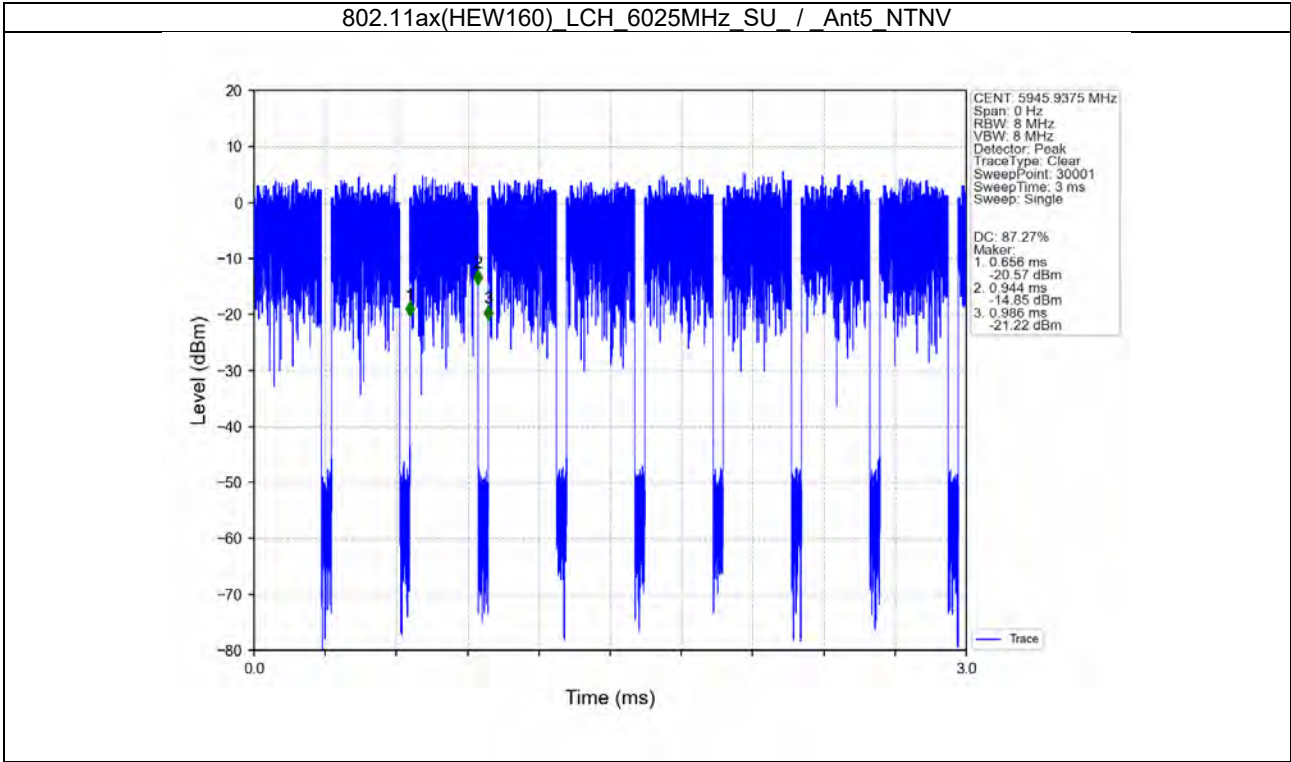



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 39 of 708

2. Bandwidth

2.1 Test Result

2.1.1 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	5955	/	/	4	17.408	/	Pass
						5	17.066	/	Pass
			6175	/	/	4	17.055	/	Pass
						5	16.796	/	Pass
			6415	/	/	4	17.034	/	Pass
						5	16.781	/	Pass
	802.11ax (HEW20)	MIMO	5955	SU	/	4	19.031	/	Pass
						5	19.064	/	Pass
			6175	SU	/	4	19.042	/	Pass
						5	19.089	/	Pass
			6415	SU	/	4	19.117	/	Pass
						5	19.024	/	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	4	37.681	/	Pass
						5	37.672	/	Pass
			6165	SU	/	4	37.799	/	Pass
						5	37.687	/	Pass
			6405	SU	/	4	37.746	/	Pass
						5	37.732	/	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	4	77.884	/	Pass
						5	77.962	/	Pass
			6145	SU	/	4	78.082	/	Pass
						5	78.046	/	Pass
			6385	SU	/	4	78.078	/	Pass
						5	77.951	/	Pass
	802.11ax (HEW160)	MIMO	6025	SU	/	4	156.572	/	Pass
						5	157.028	/	Pass
			6185	SU	/	4	157.093	/	Pass
						5	157.147	/	Pass
			6345	SU	/	4	157.140	/	Pass
						5	156.564	/	Pass

2.1.2 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	5955	/	/	4	21.049	<=320	Pass
						5	20.307	<=320	Pass
			6175	/	/	4	20.012	<=320	Pass
						5	19.791	<=320	Pass
			6415	/	/	4	19.842	<=320	Pass
						5	19.676	<=320	Pass
	802.11ax (HEW20)	MIMO	5955	SU	/	4	21.487	<=320	Pass
						5	21.112	<=320	Pass
			6175	SU	/	4	20.819	<=320	Pass
						5	20.811	<=320	Pass
			6415	SU	/	4	21.719	<=320	Pass
						5	21.429	<=320	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	4	39.661	<=320	Pass
						5	39.583	<=320	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 40 of 708

			6165	SU	/	4	39.559	<=320	Pass
						5	39.420	<=320	Pass
			6405	SU	/	4	39.400	<=320	Pass
						5	39.652	<=320	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	4	80.501	<=320	Pass
						5	80.490	<=320	Pass
			6145	SU	/	4	80.354	<=320	Pass
						5	80.464	<=320	Pass
			6385	SU	/	4	80.508	<=320	Pass
						5	80.527	<=320	Pass
	802.11ax (HEW160)	MIMO	6025	SU	/	4	162.119	<=320	Pass
						5	161.847	<=320	Pass
			6185	SU	/	4	162.360	<=320	Pass
						5	161.998	<=320	Pass
			6345	SU	/	4	162.301	<=320	Pass
						5	162.030	<=320	Pass

2.1.3 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6435	/	/	4	17.033	/	Pass
						5	16.817	/	Pass
			6475	/	/	4	17.100	/	Pass
						5	16.813	/	Pass
			6515	/	/	4	17.144	/	Pass
						5	16.803	/	Pass
	802.11ax (HEW20)	MIMO	6435	SU	/	4	19.082	/	Pass
						5	19.049	/	Pass
			6475	SU	/	4	19.080	/	Pass
						5	19.008	/	Pass
			6515	SU	/	4	19.035	/	Pass
						5	19.031	/	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	4	37.737	/	Pass
						5	37.651	/	Pass
			6485	SU	/	4	37.657	/	Pass
						5	37.661	/	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	4	77.972	/	Pass
						5	77.977	/	Pass

2.1.4 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6435	/	/	4	19.842	<=320	Pass
						5	19.862	<=320	Pass
			6475	/	/	4	20.391	<=320	Pass
						5	20.068	<=320	Pass
			6515	/	/	4	19.991	<=320	Pass
						5	19.503	<=320	Pass
	802.11ax (HEW20)	MIMO	6435	SU	/	4	21.168	<=320	Pass
						5	20.853	<=320	Pass
			6475	SU	/	4	21.693	<=320	Pass
						5	21.502	<=320	Pass
			6515	SU	/	4	21.156	<=320	Pass
						5	21.341	<=320	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	4	39.544	<=320	Pass
						5	39.519	<=320	Pass
			6485	SU	/	4	39.559	<=320	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 41 of 708

						5	39.518	<=320	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	4	80.553	<=320	Pass
						5	80.272	<=320	Pass

2.1.5 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6535	/	/	4	17.063	/	Pass
						5	16.820	/	Pass
			6695	/	/	4	17.067	/	Pass
						5	16.791	/	Pass
			6855	/	/	4	17.113	/	Pass
						5	16.832	/	Pass
	802.11ax (HEW20)	MIMO	6535	SU	/	4	19.091	/	Pass
						5	19.100	/	Pass
			6695	SU	/	4	19.070	/	Pass
						5	19.032	/	Pass
			6855	SU	/	4	19.086	/	Pass
						5	19.024	/	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	4	37.690	/	Pass
						5	37.785	/	Pass
			6685	SU	/	4	37.662	/	Pass
						5	37.609	/	Pass
			6845	SU	/	4	37.698	/	Pass
						5	37.603	/	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	4	77.899	/	Pass
						5	77.797	/	Pass
			6705	SU	/	4	77.996	/	Pass
						5	78.076	/	Pass
			6785	SU	/	4	77.882	/	Pass
						5	77.984	/	Pass
	802.11ax (HEW160)	MIMO	6665	SU	/	4	156.958	/	Pass
						5	157.085	/	Pass

2.1.6 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6535	/	/	4	20.183	<=320	Pass
						5	19.699	<=320	Pass
			6695	/	/	4	20.484	<=320	Pass
						5	19.780	<=320	Pass
			6855	/	/	4	20.375	<=320	Pass
						5	19.916	<=320	Pass
	802.11ax (HEW20)	MIMO	6535	SU	/	4	21.276	<=320	Pass
						5	21.116	<=320	Pass
			6695	SU	/	4	21.251	<=320	Pass
						5	20.870	<=320	Pass
			6855	SU	/	4	21.076	<=320	Pass
						5	20.792	<=320	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	4	39.476	<=320	Pass
						5	39.491	<=320	Pass
			6685	SU	/	4	39.543	<=320	Pass
						5	39.528	<=320	Pass
			6845	SU	/	4	39.467	<=320	Pass
						5	39.393	<=320	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	4	80.418	<=320	Pass
						5	80.617	<=320	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 42 of 708

	802.11ax (HEW160)	MIMO	6705	SU	/	4	80.412	<=320	Pass
						5	80.280	<=320	Pass
			6785	SU	/	4	80.627	<=320	Pass
						5	80.359	<=320	Pass
			6665	SU	/	4	162.035	<=320	Pass
						5	162.118	<=320	Pass

2.1.7 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6895	/	/	4	17.100	/	Pass
						5	16.818	/	Pass
			6995	/	/	4	16.984	/	Pass
						5	16.778	/	Pass
			7115	/	/	4	17.038	/	Pass
						5	16.823	/	Pass
	802.11ax (HEW20)	MIMO	6895	SU	/	4	19.071	/	Pass
						5	19.123	/	Pass
			6995	SU	/	4	19.102	/	Pass
						5	19.031	/	Pass
			7115	SU	/	4	19.036	/	Pass
						5	19.075	/	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	4	37.681	/	Pass
						5	37.642	/	Pass
			7005	SU	/	4	37.638	/	Pass
						5	37.709	/	Pass
			7085	SU	/	4	37.751	/	Pass
						5	37.816	/	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	4	77.889	/	Pass
						5	77.881	/	Pass
			7025	SU	/	4	78.000	/	Pass
						5	77.996	/	Pass
	802.11ax (HEW160)	MIMO	6985	SU	/	4	156.981	/	Pass
						5	157.293	/	Pass

2.1.8 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6895	/	/	4	19.925	<=320	Pass
						5	19.857	<=320	Pass
			6995	/	/	4	20.437	<=320	Pass
						5	20.185	<=320	Pass
			7115	/	/	4	20.374	<=320	Pass
						5	19.757	<=320	Pass
	802.11ax (HEW20)	MIMO	6895	SU	/	4	21.135	<=320	Pass
						5	21.267	<=320	Pass
			6995	SU	/	4	21.214	<=320	Pass
						5	20.975	<=320	Pass
			7115	SU	/	4	20.685	<=320	Pass
						5	21.103	<=320	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	4	39.501	<=320	Pass
						5	39.503	<=320	Pass
			7005	SU	/	4	39.599	<=320	Pass
						5	39.545	<=320	Pass
			7085	SU	/	4	39.641	<=320	Pass
						5	39.478	<=320	Pass
	802.11ax	MIMO	6945	SU	/	4	80.477	<=320	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207

Rev.: 02

Page: 43 of 708

	(HEW80)					5	80.607	<=320	Pass
			7025	SU	/	4	80.586	<=320	Pass
						5	80.506	<=320	Pass
	802.11ax (HEW160)	MIMO	6985	SU	/	4	162.353	<=320	Pass
						5	162.317	<=320	Pass

2.1.9 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6875	/	/	4	17.105	/	Pass
						5	16.827	/	Pass
	802.11ax (HEW20)	MIMO	6875	SU	/	4	19.088	/	Pass
						5	19.031	/	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	4	37.677	/	Pass
						5	37.735	/	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	4	77.847	/	Pass
						5	78.001	/	Pass
	802.11ax (HEW160)	MIMO	6825	SU	/	4	157.003	/	Pass
						5	157.341	/	Pass

2.1.10 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11a	MIMO	6875	/	/	4	20.029	<=320	Pass
						5	19.814	<=320	Pass
	802.11ax (HEW20)	MIMO	6875	SU	/	4	21.176	<=320	Pass
						5	21.078	<=320	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	4	39.542	<=320	Pass
						5	39.548	<=320	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	4	80.511	<=320	Pass
						5	80.625	<=320	Pass
	802.11ax (HEW160)	MIMO	6825	SU	/	4	161.960	<=320	Pass
						5	162.171	<=320	Pass

2.1.11 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	4	37.814	/	Pass
						5	37.731	/	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	4	77.879	/	Pass
						5	77.960	/	Pass
	802.11ax (HEW160)	MIMO	6505	SU	/	4	156.760	/	Pass
						5	157.024	/	Pass

2.1.12 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	4	39.463	<=320	Pass
						5	39.539	<=320	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	4	80.454	<=320	Pass
						5	80.290	<=320	Pass
	802.11ax (HEW160)	MIMO	6505	SU	/	4	162.198	<=320	Pass
						5	162.249	<=320	Pass




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 44 of 708

2.2 Test Graph


2.2.1 OBW

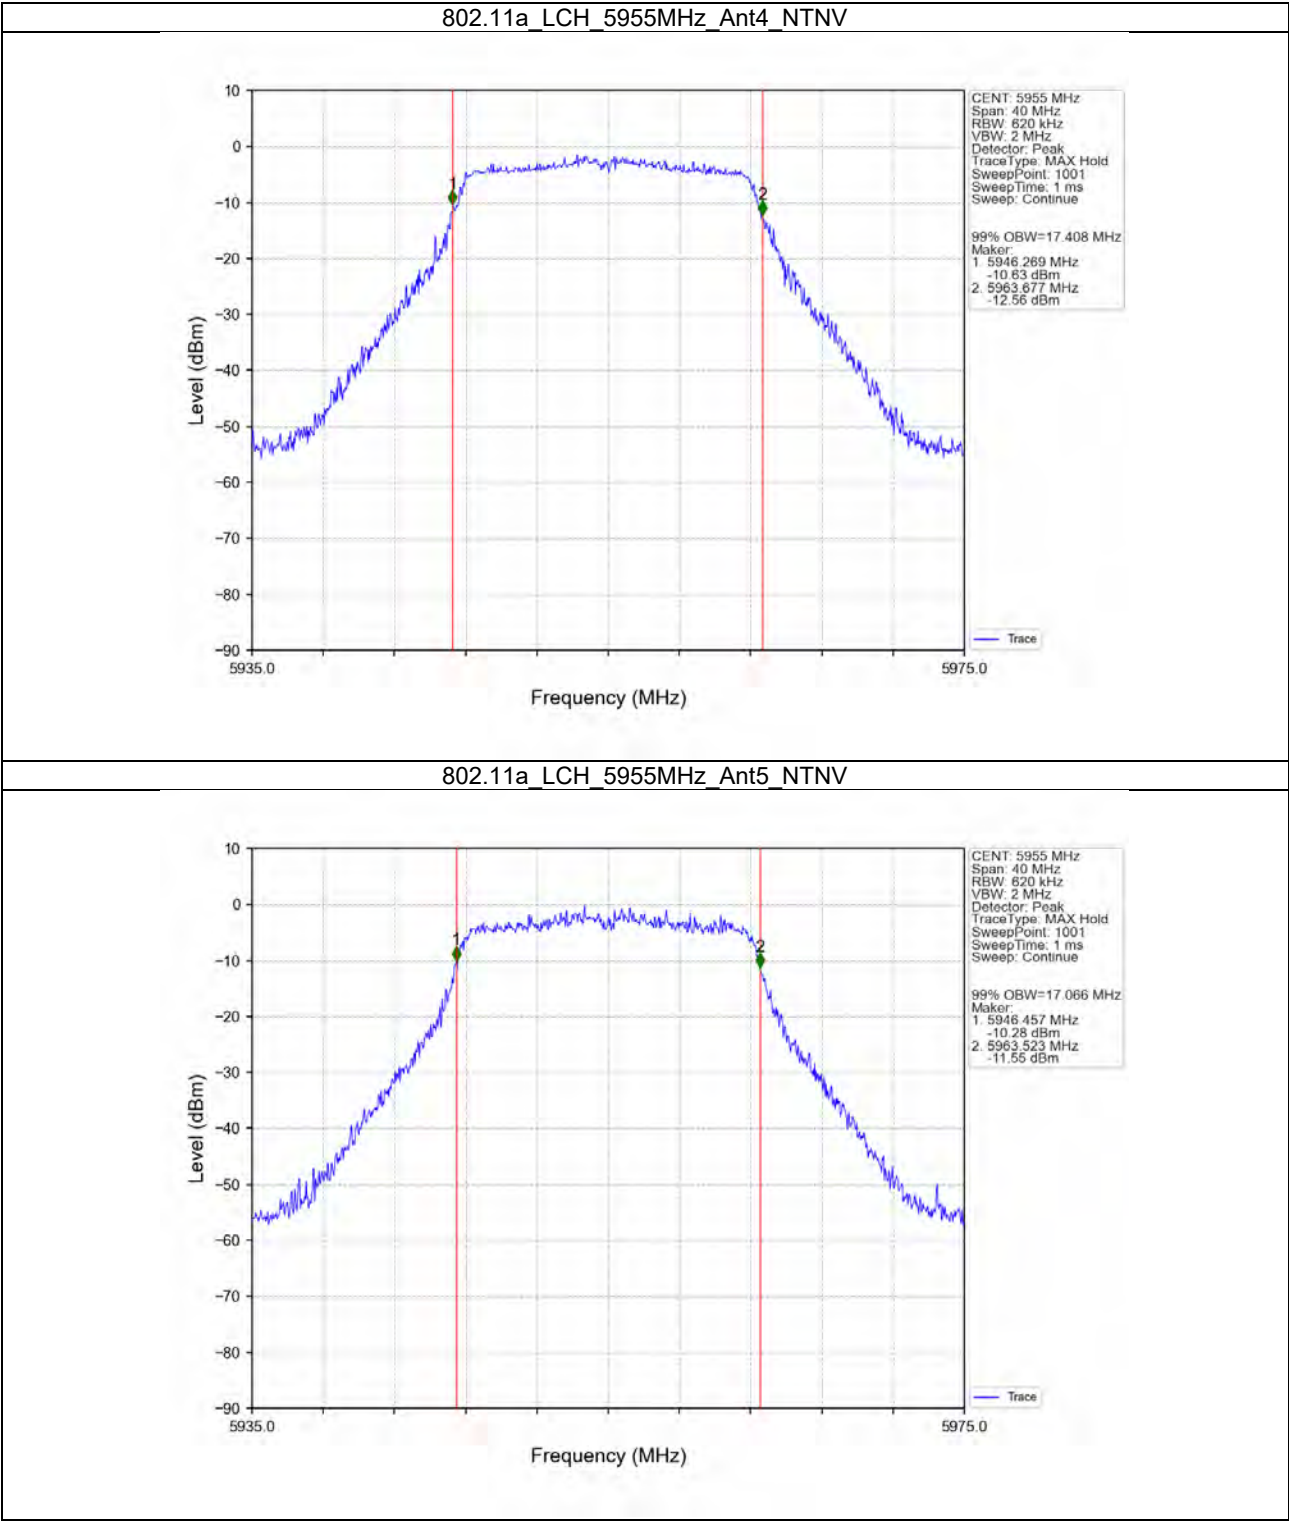



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 45 of 708

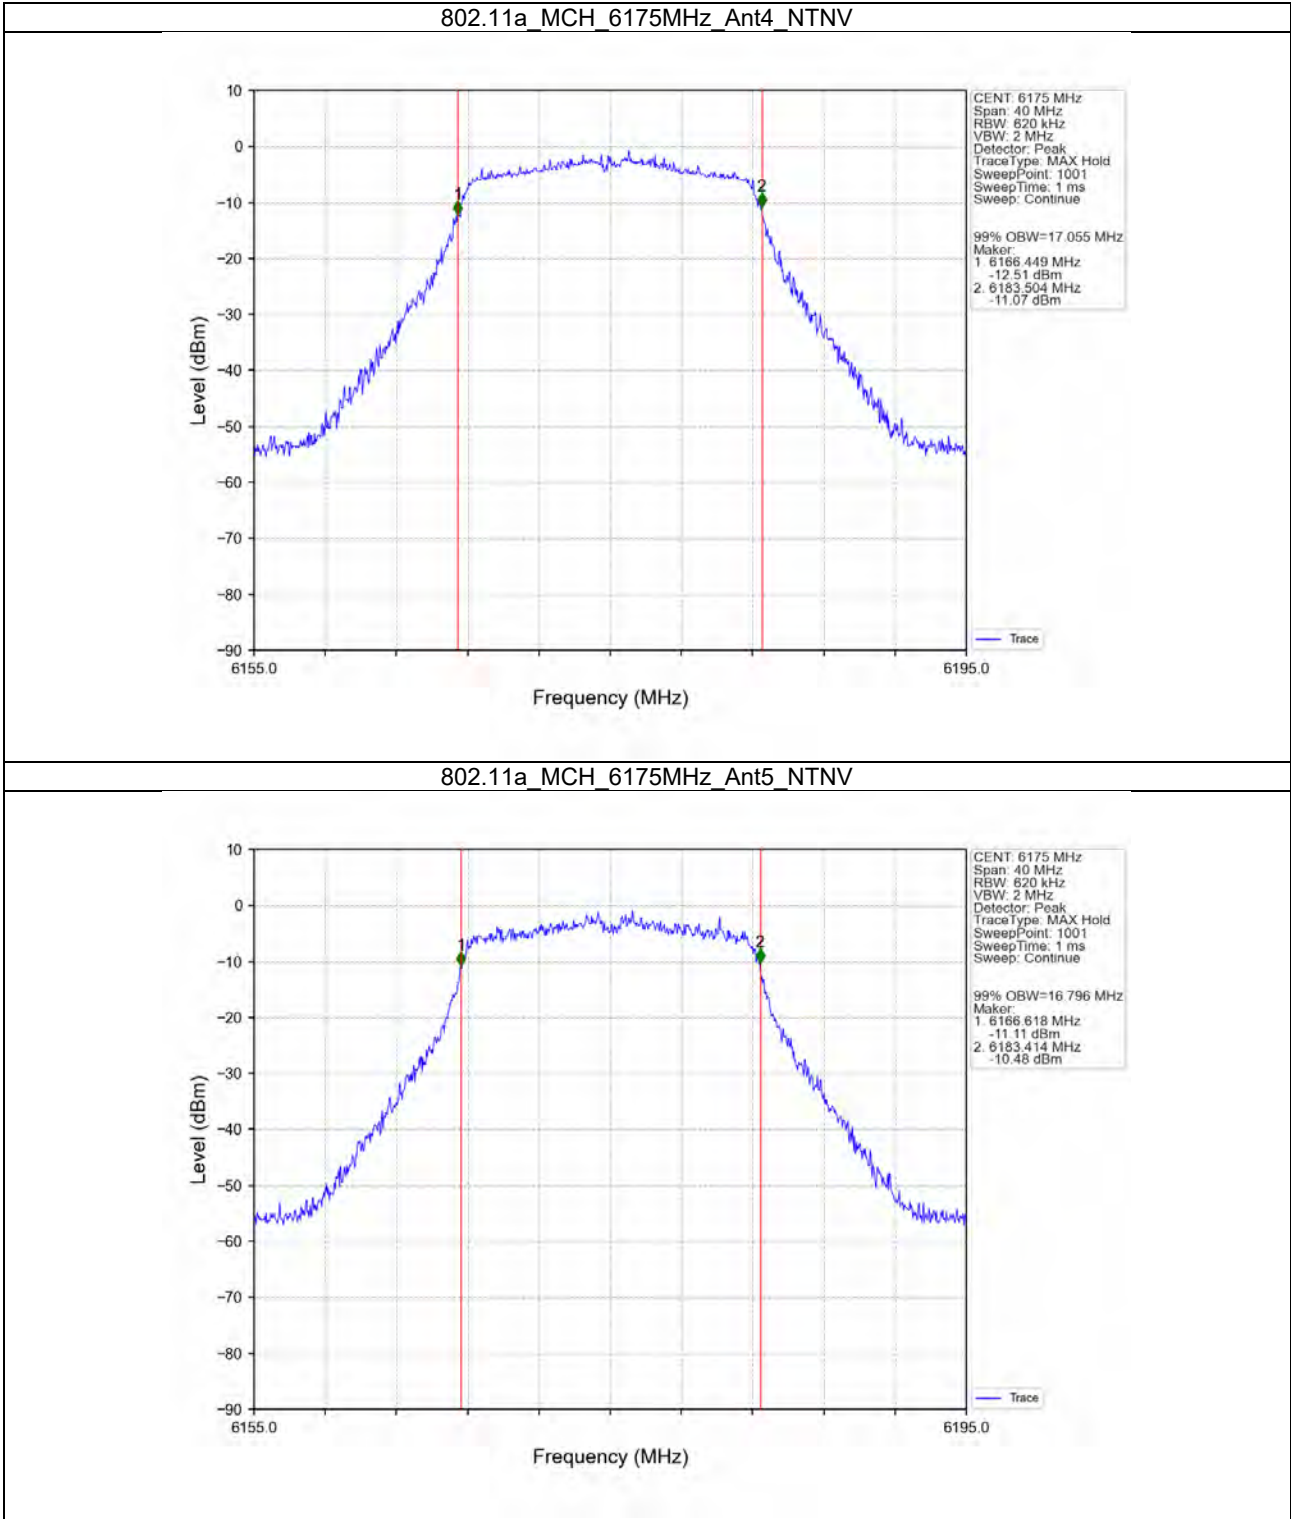



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 46 of 708

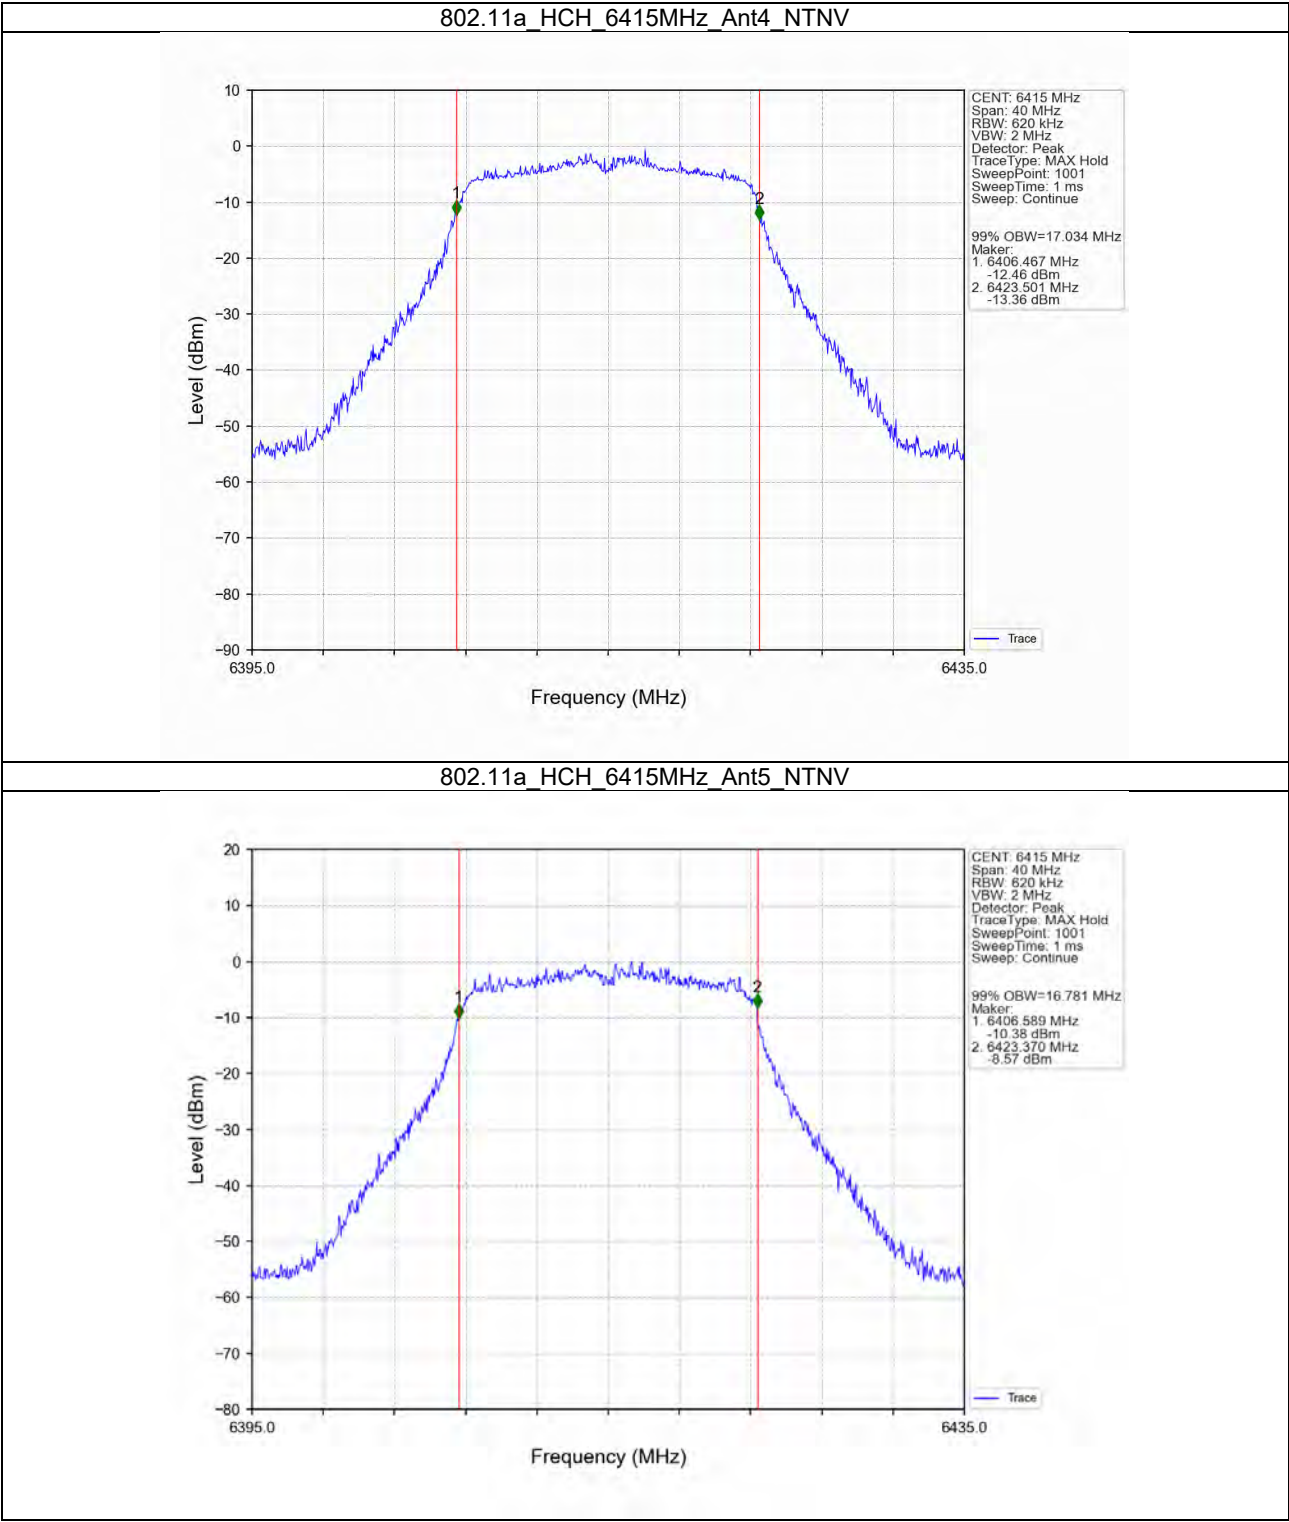



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 47 of 708

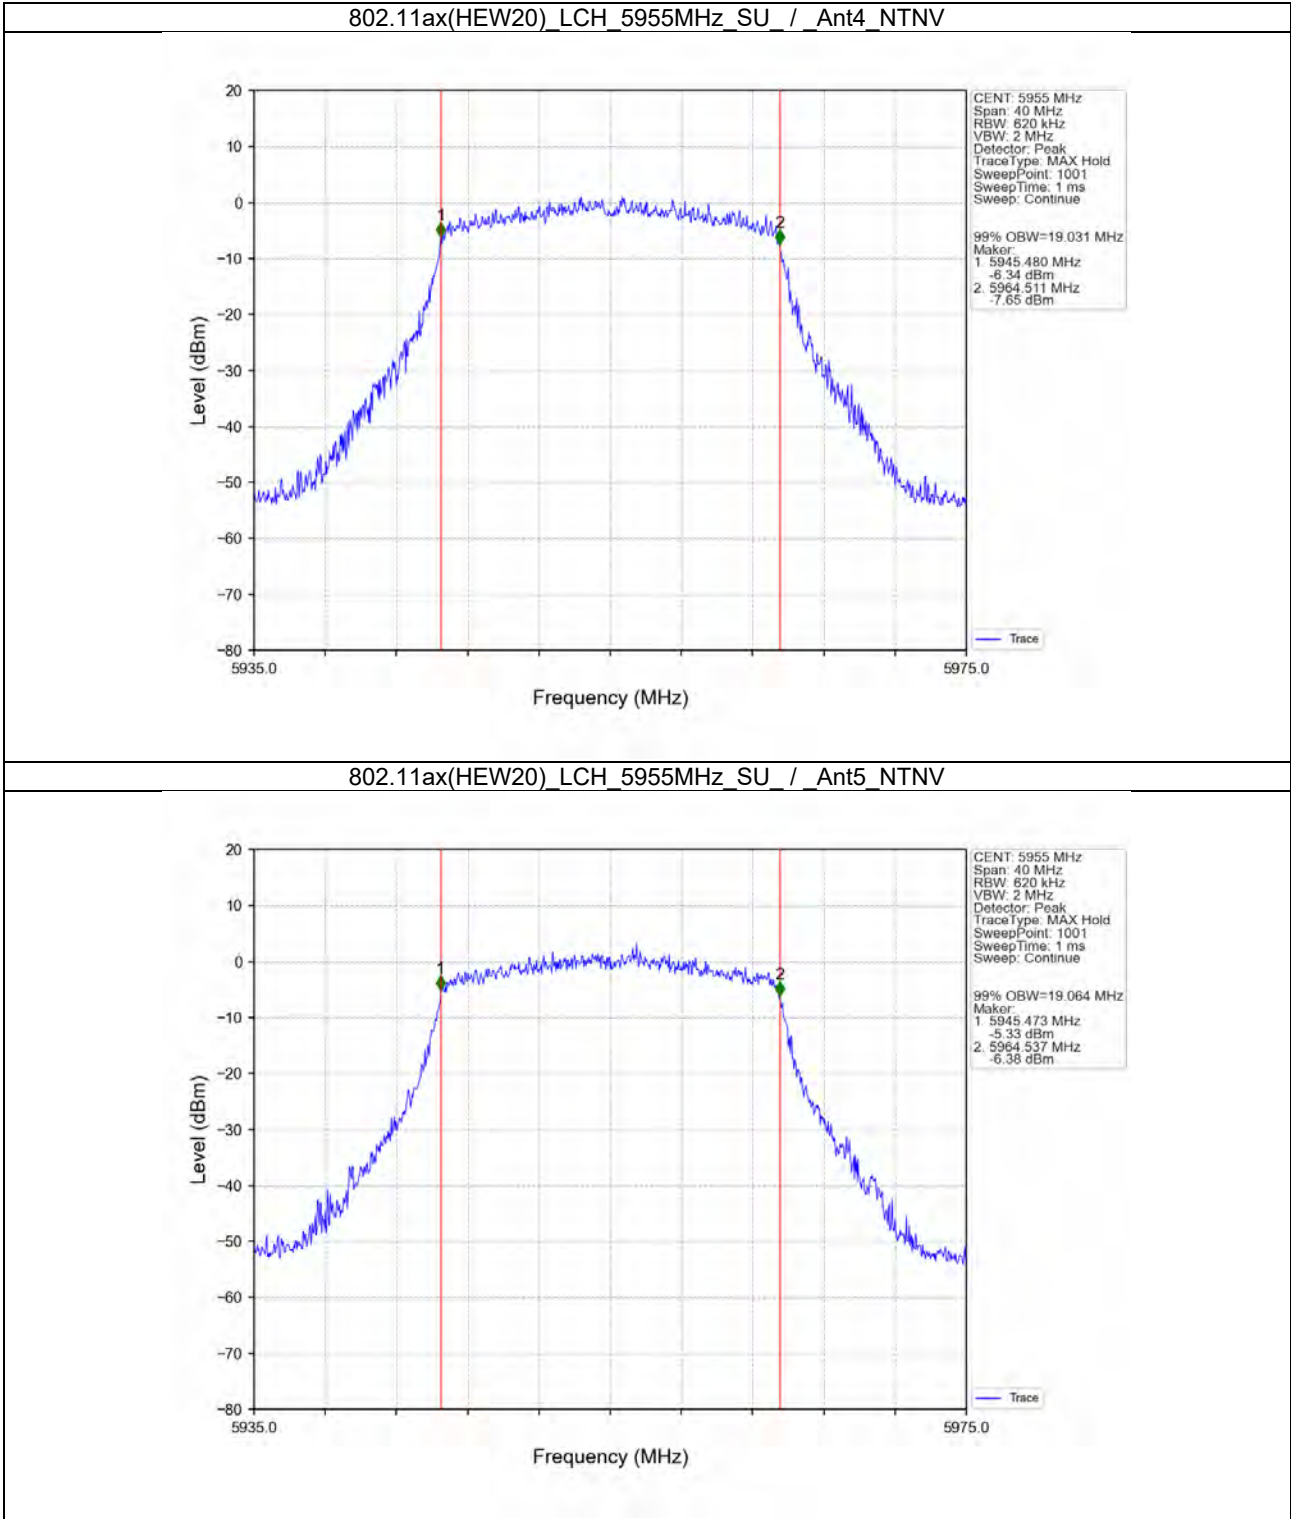



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 48 of 708

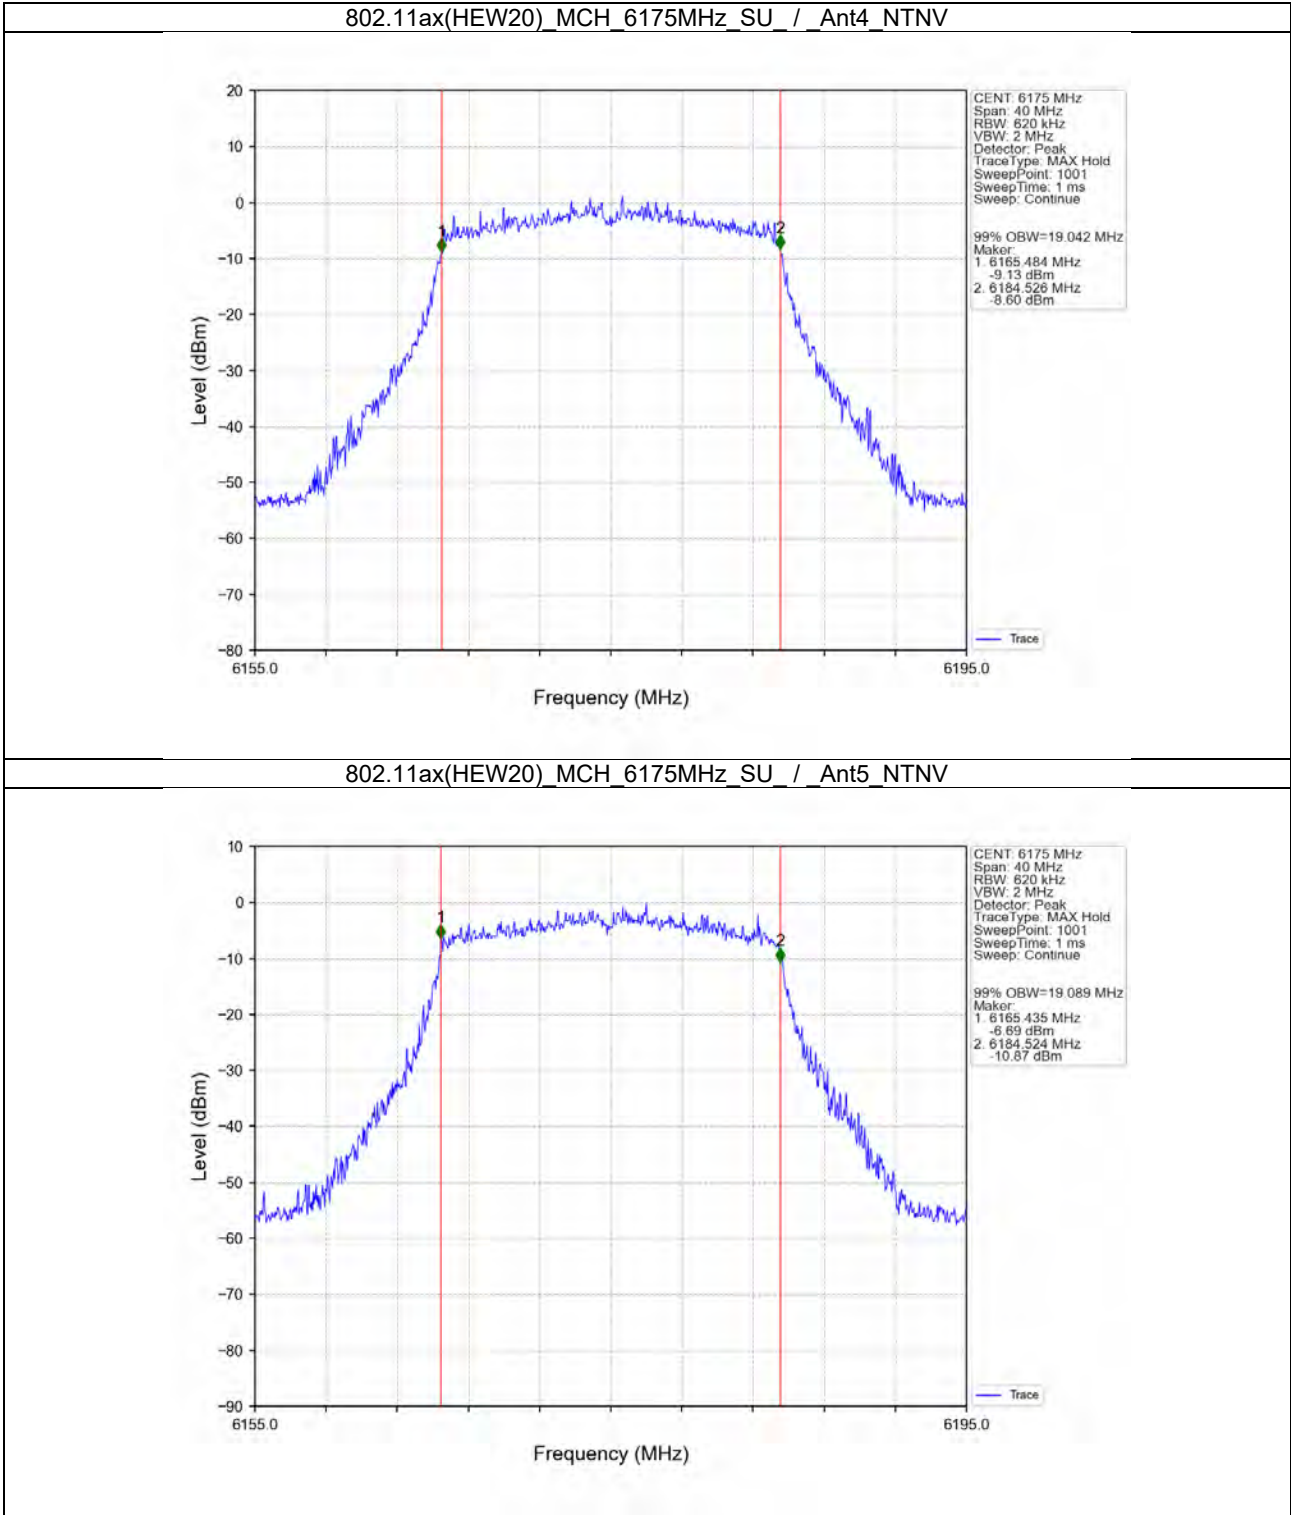





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 49 of 708

802.11ax(HEW20)_HCH_6415MHz_SU_ / Ant4_NTNV

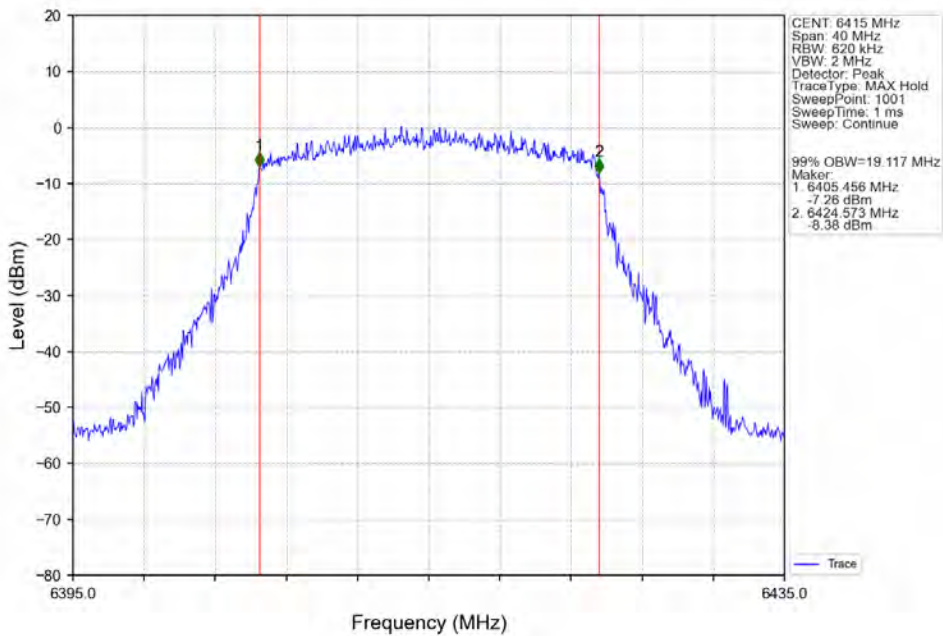

802.11ax(HEW20)_HCH_6415MHz_SU_ / Ant5_NTNV

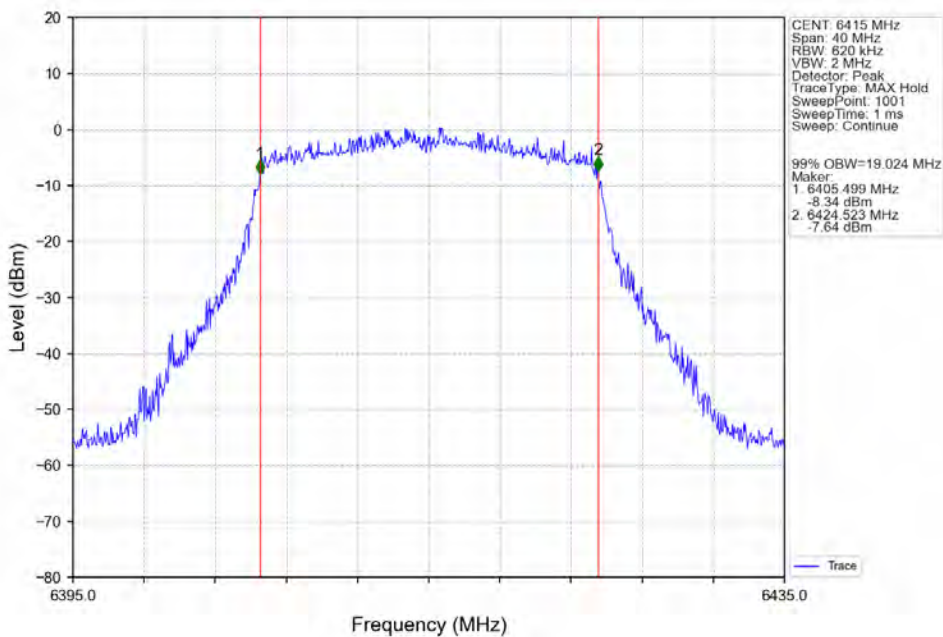





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 50 of 708

802.11ax(HEW40)_LCH_5965MHz_SU_/_Ant4_NTNV

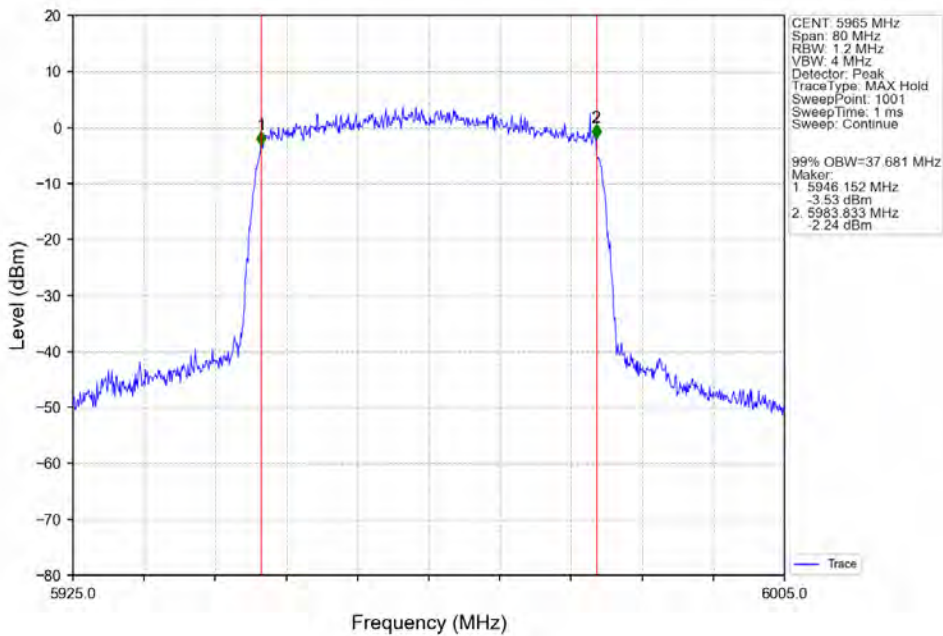


802.11ax(HEW40)_LCH_5965MHz_SU_/_Ant5_NTNV

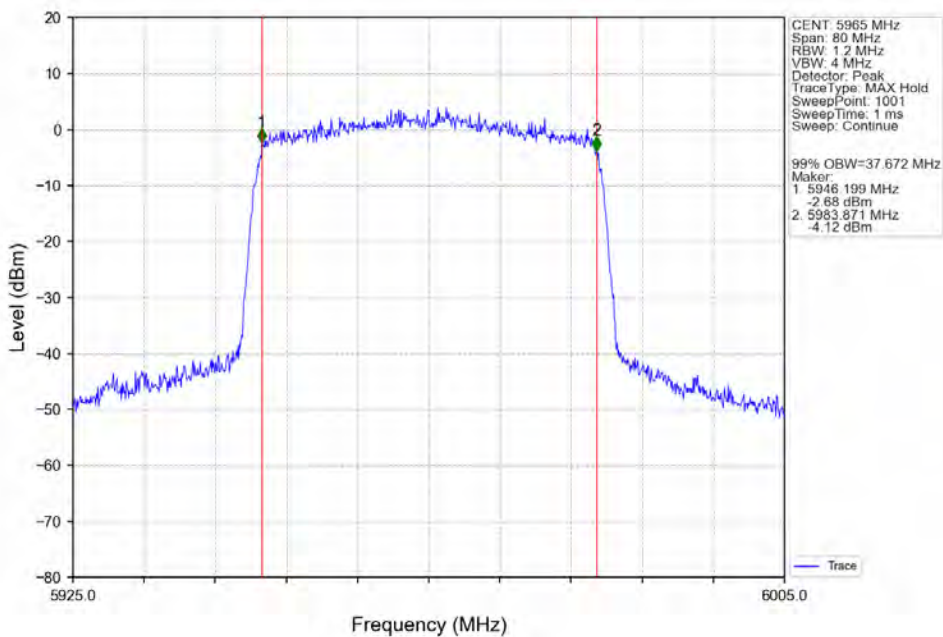



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 51 of 708

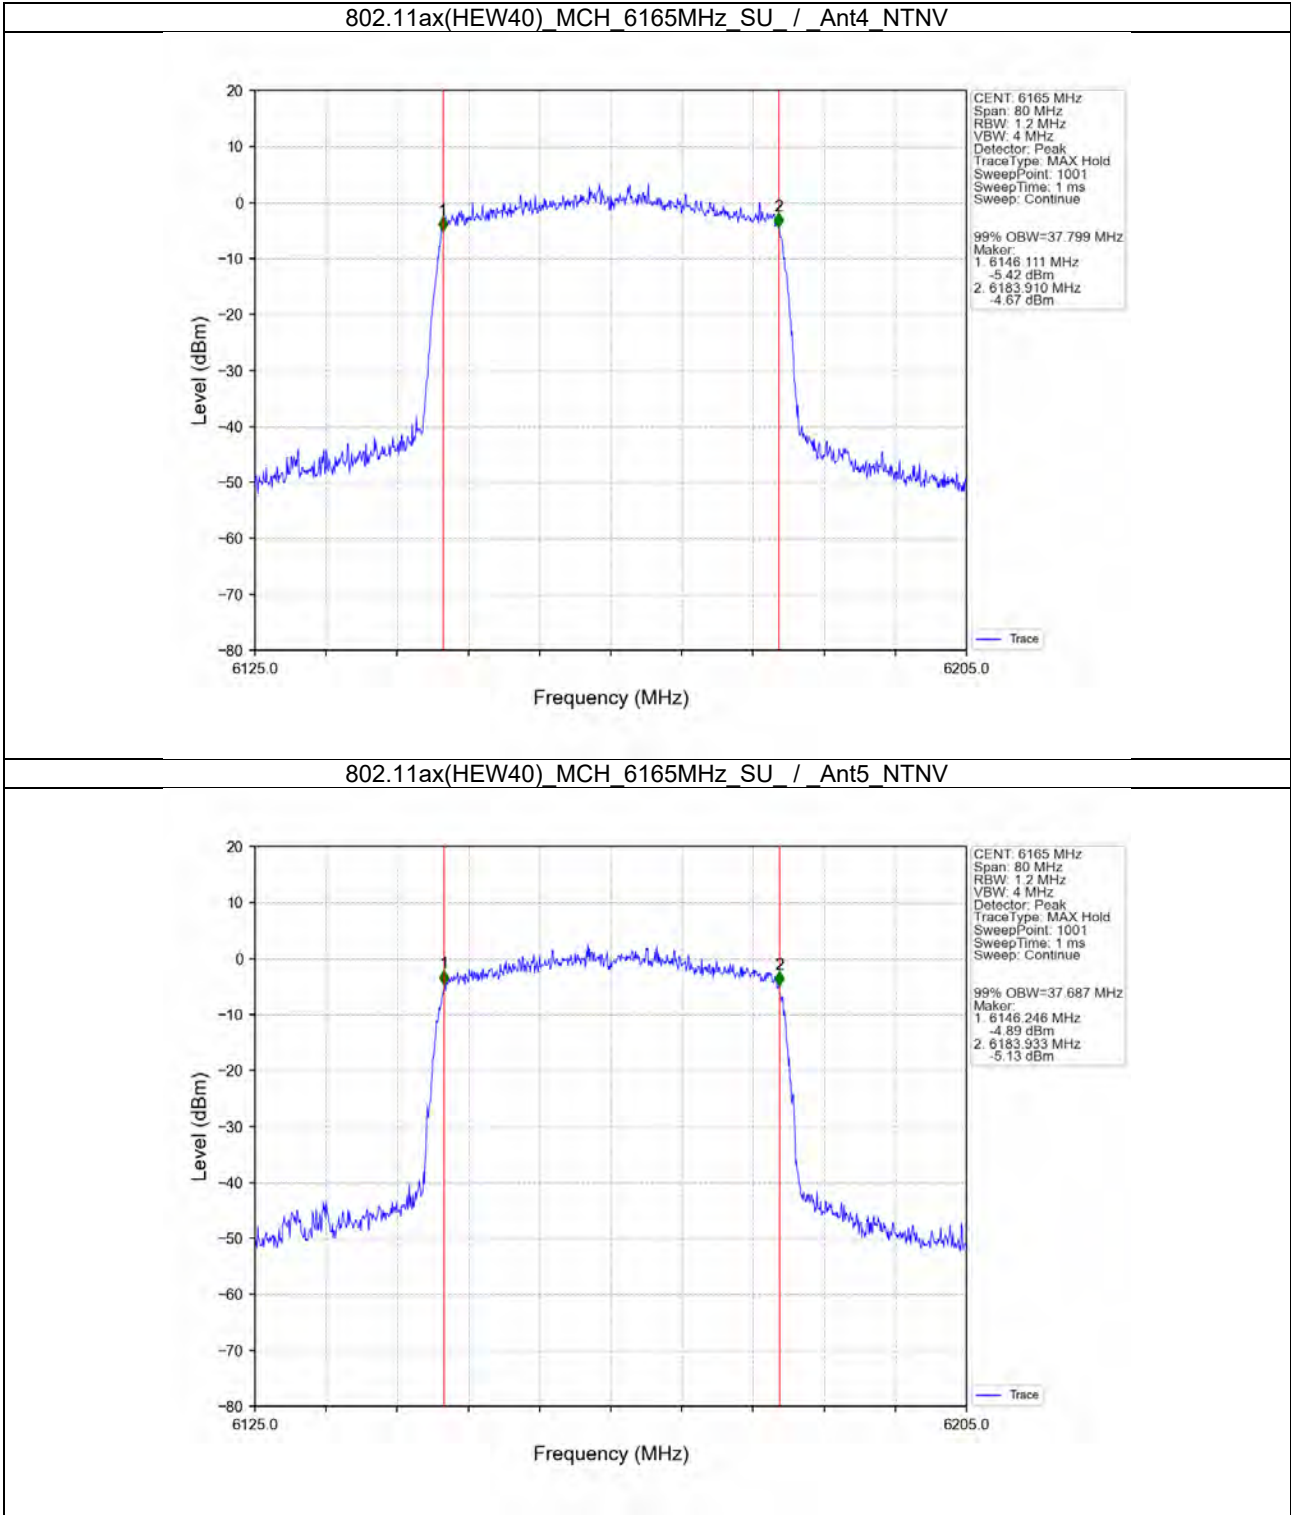



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 52 of 708

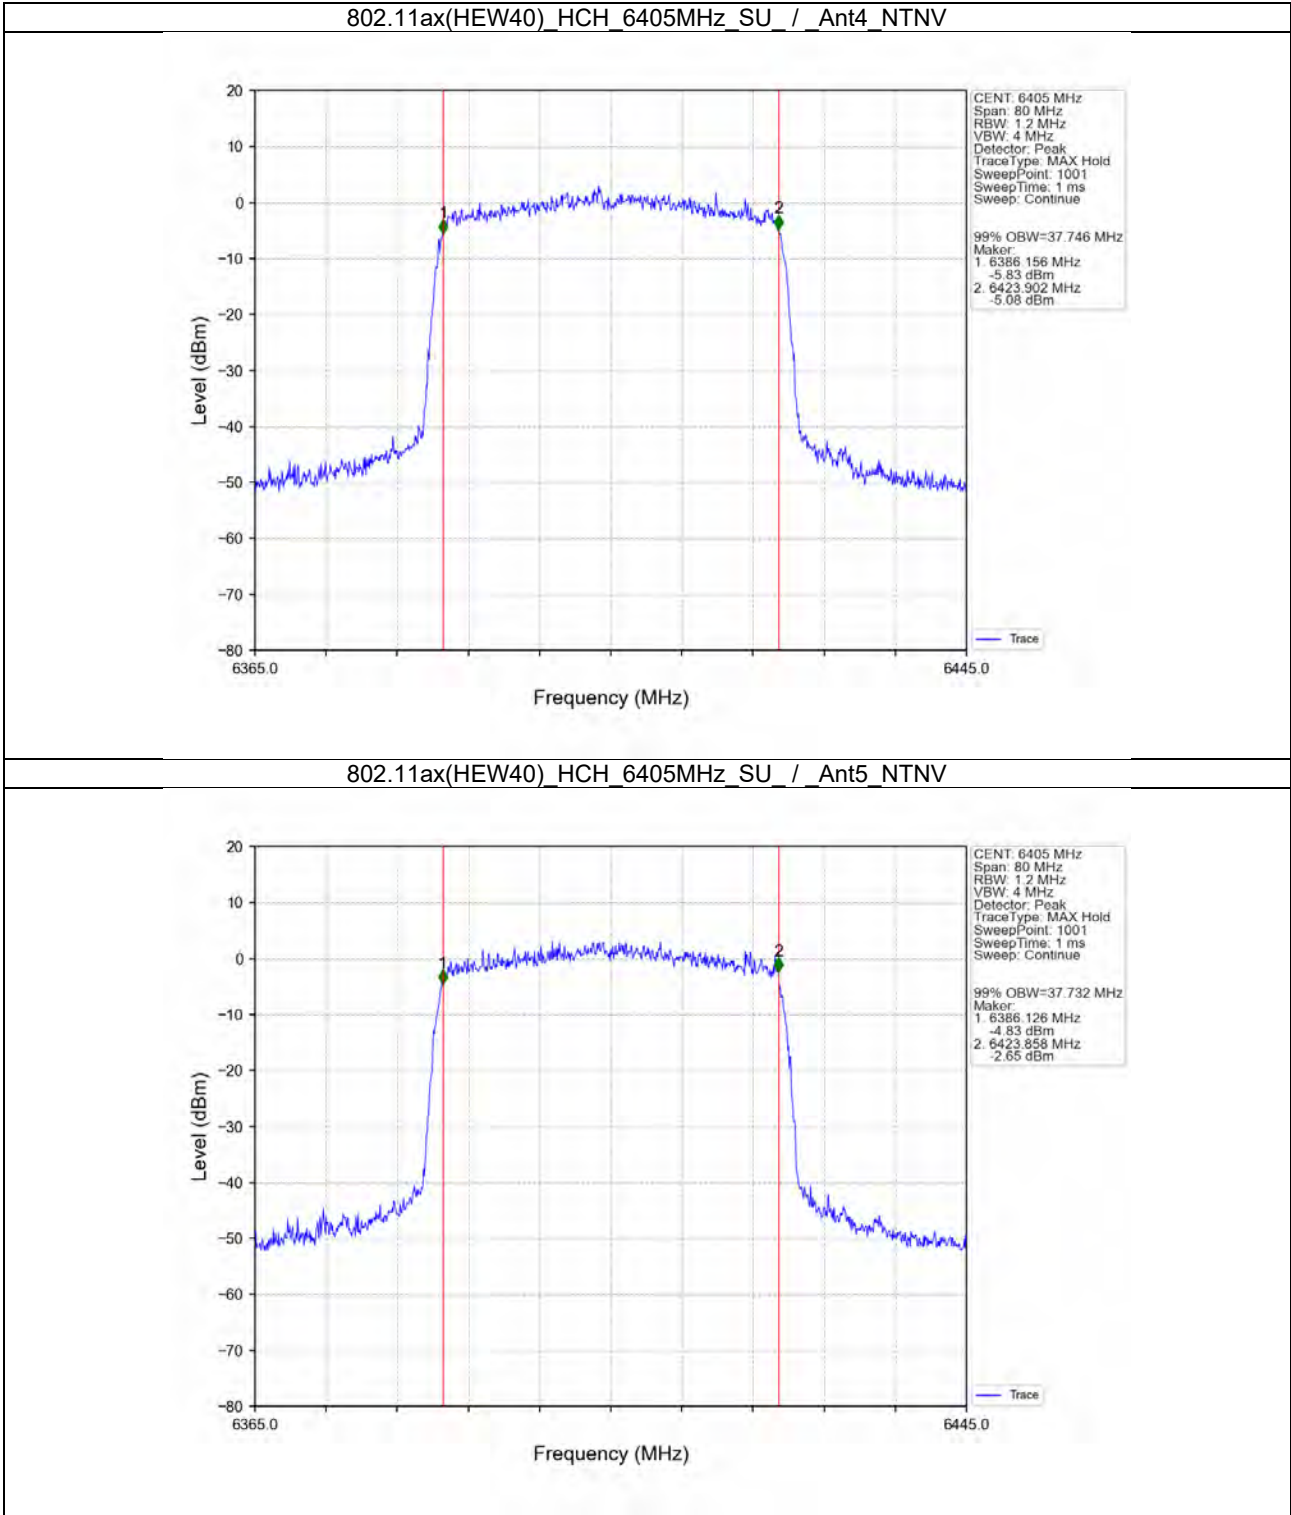



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 53 of 708

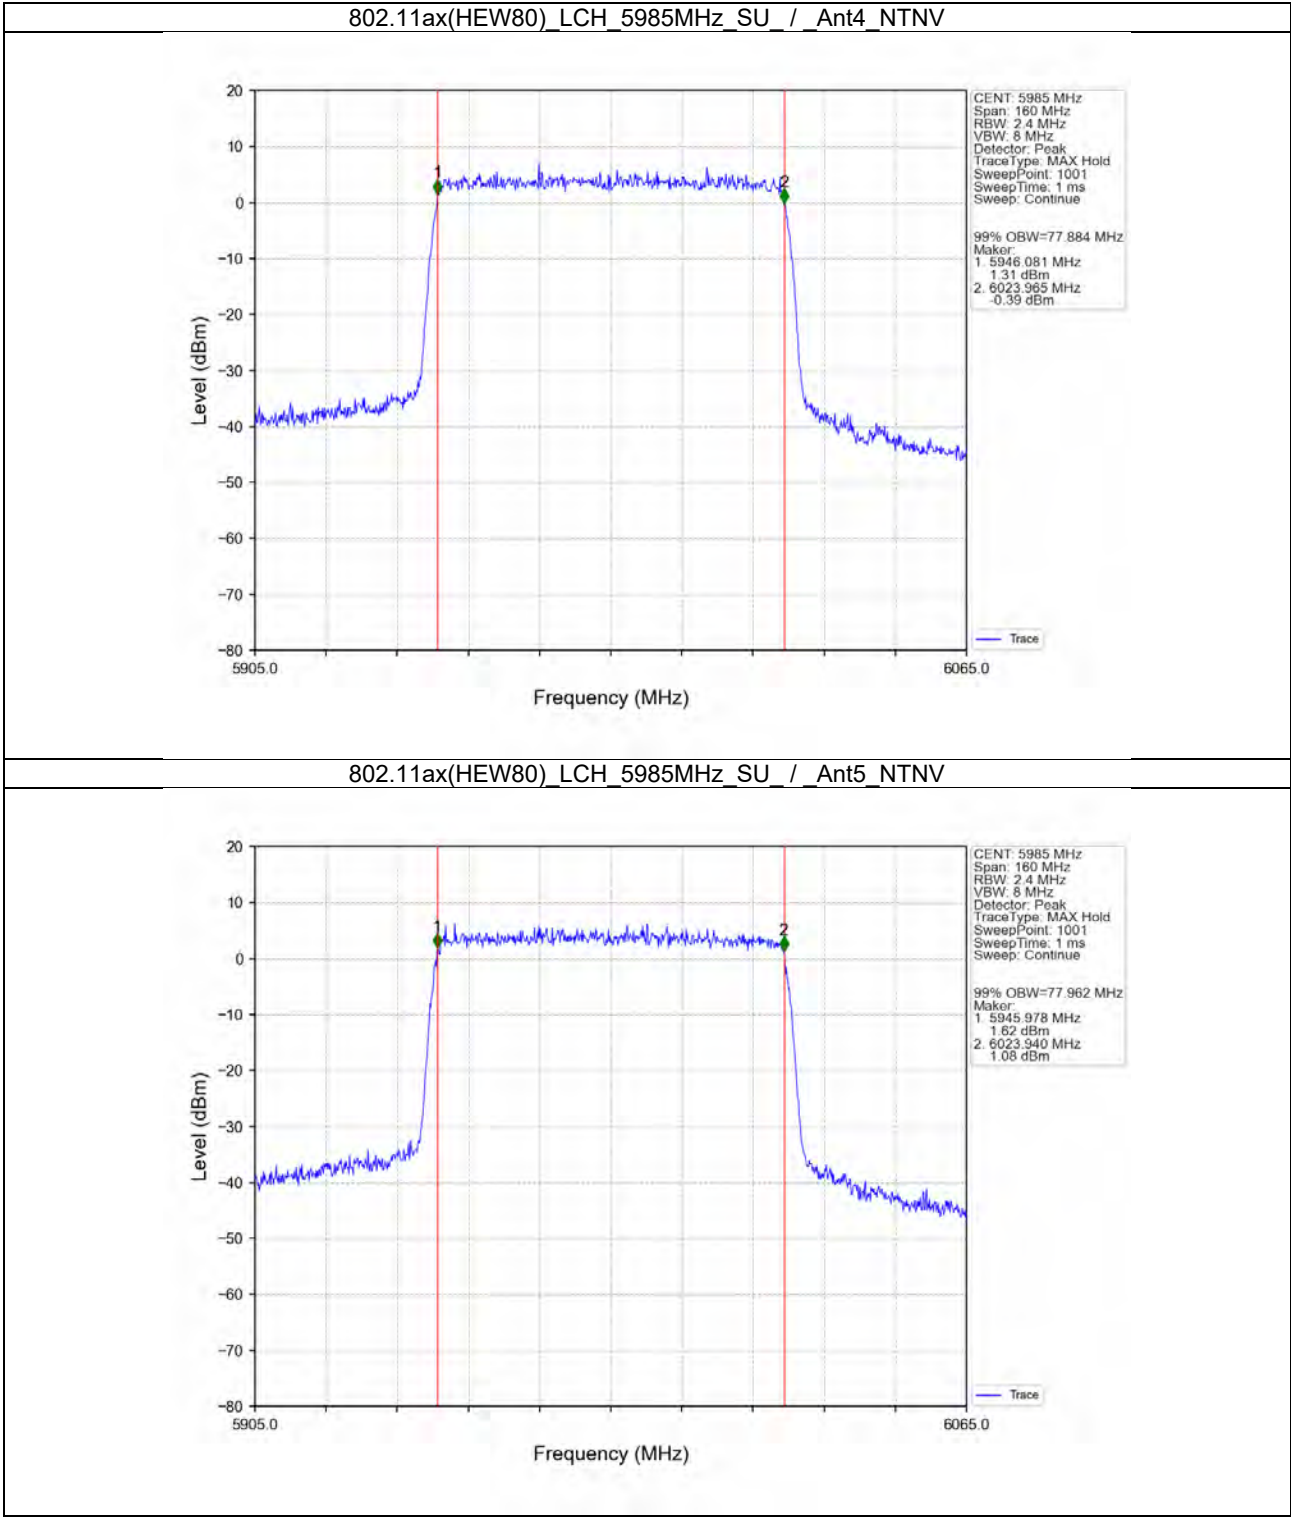



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 54 of 708

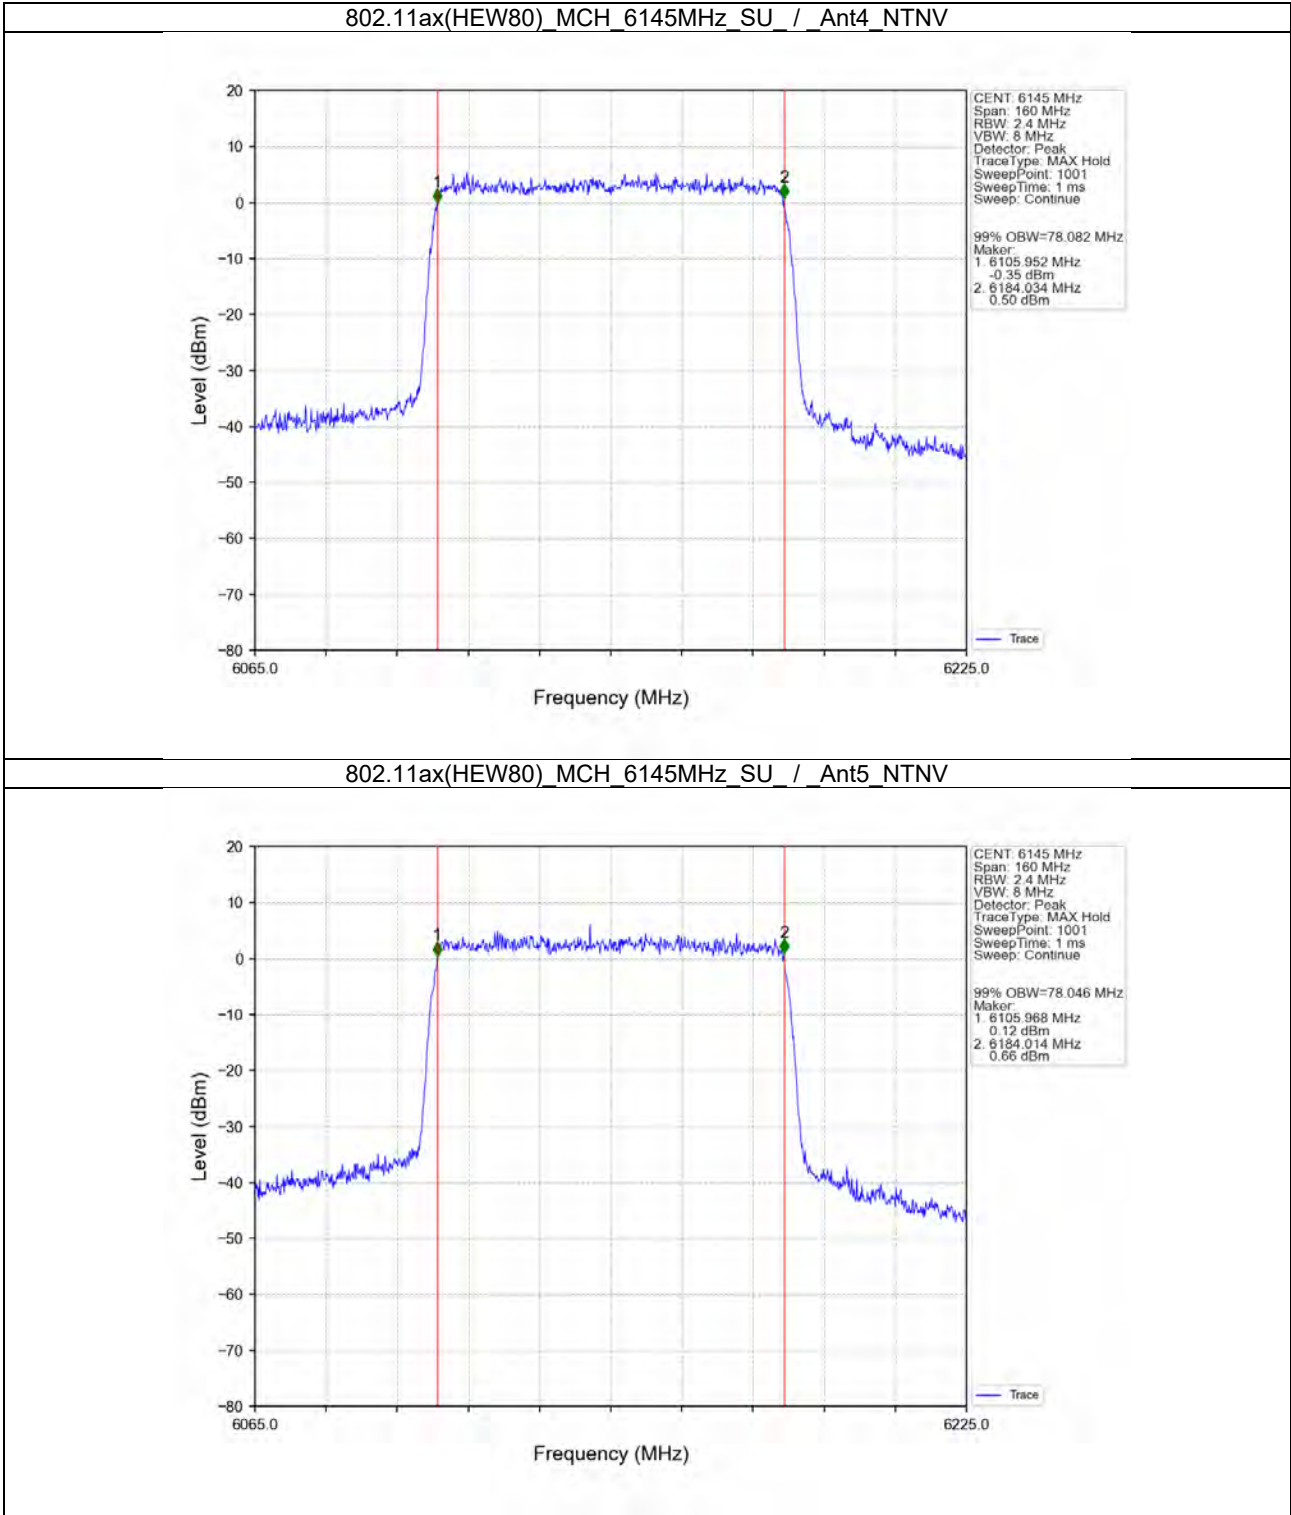



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 55 of 708

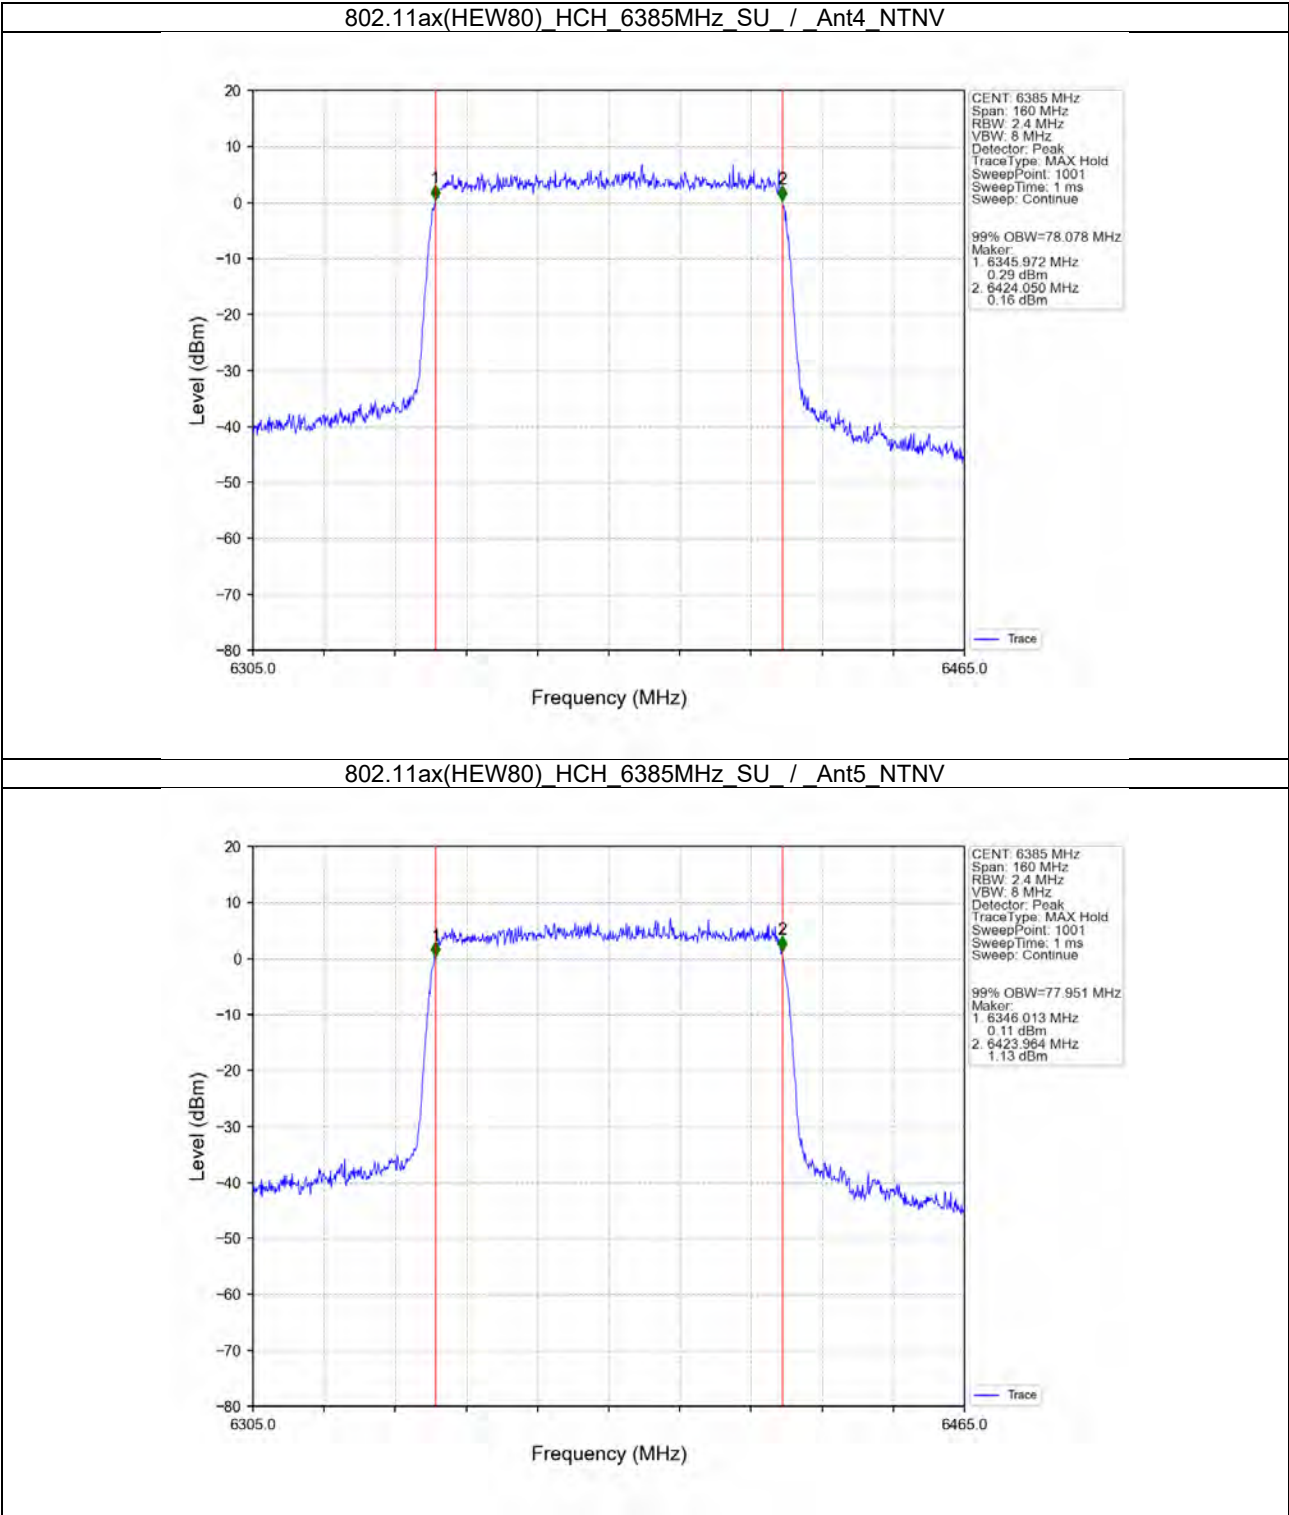



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 56 of 708

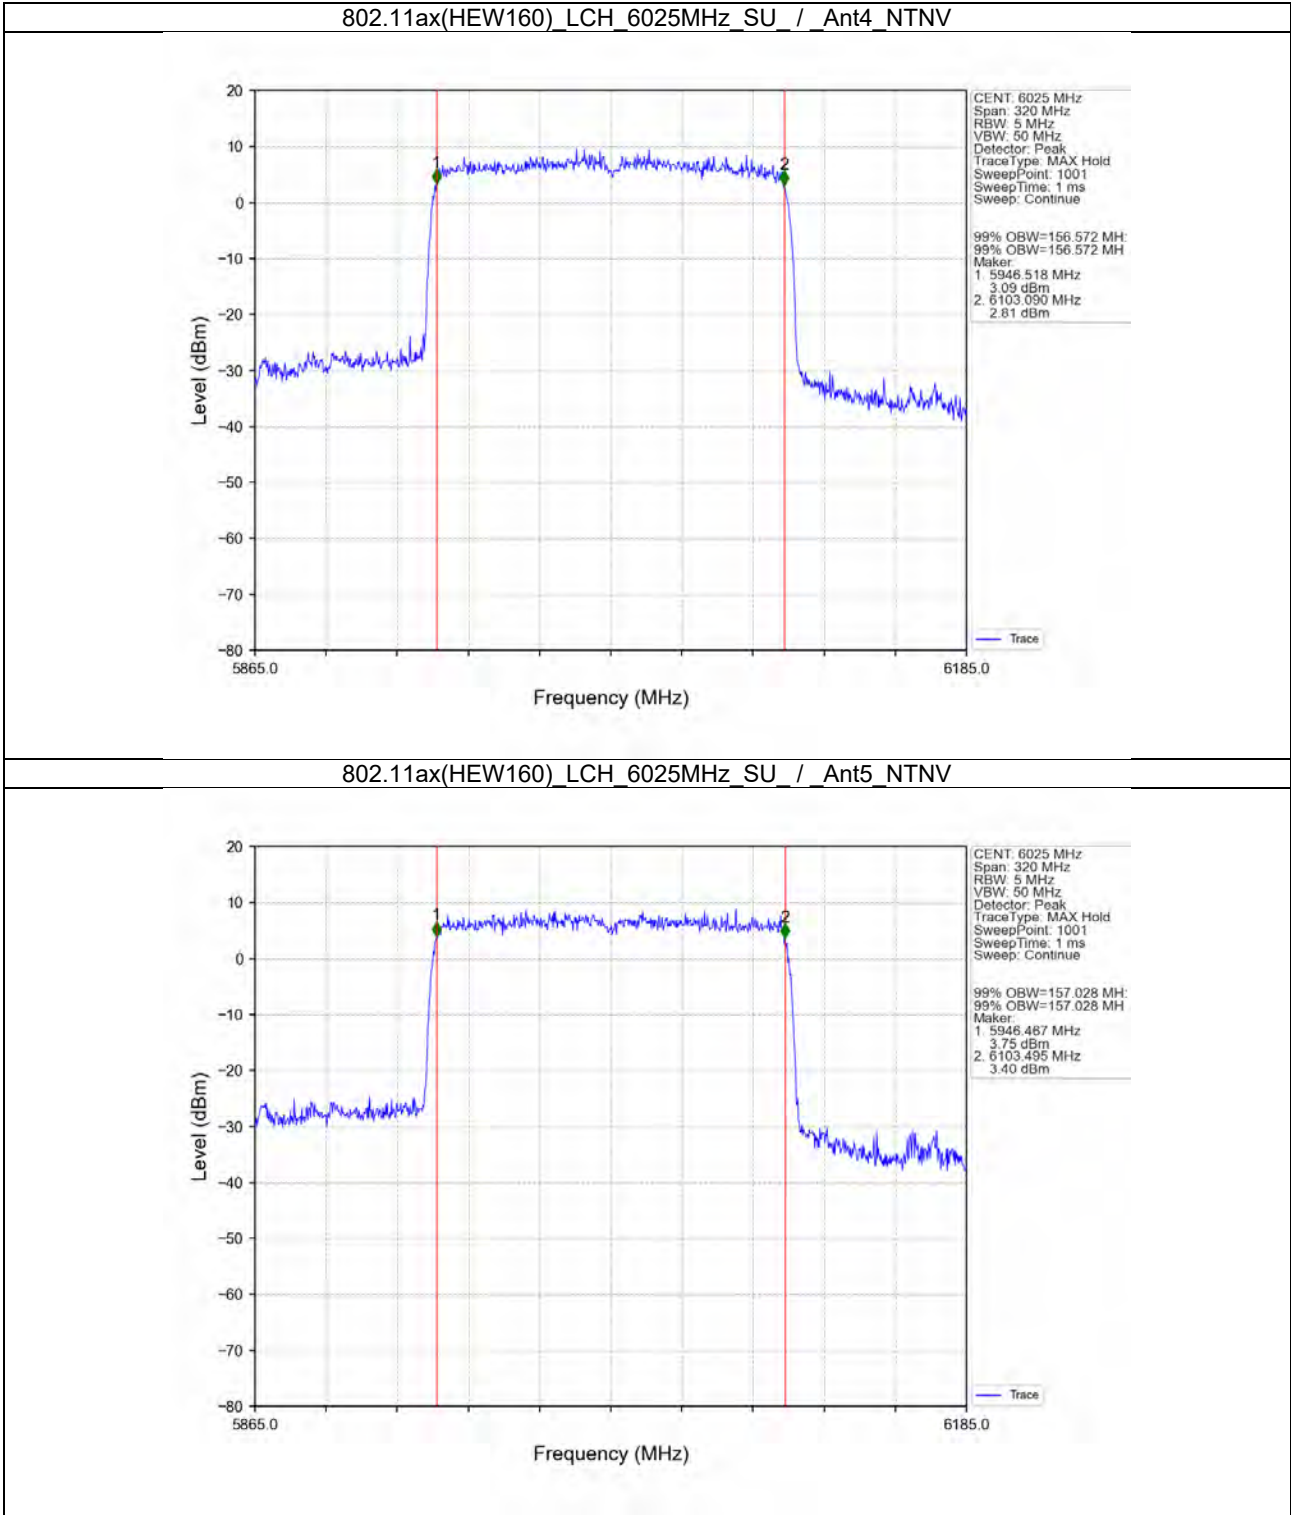



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 57 of 708

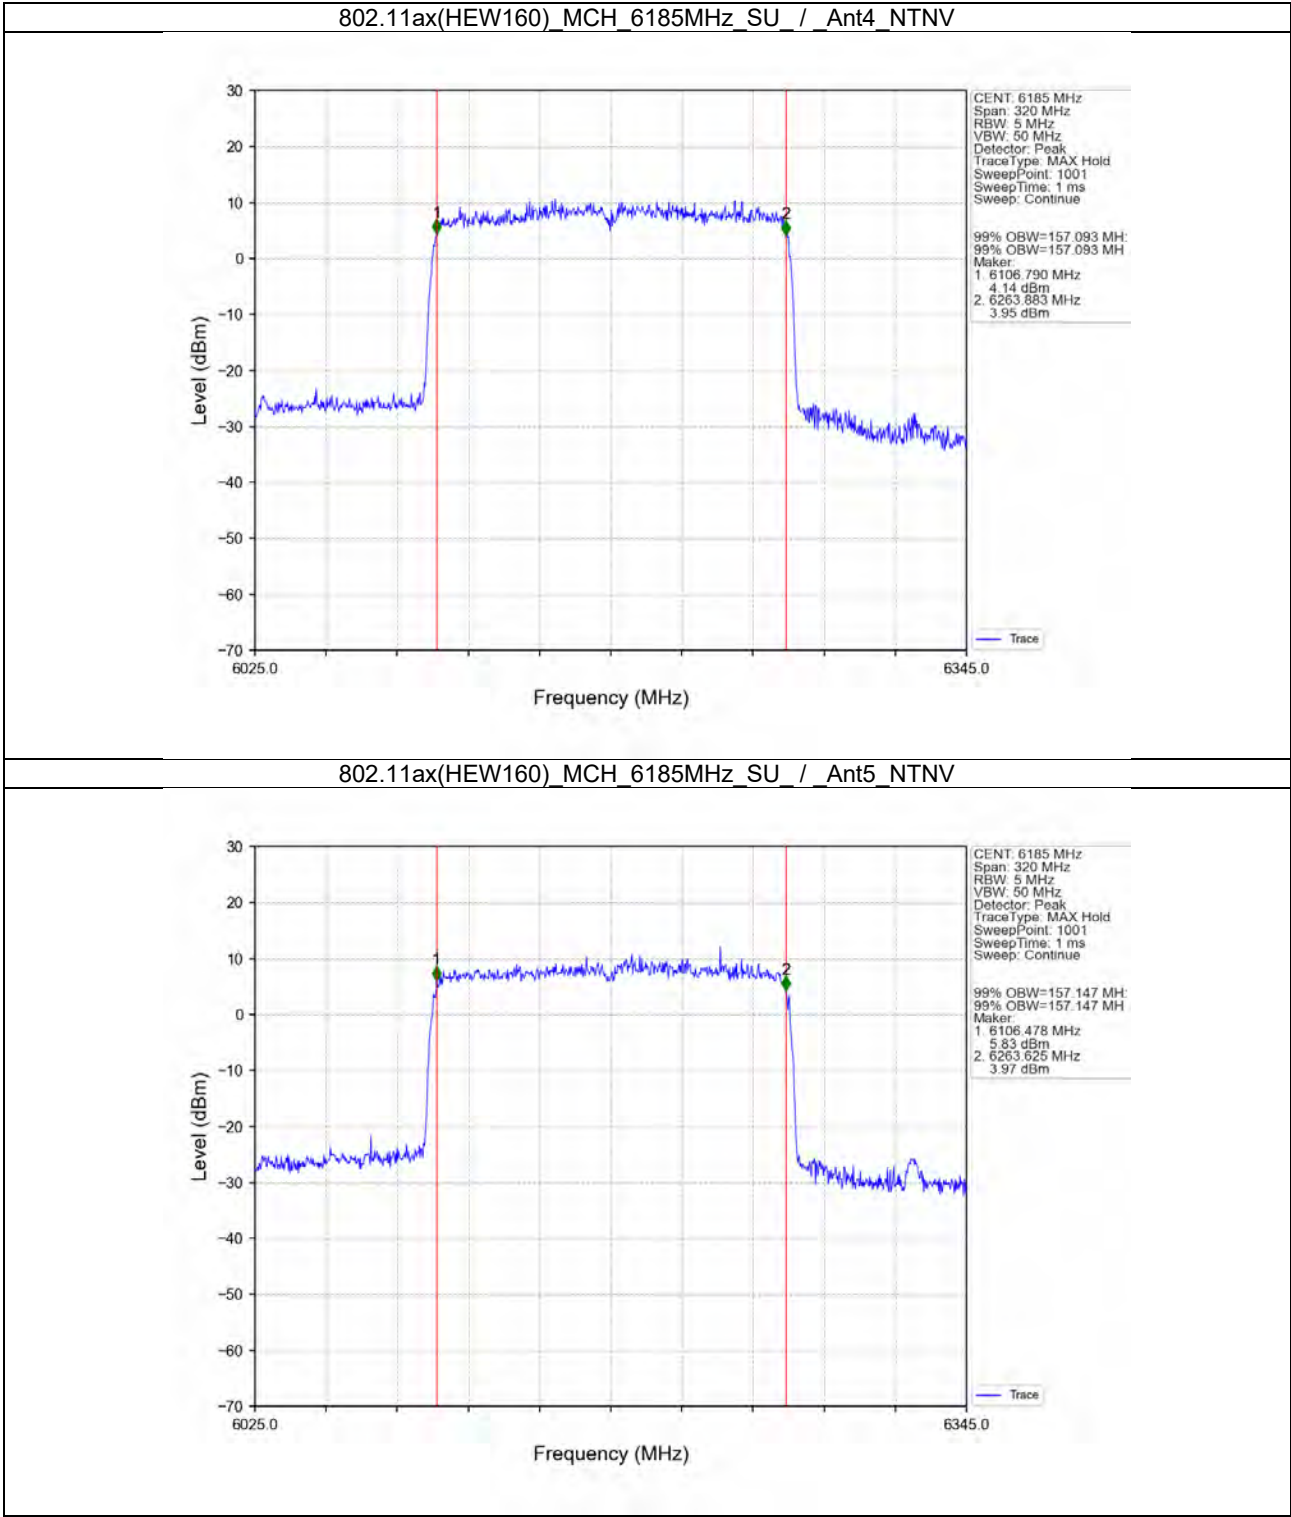




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 58 of 708

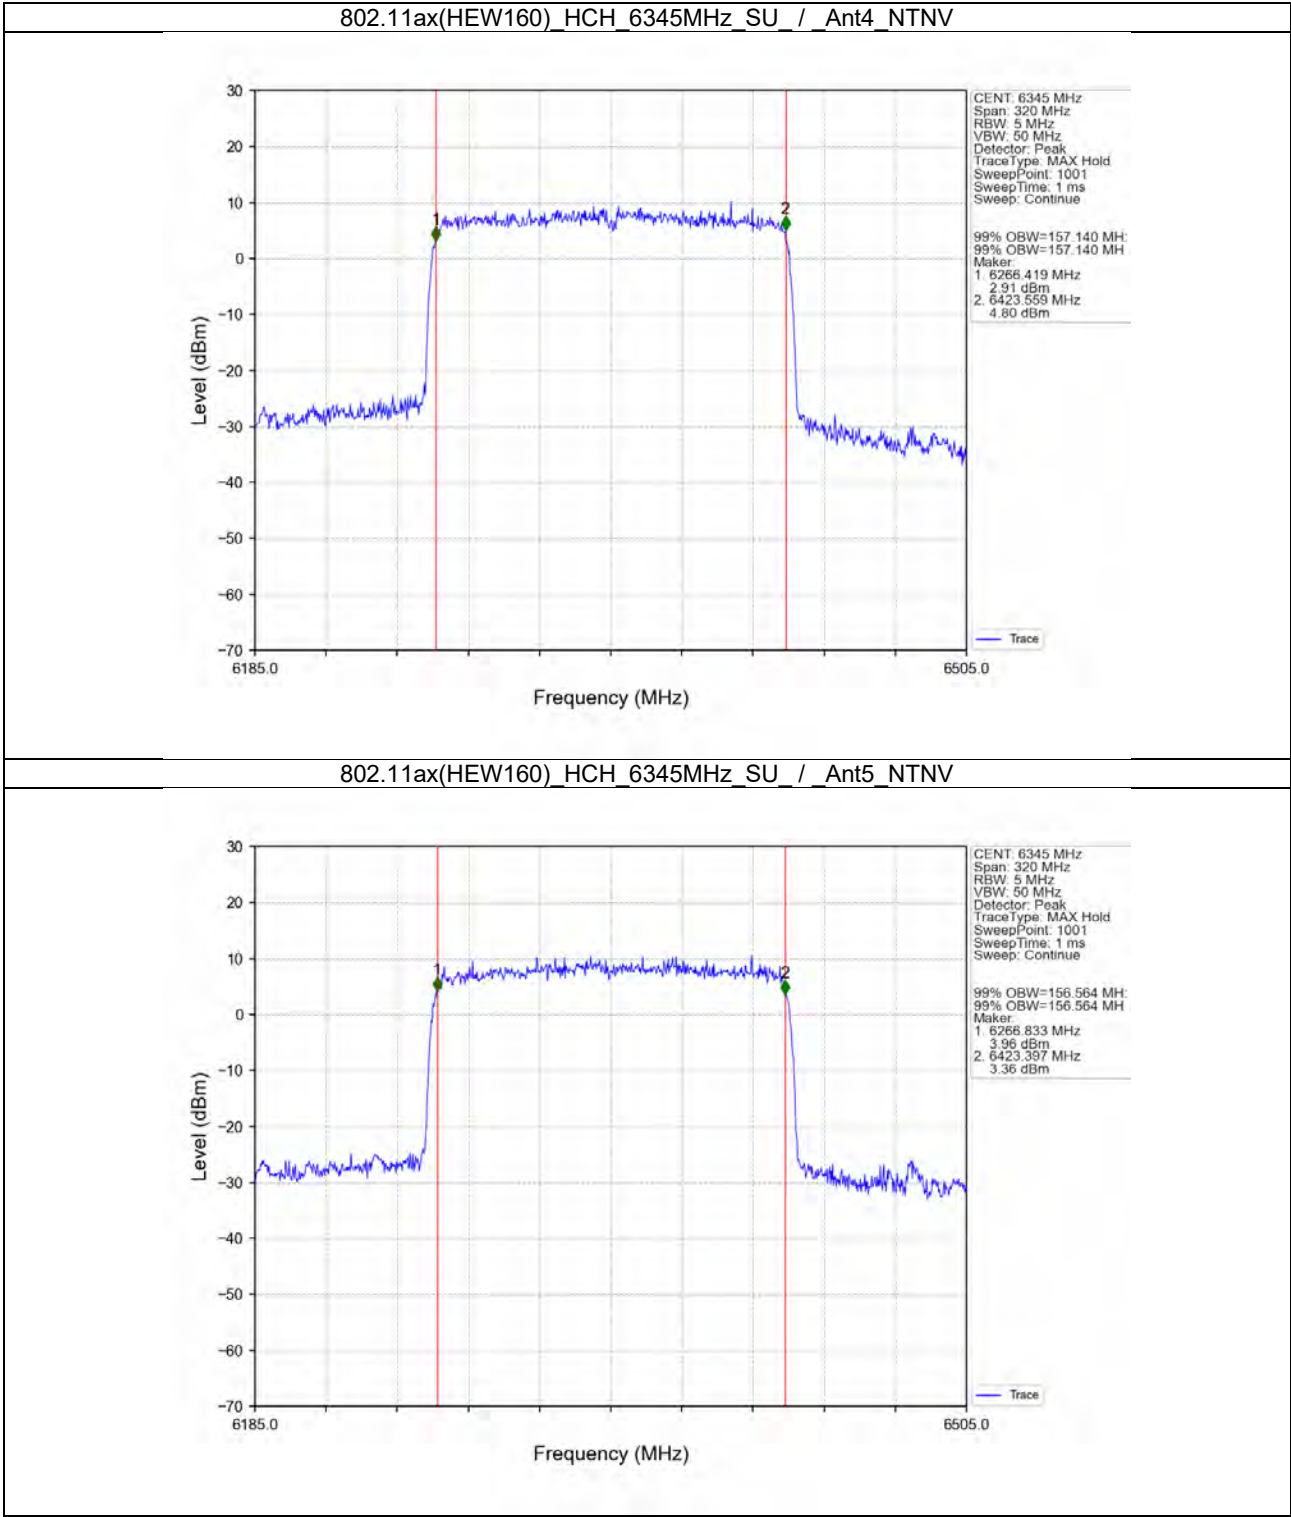

2.2.2 26dB BW

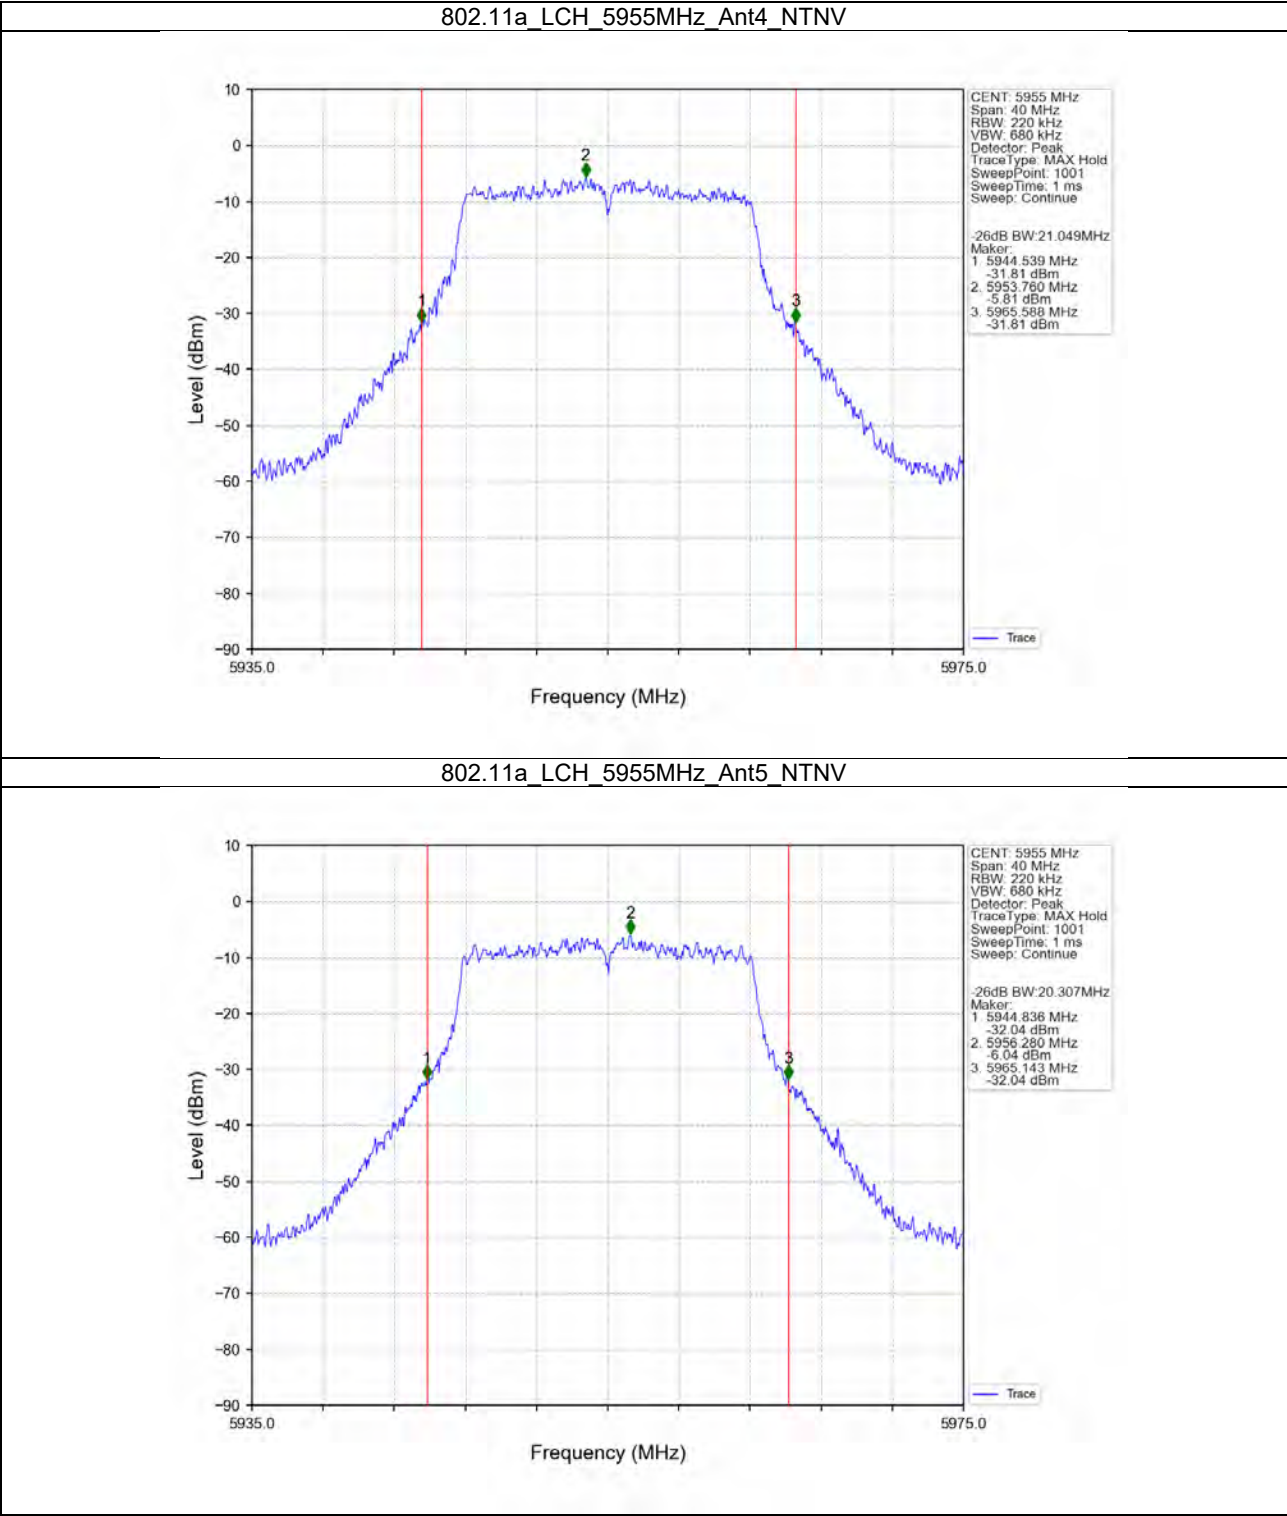





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 60 of 708

802.11a_MCH_6175MHz_Ant4_NTNV

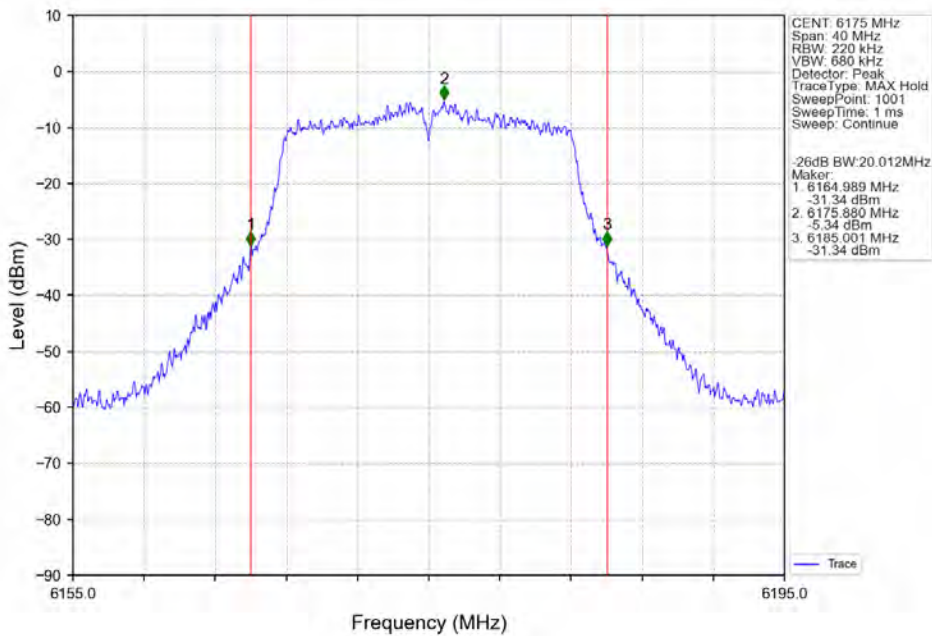


802.11a_MCH_6175MHz_Ant5_NTNV

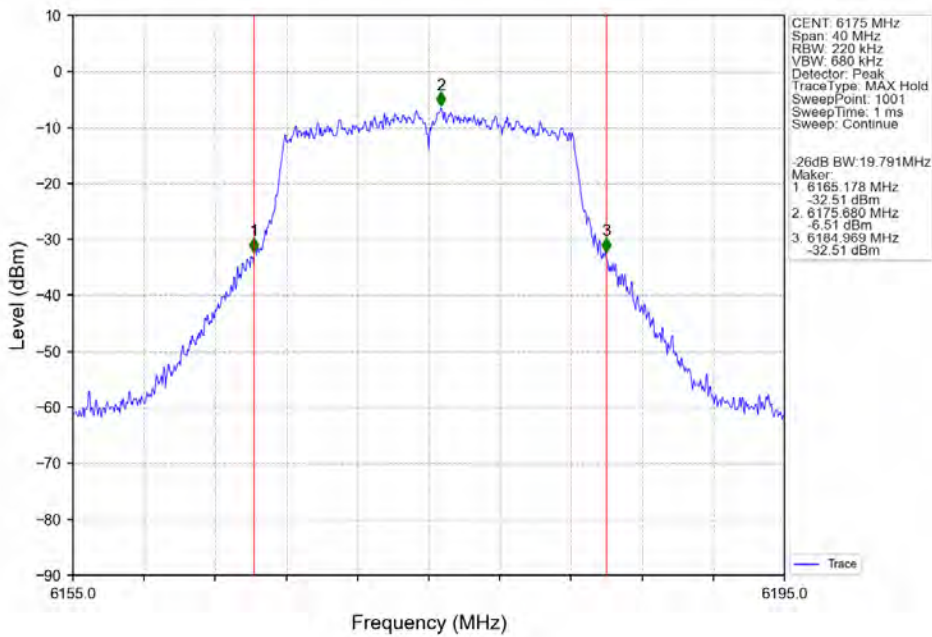



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 61 of 708

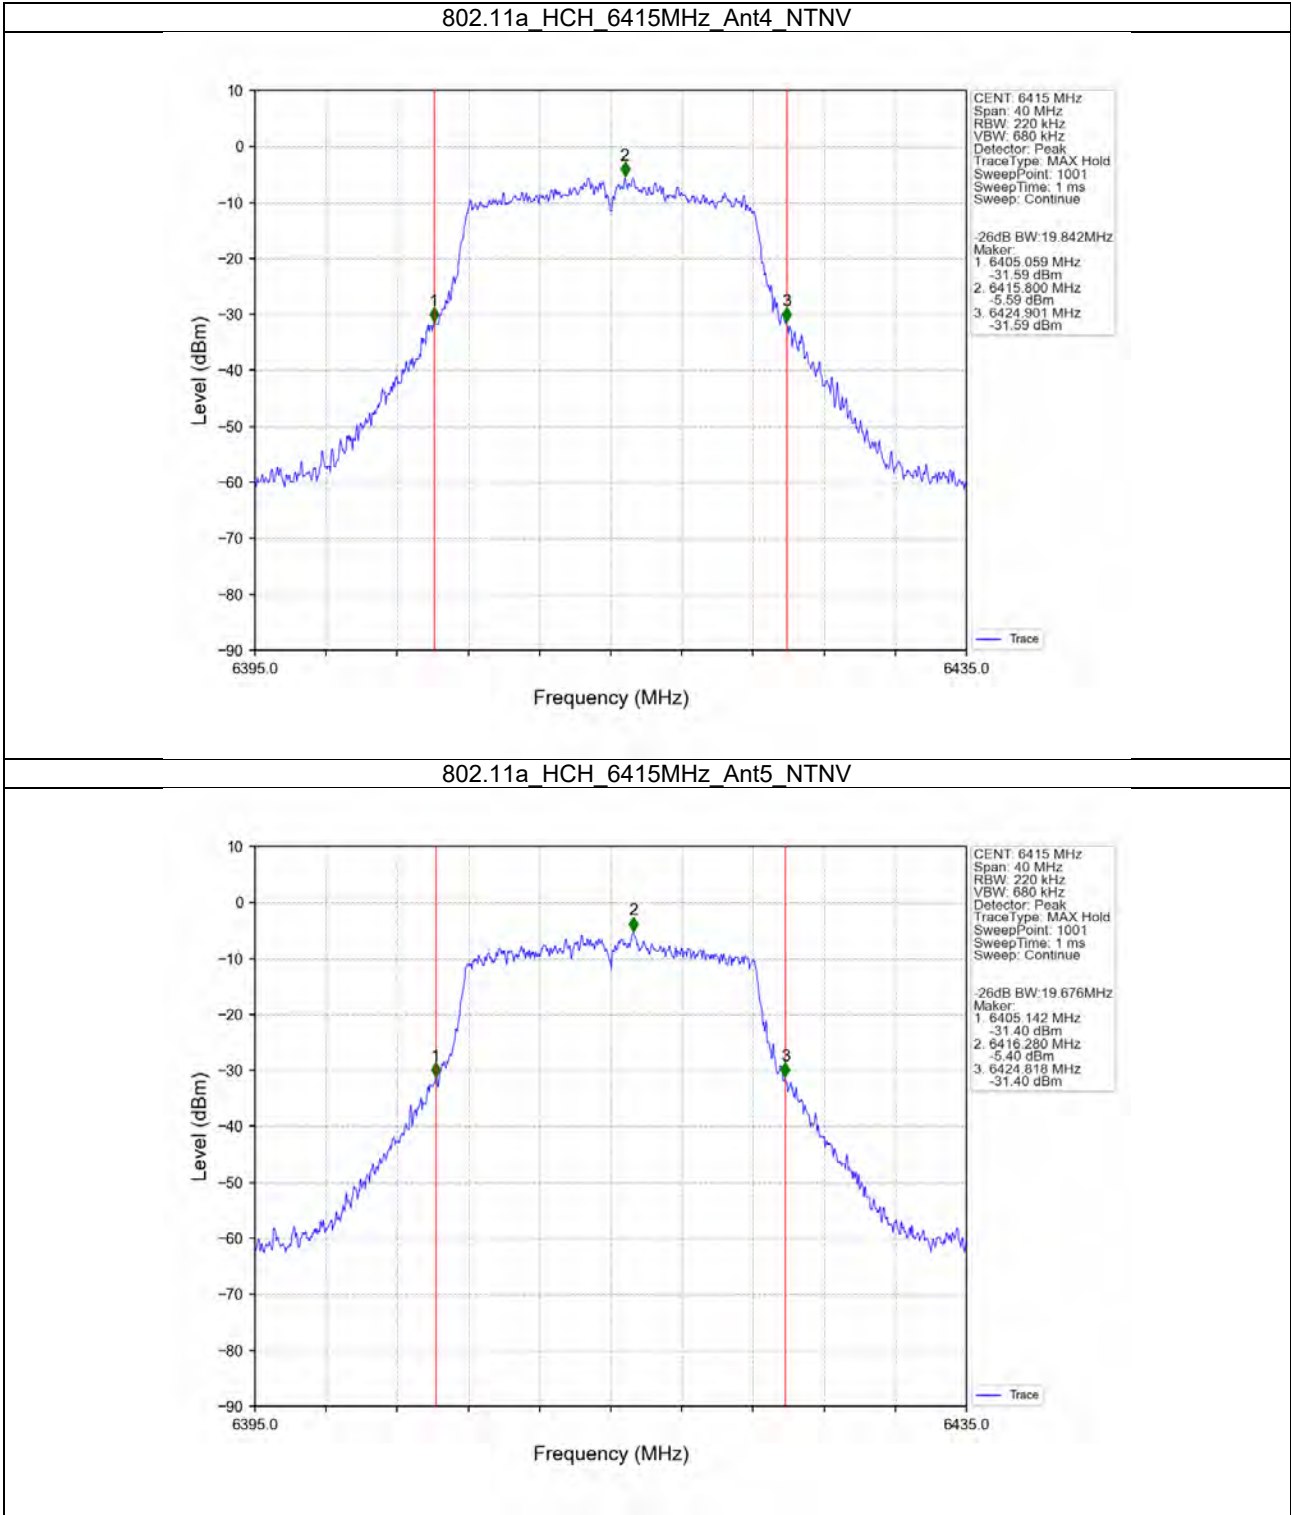





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 62 of 708

802.11ax(HEW20)_LCH_5955MHz_SU_ / Ant4_NTNV

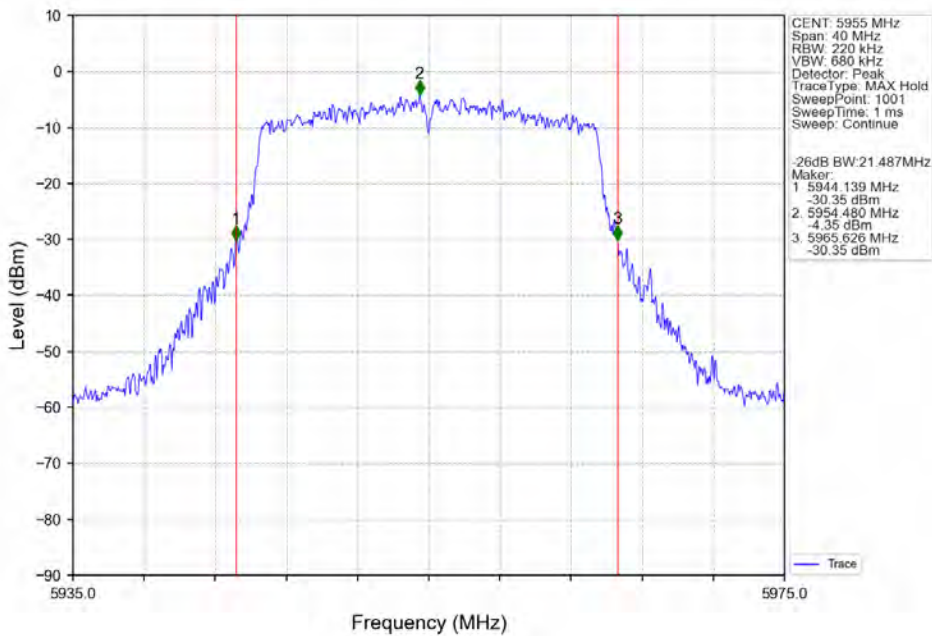


802.11ax(HEW20)_LCH_5955MHz_SU_ / Ant5_NTNV

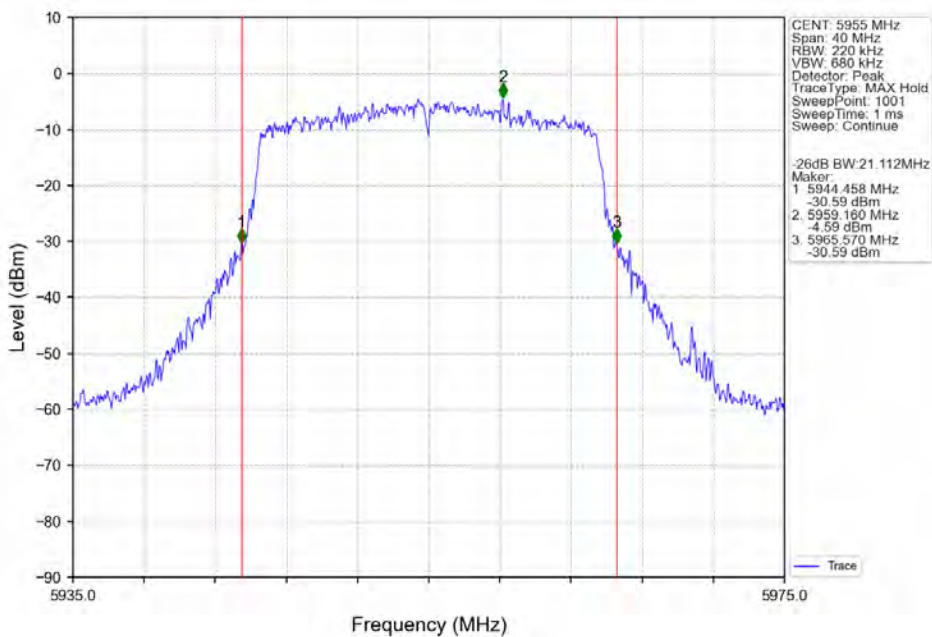



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 63 of 708

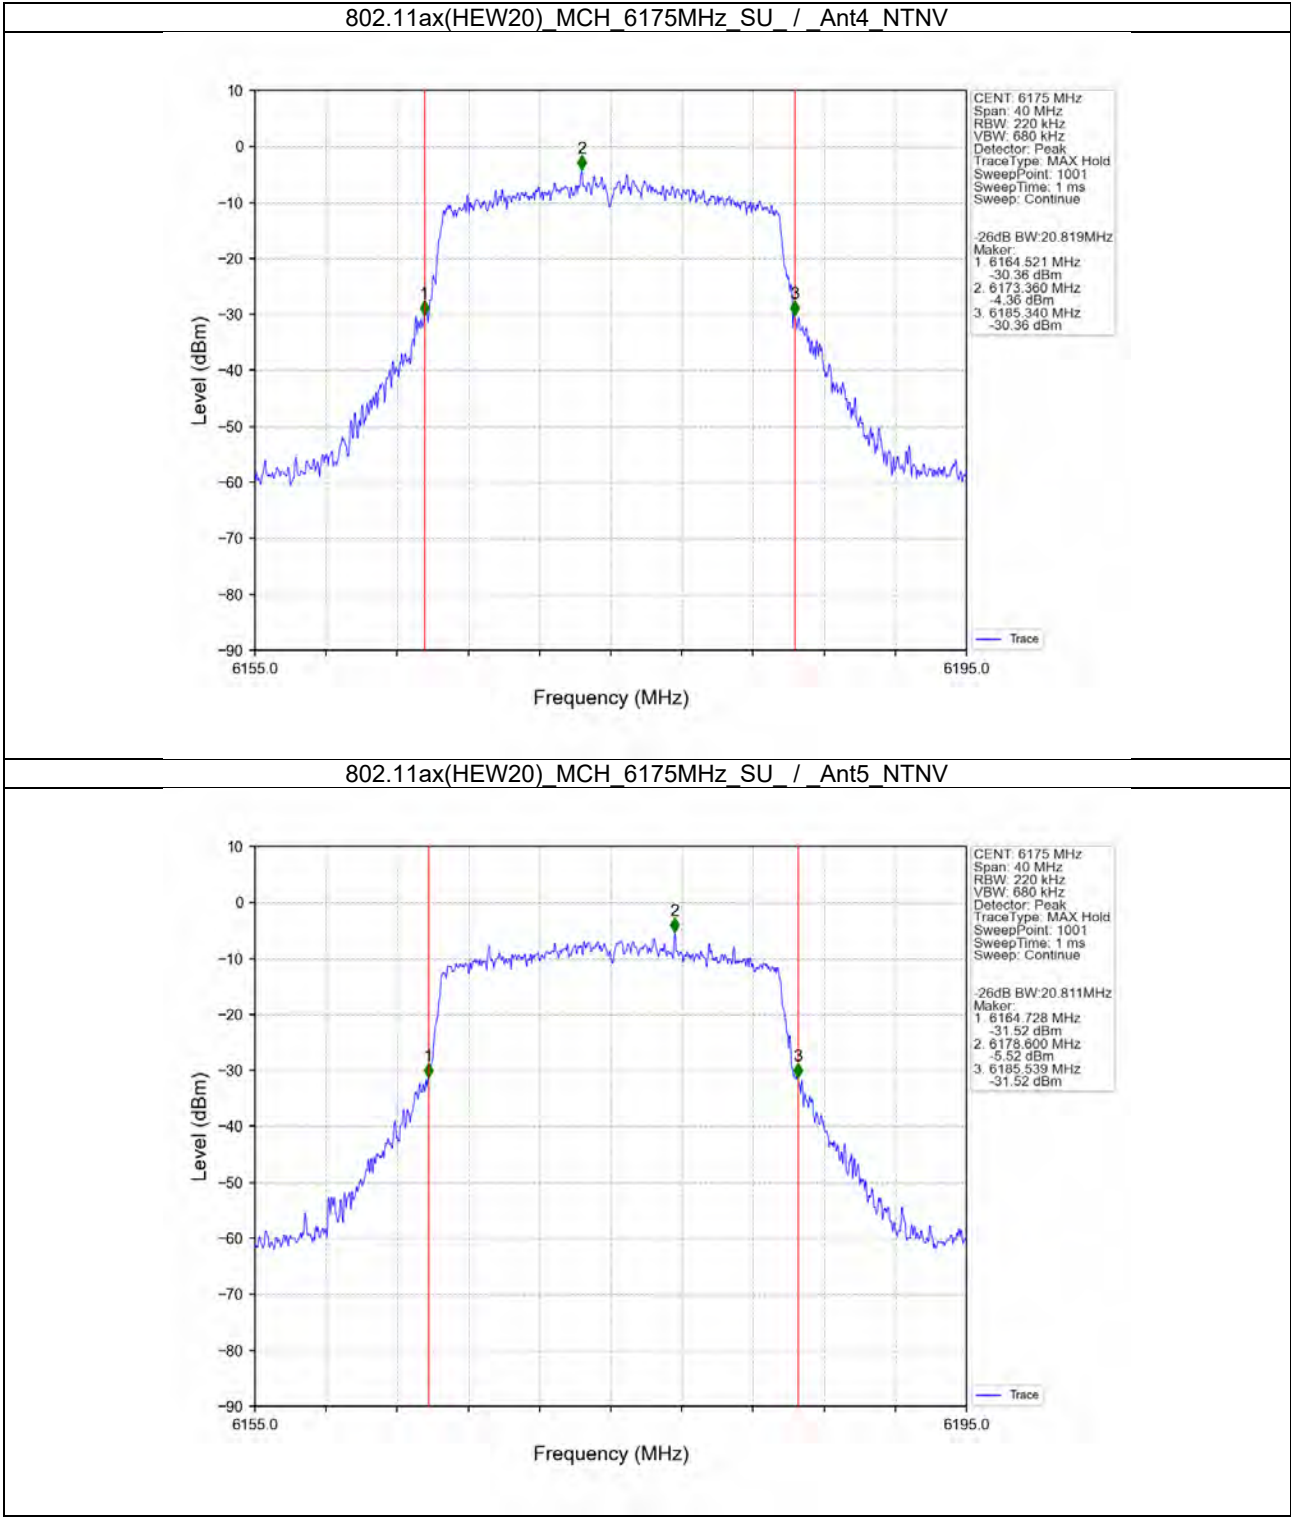



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 64 of 708

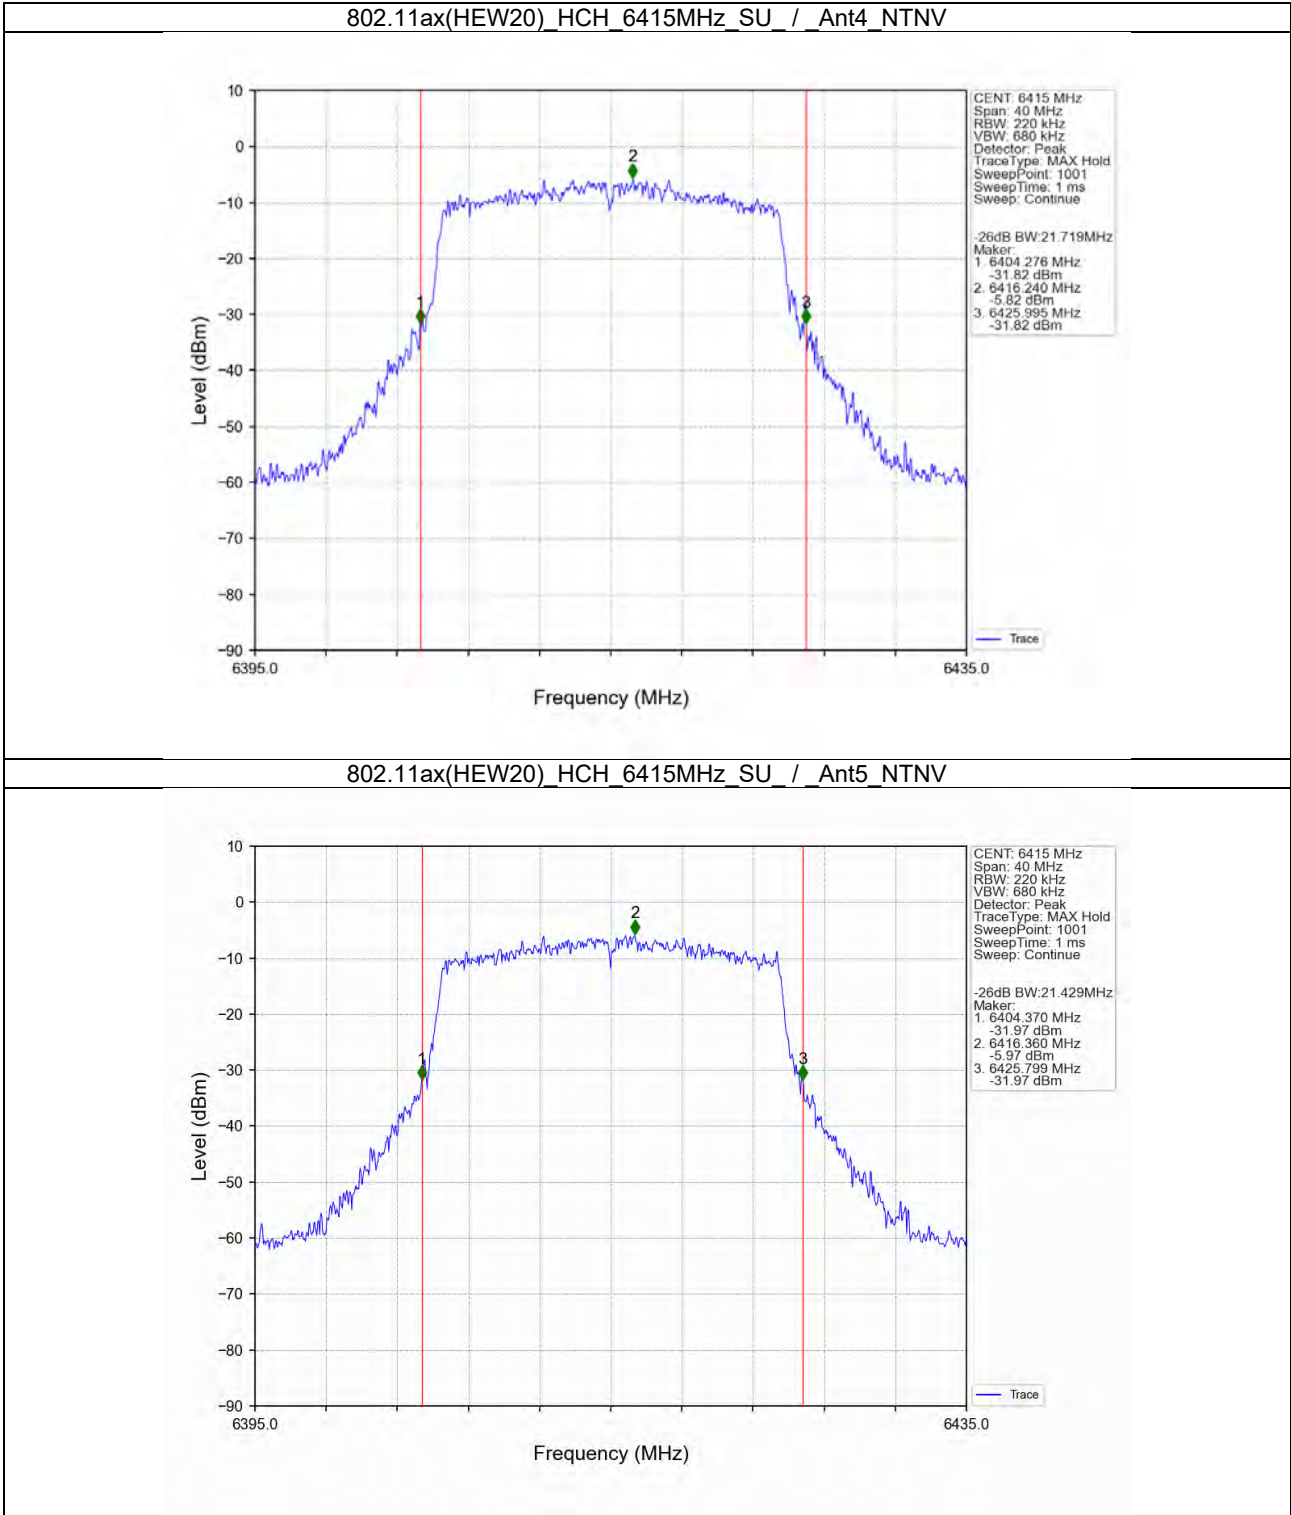



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 65 of 708

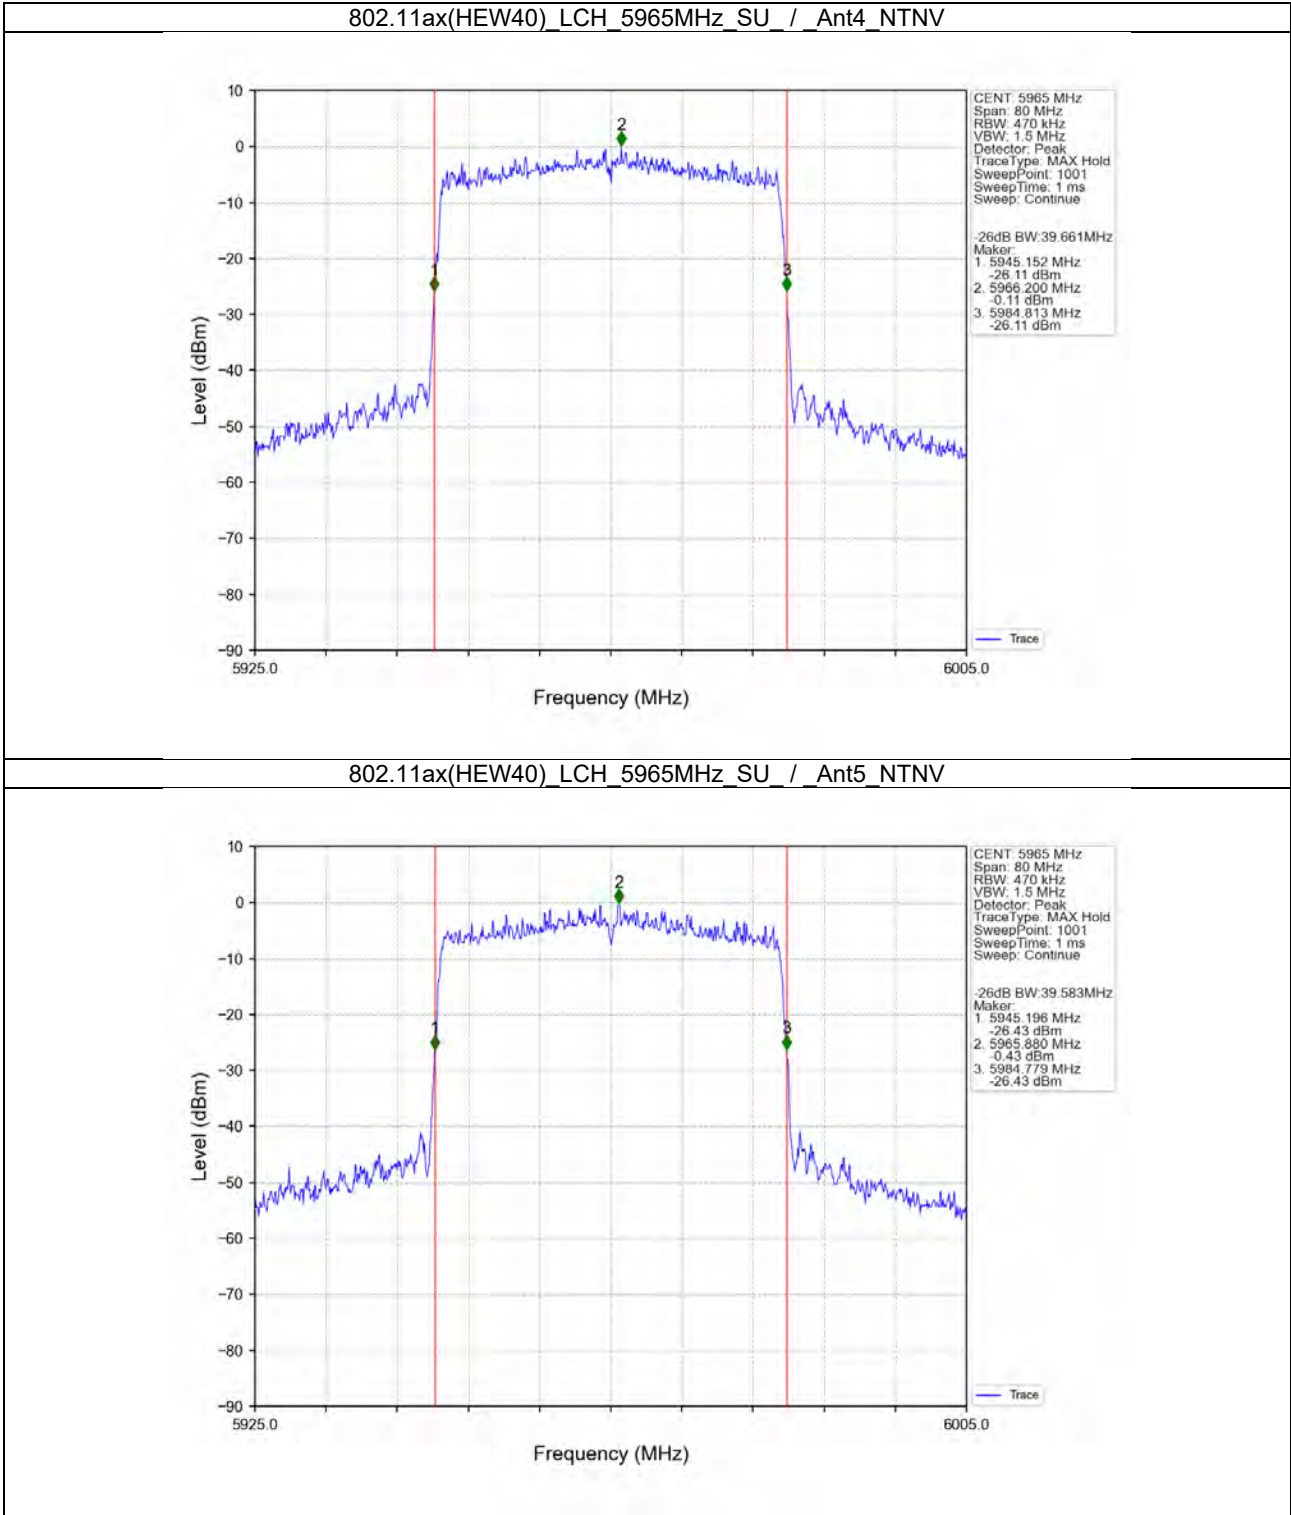



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 66 of 708

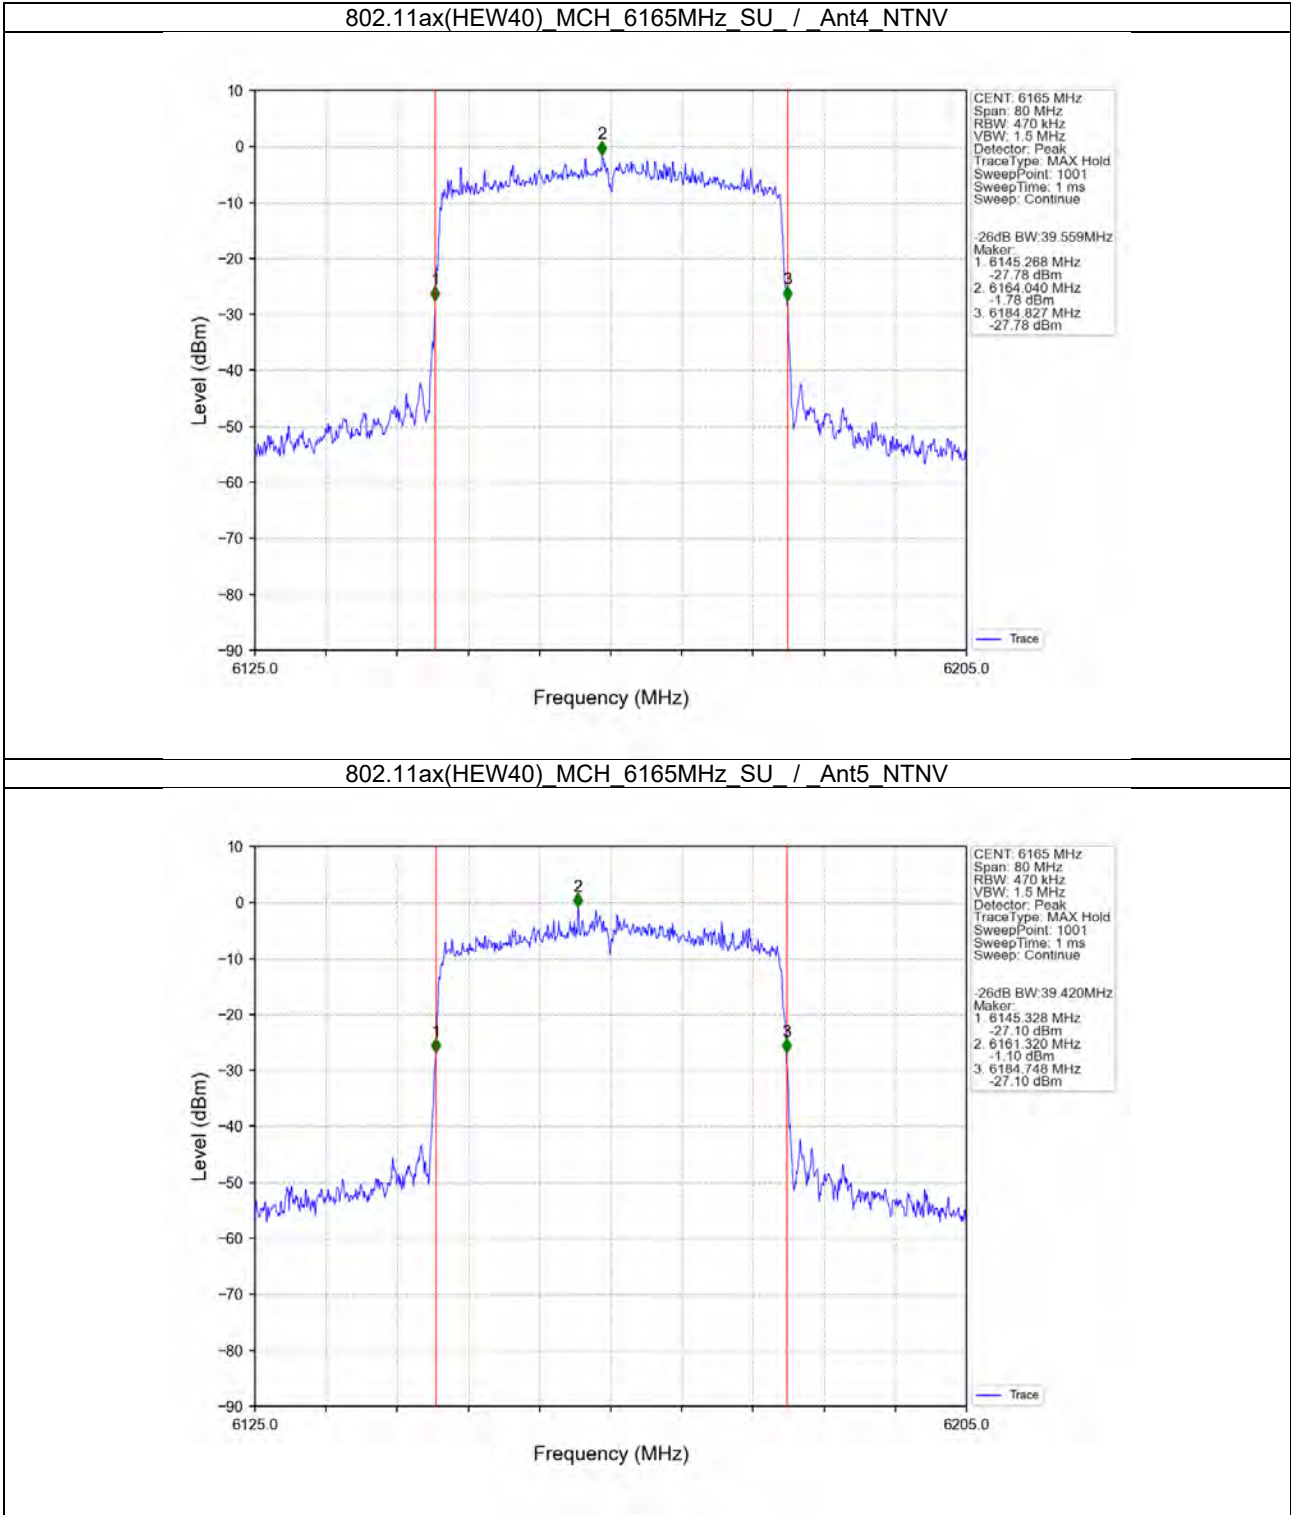



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 67 of 708

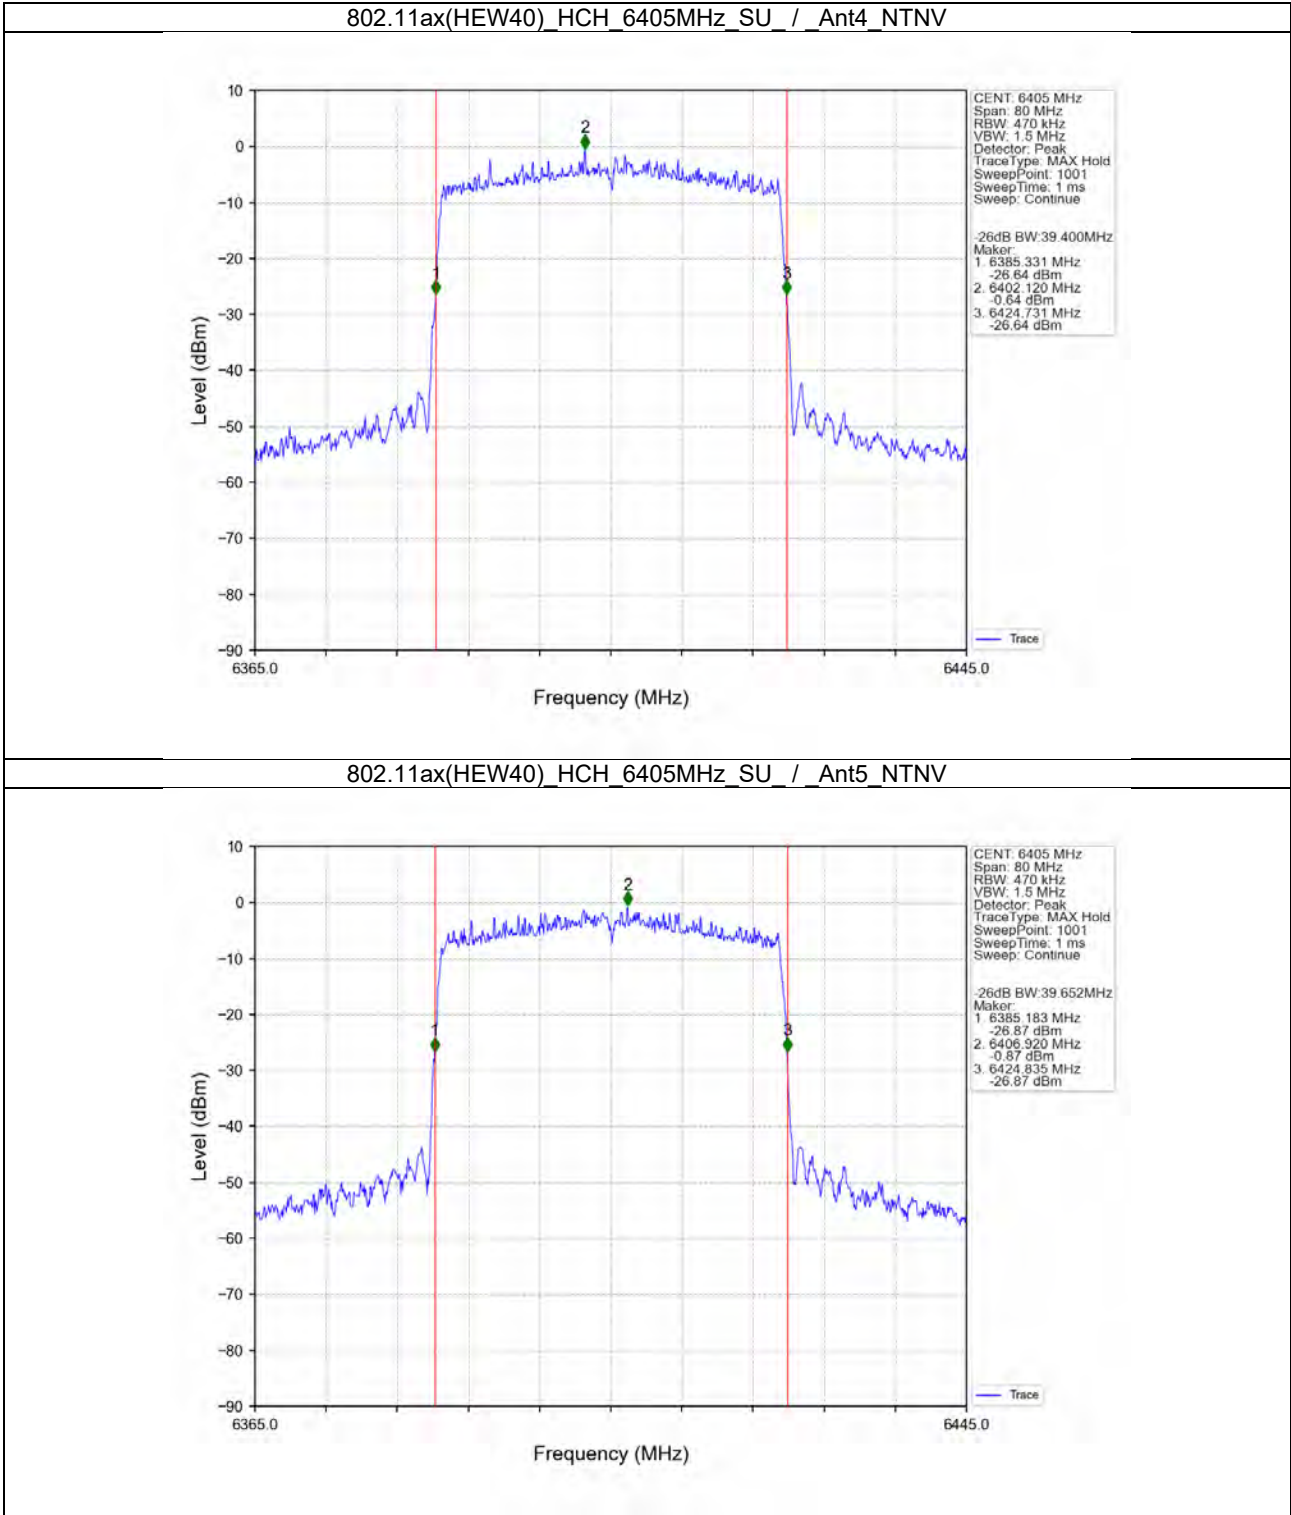



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 68 of 708

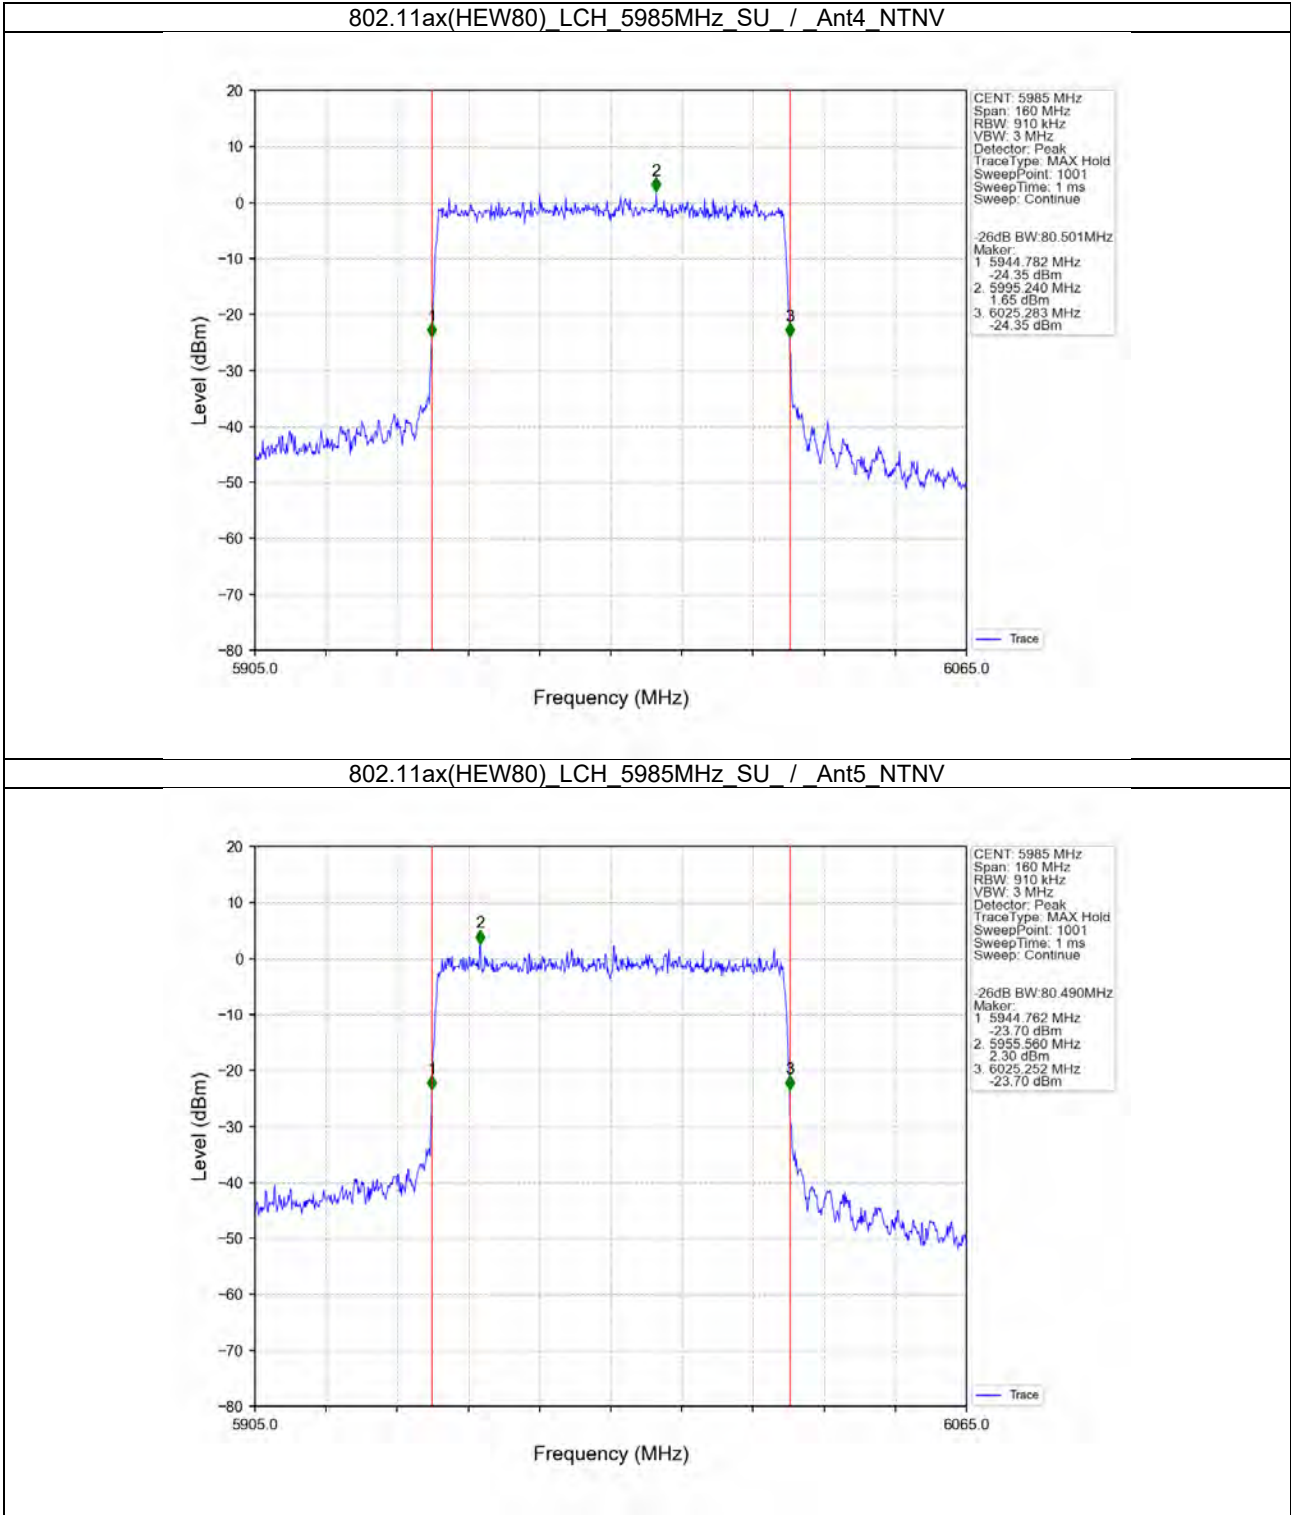



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 69 of 708

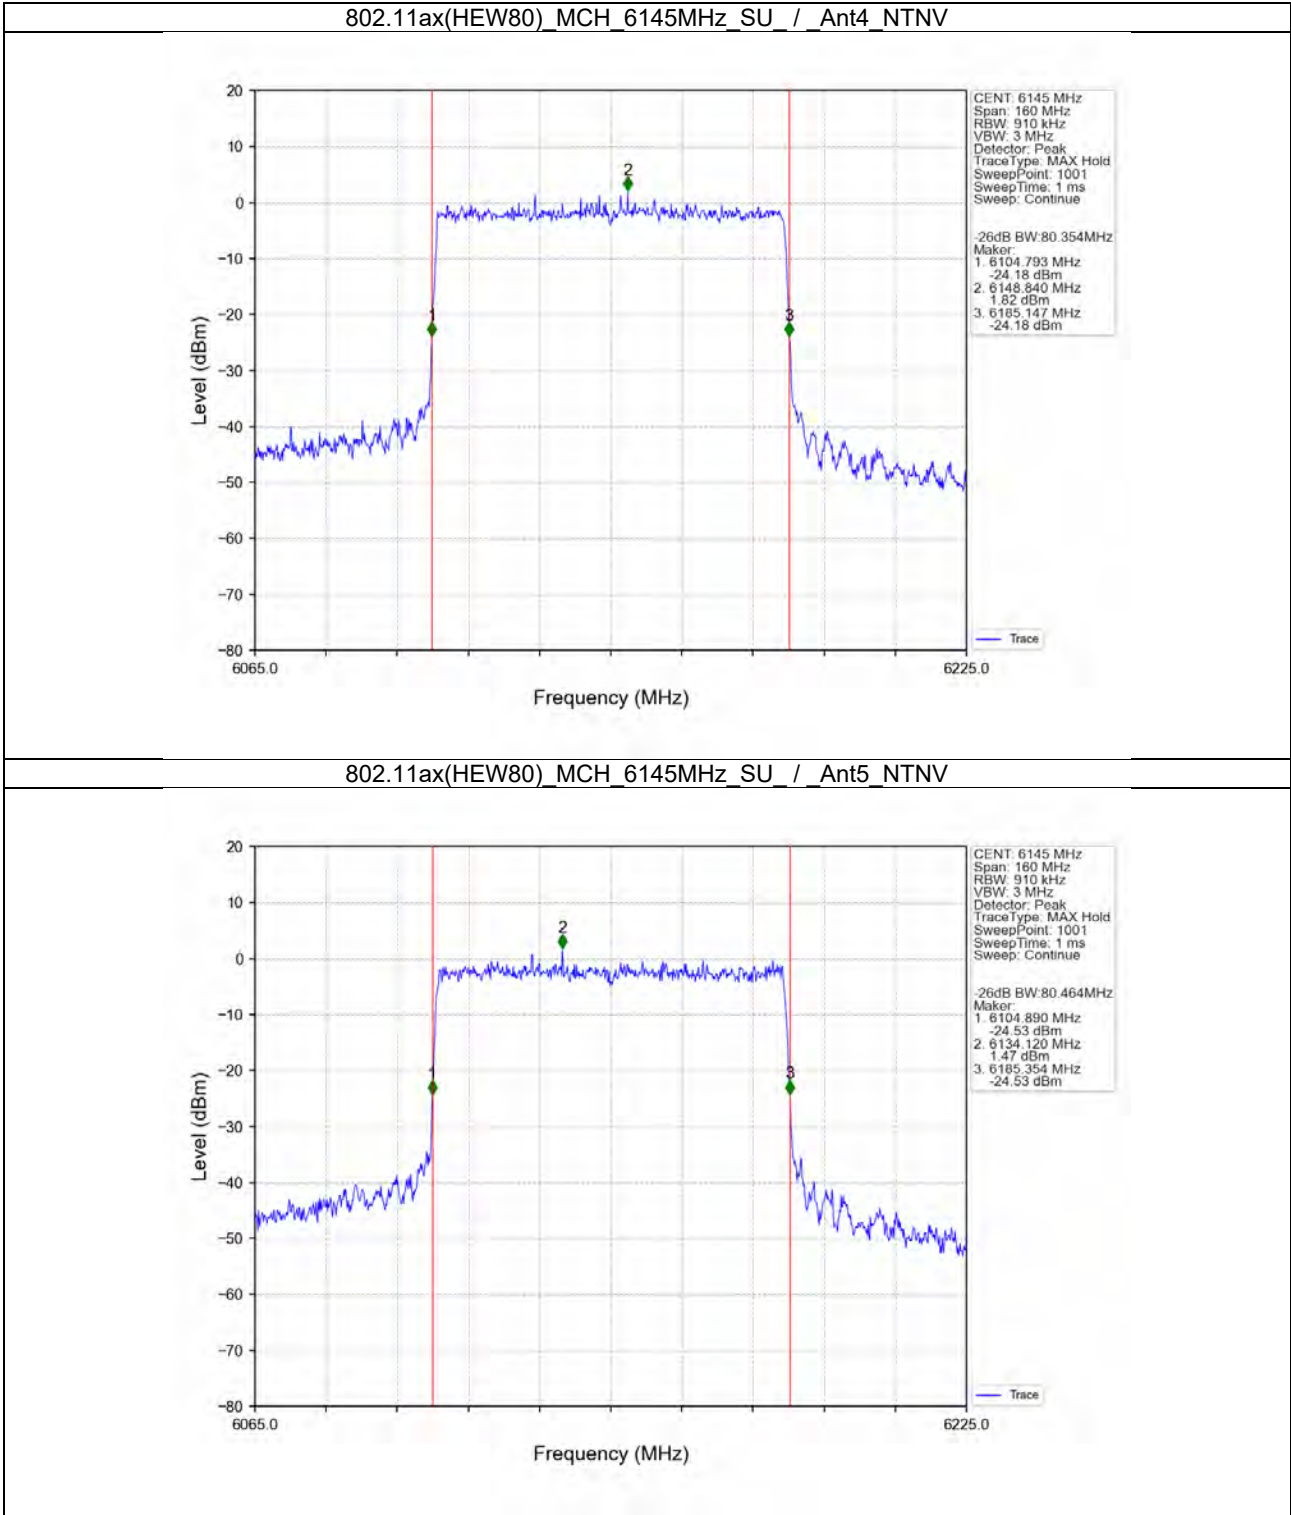



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 70 of 708

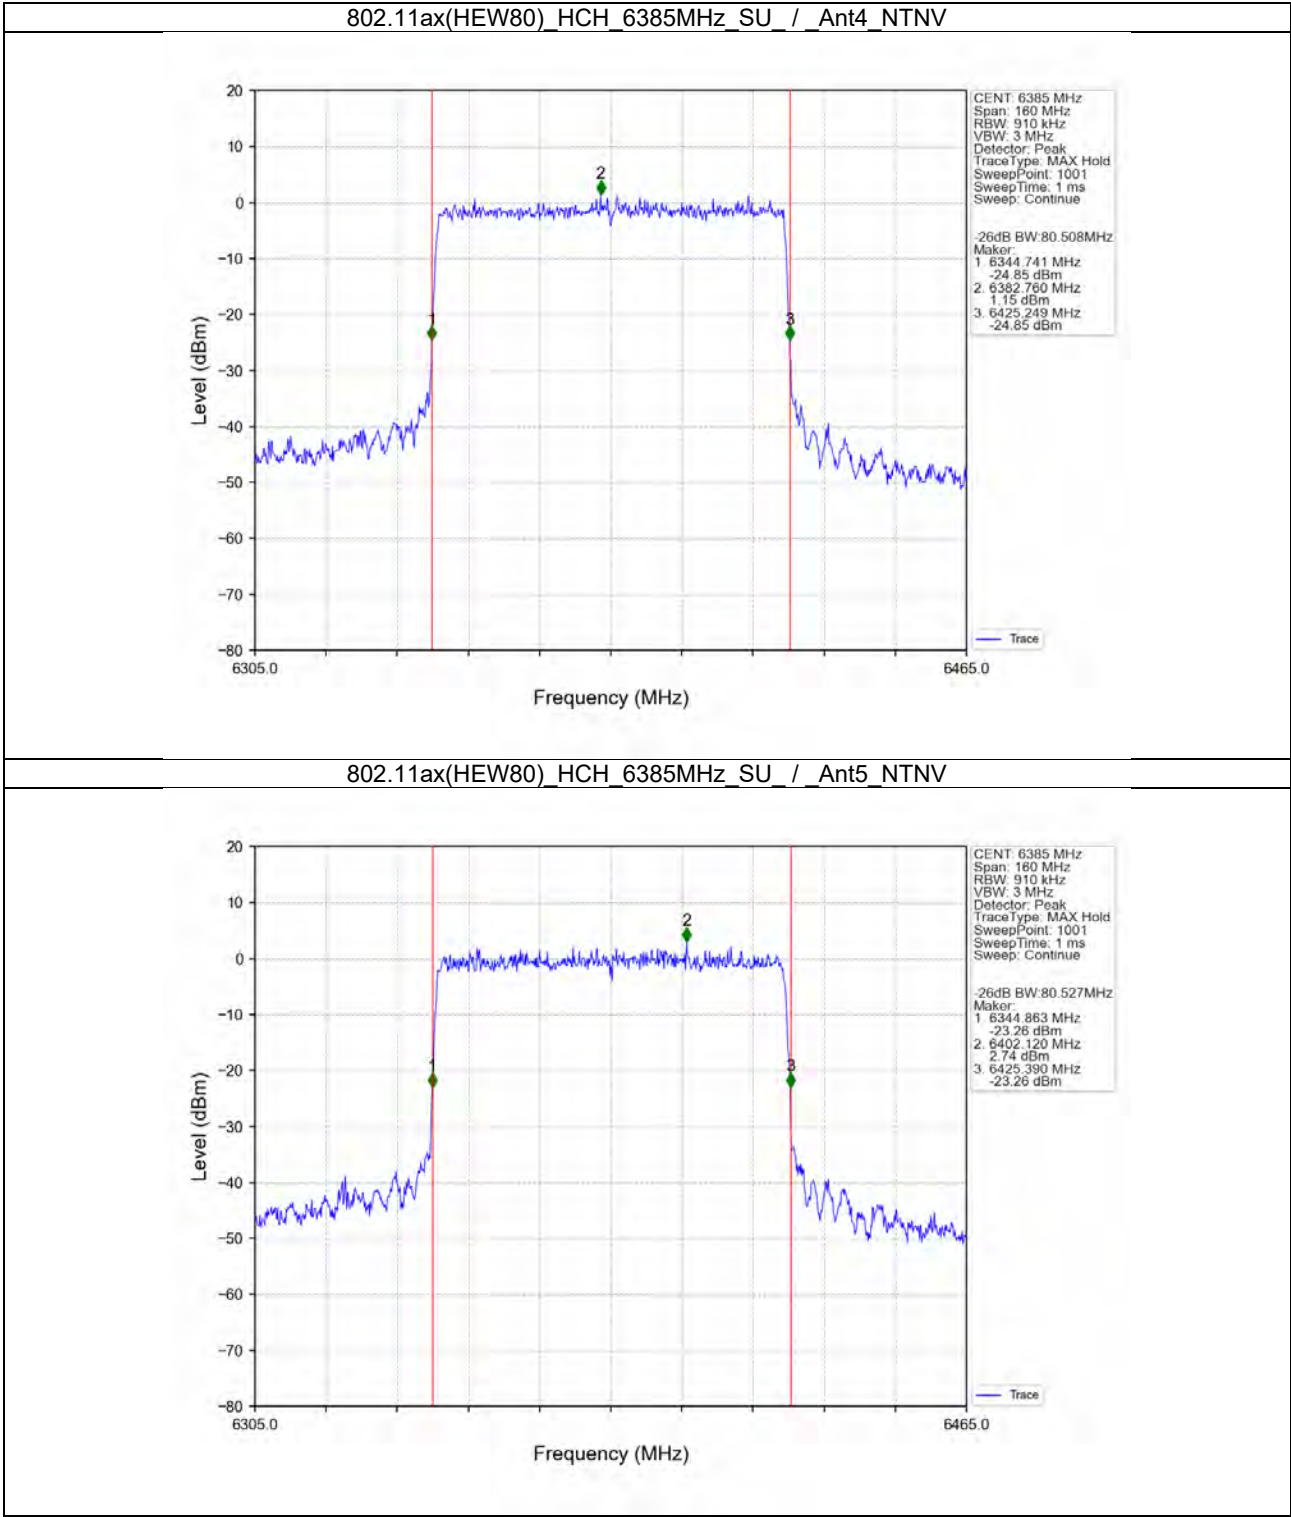





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 71 of 708

802.11ax(HEW160)_LCH_6025MHz_SU_/_Ant4_NTNV

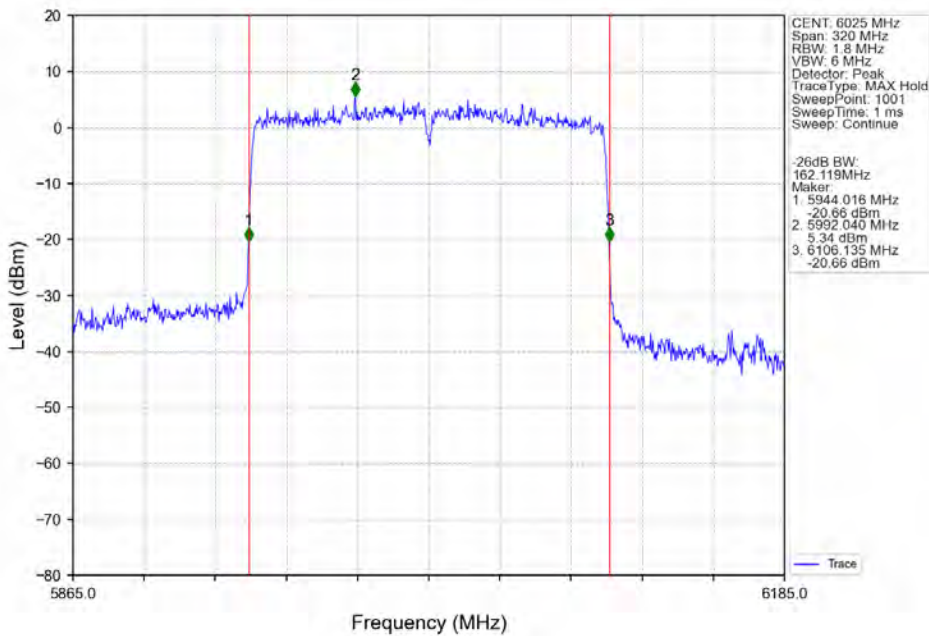


802.11ax(HEW160)_LCH_6025MHz_SU_/_Ant5_NTNV

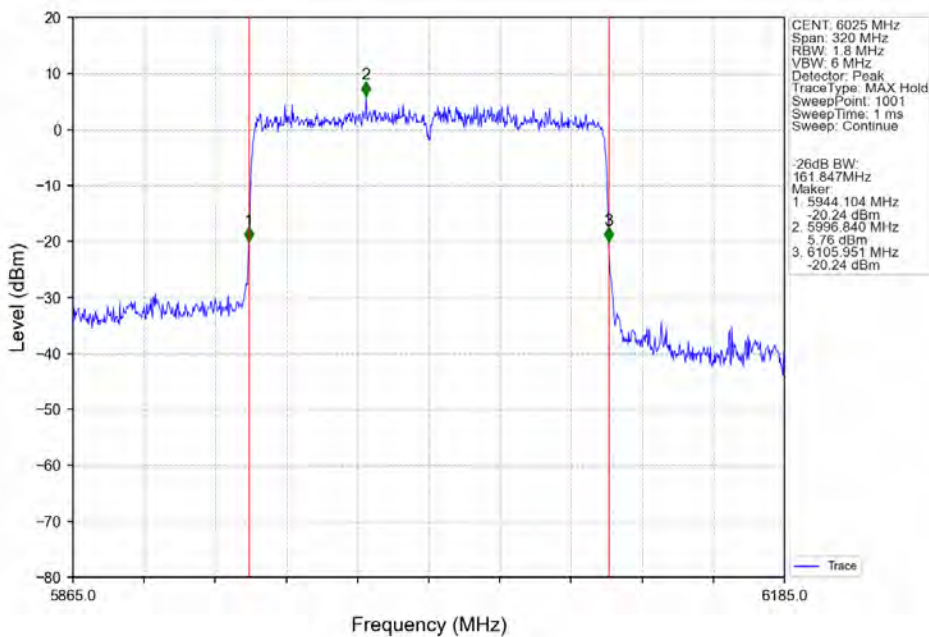



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 72 of 708

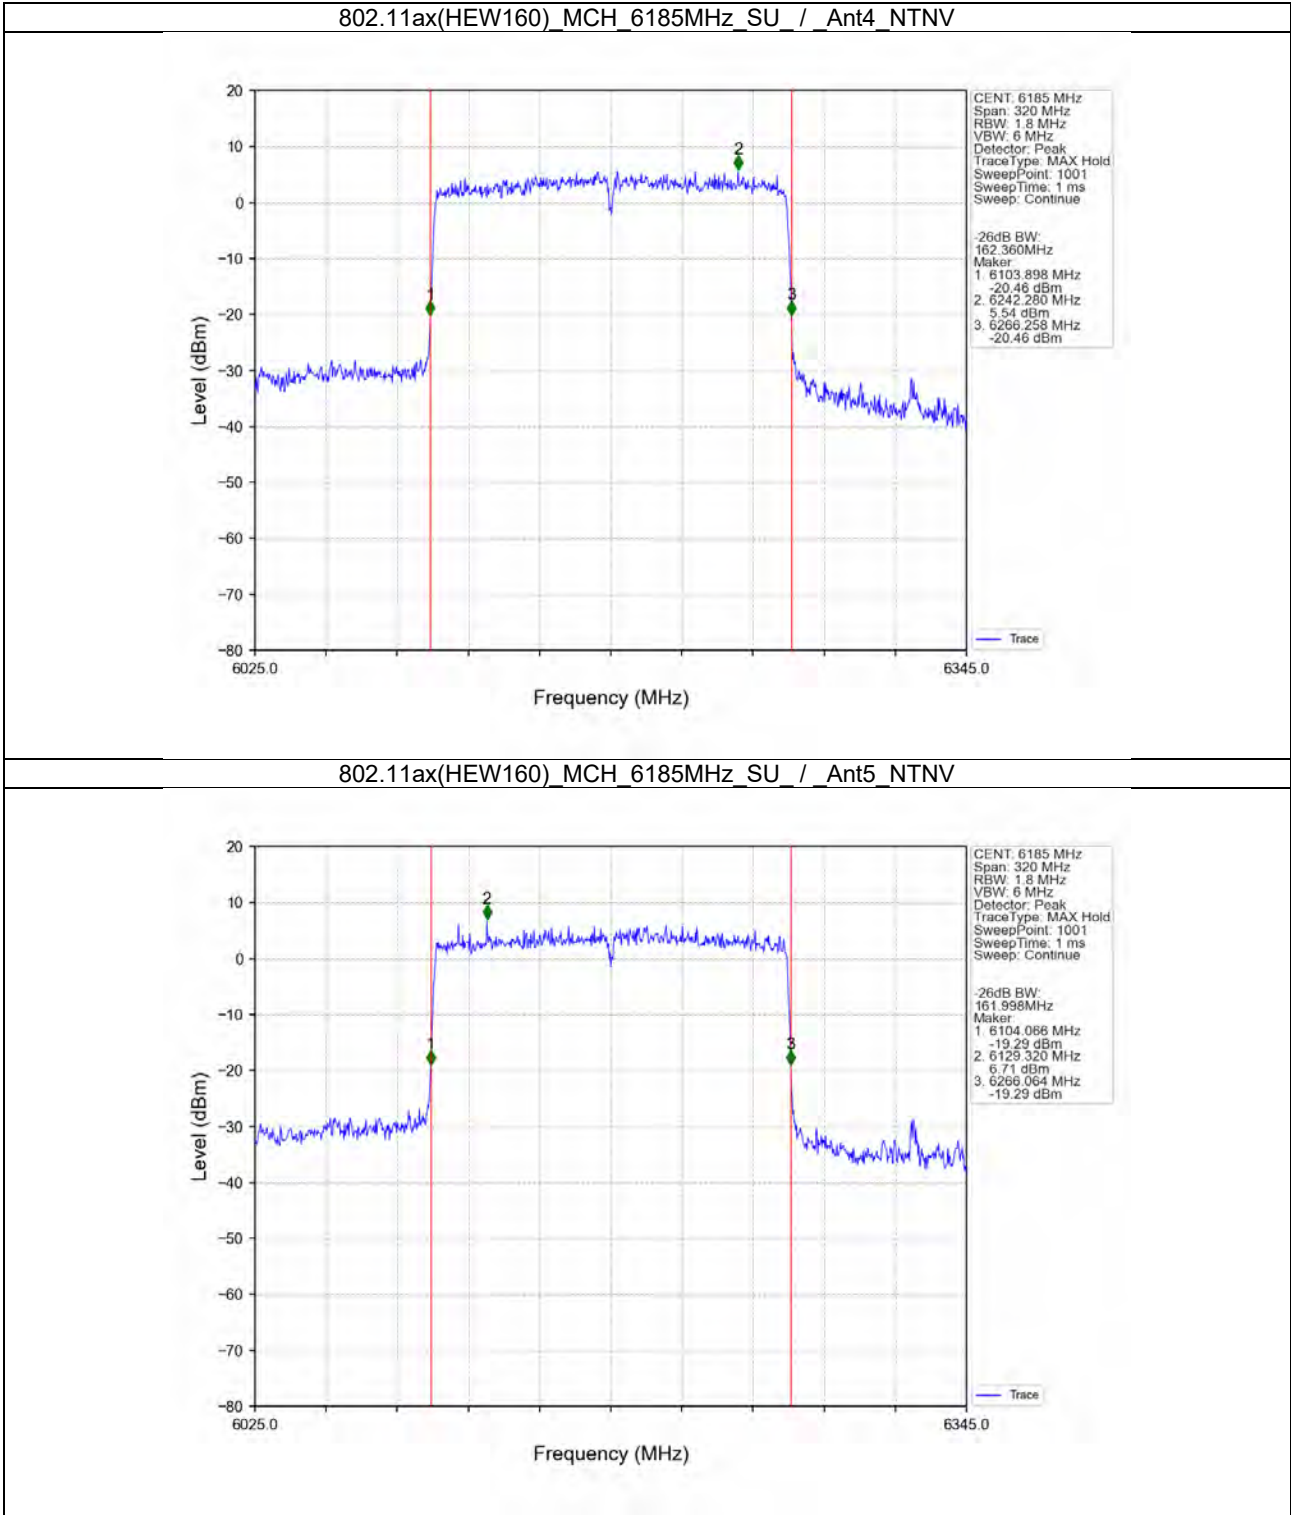



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 73 of 708

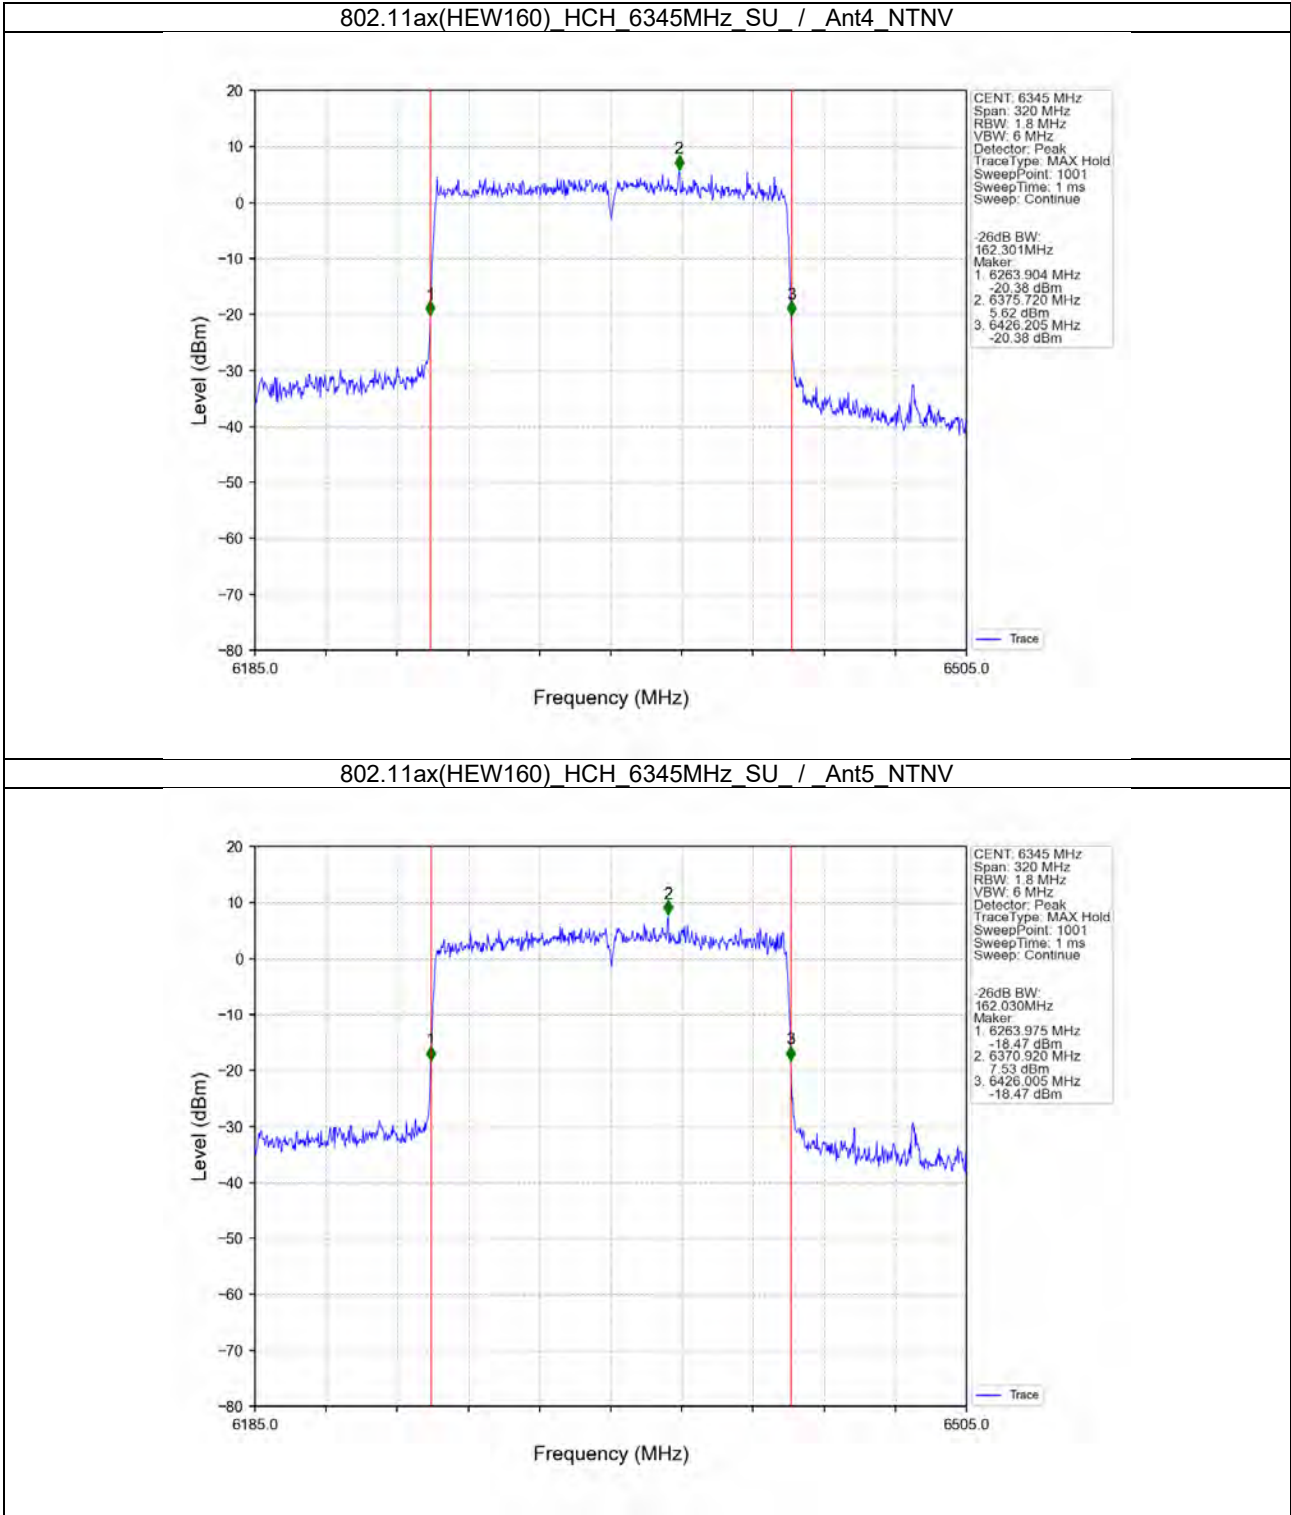




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 74 of 708


2.2.3 OBW

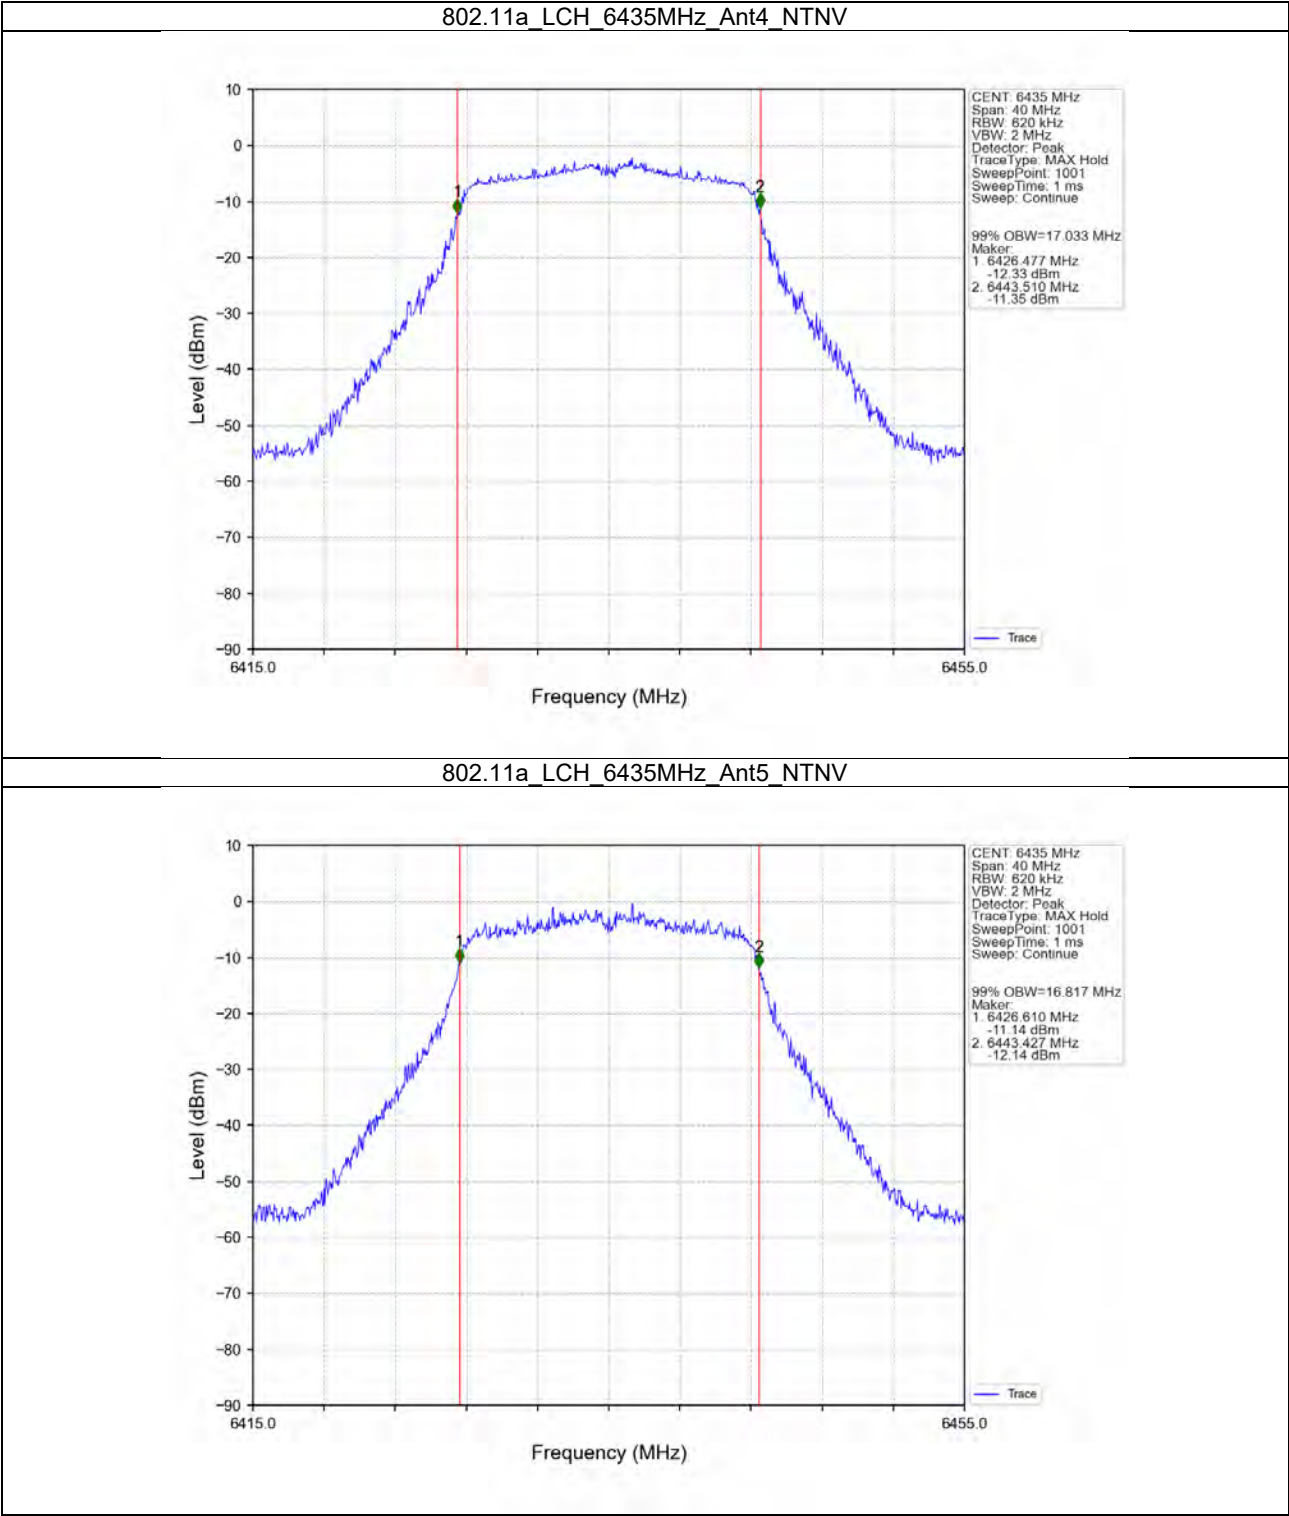



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 75 of 708

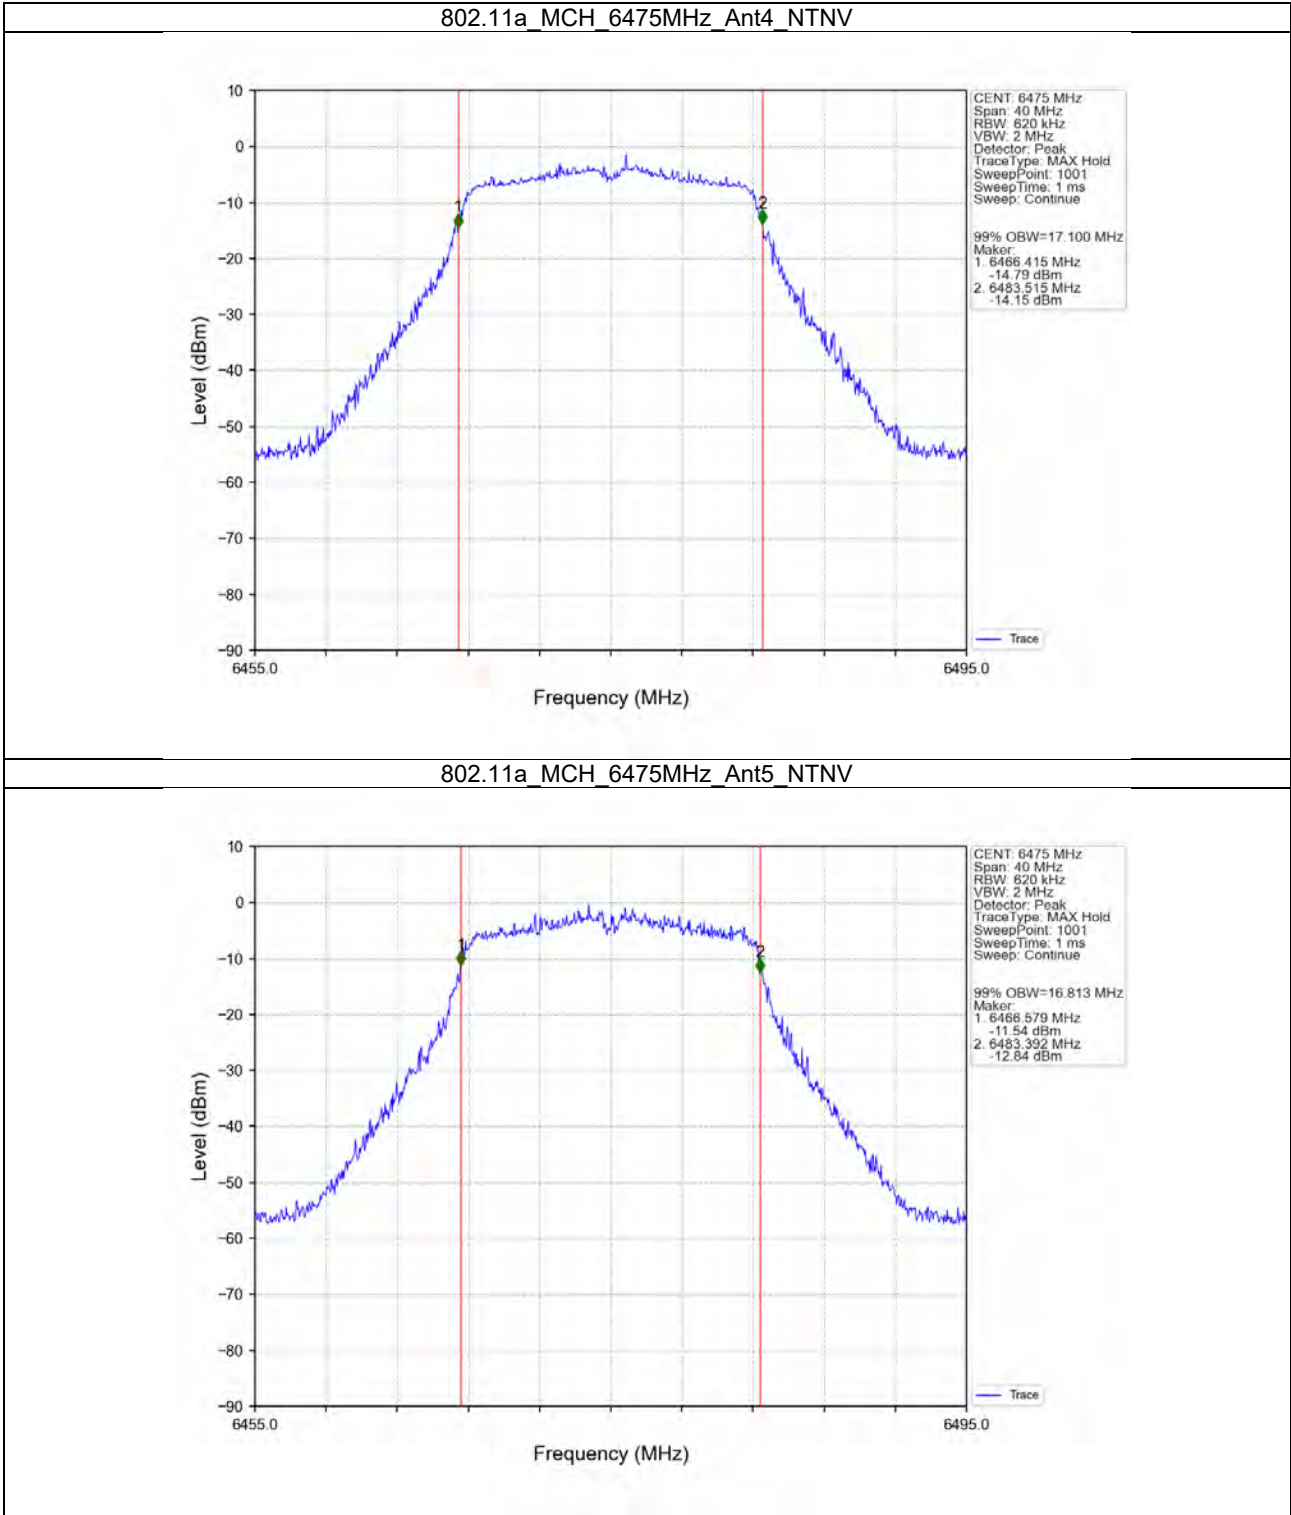



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 76 of 708

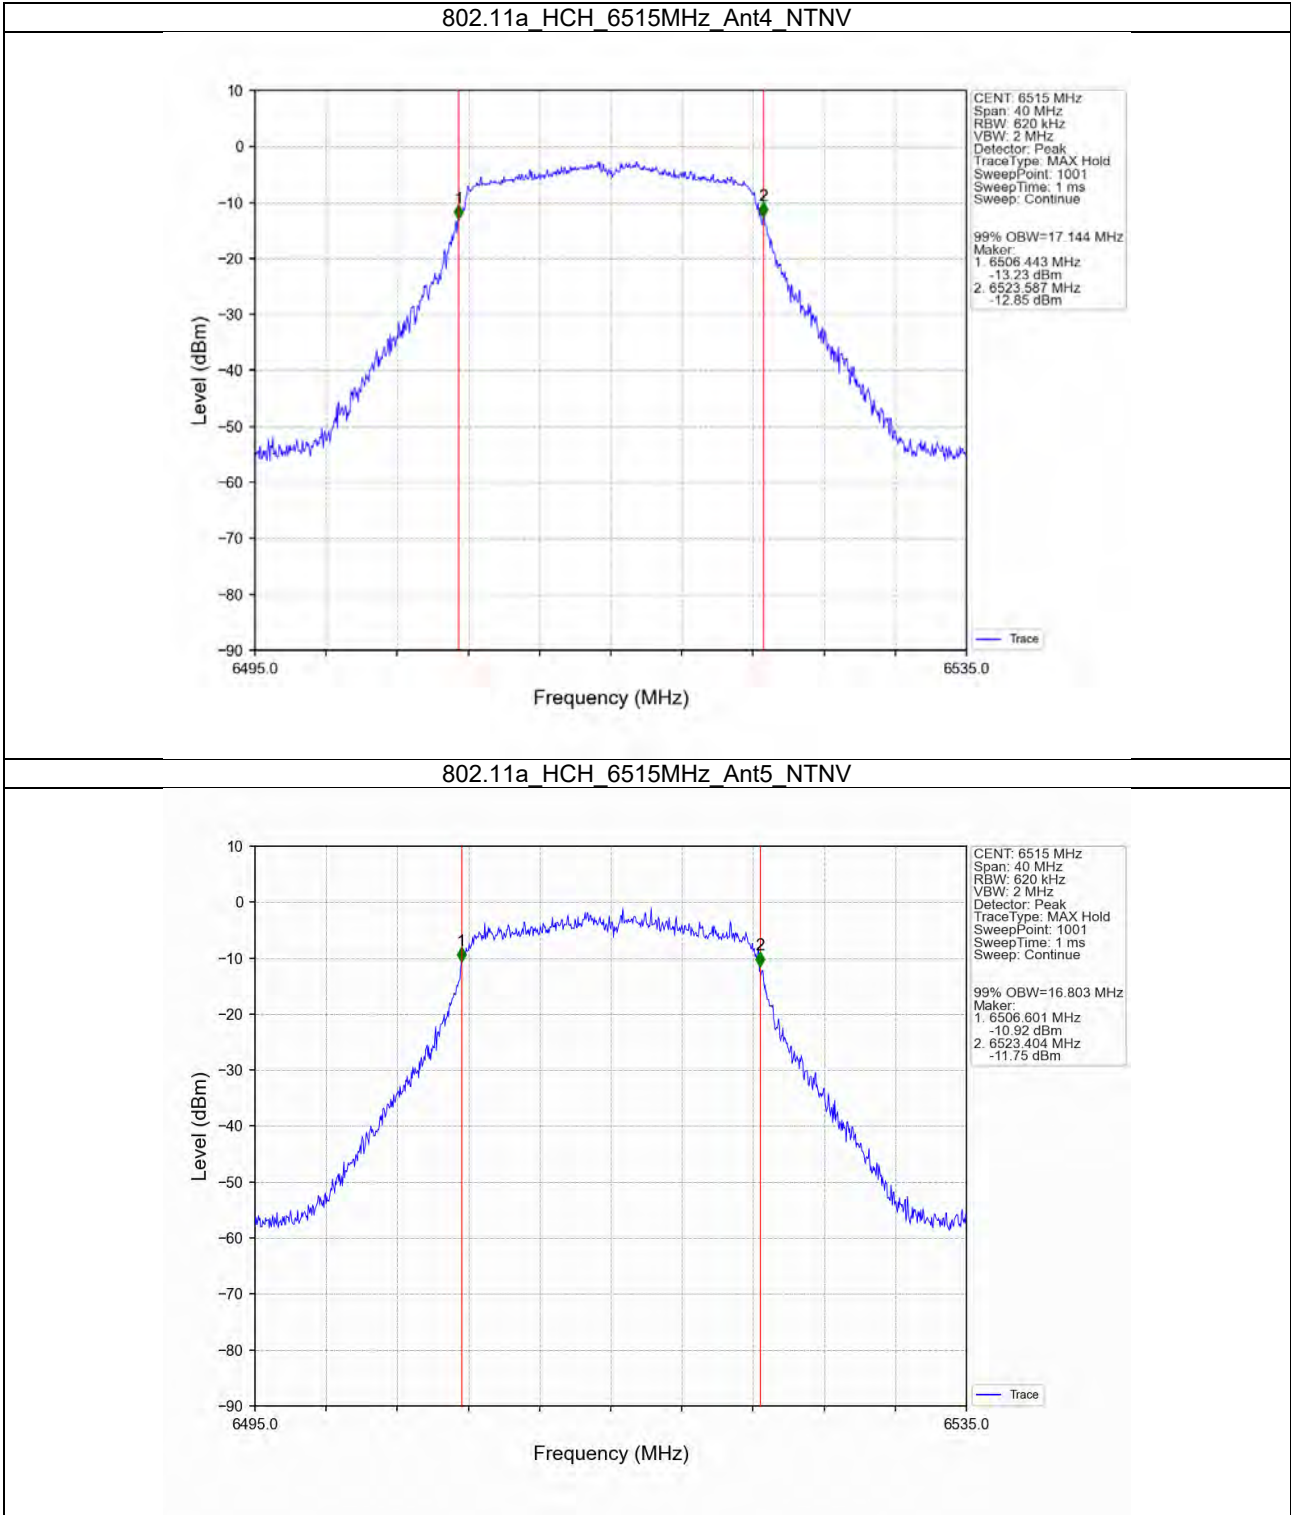



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 77 of 708

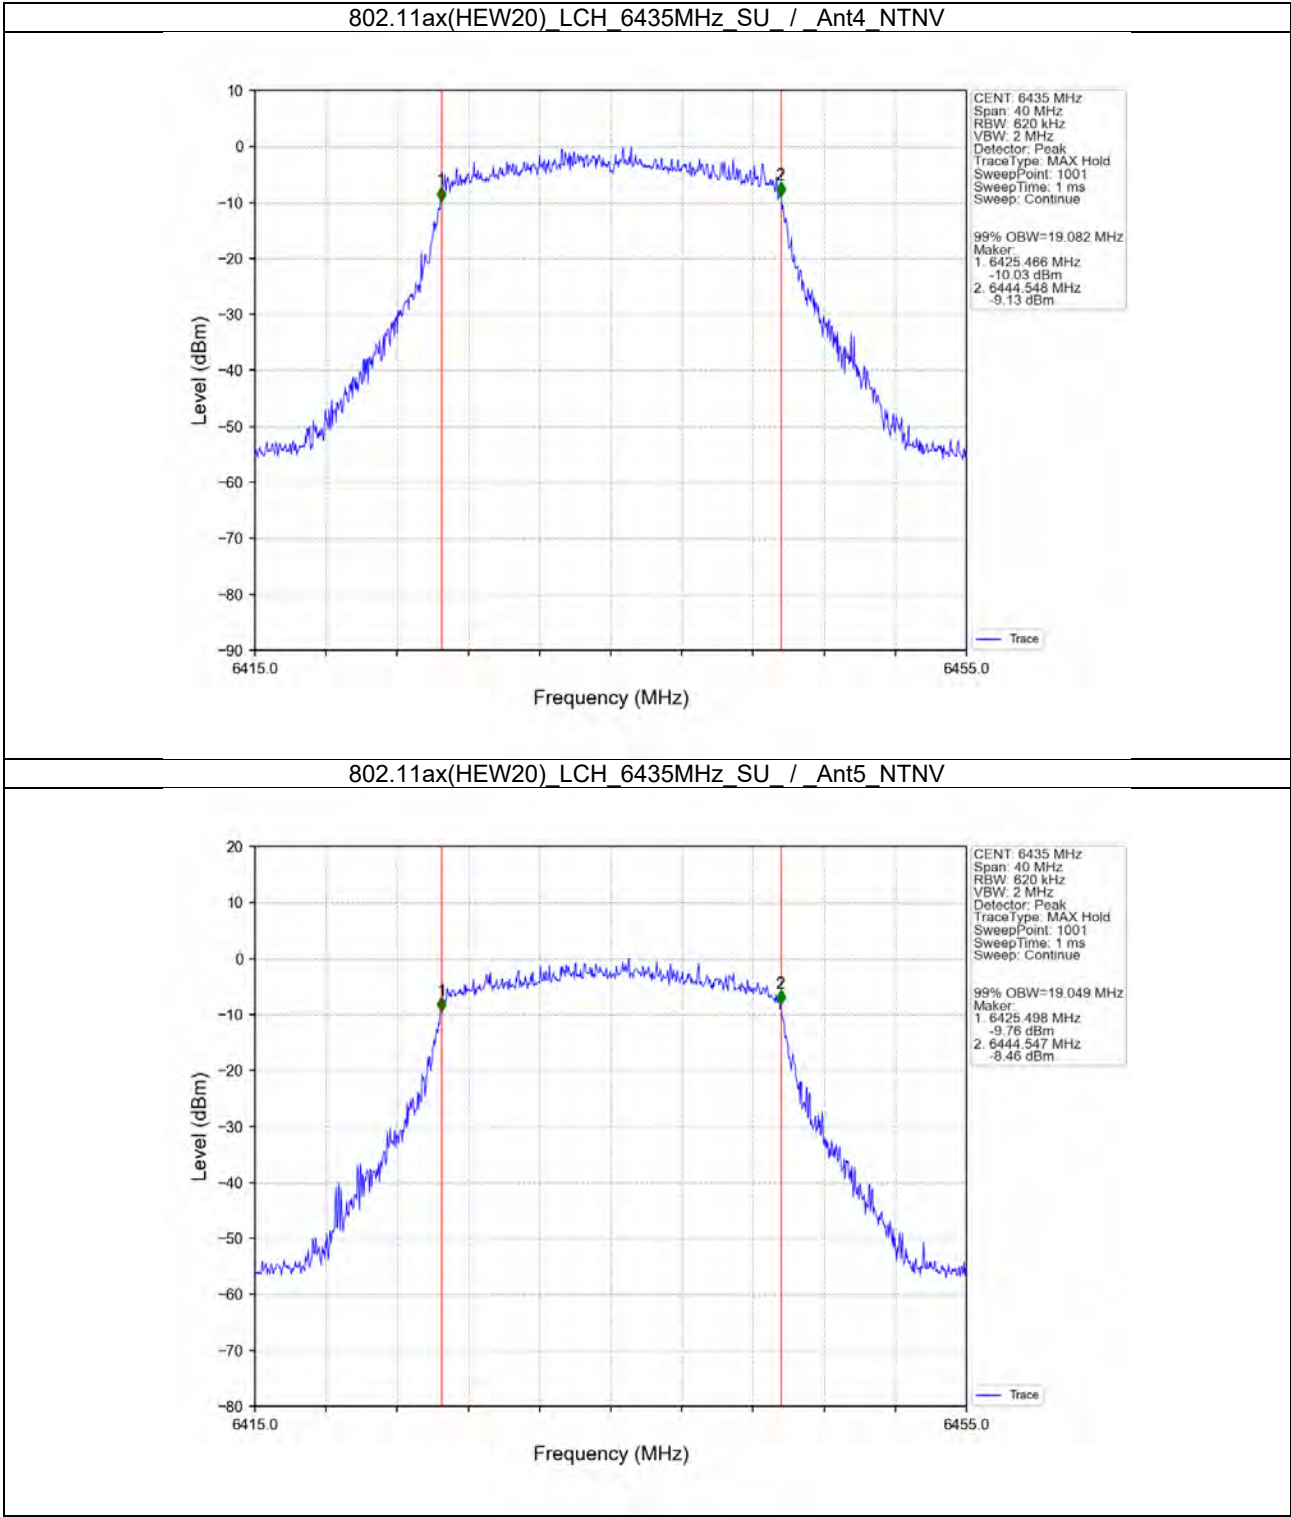



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 78 of 708

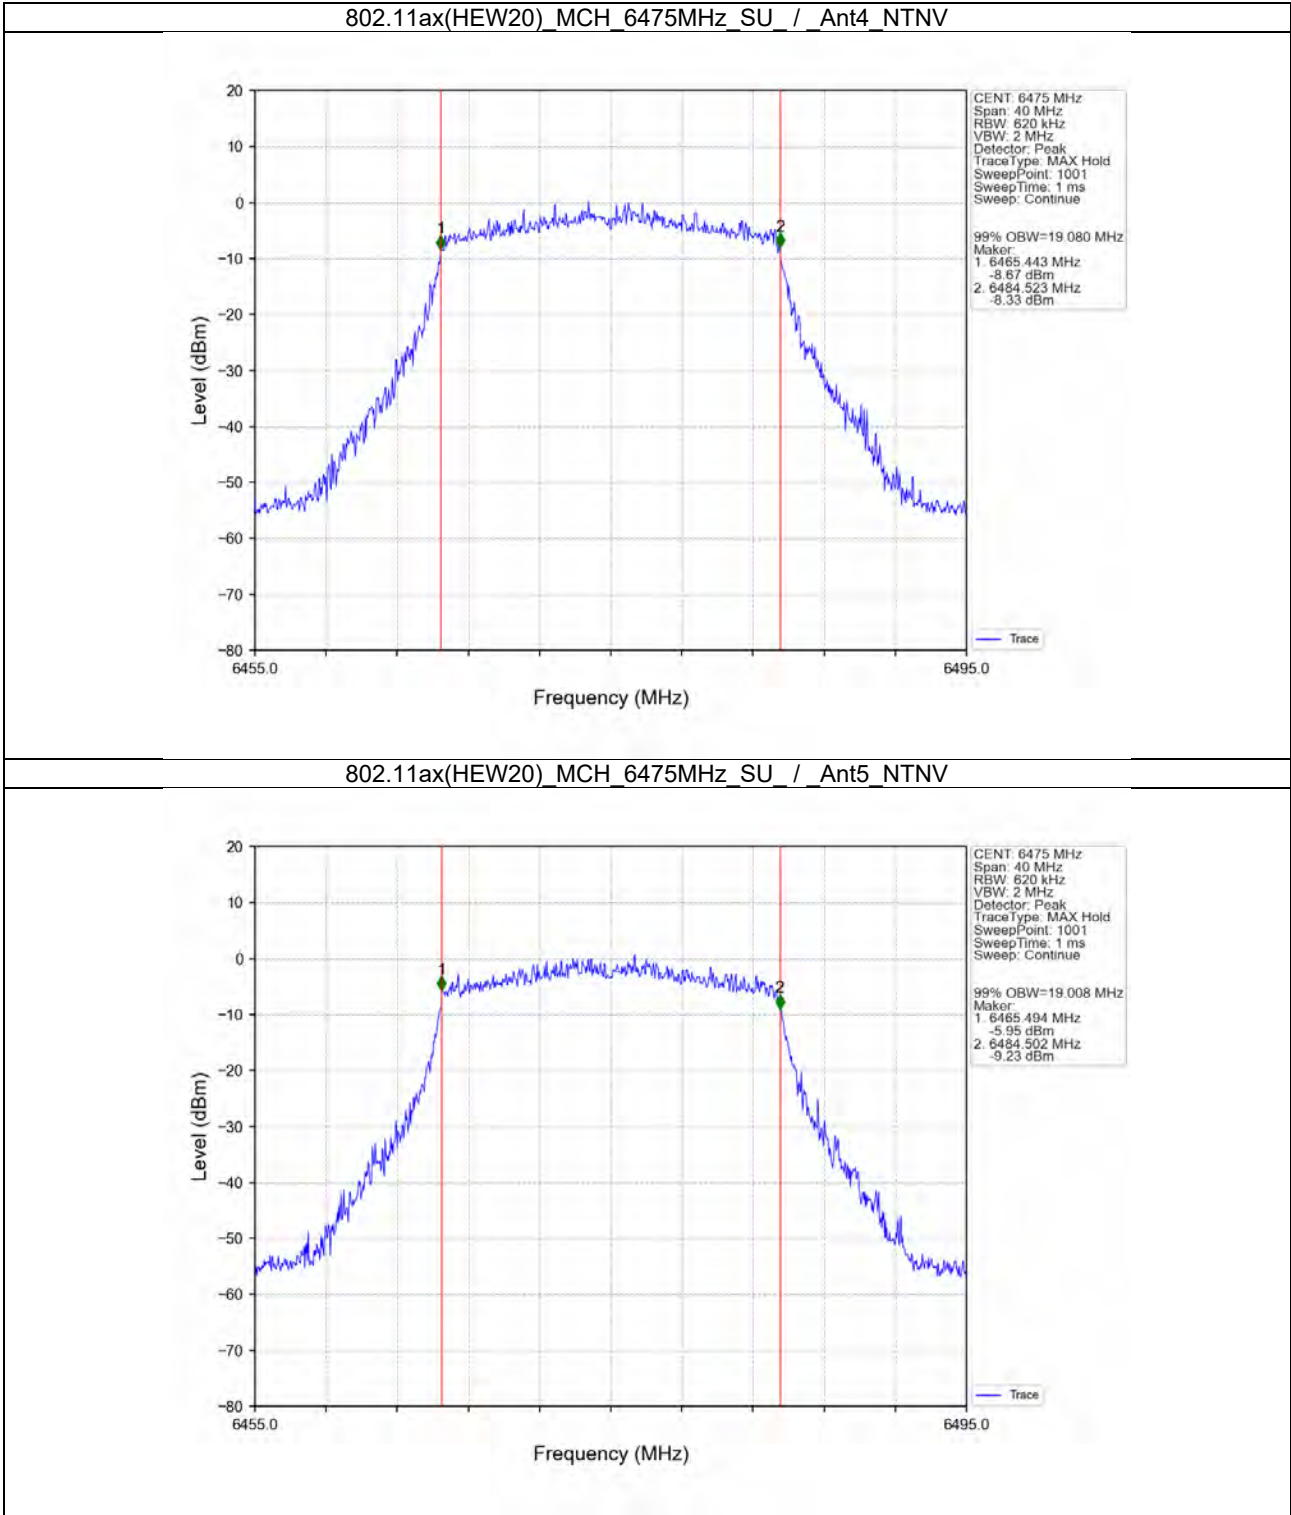



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 79 of 708

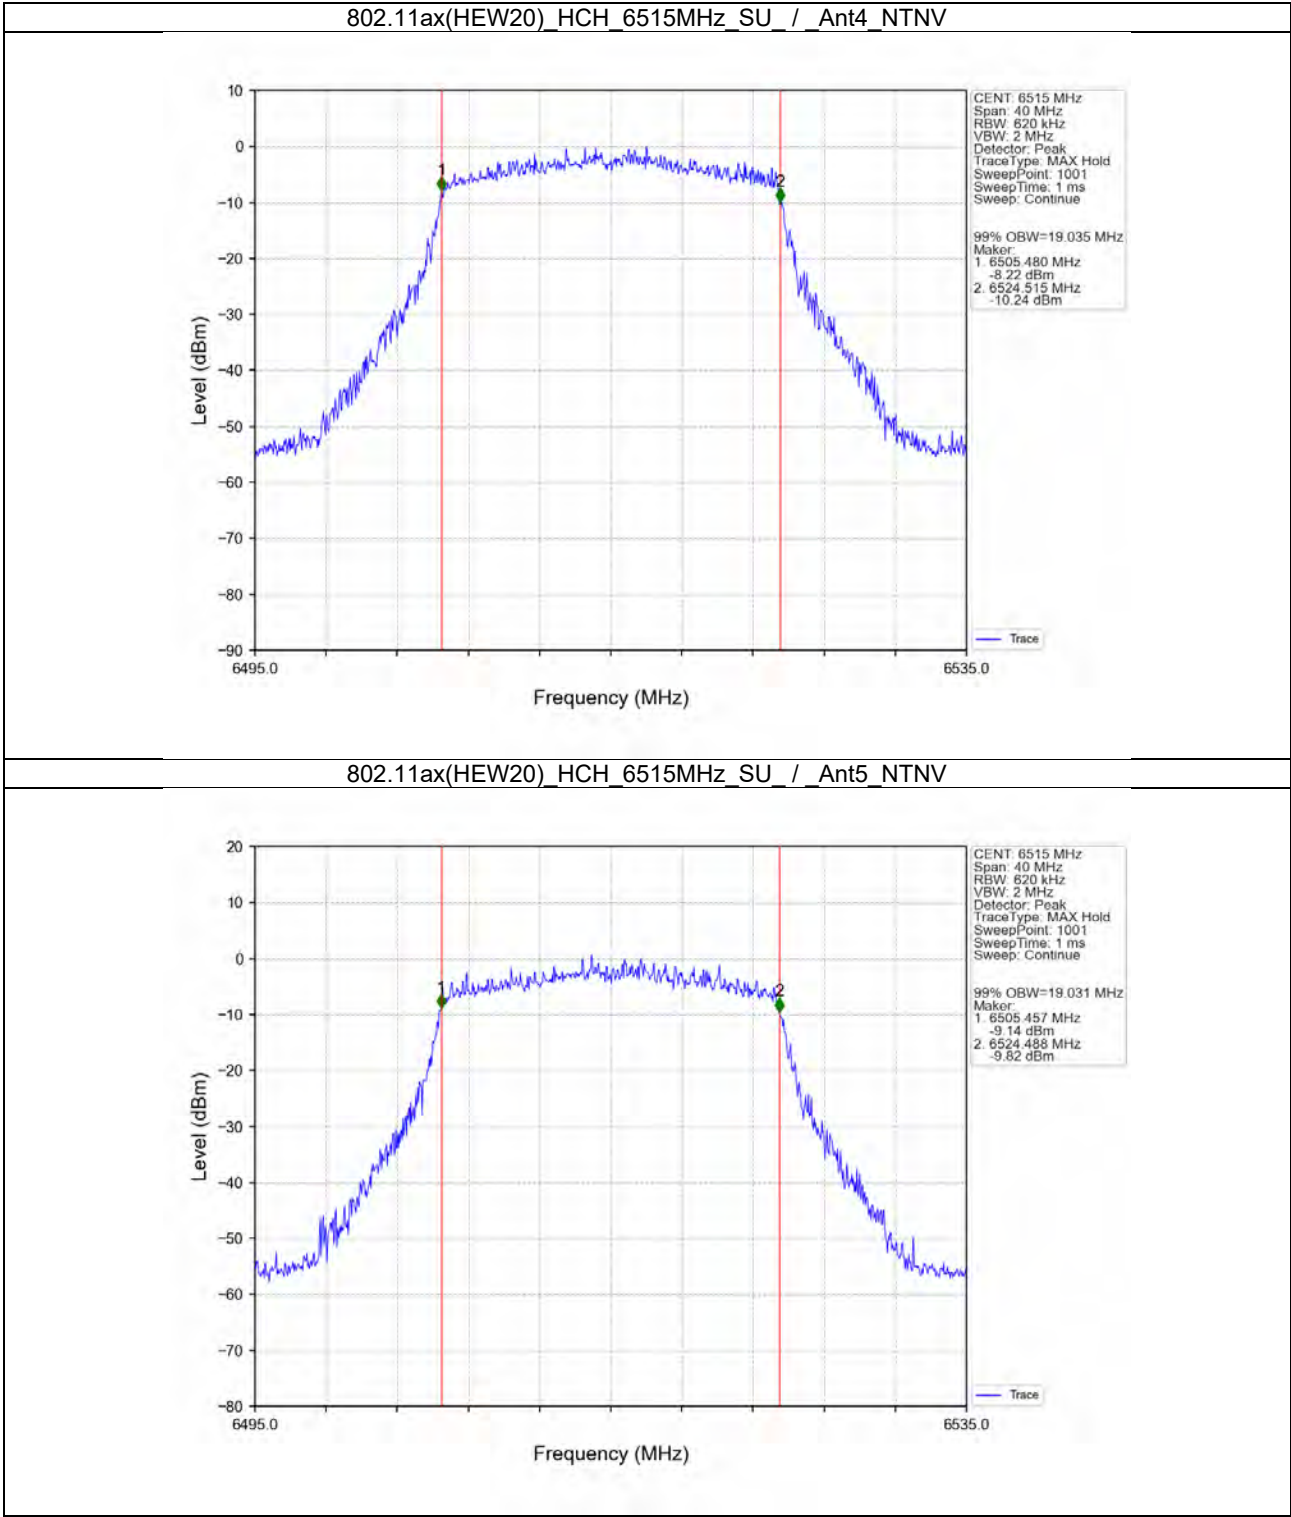



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 80 of 708

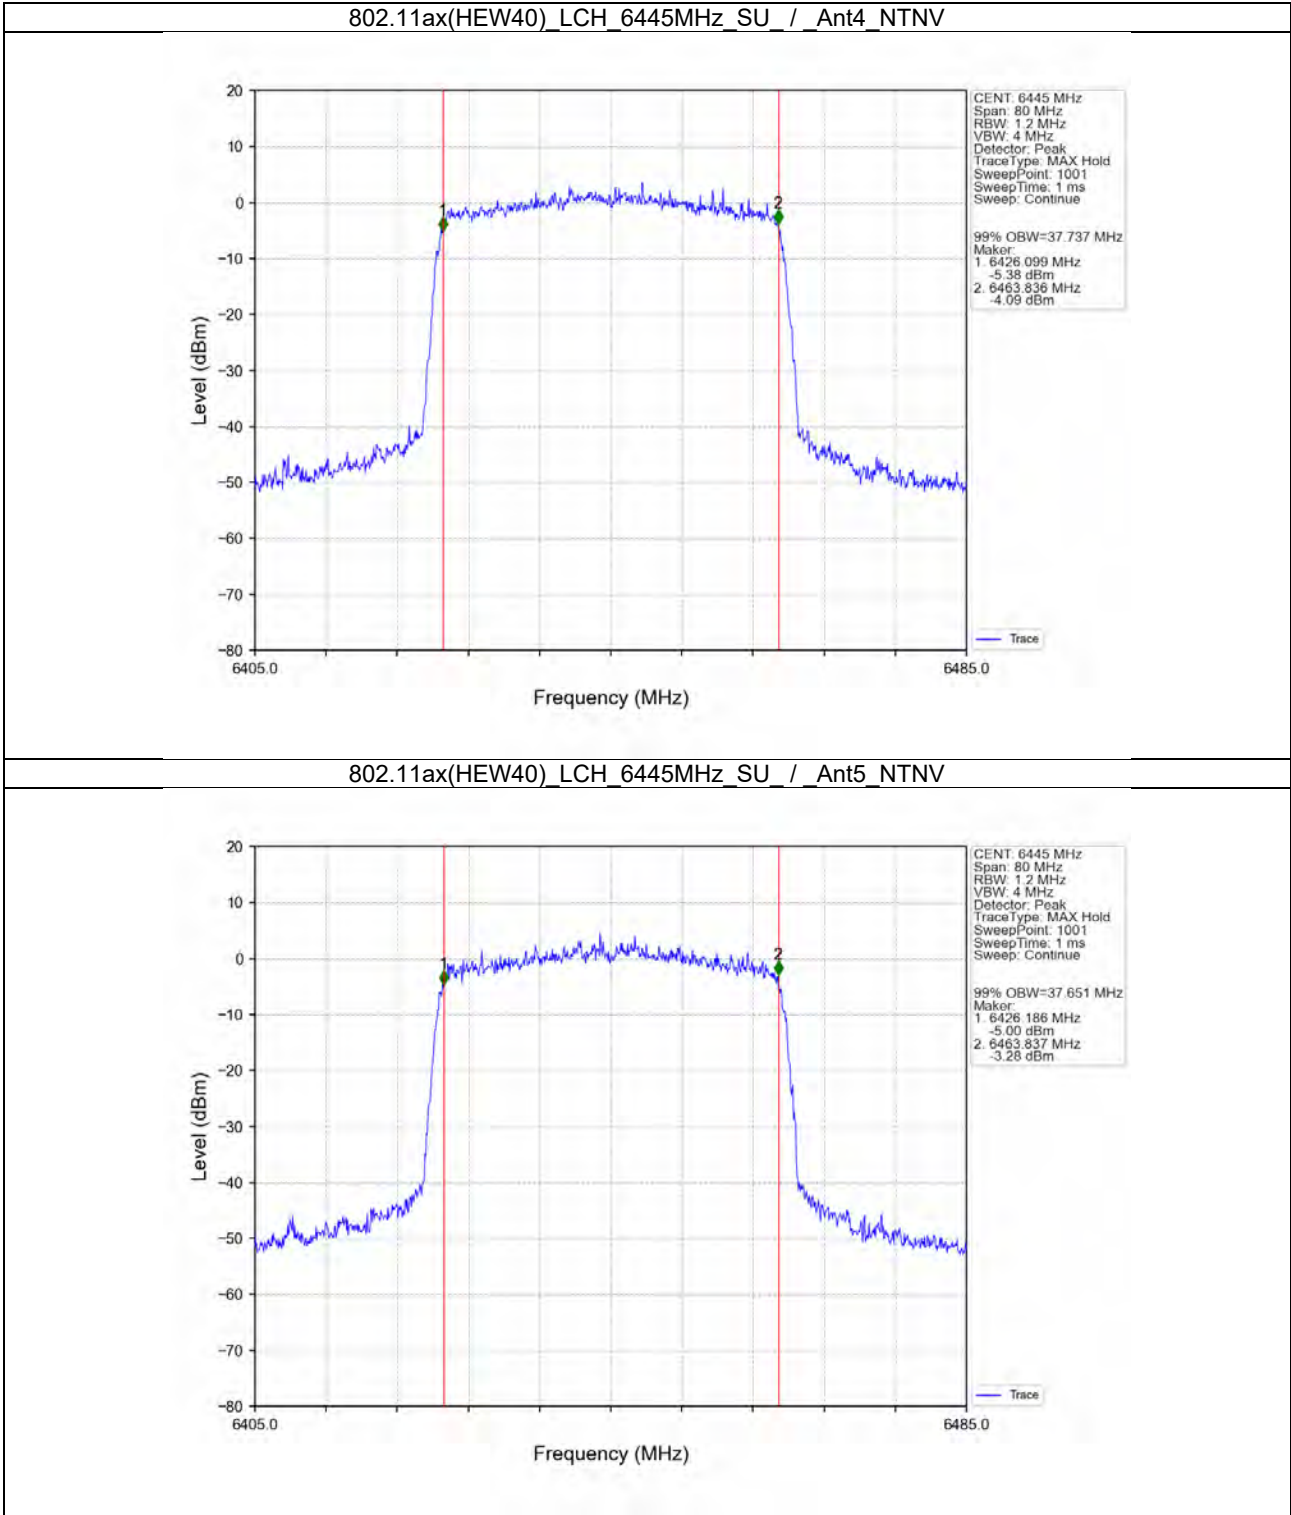



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 81 of 708

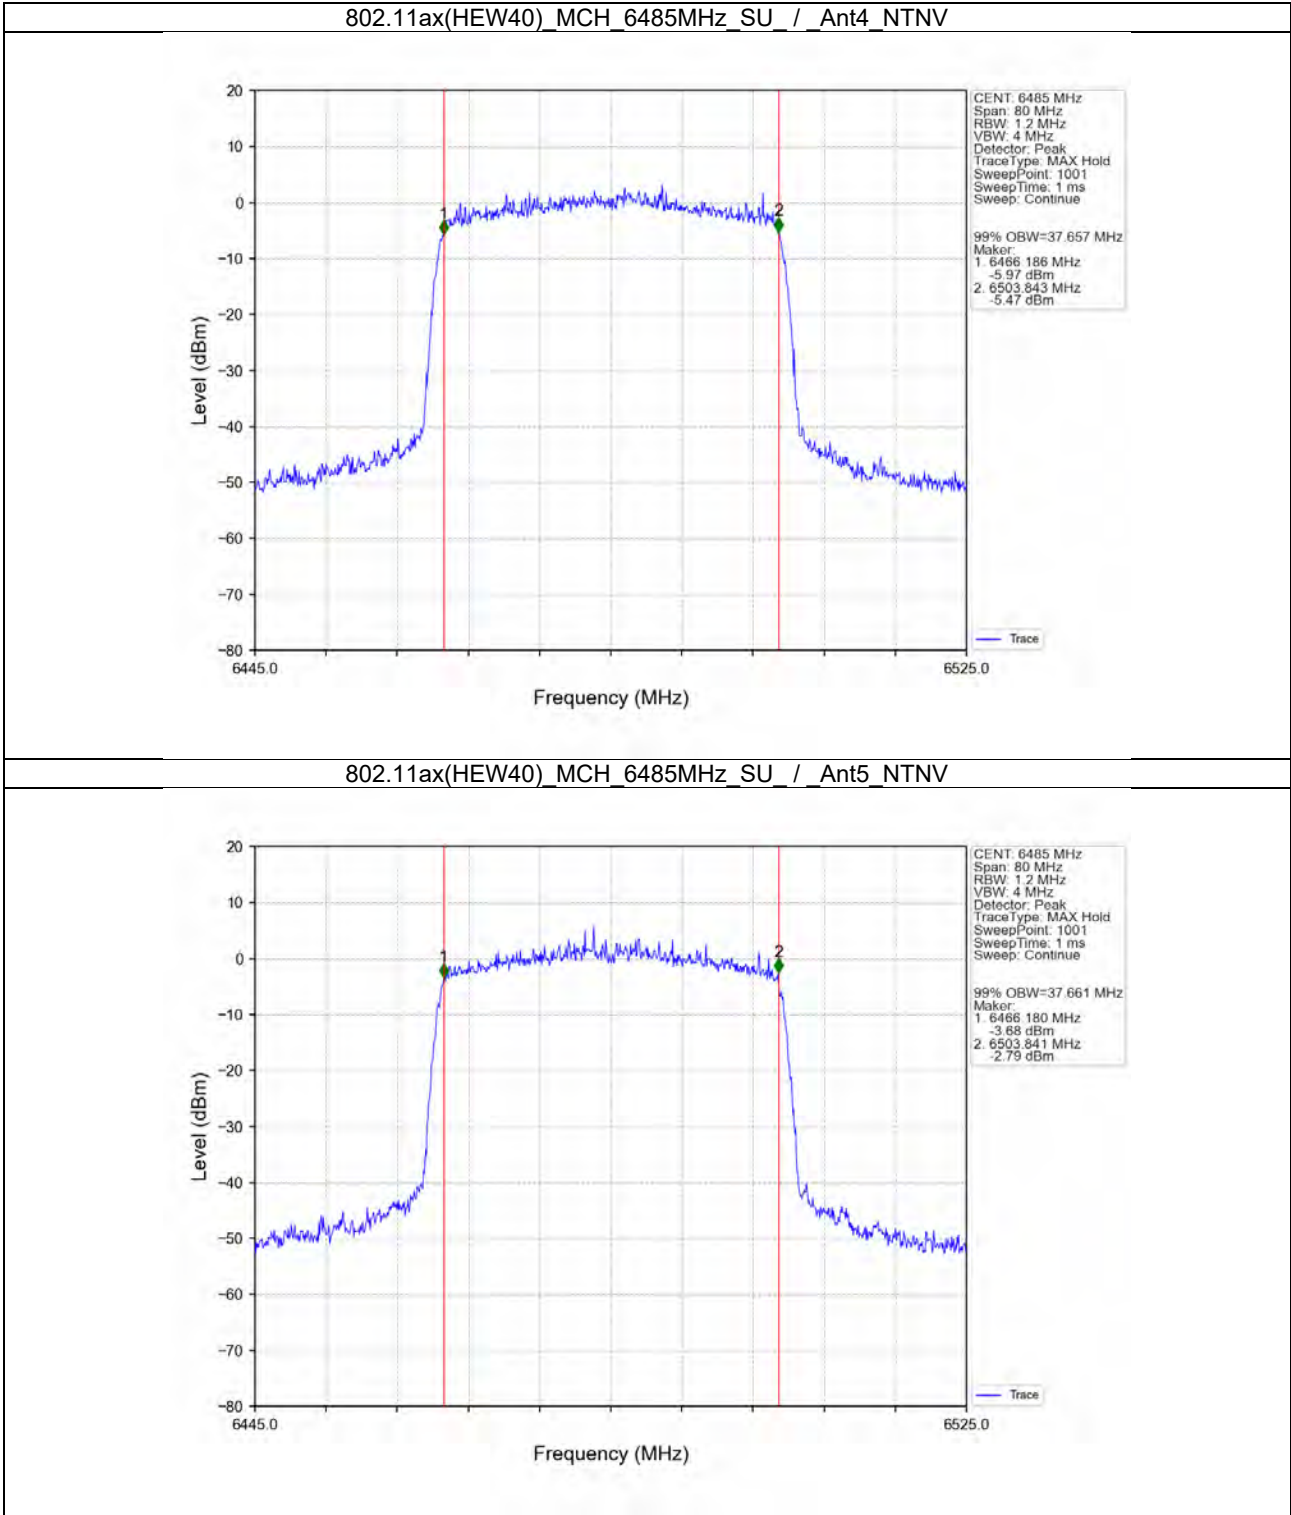



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 82 of 708

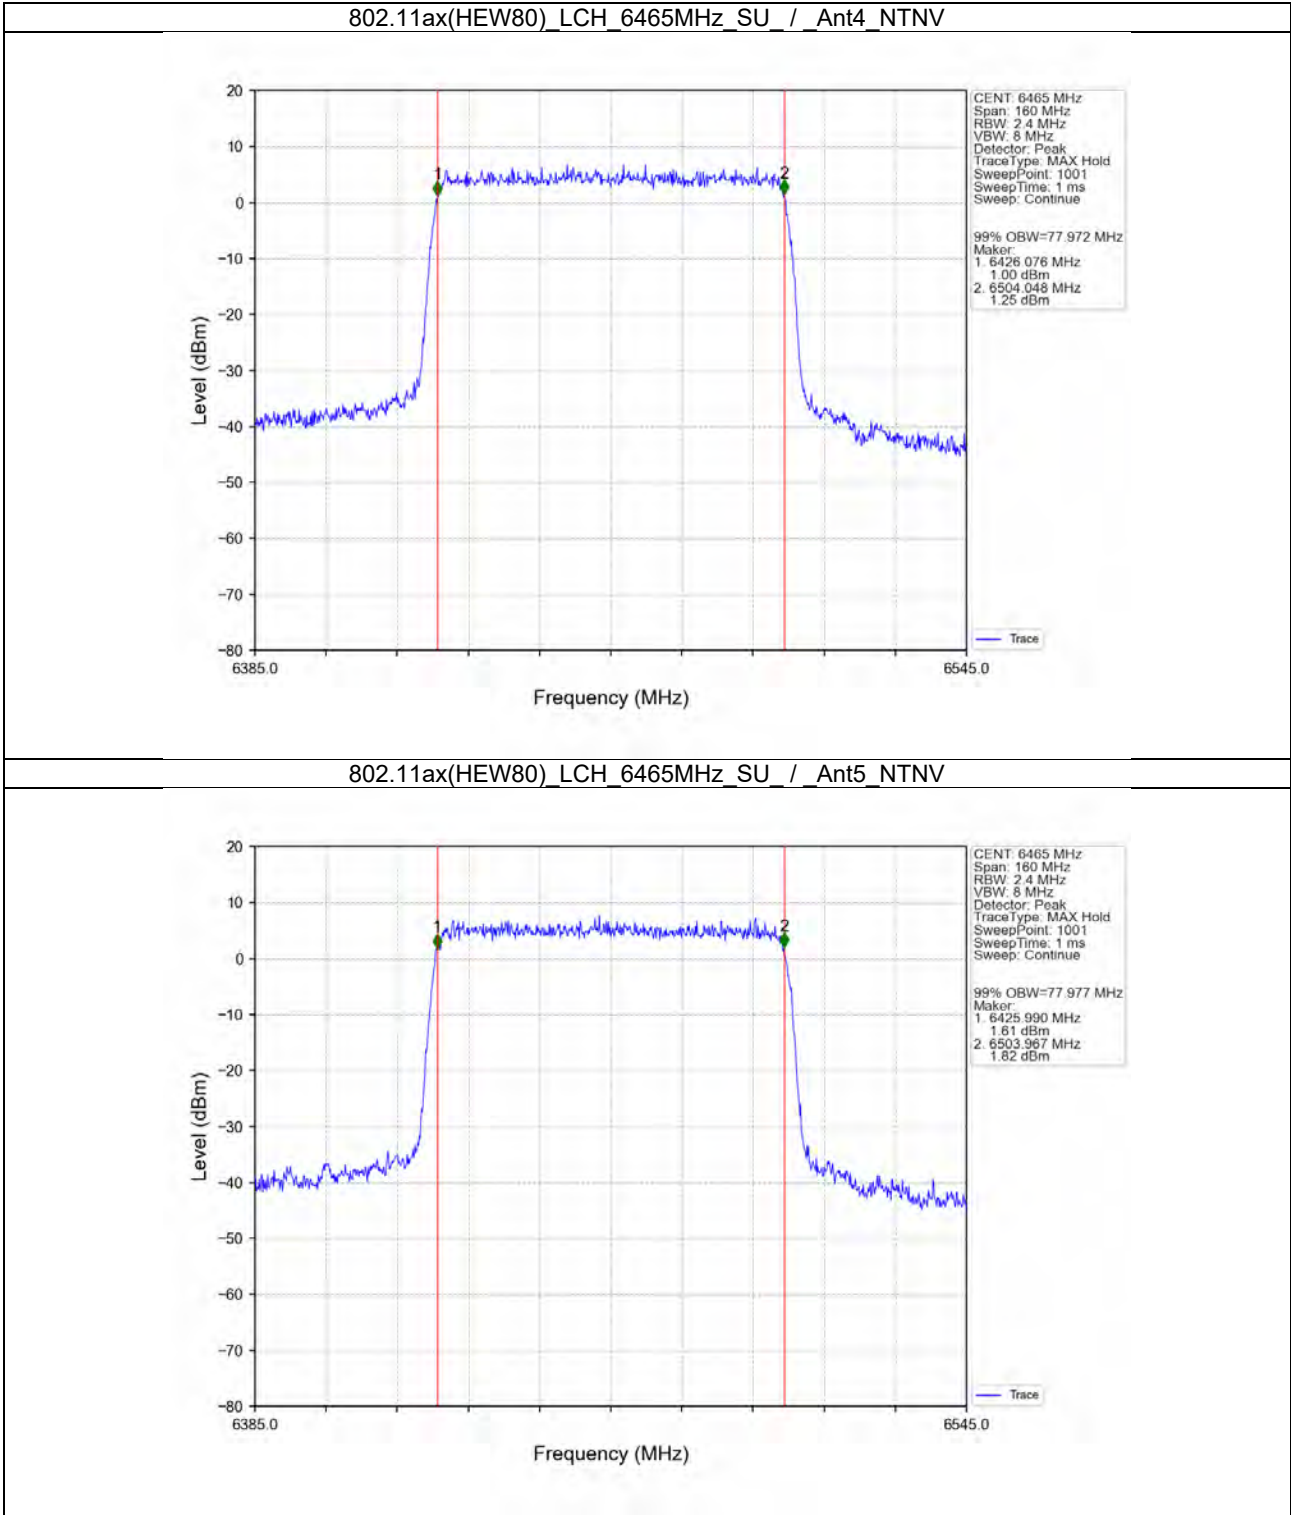




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 83 of 708


2.2.4 26dB BW

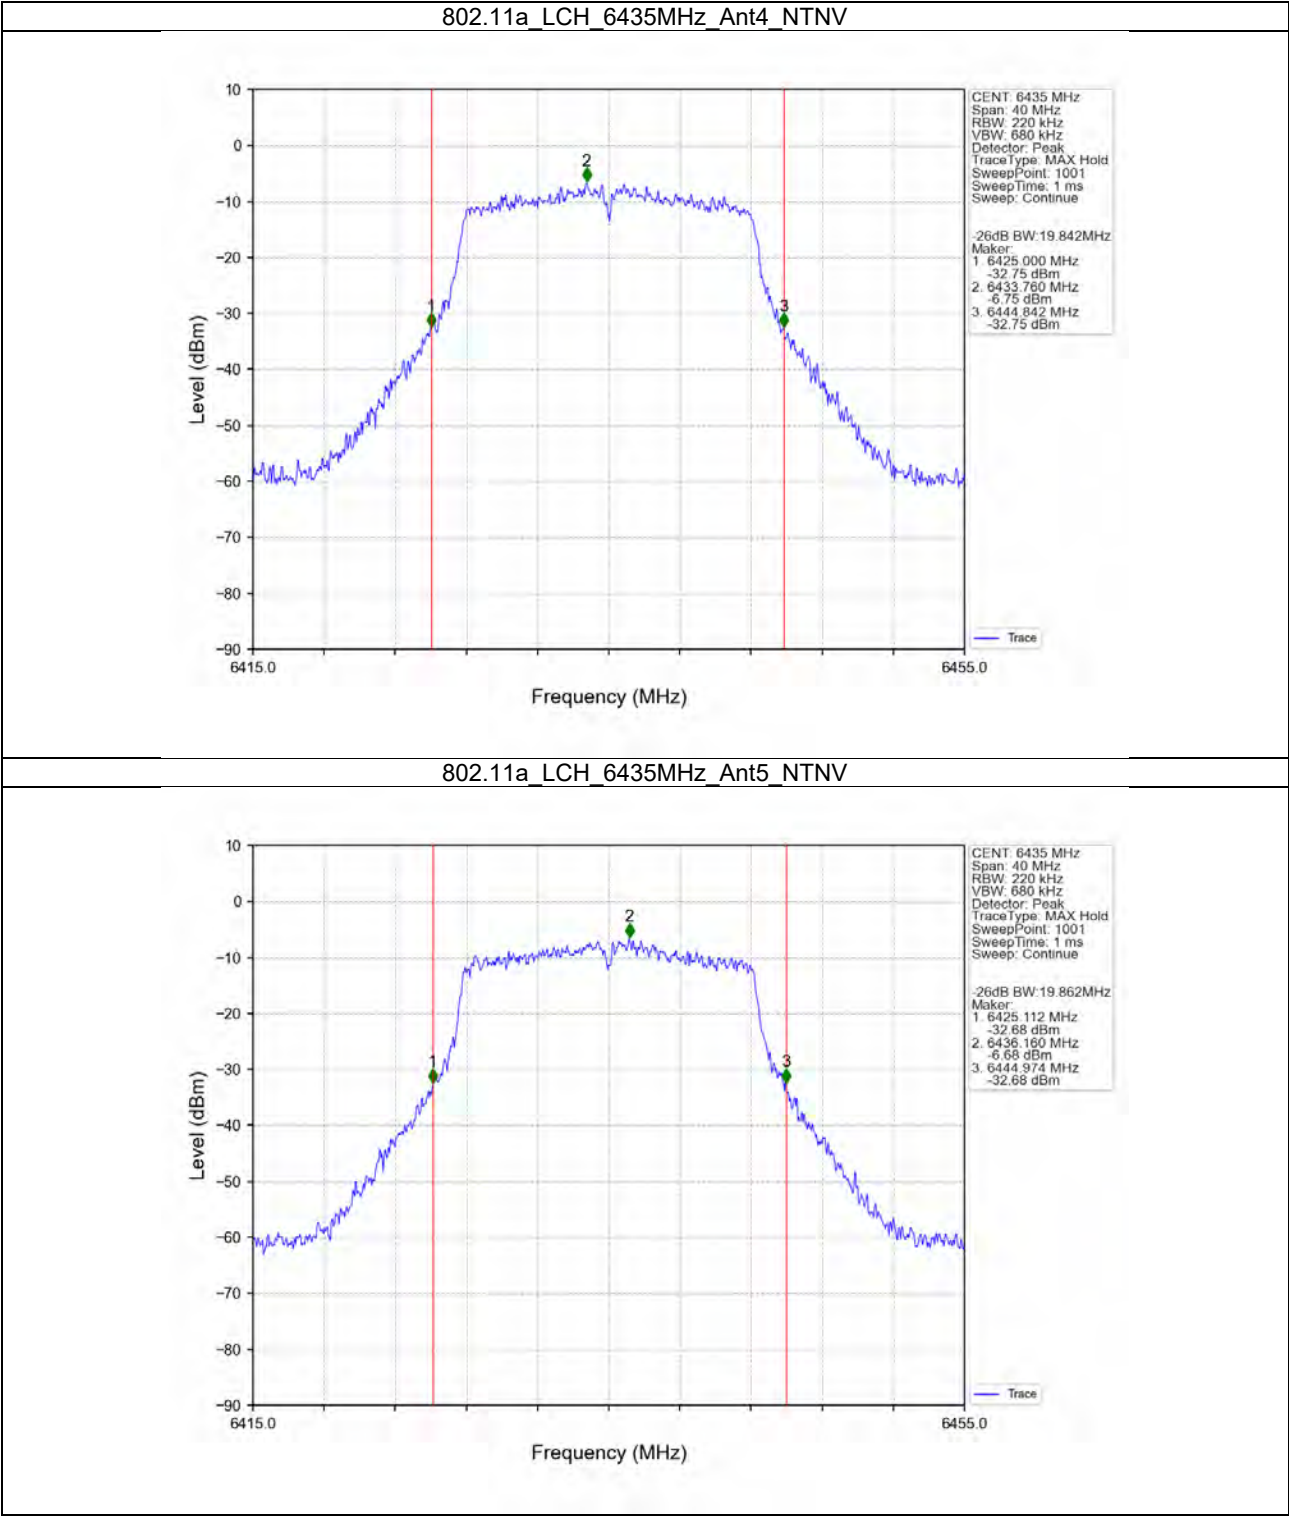



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 84 of 708

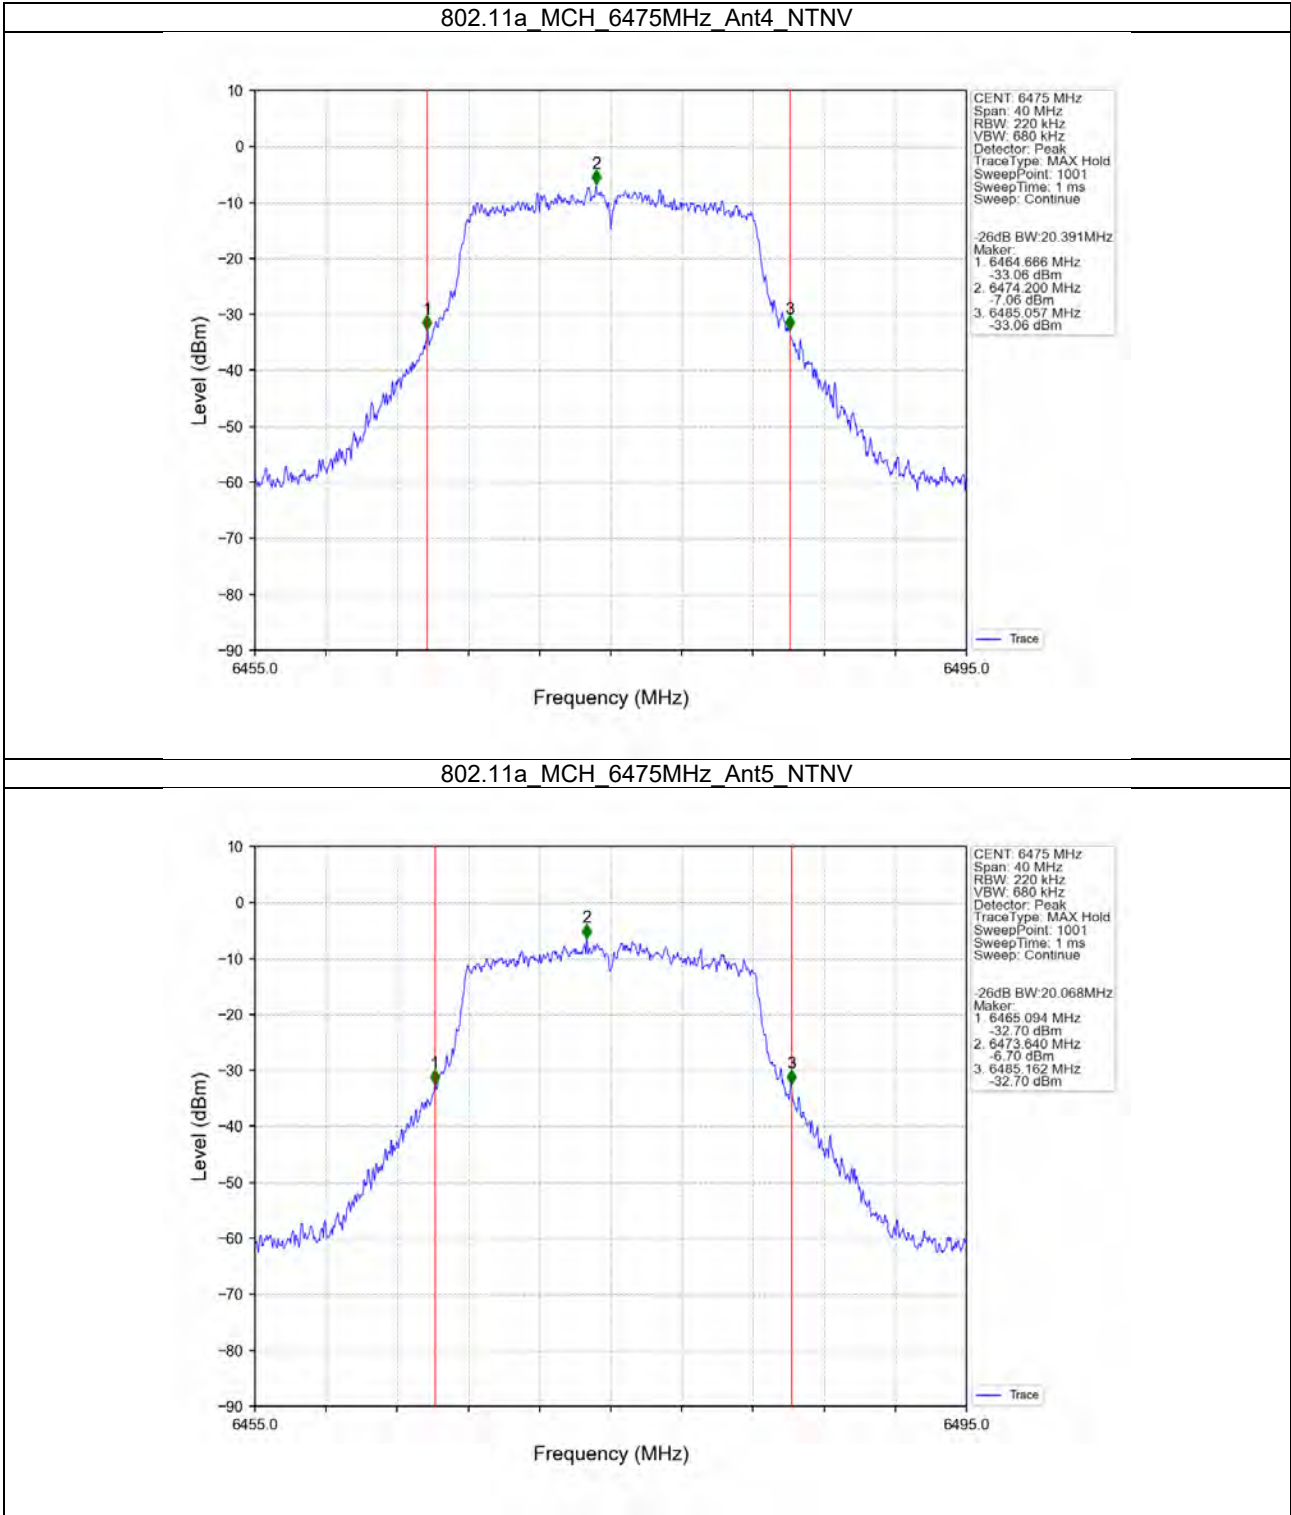



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 85 of 708

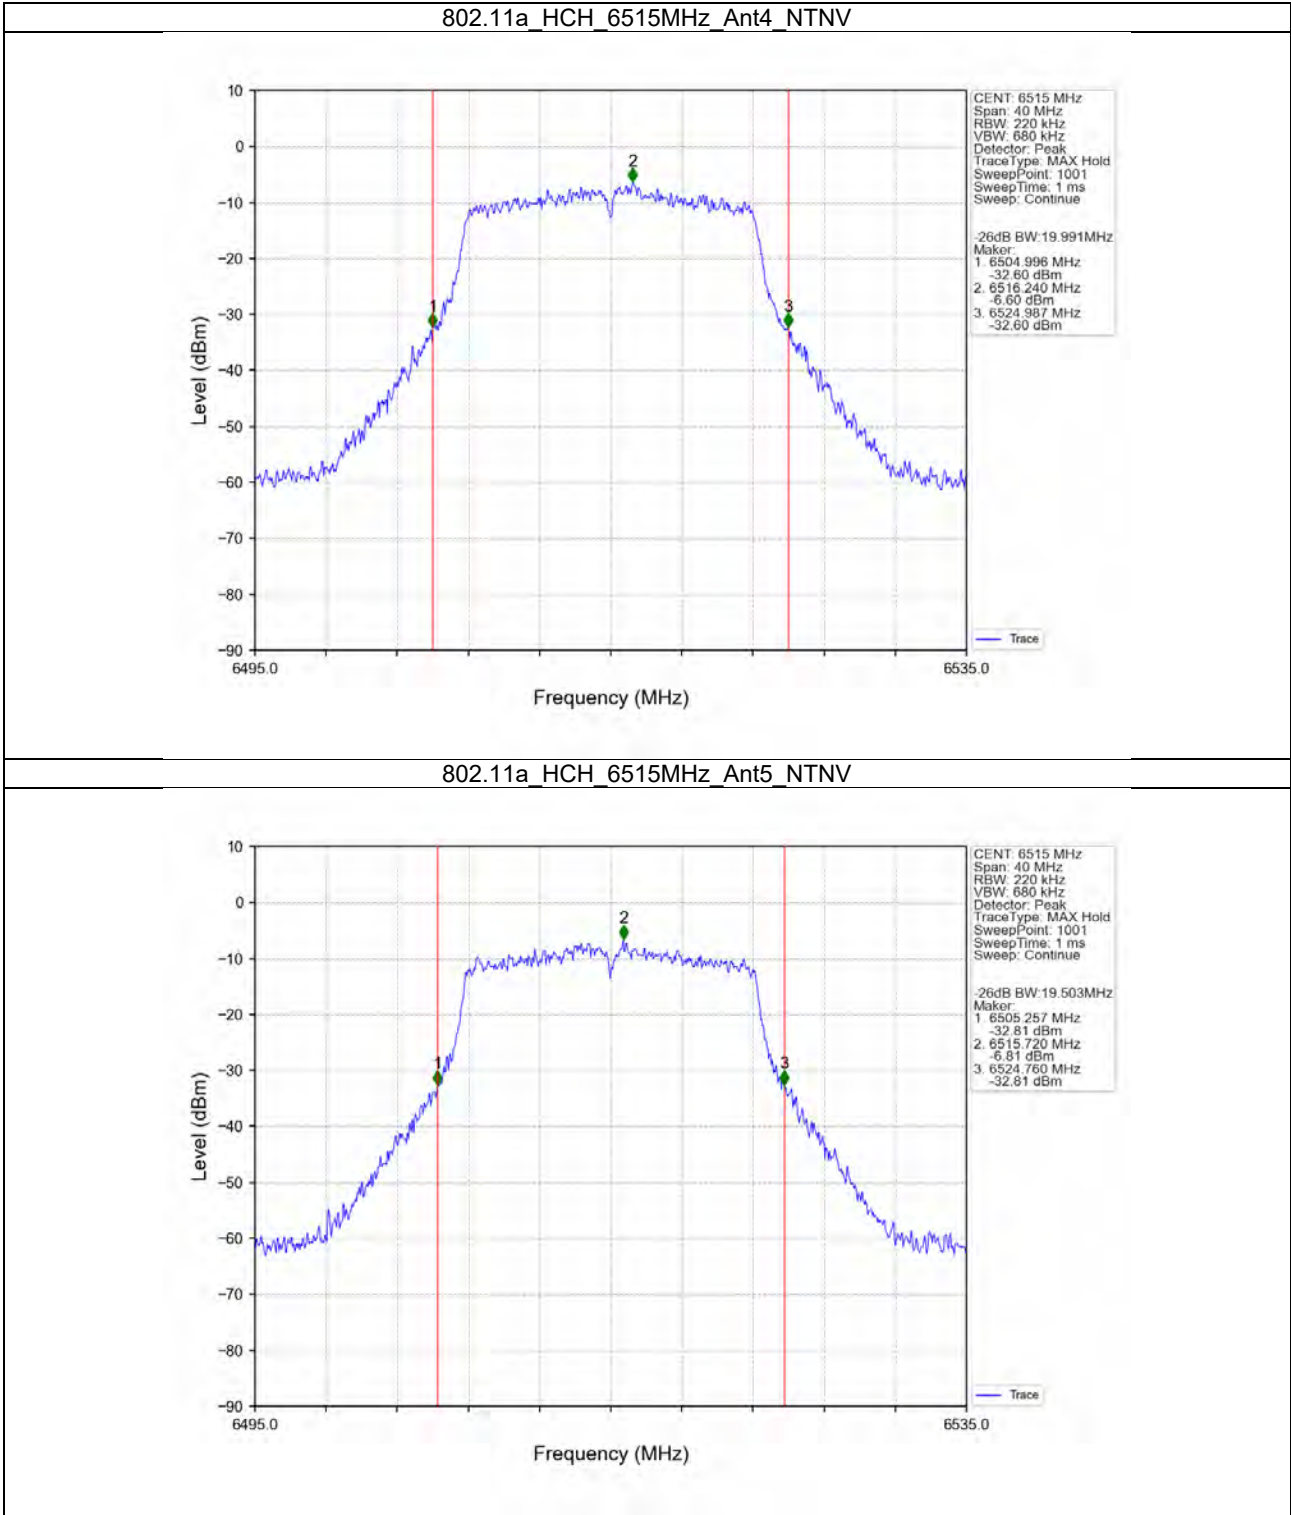





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 86 of 708

802.11ax(HEW20)_LCH_6435MHz_SU_ / Ant4_NTNV

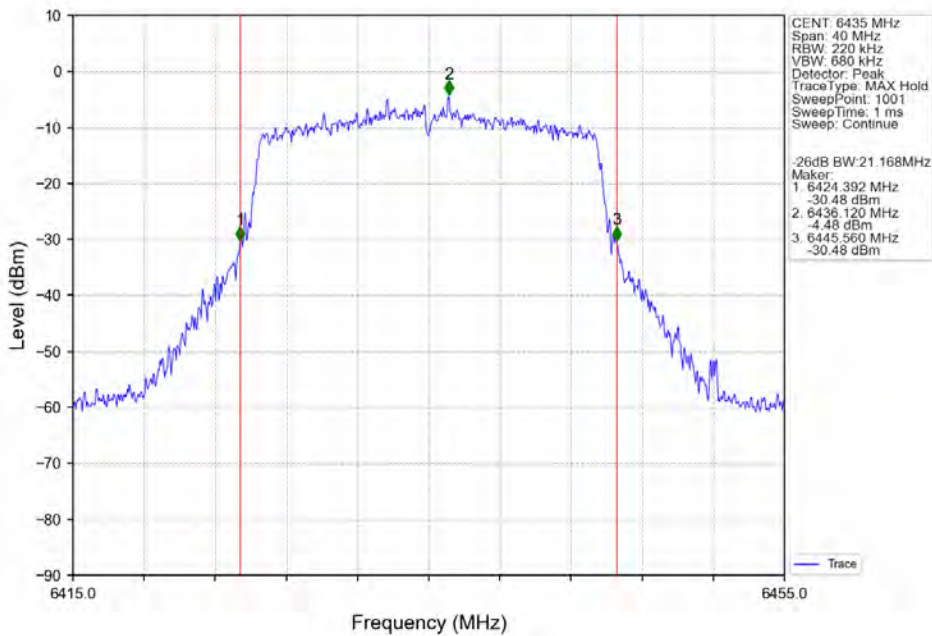

802.11ax(HEW20)_LCH_6435MHz_SU_ / Ant5_NTNV

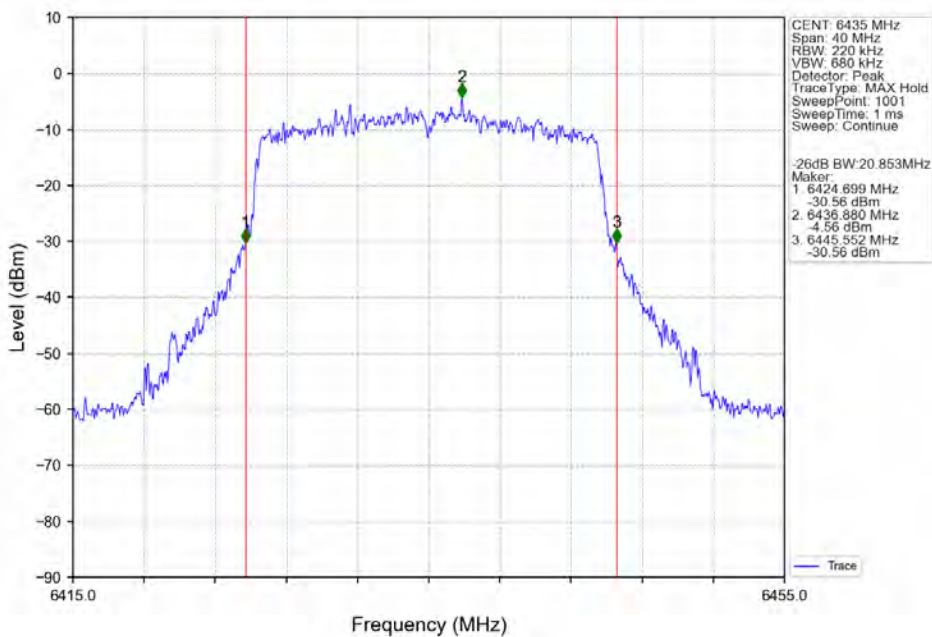




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207


Rev.: 02

Page: 87 of 708

802.11ax(HEW20)_MCH_6475MHz_SU_/_Ant4_NTNV

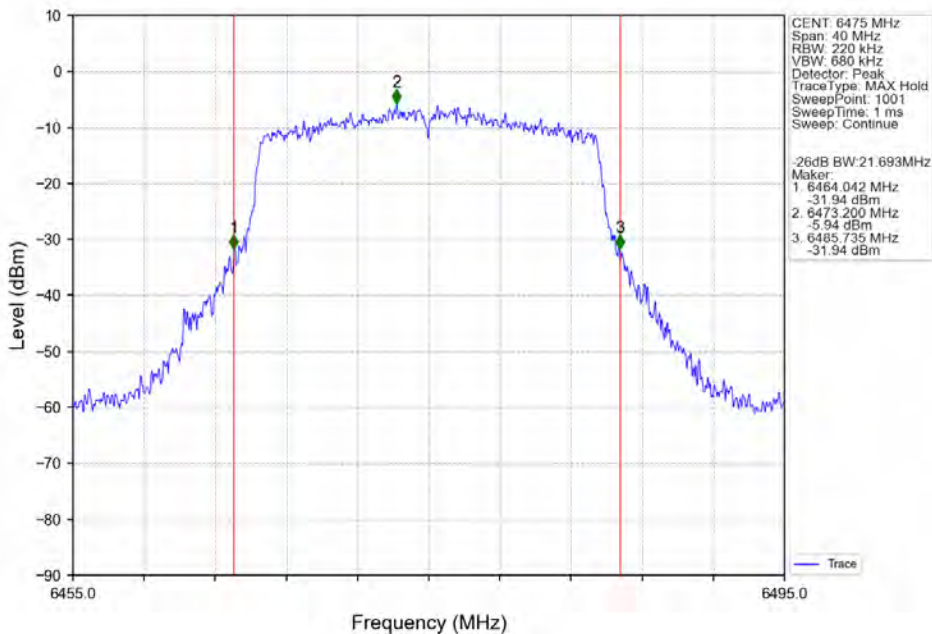

802.11ax(HEW20)_MCH_6475MHz_SU_/_Ant5_NTNV

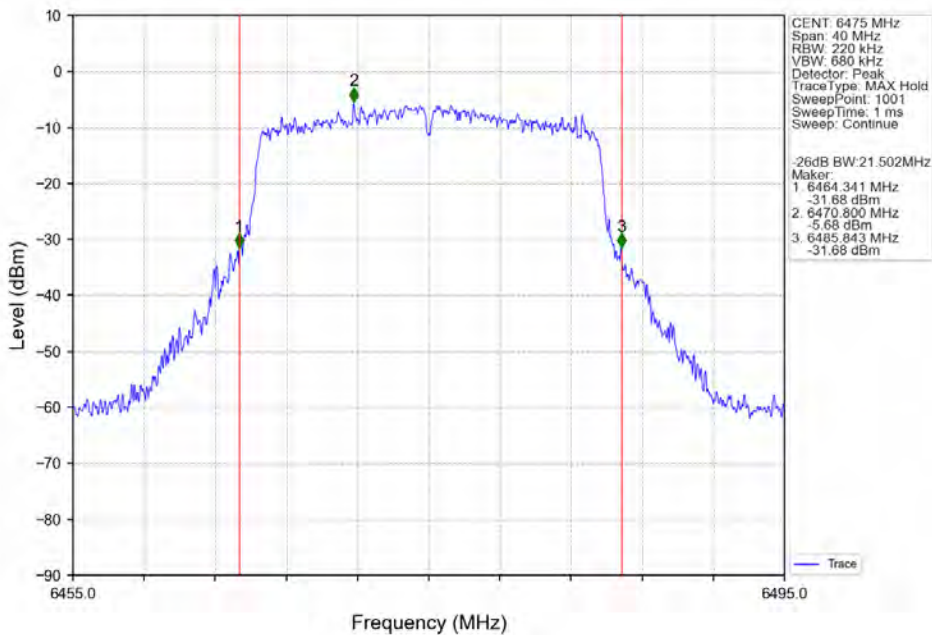





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 88 of 708

802.11ax(HEW20)_HCH_6515MHz_SU_ / Ant4_NTNV

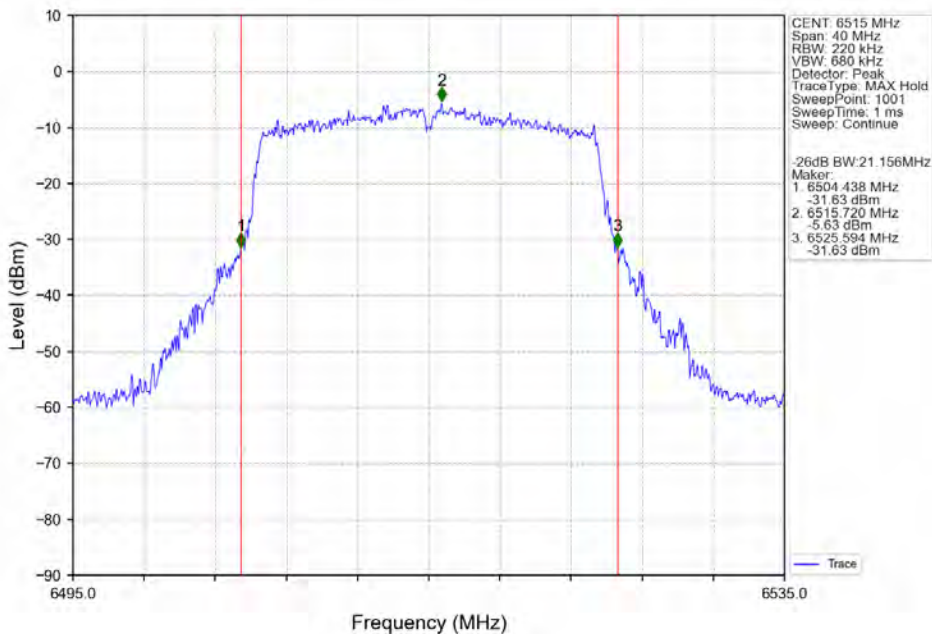


802.11ax(HEW20)_HCH_6515MHz_SU_ / Ant5_NTNV

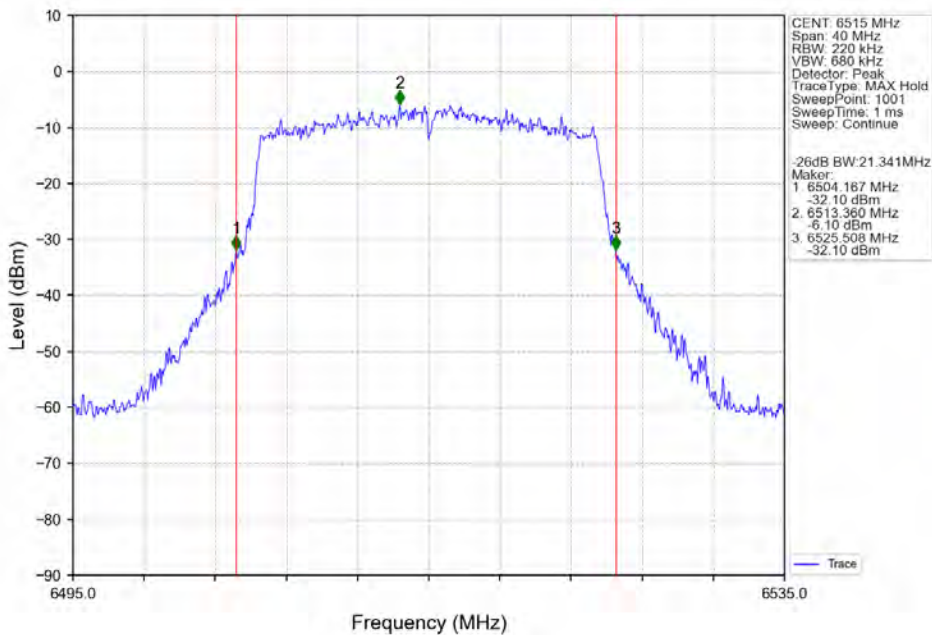



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 89 of 708

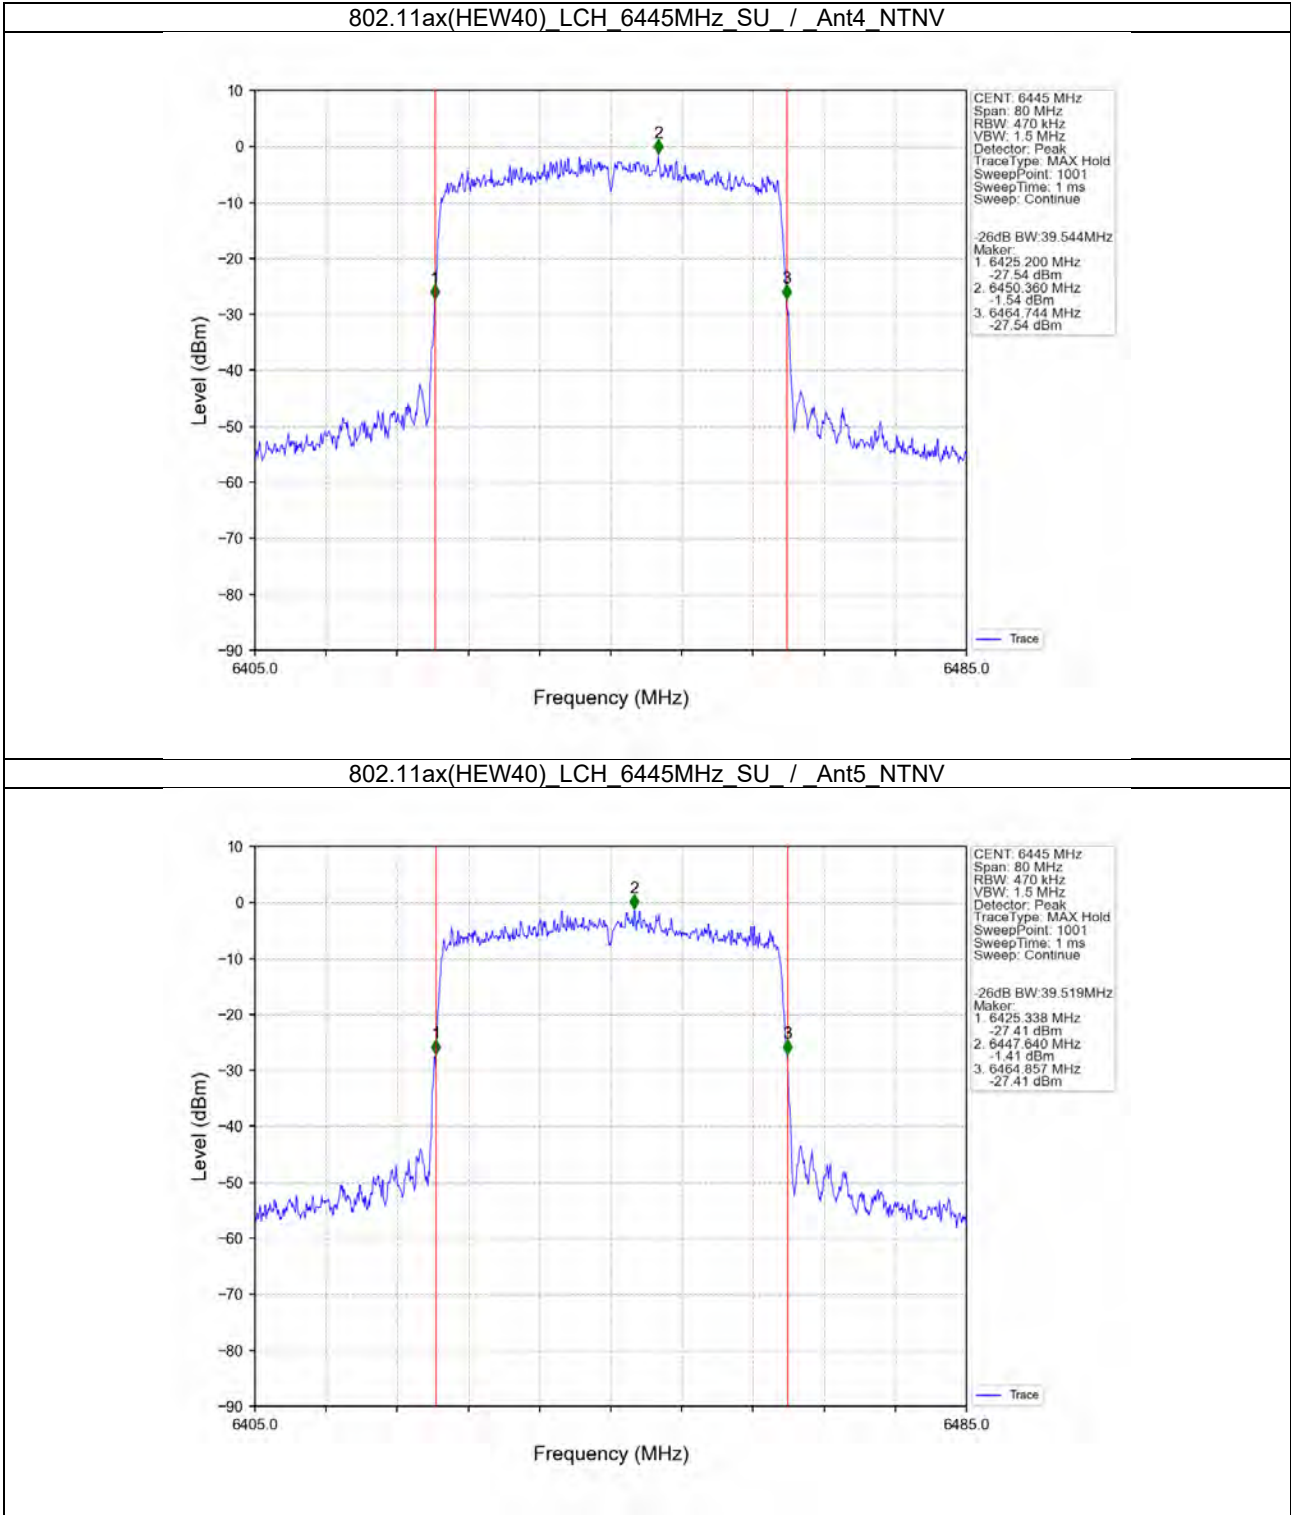



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 90 of 708

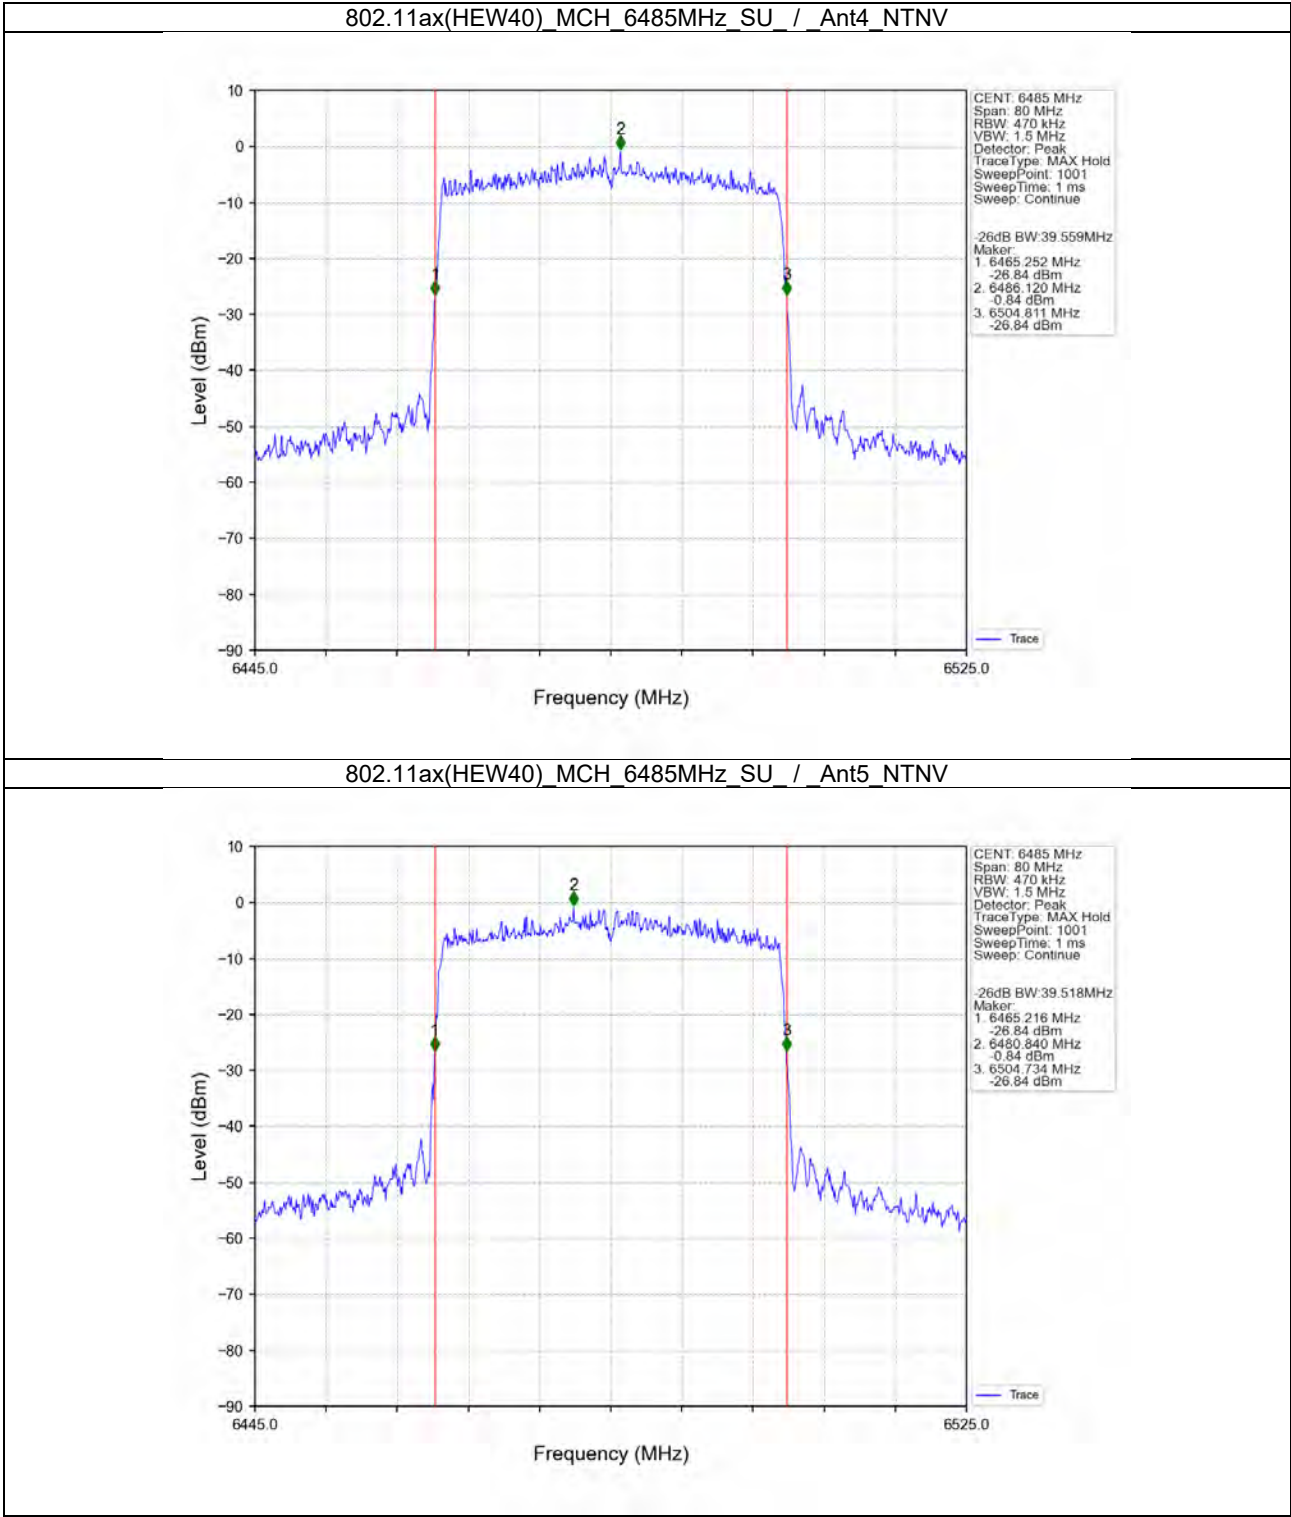



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 91 of 708

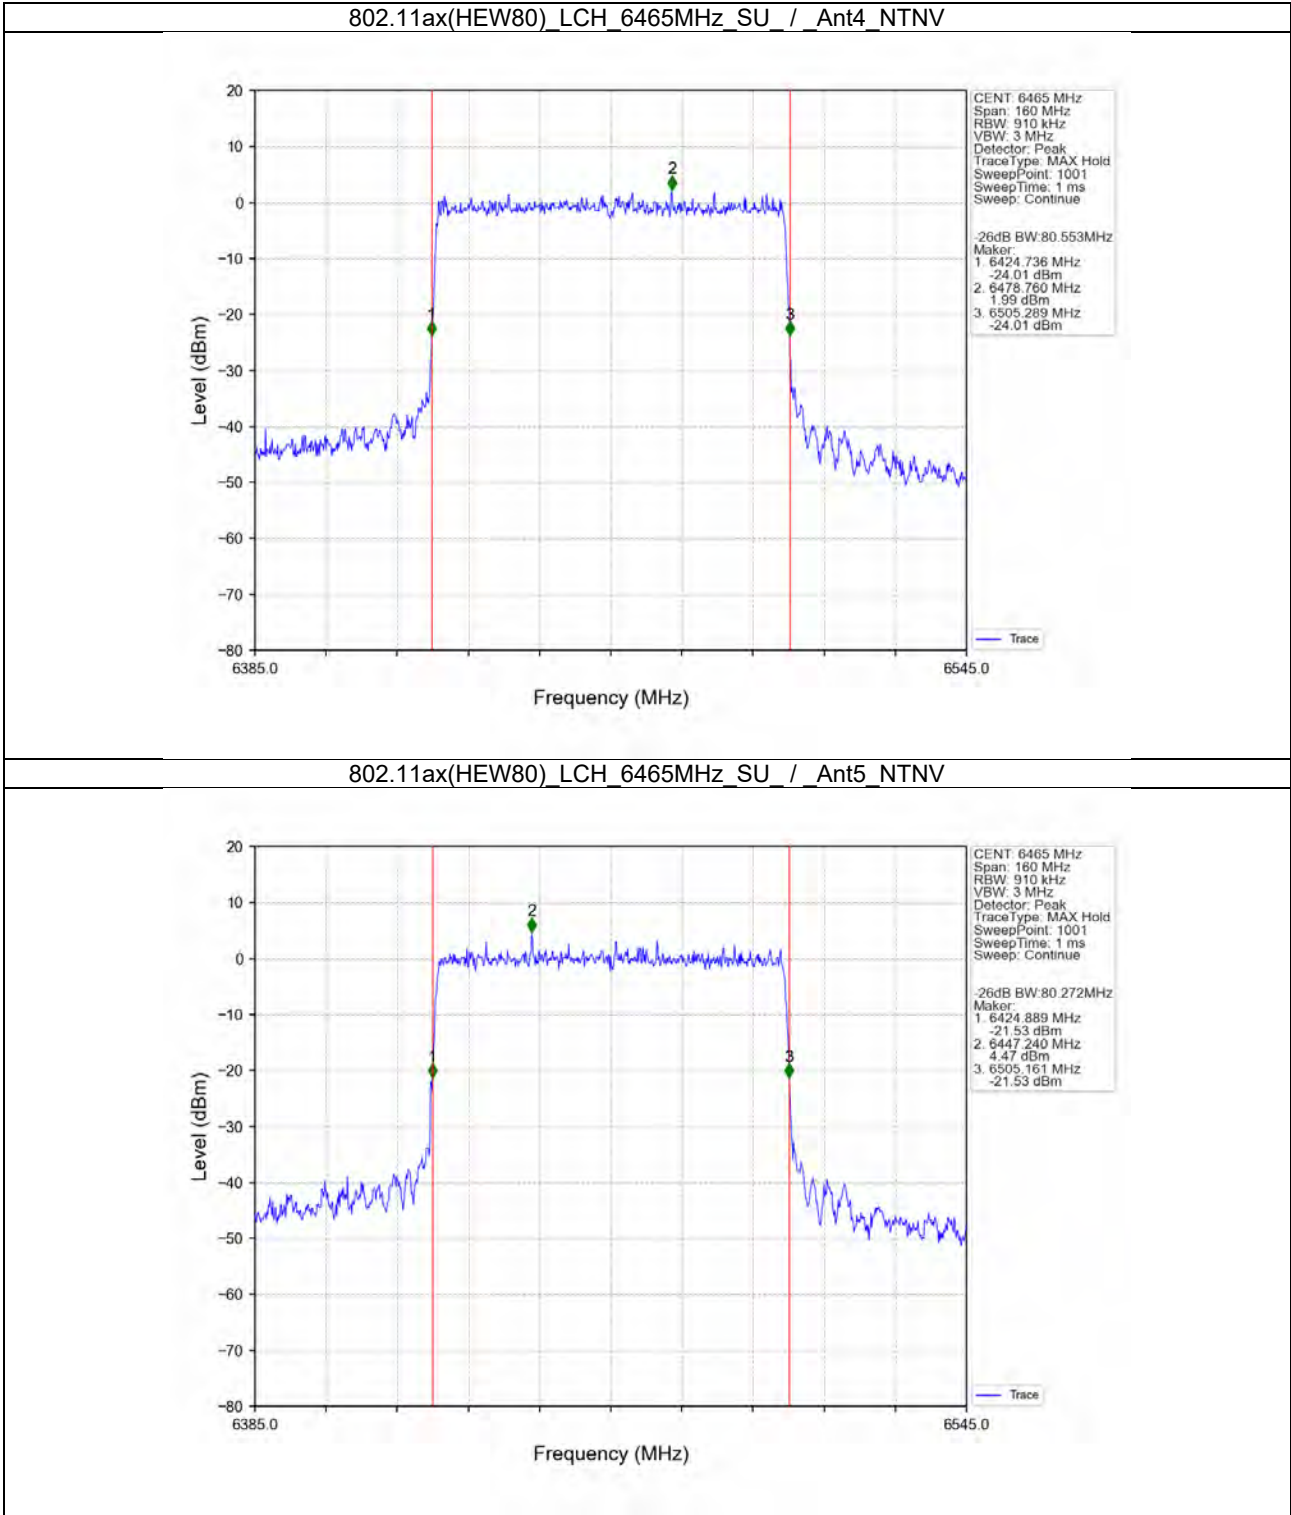




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 92 of 708


2.2.5 OBW

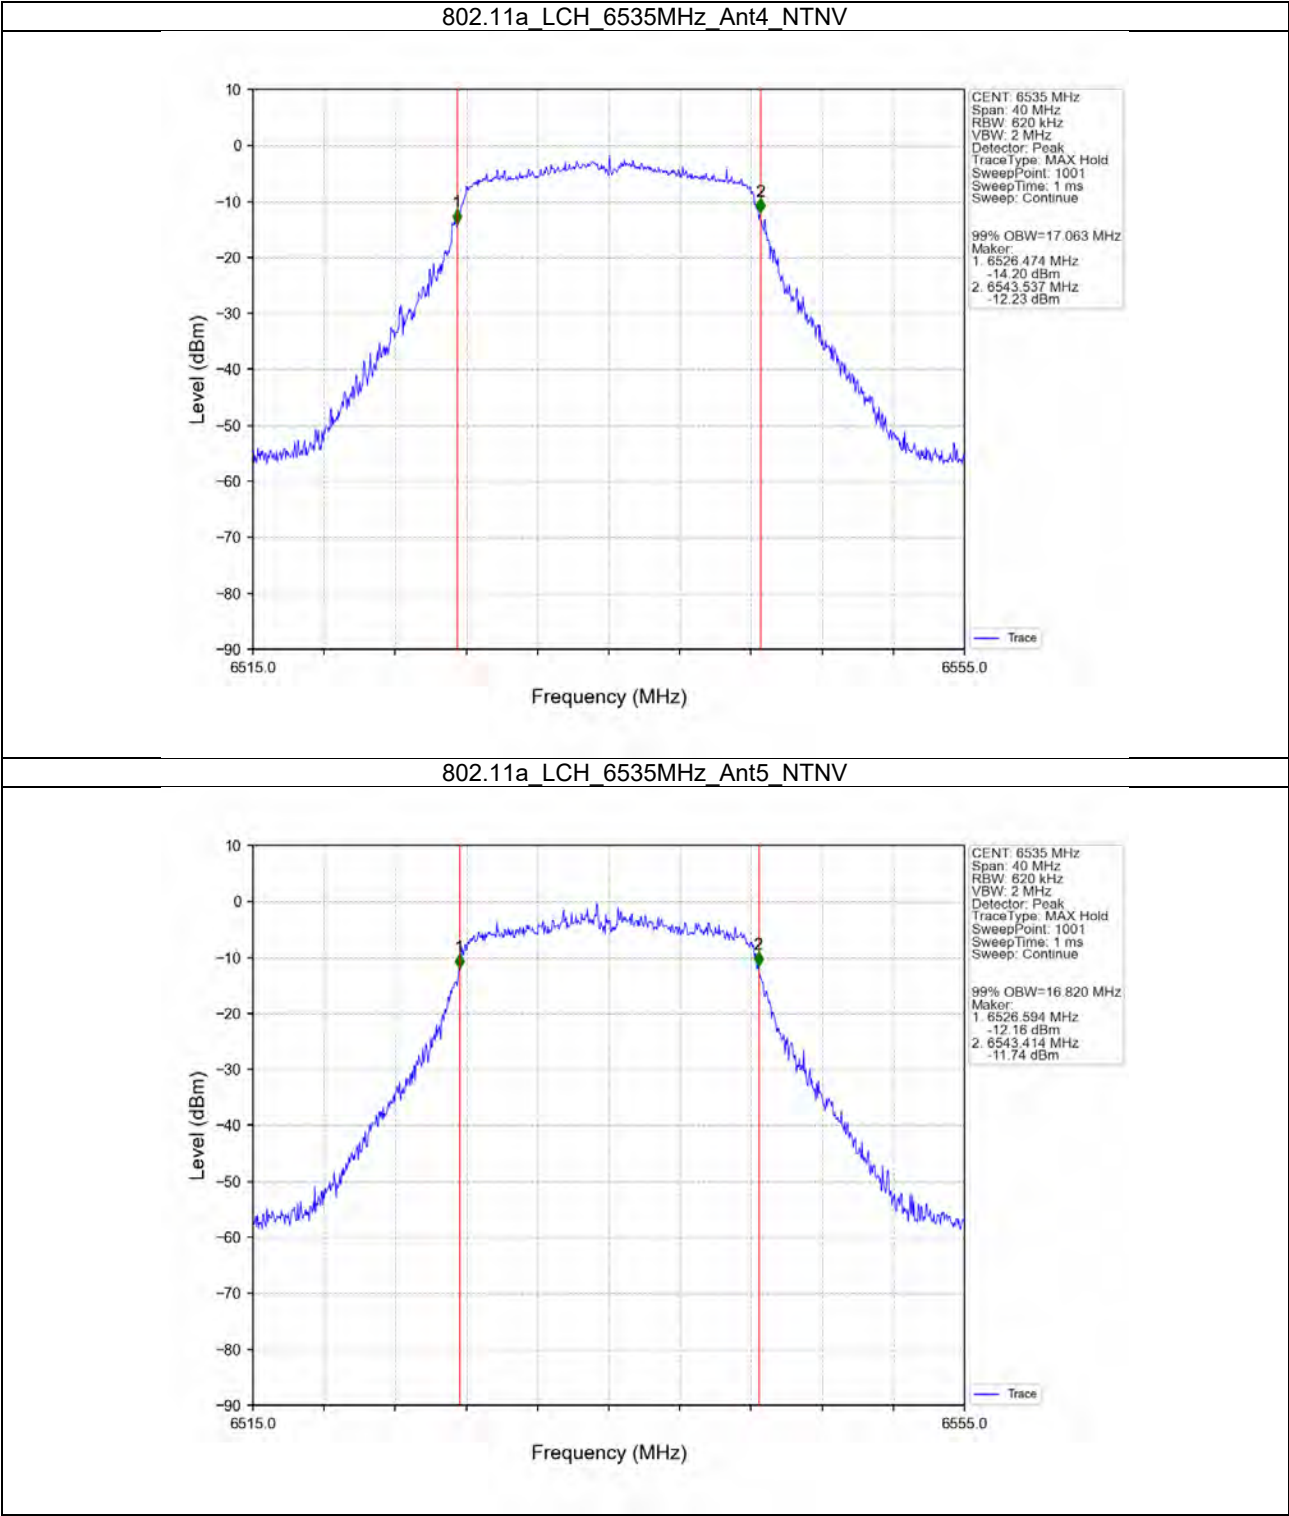



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 93 of 708

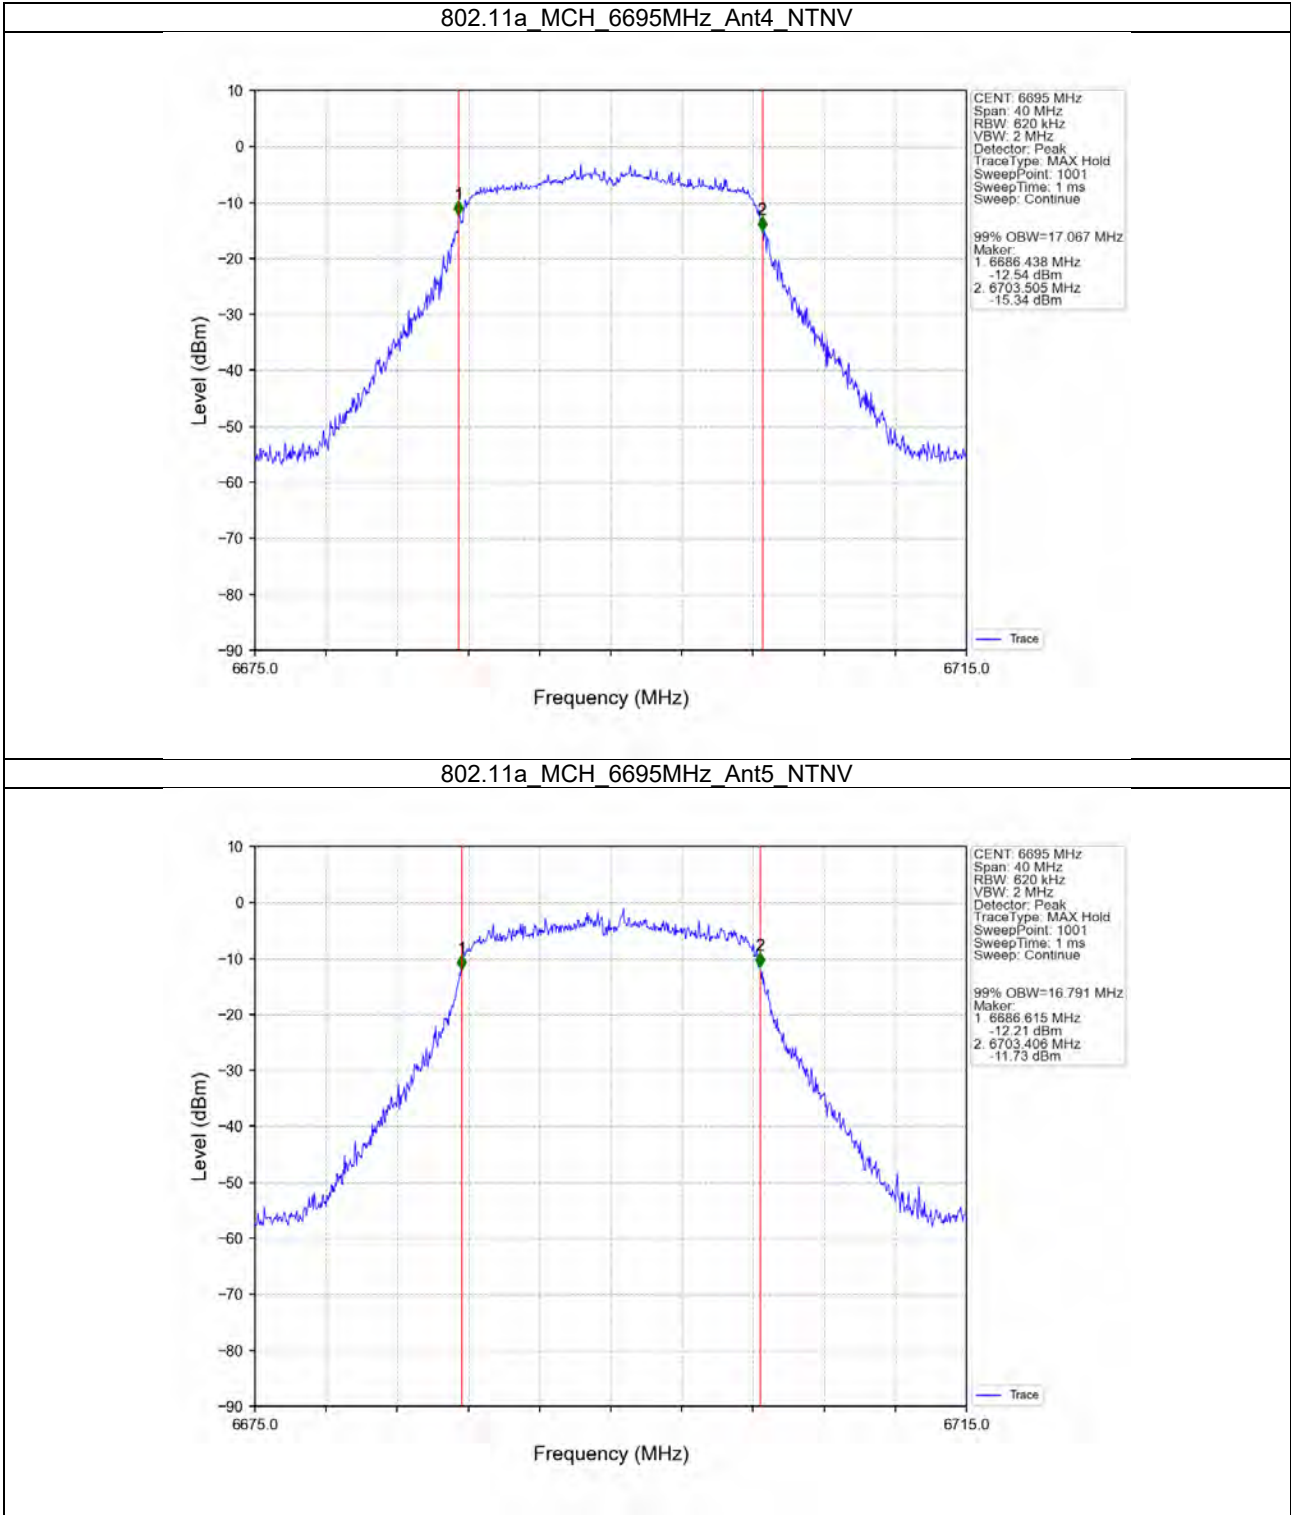





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 94 of 708

802.11a_HCH_6855MHz_Ant4_NTNV

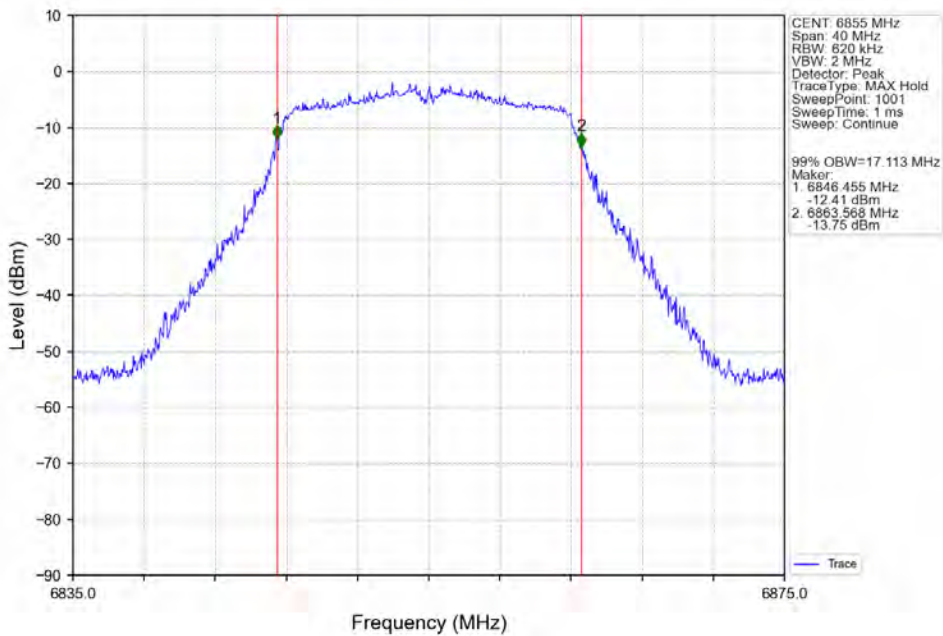


802.11a_HCH_6855MHz_Ant5_NTNV

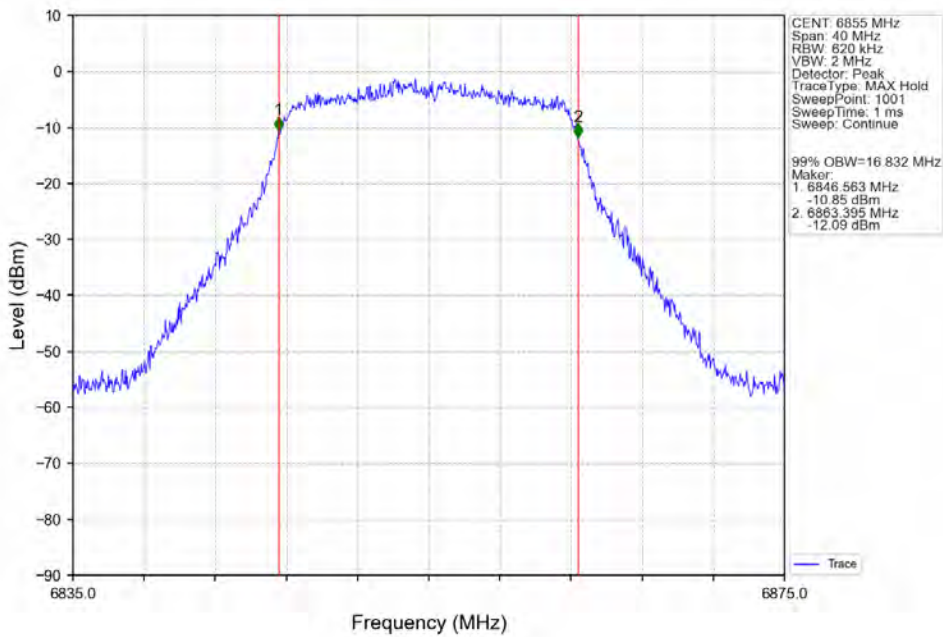



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 95 of 708

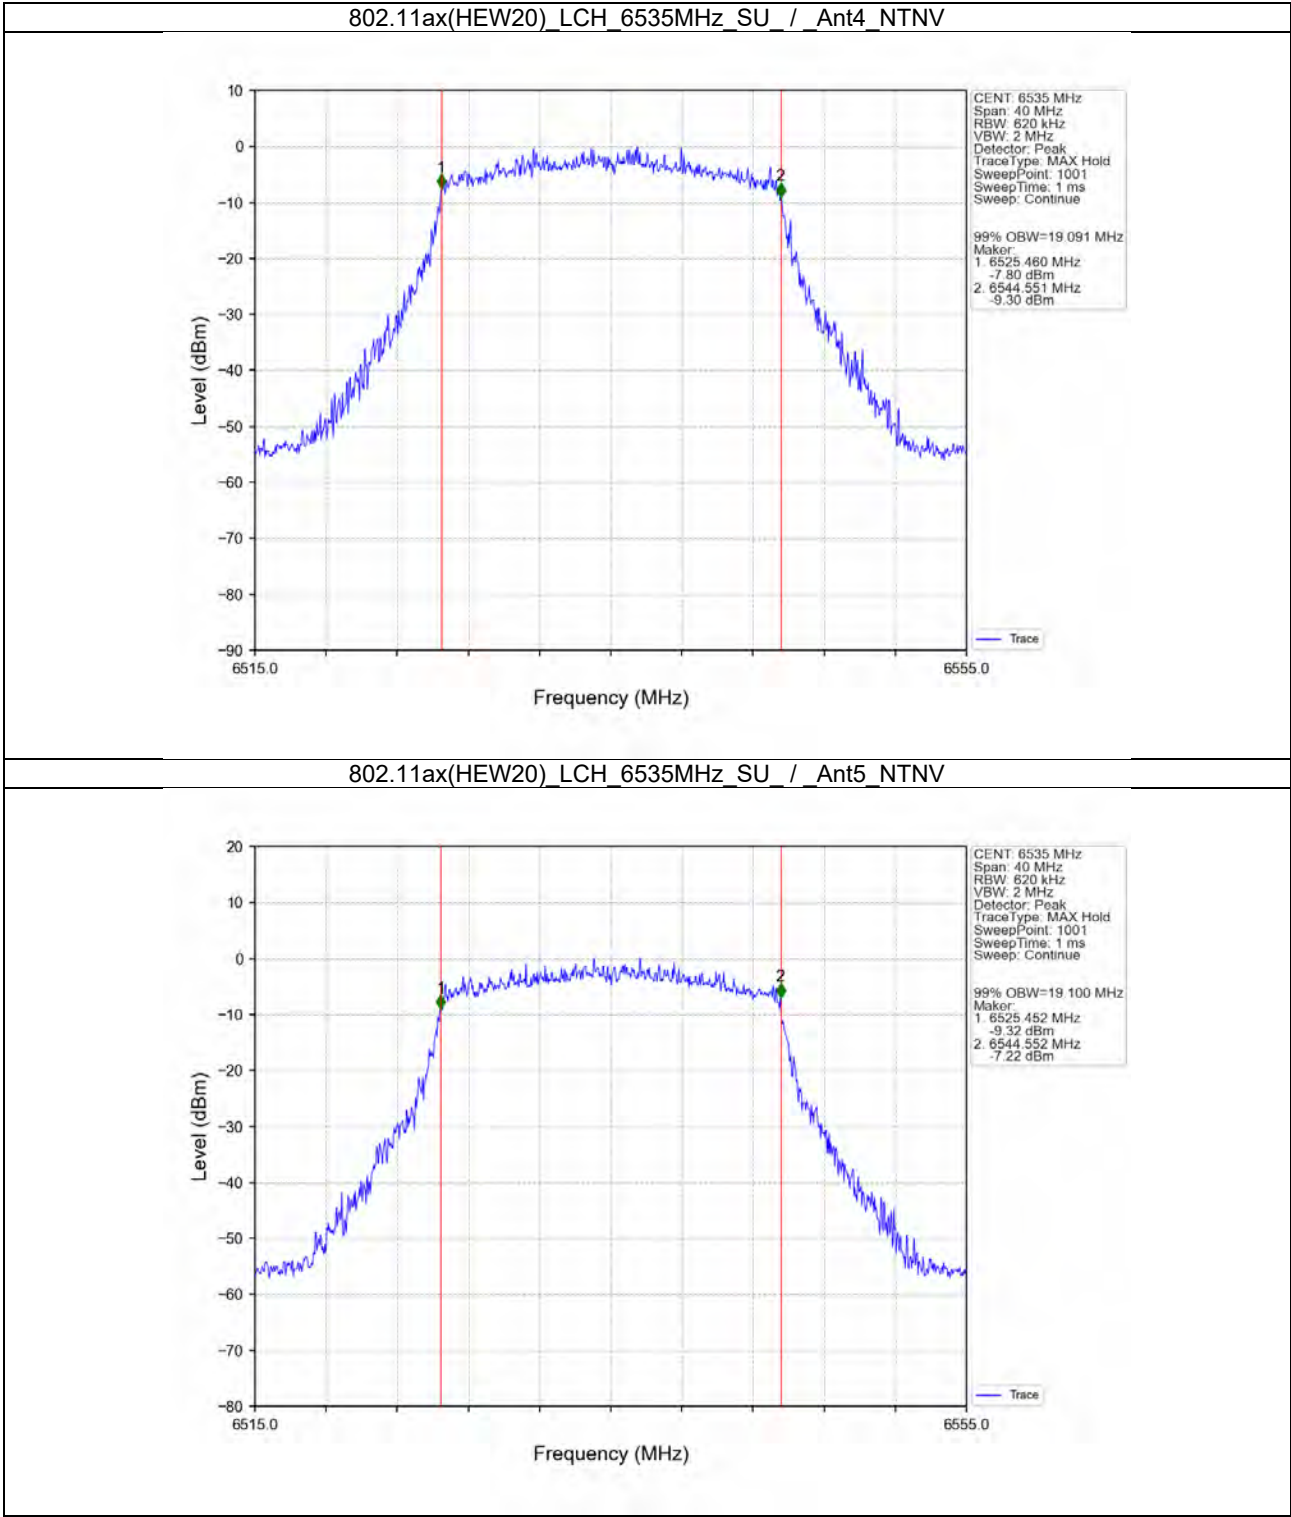



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 96 of 708

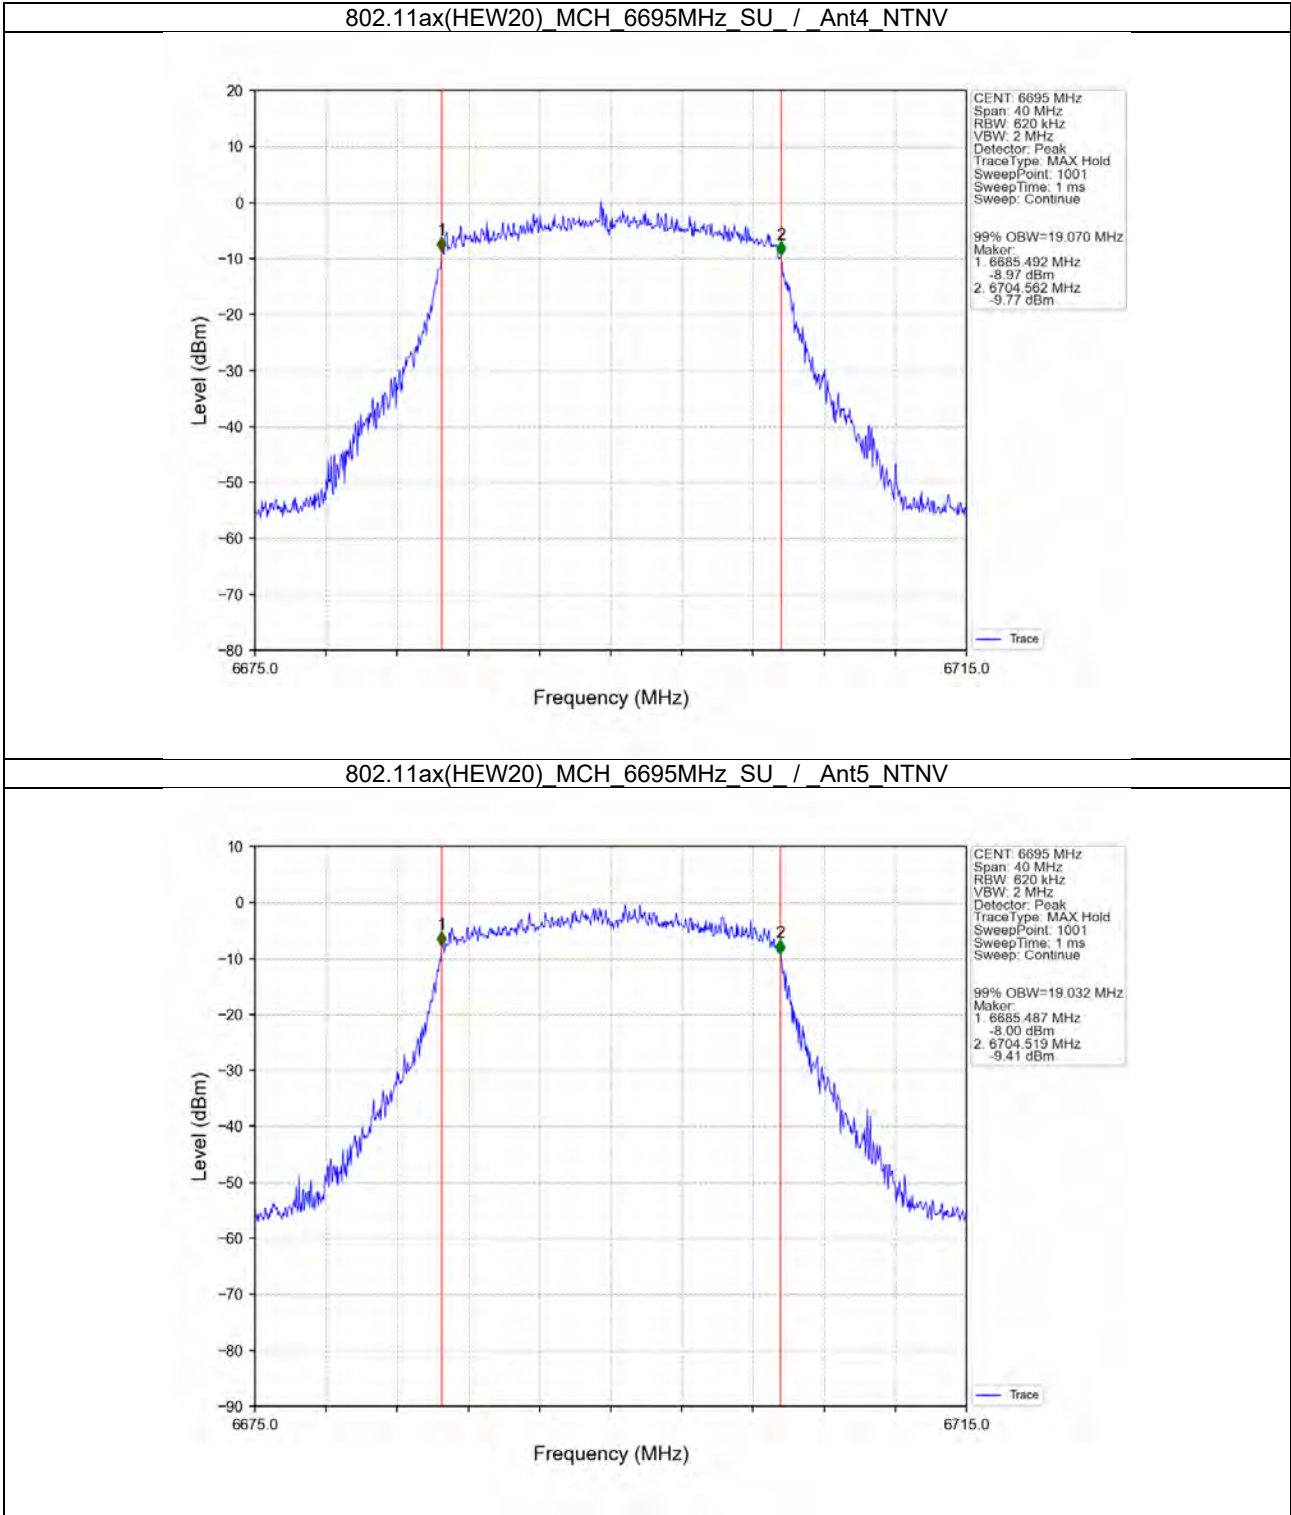



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 97 of 708

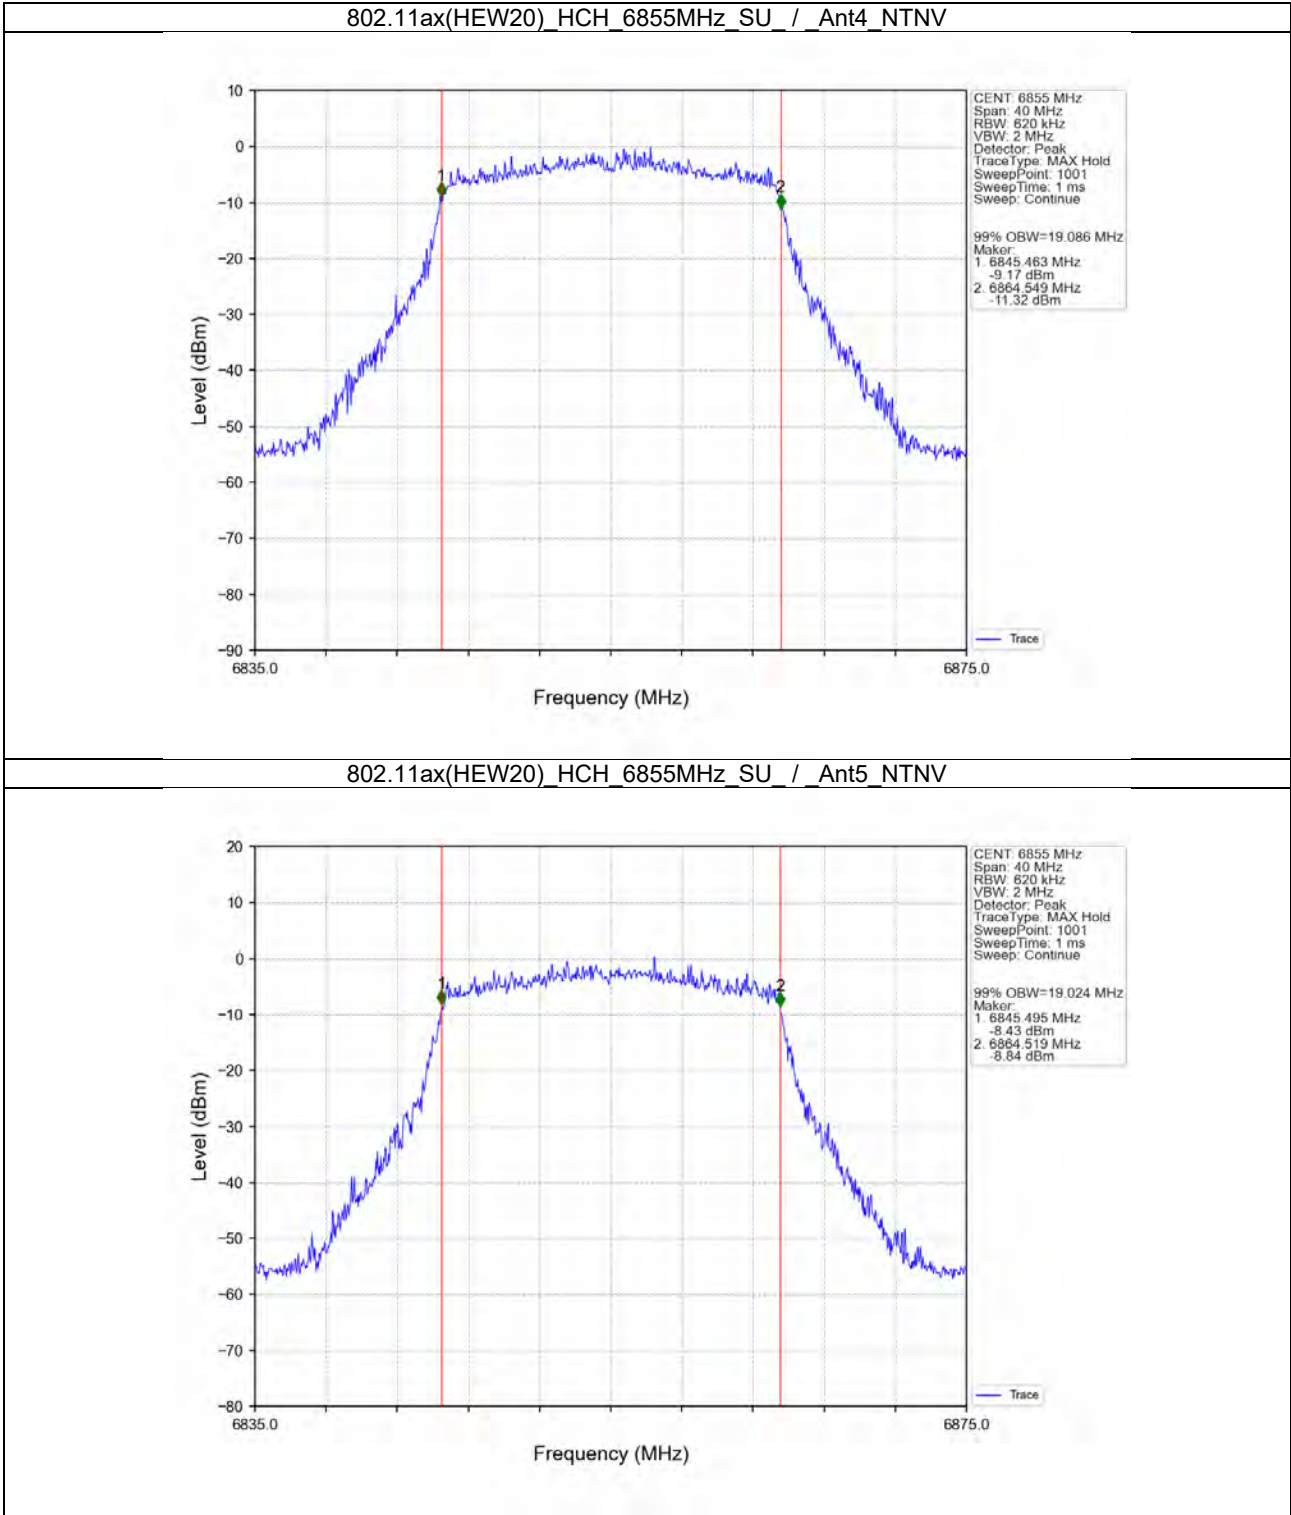



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 98 of 708

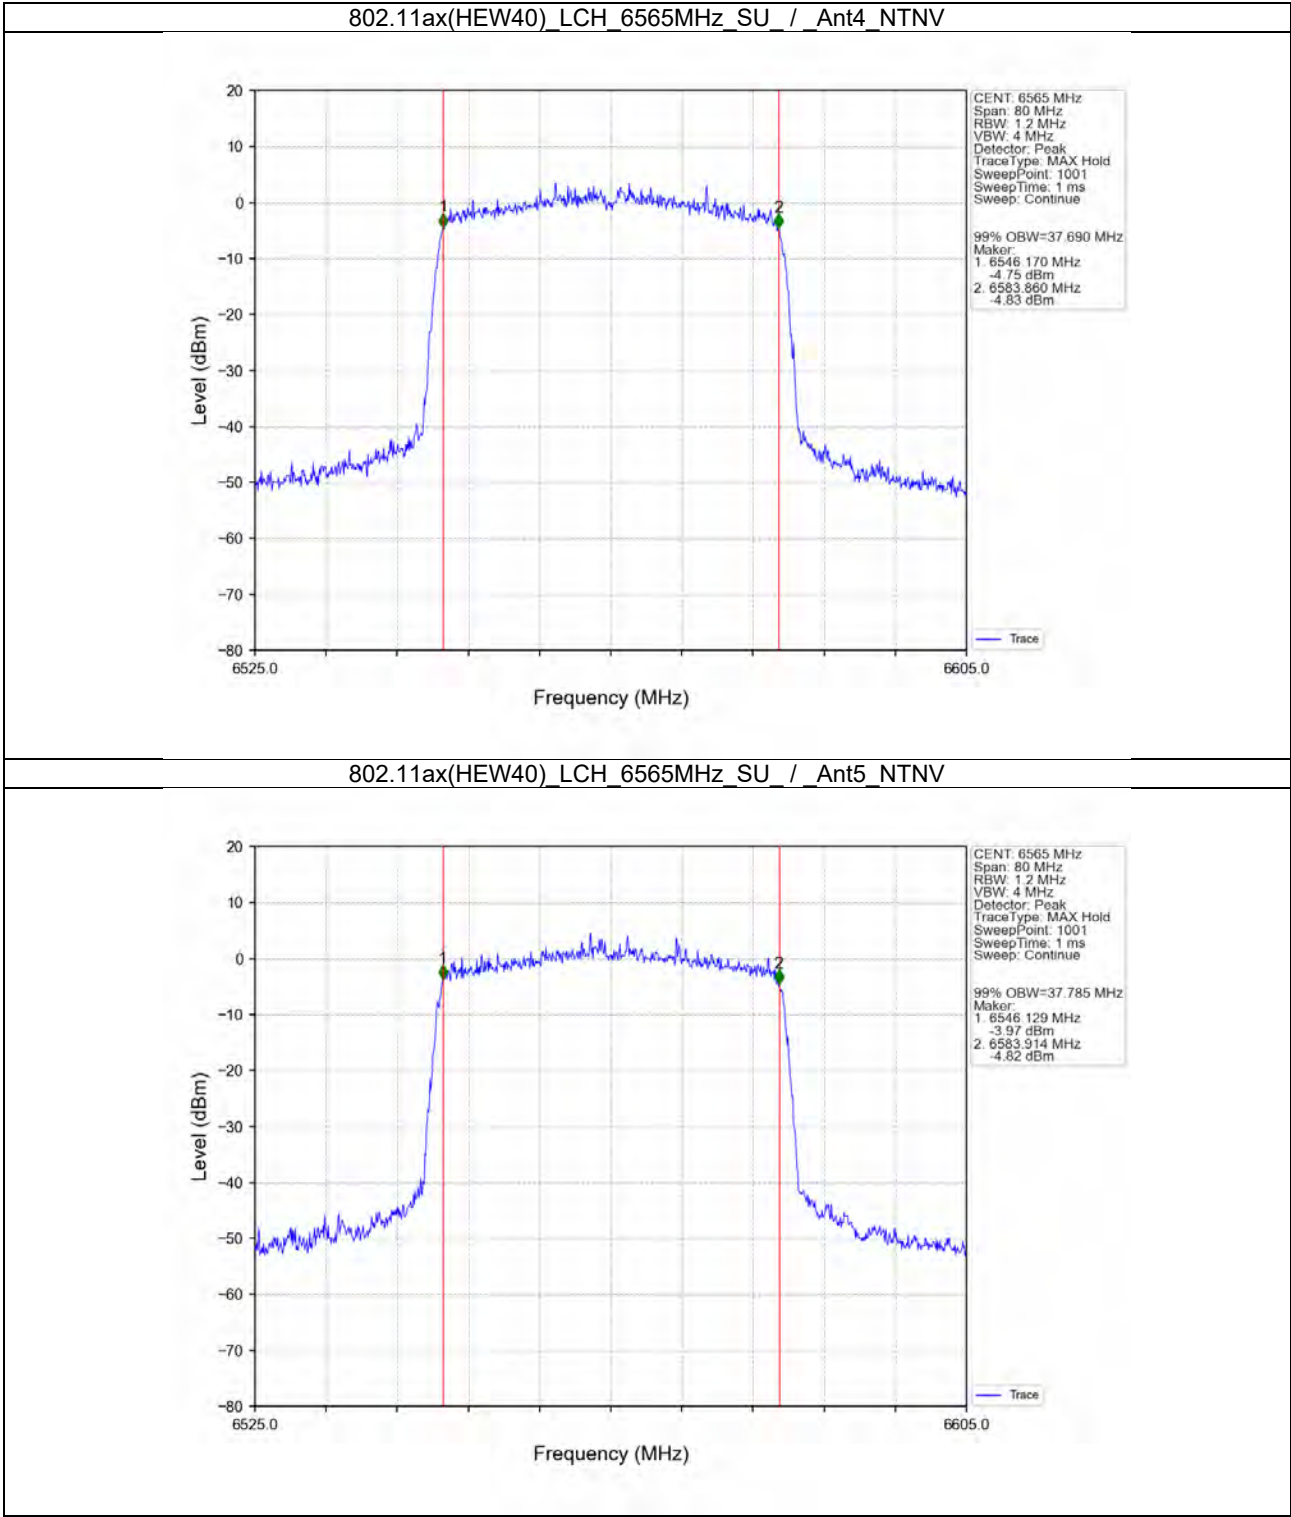



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 99 of 708

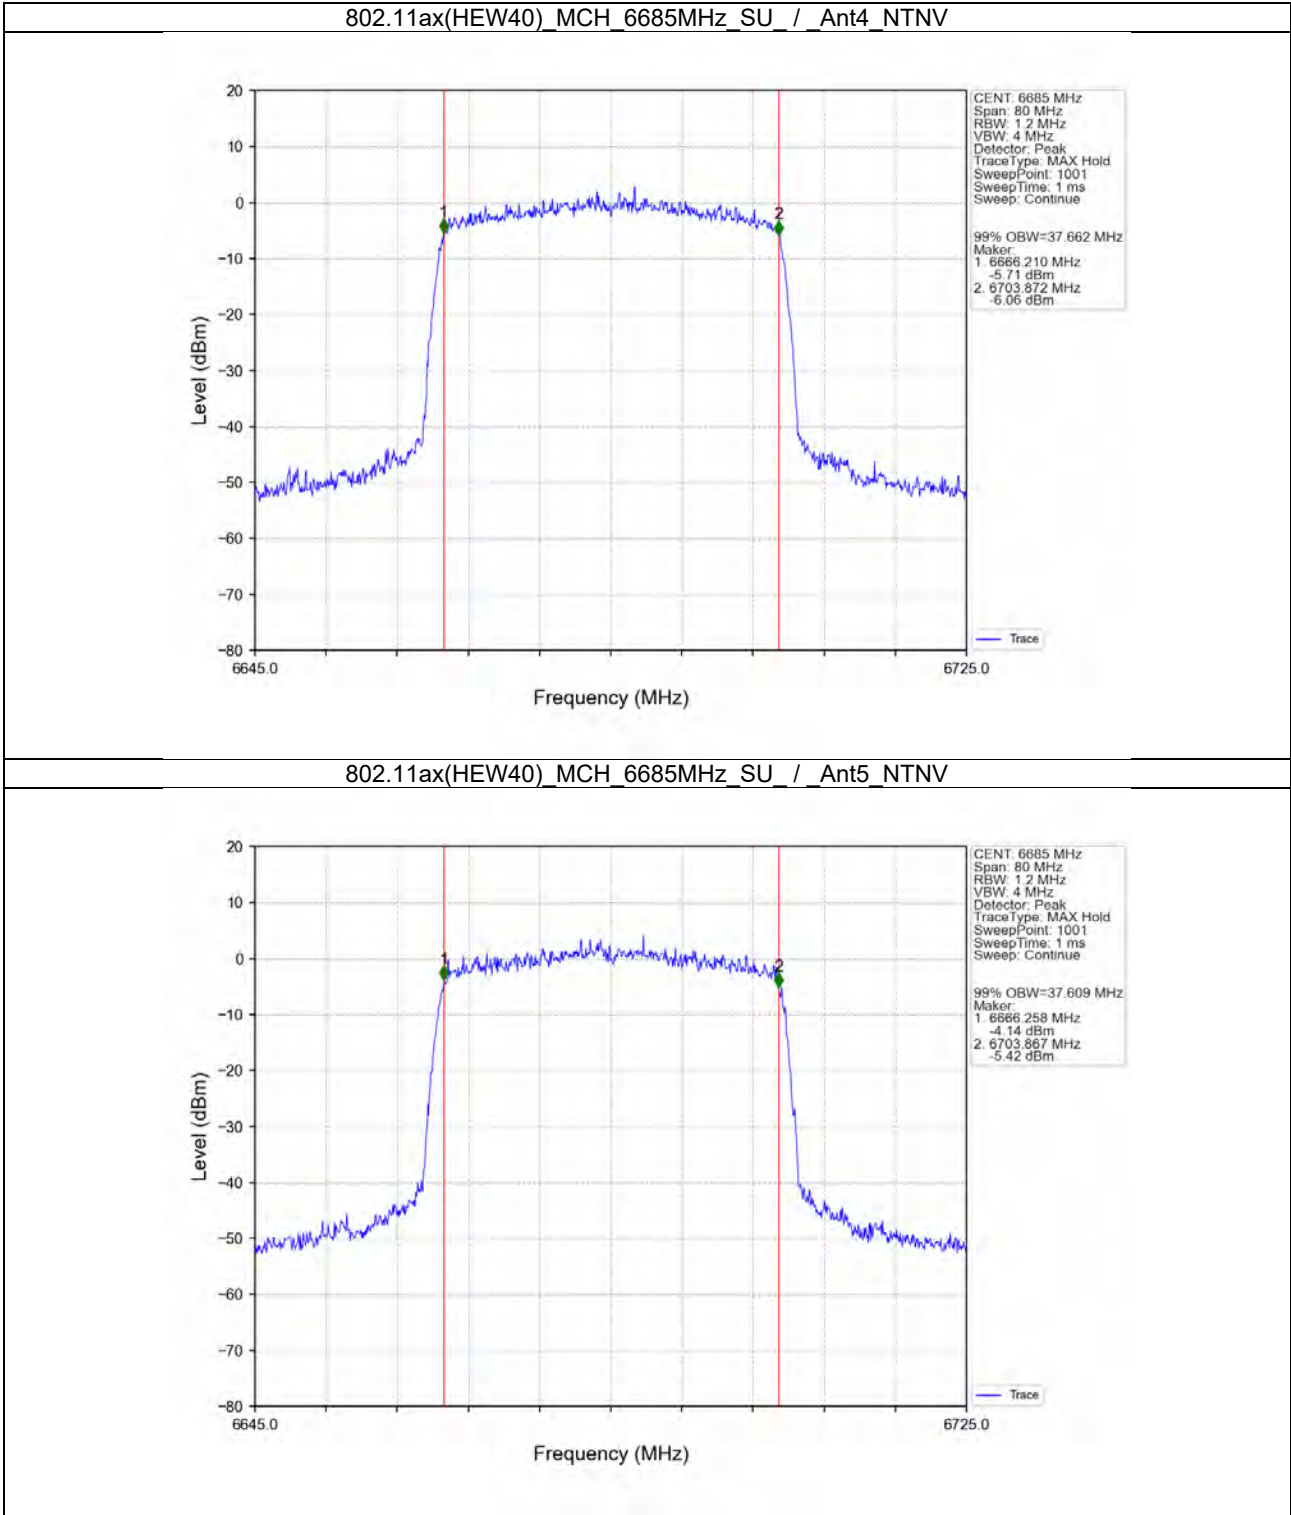



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 100 of 708

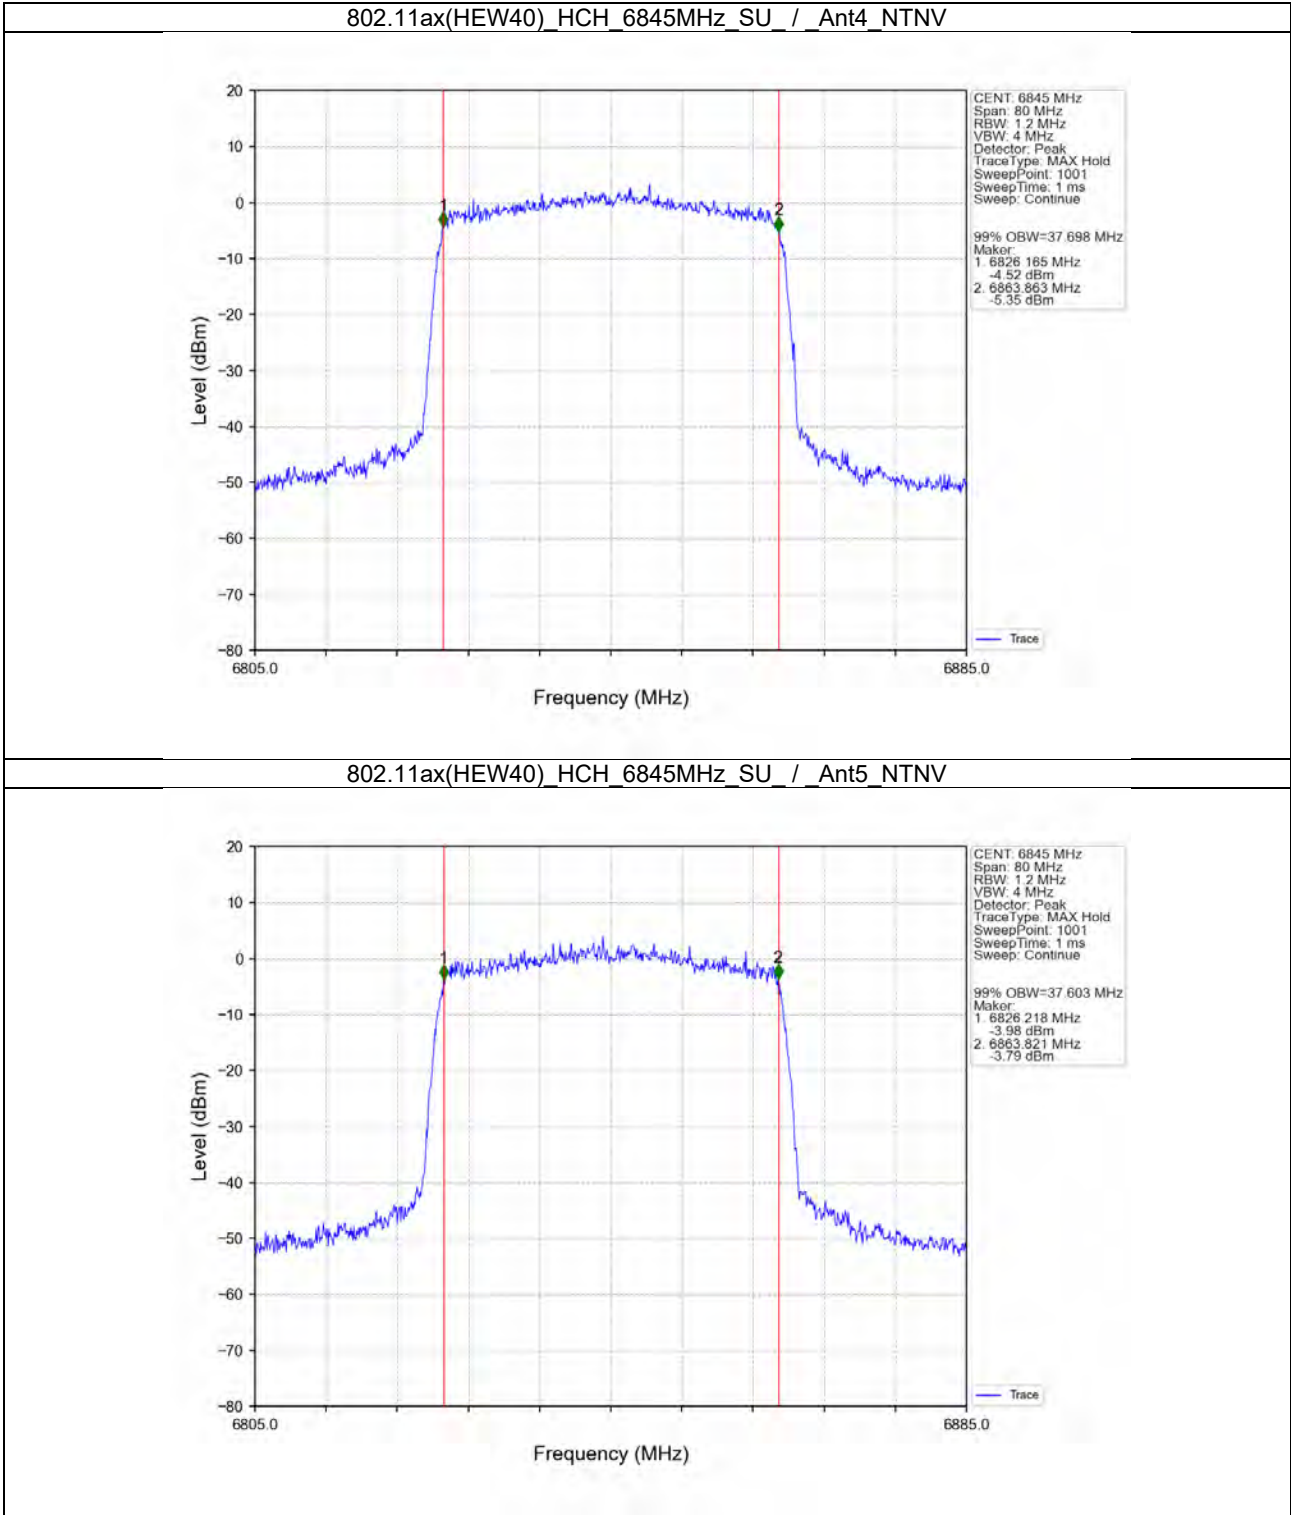



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 101 of 708

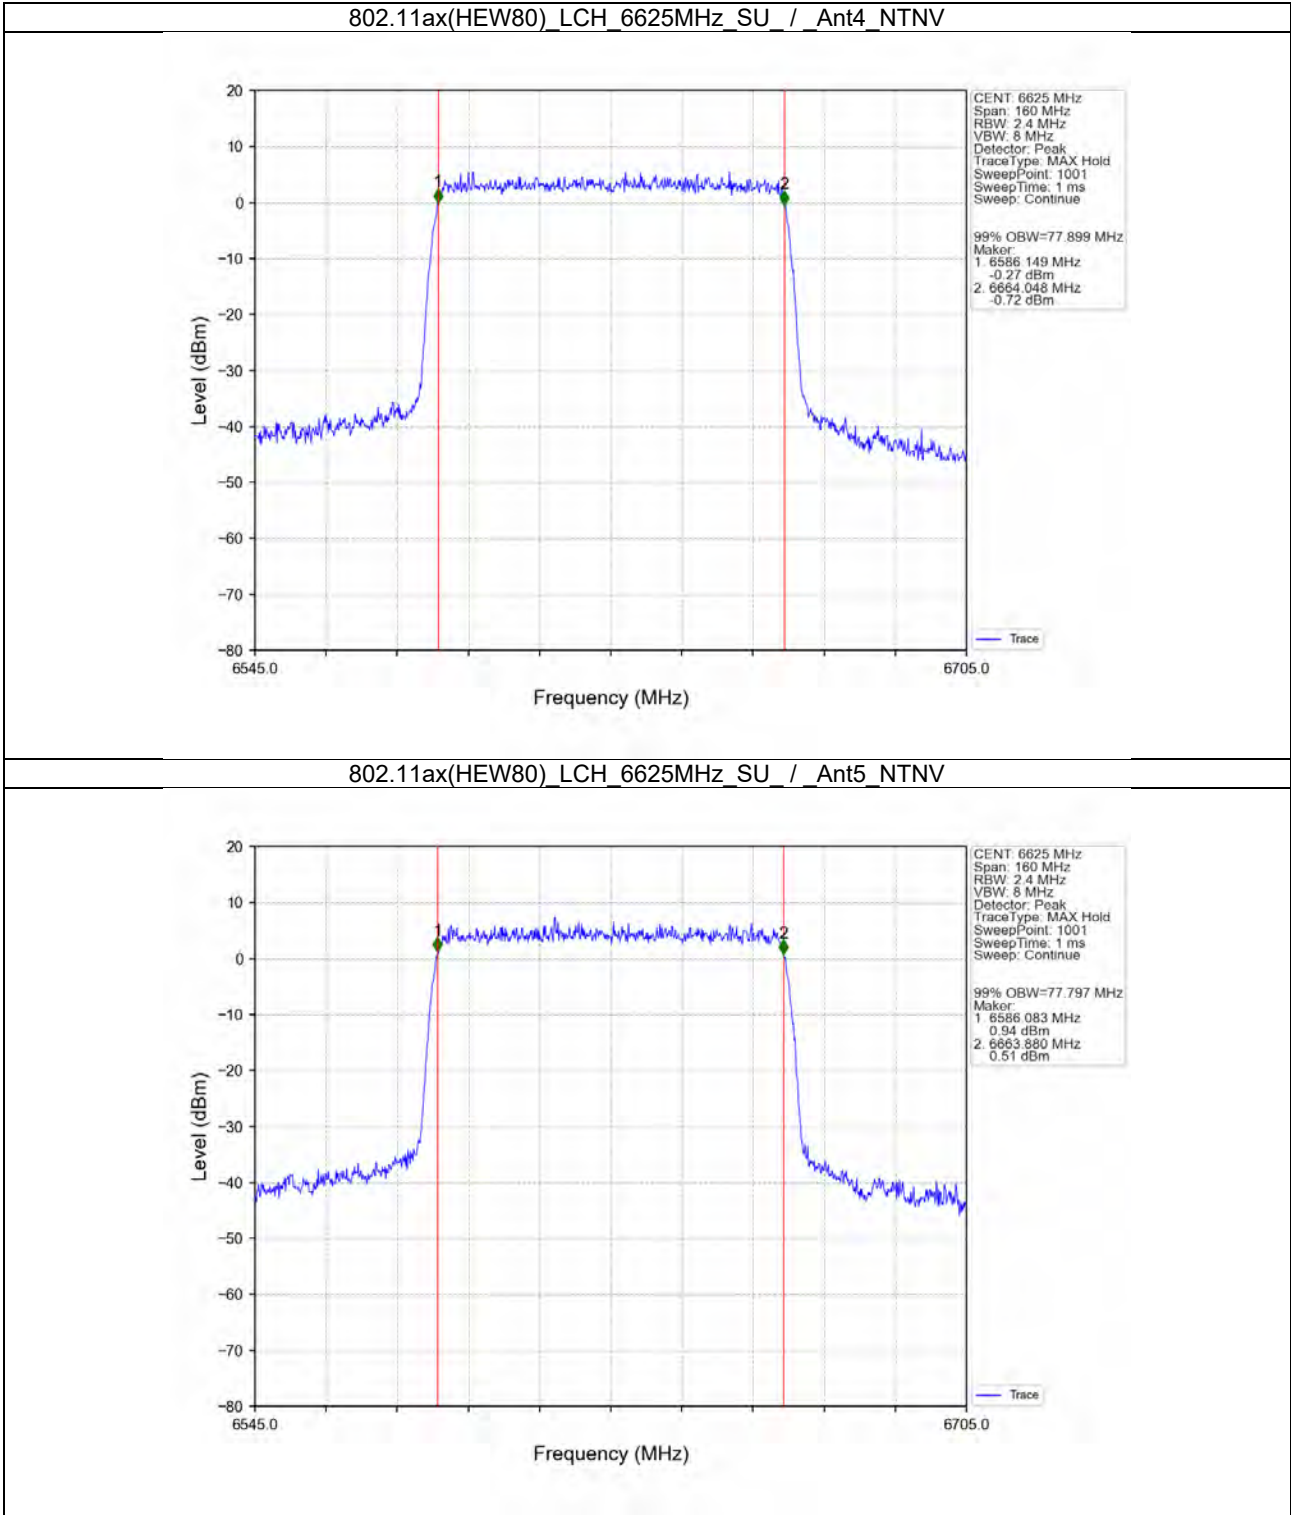



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 102 of 708

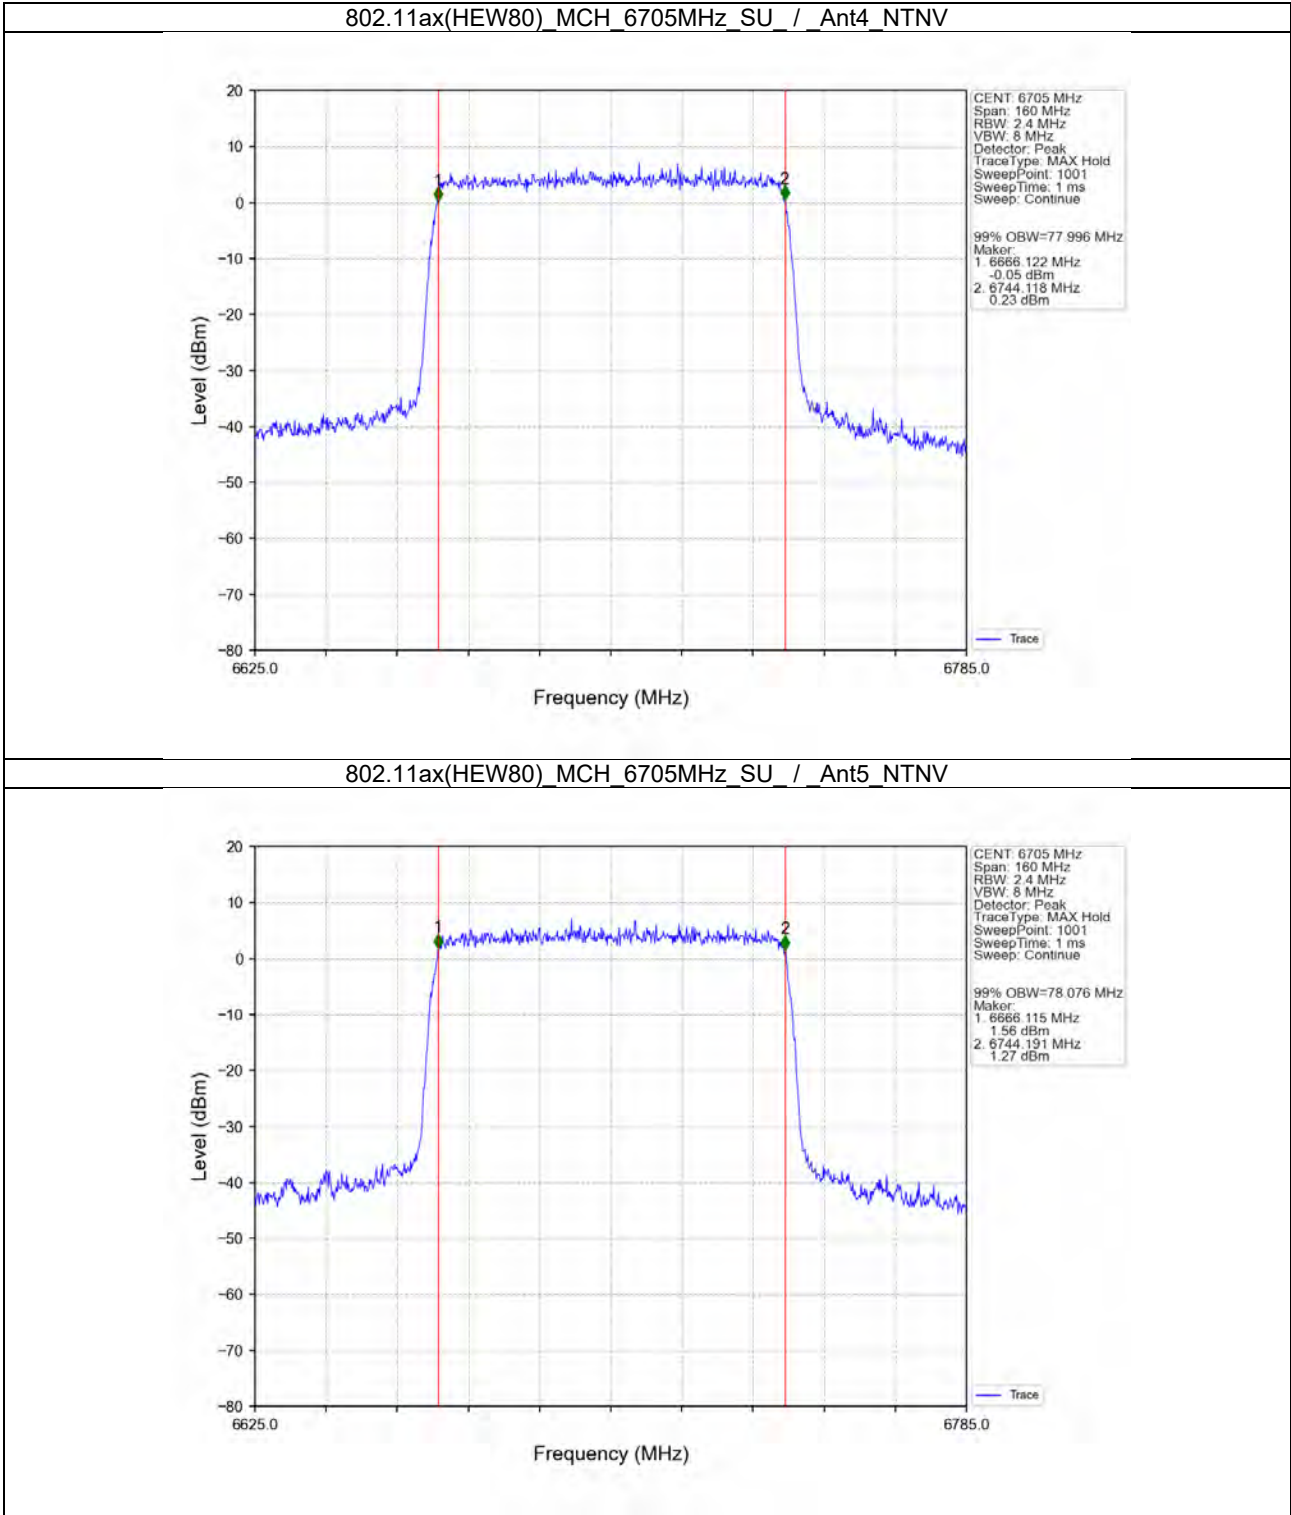



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 103 of 708

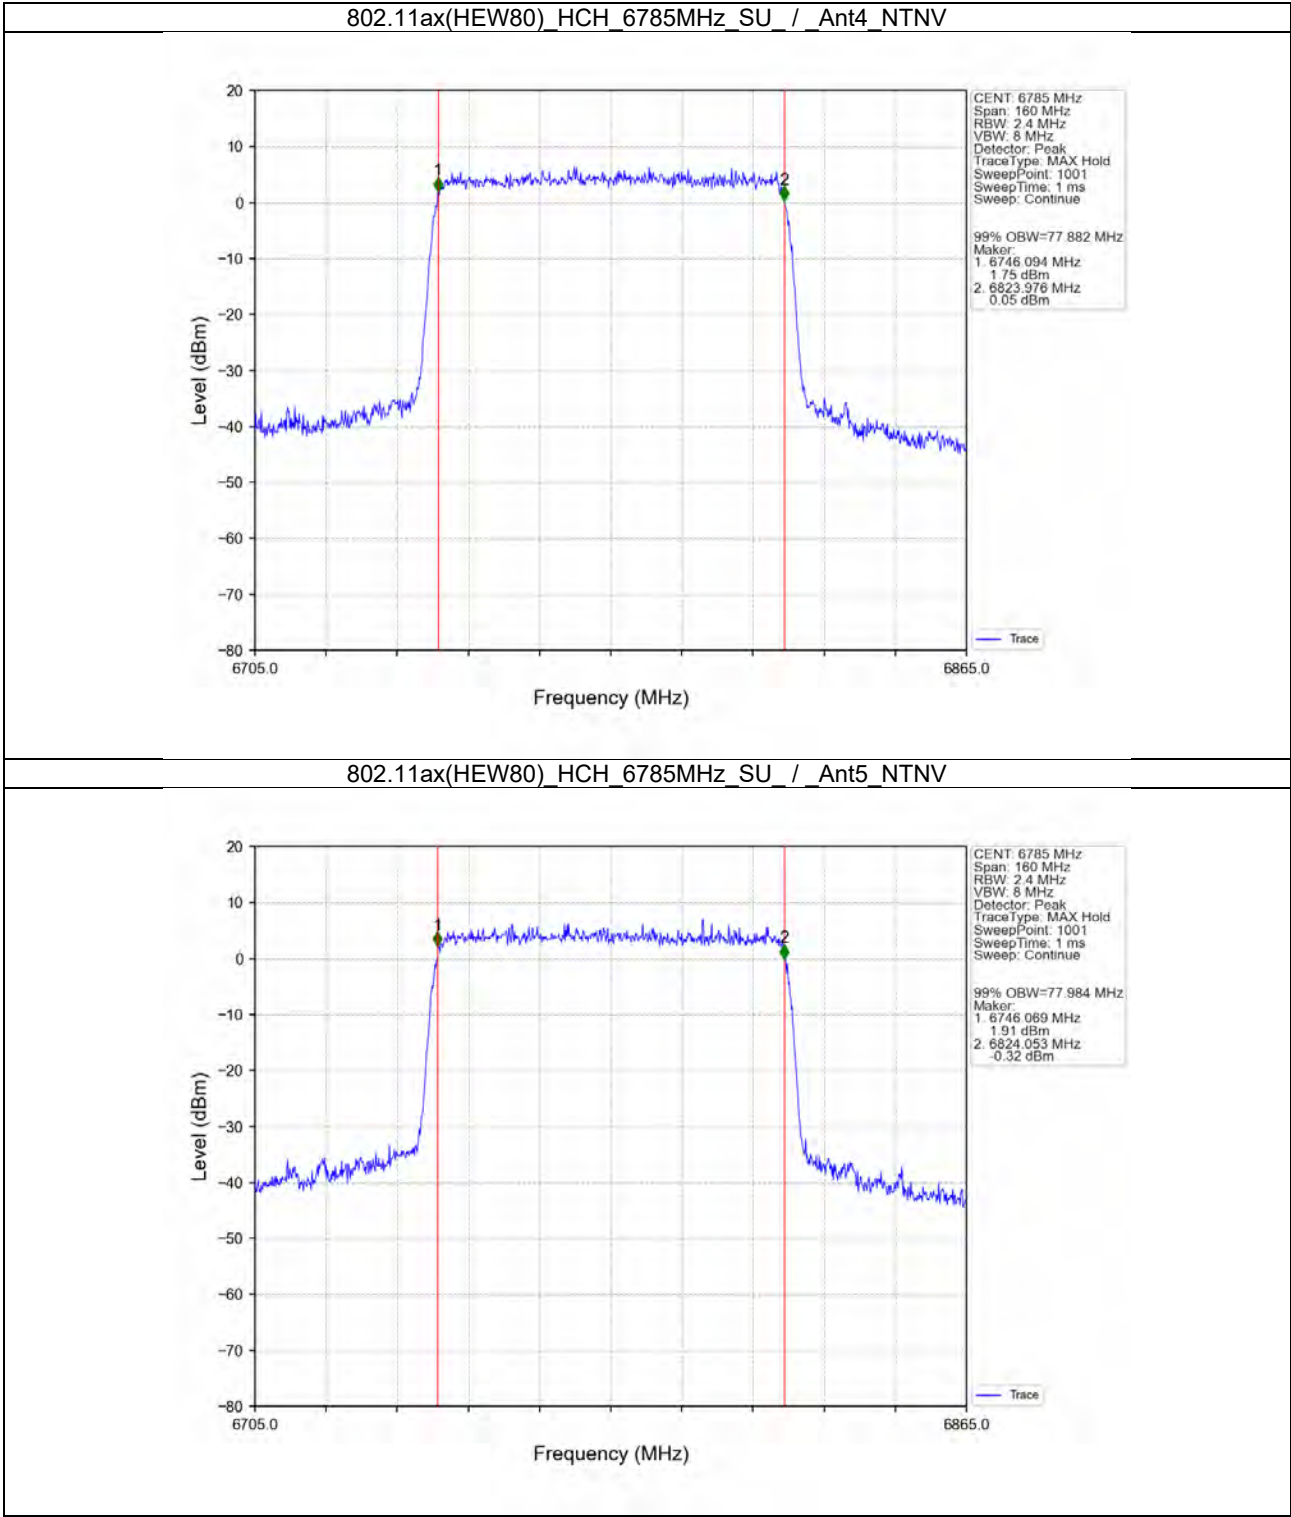



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 104 of 708

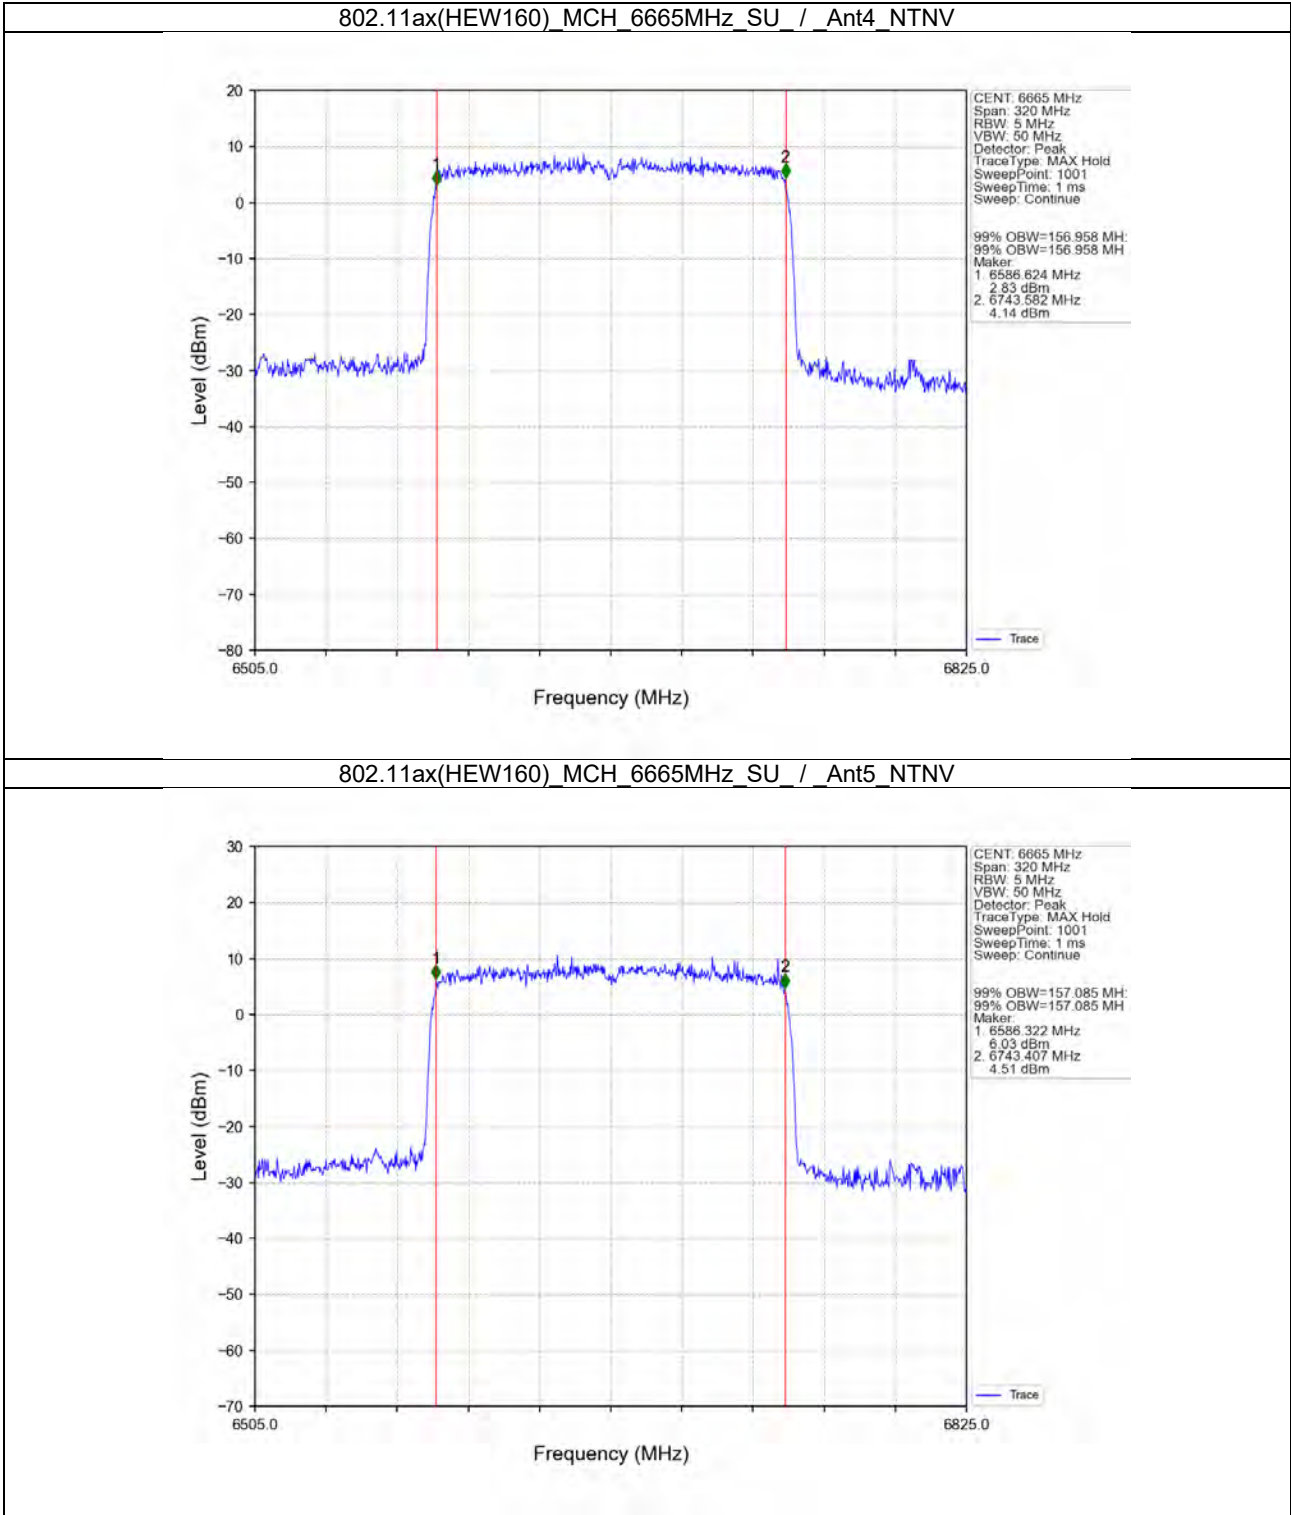




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 105 of 708


2.2.6 26dB BW

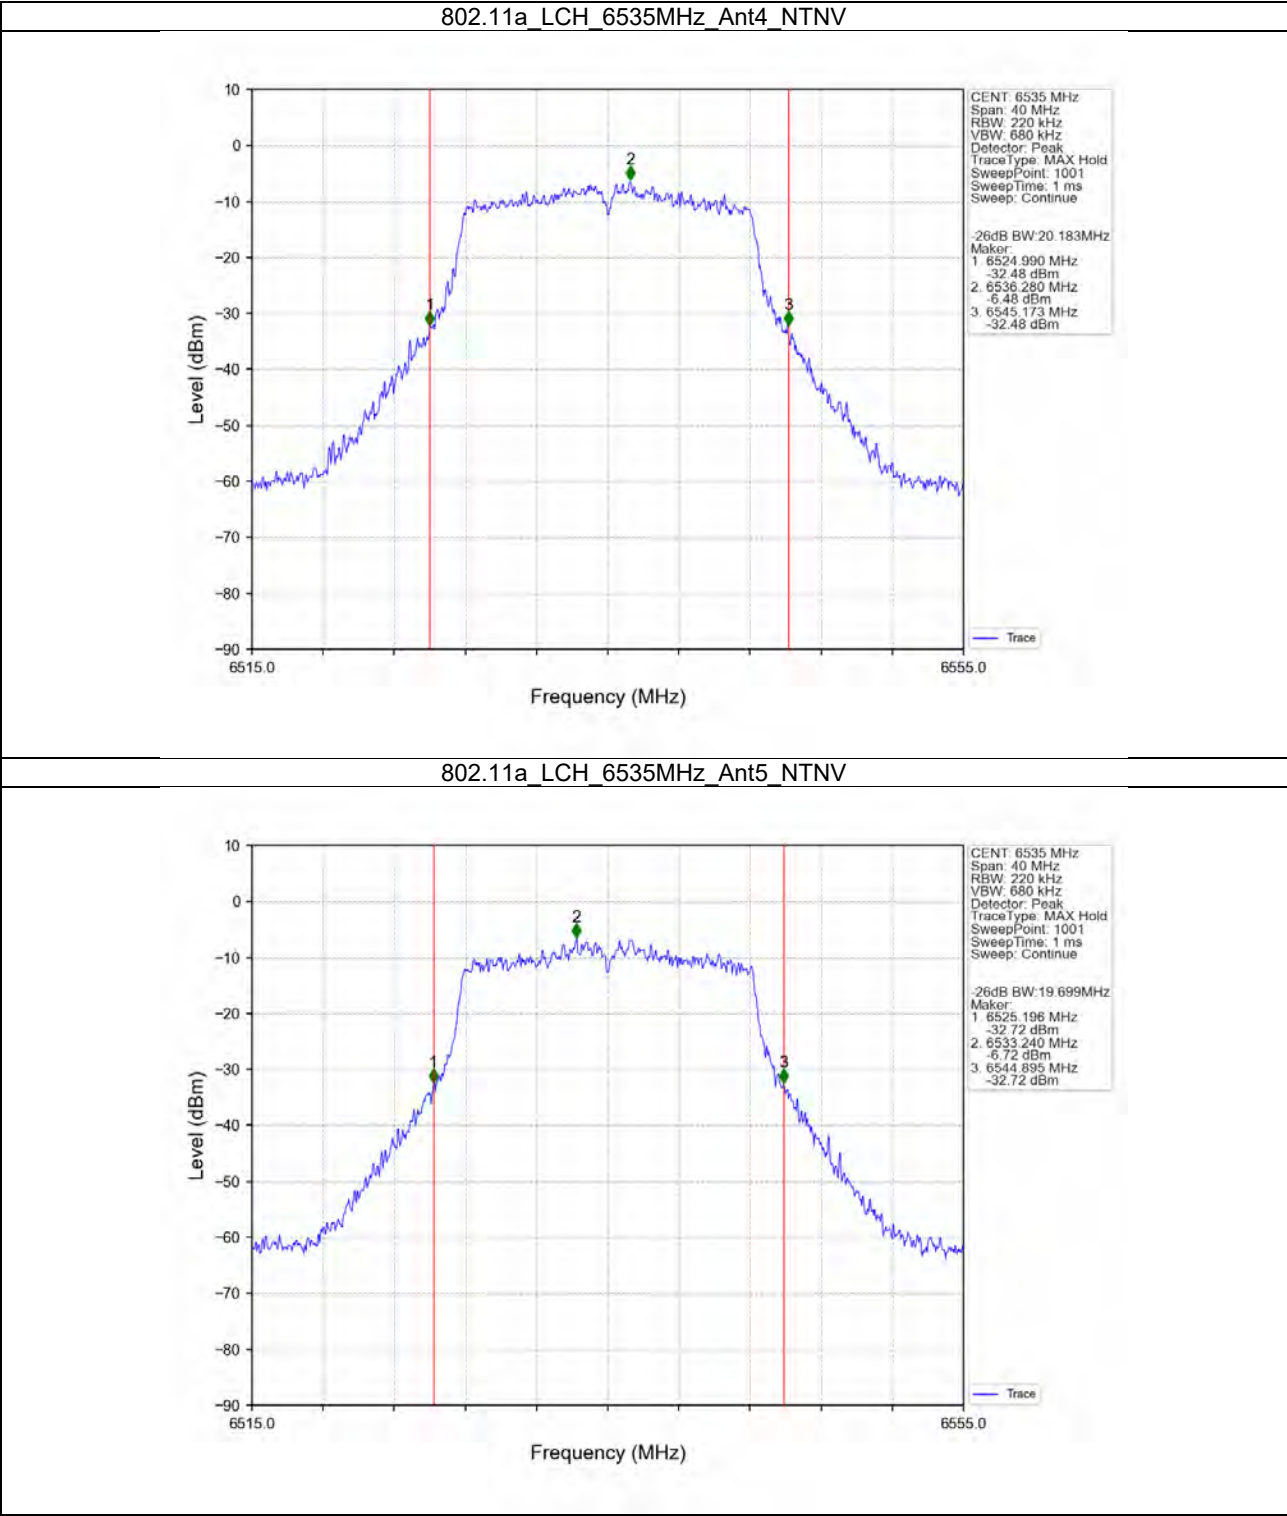



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 106 of 708

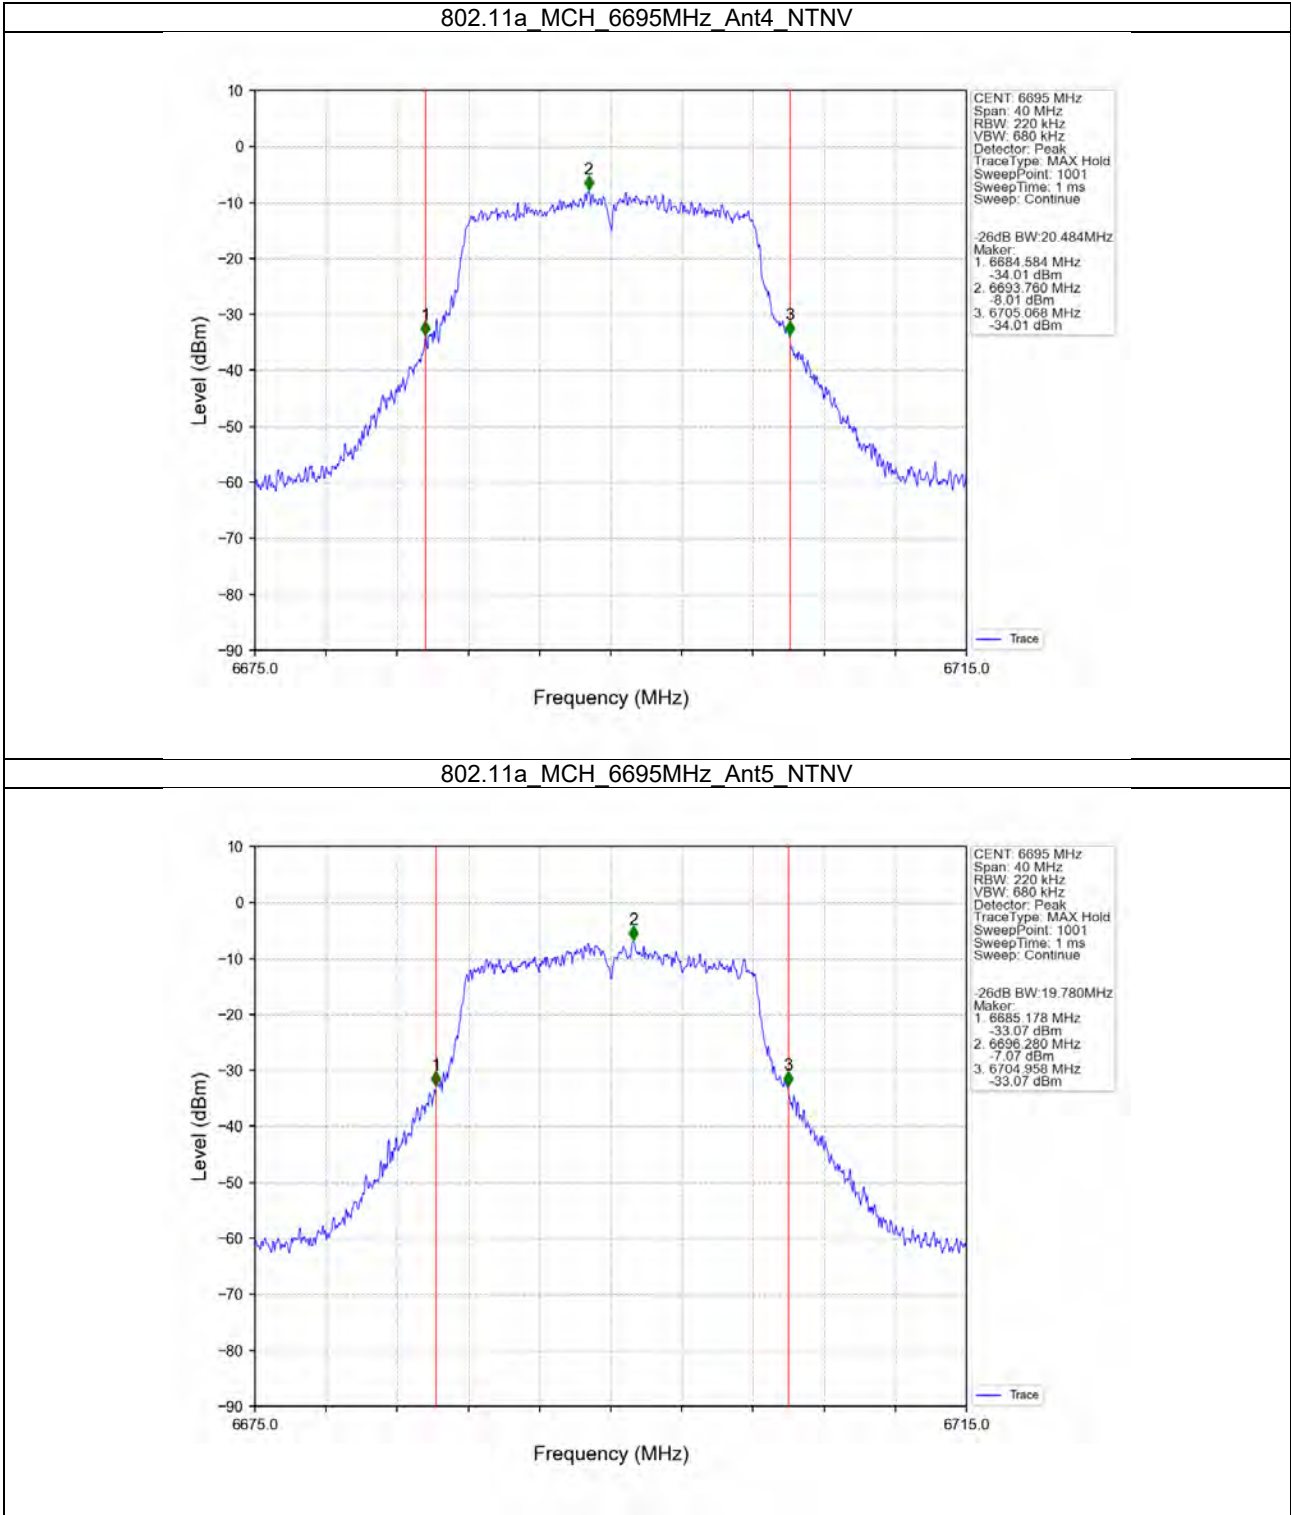



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 107 of 708

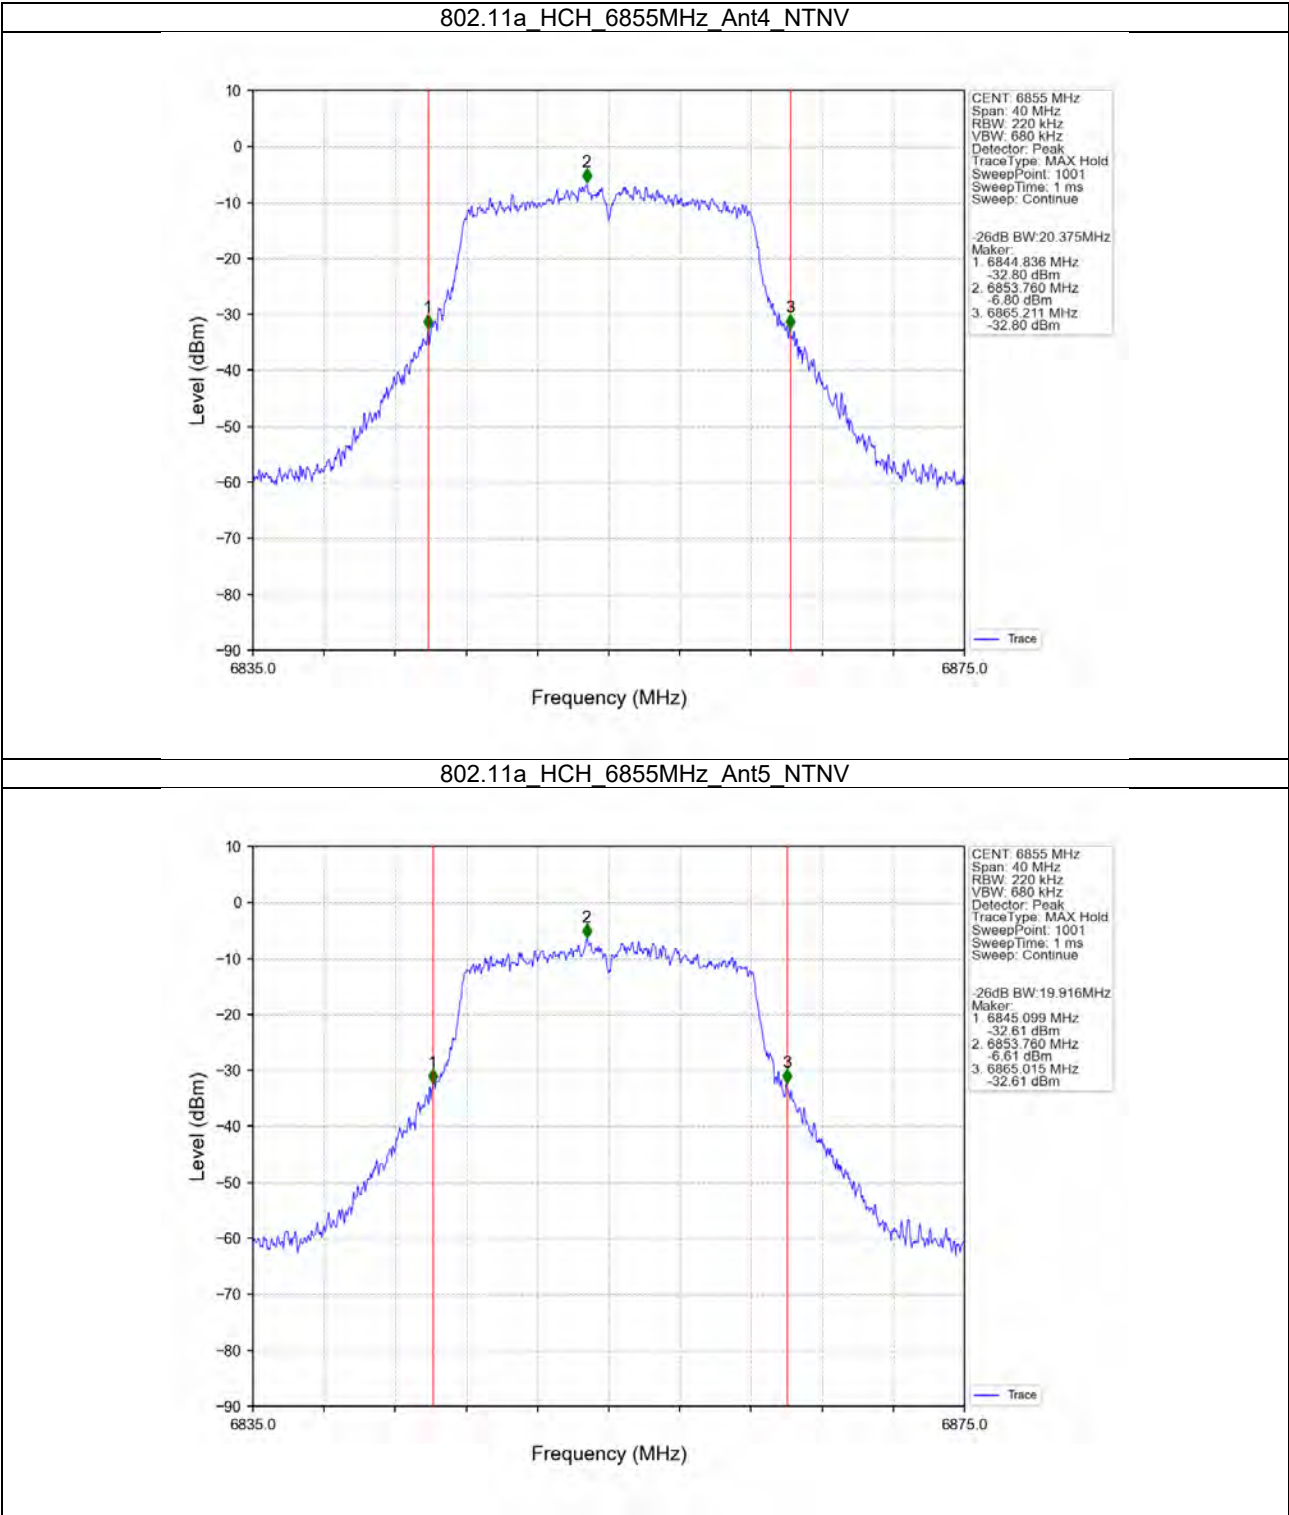




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207


Rev.: 02

Page: 108 of 708

802.11ax(HEW20)_LCH_6535MHz_SU_ / Ant4_NTNV

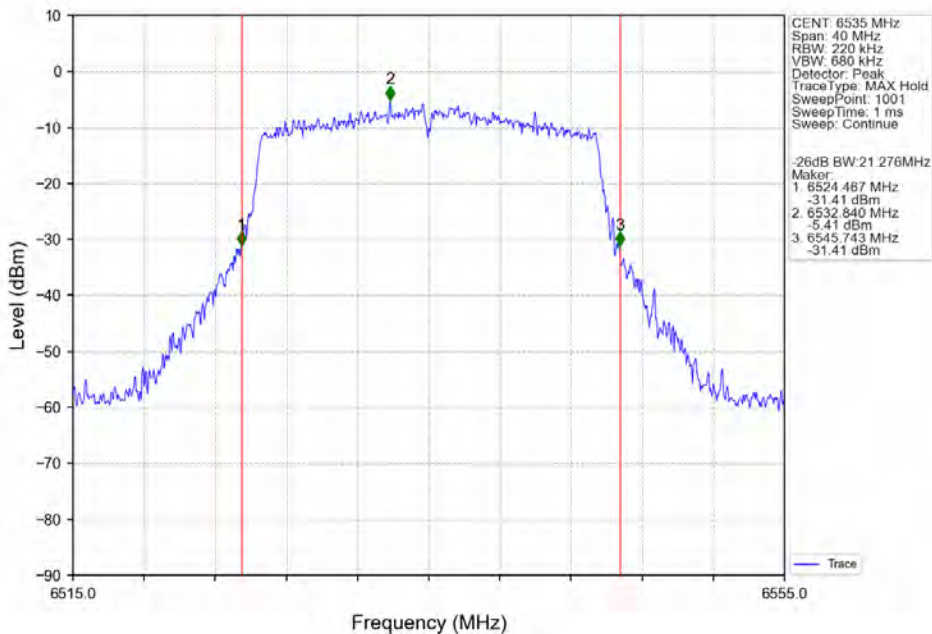


802.11ax(HEW20)_LCH_6535MHz_SU_ / Ant5_NTNV

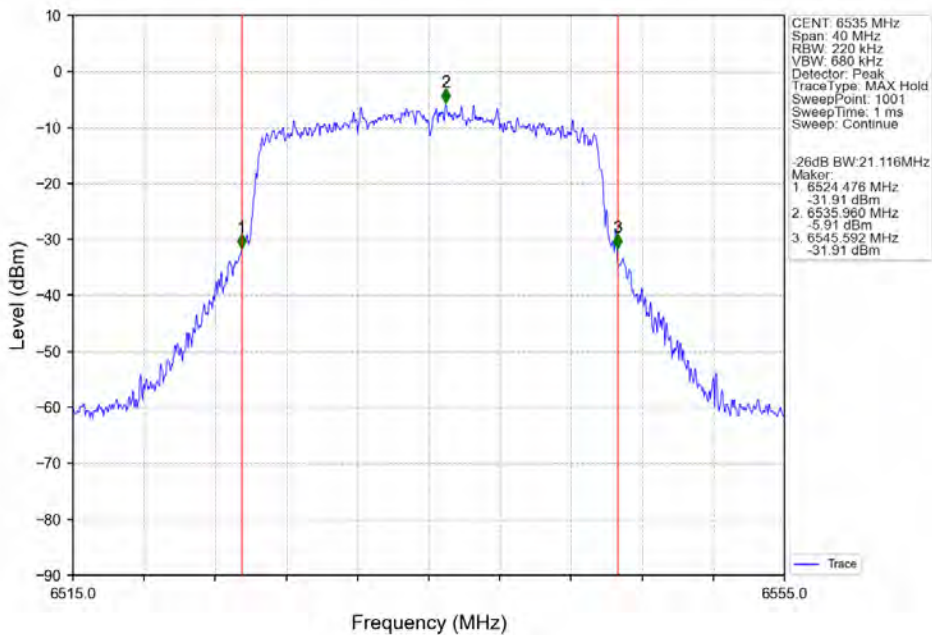



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 109 of 708

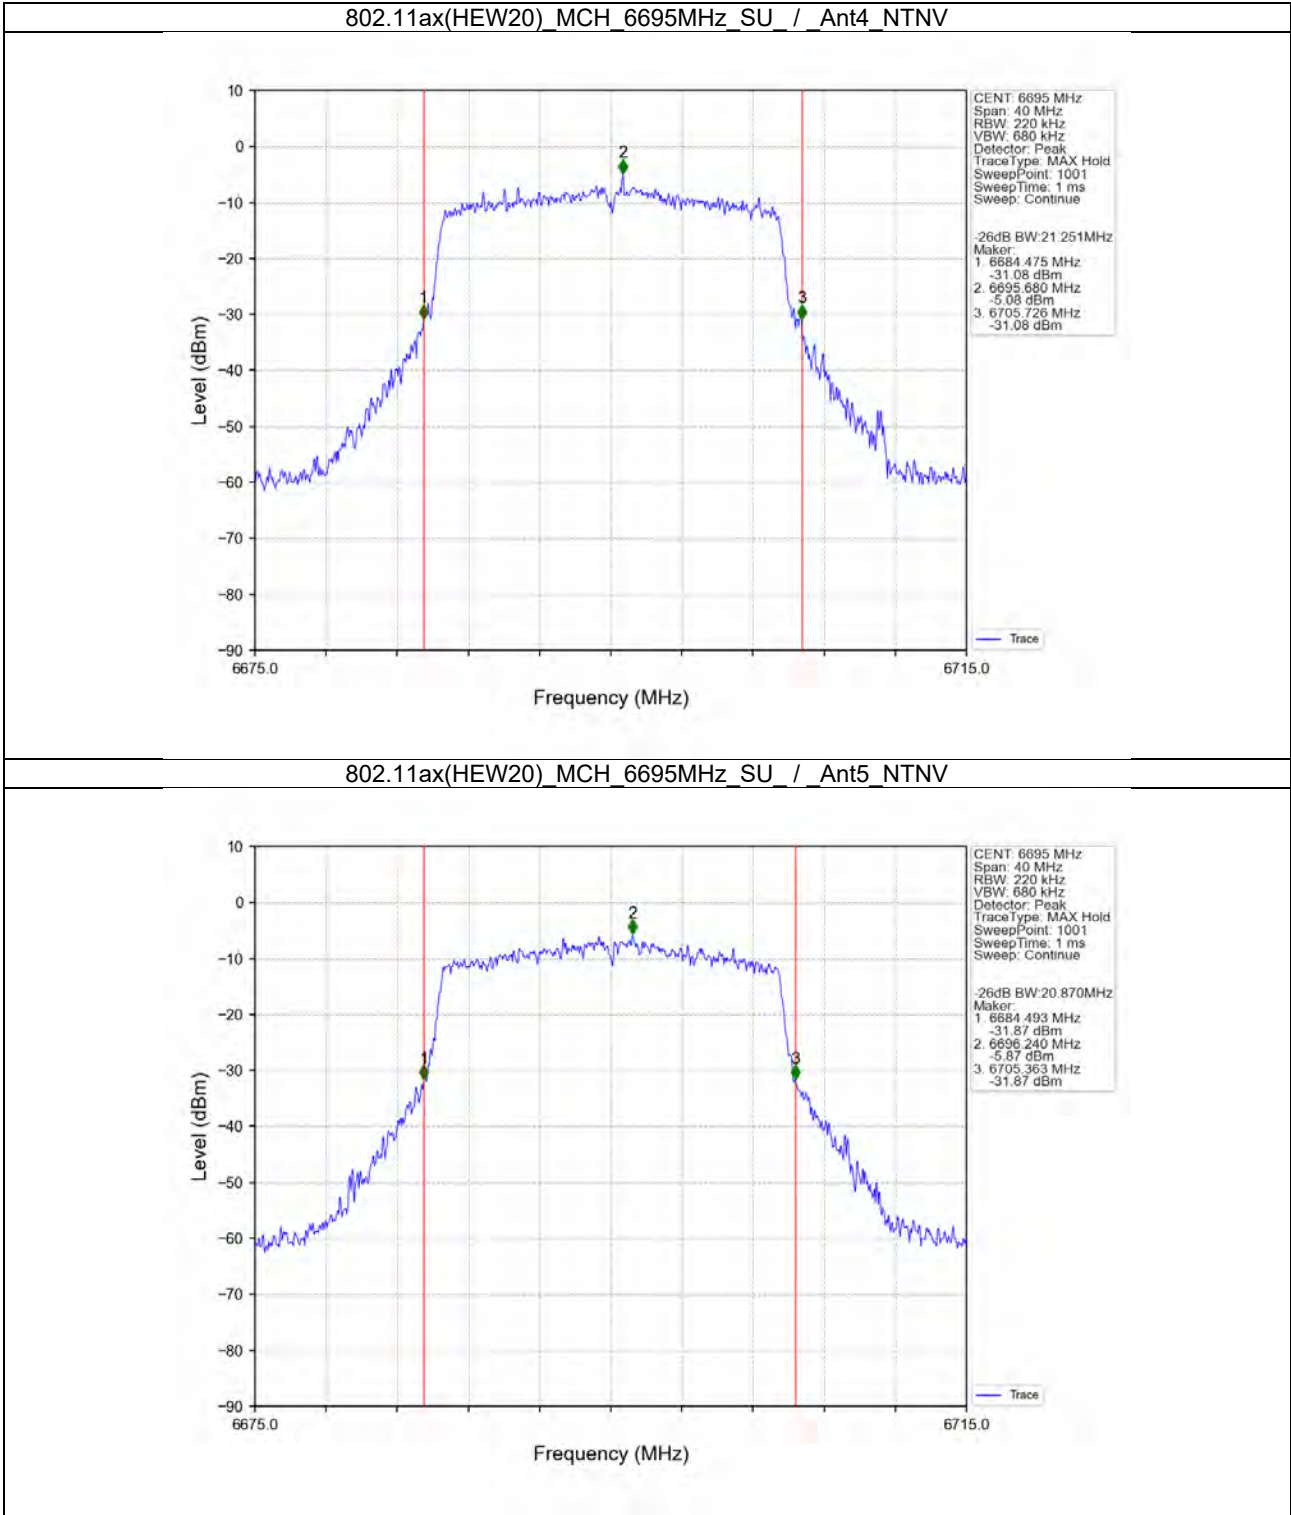





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 110 of 708

802.11ax(HEW20)_HCH_6855MHz_SU_ / Ant4_NTNV

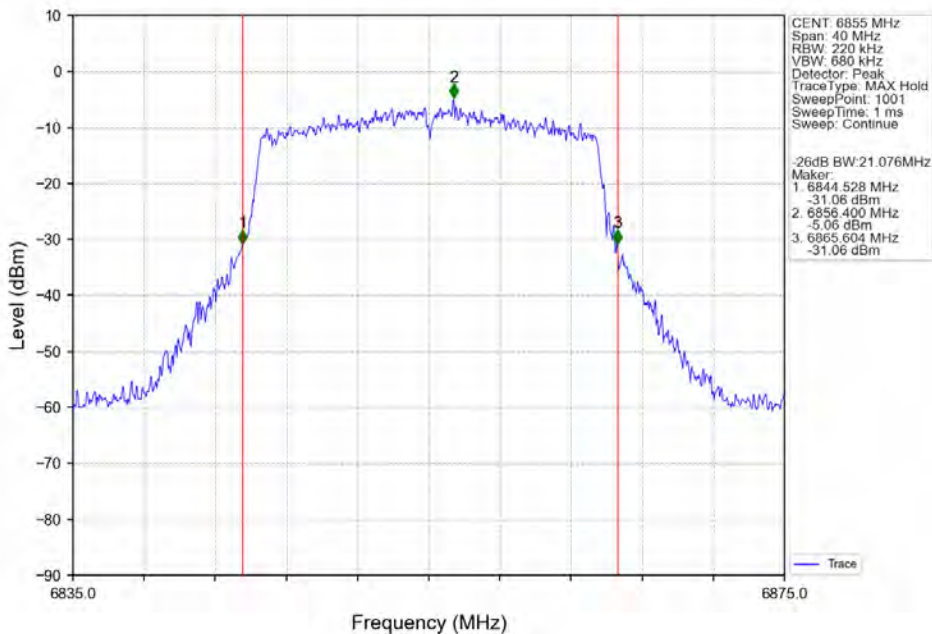


802.11ax(HEW20)_HCH_6855MHz_SU_ / Ant5_NTNV

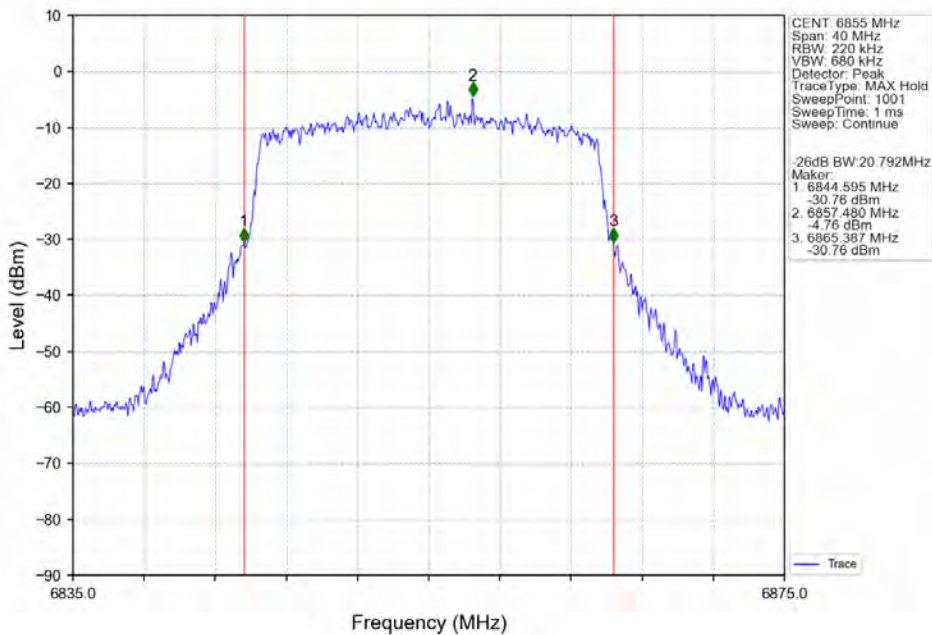



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 111 of 708

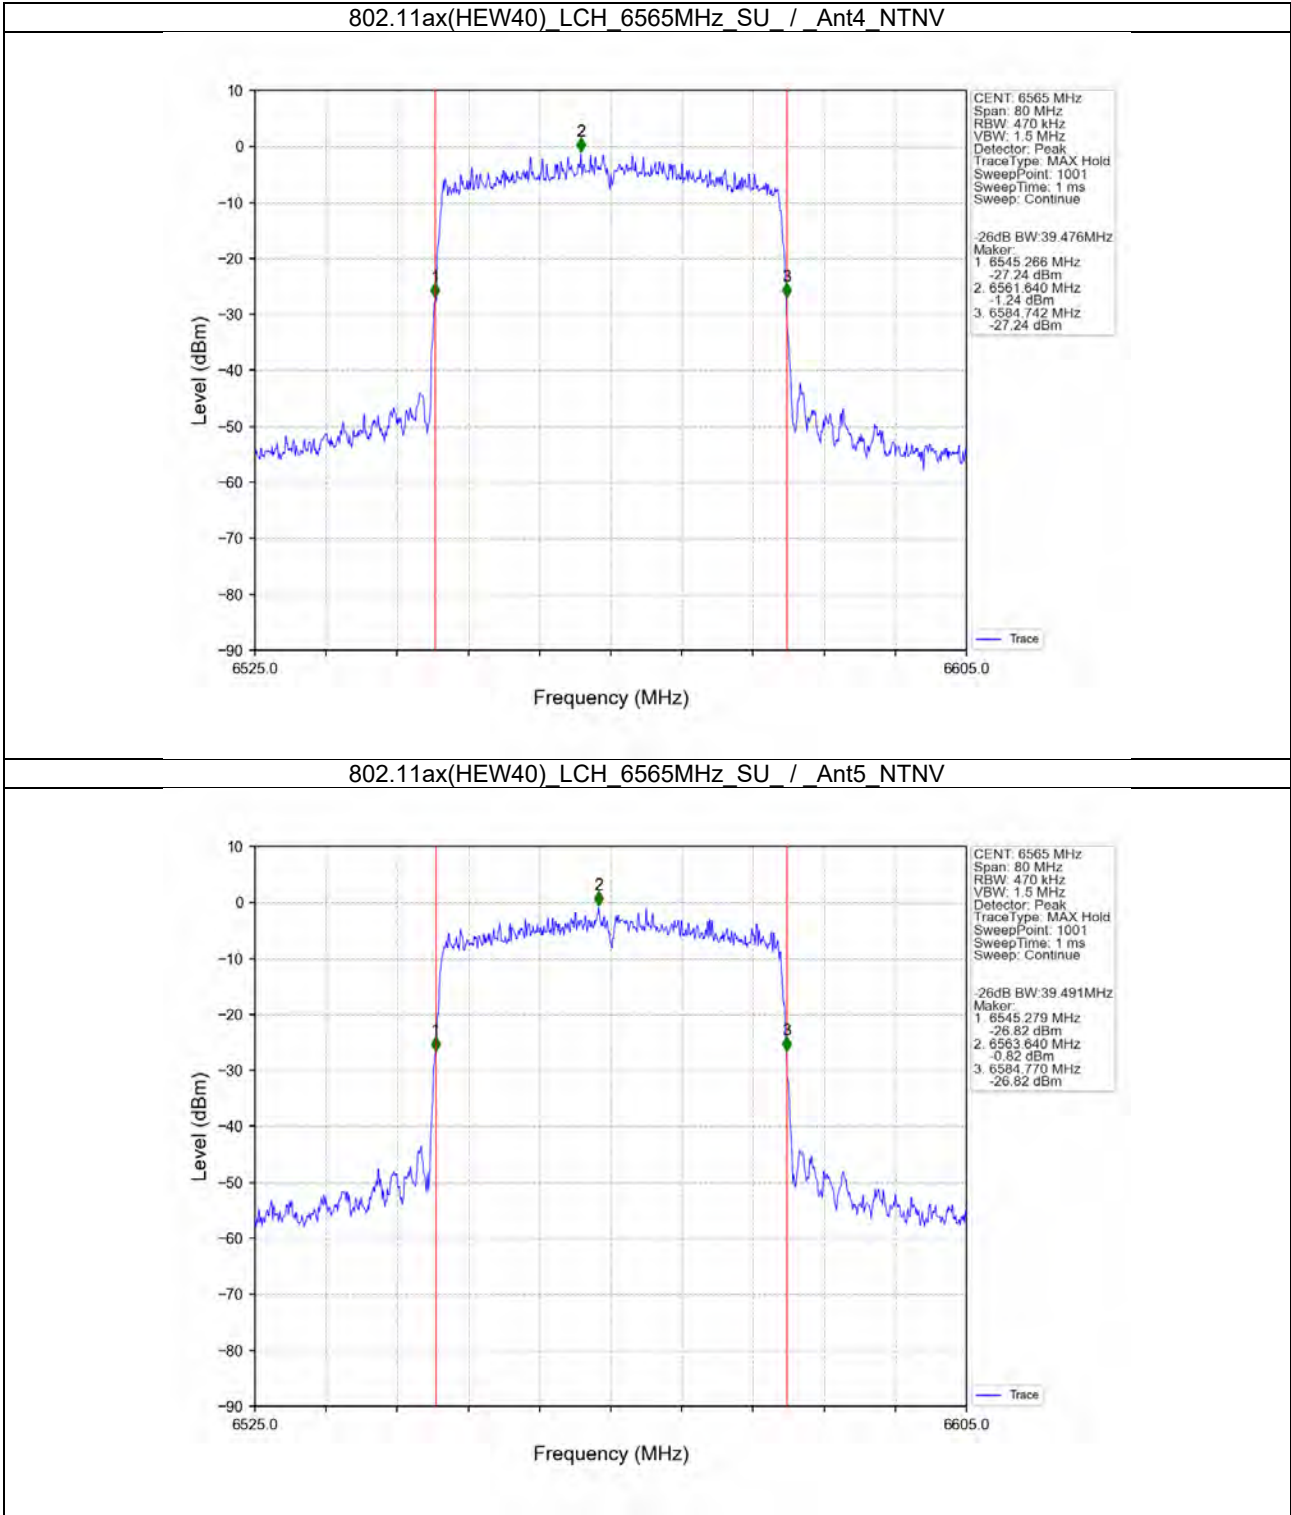



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 112 of 708

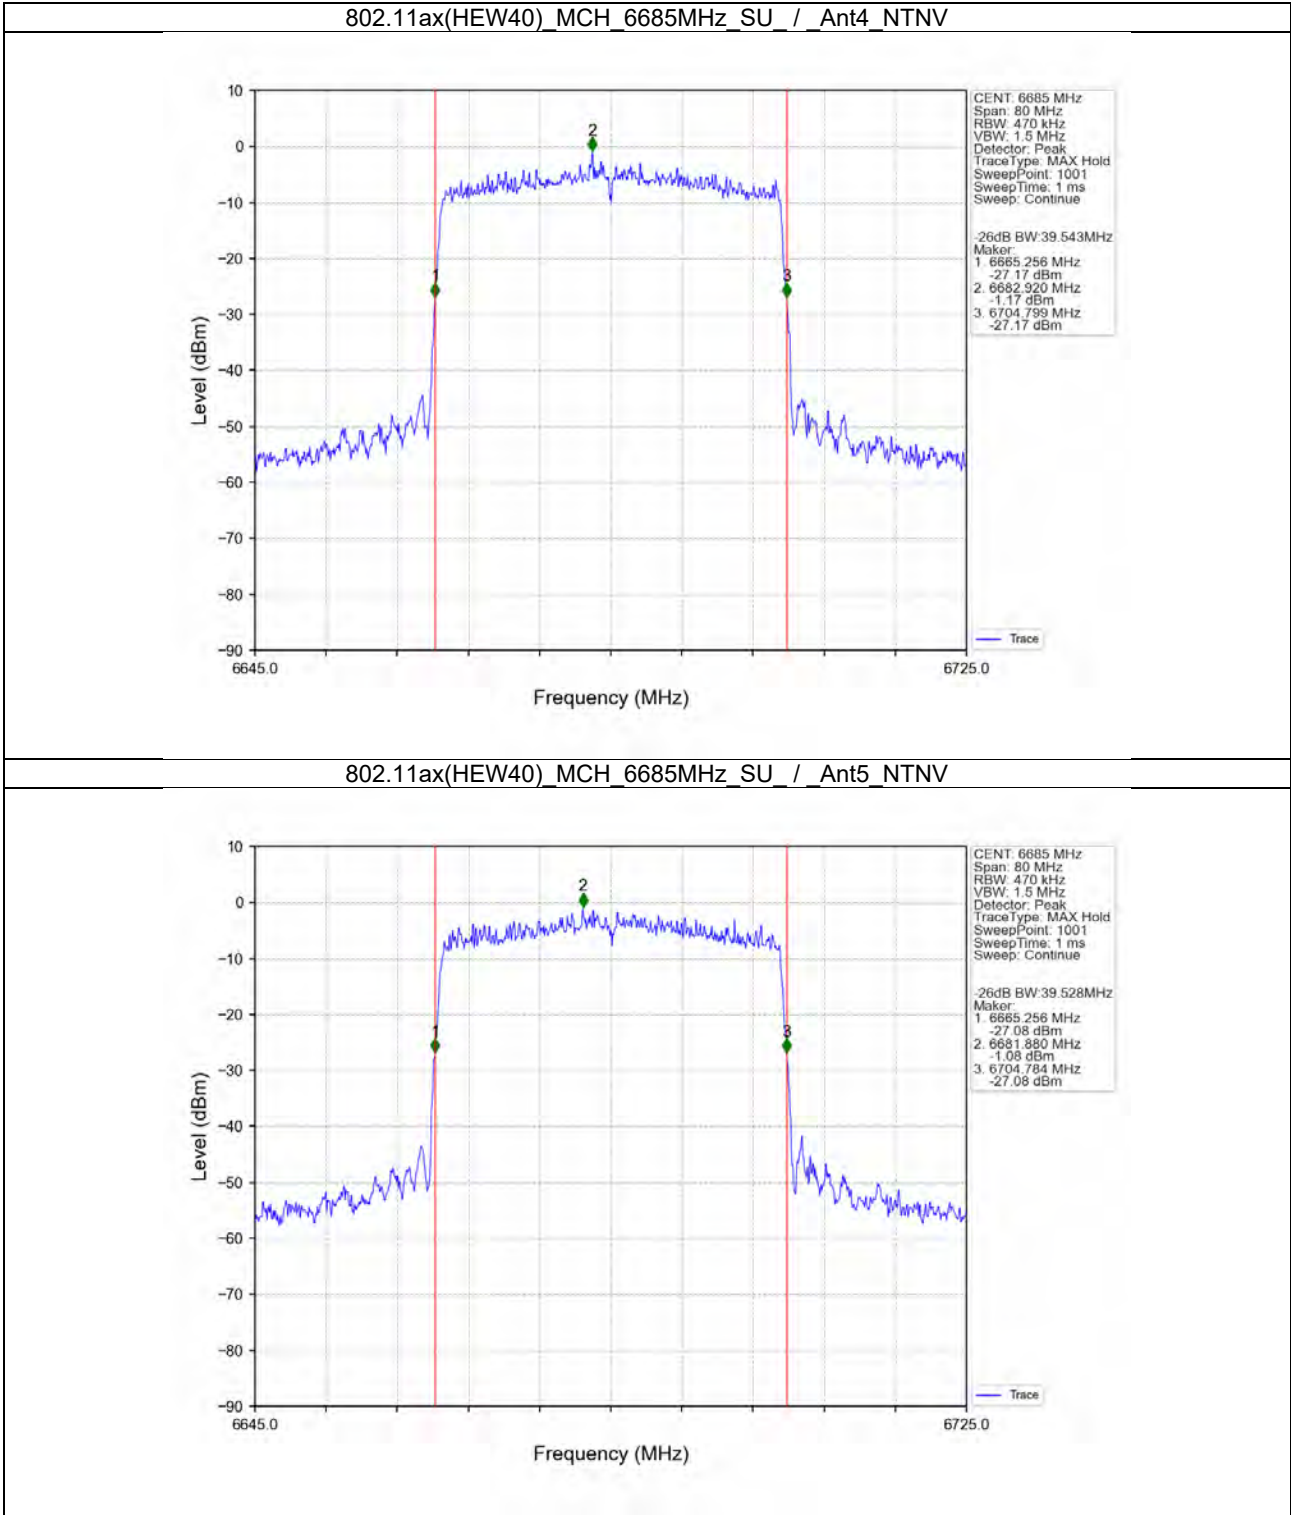



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 113 of 708

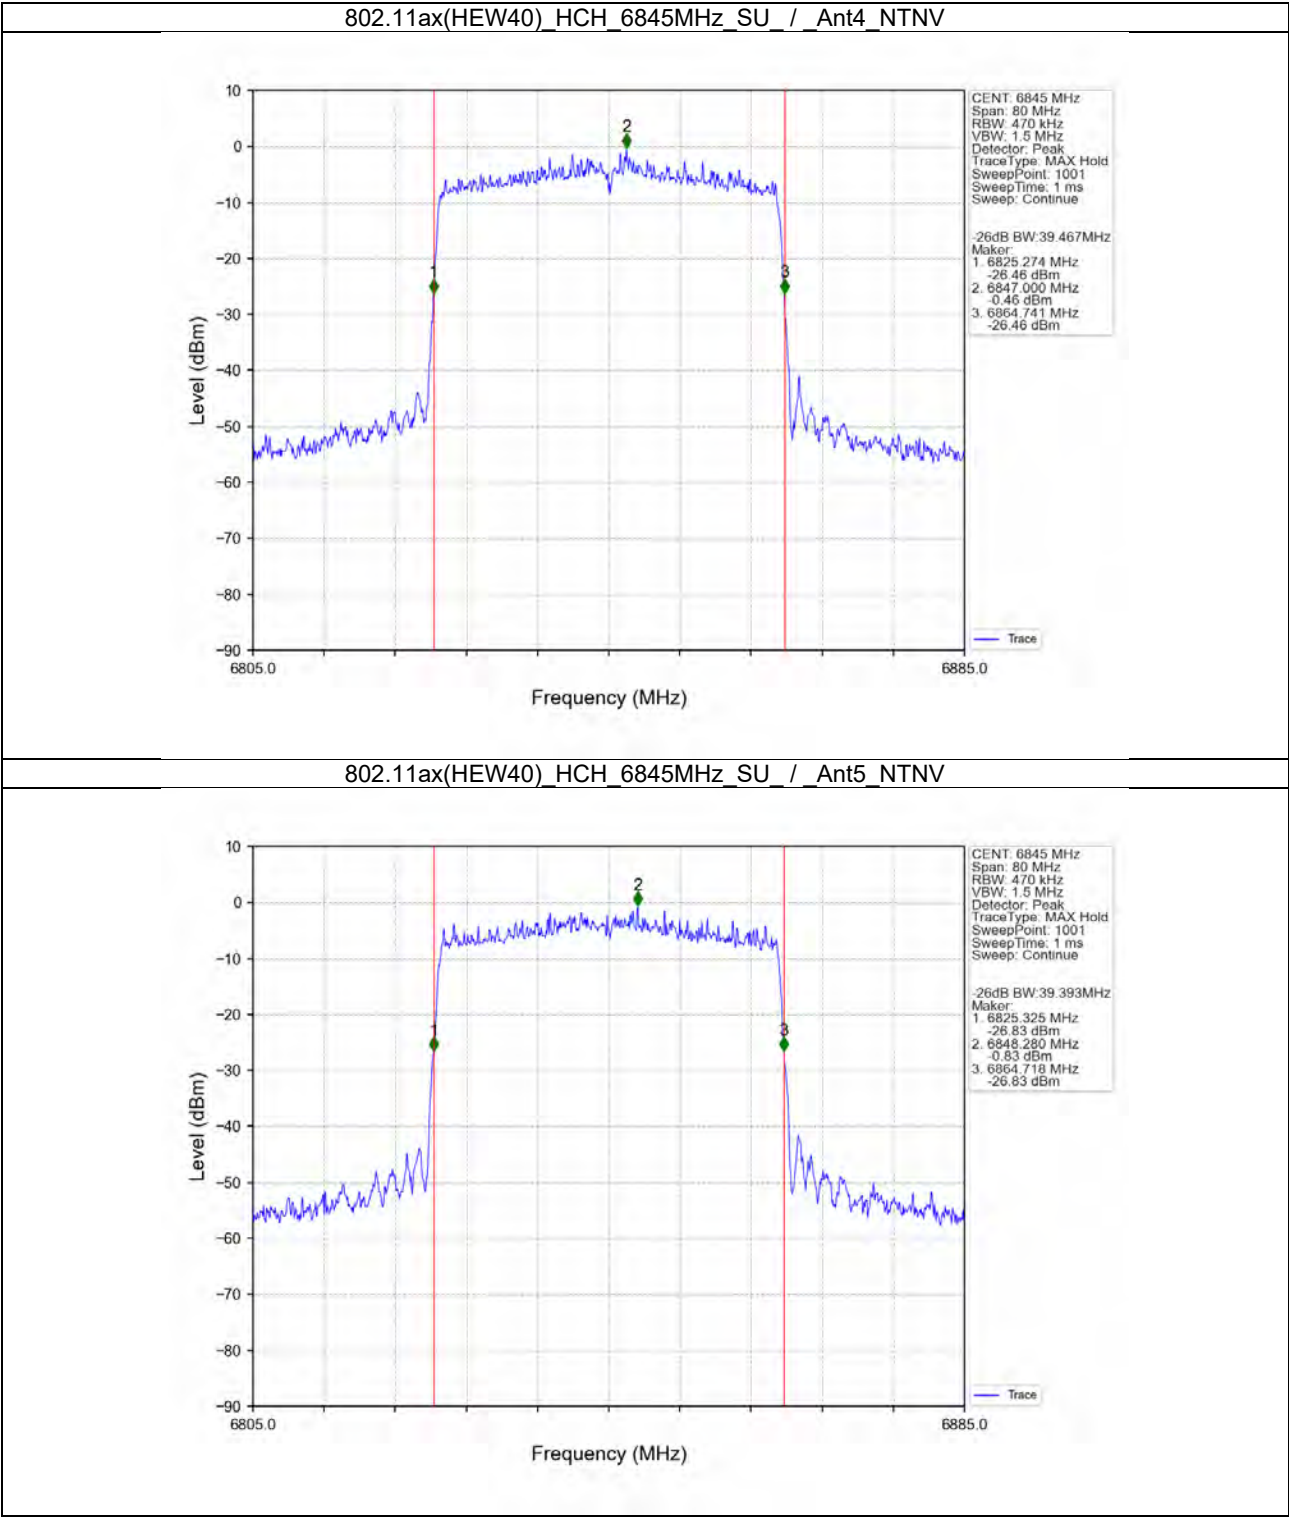



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 114 of 708

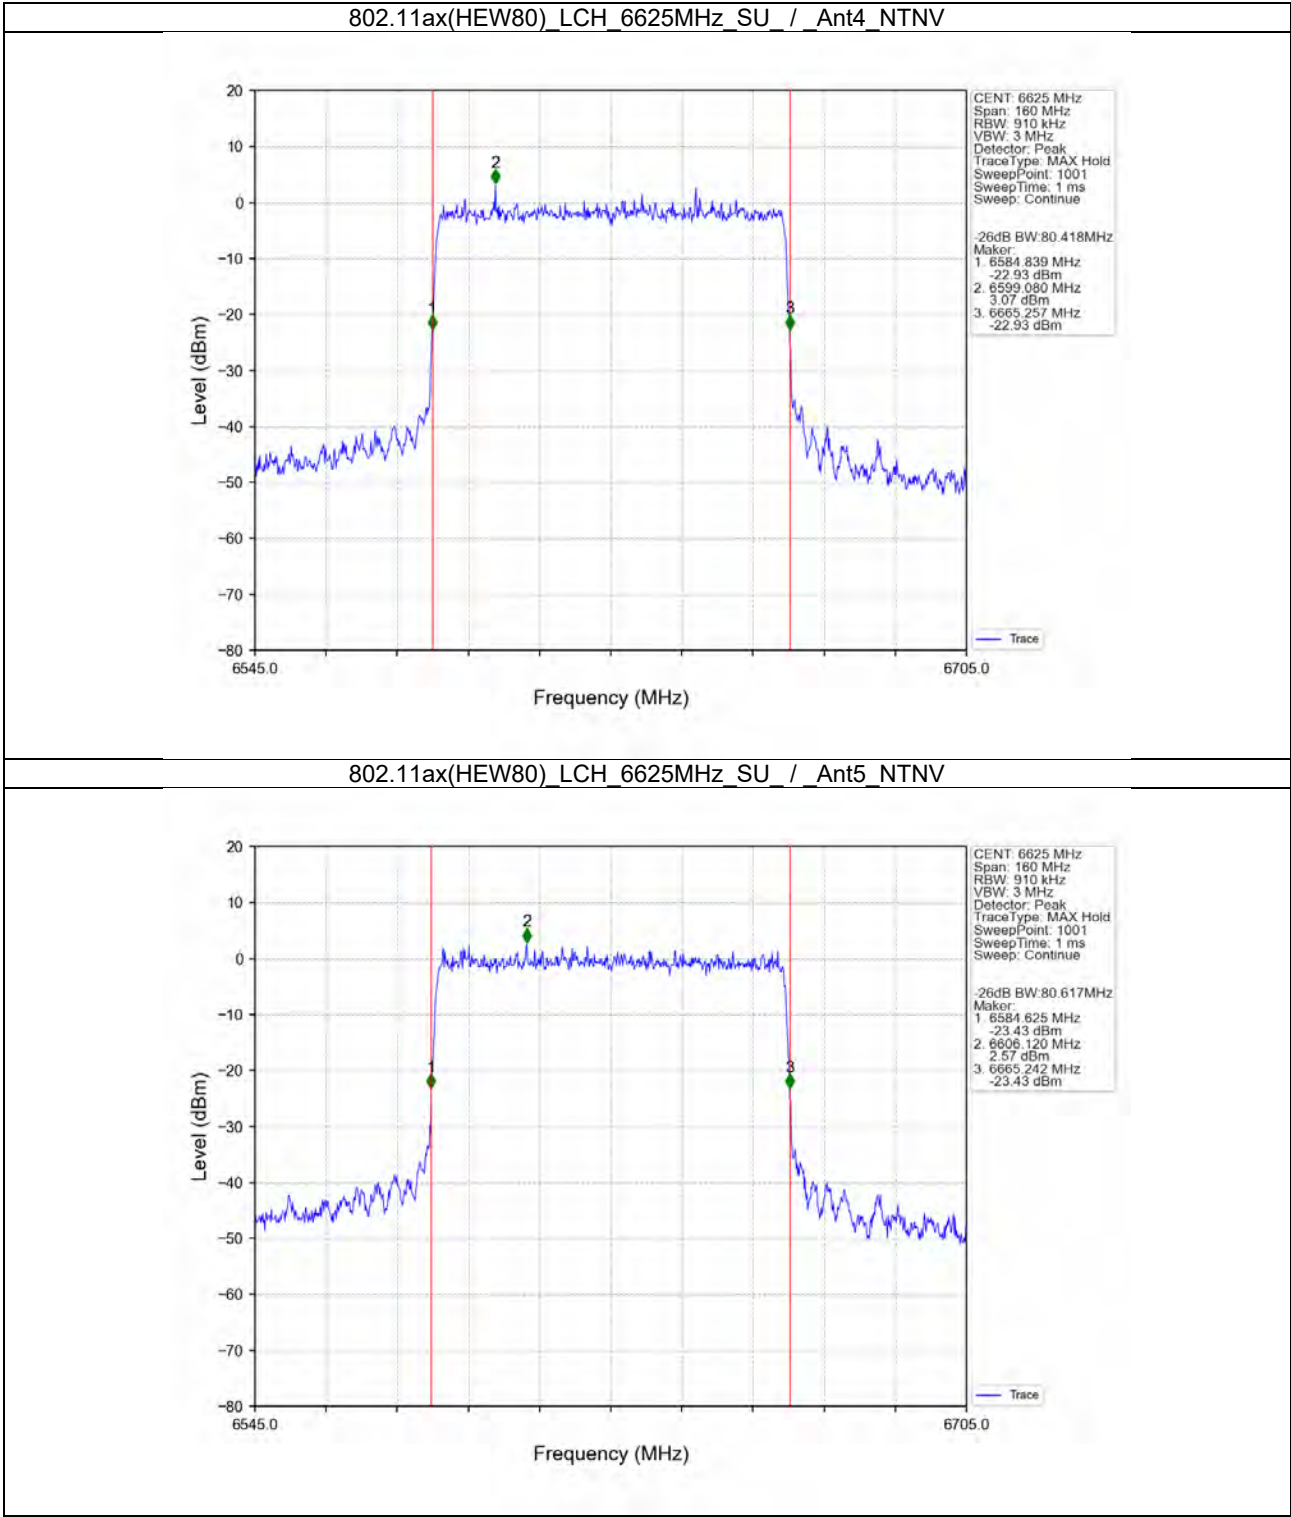



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 115 of 708

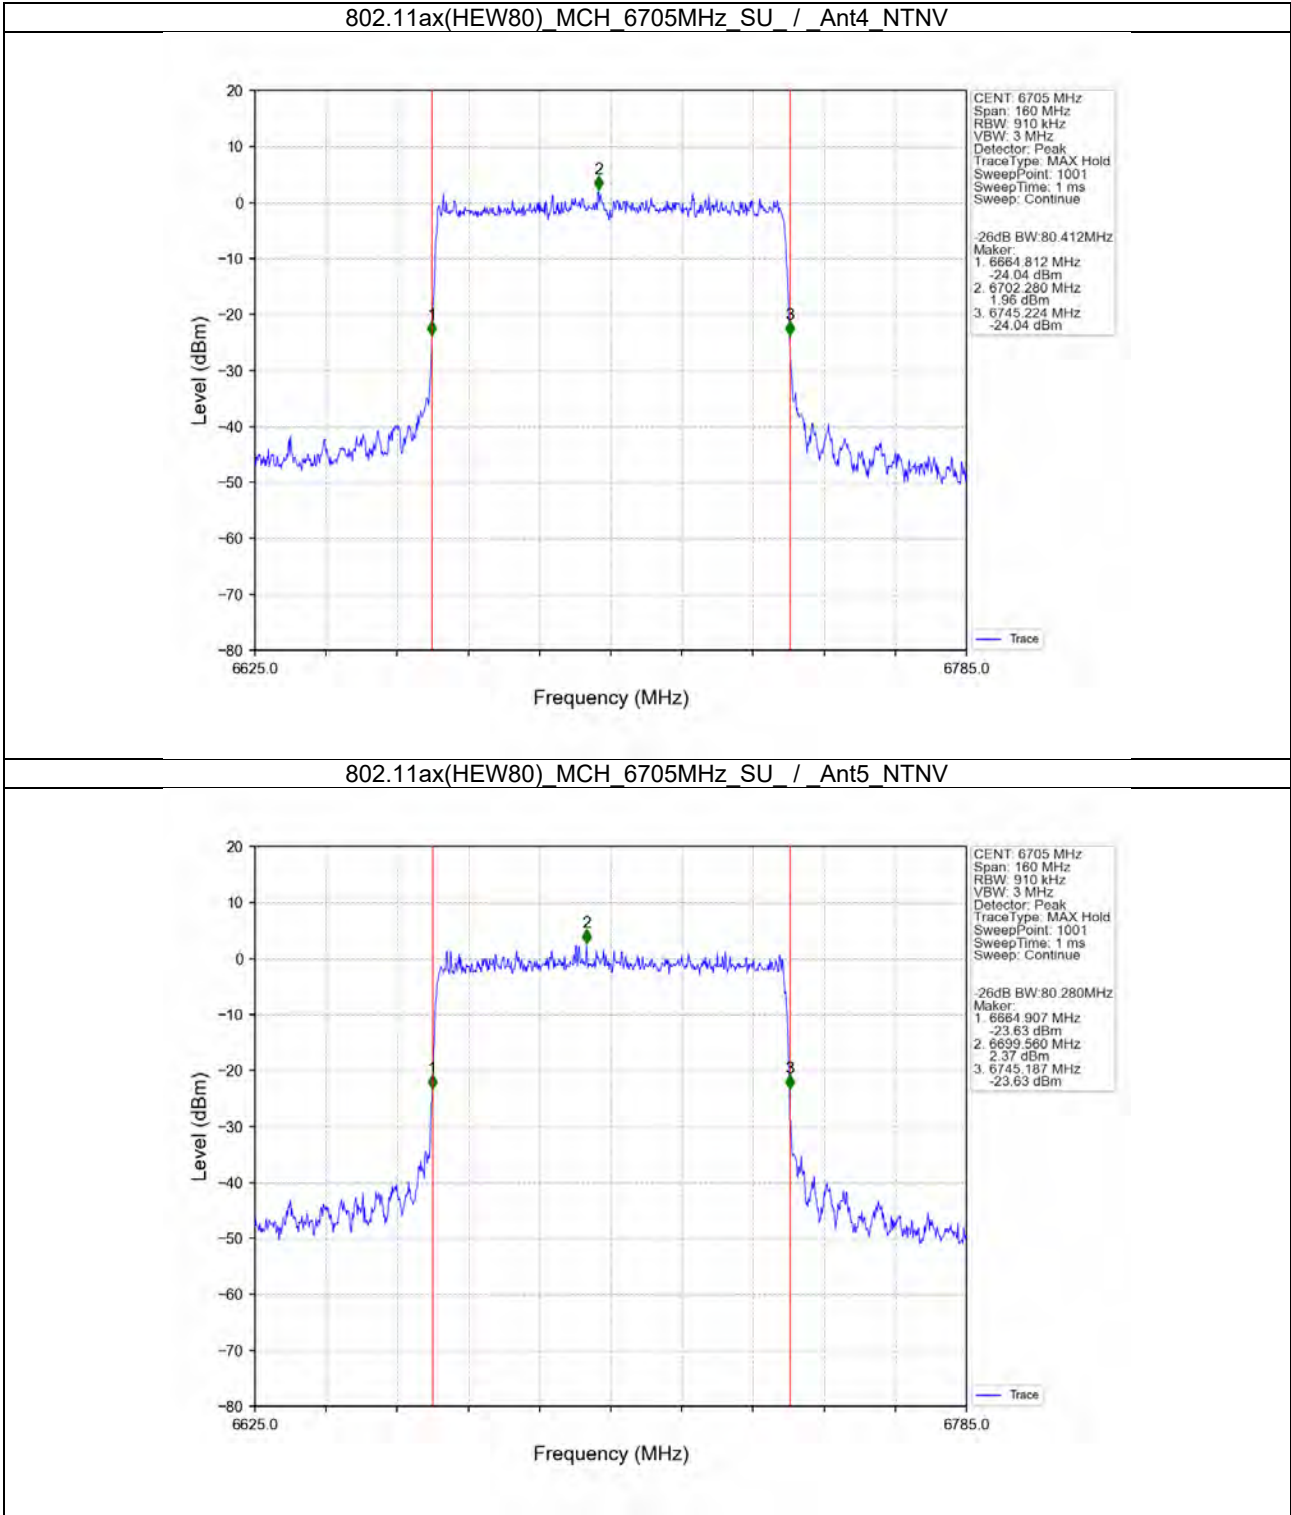



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 116 of 708

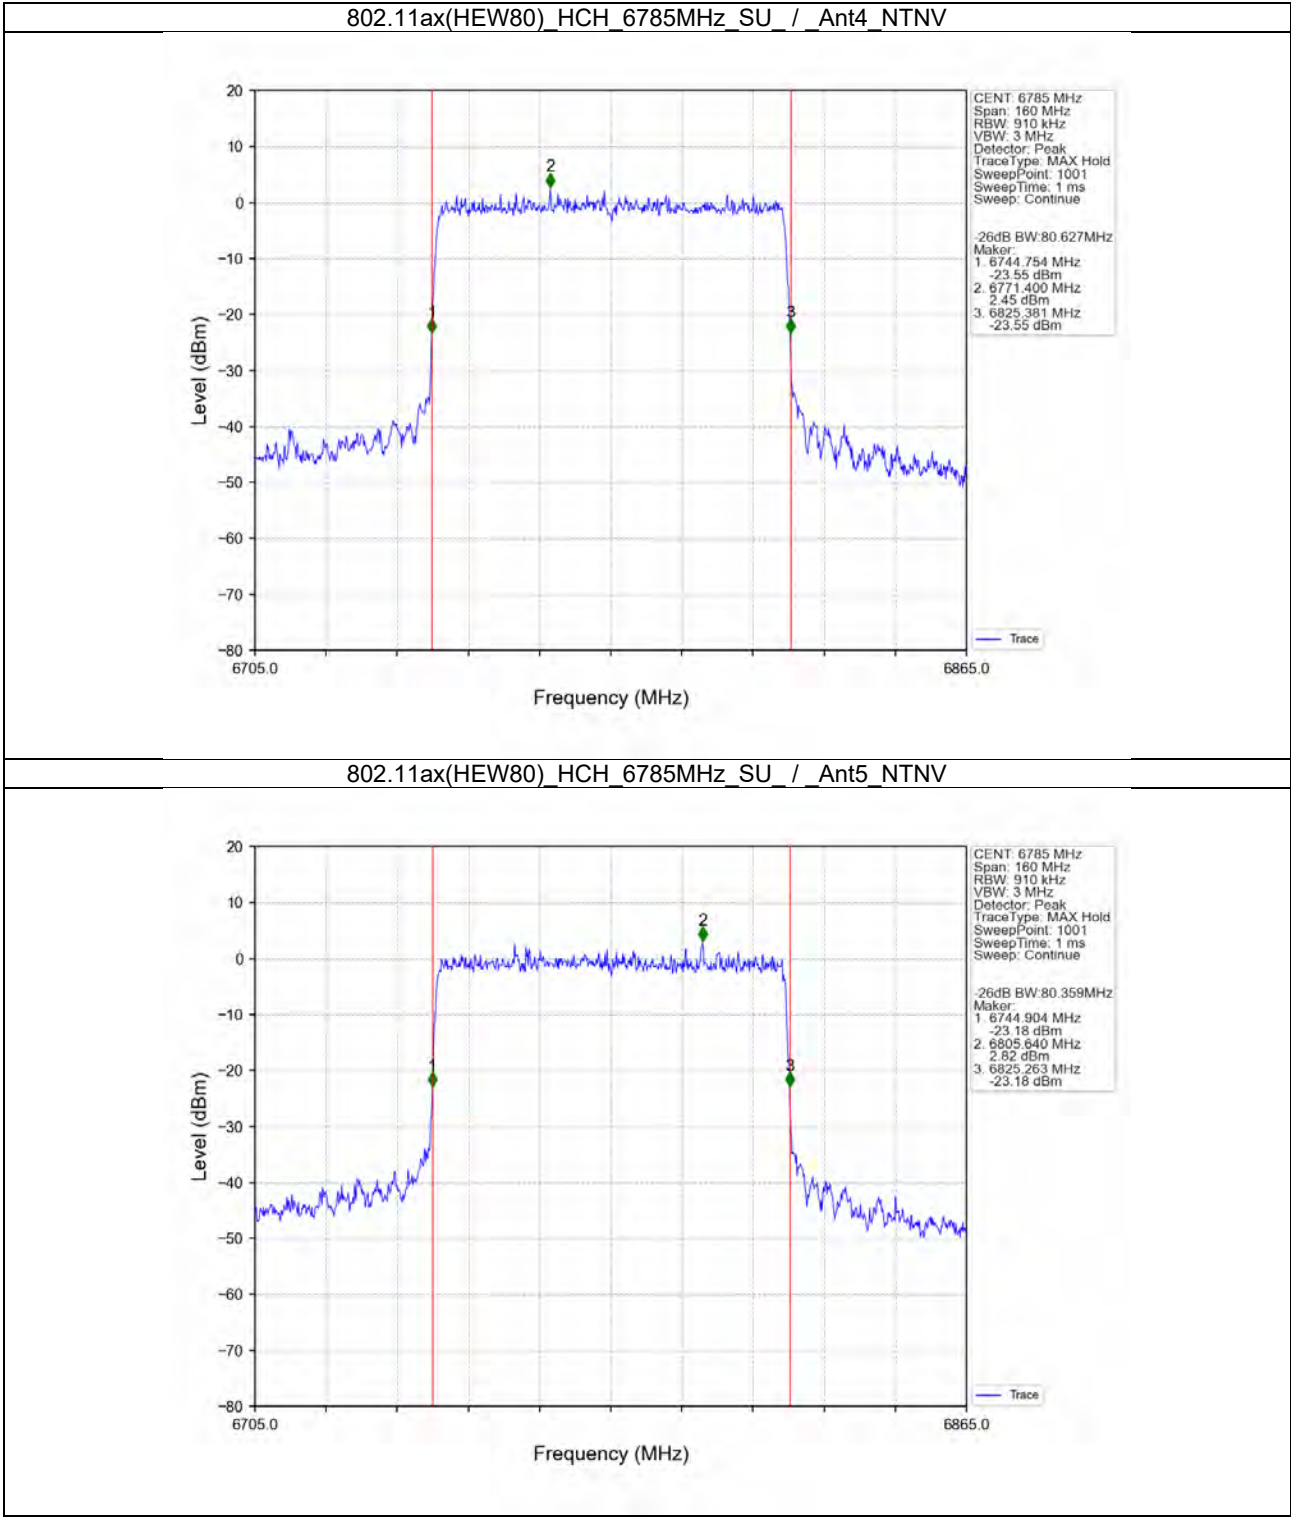



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 117 of 708

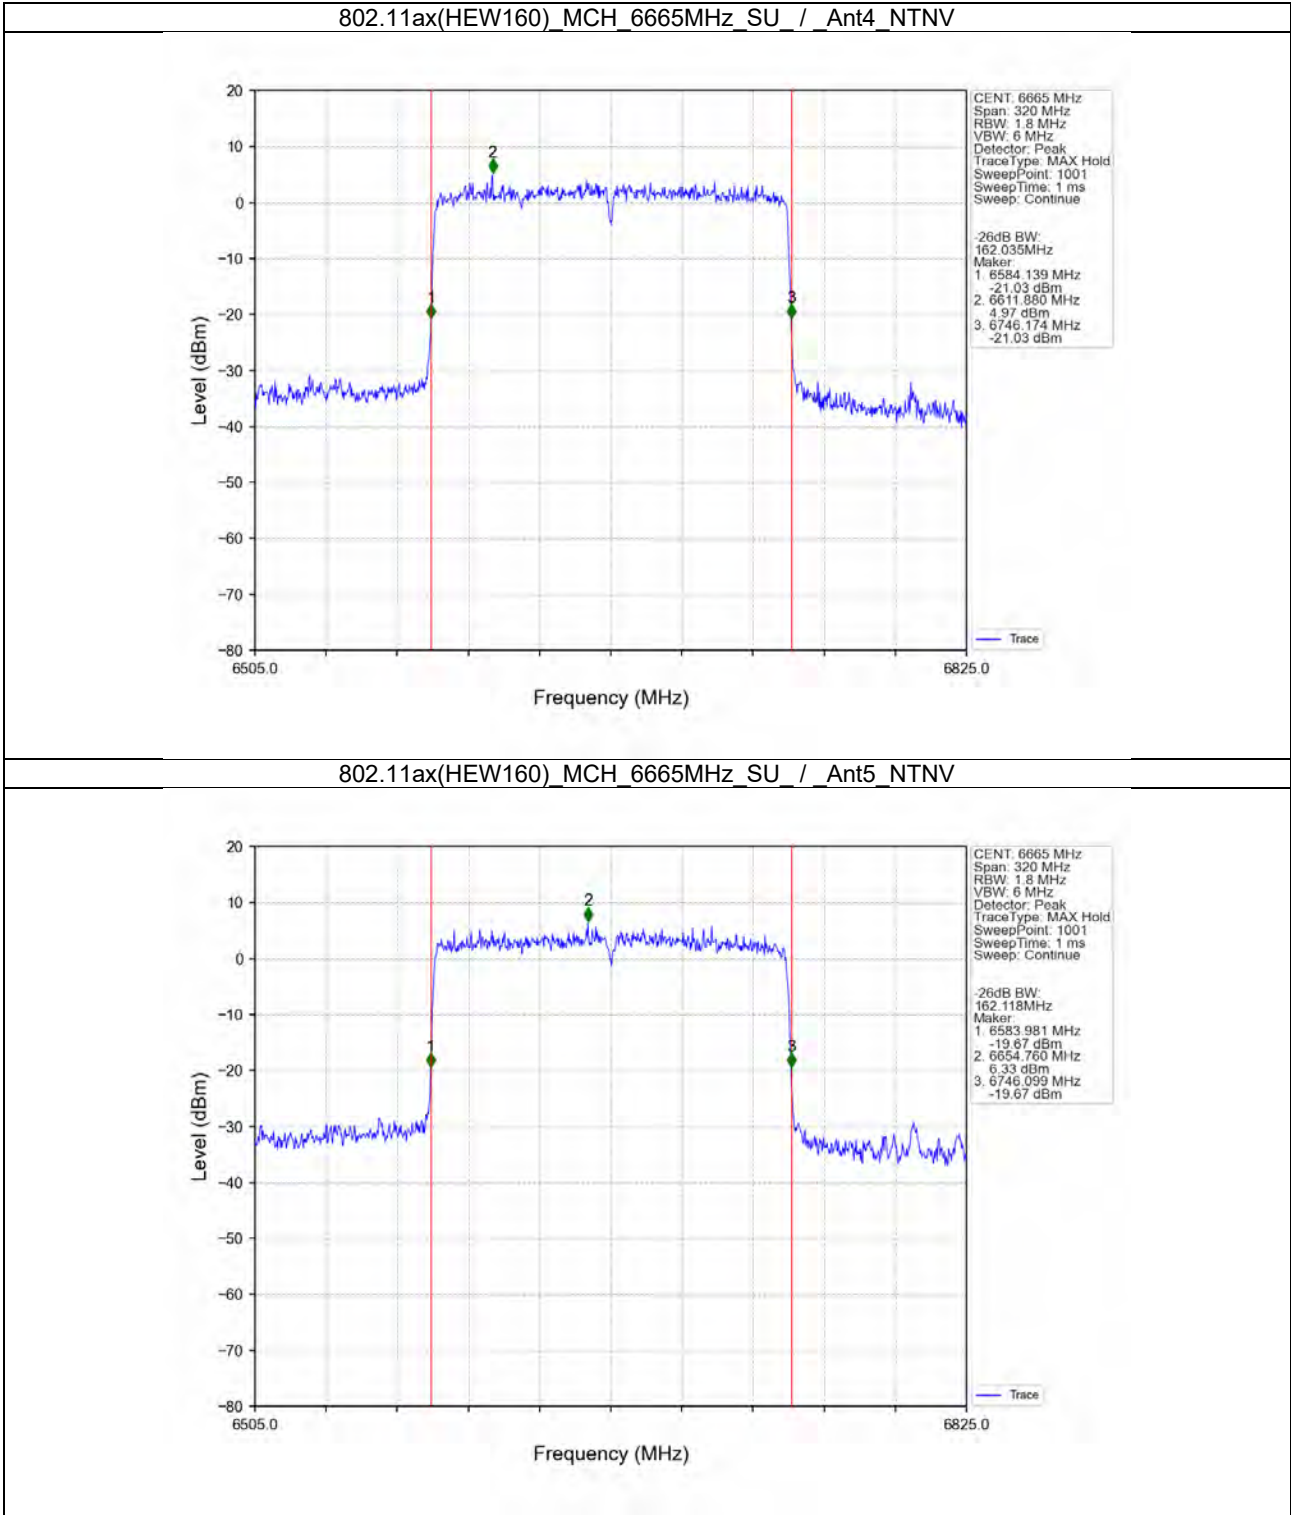




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 118 of 708


2.2.7 OBW

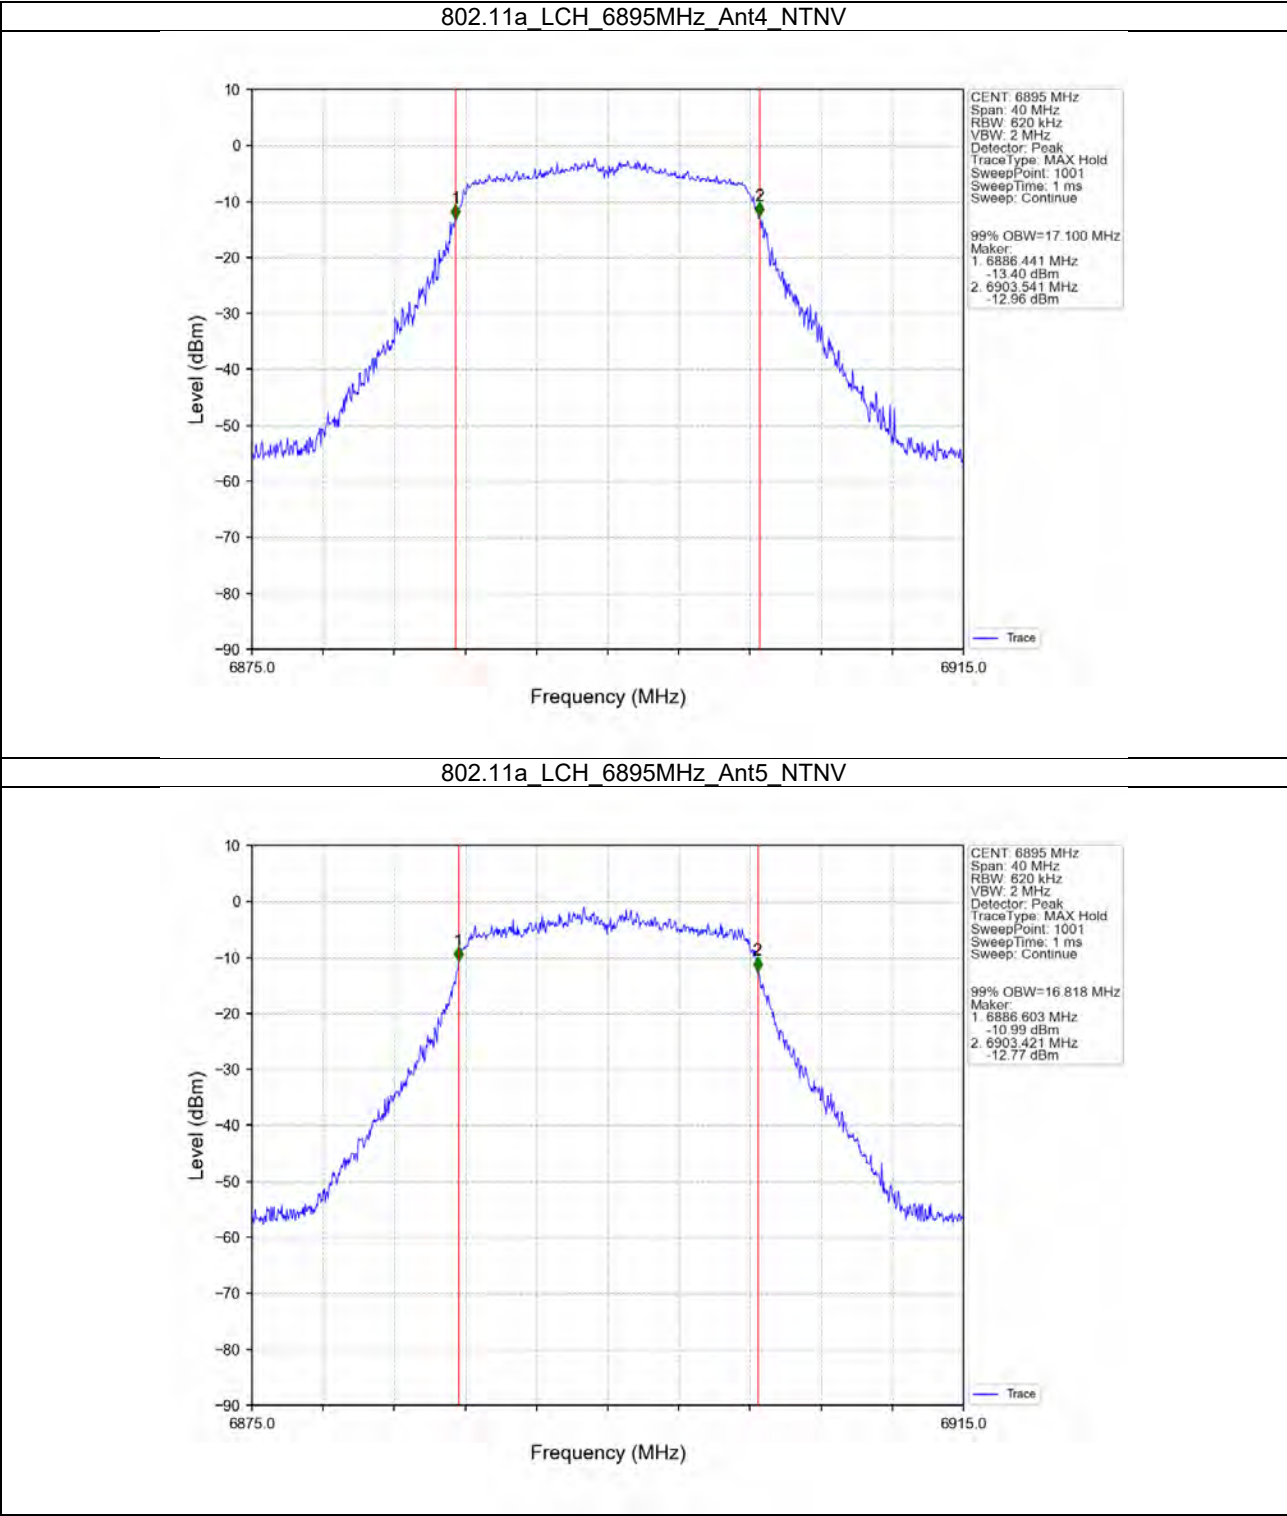



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 119 of 708

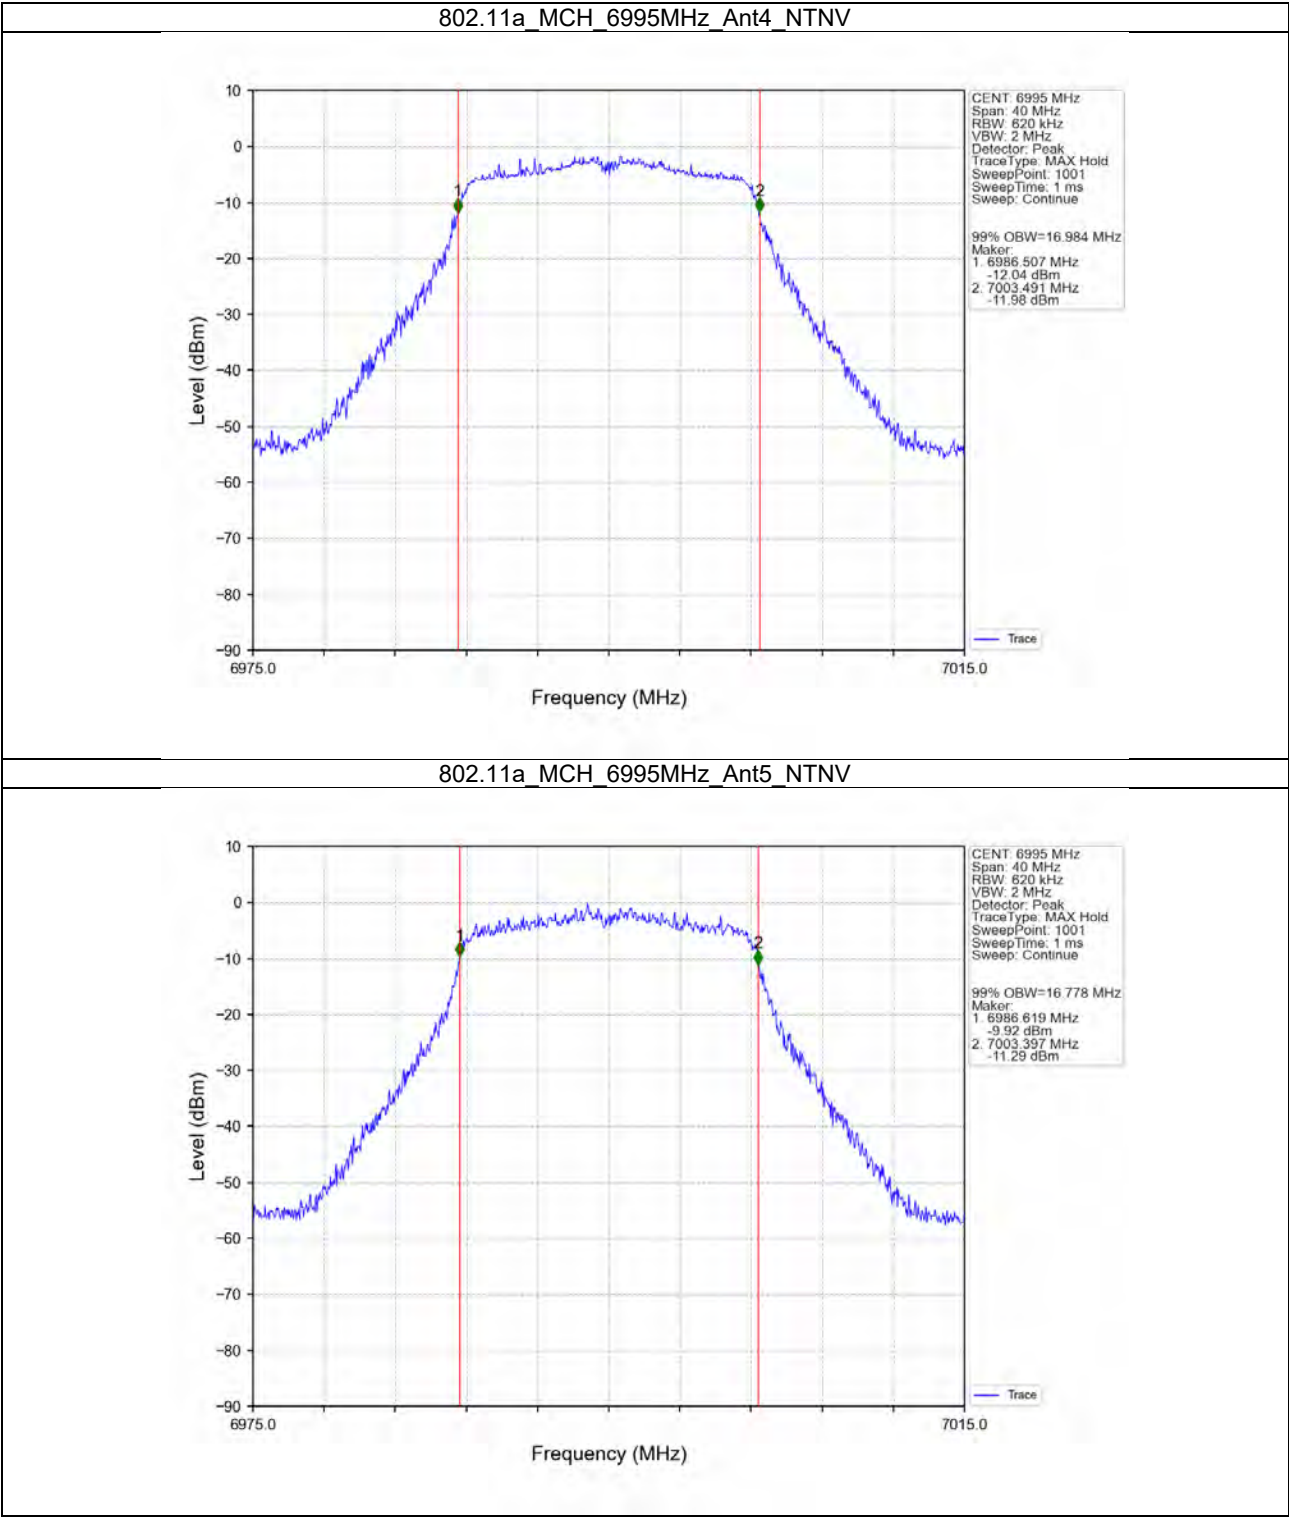



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 120 of 708

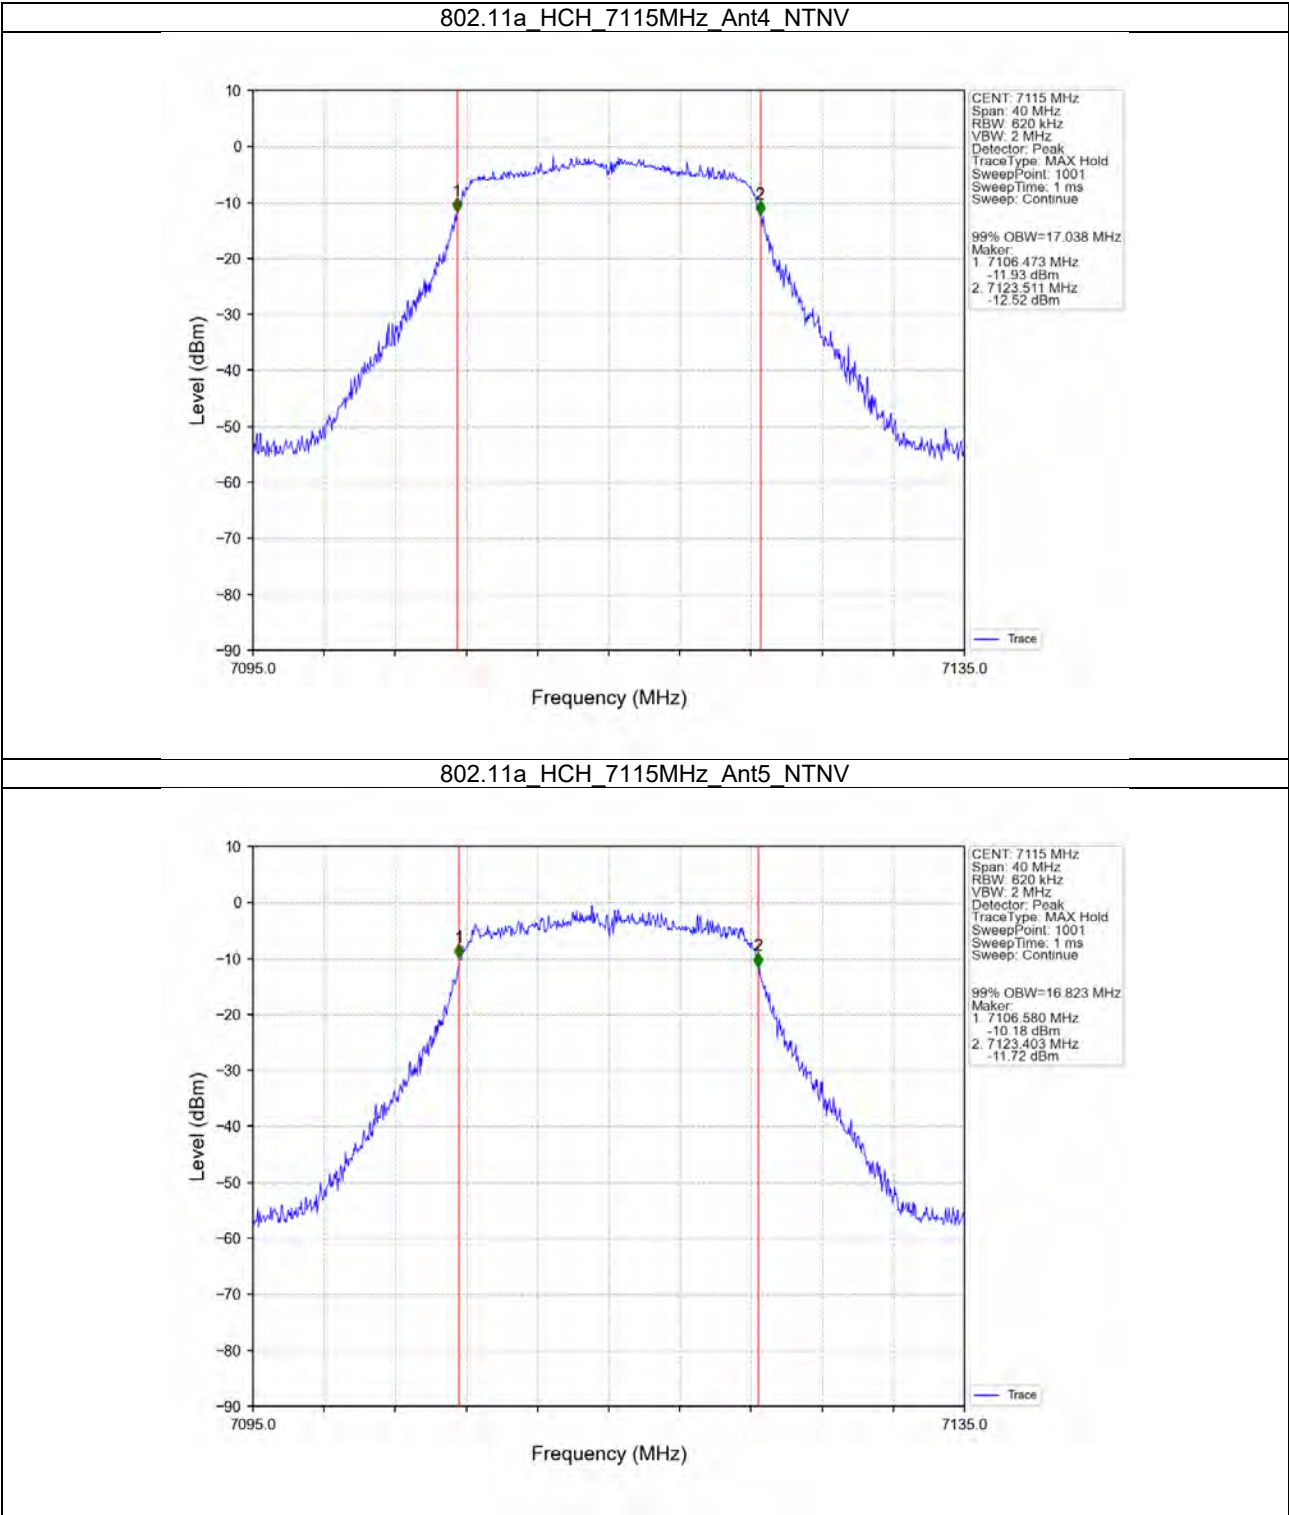



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 121 of 708

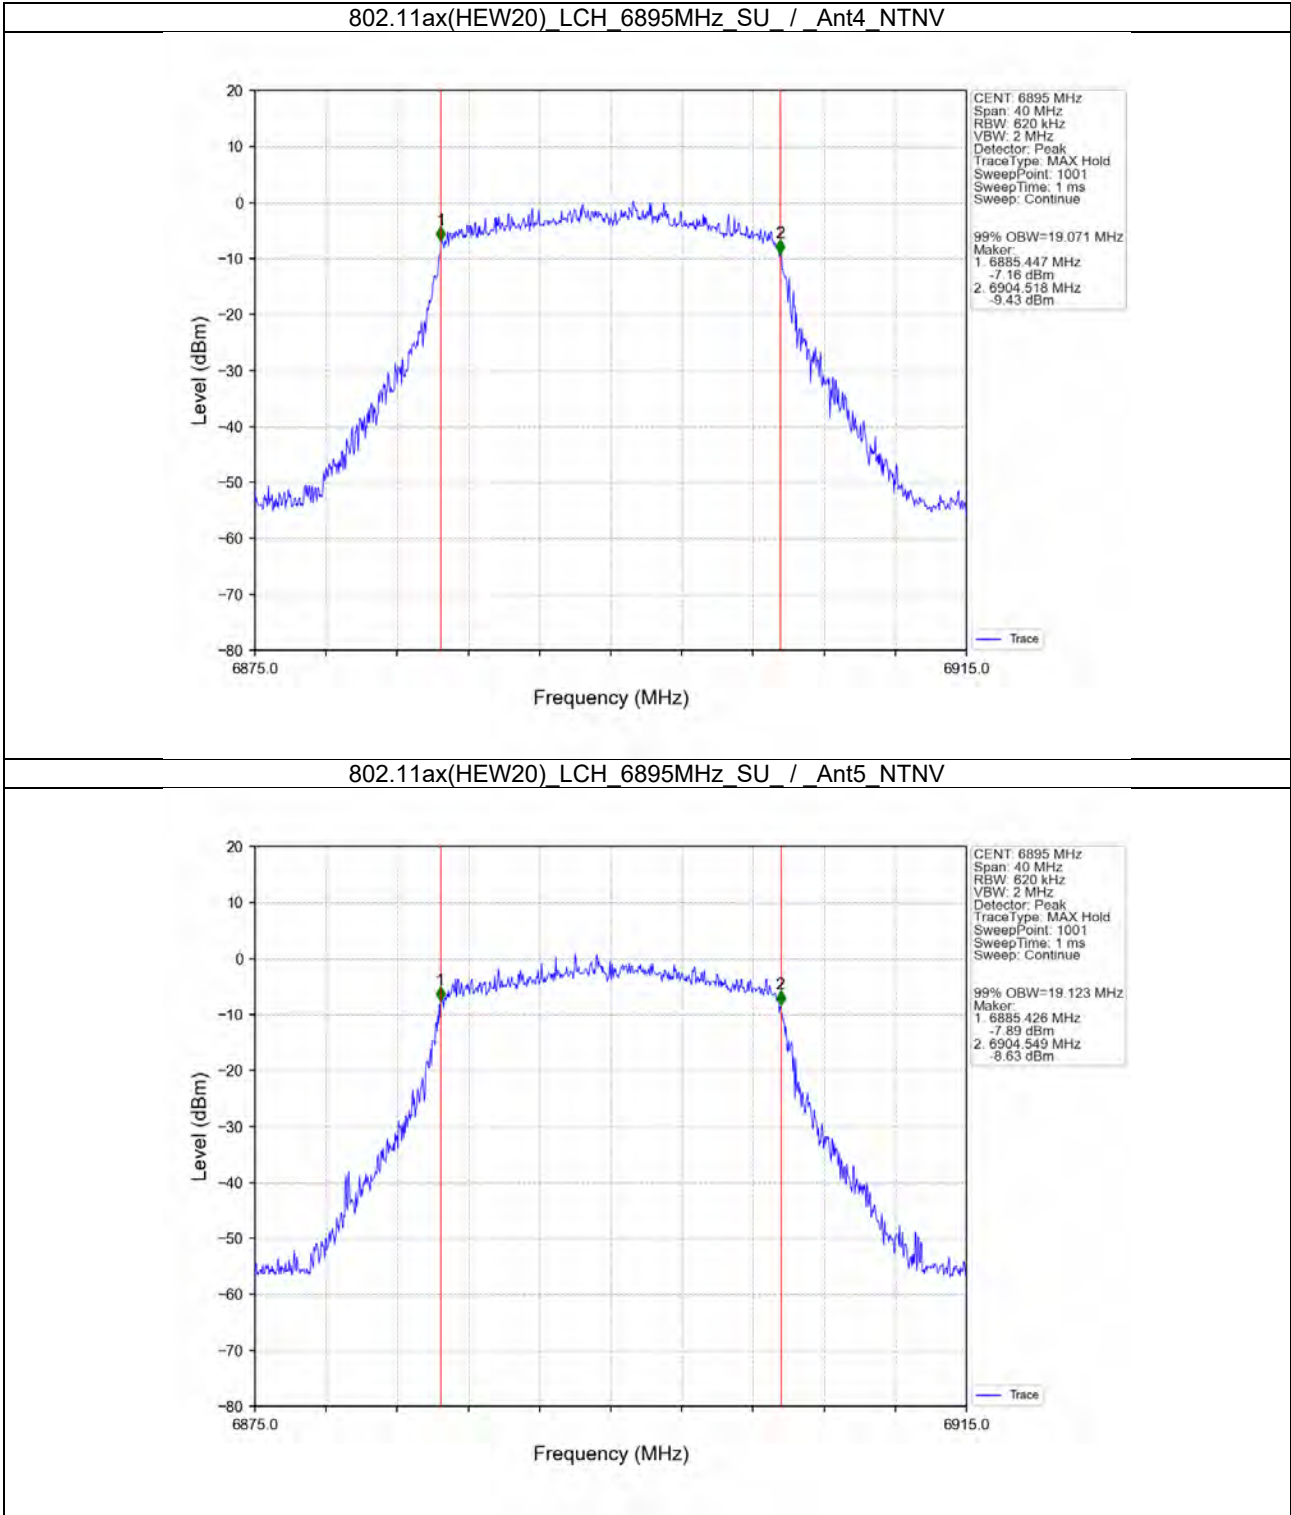



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 122 of 708

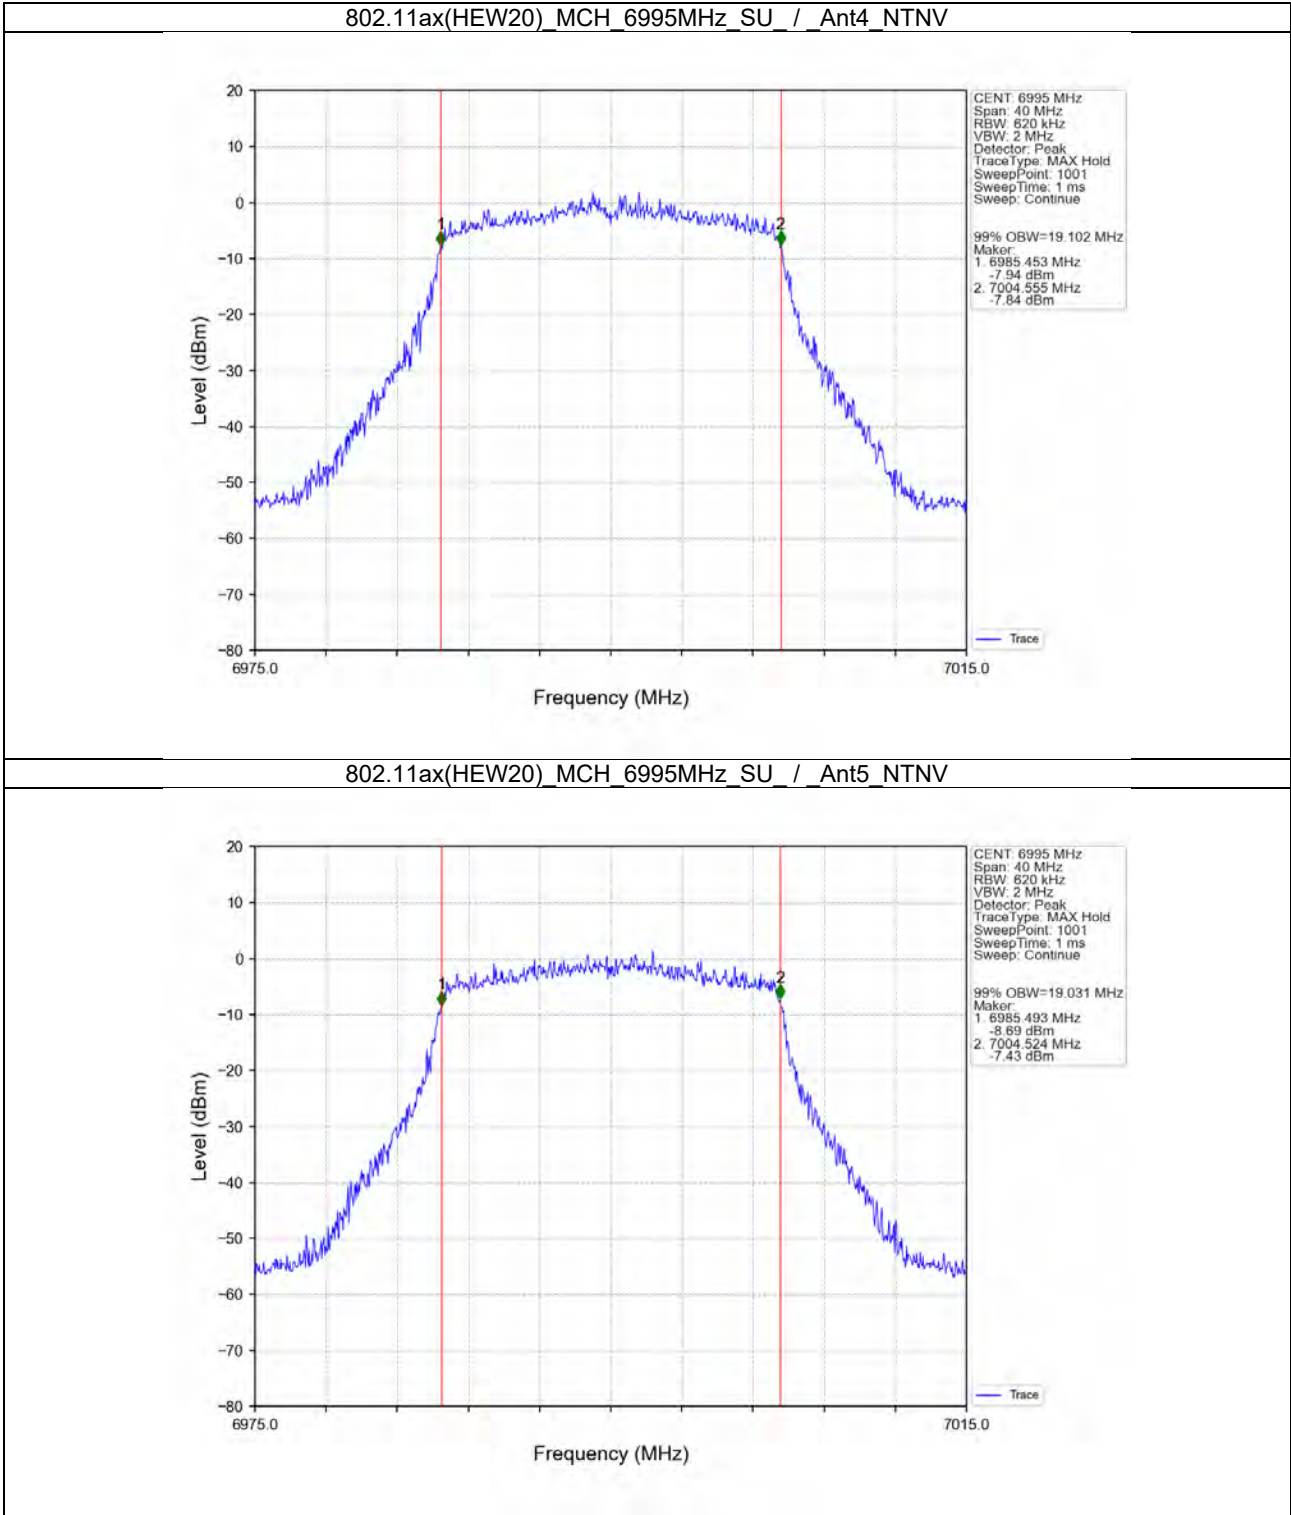



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 123 of 708

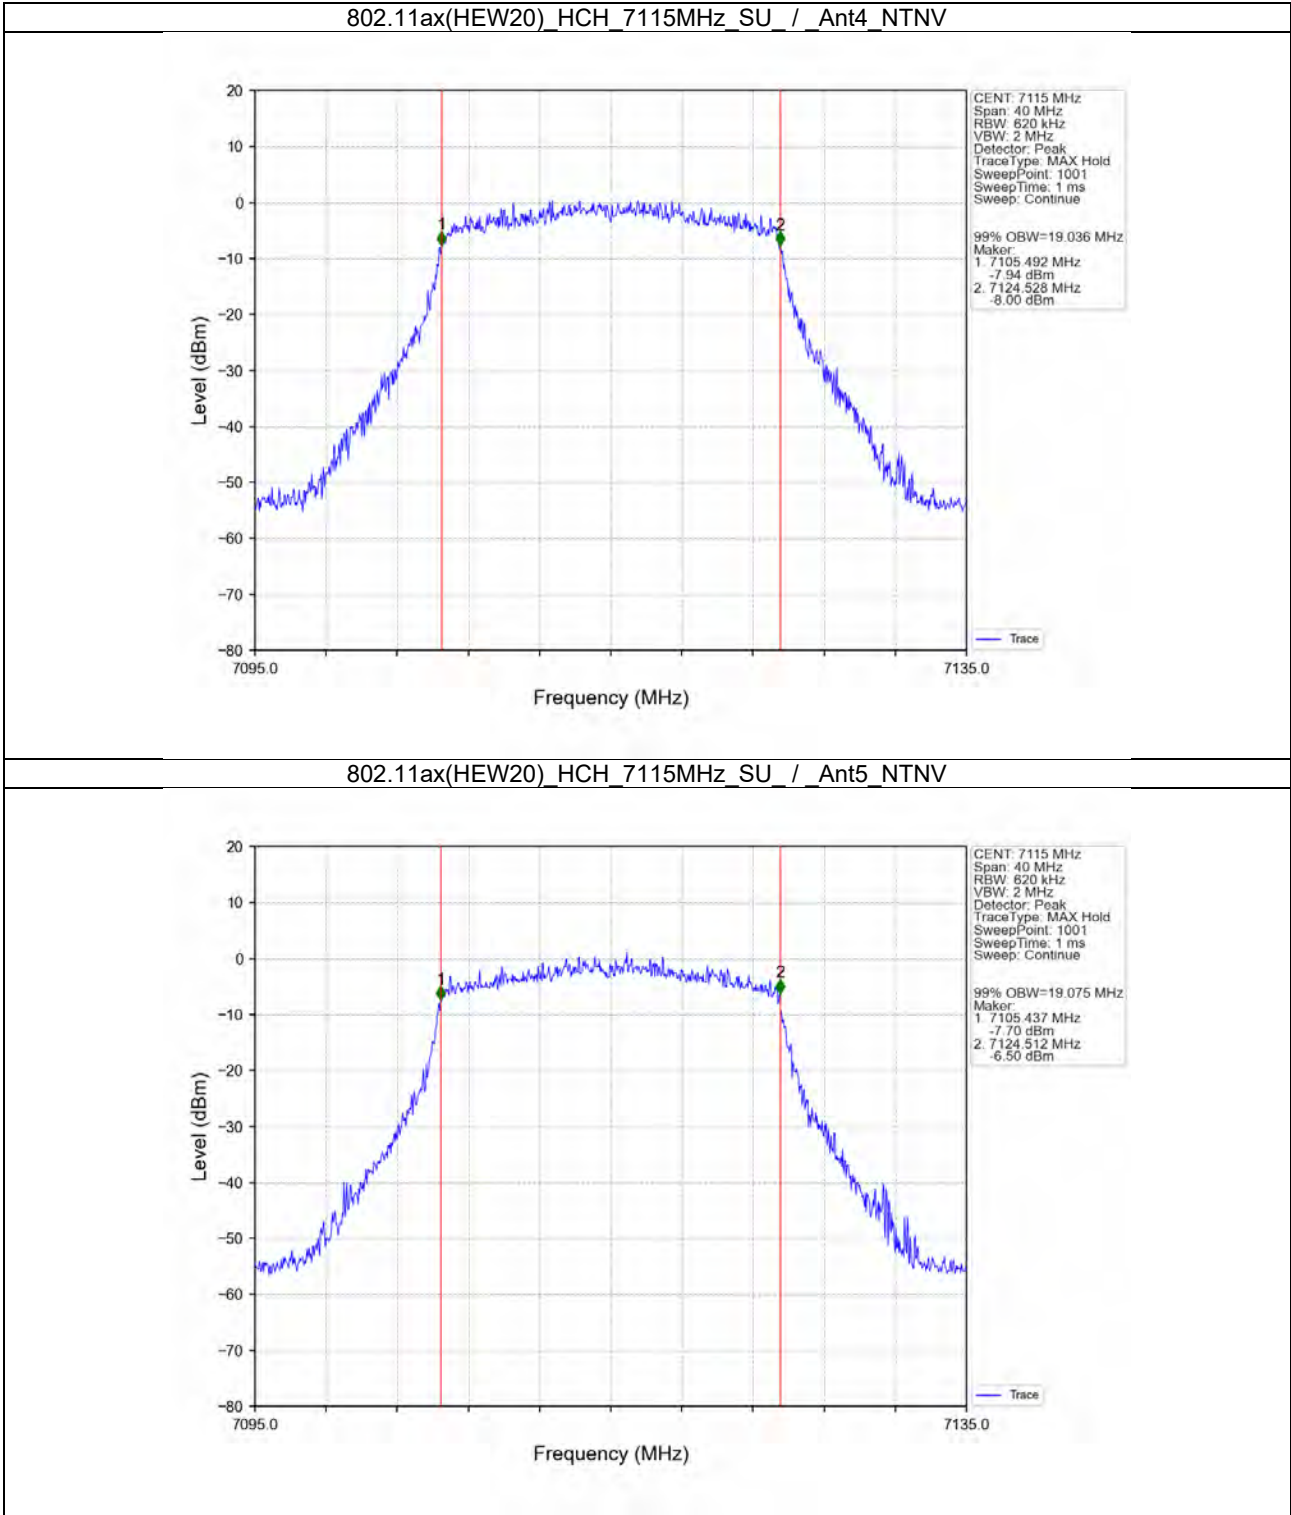



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 124 of 708

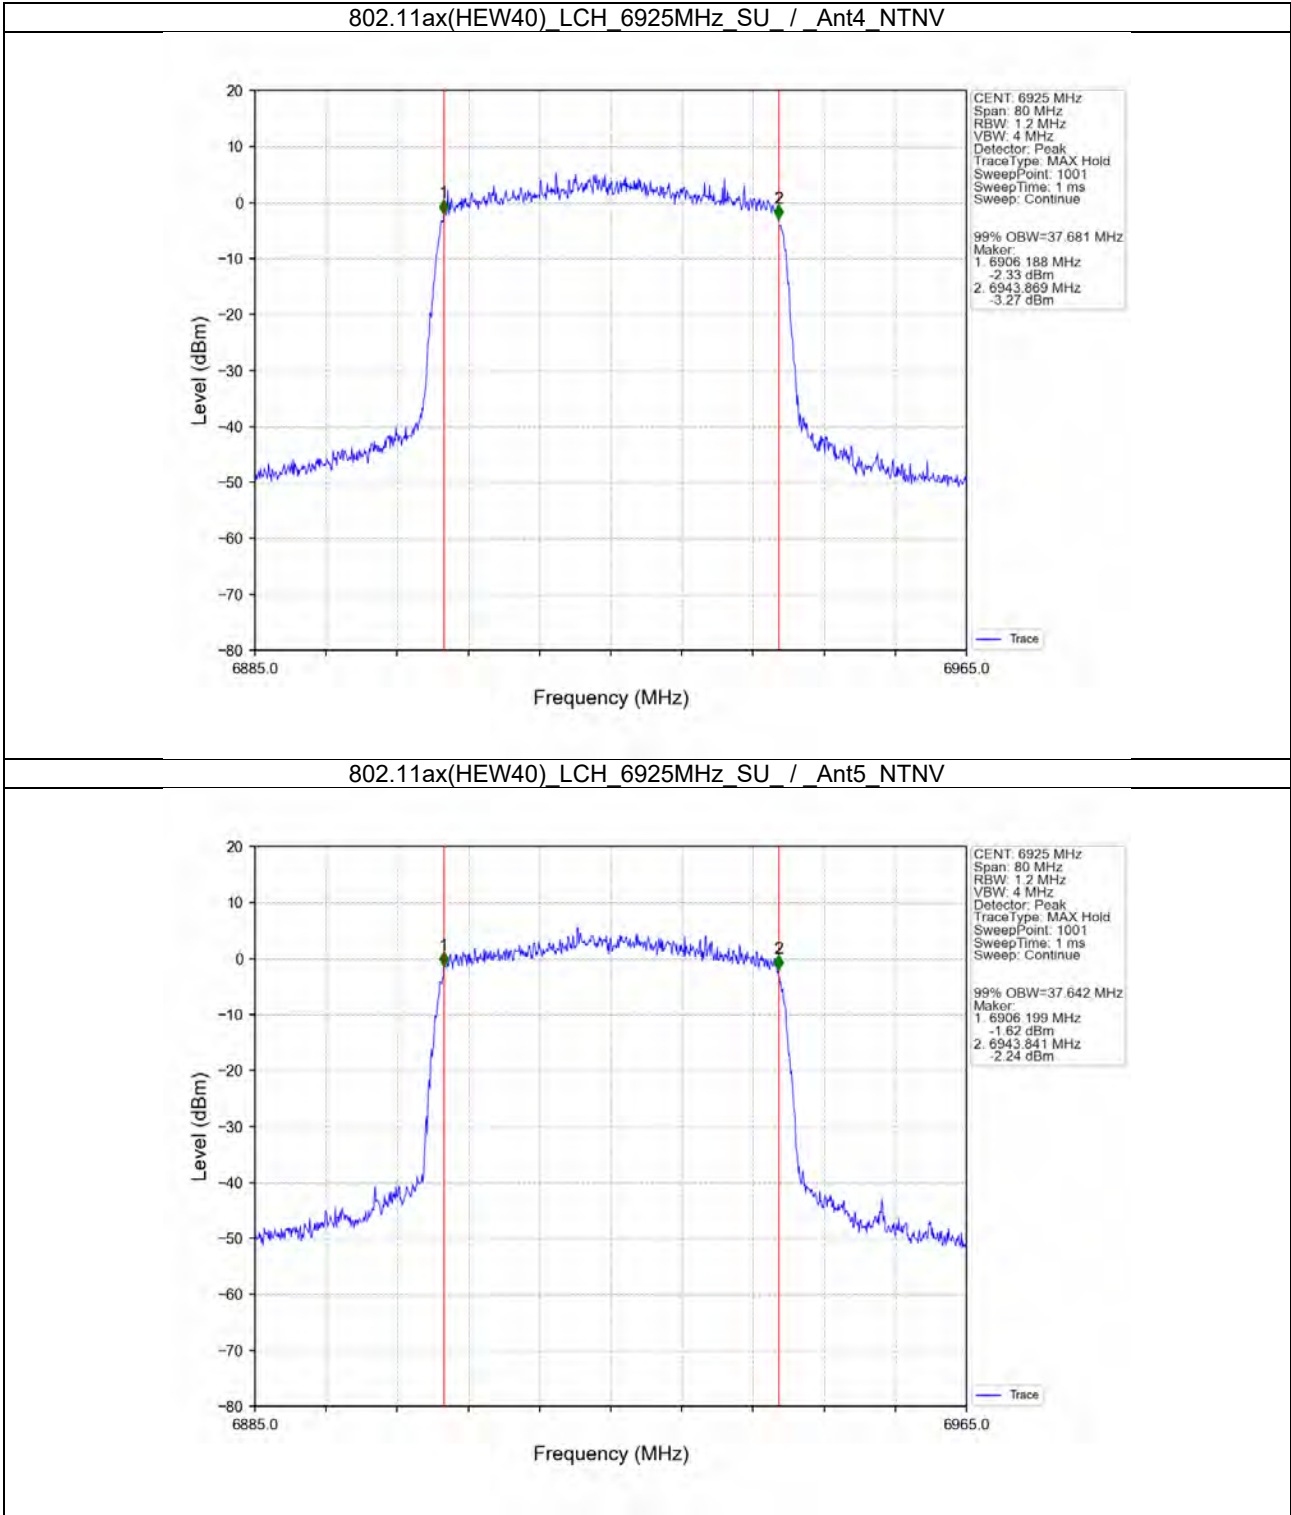



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 125 of 708

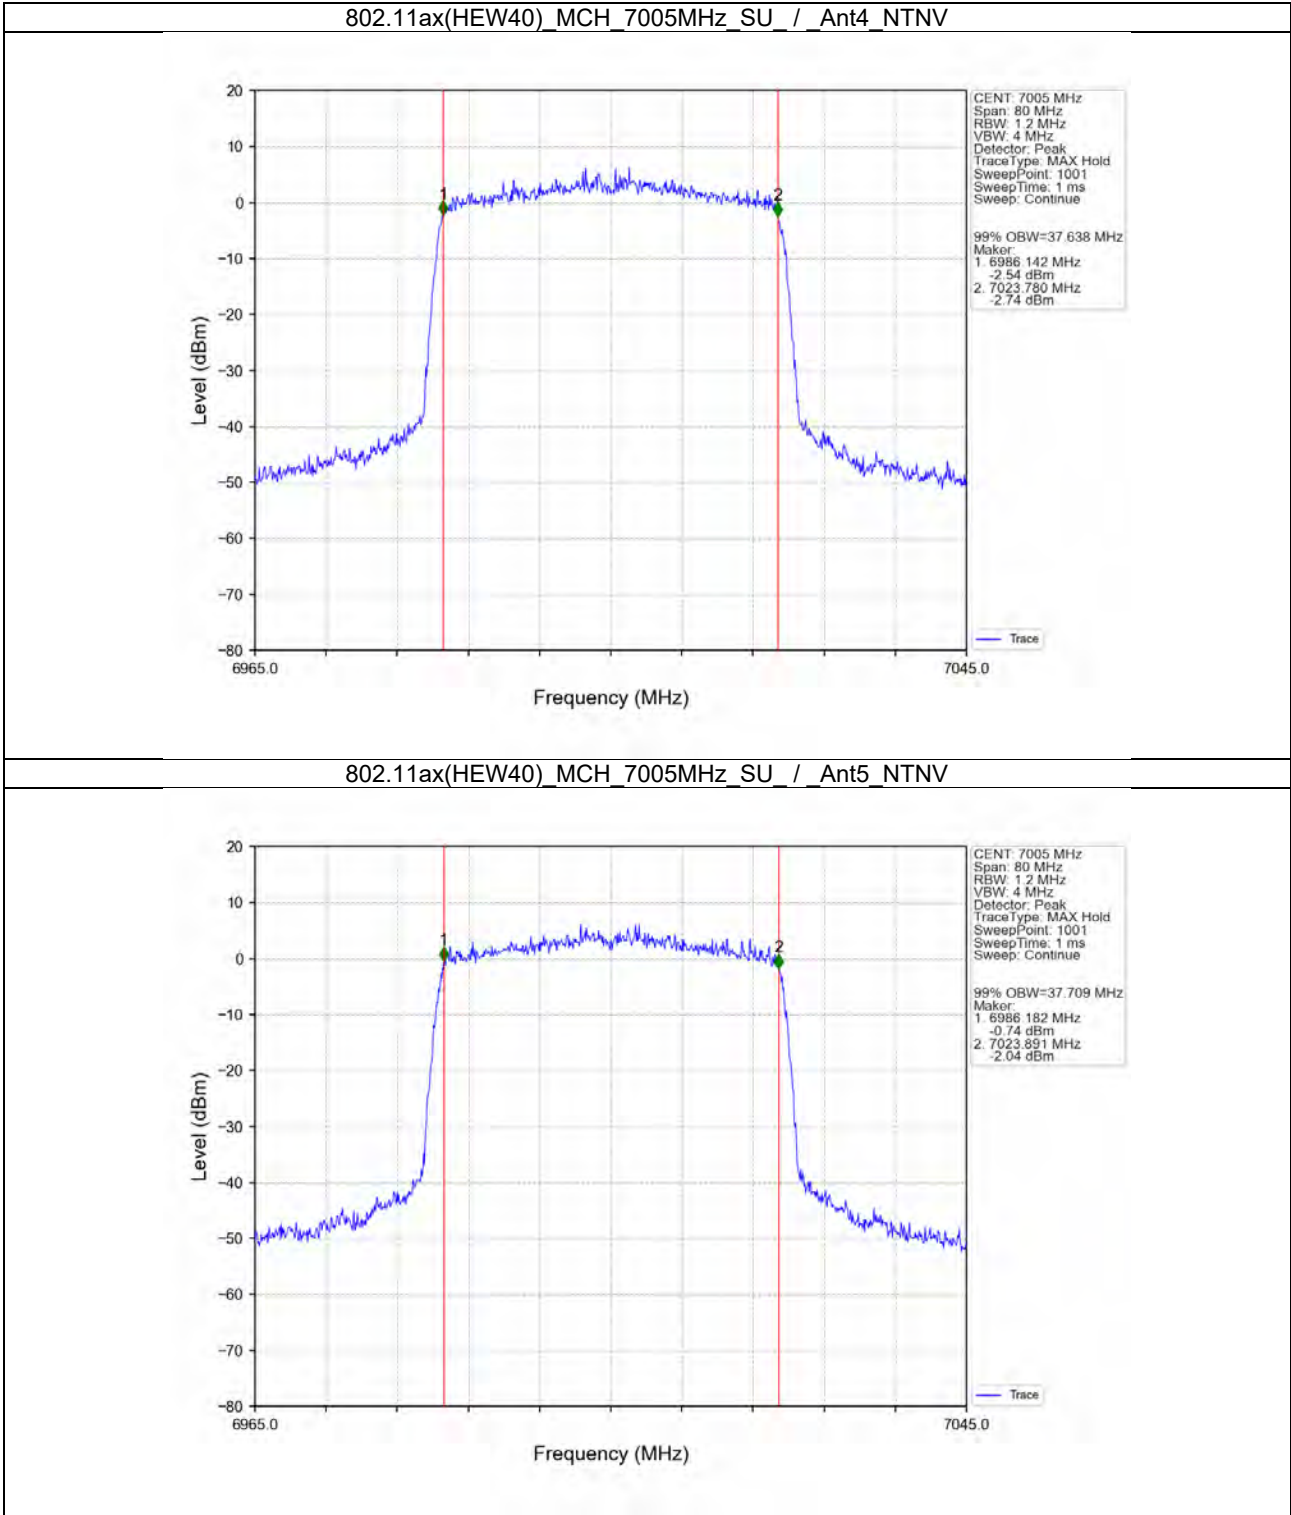





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 126 of 708

802.11ax(HEW40)_HCH_7085MHz_SU_ / Ant4_NTNV

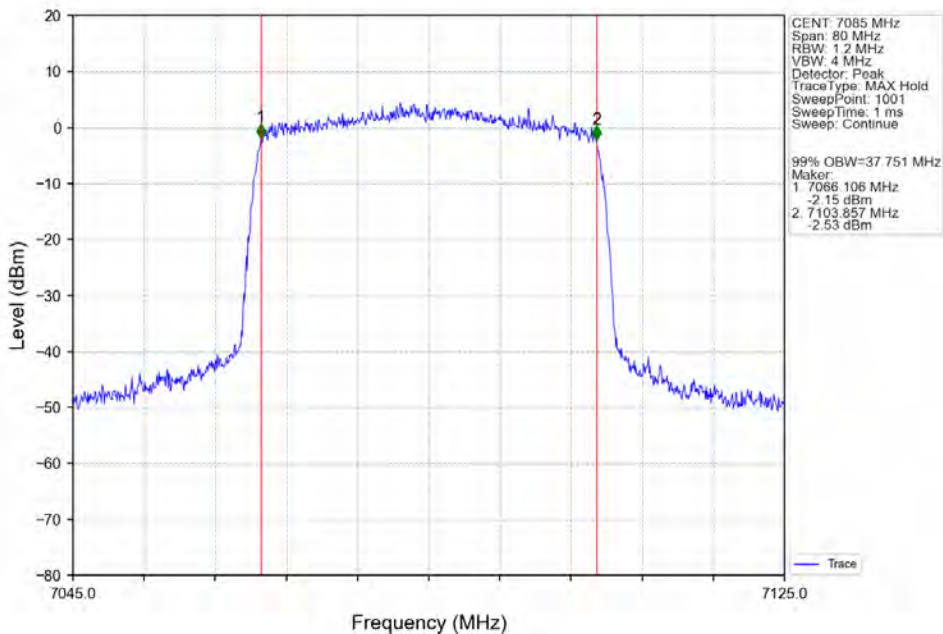

802.11ax(HEW40)_HCH_7085MHz_SU_ / Ant5_NTNV

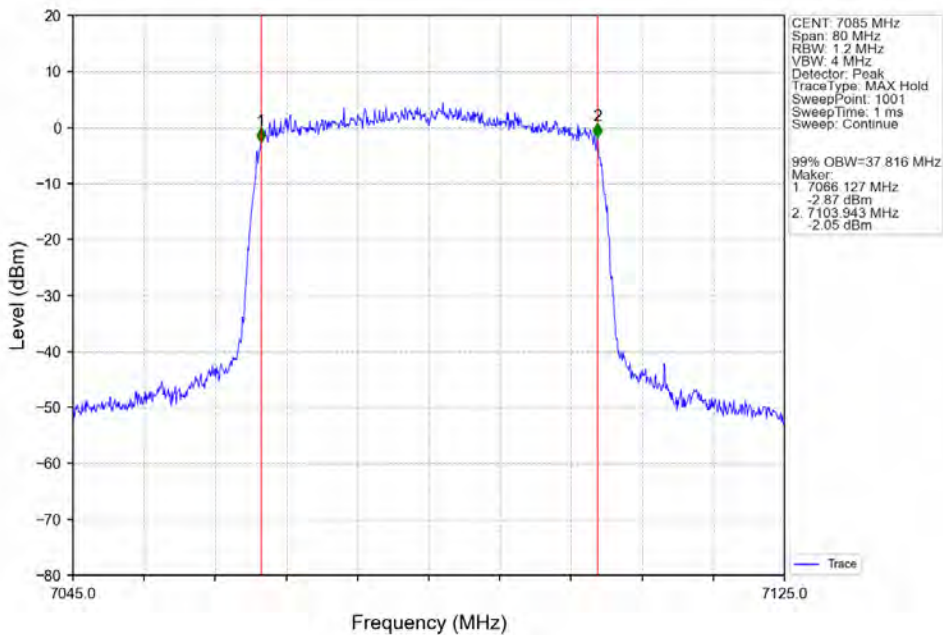





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 127 of 708

802.11ax(HEW80)_LCH_6945MHz_SU_ / _Ant4_NTNV

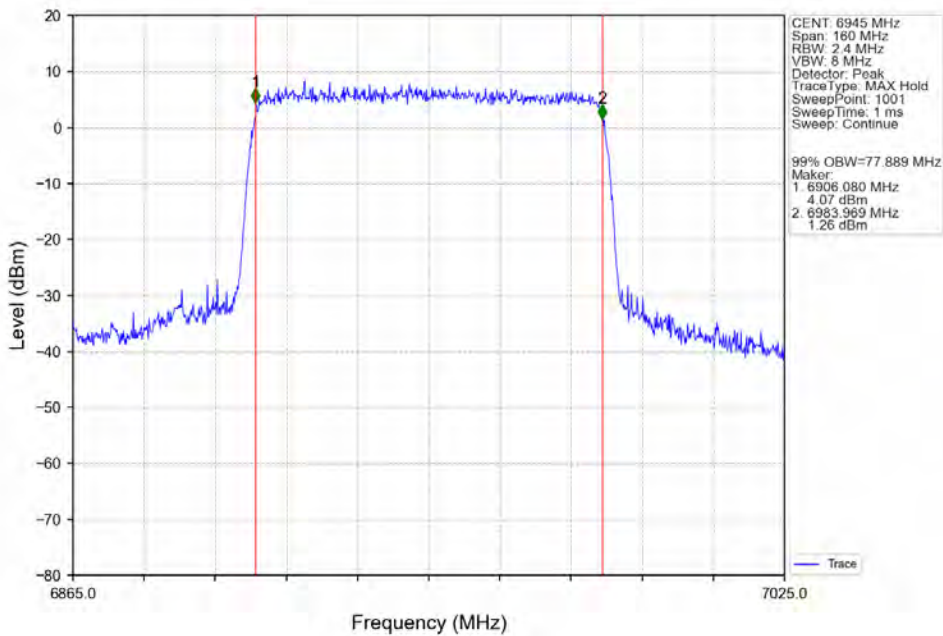


802.11ax(HEW80)_LCH_6945MHz_SU_ / _Ant5_NTNV

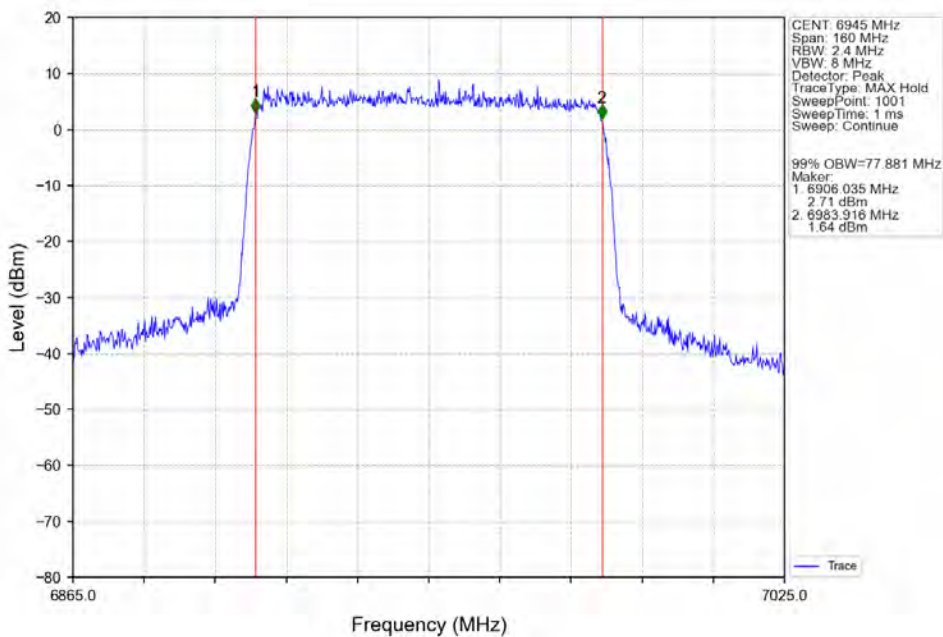



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 128 of 708

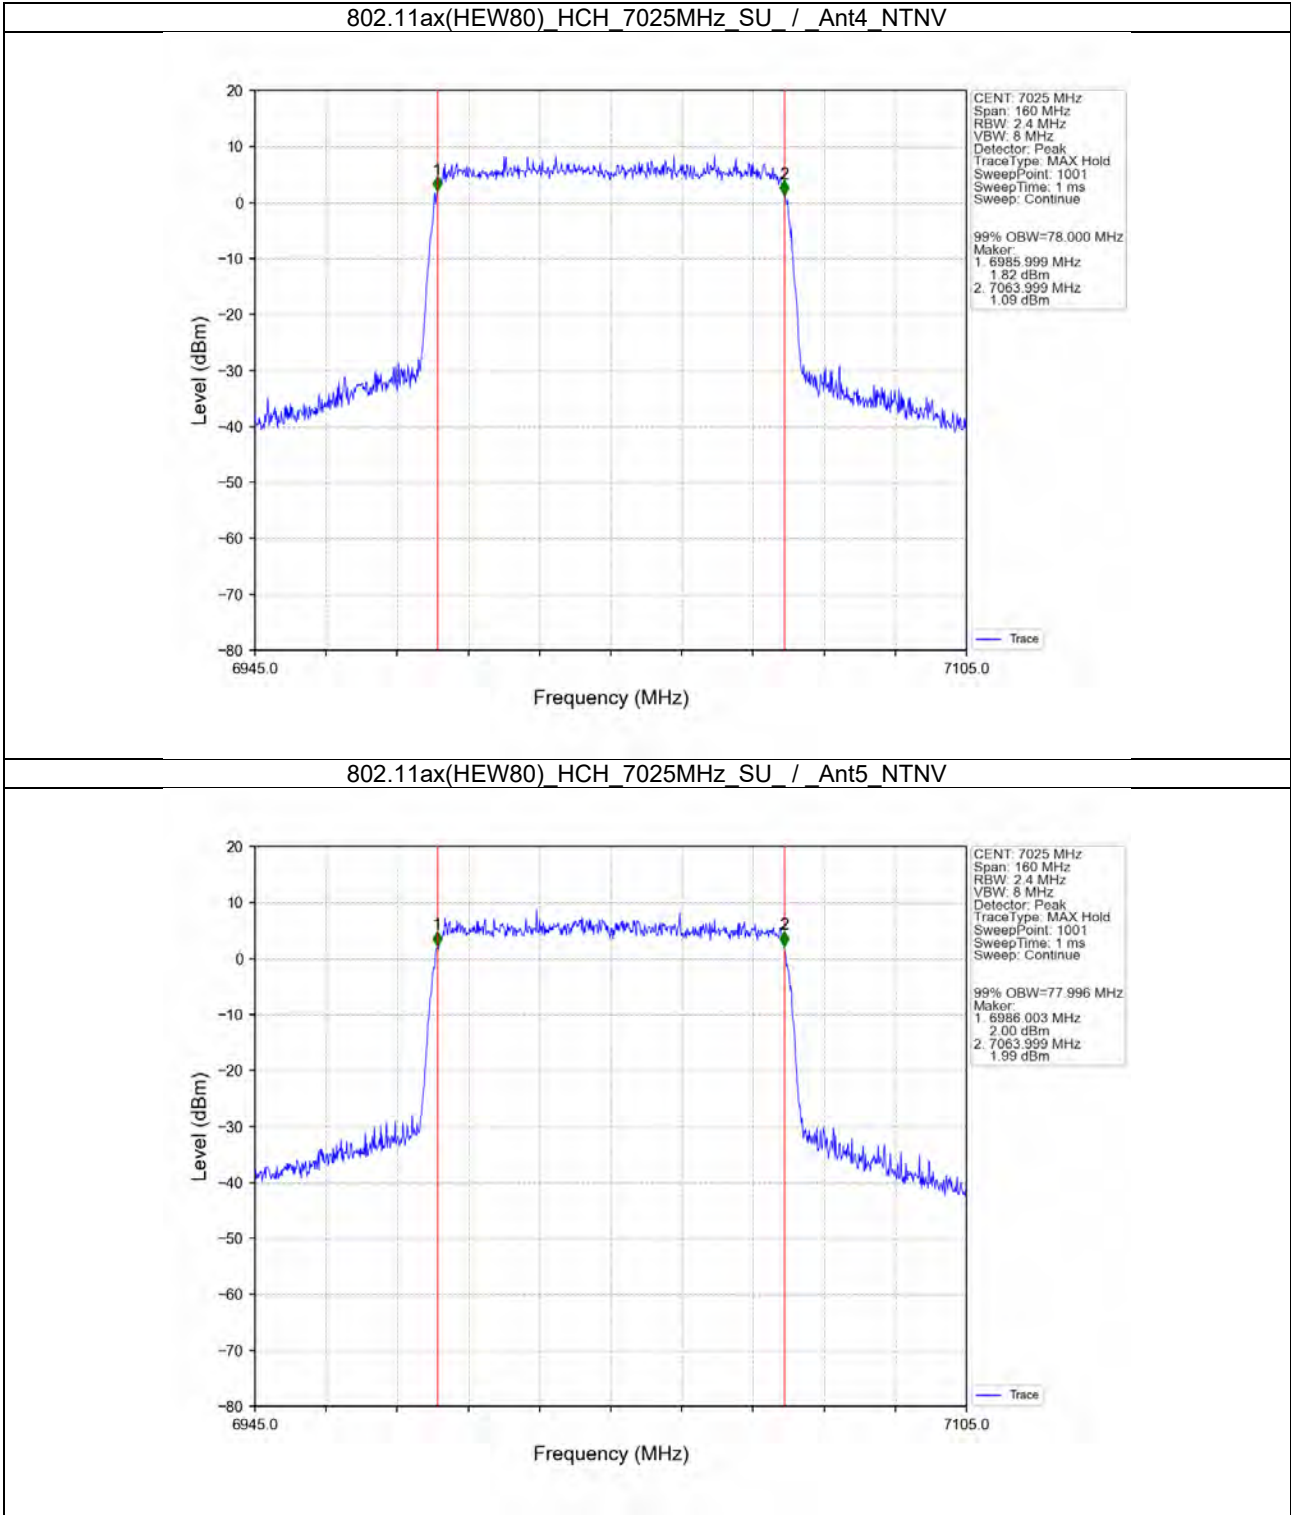



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 129 of 708

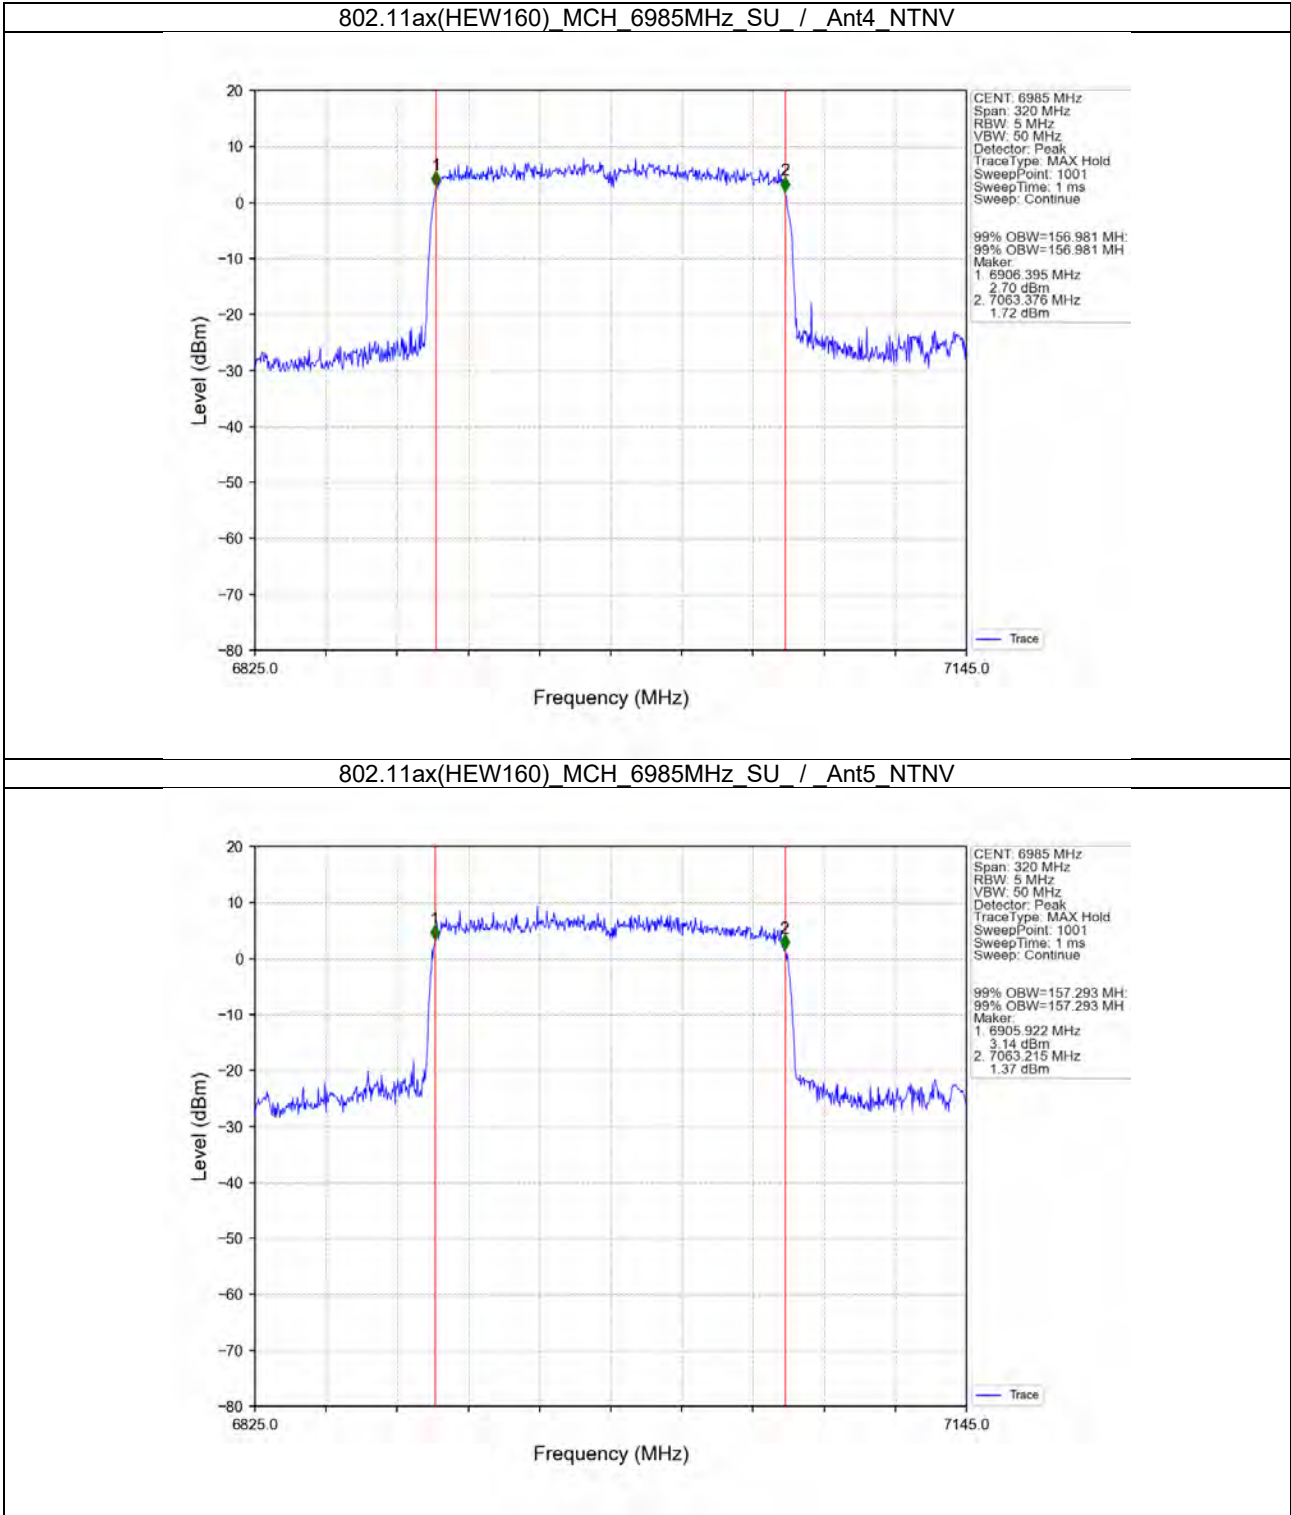




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 130 of 708


2.2.8 26dB BW

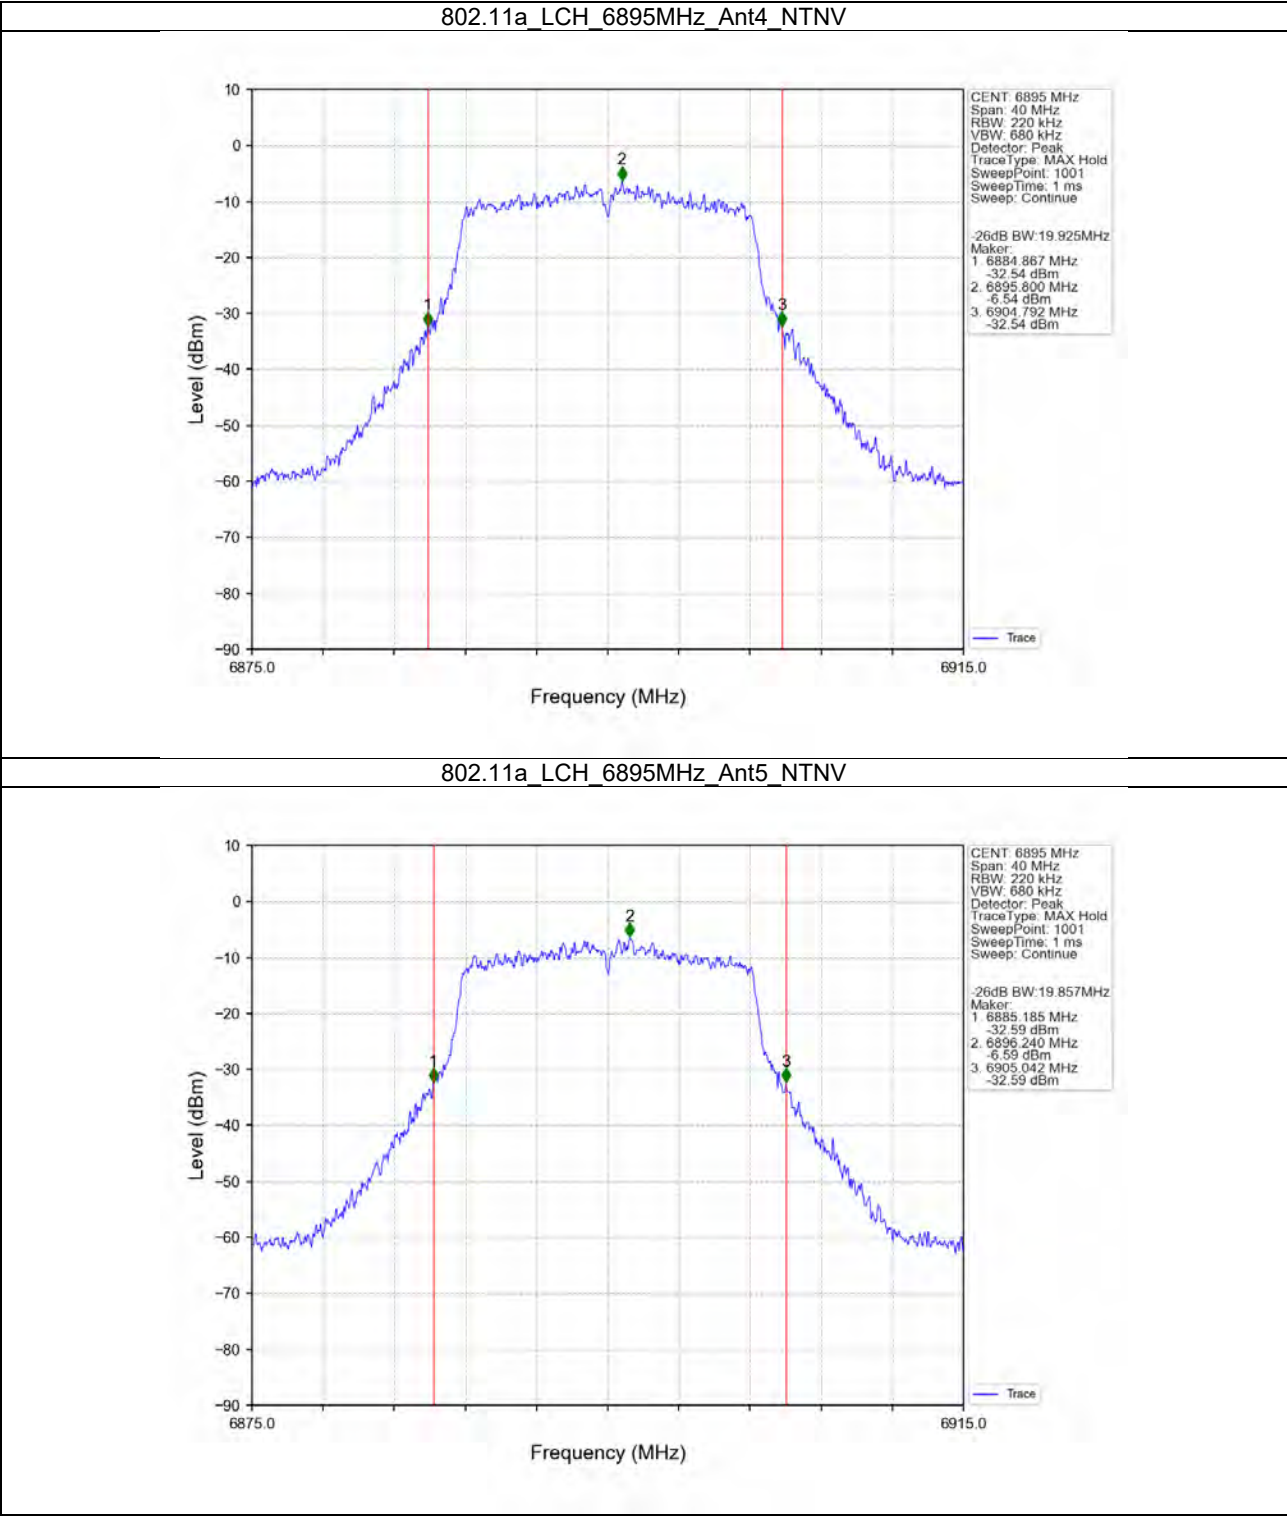



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 131 of 708

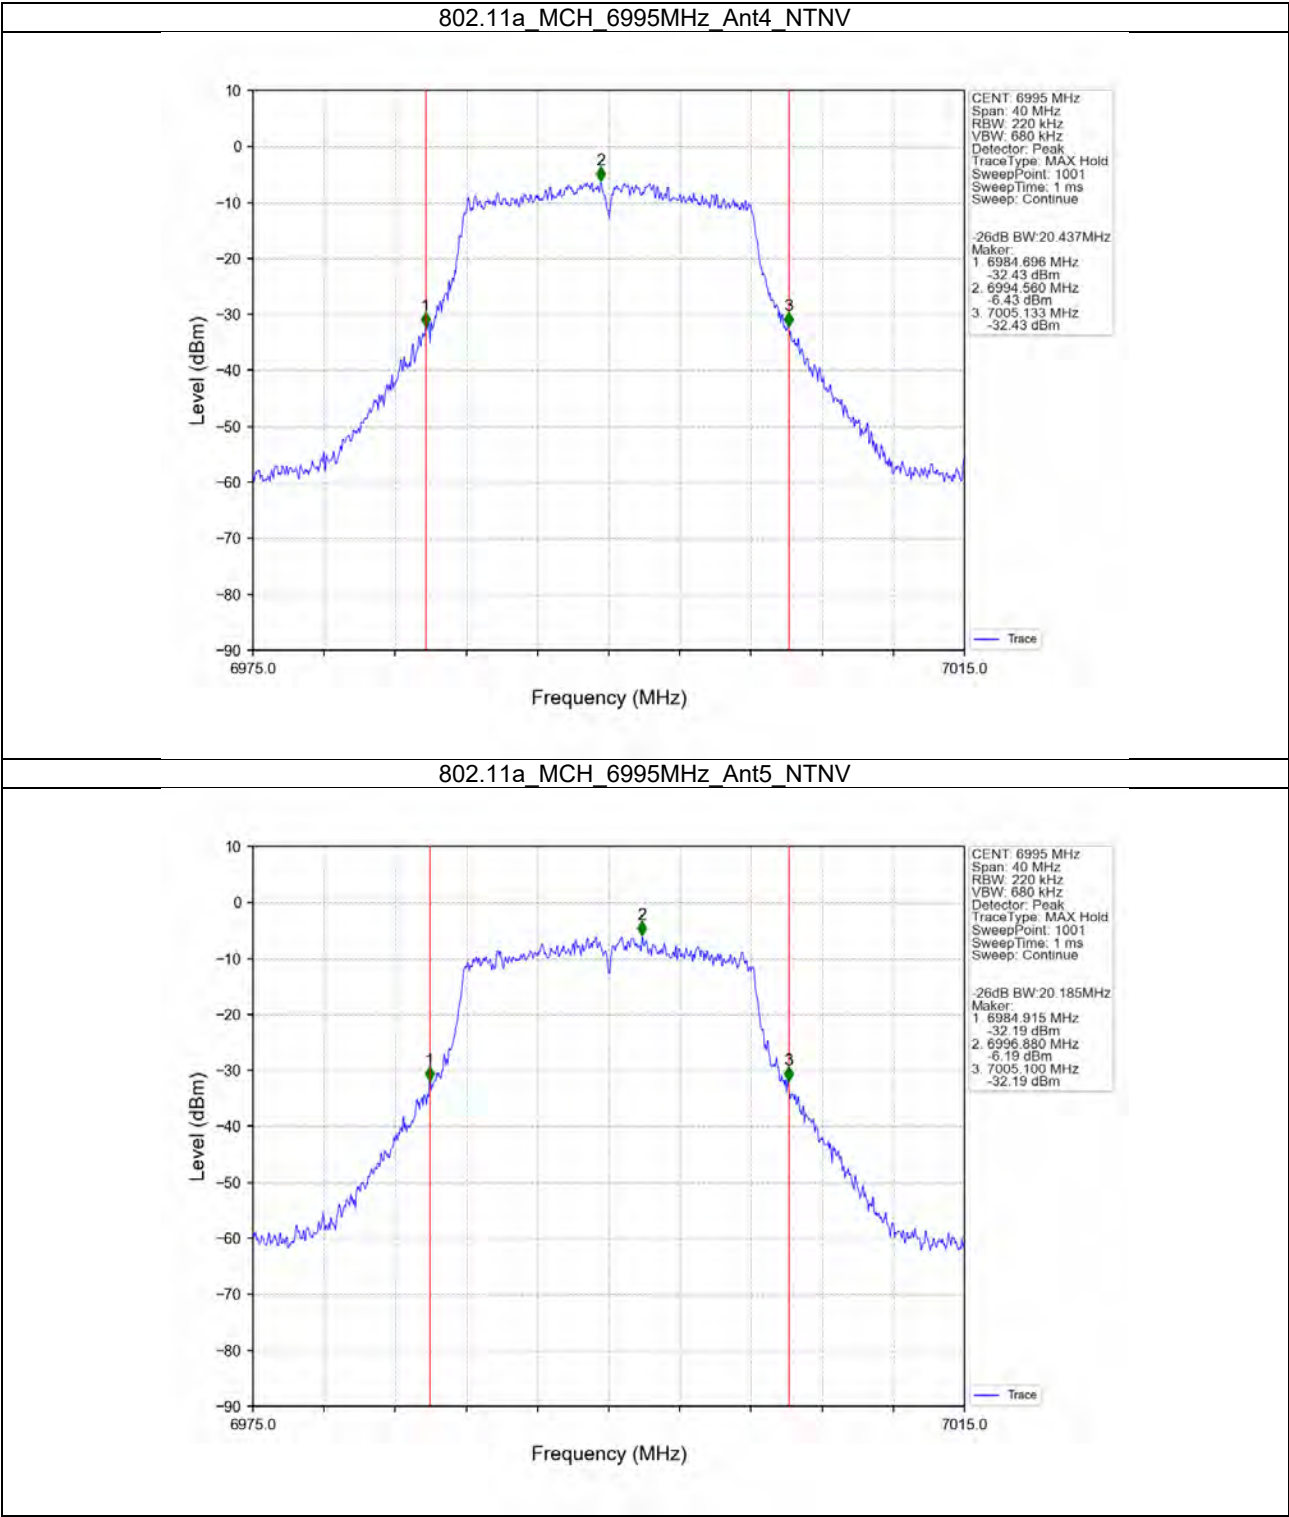



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 132 of 708

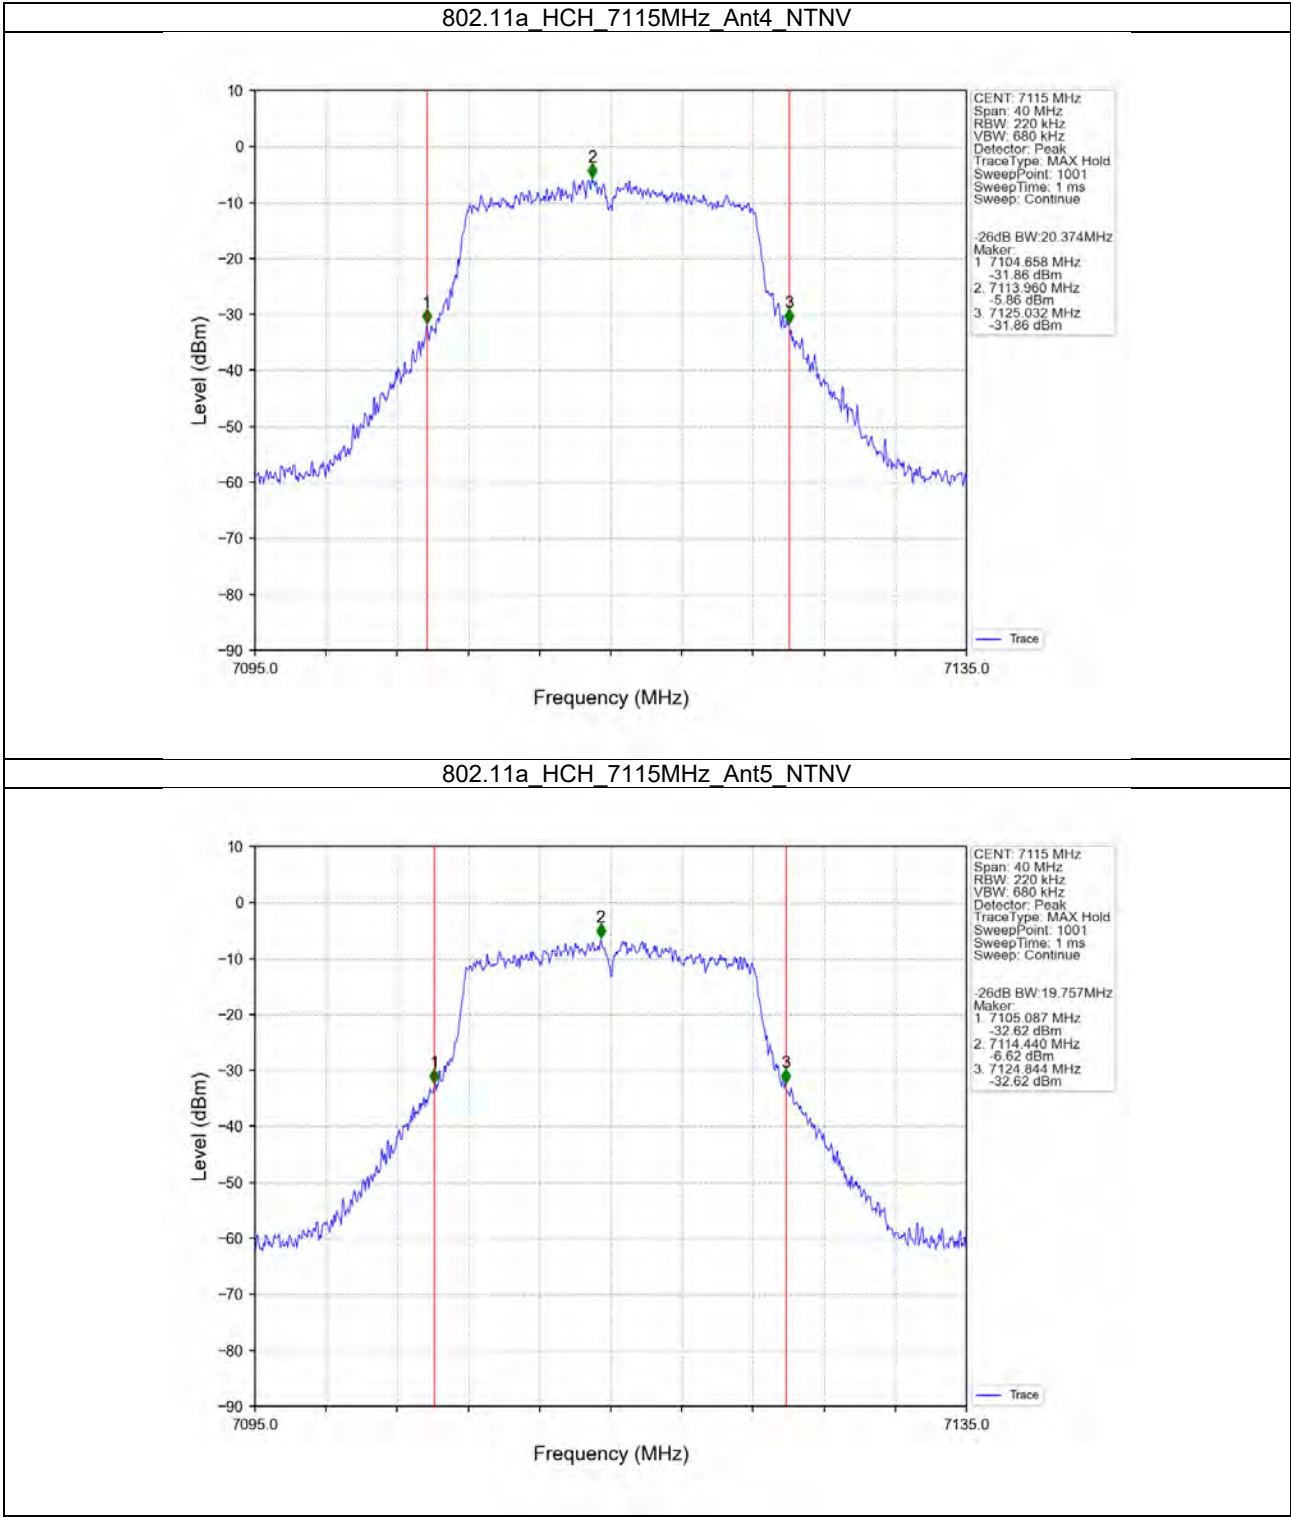




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207


Rev.: 02

Page: 133 of 708

802.11ax(HEW20)_LCH_6895MHz_SU_ / Ant4_NTNV

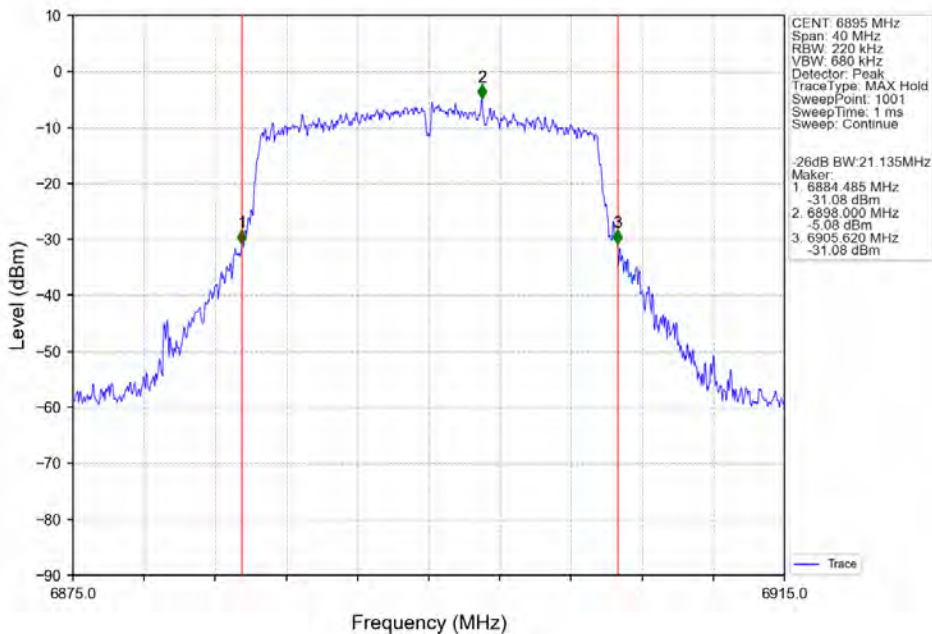


802.11ax(HEW20)_LCH_6895MHz_SU_ / Ant5_NTNV

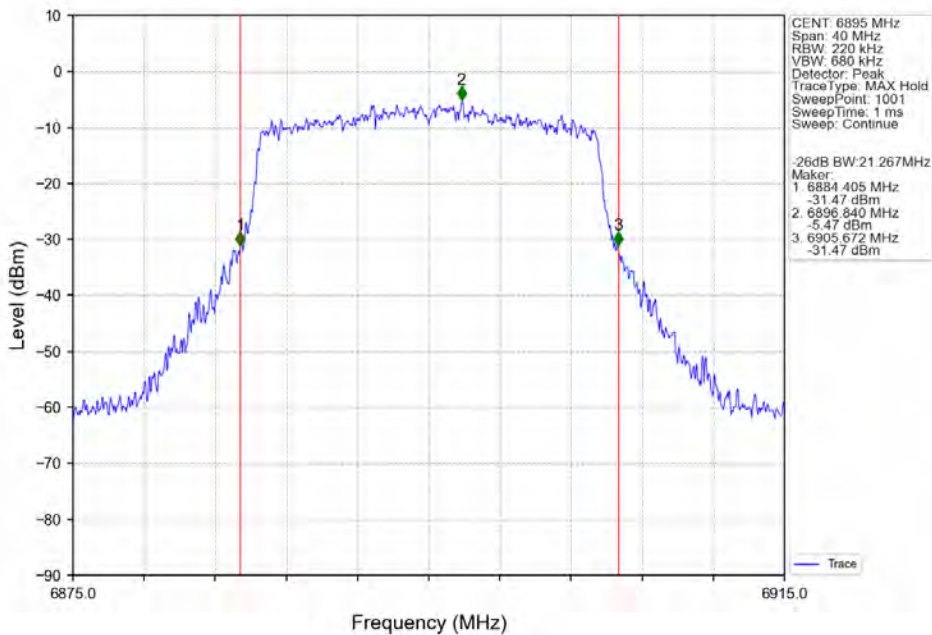



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 134 of 708

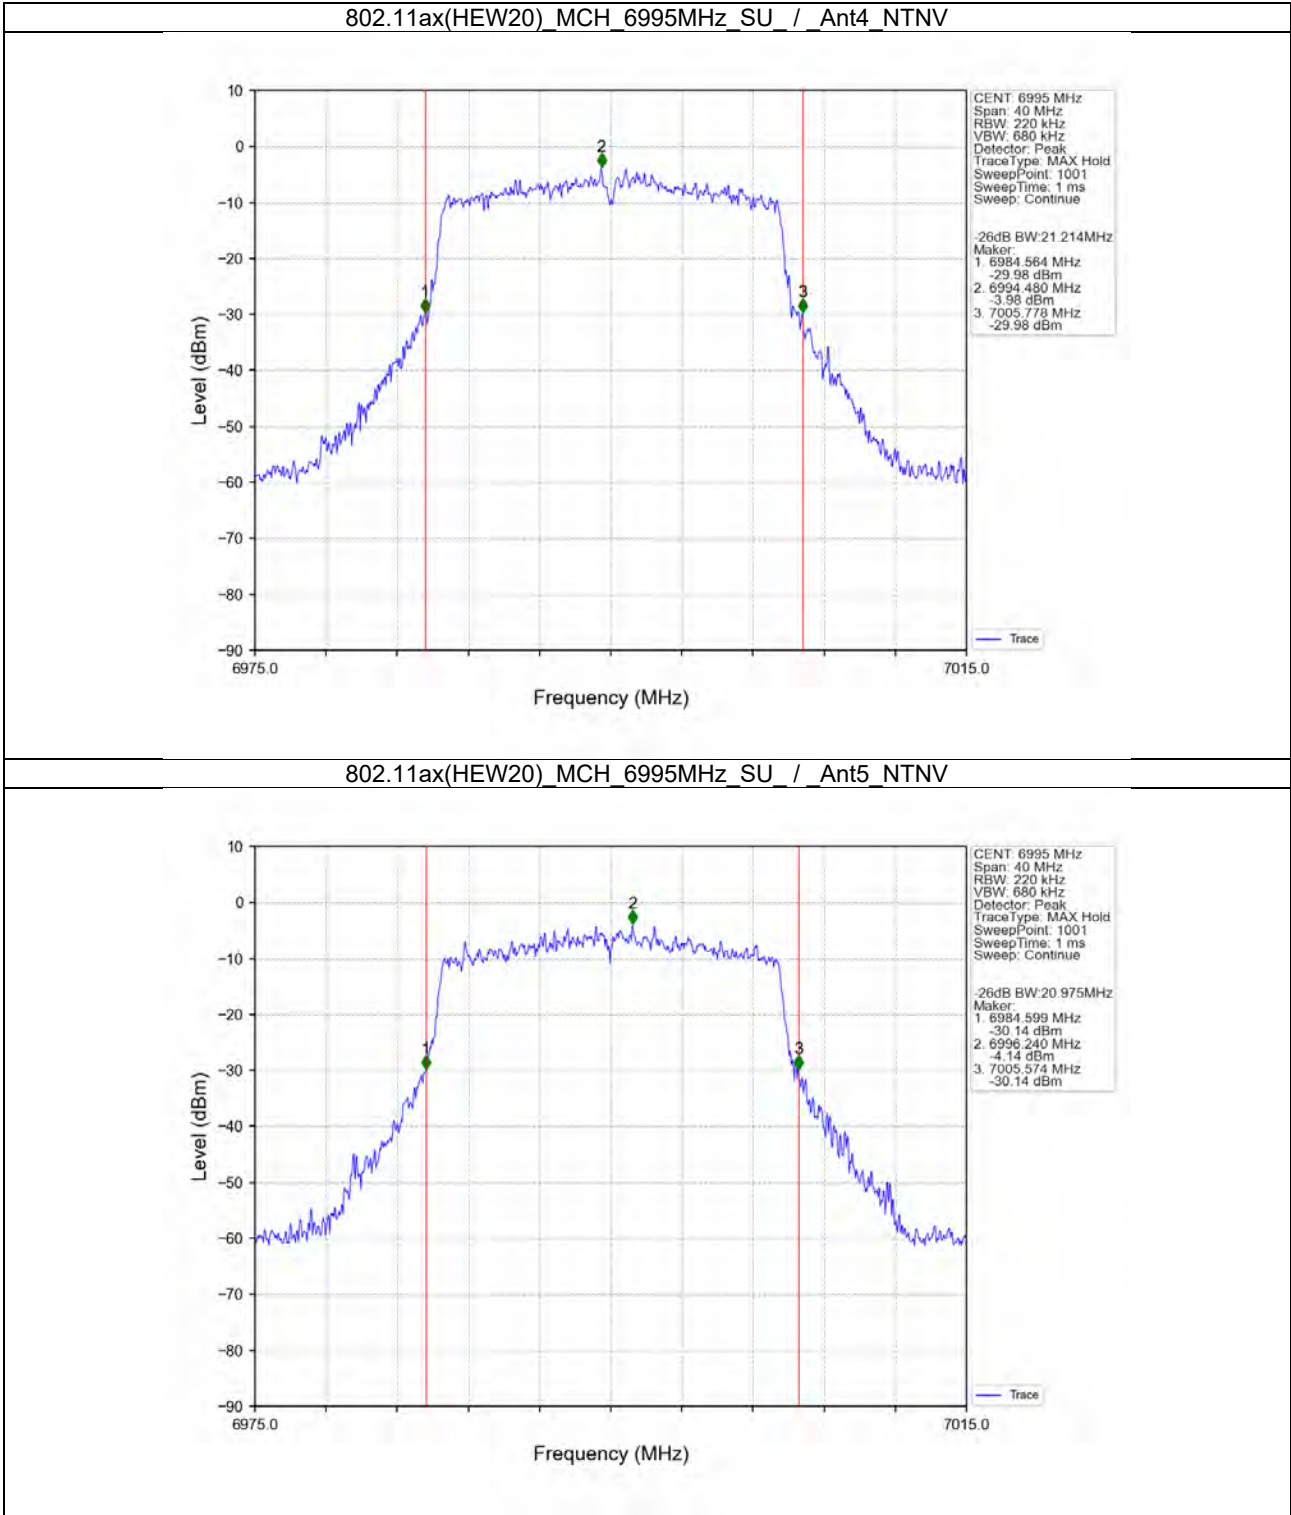





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 135 of 708

802.11ax(HEW20)_HCH_7115MHz_SU_ / Ant4_NTNV

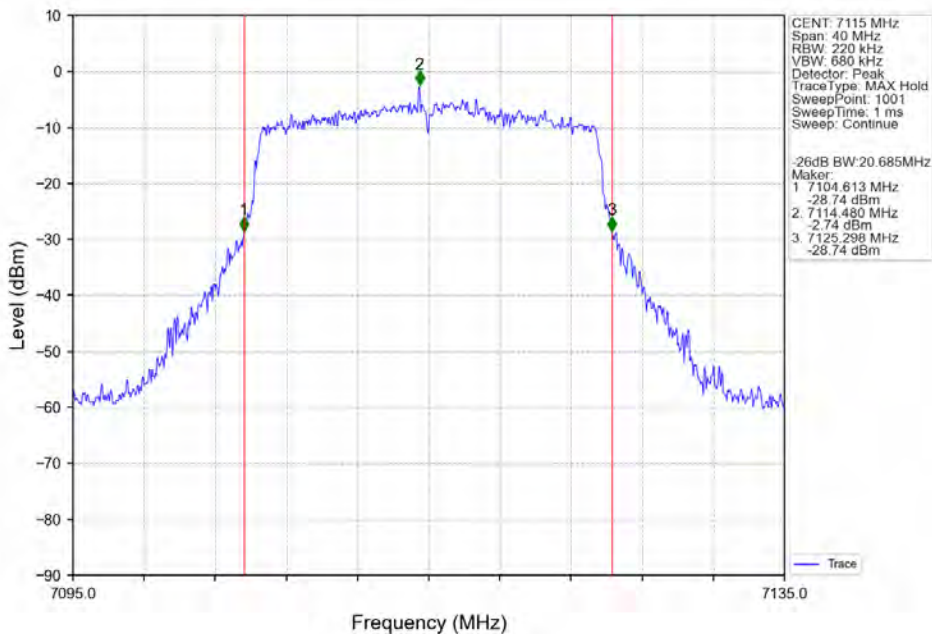


802.11ax(HEW20)_HCH_7115MHz_SU_ / Ant5_NTNV

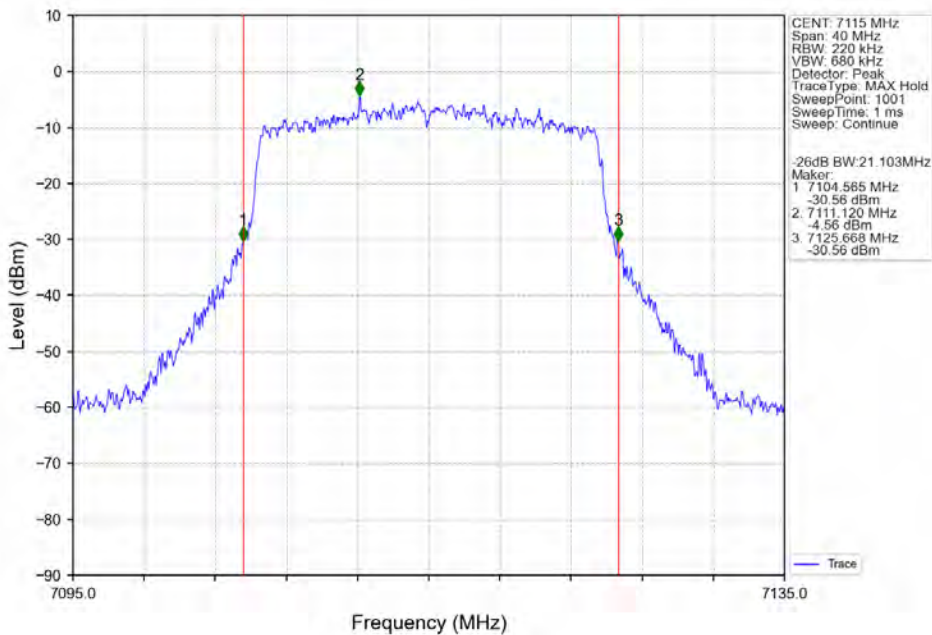



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 136 of 708

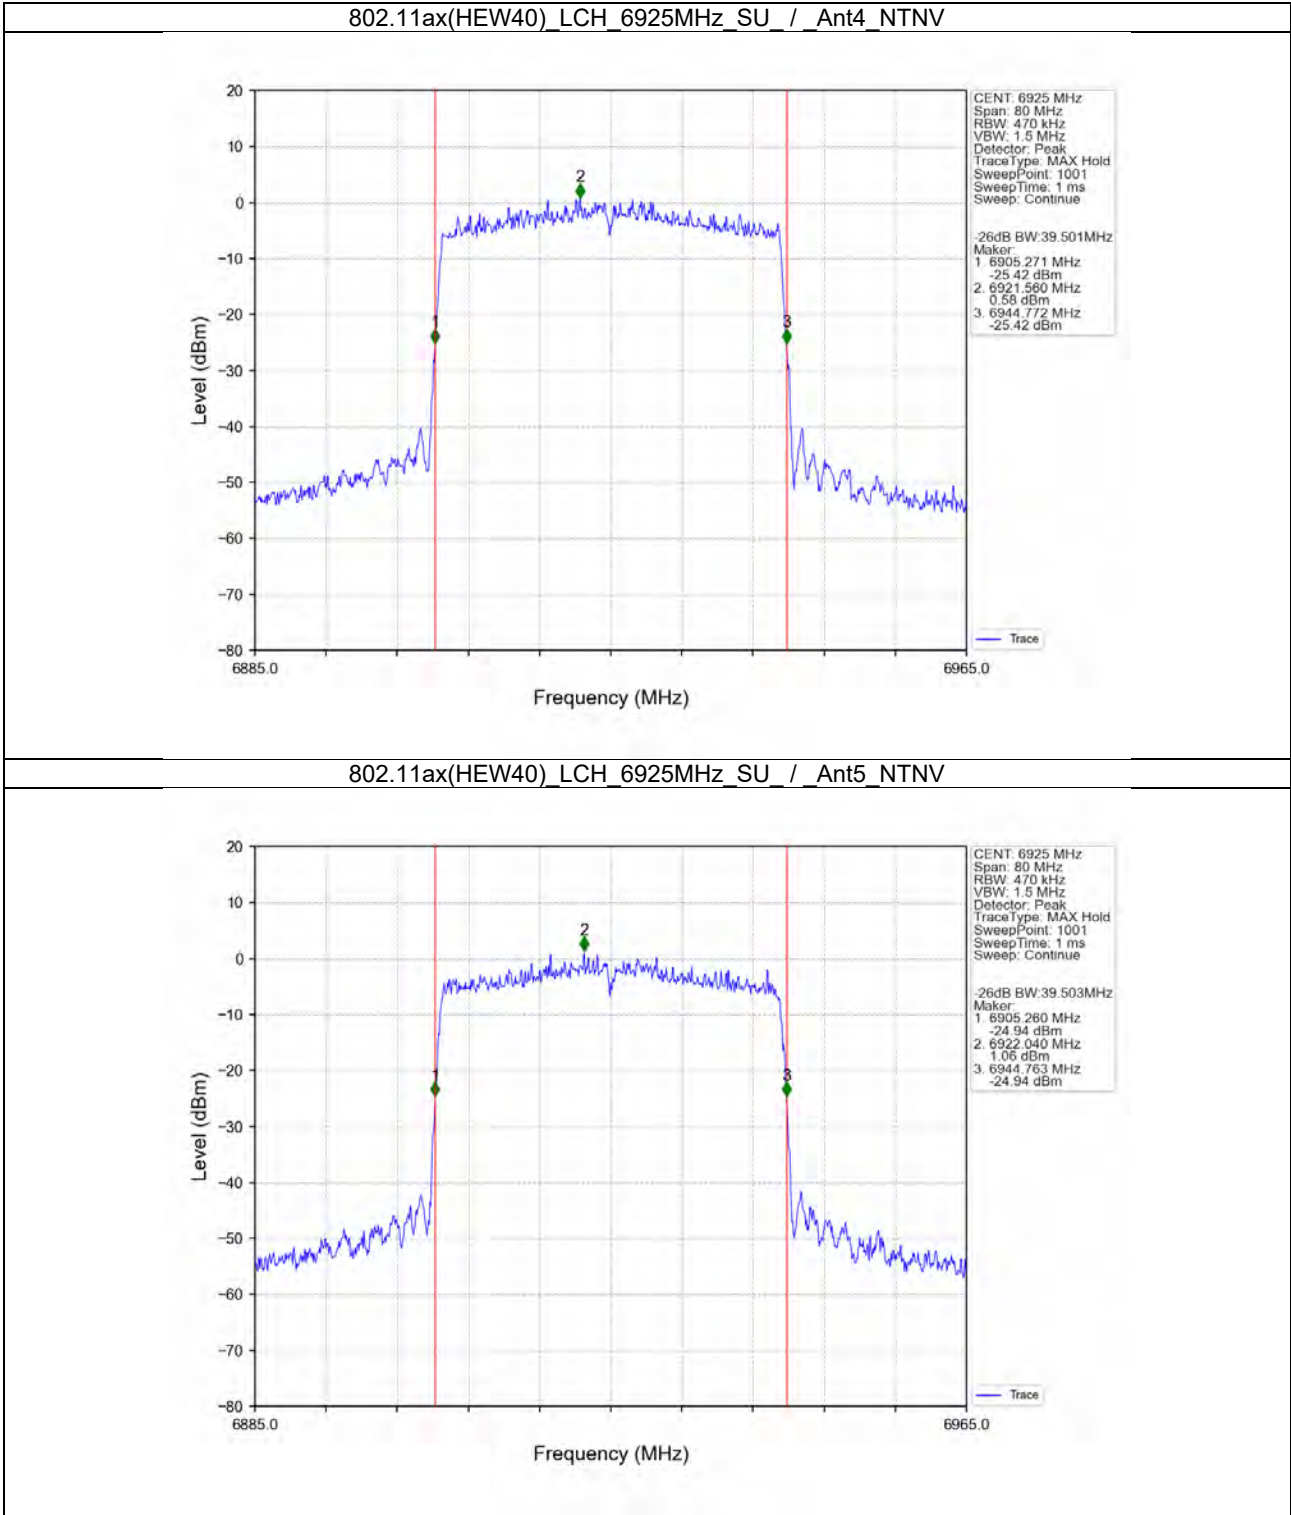



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 137 of 708

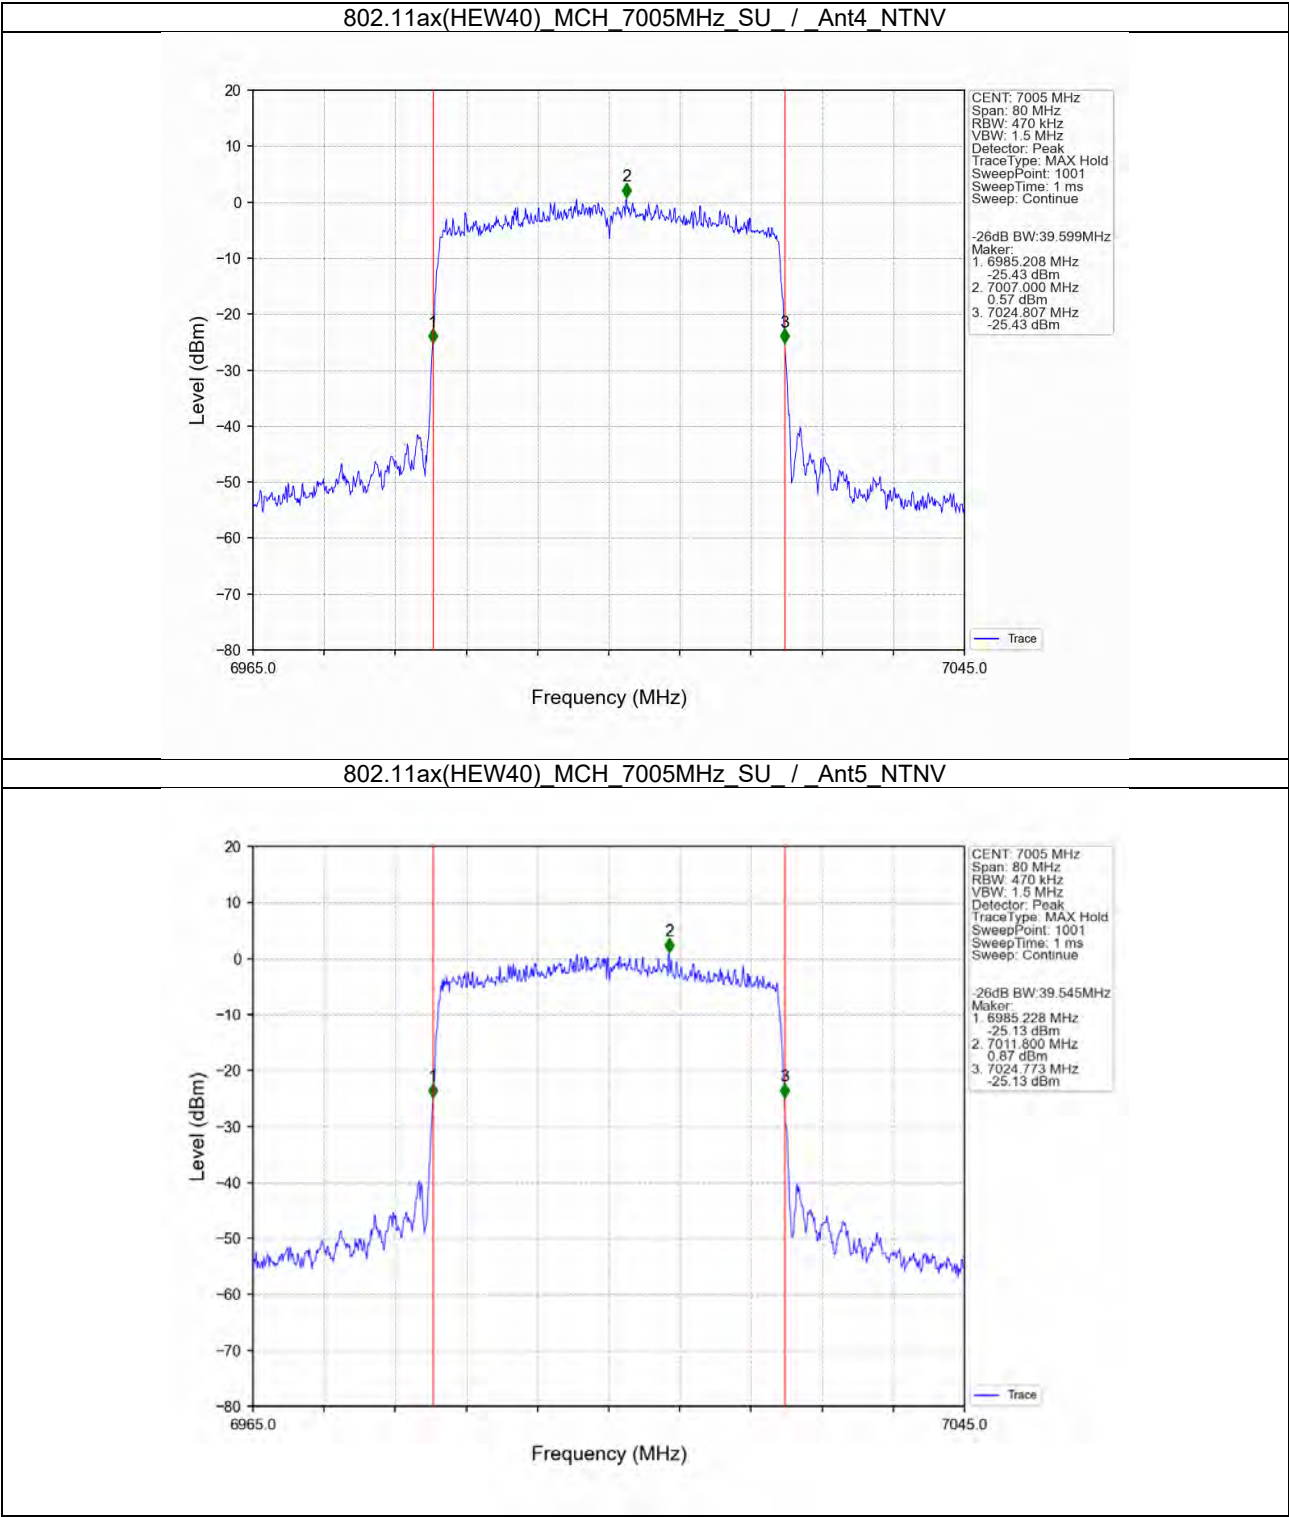



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 138 of 708

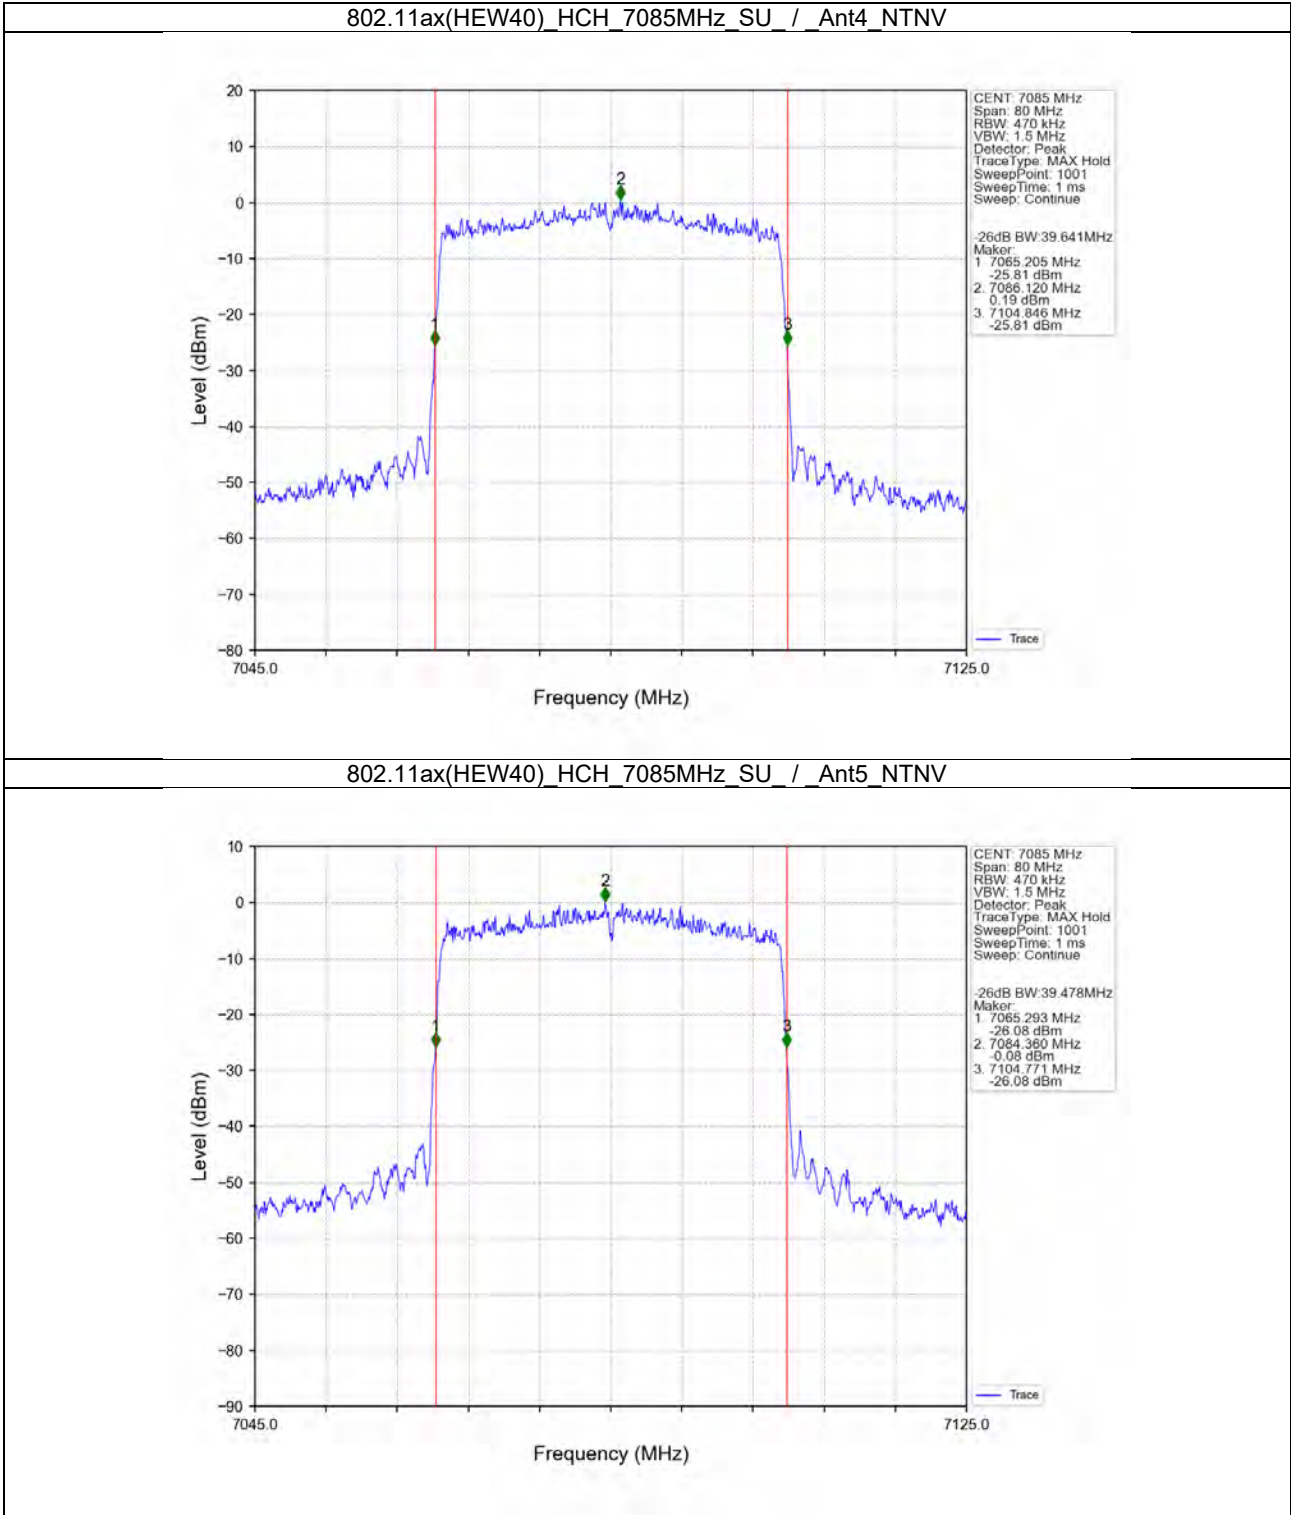



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 139 of 708

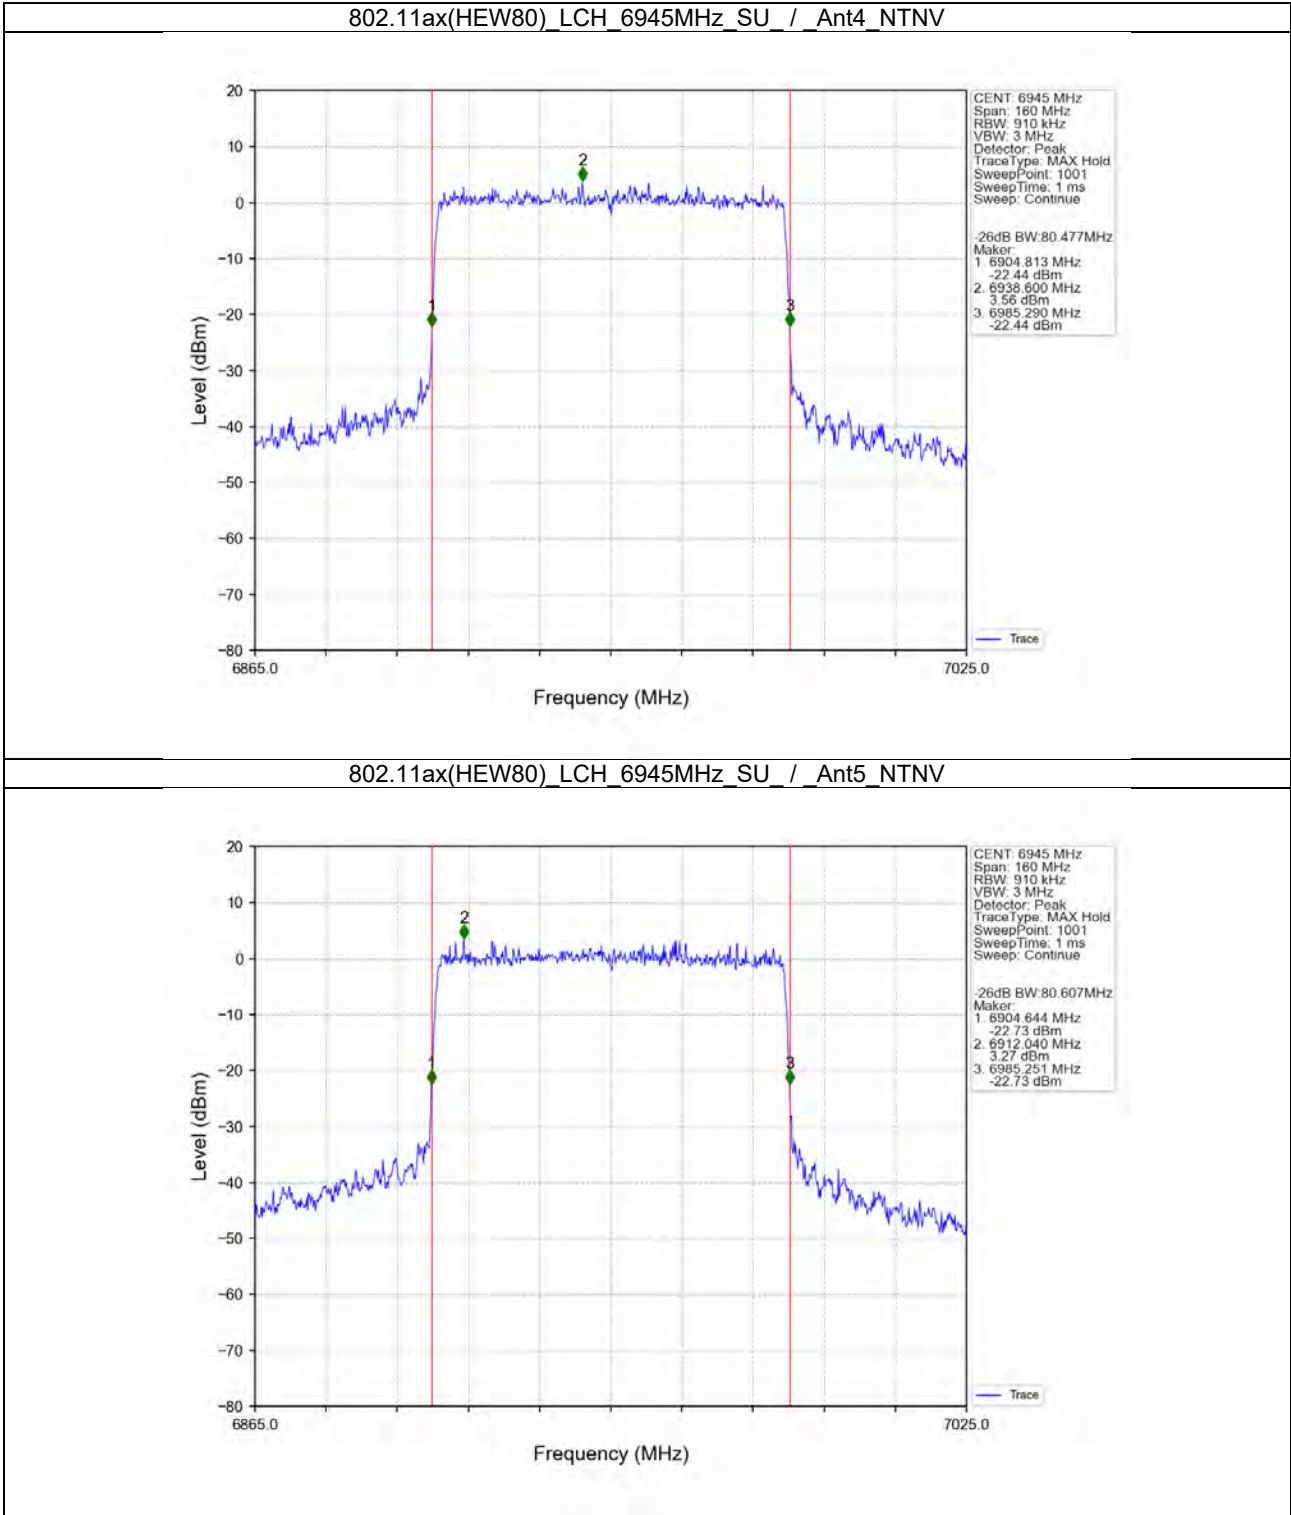



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 140 of 708

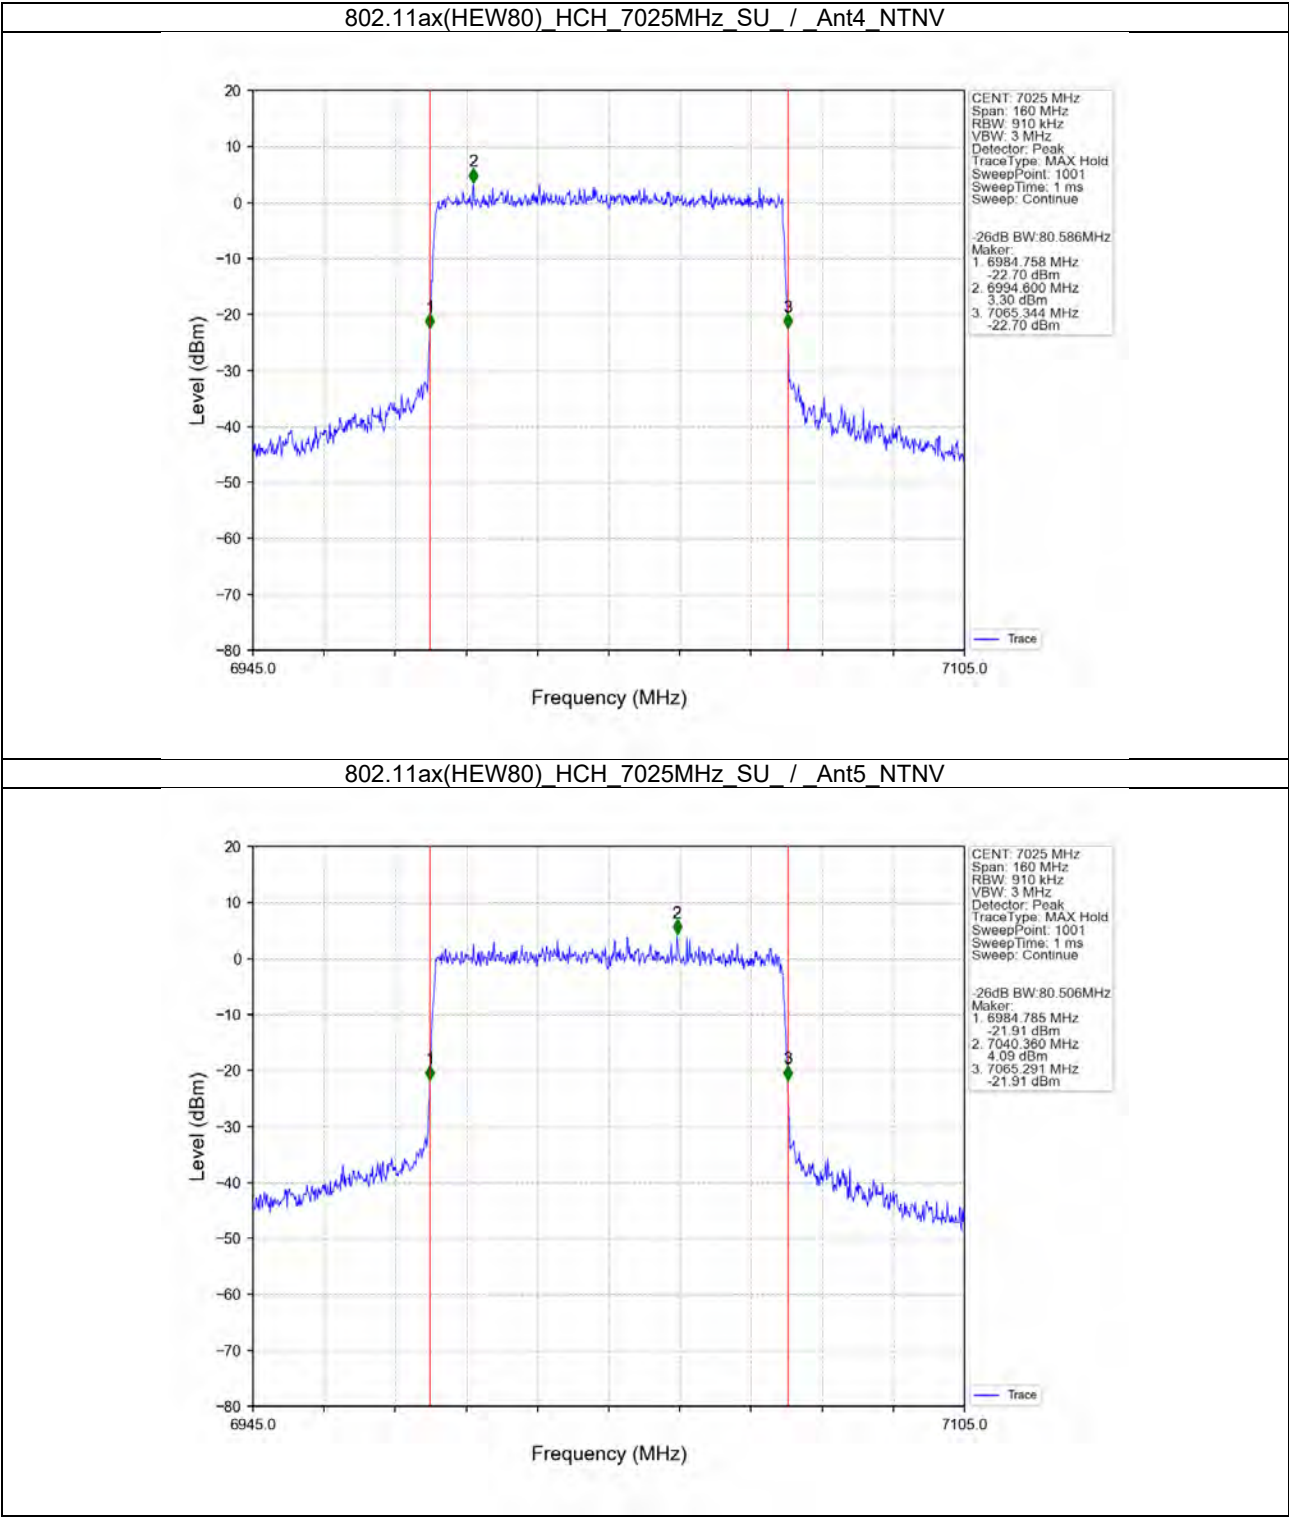



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 141 of 708

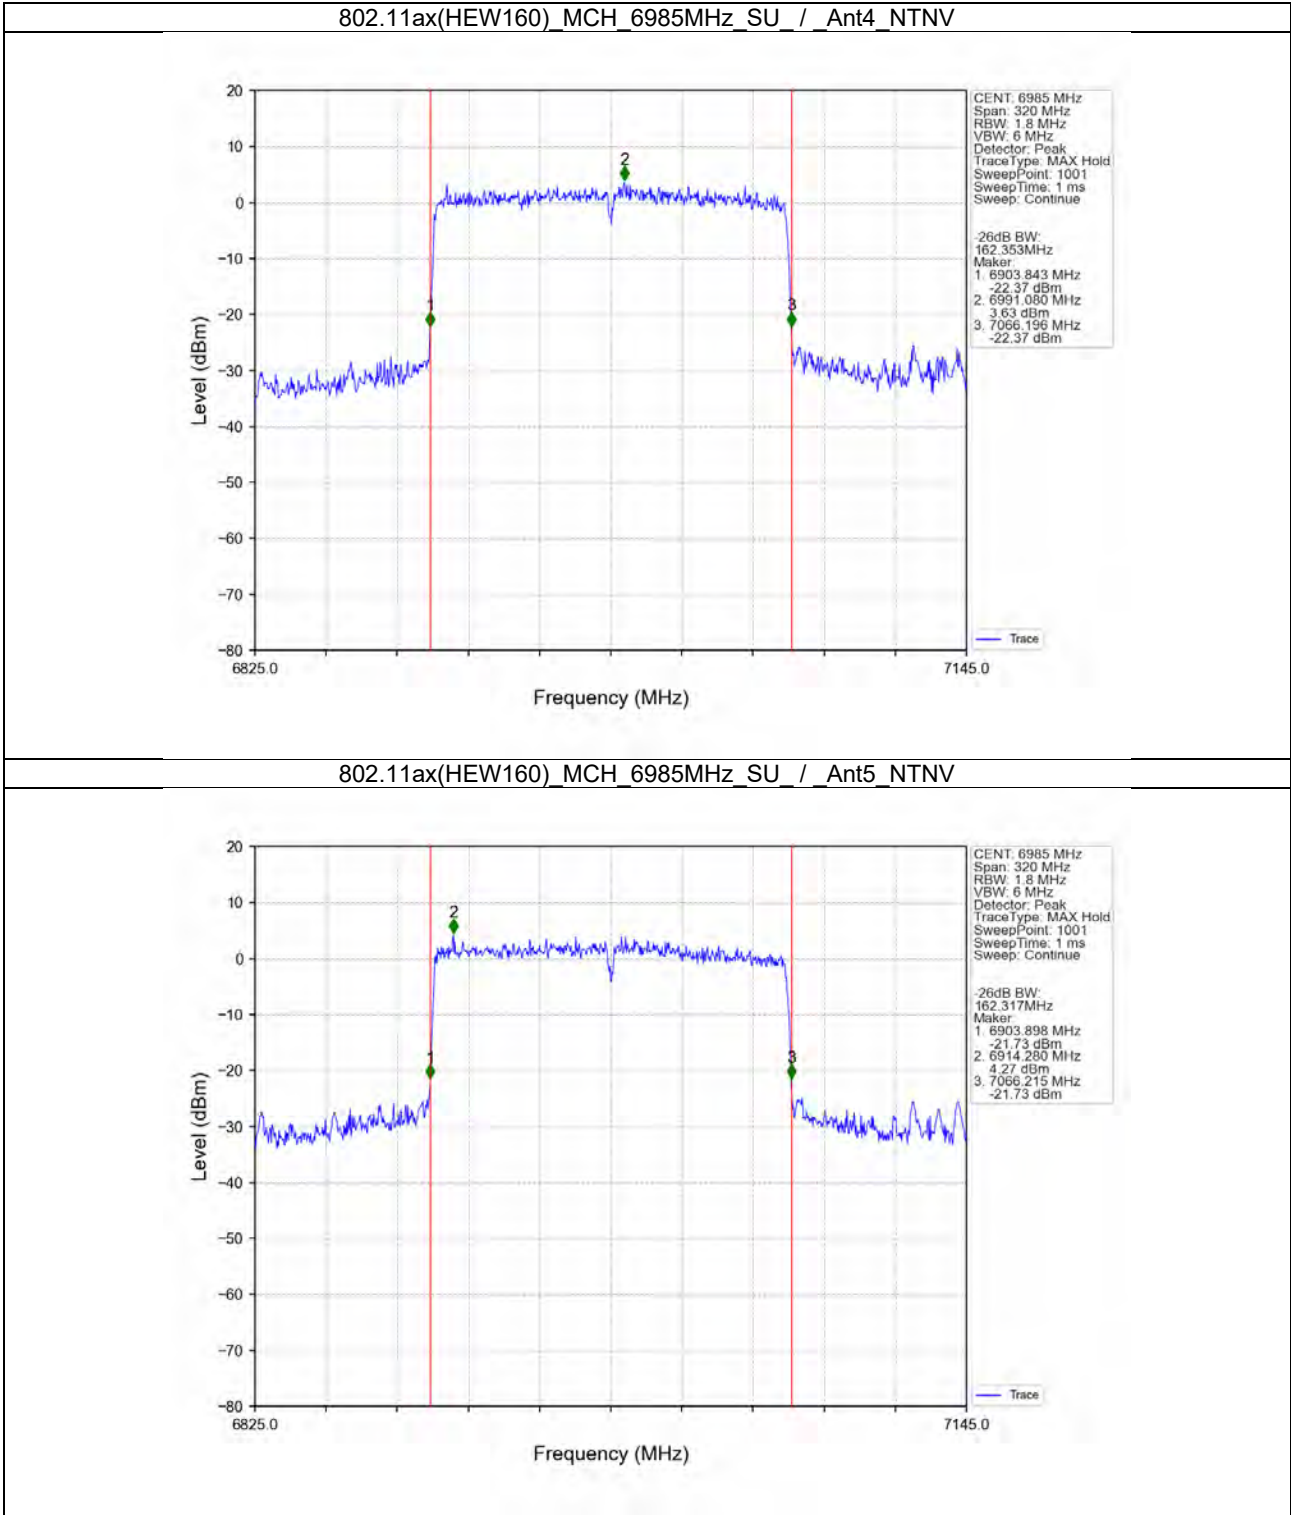




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 142 of 708


2.2.9 OBW

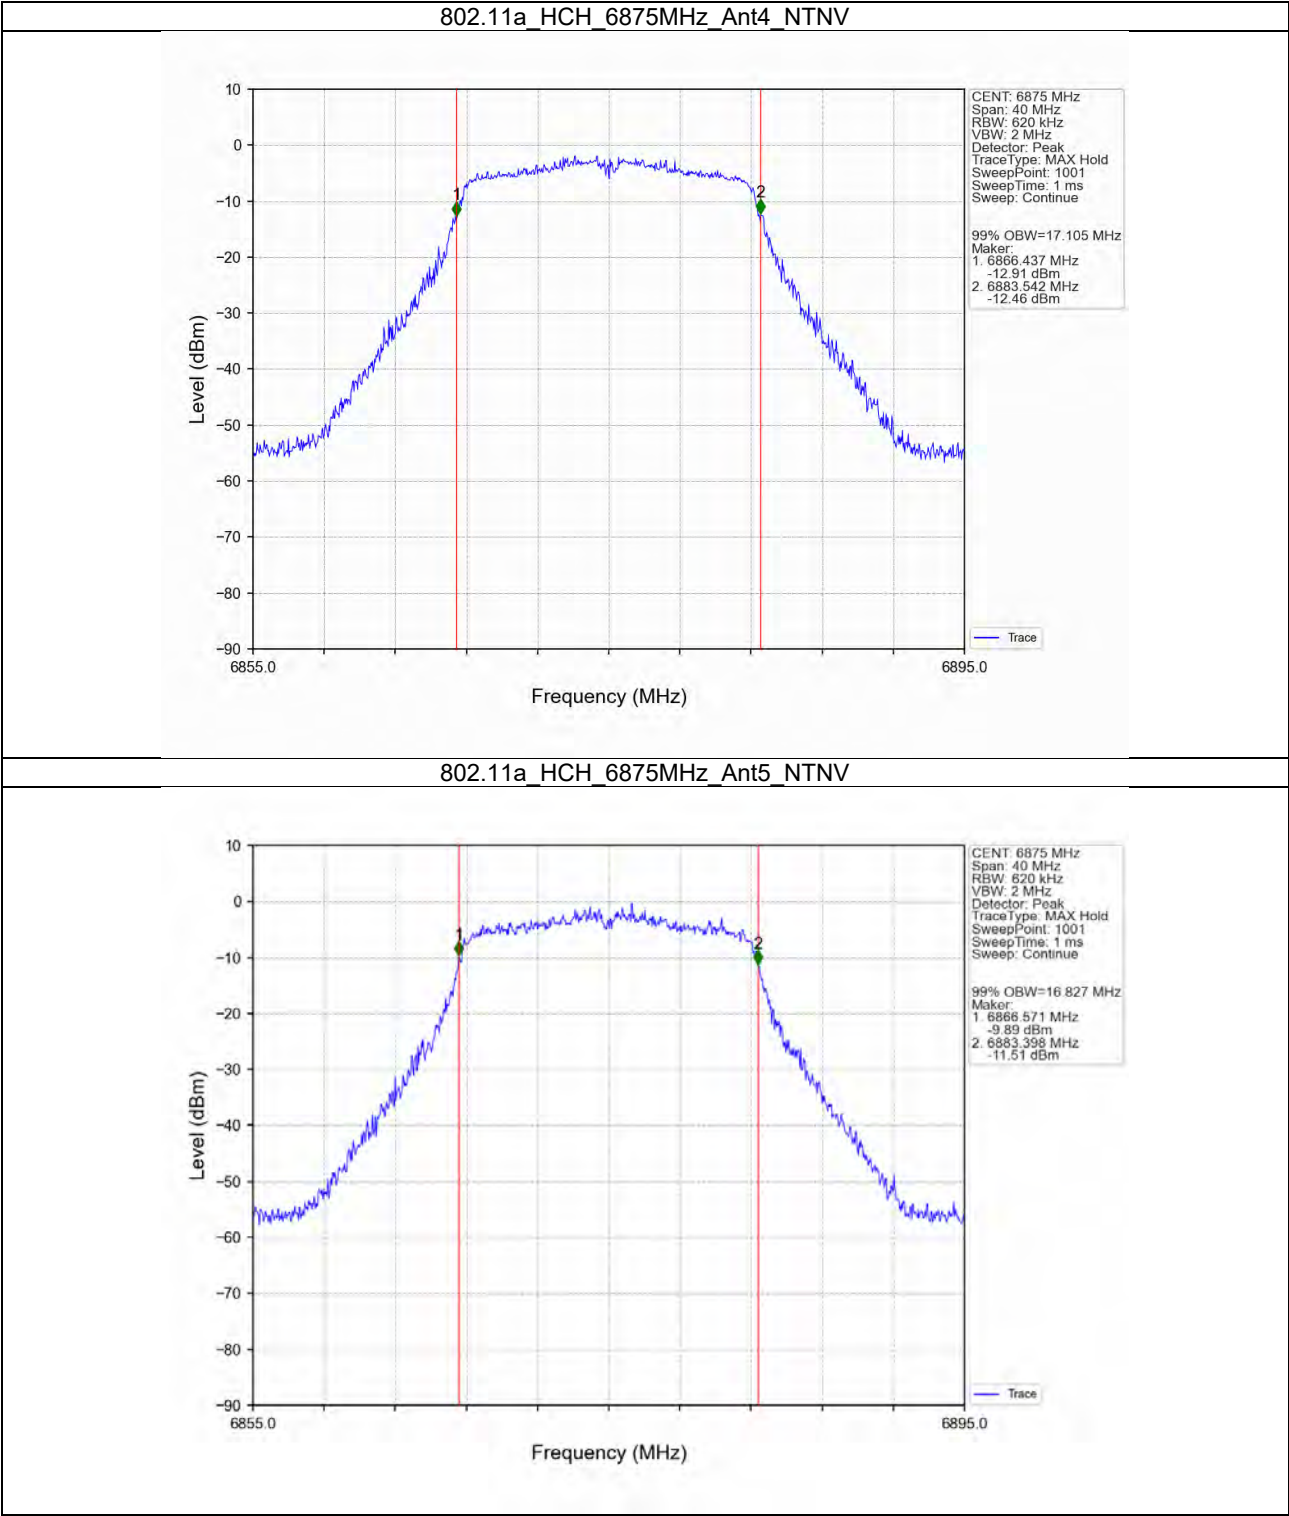



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 143 of 708

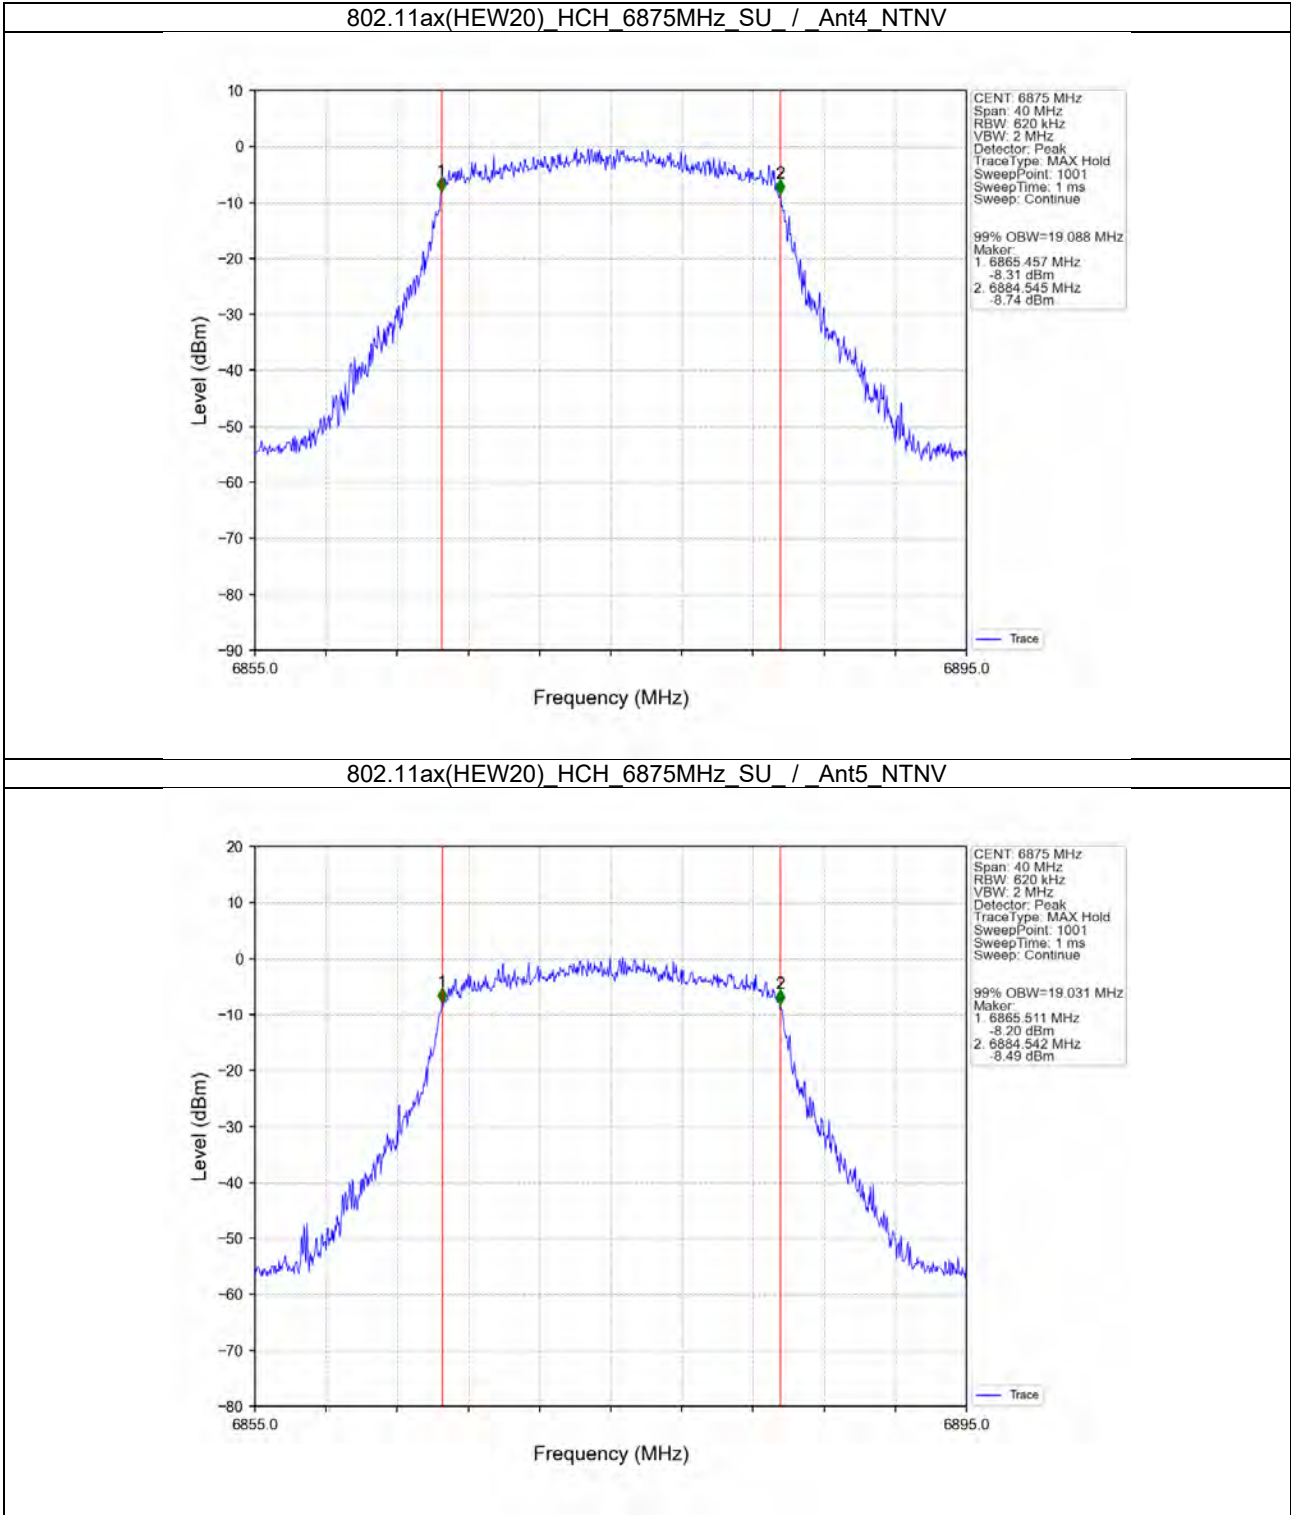



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 144 of 708

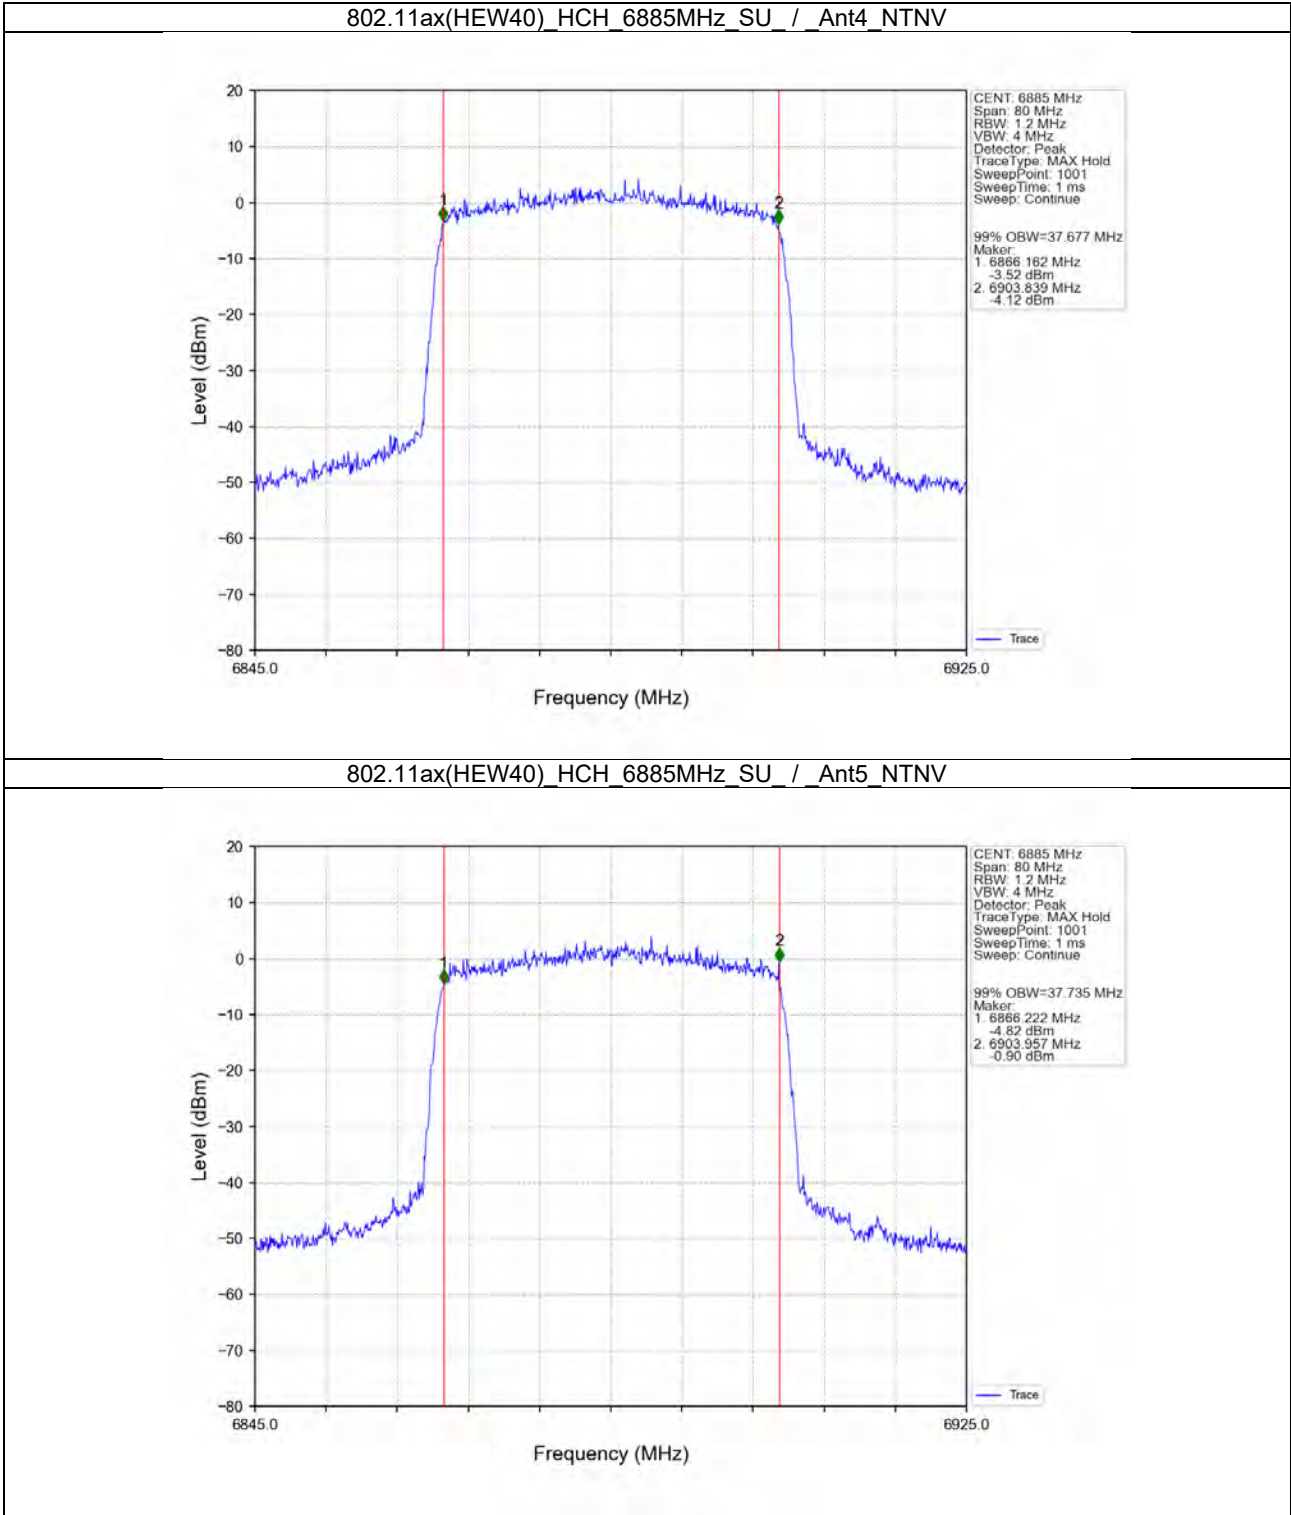



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 145 of 708

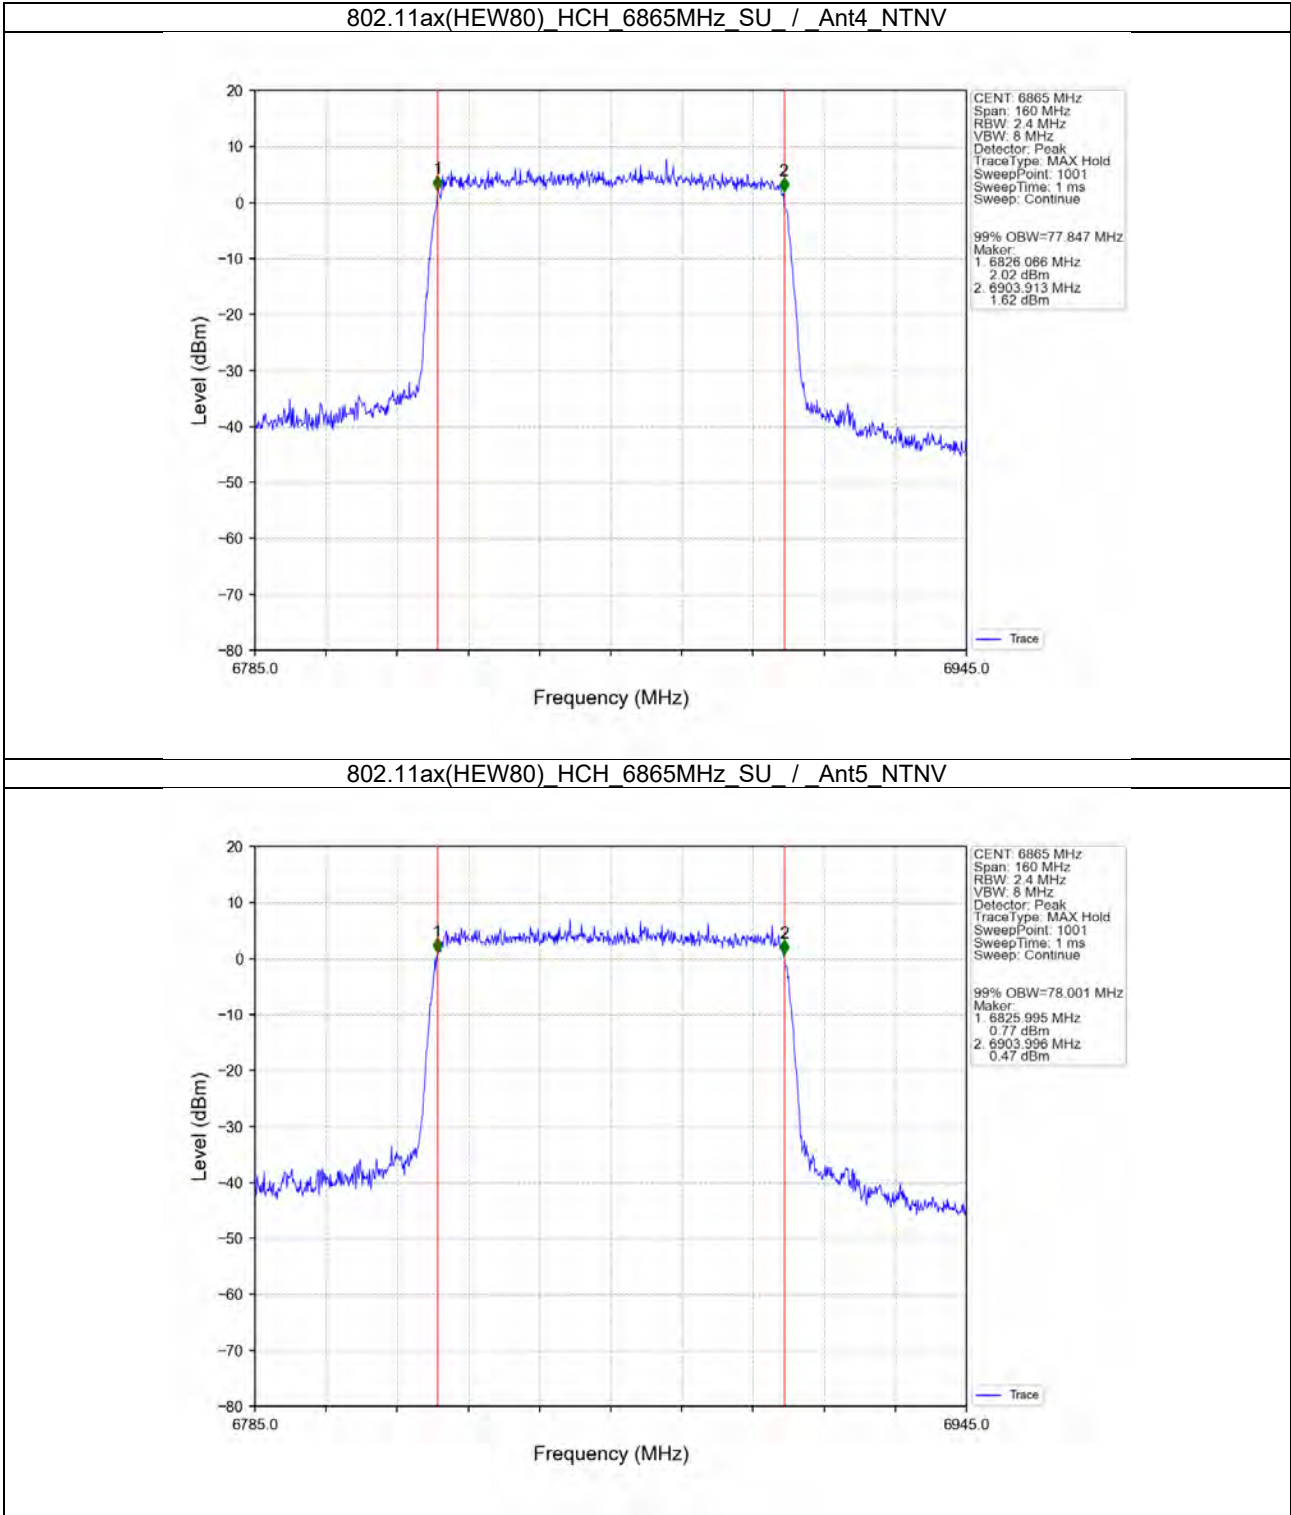



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 146 of 708

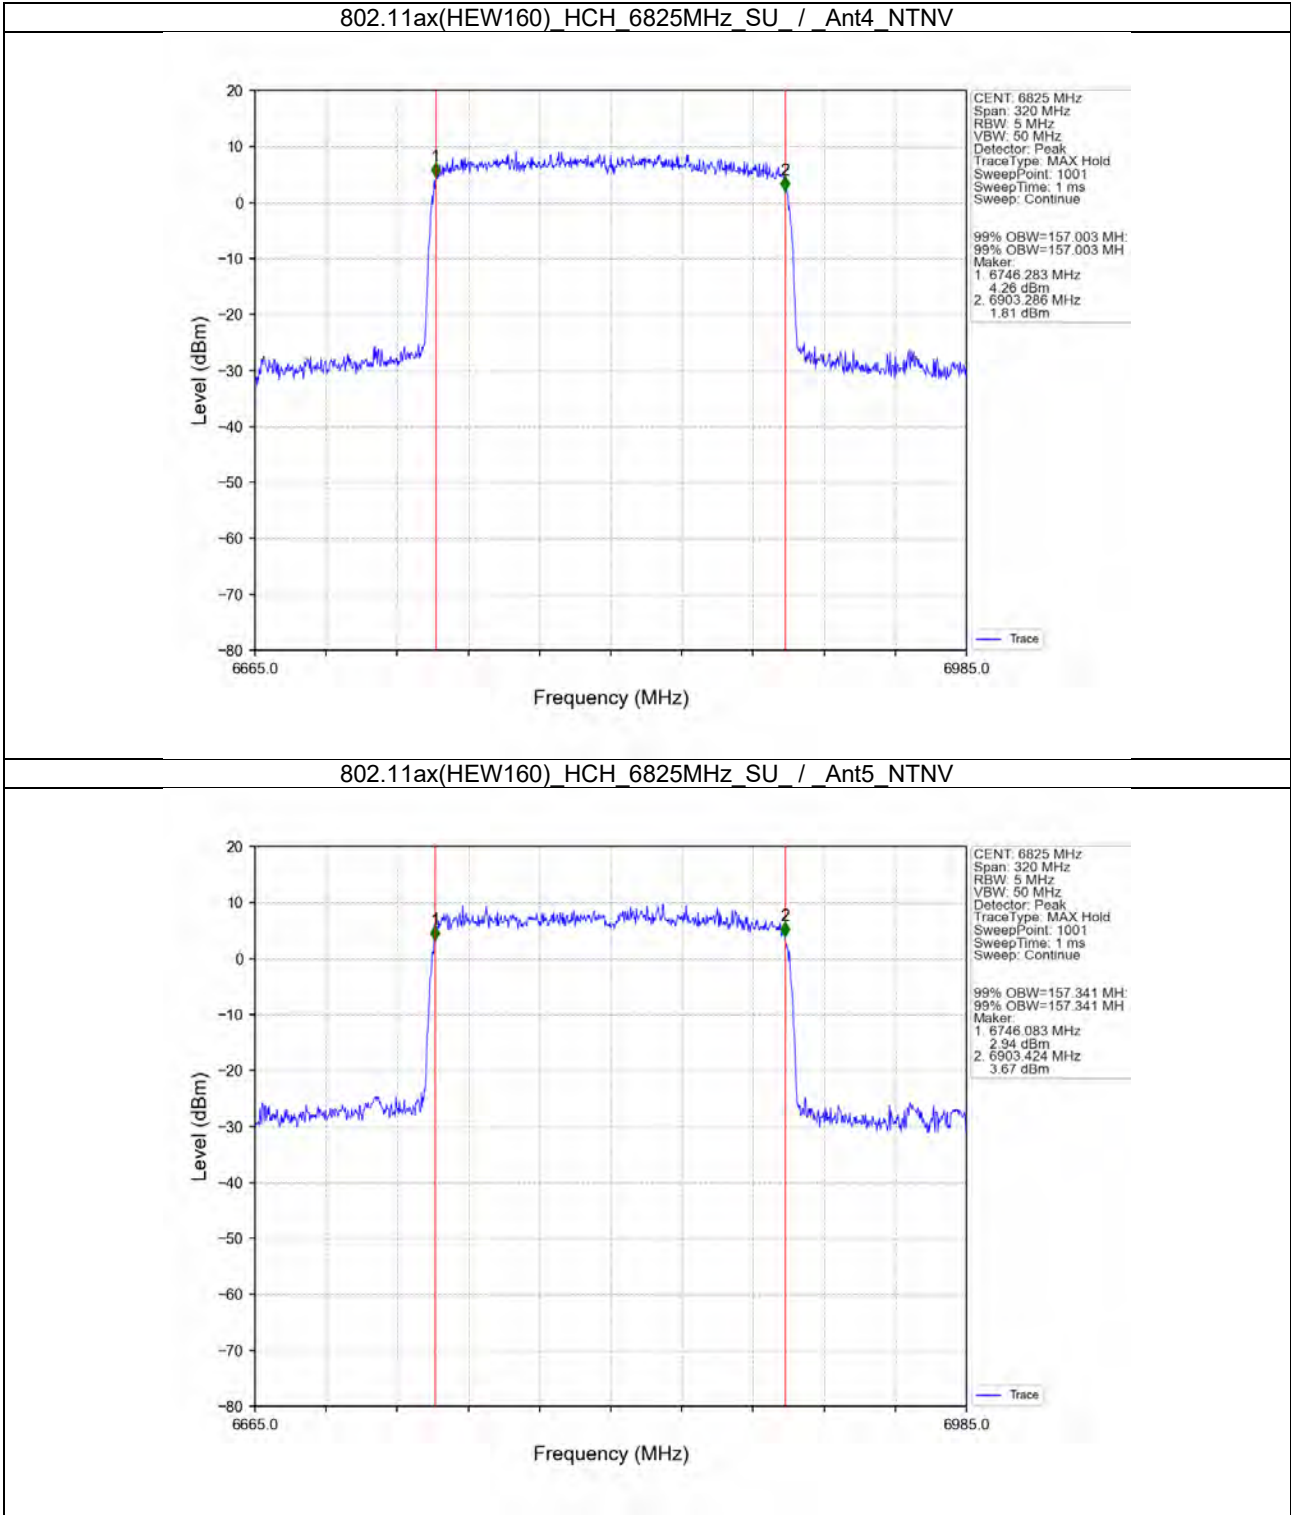




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 147 of 708


2.2.10 26dB BW

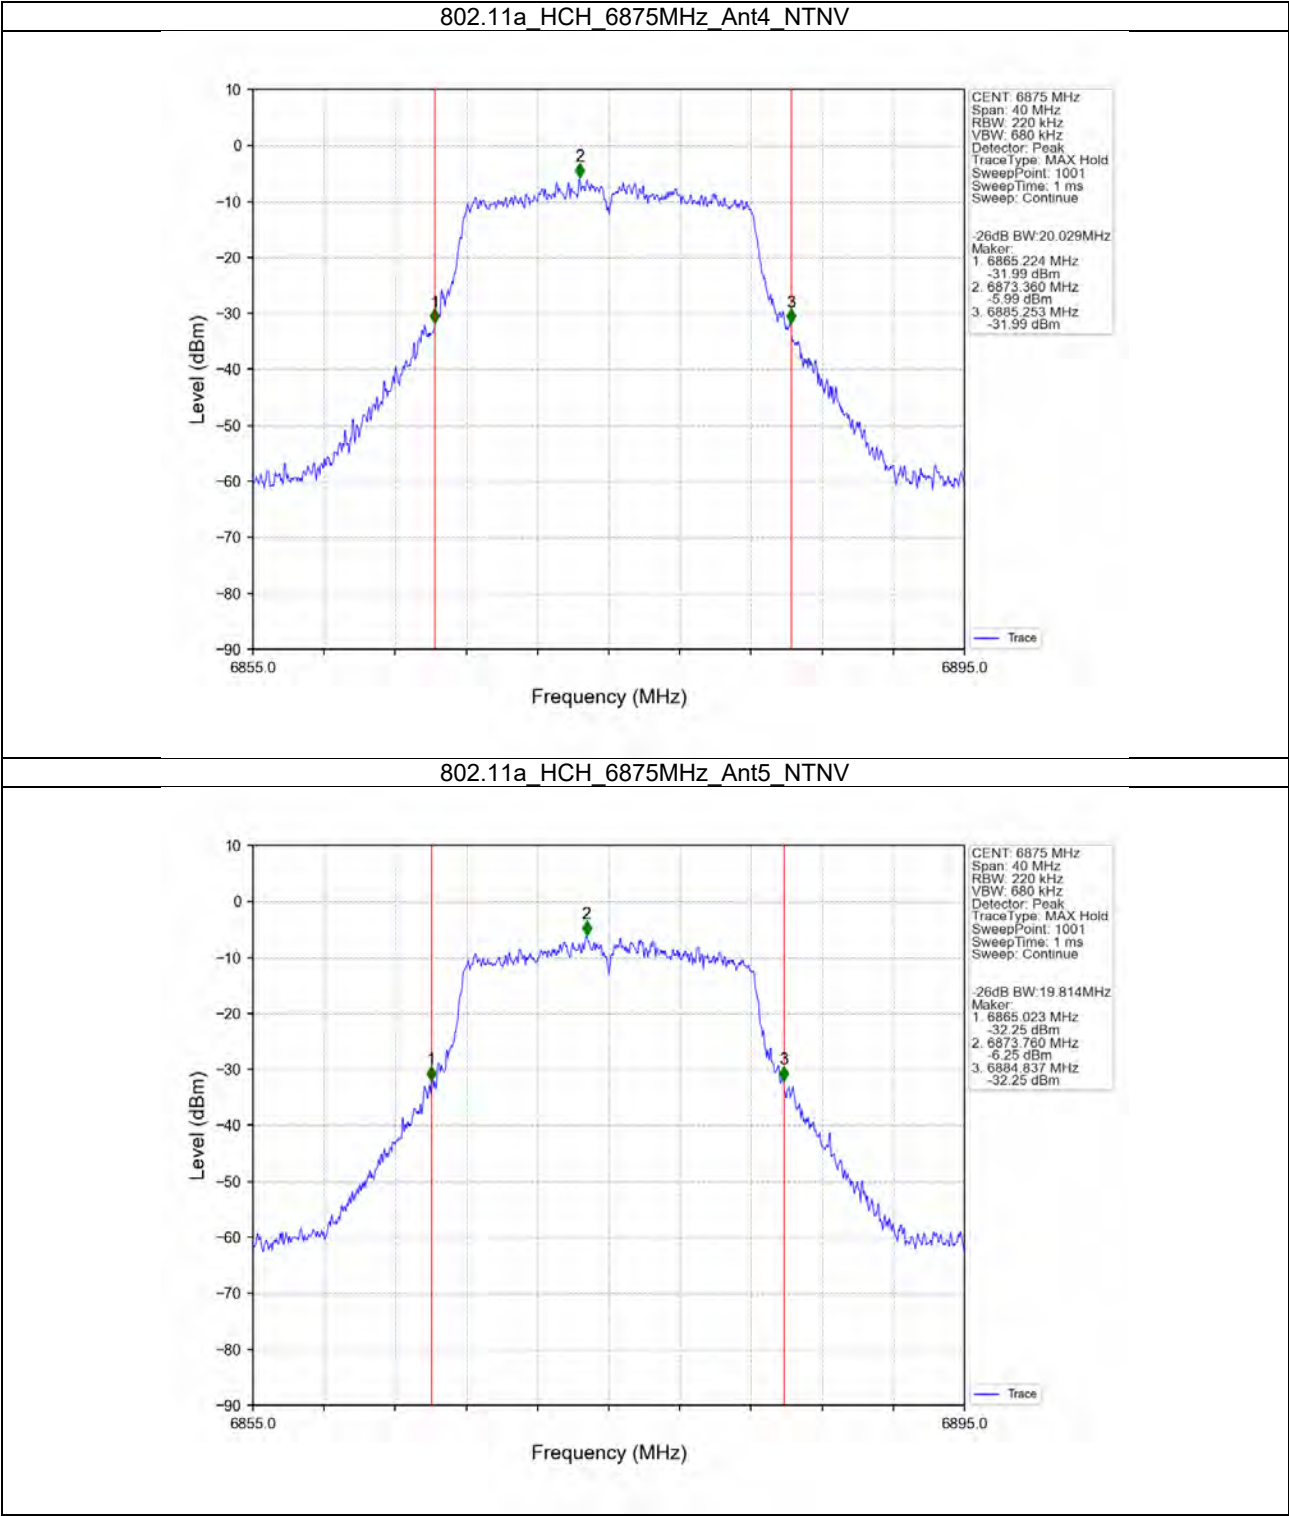



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400034207
Rev.: 02
Page: 148 of 708

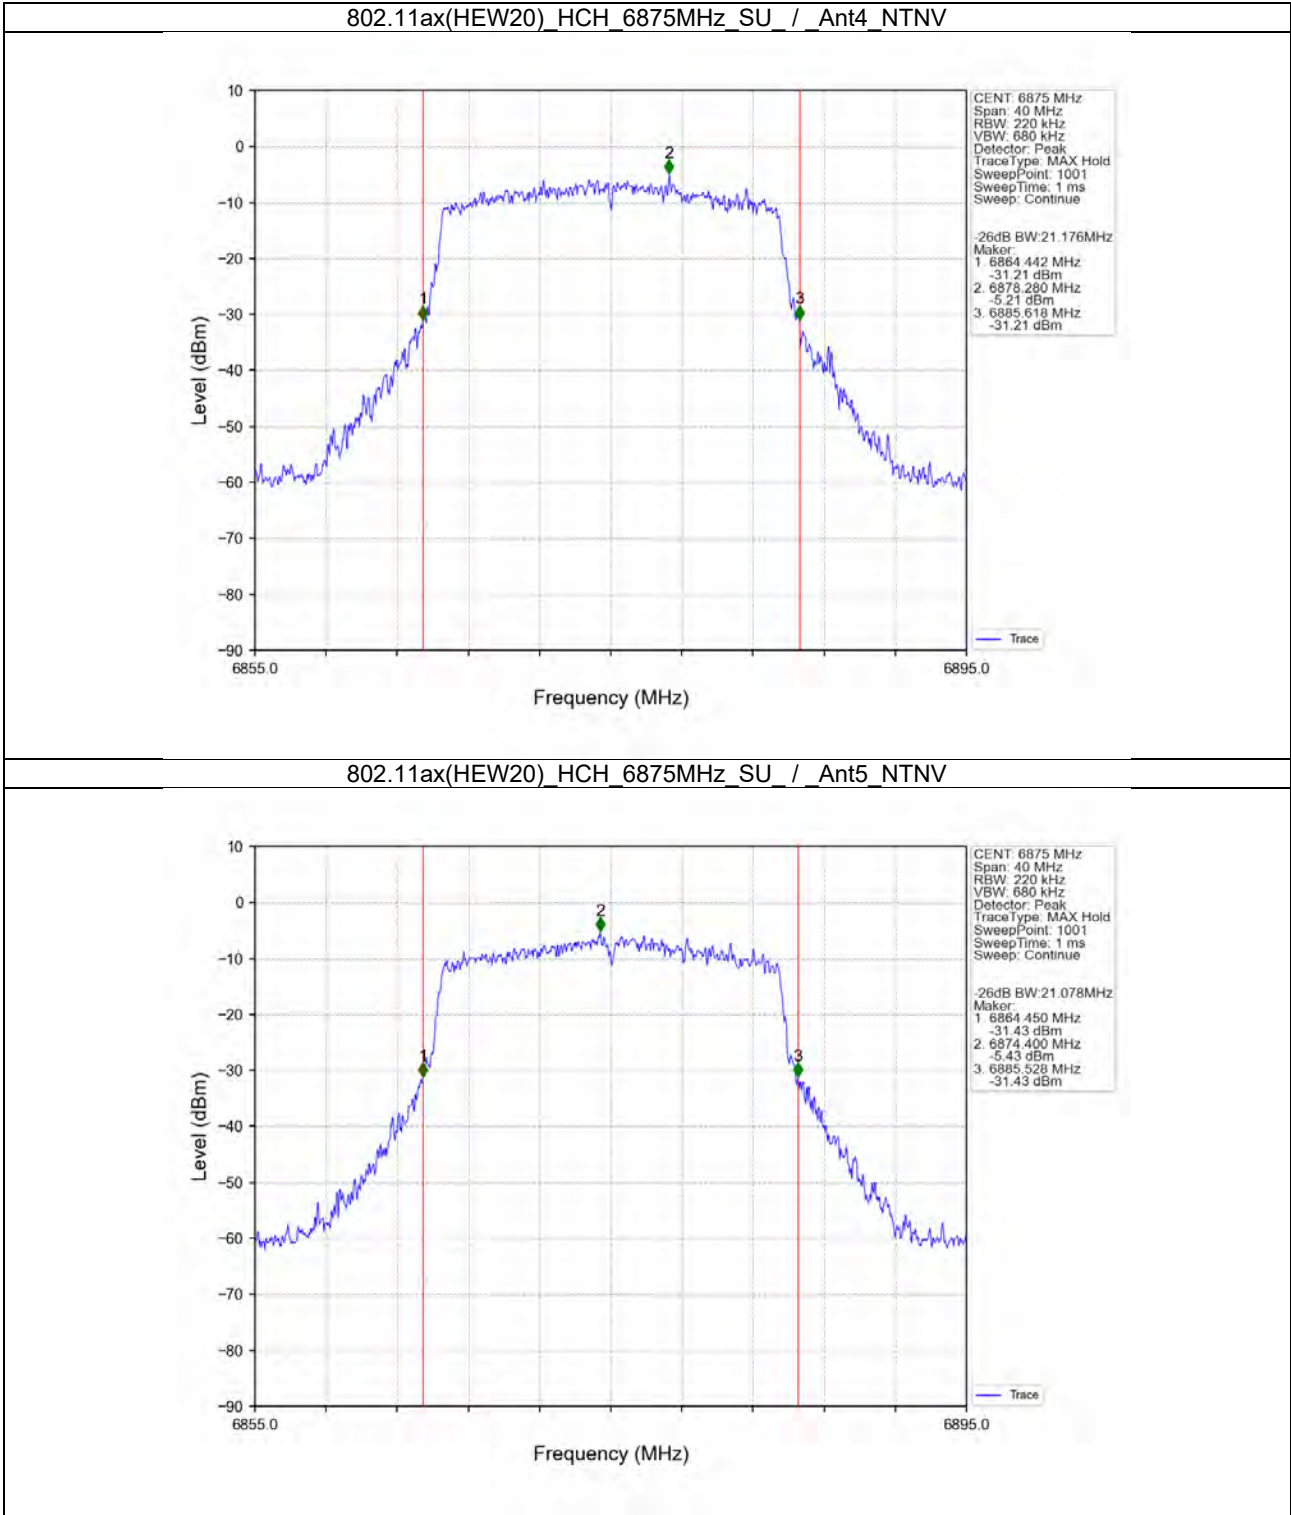



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 149 of 708

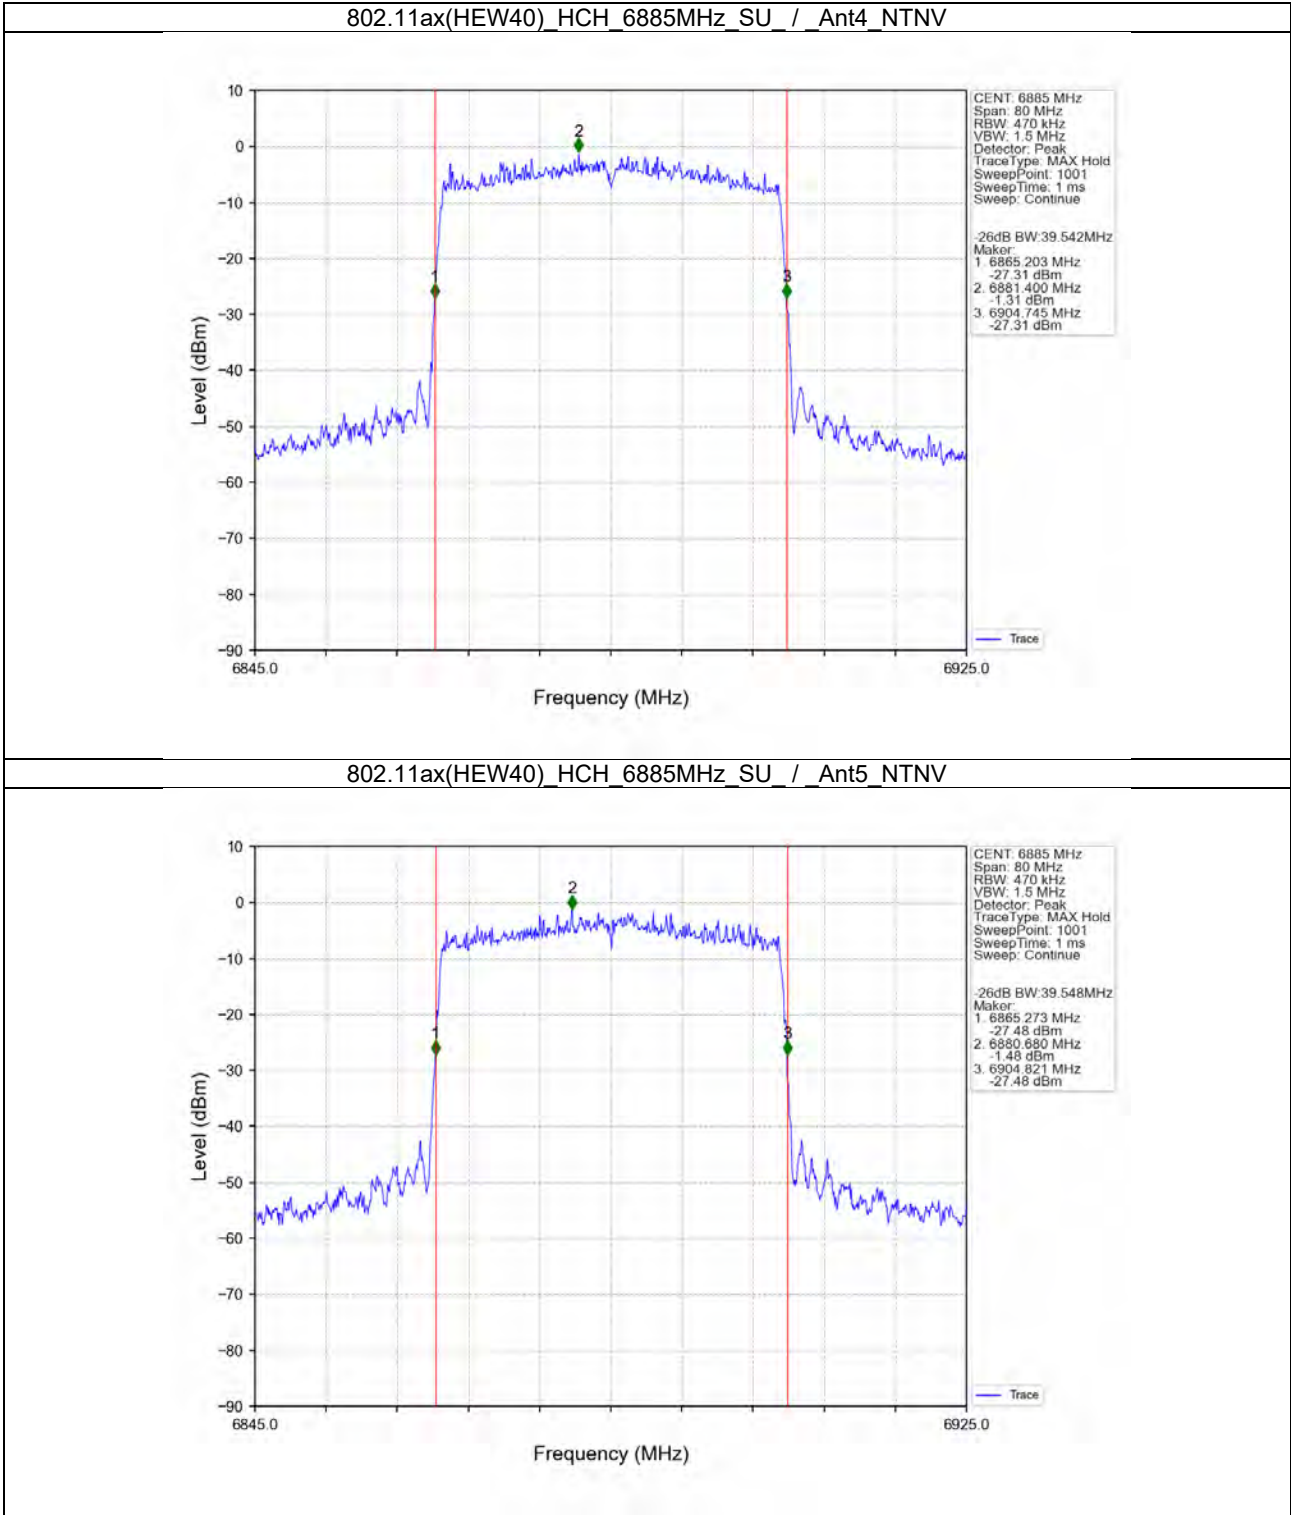



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034207
Rev.: 02
Page: 150 of 708

