

Appendix B.1(BLE - CE&RSE Test Result)

AC Line Conducted Emissions

Test Data


Environmental Conditions

Temperature:	23.6 °C
Relative Humidity:	55 %
ATM Pressure:	99.7 kPa
Test Engineer:	Jason Fan
Test Date:	2025-06-17
EUT Operation Mode:	BLE Transmitting

Test Result: Compliance, please refer to the below data.

Note: The maximum output power mode and channel: BLE 2M Low Channel was tested.


AC 120V/60Hz, Line:

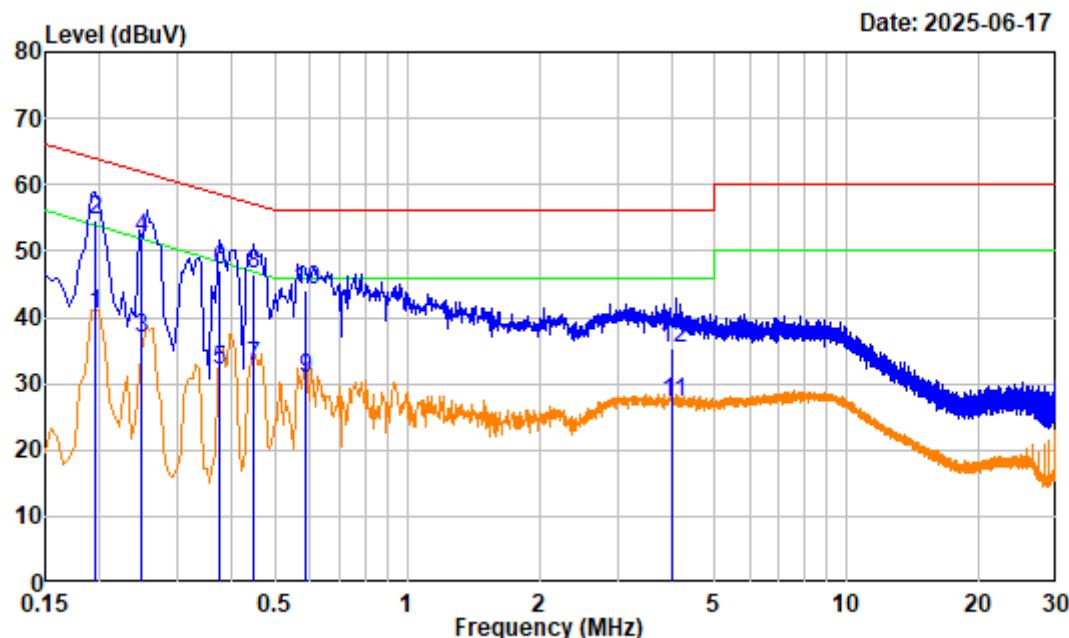

Site : Shielding Room
 Condition : Line
 Project No. : 2504T31635E-RF Tester: Jason Fan
 Test Mode : BLE Transmitting
 Note : Adapter
 Receiver Setting: IF B/W 9kHz PK/AV

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.196	20.30	20.07	40.37	53.79	-13.42	Average
2	0.196	20.30	34.40	54.70	63.79	-9.09	QP
3	0.249	20.27	16.55	36.82	51.78	-14.96	Average
4	0.249	20.27	31.57	51.84	61.78	-9.94	QP
5	0.374	20.18	11.70	31.88	48.41	-16.53	Average
6	0.374	20.18	26.81	46.99	58.41	-11.42	QP
7	0.449	20.14	12.50	32.64	46.89	-14.25	Average
8	0.449	20.14	26.39	46.53	56.89	-10.36	QP
9	0.589	20.30	10.38	30.68	46.00	-15.32	Average
10	0.589	20.30	23.83	44.13	56.00	-11.87	QP
11	4.019	20.75	6.53	27.28	46.00	-18.72	Average
12	4.019	20.75	14.69	35.44	56.00	-20.56	QP

AC 120V/60Hz, Neutral:

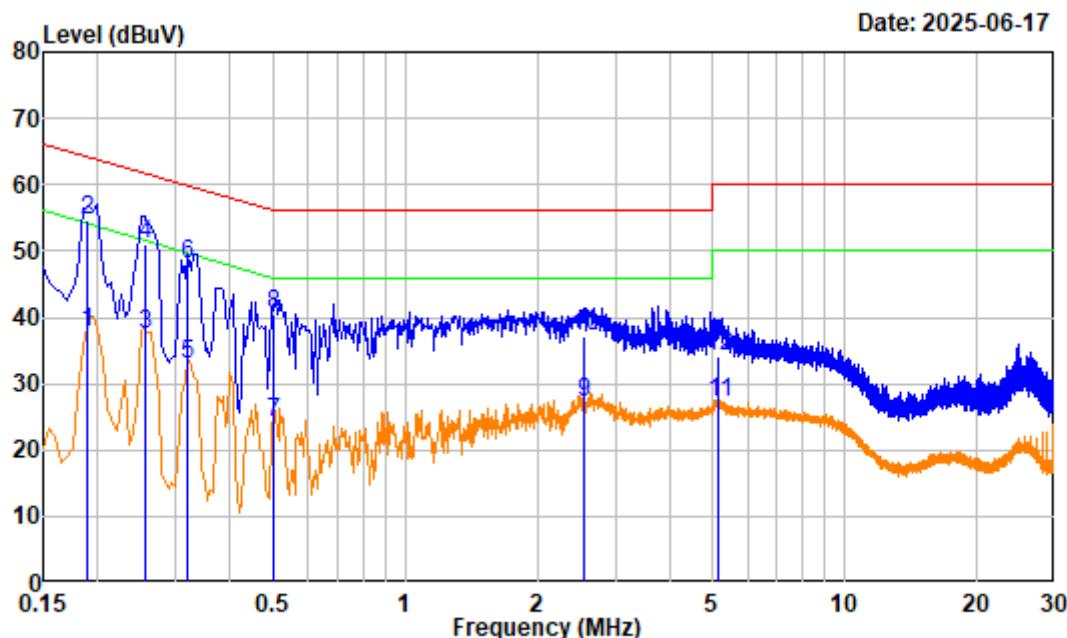

Site : Shielding Room
 Condition : neutral
 Project No. : 2504T31635E-RF Tester: Jason Fan
 Test Mode : BLE Transmitting
 Note : Adapter
 Receiver Setting: IF B/W 9kHz PK/AV

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.188	19.85	17.85	37.70	54.11	-16.41	Average
2	0.188	19.85	34.88	54.73	64.11	-9.38	QP
3	0.256	19.91	17.48	37.39	51.57	-14.18	Average
4	0.256	19.91	31.26	51.17	61.57	-10.40	QP
5	0.318	20.07	12.82	32.89	49.76	-16.87	Average
6	0.318	20.07	27.85	47.92	59.76	-11.84	QP
7	0.500	20.42	3.82	24.24	46.00	-21.76	Average
8	0.500	20.42	20.02	40.44	56.00	-15.56	QP
9	2.559	20.25	7.01	27.26	46.00	-18.74	Average
10	2.559	20.25	16.89	37.14	56.00	-18.86	QP
11	5.163	20.63	6.52	27.15	50.00	-22.85	Average
12	5.163	20.63	13.48	34.11	60.00	-25.89	QP

Radiated Spurious Emissions

Test Data

9kHz-1GHz

Environmental Conditions


Temperature:	24.6 °C
Relative Humidity:	56 %
ATM Pressure:	99.7 kPa
Test Engineer:	Colin Lin
Test Date:	2025-06-12
EUT Operation Mode:	BLE Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The Loop Antenna were tested in parallel, perpendicular and ground-parallel. The worst orientation was parallel and the data was recorded in report.


Note 2: The maximum output power mode and channel: BLE 2M Low Channel was tested.

9kHz~30MHz:

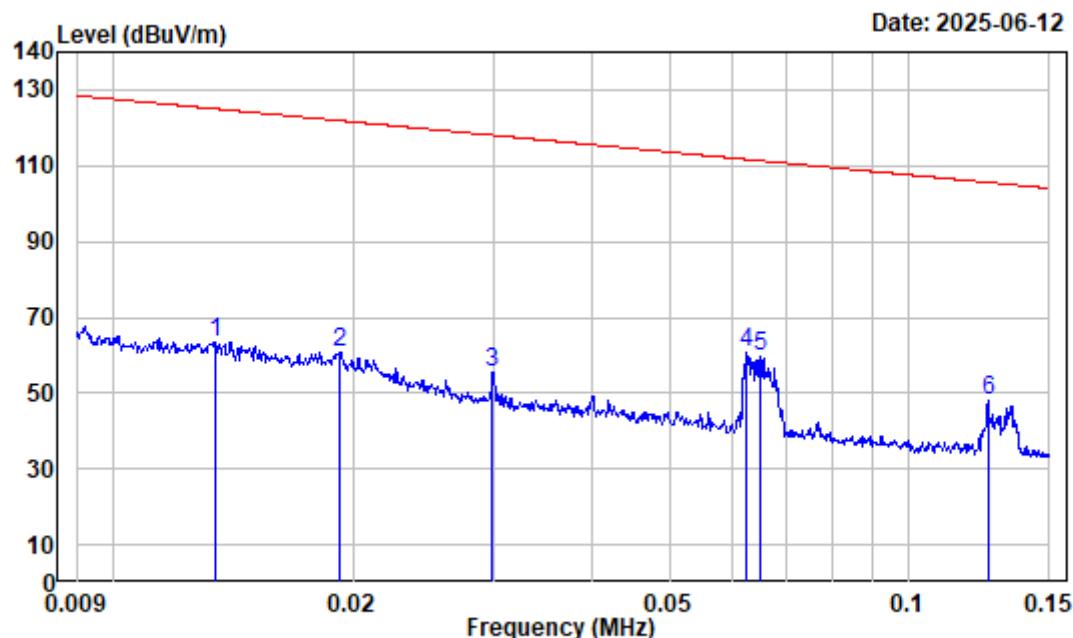

Site : Chamber
Condition : 3m
Job No. : 2504T31635E-RF Tester: Colin Lin
Polarization : Parallel
Test Mode : BLE Transmitting
Receiver Setting: RBW:300Hz VBW:1kHz


Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	Limit
1	0.013	34.31	29.30	63.61	125.05	-61.44	Peak
2	0.019	31.72	29.07	60.79	121.92	-61.13	Peak
3	0.030	26.98	28.34	55.32	118.09	-62.77	Peak
4	0.063	21.04	39.65	60.69	111.68	-50.99	Peak
5	0.065	20.71	38.73	59.44	111.36	-51.92	Peak
6	0.126	15.27	32.78	48.05	105.62	-57.57	Peak

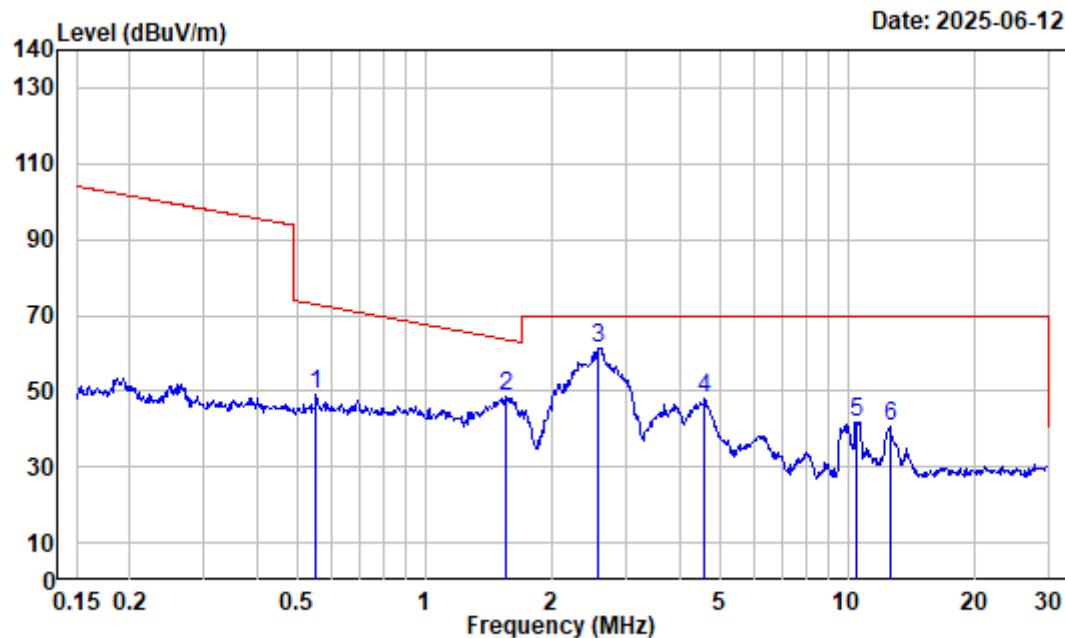

Site : Chamber
Condition : 3m
Job No. : 2504T31635E-RF Tester: Colin Lin
Polarization : Parallel
Test Mode : BLE Transmitting
Receiver Setting: RBW:10kHz VBW:30kHz


Freq	Factor	Read		Limit		Over Line	Limit	Remark
		MHz	dB/m	dBuV	dBuV/m			
1	0.552	2.66	46.51	49.17	72.74	-23.57	Peak	
2	1.552	-3.84	52.25	48.41	63.57	-15.16	Peak	
3	2.567	-5.68	67.03	61.35	69.54	-8.19	Peak	
4	4.598	-6.30	54.34	48.04	69.54	-21.50	Peak	
5	10.452	-5.32	47.00	41.68	69.54	-27.86	Peak	
6	12.582	-4.81	45.29	40.48	69.54	-29.06	Peak	

30MHz~1GHz:

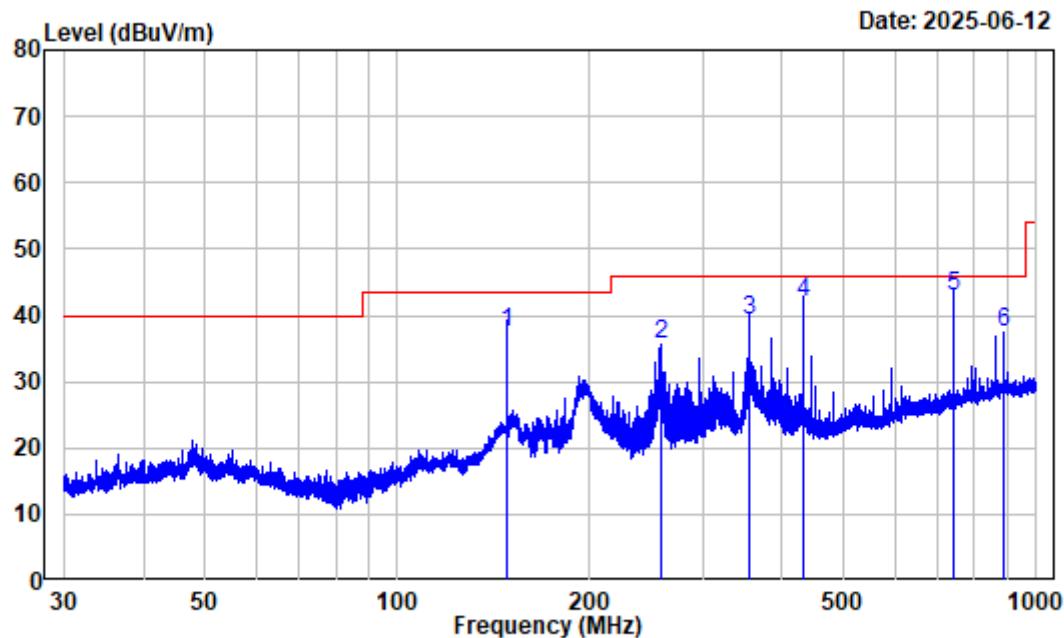

Site : Chamber
Condition : 3m HORIZONTAL
Job No. : 2504T31635E-RF Tester: Colin Lin
Test Mode : BLE Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	148.376	-15.36	52.70	37.34	43.50	-6.16	QP
2	258.326	-10.76	46.41	35.65	46.00	-10.35	Peak
3	356.051	-7.77	47.00	39.23	46.00	-6.77	QP
4	431.977	-5.55	47.39	41.84	46.00	-4.16	QP
5	741.934	-1.00	43.80	42.80	46.00	-3.20	QP
6	890.338	0.61	36.75	37.36	46.00	-8.64	Peak

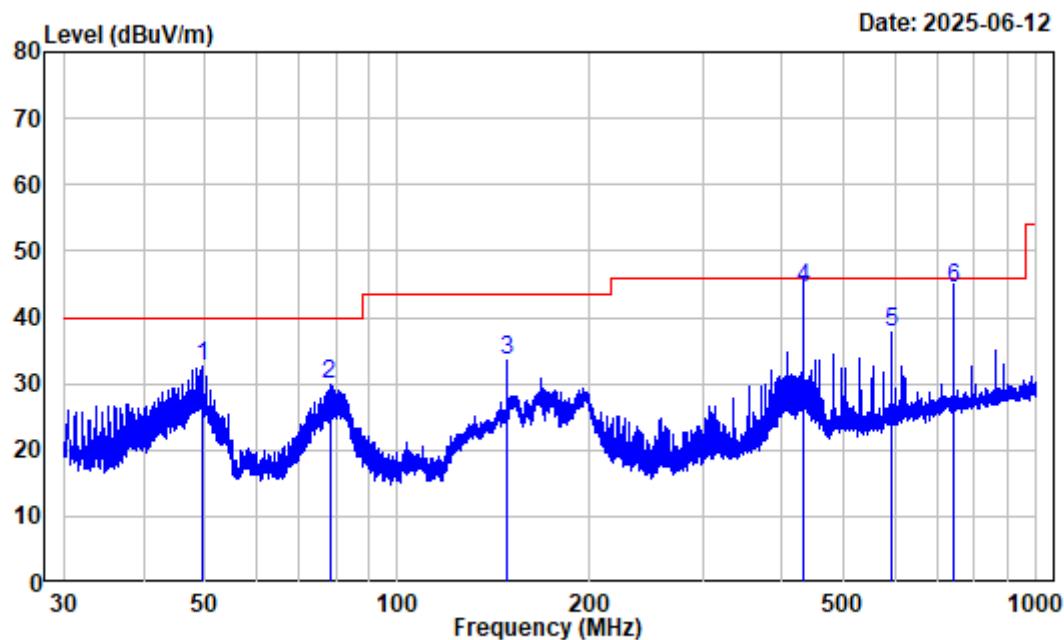

Site : Chamber
Condition : 3m VERTICAL
Job No. : 2504T31635E-RF Tester: Colin Lin
Test Mode : BLE Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	dBuV/m		
1	49.381	-10.37	43.11	32.74	40.00	-7.26	Peak
2	78.276	-16.87	46.71	29.84	40.00	-10.16	Peak
3	148.376	-15.36	48.76	33.40	43.50	-10.10	Peak
4	432.167	-5.55	49.99	44.44	46.00	-1.56	QP
5	593.570	-3.14	41.03	37.89	46.00	-8.11	Peak
6	741.934	-1.00	45.40	44.40	46.00	-1.60	QP

1GHz-25GHz**Environmental Conditions**


Temperature:	23.6-24.5°C
Relative Humidity:	53-55 %
ATM Pressure:	99.7 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-06-11 to 2025-06-17
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The fundamental with band reject filter.

Note 2: For 18GHz-25GHz, the maximum output power mode and channel: BLE 2M Low Channel was tested.

BLE 1M Low Channel 1GHz-4GHz_HORIZONTAL

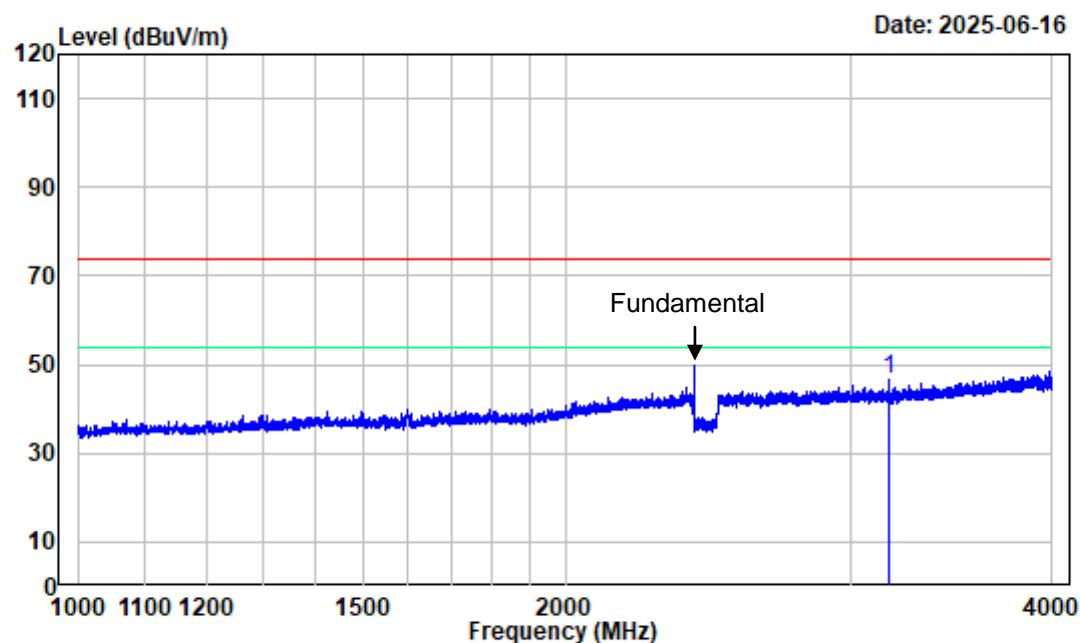

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Low Channel 2402MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 3168.625	-10.01	56.57	46.56	74.00	-27.44	Peak	

BLE 1M Low Channel 1GHz-4GHz_VERTICAL

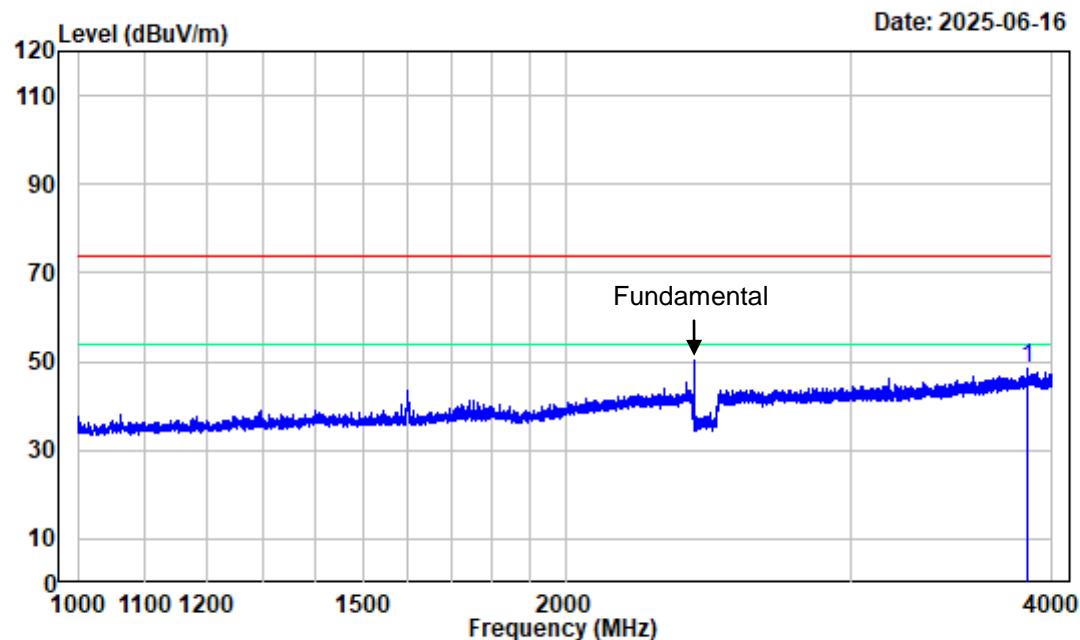

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Low Channel 2402MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3861.250	-8.25	56.59	48.34	74.00	-25.66	Peak

BLE 1M Low Channel 4GHz-18GHz_HORIZONTAL

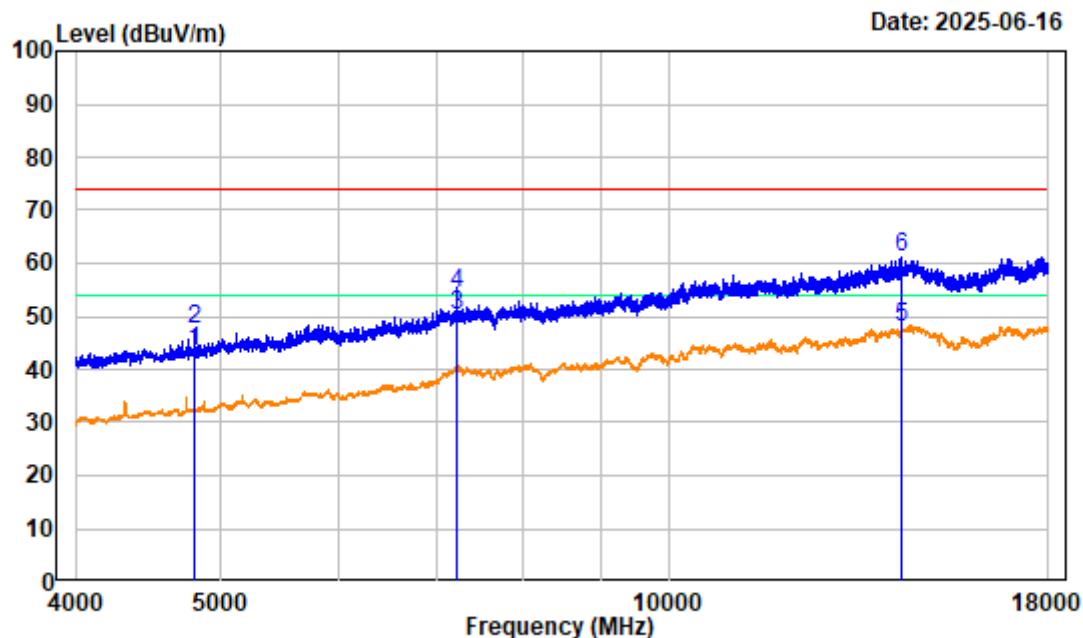

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Low Channel 2402MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	Level	dBuV/m	Line	dB
1	4804.000	-6.59	50.01	43.42	54.00	-10.58	Average
2	4804.000	-6.59	54.03	47.44	74.00	-26.56	Peak
3	7206.000	-1.33	51.45	50.12	54.00	-3.88	Average
4	7206.000	-1.33	55.85	54.52	74.00	-19.48	Peak
5	14351.250	8.79	39.17	47.96	54.00	-6.04	Average
6	14351.250	8.79	52.19	60.98	74.00	-13.02	Peak

BLE 1M Low Channel 4GHz-18GHz_VERTICAL

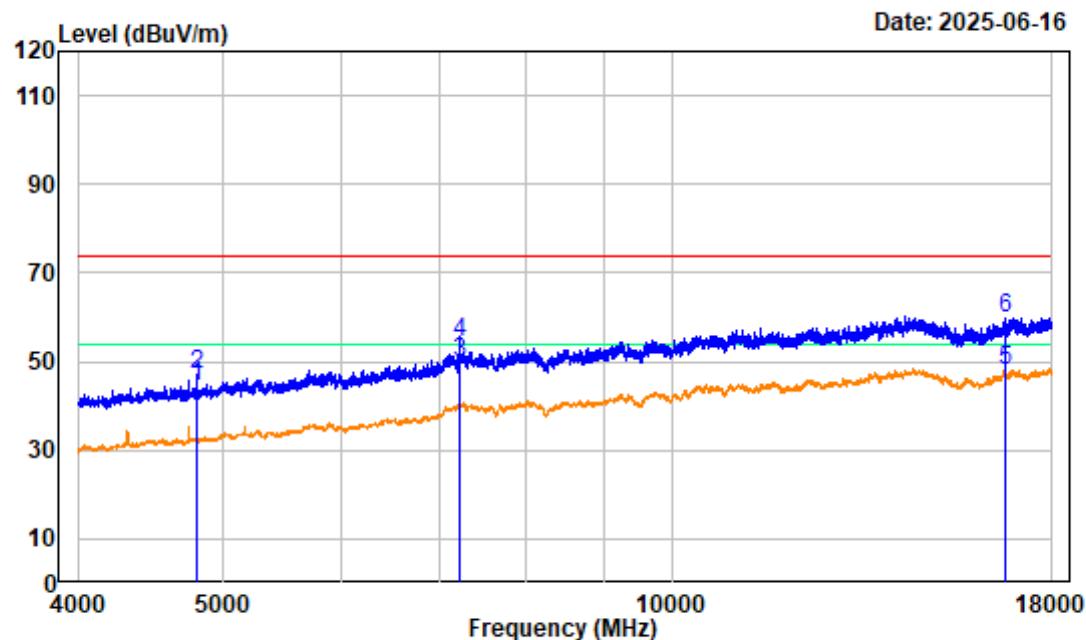

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Low Channel 2402MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	4804.000	-6.59	50.77	44.18	54.00	-9.82	Average
2	4804.000	-6.59	53.61	47.02	74.00	-26.98	Peak
3	7206.000	-1.33	51.28	49.95	54.00	-4.05	Average
4	7206.000	-1.33	55.73	54.40	74.00	-19.60	Peak
5	16733.000	7.49	40.35	47.84	54.00	-6.16	Average
6	16733.000	7.49	52.34	59.83	74.00	-14.17	Peak

BLE 1M Low Channel Bandedge_HORIZONTAL

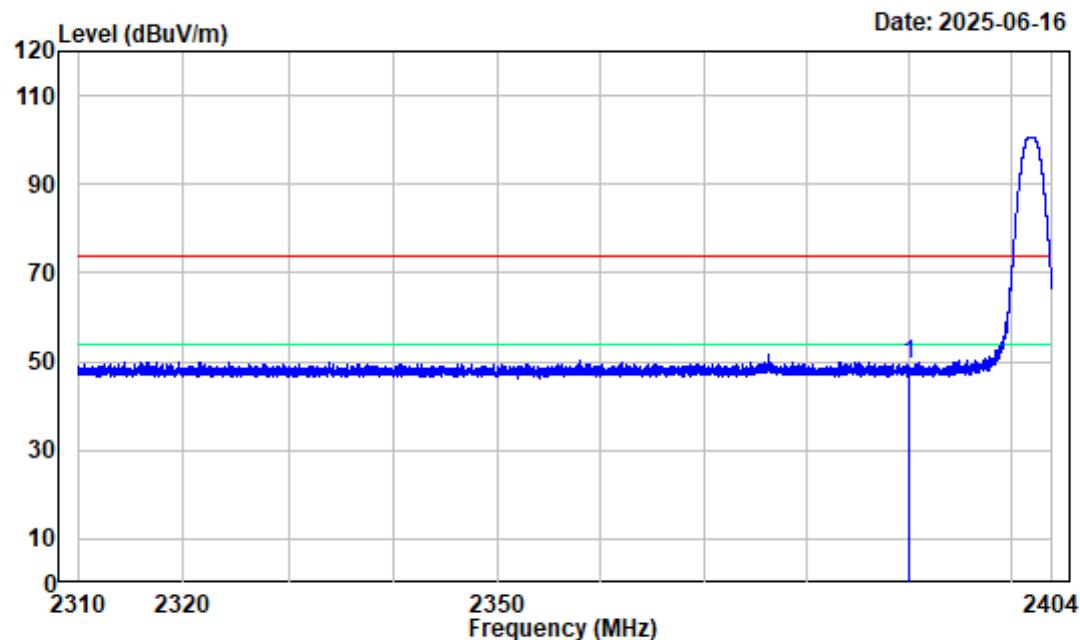

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Low Channel 2402MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	59.80	49.56	74.00	-24.44	peak

BLE 1M Low Channel Bandedge_VERTICAL

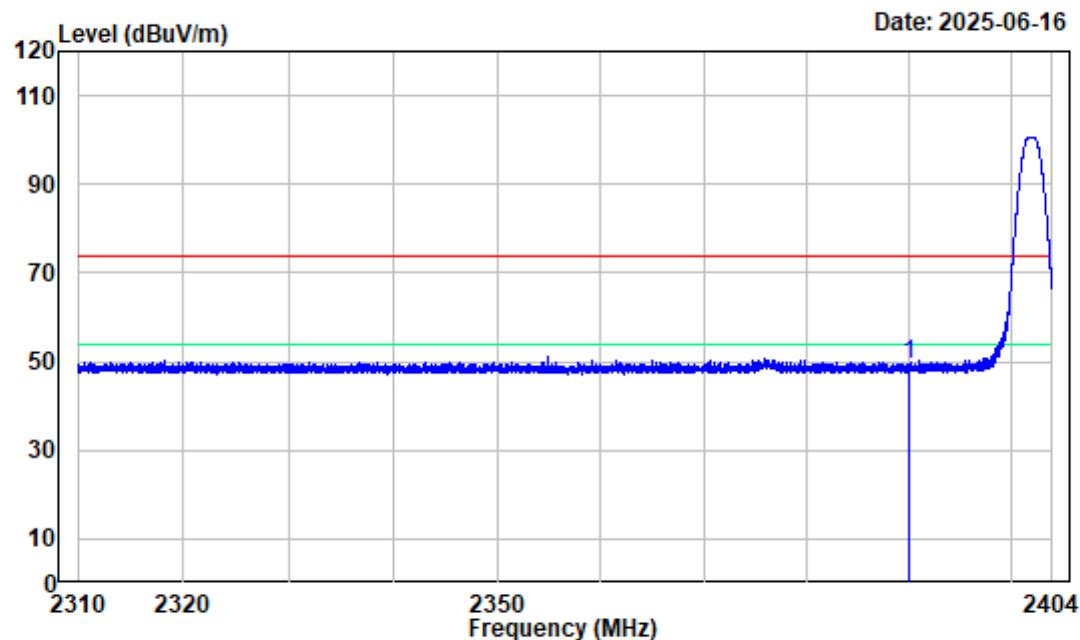

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester: Kevin Lv

Note : BLE 1M Low Channel 2402MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
		MHz	dB/m	dBuV	dBuV/m	dB	
1		2390.000	-10.24	59.78	49.54	74.00	-24.46 peak

BLE 1M Middle Channel 1GHz-4GHz_HORIZONTAL

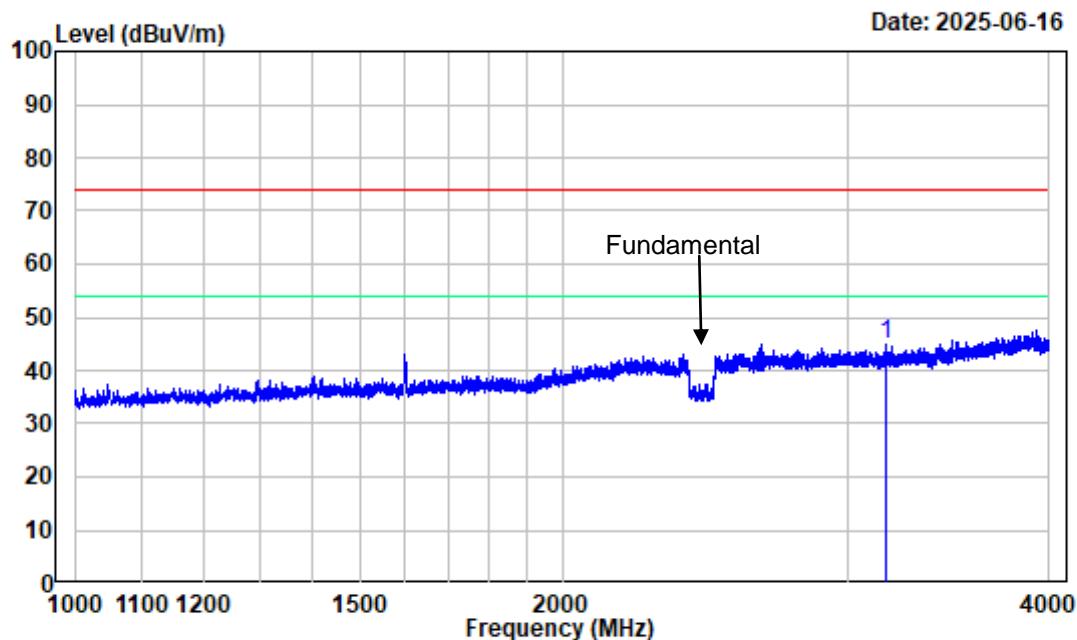

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Middle Channel 2440MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3168.625	-10.01	54.94	44.93	74.00	-29.07	Peak

BLE 1M Middle Channel 1GHz-4GHz_VERTICAL

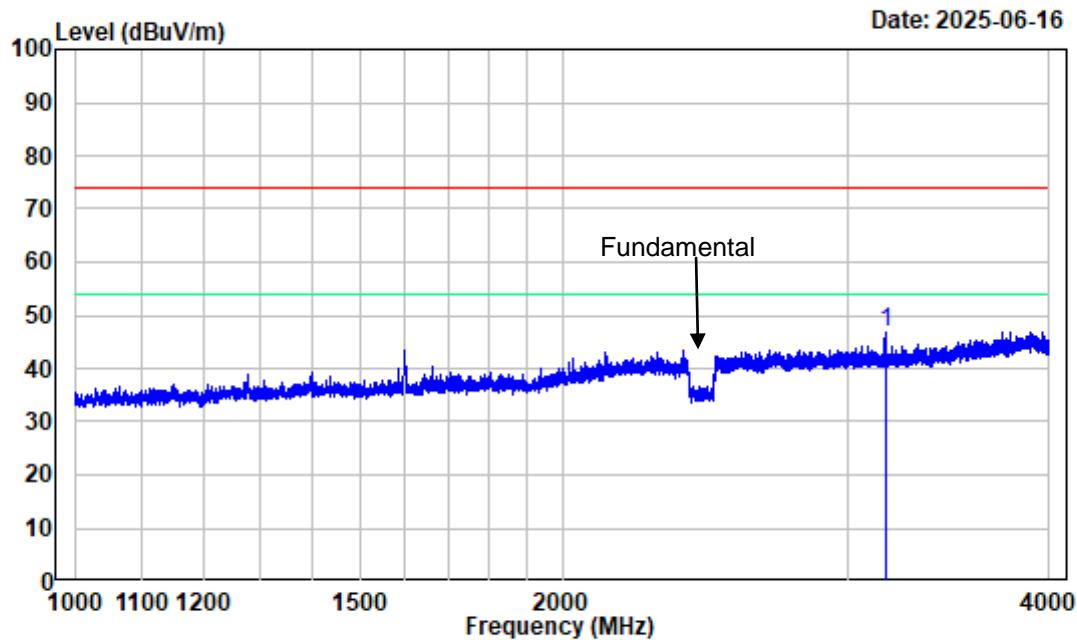

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester: Kevin Lv

Note : BLE 1M Middle Channel 2440MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3168.250	-10.01	56.96	46.95	74.00	-27.05	Peak

BLE 1M Middle Channel 4GHz-18GHz_HORIZONTAL

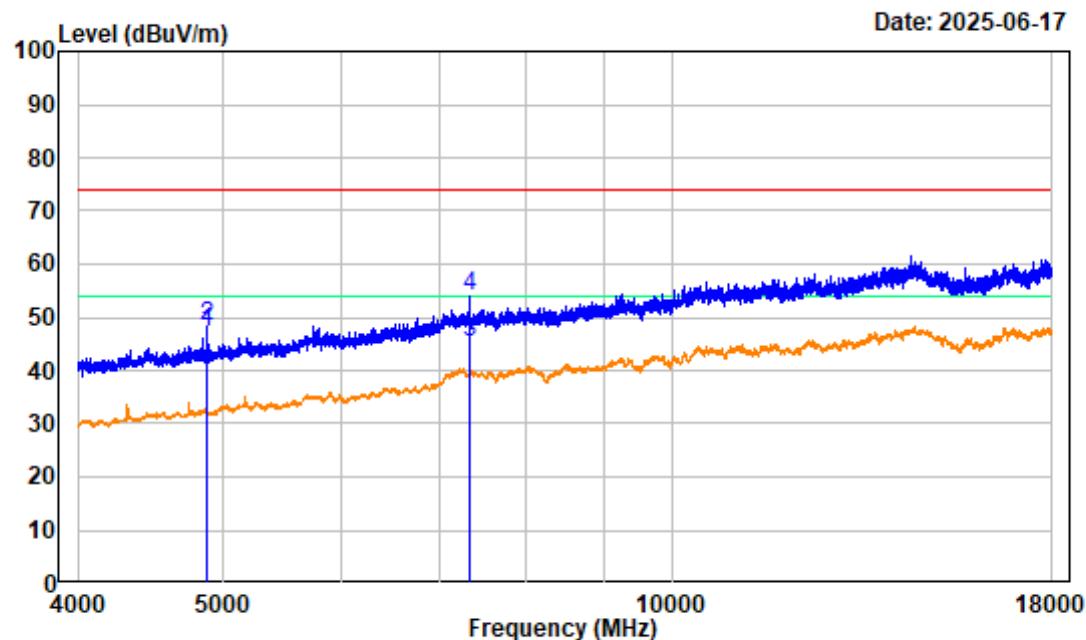

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Middle Channel 2440MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	dB
1	4880.000	-6.63	53.86	47.23	54.00	-6.77	Average
2	4880.000	-6.63	54.92	48.29	74.00	-25.71	Peak
3	7320.000	-1.22	46.32	45.10	54.00	-8.90	Average
4	7320.000	-1.22	55.36	54.14	74.00	-19.86	Peak

BLE 1M Middle Channel 4GHz-18GHz_VERTICAL

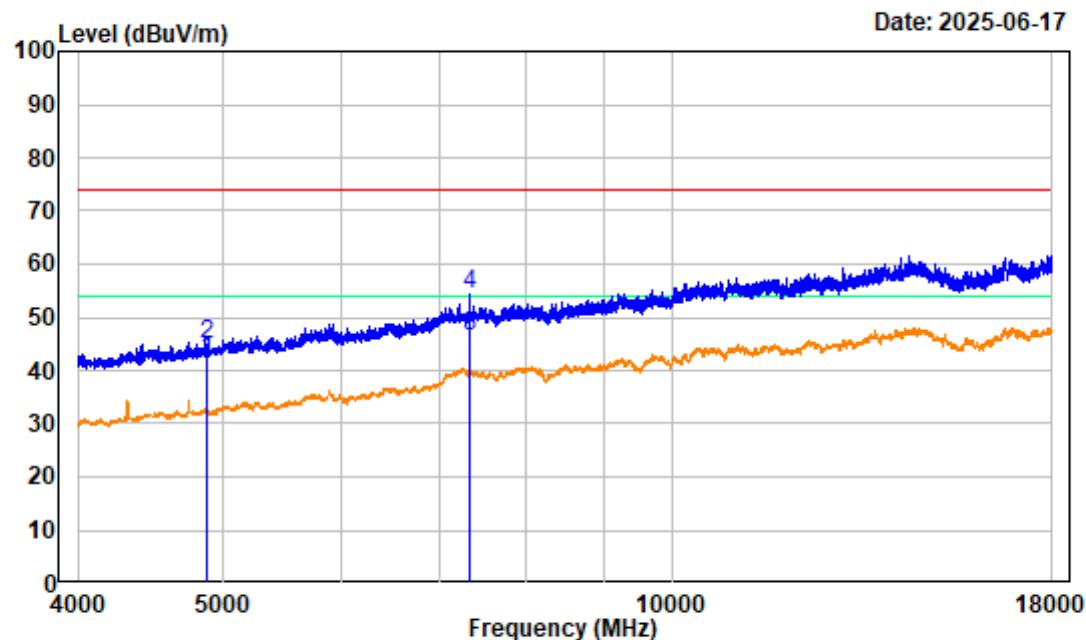

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M Middle Channel 2440MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	dB
1	4880.000	-6.63	48.67	42.04	54.00	-11.96	Average
2	4880.000	-6.63	51.72	45.09	74.00	-28.91	Peak
3	7320.000	-1.22	47.68	46.46	54.00	-7.54	Average
4	7320.000	-1.22	55.72	54.50	74.00	-19.50	Peak

BLE 1M High Channel 1GHz-4GHz_HORIZONTAL

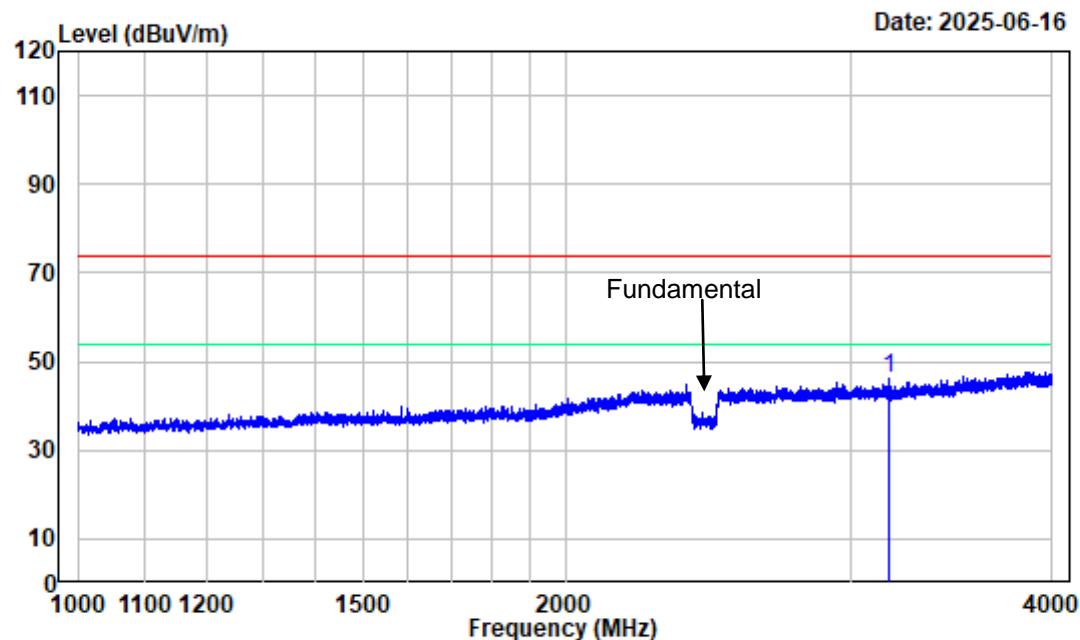

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M High Channel 2480MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 3168.625	-10.01	56.19	46.18	74.00	-27.82	Peak	

BLE 1M High Channel 1GHz-4GHz_VERTICAL

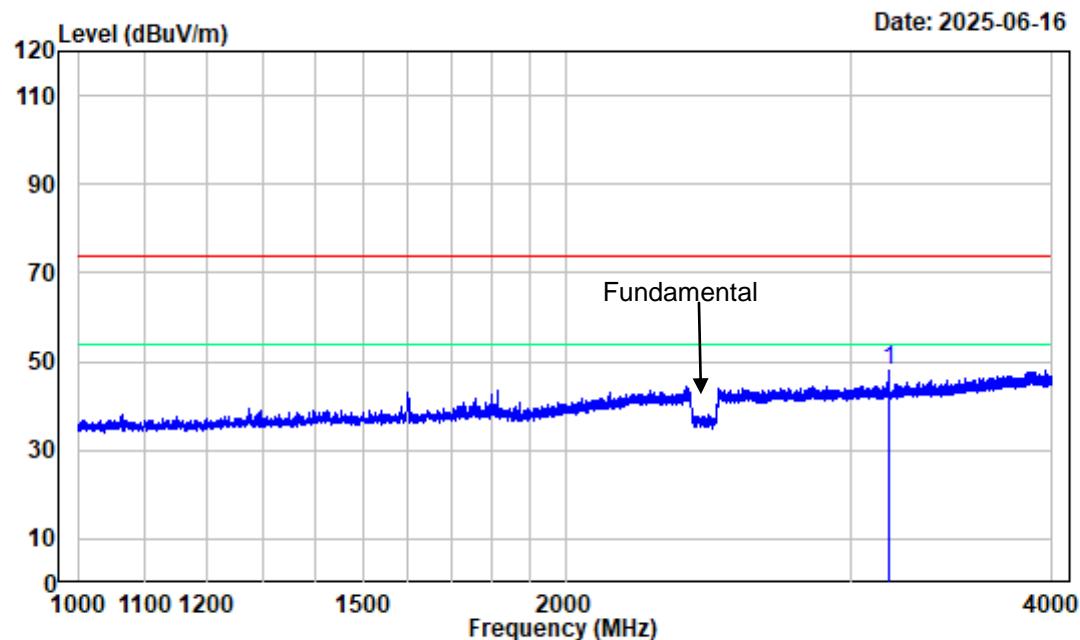

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M High Channel 2480MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 3168.250	-10.01	58.12	48.11	74.00	-25.89	Peak	

BLE 1M High Channel 4GHz-18GHz_HORIZONTAL

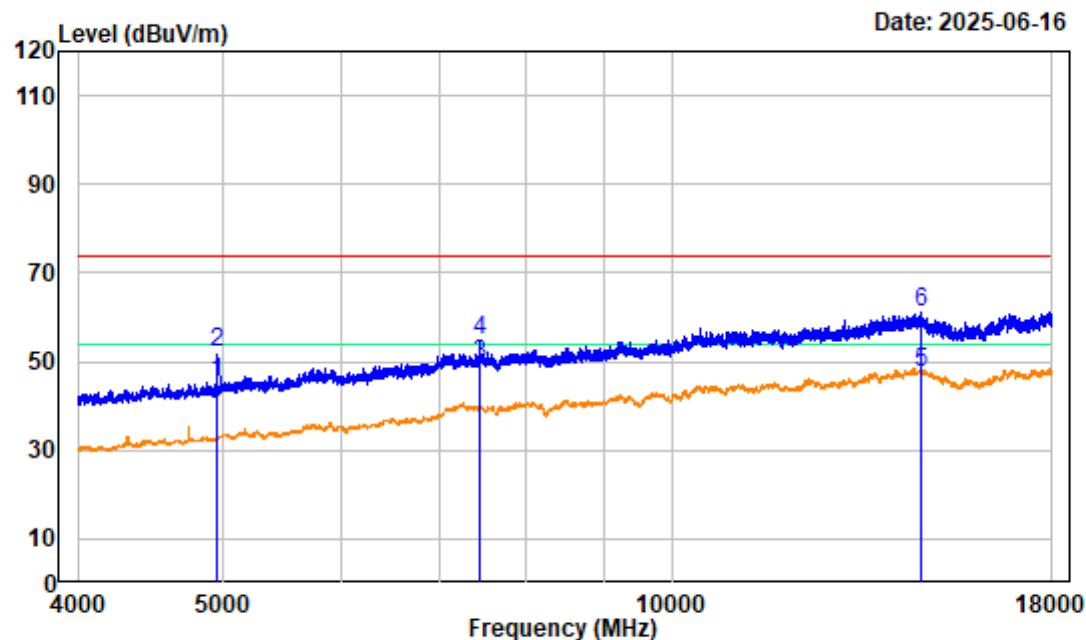

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M High Channel 2480MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	-6.44	51.89	45.45	54.00	-8.55	Average
2	4960.000	-6.44	58.68	52.24	74.00	-21.76	Peak
3	7440.000	-1.07	50.41	49.34	54.00	-4.66	Average
4	7440.000	-1.07	55.73	54.66	74.00	-19.34	Peak
5	14713.500	8.06	39.68	47.74	54.00	-6.26	Average
6	14713.500	8.06	52.87	60.93	74.00	-13.07	Peak

BLE 1M High Channel 4GHz-18GHz_VERTICAL

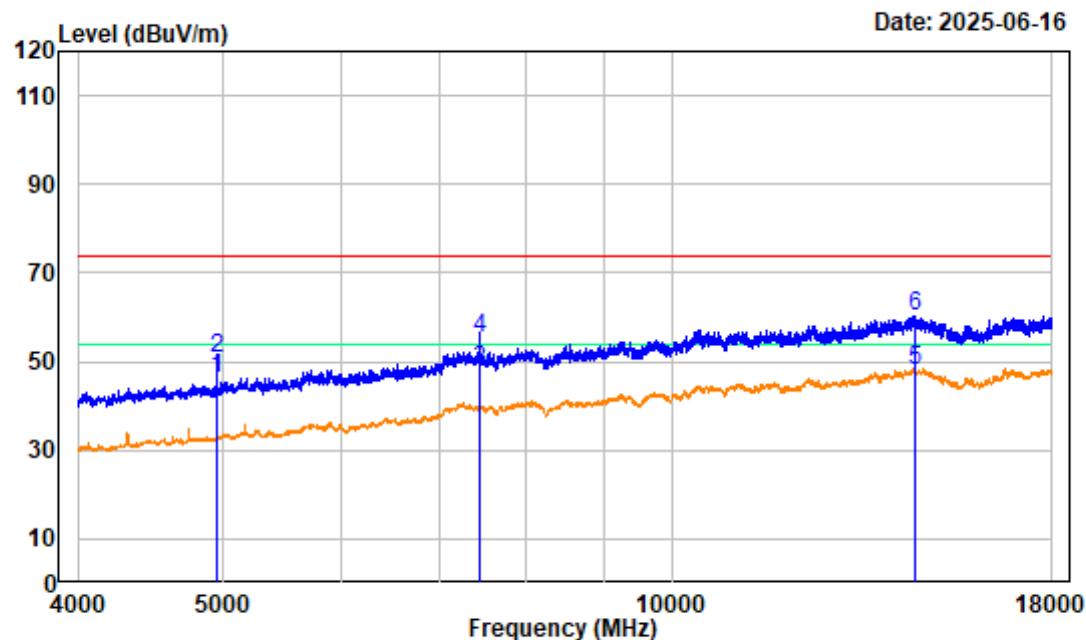

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M High Channel 2480MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	4960.000	-6.44	52.66	46.22	54.00	-7.78	Average
2	4960.000	-6.44	56.98	50.54	74.00	-23.46	Peak
3	7440.000	-1.07	48.97	47.90	54.00	-6.10	Average
4	7440.000	-1.07	56.09	55.02	74.00	-18.98	Peak
5	14557.750	8.90	38.91	47.81	54.00	-6.19	Average
6	14557.750	8.90	51.22	60.12	74.00	-13.88	Peak

BLE 1M High Channel Bandedge_HORIZONTAL

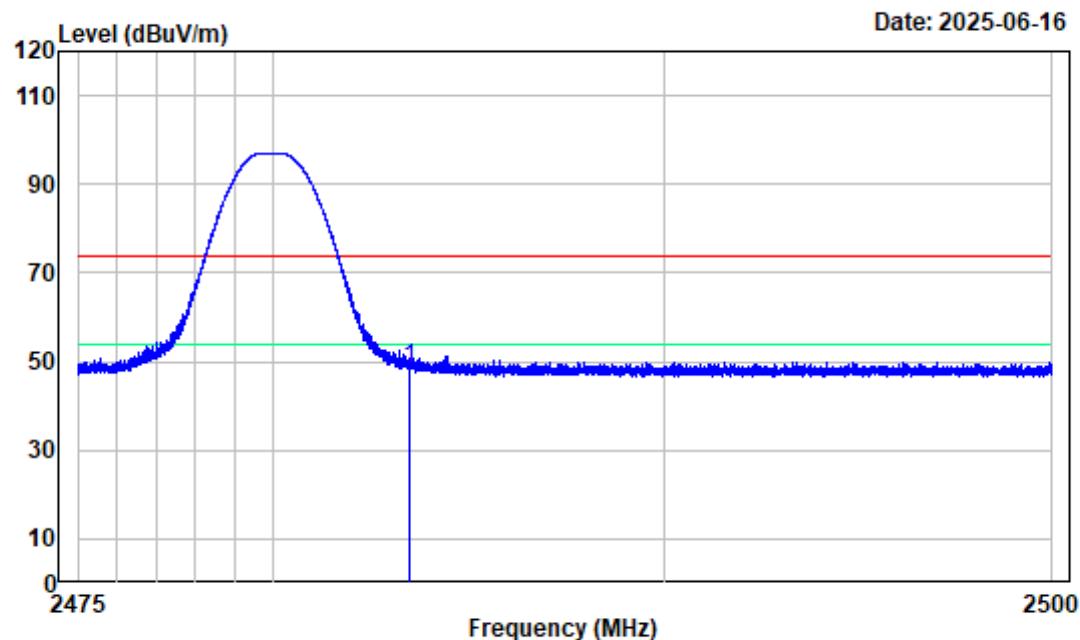

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M High Channel 2480MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	58.71	48.49	74.00	-25.51	Peak

BLE 1M High Channel Bandedge_VERTICAL

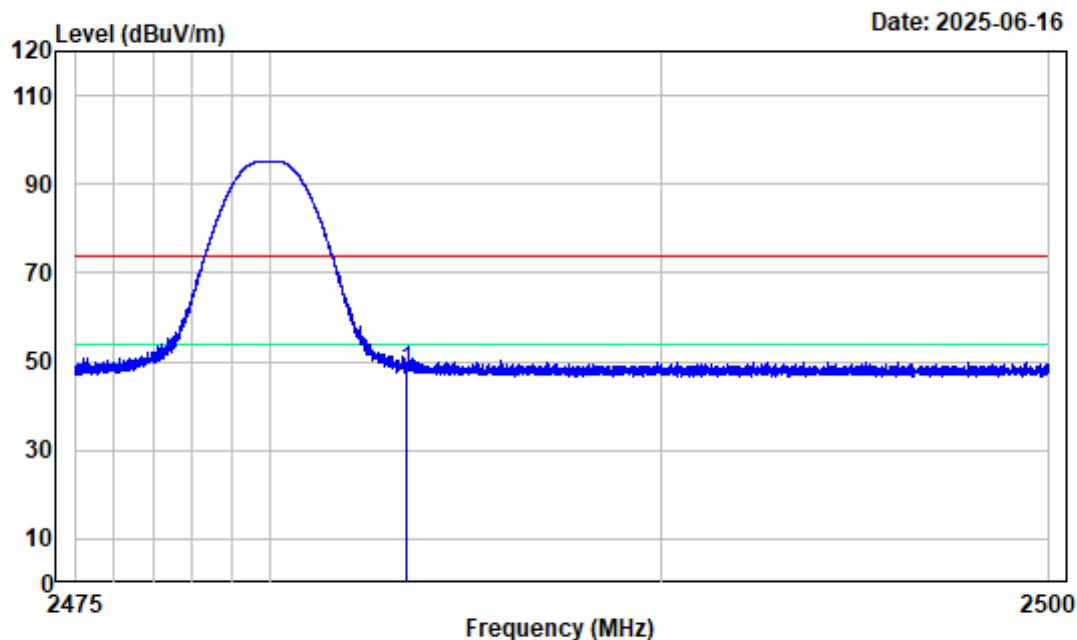

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 1M High Channel 2480MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	58.10	47.88	74.00	-26.12	Peak

BLE 2M Low Channel 1GHz-4GHz_HORIZONTAL

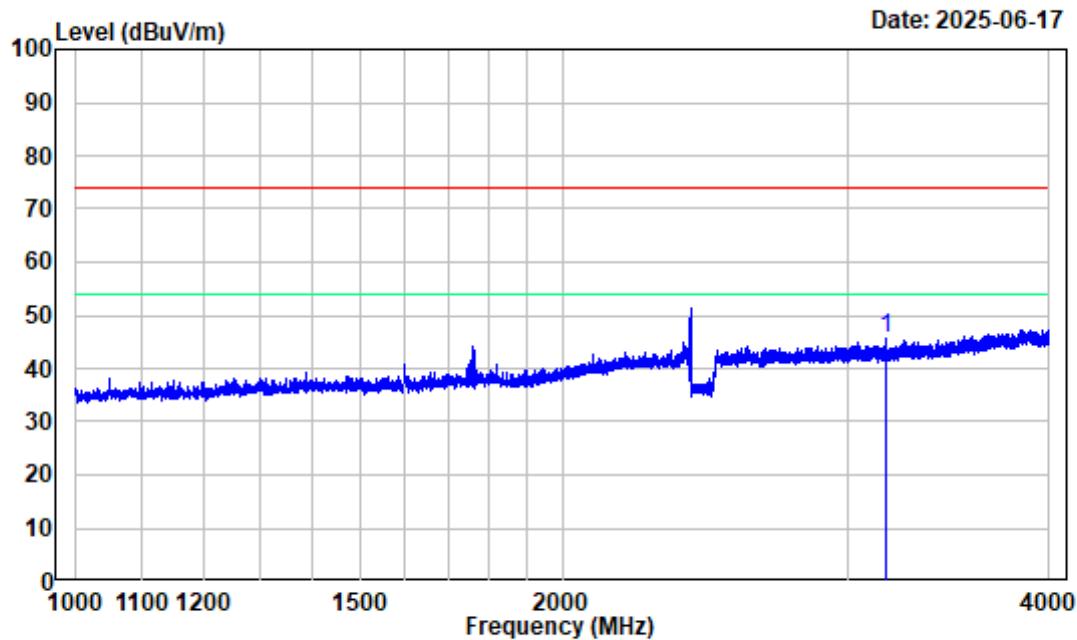

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Low Channel 2402MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3167.500	-9.99	55.59	45.60	74.00	-28.40	Peak

BLE 2M Low Channel 1GHz-4GHz_VERTICAL

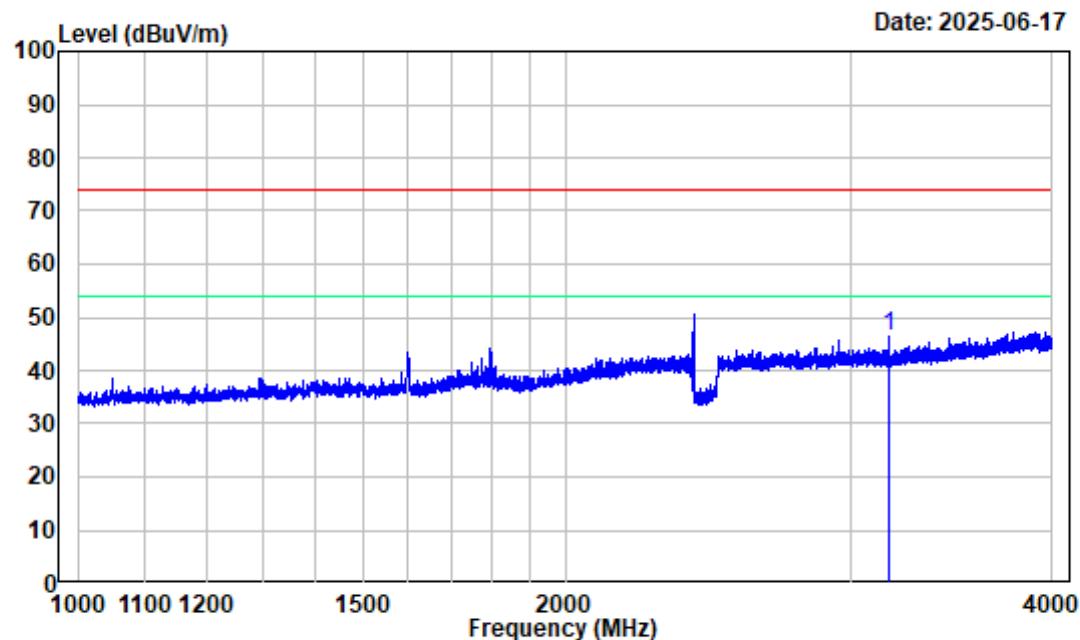

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Low Channel 2402MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	
1	3167.875	-10.00	56.34	46.34	74.00	-27.66	Peak

BLE 2M Low Channel 4GHz-18GHz_HORIZONTAL

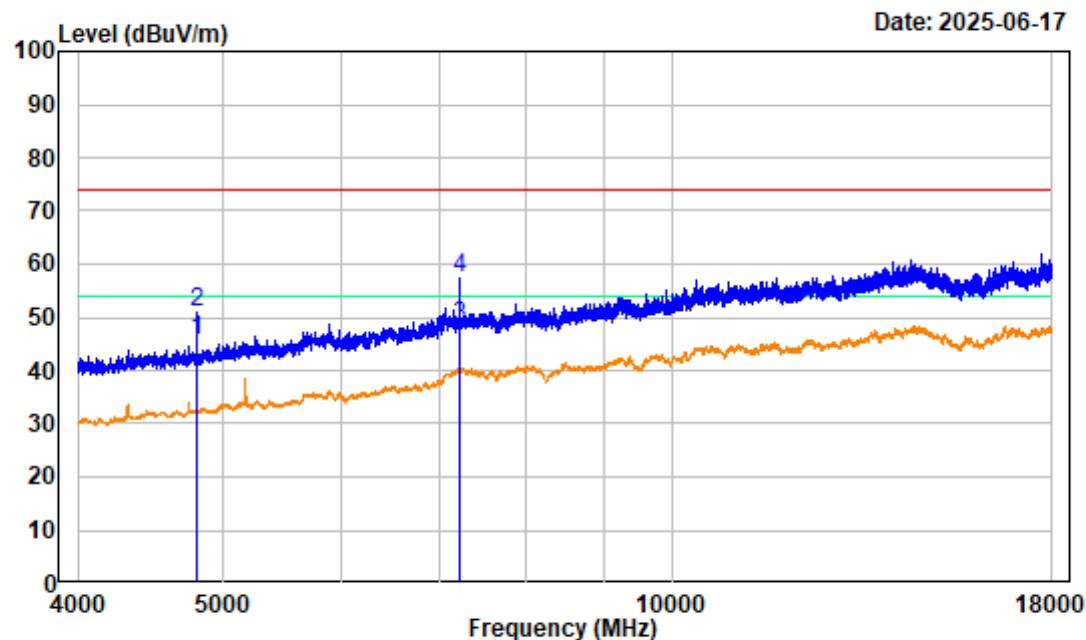

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Low Channel 2402MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	-6.59	52.23	45.64	54.00	-8.36	Average
2	4804.000	-6.59	57.38	50.79	74.00	-23.21	Peak
3	7206.000	-1.33	49.63	48.30	54.00	-5.70	Average
4	7206.000	-1.33	58.50	57.17	74.00	-16.83	Peak

BLE 2M Low Channel 4GHz-18GHz_VERTICAL

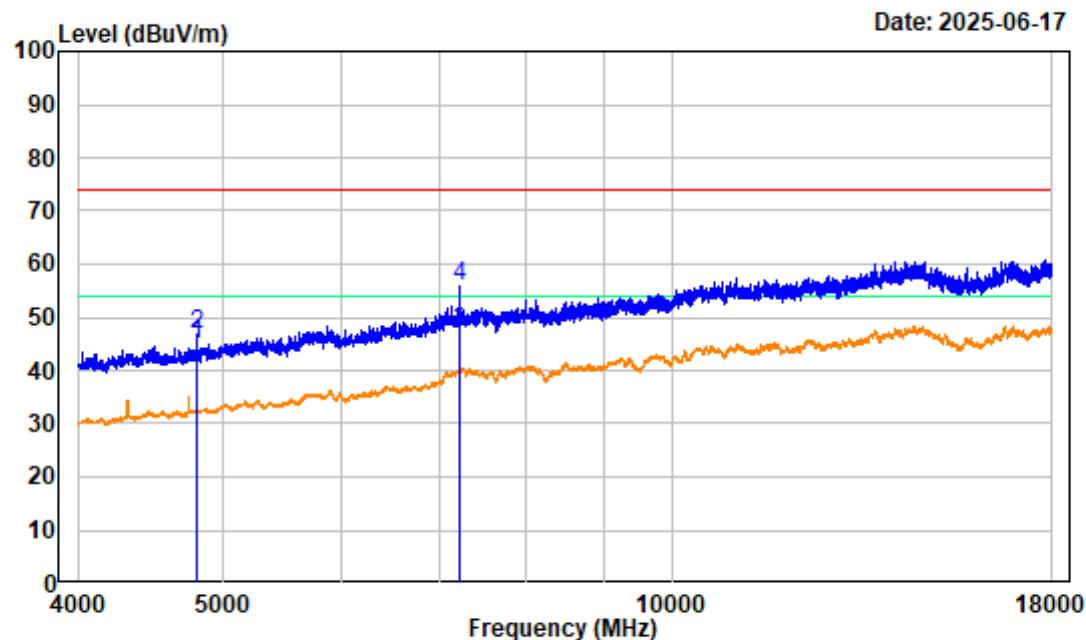

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Low Channel 2402MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	-6.59	51.32	44.73	54.00	-9.27	Average
2	4804.000	-6.59	53.37	46.78	74.00	-27.22	Peak
3	7206.000	-1.33	48.59	47.26	54.00	-6.74	Average
4	7206.000	-1.33	57.14	55.81	74.00	-18.19	Peak

BLE 2M Low Channel 18GHz-25GHz_HORIZONTAL

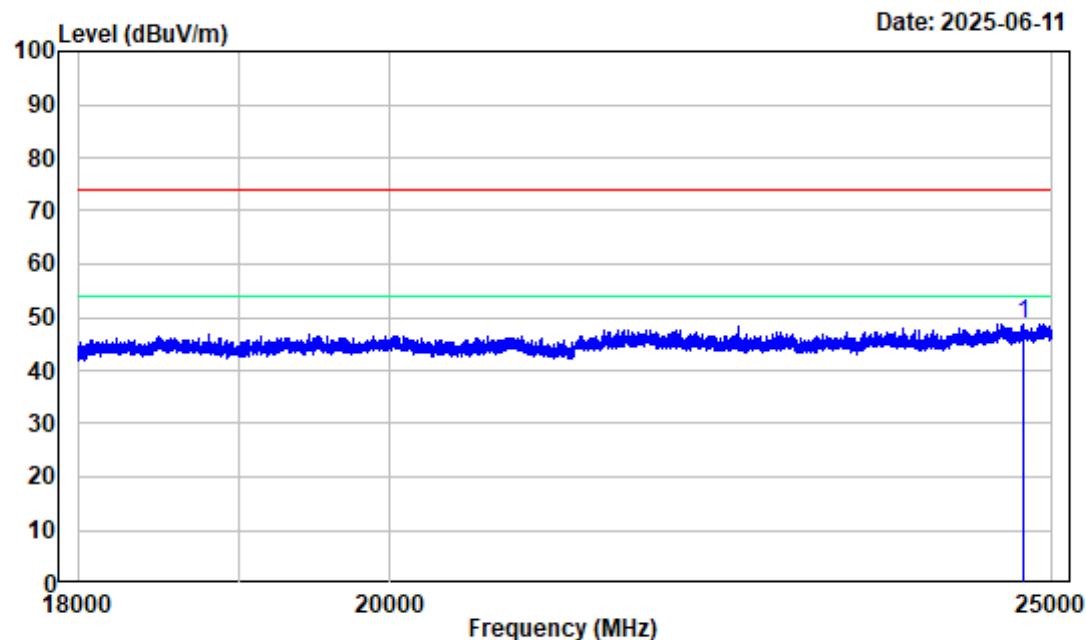

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Low Channel 2402MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 24754.130	0.05	48.77	48.82	74.00	-25.18	Peak	

BLE 2M Low Channel 18GHz-25GHz_VERTICAL

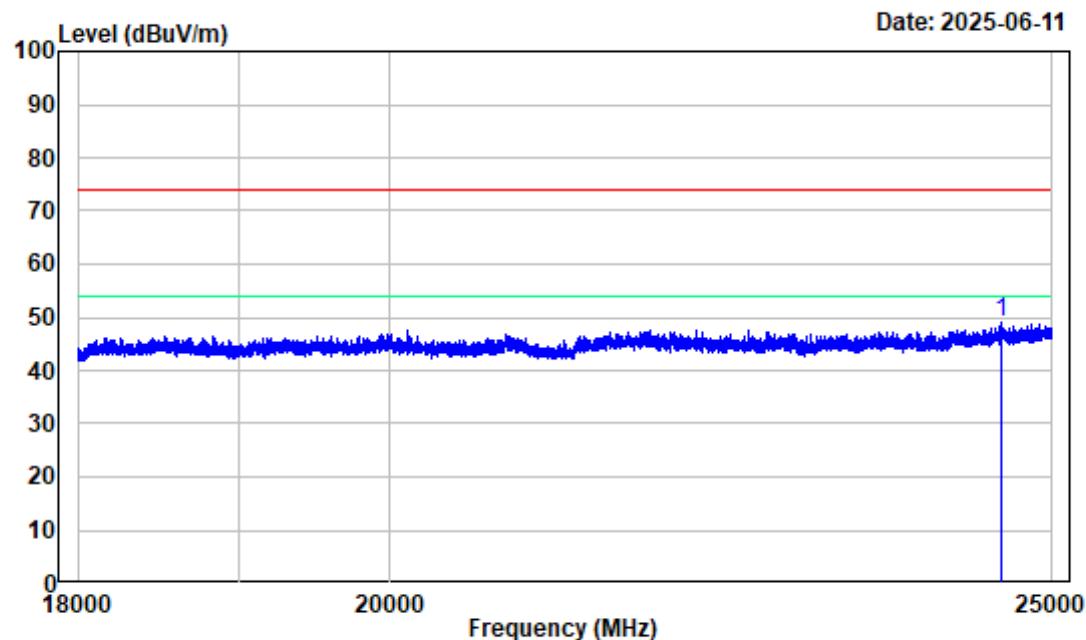

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester: Kevin Lv

Note : BLE 2M Low Channel 2402MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 24580.880	-0.35	49.26	48.91	74.00	-25.09	Peak	

BLE 2M Low Channel Bandedge_HORIZONTAL

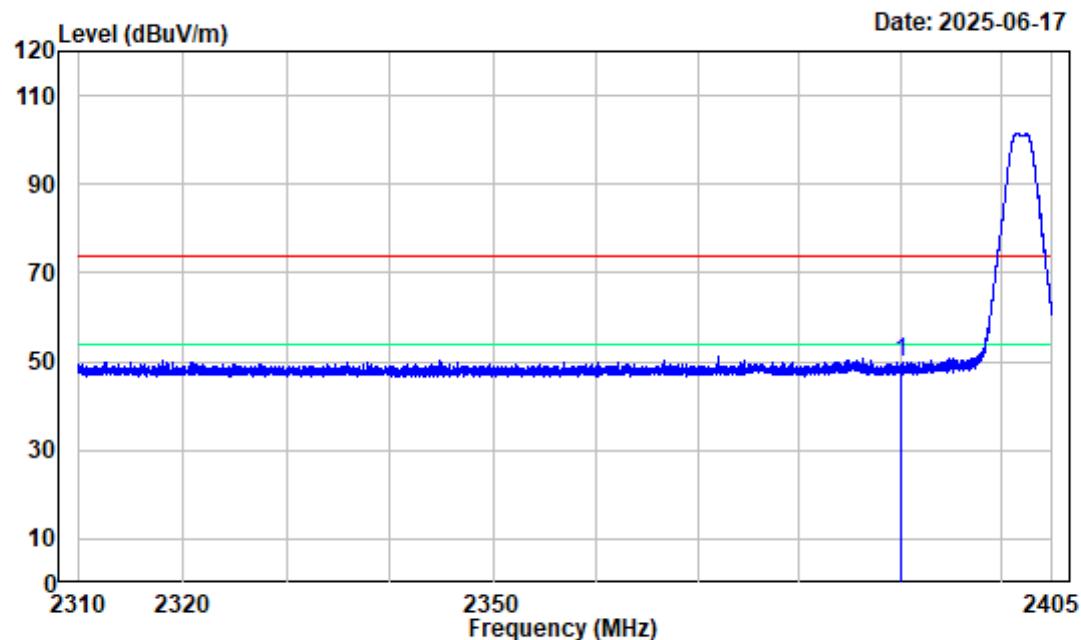

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Low Channel 2402MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	60.26	50.02	74.00	-23.98	peak

BLE 2M Low Channel Bandedge_VERTICAL

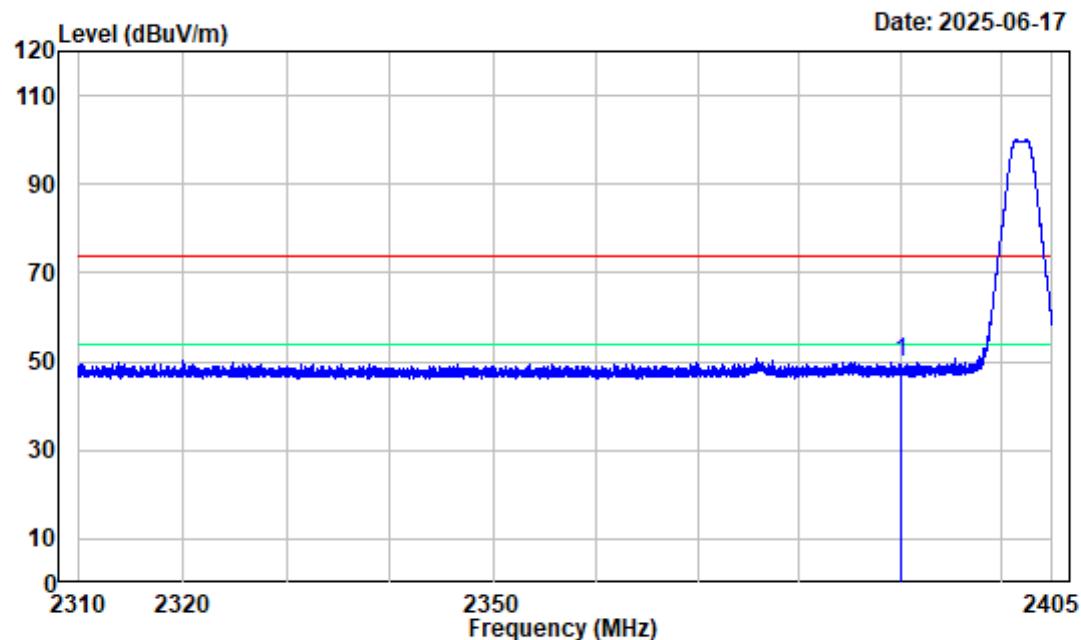

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester: Kevin Lv

Note : BLE 2M Low Channel 2402MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	60.17	49.93	74.00	-24.07	peak

BLE 2M Middle Channel 1GHz-4GHz_HORIZONTAL

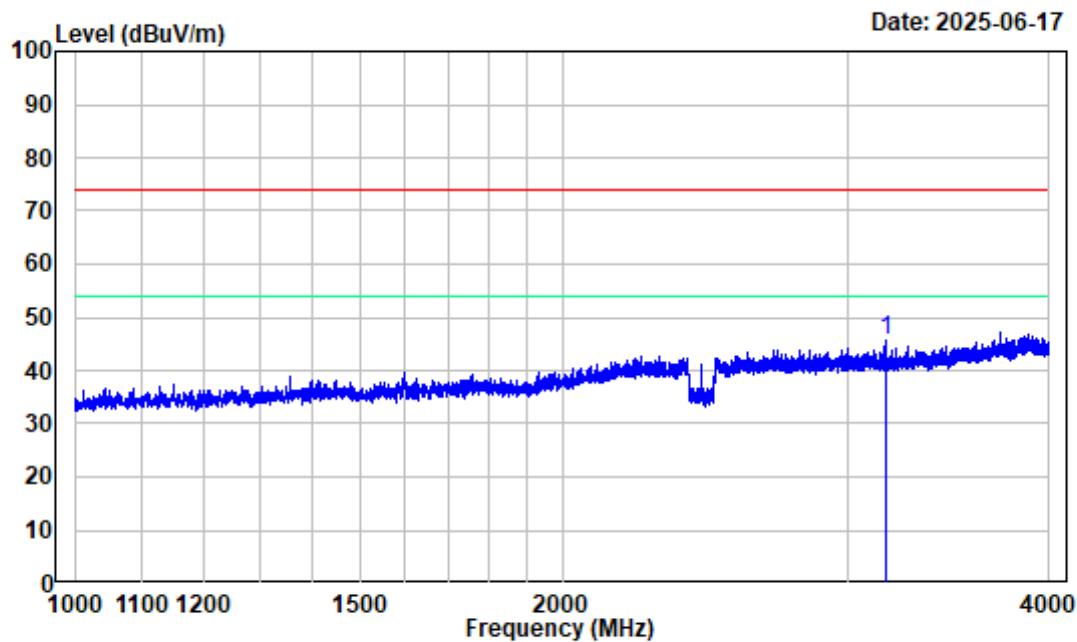

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Middle Channel 2440MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
1	3168.625	-10.01	55.68	45.67	74.00	-28.33	Peak

BLE 2M Middle Channel 1GHz-4GHz_VERTICAL

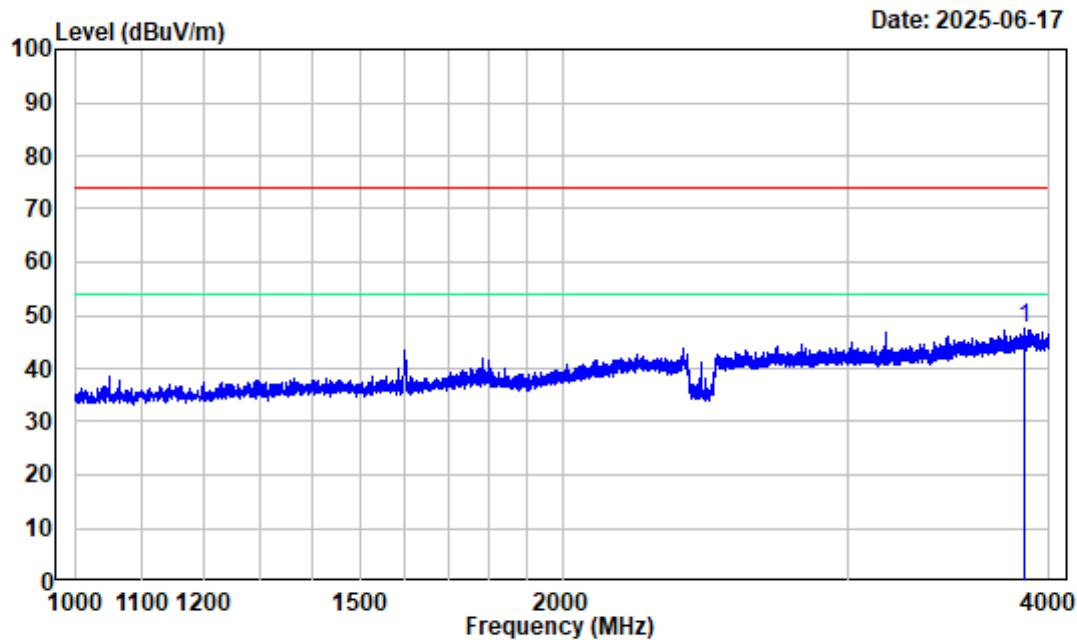

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Middle Channel 2440MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3863.125	-8.24	55.75	47.51	74.00	-26.49	Peak

BLE 2M Middle Channel 4GHz-18GHz_HORIZONTAL

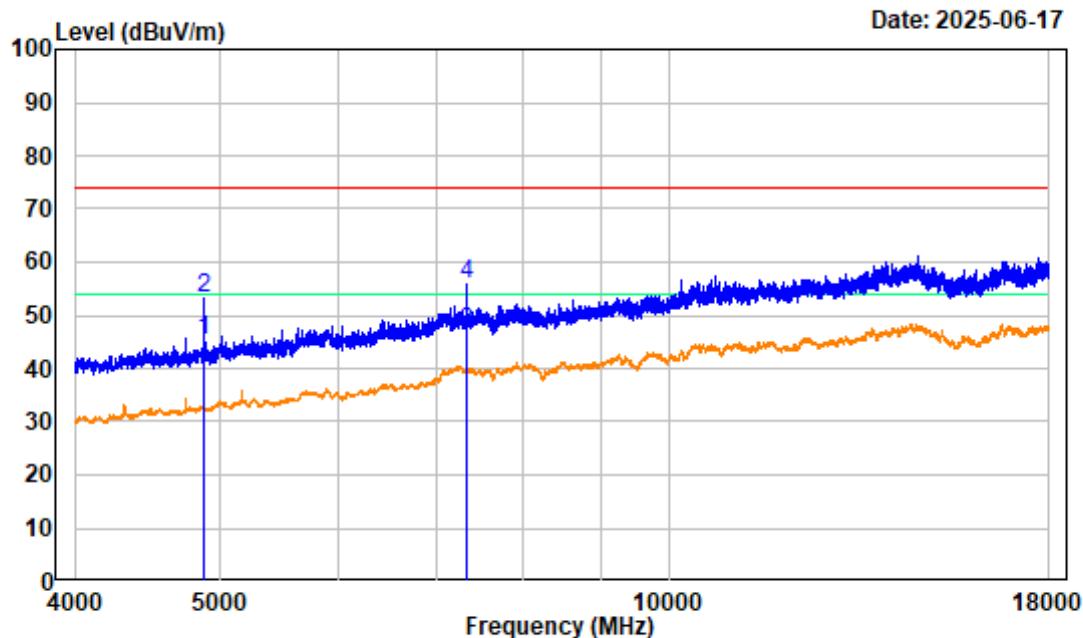

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Middle Channel 2440MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	4880.000	-6.63	51.90	45.27	54.00	-8.73	Average
2	4880.000	-6.63	59.93	53.30	74.00	-20.70	Peak
3	7320.000	-1.22	48.03	46.81	54.00	-7.19	Average
4	7320.000	-1.22	57.11	55.89	74.00	-18.11	Peak

BLE 2M Middle Channel 4GHz-18GHz_VERTICAL

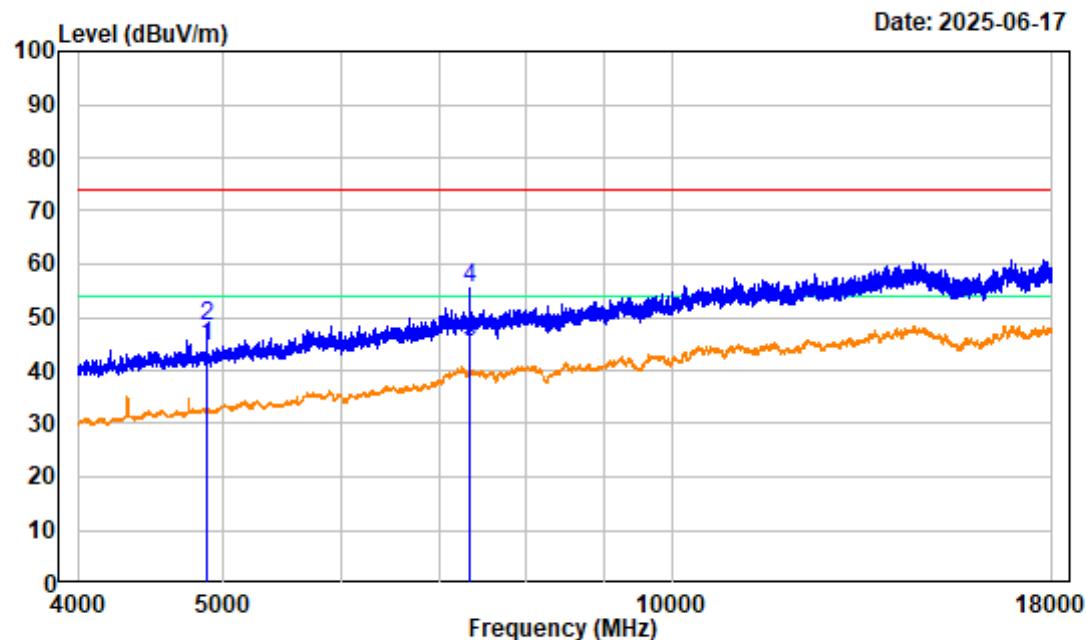

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M Middle Channel 2440MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	dB
1	4880.000	-6.63	51.10	44.47	54.00	-9.53	Average
2	4880.000	-6.63	55.11	48.48	74.00	-25.52	Peak
3	7320.000	-1.22	46.57	45.35	54.00	-8.65	Average
4	7320.000	-1.22	56.53	55.31	74.00	-18.69	Peak

BLE 2M High Channel 1GHz-4GHz_HORIZONTAL

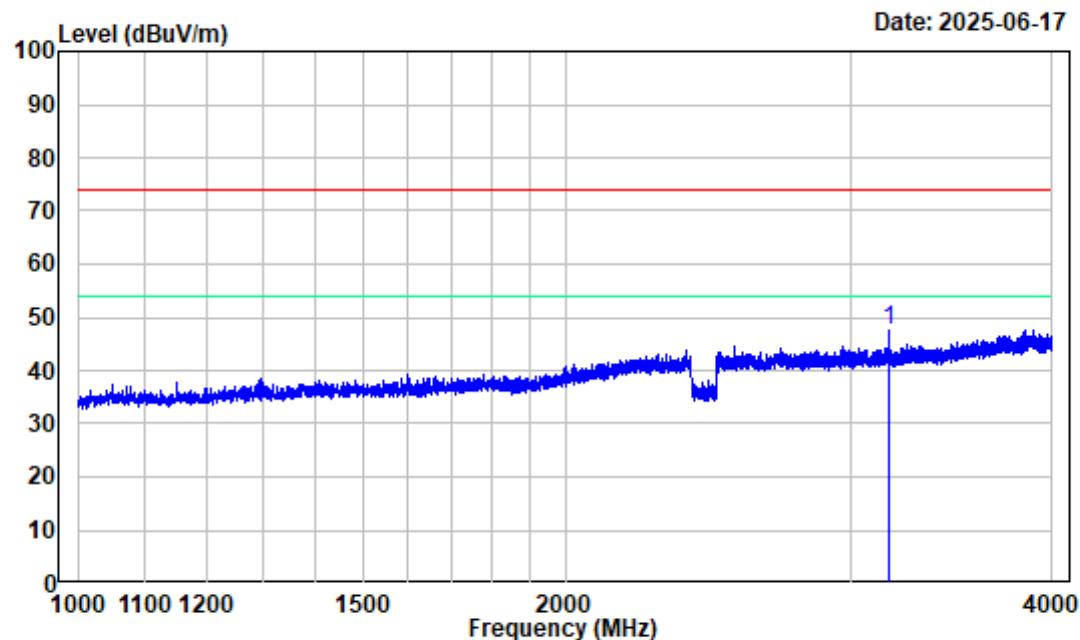

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M High Channel 2480MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 3167.875	-10.00	57.60	47.60	74.00	-26.40	Peak	

BLE 2M High Channel 1GHz-4GHz_VERTICAL

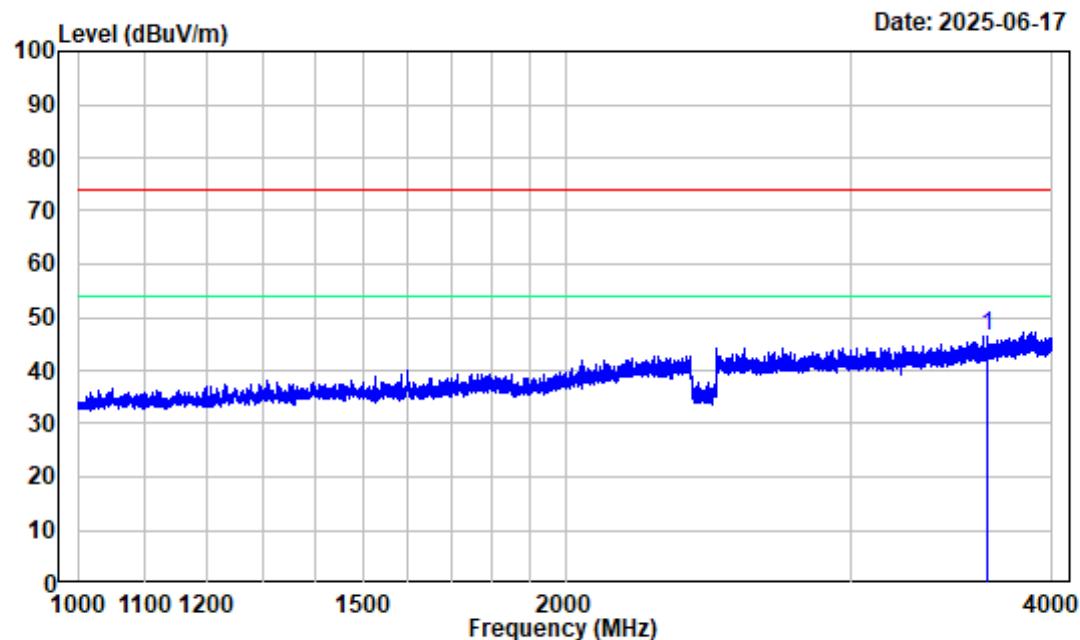

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M High Channel 2480MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3649.750	-9.15	55.68	46.53	74.00	-27.47	Peak

BLE 2M High Channel 4GHz-18GHz_HORIZONTAL

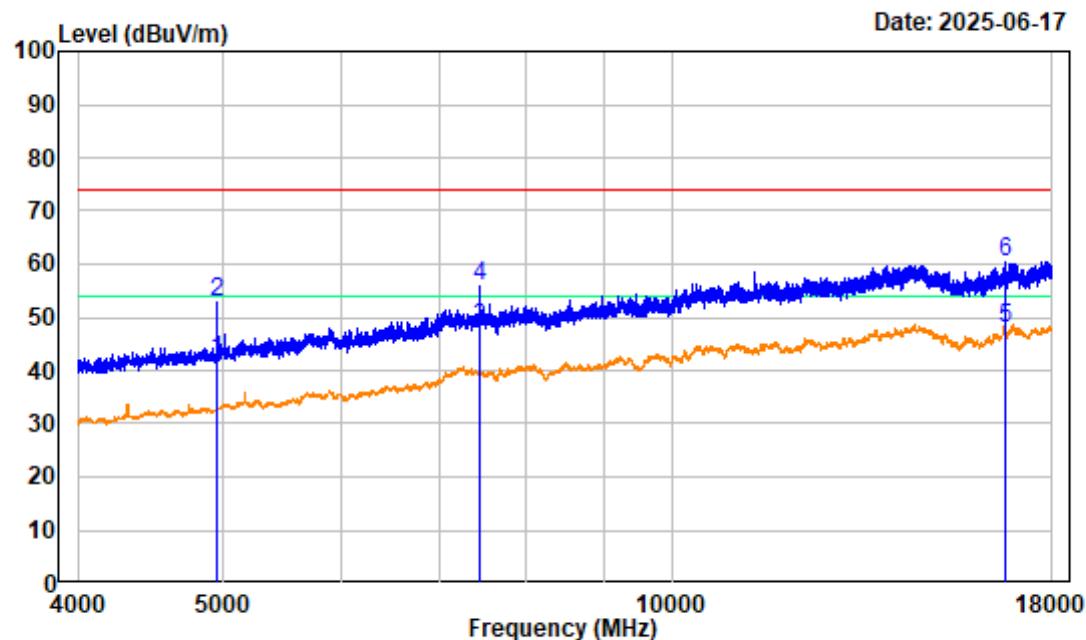

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M High Channel 2480MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	4959.000	-6.46	48.29	41.83	54.00	-12.17	Average
2	4959.000	-6.46	59.35	52.89	74.00	-21.11	Peak
3	7438.750	-1.08	49.01	47.93	54.00	-6.07	Average
4	7438.750	-1.08	56.99	55.91	74.00	-18.09	Peak
5	16752.250	7.78	40.07	47.85	54.00	-6.15	Average
6	16752.250	7.78	52.74	60.52	74.00	-13.48	Peak

BLE 2M High Channel 4GHz-18GHz_VERTICAL

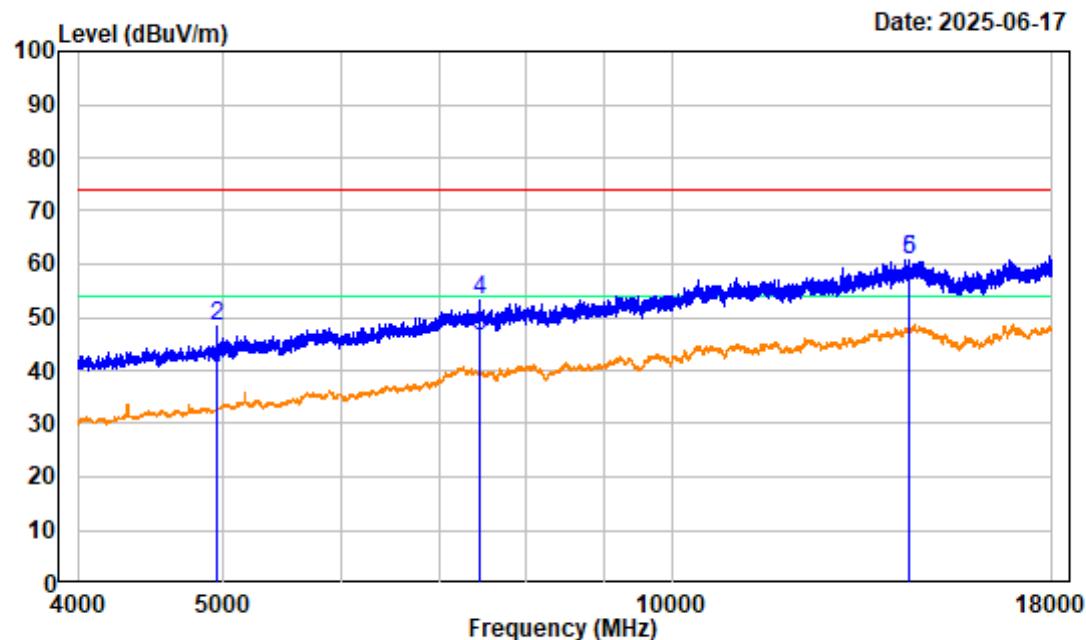

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M High Channel 2480MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	-6.44	46.79	40.35	54.00	-13.65	Average
2	4960.000	-6.44	54.60	48.16	74.00	-25.84	Peak
3	7438.750	-1.08	47.33	46.25	54.00	-7.75	Average
4	7438.750	-1.08	54.21	53.13	74.00	-20.87	Peak
5	14430.000	8.47	52.38	60.85	74.00	-13.15	Peak
6	14430.000	8.47	52.38	60.85	74.00	-13.15	Peak

BLE 2M High Channel Bandedge_HORIZONTAL

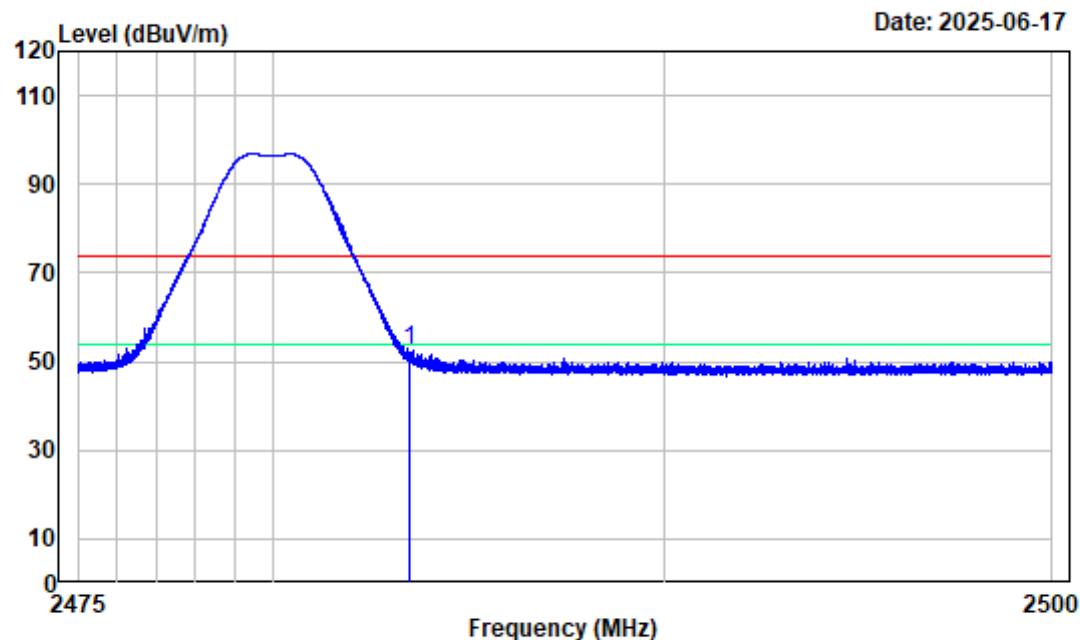

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M High Channel 2480MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	62.77	52.55	74.00	-21.45	peak

BLE 2M High Channel Bandedge_VERTICAL

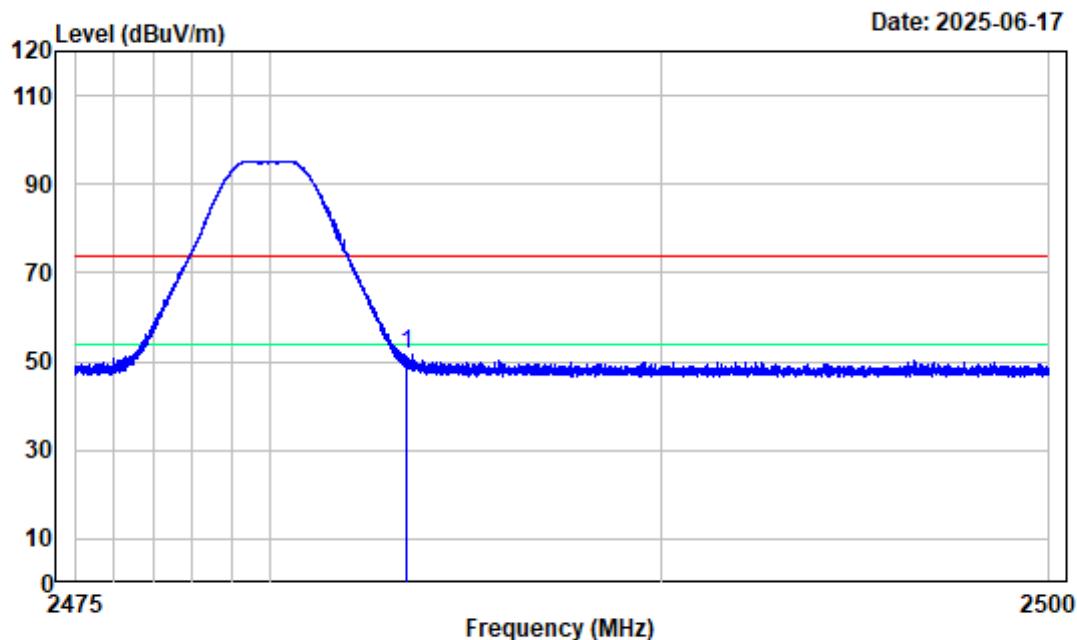

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF

Test Mode : Transmitting Tester:Kevin Lv

Note : BLE 2M High Channel 2480MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	61.74	51.52	74.00	-22.48	peak

***** END *****