

Appendix C.1(2.4G WIFI-CE&RSE Test Result)

AC Line Conducted Emissions

Test Data


Environmental Conditions

Temperature:	23.6 °C
Relative Humidity:	55 %
ATM Pressure:	99.7 kPa
Test Engineer:	Jason Fan
Test Date:	2025-06-17
EUT Operation Mode:	2.4G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note: The maximum output power mode and channel: 802.11g Low Channel was tested.

AC 120V/60Hz, Line:

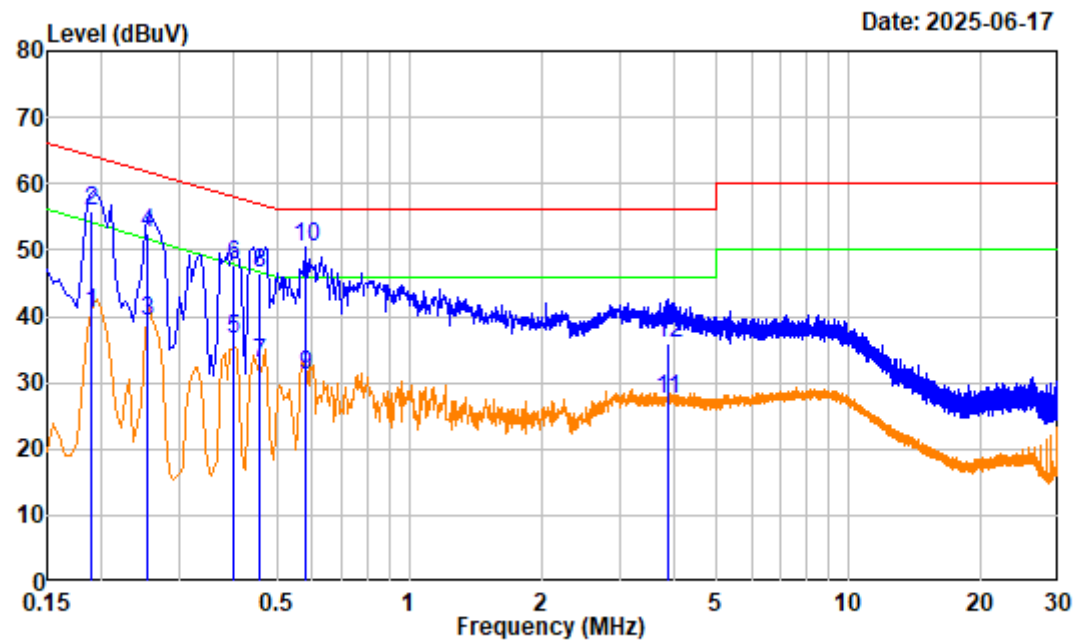

Site : Shielding Room

Condition : Line

Project No. : 2504T31635E-RF Tester:Jason Fan


Test Mode : 2.4G WIFI Transmitting

Note : Adapter

Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.190	20.28	20.05	40.33	54.05	-13.72	Average
2	0.190	20.28	35.60	55.88	64.05	-8.17	QP
3	0.253	20.27	18.90	39.17	51.65	-12.48	Average
4	0.253	20.27	32.37	52.64	61.65	-9.01	QP
5	0.400	20.17	16.24	36.41	47.85	-11.44	Average
6	0.400	20.17	27.45	47.62	57.85	-10.23	QP
7	0.457	20.14	12.86	33.00	46.75	-13.75	Average
8	0.457	20.14	26.41	46.55	56.75	-10.20	QP
9	0.580	20.29	10.70	30.99	46.00	-15.01	Average
10	0.580	20.29	30.06	50.35	56.00	-5.65	Peak
11	3.875	20.74	6.66	27.40	46.00	-18.60	Average
12	3.875	20.74	15.09	35.83	56.00	-20.17	QP

AC 120V/60Hz, Neutral:

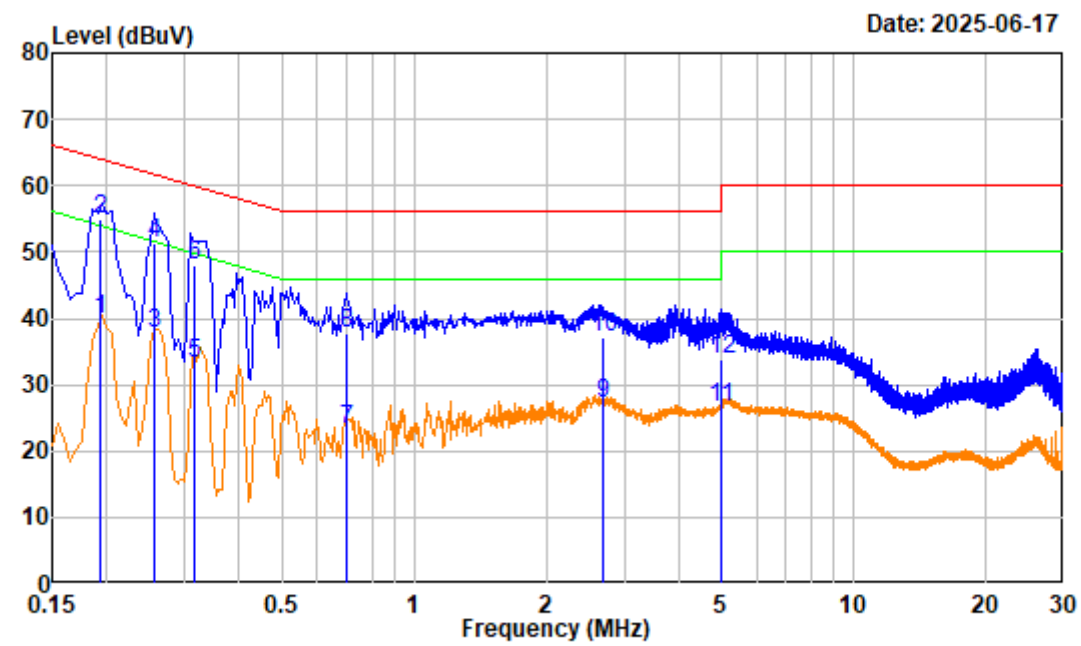

Site : Shielding Room
Condition : neutral
Project No. : 2504T31635E-RF Tester:Jason Fan
Test Mode : 2.4G WIFI Transmitting
Note : Adapter
Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.193	19.79	20.17	39.96	53.89	-13.93	Average
2	0.193	19.79	35.19	54.98	63.89	-8.91	QP
3	0.257	19.91	17.71	37.62	51.53	-13.91	Average
4	0.257	19.91	31.44	51.35	61.53	-10.18	QP
5	0.317	20.07	13.26	33.33	49.78	-16.45	Average
6	0.317	20.07	28.00	48.07	59.78	-11.71	QP
7	0.700	20.71	2.58	23.29	46.00	-22.71	Average
8	0.700	20.71	16.89	37.60	56.00	-18.40	QP
9	2.682	20.28	6.97	27.25	46.00	-18.75	Average
10	2.682	20.28	16.81	37.09	56.00	-18.91	QP
11	4.976	20.62	5.90	26.52	46.00	-19.48	Average
12	4.976	20.62	13.07	33.69	56.00	-22.31	QP

Radiated Spurious Emissions

Test Data

9kHz-1GHz

Environmental Conditions


Temperature:	24.6 °C
Relative Humidity:	56 %
ATM Pressure:	99.7 kPa
Test Engineer:	Colin Lin
Test Date:	2025-06-12
EUT Operation Mode:	2.4G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The Loop Antenna were tested in parallel, perpendicular and ground-parallel. The worst orientation was parallel and the data was recorded in report.

Note 2: The maximum output power mode and channel: 802.11g Low Channel was tested.

9kHz~30MHz:

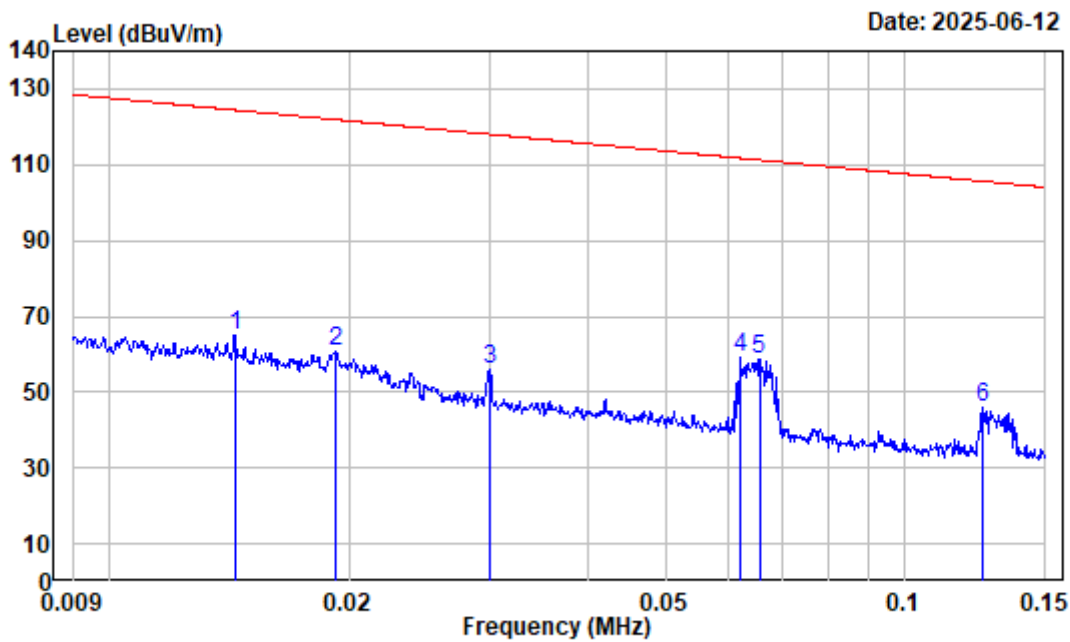

Site : Chamber

Condition : 3m


Job No. : 2504T31635E-RF Tester: Colin Lin

Polarization : Parallel

Test Mode : 2.4G WIFI Transmitting

Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.014	33.87	30.96	64.83	124.44	-59.61	Peak
2	0.019	31.70	28.83	60.53	121.90	-61.37	Peak
3	0.030	26.92	29.09	56.01	118.04	-62.03	Peak
4	0.062	21.12	38.18	59.30	111.76	-52.46	Peak
5	0.066	20.60	37.97	58.57	111.27	-52.70	Peak
6	0.125	15.29	30.65	45.94	105.65	-59.71	Peak

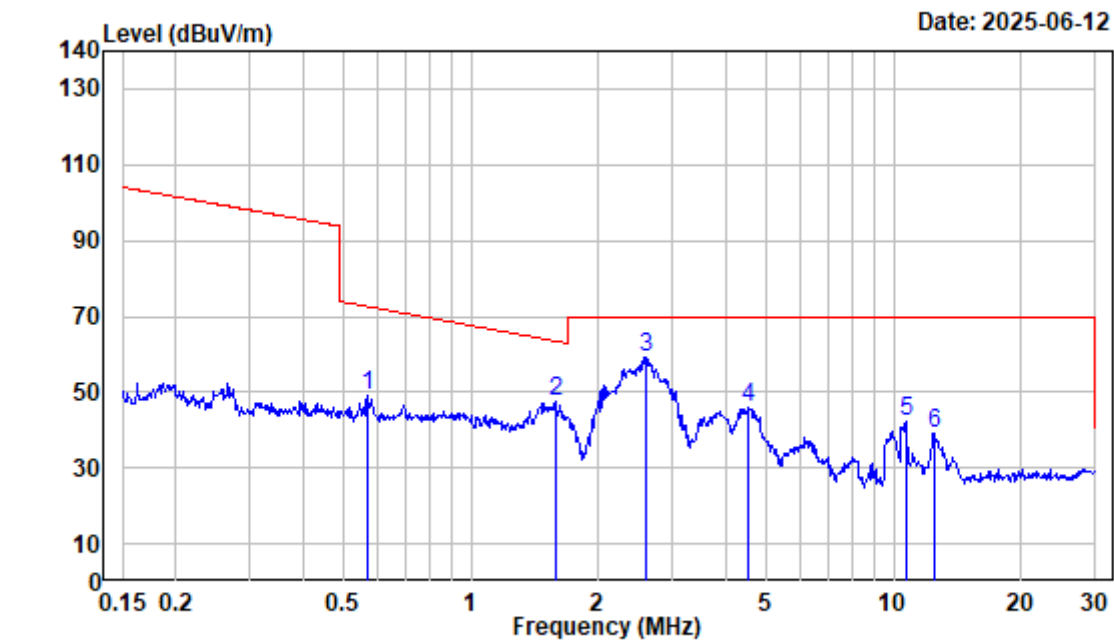

Site : Chamber
Condition : 3m
Job No. : 2504T31635E-RF Tester: Colin Lin
Polarization : Parallel
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:10kHz VBW:30kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.570	2.45	46.47	48.92	72.46	-23.54	Peak
2	1.585	-3.95	51.69	47.74	63.39	-15.65	Peak
3	2.594	-5.70	65.11	59.41	69.54	-10.13	Peak
4	4.549	-6.30	52.09	45.79	69.54	-23.75	Peak
5	10.676	-5.27	47.55	42.28	69.54	-27.26	Peak
6	12.449	-4.85	44.09	39.24	69.54	-30.30	Peak

30MHz~1GHz:

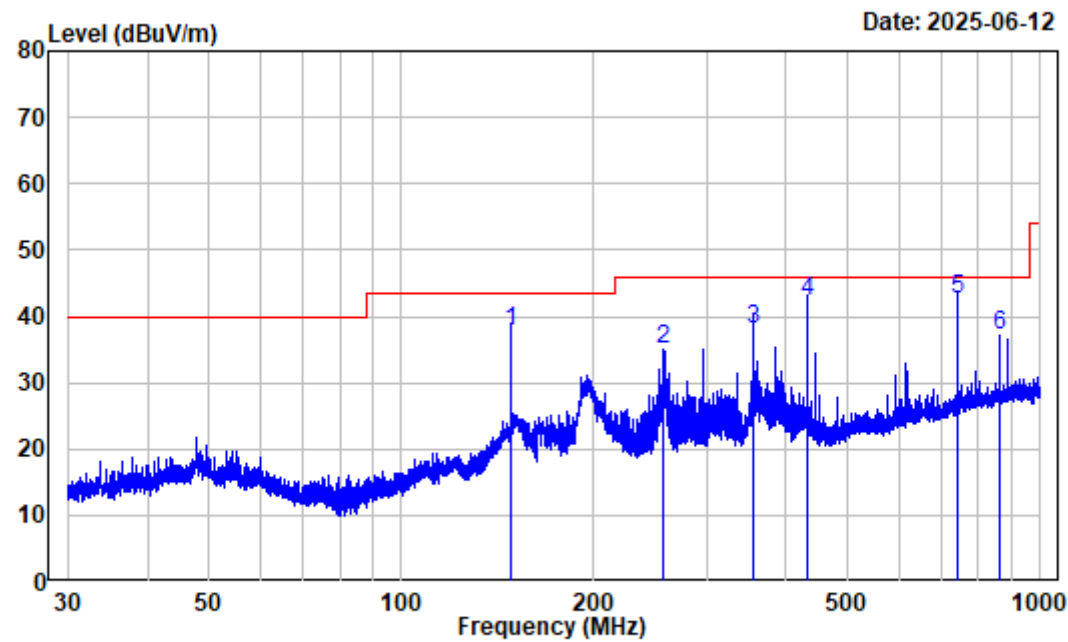

Site : Chamber


Condition : 3m HORIZONTAL

Job No. : 2504T31635E-RF Tester: Colin Lin

Test Mode : 2.4G WIFI Transmitting

Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	148.376	-15.36	53.10	37.74	43.50	-5.76	QP
2	257.197	-10.77	45.79	35.02	46.00	-10.98	Peak
3	356.051	-7.77	45.80	38.03	46.00	-7.97	QP
4	431.977	-5.55	47.69	42.14	46.00	-3.86	QP
5	741.934	-1.00	43.50	42.50	46.00	-3.50	QP
6	864.192	0.37	36.73	37.10	46.00	-8.90	Peak

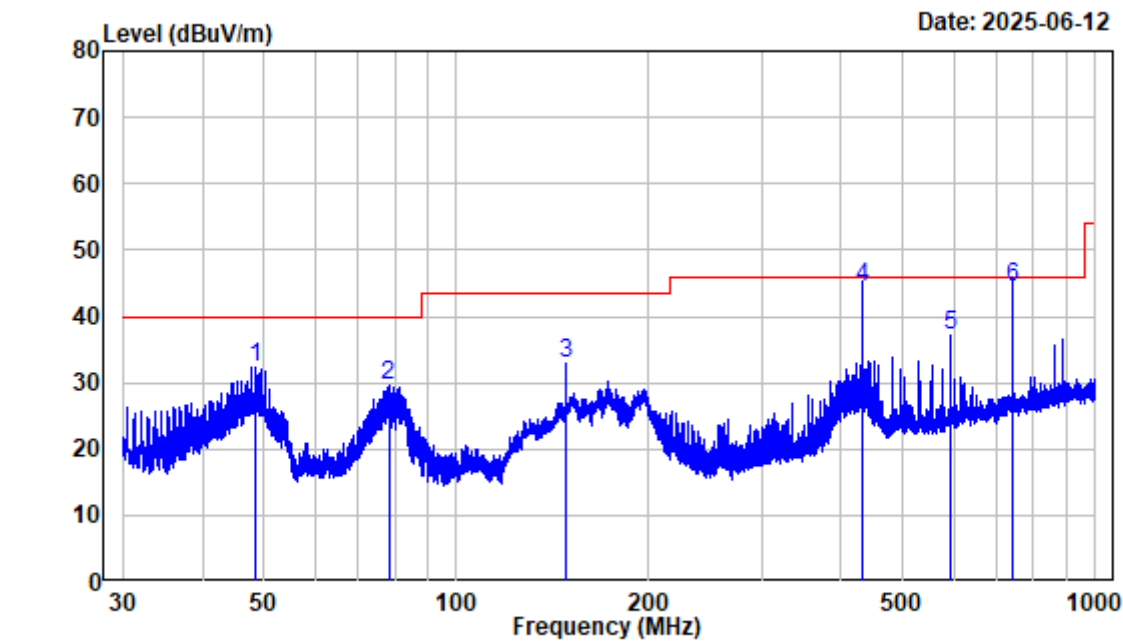

Site : Chamber

Condition : 3m VERTICAL

Job No. : 2504T31635E-RF Tester: Colin Lin

Test Mode : 2.4G WIFI Transmitting

Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	48.565	-10.34	42.61	32.27	40.00	-7.73	Peak
2	78.276	-16.87	46.37	29.50	40.00	-10.50	Peak
3	148.311	-15.36	48.37	33.01	43.50	-10.49	Peak
4	431.977	-5.55	49.89	44.34	46.00	-1.66	QP
5	593.570	-3.14	40.29	37.15	46.00	-8.85	Peak
6	741.934	-1.00	45.50	44.50	46.00	-1.50	QP

1GHz-25GHz

Environmental Conditions


Temperature:	23.8 to 24.2 °C
Relative Humidity:	53 to 54 %
ATM Pressure:	99.7 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-06-10 to 2025-06-11
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The fundamental with band reject filter.

Note 2: For 18GHz-25GHz, the maximum output power mode and channel: 802.11g Low Channel was tested.


802.11b Low Channel 1GHz-4GHz_HORIZONTAL

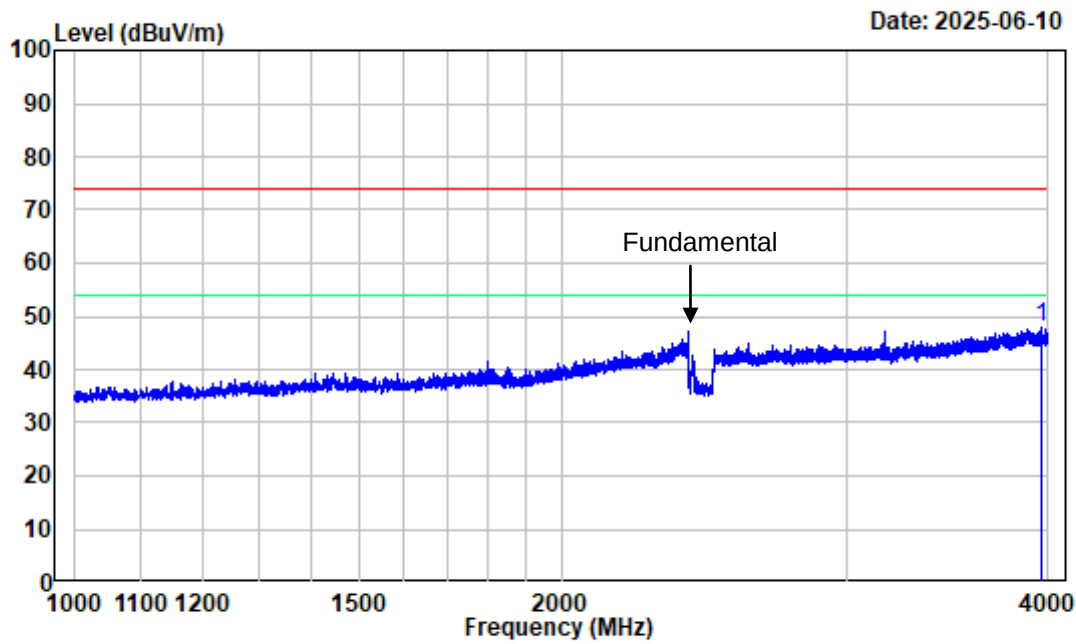

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3959.875	-8.33	56.13	47.80	74.00	-26.20	Peak


802.11b Low Channel 1GHz-4GHz_VERTICAL

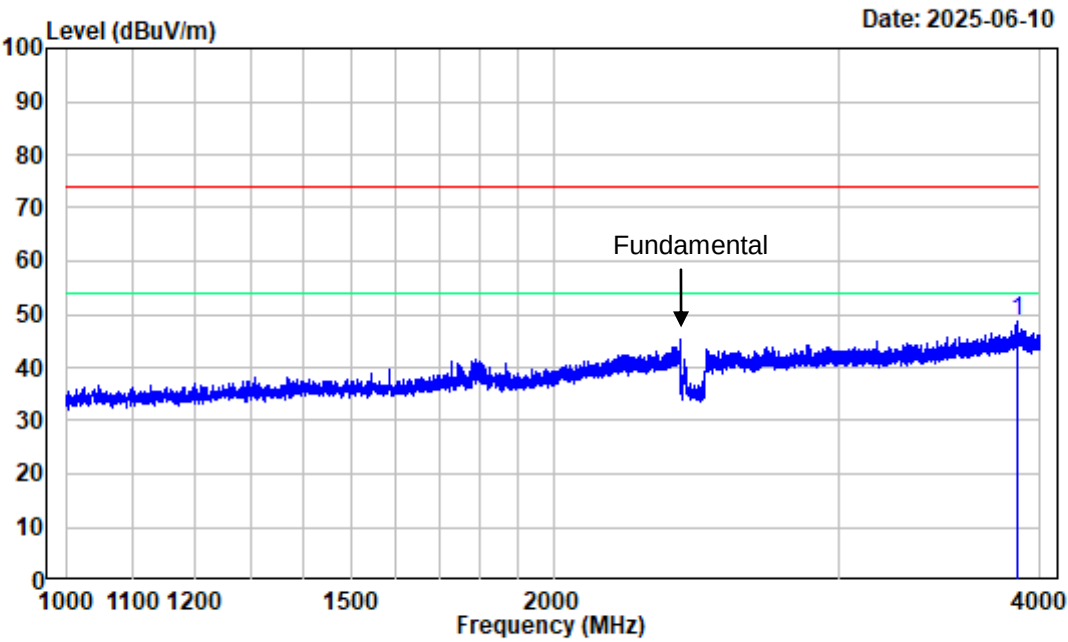

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3878.125	-8.11	56.87	48.76	74.00	-25.24	Peak


802.11b Low Channel 4GHz-18GHz_HORIZONTAL

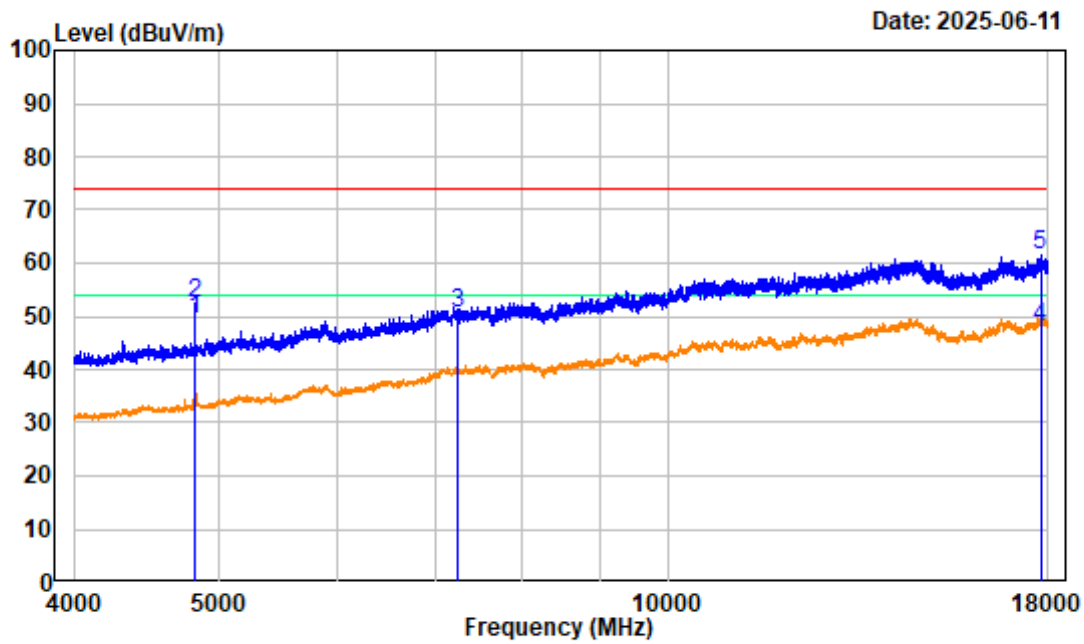

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	55.89	49.28	54.00	-4.72	average
2	4824.250	-6.61	58.88	52.27	74.00	-21.73	peak
3	7235.750	-1.31	51.90	50.59	74.00	-23.41	peak
4	17791.750	7.60	40.37	47.97	54.00	-6.03	average
5	17791.750	7.60	53.94	61.54	74.00	-12.46	peak


802.11b Low Channel 4GHz-18GHz_VERTICAL

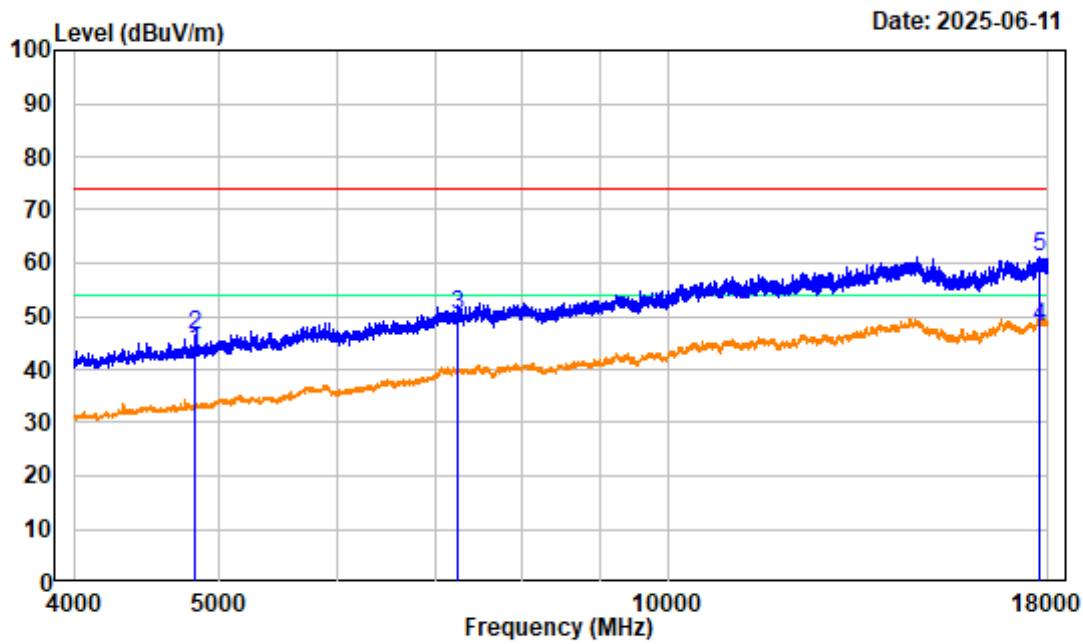

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	50.18	43.57	54.00	-10.43	average
2	4824.250	-6.61	53.13	46.52	74.00	-27.48	peak
3	7235.750	-1.31	51.44	50.13	74.00	-23.87	peak
4	17786.500	7.63	40.23	47.86	54.00	-6.14	average
5	17786.500	7.63	53.54	61.17	74.00	-12.83	peak


802.11b Low Channel Bandedge_HORIZONTAL

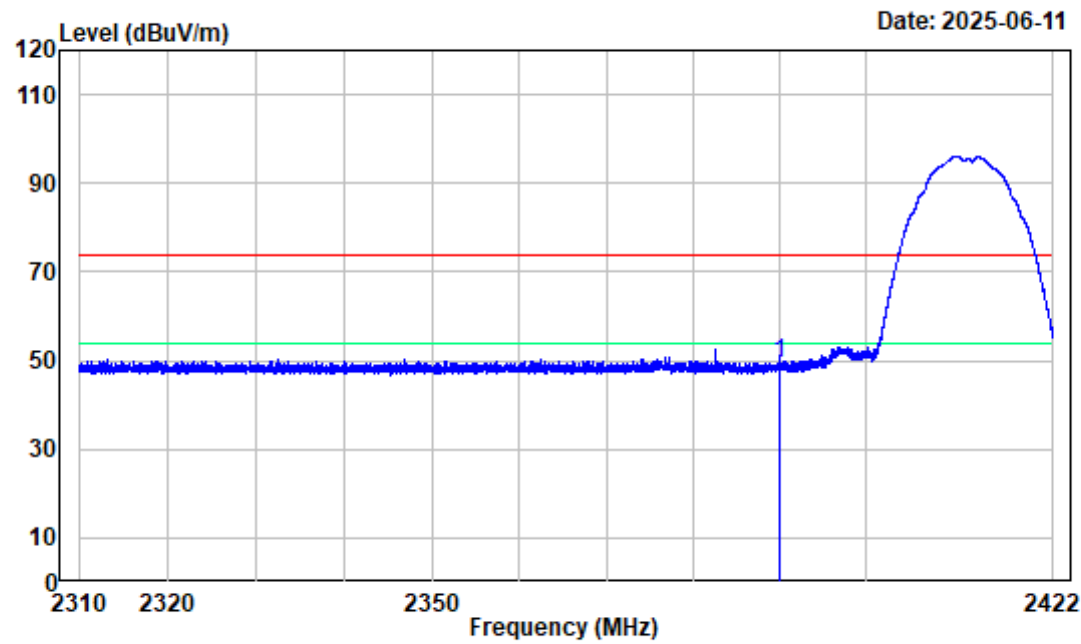

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.24	59.75	49.51	74.00	-24.49	peak


802.11b Low Channel Bandedge_VERTICAL

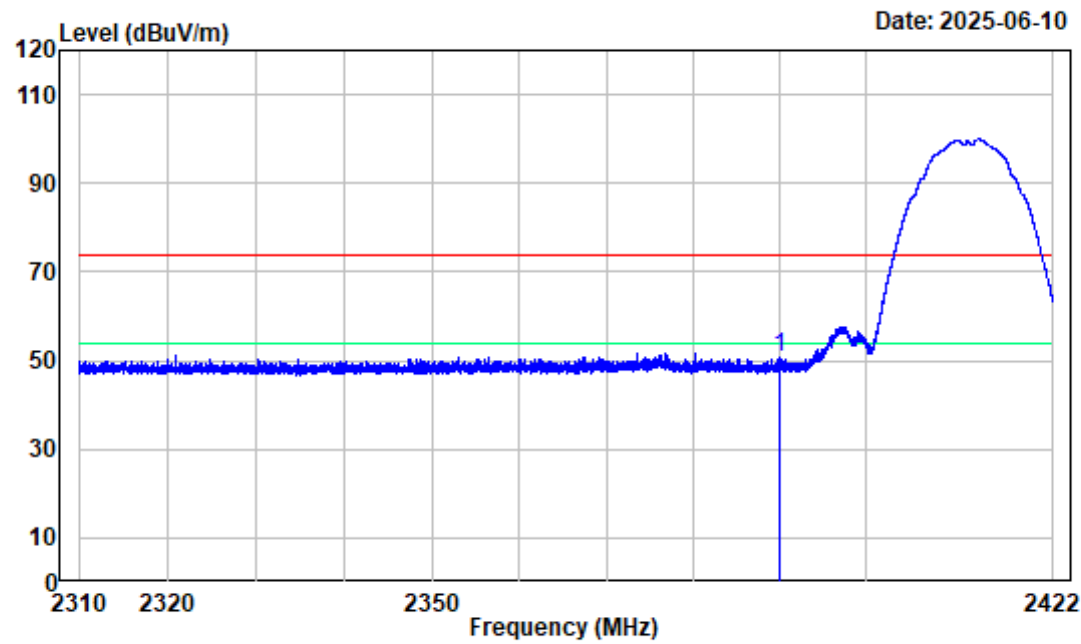

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.24	61.05	50.81	74.00	-23.19	peak


802.11b Middle Channel 1GHz-4GHz_HORIZONTAL

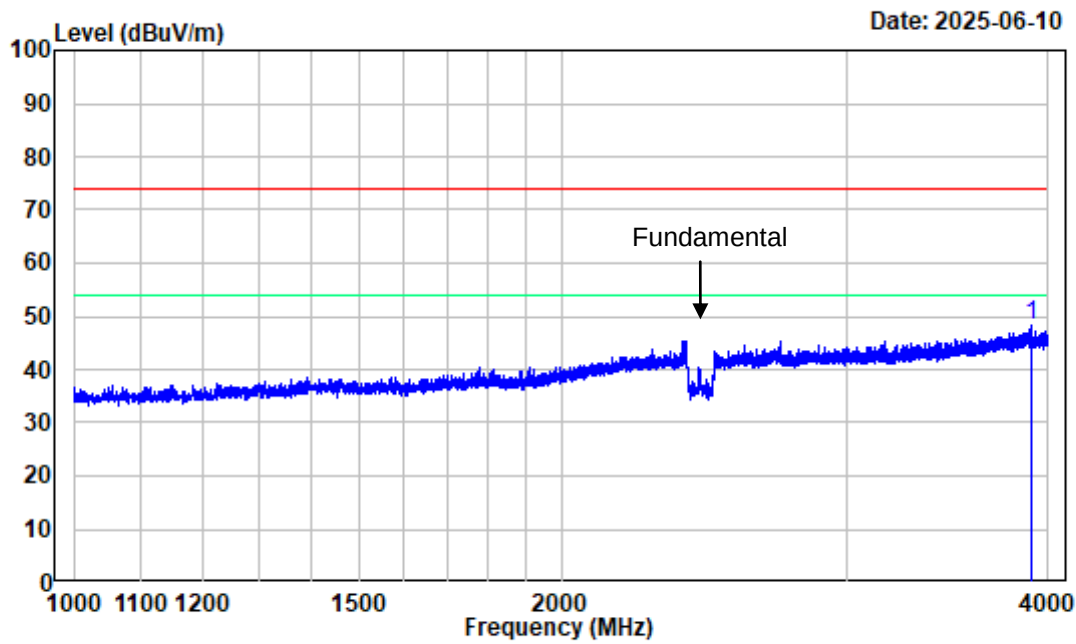

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3902.875	-7.93	56.09	48.16	74.00	-25.84	Peak


802.11b Middle Channel 1GHz-4GHz_VERTICAL

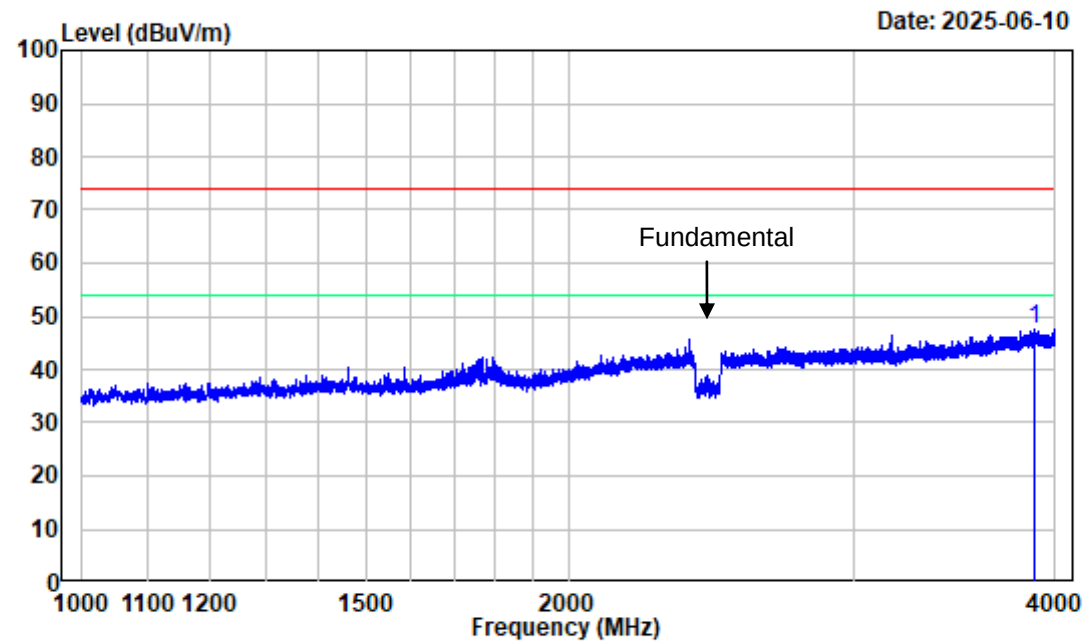

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3880.375	-8.09	55.74	47.65	74.00	-26.35	Peak


802.11b Middle Channel 4GHz-18GHz_HORIZONTAL

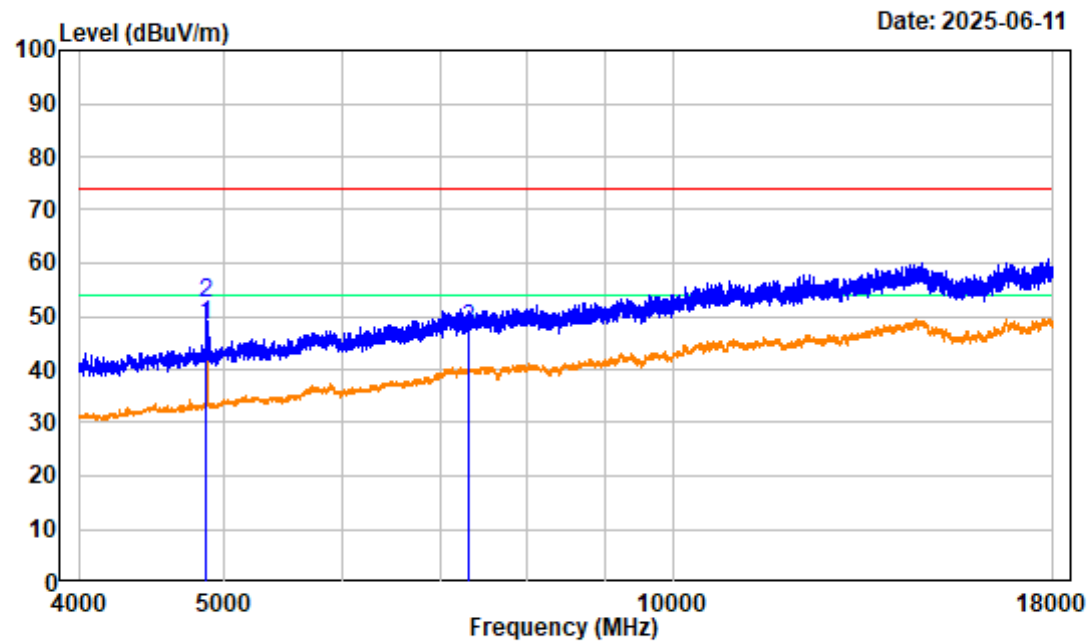

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	55.07	48.44	54.00	-5.56	average
2	4873.250	-6.63	59.09	52.46	74.00	-21.54	peak
3	7311.000	-1.21	48.93	47.72	74.00	-26.28	peak


802.11b Middle Channel 4GHz-18GHz_VERTICAL

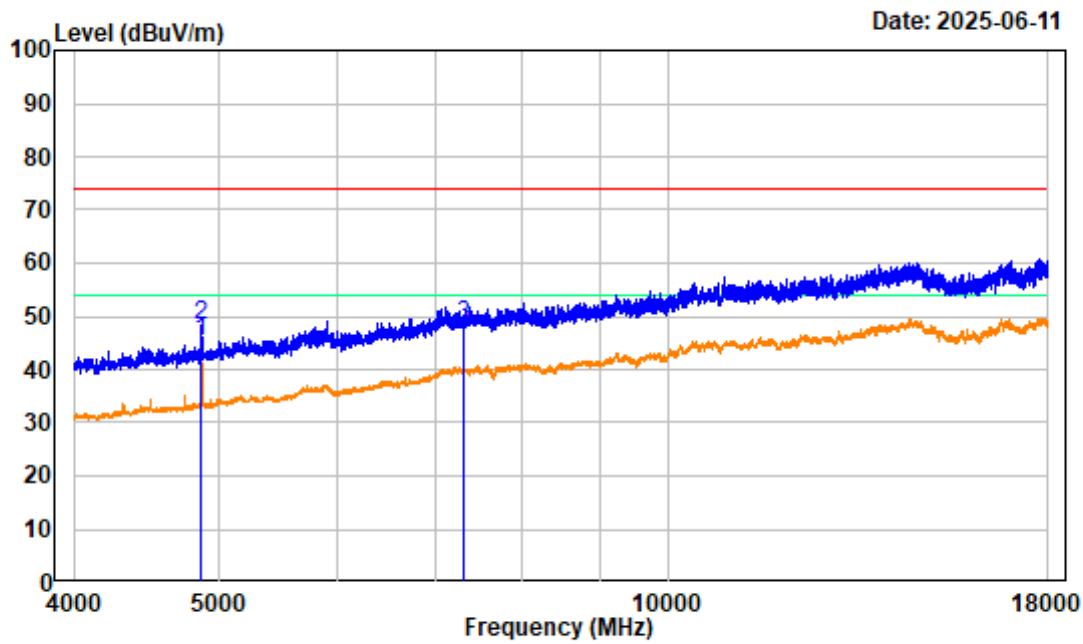

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	52.09	45.46	54.00	-8.54	average
2	4873.250	-6.63	55.12	48.49	74.00	-25.51	peak
3	7311.000	-1.21	49.63	48.42	74.00	-25.58	peak


802.11b High Channel 1GHz-4GHz_HORIZONTAL

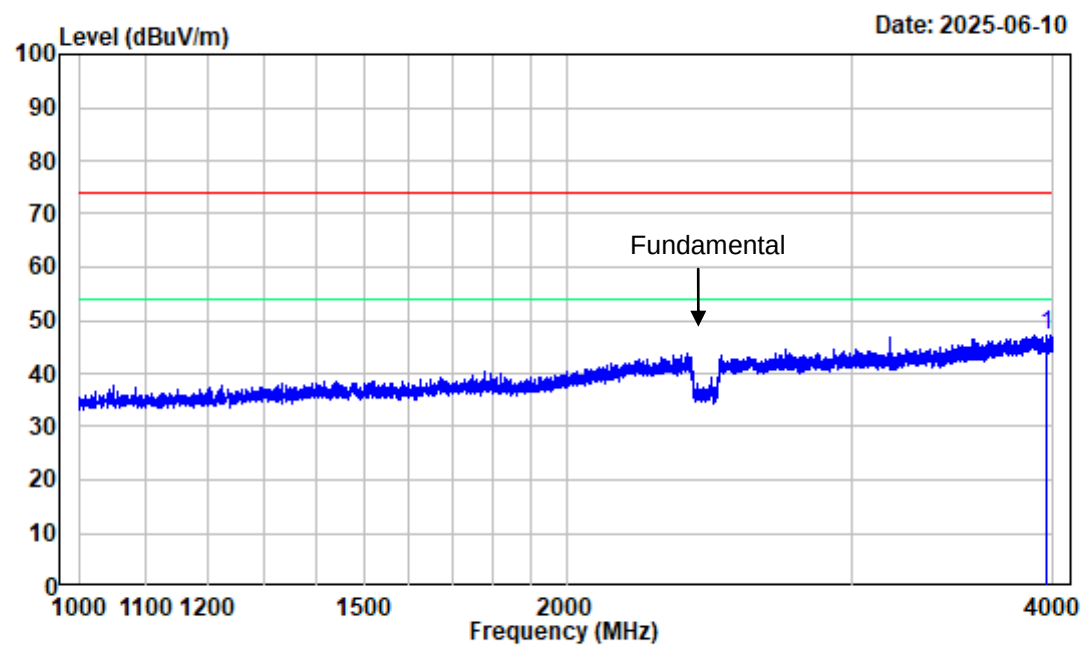

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3961.000	-8.32	55.61	47.29	74.00	-26.71	Peak


802.11b High Channel 1GHz-4GHz_VERTICAL

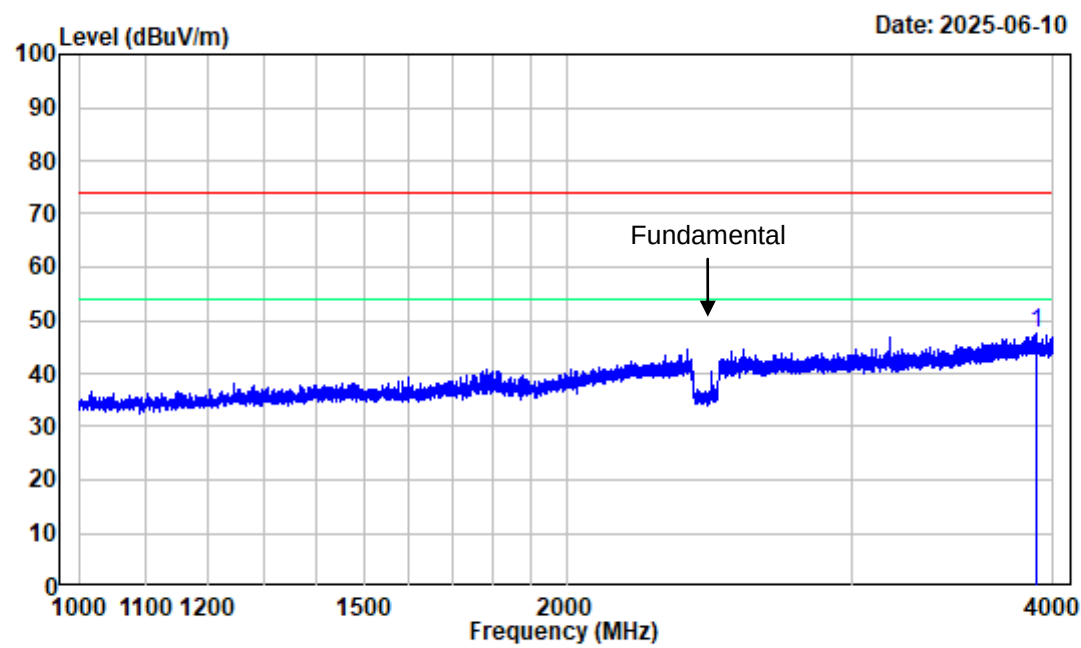

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3904.750	-7.96	55.45	47.49	74.00	-26.51	Peak


802.11b High Channel 4GHz-18GHz_HORIZONTAL

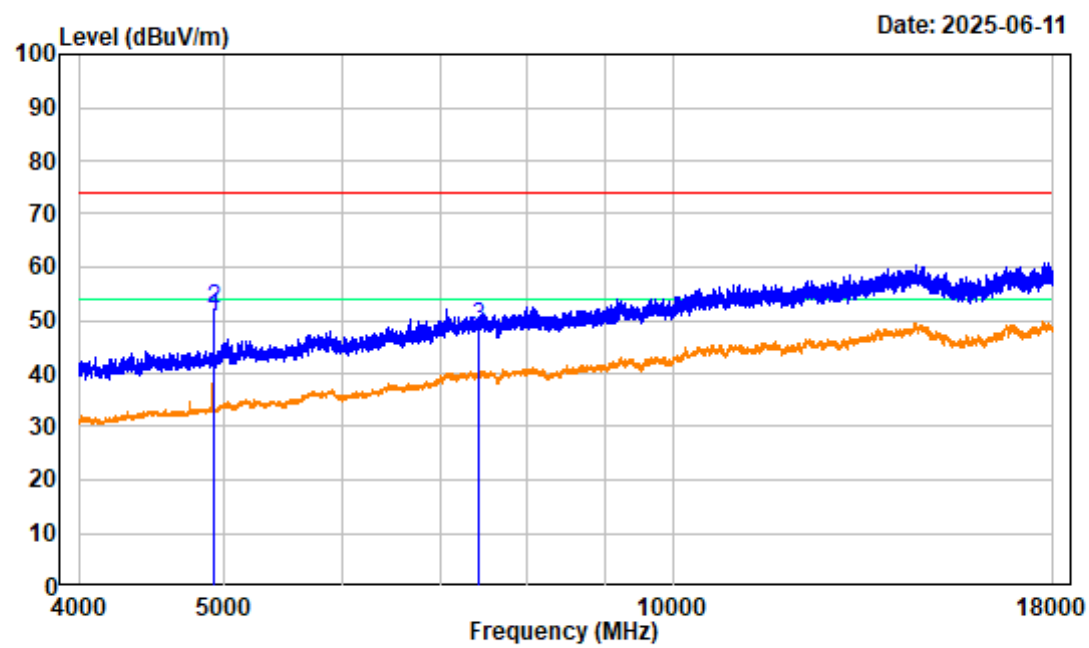

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	57.03	50.43	54.00	-3.57	average
2	4924.000	-6.60	58.61	52.01	74.00	-21.99	peak
3	7416.000	-1.28	50.02	48.74	74.00	-25.26	peak


802.11b High Channel 4GHz-18GHz_VERTICAL

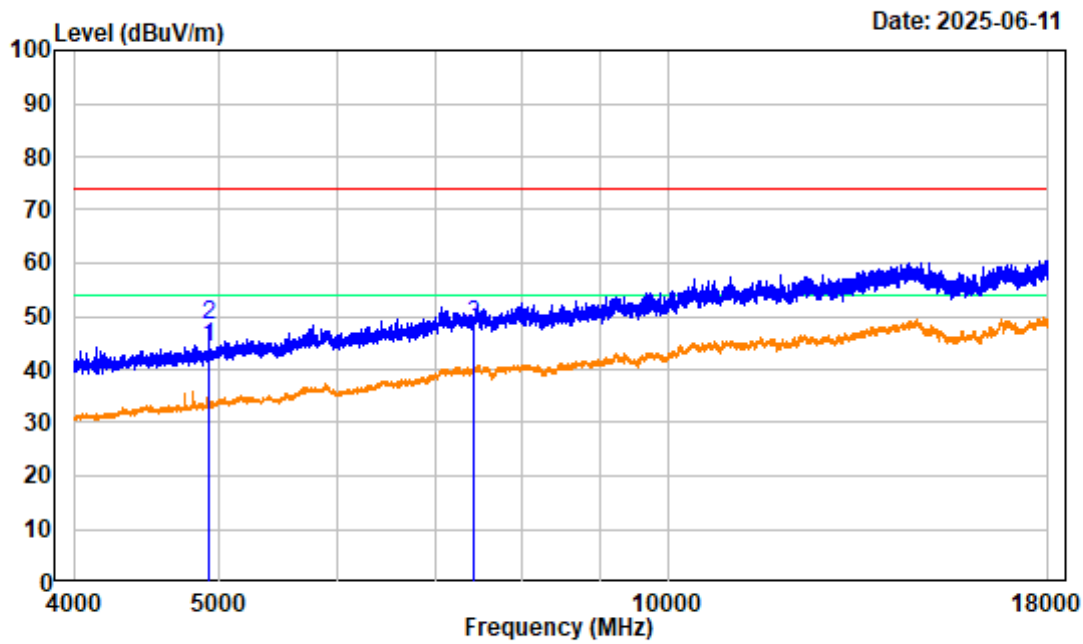

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	50.77	44.17	54.00	-9.83	average
2	4924.000	-6.60	54.86	48.26	74.00	-25.74	peak
3	7416.000	-1.28	49.49	48.21	74.00	-25.79	peak

802.11b High Channel Bandedge_HORIZONTAL

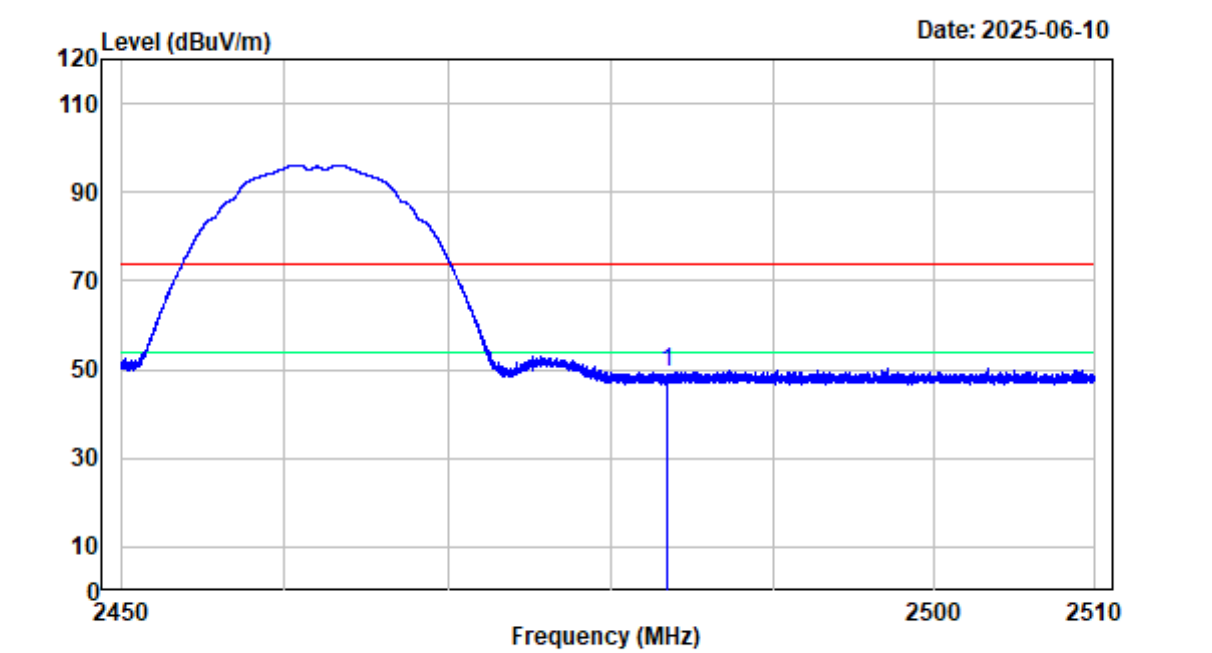

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T31635E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11b High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	59.69	49.47	74.00	-24.53	peak


802.11b High Channel Bandedge_VERTICAL

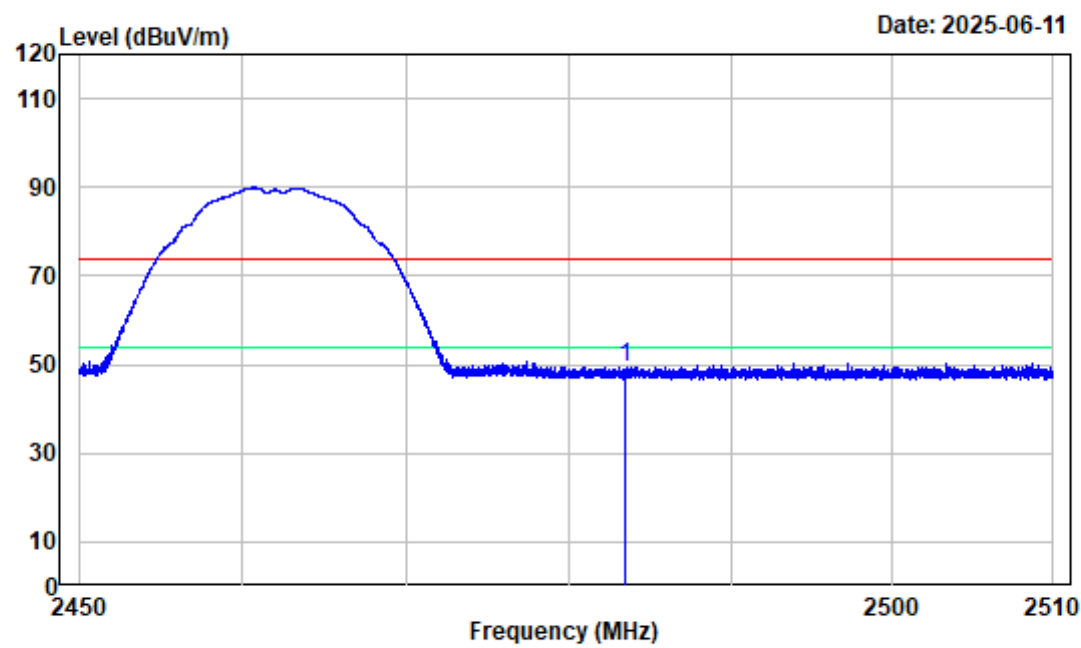

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11b High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.22	59.67	49.45	74.00	-24.55	peak


802.11g Low Channel 1GHz-4GHz_HORIZONTAL

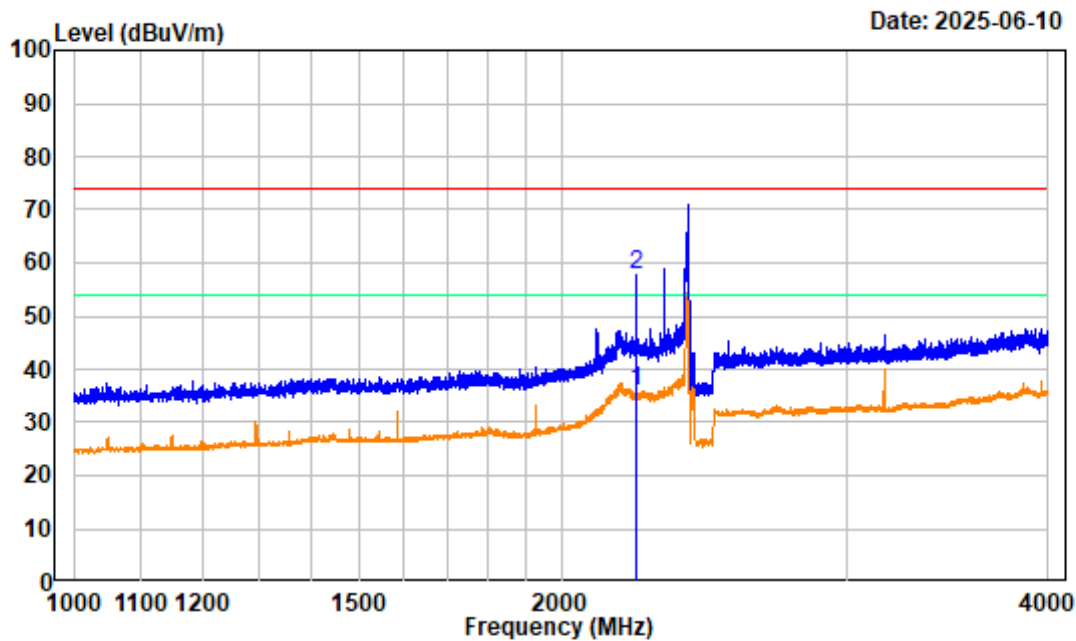

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2228.125 -10.12	45.91	35.79	54.00	-18.21	Average
2	2228.125 -10.12	67.90	57.78	74.00	-16.22	Peak


802.11g Low Channel 1GHz-4GHz_VERTICAL

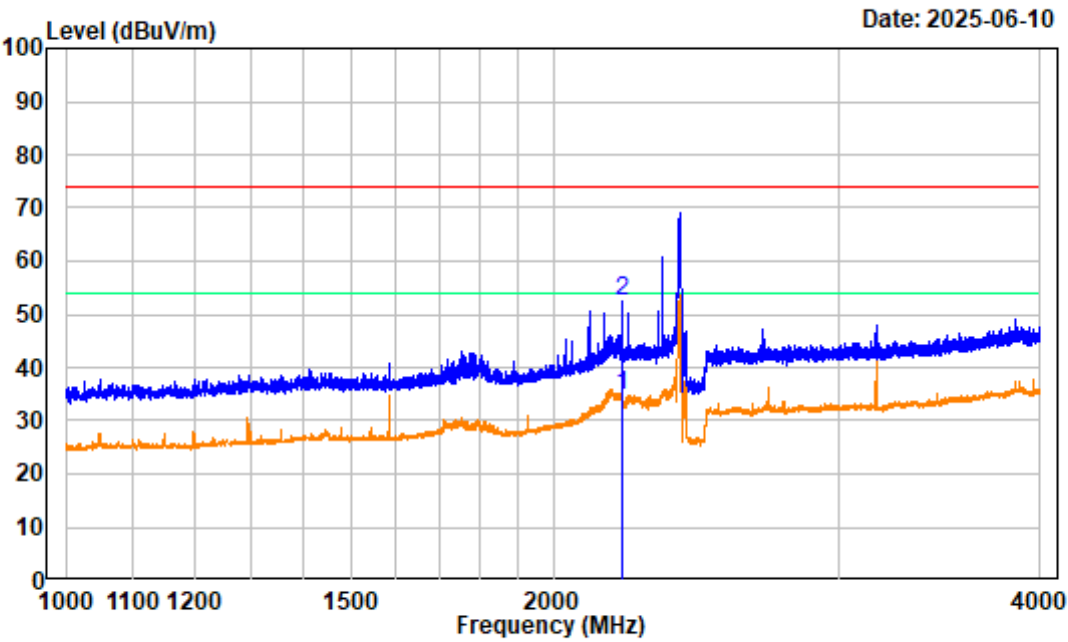

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2209.750	-10.10	44.67	34.57	54.00	-19.43	Average
2	2209.750	-10.10	62.64	52.54	74.00	-21.46	Peak


802.11g Low Channel 4GHz-18GHz_HORIZONTAL

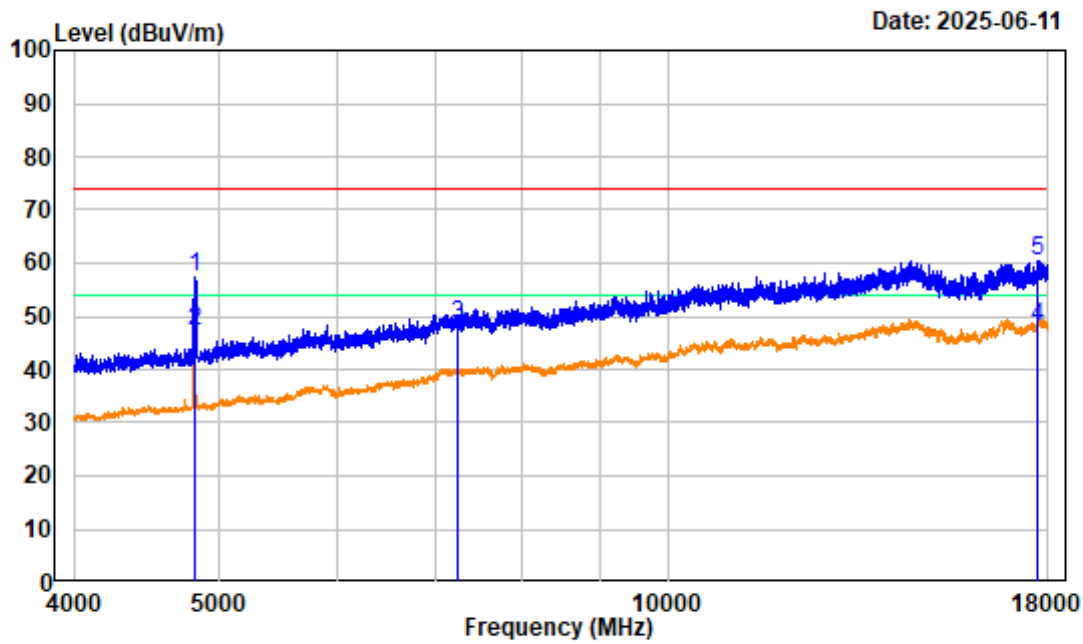

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	63.79	57.18	74.00	-16.82	peak
2	4824.250	-6.61	53.79	47.18	54.00	-6.82	average
3	7235.750	-1.31	49.79	48.48	74.00	-25.52	peak
4	17704.250	7.60	40.30	47.90	54.00	-6.10	average
5	17704.250	7.60	52.72	60.32	74.00	-13.68	peak


802.11g Low Channel 4GHz-18GHz_VERTICAL

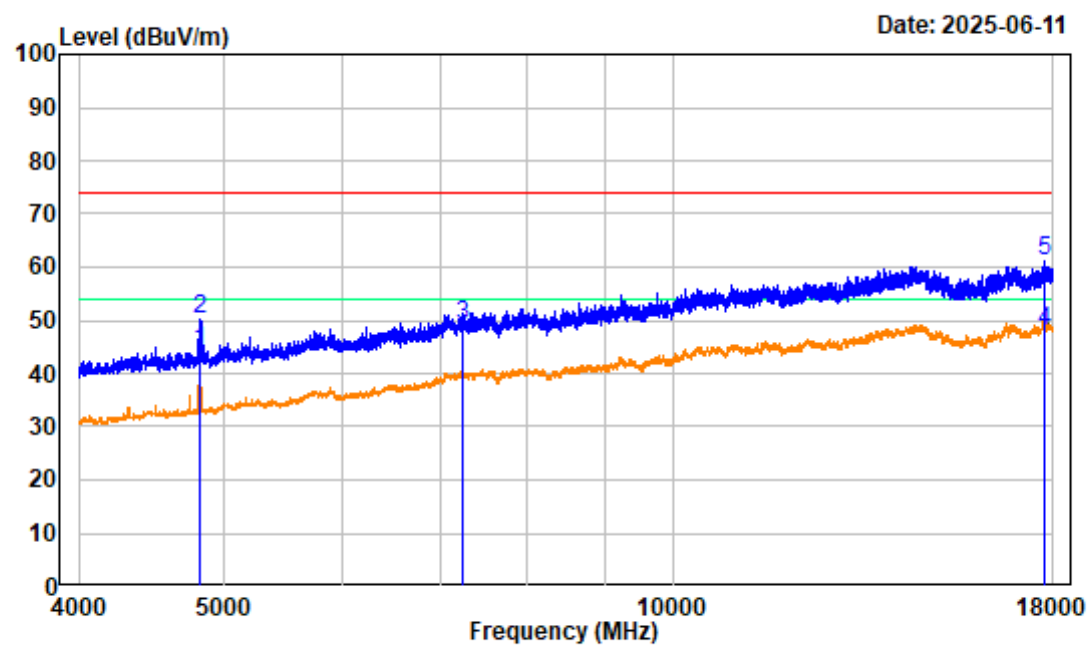

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	50.72	44.11	54.00	-9.89	average
2	4824.250	-6.61	56.77	50.16	74.00	-23.84	peak
3	7235.750	-1.31	50.23	48.92	74.00	-25.08	peak
4	17753.250	7.71	40.22	47.93	54.00	-6.07	average
5	17753.250	7.71	53.33	61.04	74.00	-12.96	peak


802.11g Low Channel 18GHz-25GHz_HORIZONTAL

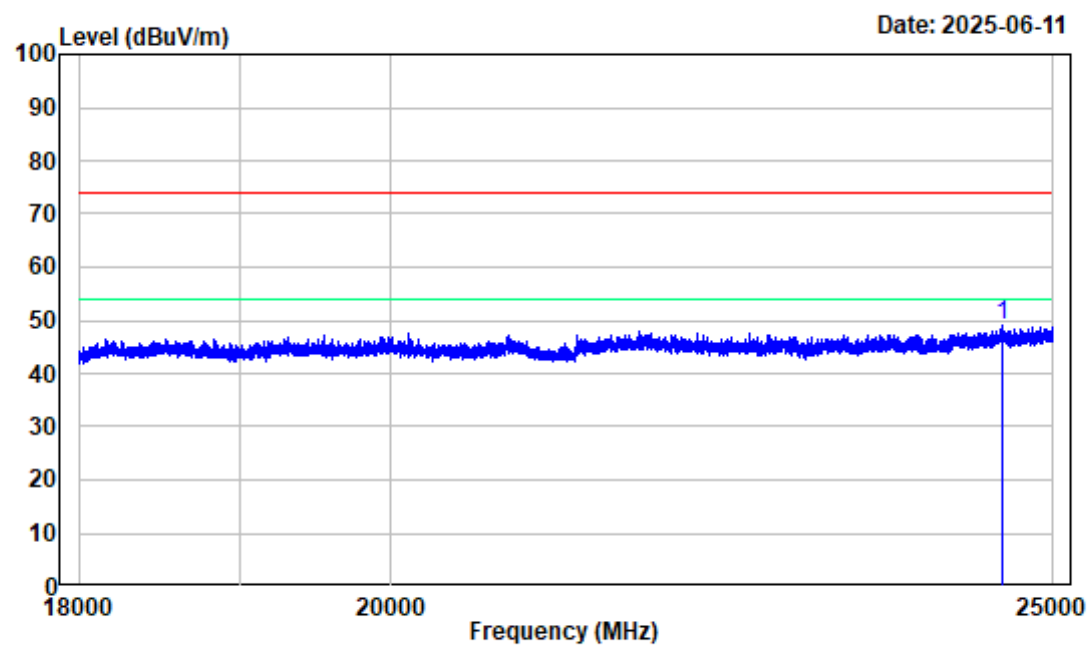

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24580.880		-0.35	49.26	48.91	74.00	-25.09	Peak


802.11g Low Channel 18GHz-25GHz_VERTICAL

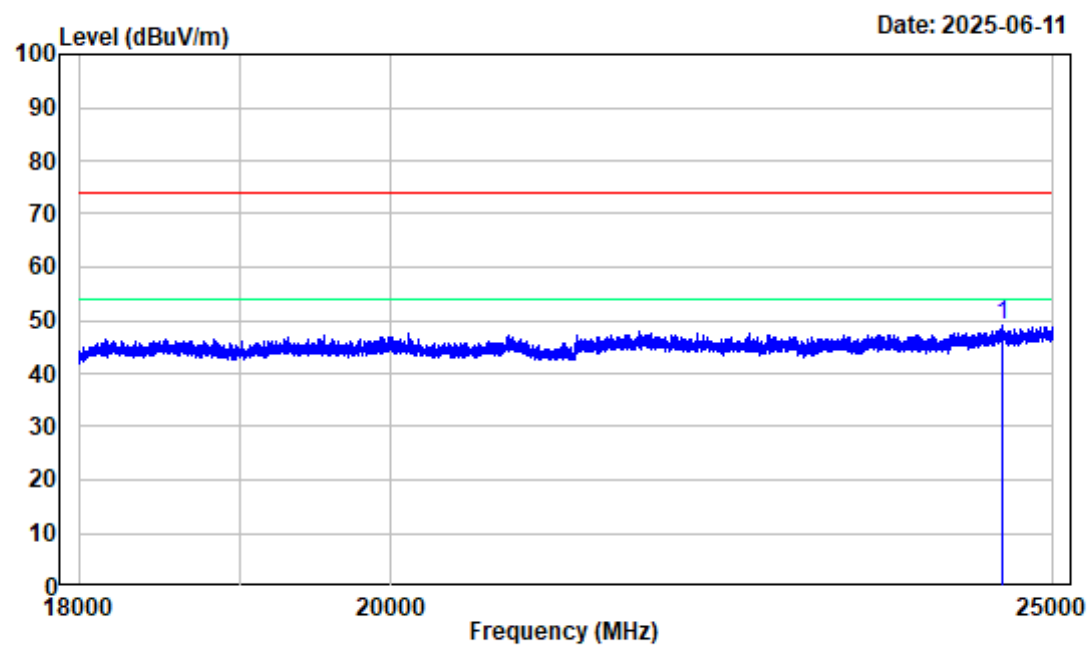

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24580.880	-0.35	49.26	48.91	74.00	-25.09	Peak


802.11g Low Channel Bandedge_HORIZONTAL

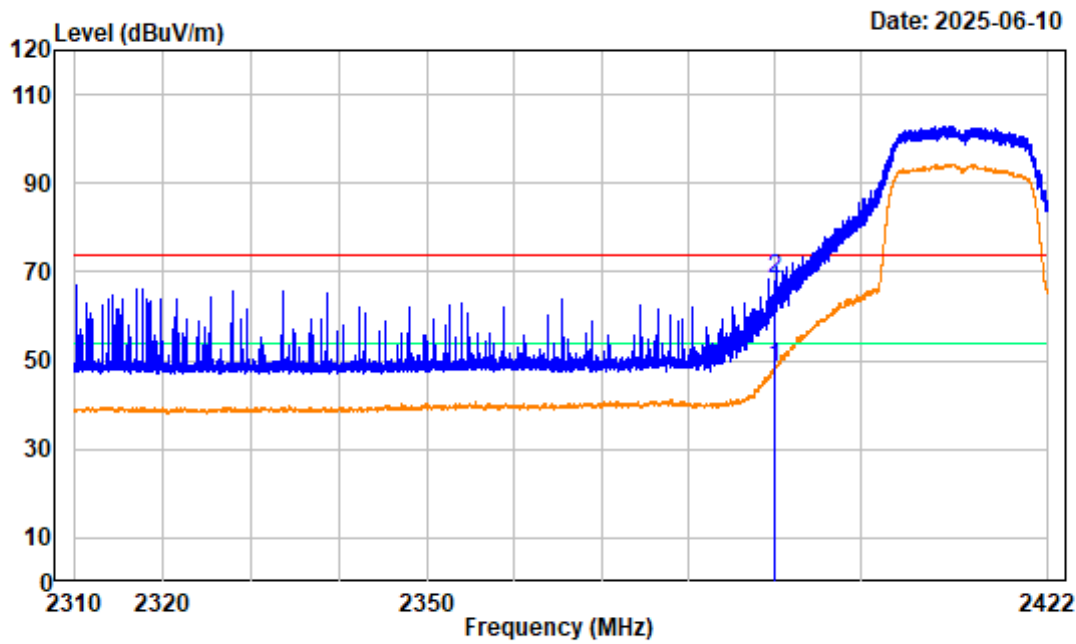

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000 -10.24	58.61	48.37	54.00	-5.63	Average
2	2390.000 -10.24	78.61	68.37	74.00	-5.63	peak


802.11g Low Channel Bandedge_VERTICAL

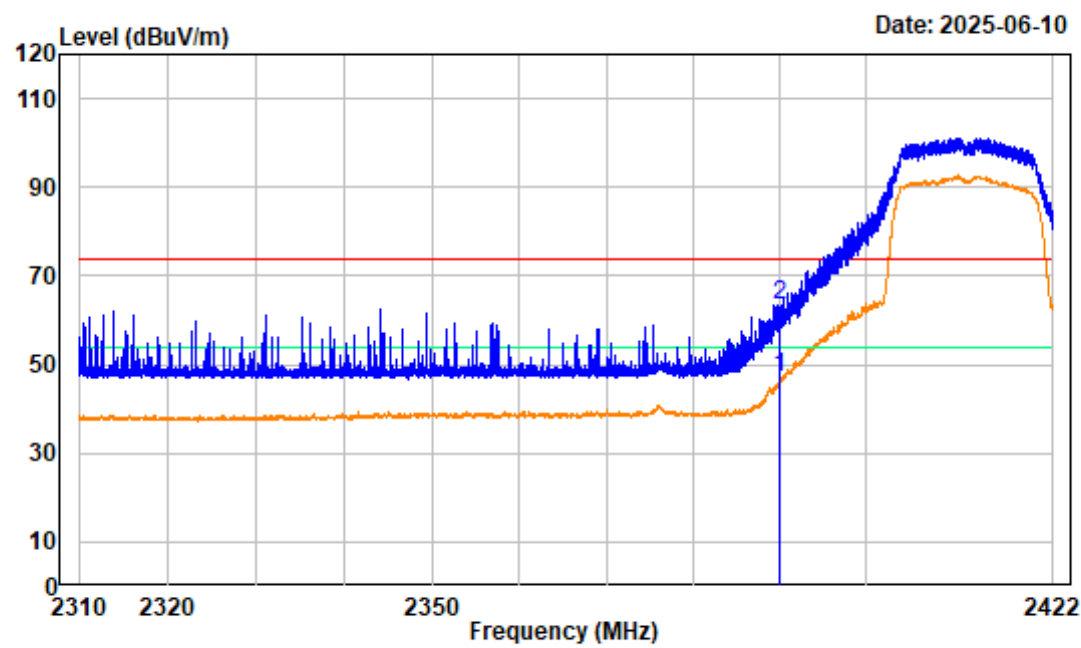

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	57.55	47.31	54.00	-6.69 Average
2	2390.000	-10.24	73.61	63.37	74.00	-10.63 peak


802.11g Middle Channel 1GHz-4GHz_HORIZONTAL

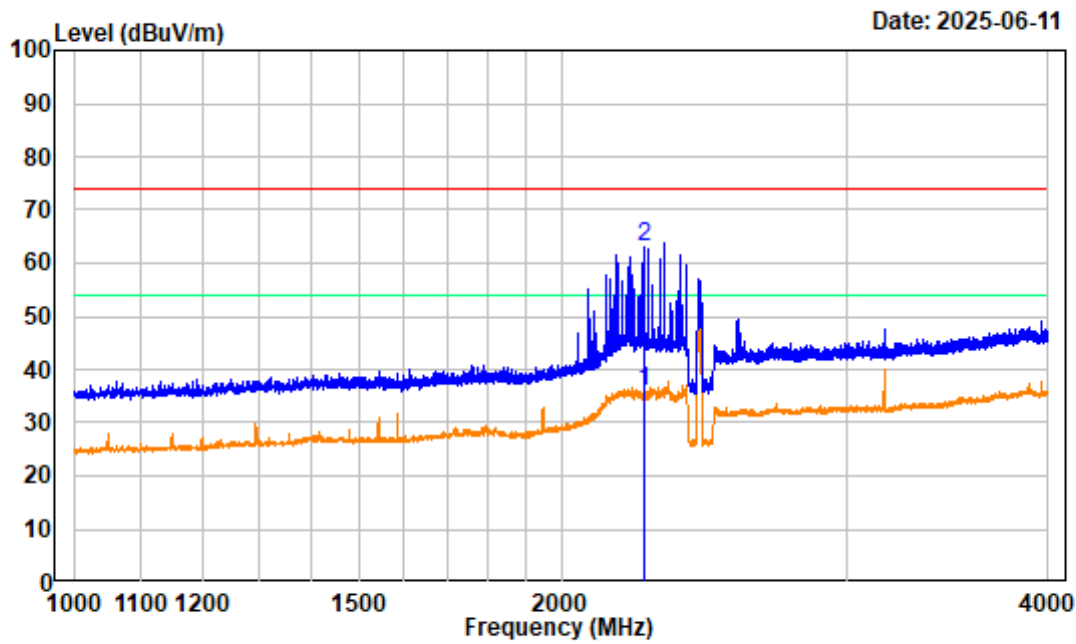

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2254.375	-10.10	46.03	35.93	54.00	-18.07	Average
2	2254.375	-10.10	73.04	62.94	74.00	-11.06	Peak


802.11g Middle Channel 1GHz-4GHz_VERTICAL

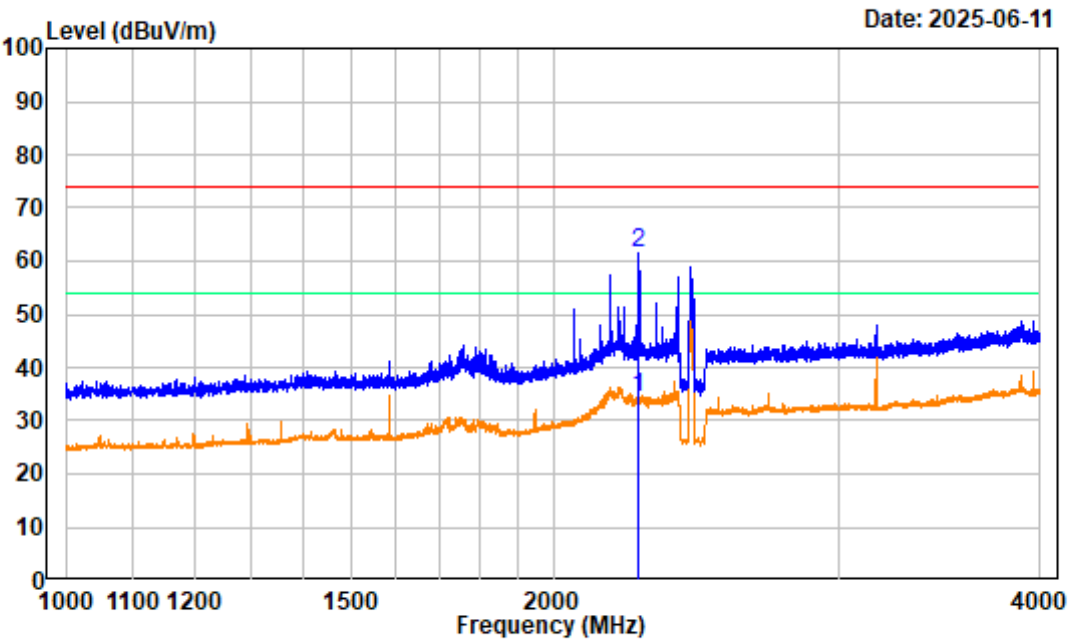

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2261.125 -10.07	44.55	34.48	54.00	-19.52	Average
2	2261.125 -10.07	71.49	61.42	74.00	-12.58	Peak


802.11g Middle Channel 4GHz-18GHz_HORIZONTAL

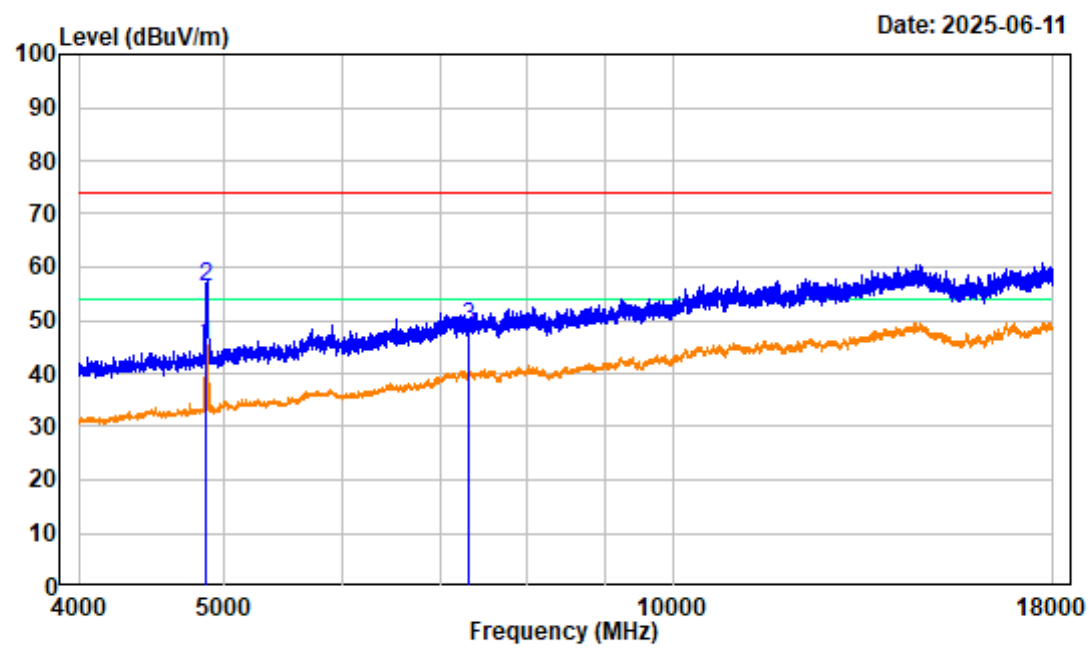

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	51.84	45.21	54.00	-8.79	average
2	4873.250	-6.63	62.88	56.25	74.00	-17.75	peak
3	7311.000	-1.21	50.00	48.79	74.00	-25.21	peak


802.11g Middle Channel 4GHz-18GHz_VERTICAL

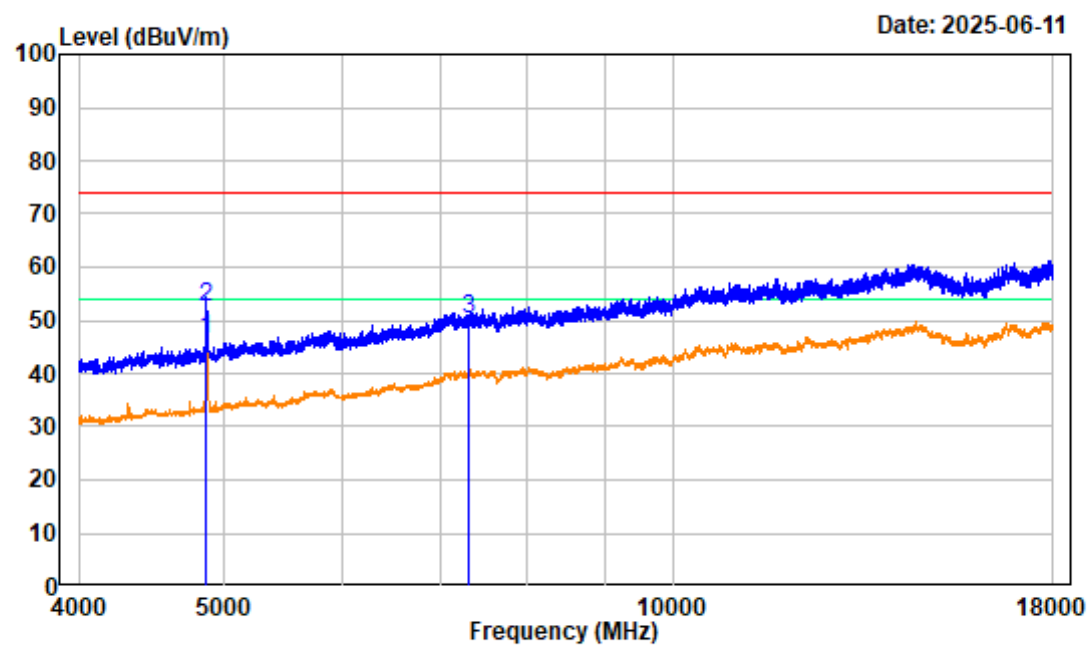

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	52.99	46.36	54.00	-7.64	average
2	4873.250	-6.63	58.98	52.35	74.00	-21.65	peak
3	7311.000	-1.21	51.24	50.03	74.00	-23.97	peak


802.11g High Channel 1GHz-4GHz_HORIZONTAL

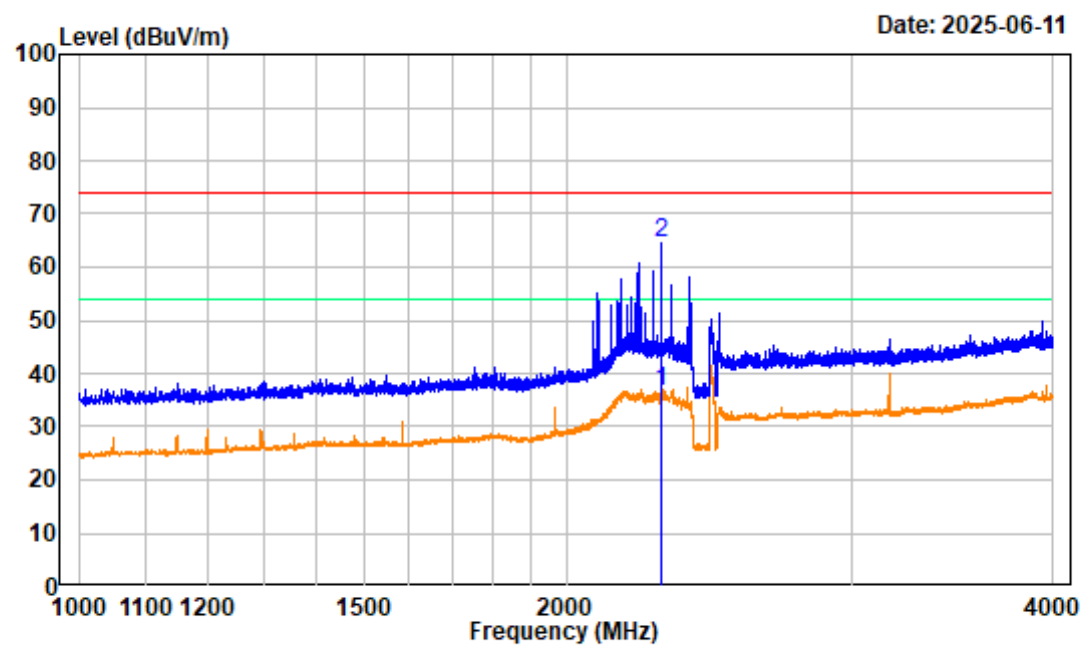

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2289.625	-9.94	46.50	36.56	54.00	-17.44	Average
2	2289.625	-9.94	74.52	64.58	74.00	-9.42	Peak


802.11g High Channel 1GHz-4GHz_VERTICAL

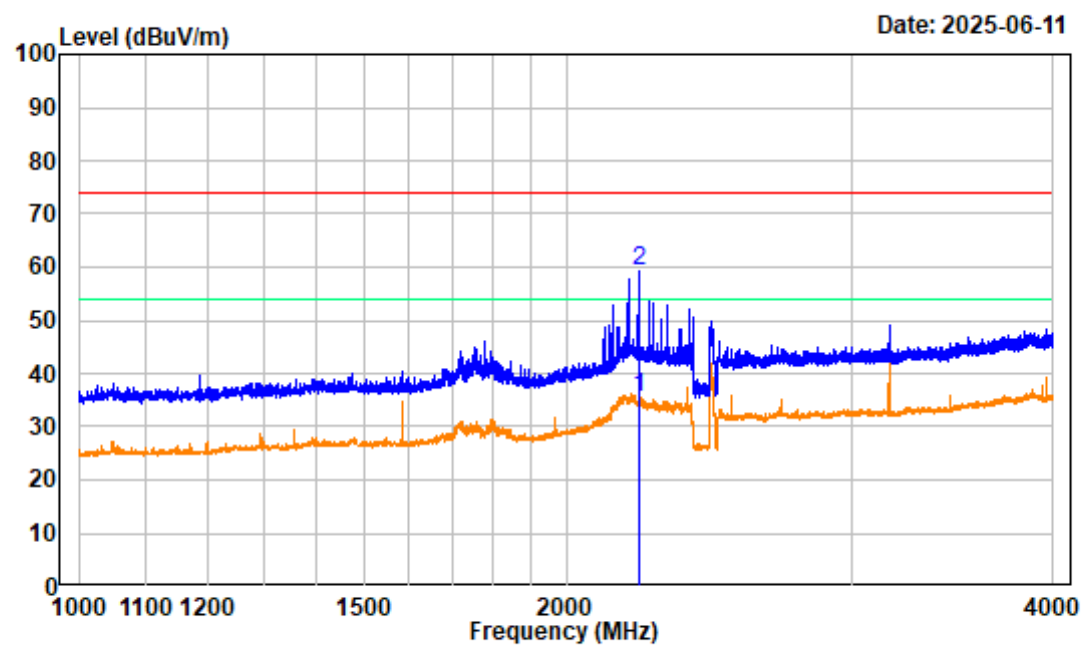

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2220.250	-10.10	45.41	35.31	54.00	-18.69	Average
2	2220.250	-10.10	69.40	59.30	74.00	-14.70	Peak


802.11g High Channel 4GHz-18GHz_HORIZONTAL

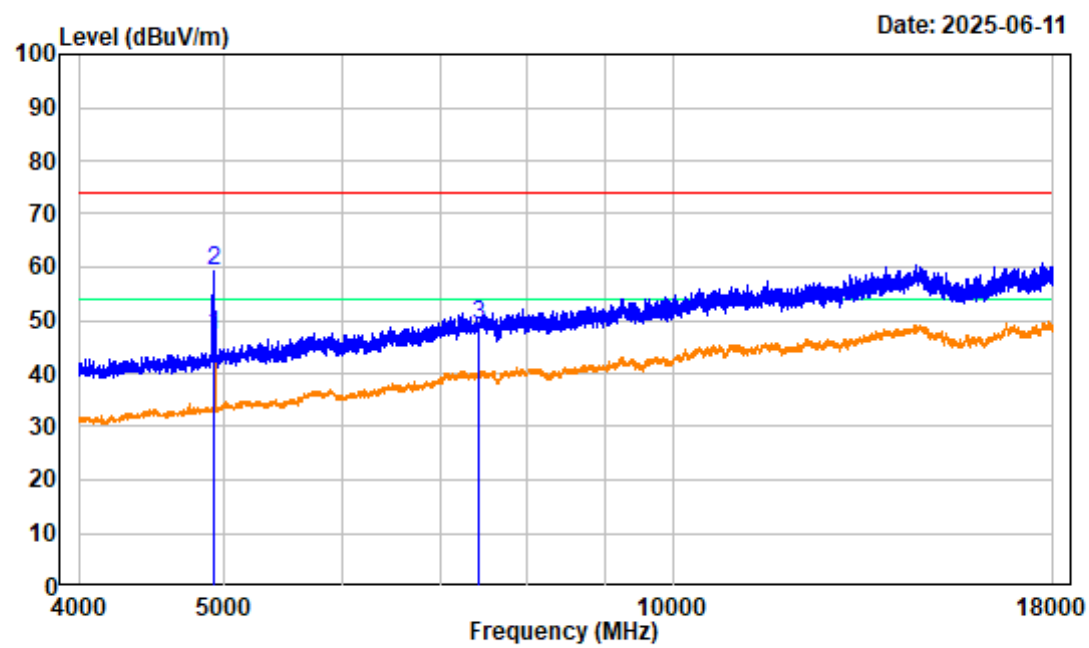

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	53.90	47.30	54.00	-6.70	average
2	4924.000	-6.60	65.85	59.25	74.00	-14.75	peak
3	7416.000	-1.28	50.22	48.94	74.00	-25.06	peak


802.11g High Channel 4GHz-18GHz_VERTICAL

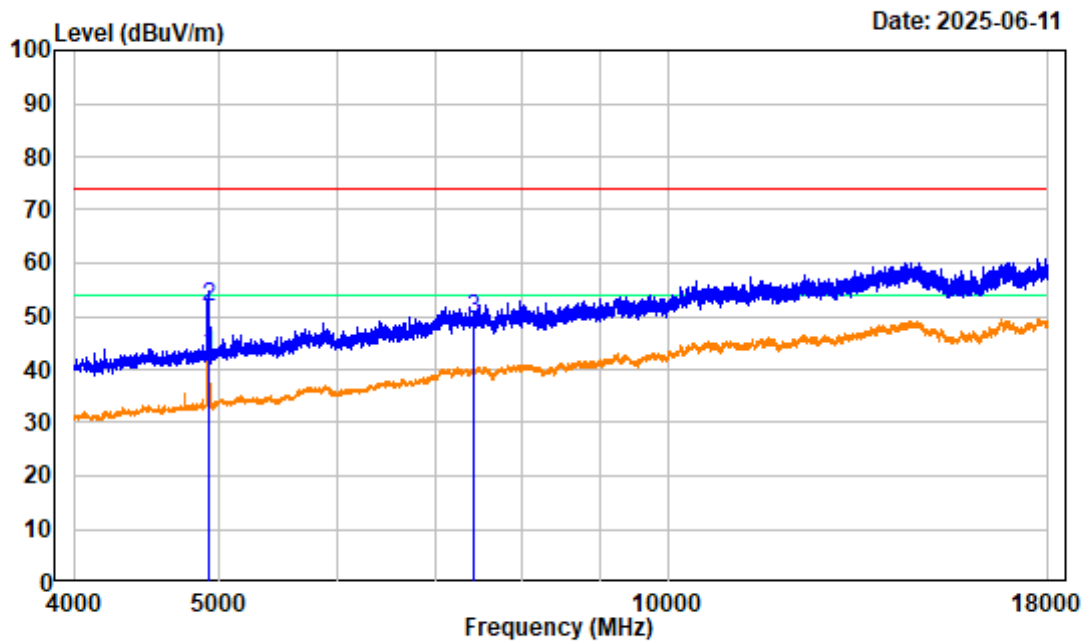

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	49.20	42.60	54.00	-11.40	average
2	4924.000	-6.60	58.17	51.57	74.00	-22.43	peak
3	7416.000	-1.28	50.58	49.30	74.00	-24.70	peak


802.11g High Channel Bandedge_HORTZONTAL

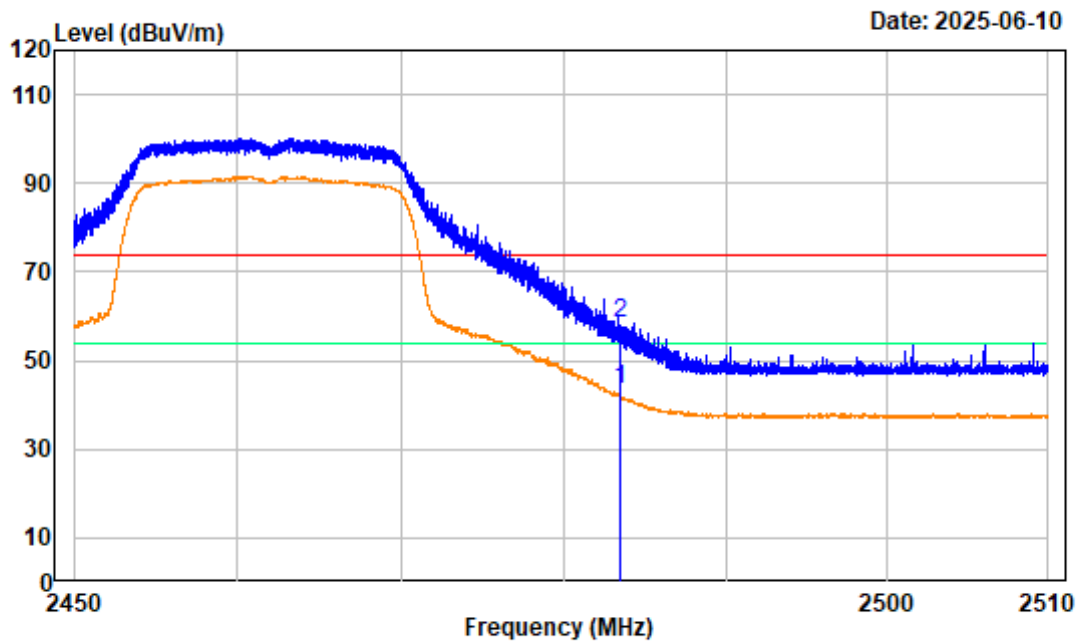

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	53.47	43.25	54.00	-10.75	average
2	2483.500	-10.22	68.52	58.30	74.00	-15.70	peak


802.11g High Channel Bandedge_VERTICAL

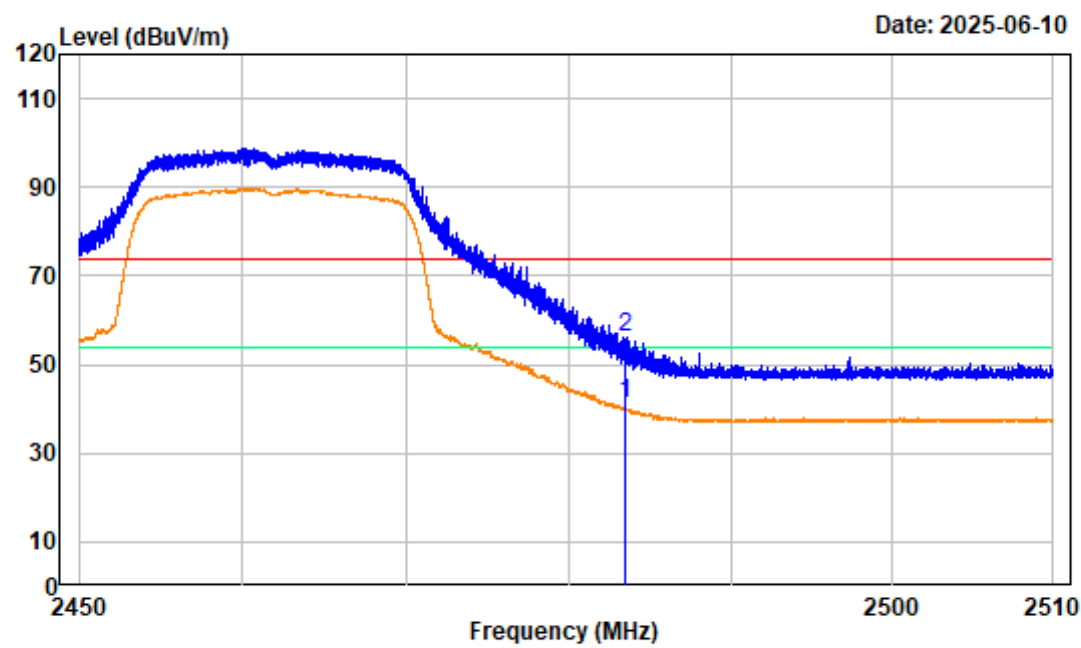

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	51.62	41.40	54.00	-12.60	average
2	2483.500	-10.22	66.54	56.32	74.00	-17.68	peak


802.11n20 Low Channel 1GHz-4GHz_HORIZONTAL

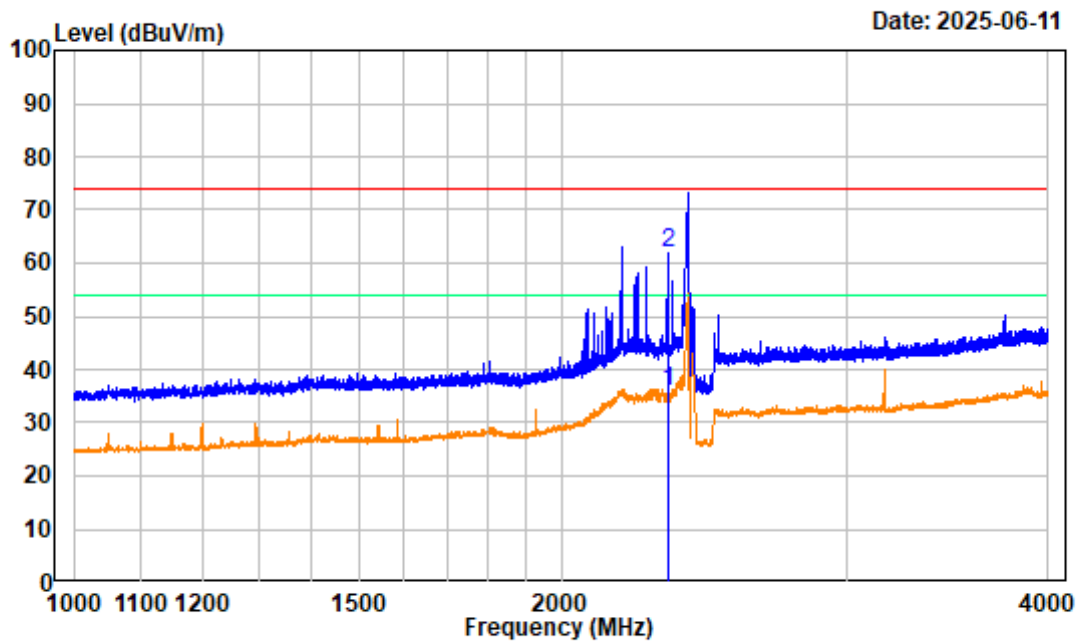

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2331.625 -10.14	45.87	35.73	54.00	-18.27	Average
2	2331.625 -10.14	71.90	61.76	74.00	-12.24	Peak


802.11n20 Low Channel 1GHz-4GHz_VERTICAL

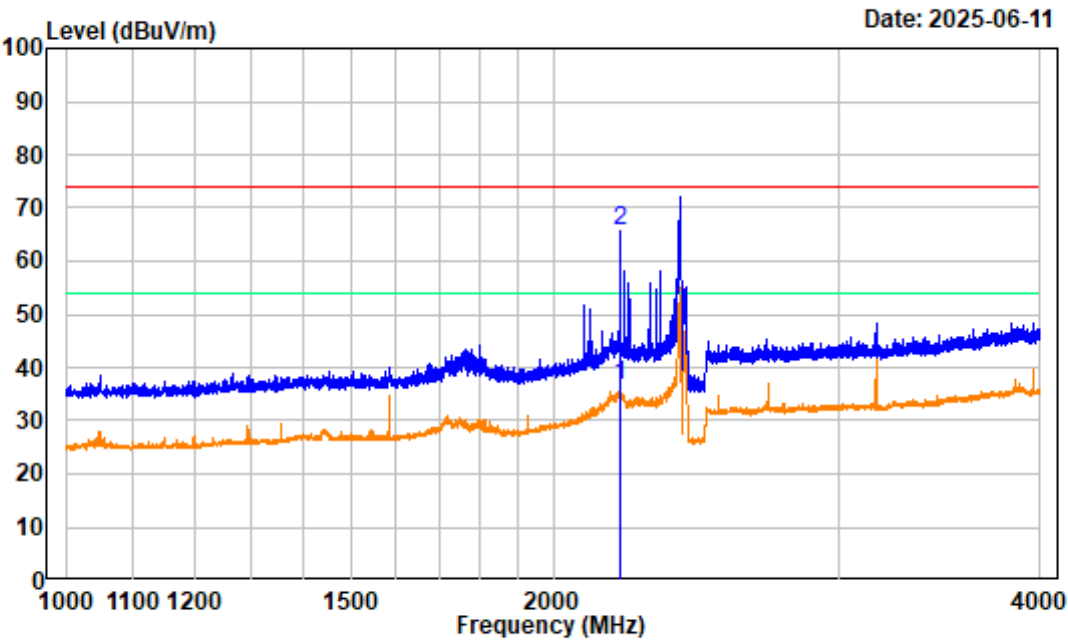

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2203.000	-10.11	46.57	36.46	54.00	-17.54	Average
2	2203.000	-10.11	75.59	65.48	74.00	-8.52	Peak


802.11n20 Low Channel 4GHz-18GHz_HORIZONTAL

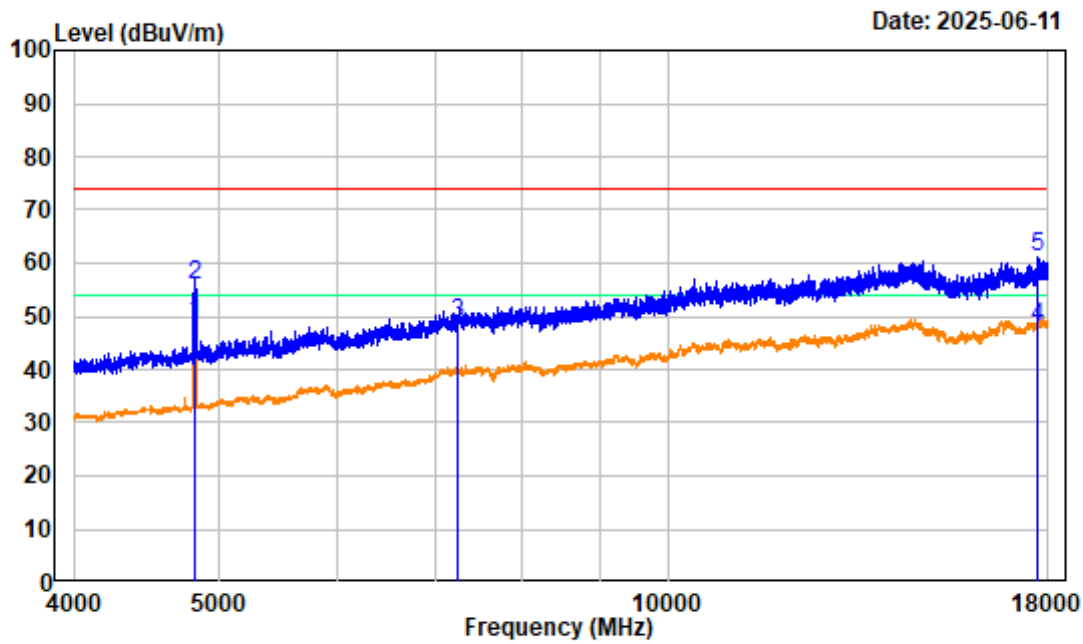

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	55.35	48.74	54.00	-5.26	average
2	4824.250	-6.61	62.34	55.73	74.00	-18.27	peak
3	7235.750	-1.31	49.83	48.52	74.00	-25.48	peak
4	17725.250	7.65	40.25	47.90	54.00	-6.10	average
5	17725.250	7.65	53.57	61.22	74.00	-12.78	peak


802.11n20 Low Channel 4GHz-18GHz_VERTICAL

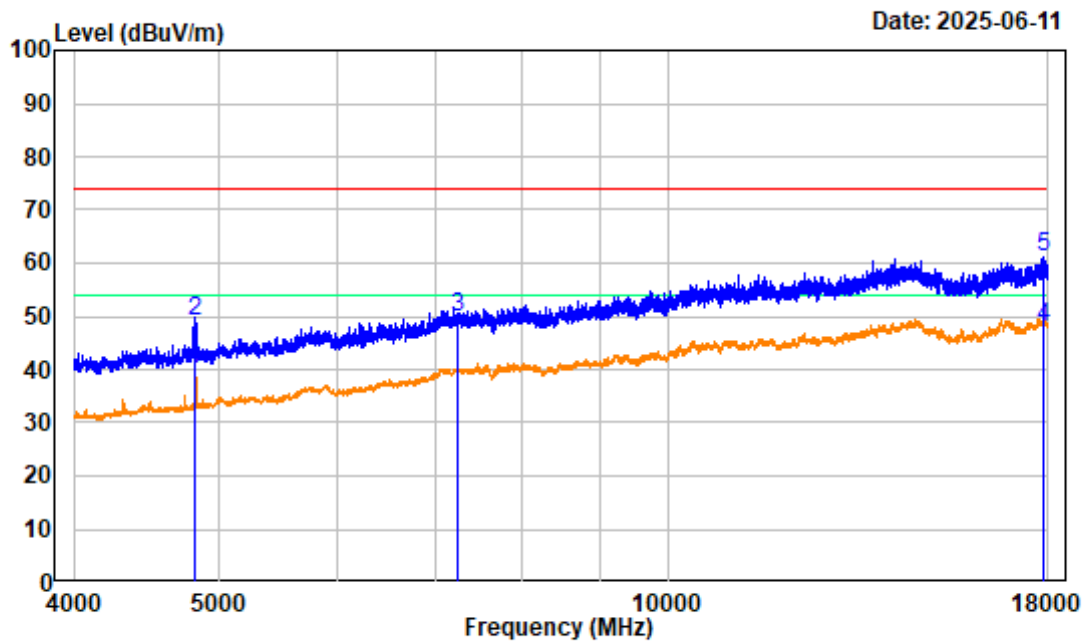

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	46.62	40.01	54.00	-13.99	average
2	4824.250	-6.61	55.61	49.00	74.00	-25.00	peak
3	7235.750	-1.31	50.95	49.64	74.00	-24.36	peak
4	17888.000	8.23	39.69	47.92	54.00	-6.08	average
5	17888.000	8.23	52.85	61.08	74.00	-12.92	peak


802.11n20 Low Channel Bandedge_HORIZONTAL

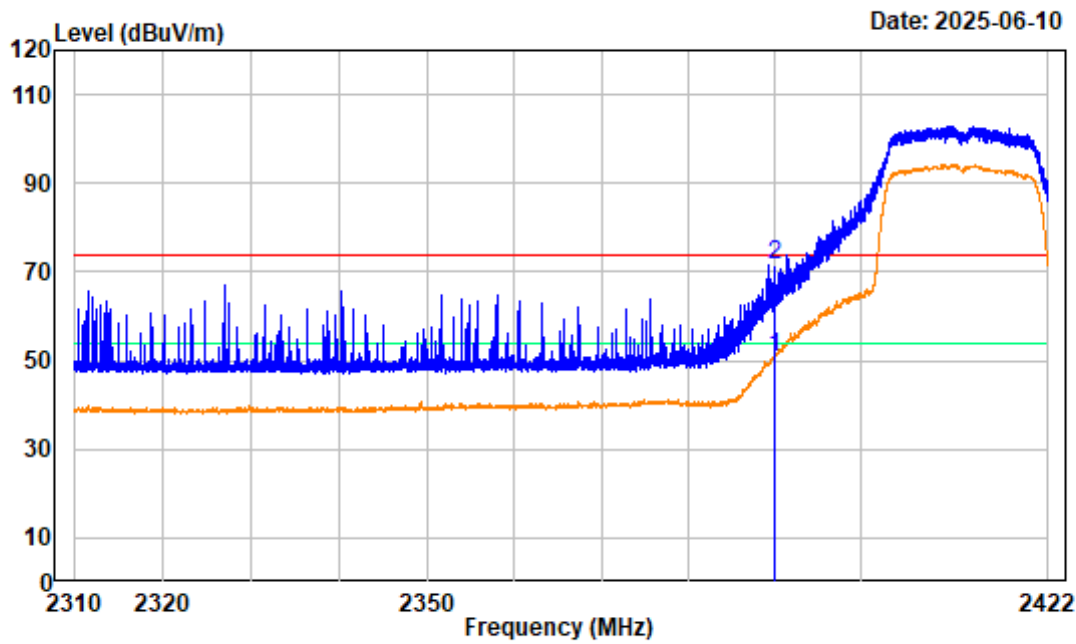

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	60.91	50.67	54.00	-3.33	average
2	2390.000	-10.24	81.89	71.65	74.00	-2.35	peak


802.11n20 Low Channel Bandedge_VERTICAL

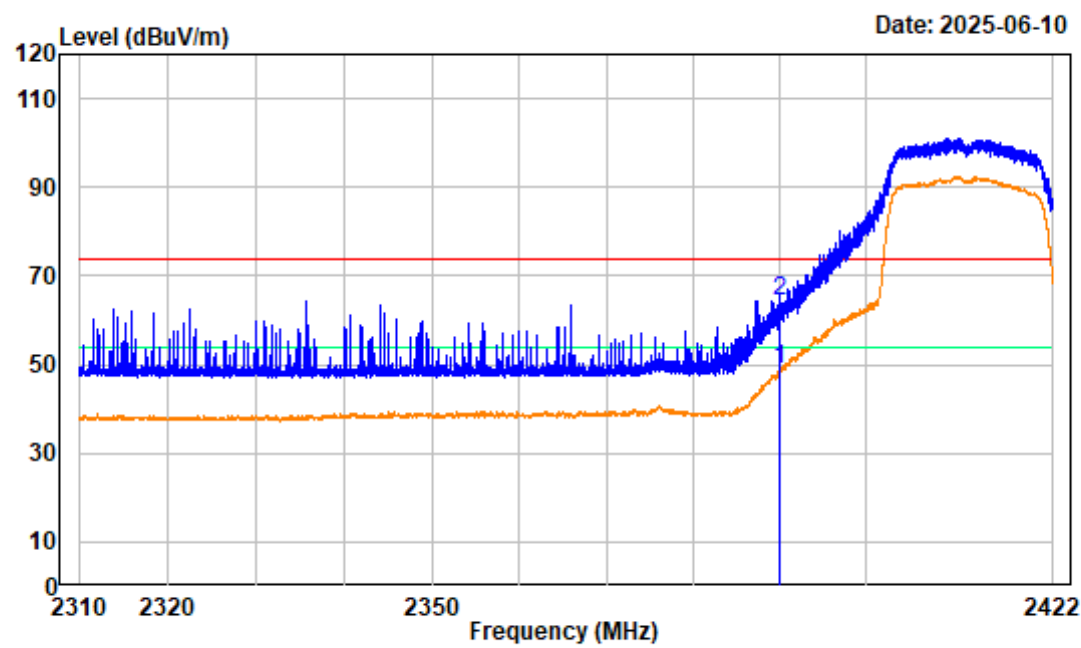

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	59.01	48.77	54.00	-5.23	average
2	2390.000	-10.24	74.53	64.29	74.00	-9.71	peak


802.11n20 Middle Channel 1GHz-4GHz_HORIZONTAL

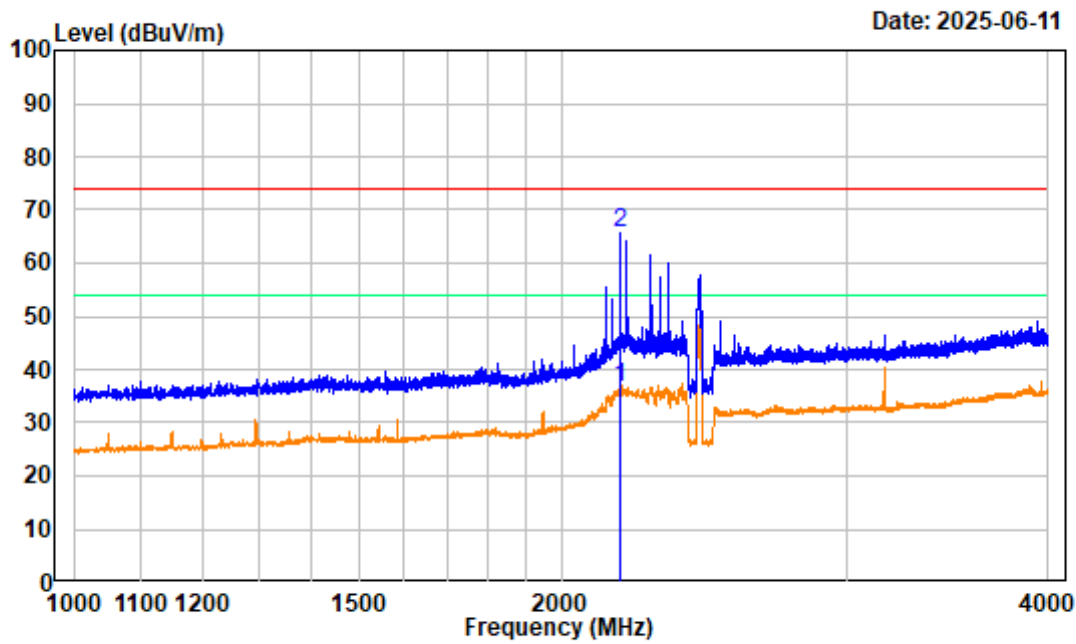

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2176.000	-10.36	46.92	36.56	54.00	-17.44	Average
2	2176.000	-10.36	75.89	65.53	74.00	-8.47	Peak


802.11n20 Middle Channel 1GHz-4GHz_VERTICAL

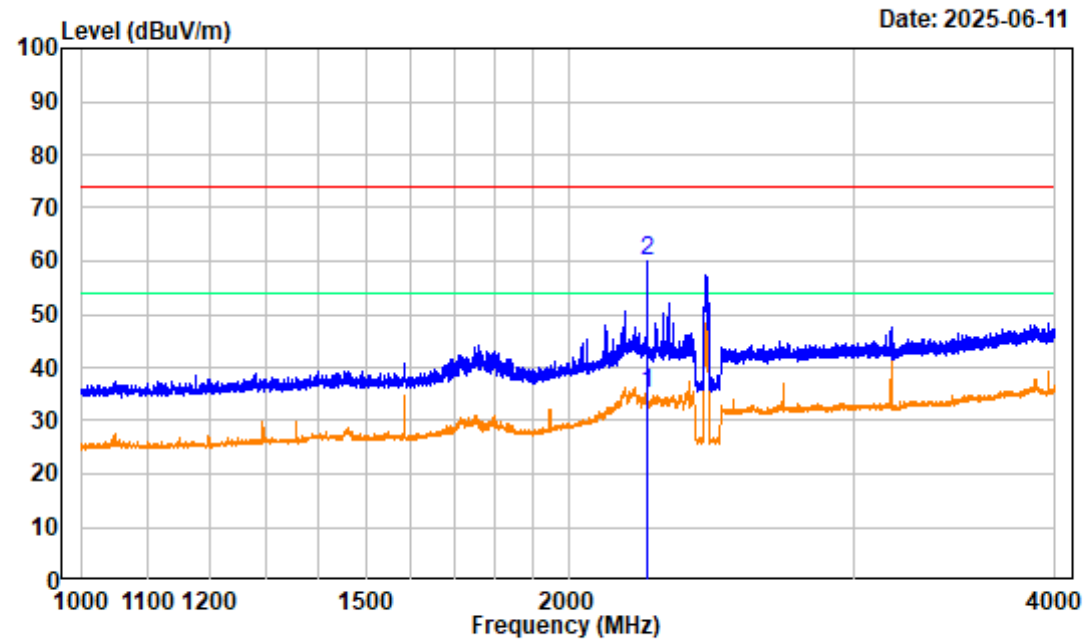

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2239.750	-10.12	45.29	35.17	54.00	-18.83	Average
2	2239.750	-10.12	70.30	60.18	74.00	-13.82	Peak


802.11n20 Middle Channel 4GHz-18GHz_HORIZONTAL

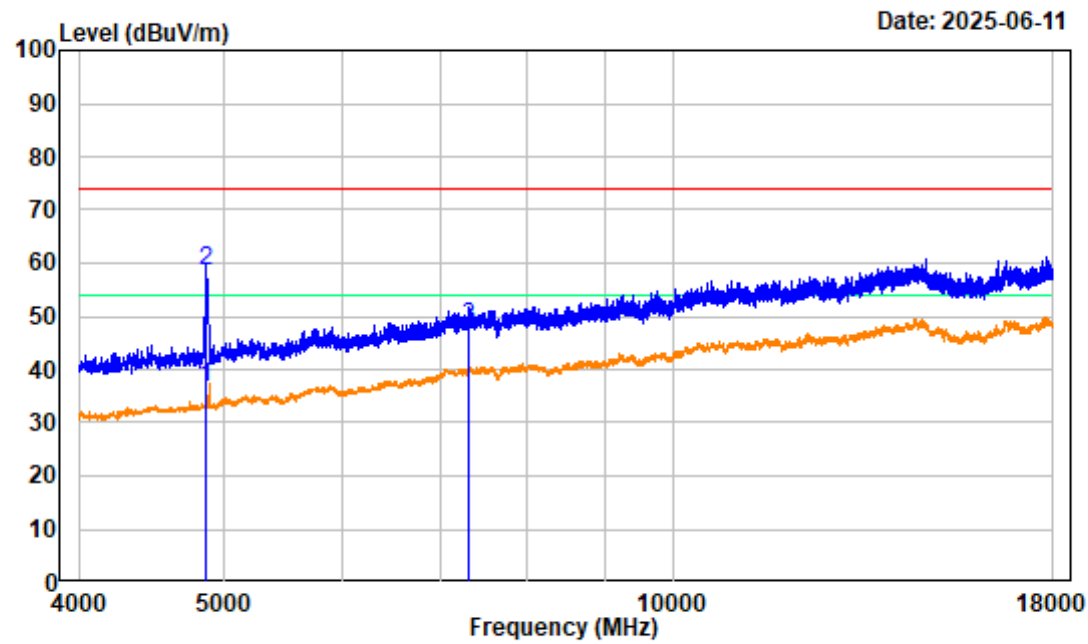

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	43.07	36.44	54.00	-17.56	average
2	4873.250	-6.63	65.12	58.49	74.00	-15.51	peak
3	7311.000	-1.21	49.04	47.83	74.00	-26.17	peak


802.11n20 Middle Channel 4GHz-18GHz_VERTICAL

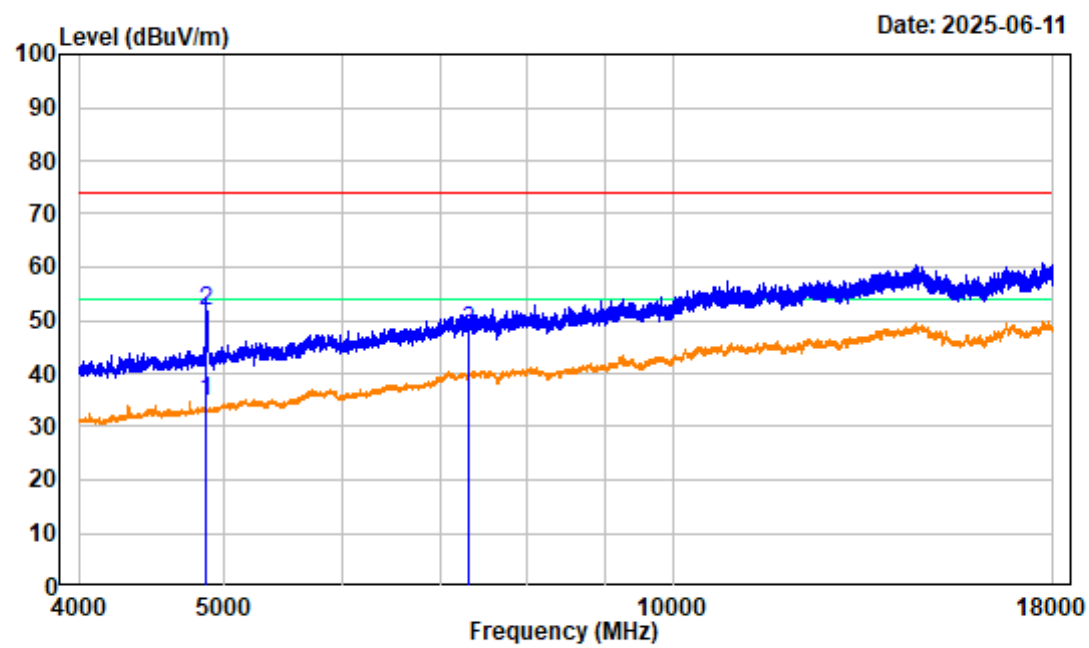

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	41.31	34.68	54.00	-19.32	average
2	4873.250	-6.63	58.33	51.70	74.00	-22.30	peak
3	7311.000	-1.21	48.98	47.77	74.00	-26.23	peak


802.11n20 High Channel 1GHz-4GHz_HORIZONTAL

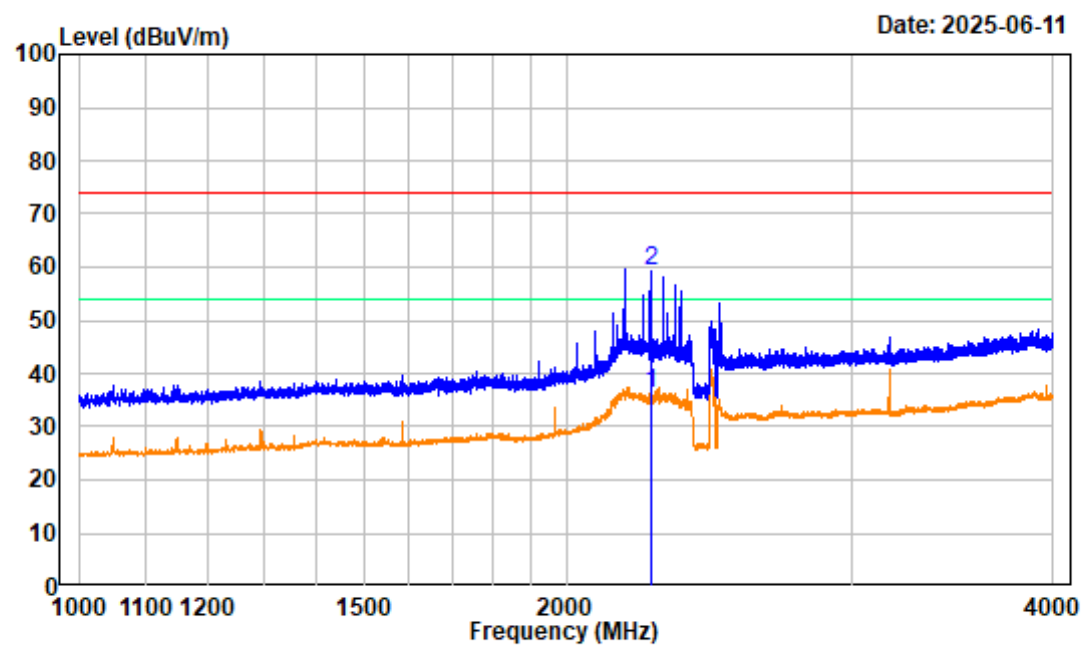

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2259.250	-10.08	46.40	36.32	54.00	-17.68	Average
2	2259.250	-10.08	69.39	59.31	74.00	-14.69	Peak


802.11n20 High Channel 1GHz-4GHz_VERTICAL

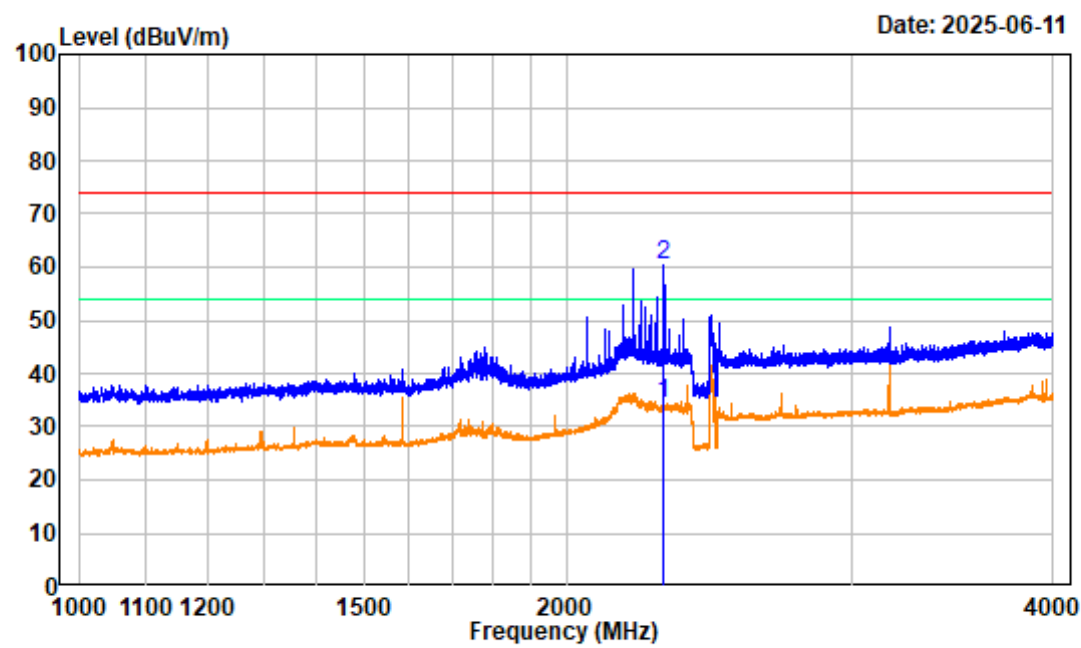

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2299.000	-9.91	44.28	34.37	54.00	-19.63	Average
2	2299.000	-9.91	70.31	60.40	74.00	-13.60	Peak


802.11n20 High Channel 4GHz-18GHz_HORIZONTAL

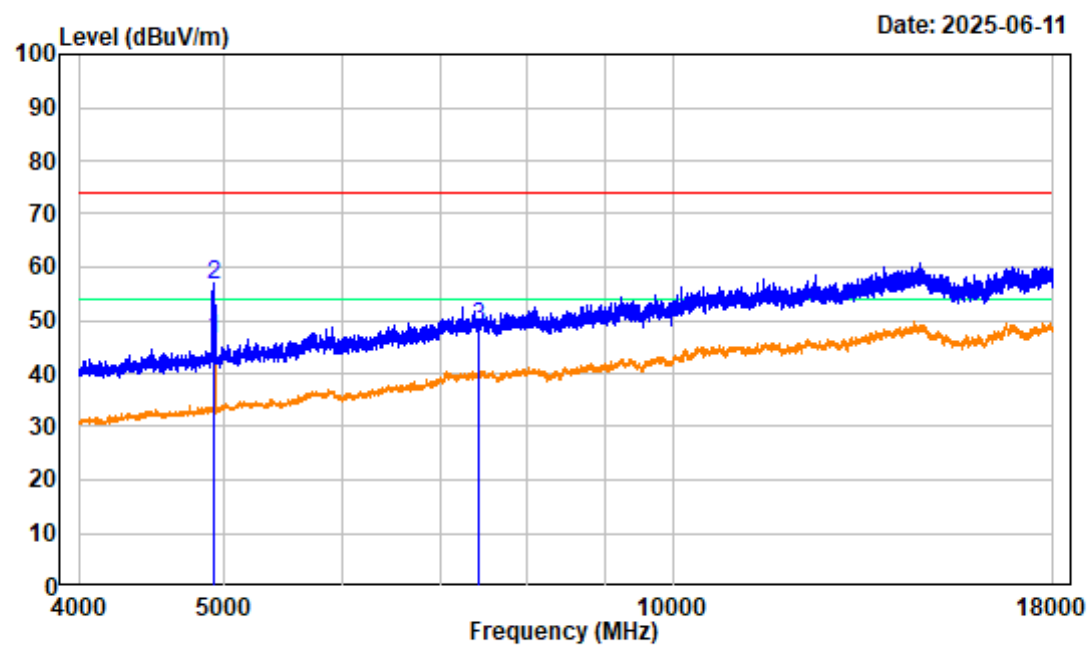

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	53.14	46.54	54.00	-7.46	average
2	4924.000	-6.60	63.11	56.51	74.00	-17.49	peak
3	7416.000	-1.28	49.84	48.56	74.00	-25.44	peak


802.11n20 High Channel 4GHz-18GHz_VERTICAL

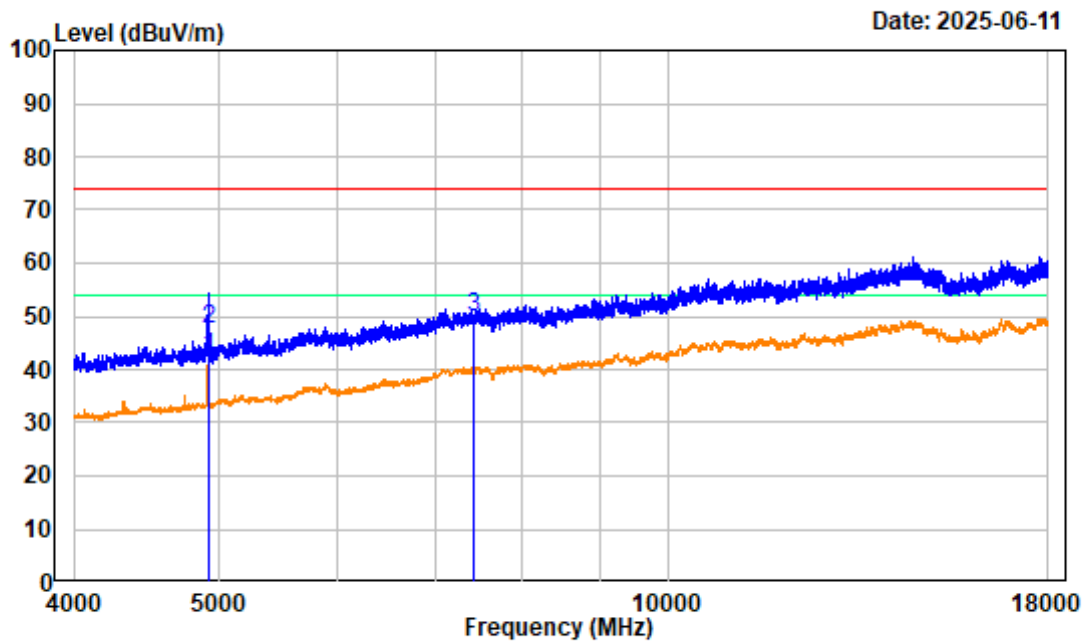

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	48.96	42.36	54.00	-11.64	average
2	4924.000	-6.60	53.98	47.38	74.00	-26.62	peak
3	7416.000	-1.28	51.21	49.93	74.00	-24.07	peak


802.11n20 High Channel Bandedge_HORIZONTAL

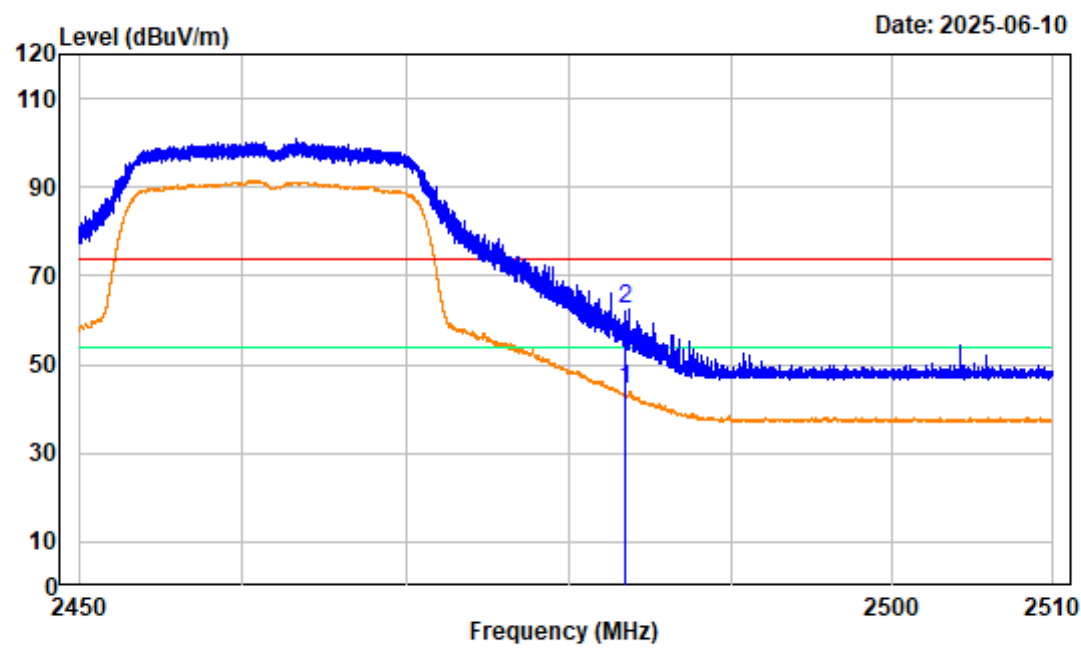

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	54.68	44.46	54.00	-9.54	average
2	2483.500	-10.22	72.66	62.44	74.00	-11.56	peak


802.11n20 High Channel Bandedge_VERTICAL

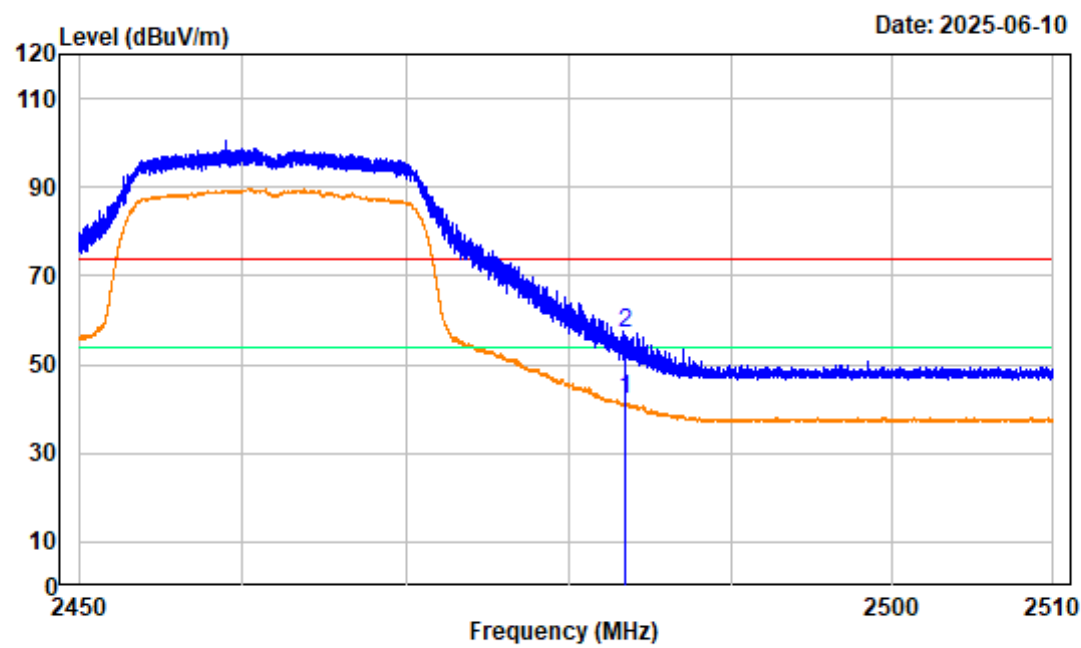

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n20 High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	52.31	42.09	54.00	-11.91	average
2	2483.500	-10.22	67.30	57.08	74.00	-16.92	peak


802.11n40 Low Channel 1GHz-4GHz_HORIZONTAL

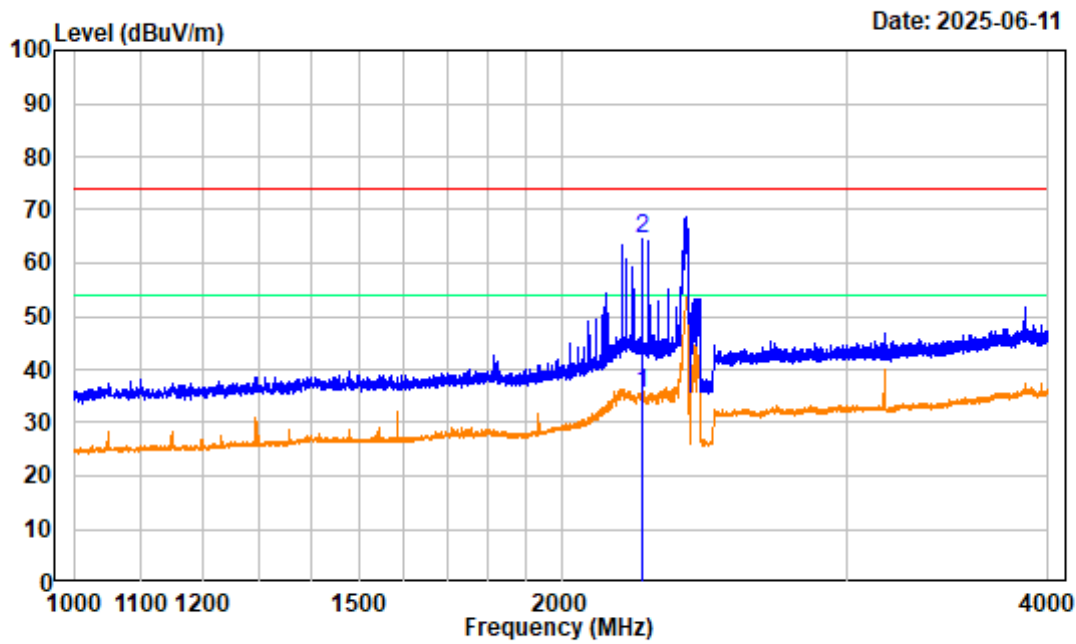

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Low Channel 2422MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2243.125	-10.13	45.53	35.40	54.00	-18.60	Average
2	2243.125	-10.13	74.49	64.36	74.00	-9.64	Peak


802.11n40 Low Channel 1GHz-4GHz_VERTICAL

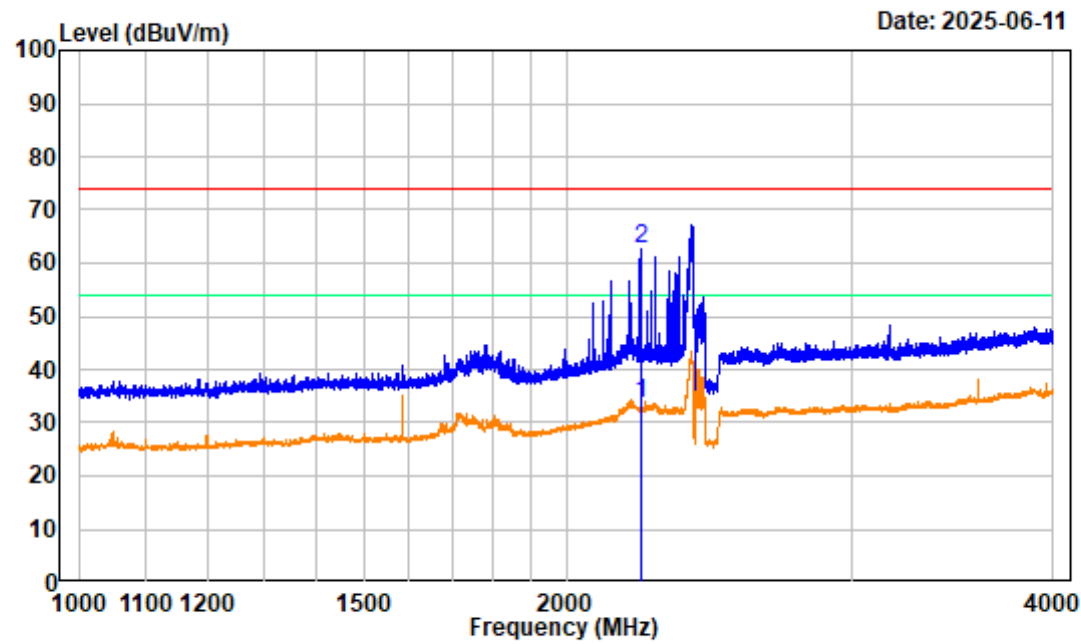

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Low Channel 2422MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2227.750	-10.12	43.70	33.58	54.00	-20.42	Average
2	2227.750	-10.12	72.69	62.57	74.00	-11.43	Peak


802.11n40 Low Channel 4GHz-18GHz_HORIZONTAL

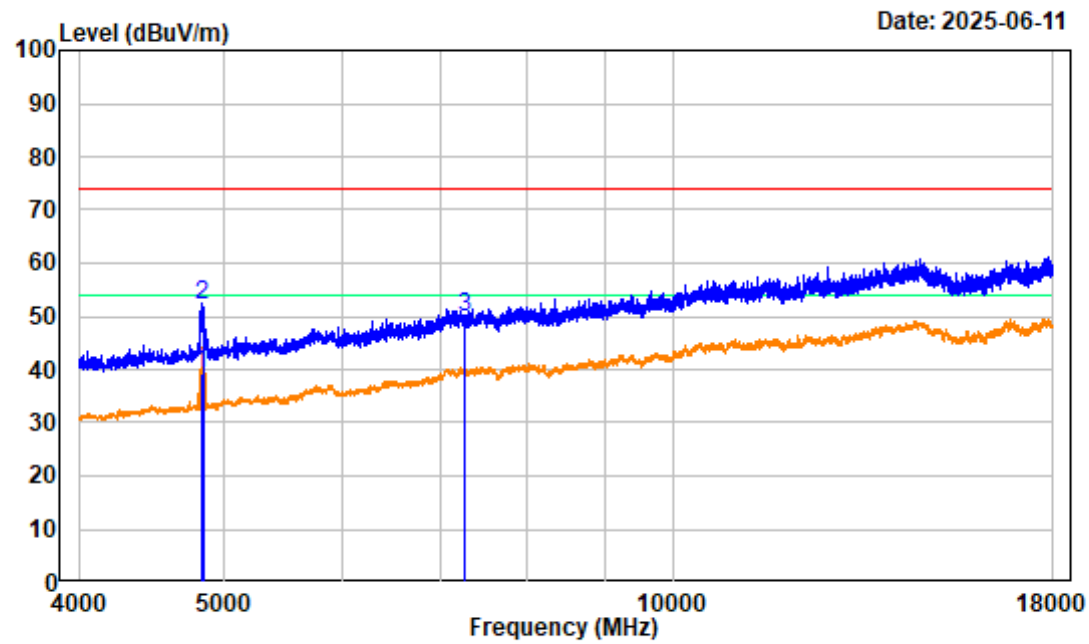

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Low Channel 2422MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4843.500	-6.62	45.76	39.14	54.00	-14.86	average
2	4844.000	-6.62	58.80	52.18	74.00	-21.82	peak
3	7265.500	-1.26	50.98	49.72	74.00	-24.28	peak


802.11n40 Low Channel 4GHz-18GHz_VERTICAL

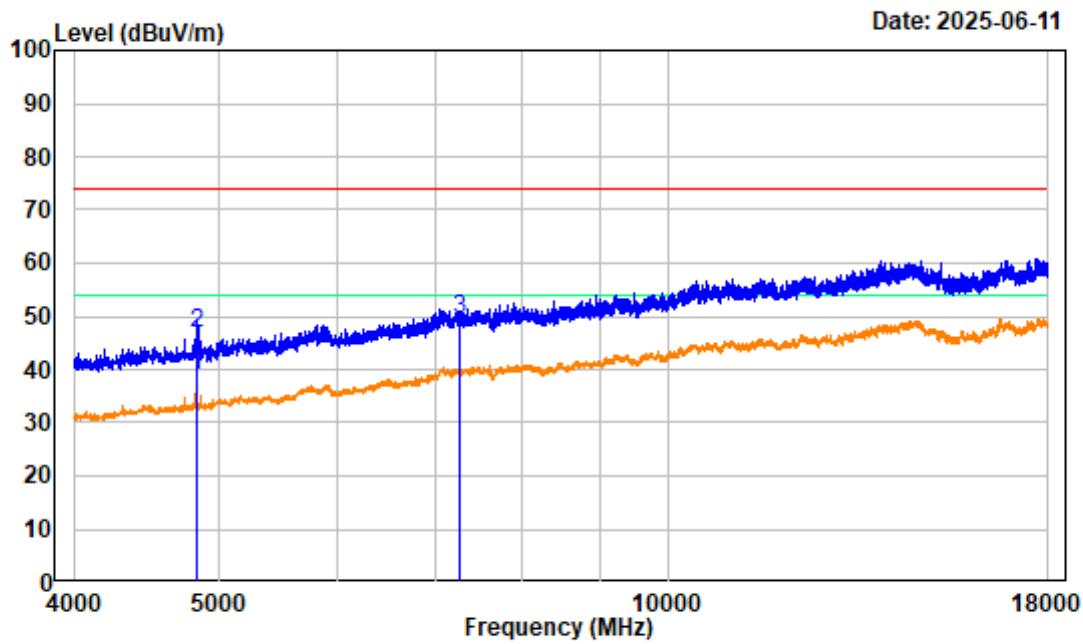

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Low Channel 2422MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4843.500	-6.62	45.42	38.80	54.00	-15.20	average
2	4843.500	-6.62	53.41	46.79	74.00	-27.21	peak
3	7265.500	-1.26	50.76	49.50	74.00	-24.50	peak


802.11n40 Low Channel Bandedge_HORIZONTAL

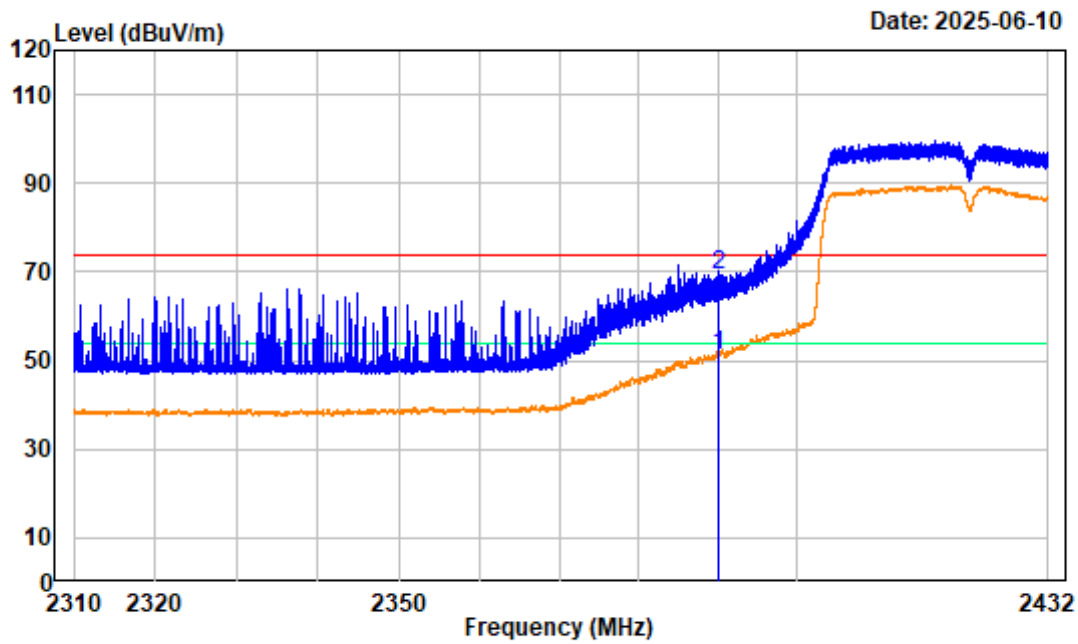

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	61.19	50.95	54.00	-3.05	average
2	2390.000	-10.24	79.50	69.26	74.00	-4.74	peak


802.11n40 Low Channel Bandedge_VERTICAL

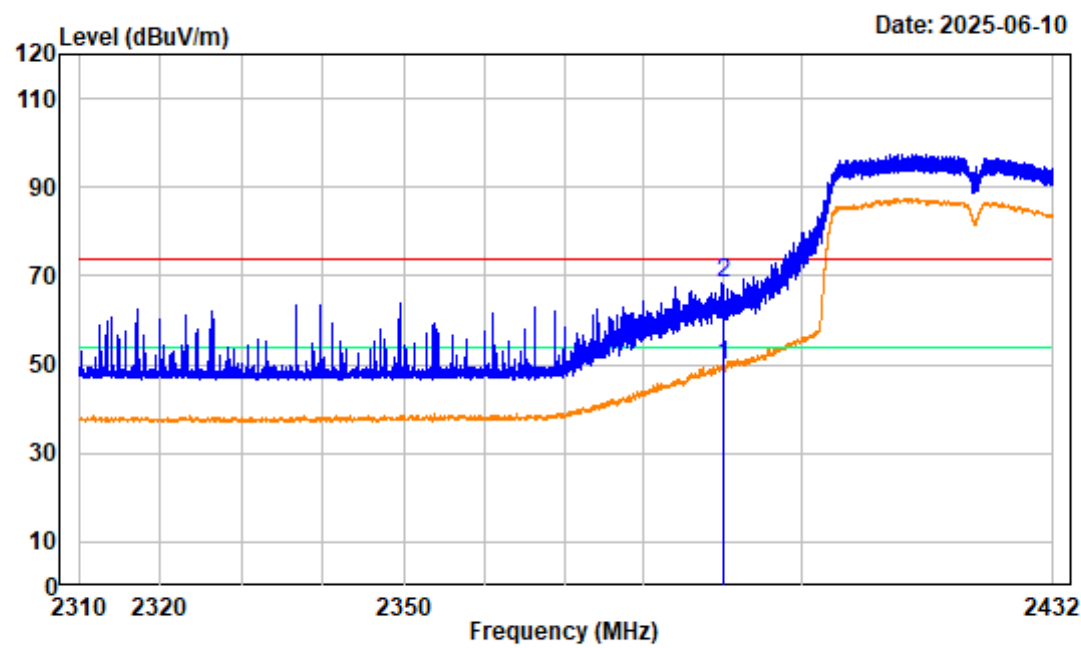

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	59.84	49.60	54.00	-4.40	average
2	2390.000	-10.24	78.79	68.55	74.00	-5.45	peak


802.11n40 Middle Channel 1GHz-4GHz_HORIZONTAL

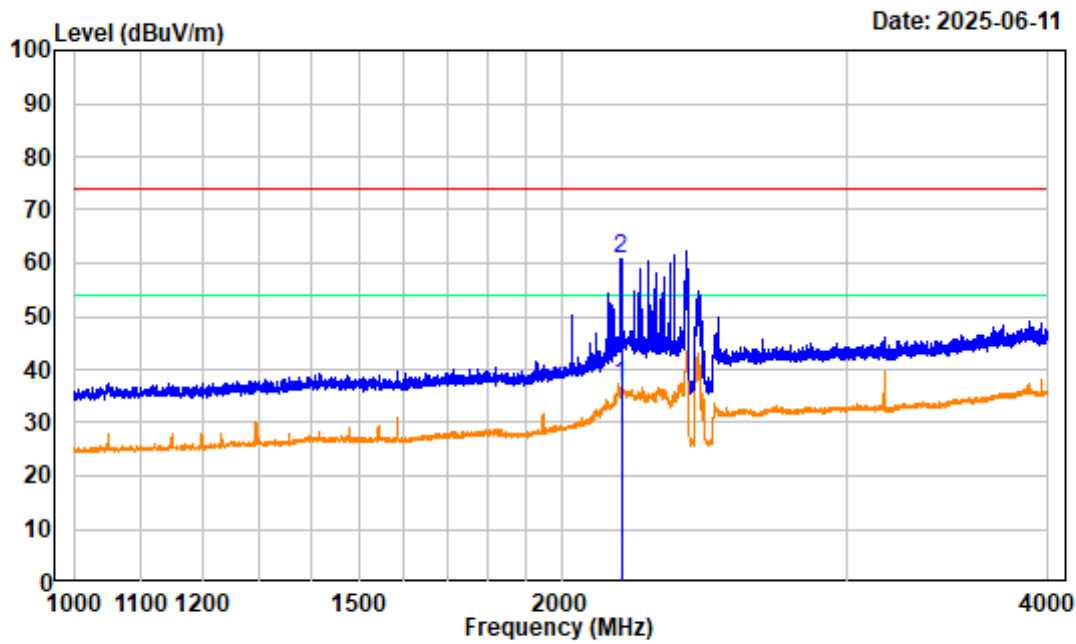

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2179.000	-10.33	47.14	36.81	54.00	-17.19	Average
2	2179.000	-10.33	71.17	60.84	74.00	-13.16	Peak


802.11n40 Middle Channel 1GHz-4GHz_VERTICAL

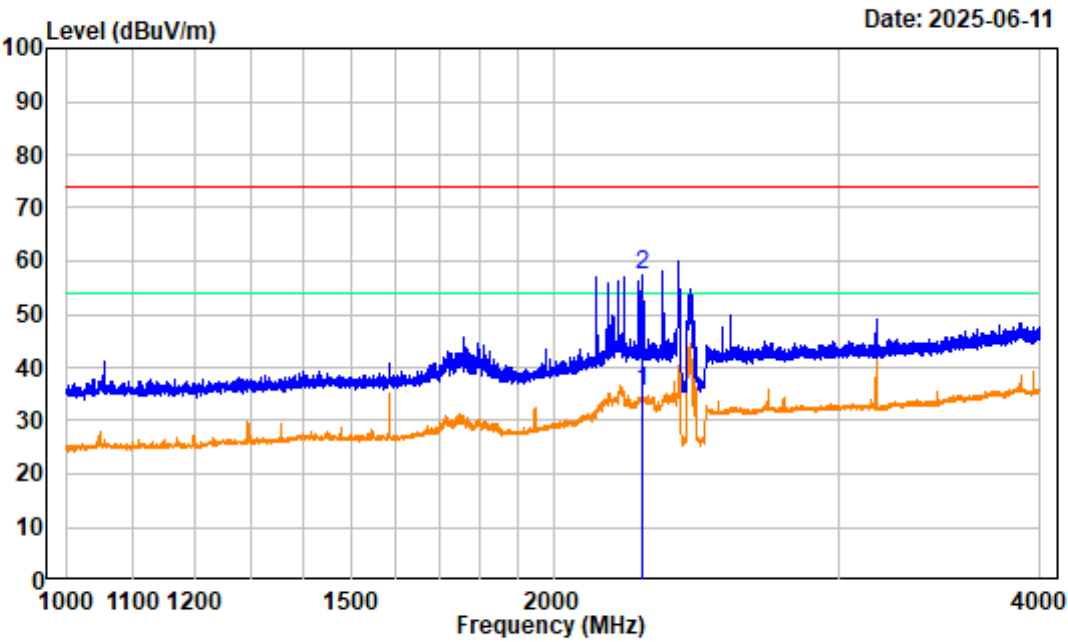

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2272.000	-10.02	45.42	35.40	54.00	-18.60	Average
2	2272.000	-10.02	67.44	57.42	74.00	-16.58	Peak


802.11n40 Middle Channel 4GHz-18GHz_HORIZONTAL

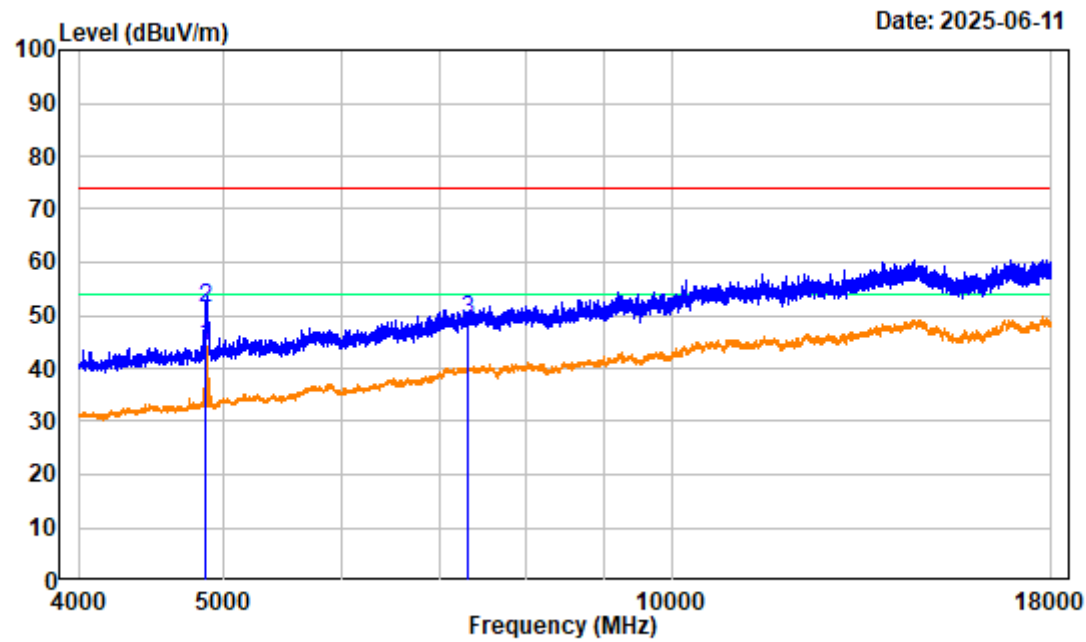

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	50.79	44.16	54.00	-9.84	average
2	4873.250	-6.63	57.81	51.18	74.00	-22.82	peak
3	7311.000	-1.21	50.08	48.87	74.00	-25.13	peak


802.11n40 Middle Channel 4GHz-18GHz_VERTICAL

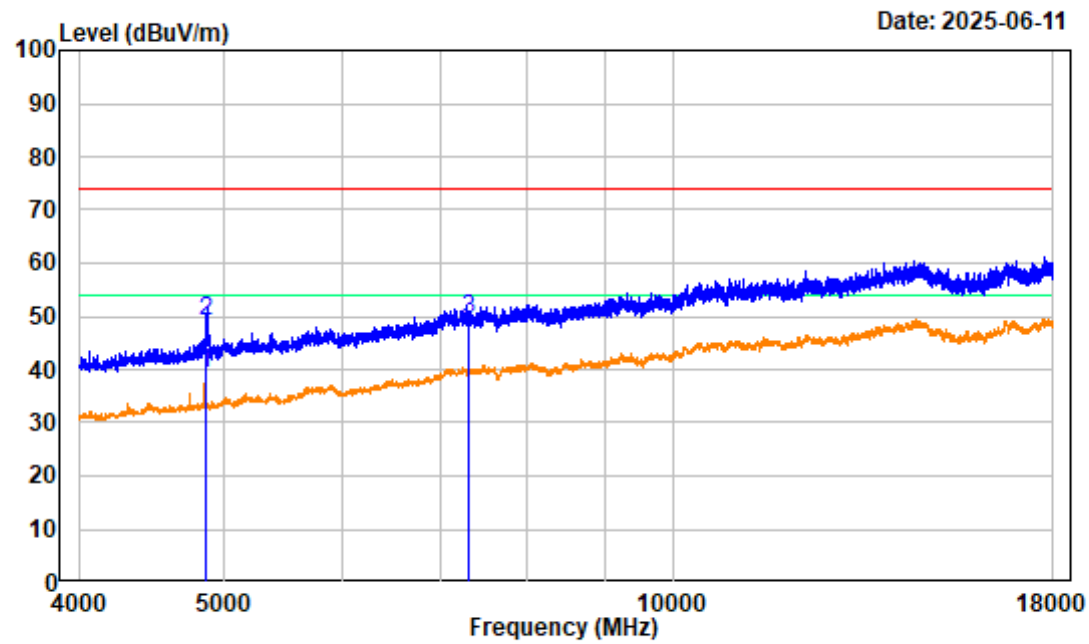

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	45.85	39.22	54.00	-14.78	average
2	4873.250	-6.63	55.86	49.23	74.00	-24.77	peak
3	7311.000	-1.21	50.56	49.35	74.00	-24.65	peak


802.11n40 High Channel 1GHz-4GHz_HORIZONTAL

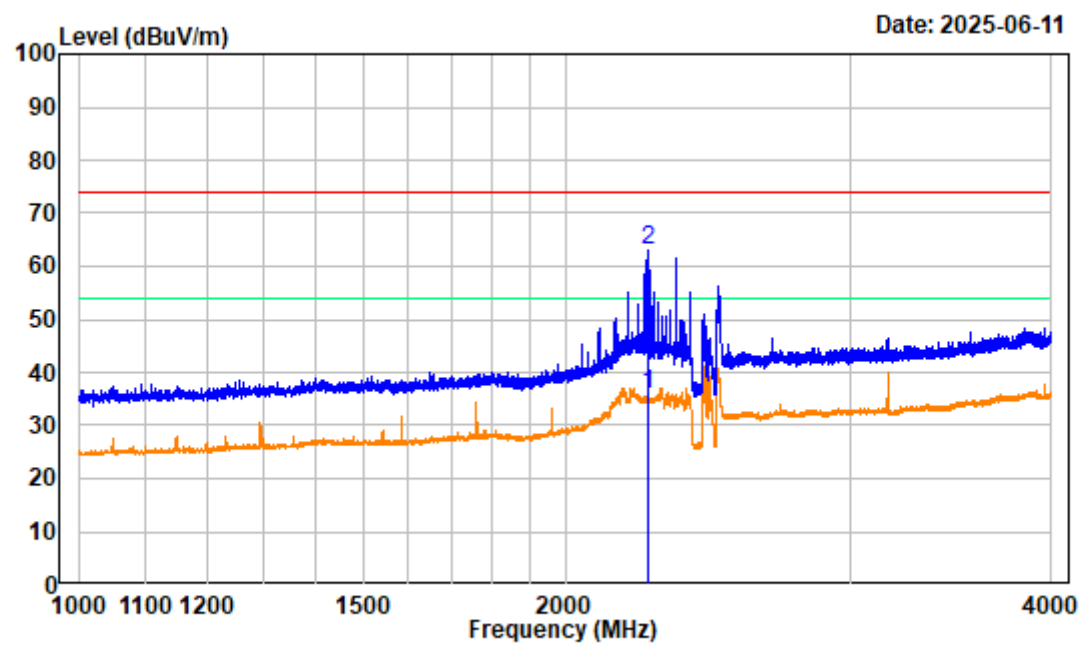

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 High Channel 2452MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2253.250	-10.11	46.03	35.92	54.00	-18.08	Average
2	2253.250	-10.11	73.06	62.95	74.00	-11.05	Peak


802.11n40 High Channel 1GHz-4GHz_VERTICAL

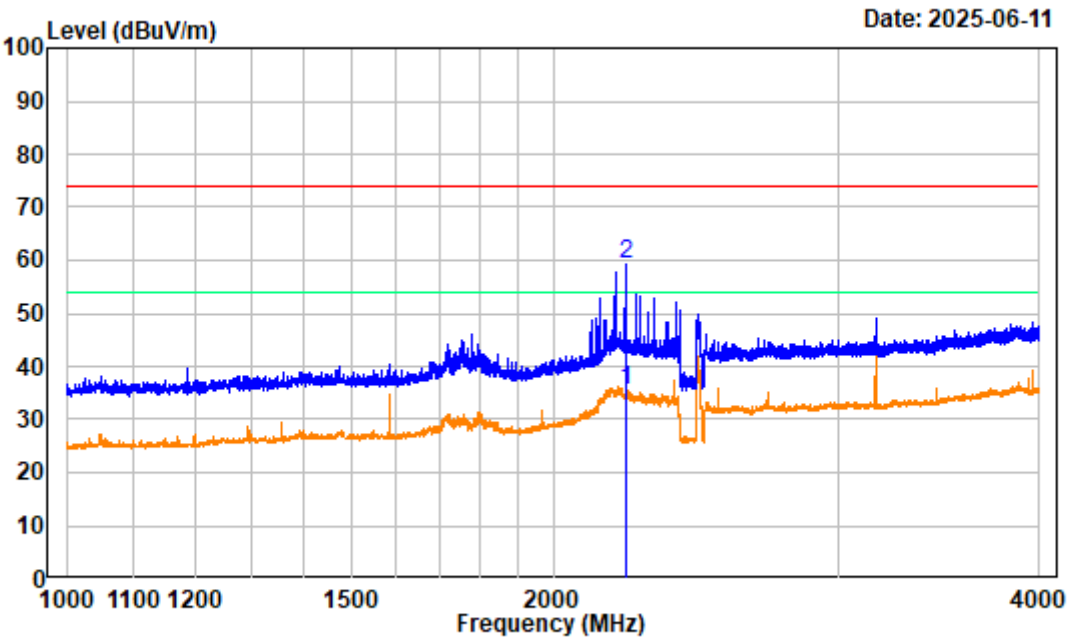

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11g High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2220.250	-10.10	45.41	35.31	54.00	-18.69	Average
2	2220.250	-10.10	69.40	59.30	74.00	-14.70	Peak


802.11n40 High Channel 4GHz-18GHz_HORIZONTAL

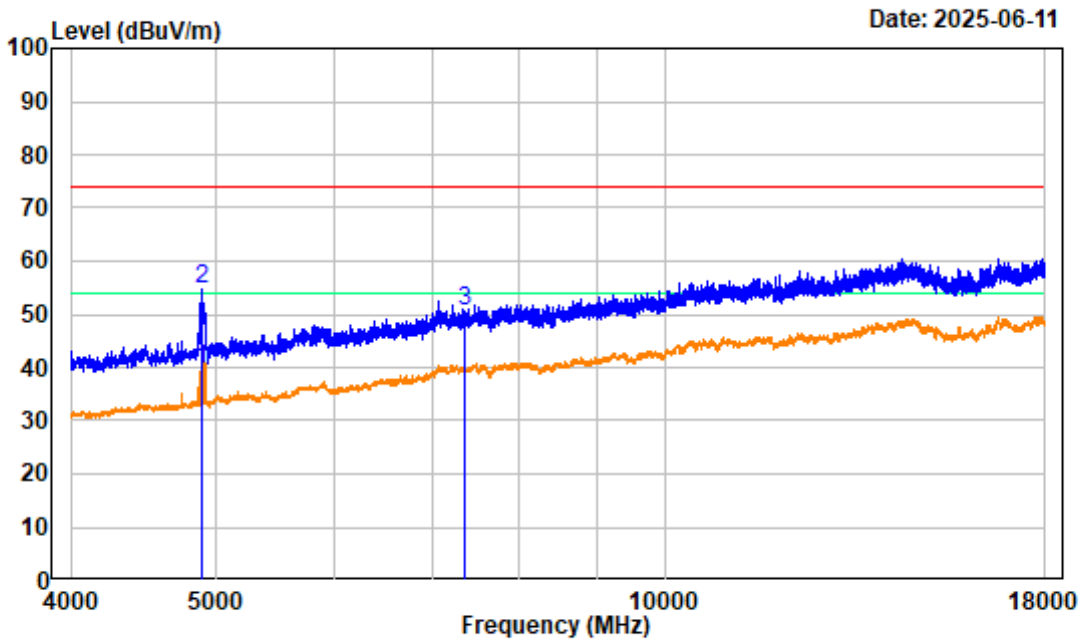

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 High Channel 2452MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-6.63	46.40	39.77	54.00	-14.23	average
2	4904.000	-6.63	61.37	54.74	74.00	-19.26	peak
3	7356.000	-1.31	51.88	50.57	74.00	-23.43	peak


802.11n40 High Channel 4GHz-18GHz_VERTICAL

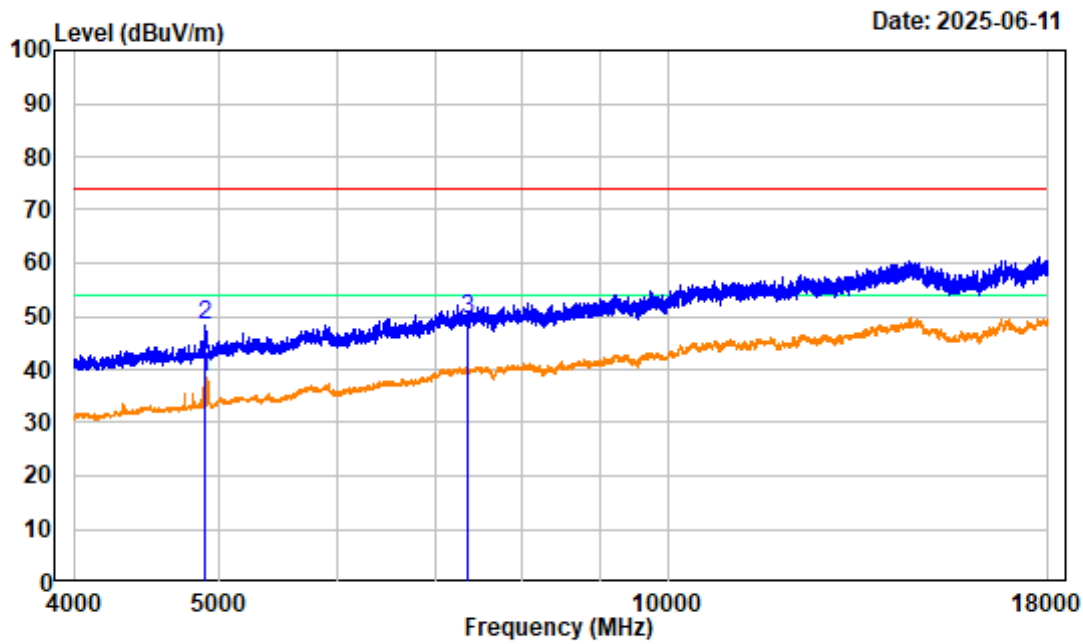

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 High Channel 2452MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-6.63	44.95	38.32	54.00	-15.68	average
2	4904.000	-6.63	55.01	48.38	74.00	-25.62	peak
3	7356.000	-1.31	50.75	49.44	74.00	-24.56	peak


802.11n40 High Channel Bandedge_HORIZONTAL

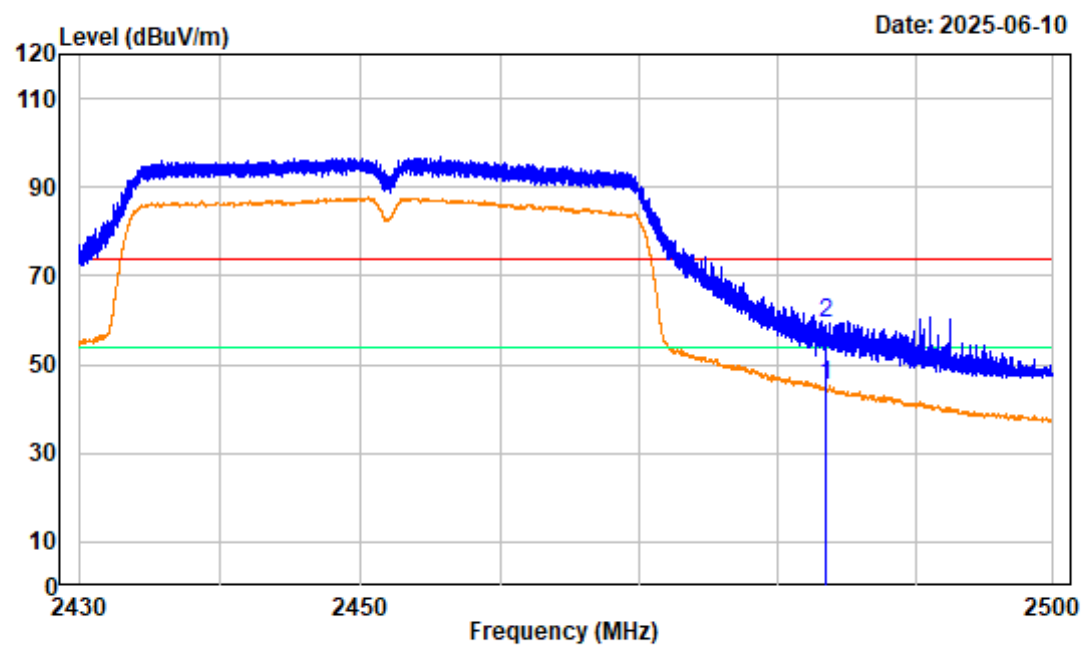

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 High Channel 2452MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	55.69	45.47	54.00	-8.53	average
2	2483.500	-10.22	69.68	59.46	74.00	-14.54	peak


802.11n40 High Channel Bandedge_VERTICAL

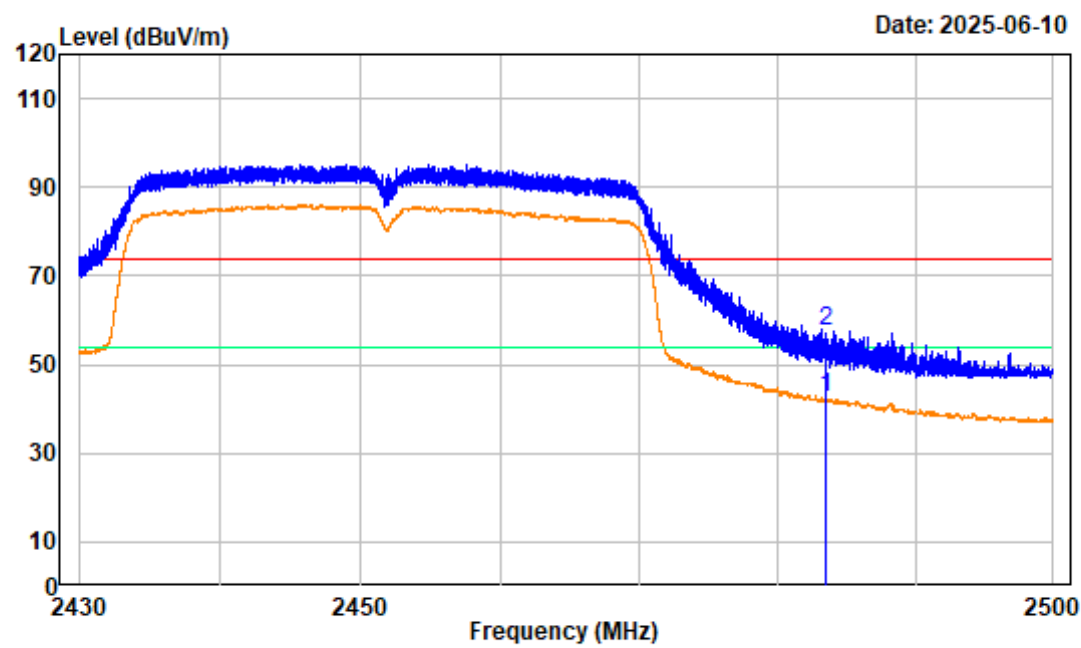

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11n40 High Channel 2452MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	52.60	42.38	54.00	-11.62	average
2	2483.500	-10.22	67.58	57.36	74.00	-16.64	peak


802.11ax20 Low Channel 1GHz-4GHz_HORIZONTAL

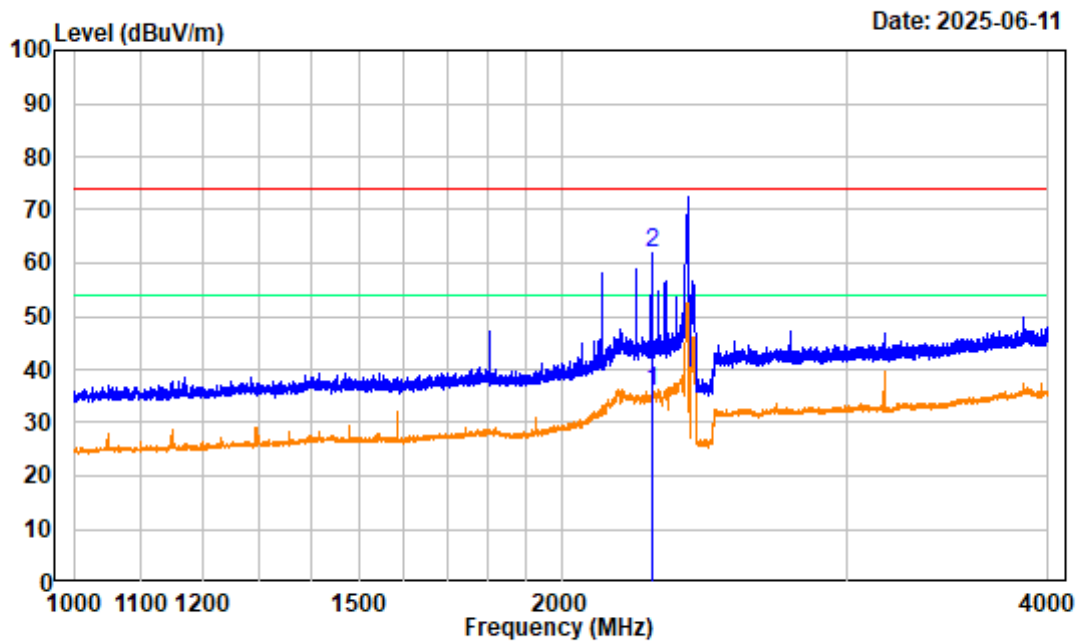

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2279.125	-10.00	45.83	35.83	54.00	-18.17	Average
2	2279.125	-10.00	71.88	61.88	74.00	-12.12	Peak


802.11ax20 Low Channel 1GHz-4GHz_VERTICAL

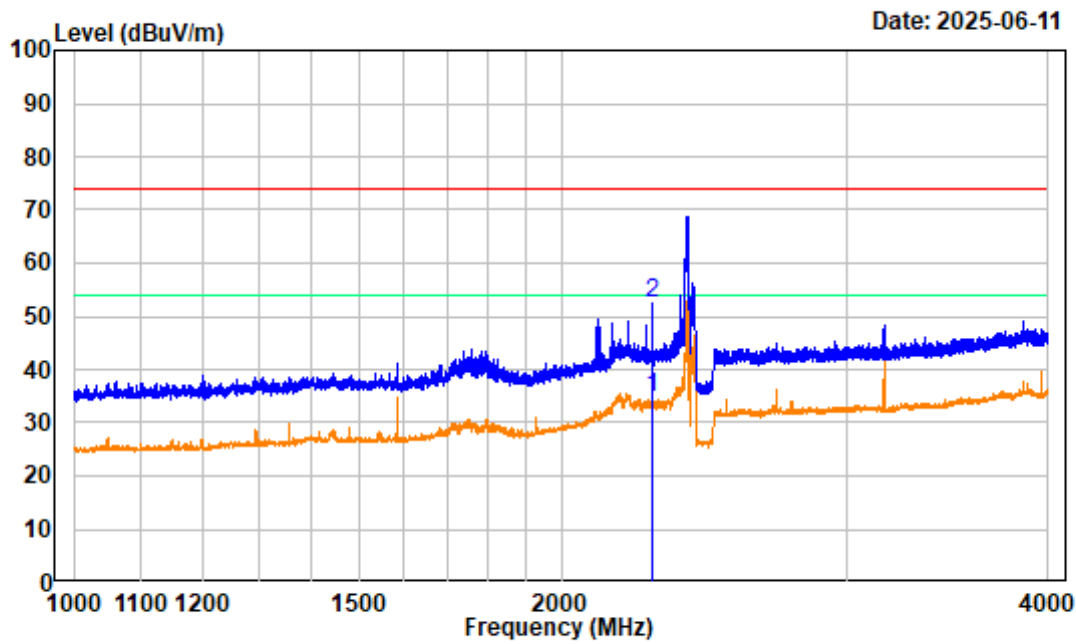

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2275.750 -10.01	44.62	34.61	54.00	-19.39	Average
2	2275.750 -10.01	62.64	52.63	74.00	-21.37	Peak


802.11ax20 Low Channel 4GHz-18GHz_HORIZONTAL

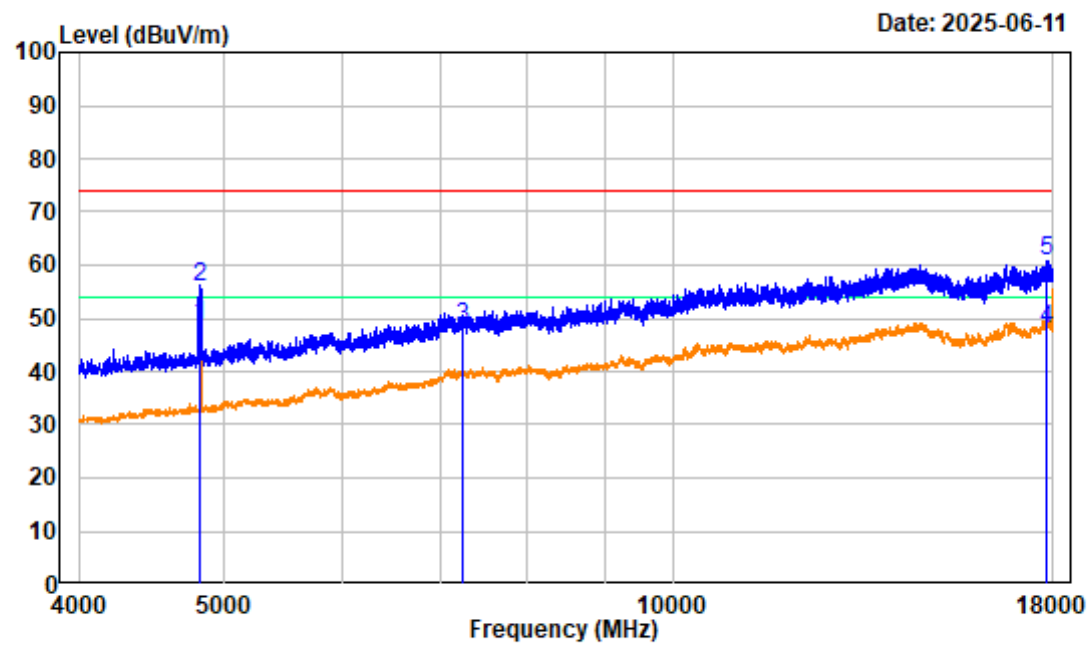

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	55.33	48.72	54.00	-5.28	average
2	4824.250	-6.61	62.37	55.76	74.00	-18.24	peak
3	7235.750	-1.31	49.71	48.40	74.00	-25.60	peak
4	17798.750	7.58	40.33	47.91	54.00	-6.09	average
5	17798.750	7.58	53.28	60.86	74.00	-13.14	peak


802.11ax20 Low Channel 4GHz-18GHz_VERTICAL

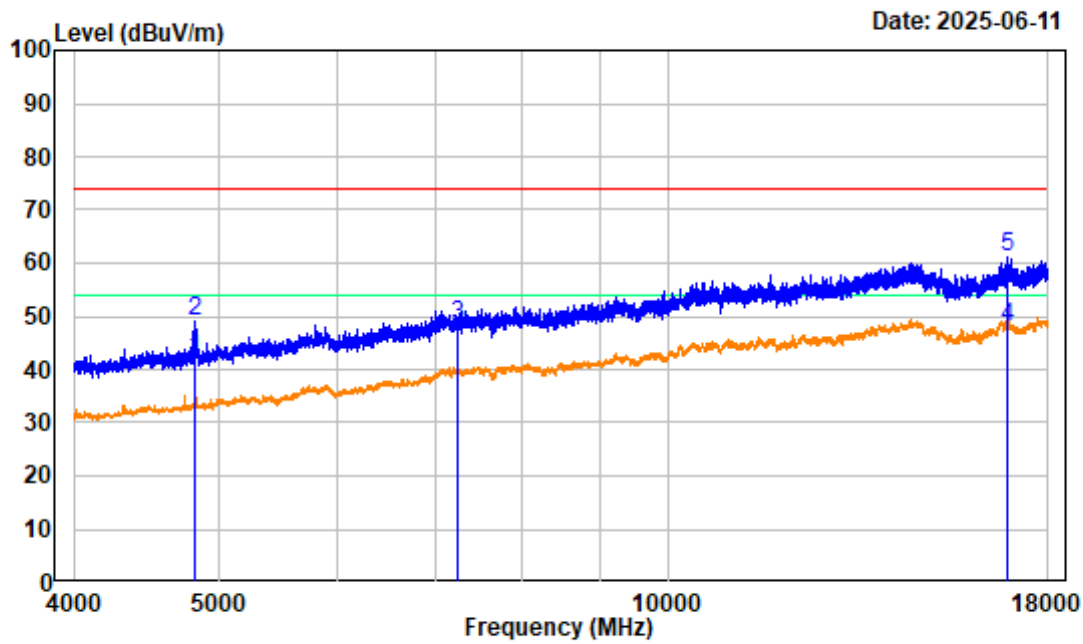

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.250	-6.61	48.67	42.06	54.00	-11.94	average
2	4824.250	-6.61	55.71	49.10	74.00	-24.90	peak
3	7235.750	-1.31	49.52	48.21	74.00	-25.79	peak
4	16916.750	7.85	40.09	47.94	54.00	-6.06	average
5	16916.750	7.85	53.23	61.08	74.00	-12.92	peak


802.11ax20 Low Channel Bandedge_HORIZONTAL

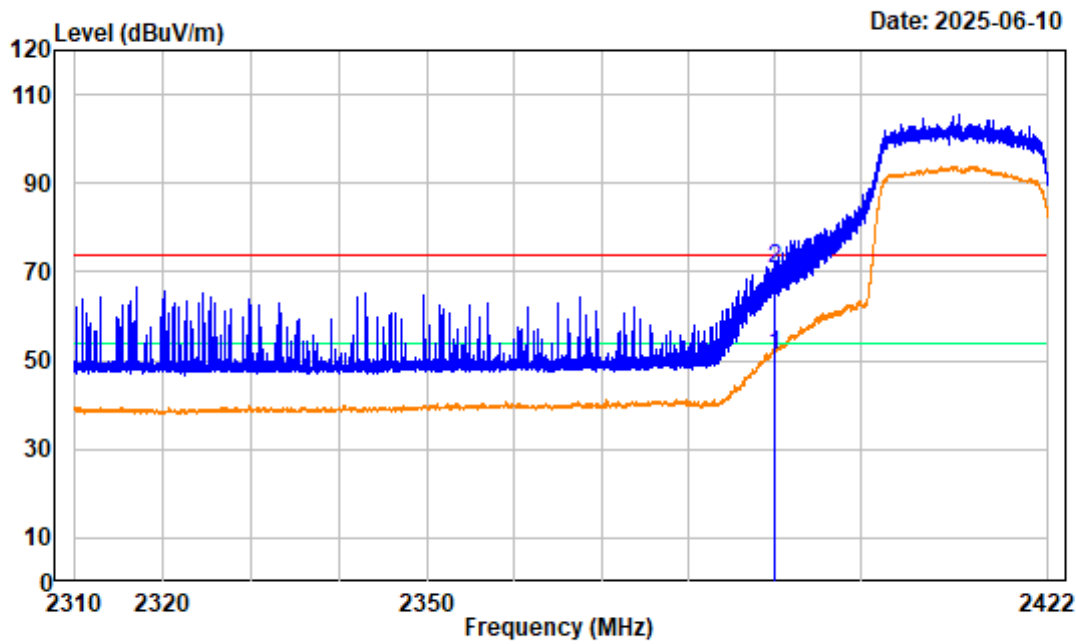

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	61.22	50.98	54.00	-3.02	average
2	2390.000	-10.24	81.10	70.86	74.00	-3.14	peak


802.11ax20 Low Channel Bandedge_VERTICAL

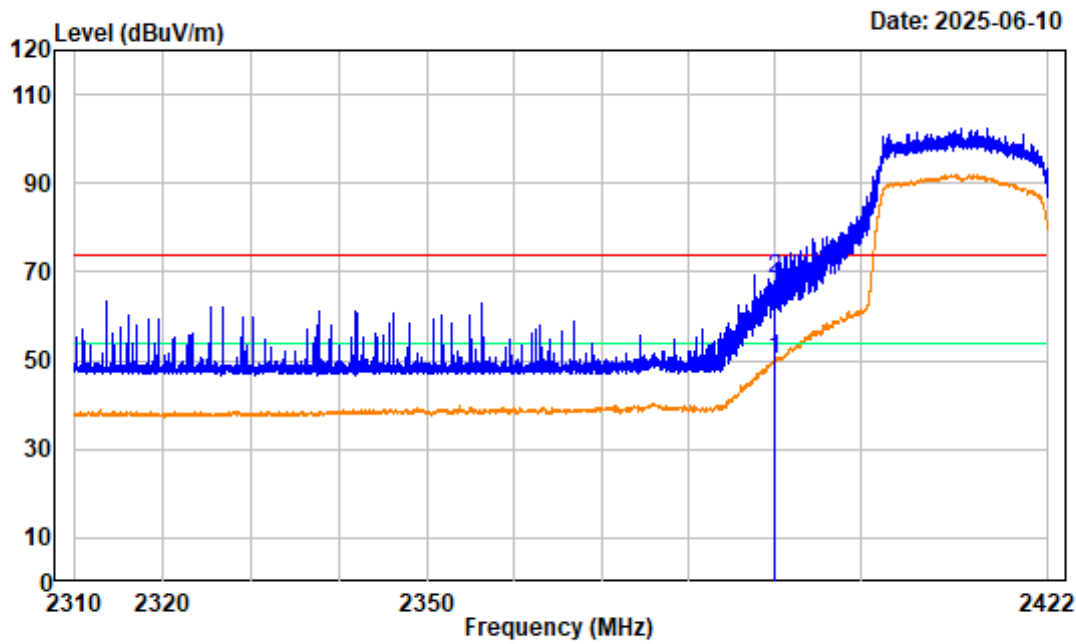

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	60.52	50.28	54.00	-3.72	average
2	2390.000	-10.24	78.49	68.25	74.00	-5.75	peak


802.11ax20 Middle Channel 1GHz-4GHz_HORIZONTAL

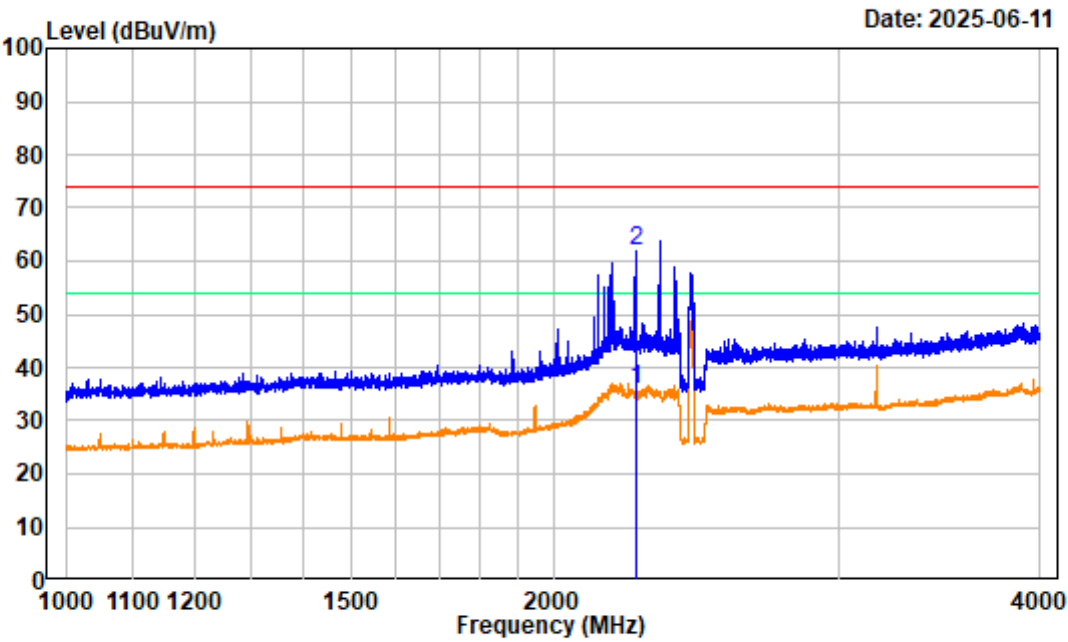

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2253.250	-10.11	45.91	35.80	54.00	-18.20	Average
2	2253.250	-10.11	71.94	61.83	74.00	-12.17	Peak


802.11ax20 Middle Channel 1GHz-4GHz_VERTICAL

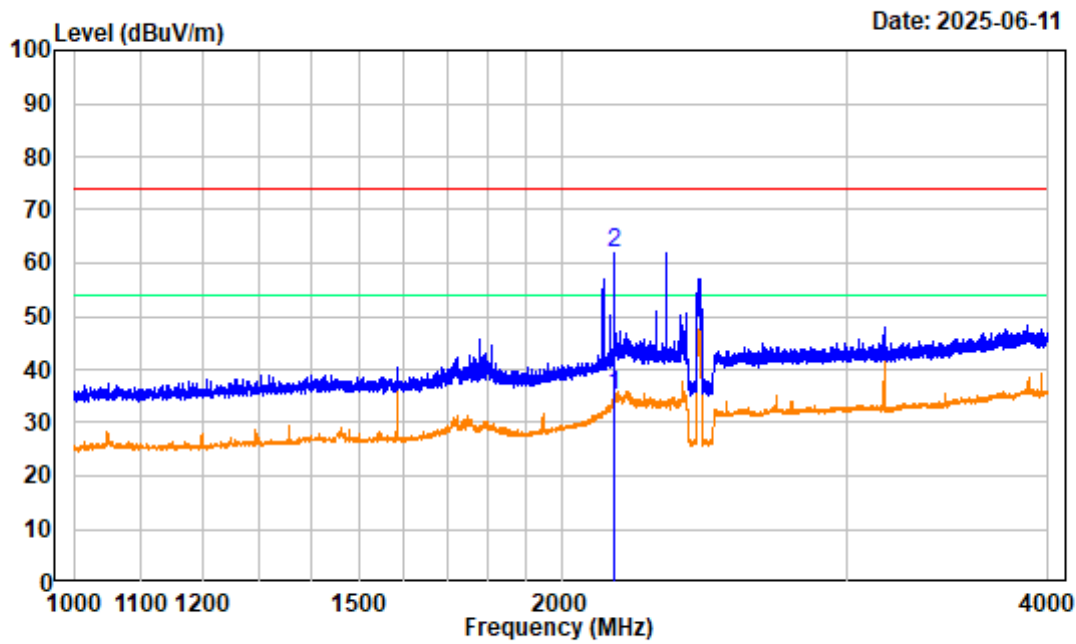

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2157.250	-10.57	45.64	35.07	54.00	-18.93	Average
2	2157.250	-10.57	72.58	62.01	74.00	-11.99	Peak


802.11ax20 Middle Channel 4GHz-18GHz_HORIZONTAL

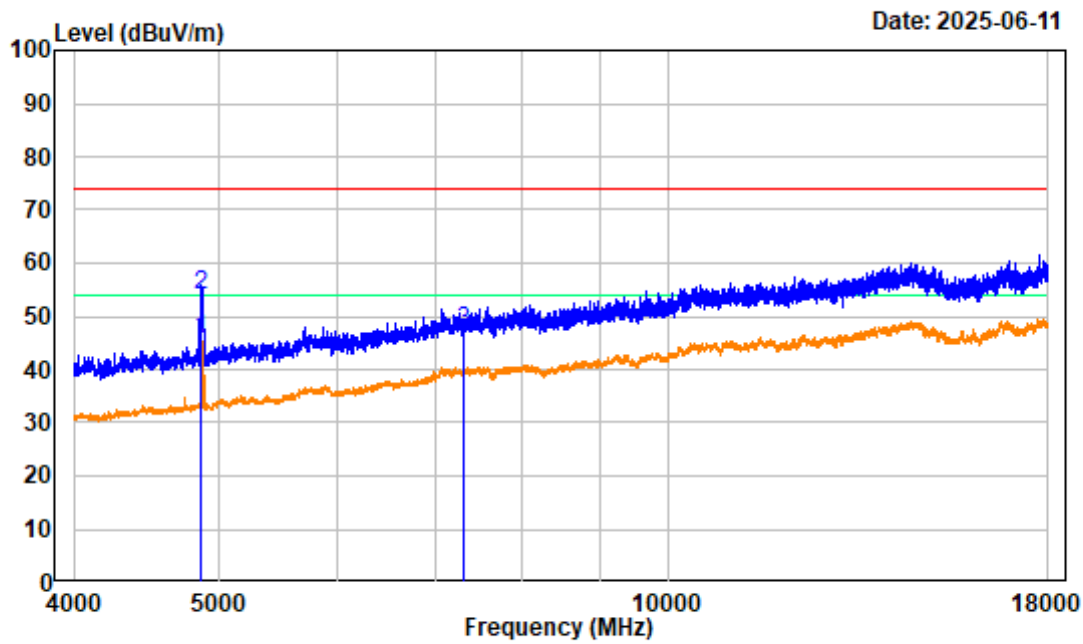

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	52.46	45.83	54.00	-8.17	average
2	4873.250	-6.63	60.46	53.83	74.00	-20.17	peak
3	7311.000	-1.21	48.27	47.06	74.00	-26.94	peak


802.11ax20 Middle Channel 4GHz-18GHz_VERTICAL

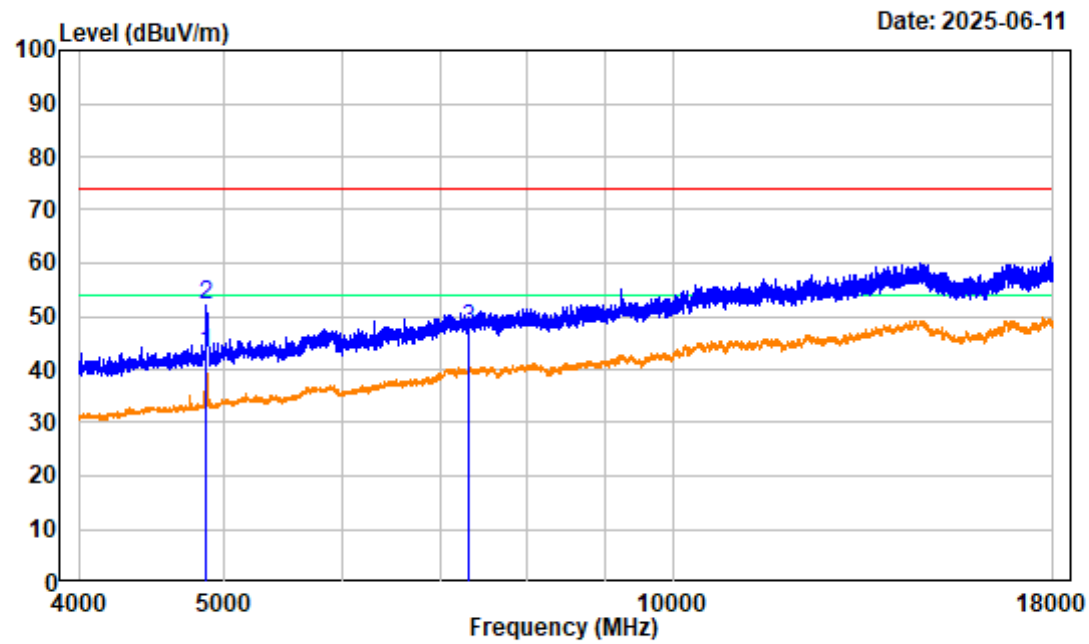

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	49.75	43.12	54.00	-10.88	average
2	4873.250	-6.63	58.81	52.18	74.00	-21.82	peak
3	7311.000	-1.21	48.59	47.38	74.00	-26.62	peak


802.11ax20 High Channel 1GHz-4GHz_HORIZONTAL

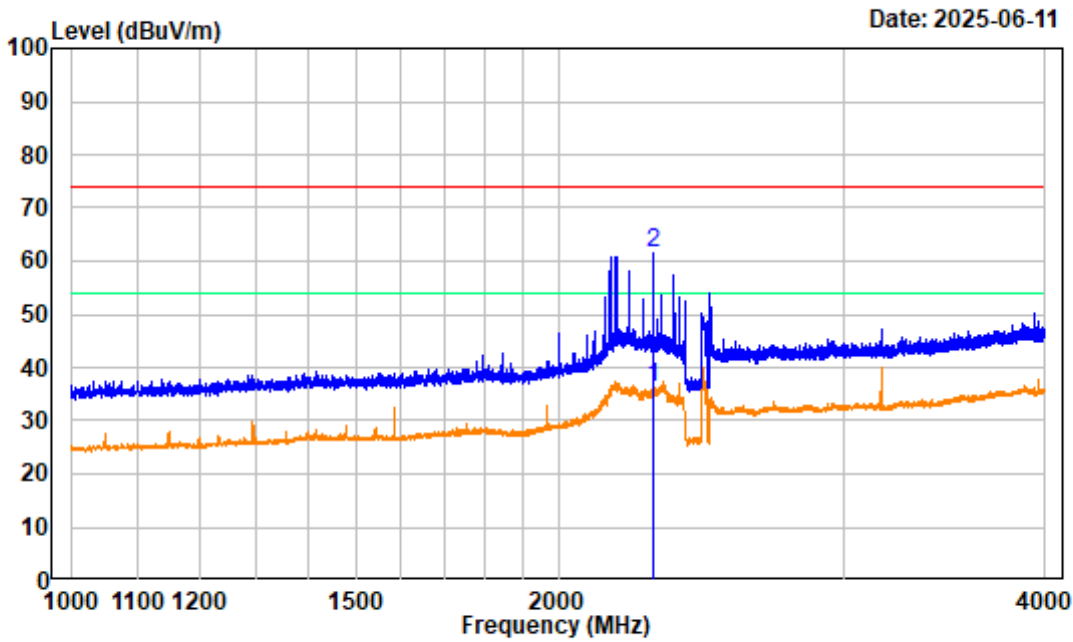

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2290.375	-9.94	46.29	36.35	54.00	-17.65	Average
2	2290.375	-9.94	71.34	61.40	74.00	-12.60	Peak


802.11ax20 High Channel 1GHz-4GHz_VERTICAL

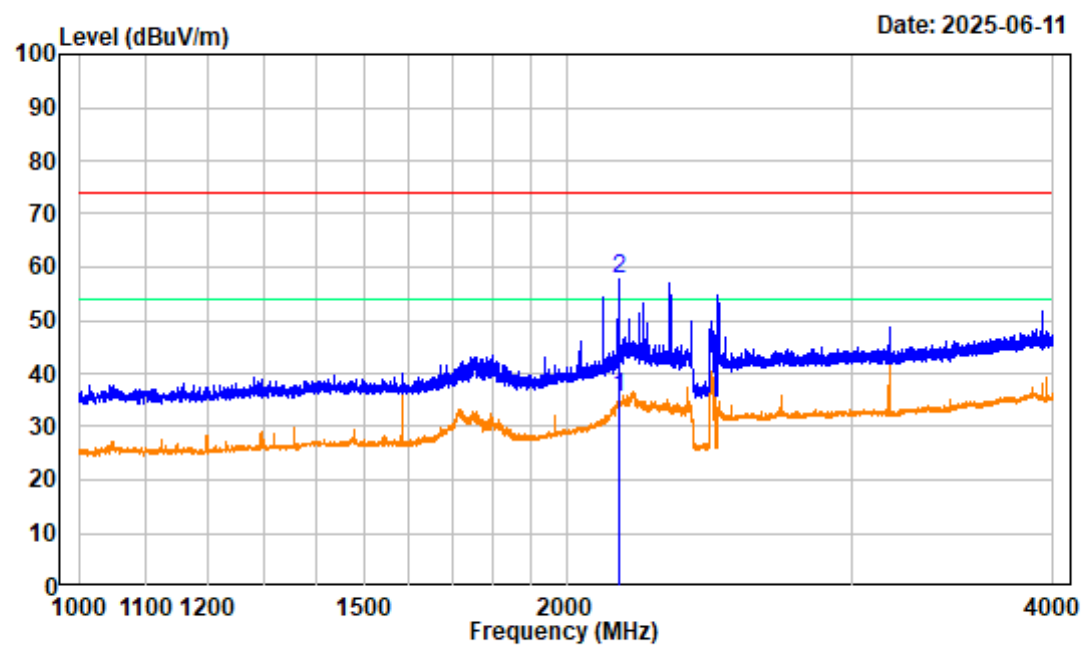

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 High Channel 2462MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2154.625 -10.60	46.25	35.65	54.00	-18.35	Average
2	2154.625 -10.60	68.27	57.67	74.00	-16.33	Peak


802.11ax20 High Channel 4GHz-18GHz_HORIZONTAL

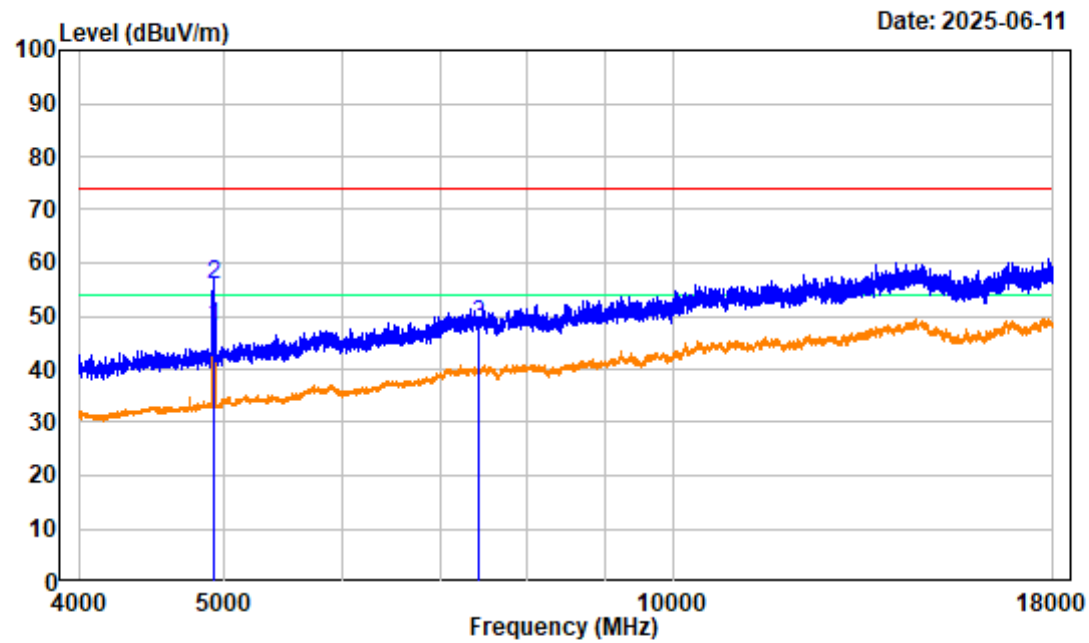

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	54.43	47.83	54.00	-6.17	average
2	4924.000	-6.60	62.42	55.82	74.00	-18.18	peak
3	7416.000	-1.28	49.63	48.35	74.00	-25.65	peak


802.11ax20 High Channel 4GHz-18GHz_VERTICAL

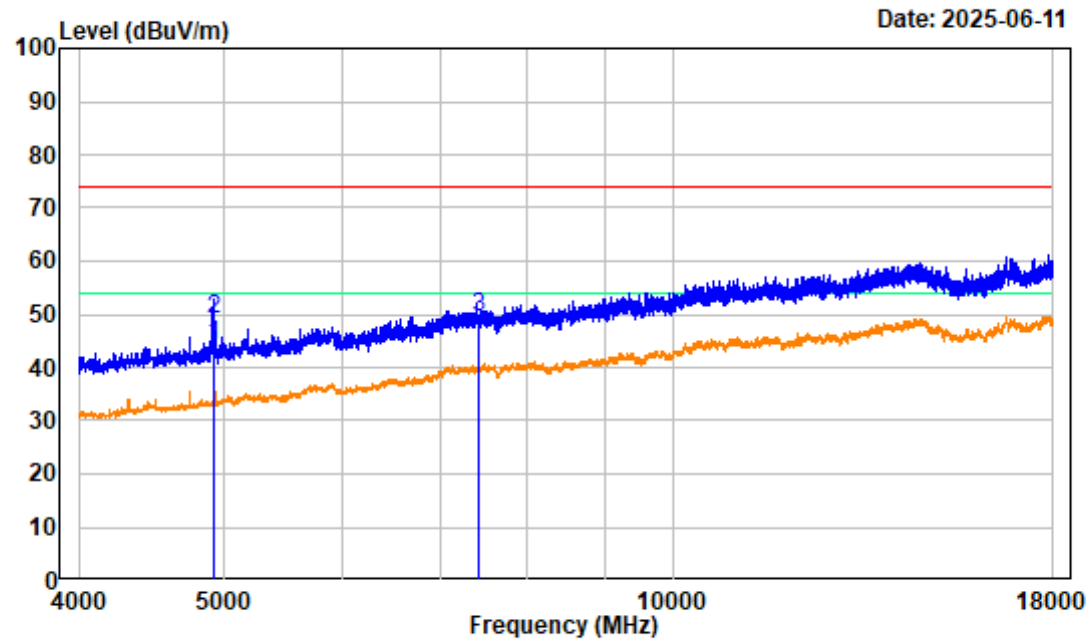

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 High Channel 2462MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	50.57	43.97	54.00	-10.03	average
2	4924.000	-6.60	55.52	48.92	74.00	-25.08	peak
3	7416.000	-1.28	50.58	49.30	74.00	-24.70	peak


802.11ax20 High Channel Bandedge_HORIZONTAL

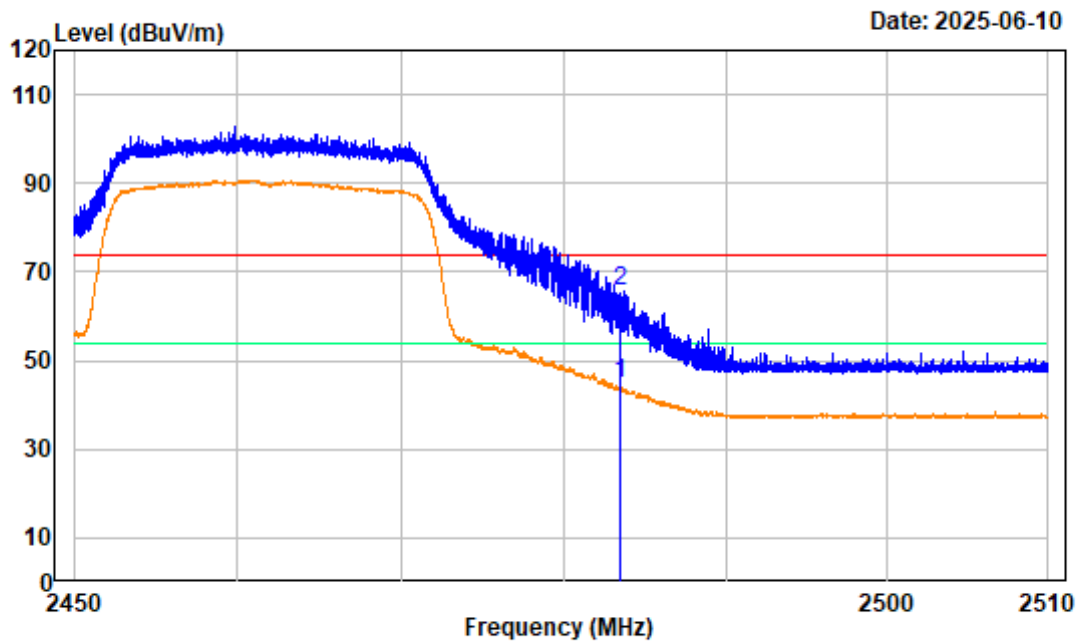

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	55.06	44.84	54.00	-9.16	average
2	2483.500	-10.22	76.02	65.80	74.00	-8.20	peak


802.11ax20 High Channel Bandedge_VERTICAL

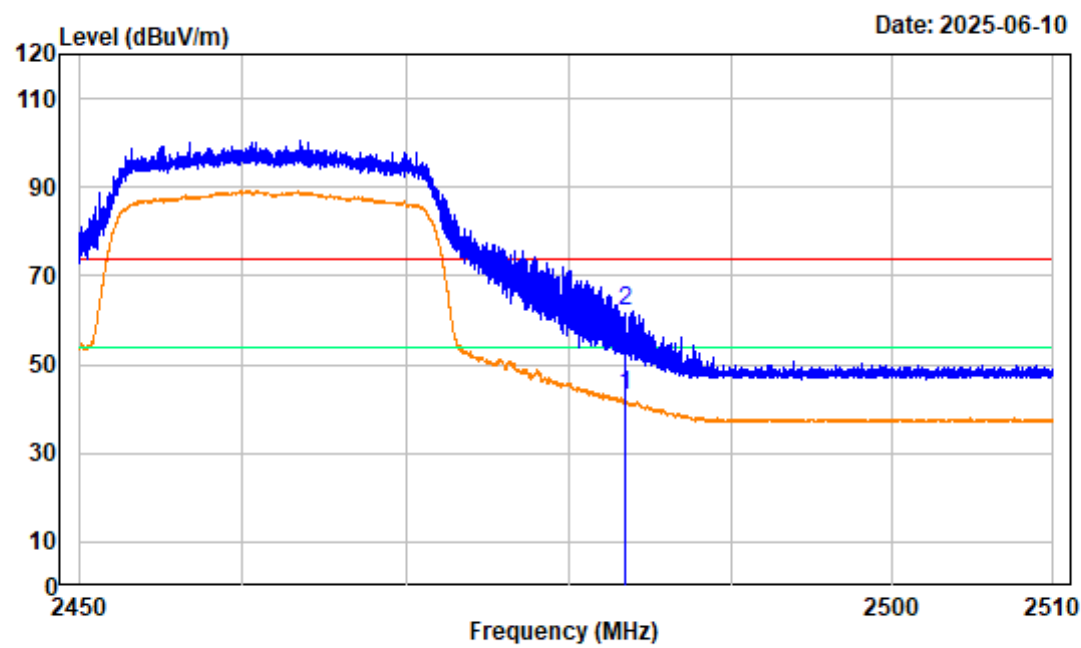

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax20 High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	53.38	43.16	54.00	-10.84	average
2	2483.500	-10.22	72.35	62.13	74.00	-11.87	peak


802.11ax40 Low Channel 1GHz-4GHz_HORIZONTAL

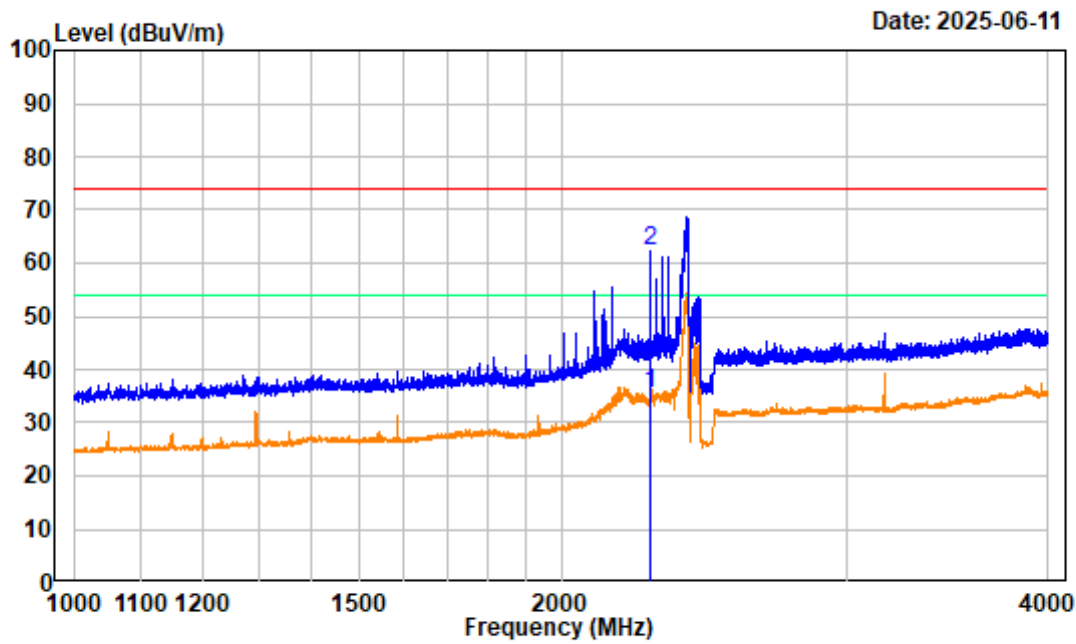

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Low Channel 2422MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2269.000	-10.04	45.52	35.48	54.00	-18.52	Average
2	2269.000	-10.04	72.47	62.43	74.00	-11.57	Peak


802.11ax40 Low Channel 1GHz-4GHz_VERTICAL

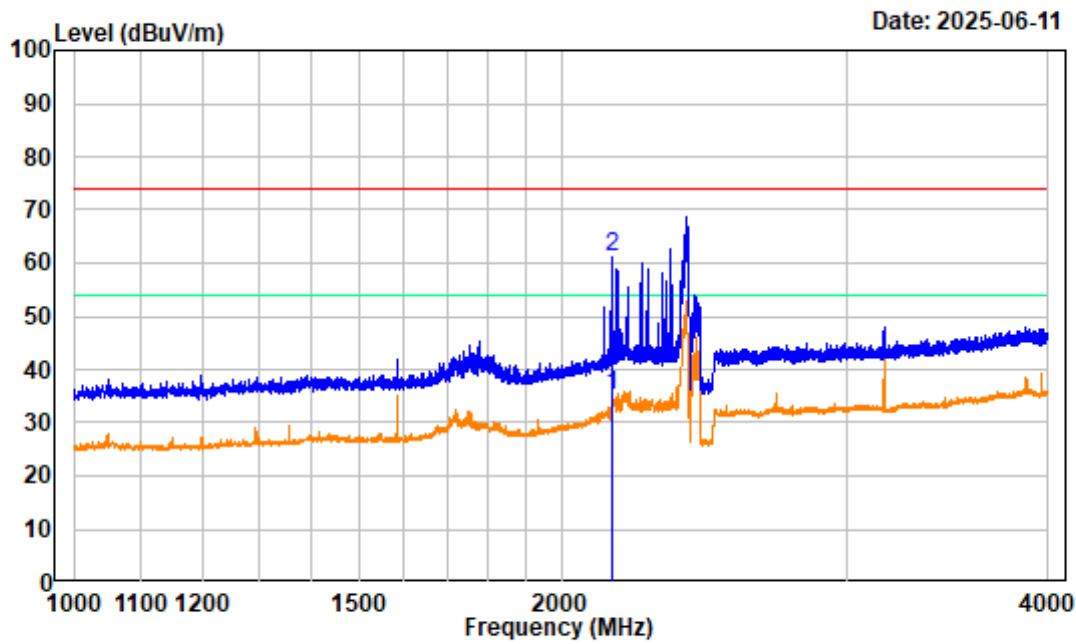

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Low Channel 2422MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2152.375	-10.62	45.65	35.03	54.00	-18.97	Average
2	2152.375	-10.62	71.63	61.01	74.00	-12.99	Peak


802.11ax40 Low Channel 4GHz-18GHz_HORIZONTAL

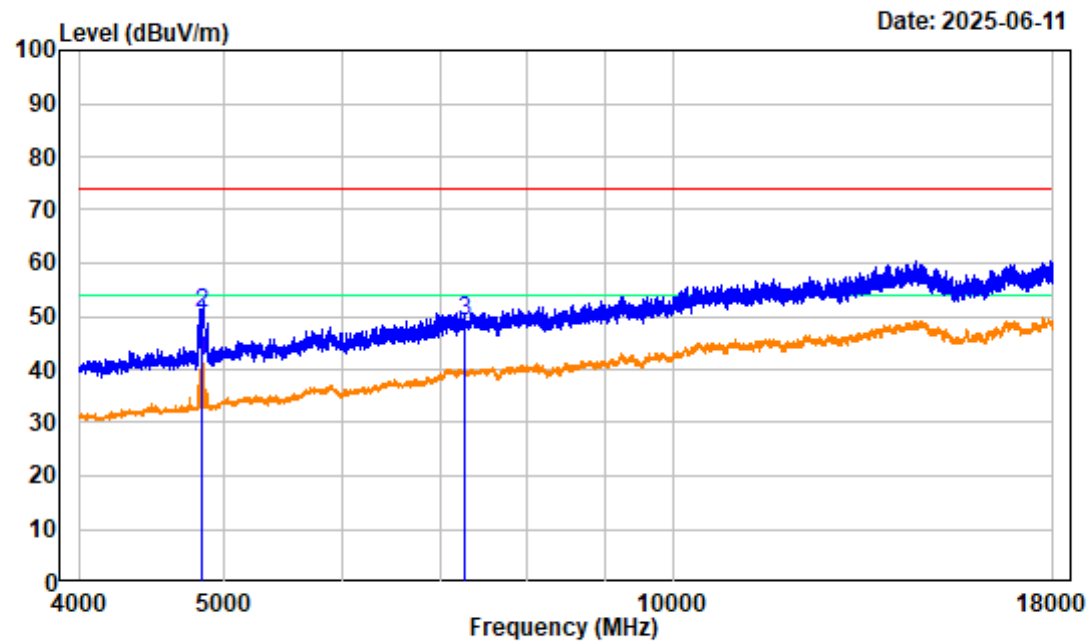

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Low Channel 2422MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4843.500	-6.62	48.19	41.57	54.00	-12.43	average
2	4843.500	-6.62	57.21	50.59	74.00	-23.41	peak
3	7265.500	-1.26	50.29	49.03	74.00	-24.97	peak

802.11ax40 Low Channel 4GHz-18GHz_VERTICAL

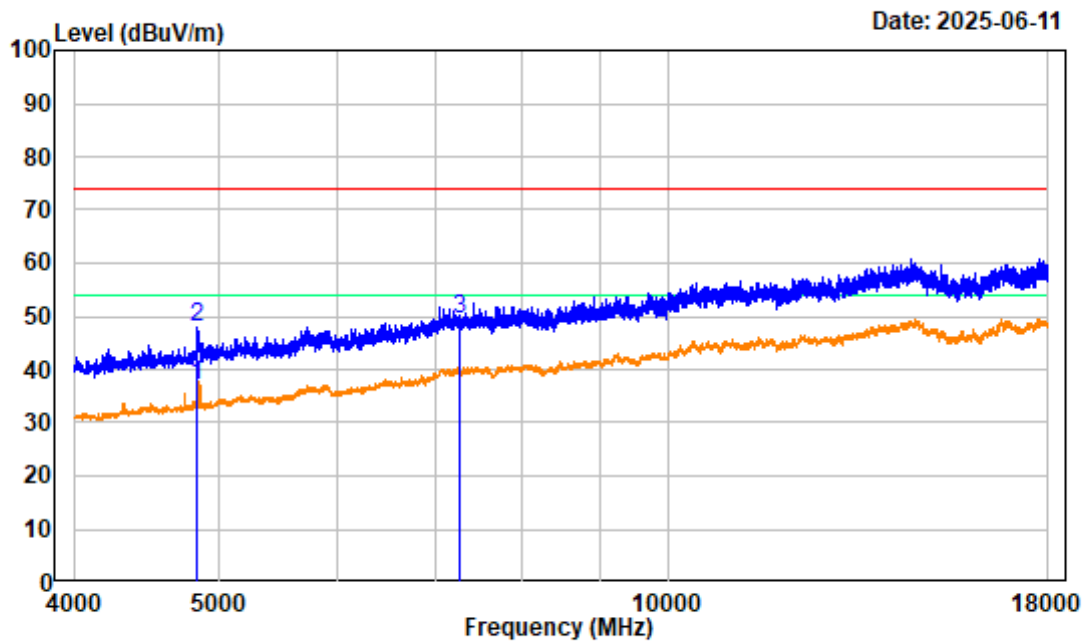

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T31635E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11ax40 Low Channel 2422MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4843.500	-6.62	43.42	36.80	54.00	-17.20	average
2	4843.500	-6.62	54.40	47.78	74.00	-26.22	peak
3	7265.500	-1.26	50.78	49.52	74.00	-24.48	peak


802.11ax40 Low Channel Bandedge_HORIZONTAL

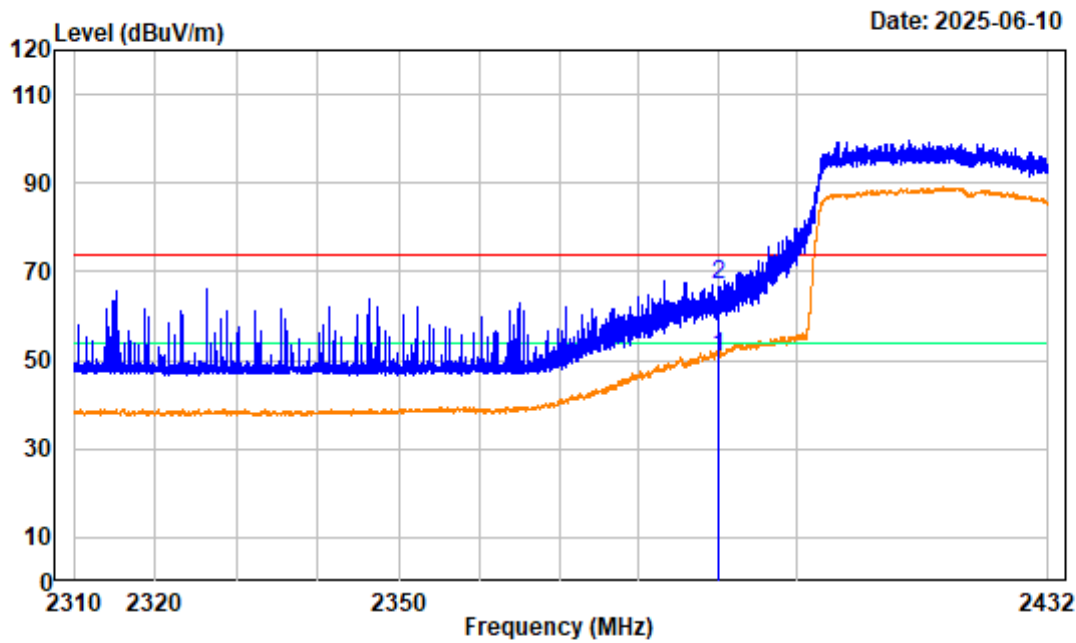

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	61.14	50.90	54.00	-3.10	average
2	2390.000	-10.24	77.48	67.24	74.00	-6.76	peak


802.11ax40 Low Channel Bandedge_VERTICAL

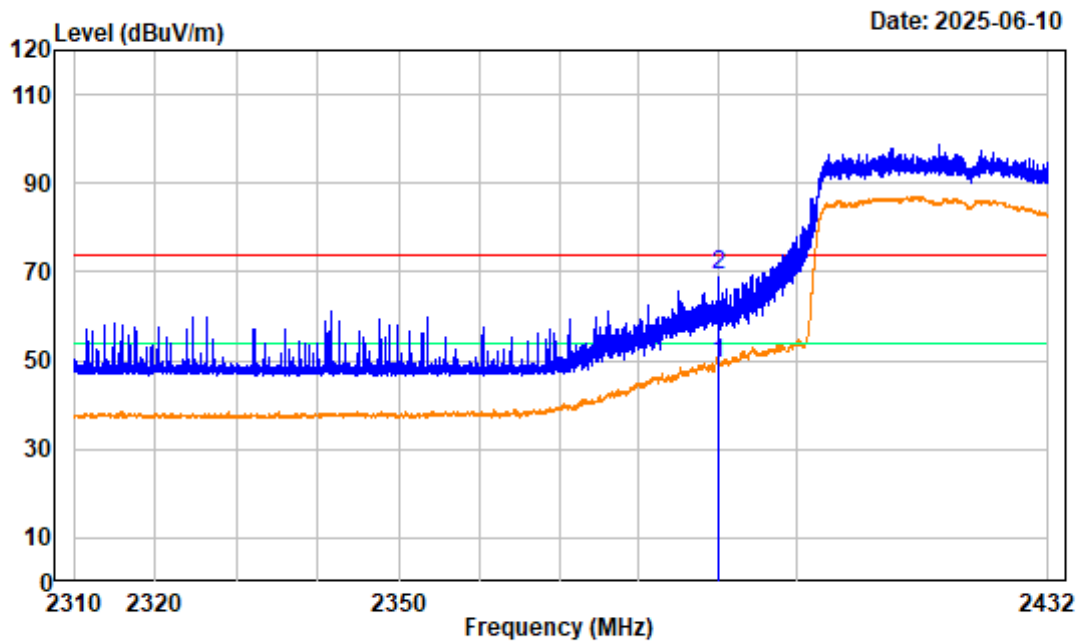

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	59.55	49.31	54.00	-4.69	Average
2	2390.000	-10.24	79.54	69.30	74.00	-4.70	peak


802.11ax40 Middle Channel 1GHz-4GHz_HORIZONTAL

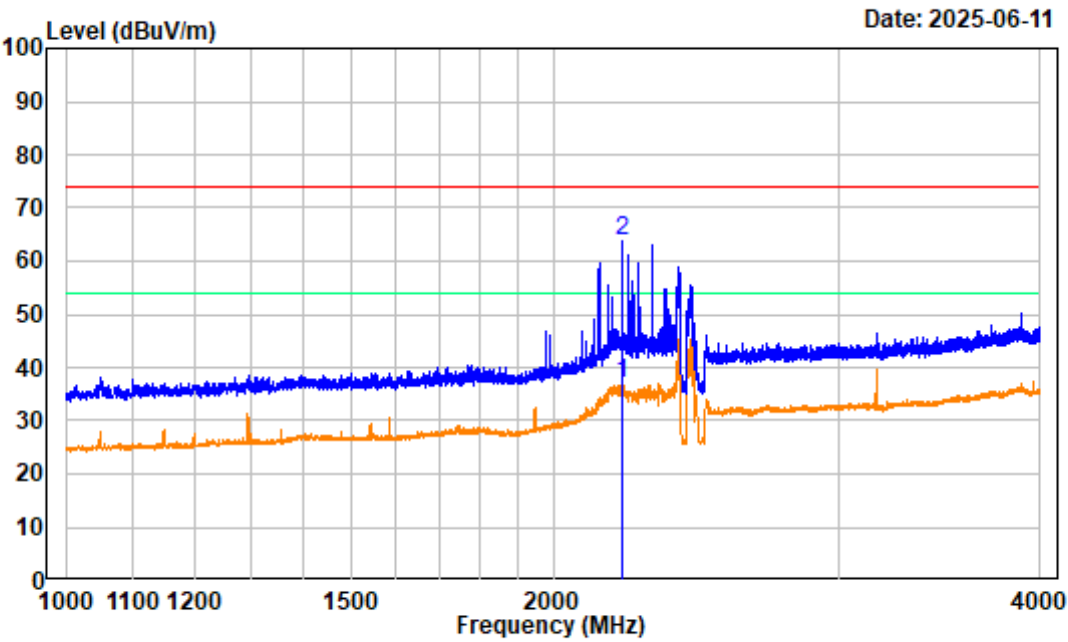

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2205.625	-10.11	47.08	36.97	54.00	-17.03	Average
2	2205.625	-10.11	74.04	63.93	74.00	-10.07	Peak


802.11ax40 Middle Channel 1GHz-4GHz_VERTICAL

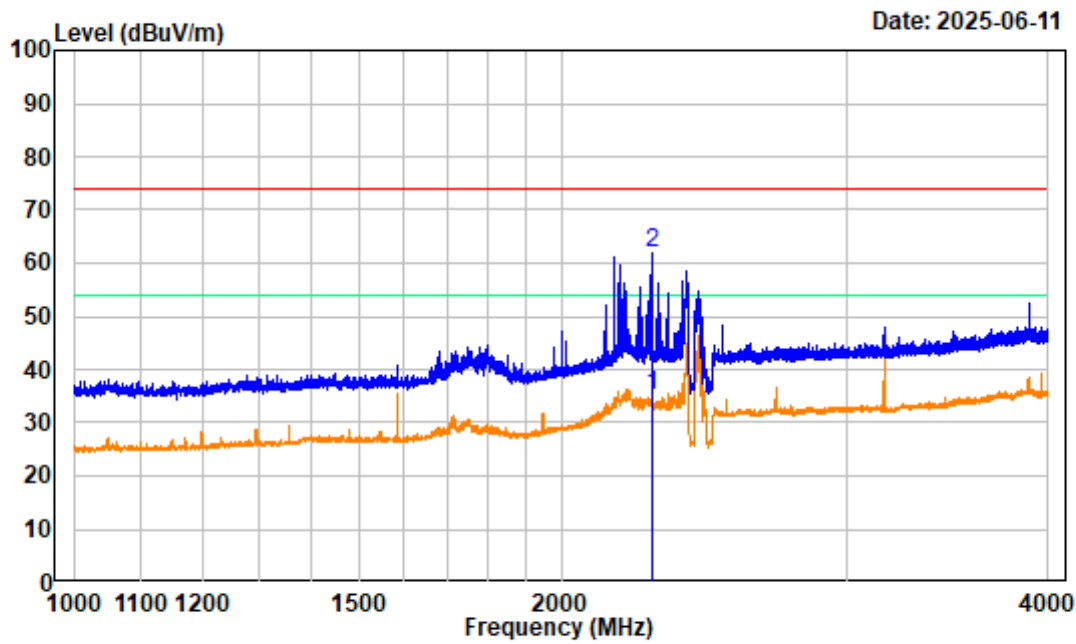

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Middle Channel 2437MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2276.125	-10.00	44.97	34.97	54.00	-19.03	Average
2	2276.125	-10.00	71.92	61.92	74.00	-12.08	Peak


802.11ax40 Middle Channel 4GHz-18GHz_HORIZONTAL

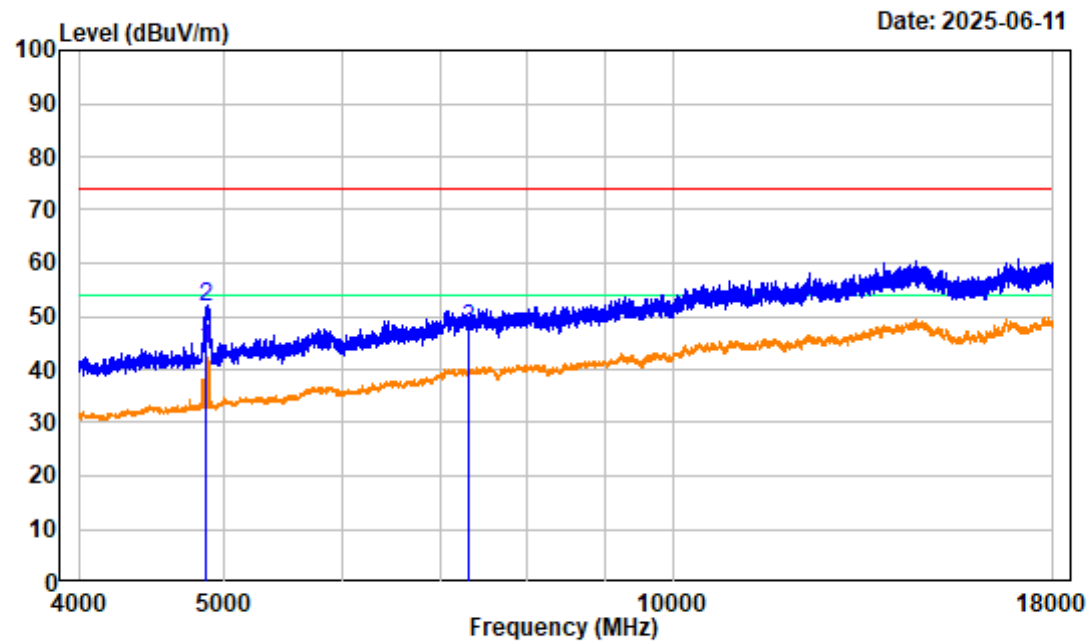

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	50.27	43.64	54.00	-10.36	average
2	4873.250	-6.63	58.28	51.65	74.00	-22.35	peak
3	7311.000	-1.21	48.84	47.63	74.00	-26.37	peak


802.11ax40 Middle Channel 4GHz-18GHz_VERTICAL

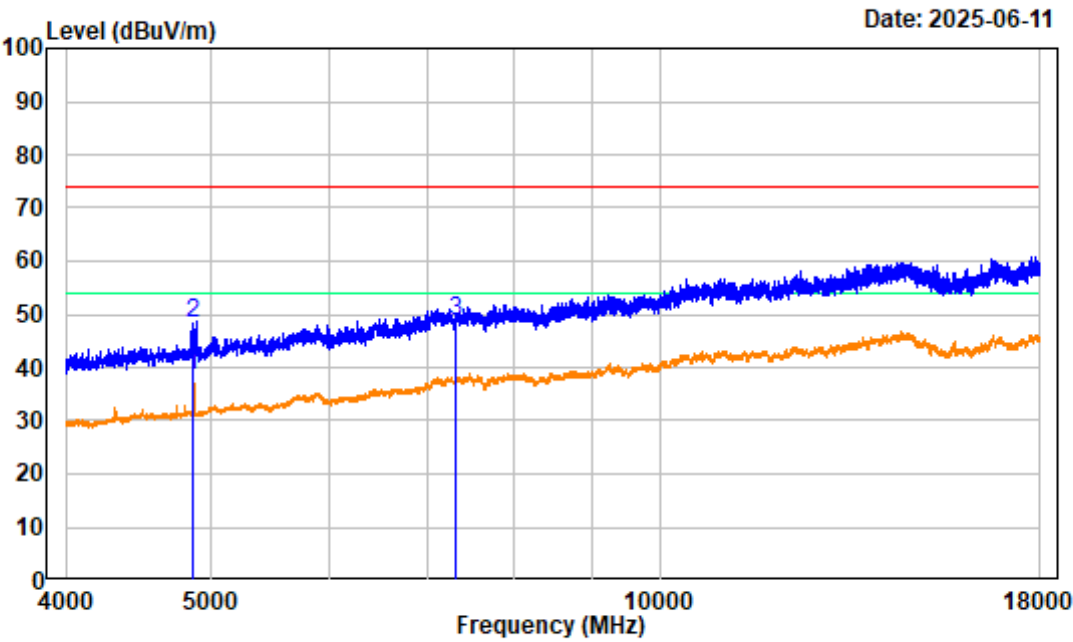

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 Middle Channel 2437MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4873.250	-6.63	44.99	38.36	54.00	-15.64	average
2	4873.250	-6.63	54.97	48.34	74.00	-25.66	peak
3	7311.000	-1.21	49.84	48.63	74.00	-25.37	peak


802.11ax40 High Channel 1GHz-4GHz_HORIZONTAL

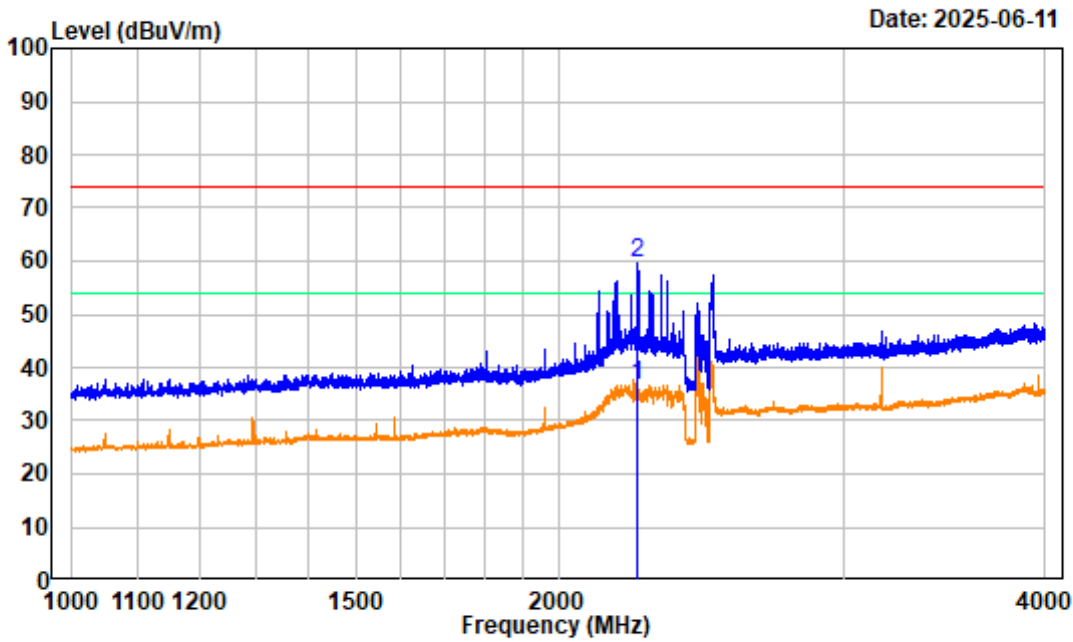

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 High Channel 2452MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2240.500	-10.12	46.86	36.74	54.00	-17.26	Average
2	2240.500	-10.12	69.84	59.72	74.00	-14.28	Peak


802.11ax40 High Channel 1GHz-4GHz_VERTICAL

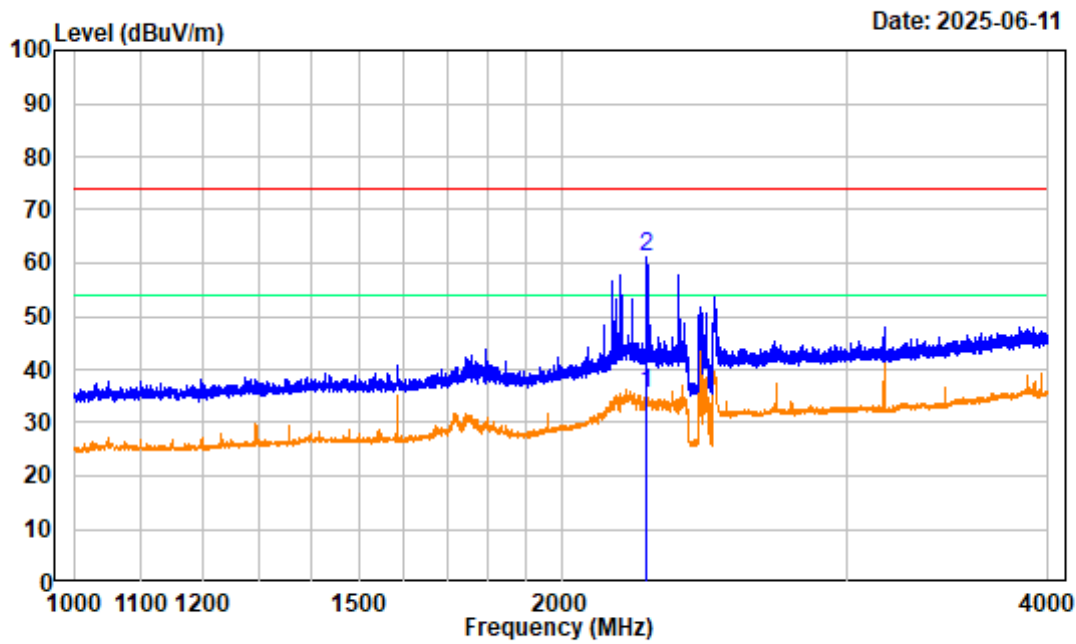

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 High Channel 2452MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2260.750	-10.08	45.43	35.35	54.00	-18.65	Average
2	2260.750	-10.08	71.39	61.31	74.00	-12.69	Peak


802.11ax40 High Channel 4GHz-18GHz_HORIZONTAL

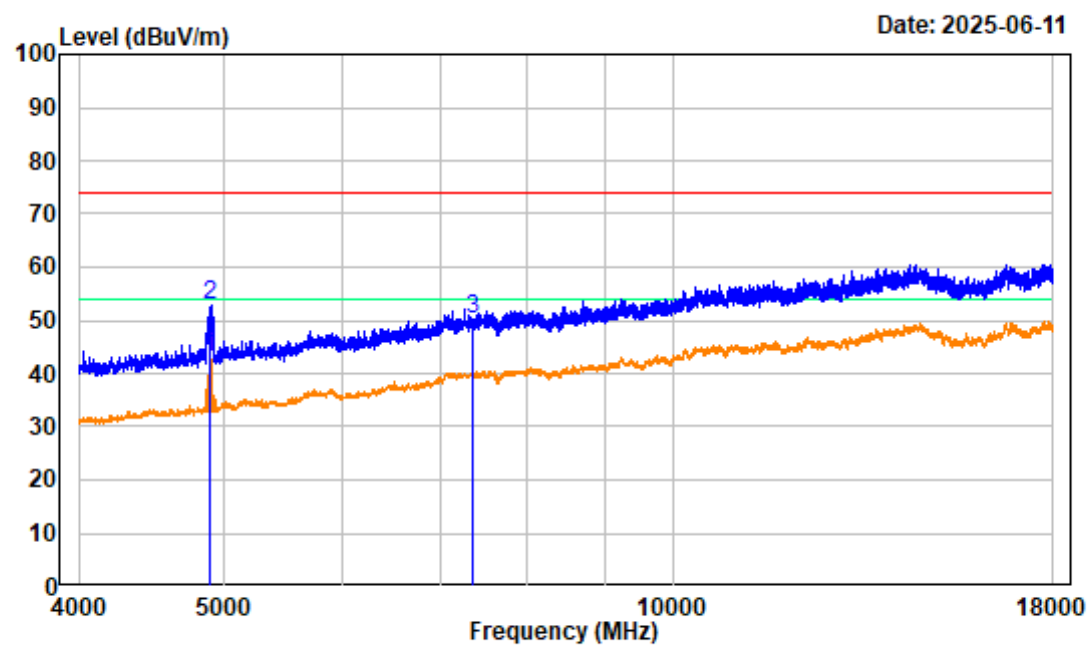

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 High Channel 2452MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-6.63	49.48	42.85	54.00	-11.15	average
2	4904.000	-6.63	59.49	52.86	74.00	-21.14	peak
3	7356.000	-1.31	51.43	50.12	74.00	-23.88	peak


802.11ax40 High Channel 4GHz-18GHz_VERTICAL

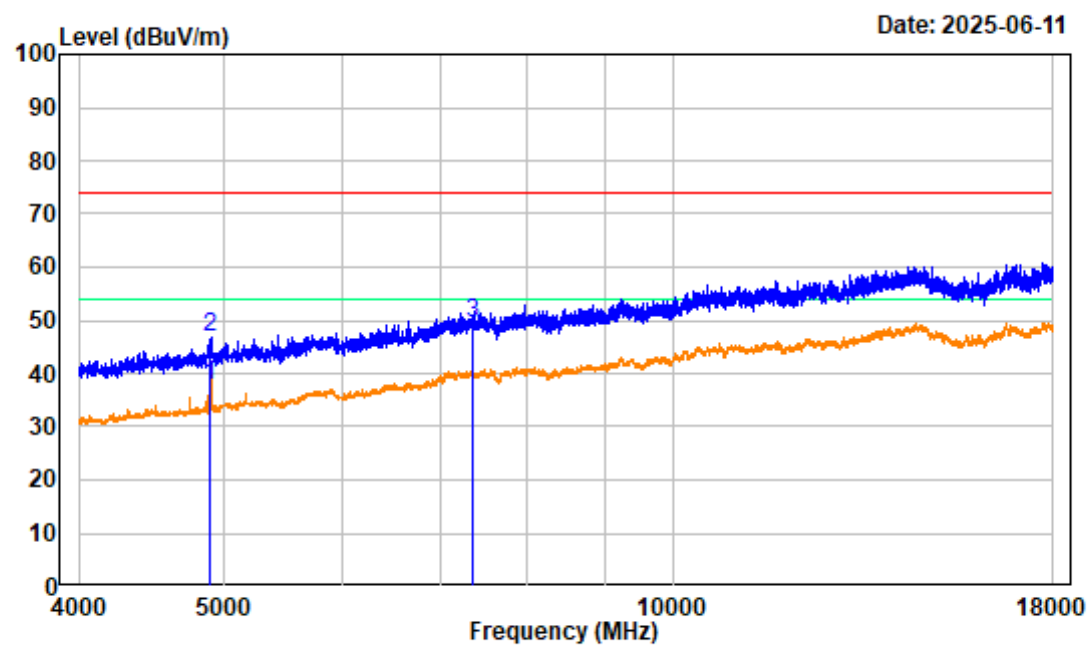

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 High Channel 2452MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-6.63	44.41	37.78	54.00	-16.22	average
2	4904.000	-6.63	53.38	46.75	74.00	-27.25	peak
3	7356.000	-1.31	50.62	49.31	74.00	-24.69	peak


802.11ax40 High Channel Bandedge_HORIZONTAL

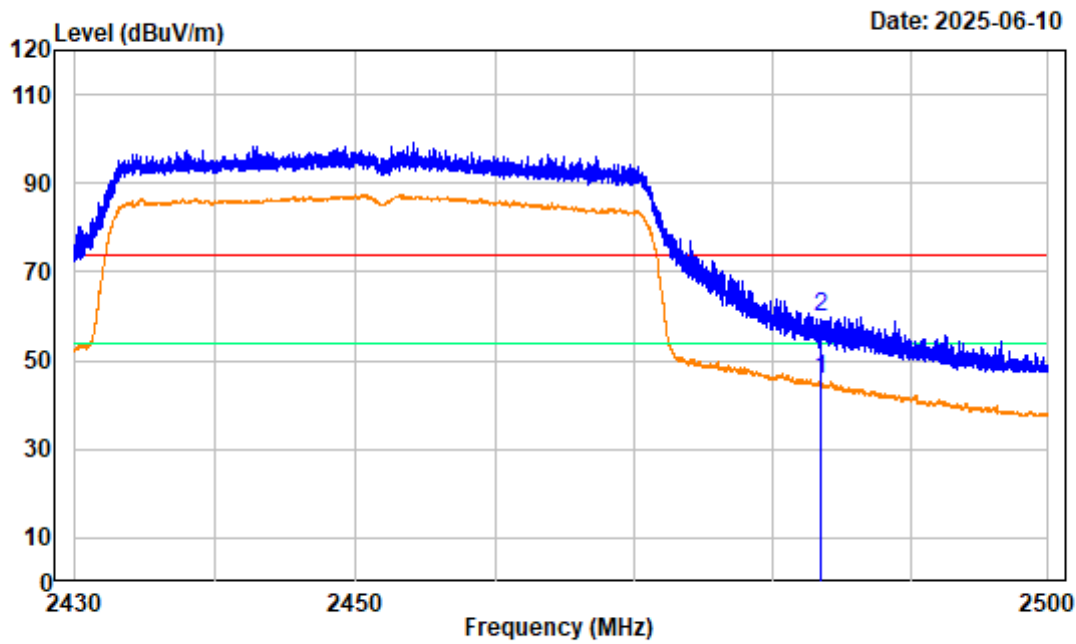

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 High Channel 2452MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	56.15	45.93	54.00	-8.07	average
2	2483.500	-10.22	70.18	59.96	74.00	-14.04	peak

802.11ax40 High Channel Bandedge_VERTICAL

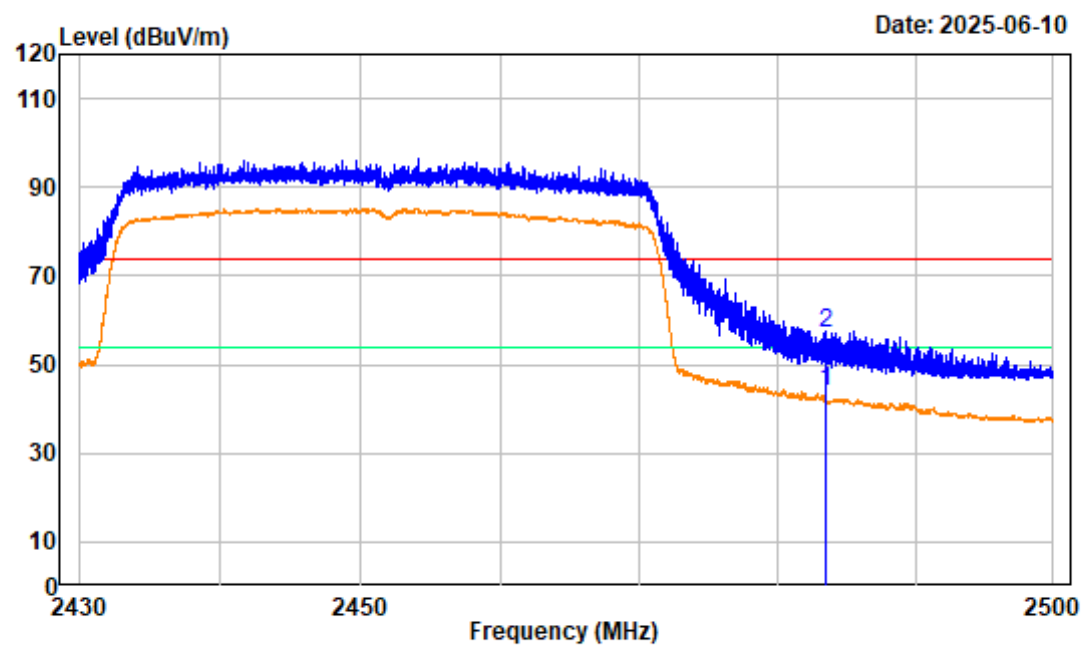

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T31635E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ax40 High Channel 2452MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	54.27	44.05	54.00	-9.95	average
2	2483.500	-10.22	67.32	57.10	74.00	-16.90	peak

***** END *****