

TEST REPORT

Application No.: SHCR2401000070HS
FCC ID: 2BESUJYC08A-01
Applicant: Xianglu Robotics(Jiangsu) Co., Ltd.
Address of Applicant: Room 1701, No.5(South), Zhihui Road, Huishan economic development District, Wuxi City, Jiangsu Province.
Manufacturer: Xianglu Robotics(Jiangsu) Co., Ltd.
Address of Manufacturer: Room 1701, No.5(South), Zhihui Road, Huishan economic development District, Wuxi City, Jiangsu Province.
Factory: Xianglu Robotics(Dongguan) Co., Ltd.
Address of Factory: No.11, Songbailangxinyuan No.2 Road, Dalang Town, Dongguan City, Guangdong Province.
Equipment Under Test (EUT):
EUT Name: Intelligent Cooking Machine
Model No.: JYC08A-01
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2024-01-10
Date of Test: 2024-03-19 to 2024-03-26
Date of Issue: 2024-05-07

Test Result:**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 2 of 106

Revision Record			
Version	Description	Date	Remark
00	Original	2024-05-07	/

Authorized for issue by:				
Tested By		Wade Zhang		
		Wade Zhang/Project Engineer		
Approved By		Parlam Zhan		
		Parlam Zhan / Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	7
4.1 DETAILS OF E.U.T.	7
4.2 DESCRIPTION OF SUPPORT UNITS	7
4.3 POWER LEVEL SETTING USING IN TEST	7
4.4 MEASUREMENT UNCERTAINTY	7
4.5 TEST LOCATION.....	9
4.6 TEST FACILITY.....	9
4.7 DEVIATION FROM STANDARDS	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	12
6.1 ANTENNA REQUIREMENT	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
6.2 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE	13
6.2.1 Test Requirement:	13
6.2.2 Conclusion	13
7 RADIO SPECTRUM MATTER TEST RESULTS	14
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Mode Description.....	14
7.1.3 Test Setup Diagram.....	14
7.1.4 Measurement Procedure and Data.....	15
7.2 CONDUCTED PEAK OUTPUT POWER	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description.....	20
7.2.3 Test Setup Diagram.....	20
7.2.4 Measurement Procedure and Data.....	20
7.3 20dB BANDWIDTH	21
7.3.1 E.U.T. Operation	21
7.3.2 Test Mode Description.....	21
7.3.3 Test Setup Diagram.....	21
7.3.4 Measurement Procedure and Data.....	21
7.4 CARRIER FREQUENCIES SEPARATION	22
7.4.1 E.U.T. Operation	22
7.4.2 Test Mode Description.....	22
7.4.3 Test Setup Diagram.....	22
7.4.4 Measurement Procedure and Data.....	22
7.5 HOPPING CHANNEL NUMBER	23
7.5.1 E.U.T. Operation	23
7.5.2 Test Mode Description.....	23
7.5.3 Test Setup Diagram.....	23
7.5.4 Measurement Procedure and Data.....	23

7.6	DWELL TIME	24
7.6.1	E.U.T. Operation	24
7.6.2	Test Mode Description	24
7.6.3	Test Setup Diagram	24
7.6.4	Measurement Procedure and Data	24
7.7	CONDUCTED BAND EDGES MEASUREMENT	25
7.7.1	E.U.T. Operation	25
7.7.2	Test Mode Description	25
7.7.3	Test Setup Diagram	25
7.7.4	Measurement Procedure and Data	25
7.8	CONDUCTED SPURIOUS EMISSIONS	26
7.8.1	E.U.T. Operation	26
7.8.2	Test Mode Description	26
7.8.3	Test Setup Diagram	26
7.8.4	Measurement Procedure and Data	26
7.9	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	27
7.9.1	E.U.T. Operation	27
7.9.2	Test Mode Description	27
7.9.3	Test Setup Diagram	27
7.9.4	Measurement Procedure and Data	28
7.10	RADIATED SPURIOUS EMISSIONS BELOW 1GHZ	45
7.10.1	E.U.T. Operation	45
7.10.2	Test Mode Description	45
7.10.3	Test Setup Diagram	45
7.10.4	Measurement Procedure and Data	46
7.11	RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ	49
7.11.1	E.U.T. Operation	49
7.11.2	Test Mode Description	49
7.11.3	Test Setup Diagram	49
7.11.4	Measurement Procedure and Data	50
8	TEST SETUP PHOTO	69
9	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	69
10	APPENDIX	69
10.1	APPENDIX A: 20dB EMISSION BANDWIDTH	69
10.1.1	Test Result	69
10.1.2	Test Graphs	70
10.2	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	73
10.2.1	Test Result	73
10.2.2	Test Graphs	74
10.3	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	77
10.3.1	Test Result	77
10.3.2	Test Graphs	78
10.4	APPENDIX D: CARRIER FREQUENCY SEPARATION	81
10.4.1	Test Result	81
10.4.2	Test Graphs	82
10.5	APPENDIX E: TIME OF OCCUPANCY	83
10.5.1	Test Result	83
10.5.2	Test Graphs	84
10.6	APPENDIX F: NUMBER OF HOPPING CHANNELS	90
10.6.1	Test Result	90
10.6.2	Test Graphs	91
10.7	APPENDIX G: BAND EDGE MEASUREMENTS	92
10.7.1	Test Result	92
10.7.2	Test Graphs	93



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 6 of 106

10.8	APPENDIX H: CONDUCTED SPURIOUS EMISSION	97
10.8.1	Test Result	97
10.8.2	Test Graphs.....	98

4 General Information

4.1 Details of E.U.T.

Power Supply:	AC 380V 50Hz
Test Voltage:	AC 380V 50Hz&DC12V
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Type:	Mushroom antenna
Antenna Gain:	4.63 dBi (Provided by manufacturer)
Antenna Number:	1

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-
SecureCRT	VanDyke	V 6.2.0	-
Serial port adapter plate	-	Test Plate 3	-

4.3 Power level setting using in test

Channel	Power setting		
	DH5	2DH5	3DH5
Low	Default	Default	Default
Middle	Default	Default	Default
High	Default	Default	Default

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 8 of 106

13	Time	3%
----	------	----

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2023-12-19	2024-12-18
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2023-08-01	2024-07-31
Signal Generator	R&S	SMR20	SHEM006-1	2023-08-01	2024-07-31
Signal Generator	Agilent	N5182A	SHEM182-1	2023-08-01	2024-07-31
Communication Tester	R&S	CMW270	SHEM183-1	2023-06-01	2024-05-31
Communication Tester	R&S	CMW500	SHEM268-1	2023-06-01	2024-05-31
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2023-08-01	2024-07-31
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2022-11-08	2024-11-07
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2023-12-19	2024-12-18
DC Power Supply	HP	6010A	SHEM222-1	2023-12-19	2024-12-18
Conducted test Cable	/	RF01~RF04	/	2023-12-19	2024-12-18
Switcher	Tonscend	JS0806	SHEM184-1	2023-08-01	2024-07-31
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2023-08-01	2024-07-31
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2023-12-19	2024-12-18
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Communication Tester	R&S	CMW500	SHEM268-1	2023-06-01	2024-05-31
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2023-12-19	2024-12-18
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2023-04-17	2025-04-16
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2022-08-11	2024-08-10
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Pre-Amplifier	HP	8447D	SHEM236-1	2023-12-19	2024-12-18
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2023-12-19	2024-12-18
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMMN-10M	SHEM217-2	2023-12-19	2024-12-18
Test software	ESE	E3	Version: 6.111221a	/	/



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 11 of 106

Conducted Emissions at AC Mains Power Port (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2023/12/19	2024/12/18
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2023/12/19	2024/12/18
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2023/12/19	2024/12/18
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2023/12/19	2024/12/18
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2024/12/18
CE test Cable	/	/	SHEM172-1	2023/12/19	2024/12/18
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is mushroom antenna and no consideration of replacement. The best case gain of the antenna is 4.63 dBi.

Antenna location: Refer to internal photo.

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

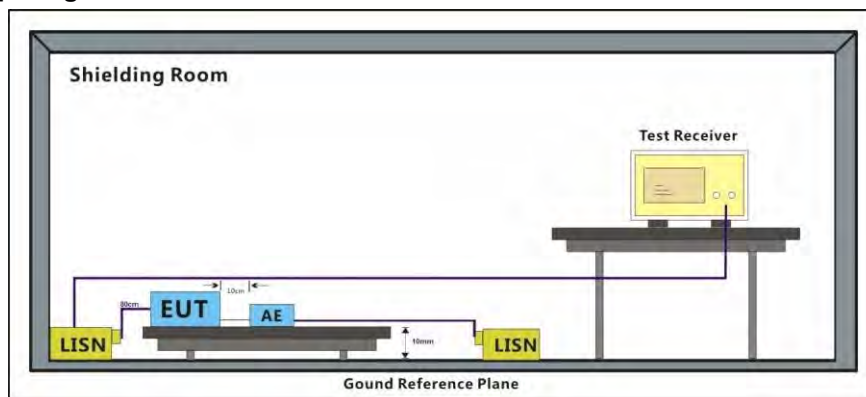


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line L1

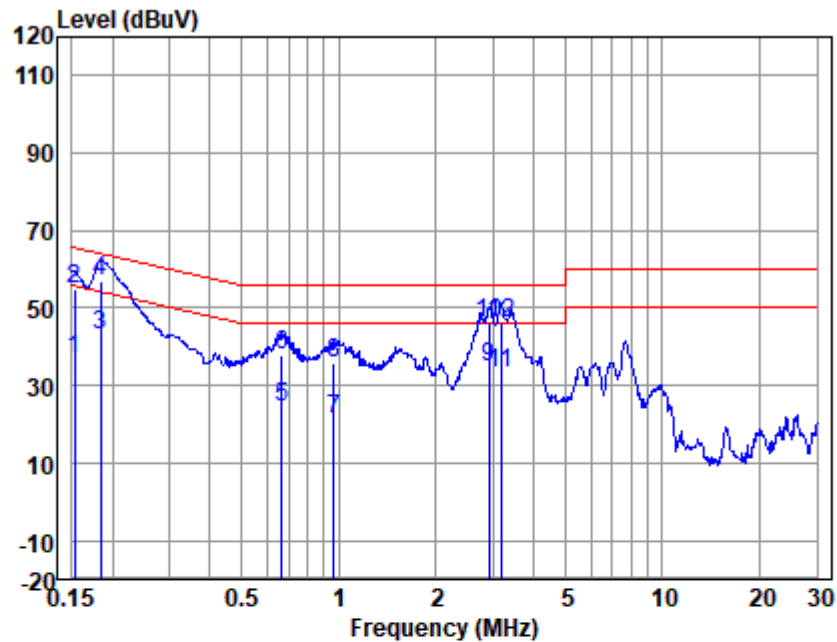


LISN : LINE
EUT/Project No : 0070HS
Test Mode : 00 L1

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.15	26.51	0.37	9.90	36.78	55.87	-19.09	Average
2	0.15	44.56	0.37	9.90	54.83	65.87	-11.04	QP
3	0.18	32.99	0.27	9.90	43.16	54.33	-11.17	Average
4	0.18	47.01	0.27	9.90	57.18	64.33	-7.15	QP
5	0.67	14.25	0.05	9.90	24.20	46.00	-21.80	Average
6	0.67	27.82	0.05	9.90	37.77	56.00	-18.23	QP
7	0.97	11.29	0.06	9.99	21.34	46.00	-24.66	Average
8	0.97	25.59	0.06	9.99	35.64	56.00	-20.36	QP
9	2.92	24.48	0.12	10.14	34.74	46.00	-11.26	Average
10	2.92	35.85	0.12	10.14	46.11	56.00	-9.89	QP
11	3.17	22.67	0.13	10.15	32.95	46.00	-13.05	Average
12	3.17	35.97	0.13	10.15	46.25	56.00	-9.75	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Live line L2

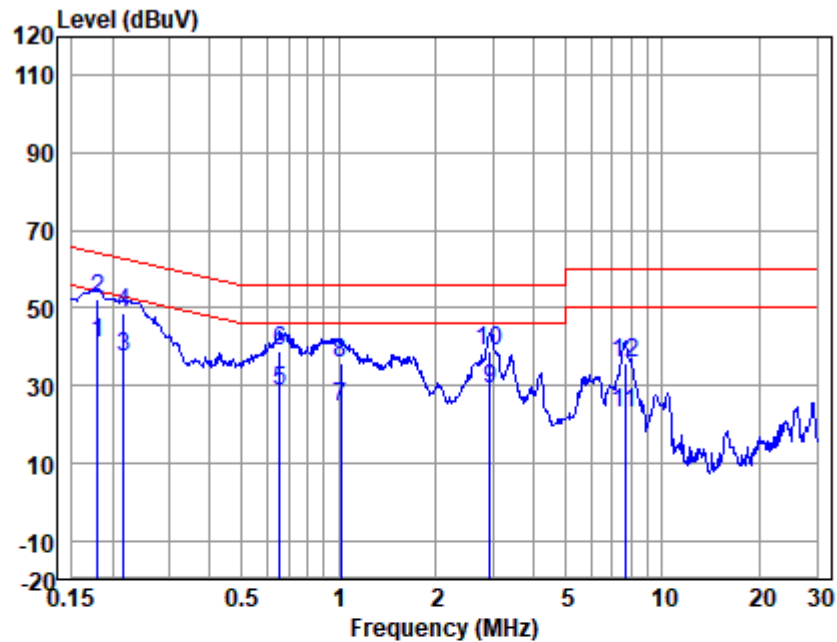


LISN : LINE
EUT/Project No : 0070HS
Test Mode : 00 L2

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.18	30.95	0.28	9.90	41.13	54.50	-13.37	Average
2	0.18	41.97	0.28	9.90	52.15	64.50	-12.35	QP
3	0.22	27.46	0.21	9.90	37.57	52.96	-15.39	Average
4	0.22	38.36	0.21	9.90	48.47	62.96	-14.49	QP
5	0.66	18.50	0.06	9.90	28.46	46.00	-17.54	Average
6	0.66	28.81	0.06	9.90	38.77	56.00	-17.23	QP
7	1.02	14.29	0.05	10.00	24.34	46.00	-21.66	Average
8	1.02	25.73	0.05	10.00	35.78	56.00	-20.22	QP
9	2.93	18.81	0.12	10.14	29.07	46.00	-16.93	Average
10	2.93	28.78	0.12	10.14	39.04	56.00	-16.96	QP
11	7.65	12.42	0.28	10.32	23.02	50.00	-26.98	Average
12	7.65	25.38	0.28	10.32	35.98	60.00	-24.02	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Live line L3

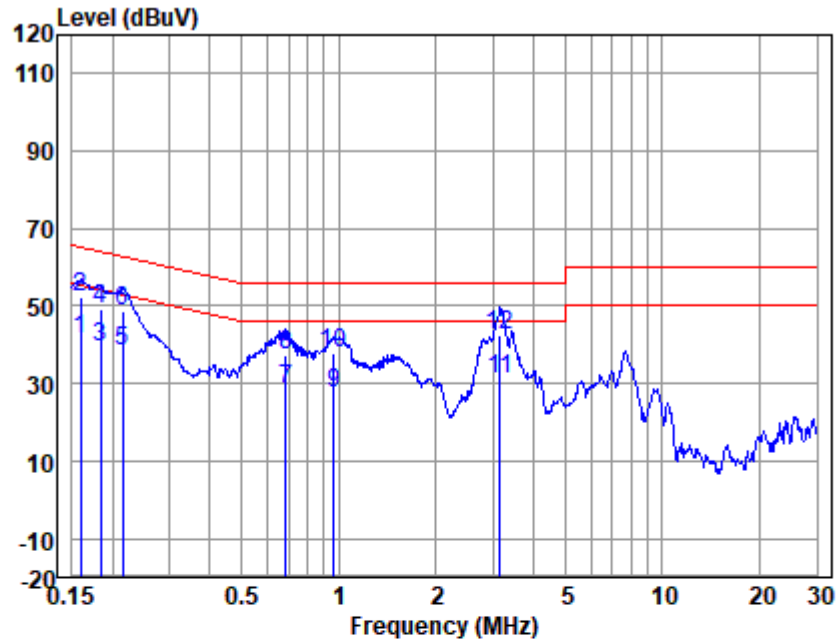


LISN : LINE
EUT/Project No : 0070HS
Test Mode : 00 L3

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	31.03	0.36	9.90	41.29	55.52	-14.23	Average
2	0.16	41.87	0.36	9.90	52.13	65.52	-13.39	QP
3	0.18	29.18	0.28	9.90	39.36	54.33	-14.97	Average
4	0.18	39.21	0.28	9.90	49.39	64.33	-14.94	QP
5	0.22	28.27	0.22	9.90	38.39	53.01	-14.62	Average
6	0.22	38.56	0.22	9.90	48.68	63.01	-14.33	QP
7	0.69	18.36	0.07	9.90	28.33	46.00	-17.67	Average
8	0.69	27.59	0.07	9.90	37.56	56.00	-18.44	QP
9	0.96	17.23	0.06	9.99	27.28	46.00	-18.72	Average
10	0.96	27.68	0.06	9.99	37.73	56.00	-18.27	QP
11	3.16	20.88	0.12	10.15	31.15	46.00	-14.85	Average
12	3.16	32.11	0.12	10.15	42.38	56.00	-13.62	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Neutral Line

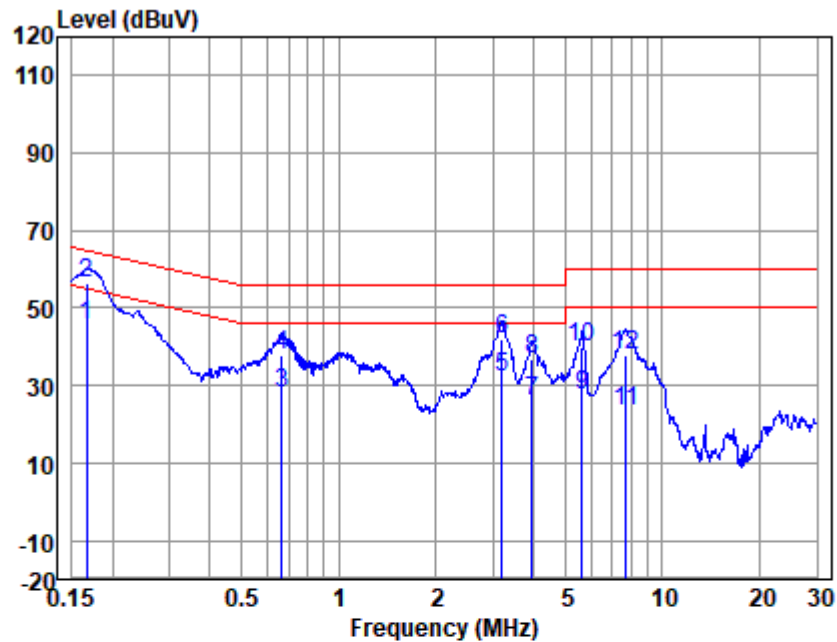

LISN : NEUTRAL
EUT/Project No : 0070HS
Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.17	35.42	0.34	9.90	45.66	55.16	-9.50	Average
2	0.17	46.33	0.34	9.90	56.57	65.16	-8.59	QP
3	0.67	18.33	0.06	9.90	28.29	46.00	-17.71	Average
4	0.67	27.82	0.06	9.90	37.78	56.00	-18.22	QP
5	3.19	21.74	0.12	10.15	32.01	46.00	-13.99	Average
6	3.19	31.93	0.12	10.15	42.20	56.00	-13.80	QP
7	3.96	15.56	0.14	10.17	25.87	46.00	-20.13	Average
8	3.96	26.75	0.14	10.17	37.06	56.00	-18.94	QP
9	5.65	16.98	0.18	10.24	27.40	50.00	-22.60	Average
10	5.65	29.38	0.18	10.24	39.80	60.00	-20.20	QP
11	7.73	12.94	0.25	10.33	23.52	50.00	-26.48	Average
12	7.73	27.40	0.25	10.33	37.98	60.00	-22.02	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 42.8 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

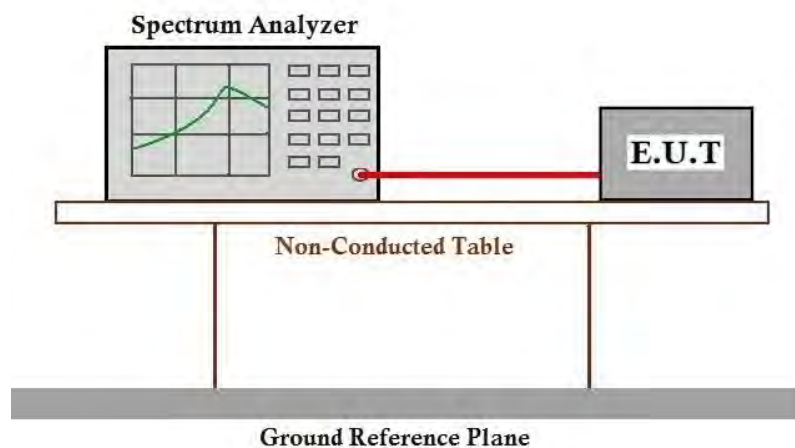

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.7


7.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 19.7 °C Humidity: 42.9 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

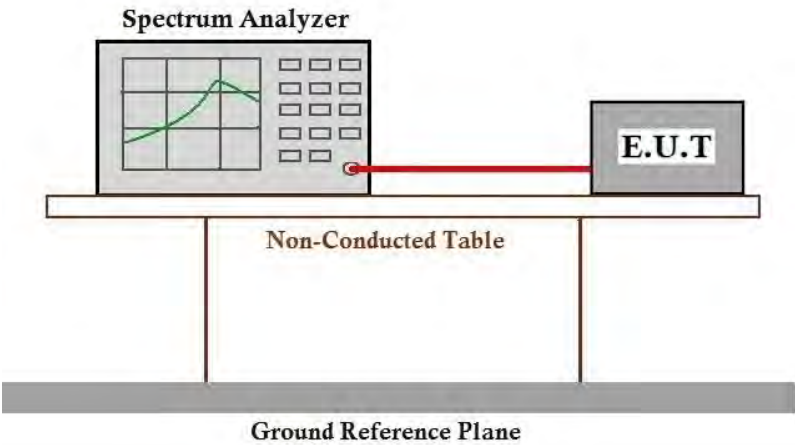

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 43.0 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

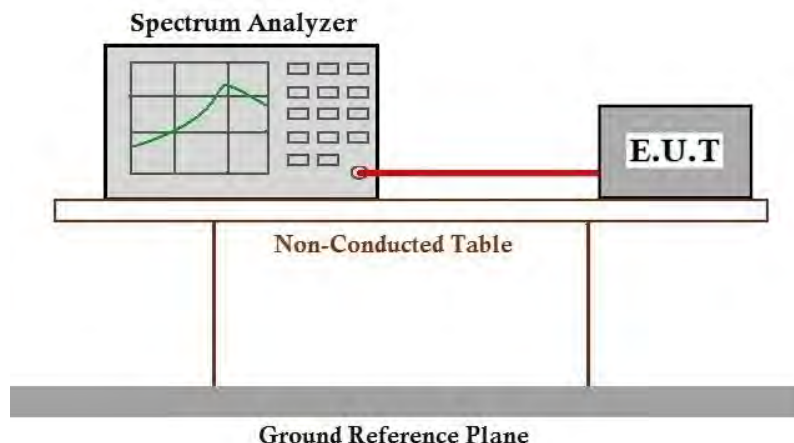

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 43.0 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

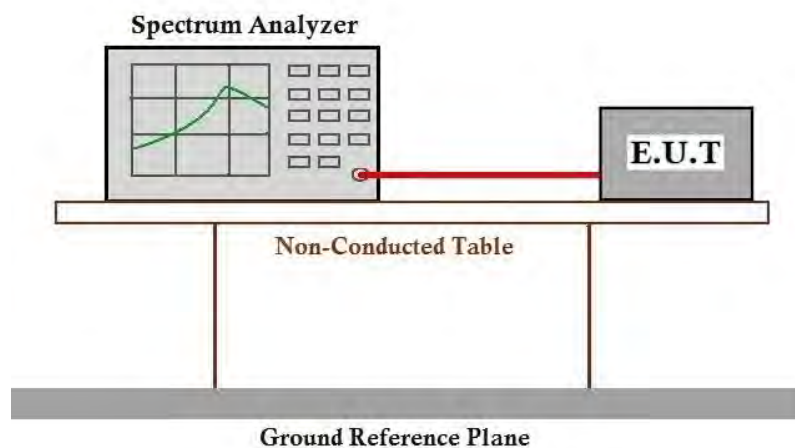

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 43.0 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

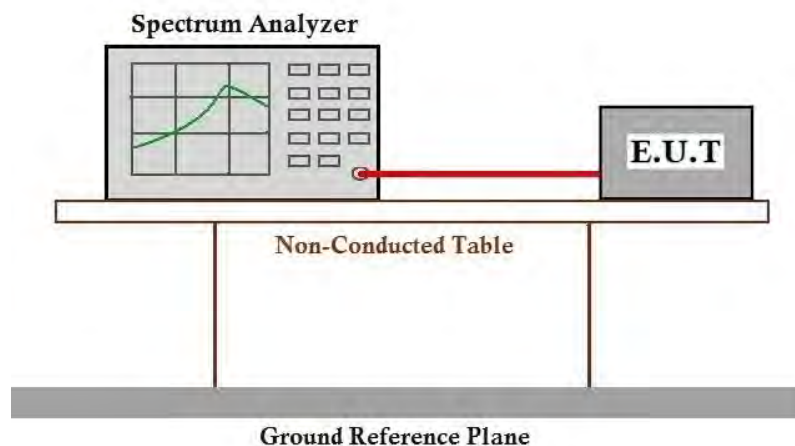

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 42.9 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

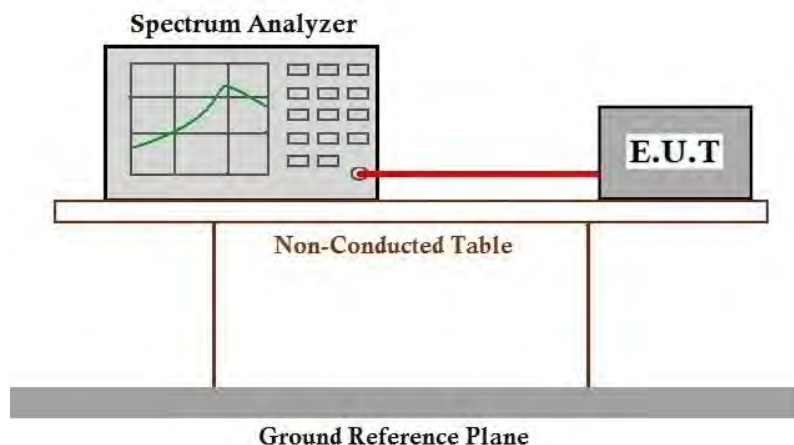

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 42.9 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

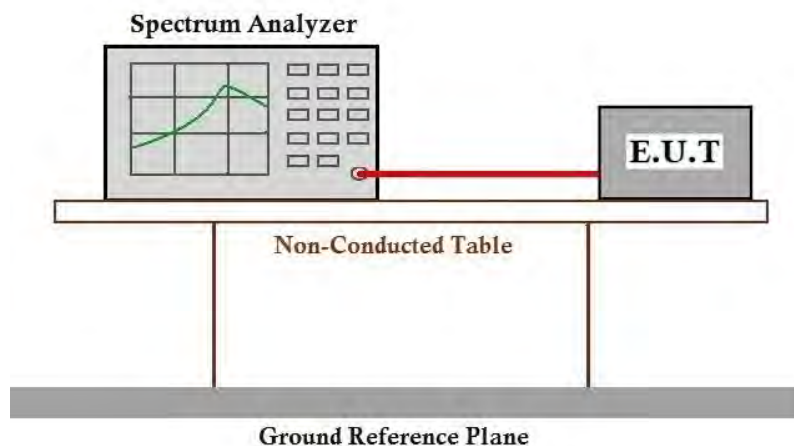

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 19.7 °C Humidity: 42.9 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

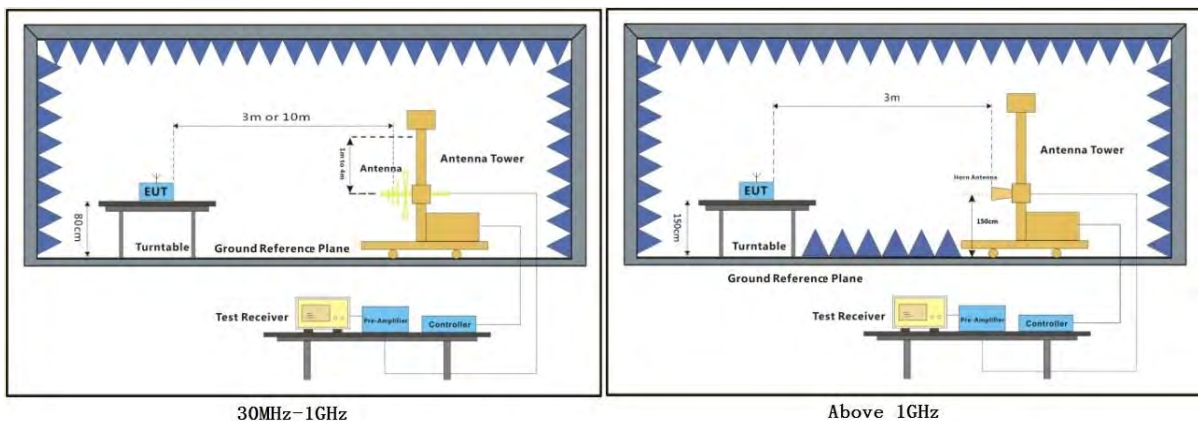


7.9.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

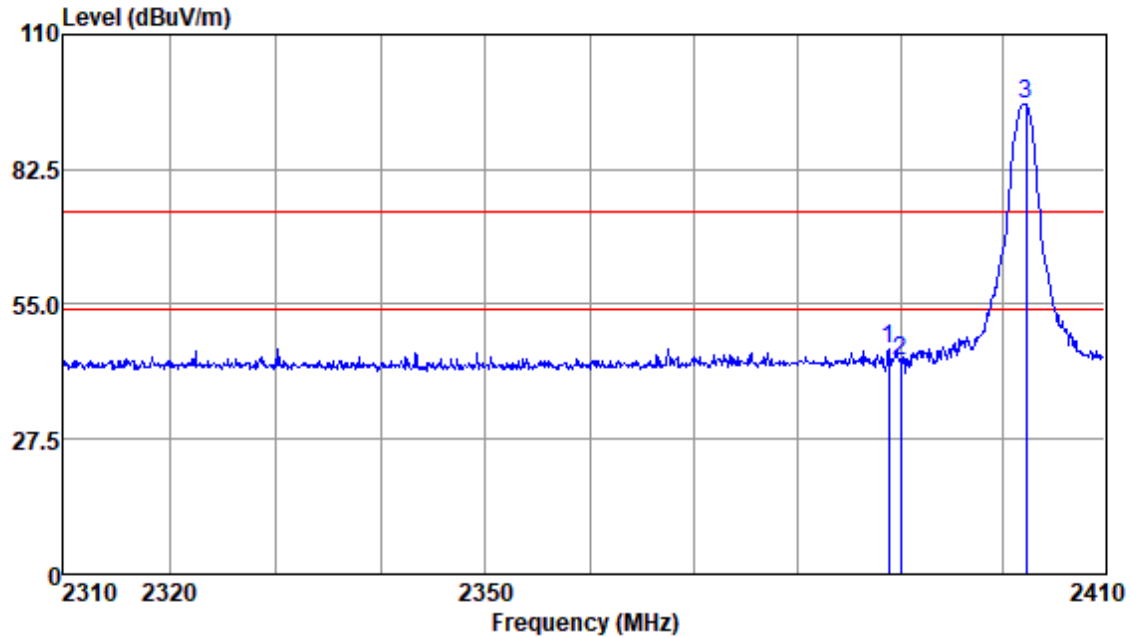


Antenna Polarity :HORIZONTAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2388.85	48.82	28.80	3.34	35.18	45.78	74.00	-28.22	Peak
2390.00	46.59	28.80	3.34	35.18	43.55	74.00	-30.45	Peak
2402.25	98.72	28.85	3.34	35.19	95.72	74.00	21.72	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

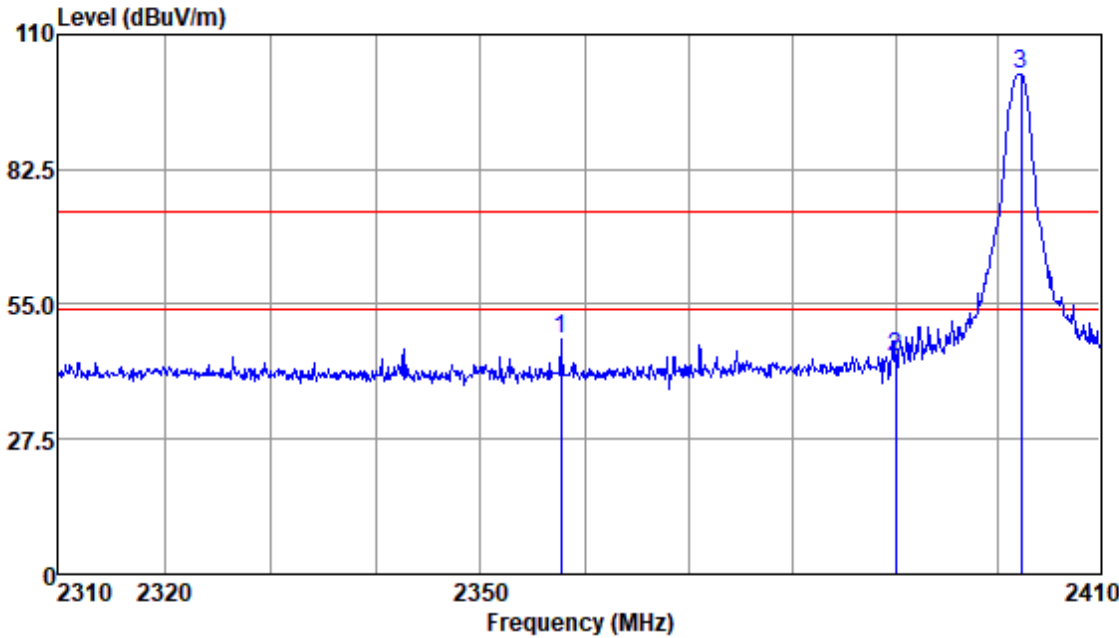


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2357.67	50.99	28.66	3.30	35.16	47.79	74.00	-26.21	Peak
2390.00	47.41	28.80	3.34	35.18	44.37	74.00	-29.63	Peak
2402.25	105.03	28.85	3.34	35.19	102.03	74.00	28.03	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

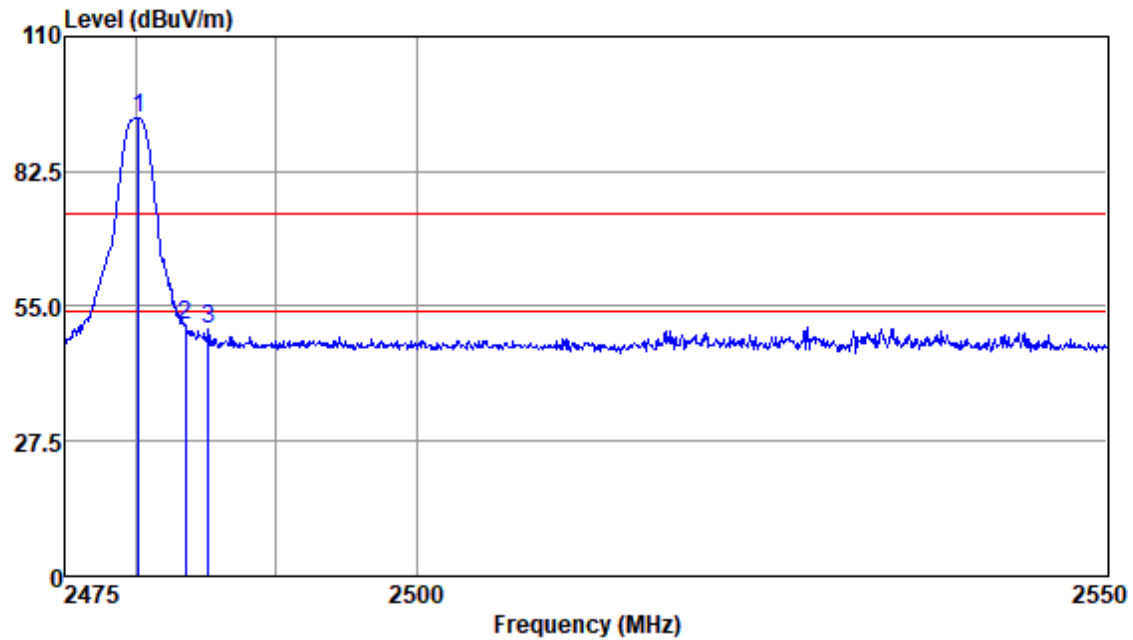


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.18	96.18	29.08	3.40	35.25	93.41	74.00	19.41	Peak
2483.50	54.06	29.09	3.36	35.26	51.25	74.00	-22.75	Peak
2485.14	53.32	29.09	3.36	35.26	50.51	74.00	-23.49	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

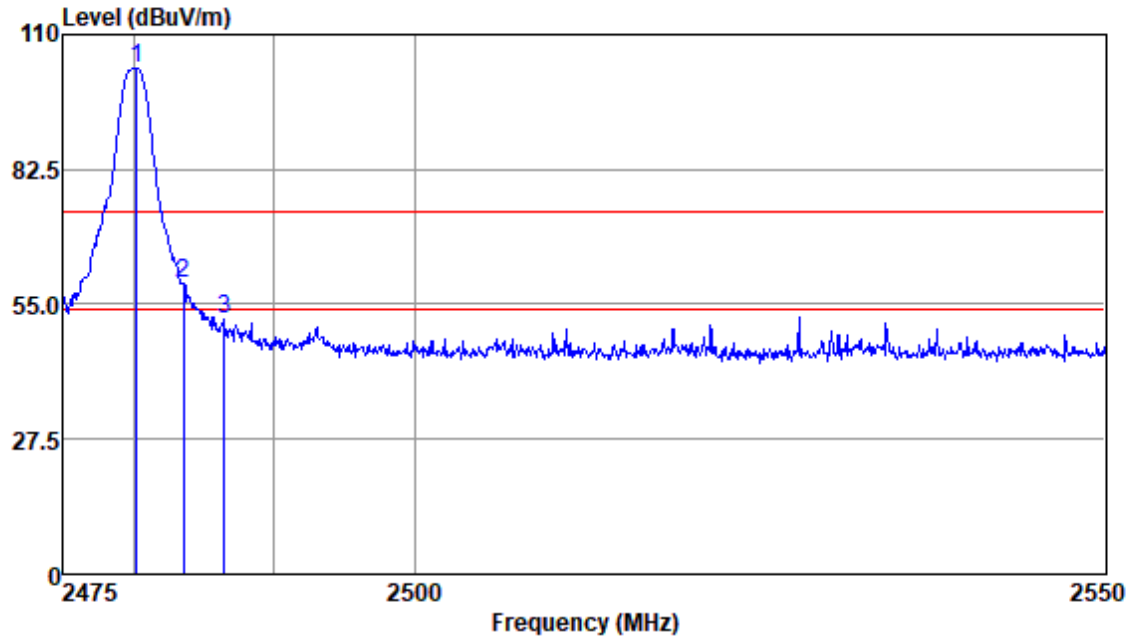


Antenna Polarity :VERTICAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.18	105.85	29.08	3.40	35.25	103.08	74.00	29.08	Peak
2483.50	62.00	29.09	3.36	35.26	59.19	74.00	-14.81	Peak
2486.41	54.92	29.09	3.36	35.26	52.11	74.00	-21.89	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

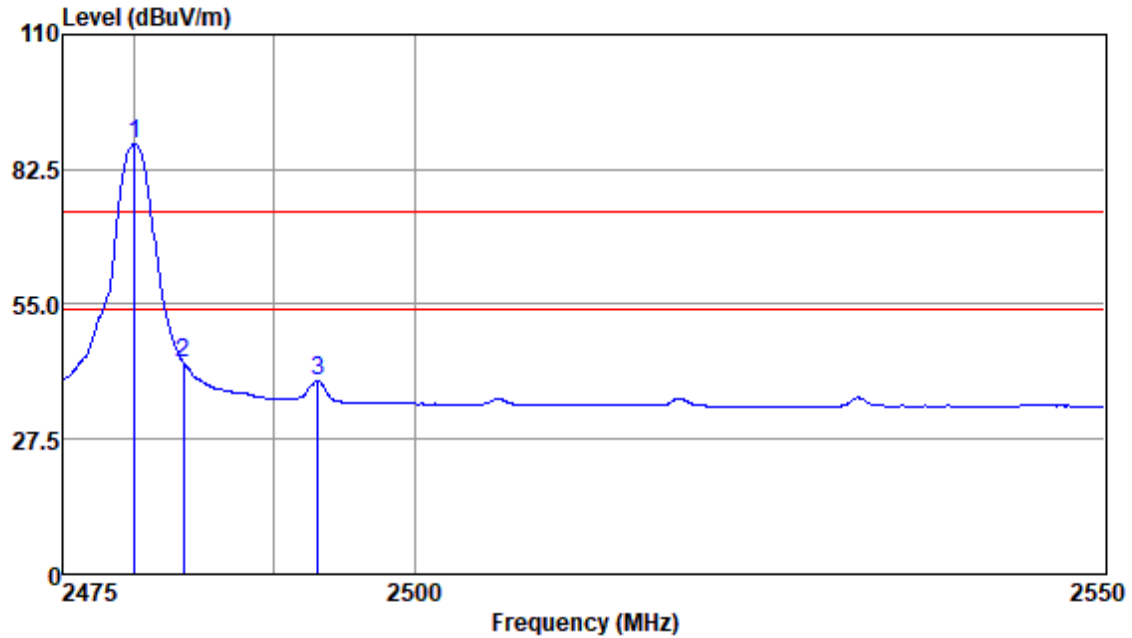


Antenna Polarity :VERTICAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.03	90.48	29.08	3.40	35.25	87.71	54.00	33.71	Average
2483.50	45.80	29.09	3.36	35.26	42.99	54.00	-11.01	Average
2493.09	42.29	29.10	3.33	35.26	39.46	54.00	-14.54	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

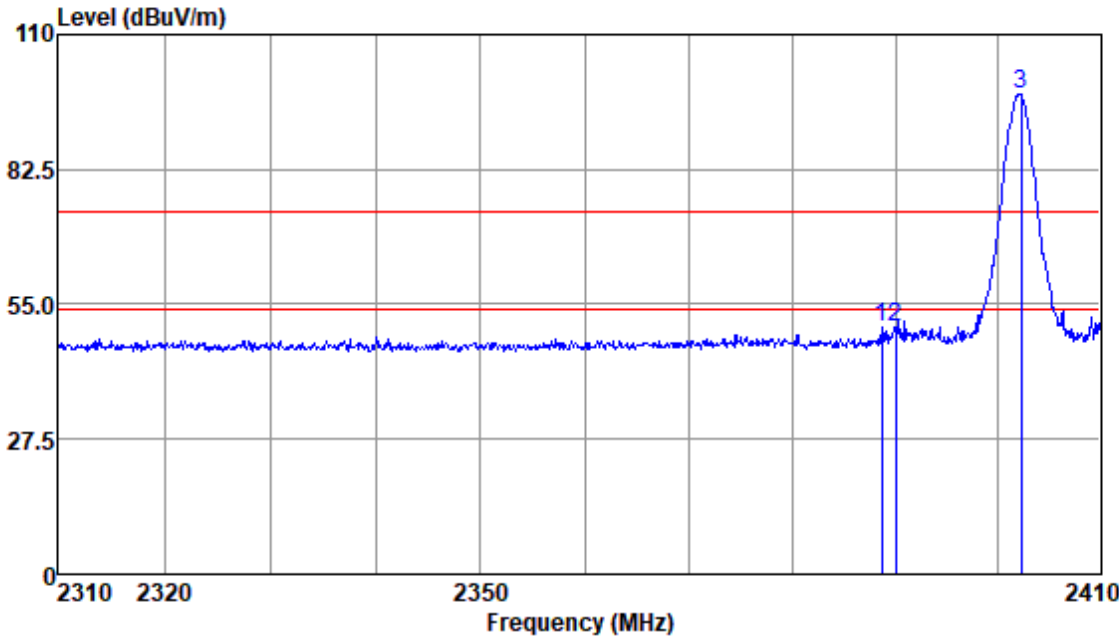


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2388.65	53.40	28.80	3.34	35.18	50.36	74.00	-23.64	Peak
2390.00	53.22	28.80	3.34	35.18	50.18	74.00	-23.82	Peak
2402.25	100.86	28.85	3.34	35.19	97.86	74.00	23.86	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

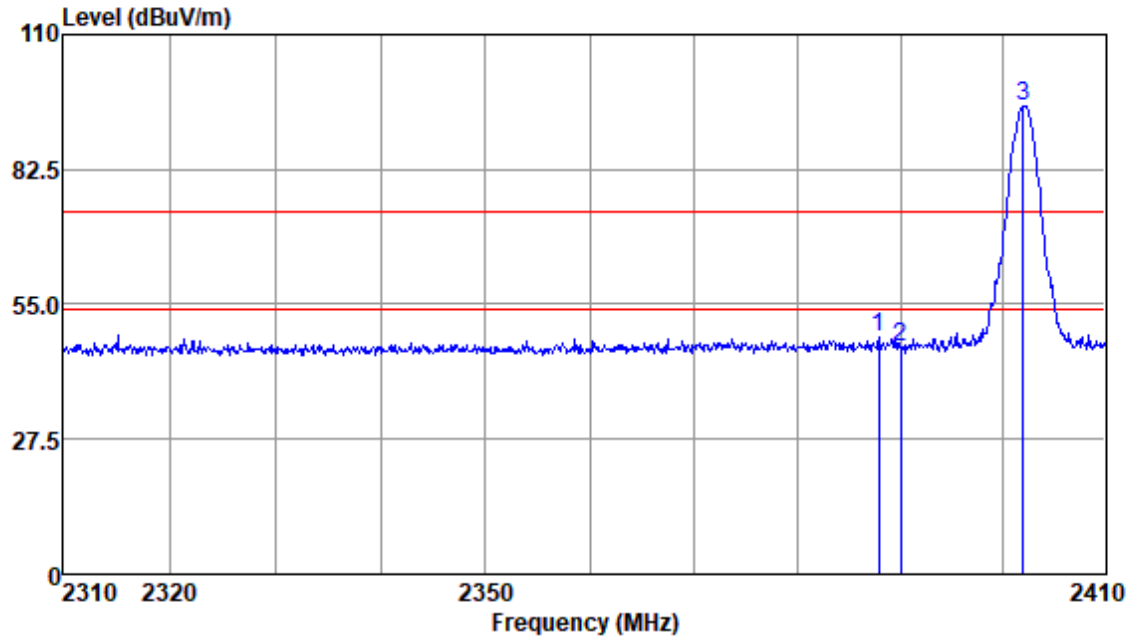


Antenna Polarity : VERTICAL

EUT/Project : 0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2387.94	51.52	28.80	3.34	35.18	48.48	74.00	-25.52	Peak
2390.00	49.13	28.80	3.34	35.18	46.09	74.00	-27.91	Peak
2401.95	98.33	28.85	3.34	35.19	95.33	74.00	21.33	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

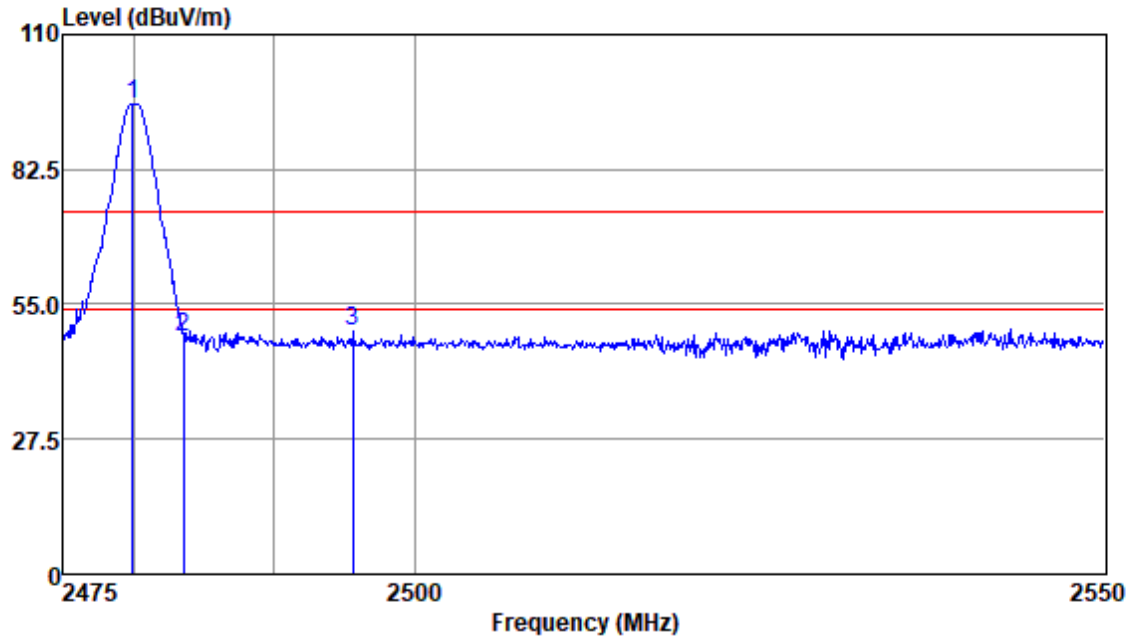


Antenna Polarity :HORIZONTAL

EUT/Project :0070HS

Read Freq	Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2479.88	98.57	29.08	3.40	35.25	95.80	74.00	21.80	Peak
2483.50	51.00	29.09	3.36	35.26	48.19	74.00	-25.81	Peak
2495.63	52.21	29.10	3.33	35.26	49.38	74.00	-24.62	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

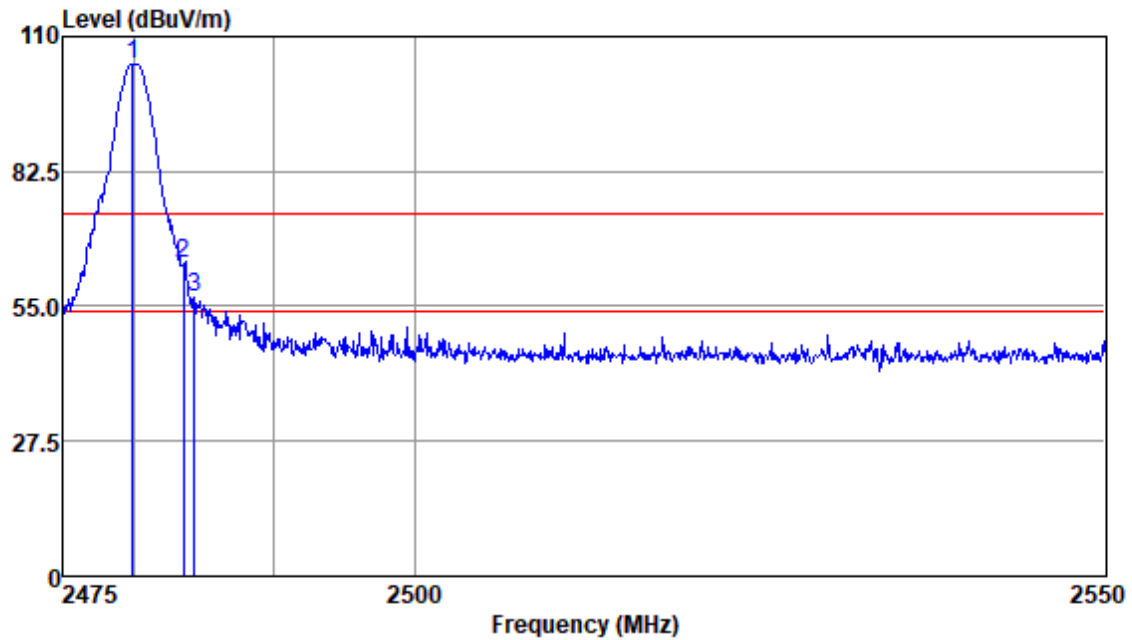


Antenna Polarity : VERTICAL

EUT/Project : 0070HS

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2479.88	107.18	29.08	3.40	35.25	104.41	74.00	30.41	Peak
2483.50	66.44	29.09	3.36	35.26	63.63	74.00	-10.37	Peak
2484.33	59.83	29.09	3.36	35.26	57.02	74.00	-16.98	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

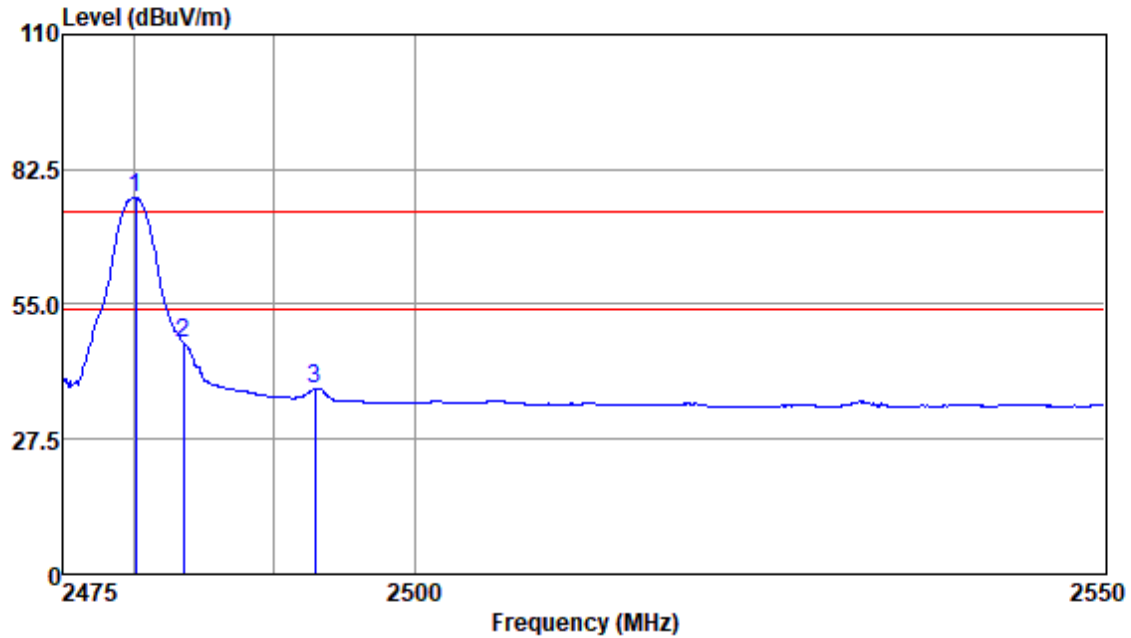


Antenna Polarity : VERTICAL

EUT/Project : 0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.10	79.65	29.08	3.40	35.25	76.88	54.00	22.88	Average
2483.50	50.01	29.09	3.36	35.26	47.20	54.00	-6.80	Average
2492.87	40.74	29.10	3.33	35.26	37.91	54.00	-16.09	Average

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

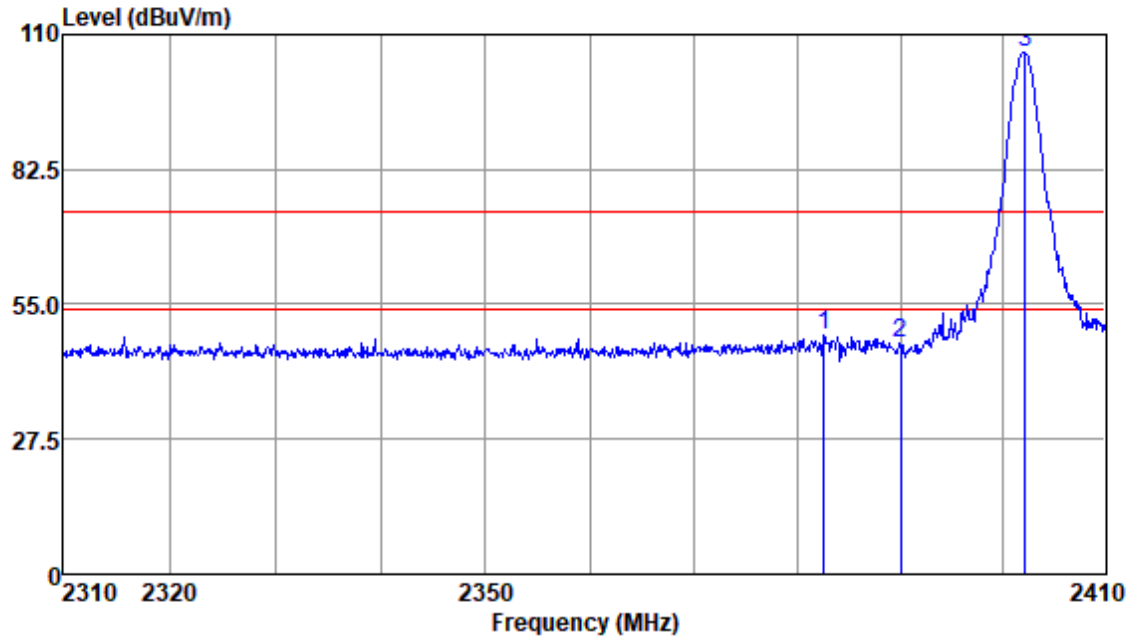


Antenna Polarity : HORIZONTAL

EUT/Project : 0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2382.58	51.87	28.76	3.33	35.17	48.79	74.00	-25.21	Peak
2390.00	49.93	28.80	3.34	35.18	46.89	74.00	-27.11	Peak
2402.15	109.21	28.85	3.34	35.19	106.21	74.00	32.21	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

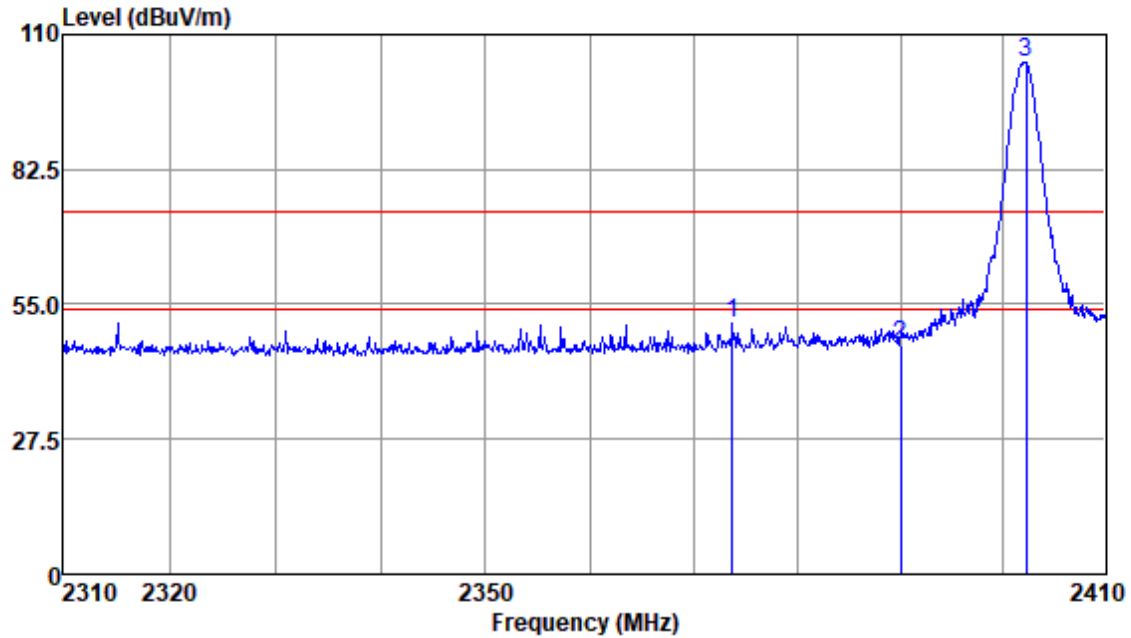


Antenna Polarity :VERTICAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2373.71	54.12	28.71	3.32	35.17	50.98	74.00	-23.02	Peak
2390.00	49.66	28.80	3.34	35.18	46.62	74.00	-27.38	Peak
2402.25	107.21	28.85	3.34	35.19	104.21	74.00	30.21	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

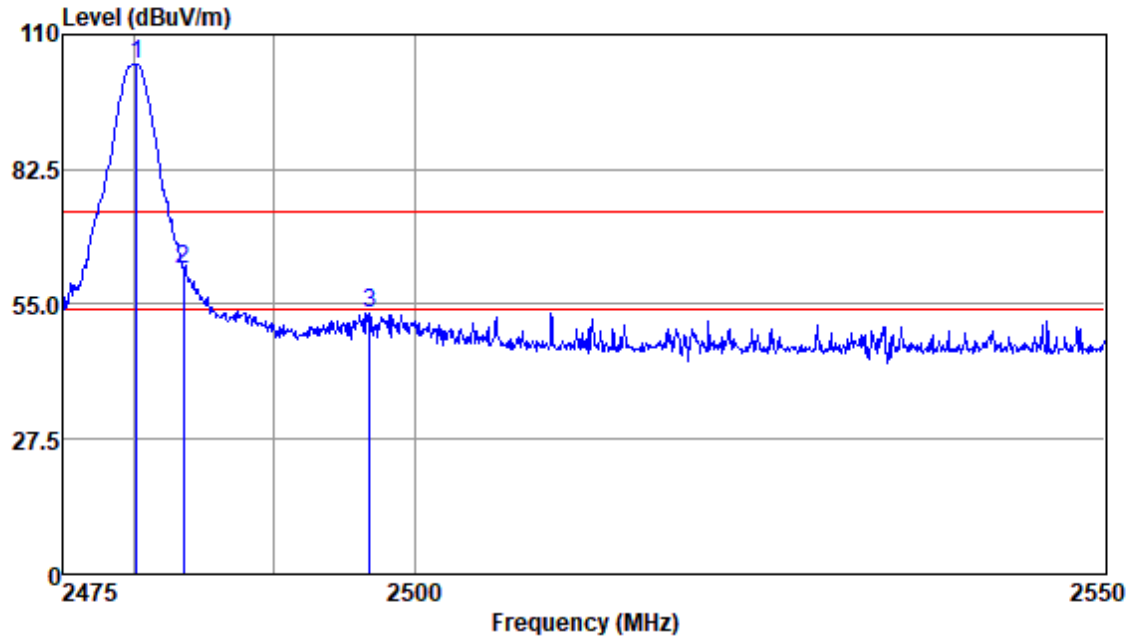


Antenna Polarity :HORIZONTAL

EUT/Project :0070HS

Read Freq	Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.18	106.67	29.08	3.40	35.25	103.90	74.00	29.90	Peak
2483.50	64.84	29.09	3.36	35.26	62.03	74.00	-11.97	Peak
2496.82	56.02	29.12	3.36	35.27	53.23	74.00	-20.77	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

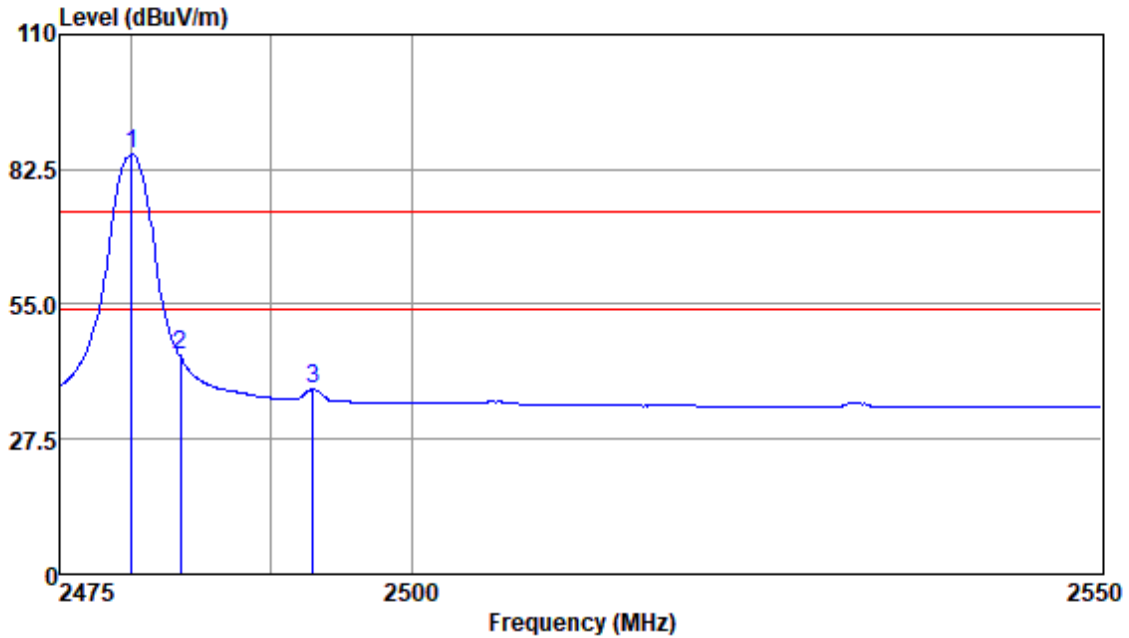


Antenna Polarity : HORIZONTAL

EUT/Project : 0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.03	88.33	29.08	3.40	35.25	85.56	54.00	31.56	Average
2483.50	47.32	29.09	3.36	35.26	44.51	54.00	-9.49	Average
2492.95	40.59	29.10	3.33	35.26	37.76	54.00	-16.24	Average

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

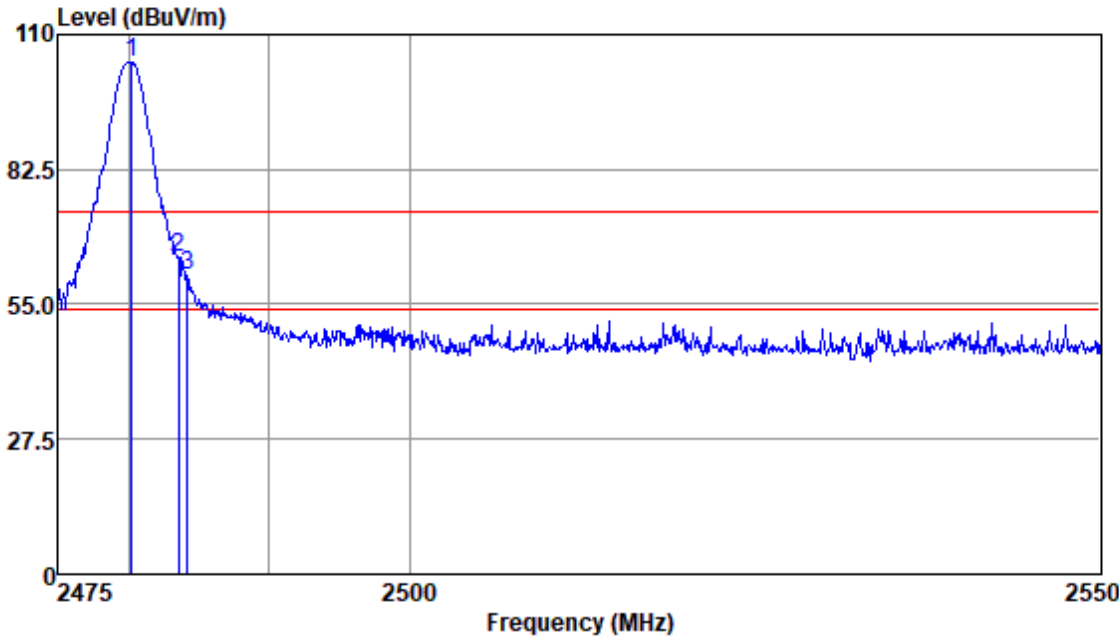


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.18	107.04	29.08	3.40	35.25	104.27	74.00	30.27	Peak
2483.50	67.15	29.09	3.36	35.26	64.34	74.00	-9.66	Peak
2484.18	63.71	29.09	3.36	35.26	60.90	74.00	-13.10	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

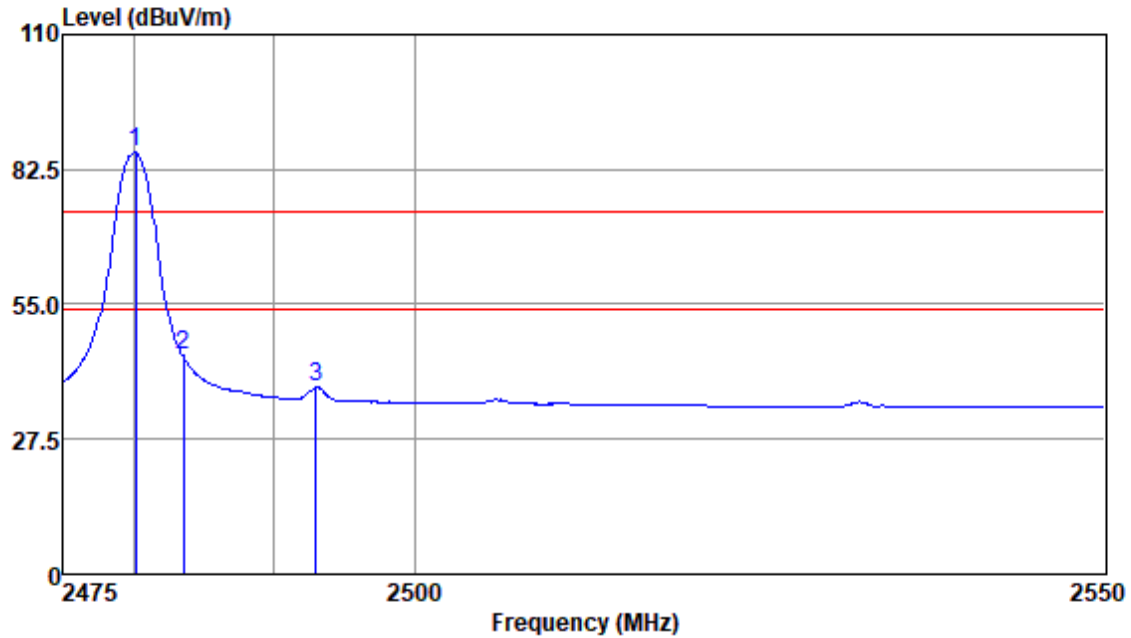

Antenna Polarity :VERTICAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.10	88.69	29.08	3.40	35.25	85.92	54.00	31.92	Average
2483.50	47.31	29.09	3.36	35.26	44.50	54.00	-9.50	Average
2492.95	40.88	29.10	3.33	35.26	38.05	54.00	-15.95	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

7.10 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.10.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

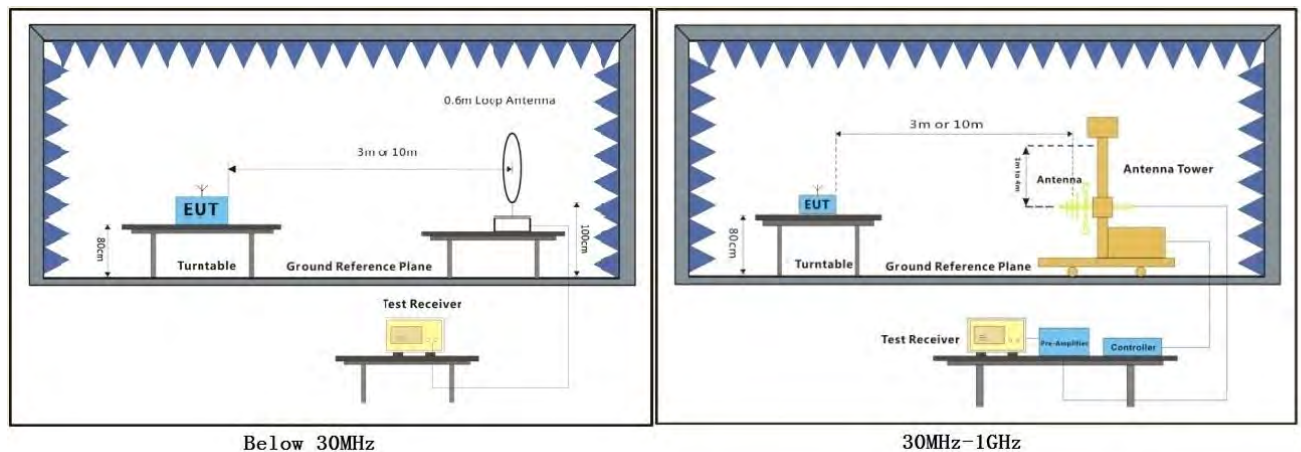


7.10.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 00; Polarity: Horizontal

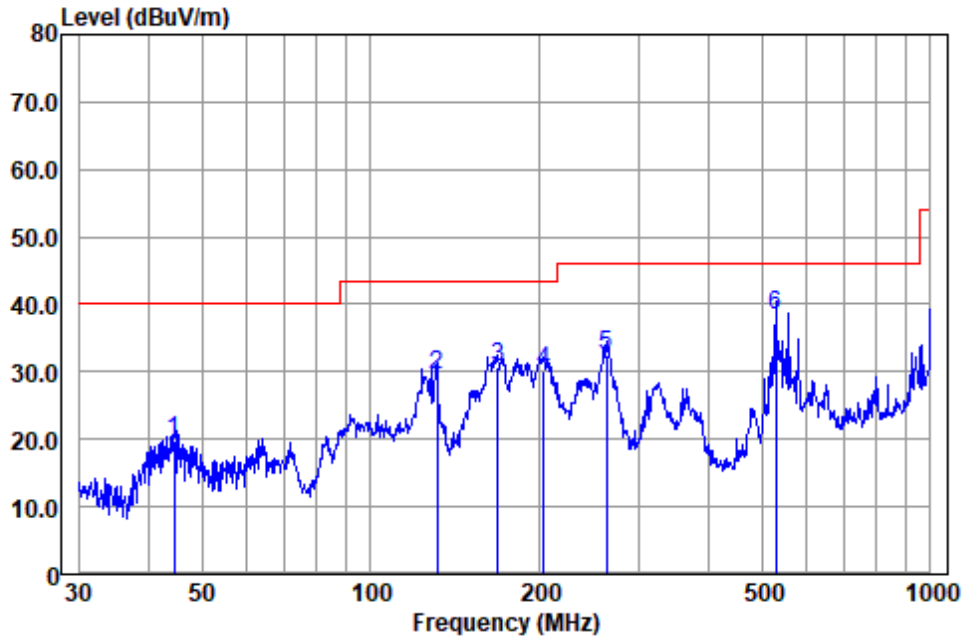


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	44.587	37.91	13.79	1.30	33.20	19.80	40.00	-20.20	QP
2	131.297	47.73	12.20	2.52	33.07	29.38	43.50	-14.12	QP
3	168.414	47.94	12.85	2.78	33.00	30.57	43.50	-12.93	QP
4	203.523	49.99	9.93	3.21	32.98	30.15	43.50	-13.35	QP
5	263.819	49.75	12.11	3.45	32.80	32.51	46.00	-13.49	QP
6	528.246	47.60	18.46	5.04	32.70	38.40	46.00	-7.60	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

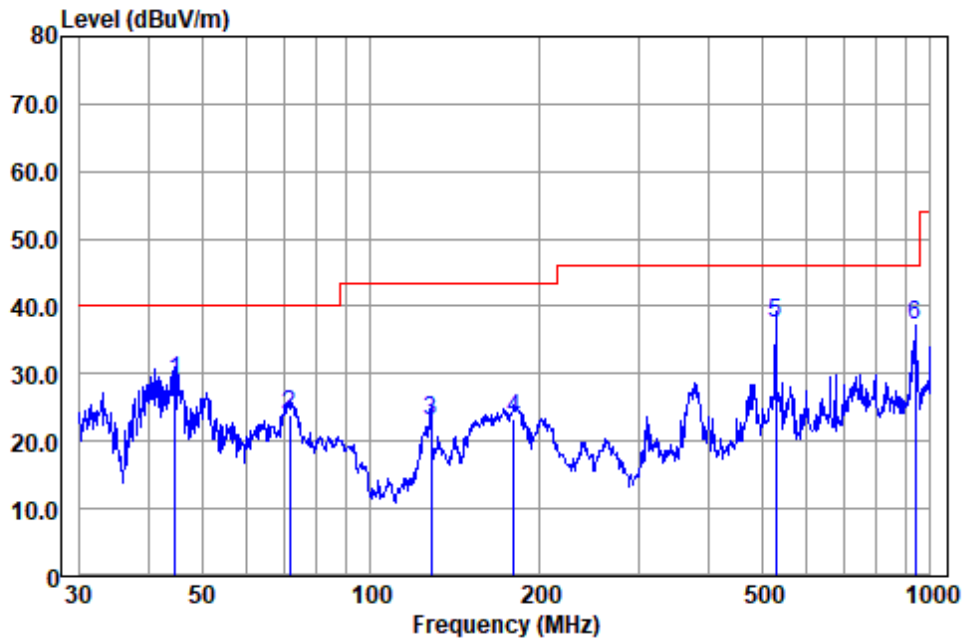

Antenna Polarity :VERTICAL

EUT/Project :0070HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	44.743	47.01	13.76	1.31	33.20	28.88	40.00	-11.12	QP
2	71.581	44.30	11.10	1.72	33.20	23.92	40.00	-16.08	QP
3	128.113	41.67	11.90	2.56	33.08	23.05	43.50	-20.45	QP
4	180.017	42.00	11.60	2.77	33.00	23.37	43.50	-20.13	QP
5	528.246	46.60	18.46	5.04	32.70	37.40	46.00	-8.60	QP
6	938.833	37.89	23.70	7.09	31.55	37.13	46.00	-8.87	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.11 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 19.7 °C


Humidity: 42.9 % RH

Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

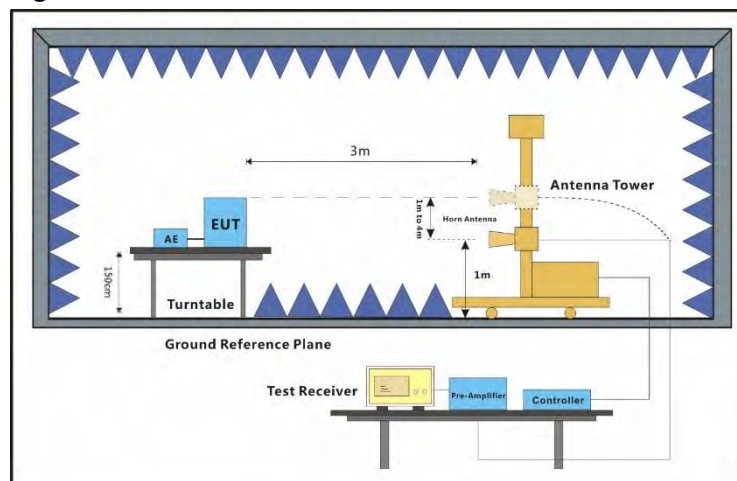


7.11.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

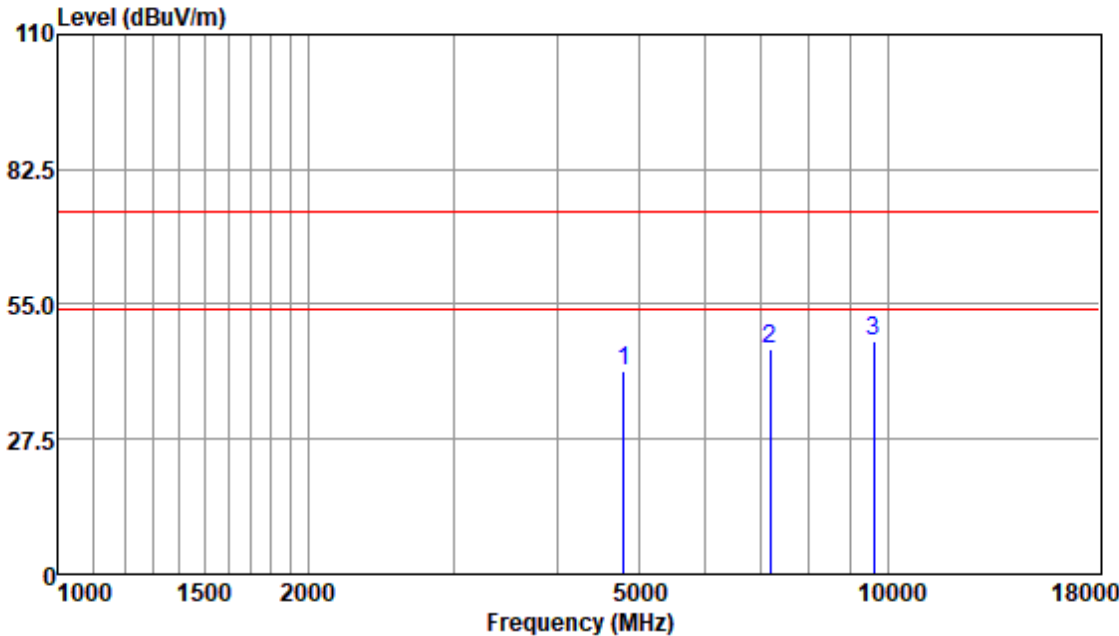


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	39.33	33.57	5.22	36.79	41.33	74.00	-32.67	Peak
7206.31	37.97	36.24	7.13	35.53	45.81	74.00	-28.19	Peak
9608.43	34.57	37.75	8.66	33.58	47.40	74.00	-26.60	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

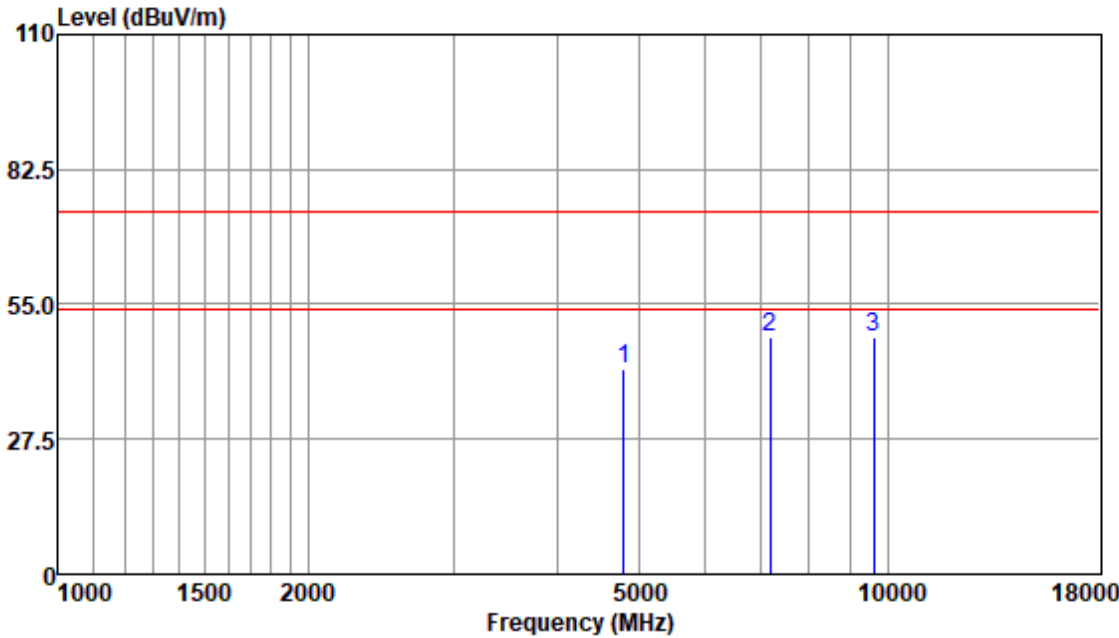


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	39.90	33.57	5.22	36.79	41.90	74.00	-32.10	Peak
7206.31	40.63	36.24	7.13	35.53	48.47	74.00	-25.53	Peak
9608.43	35.45	37.75	8.66	33.58	48.28	74.00	-25.72	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

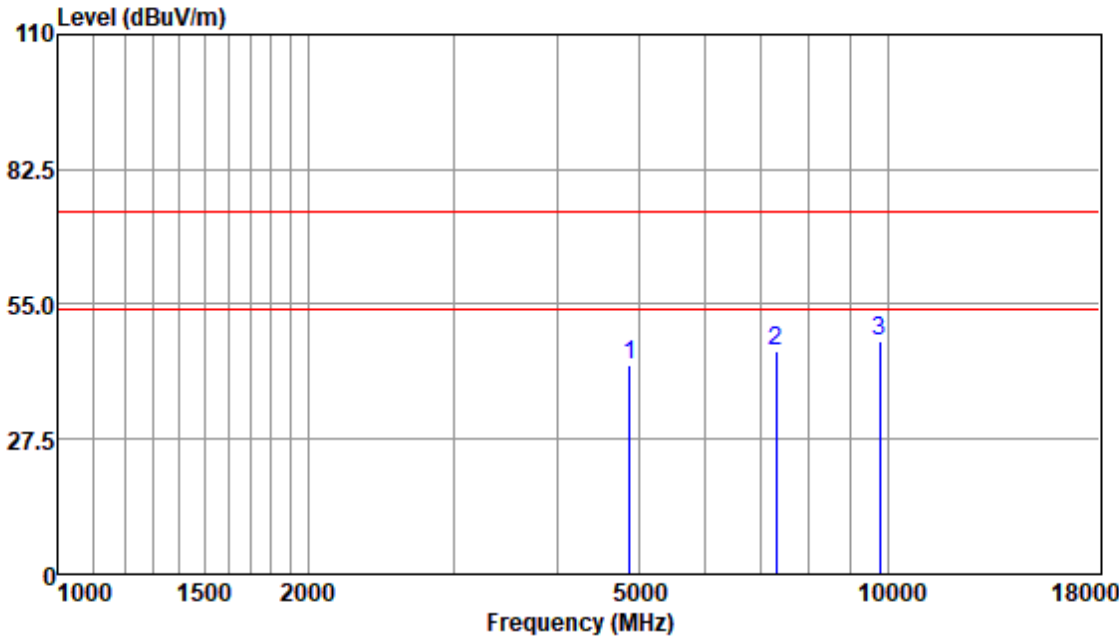


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	40.49	33.66	5.36	36.81	42.70	74.00	-31.30	Peak
7323.27	37.06	36.33	7.33	35.42	45.30	74.00	-28.70	Peak
9764.37	34.53	37.54	8.84	33.50	47.41	74.00	-26.59	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

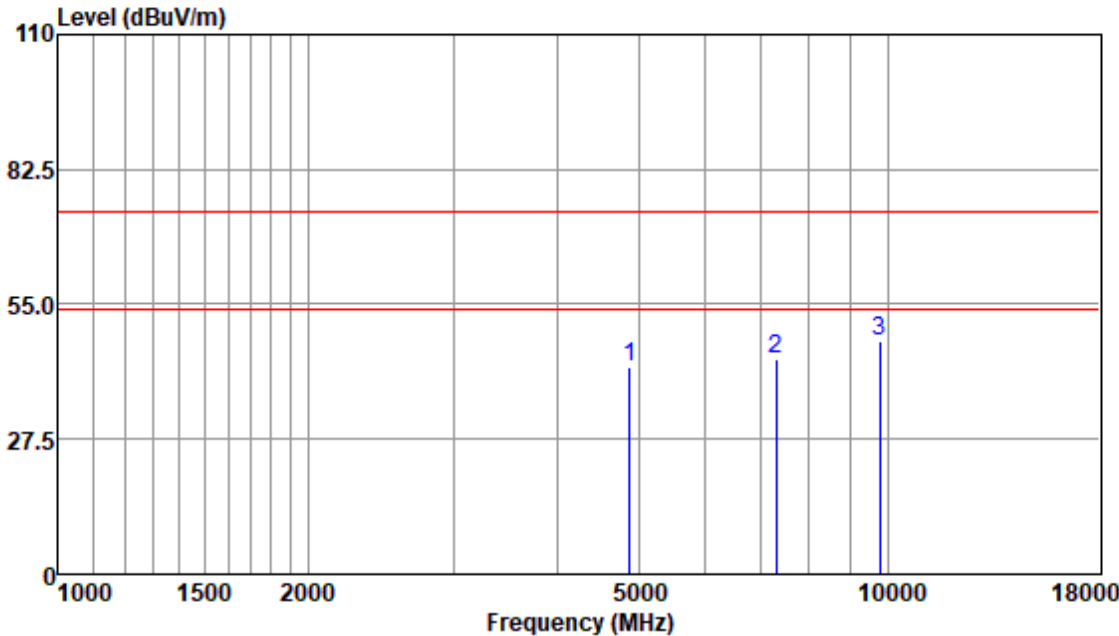


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	40.04	33.66	5.36	36.81	42.25	74.00	-31.75	Peak
7323.27	35.49	36.33	7.33	35.42	43.73	74.00	-30.27	Peak
9764.37	34.69	37.54	8.84	33.50	47.57	74.00	-26.43	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

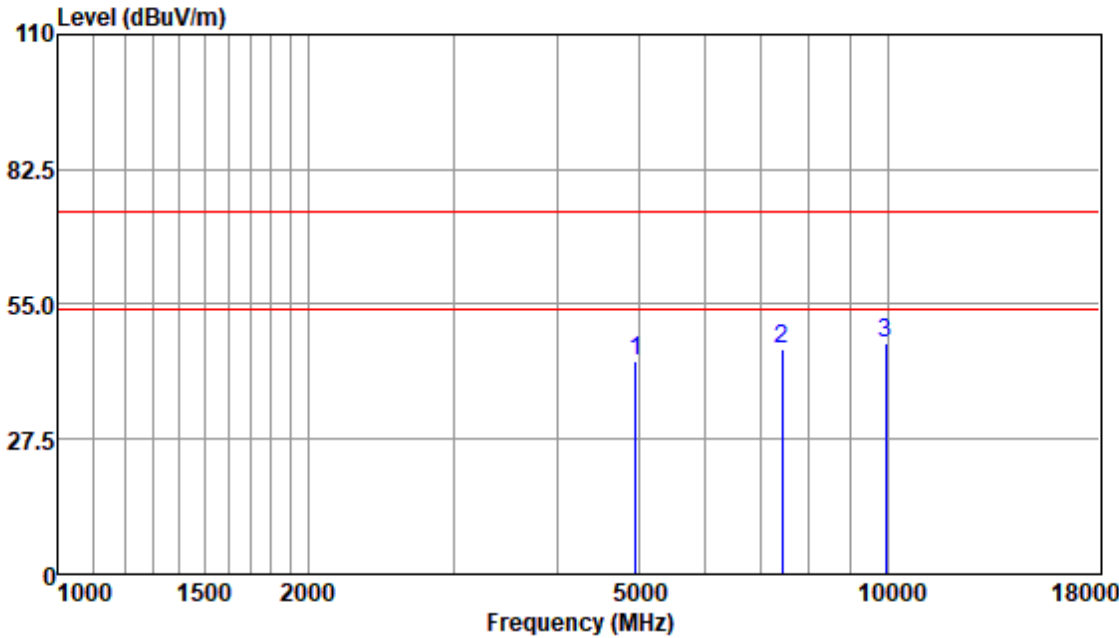


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	40.96	33.65	5.46	36.83	43.24	74.00	-30.76	Peak
7440.91	37.58	36.31	7.43	35.34	45.98	74.00	-28.02	Peak
9920.99	34.17	37.62	8.69	33.41	47.07	74.00	-26.93	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

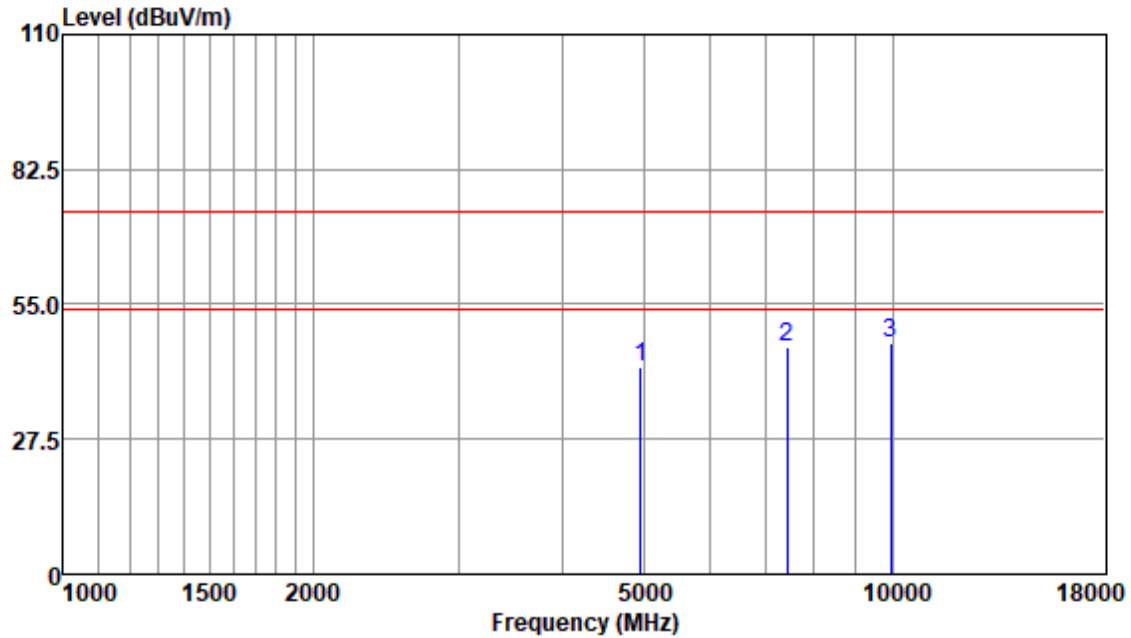


Antenna Polarity :VERTICAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	39.95	33.65	5.46	36.83	42.23	74.00	-31.77	Peak
7440.91	37.70	36.31	7.43	35.34	46.10	74.00	-27.90	Peak
9920.99	34.13	37.62	8.69	33.41	47.03	74.00	-26.97	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

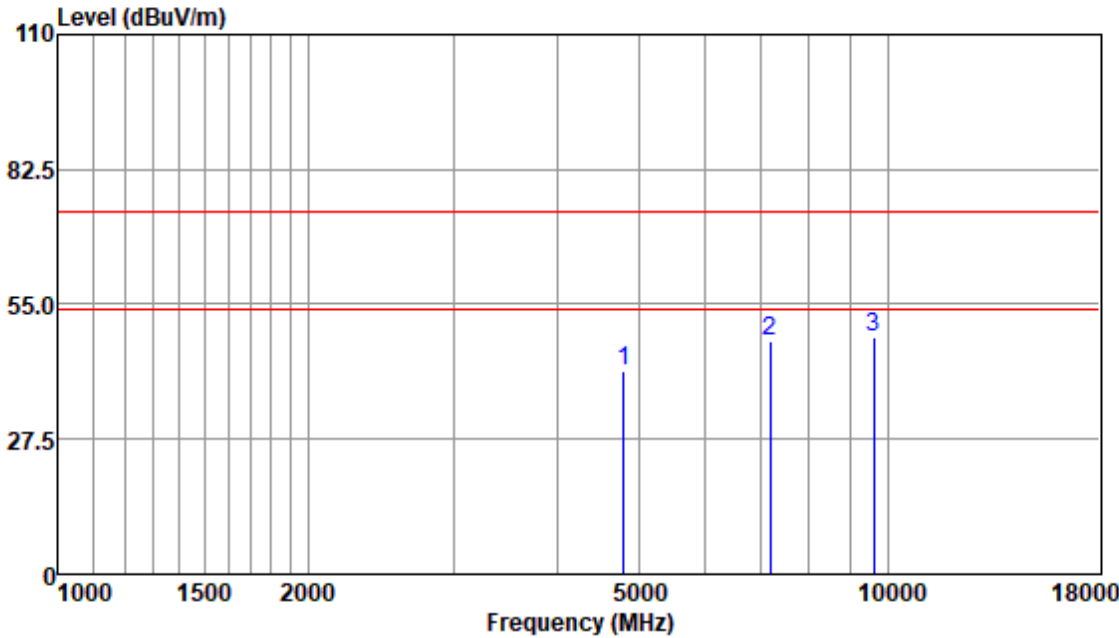


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4804.11	39.33	33.57	5.22	36.79	41.33	74.00	-32.67	Peak
7206.31	39.66	36.24	7.13	35.53	47.50	74.00	-26.50	Peak
9608.43	35.34	37.75	8.66	33.58	48.17	74.00	-25.83	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

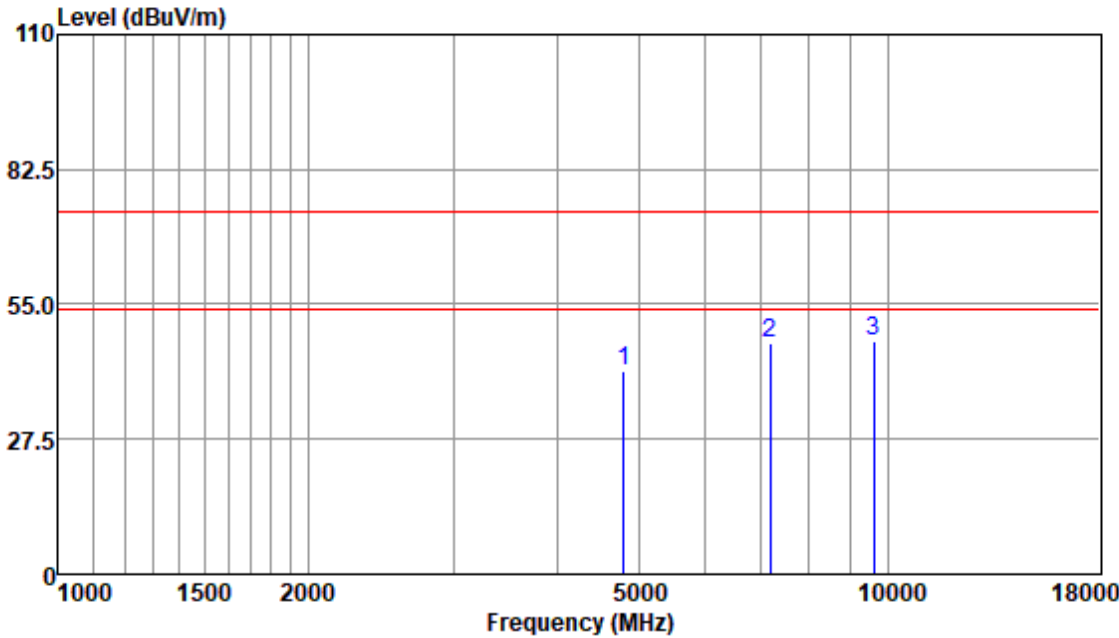


Antenna Polarity : VERTICAL
 EUT/Project : 0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4804.11	39.23	33.57	5.22	36.79	41.23	74.00	-32.77	Peak
7206.31	39.40	36.24	7.13	35.53	47.24	74.00	-26.76	Peak
9608.43	34.74	37.75	8.66	33.58	47.57	74.00	-26.43	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: middle

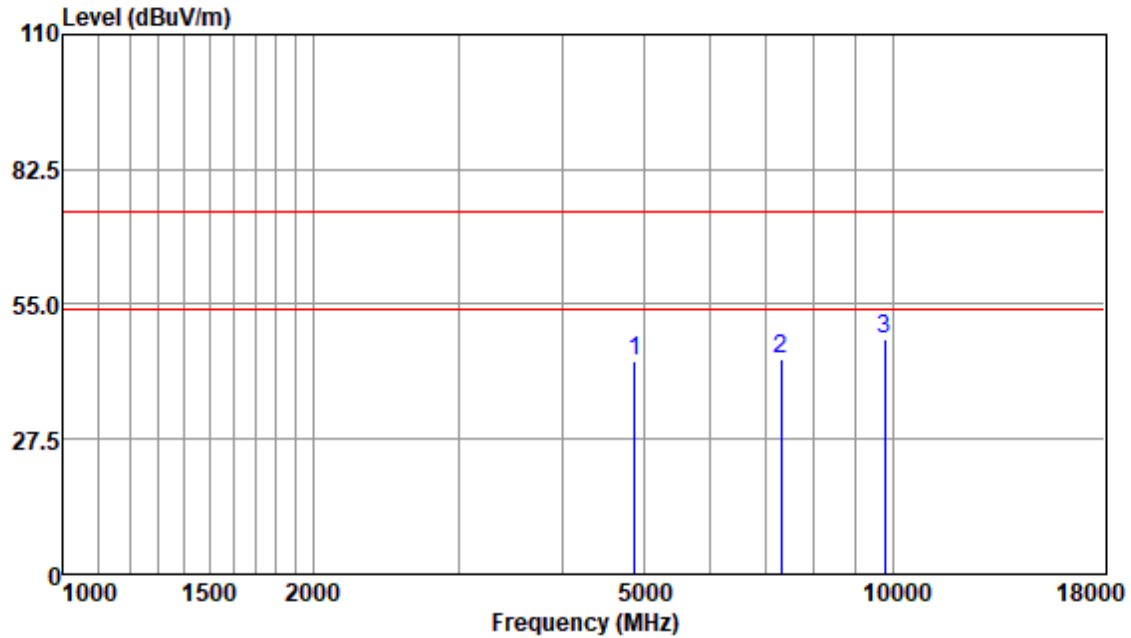


Antenna Polarity :HORIZONTAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4882.15	41.06	33.66	5.36	36.81	43.27	74.00	-30.73	Peak
7323.27	35.44	36.33	7.33	35.42	43.68	74.00	-30.32	Peak
9764.37	34.86	37.54	8.84	33.50	47.74	74.00	-26.26	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: middle

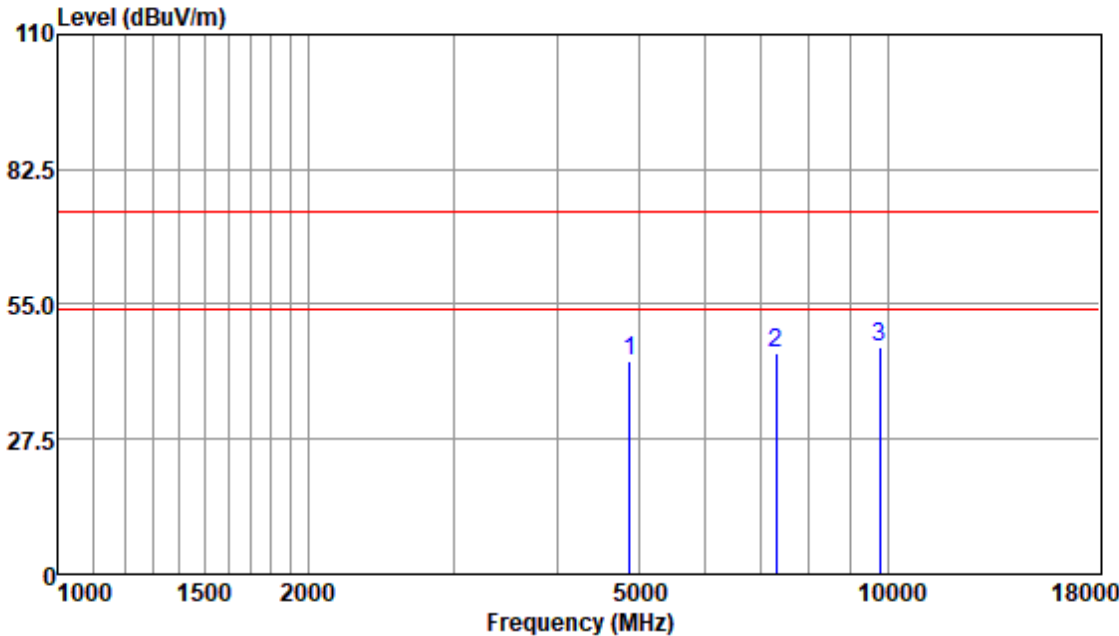


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	41.17	33.66	5.36	36.81	43.38	74.00	-30.62	Peak
7323.27	36.88	36.33	7.33	35.42	45.12	74.00	-28.88	Peak
9764.37	33.51	37.54	8.84	33.50	46.39	74.00	-27.61	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

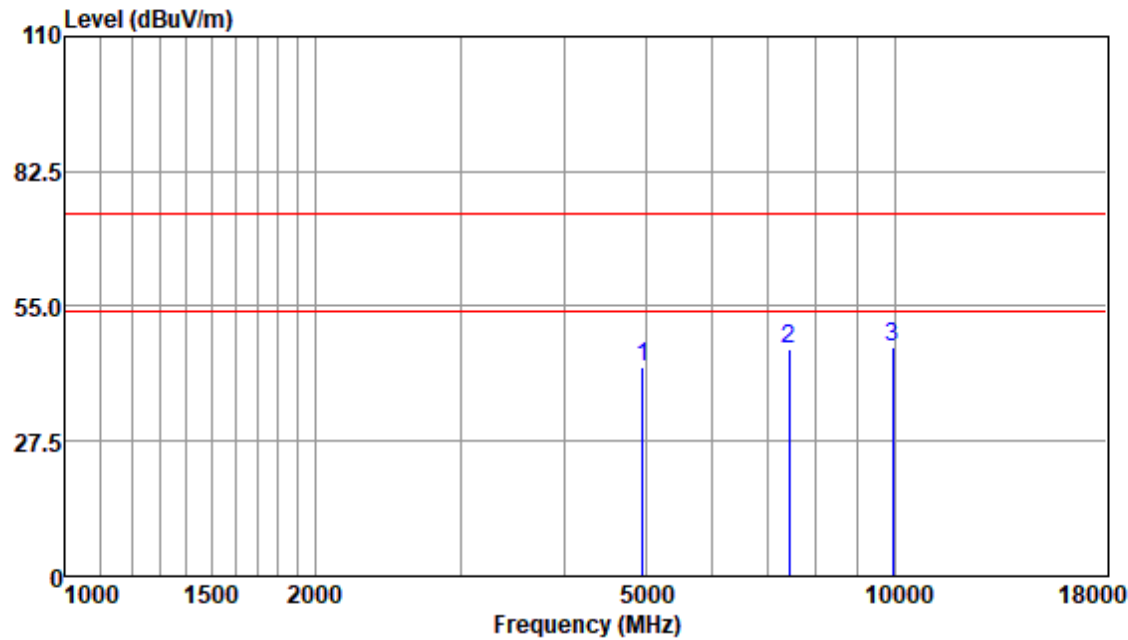


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	40.48	33.65	5.46	36.83	42.76	74.00	-31.24	Peak
7440.91	37.78	36.31	7.43	35.34	46.18	74.00	-27.82	Peak
9920.99	33.75	37.62	8.69	33.41	46.65	74.00	-27.35	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

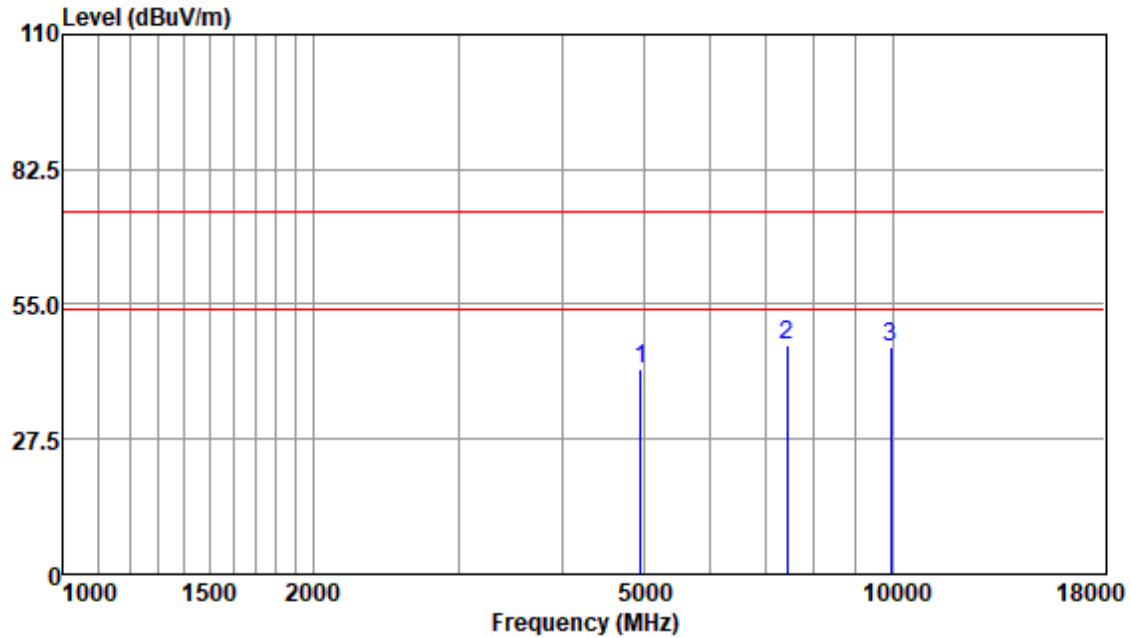

Antenna Polarity : VERTICAL

EUT/Project : 0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4960.31	39.49	33.65	5.46	36.83	41.77	74.00	-32.23	Peak
7440.91	38.13	36.31	7.43	35.34	46.53	74.00	-27.47	Peak
9920.99	33.28	37.62	8.69	33.41	46.18	74.00	-27.82	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 63 of 106

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

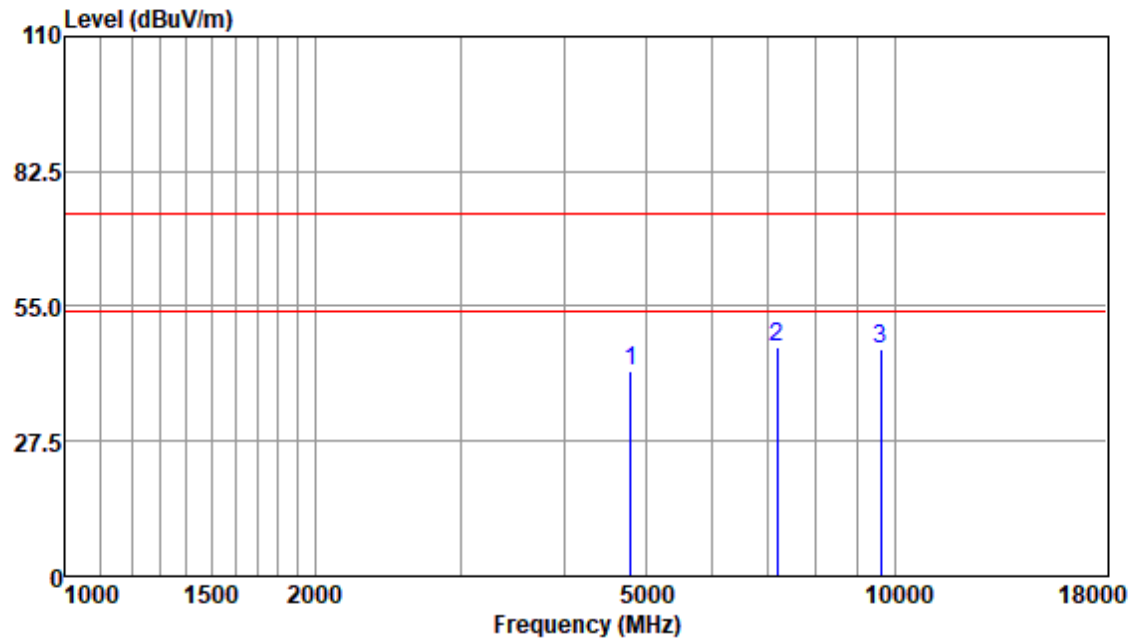


Antenna Polarity :HORIZONTAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	39.68	33.57	5.22	36.79	41.68	74.00	-32.32	Peak
7206.31	38.78	36.24	7.13	35.53	46.62	74.00	-27.38	Peak
9608.43	33.49	37.75	8.66	33.58	46.32	74.00	-27.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

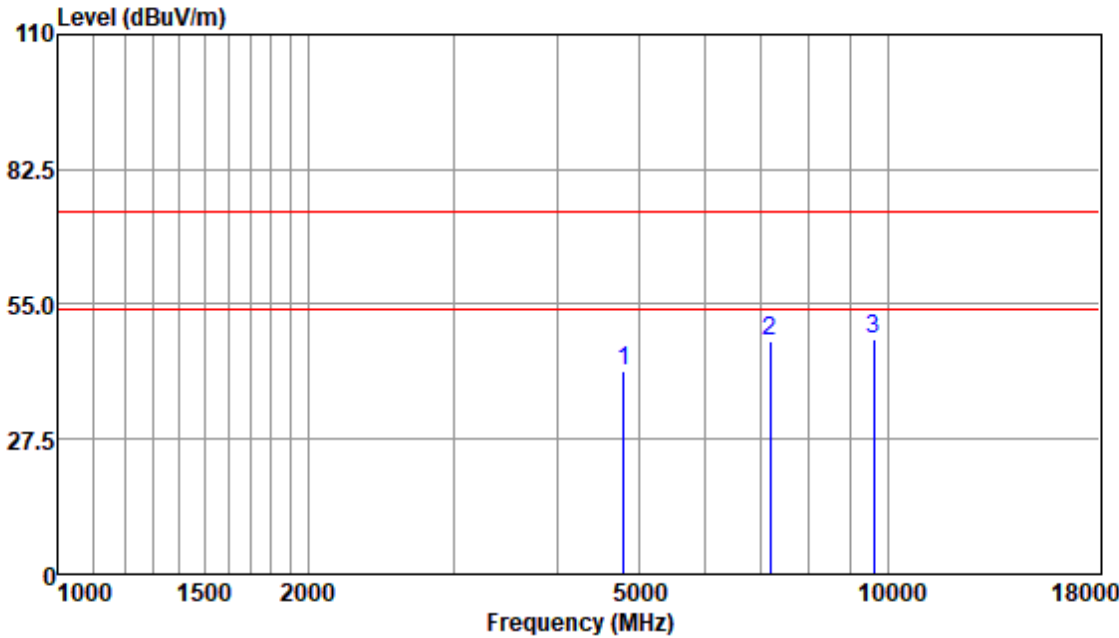


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	39.57	33.57	5.22	36.79	41.57	74.00	-32.43	Peak
7206.31	39.68	36.24	7.13	35.53	47.52	74.00	-26.48	Peak
9608.43	35.21	37.75	8.66	33.58	48.04	74.00	-25.96	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

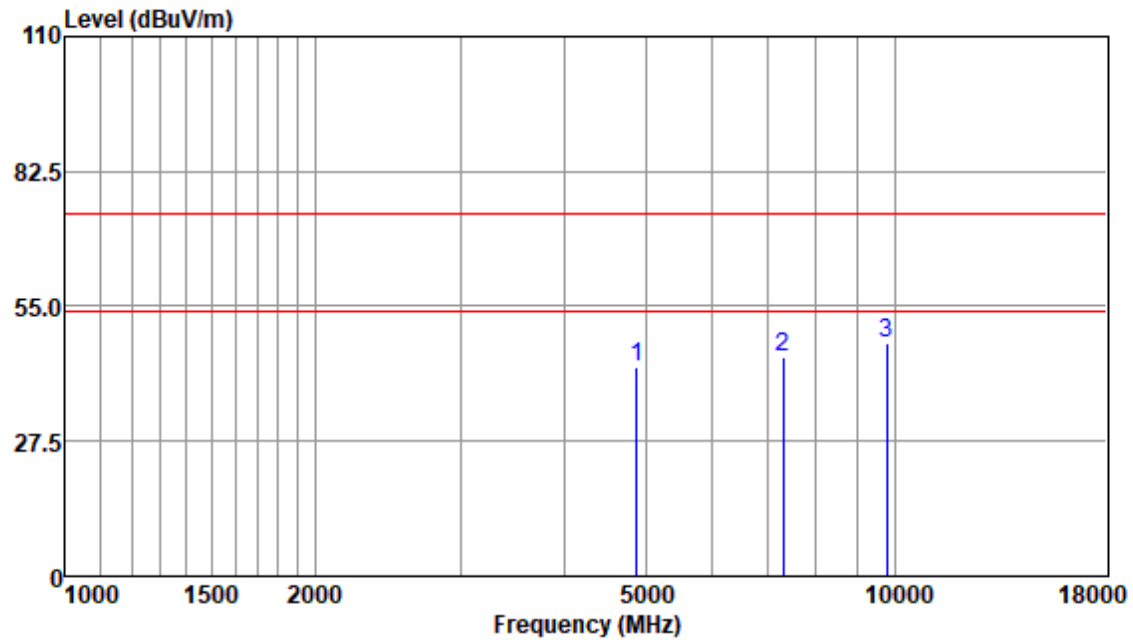


Antenna Polarity :HORIZONTAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	40.30	33.66	5.36	36.81	42.51	74.00	-31.49	Peak
7323.27	36.53	36.33	7.33	35.42	44.77	74.00	-29.23	Peak
9764.37	34.76	37.54	8.84	33.50	47.64	74.00	-26.36	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:middle

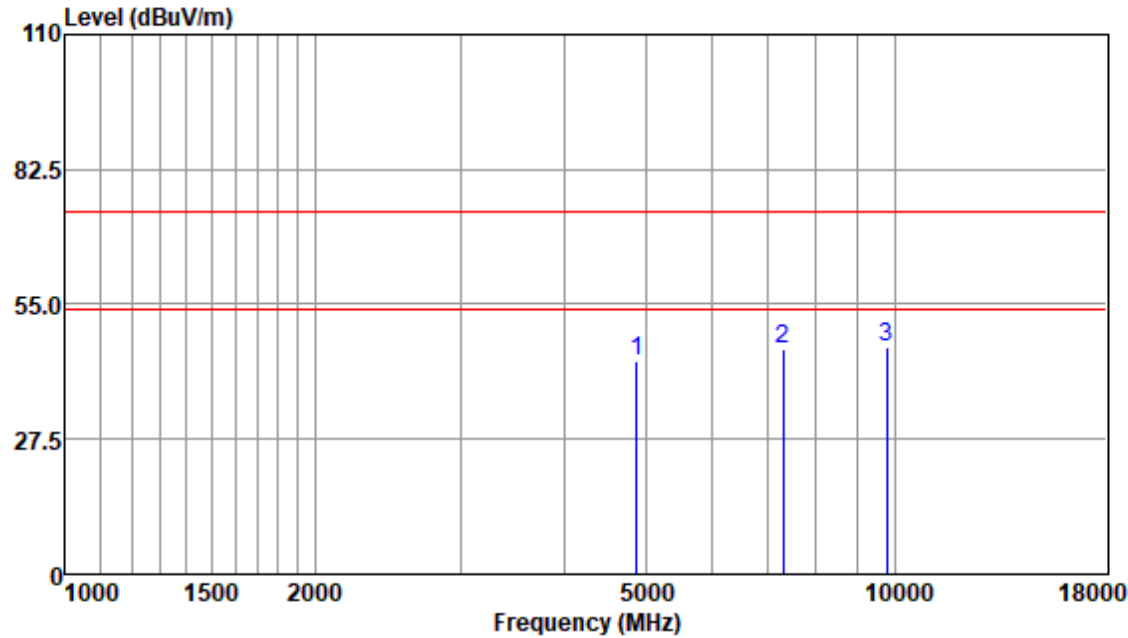


Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	41.32	33.66	5.36	36.81	43.53	74.00	-30.47	Peak
7323.27	37.51	36.33	7.33	35.42	45.75	74.00	-28.25	Peak
9764.37	33.38	37.54	8.84	33.50	46.26	74.00	-27.74	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

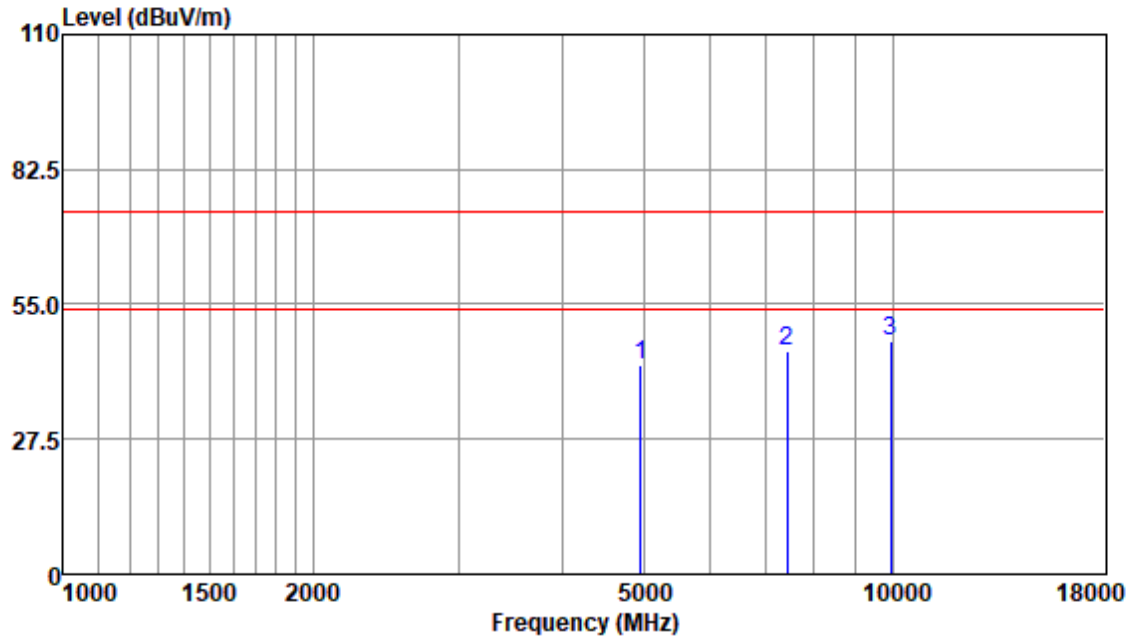


Antenna Polarity :HORIZONTAL

EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	40.28	33.65	5.46	36.83	42.56	74.00	-31.44	Peak
7440.91	37.21	36.31	7.43	35.34	45.61	74.00	-28.39	Peak
9920.99	34.67	37.62	8.69	33.41	47.57	74.00	-26.43	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

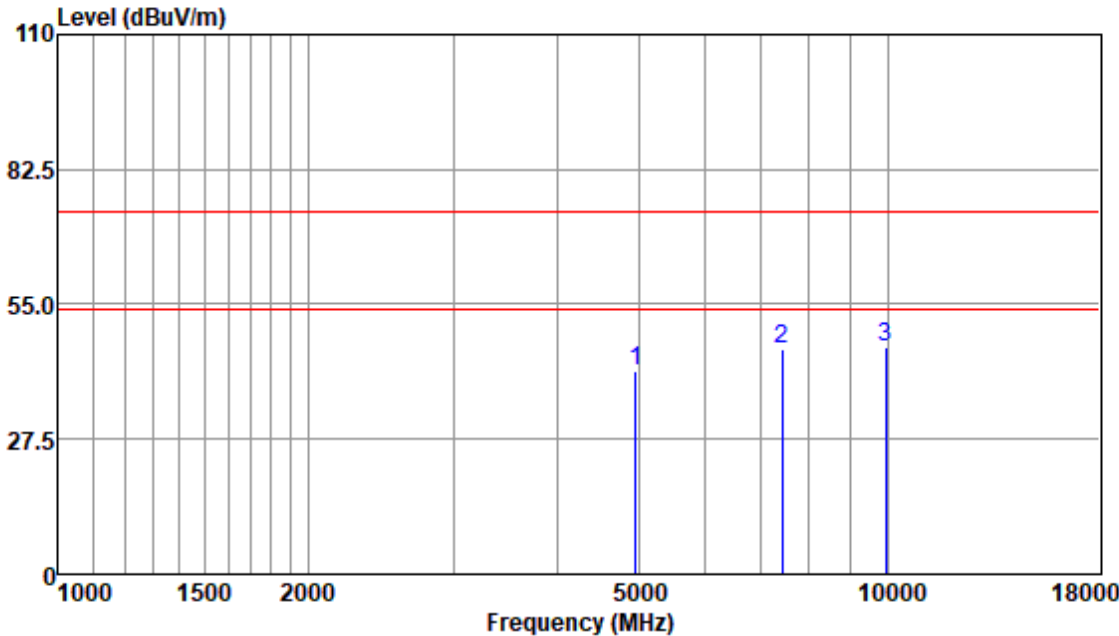

Antenna Polarity :VERTICAL
EUT/Project :0070HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	39.31	33.65	5.46	36.83	41.59	74.00	-32.41	Peak
7440.91	37.30	36.31	7.43	35.34	45.70	74.00	-28.30	Peak
9920.99	33.24	37.62	8.69	33.41	46.14	74.00	-27.86	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 69 of 106

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2401000070HS

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2401000070HS

10 Appendix

10.1 Appendix A: 20dB Emission Bandwidth

10.1.1 Test Result

Test Mode	Antenna	Channel	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.933	2401.538	2402.471	---	---
		2441	0.945	2440.538	2441.483	---	---
		2480	0.945	2479.538	2480.483	---	---
2DH5	Ant1	2402	1.338	2401.322	2402.660	---	---
		2441	1.347	2440.322	2441.669	---	---
		2480	1.239	2479.382	2480.621	---	---
3DH5	Ant1	2402	1.287	2401.352	2402.639	---	---
		2441	1.248	2440.373	2441.621	---	---
		2480	1.335	2479.331	2480.666	---	---

10.1.2 Test Graphs

DH5_Ant1_2402




DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402

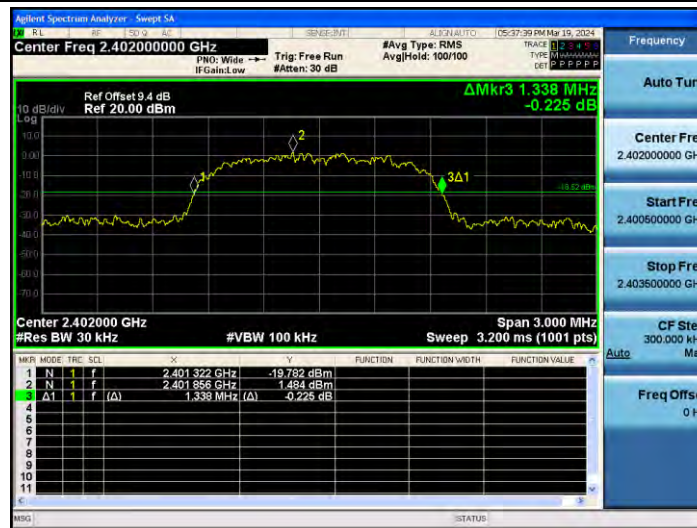

2DH5_Ant1_2441




2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441

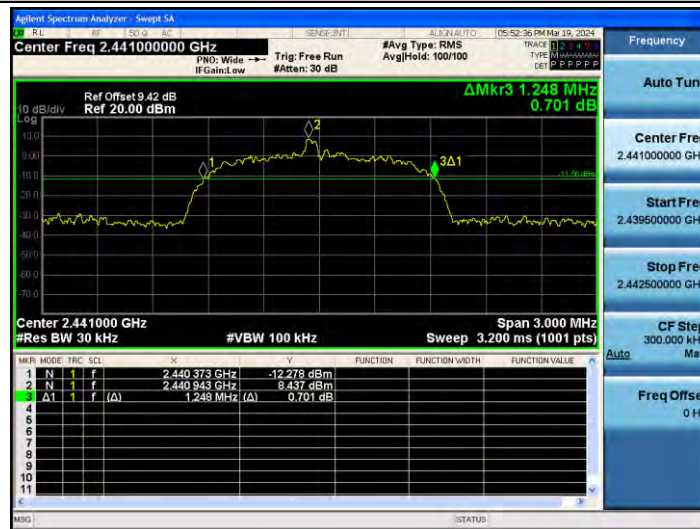

3DH5_Ant1_2480





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 73 of 106

10.2 Appendix B: Occupied Channel Bandwidth

10.2.1 Test Result


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.81906	2401.5863	2402.4054	---	---
		2441	0.83359	2440.5748	2441.4084	---	---
		2480	0.82032	2479.5832	2480.4035	---	---
2DH5	Ant1	2402	1.1940	2401.3946	2402.5886	---	---
		2441	1.1769	2440.4058	2441.5827	---	---
		2480	1.1705	2479.4063	2480.5768	---	---
3DH5	Ant1	2402	1.1836	2401.4016	2402.5852	---	---
		2441	1.1668	2440.4091	2441.5759	---	---
		2480	1.2114	2479.3820	2480.5934	---	---

10.2.2 Test Graphs

DH5_Ant1_2402




DH5_Ant1_2441

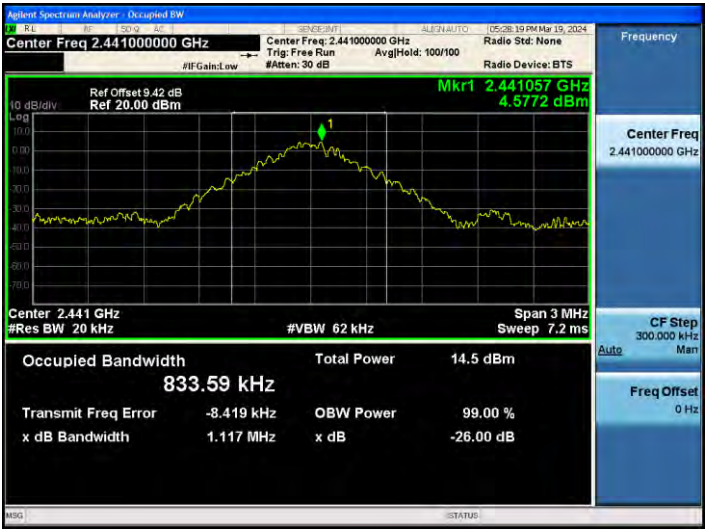


DH5_Ant1_2480




2DH5_Ant1_2402

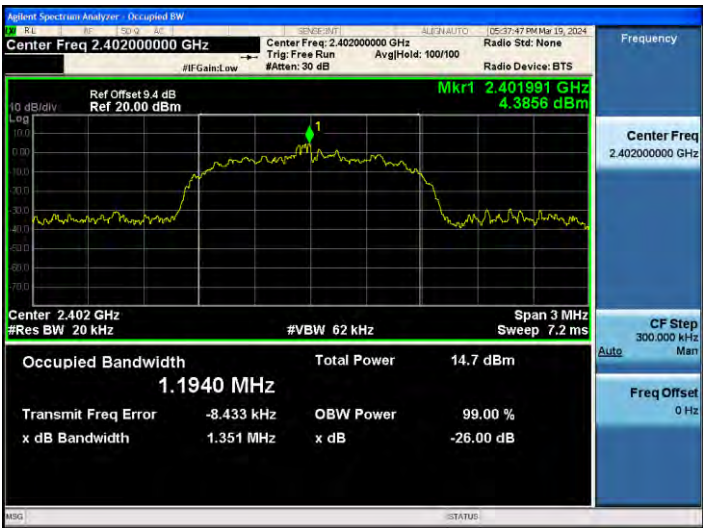


2DH5_Ant1_2441

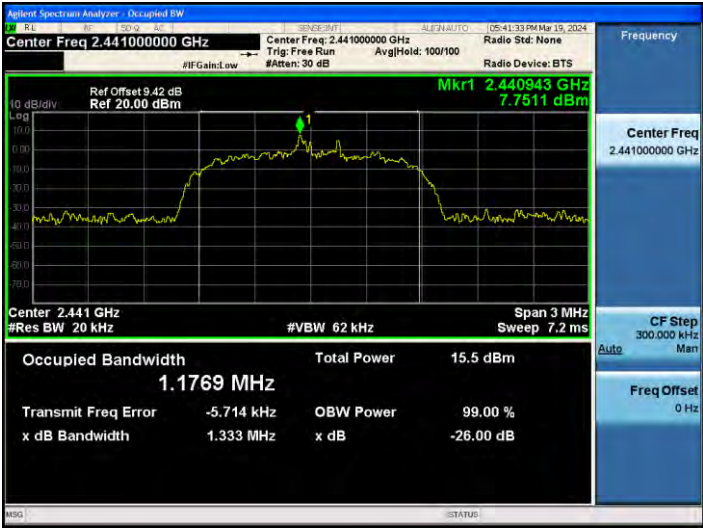


2DH5_Ant1_2480

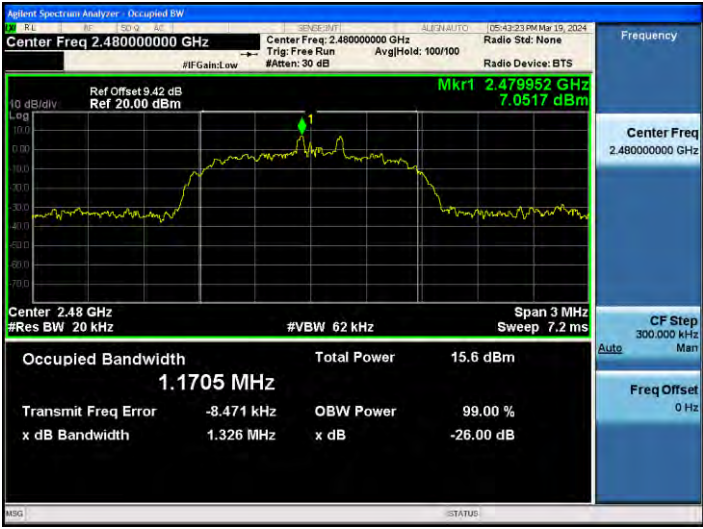


3DH5_Ant1_2402

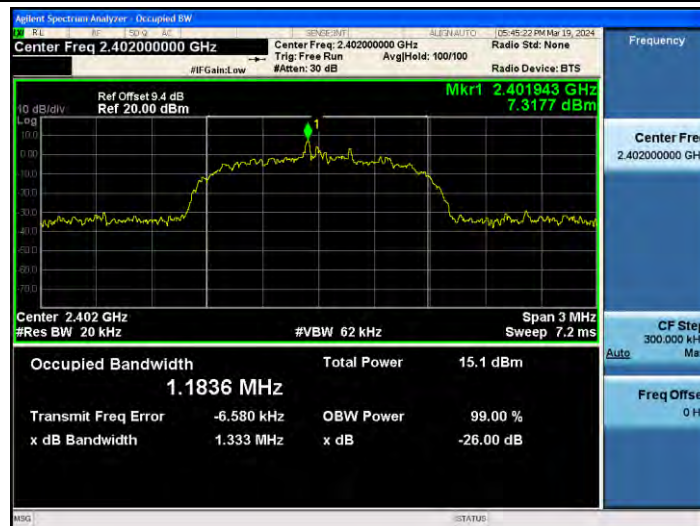

3DH5_Ant1_2441

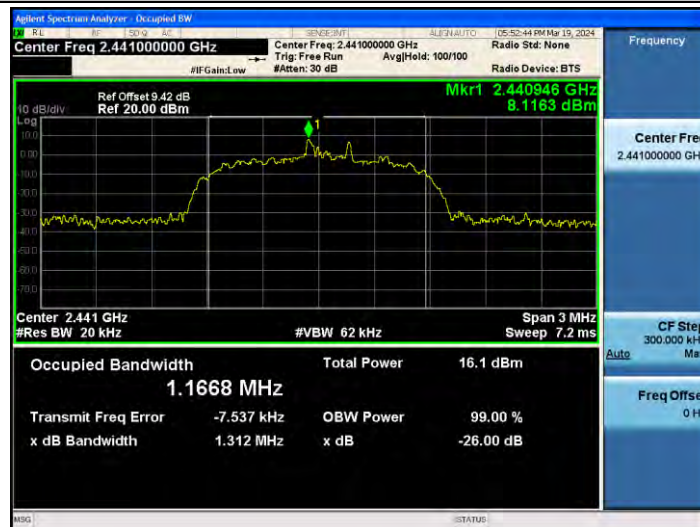

3DH5_Ant1_2480

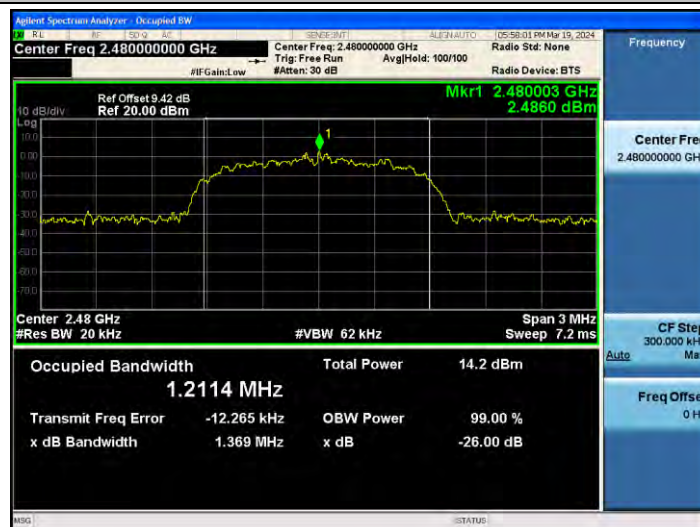



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 77 of 106

10.3 Appendix C: Maximum conducted output power

10.3.1 Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	7.63	≤20.97	PASS
		2441	7.92	≤20.97	PASS
		2480	7.45	≤20.97	PASS
2DH5	Ant1	2402	8.67	≤20.97	PASS
		2441	8.53	≤20.97	PASS
		2480	7.66	≤20.97	PASS
3DH5	Ant1	2402	9.11	≤20.97	PASS
		2441	8.79	≤20.97	PASS
		2480	8.02	≤20.97	PASS

10.3.2 Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 81 of 106

10.4 Appendix D: Carrier frequency separation

10.4.1 Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.03	≥0.945	PASS
2DH5	Ant1	Hop	0.936	≥0.898	PASS
3DH5	Ant1	Hop	0.99	≥0.890	PASS

10.4.2 Test Graphs

DH5_Ant1_Hop



2DH5_Ant1_Hop



3DH5_Ant1_Hop





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 83 of 106



10.5 Appendix E: Time of occupancy

10.5.1 Test Result


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.376	90	0.034	≤0.4	PASS
DH3	Ant1	Hop	1.623	110	0.179	≤0.4	PASS
DH5	Ant1	Hop	2.872	120	0.345	≤0.4	PASS
2DH1	Ant1	Hop	0.298	90	0.027	≤0.4	PASS
2DH3	Ant1	Hop	1.134	180	0.204	≤0.4	PASS
2DH5	Ant1	Hop	1.965	60	0.118	≤0.4	PASS
3DH1	Ant1	Hop	0.376	120	0.045	≤0.4	PASS
3DH3	Ant1	Hop	1.626	70	0.114	≤0.4	PASS
3DH5	Ant1	Hop	2.878	70	0.201	≤0.4	PASS


10.5.2 Test Graphs

DH1_Ant1_Hop

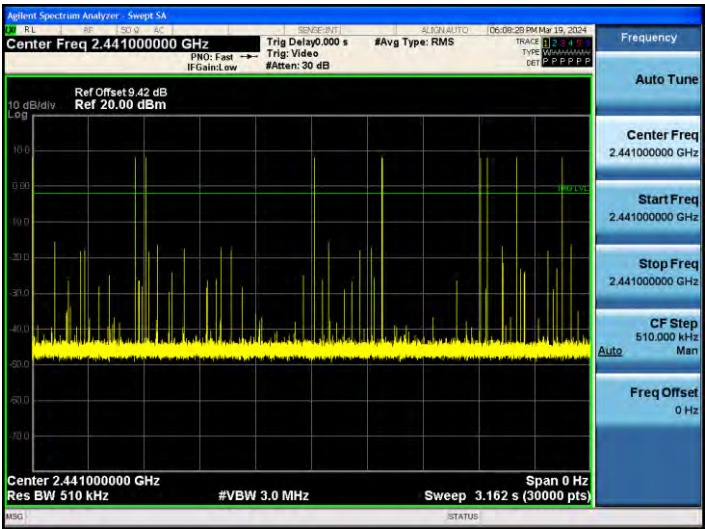
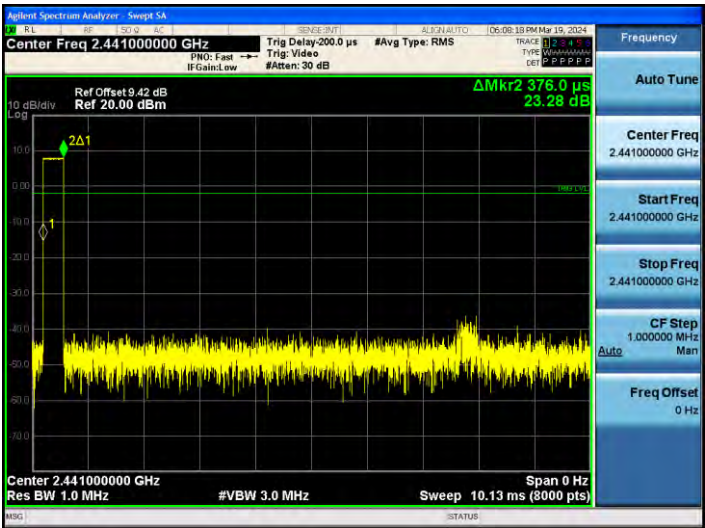


DH3_Ant1_Hop

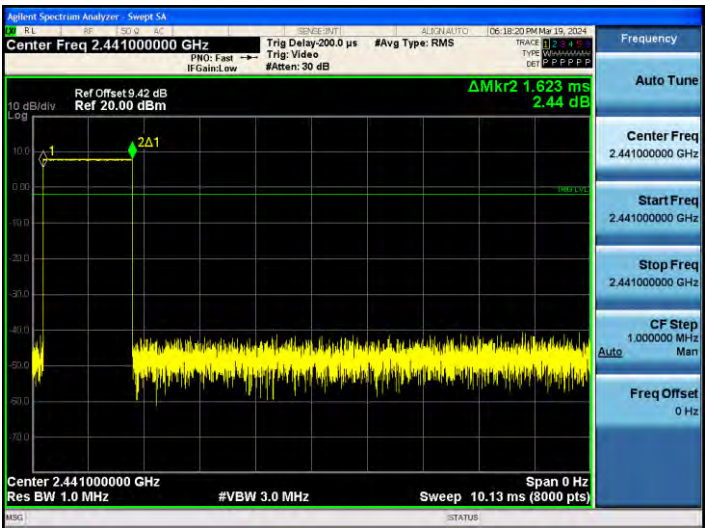


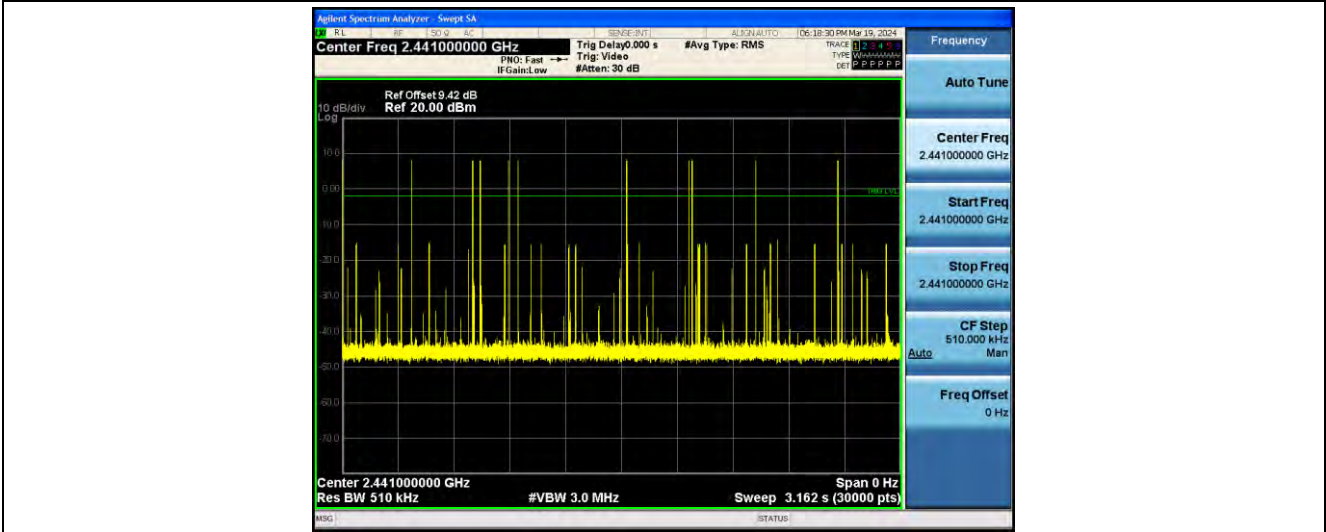


DH5_Ant1_Hop

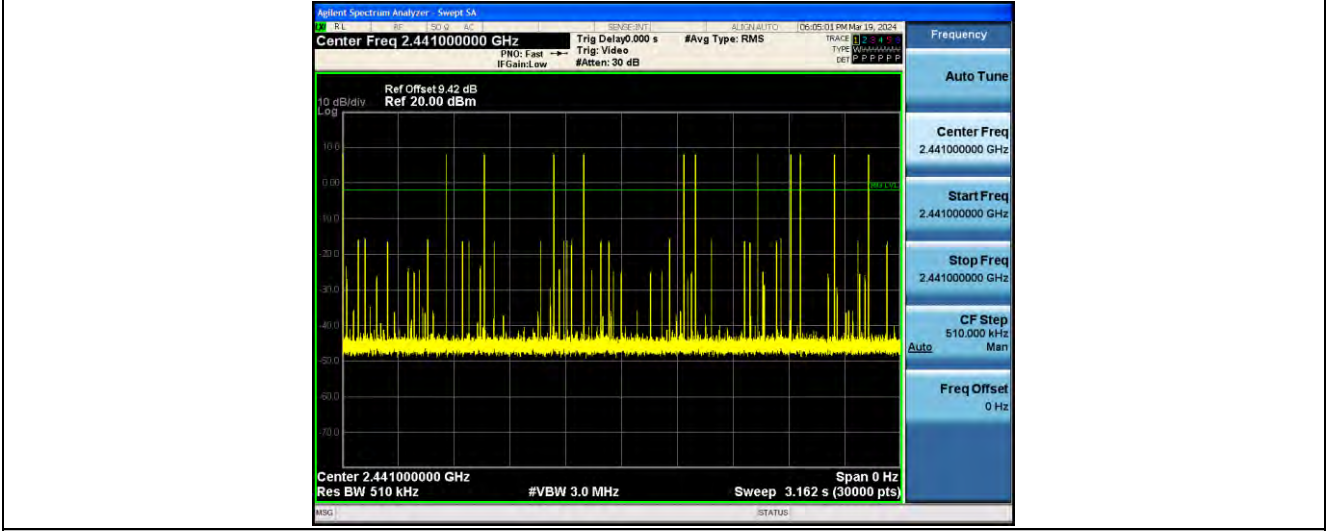
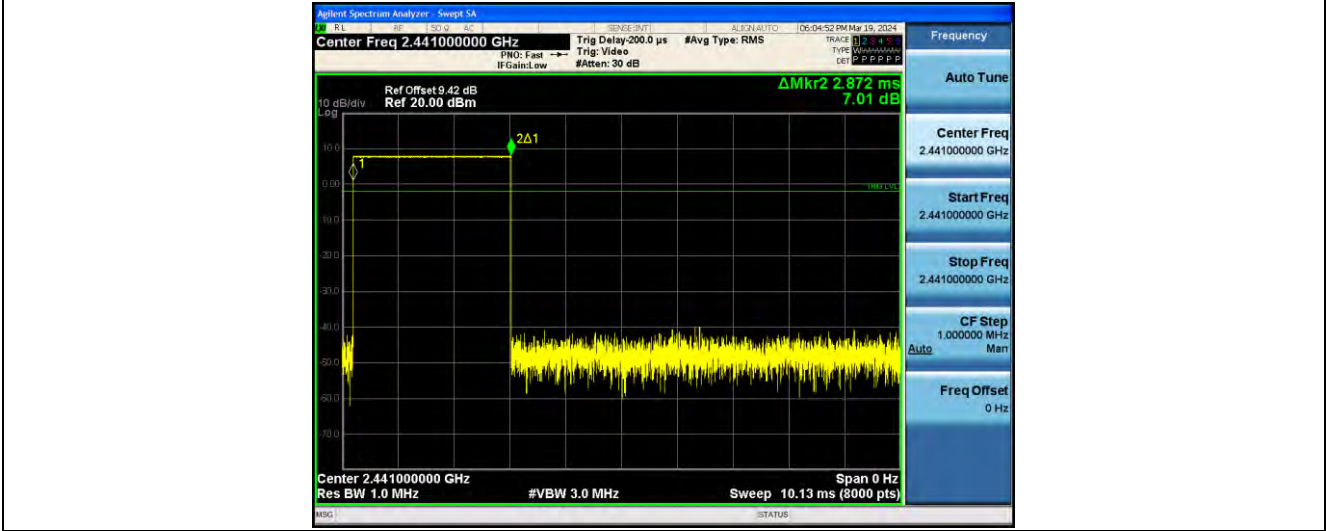


2DH1_Ant1_Hop

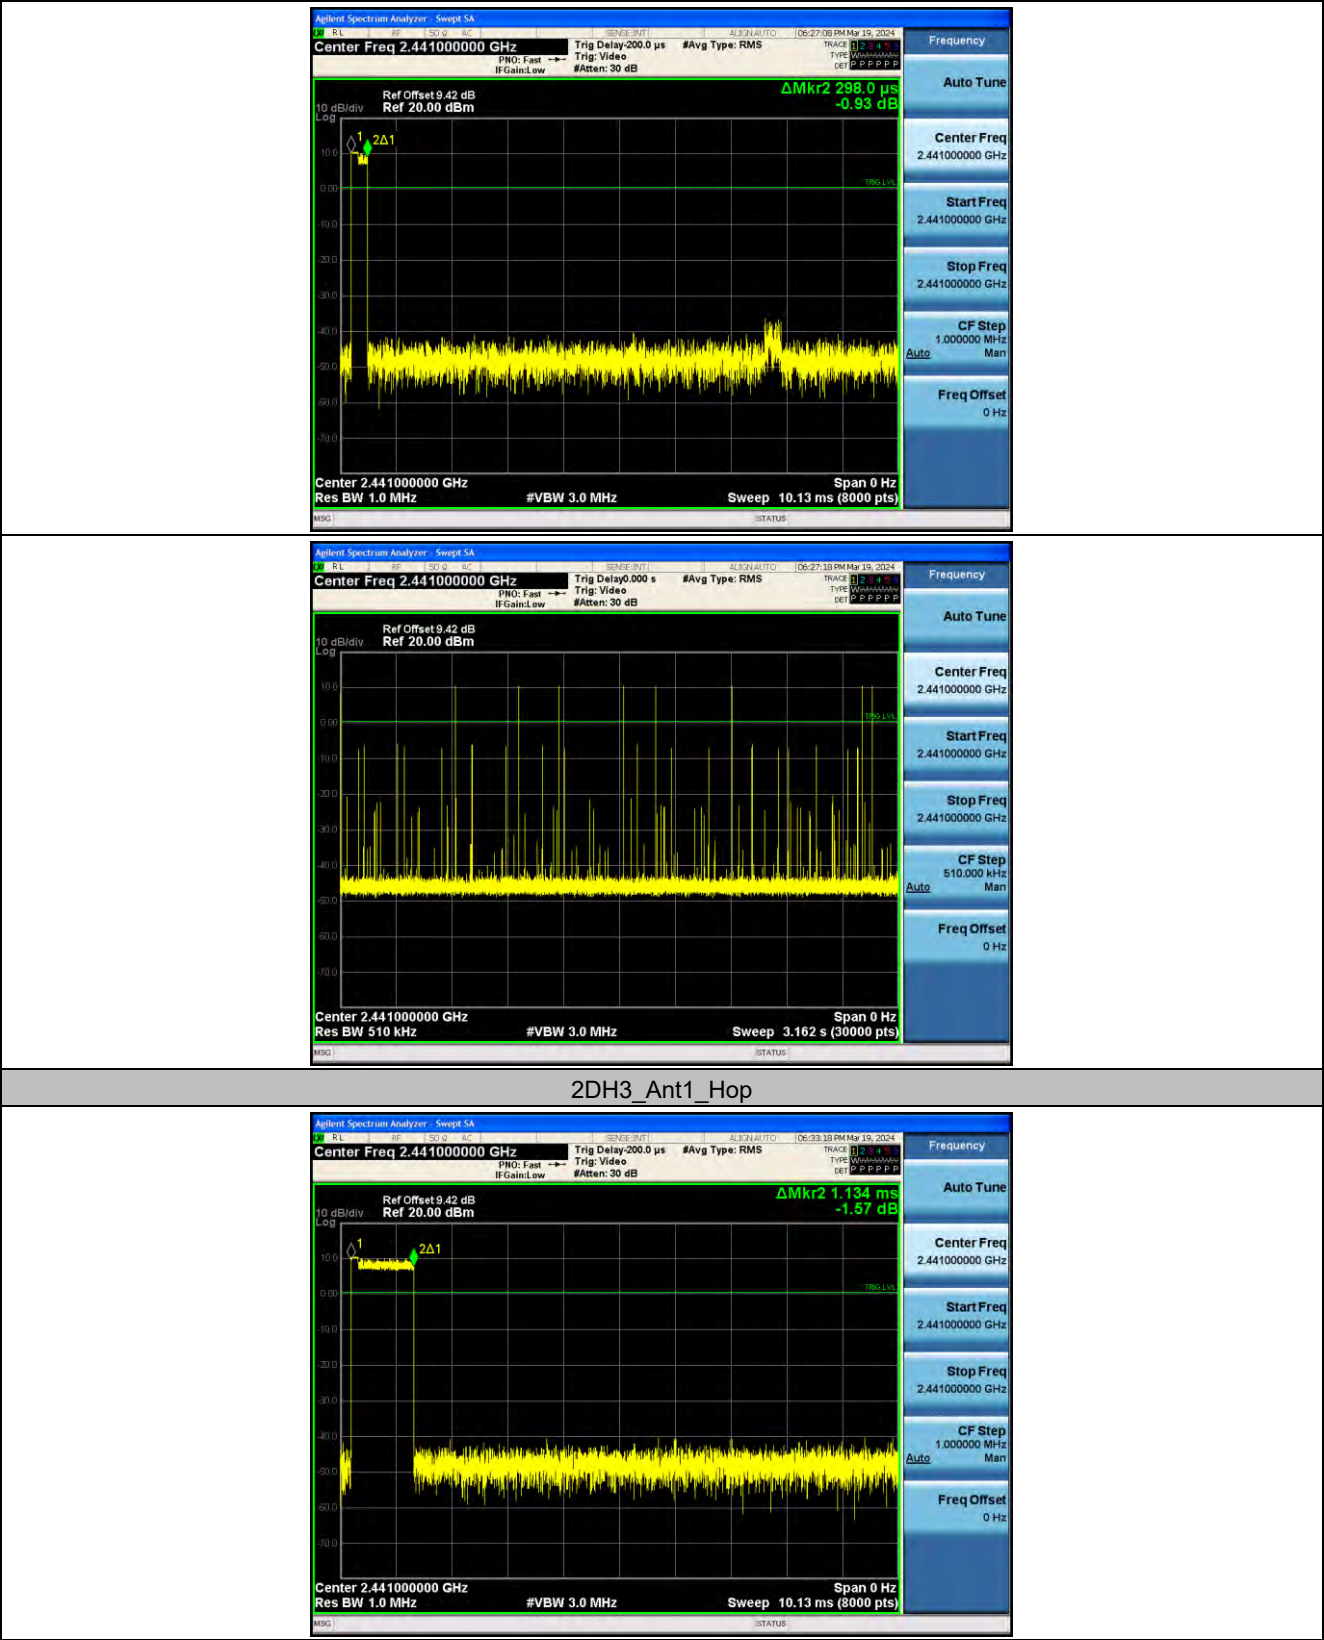


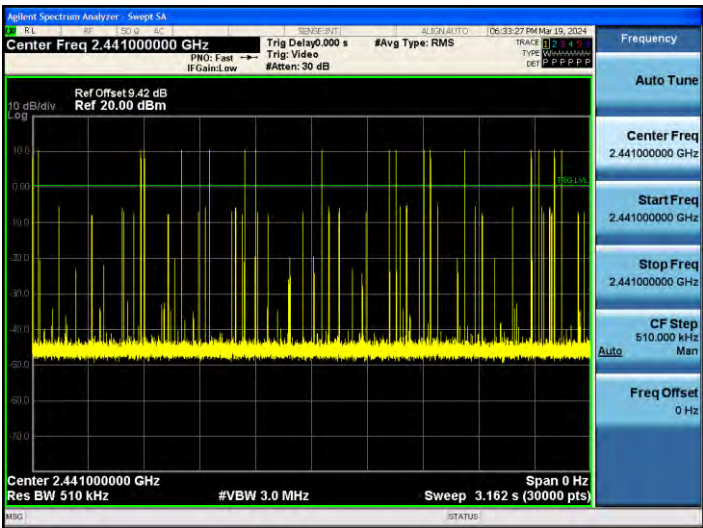


2DH5_Ant1_Hop

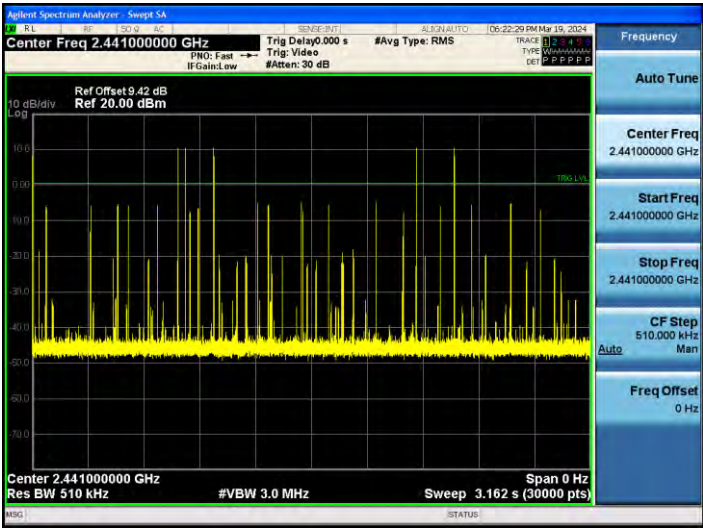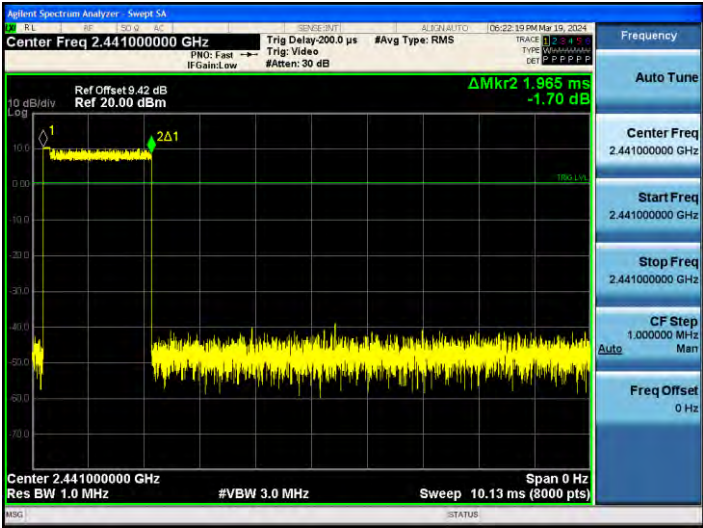

3DH1_Ant1_Hop

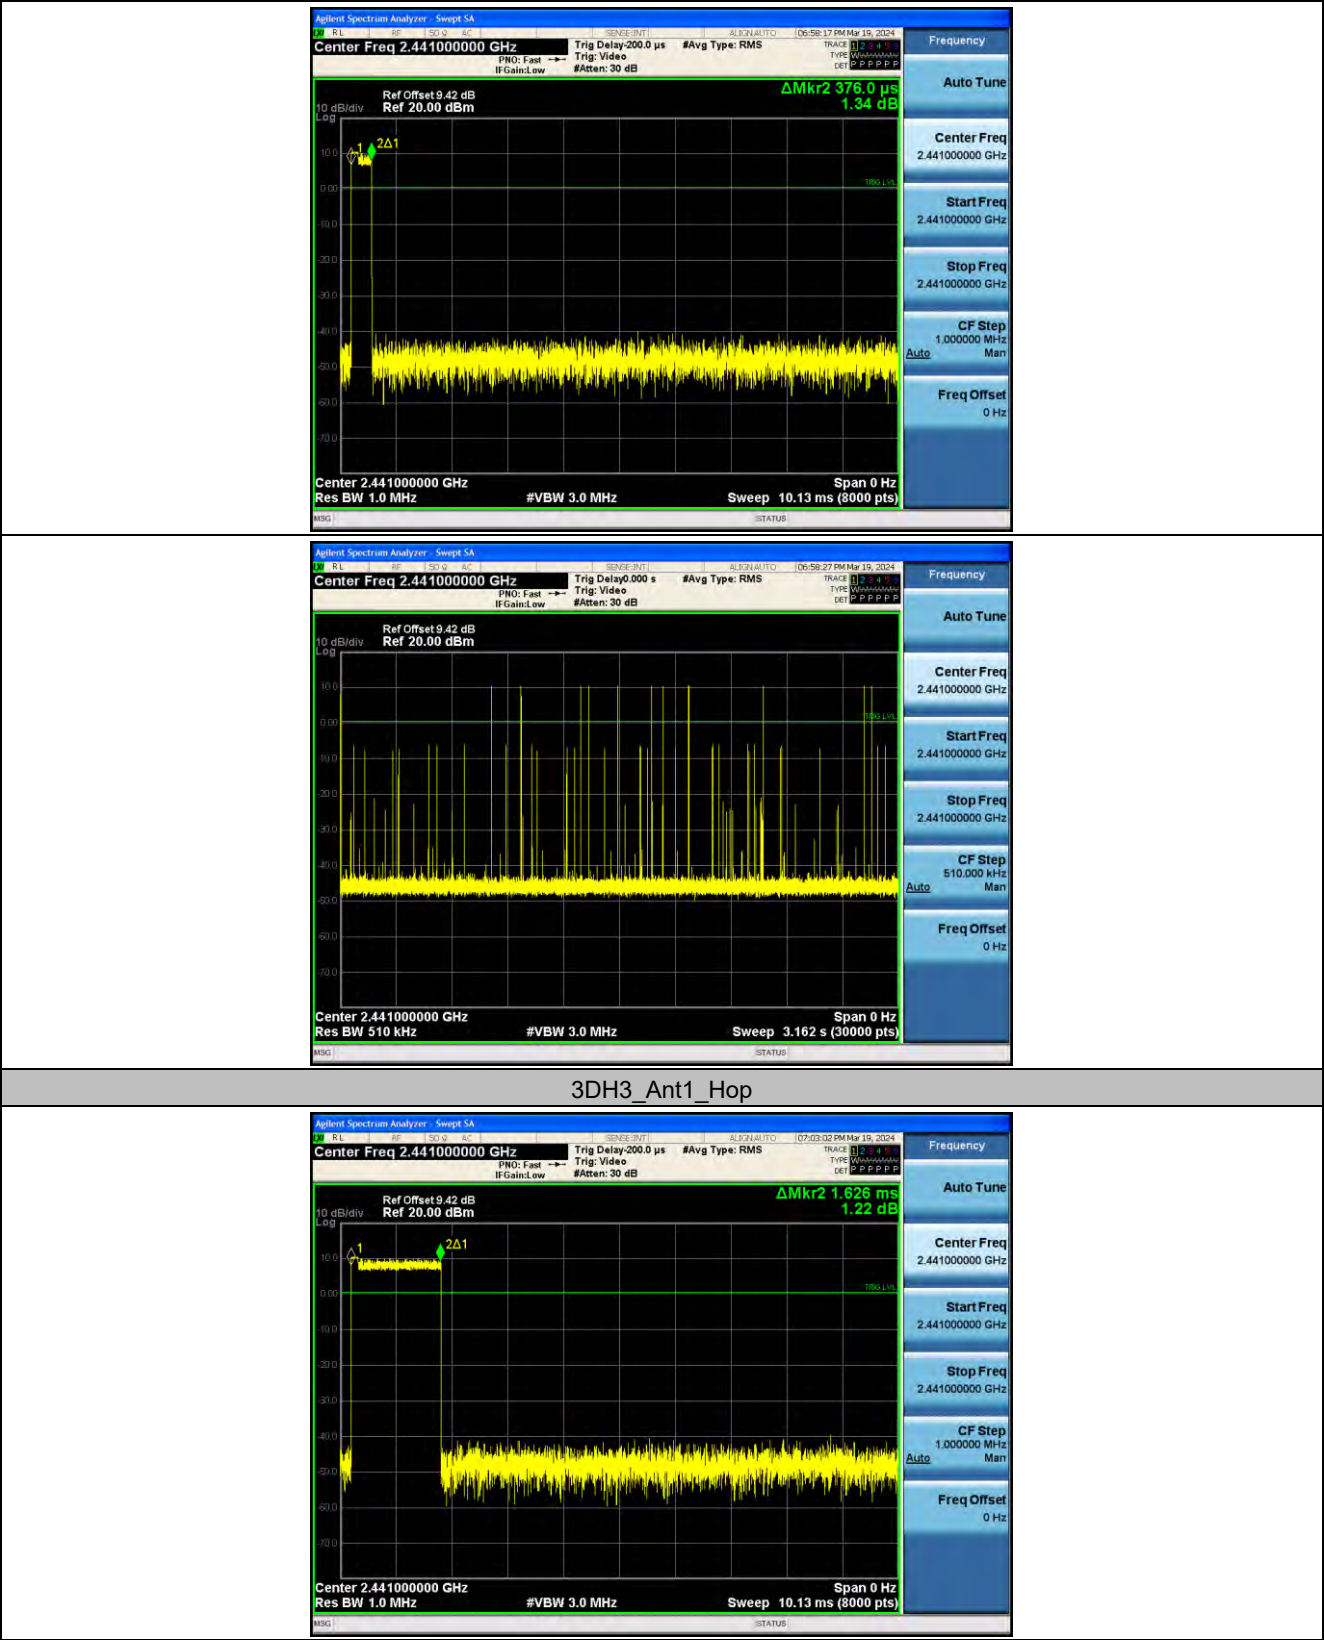

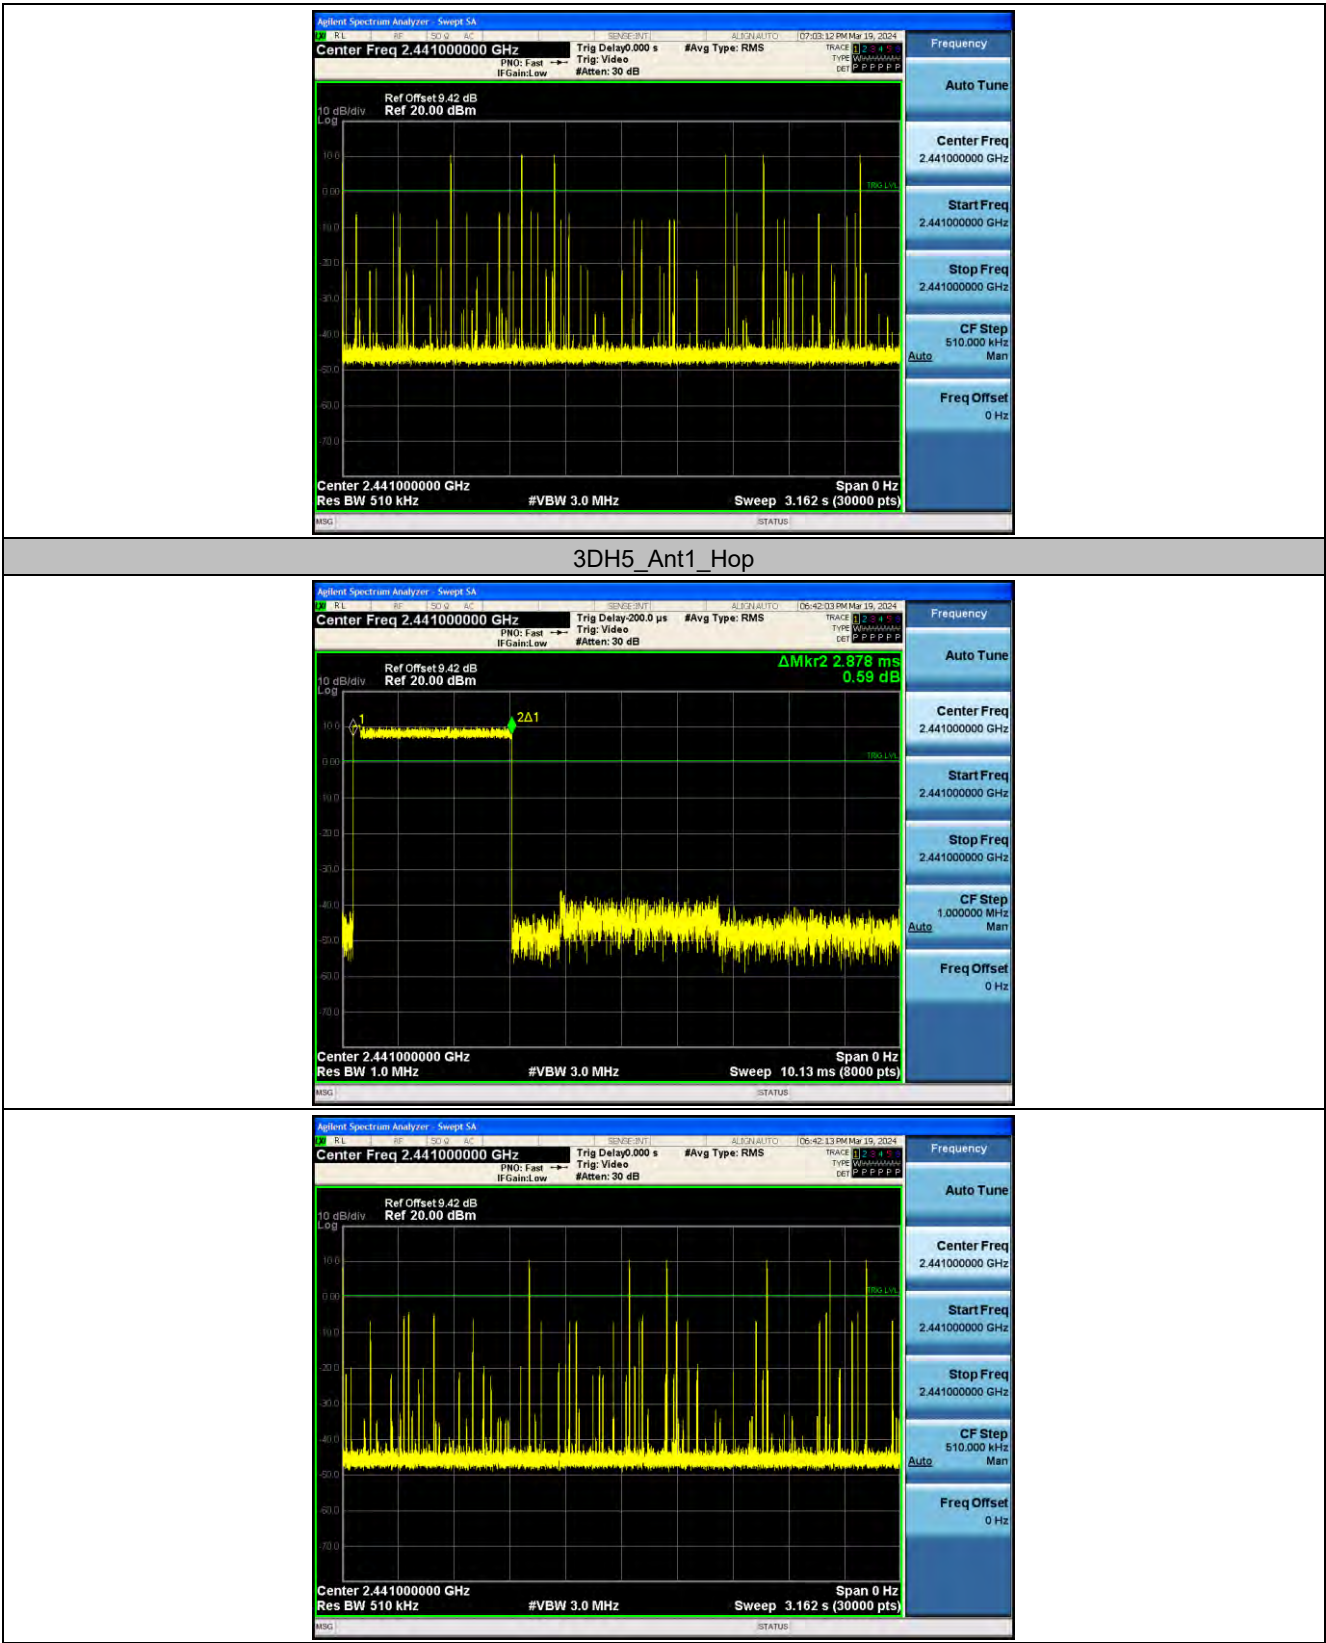



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001


Page: 90 of 106

10.6 Appendix F: Number of hopping channels

10.6.1 Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

10.6.2 Test Graphs

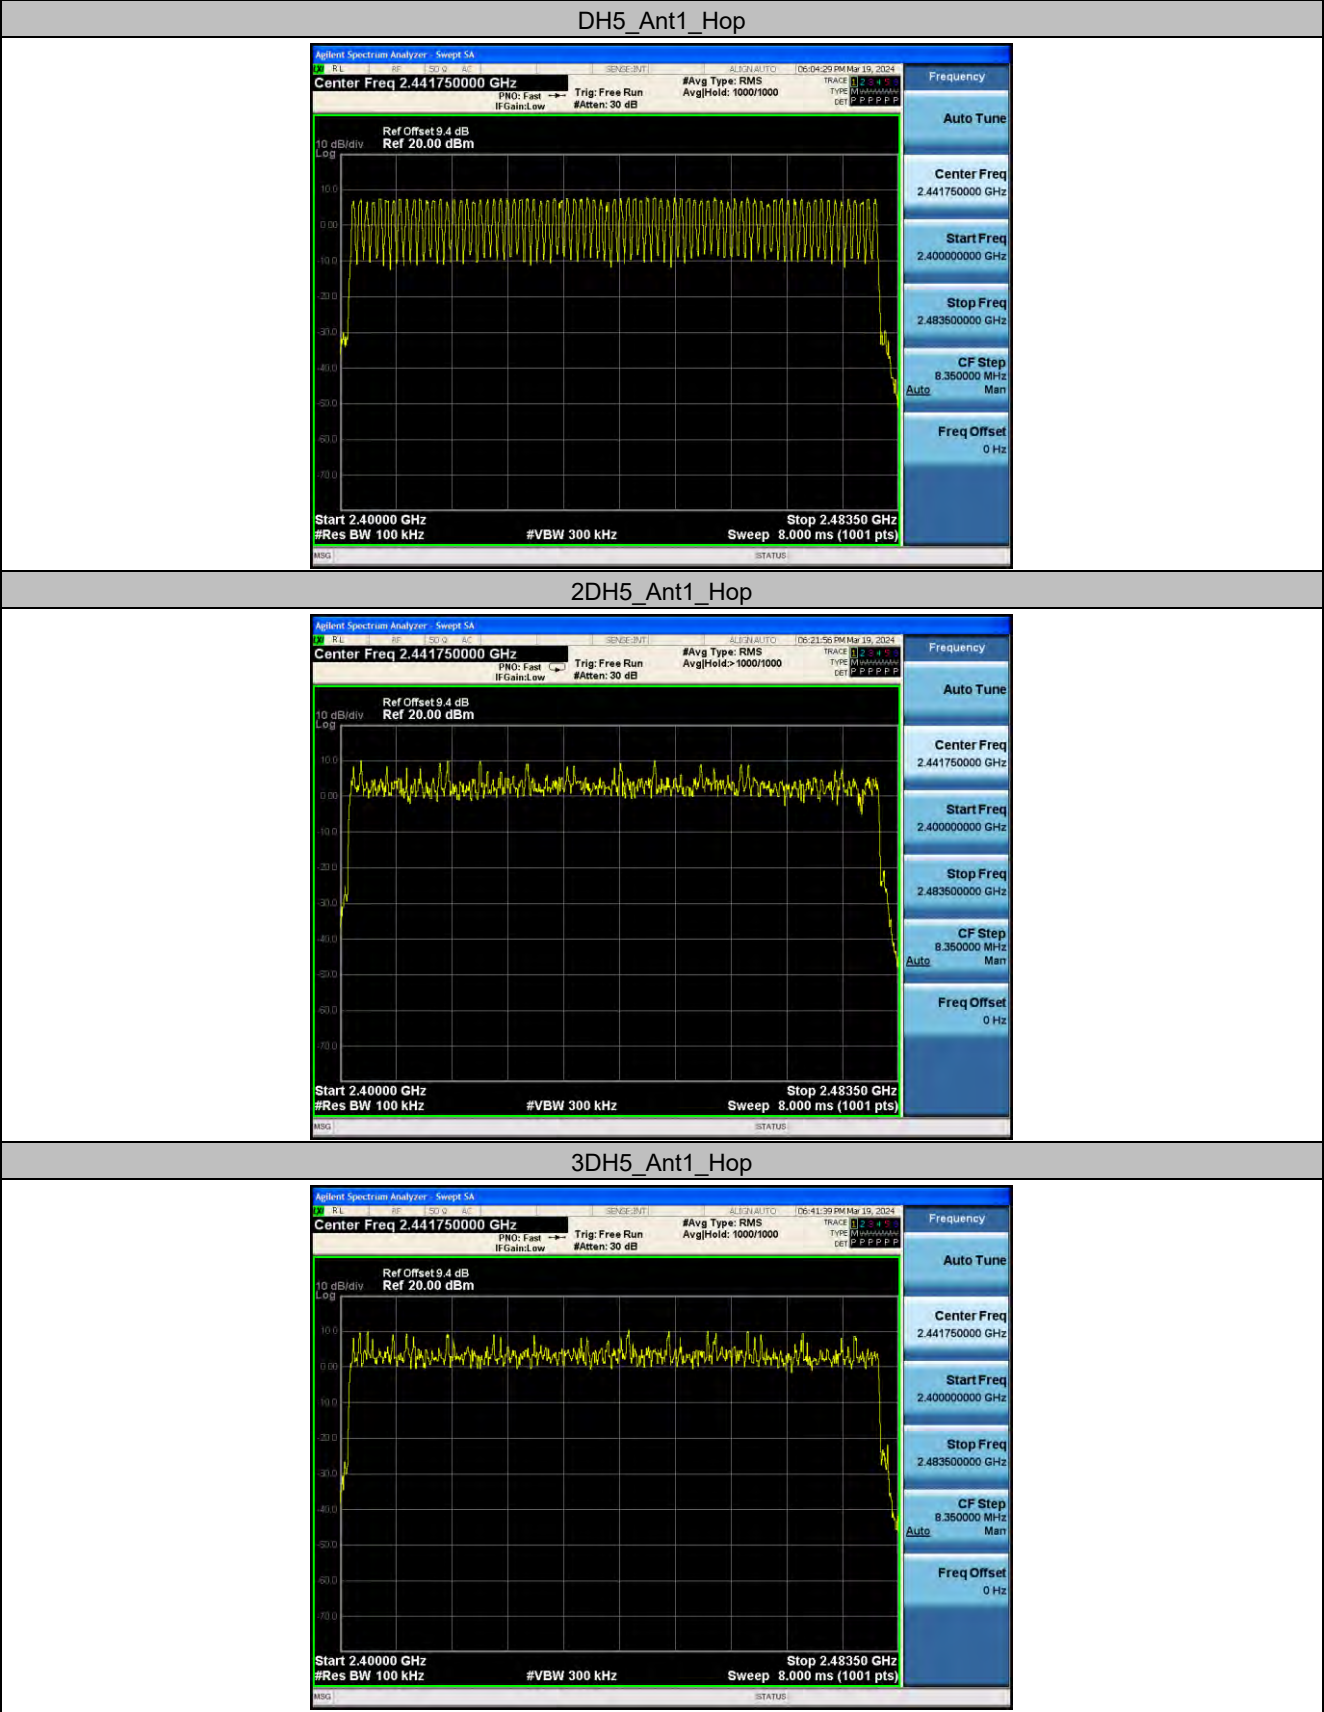



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240100007001

Page: 92 of 106


10.7 Appendix G: Band edge measurements

10.7.1 Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	7.38	-34.96	≤ -12.62	PASS
		High	2480	7.42	-45.38	≤ -12.58	PASS
		Low	Hop_2402	7.07	-49.14	≤ -12.93	PASS
		High	Hop_2480	7.35	-48.11	≤ -12.65	PASS
2DH5	Ant1	Low	2402	8.14	-31.12	≤ -11.86	PASS
		High	2480	9.85	-45.21	≤ -10.15	PASS
		Low	Hop_2402	4.18	-49.41	≤ -15.82	PASS
		High	Hop_2480	9.45	-47.45	≤ -10.56	PASS
3DH5	Ant1	Low	2402	8.41	-32.48	≤ -11.59	PASS
		High	2480	9.77	-44.18	≤ -10.23	PASS
		Low	Hop_2402	5.30	-48.73	≤ -14.7	PASS
		High	Hop_2480	9.28	-48.05	≤ -10.73	PASS

10.7.2 Test Graphs


DH5_Ant1_Low_2402

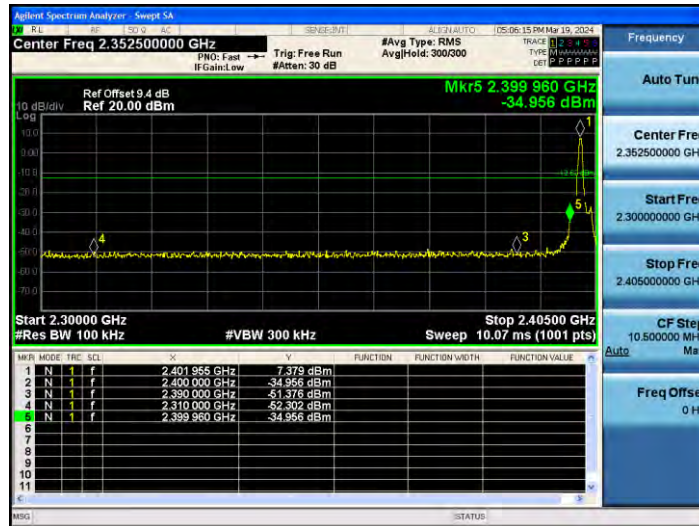


DH5_Ant1_High_2480

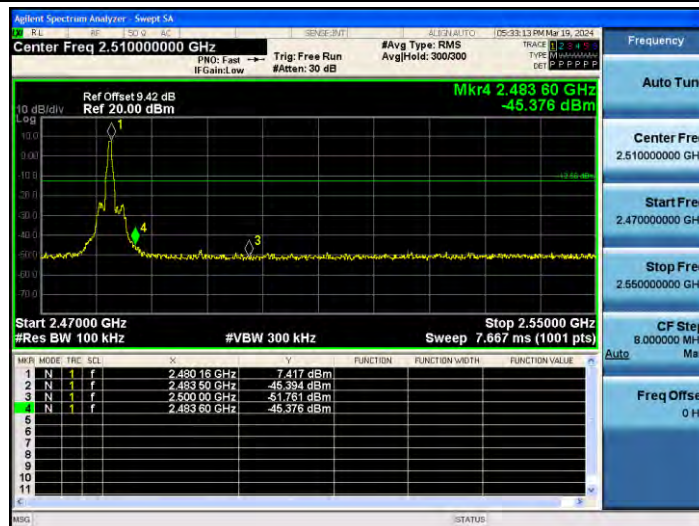


DH5_Ant1_Low_Hop_2402

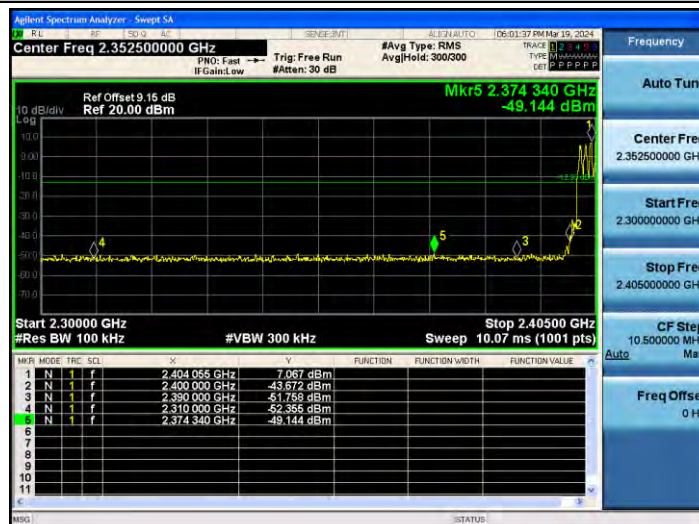


DH5_Ant1_High_Hop_2480

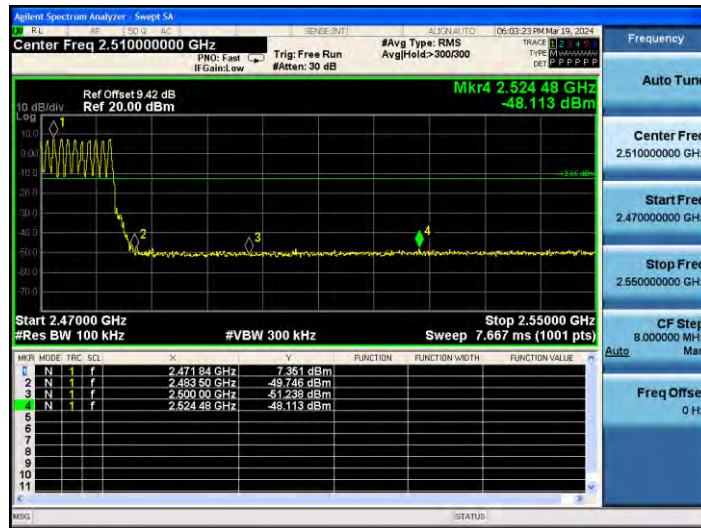


2DH5_Ant1_Low_2402

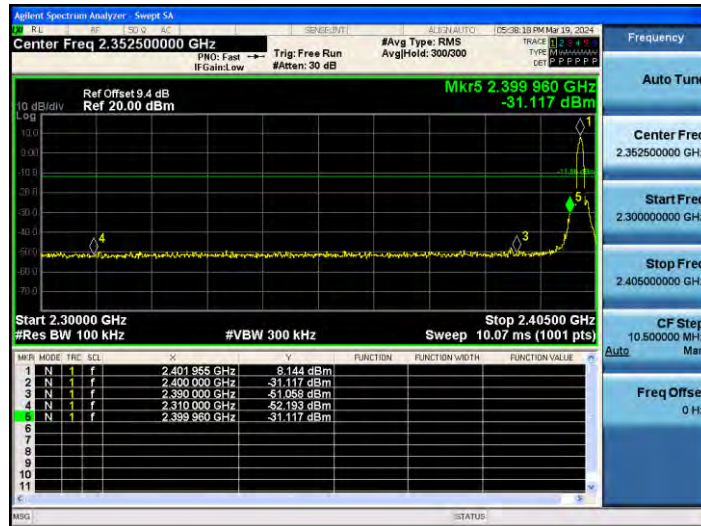


2DH5_Ant1_High_2480

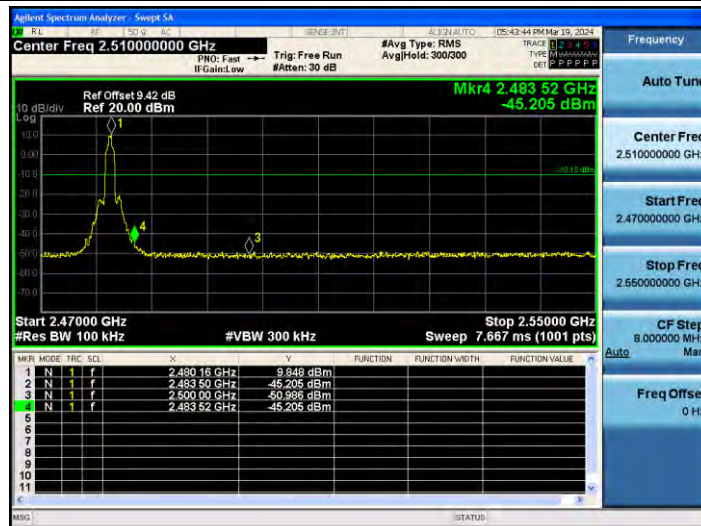


2DH5_Ant1_Low_Hop_2402

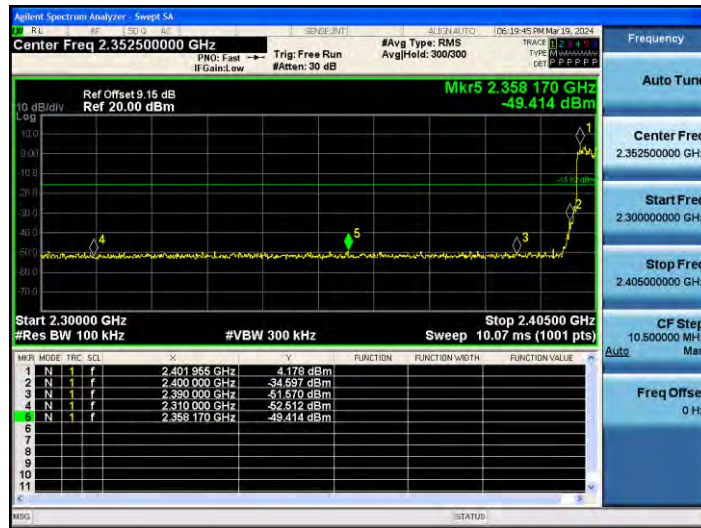


2DH5_Ant1_High_Hop_2480

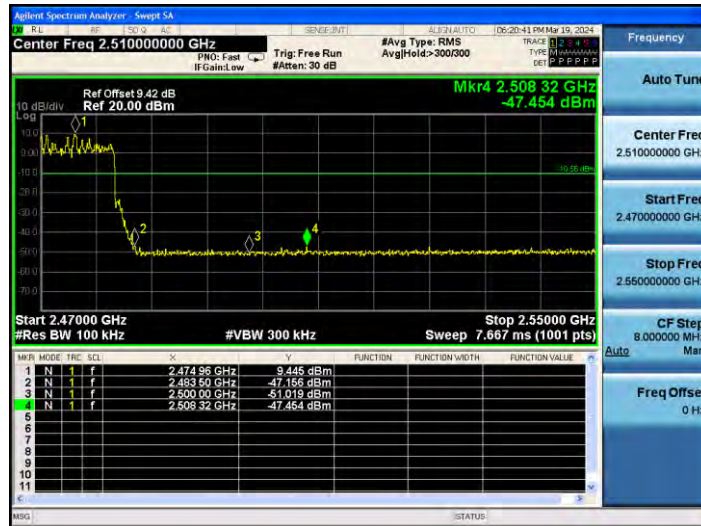


3DH5_Ant1_Low_2402

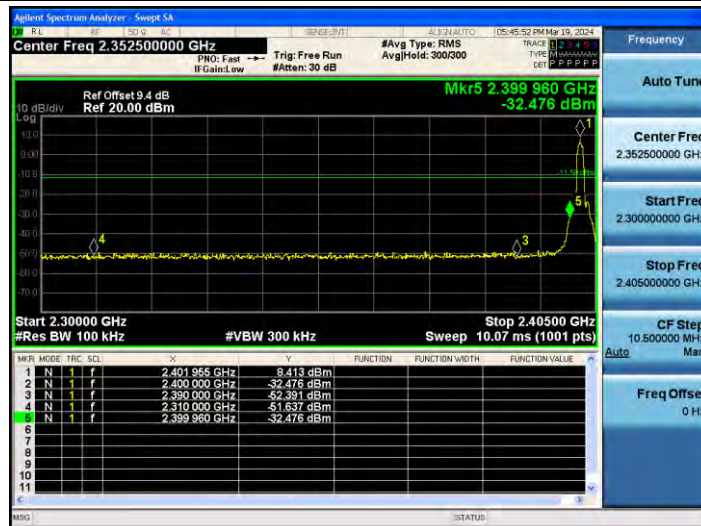


3DH5_Ant1_High_2480

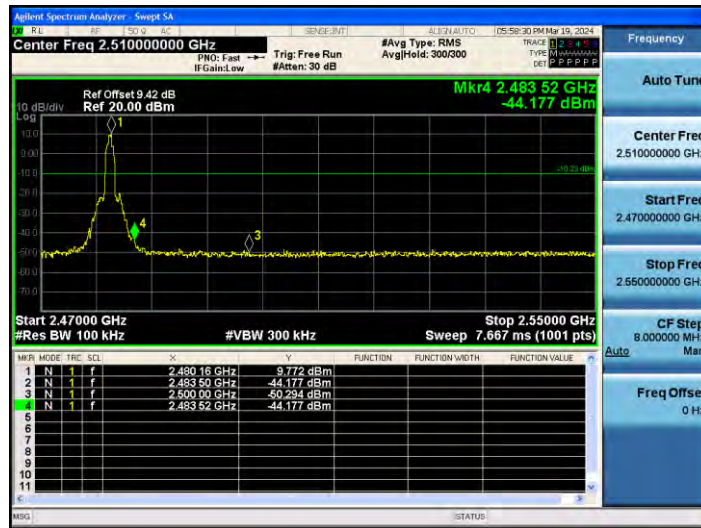

3DH5_Ant1_Low_Hop_2402

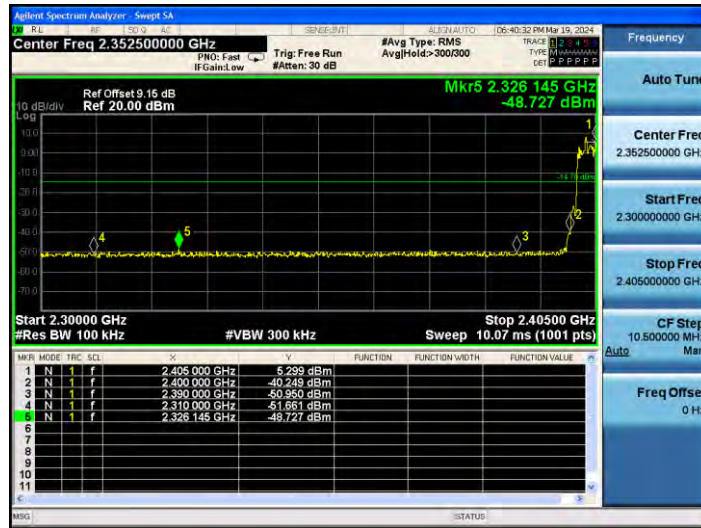

3DH5_Ant1_High_Hop_2480

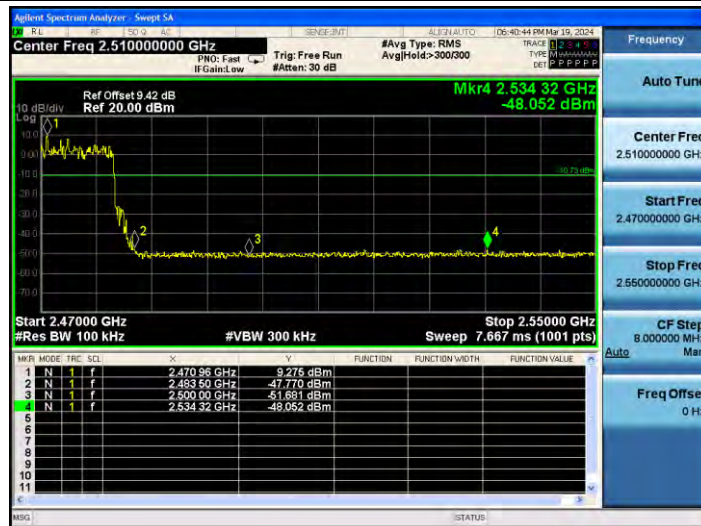

10.8 Appendix H: Conducted Spurious Emission

10.8.1 Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	5.27	5.27	---	PASS
			30~1000	5.27	-45.66	≤-14.73	PASS
			1000~26500	5.27	-42.3	≤-14.73	PASS
		2441	Reference	7.27	7.27	---	PASS
			30~1000	7.27	-59.52	≤-12.73	PASS
			1000~26500	7.27	-41.41	≤-12.73	PASS
		2480	Reference	6.66	6.66	---	PASS
			30~1000	6.66	-60.02	≤-13.34	PASS
			1000~26500	6.66	-42.3	≤-13.34	PASS
2DH5	Ant1	2402	Reference	9.58	9.58	---	PASS
			30~1000	9.58	-59.86	≤-10.42	PASS
			1000~26500	9.58	-41.7	≤-10.42	PASS
		2441	Reference	5.19	5.19	---	PASS
			30~1000	5.19	-59.92	≤-14.81	PASS
			1000~26500	5.19	-42.18	≤-14.81	PASS
		2480	Reference	4.79	4.79	---	PASS
			30~1000	4.79	-60.2	≤-15.21	PASS
			1000~26500	4.79	-41.78	≤-15.21	PASS
3DH5	Ant1	2402	Reference	6.29	6.29	---	PASS
			30~1000	6.29	-61.06	≤-13.71	PASS
			1000~26500	6.29	-41.26	≤-13.71	PASS
		2441	Reference	9.78	9.78	---	PASS
			30~1000	9.78	-60.45	≤-10.22	PASS
			1000~26500	9.78	-41.78	≤-10.22	PASS
		2480	Reference	5.02	5.02	---	PASS
			30~1000	5.02	-61.08	≤-14.98	PASS
			1000~26500	5.02	-42.04	≤-14.98	PASS

10.8.2 Test Graphs


DH5_Ant1_2402_0~Reference



DH5_Ant1_2402_30~1000

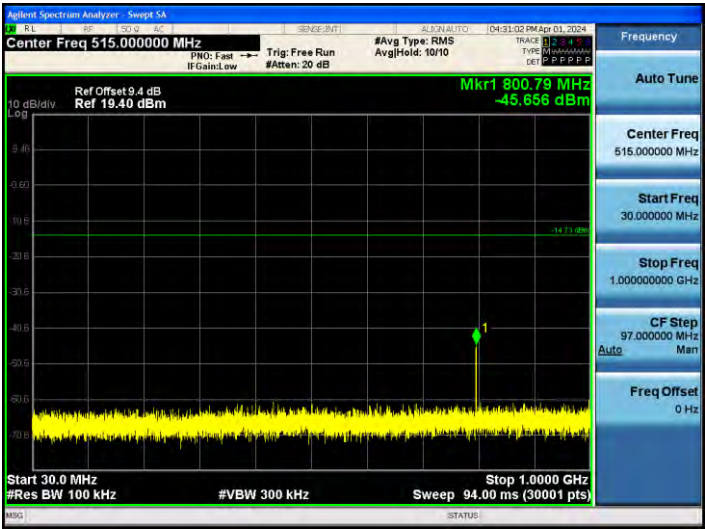


DH5_Ant1_2402_1000~26500

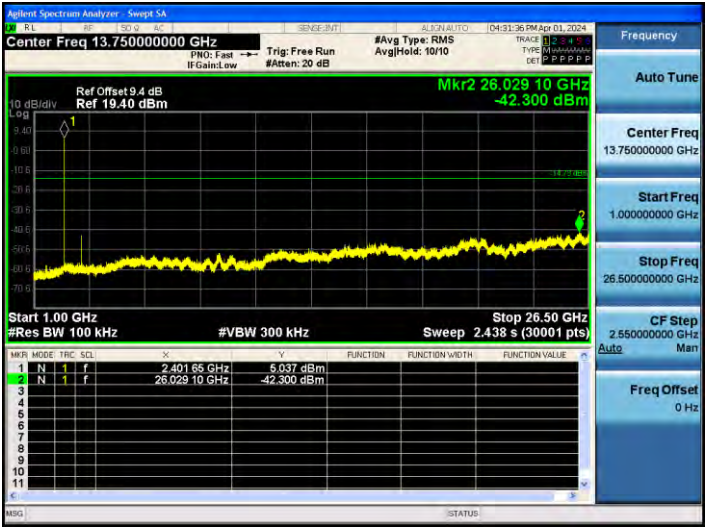


DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000

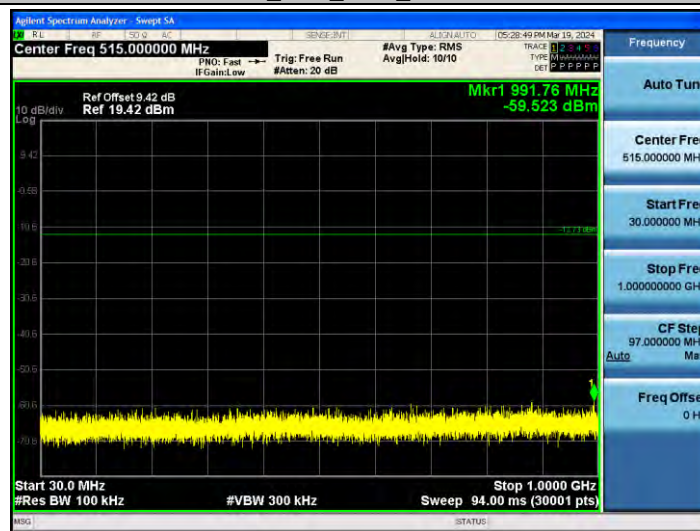


DH5_Ant1_2441_1000~26500

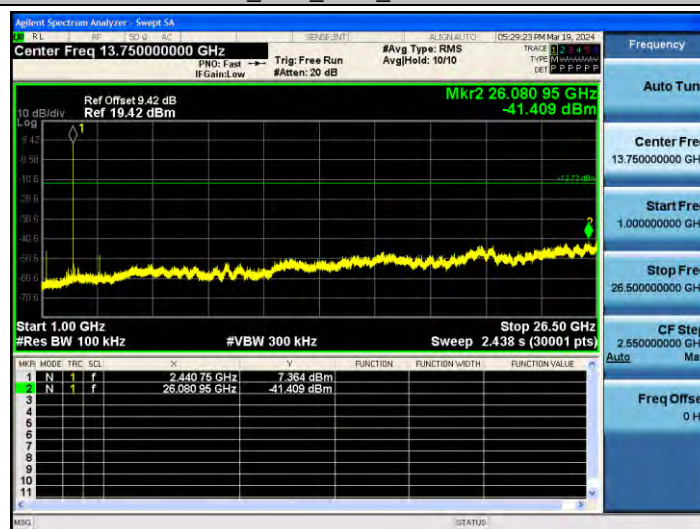


DH5_Ant1_2480_0~Reference



DH5_Ant1_2480_30~1000

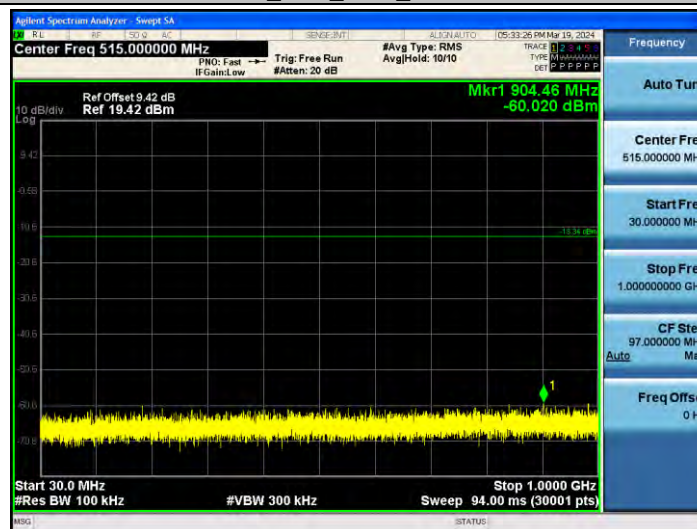


DH5_Ant1_2480_1000~26500

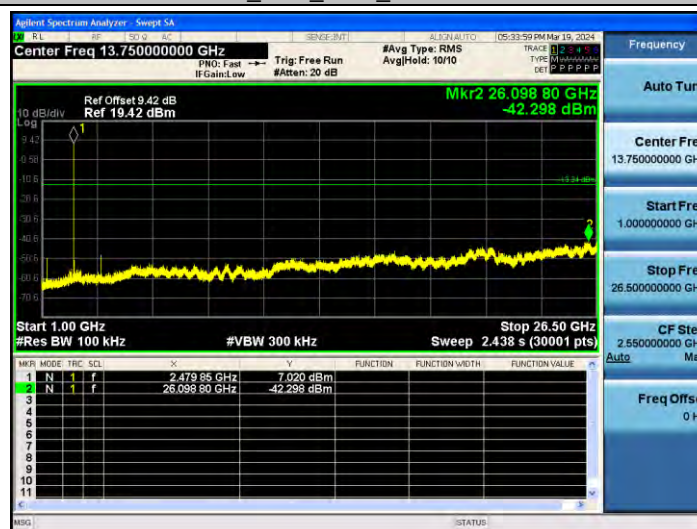


2DH5_Ant1_2402_0~Reference



2DH5_Ant1_2402_30~1000

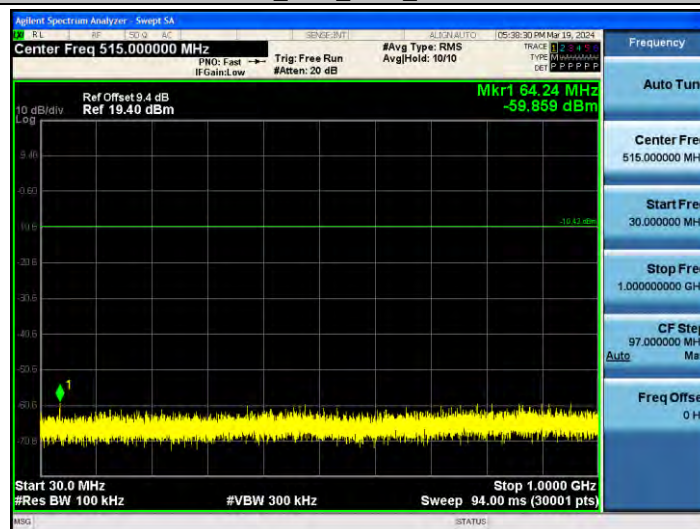


2DH5_Ant1_2402_1000~26500

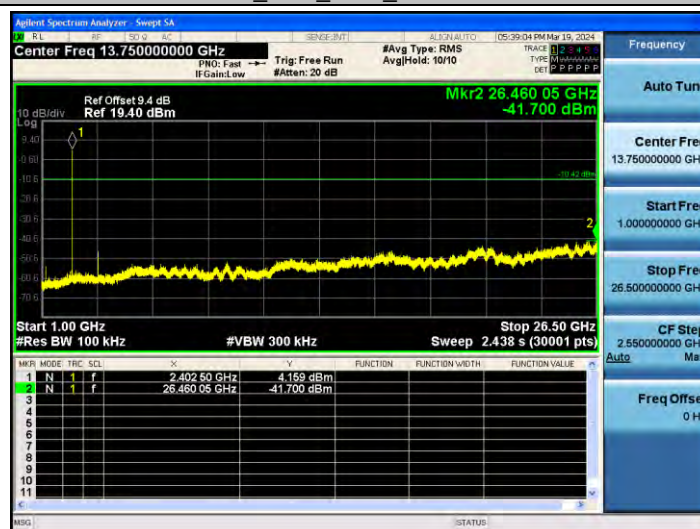


2DH5_Ant1_2441_0~Reference



2DH5_Ant1_2441_30~1000

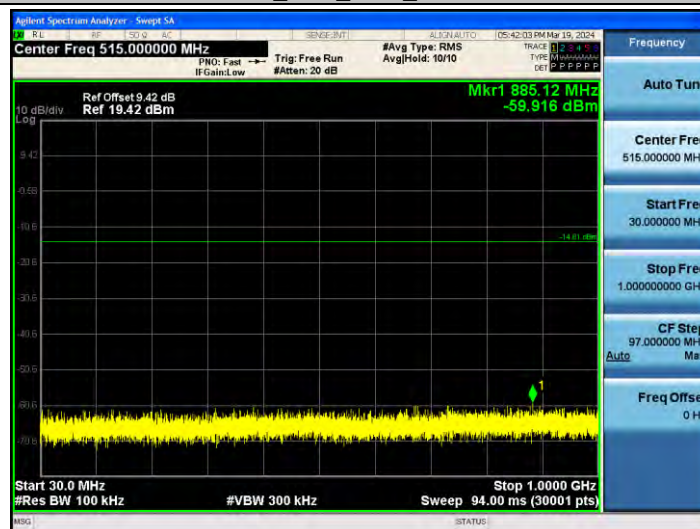


2DH5_Ant1_2441_1000~26500

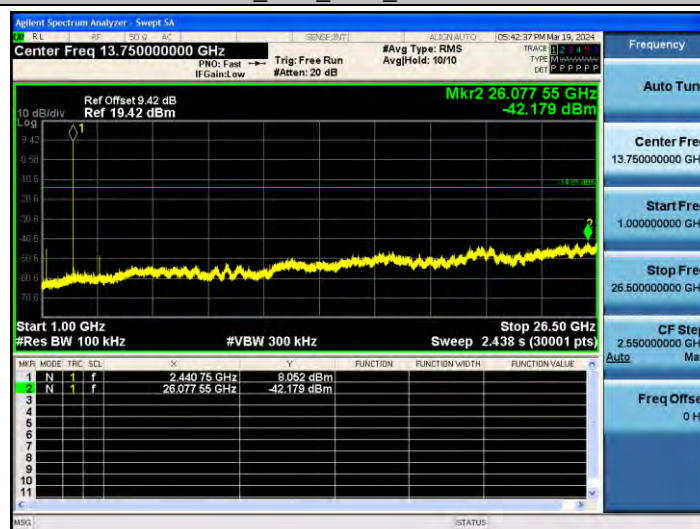


2DH5_Ant1_2480_0~Reference



2DH5_Ant1_2480_30~1000

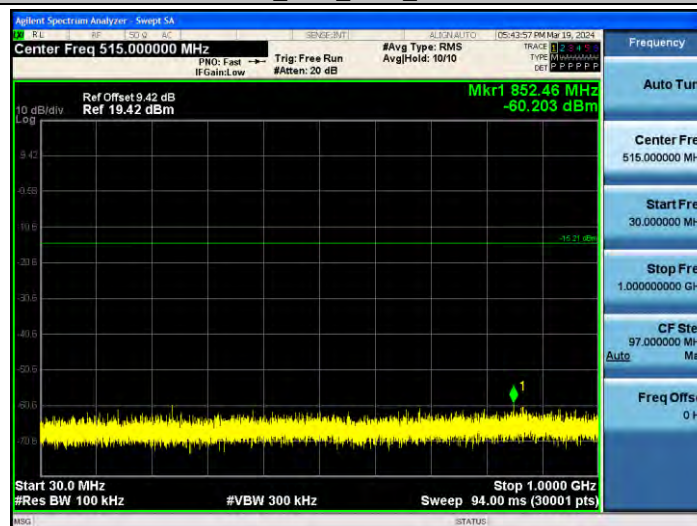


2DH5_Ant1_2480_1000~26500

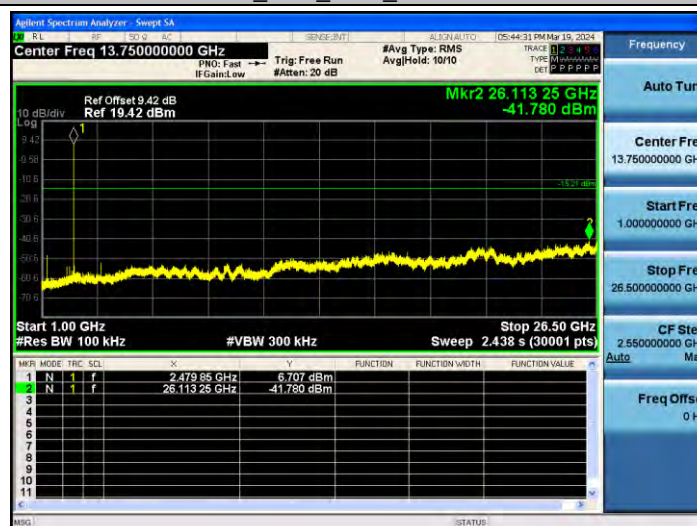


3DH5_Ant1_2402_0~Reference



3DH5_Ant1_2402_30~1000

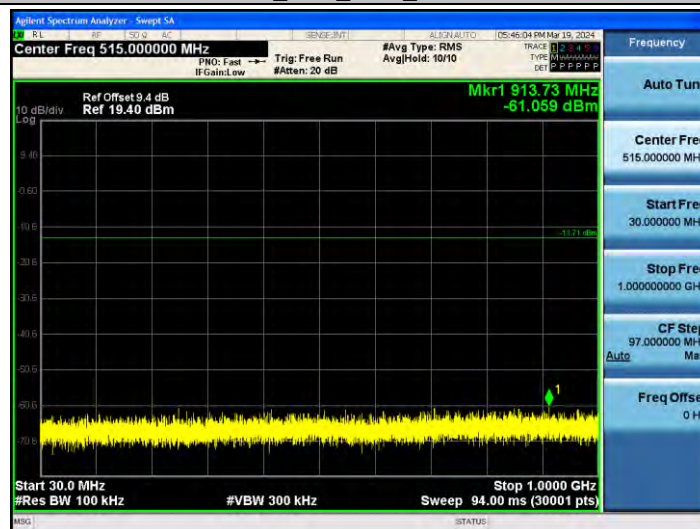


3DH5_Ant1_2402_1000~26500

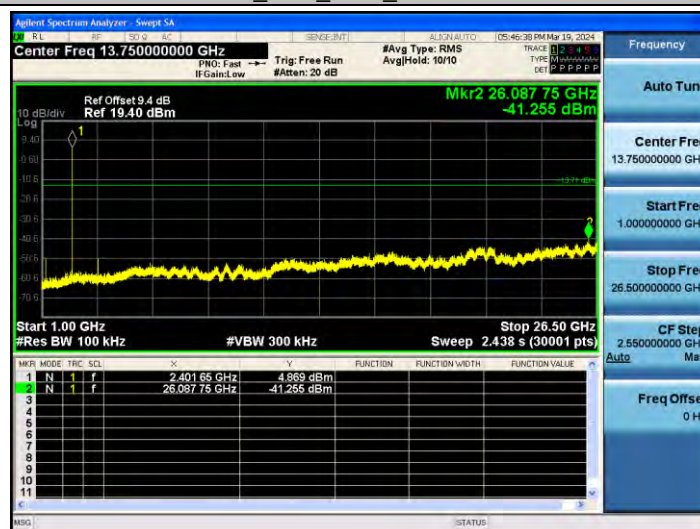


3DH5_Ant1_2441_0~Reference



3DH5_Ant1_2441_30~1000

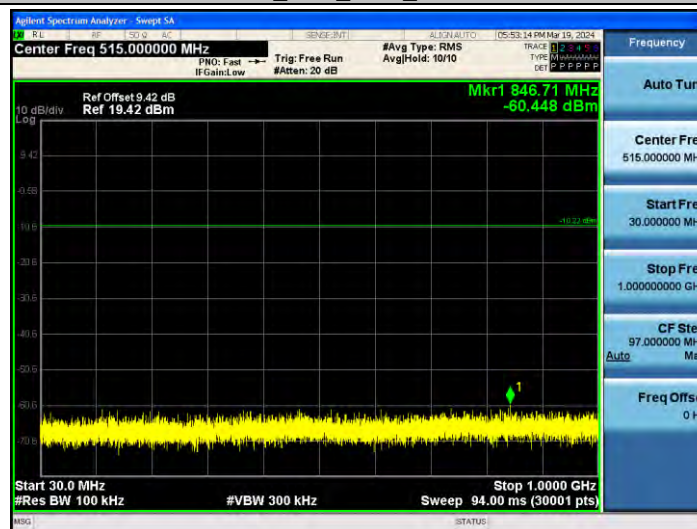

3DH5_Ant1_2441_1000~26500

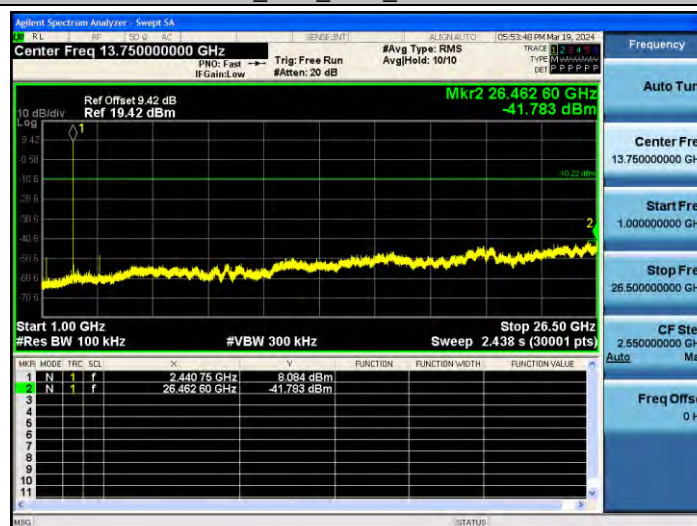

3DH5_Ant1_2480_0~Reference

