



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

Report Reference No.: CTA23122900708

FCC ID: 2BEW5-TAB18

Compiled by
(position+printed name+signature)...: File administrators Zoey Cao

Zoey Cao

Supervised by
(position+printed name+signature)...: Project Engineer Amy Wen



Approved by
(position+printed name+signature)...: RF Manager Eric Wang

Eric Wang

Date of issue.....: Jan. 25, 2024

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Shenzhen Viquee Technology Co.,Ltd

Address.....: B808 GuangHong Center PingHu Street, ShenZhen China

Test specification.....:

Standard: IEC 62209-2:2010; IEEE 1528:2013; FCC 47 CFR Part 2.1093;
ANSI/IEEE C95.1:2005; Reference FCC KDB 447498;
KDB 248227; KDB 616217; KDB 941225; KDB 865664

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Tablet

Trade Mark.....: N/A

Manufacturer.....: Shenzhen Viquee Technology Co.,Ltd

Model/Type reference.....: TAB18

Listed Models: TAB16, TAB 14PRO, TAB 13PRO, TAB 15, TAB 15PRO, TAB14,

Rating: DC 3.85V From battery and DC 5.0V From external circuit

Result.....: PASS

TEST REPORT

Equipment under Test : Tablet

Model /Type : TAB18

Listed Models : TAB16, TAB 14PRO, TAB 13PRO, TAB 15, TAB 15PRO, TAB14, TAB13, TAB12, TAB12 PRO, TAB 20, TAB**(=0-9, A-Z, a-z, -, +)

Applicant : **Shenzhen Viquee Technology Co.,Ltd**

Address : B808 GuangHong Center PingHu Street, ShenZhen China

Manufacturer : **Shenzhen Viquee Technology Co.,Ltd**

Address : B808 GuangHong Center PingHu Street, ShenZhen China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	Statement of Compliance	6
2	General Information.....	7
2.1	General Remarks	7
2.2	Description of Equipment Under Test (EUT).....	7
2.3	Device Category and SAR Limits	8
2.4	Applied Standard.....	8
2.5	Test Facility.....	8
2.6	Environment of Test Site.....	8
2.7	Test Configuration.....	9
3	Specific Absorption Rate (SAR)	10
3.1	Introduction.....	10
3.2	SAR Definition	10
4	SAR Measurement System	11
4.1	E-Field Probe.....	11
4.2	Data Acquisition Electronics (DAE).....	12
4.3	Robot.....	13
4.4	Measurement Server	13
4.5	Phantom	13
4.6	Device Holder.....	14
4.7	Data Storage and Evaluation.....	15
5	Test Equipment List.....	18
6	Tissue Simulating Liquids.....	19
7	System Verification Procedures	21
8	EUT Testing Position.....	23
8.1	Body-Supported Device Configurations.....	23
9	Measurement Procedures	24
9.1	Spatial Peak SAR Evaluation	24
9.2	Power Reference Measurement.....	24
9.3	Area Scan Procedures	25
9.4	Zoom Scan Procedures.....	25
9.5	Volume Scan Procedures	26
9.6	Power Drift Monitoring	26
10	TEST CONDITIONS AND RESULTS.....	27
10.1	Conducted Power	27
10.2	Transmit Antennas and SAR Measurement Position	35
10.3	Standalone SAR Test Exclusion Considerations	36
10.4	Estimated SAR	38
10.5	SAR Test Results.....	39
10.6	SAR Measurement Variability	45
10.7	Simultaneous Transmission Analysis.....	47
11	Measurement Uncertainty	48

Appendix A.	EUT Photos and Test Setup Photos.....	50
Appendix B.	Plots of SAR System Check	51
Appendix C.	Plots of SAR Test Data.....	56
Appendix D.	DASY System Calibration Certificate.....	62

Version

Version No.	Date	Description
R00	Jan. 25, 2024	Original

1 Statement of Compliance

<Highest SAR Summary>

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013. The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

<Highest SAR Summary>

Frequency Band	Highest Reported 1g-SAR(W/Kg)	Simultaneous Reported SAR (W/Kg)
	Body (0mm)	
LTE Band 40A	1.259	1.548
LTE Band 40B	1.291	
LTE Band 41 & 38	1.152	
WLAN2.4G	0.257	
WLAN5.2G	0.244	
WLAN5.8G	0.256	
SAR Test Limit (W/Kg)	1.60	
Test Result	PASS	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

2 General Information

2.1 General Remarks

Date of receipt of test sample	:	Dec. 07, 2023
Testing commenced on	:	Dec. 07, 2023
Testing concluded on	:	Jan. 25, 2024

2.2 Description of Equipment Under Test (EUT)

Product Name	:	Tablet
Model No.	:	TAB18
Listed Models	:	TAB16, TAB 14PRO, TAB 13PRO, TAB 15, TAB 15PRO, TAB14, TAB13, TAB12, TAB12 PRO, TAB 20, TAB**(=*0-9, A-Z, a-z, -, +)
Trade Mark	:	N/A
Test Power Supply	:	DC 3.85V battery inside
Test Sample No.	:	CTA231229007-1#(Engineering Sample)
Tx Frequency	:	SRD: BT:2402~2480MHz 2.4G WIFI: 2412~2462MHz 5.2G WIFI: 5180~5240MHz 5.8G WIFI: 5745-5825MHz LTE: FDD Band 38: TX: 2570~2620MHz FDD Band 40: TX: 2305~2315MHz&2350MHz~2360MHz FDD Band 41: TX: 2555 ~2655MHz
Type of Modulation	:	BT: GFSK, $\pi/4$ DQPSK, 8DPSK 2.4G WIFI: BPSK, QPSK, 16QAM, 64QAM LTE: QPSK, 16QAM
Category of device	:	Portable device
Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.		

2.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093:2013)
- ANSI/IEEE C95.1:2005
- IEEE Std 1528:2013
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- KDB 941225 D05 SAR for LTE Devices v02r05
- KDB 616217 D04 SAR for laptop and tablets v01r02

2.5 Test Facility

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27890 CAB identifier: CN0127

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

2.6 Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

2.7 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

3 Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4 SAR Measurement System

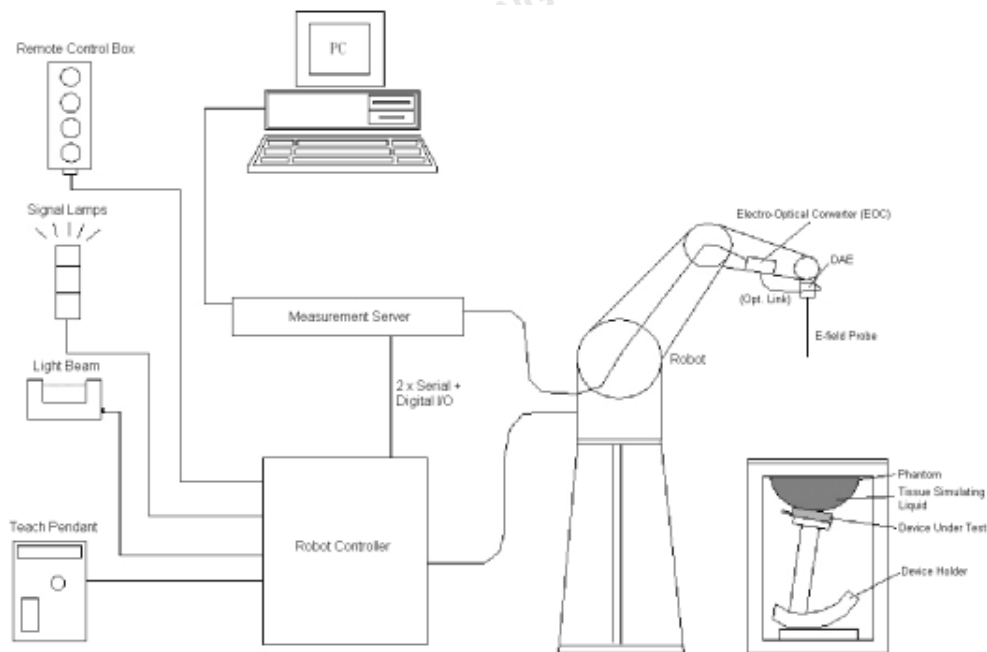

DASY System Configurations

The DASYS system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASYS software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

4.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface

detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Photo of DAE

4.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Photo of DASY5

4.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5

4.5 Phantom


<SAM Twin Phantom>

Shell Thickness	2 $\pm$ 0.2 mm; Center ear point: 6 $\pm$ 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm;	

Measurement Areas	Height: adjustable feet	 Photo of SAM Phantom
	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

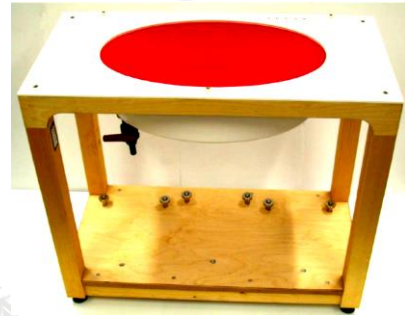Shell Thickness	2 ± 0.2 mm (sagging: <1%)	 Photo of ELI4 Phantom
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ±0.5mm would produce a SAR uncertainty of ± 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric

parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7 Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcpi

Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)

U_i = input signal of channel i, (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i, (i = x, y, z)

Norm_i= sensor sensitivity of channel i, (i = x, y, z), $\mu V/(V/m)^2$ for E-field Probes

ConvF= sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2300MHz System Validation Kit	D2300V2	1103	Feb. 16,2023	Feb. 15,2026
SPEAG	2450MHz System Validation Kit	D2450V2	745	Aug. 28,2023	Aug. 27,2026
SPEAG	2600MHz System Validation Kit	D2600V2	1073	Feb. 17,2023	Feb. 16,2026
SPEAG	5GHz System Validation Kit	D5GHzV2	1102	May. 19,2023	May. 18,2026
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMW500	1201.0002K50-104209-JC	Nov.05, 2023	Nov.04, 2024
SPEAG	Data Acquisition Electronics	DAE3	428	Aug.30,2023	Aug.29,2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7380	June 21,2023	June 20,2024
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Oct.25, 2023	Oct.24, 2024
SPEAG	DAK	DAK-3.5	1226	NCR	NCR
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
AR	Amplifier	ZHL-42W	QA1118004	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	Oct.25, 2023	Oct.24, 2024
Agilent	Power Sensor	N8481H	MY51240001	Oct.25, 2023	Oct.24, 2024
R&S	Spectrum Analyzer	N9020A	MY51170037	Oct.25, 2023	Oct.24, 2024
Agilent	Signal Generation	N5182A	MY48180656	Oct.25, 2023	Oct.24, 2024
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.25, 2023	Oct.24, 2024

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it

6 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of Liquid Height for Head SAR

Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	65.5	0	0	0	0	31.5	2.16	52.5

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
	ϵ_r	σ	ϵ_r	Dev. (%)	σ	Dev. (%)		
2300	39.5	1.67	38.434	-2.70%	1.673	0.19%	22.2	01/09/2024
2450	39.2	1.80	40.070	2.22%	1.759	-2.26%	22.7	01/11/2024
2600	39.0	1.96	38.337	-1.70%	1.964	0.21%	22.3	01/10/2024
5250	35.9	4.71	36.683	2.18%	4.648	-1.31%	22.3	01/12/2024
5750	35.4	5.22	36.158	2.14%	5.105	-2.21%	22.8	01/12/2024

7 System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

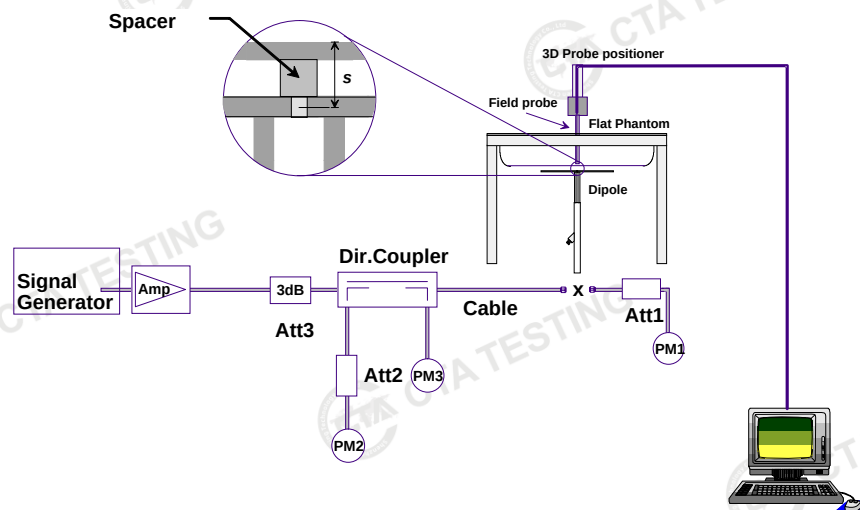

System Setup for System Evaluation

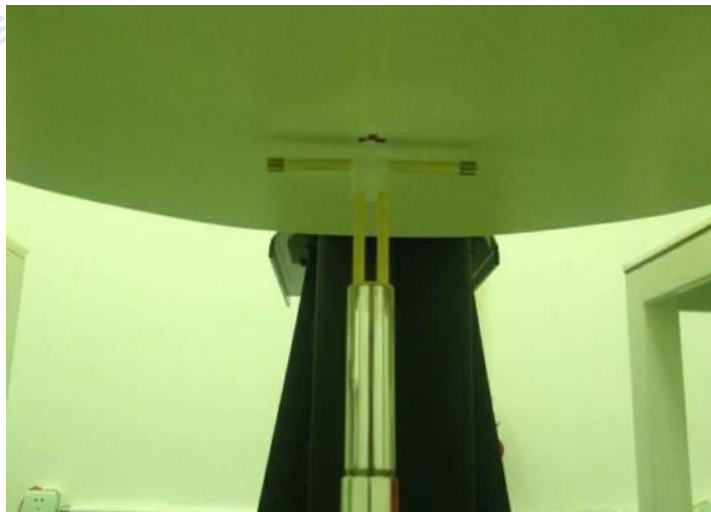


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR 1g (W/kg)	Measured SAR 1g (W/kg)	Normalized SAR (W/kg)	Deviation (%)
01/09/2024	2300	250	49.2	11.90	47.60	-3.25%
01/11/2024	2450	250	52.7	13.09	52.34	-0.68%
01/10/2024	2600	250	56.8	13.51	54.04	-4.86%
01/12/2024	5250	100	78.7	8.02	80.20	1.91%
01/12/2024	5750	100	77.3	7.99	79.90	3.36%

8 EUT Testing Position

8.1 Body-Supported Device Configurations

According to KDB 616217 section 4.3, SAR should be separately assessed with each surface and separation distance positioned against the flat phantom that correspond to the intended use as specified by the manufacturer. The antennas in tablets are typically located near the back (bottom) surface and/or along the edges of the devices; therefore, SAR evaluation is required for these configurations. Exposures from antennas through the front (top) surface of the display section of a full-size tablet, away from the edges, are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary, except for tablets that are designed to require continuous operations with the hand(s) next to the antenna(s).

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 0 mm.
- When each surface is measurement, the SAR Test Exclusion Threshold in KDB 447498 should be applied.

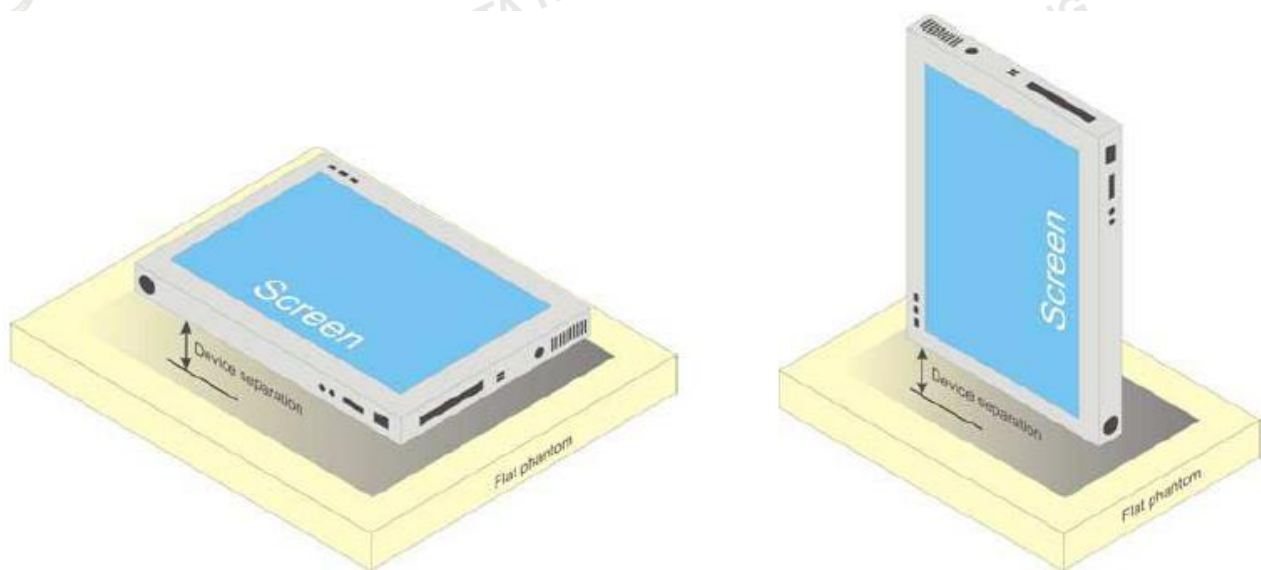


Fig.8.1 Illustration for Body Position

9 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller

than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
--	--------------	-----------

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10 TEST CONDITIONS AND RESULTS

10.1 Conducted Power

<LTE Conducted Power>

LTE Band 38							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				37850	38000	38150	
				2580	2595	2610	
20	QPSK	1	0	23.52	23.34	23.76	24
20	QPSK	1	49	23.24	23.93	23.69	
20	QPSK	1	99	23.09	23.40	23.25	
20	QPSK	50	0	22.17	22.34	22.31	23
20	QPSK	50	24	22.21	22.45	22.04	
20	QPSK	50	50	22.16	22.39	22.17	
20	QPSK	100	0	22.28	22.18	22.12	
20	16QAM	1	0	22.24	22.33	22.04	23
20	16QAM	1	49	22.43	22.12	22.15	
20	16QAM	1	99	22.13	22.38	22.42	
20	16QAM	50	0	21.48	21.55	21.26	22
20	16QAM	50	24	21.49	21.37	21.48	
20	16QAM	50	50	21.24	21.47	21.30	
20	16QAM	100	0	21.43	21.35	21.37	
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				37825	38000	38175	
				2577.5	2595	2612.5	
15	QPSK	1	0	23.42	23.32	23.73	24
15	QPSK	1	37	23.98	23.83	23.25	
15	QPSK	1	74	23.67	23.13	23.24	
15	QPSK	36	0	22.15	22.10	22.39	23
15	QPSK	36	20	22.17	22.03	22.10	
15	QPSK	36	39	22.39	22.34	22.41	
15	QPSK	75	0	22.35	22.13	22.43	
15	16QAM	1	0	22.05	22.42	22.42	23
15	16QAM	1	37	22.19	22.33	22.27	
15	16QAM	1	74	22.27	22.20	22.29	
15	16QAM	36	0	21.44	21.26	21.50	22
15	16QAM	36	20	21.37	21.41	21.34	
15	16QAM	36	39	21.30	21.39	21.43	
15	16QAM	75	0	21.24	21.28	21.15	

BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				37800	38000	38200	
				2575	2595	2615	
10	QPSK	1	0	23.56	23.71	23.84	24
10	QPSK	1	25	23.22	23.53	23.28	
10	QPSK	1	49	23.04	23.08	23.00	
10	QPSK	25	0	22.35	22.06	22.11	23
10	QPSK	25	12	22.01	22.20	22.34	
10	QPSK	25	25	22.11	22.43	22.14	
10	QPSK	50	0	22.44	22.03	22.16	
10	16QAM	1	0	22.28	22.15	22.16	23
10	16QAM	1	25	22.44	22.43	22.39	
10	16QAM	1	49	22.12	22.03	22.05	
10	16QAM	25	0	21.18	21.44	21.34	22
10	16QAM	25	12	21.46	21.32	21.28	
10	16QAM	25	25	21.15	21.18	21.40	
10	16QAM	50	0	21.38	21.24	21.46	
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				37775	38000	38225	
				2572.5	2595	2617.5	
5	QPSK	1	0	23.10	23.91	23.12	24
5	QPSK	1	12	23.23	23.78	23.47	
5	QPSK	1	24	23.88	23.16	23.43	
5	QPSK	12	0	22.23	22.14	22.06	23
5	QPSK	12	7	22.02	22.09	22.41	
5	QPSK	12	13	22.22	22.42	22.36	
5	QPSK	25	0	22.23	22.04	22.33	
5	16QAM	1	0	22.26	22.21	22.07	23
5	16QAM	1	12	22.06	22.15	22.12	
5	16QAM	1	24	22.16	22.19	22.26	
5	16QAM	12	0	21.38	21.33	21.36	22
5	16QAM	12	7	21.27	21.16	21.24	
5	16QAM	12	13	21.39	21.31	21.27	
5	16QAM	25	0	21.23	21.19	21.24	

LTE Band 40A 2305MHz~2315MHz							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				38750			
				2310			
10	QPSK	1	0	23.27			24
10	QPSK	1	25	23.53			
10	QPSK	1	49	23.89			
10	QPSK	25	0	22.16			23
10	QPSK	25	12	22.32			
10	QPSK	25	25	22.21			
10	QPSK	50	0	22.41			
10	16QAM	1	0	22.42			23
10	16QAM	1	25	22.11			
10	16QAM	1	49	22.17			
10	16QAM	25	0	21.23			22
10	16QAM	25	12	21.54			
10	16QAM	25	25	21.51			
10	16QAM	50	0	21.53			
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				38725	38750	38775	
				2307.5	2310	2312.5	
5	QPSK	1	0	23.85	23.39	23.61	24
5	QPSK	1	12	23.12	23.71	23.34	
5	QPSK	1	24	23.90	23.49	23.59	
5	QPSK	12	0	22.08	22.42	22.12	23
5	QPSK	12	7	22.03	22.41	22.14	
5	QPSK	12	13	22.13	22.38	22.39	
5	QPSK	25	0	22.09	22.15	22.01	
5	16QAM	1	0	22.41	22.33	22.44	23
5	16QAM	1	12	22.33	22.07	22.37	
5	16QAM	1	24	22.04	22.31	22.32	
5	16QAM	12	0	21.53	21.30	21.19	22
5	16QAM	12	7	21.43	21.34	21.48	
5	16QAM	12	13	21.22	21.23	21.19	
5	16QAM	25	0	21.38	21.46	21.41	

LTE Band 40B 2350MHz~2360MHz							
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				39200			
				2355			
10	QPSK	1	0	23.39			24
10	QPSK	1	25	23.49			
10	QPSK	1	49	23.81			
10	QPSK	25	0	22.05			23
10	QPSK	25	12	22.33			
10	QPSK	25	25	22.09			
10	QPSK	50	0	22.14			
10	16QAM	1	0	22.13			23
10	16QAM	1	25	22.05			
10	16QAM	1	49	22.20			
10	16QAM	25	0	21.50			22
10	16QAM	25	12	21.36			
10	16QAM	25	25	21.52			
10	16QAM	50	0	21.16			
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)			Tune-up limit (dBm)
				39175	39200	39225	
				2352.5	2355	2357.5	
5	QPSK	1	0	23.08	23.28	23.72	24
5	QPSK	1	12	23.53	23.04	23.61	
5	QPSK	1	24	23.18	23.84	23.46	
5	QPSK	12	0	22.24	22.45	22.21	23
5	QPSK	12	7	22.35	22.15	22.22	
5	QPSK	12	13	22.16	22.32	22.07	
5	QPSK	25	0	22.01	22.33	22.44	
5	16QAM	1	0	22.38	22.32	22.04	23
5	16QAM	1	12	22.03	22.16	22.22	
5	16QAM	1	24	22.25	22.25	22.30	
5	16QAM	12	0	21.35	21.39	21.53	22
5	16QAM	12	7	21.45	21.28	21.43	
5	16QAM	12	13	21.36	21.53	21.49	
5	16QAM	25	0	21.17	21.33	21.21	

LTE Band 41									
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40340	40540	40740	40940	41140	
				2565	2585	2605	2625	2645	
20	QPSK	1	0	23.22	23.53	23.23	23.88	23.33	24
20	QPSK	1	49	23.53	23.62	23.28	23.4	23.31	
20	QPSK	1	99	23.70	23.89	23.09	23.09	23.68	
20	QPSK	50	0	22.11	22.25	22.12	22.43	22.14	23
20	QPSK	50	24	22.44	22.26	22.30	22.28	22.23	
20	QPSK	50	50	22.32	22.29	22.43	22.15	22.23	
20	QPSK	100	0	22.05	22.27	22.11	22.32	22.19	
20	16QAM	1	0	22.14	22.02	22.39	22.29	22.26	23
20	16QAM	1	49	22.24	22.21	22.10	22.10	22.40	
20	16QAM	1	99	22.29	22.43	22.13	22.29	22.26	
20	16QAM	50	0	21.24	21.23	21.46	21.26	21.51	22
20	16QAM	50	24	21.23	21.44	21.32	21.45	21.21	
20	16QAM	50	50	21.55	21.39	21.28	21.26	21.52	
20	16QAM	100	0	21.33	21.35	21.53	21.39	21.23	
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40315	40515	40740	40965	41165	
				2562.5	2582.5	2605	2627.5	2647.5	
15	QPSK	1	0	23.66	23.87	23.83	23.50	23.59	24
15	QPSK	1	37	23.23	23.95	23.37	23.45	23.86	
15	QPSK	1	74	23.23	23.21	23.03	23.11	23.21	
15	QPSK	36	0	22.01	22.17	22.43	22.02	22.09	23
15	QPSK	36	20	22.05	22.02	22.18	22.24	22.05	
15	QPSK	36	39	22.10	22.42	22.04	22.19	22.33	
15	QPSK	75	0	22.09	22.11	22.29	22.45	22.04	
15	16QAM	1	0	22.35	22.02	22.22	22.37	22.22	23
15	16QAM	1	37	22.44	22.35	22.08	22.28	22.03	
15	16QAM	1	74	22.27	22.32	22.31	22.10	22.40	
15	16QAM	36	0	21.45	21.29	21.51	21.52	21.53	22
15	16QAM	36	20	21.25	21.33	21.40	21.36	21.39	
15	16QAM	36	39	21.36	21.44	21.16	21.41	21.41	
15	16QAM	75	0	21.45	21.36	21.35	21.55	21.43	
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40290	40490	40740	40990	41190	
				2560	2580	2605	2630	2650	
10	QPSK	1	0	23.28	23.12	23.63	23.06	23.56	24
10	QPSK	1	25	23.45	23.61	23.59	23.71	23.74	
10	QPSK	1	49	23.83	23.32	23.53	23.26	23.04	

10	QPSK	25	0	22.45	22.34	22.24	22.14	22.37	23
10	QPSK	25	12	22.03	22.13	22.11	22.15	22.3	
10	QPSK	25	25	22.09	22.21	22.4	22.22	22.18	
10	QPSK	50	0	22.22	22.12	22.10	22.06	22.22	
10	16QAM	1	0	22.28	22.29	22.16	22.44	22.21	23
10	16QAM	1	25	22.39	22.44	22.29	22.03	22.30	
10	16QAM	1	49	22.17	22.34	22.37	22.14	22.02	
10	16QAM	25	0	21.18	21.53	21.22	21.20	21.52	22
10	16QAM	25	12	21.27	21.49	21.29	21.45	21.49	
10	16QAM	25	25	21.33	21.50	21.50	21.16	21.31	
10	16QAM	50	0	21.48	21.46	21.34	21.15	21.21	
BW (MHz)	Modulation	RB Size	RB Offset	Channel/Frequency(MHz)					Tune-up limit (dBm)
				40265	40465	40740	41015	41215	
				2557.5	2577.5	2605	2632.5	2652.5	
5	QPSK	1	0	23.12	23.79	23.44	23.05	23.54	24
5	QPSK	1	12	23.37	23.54	23.71	23.81	23.13	
5	QPSK	1	24	23.59	23.76	23.91	23.68	23.83	
5	QPSK	12	0	22.1	22.37	22.35	22.42	22.31	23
5	QPSK	12	7	22.45	22.45	22.01	22.33	22.35	
5	QPSK	12	13	22.25	22.02	22.41	22.06	22.43	
5	QPSK	25	0	22.05	22.16	22.19	22.44	22.13	
5	16QAM	1	0	22.34	22.35	22.15	22.09	22.10	23
5	16QAM	1	12	22.25	22.36	22.01	22.45	22.33	
5	16QAM	1	24	22.11	22.10	22.31	22.08	22.04	
5	16QAM	12	0	21.34	21.35	21.54	21.22	21.38	22
5	16QAM	12	7	21.17	21.55	21.55	21.21	21.22	
5	16QAM	12	13	21.49	21.39	21.47	21.42	21.54	
5	16QAM	25	0	21.43	21.18	21.32	21.51	21.20	

<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11b	1	2412	14.64	13.33	14.0
	6	2437	14.69	13.36	14.0
	11	2462	15.01	13.69	14.0
802.11g	1	2412	13.89	10.92	11.5
	6	2437	13.39	10.29	11.5
	11	2462	14.73	11.73	11.5
802.11n(HT20)	1	2412	14.32	10.90	11.5
	6	2437	13.57	10.34	11.5
	11	2462	14.79	11.64	11.5
802.11n(HT40)	3	2422	13.80	10.67	11
	6	2437	13.49	9.95	11
	9	2452	14.40	10.99	11

<WLAN 5.2GHz Conducted Power>

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11a	36	5180	11.27	12.0
	44	5220	10.16	12.0
	48	5240	10.17	12.0
802.11n(HT20)	36	5180	11.84	12.0
	44	5220	10.27	12.0
	48	5240	10.40	12.0
802.11n(HT40)	38	5190	10.95	11.0
	46	5230	10.74	11.0
802.11ac(HT20)	36	5180	11.30	12.0
	44	5200	10.29	12.0
	48	5240	10.05	12.0
802.11ac(HT40)	38	5190	10.97	11.0
	46	5230	9.82	11.0
802.11ac(HT80)	42	5210	10.18	11.0


<WLAN 5.8GHz Conducted Power>

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11a	149	5745	11.13	12.0
	157	5785	10.45	12.0
	165	5825	10.76	12.0
802.11n(HT20)	149	5745	10.68	12.0
	157	5785	11.32	12.0
	165	5825	10.64	12.0
802.11n(HT40)	151	5755	10.03	11.5
	159	5795	10.45	11.5
802.11ac(HT20)	149	5745	10.74	12.0
	157	5785	11.35	12.0
	165	5825	10.91	12.0
802.11ac(HT40)	151	5755	10.64	11.5
	159	5795	10.03	11.5
802.11ac(HT80)	155	5775	11.18	11.5

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
GFSK	0	2402	3.96	4.0
	39	2441	2.53	4.0
	78	2480	3.71	4.0
$\pi/4$ DQPSK	0	2402	4.48	5.0
	39	2441	3.51	5.0
	78	2480	4.31	5.0
8DPSK	0	2402	4.95	5.0
	39	2441	3.84	5.0
	78	2480	4.79	5.0
BLE1M(GFSK)	00	2402	3.51	5.0
	19	2440	3.39	5.0
	39	2480	4.49	5.0
BLE2M(GFSK)	00	2402	3.54	5.0
	19	2440	3.42	5.0
	39	2480	4.52	5.0

10.2 Transmit Antennas and SAR Measurement Position

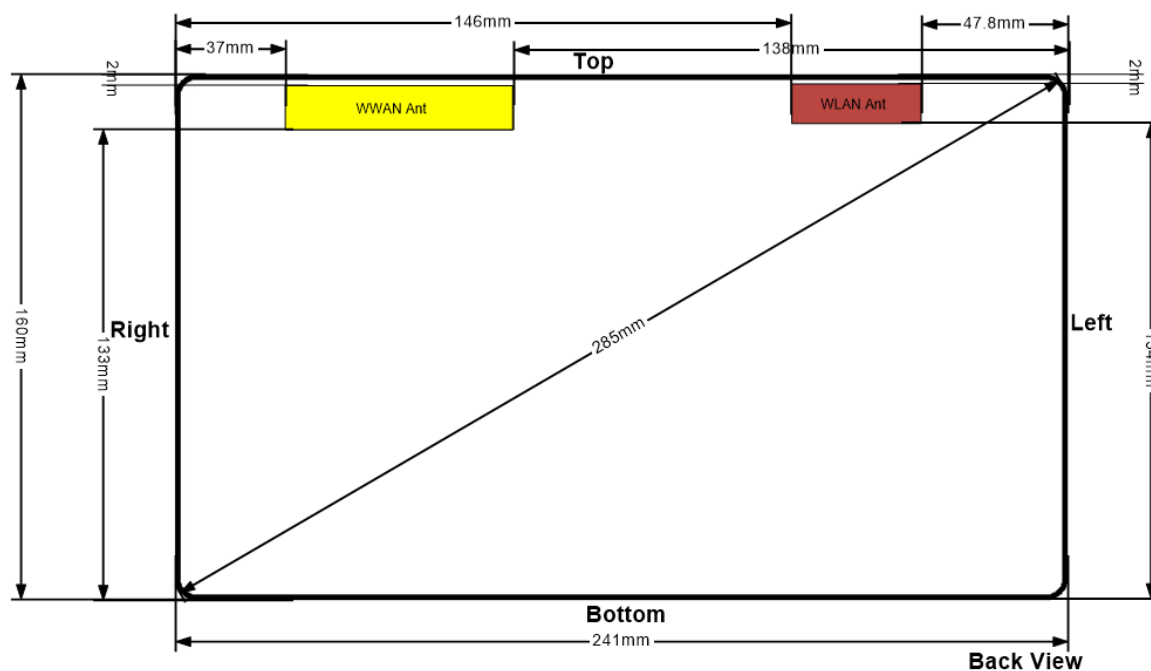

Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	<5mm	<5mm	<5mm	133mm	138mm	37mm
WLAN	<5mm	<5mm	<5mm	134mm	47.8mm	146mm

10.3 Standalone SAR Test Exclusion Considerations

General Note:

- 1 The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- 2 Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- 3 Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- 4 Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- 5 Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
 - Power and distance are rounded to the nearest mW and mm before calculation.
 - The result is rounded to one decimal place for comparison.
- 6 Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · ($f(\text{MHz})/150$)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

The below table, exemption limits for routine evaluation based on frequency and separation distance was according to SAR-based Exemption – §1.1307(b)(3)(i)(B).

Standalone SAR test exclusion considerations								
Wireless Interface	Frequency (MHz)	Configuration	Maximum Average Power		Separation Distance (mm)	Calculation Result	SAR Exclusion Thresholds	Standalone SAR Exclusion
			dBm	mW				
LTE band 38	2595	Rear Face	24.00	251.189	5	80.9	3	no
		Left Edge	24.00	251.189	138	251.189	973	yes
		Right Edge	24.00	251.189	37	10.9	3	yes
		Top Edge	24.00	251.189	5	80.9	3	no
		Bottom Edge	24.00	251.189	133	251.189	923	no
LTE band 40A	2310	Rear Face	24.00	251.189	5	76.4	3	no
		Left Edge	24.00	251.189	138	251.189	979	yes
		Right Edge	24.00	251.189	37	10.3	3	yes
		Top Edge	24.00	251.189	5	76.4	3	no
		Bottom Edge	24.00	251.189	133	251.189	929	no
LTE band 40B	2355	Rear Face	24.00	251.189	5	77.1	3	no
		Left Edge	24.00	251.189	138	251.189	978	yes
		Right Edge	24.00	251.189	37	10.4	3	yes

LTE band 41	2593	Top Edge	24.00	251.189	5	77.1	3	no
		Bottom Edge	24.00	251.189	133	251.189	928	no
		Rear Face	24.00	251.189	5	77.7	3	no
		Left Edge	24.00	251.189	138	251.189	977	yes
		Right Edge	24.00	251.189	37	10.5	3	yes
		Top Edge	24.00	251.189	5	77.7	3	no
2.4GHz WLAN	2450	Bottom Edge	24.00	251.189	133	251.189	927	no
		Rear Face	14.00	25.119	5	7.9	3	no
		Left Edge	14.00	25.119	47.8	0.8	3	yes
		Right Edge	14.00	25.119	146	25.119	1056	yes
		Top Edge	14.00	25.119	5	7.9	3	no
5.2GHz WLAN	5150	Bottom Edge	14.00	25.119	134	25.119	936	yes
		Rear Face	12.00	15.849	5	7.2	3	no
		Left Edge	12.00	15.849	47.8	0.8	3	yes
		Right Edge	12.00	15.849	146	15.849	1026	yes
		Top Edge	12.00	15.849	5	7.2	3	no
5.8GHz WLAN	5750	Bottom Edge	12.00	15.849	134	15.849	906	yes
		Rear Face	12.00	15.849	5	7.6	3	no
		Left Edge	12.00	15.849	47.8	0.8	3	yes
		Right Edge	12.00	15.849	146	15.849	1023	yes
		Top Edge	12.00	15.849	5	7.6	3	no
Bluetooth*	2440	Bottom Edge	12.00	15.849	134	15.849	903	yes
		Rear Size	5.00	3.162	5	1	3	Yes
		Left Size	5.00	3.162	47.8	0.1	3	Yes
		Right Size	5.00	3.162	146	3.162	1056	Yes
		Top Size	5.00	3.162	5	1	3	Yes
Bluetooth*	2440	Bottom Size	5.00	3.162	134	3.162	936	Yes

Remark:

1. Maximum average power including tune-up tolerance;
2. Bluetooth including BLE-Lower Energy Bluetooth and Classical Bluetooth;
3. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
4. Per KDB 648474, if overall diagonal dimension of the display section of a tablet larger than 20 cm, no need consider Hotspot mode.

10.4 Estimated SAR

Per KDB447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion;

- (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

Estimated stand alone SAR					
Communication system	Frequency (MHz)	Configuration	Maximum Power (dBm)	Separation Distance (mm)	Estimated SAR _{1-g} (W/kg)
Bluetooth	2450	Body	5.0	0	0.132
/	/	/	/	/	/

Remark:

1. Maximum average power including tune-up tolerance;
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
3. Body including Hotspot mode as body use distance is 10mm from manufacturer declaration of user manual.

10.5 SAR Test Results

General Note:

- 1 Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a) Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b) For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c) For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d) For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e) For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- 2 Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3 Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- 4 Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

LTE Note:

- 1 The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

LTE MPR will follow up 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

- 2 Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
- 3 Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- 4 Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation

procedure.

- 5 Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- 6 Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
- 7 Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
- 8 LTE band 38 SAR test was covered by Band 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a) The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b) The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
- 9 According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAM signal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.

WLAN Note:

- 1 Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 2 Per KDB 248227 D01v02r02, WLAN 5.2GHz SAR testing is not required when the WLAN 5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN 5.2GHz band.
- 3 When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- 4 For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 5 For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.

- 6 Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
- 7 During SAR testing the WLAN transmission was verified using a spectrum analyzer.

SAR Values [LTE Band 40A]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body 0mm										
	10MHz/1RB#49	Front Side	38750	2310	23.89	24.00	1.026	0.04	0.894	0.922
#1	10MHz/1RB#49	Rear Side	38750	2310	23.89	24.00	1.026	-0.07	1.150	1.187
	10MHz/1RB#49	Top Edge	38750	2310	23.89	24.00	1.026	-0.11	0.925	0.954
	10MHz/1RB#49	Right Edge	38750	2310	23.89	24.00	1.026	0.10	0.236	0.244
	10MHz/25RB#12	Front Side	38750	2310	22.32	23.00	1.169	-0.05	0.816	0.960
	10MHz/25RB#12	Rear Side	38750	2310	22.32	23.00	1.169	-0.03	1.070	1.259
	10MHz/25RB#12	Top Edge	38750	2310	22.32	23.00	1.169	0.03	0.849	0.999
	10MHz/25RB#12	Right Edge	38750	2310	22.32	23.00	1.169	-0.05	0.158	0.186
	10MHz/50RB#0	Front Side	38750	2310	22.41	23.00	1.146	0.06	0.711	0.819
	10MHz/50RB#0	Rear Side	38750	2310	22.41	23.00	1.146	0.11	0.970	1.118
	10MHz/50RB#0	Top Edge	38750	2310	22.41	23.00	1.146	0.096	0.750	0.864

SAR Values [LTE Band 40B]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body 0mm										
	10MHz/1RB#49	Front Side	39200	2355	23.81	24.00	1.045	0.11	0.904	0.950
#2	10MHz/1RB#49	Rear Side	39200	2355	23.81	24.00	1.045	-0.05	1.160	1.219
	10MHz/1RB#49	Top Edge	39200	2355	23.81	24.00	1.045	-0.05	0.935	0.983
	10MHz/1RB#49	Right Edge	39200	2355	23.81	24.00	1.045	0.04	0.246	0.259
	10MHz/25RB#12	Front Side	39200	2355	22.33	23.00	1.167	-0.07	0.844	0.991
	10MHz/25RB#12	Rear Side	39200	2355	22.33	23.00	1.167	0.06	1.100	1.291
	10MHz/25RB#12	Top Edge	39200	2355	22.33	23.00	1.167	-0.13	0.877	1.029
	10MHz/25RB#12	Right Edge	39200	2355	22.33	23.00	1.167	0.09	0.190	0.223
	10MHz/50RB#0	Front Side	39200	2355	22.14	23.00	1.219	0.06	0.710	0.871
	10MHz/50RB#0	Rear Side	39200	2355	22.14	23.00	1.219	0.11	0.968	1.187
	10MHz/50RB#0	Top Edge	39200	2355	22.14	23.00	1.219	0.096	0.744	0.912

SAR Values [LTE Band 41]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body 0mm										
	20MHz/1RB#99	Front Side	40540	2585	23.89	24.00	1.026	0.03	0.817	0.843
#3	20MHz/1RB#99	Rear Side	40540	2585	23.89	24.00	1.026	-0.07	1.070	1.104
	20MHz/1RB#99	Top Edge	40540	2585	23.89	24.00	1.026	-0.10	0.847	0.874
	20MHz/1RB#99	Right Edge	40540	2585	23.89	24.00	1.026	0.11	0.158	0.163
	20MHz/1RB#99	Front Side	40340	2565	23.70	24.00	1.072	0.09	0.773	0.833
	20MHz/1RB#99	Rear Side	40340	2565	23.70	24.00	1.072	-0.04	1.030	1.110
	20MHz/1RB#99	Top Edge	40340	2565	23.70	24.00	1.072	0.02	0.807	0.870
	20MHz/1RB#49	Front Side	40740	2605	23.28	24.00	1.180	-0.10	0.719	0.854
	20MHz/1RB#49	Rear Side	40740	2605	23.28	24.00	1.180	0.03	0.970	1.152
	20MHz/1RB#49	Top Edge	40740	2605	23.28	24.00	1.180	0.11	0.747	0.887
	20MHz/1RB#0	Front Side	40940	2625	23.88	24.00	1.028	0.07	0.797	0.824
	20MHz/1RB#0	Rear Side	40940	2625	23.88	24.00	1.028	-0.06	1.050	1.086
	20MHz/1RB#0	Top Edge	40940	2625	23.88	24.00	1.028	0.05	0.820	0.848
	20MHz/1RB#99	Front Side	2645	2645	23.68	24.00	1.076	-0.10	0.790	0.856
	20MHz/1RB#99	Rear Side	41140	2645	23.68	24.00	1.076	0.11	1.050	1.137
	20MHz/1RB#99	Top Edge	41140	2645	23.68	24.00	1.076	0.04	0.821	0.889
	20MHz/50RB#24	Front Side	40340	2565	22.44	23.00	1.138	0.05	0.695	0.795
	20MHz/50RB#24	Rear Side	40340	2565	22.44	23.00	1.138	-0.06	0.950	1.087
	20MHz/50RB#24	Top Edge	40340	2565	22.44	23.00	1.138	0.05	0.729	0.834
	20MHz/50RB#24	Right Edge	40340	2565	22.44	23.00	1.138	-0.10	0.039	0.045
	20MHz/50RB#50	Rear Side	40540	2585	22.29	23.00	1.178	-0.09	0.898	1.064
	20MHz/50RB#50	Top Edge	40540	2585	22.29	23.00	1.178	0.07	0.801	0.949
	20MHz/50RB#50	Rear Side	40740	2605	22.43	23.00	1.140	0.04	0.915	1.050
	20MHz/50RB#50	Top Edge	40740	2605	22.43	23.00	1.140	0.03	0.875	1.004
	20MHz/50RB#0	Rear Side	40940	2625	22.43	23.00	1.140	-0.05	0.932	1.069
	20MHz/50RB#0	Top Edge	40940	2625	22.43	23.00	1.140	-0.05	0.886	1.016
	20MHz/50RB#50	Rear Side	41140	2645	22.23	23.00	1.194	0.03	0.885	1.063

	20MHz/50RB#50	Top Edge	41140	2645	22.23	23.00	1.194	0.07	0.787	0.945
	20MHz/100RB#0	Front Side	40940	2625	22.32	23.00	1.169	0.05	0.695	0.818
	20MHz/100RB#0	Rear Side	40940	2625	22.32	23.00	1.169	0.09	0.950	1.118
	20MHz/100RB#0	Top Edge	40940	2625	22.32	23.00	1.169	0.10	0.729	0.858

SAR Values [WIFI 2.4G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body 0mm										
	802.11b	Front Side	11	2462	13.69	14.00	1.074	0.03	0.187	0.201
#4	802.11b	Rear Side	11	2462	13.69	14.00	1.074	-0.05	0.239	0.257
	802.11b	Top Edge	11	2462	13.69	14.00	1.074	0.09	0.203	0.218

Note: Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Values [WIFI 5.2G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body 0mm										
	802.11n(HT20)	Front Side	36	5180	11.84	12.00	1.038	0.03	0.166	0.172
#5	802.11n(HT20)	Rear Side	36	5180	11.84	12.00	1.038	-0.06	0.235	0.244
	802.11n(HT20)	Top Edge	36	5180	11.84	12.00	1.038	-0.11	0.199	0.206

SAR Values [WIFI 5.8G]

Plot No.	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Measured / Reported SAR numbers-Body 0mm										
	802.11ac(HT20)	Front Side	157	5785	11.35	12.0	1.161	-0.07	0.154	0.179
#6	802.11ac(HT20)	Rear Side	157	5785	11.35	12.0	1.161	-0.05	0.220	0.256
	802.11ac(HT20)	Top Edge	157	5785	11.35	12.0	1.161	-0.04	0.185	0.215

10.6 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. The following procedures are applied to determine if repeated measurements are required.

- 1 Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2 When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3 Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

SAR Measurement Variability

Band	Mode	Test Position	Ch.	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
LTE Band 40A	10MHz/1RB#49	Front Side	38750	0	0.892	0.894	1.002	--
LTE Band 40A	10MHz/1RB#49	Rear Side	38750	0	1.150	1.141	1.008	--
LTE Band 40A	10MHz/1RB#49	Top Edge	38750	0	0.925	0.896	1.032	--
LTE Band 40A	10MHz/25RB#12	Front Side	38750	0	0.798	0.816	1.023	--
LTE Band 40A	10MHz/25RB#12	Rear Side	38750	0	1.046	1.070	1.023	--
LTE Band 40A	10MHz/25RB#12	Top Edge	38750	0	0.849	0.830	1.023	--
LTE Band 40A	10MHz/50RB#0	Rear Side	38750	0	0.962	0.970	1.008	--
LTE Band 40B	10MHz/1RB#49	Front Side	39200	0	0.904	0.888	1.018	--
LTE Band 40B	10MHz/1RB#49	Rear Side	39200	0	1.159	1.160	1.001	--
LTE Band 40B	10MHz/1RB#49	Top Edge	39200	0	0.935	0.923	1.013	--
LTE Band 40B	10MHz/25RB#12	Front Side	39200	0	0.819	0.844	1.031	--
LTE Band 40B	10MHz/25RB#12	Rear Side	39200	0	1.071	1.100	1.027	--
LTE Band 40B	10MHz/25RB#12	Top Edge	39200	0	0.877	0.850	1.032	--
LTE Band 40B	10MHz/50RB#0	Rear Side	39200	0	0.951	0.968	1.018	--
LTE Band 41	20MHz/1RB#99	Front Side	40540	0	0.817	0.816	1.001	--
LTE Band 41	20MHz/1RB#99	Rear Side	40540	0	1.054	1.070	1.015	--
LTE Band 41	20MHz/1RB#99	Top Edge	40540	0	0.847	0.847	1.000	--
LTE Band 41	20MHz/1RB#99	Rear Side	40340	0	1.030	1.002	1.028	--
LTE Band 41	20MHz/1RB#99	Top Edge	40340	0	0.804	0.807	1.004	--
LTE Band 41	20MHz/1RB#49	Rear Side	40740	0	0.970	0.960	1.010	--
LTE Band 41	20MHz/1RB#0	Rear Side	40940	0	1.050	1.045	1.005	--
LTE Band 41	20MHz/1RB#0	Top Edge	40940	0	0.813	0.820	1.009	--
LTE Band 41	20MHz/1RB#99	Rear Side	41140	0	1.050	1.043	1.007	--
LTE Band 41	20MHz/1RB#99	Top Edge	41140	0	0.812	0.821	1.011	--
LTE Band 41	20MHz/50RB#24	Rear Side	40340	0	0.950	0.935	1.016	--
LTE Band 41	20MHz/50RB#50	Rear Side	40540	0	0.882	0.898	1.018	--
LTE Band 41	20MHz/50RB#50	Top Edge	40540	0	0.801	0.773	1.036	--
LTE Band 41	20MHz/50RB#50	Rear Side	40740	0	0.915	0.886	1.033	--

LTE Band 41	20MHz/50RB#50	Top Edge	40740	0	0.847	0.875	1.033	--
LTE Band 41	20MHz/50RB#0	Rear Side	40940	0	0.932	0.917	1.016	--
LTE Band 41	20MHz/50RB#0	Top Edge	40940	0	0.868	0.886	1.021	--
LTE Band 41	20MHz/50RB#50	Rear Side	41140	0	0.862	0.885	1.027	--
LTE Band 41	20MHz/100RB#0	Rear Side	40940	0	0.950	0.939	1.012	--

10.7 Simultaneous Transmission Analysis

10.8.1 Introduction

Application Simultaneous Transmission information:

No.	Simultaneous Transmission Configurations	Tablet
		Body-worn
1	WWAN (4G) + WLAN 2.4GHz	Yes
2	WWAN (4G) + WLAN 5GHz	Yes
3	WWAN (4G) + Bluetooth	Yes

10.8.2 Evaluation of Simultaneous SAR

Simultaneous transmission SAR for WLAN/BT and LTE

Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR
	MAX. WWAN Reported SAR	MAX. WLAN2.4G Reported SAR	MAX. WLAN5G Reported SAR	Bluetooth				
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
Front Face	0.991	0.201	0.179	0.132	1.192	1.17	1.123	N/A
Rear Face	1.291	0.257	0.256	0.132	1.548	1.547	1.423	N/A
Left Edge	N/A	N/A	N/A	0.132	N/A	N/A	0.132	N/A
Right Edge	0.259	N/A	N/A	0.132	N/A	N/A	0.391	N/A
Top Edge	1.029	0.218	0.215	0.132	1.247	1.244	1.161	N/A
Bottom Edge	N/A	N/A	N/A	0.132	N/A	N/A	0.132	N/A



MAX. $\Sigma SAR_{1g} = 1.548$ W/kg < 1.6 W/kg, so the Simultaneous transmission SAR with volume scan are not required.

11 Measurement Uncertainty

NO	Source	Uncert. ai (%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	Stand.U ncert. ui (1g)	Stand.U ncert. ui (10g)	Veff
1	Repeat	0.4	N	1	1	1	0.4	0.4	9
Instrument									
2	Probe calibration	7	N	2	1	1	3.5	3.5	∞
3	Axial isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
4	Hemispherical isotropy	9.4	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	∞
5	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
7	Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
8	Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
9	Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
10	Integration time	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Probe positioner mech. restrictions	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞

Test sample related									
16	Device positioning	3.8	N	1	1	1	3.8	3.8	99
17	Device holder	5.1	N	1	1	1	5.1	5.1	5
18	Drift of output power	5.0	R	$\frac{1}{\sqrt{3}}$	1	1	2.9	2.9	∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\frac{1}{\sqrt{3}}$	1	1	2.3	2.3	∞
20	Liquid conductivity (target)	5.0	R	$\frac{1}{\sqrt{3}}$	0.64	0.43	1.8	1.2	∞
21	Liquid conductivity (meas)	2.5	N	1	0.64	0.43	1.6	1.2	∞
22	Liquid Permittivity (target)	5.0	R	$\frac{1}{\sqrt{3}}$	0.6	0.49	1.7	1.5	∞
23	Liquid Permittivity (meas)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			11.4%	11.3%	236
Expanded uncertainty(P=95%)		$U = k U_c$					22.8%	22.6%	

Appendix A. EUT Photos and Test Setup Photos

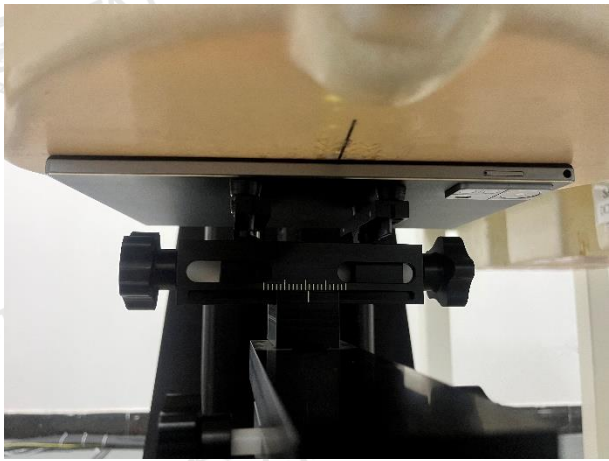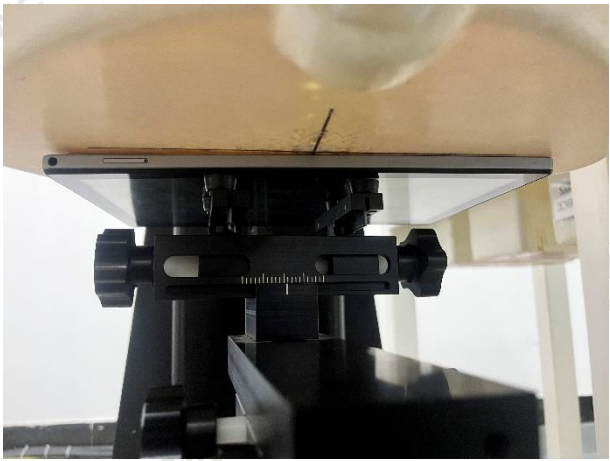	
Front face(0mm)	Rear Face(0mm)
	
Left Edge(0mm)	

Appendix B. Plots of SAR System Check

2300MHz System Check

Date: 01/09/2024

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1103

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2300$ MHz; $\sigma = 1.673$ S/m; $\epsilon_r = 38.434$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(7.75, 7.75, 7.75); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 14.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 89.68 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 23.5 W/kg

SAR(1 g) = 11.90 W/kg; SAR(10 g) = 5.77 W/kg

Maximum value of SAR (measured) = 13.2 W/kg

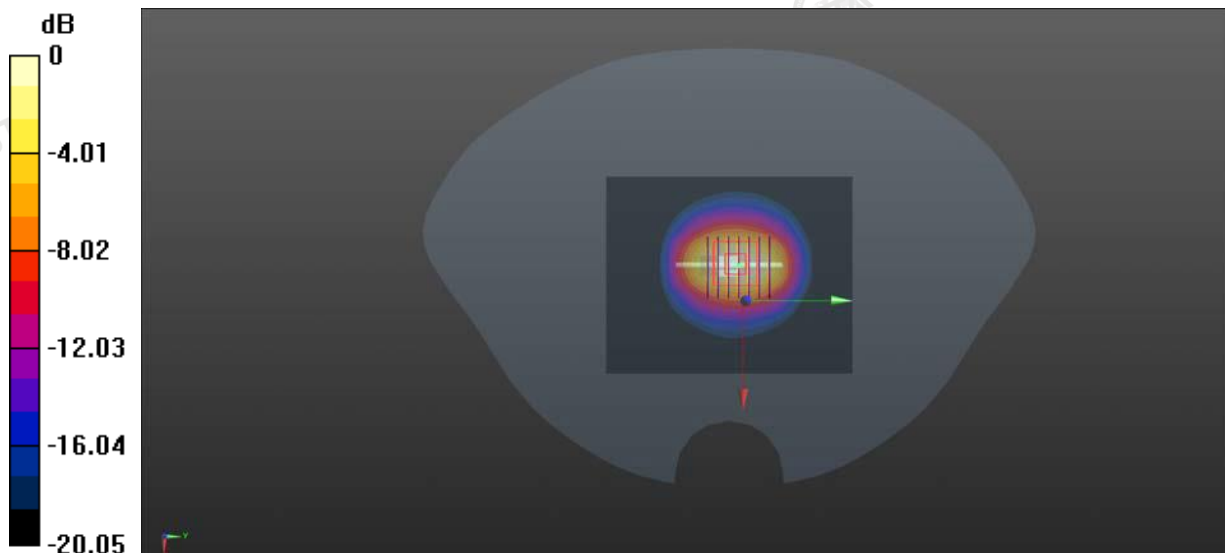

0 dB = 13.2 W/kg = 11.21 dBW/kg

System Performance Check 2300MHz 250mW

2450MHz System Check

Date: 01/11/2024

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 745

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 40.070$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(7.50, 7.50, 7.50); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 16.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 89.48 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 26.8 W/kg

SAR(1 g) = 13.09 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

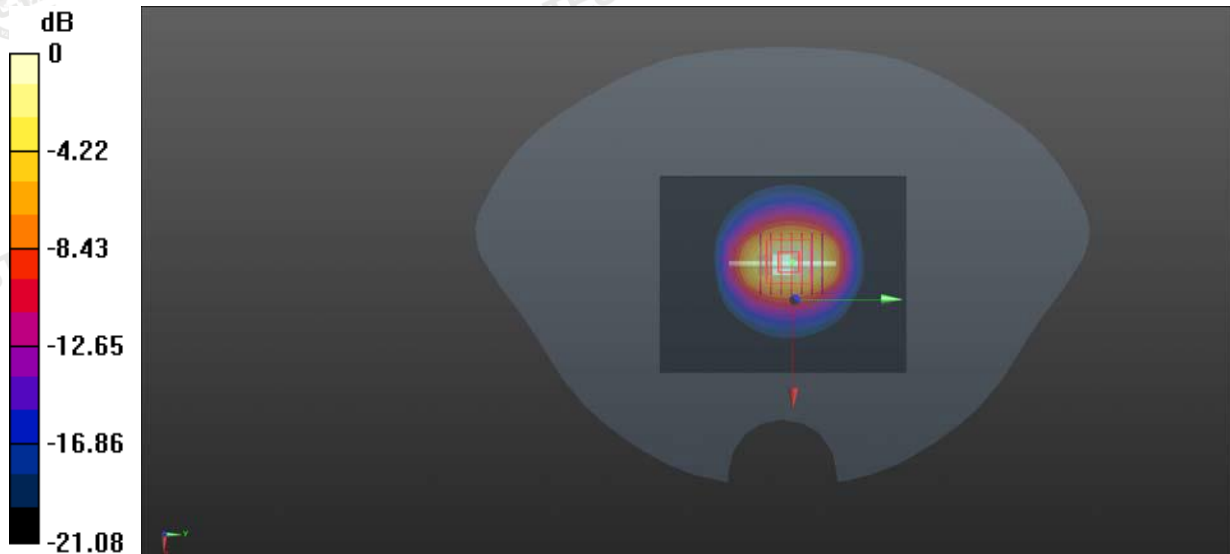

System Performance Check 2450MHz 250mW

2600MHz System Check

Date: 01/10/2024

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1073

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(7.35, 7.35, 7.35); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 16.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 87.76 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.7 W/kg

SAR(1 g) = 13.51 W/kg; SAR(10 g) = 6.34 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

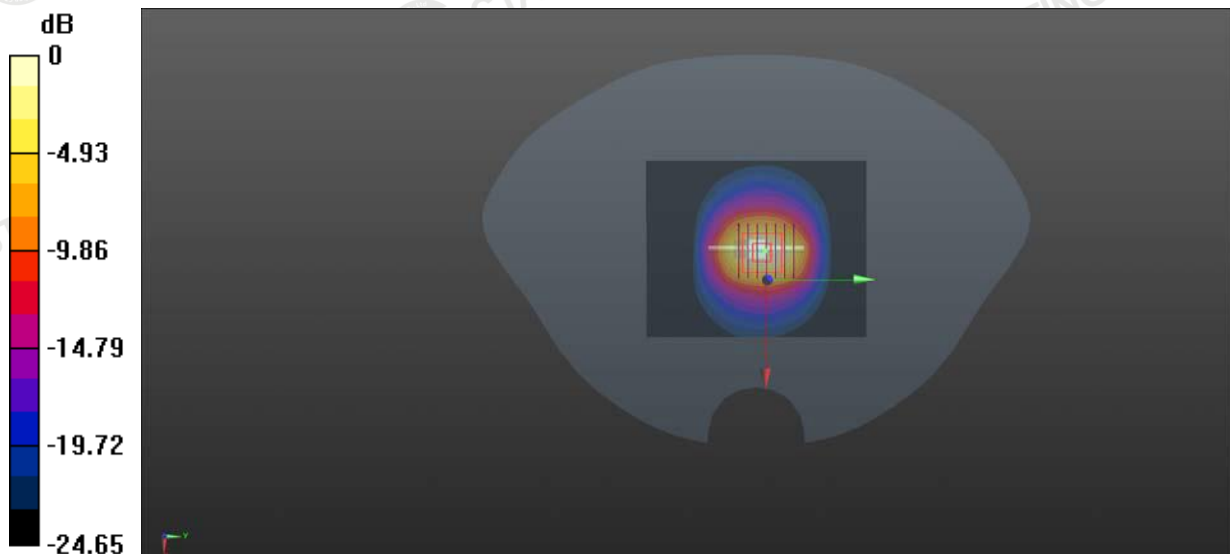

System Performance Check 2600MHz 250mW

5250MHz System Check

Date: 01/12/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1102

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.648$ S/m; $\epsilon_r = 36.683$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(5.45, 5.45, 5.45); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 9.41 W/kg


Zoom Scan (7x7x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 33.27 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 9.62 W/kg

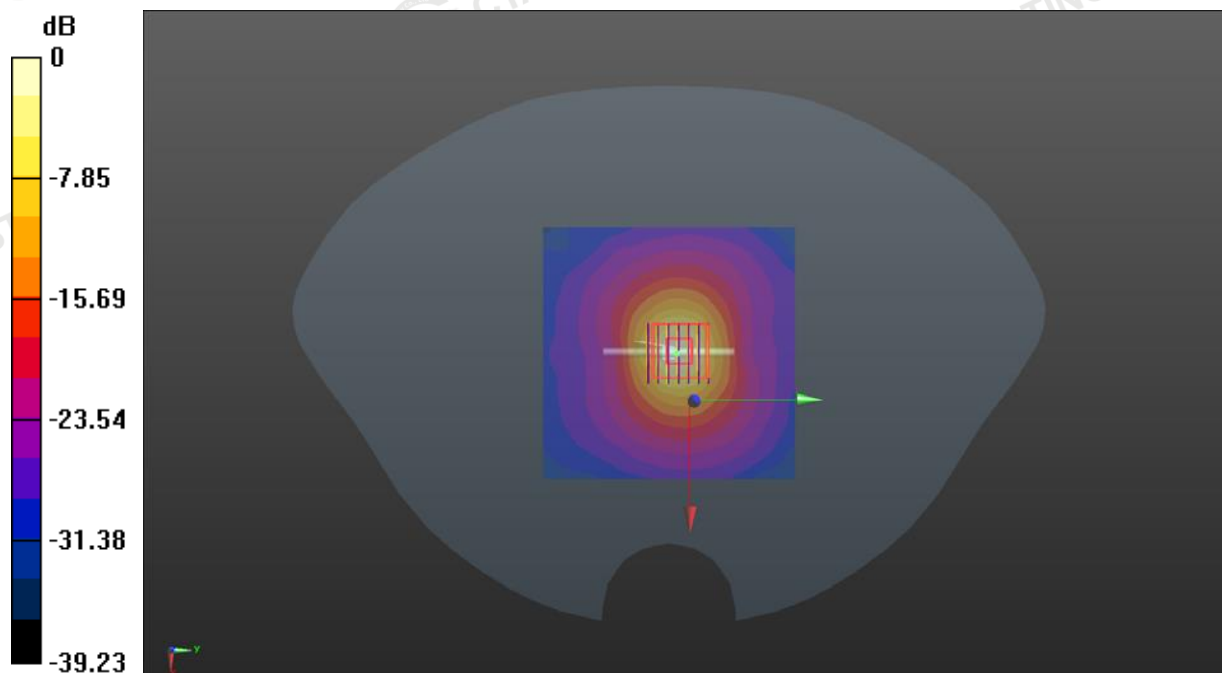

0 dB = 9.62 W/kg = 9.83 dBW/kg

System Performance Check 5250MHz 100mW

5750MHz System Check

Date: 01/12/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1102

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5750$ MHz; $\sigma = 5.105$ S/m; $\epsilon_r = 36.158$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(4.96, 4.96, 4.96); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 18.9 W/kg


Zoom Scan (7x7x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 42.02 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

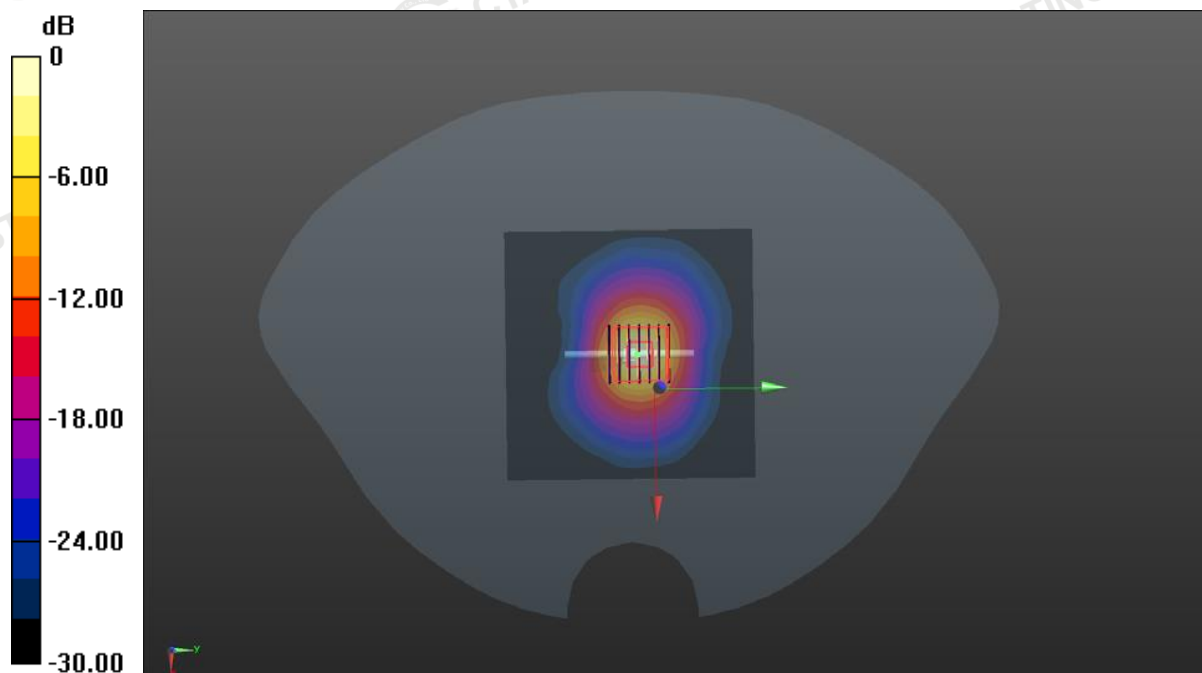

0 dB = 19.0 W/kg = 12.79 dBW/kg

System Performance Check 5750MHz 100mW

Appendix C. Plots of SAR Test Data

#1

Date: 01/09/2024

LTE Band 40A_10M_QPSK_1RB#49_Rear Face_0mm_Ch38750

Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(7.75, 7.75, 7.75); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.11 W/Kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.56 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.15 W/Kg; SAR(10 g) = 0.822 W/Kg

Maximum value of SAR (measured) = 1.56 W/Kg

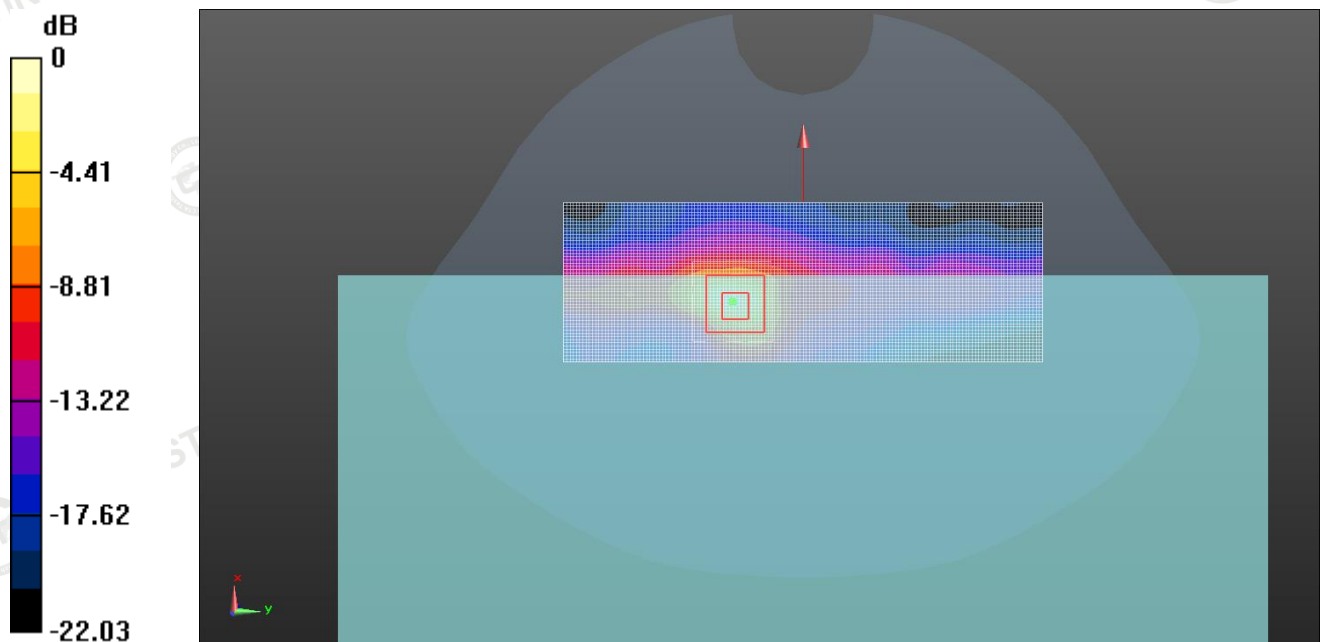

#2

Date: 01/09/2024

LTE Band 40B_10M_QPSK_1RB#49_Rear Face_10mm_Ch39200

Communication System: UID 0, Generic LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2355$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(7.75, 7.75, 7.75); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.36 W/Kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value =19.22V/m; Power Drift =-0.05 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.160 W/Kg; SAR(10 g) = 0.776 W/Kg

Maximum value of SAR (measured) = 1.41 W/Kg

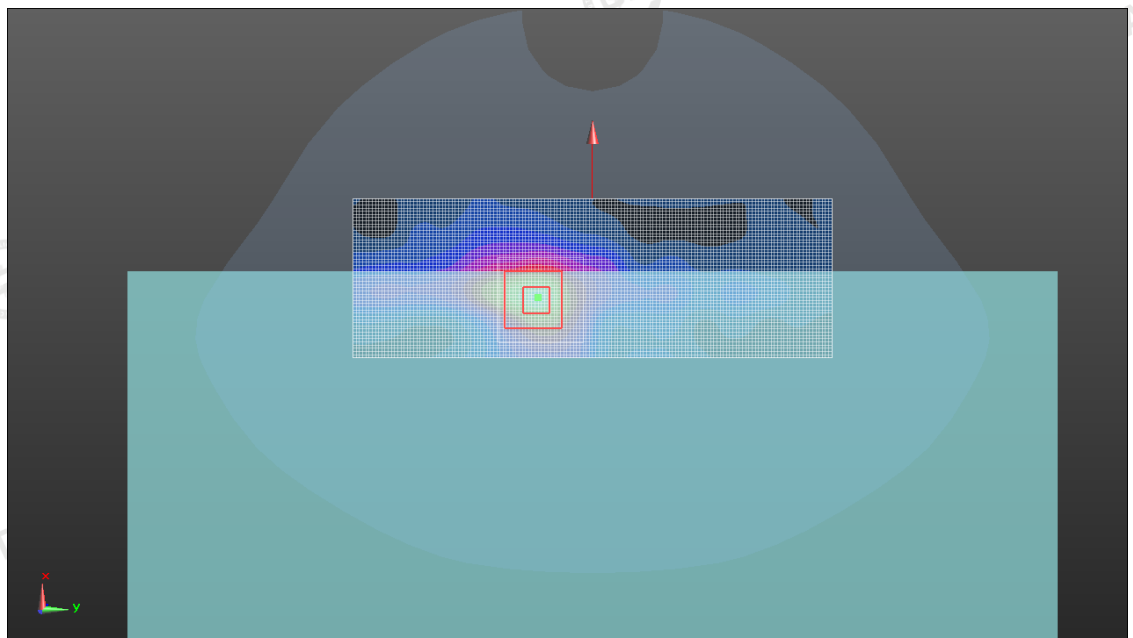

#3

Date: 01/10/2024

LTE Band 41_20M_QPSK_1RB#99_Rear Face_0mm_Ch40185

Communication System: UID 0, Generic LTE (0); Frequency: 2549.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2549.5$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 39.369$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(7.35, 7.35, 7.35); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.24 W/Kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.21 V/m; Power Drift = - 0.07 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.07 W/Kg; SAR(10 g) = 0.752 W/Kg

Maximum value of SAR (measured) = 1.55 W/Kg

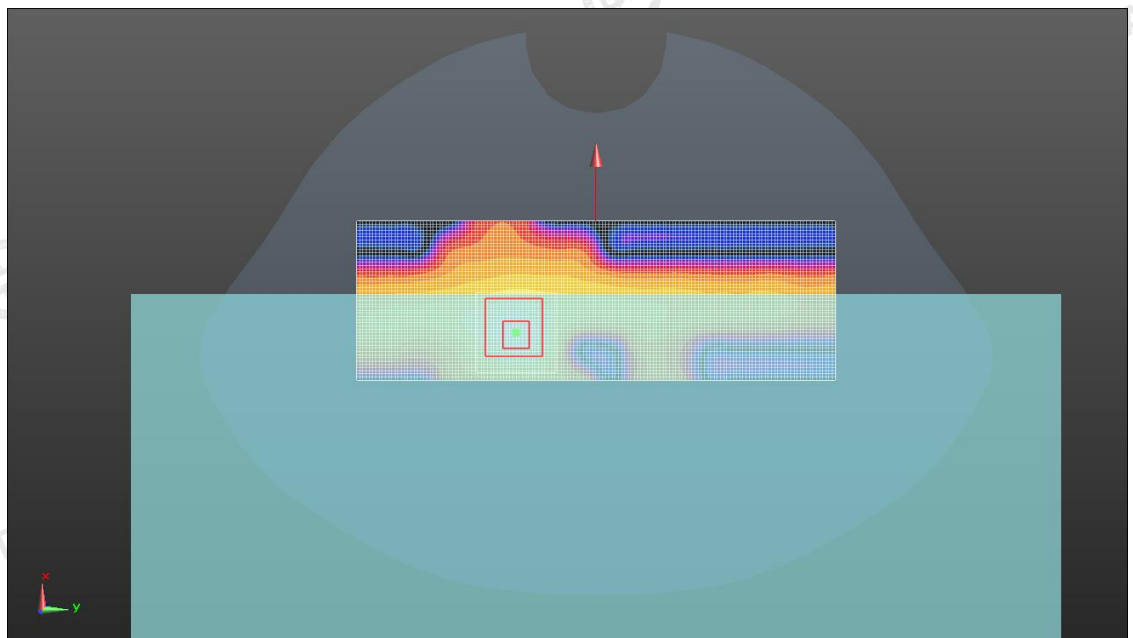

#4

Date: 01/11/2024

WLAN2.4GHz_802.11b 1Mbps_Rear Face_0mm_Ch11

Communication System: UID 0, Generic (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 40.207$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(7.50, 7.50, 7.50); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.288 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.239 W/Kg; SAR(10 g) = 0.155 W/Kg

Maximum value of SAR (measured) = 0.285 W/Kg

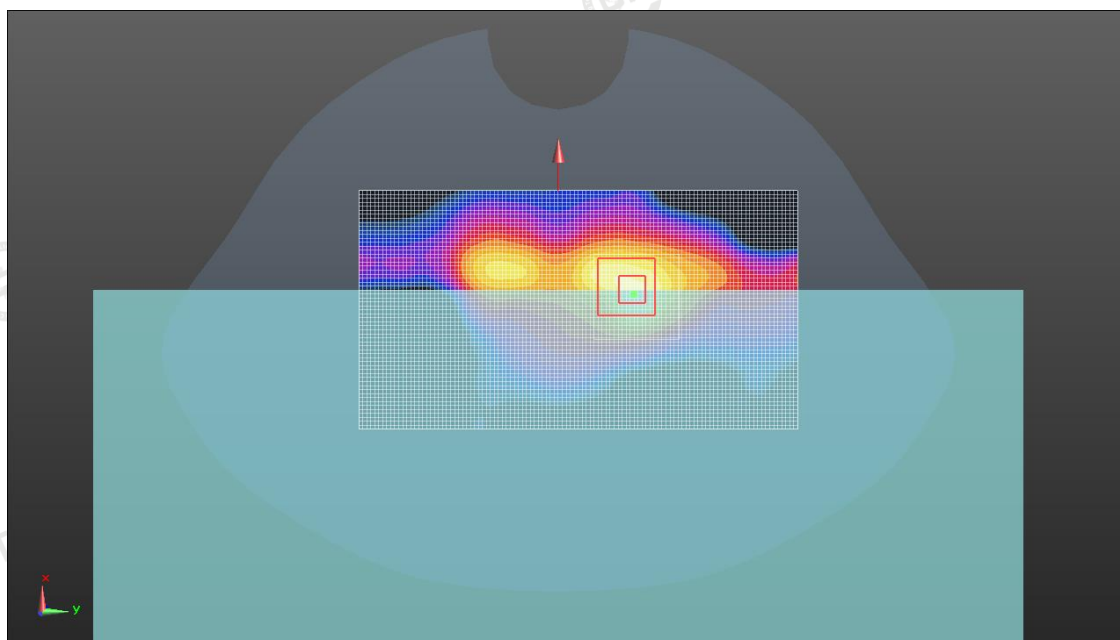

#5

Date: 01/12/2024

WLAN5.2G 802.11n(HT20) _ Rear Face _0mm _CH 36

Communication System: UID 0, Generic (0); Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 4.698$ S/m; $\epsilon_r = 35.654$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(5.45, 5.45, 5.45); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.277 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.21 V/m; Power Drift =-0.06 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.235 W/Kg; SAR(10 g) = 0.137 W/Kg

Maximum value of SAR (measured) = 0.245 W/Kg

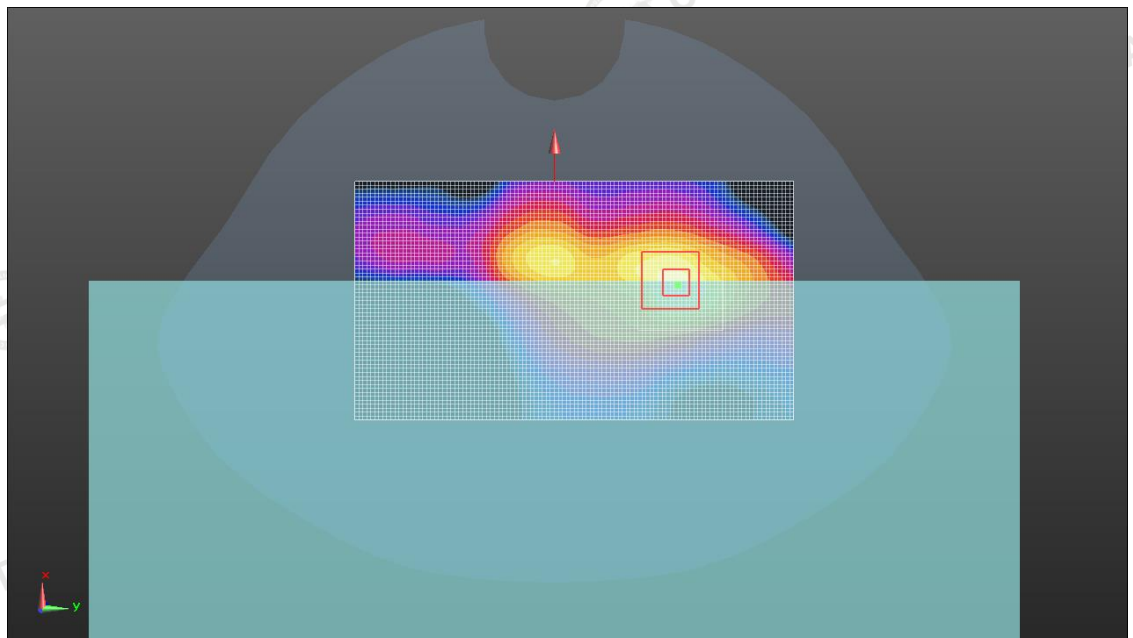

#6

Date: 01/12/2024

WLAN5.8G 802.11a _Rear Face_0mm_CH 157

Communication System: UID 0, Generic (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.244$ S/m; $\epsilon_r = 35.658$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF (4.96, 4.96, 4.96); Calibrated: June 21, 2023;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.374 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value =3.51 V/m; Power Drift =-0.05 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.220 W/Kg; SAR(10 g) = 0.131 W/Kg

Maximum value of SAR (measured) = 0.365 W/kg

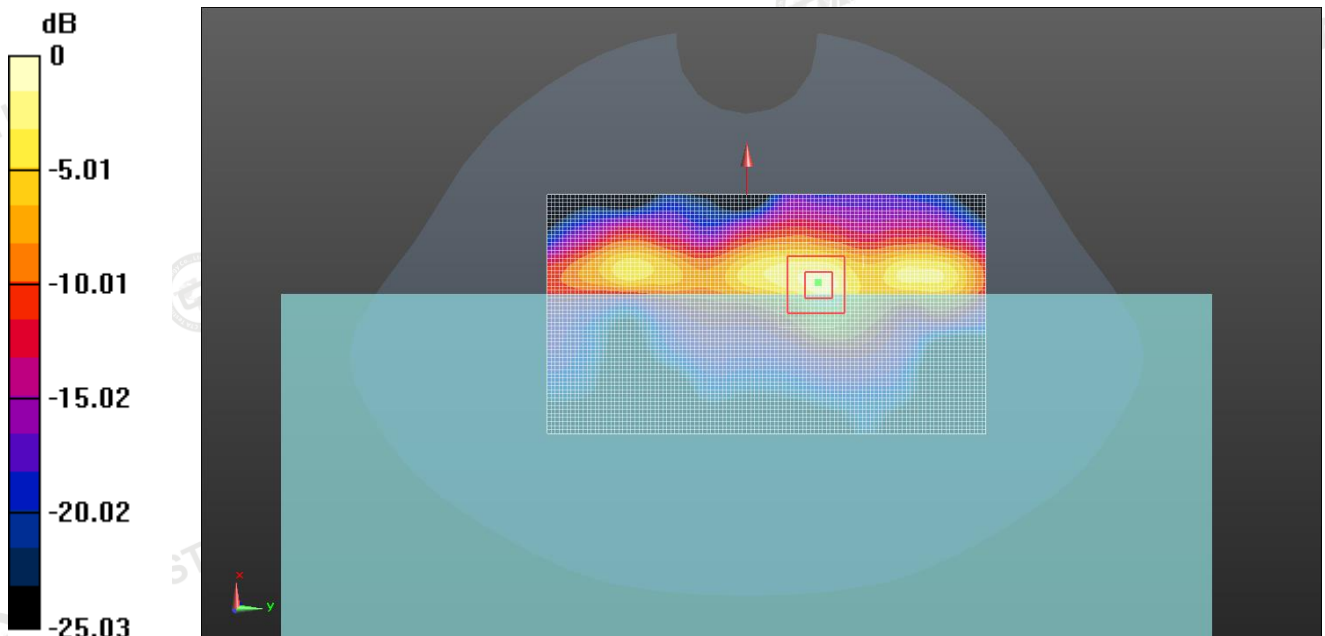

Appendix D. DASY System Calibration Certificate

TTL In Collaboration with **s p e a g**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn http://www.caict.ac.cn

CAICT 中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client: **ruixiang** Certificate No: **J23Z60276**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN : 7380**

Calibration Procedure(s): **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field Probes

Calibration date: **June 21, 2023**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101547	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101548	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Reference 10dBAttenuator	18N50W-10dB	19-Jan-23(CTTL, No.J23X00212)	Jan-25
Reference 20dBAttenuator	18N50W-20dB	19-Jan-23(CTTL, No.J23X00211)	Jan-25
Reference Probe EX3DV4	SN 7517	27-Jan-23(SPEAG, No.EX-7517_Jan23)	Jan-24
DAE4	SN 1555	25-Aug-22(SPEAG, No.DAE4-1555_Aug22)	Aug-23

Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	12-Jun-23(CTTL, No.J23X05434)	Jun-24
Network Analyzer E5071C	MY46110673	10-Jan-23(CTTL, No.J23X00104)	Jan-24
Reference 10dBAttenuator	BT0520	11-May-23(CTTL, No.J23X04061)	May-25
Reference 20dBAttenuator	BT0267	11-May-23(CTTL, No.J23X04062)	May-25
OCP DAK-3.5	SN 1040	18-Jan-23(SPEAG, No.OCP-DAK3.5-1040_Jan23)	Jan-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: June 27, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J23Z60276 Page 1 of 9



In Collaboration with

s p e a g
 CALIBRATION LABORATORY

 Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn
Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Certificate No: J23Z60276

Page 2 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7380

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.44	0.35	0.41	$\pm 10.0\%$
DCP(mV) ^B	100.5	101.6	100.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB· μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	161.9	$\pm 2.2\%$
		Y	0.0	0.0	1.0		139.0	
		Z	0.0	0.0	1.0		149.3	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with

s p e a g

CALIBRATION LABORATORY

CAICT

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7380**Calibration Parameter Determined in Head Tissue Simulating Media**

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc. (k=2)
750	41.9	0.89	10.02	10.02	10.02	0.17	1.27	±12.7%
835	41.5	0.90	9.62	9.62	9.62	0.18	1.30	±12.7%
1750	40.1	1.37	8.35	8.35	8.35	0.28	1.02	±12.7%
1900	40.0	1.40	8.05	8.05	8.05	0.24	1.11	±12.7%
2100	39.8	1.49	8.00	8.00	8.00	0.24	1.11	±12.7%
2300	39.5	1.67	7.75	7.75	7.75	0.65	0.67	±12.7%
2450	39.2	1.80	7.50	7.50	7.50	0.65	0.69	±12.7%
2600	39.0	1.96	7.35	7.35	7.35	0.47	0.85	±12.7%
3500	37.9	2.91	6.85	6.85	6.85	0.41	1.03	±13.9%
3700	37.7	3.12	6.69	6.69	6.69	0.43	1.03	±13.9%
3900	37.5	3.32	6.58	6.58	6.58	0.30	1.50	±13.9%
4100	37.2	3.53	6.62	6.62	6.62	0.35	1.25	±13.9%
4200	37.1	3.63	6.52	6.52	6.52	0.30	1.45	±13.9%
4400	36.9	3.84	6.44	6.44	6.44	0.30	1.50	±13.9%
4600	36.7	4.04	6.41	6.41	6.41	0.35	1.48	±13.9%
4800	36.4	4.25	6.36	6.36	6.36	0.35	1.50	±13.9%
4950	36.3	4.40	5.95	5.95	5.95	0.35	1.55	±13.9%
5250	35.9	4.71	5.45	5.45	5.45	0.40	1.55	±13.9%
5600	35.5	5.07	4.86	4.86	4.86	0.45	1.40	±13.9%
5750	35.4	5.22	4.96	4.96	4.96	0.45	1.40	±13.9%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No:J23Z60276

Page 4 of 9




In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

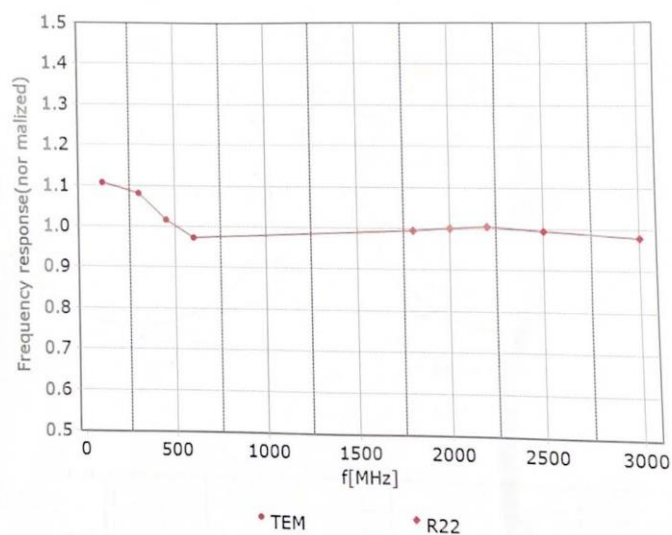

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)

Certificate No: J23Z60276

Page 5 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>


Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM


f=1800 MHz, R22



-- Tot -- X -- Y -- Z



-- Tot -- X -- Y -- Z

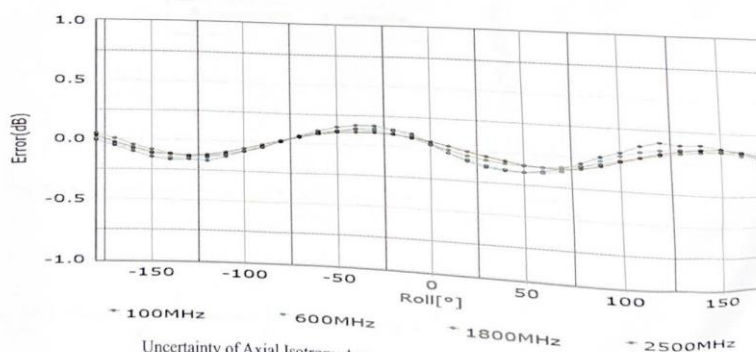

Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)

Certificate No: J23Z60276

Page 6 of 9





In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

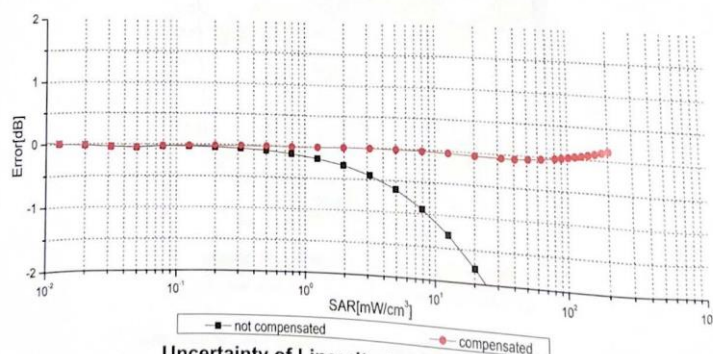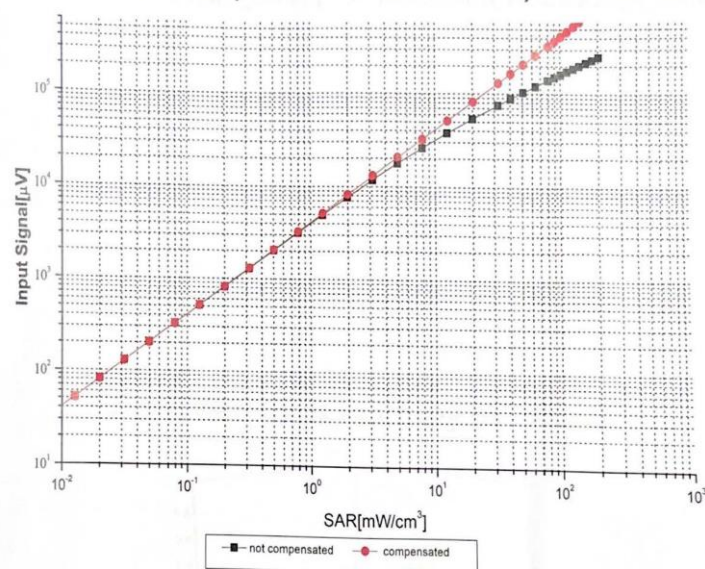

Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)

Certificate No: J23Z60276

Page 7 of 9




In Collaboration with
s p e a g
CALIBRATION LABORATORY




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Conversion Factor Assessment


$f=750\text{ MHz, WGLS R9(H_convF)}$



$f=1750\text{ MHz, WGLS R22(H_convF)}$



Deviation from Isotropy in Liquid

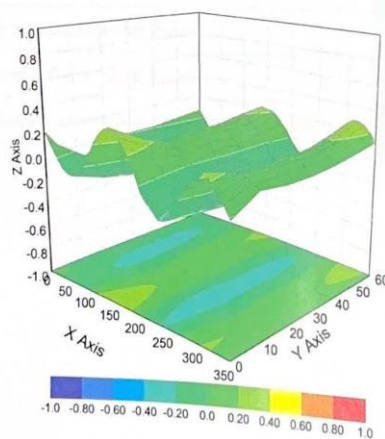

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)

Certificate No: J23Z60276

Page 8 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7380

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	83.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn <http://www.caict.ac.cn>



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client : CTA

Certificate No: J23Z60391

CALIBRATION CERTIFICATE

Object DAE3 - SN: 428

Calibration Procedure(s)
FF-Z11-002-01
Calibration Procedure for the Data Acquisition Electronics
(DAEx)

Calibration date: August 30, 2023

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	12-Jun-23 (CTTL, No.J23X05436)	Jun-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 06, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J23Z60391

Page 1 of 3



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn <http://www.caict.ac.cn>

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2117

E-mail: cmf@caict.ac.cn

<http://www.caict.ac.cn>**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.468 $\pm$ 0.15% (k=2)	404.804 $\pm$ 0.15% (k=2)	404.579 $\pm$ 0.15% (k=2)
Low Range	3.95934 $\pm$ 0.7% (k=2)	3.95437 $\pm$ 0.7% (k=2)	3.91875 $\pm$ 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	258.5° $\pm$ 1°
---	-----------------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client **ATC**

Certificate No: **Z23-60085**

CALIBRATION CERTIFICATE

Object **D2300V2 - SN: 1103**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **February 16, 2023**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106276	10-May-22 (CTTL, No.J22X03103)	May-23
Power sensor NRP6A	101369	10-May-22 (CTTL, No.J22X03103)	May-23
Reference Probe EX3DV4	SN 7464	19-Jan-23 (CTTL-SPEAG, No.Z22-60565)	Jan-24
DAE4	SN 1556	11-Jan-23(CTTL-SPEAG, No.Z23-60034)	Jan-24
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49070393	17-May-23 (CTTL, No.J22X03157)	May-24
NetworkAnalyzer E5071C	MY46110673	10-Jan-23 (CTTL, No. J23X00104)	Jan-24

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: February 24, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z23-60085

Page 1 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"


Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2300 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.3 $\pm$ 6 %	1.67 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	49.2 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg $\pm$ 18.7 % (k=2)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.2Ω- 1.90jΩ
Return Loss	- 31.5dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.077 ns
----------------------------------	----------


After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

**DASY5 Validation Report for Head TSL**

Date: 2023-02-16

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1103

Communication System: UID 0, CW; Frequency: 2300 MHz

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.668$ S/m; $\epsilon_r = 39.27$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.95, 7.95, 7.95) @ 2300 MHz; Calibrated: 2023-01-19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2023-01-11
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.11 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 24.1 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.98 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 19.9 W/kg

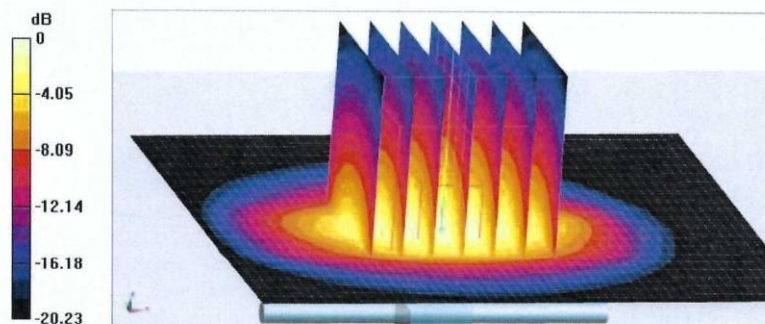

0 dB = 19.9 W/kg = 12.99 dBW/kg