

Shenzhen SKYLink Technology Co.,Ltd

Antenna Specification for Approval

Customer Name: _____

Product Name: _____ 2.4G/5.8G WIFI Antenna

Part NO.: _____ TY06

Write By: _____ Damon Cui

Issued Date: _____ 2024.08.12

Customer

R&D Dept	Business Dept	Approved By

SKYLink

R&D Dept	Engineer Dept	Approval

● Specification Summary

A. Electrical Characteristics	
Frequency	2400MHz ~2500MHz 5150MHz ~5850MHz
Return Loss	<-10 dbi
Efficiency	>50%
Peak Gain	2.3dbi
Impedance	50 Ohm
Polarization	Line
B. Material & Mechanical Characteristics	
Material of Radiator	/
Cable Type	/
Connector Type	/
Dimension	At Attachment
Heat-durability	280±5°C, 10sec.
C. Environmental Characteristics	
Operation Temperature	- 20 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C

● Test Equipment & Conditions




1. Network Analyzers :





Agilent 8753D 5071B

Communications Test Set:

Agilent E5515C CMW500

2. 3D Chamber Test System

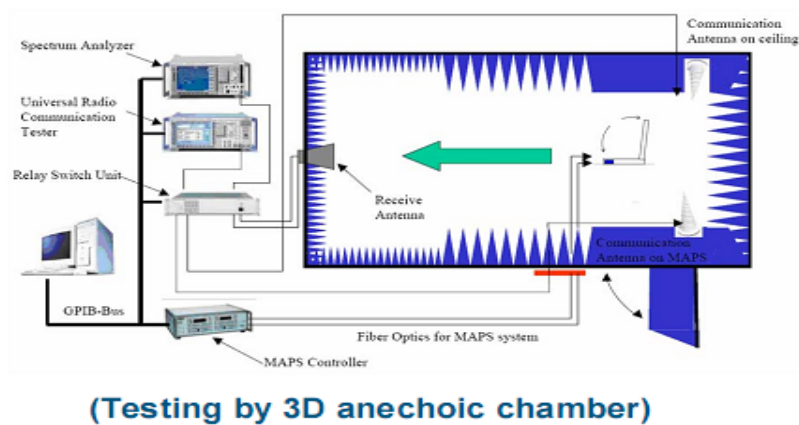

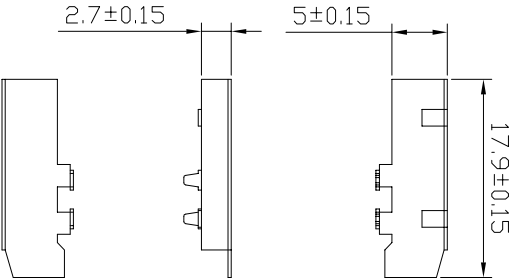

1	2	3	4	5	6	7	8
A				A			
B				B			
C				C			
D				D			
RoHS Compliant G.P.				SHEN ZHEN SKYLINK CO., LTD			
				Project			
				Date			
				2024-08-12			
				Part Name			
				TY06			
				Part No.			
				Material			
				DWG No.			
				Approved by			
				Unit			
				mm			
				Scale			
				1:1			
				Rev			
				A			
Rev				Description			
1				2			
A				New drawing			
Date				Remark			
1				2			
3				4			
5				6			
7				8			
9				10			
11				12			
13				14			
15				16			
17				18			
19				20			
21				22			
23				24			
25				26			
27				28			
29				30			
31				32			
33				34			
35				36			
37				38			
39				40			
41				42			
43				44			
45				46			
47				48			
49				50			
51				52			
53				54			
55				56			
57				58			
59				60			
61				62			
63				64			
65				66			
67				68			
69				70			
71				72			
73				74			
75				76			
77				78			
79				80			
81				82			
83				84			
85				86			
87				88			
89				90			
91				92			
93				94			
95				96			
97				98			
99				100			
101				102			
103				104			
105				106			
107				108			
109				110			
111				112			
113				114			
115				116			
117				118			
119				120			
121				122			
123				124			
125				126			
127				128			
129				130			
131				132			
133				134			
135				136			
137				138			
139				140			
141				142			
143				144			
145				146			
147				148			
149				150			
151				152			
153				154			
155				156			
157				158			
159				160			
161				162			
163				164			
165				166			
167				168			
169				170			
171				172			
173				174			
175				176			
177				178			
179				180			
181				182			
183				184			
185				186			
187				188			
189				190			
191				192			
193				194			
195				196			
197				198			
199				200			
201				202			
203				204			
205				206			
207				208			
209				210			
211				212			
213				214			
215				216			
217				218			
219				220			
221				222			
223				224			
225				226			
227				228			
229				230			
231				232			
233				234			
235				236			
237				238			
239				240			
241				242			
243				244			
245				246			
247				248			
249				250			
251				252			
253				254			
255				256			
257				258			
259				260			
261				262			
263				264			
265				266			
267				268			
269				270			
271				272			
273				274			
275				276			
277				278			
279				280			
281				282			
283				284			
285				286			
287				288			
289				290			
291				292			
293				294			
295				296			
297				298			
299				300			
301				302			
303				304			
305				306			
307				308			
309				310			
311				312			
313				314			
315				316			
317				318			
319				320			
321				322			
323				324			
325				326			
327				328			
329				330			
331				332			
333				334			
335				336			
337				338			
339				340			
341				342			
343				344			
345				346			
347				348			
349				350			
351				352			
353				354			
355				356			
357				358			
359				360			
361				362			
363				364			
365				366			
367				368			
369				370			
371				372			
373				374			
375				376			
377				378			
379				380			
381				382			
383				384			
385				386			
387				388			
389				390			
391				392			
393				394			
395				396			
397				398			
399				400			
401				402			
403				404			
405				406			
407				408			
409				410			
411				412			
413				414			
415				416			
417				418			
419				420			
421				422			
423				424			
425				426			
427				428			
429				430			
431				432			
433				434			
435				436			
437				438			
439				440			
441				442			
443				444			
445				446			
447				448			
449				450			
451				452			
453				454			
455				456			
457				458			
459				460			
461				462			
463				464			
465				466			
467				468			
469				470			
471				472			
473				474			
475				476			
477				478			
479				480			
481				482			
483				484			
485				486			
487				488			
489				490			
491				492			
493				494			
495				496			
497				498			
499				499			

◆ Gain & Efficiency

Freq (MHz)	Effi (%)	Gain (dBi)	Freq (MHz)	Effi (%)	Gain (dBi)
2400	55.11	2.23	5000	56.49	1.46
2410	56.47	2.07	5050	57.8	1.85
2420	54.84	1.89	5100	55.15	1.14
2430	55.25	1.51	5150	53.67	0.79
2440	56.05	1.42	5200	53.06	0.18
2450	53.03	0.89	5250	54.03	-0.39
2460	53.37	0.71	5300	55.54	-0.27
2470	54.54	0.12	5350	54.77	-0.11
2480	54.37	0.06	5400	52.92	-0.45
2490	55.25	-0.04	5450	51.42	-1.05
2500	56.8	0.1	5500	51.61	-0.7
			5550	50.56	-0.44
			5600	53.5	-0.05
			5650	53.76	0.11
			5700	54.05	0.2
			5750	55.57	0.59
			5800	55.82	0.63
			5850	54.94	1.28

◆ TRP &TIS

2.4G

B:

Test Result	Wifi 2G TRP			Test Result	Wifi 2G TIS		
	1	6	11		1	6	11
Frequency (MHz)	2412	2437	2462	Frequency (MHz)	2412	2437	2462
TRP (dBm)	16.09	16.33	16.38	TIS (dBm)	-79.35	-81.04	-79.66

G:

Test Result	Wifi 2G TRP			Test Result	Wifi 2G TIS		
	1	6	11		1	6	11
Frequency (MHz)	2412	2437	2462	Frequency (MHz)	2412	2437	2462
TRP (dBm)	12.04	12.51	12.47	TIS (dBm)	-64.09	-64.19	-64.16

N:

Test Result	Wifi 2G TRP			Test Result	Wifi 2G TIS		
	1	6	11		1	6	11
Frequency (MHz)	2412	2437	2462	Frequency (MHz)	2412	2437	2462
TRP (dBm)	14.45	14.74	14.35	TIS (dBm)	-63.2	-63.28	-63.75


5.8G

N:


Test Result	Wifi 5G TRP			Test Result	Wifi 5G TIS		
	36	149	161		36	149	161
Frequency (MHz)	5180	5745	5805	Frequency (MHz)	5180	5745	5805
TRP (dBm)	13.8	13.71	13.61	TIS (dBm)	-64.29	-64.97	-64.29

◆ Radiation Pattern


2400.000MHz




2400.000MHz H

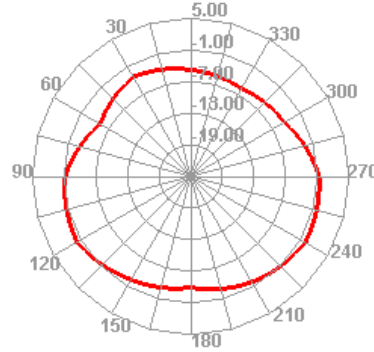


2400.000MHz E1

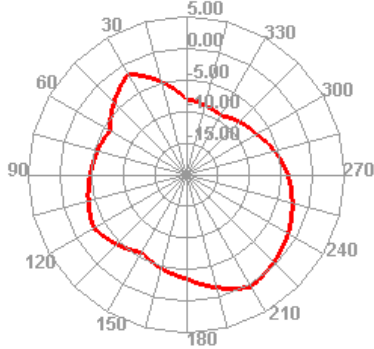


2400.000MHz E2

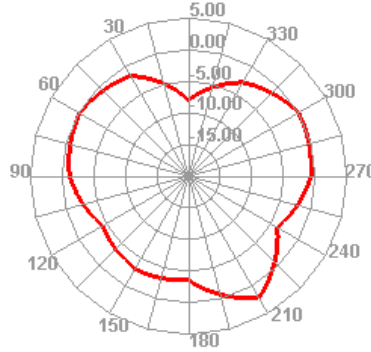


2450.000MHz




2450.000MHz H

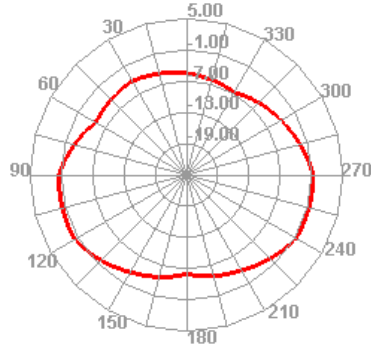


2450.000MHz E1

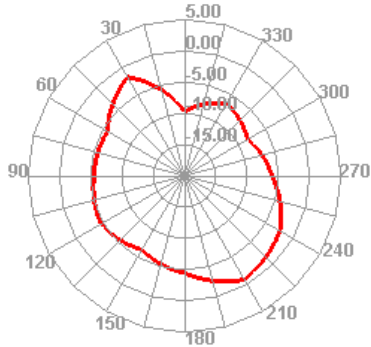


2450.000MHz E2

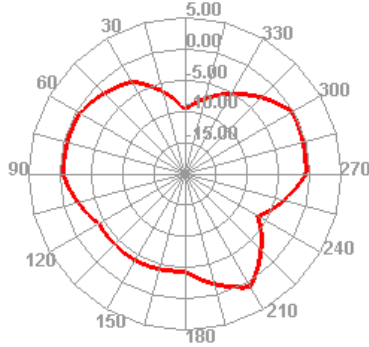


2500.000MHz

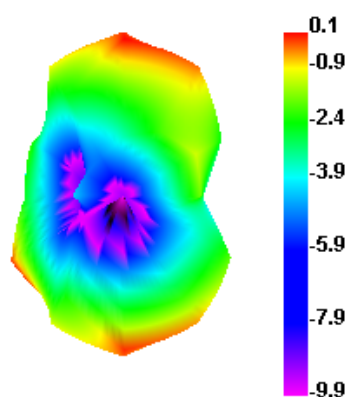


2500.000MHz H

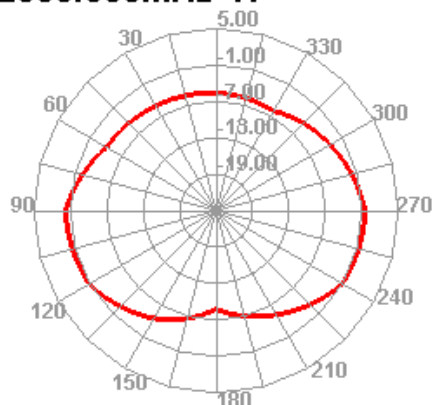


2500.000MHz E1

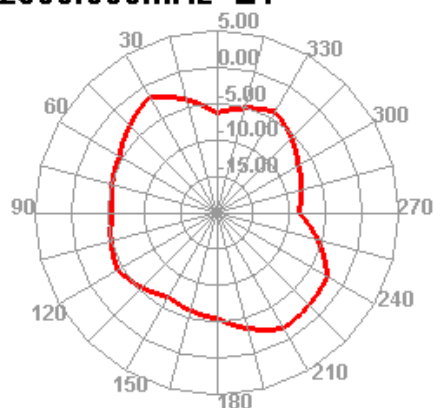


2500.000MHz E2

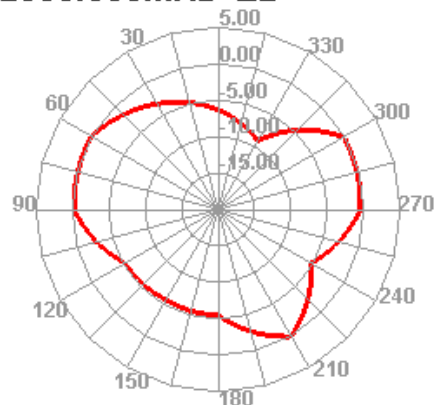


5150.000MHz

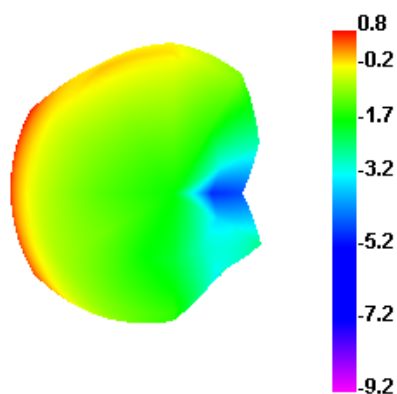


5150.000MHz H

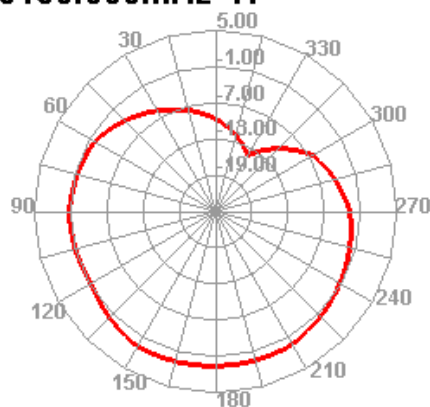


5150.000MHz E1

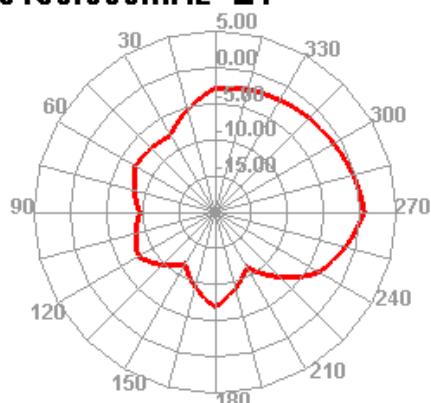


5150.000MHz E2

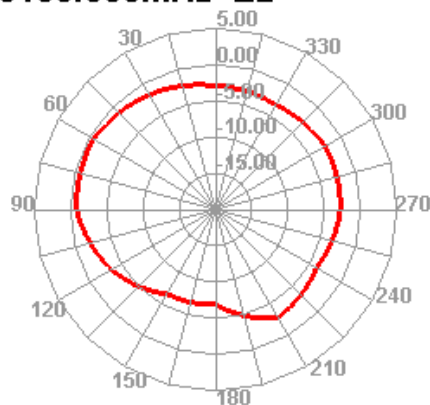


5500.000MHz

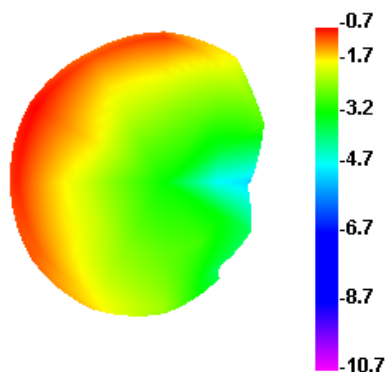


5500.000MHz H

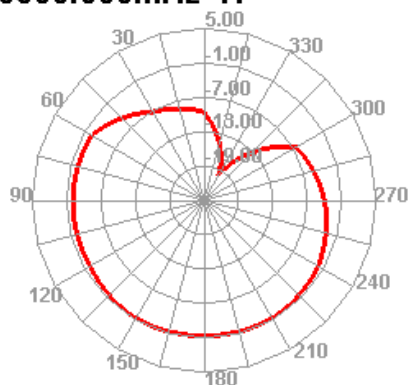


5500.000MHz E1

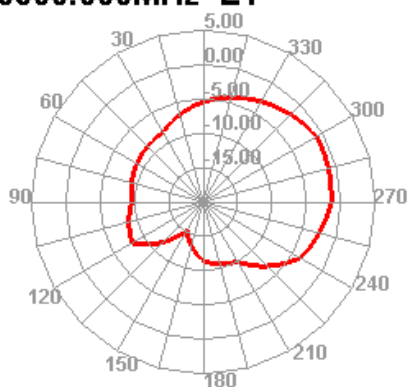


5500.000MHz E2

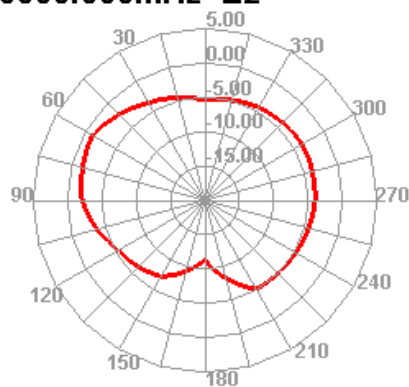


5850.000MHz

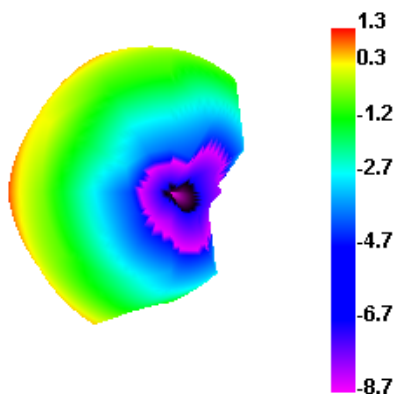


5850.000MHz H

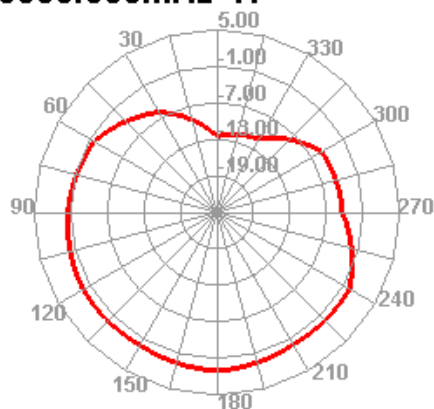


5850.000MHz E1

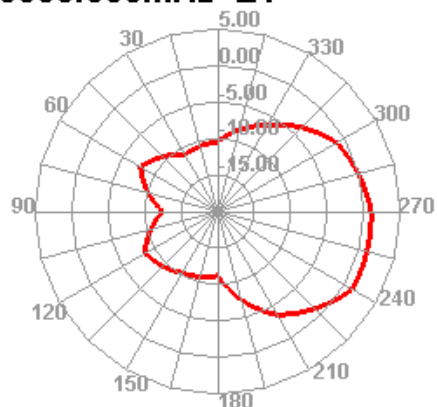

5850.000MHz E2

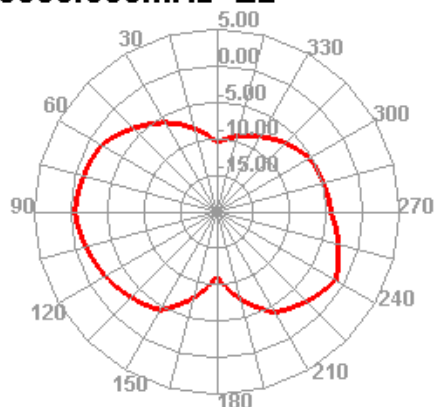

◆ Antenna Picture

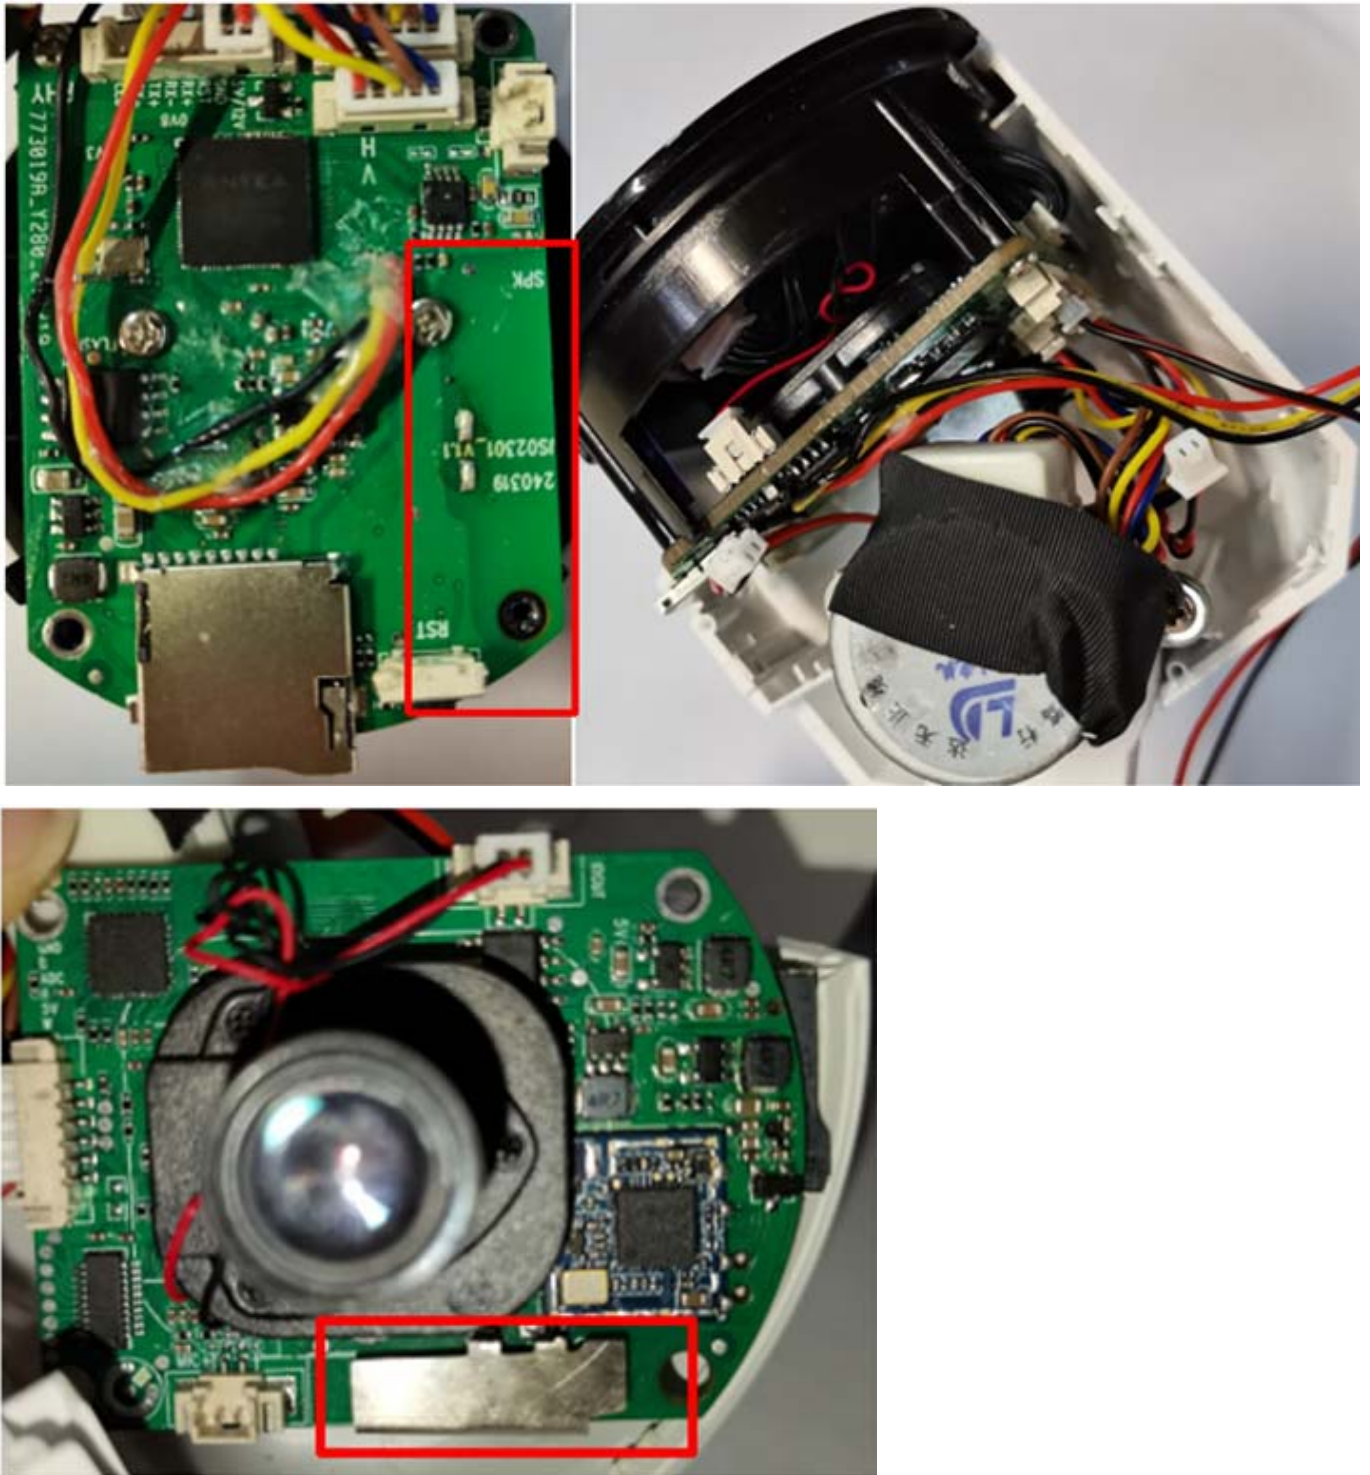

◆ Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: $35 \pm 2^{\circ}\text{C}$ Humidity: 85% NaCl salt spray :5 ± 1 %.PH value :6.5~7.2 Test time:24hours	Salt-Spray Tester	No color change No appear rusting	PASS