

Date: 2024-08-30

#01_WCDMA II_RMC 12.2Kbps_Back_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_1900_240830 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.61, 8.23, 7.25); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.718 W/kg; SAR (10g) = 0.353 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.907 W/kg; SAR (8g) = 0.418 W/kg; SAR (10g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

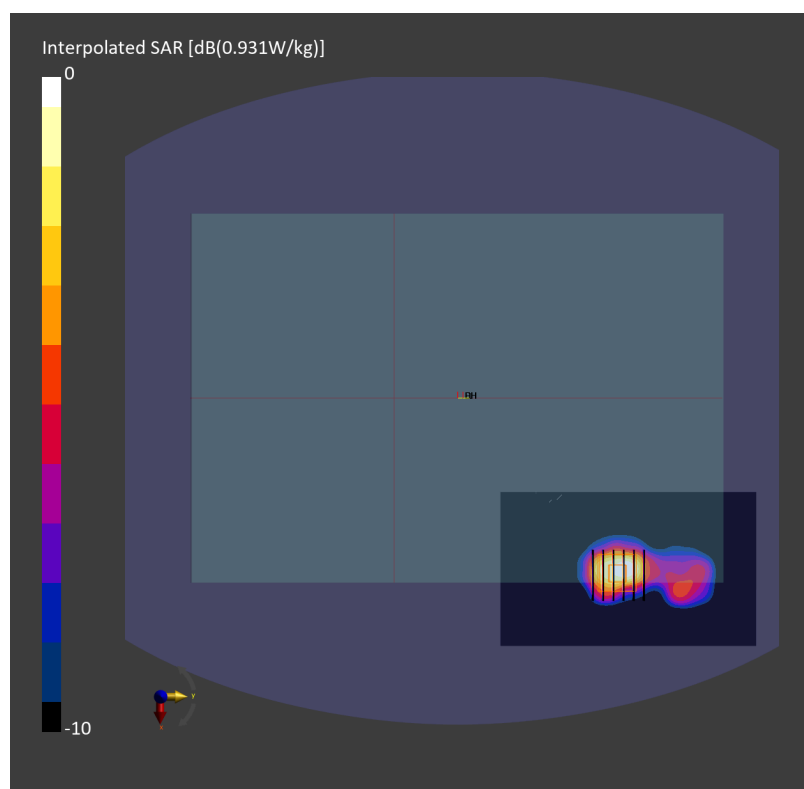

Date: 2024-08-30

#02_WCDMA IV_RMC 12.2Kbps_Back_0mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_1750_240830 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.62, 8.22, 7.18); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.810 W/kg; SAR (10g) = 0.395 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.906 W/kg; SAR (8g) = 0.439 W/kg; SAR (10g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

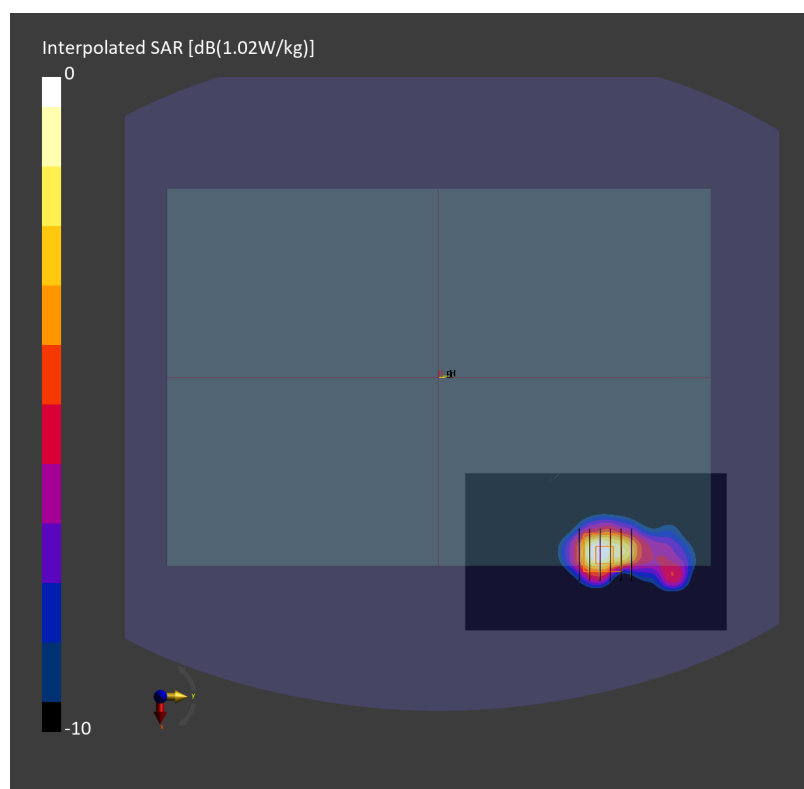

Date: 2024-09-01

#03_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4233

Communication System: UMTS-FDD; Frequency: 846.600 MHz

Medium: HSL_850_240901 Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.71, 9.44, 8.39); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.777 W/kg; SAR (10g) = 0.402 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.968 W/kg; SAR (8g) = 0.428 W/kg; SAR (10g) = 0.385 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.1 %

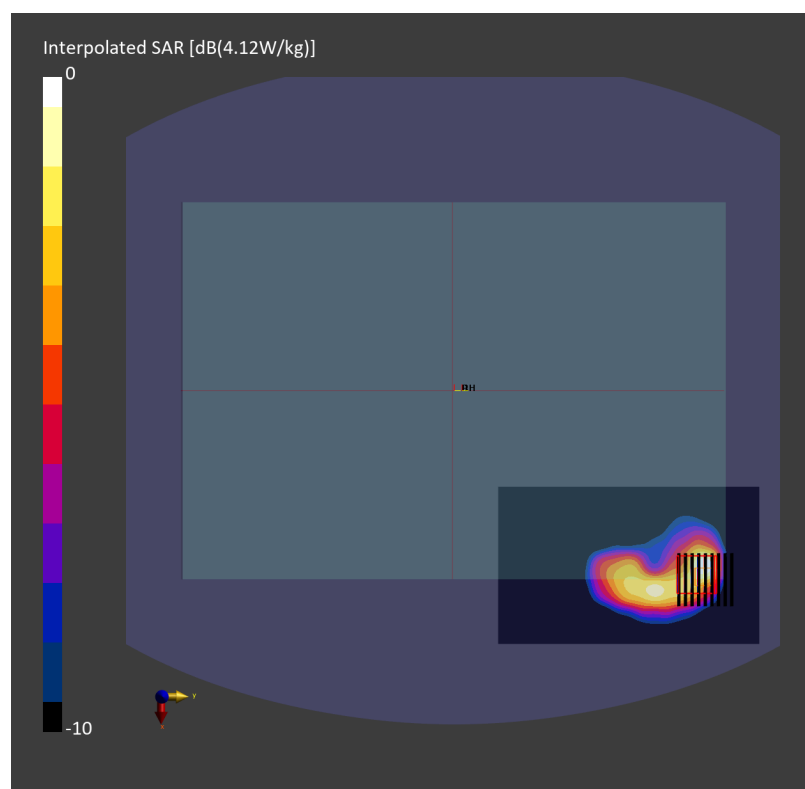

Date: 2024-08-29

#04_LTE Band 7_20M_QPSK_1_0_Back_0mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_2600_240829 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.76, 7.23, 6.43); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.993 W/kg; SAR (10g) = 0.415 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.988 W/kg; SAR (8g) = 0.452 W/kg; SAR (10g) = 0.401 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

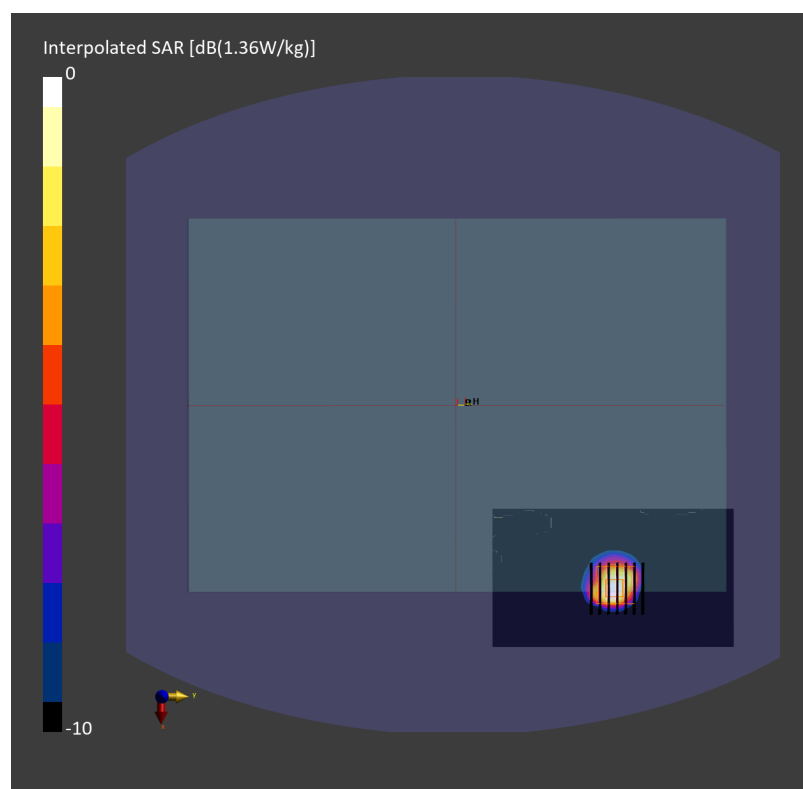

Date: 2024-09-12

#05_LTE Band 12_10M_QPSK_1_0_Right Edge_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_240912 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.45, 9.55, 9.92); Calibrated: 2024-02-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.456 W/kg; SAR (10g) = 0.253 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = -0.01 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.350 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 46.9 %

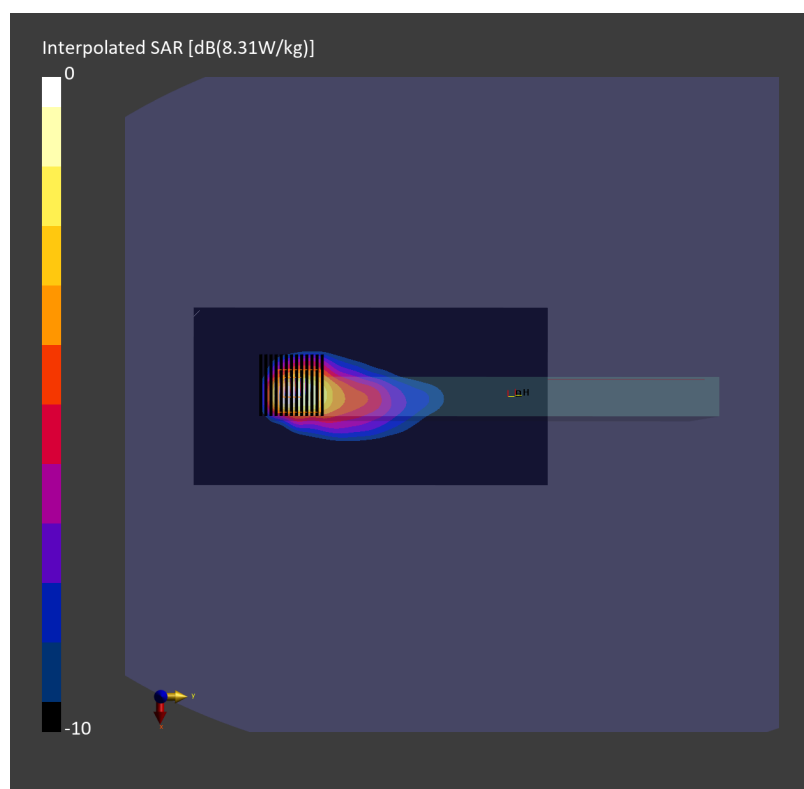

Date: 2024-09-12

#06_LTE Band 13_10M_QPSK_1_0_Back_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_750_240912 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.45, 9.55, 9.92); Calibrated: 2024-02-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.793 W/kg; SAR (10g) = 0.411 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.9 mm x 3.9 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.938 W/kg; SAR (8g) = 0.407 W/kg; SAR (10g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.8 %

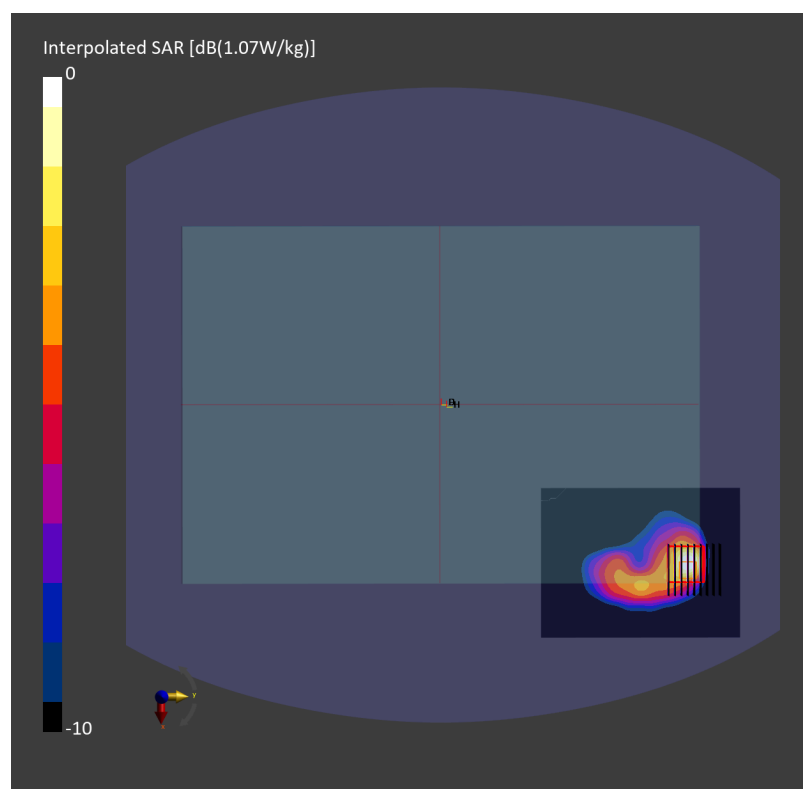

#07_LTE Band 14_10M_QPSK_1_0_Back_0mm_Ch23330

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

- UID: LTE-FDD, 10175-CAH

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.401 W/kg;

Ratio of SAR at M2 to SAR at M1 = 59.4 %



Date: 2024-08-30

#08_LTE Band 25_20M_QPSK_1_0_Back_0mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_1900_240830 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.61, 8.23, 7.25); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.918 W/kg; SAR (10g) = 0.422 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 1.04 W/kg; SAR (8g) = 0.483 W/kg; SAR (10g) = 0.433 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

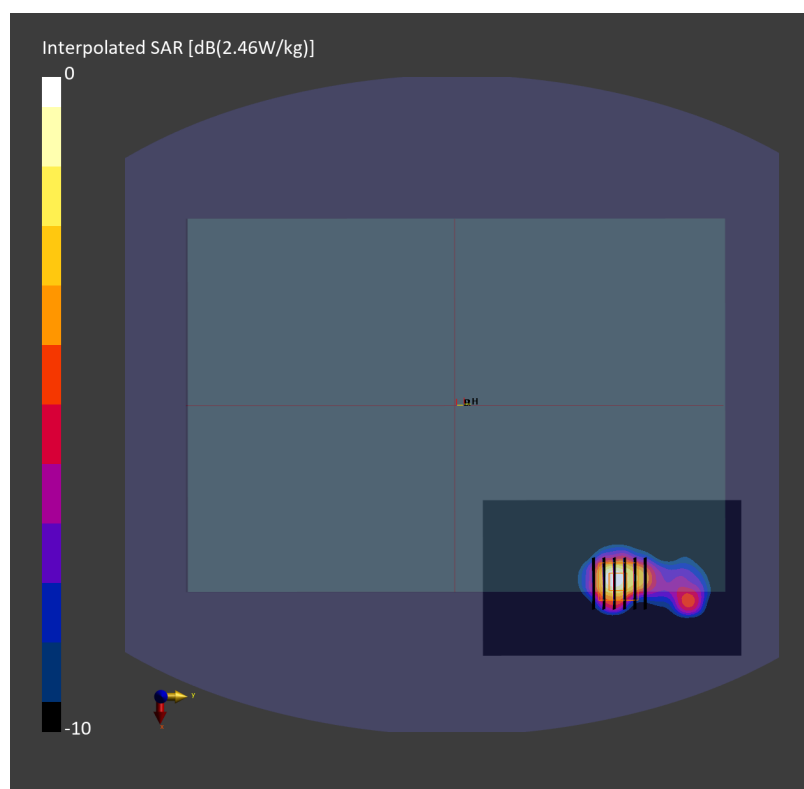

Date: 2024-09-12

#09_LTE Band 26_15M_QPSK_1_37_Back_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_850_240912 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.49, 9.77, 9.84); Calibrated: 2024-02-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.792 W/kg; SAR (10g) = 0.415 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.979 W/kg; SAR (8g) = 0.422 W/kg; SAR (10g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 3.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.7 %

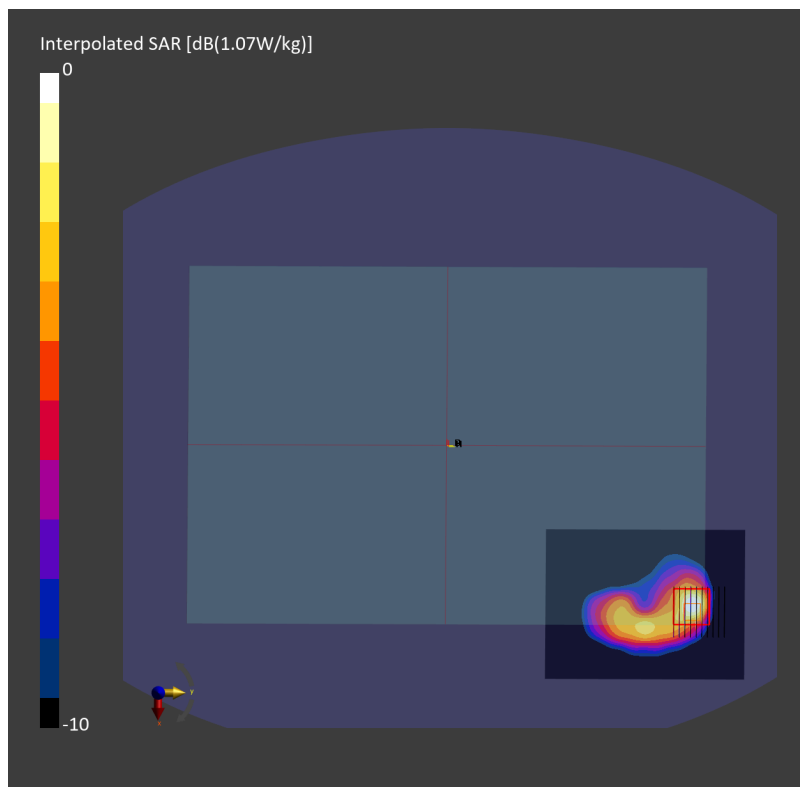

Date: 2024-08-29

#10_LTE Band 30_10M_QPSK_1_0_Back_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_2300_240829 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.06, 7.55, 6.73); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.875 W/kg; SAR (10g) = 0.382 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.888 W/kg; SAR (8g) = 0.407 W/kg; SAR (10g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

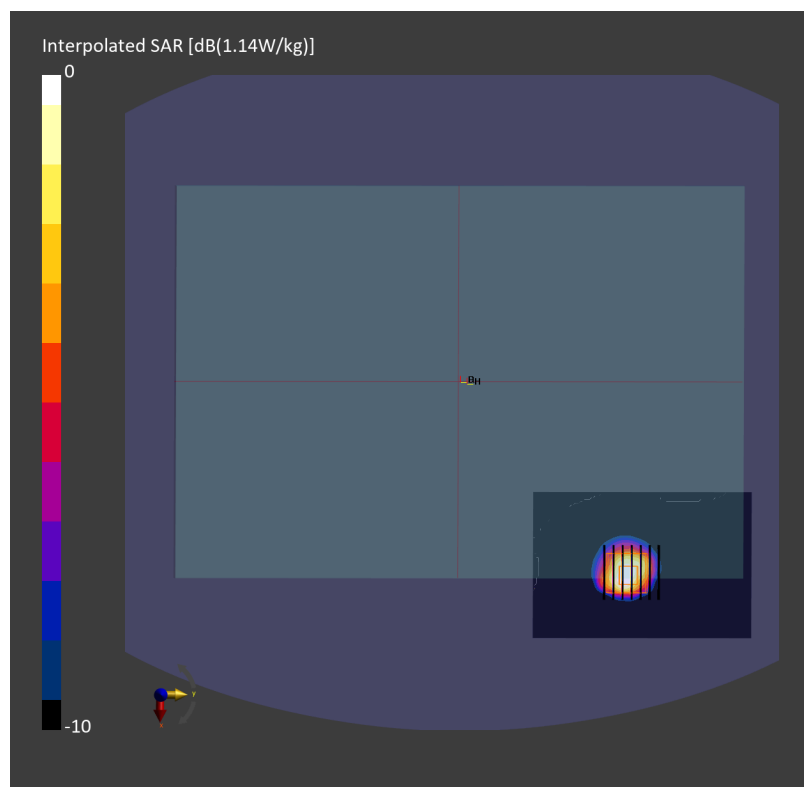

Date: 2024-08-30

#11_LTE Band 66_20M_QPSK_50_0_Left Edge_0mm_CH132572

Communication System: LTE-FDD ; Frequency: 1770.000 MHz

Medium: HSL_1750_240830 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.62, 8.22, 7.18); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10297-AAE

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.322 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.474 W/kg; SAR (10g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

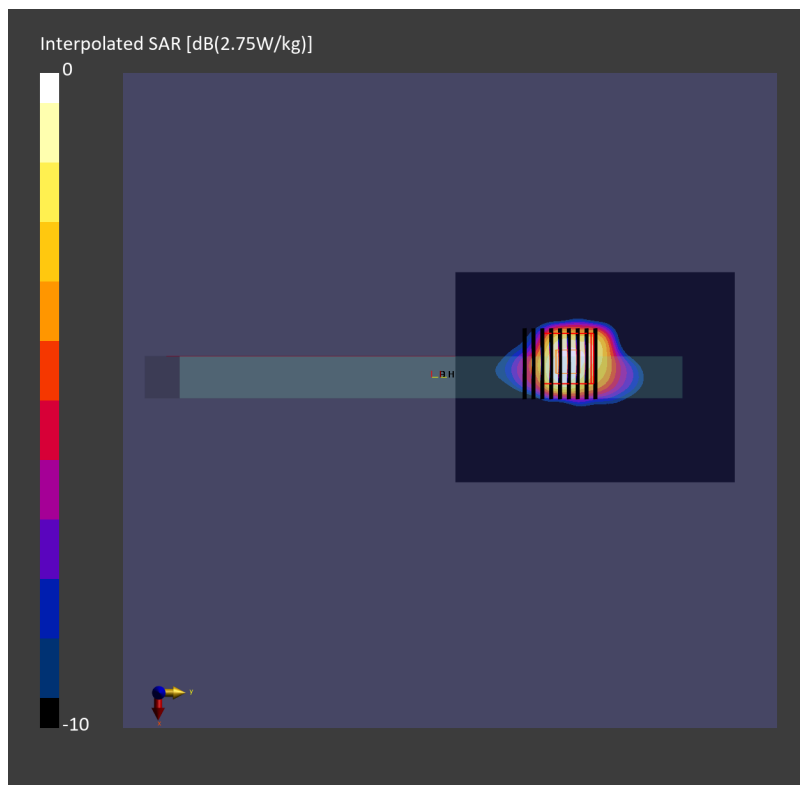

Date: 2024-09-01

#12_LTE Band 71_20M_QPSK_1_0_Right Edge_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_750_240901 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(9.09, 9.62, 8.59); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.545 W/kg; SAR (10g) = 0.260 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.2 mm x 2.2 mm x 1.2 mm

Power Drift = -0.04 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.316 W/kg; SAR (10g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 3.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.7 %

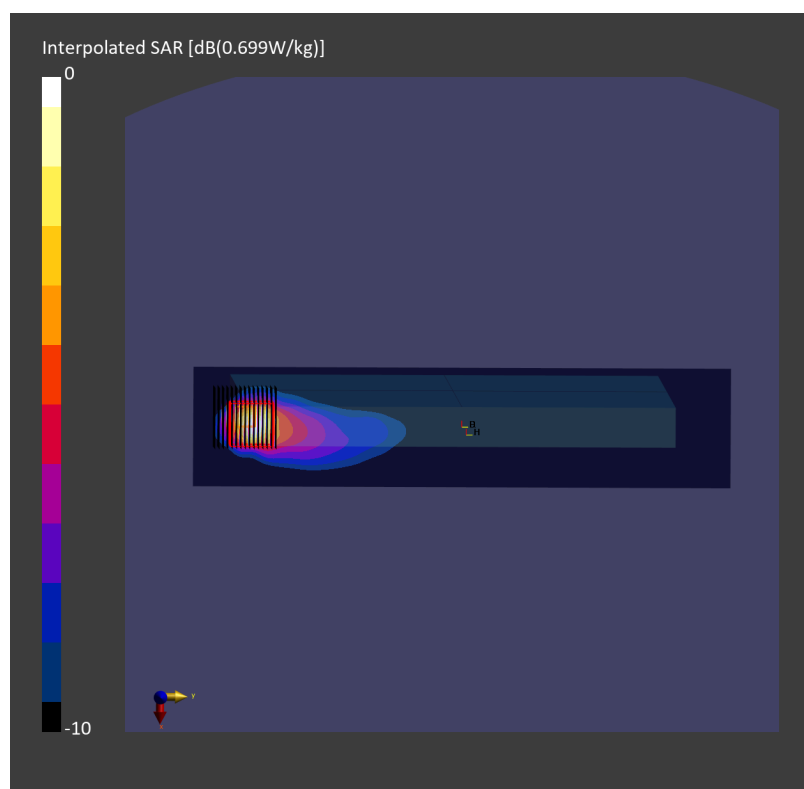

Date: 2024-08-29

#13_LTE Band 41_20M_QPSK_1_0_Left Edge_0mm_CH41055

Communication System: LTE-TDD ; Frequency: 2636.500 MHz

Medium: HSL_2600_240829 Medium parameters used: $f = 2636.500$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.76, 7.23, 6.43); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.841 W/kg; SAR (10g) = 0.324 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 1.09 W/kg; SAR (8g) = 0.414 W/kg; SAR (10g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.1 %

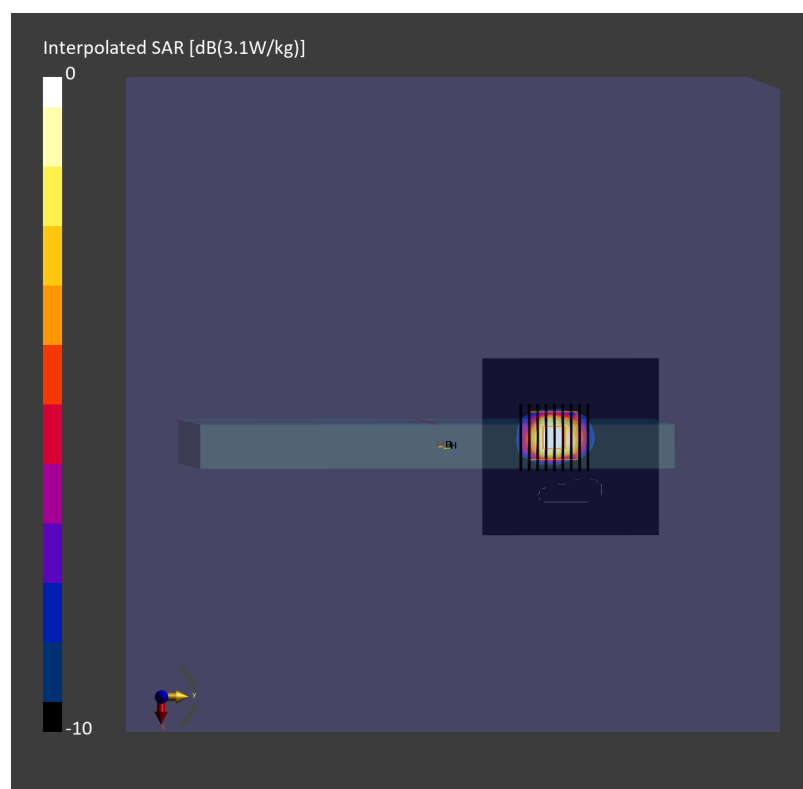

Date: 2024-09-04

#14_LTE Band 42_20M_QPSK_1_0_Left Edge_0mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_3500_240904 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.89$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.12, 6.69, 5.85); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.256 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.969 W/kg; SAR (8g) = 0.326 W/kg; SAR (10g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.4 %

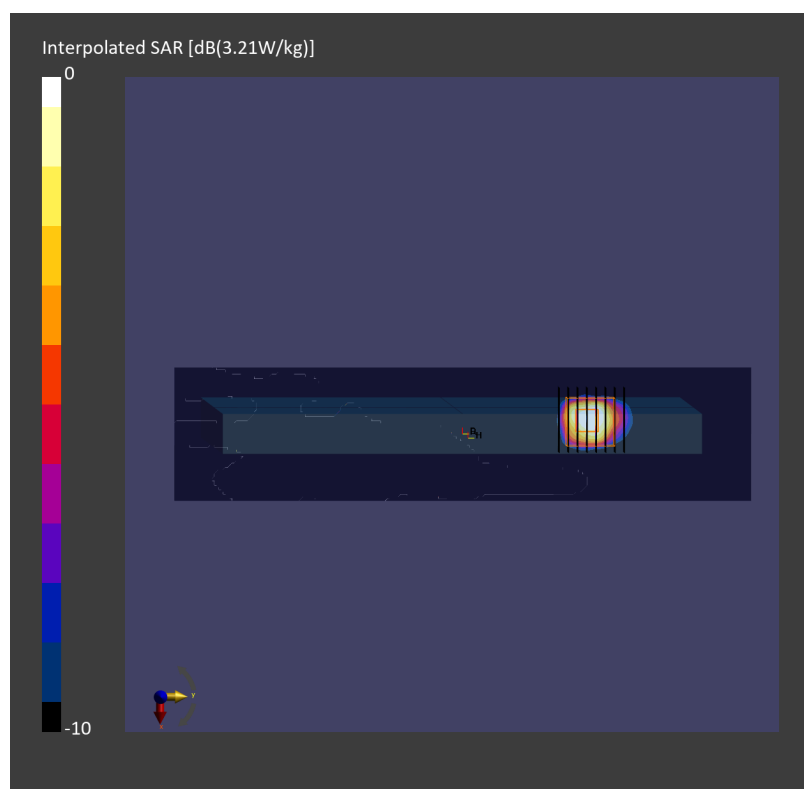

Date: 2024-09-04

#15_LTE Band 43_20M_QPSK_1_0_Left Edge_0mm_Ch44690

Communication System: LTE-TDD; Frequency: 3710.000 MHz

Medium: HSL_3700_240904 Medium parameters used: $f = 3710.000$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.28, 6.87, 6.01); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435 - AAG

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.726 W/kg; SAR (10g) = 0.246 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.971 W/kg; SAR (8g) = 0.318 W/kg; SAR (10g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.2 %

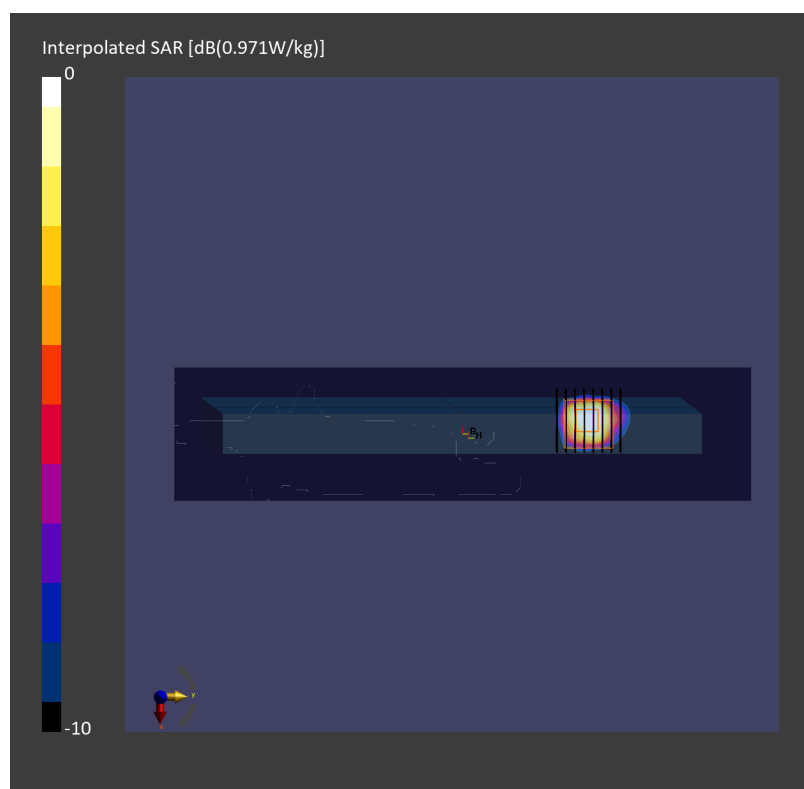

Date: 2024-09-04

#16_LTE Band 48_20M_QPSK_1_0_Left Edge_0mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_3700_240904 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 3.08$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.28, 6.87, 6.01); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.721 W/kg; SAR (10g) = 0.245 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.8 %

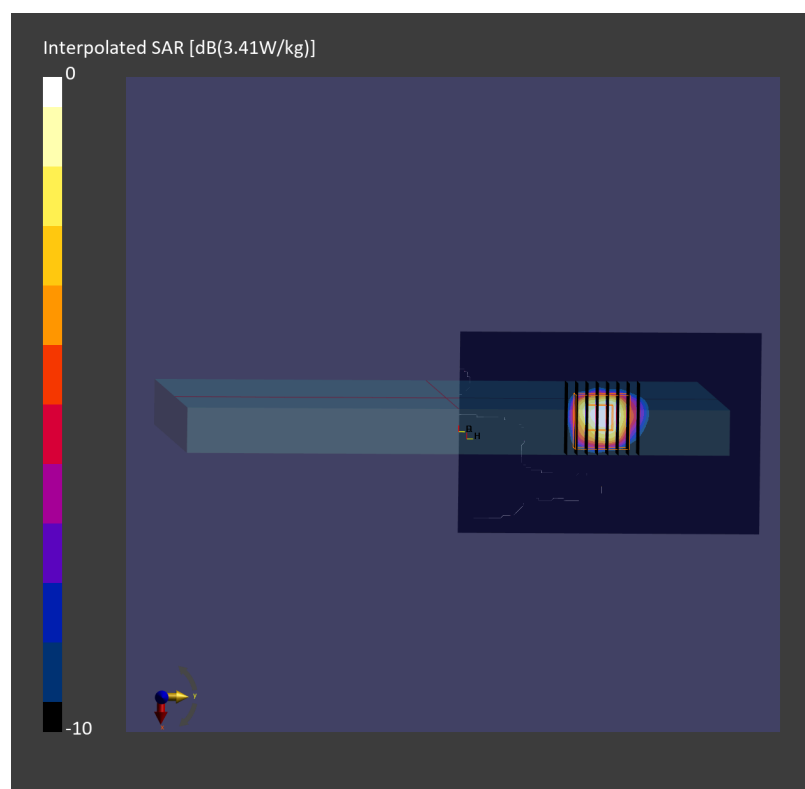

Date: 2024-08-29

#17_FR1 n7_40M_BPSK_1_214_Back_0mm_CH507000

Communication System: 5G NR ; Frequency: 2535.000 MHz

Medium: HSL_2600_240829 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.76, 7.23, 6.43); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.593 W/kg; SAR (10g) = 0.263 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.852 W/kg; SAR (8g) = 0.400 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

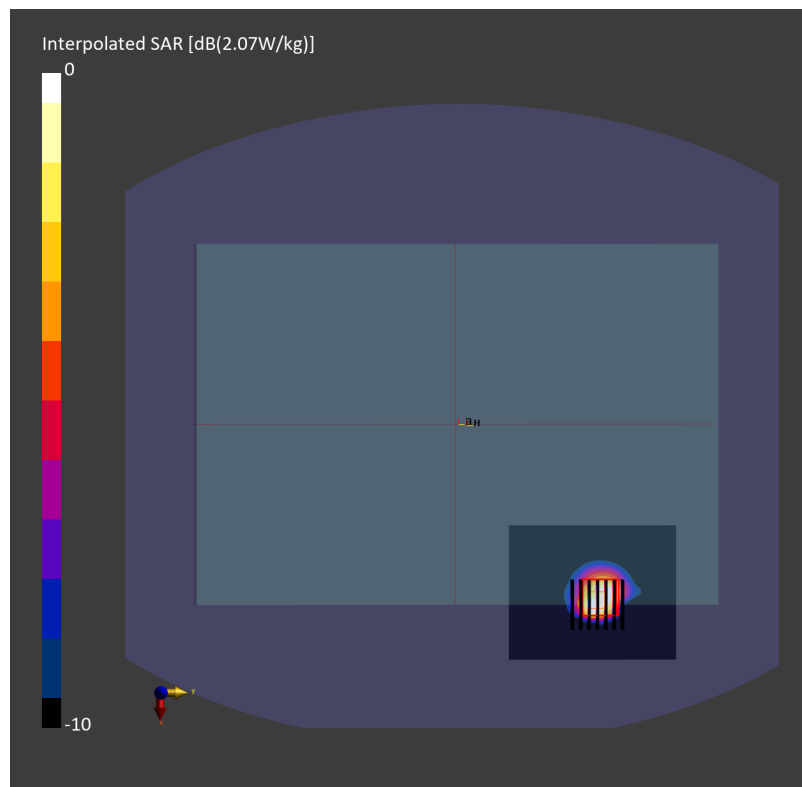

Date: 2024-09-01

#18_FR1 n12_15M_BPSK_1_1_Right Edge_0mm_CH141500

Communication System: 5G NR ; Frequency: 707.500 MHz

Medium: HSL_750_240901 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(9.09, 9.62, 8.59); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.375 W/kg; SAR (10g) = 0.202 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.13 dB

SAR (1g) = 0.966 W/kg; SAR (8g) = 0.294 W/kg; SAR (10g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.4 %

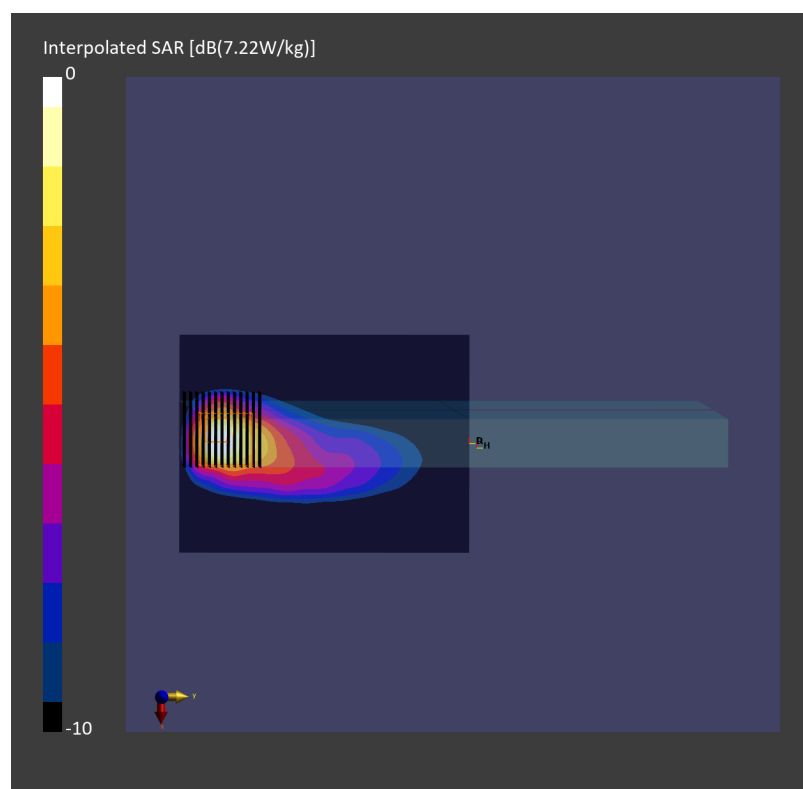

Date: 2024-09-01

#19_FR1 n13_10M_BPSK_1_26_Right Edge_0mm_CH156400

Communication System: 5G NR ; Frequency: 782.000 MHz

Medium: HSL_750_240901 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(9.09, 9.62, 8.59); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.468 W/kg; SAR (10g) = 0.244 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.2 mm x 2.2 mm x 1.2 mm

Power Drift = -0.03 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 3.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.2 %

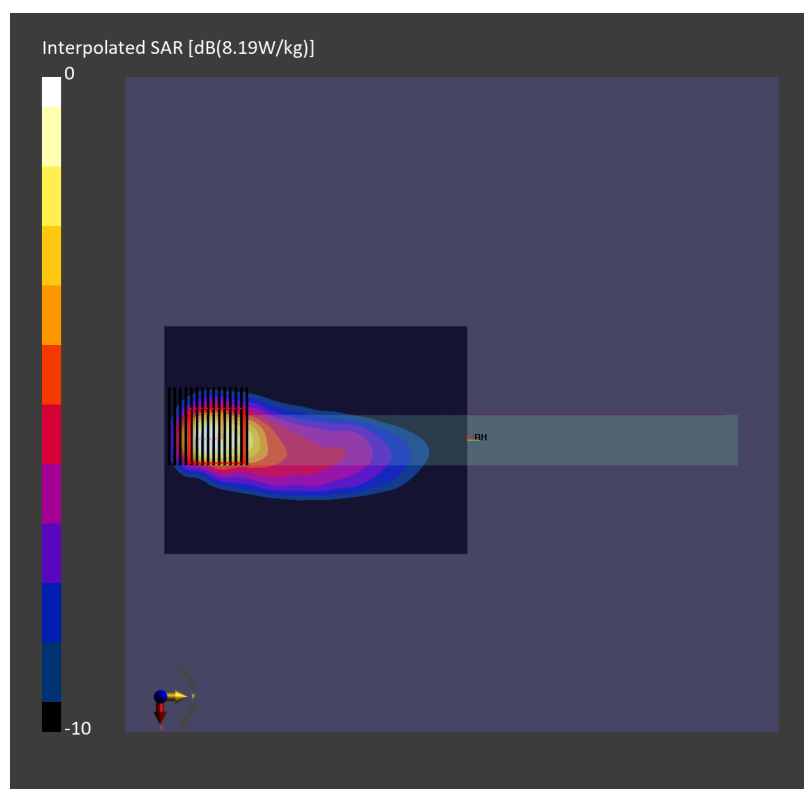

Date: 2024-09-12

#20_FR1 n14_10M_BPSK_1_1_Back_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_750_240912 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.45, 9.55, 9.92); Calibrated: 2024-02-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.810 W/kg; SAR (10g) = 0.434 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm

Power Drift = 0.02 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.453 W/kg; SAR (10g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.1 %

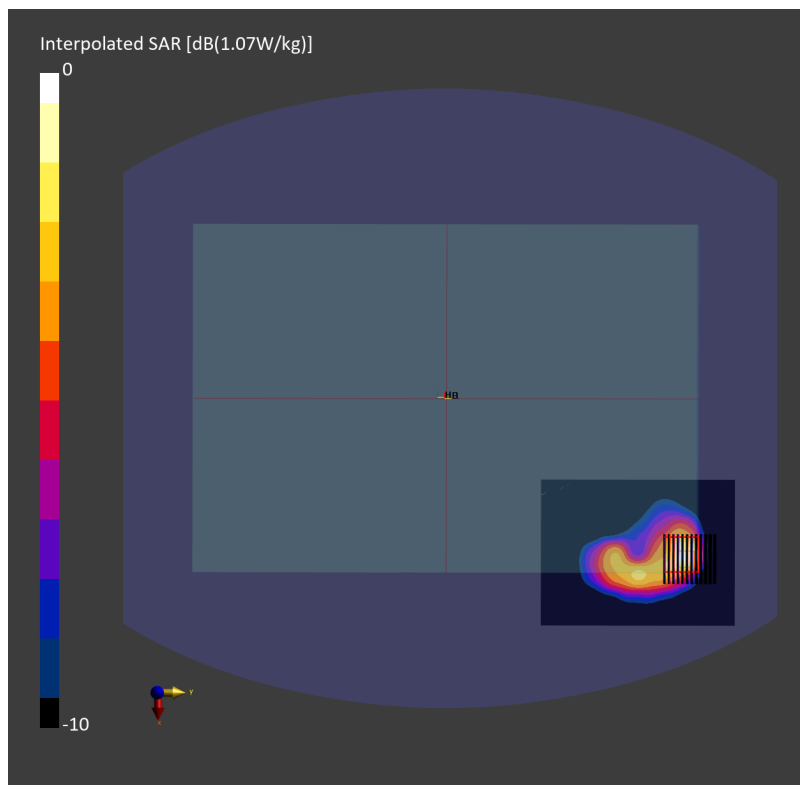

Date: 2024-08-30

#21_FR1 n25_40M_BPSK_1_108_Left Edge_0mm_Ch376500

Communication System: 5G NR ; Frequency: 1882.500 MHz

Medium: HSL_1900_240830 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.61, 8.23, 7.25); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.378 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.930 W/kg; SAR (8g) = 0.422 W/kg; SAR (10g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

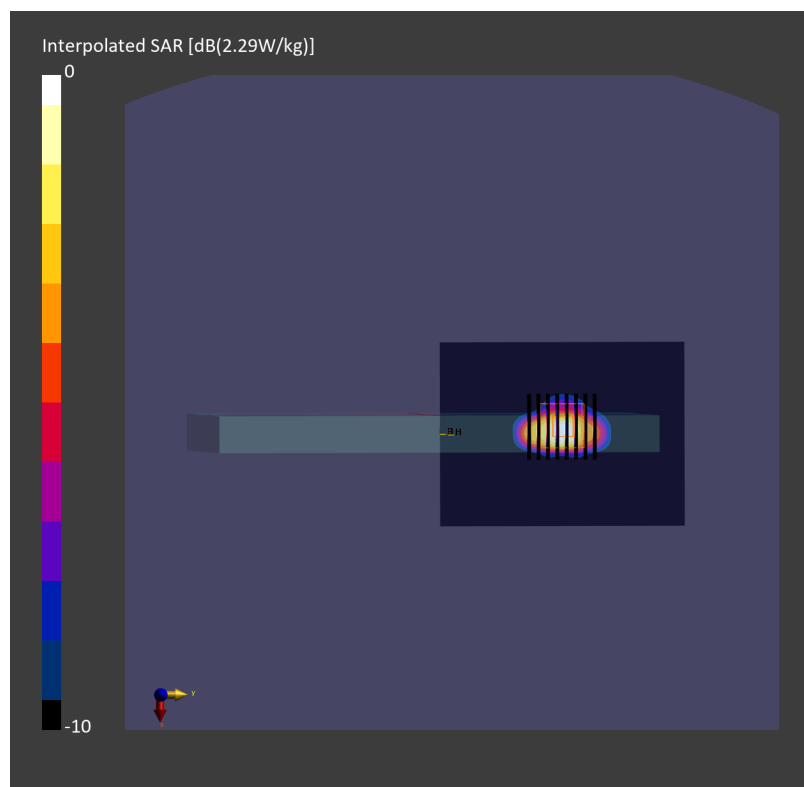

Date: 2024-09-01

#22_FR1 n26_20M_BPSK_1_104_Back_0mm_Ch166300

Communication System: 5G NR ; Frequency: 831.500 MHz

Medium: HSL_850_240901 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.71, 9.44, 8.39); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.856 W/kg; SAR (10g) = 0.423 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.943 W/kg; SAR (8g) = 0.409 W/kg; SAR (10g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.2 %

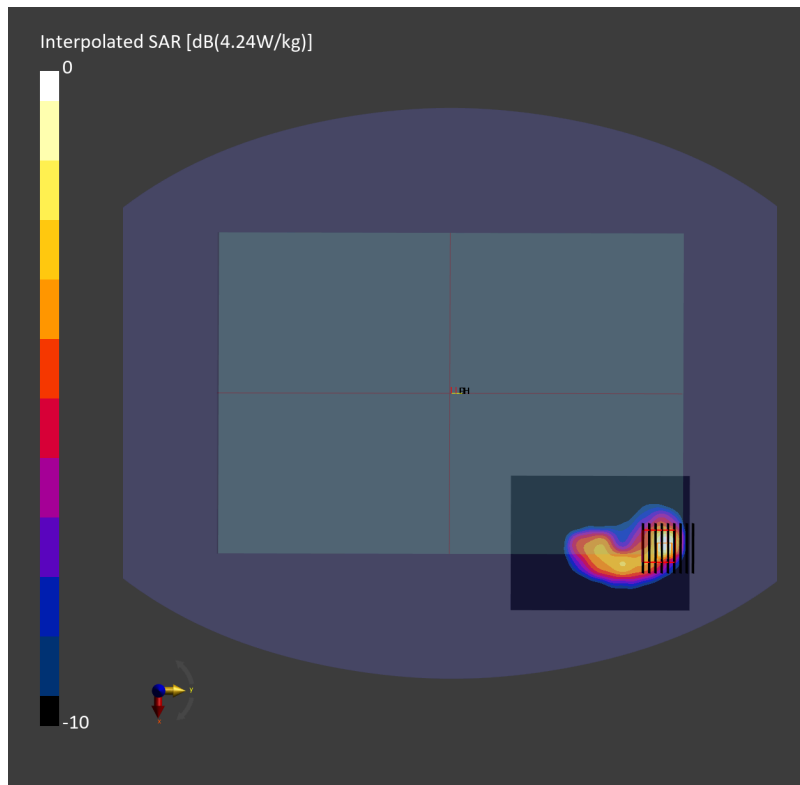

Date: 2024-08-29

#23_FR1 n30_10M_BPSK_50_0_Back_0mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_2300_240829 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.06, 7.55, 6.73); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10945-AAD

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.844 W/kg; SAR (10g) = 0.369 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.873 W/kg; SAR (8g) = 0.400 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

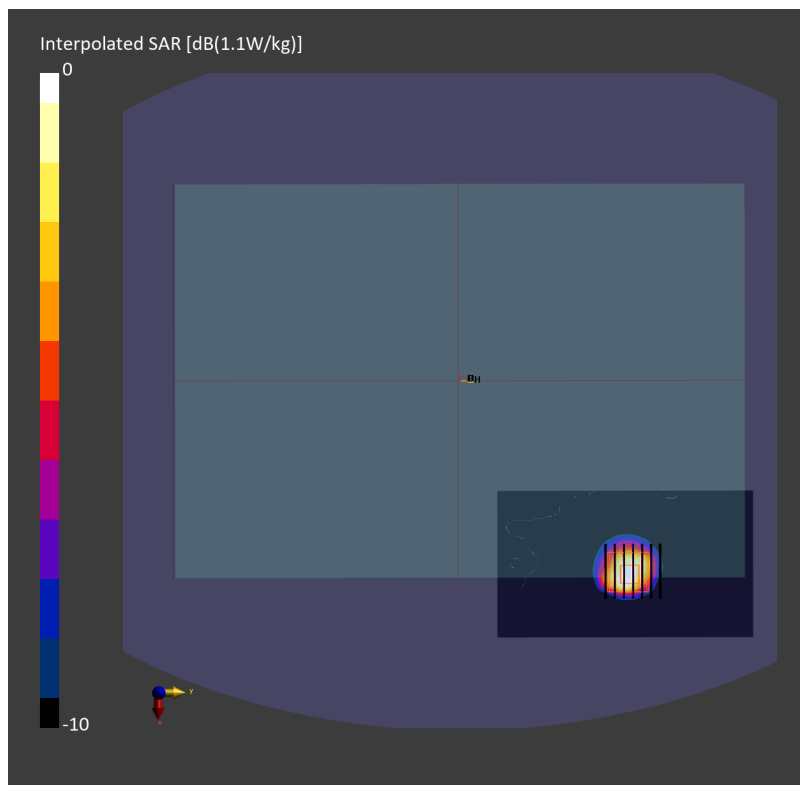

Date: 2024-08-30

#24_FR1 n66_40M_BPSK_1_214_Back_0mm_Ch349000

Communication System: 5G NR ; Frequency: 1745.000 MHz

Medium: HSL_1750_240830 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.62, 8.22, 7.18); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.398 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.927 W/kg; SAR (8g) = 0.442 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

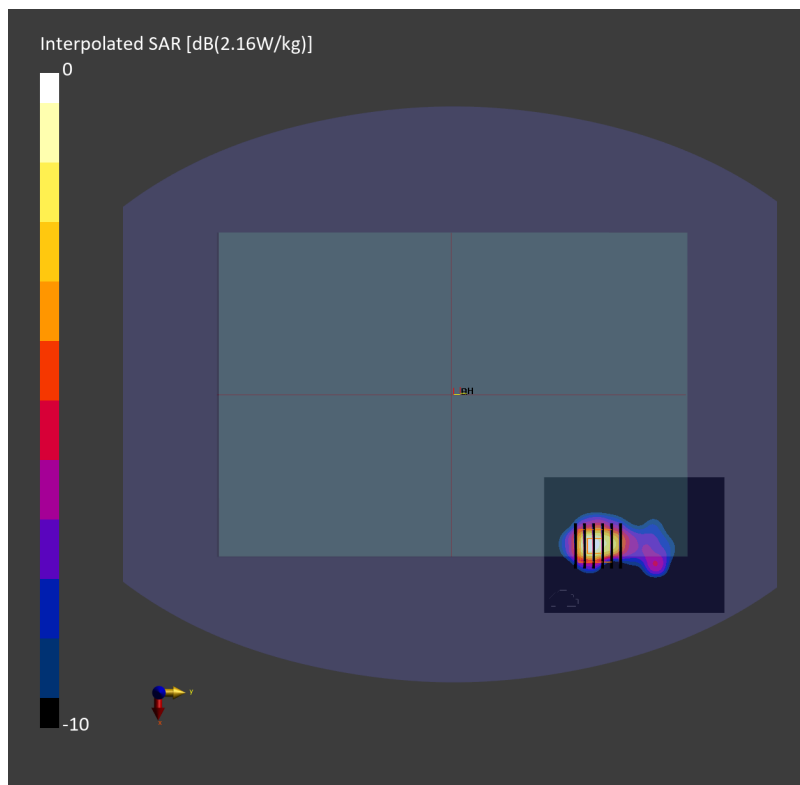

Date: 2024-09-01

#25_FR1 n71_20M_BPSK_1_53_Right Edge_0mm_Ch136100

Communication System: 5G NR ; Frequency: 680.500 MHz

Medium: HSL_750_240901 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(9.09, 9.62, 8.59); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.304 W/kg; SAR (10g) = 0.187 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.02 dB

SAR (1g) = 0.986 W/kg; SAR (8g) = 0.302 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.5 %

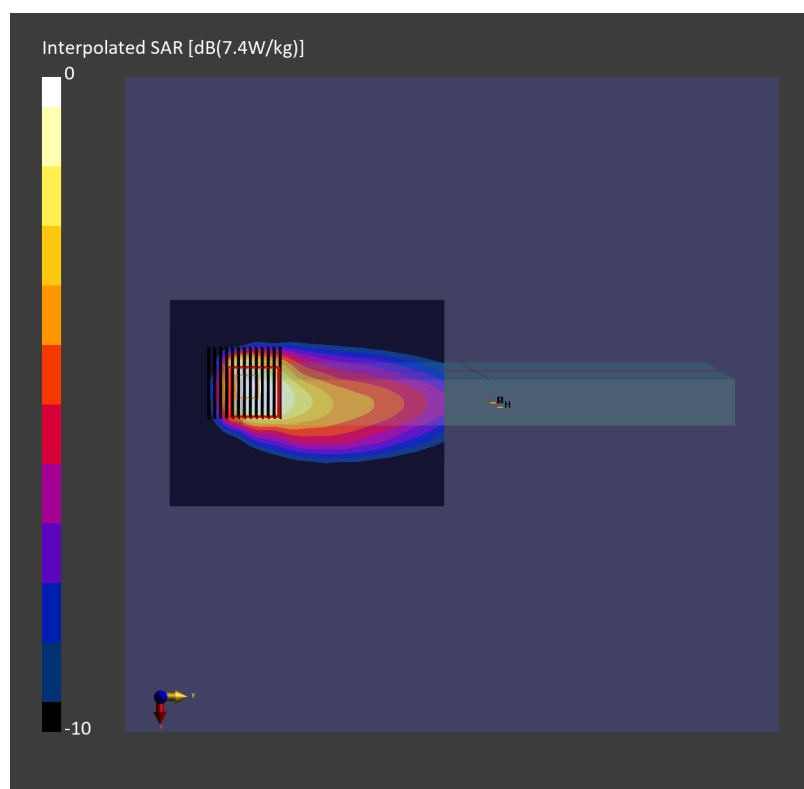

Date: 2024-08-29

#26_FR1 n41_100M_BPSK_1_271_Back_0mm_Ch518598

Communication System: 5G NR ; Frequency: 2592.990 MHz

Medium: HSL_2600_240829 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.76, 7.23, 6.43); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (80.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.772 W/kg; SAR (10g) = 0.297 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.4 mm x 4.4 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.906 W/kg; SAR (8g) = 0.356 W/kg; SAR (10g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

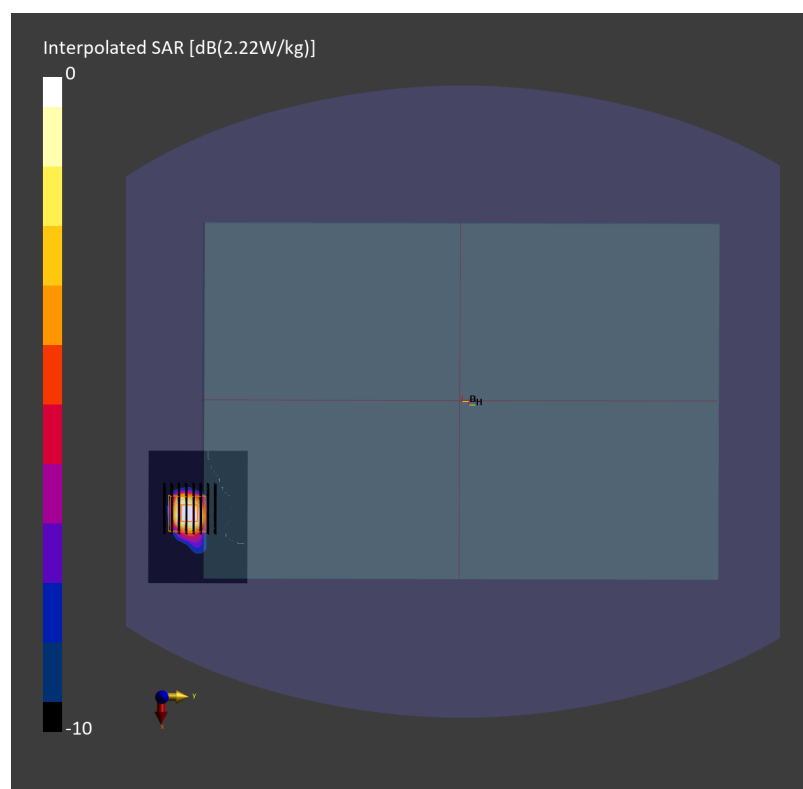

Date: 2024-09-04

#27_FR1 n48_40M_BPSK_1_104_Left Edge_0mm_Ch645332

Communication System: 5G NR ; Frequency: 3679.98 MHz

Medium: HSL_3700_240904 Medium parameters used: $f = 3679.98$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.28, 6.87, 6.01); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.668 W/kg; SAR (10g) = 0.234 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.950 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.8 %

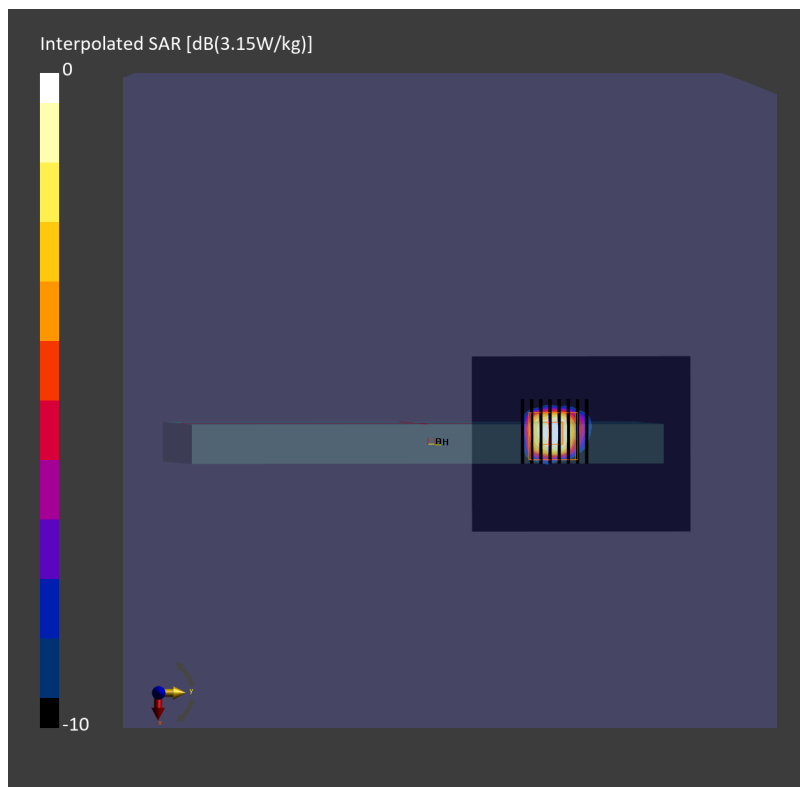

Date: 2024-09-04

#28_FR1 n77_100M_BPSK_1_1_Back_0mm_CH656000

Communication System: 5G NR ; Frequency: 3840.000 MHz

Medium: HSL_3900_240904 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.22$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.0, 6.56, 5.73); Calibrated: 2024-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.758 W/kg; SAR (10g) = 0.223 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.861 W/kg; SAR (8g) = 0.281 W/kg; SAR (10g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.7 %

