

TEST REPORT

Application No.: KSCR2505000896AT
FCC ID: 2BEY3HMT89LDA
Applicant: NETPRISMA INC.
Address of Applicant: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
Manufacturer: NETPRISMA INC.
Address of Manufacturer: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
Equipment Under Test (EUT):
EUT Name: 5G Sub-6 GHz LGA Module
Model No.: HMT89-LD
Standard(s): FCC Part 96.47
FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification
WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines
Date of Receipt: 2025-05-19
Date of Test: 2025-05-20 to 2025-06-20
Date of Issue: 2025-06-25

| | |
|---------------------|--------------|
| Test Result: | Pass* |
|---------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



| Revision Record | | | |
|-----------------|-------------|------------|--------|
| Version | Description | Date | Remark |
| 00 | Original | 2025-06-25 | / |
| | | | |
| | | | |

| | | | |
|--------------------------|--|------------------------------|--|
| Authorized for issue by: | | | |
| Tested By | | Damon Zhou | |
| | | Damon Zhou /Project Engineer | |
| Approved By | | Terry Hou | |
| | | Terry Hou /Reviewer | |



2 Test Summary

| Item | Standard | Test Case ID | Result |
|--|----------|--------------|--------|
| End User Device additional requirement | 96.47 | / | Pass |

The UUT is an End User Device. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines



3 Contents

| | Page |
|--|------|
| 1 COVER PAGE | 1 |
| 2 Test Summary | 3 |
| 3 Contents | 4 |
| 4 General Information..... | 5 |
| 4.1 Details of E.U.T. | 5 |
| 4.2 Measurement Uncertainty | 5 |
| 4.3 Description of Support Units | 6 |
| 4.4 Test Location..... | 7 |
| 4.5 Test Facility | 7 |
| 4.6 Deviation from Standards..... | 7 |
| 4.7 Abnormalities from Standard Conditions | 7 |
| 5 Equipment List | 8 |
| 6 Test Method and Environment | 9 |
| 6.1 End User Device Conformance and Performance..... | 9 |
| 6.2 Test Environment | 9 |
| 6.3 Test Requirement..... | 9 |
| 6.4 Test Procedure..... | 10 |
| 6.5 Test Setup | 11 |
| 6.6 Test Result | 12 |
| 7 Test Setup Photographs | 16 |

4 General Information

4.1 Details of E.U.T.

| | |
|------------------------------|---|
| Power supply: | DC 3.8V |
| Sample Type: | End User device |
| Transmitter Frequency Band: | LTE: Band 48 5GNR: n48 |
| Transmitter Frequency Range: | 3550~3700MHz |
| Antenna Type: | External Antenna |
| Hardware Version: | R1.0 |
| Software Version: | HMT89LDBL2201_OCPU |
| Antenna Gain: | -4.29dBi (Provided by the manufacturer) |
| MIMO | LTE:1TX1RX NR:2TX2RX |

4.2 Measurement Uncertainty

| No. | Item | Measurement Uncertainty |
|-----|--------------------|---------------------------|
| 1 | Radio Frequency | $\pm 7.25 \times 10^{-8}$ |
| 2 | RF conducted power | $\pm 0.75\text{dB}$ |
| 3 | Temperature test | $\pm 1^{\circ}\text{C}$ |
| 4 | Humidity test | $\pm 3\%$ |
| 5 | Supply voltages | $\pm 1.5\%$ |
| 6 | Time | $\pm 3\%$ |



Report No.: KSCR250500089601

Page: 6 of 16

4.3 Description of Support Units

For LTE test:

| Description | Manufacturer | Model No. | Serial No. |
|--------------|-------------------------|-------------------------------------|---------------------|
| EPC | Lanner Electronics Inc. | LICA-1513A | LR202002004052 |
| Router | TP-LINK | TL-R860+ | 1175379002425 |
| Base station | Baicells | pBS31010 (FCC ID: 2AG32PBS31010) | 12020002912122B0001 |

For 5GNR test:

| Description | Manufacturer | Model No. | Serial No. |
|-------------------|--------------|--------------------------------|-----------------|
| 5GC | astir | astir_5GC | A372768X0507398 |
| Router | TP-Link | TL-R860+ | 1175379002425 |
| Base Band Unit | BTI | sCELL- G52091NAX | L603JESE1I |
| Remote Radio Unit | BTI | RU4370 (FCC ID: WBK-RU4370) | C0214921000004S |

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Report No.: KSCR250500089601

Page: 8 of 16

5 Equipment List

| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. Date (yyyy-mm-dd) | Cal. Due date (yyyy-mm-dd) |
|-------------------------------------|---------------|------------------|-------------------|---------------------------|-------------------------------|
| Laptop | Lenovo | Y510P | HFL000026 | N/A | N/A |
| Spectrum Analyzer | KEYSIGHT | N9020A | KUS2001M00 1-2 | 2024/8/24 | 2025/8/23 |
| Shield Room | YanChuang | N/A | KS301115-2 | N/A | N/A |
| Coaxial Cable | Thermax | N/A | 13 | 2024/9/16 | 2025/9/15 |
| Attenuator | Mini-Circuits | NAT-6-2W | 15542-1 | N.C.R. | N.C.R. |
| Humidity / Temperature Indicator | Renke | RS-WS-N01- 6J | 1032844 | 20253/21 | 2026/3/20 |



6 Test Method and Environment

6.1 End User Device Conformance and Performance

Test Requirement: FCC Part 96.47

Test Method: WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

6.2 Test Environment

Environmental Conditions: 25°C, 65%RH

6.3 Test Requirement

FCC Part 96.47

- a). End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.
- b). An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

6.4 Test Procedure

Following procedure can be done by applying WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, use the certified LTE Base station CBSD (FCC ID: 2AG32PBS31010) and 5G NR Base station CBSD (FCC ID: WBK-RU4370) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):


For LTE:

1. Setup with frequency 3560-3580MHz and power level 14dBm/MHz;
2. Enable CBSD service ;
3. Check EUD Tx Frequency and power;
4. Disable AP service ;
5. Check EUD stops transmission within 10seconds;
6. Setup with 3575-3595MHz & power level 8dBm/MHz;
7. Enable CBSD service;
8. Check EUD Tx Frequency and power;
9. Disable CBSD service;
10. Check EUD stops transmission within 10seconds.

For 5G NR:

1. Setup with frequency 3620-3640MHz and power level 14dBm/MHz;
2. Enable CBSD service ;
3. Check EUD Tx Frequency and power;
4. Disable AP service ;
5. Check EUD stops transmission within 10seconds;
6. Setup with 3650-3670MHz & power level 8dBm/MHz;
7. Enable CBSD service;
8. Check EUD Tx Frequency and power;
9. Disable CBSD service;
10. Check EUD stops transmission within 10seconds.

6.5 Test Setup

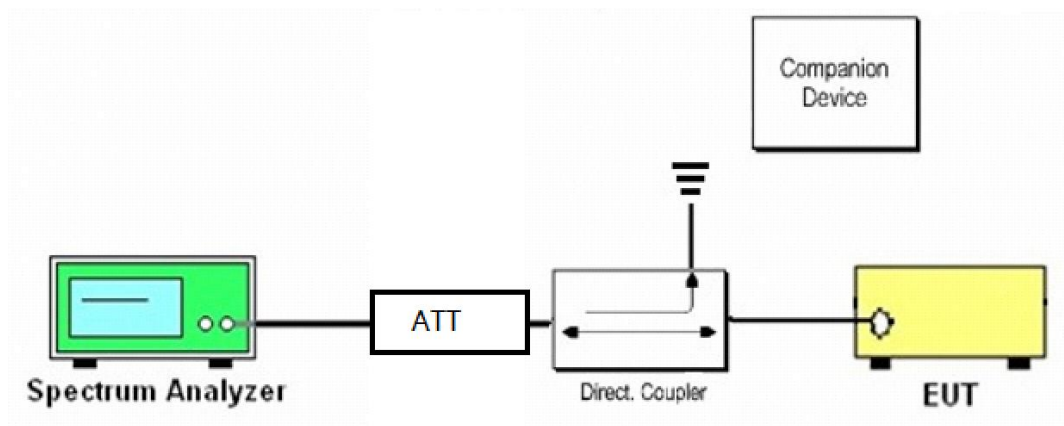

For LTE:

End User Device as UUT, the companion device is certified CBRS (FCC ID: 2AG32PBS31010)

For 5G NR:


End User Device as UUT, the companion device is certified CBRS (FCC ID: WBK-RU4370)

6.6 Test Result

For LTE

[Step 1] Setup with frequency 3560-3580MHz and power level 14dBm/MHz

[Step 3] Check EUD Tx Frequency and power

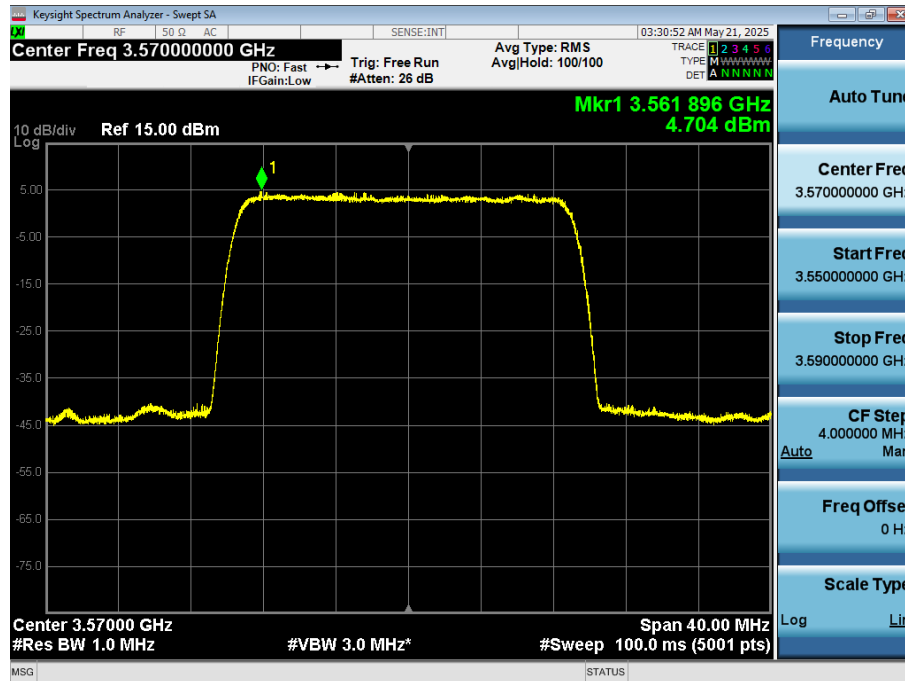


EIRP PSD=4.704-4.29+4.5=4.914dBm/MHz, Antenna gain is -4.29dBi,the path loss is 4.5dB

[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



[Step 6] Setup with frequency 3575-3595MHz and power level 8dBm/MHz

[Step 8] Check EUD Tx Frequency and power

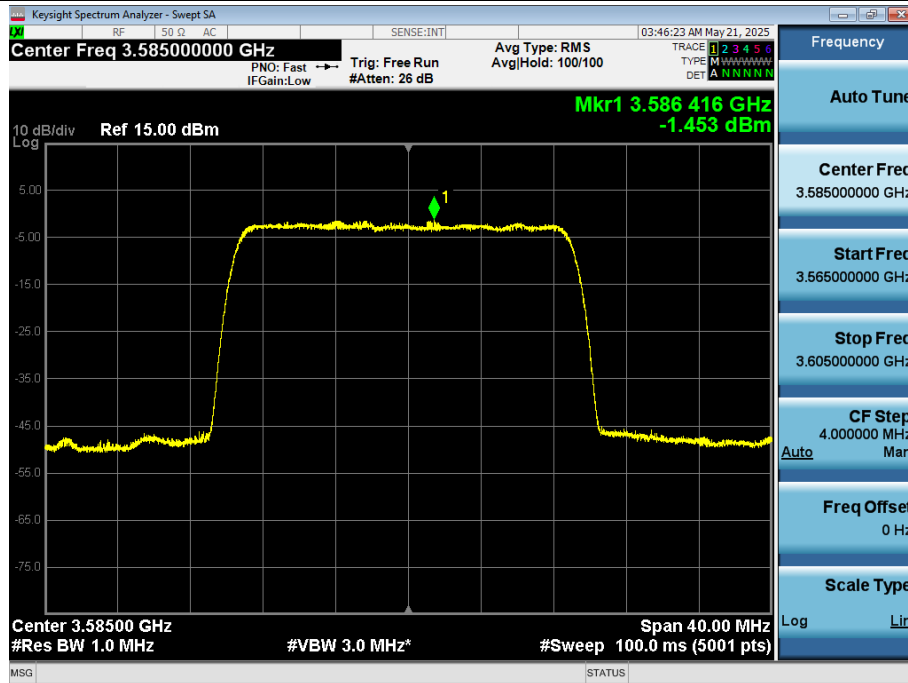

$EIRP\ PSD = -1.453 - 4.29 + 4.5 = -1.243\text{ dBm/MHz}$, Antenna gain is -4.29 dBi , the path loss is 4.5 dB


[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



For 5GNR

[Step 1] Setup with frequency 3620-3640MHz and power level 14dBm/MHz

[Step 3] Check EUD Tx Frequency and power

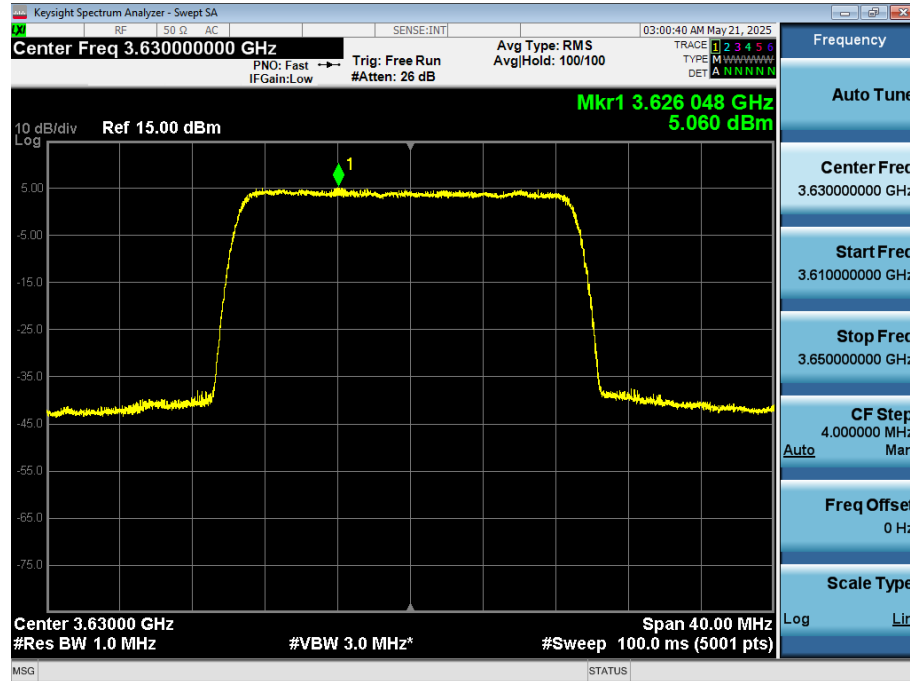


EIRP PSD=5.060-4.29+4.5+3=8.27dBm/MHz, Antenna gain is -4.29dBi,the path loss is 4.5dB, the MIMO Factor is 3dB

[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



[Step 6] Setup with frequency 3650-3670MHz and power level 8dBm/MHz

[Step 8] Check EUD Tx Frequency and power

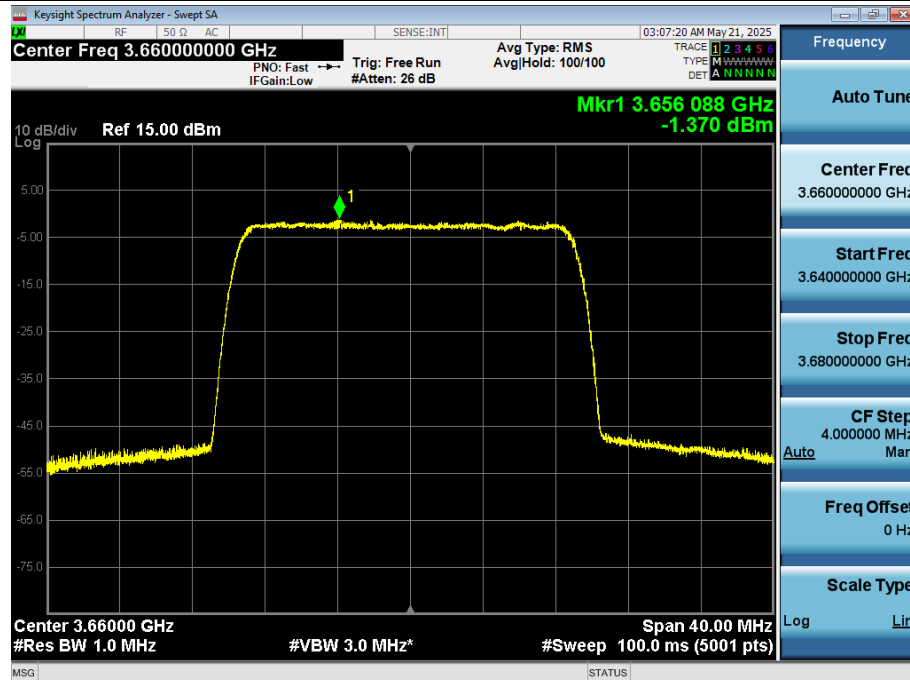


EIRP PSD=-1.370-4.29+4.5+3=1.84dBm/MHz, Antenna gain is -4.29dBi,the path loss is 4.5dB, the MIMO Factor is 3dB

[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



7 Test Setup Photographs

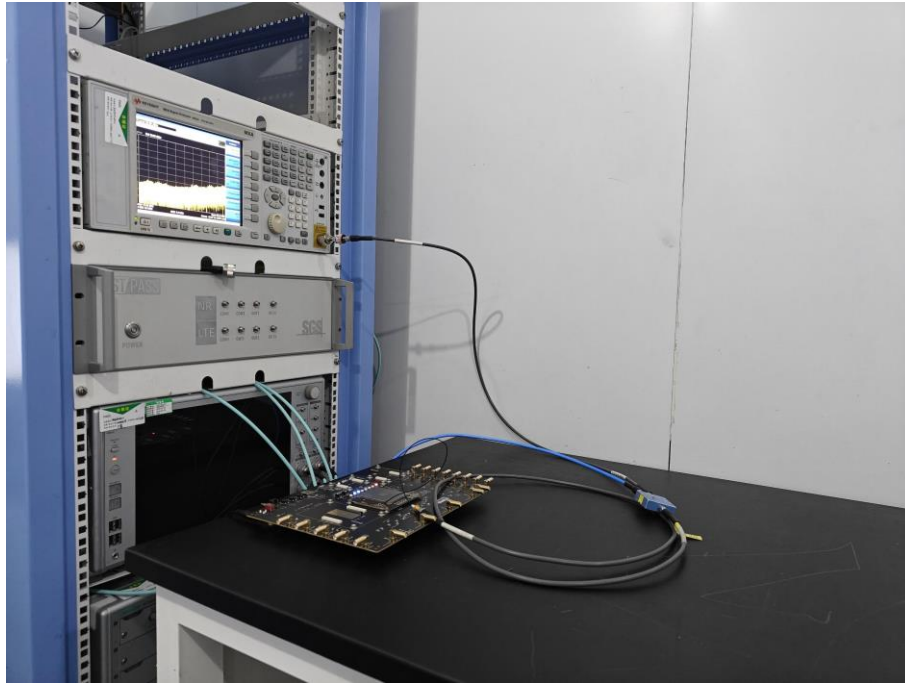

- End of the Report -