

TEST REPORT

Application No: SUCR2505000400MO
Applicant: NETPRISMA INC.
Address of Applicant: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
Manufacturer: NETPRISMA INC.
Address of Manufacturer: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
EUT Description: 5G Sub-6 GHz LGA Module
Model No.: HMT89-LD
FCC ID: 2BEY3HMT89LDA
Standards: 47 CFR Part 2
47 CFR Part 22
47 CFR Part 24
47 CFR Part 27
47 CFR Part 90
47 CFR Part 96
Date of Receipt: 2025/05/19
Date of Test: 2025/05/20 to 2025/06/20
Date of Issue: 2025/08/18

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Version

<i>Revision Record</i>			
<i>Version</i>	<i>Description</i>	<i>Date</i>	<i>Remark</i>
01	Original	June 25, 2025	/
02	Update the test Summary	August 18, 2025	/

Authorized for issue by:			
Tested By			
		Nature Shen / Project Manager	
Approved By			
		Cloud Peng/Technical Manager	

Content

Version	2
1 Test Summary	4
1.1 NR Band n5/ NR Band n26(824~849 MHz)	4
1.2 NR Band n7/ NR Band n38/ NR Band n41.....	5
1.3 NR Band n2/ NR Band n25	7
1.4 NR Band n12.....	8
1.9 NR Band n66/ NR Band n70	15
1.10 NR Band n71	16
1.11 NR Band n77/ NR Band n78	17
1.12 NR Band n48.....	20
2 General Information	22
2.1 Client Information	22
2.2 Test Location.....	22
2.3 Test Facility	23
2.4 General Description of EUT	24
2.5 Test Mode	26
2.6 Test Environment	26
2.7 Description of Support Units.....	26
2.8 Technical Specification.....	27
2.9 Test Frequencies.....	30
3 Main Test Instruments	47
4 Measurement Uncertainty	49
5 Description of Tests	50
5.1 Conducted Output Power	50
5.2 Effective (Isotropic) Radiated Power of Transmitter.....	51
5.3 EIRP Power Density.....	52
5.4 Occupied Bandwidth	53
5.5 Band Edge at Antenna Terminals	54
5.6 Spurious And Harmonic Emissions at Antenna Terminal.....	55
5.7 Peak-Average Ratio	56
5.8 Field Strength of Spurious Radiation.....	57
5.9 Frequency Stability / Temperature Variation	58
5.10 Test Setups	59
5.11 Test Conditions	61
6 Appendixes	63

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250500040002
Rev.: 02
Page: 4 of 63


1 Test Summary

1.1 NR Band n5/ NR Band n26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Section 2 of Appendix B	Pass	A
Remark: 1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". 2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.					

1.2 NR Band n7/ NR Band n38/ NR Band n41

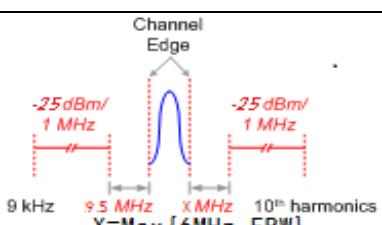Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(m)(4)	For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)		Section 5 of Appendix B	Pass	A

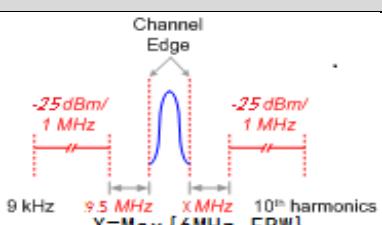Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Field Strength of Spurious Radiation	§2.1053, §27.53(m)		Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A
Remark: 1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". 2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.					

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002
Rev.: 02
Page: 7 of 63

1.3 NR Band n2/ NR Band n25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the “N/A” denotes “not applicable”, the “N/T” denotes “not tested”.
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002
Rev.: 02
Page: 8 of 63

1.4 NR Band n12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	Limit ≤ 13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002
 Rev.: 02
 Page: 9 of 63

1.5 NR Band n13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	Limit ≤ 13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(c)	≤ 43+10log10(P[Watts])	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002
 Rev.: 02
 Page: 10 of 63

1.6 NR Band n14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046 §90.542(a)	ERP ≤ 3 W.	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Emission Mask	§2.1051 §90.210(b)	<p>Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards</p> <p>(b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:</p> <ul style="list-style-type: none"> (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB. (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB. (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB. 	Section 6 of Appendix B	Pass	A
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations. (2) On all frequencies	Section 5 of Appendix B	Pass	A

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 11 of 63

		between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.			
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002
 Rev.: 02
 Page: 12 of 63

1.7 NR Band n26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log10}(f/6.1) \text{ decibels}$ or $50 + 10\text{Log10}(P) \text{ decibels}$ or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §90.691	$< 43 + 10\text{Log10}(P[\text{Watts}])$ for all out-of-band emissions	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §90.691	$< 43 + 10\text{Log10}(P[\text{Watts}])$ for all out-of-band emissions	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A
Remark: 1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". 2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.					

1.8 NR Band n30

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(a)(3)	EIRP \leq 50mW/1MHz EIRP \leq 250mW/5MHz	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	FCC: Limit \leq 13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(a)(4)	\leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(a)(4)	<p>Figure 1: Unwanted Emissions for Mobile, Portable, and Low Power Fixed Subscriber Equipment</p>  <p>For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:</p> <ul style="list-style-type: none"> (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz; (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2310 and 2315 MHz, and $67 + 10 \log (P)$ dB on all frequencies between 2320 and 2325 MHz. 	Section 5 of Appendix B	Pass	A

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 14 of 63

		dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.			
Field Strength of Spurious Radiation	§2.1053, §27.53(a)(4)	≤ -13 dBm/1 MHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the range of the operating frequency blocks	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002

Rev.: 02

Page: 15 of 63

1.9 NR Band n66/ NR Band n70

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040002

Rev.: 02

Page: 16 of 63

1.10 NR Band n71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the authorized bands of operation.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

1.11 NR Band n77/ NR Band n78**3700-3980MHz:**

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	---	≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(l)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(l)(2)	not exceed -13 dBm/MHz.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(l)(2)	not exceed -13 dBm/MHz	Appendix C	Pass	B

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 18 of 63

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 19 of 63

3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Appendix C	Pass	B
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/ frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 20 of 63

1.12 NR Band n48

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §96.41	EIRP ≤ 23dBm/10MHz	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§96.41	FCC: Limit≤13 dB	Section 4 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B	Pass	A
Adjacent Channel Leakage Ratio	§96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.	Section 6 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25	Section 5 of Appendix B	Pass	A

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 21 of 63

		dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.			
Field Strength of Spurious Radiation	§2.1053, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.	Appendix C	Pass	B
Frequency Stability	§2.1055, §96.41	Within authorized bands of operation/ frequency block.	Section 2 of Appendix B	Pass	A

Remark:

1. For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".
2. Lab A SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Lab B SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.

Report No.: SEWM2311000473RG02
Rev.: 01
Page: 22 of 63

2 General Information

2.1 Client Information

Applicant:	NETPRISMA INC.
Address of Applicant:	1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
Manufacturer:	NETPRISMA INC.
Address of Manufacturer:	1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES

2.2 Test Location

Lab A:	
Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li

Lab B:	
Company:	SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.
Address:	1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi'an, Shaanxi China
Post code:	710086
Test engineer:	Andy Yao

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

Lab B:

- **A2LA (Certificate No. 4854.01)**

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0095.

IC#: 25613.

- **FCC –Designation Number: CN1337**

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN1337.

Test Firm Registration Number: 917410

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 24 of 63

2.4 General Description of EUT

Hardware Version:	R1.0	
Software Version:	HMT89LDBL2201_OCPU	
IMEI:	RF Conducted	359020390002843
	RSE	359020390001993
Feature:	UL 2*2 MIMO: NR Band n38; NR Band n41; NR Band n48; NR Band n77; NR Band n78; NR Band n2; NR Band n5; NR Band n25; NR Band n66; NR Band n70; NR Band n71;	
HPUE Power Class:	Class 1.5: NR Band n41 MIMO; NR Band n77 MIMO; NR Band n78 MIMO Class 2: NR Band n38; NR Band n41; NR Band n77; NR Band n78	
Antenna Type:	<input checked="" type="checkbox"/> External, <input type="checkbox"/> Integrated	
Antenna Gain:	NR Band n2:	2dBi
	NR Band n5:	1dBi
	NR Band n7:	2.6dBi
	NR Band n12:	0.2dBi
	NR Band n13:	0.2dBi
	NR Band n14:	0.2dBi
	NR Band n25:	2dBi
	NR Band n26:	1dBi
	NR Band n30:	-3.06dBi
	NR Band n38:	2.6dBi
	NR Band n41:	2.6dBi
	NR Band n48:	-4.29dBi
	NR Band n66:	3.2dBi
	NR Band n70:	2dBi
	NR Band n71:	-0.5dBi
	NR Band n77:	-3.48dBi
	NR Band n78:	-4.11dBi
Note: The antenna gain are derived from the gain information report provided by the manufacturer.		
RF Cable:	0.8dB (Below 1GHz)	1.0dB (1.0~2.4GHz)
	1.5dB (Above 3.4GHz)	
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 25 of 63

MIMO Model:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, \dots, G_N dBi

- If all transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{ANT}] \text{ dBi}$$

- For MIMO mode, the conducted Bandedge/Spurious are tested at single antenna port and add $10^* \log(N_{ANT})$ according to KDB 662911 D01, only the worst MIMO Ant is shown in the report.

Band	ANT Gain1 (dBi)	ANT Gain2 (dBi)	Directional gain (dBi)
NR Band n2:	2	2	2
NR Band n5:	1	1	1
NR Band n25:	2	2	2
NR Band n38:	2.6	2.6	2.6
NR Band n41:	2.6	2.6	2.6
NR Band n48:	-4.29	-4.29	-4.29
NR Band n66:	3.2	3.2	3.2
NR Band n70:	2	2	2
NR Band n71:	-0.5	-0.5	-0.5
NR Band n77:	-3.48	-3.48	-3.48
NR Band n78:	-4.11	-4.44	-4.11

2.5 Test Mode

Test Mode	Test Modes Description
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation
NR/TM2	NR system, DFT-s-QPSK modulation
NR/TM3	NR system, DFT-s-16QAM modulation
NR/TM4	NR system, DFT-s-64QAM modulation
NR/TM5	NR system, DFT-s-256QAM modulation
NR/TM6	NR system, CP-QPSK modulation
NR/TM7	NR system, CP-16QAM modulation
NR/TM8	NR system, CP-64QAM modulation
NR/TM9	NR system, CP-256QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.

2.6 Test Environment

Environment Parameter	101.0~101.30 kPa Selected Values During Tests	
Relative Humidity	45-56 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	3.8
LTLV	-30	3.3
LTHV	-30	4.4
HTLV	50	3.3
HTHV	50	4.4

Remark:

NV: Normal Voltage LV: Low Extreme Test Voltage HV: High Extreme Test Voltage
NT: Normal Temperature LT: Low Extreme Test Temperature HT: High Extreme Test Temperature

2.7 Description of Support Units

Description	Manufacturer	Model No.
Mother board	NETPRISMA	N/A

Remark: all above the information of table are provided by client.

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 27 of 63

2.8 Technical Specification

Characteristics	Description		
Radio System Type	<input checked="" type="checkbox"/> SA <input checked="" type="checkbox"/> NSA		
Supported Frequency Range	Band	TX	RX
	NR Band n2	1850 to 1910 MHz	1930 to 1990 MHz
	NR Band n5	824 to 849 MHz	869 to 894 MHz
	NR Band n7	2500 to 2570 MHz	2620 to 2690 MHz
	NR Band n12	699 to 716 MHz	729 to 746 MHz
	NR Band n13	777 to 787 MHz	746 to 756 MHz
	NR Band n14	788 to 798 MHz	758 to 768 MHz
	NR Band n25	1850 to 1915MHz	1930 to 1995 MHz
	NR Band n26 (814 to 824 MHz)	814 to 824MHz	859 to 869 MHz
	NR Band n26 (824 to 849 MHz)	824 to 849 MHz	869 to 894 MHz
	NR Band n30	2305 to 2315 MHz	2350 to 2360 MHz
	NR Band n38	2570 to 2620 MHz	2570 to 2620 MHz
	NR Band n41	2496 to 2690 MHz	2496 to 2690 MHz
	NR Band n48	3550 to 3700 MHz	3550 to 3700 MHz
	NR Band n66	1710 to 1780 MHz	2110 to 2180 MHz
	NR Band n70	1695 to 1710 MHz	1995 to 2020 MHz
	NR Band n71	663 to 698 MHz	617 to 652 MHz
	NR Band n77*	3700 to 3980 MHz	3700 to 3980 MHz
		3450 to 3550 MHz	3450 to 3550 MHz
	NR Band n78*	3700 to 3800 MHz	3700 to 3800 MHz
		3450 to 3550 MHz	3450 to 3550 MHz
NR CA: CA_n2A-n5A; CA_n2A-n7A; CA_n2A-n12A; CA_n2A-n41A; CA_n2A-n66A; CA_n2A-n71A; CA_n2A-n77A; CA_n2A-n78A; CA_n5A-n5A; CA_n5A-n7A; CA_n5A-n12A; CA_n5A-n41A; CA_n5A-n66A; CA_n5A-n71A; CA_n5A-n77A; CA_n5A-n78A; CA_n7A-n12A; CA_n7A-n25A; CA_n7A-n66A; CA_n7A-n71A; CA_n7A-n77A; CA_n7A-n78A; CA_n12A-n25A; CA_n12A-n41A; CA_n12A-n66A; CA_n12A-n77A; CA_n25A-n41A; CA_n25A-n66A; CA_n25A-n71A; CA_n25A-n77A; CA_n25A-n78A; CA_n41A-n66A; CA_n41A-n71A; CA_n41A-n77A; CA_n41A-n78A; CA_n66A-n71A; CA_n66A-n77A; CA_n66A-n78A; CA_n71A-n77A; CA_n71A-n78A; CA_n26A-n66A; CA_n26A-n70A; CA_n70A-n71A; CA_n70A-n77A; CA_n71A-n66A; CA_n71A-n70A; ENDC: DC_2A_n2A; DC_2A_n5A; DC_2A_n7A; DC_2A_n12A; DC_2A_n25A; DC_2A_n30A; DC_2A_n38A; DC_2A_n41A; DC_2A_n66A; DC_2A_n71A;			

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 28 of 63

	DC_2A_n77A; DC_2A_n78A; DC_4A_n2A; DC_4A_n7A; DC_4A_n38A; DC_4A_n41A; DC_4A_n66A; DC_4A_n71A; DC_4A_n78A; DC_5A_n2A; DC_5A_n5A; DC_5A_n7A; DC_5A_n30A; DC_5A_n38A; DC_5A_n41A; DC_5A_n66A; DC_5A_n71A; DC_5A_n77A; DC_5A_n78A; DC_7A_n2A; DC_7A_n5A; DC_7A_n7A; DC_7A_n12A; DC_7A_n25A; DC_7A_n66A; DC_7A_n71A; DC_7A_n77A; DC_7A_n78A; DC_12A_n2A; DC_12A_n5A; DC_12A_n7A; DC_12A_n25A; DC_12A_n30A; DC_12A_n38A; DC_12A_n41A; DC_12A_n66A; DC_12A_n77A; DC_12A_n78A; DC_13A_n2A; DC_13A_n5A; DC_13A_n7A; DC_13A_n25A; DC_13A_n66A; DC_13A_n77A; DC_13A_n78A; DC_14A_n2A; DC_14A_n30A; DC_14A_n66A; DC_14A_n77A; DC_25A_n41A; DC_25A_n77A; DC_25A_n78A; DC_26A_n25A; DC_26A_n41A; DC_26A_n78A; DC_30A_n2A; DC_30A_n5A; DC_30A_n12A; DC_30A_n66A; DC_30A_n77A; DC_38A_n78A; DC_41A_n41A; DC_41A_n77A; DC_41A_n78A; DC_42A_n77A; DC_66A_n2A; DC_66A_n5A; DC_66A_n7A; DC_66A_n12A; DC_66A_n25A; DC_66A_n30A; DC_66A_n38A; DC_66A_n41A; DC_66A_n66A; DC_66A_n71A; DC_66A_n77A; DC_66A_n78A; DC_71A_n2A; DC_71A_n7A; DC_71A_n25A; DC_71A_n38A; DC_71A_n41A; DC_71A_n66A; DC_71A_n78A; DC_14A_n5A ENDC& NRCA Only test RSE, report only show worst mode.				
	Note*: Both NR Band n77 and NR Band n78 have the same frequency range 3450 MHz to 3550 MHz, and NR Band n78 was fully tested, NR Band n77 only test the items of Power.				
Supported Channel Bandwidth	NR Band n2	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz
	NR Band n5	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz
	NR Band n7	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz
		<input checked="" type="checkbox"/> 25 MHz	<input checked="" type="checkbox"/> 30 MHz	<input checked="" type="checkbox"/> 40 MHz	<input checked="" type="checkbox"/> 50 MHz
	NR Band n12	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	
	NR Band n13	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz		
	NR Band n14	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz		
	NR Band n25	SCS 15kHz:			
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 29 of 63

		<input checked="" type="checkbox"/> 25 MHz	<input checked="" type="checkbox"/> 30 MHz	<input checked="" type="checkbox"/> 35 MHz	<input checked="" type="checkbox"/> 40 MHz
NR Band n26 (814-824)	SCS 15kHz:				
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz		
NR Band n26 (824-849)	SCS 15kHz:				
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz
NR Band n30	SCS 15kHz:				
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz		
NR Band n38	SCS 30kHz:				
		<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 25 MHz
		<input checked="" type="checkbox"/> 30 MHz	<input checked="" type="checkbox"/> 40 MHz		
NR Band n41	SCS 30kHz:				
		<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 30 MHz
		<input checked="" type="checkbox"/> 40 MHz	<input checked="" type="checkbox"/> 50 MHz	<input checked="" type="checkbox"/> 60 MHz	<input checked="" type="checkbox"/> 80 MHz
		<input checked="" type="checkbox"/> 90 MHz	<input checked="" type="checkbox"/> 100 MHz		
NR Band n48	SCS 30kHz:				
		<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 40 MHz
NR Band n66	SCS 15kHz:				
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz
		<input checked="" type="checkbox"/> 25 MHz	<input checked="" type="checkbox"/> 30 MHz	<input checked="" type="checkbox"/> 40 MHz	
NR Band n70	SCS 15kHz:				
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	
NR Band n71	SCS 15kHz:				
		<input checked="" type="checkbox"/> 5 MHz	<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz
NR Band n77	SCS 30kHz:				
		<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 25 MHz
		<input checked="" type="checkbox"/> 30 MHz	<input checked="" type="checkbox"/> 40 MHz	<input checked="" type="checkbox"/> 50 MHz	<input checked="" type="checkbox"/> 60 MHz
		<input checked="" type="checkbox"/> 70 MHz	<input checked="" type="checkbox"/> 80 MHz	<input checked="" type="checkbox"/> 90 MHz	<input checked="" type="checkbox"/> 100 MHz
NR Band n78	SCS 30kHz:				
		<input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 25 MHz
		<input checked="" type="checkbox"/> 30 MHz	<input checked="" type="checkbox"/> 40 MHz	<input checked="" type="checkbox"/> 50 MHz	<input checked="" type="checkbox"/> 60 MHz
		<input checked="" type="checkbox"/> 70 MHz	<input checked="" type="checkbox"/> 80 MHz	<input checked="" type="checkbox"/> 90 MHz	<input checked="" type="checkbox"/> 100 MHz

2.9 Test Frequencies

2.9.1 Reference test frequencies for NR operating band n2

2.9.1.1 Test frequencies for NR operating band n2 and SCS 15 kHz

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	1932.5	386500
		Mid	1960	392000
		High	1987.5	397500
	Uplink	Low	1852.5	370500
		Mid	1880	376000
		High	1907.5	381500
10	Downlink	Low	1935	387000
		Mid	1960	392000
		High	1985	397000
	Uplink	Low	1855	371000
		Mid	1880	376000
		High	1905	381000
15	Downlink	Low	1937.5	387500
		Mid	1960	392000
		High	1982.5	396500
	Uplink	Low	1857.5	371500
		Mid	1880	376000
		High	1902.5	380500
20	Downlink	Low	1940	388000
		Mid	1960	392000
		High	1980	396000
	Uplink	Low	1860	372000
		Mid	1880	376000
		High	1900	380000

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 31 of 63

2.9.2 Reference test frequencies for NR operating band n5**2.9.2.1 Test frequencies for NR operating band n5 and SCS 15 kHz**

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	871.5	174300
		Mid	881.5	176300
		High	891.5	178300
	Uplink	Low	826.5	165300
		Mid	836.5	167300
		High	846.5	169300
10	Downlink	Low	874	174800
		Mid	881.5	176300
		High	889	177800
	Uplink	Low	829	165800
		Mid	836.5	167300
		High	844	168800
15	Downlink	Low	876.5	175300
		Mid	881.5	176300
		High	886.5	177300
	Uplink	Low	831.5	166300
		Mid	836.5	167300
		High	841.5	168300
20	Downlink	Low	879	175800
		Mid	881.5	176300
		High	884	176800
	Uplink	Low	834	166800
		Mid	836.5	167300
		High	839	167800

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 32 of 63

2.9.3 Reference test frequencies for NR operating band n7

2.9.3.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	2622.5	524500	15
		Mid	2655	531000	
		High	2687.5	537500	
	Uplink	Low	2502.5	500500	--
		Mid	2535	507000	
		High	2567.5	513500	
10	Downlink	Low	2625	525000	15
		Mid	2655	531000	
		High	2685	537000	
	Uplink	Low	2505	501000	--
		Mid	2535	507000	
		High	2565	513000	
15	Downlink	Low	2627.5	525500	15
		Mid	2655	531000	
		High	2682.5	536500	
	Uplink	Low	2507.5	501500	--
		Mid	2535	507000	
		High	2562.5	512500	
20	Downlink	Low	2630	526000	15
		Mid	2655	531000	
		High	2680	536000	
	Uplink	Low	2510	502000	--
		Mid	2535	507000	
		High	2560	512000	
25	Downlink	Low	2632.5	526500	15
		Mid	2655	531000	
		High	2677.5	535500	
	Uplink	Low	2512.5	502500	--
		Mid	2535	507000	
		High	2557.5	511500	
30	Downlink	Low	2635	52700	15
		Mid	2655	531000	
		High	2675	535000	
	Uplink	Low	2515	503000	--
		Mid	2535	507000	
		High	2555	511000	
40	Downlink	Low	2640	528000	15
		Mid	2655	531000	
		High	2670	534000	
	Uplink	Low	2520	504000	--
		Mid	2535	507000	
		High	2550	510000	
50	Downlink	Low	2645	529000	15
		Mid	2655	531000	
		High	2665	533000	
	Uplink	Low	2525	505000	--
		Mid	2535	507000	
		High	2545	509000	

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 33 of 63

2.9.4 Reference test frequencies for NR operating band n12

2.9.4.1 Test frequencies for NR operating band n12 and SCS 15 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	731.5	146300	15
		Mid	737.5	147500	
		High	743.5	148700	
	Uplink	Low	701.5	140300	--
		Mid	707.5	141500	
		High	713.5	142700	
10	Downlink	Low	734	146800	15
		Mid	737.5	147500	
		High	741	148200	
	Uplink	Low	704	140800	--
		Mid	707.5	141500	
		High	711	142200	
15	Downlink	Low	736.5	147300	15
		Mid	737.5	147500	
		High	738.5	147700	
	Uplink	Low	706.5	141300	--
		Mid	707.5	141500	
		High	708.5	141700	

2.9.5 Reference test frequencies for NR operating band n13

2.9.5.1 Test frequencies for NR operating band n13 and SCS 15 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	748.5	149700	15
		Mid	751	150200	
		High	753.5	150700	
	Uplink	Low	779.5	155900	--
		Mid	782	156400	
		High	784.5	156900	
10	Downlink	Low	/	/	15
		Mid	751	150200	
		High	/	/	
	Uplink	Low	/	/	--
		Mid	782	156400	
		High	/	/	

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 34 of 63

2.9.6 Reference test frequencies for NR operating band n14**2.9.6.1 Test frequencies for NR operating band n14 and SCS 15 kHz**

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	760.5	151200	15
		Mid	763	152600	
		High	765.5	153100	
	Uplink	Low	790.5	158100	--
		Mid	793	158600	
		High	795.5	159100	
10	Downlink	Low	/	/	15
		Mid	763	152600	
		High	/	/	
	Uplink	Low	/	/	--
		Mid	793	158600	
		High	/	/	

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 35 of 63

2.9.7 Reference test frequencies for NR operating band n25

2.9.7.1 Test frequencies for NR operating band n25 and SCS 15 kHz

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	1932.5	386500
		Mid	1962.5	392500
		High	1992.5	398500
	Uplink	Low	1852.5	370500
		Mid	1882.5	376500
		High	1912.5	382500
10	Downlink	Low	1935	387000
		Mid	1962.5	392500
		High	1990	398000
	Uplink	Low	1855	371000
		Mid	1882.5	376500
		High	1910	382000
15	Downlink	Low	1937.5	387500
		Mid	1962.5	392500
		High	1987.5	397500
	Uplink	Low	1857.5	371500
		Mid	1882.5	376500
		High	1907.5	381500
20	Downlink	Low	1940	388000
		Mid	1962.5	392500
		High	1985	397000
	Uplink	Low	1860	372000
		Mid	1882.5	376500
		High	1905	381000
25	Downlink	Low	1942.5	388500
		Mid	1962.5	392500
		High	1982.5	396500
	Uplink	Low	1862.5	372500
		Mid	1882.5	376500
		High	1902.5	380500
30	Downlink	Low	1945	389000
		Mid	1962.5	392500
		High	1980	396000
	Uplink	Low	1865	373000
		Mid	1882.5	376500
		High	1900	380000
35	Downlink	Low	1942.5	388500
		Mid	1962.5	392500
		High	1982.5	396500
	Uplink	Low	1862.5	372500
		Mid	1882.5	376500
		High	1902.5	380500
40	Downlink	Low	1950	390000
		Mid	1962.5	392500
		High	1975	395000
	Uplink	Low	1870	374000
		Mid	1882.5	376500
		High	1895	379000

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 36 of 63

2.9.8 Reference test frequencies for NR operating band n26

2.9.8.1 Test frequencies for NR operating band n26 and SCS 15 kHz

814-824:

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	861.5	172300
		Mid	864	172800
		High	866.5	173300
	Uplink	Low	816.5	163300
		Mid	819	163800
		High	821.5	164300
10	Downlink	Low	/	/
		Mid	864	172800
		High	/	/
	Uplink	Low	/	/
		Mid	819	163800
		High	/	/

824-849:

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	871.5	174300
		Mid	881.5	176300
		High	891.5	178300
	Uplink	Low	826.5	165300
		Mid	836.5	167300
		High	846.5	169300
10	Downlink	Low	874	174800
		Mid	881.5	176300
		High	889	177800
	Uplink	Low	829	165800
		Mid	836.5	167300
		High	844	168800
15	Downlink	Low	876.5	175300
		Mid	881.5	176300
		High	886.5	177300
	Uplink	Low	831.5	166300
		Mid	836.5	167300
		High	841.5	168300
20	Downlink	Low	879	175800
		Mid	881.5	176300
		High	884	176800
	Uplink	Low	834	166800
		Mid	836.5	167300
		High	839	167800

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 37 of 63

2.9.9 Reference test frequencies for NR operating band n30

2.9.9.1 Test frequencies for NR operating band n30 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	2352.5	470500	15
		Mid	2355	471000	
		High	2357.5	471500	
	Uplink	Low	2307.5	461500	-
		Mid	2310	462000	
		High	2312.5	462500	
10	Downlink	Low	2355	471000	15
		Mid	2355	471000	
		High	2355	471000	
	Uplink	Low	2310	462000	-
		Mid	2310	462000	
		High	2310	462000	

2.9.10 Reference test frequencies for NR operating band n38

2.9.10.1 Test frequencies for NR operating band n38 and SCS 30 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	2575	515000	30
		Mid	2595	519000	
		High	2615	523000	
15	Downlink & Uplink	Low	2577.5	515500	30
		Mid	2595	519000	
		High	2612.5	522500	
20	Downlink & Uplink	Low	2580	516000	30
		Mid	2595	519000	
		High	2610	522000	
25	Downlink & Uplink	Low	2582.5	516500	30
		Mid	2595	519000	
		High	2607.5	521500	
30	Downlink & Uplink	Low	2585	517000	30
		Mid	2595	519000	
		High	2605	521000	
40	Downlink & Uplink	Low	2590	518000	30
		Mid	2595	519000	
		High	2600	520000	

2.9.11 Reference test frequencies for NR operating band n41**2.9.11.1 Test frequencies for NR operating band n41 and SCS 30 kHz**

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	2501.01	500202
		Mid	2592.99	518598
		High	2685	537000
15	Downlink & Uplink	Low	2503.5	500700
		Mid	2592.99	518598
		High	2682.48	536496
20	Downlink & Uplink	Low	2506.02	501204
		Mid	2592.99	518598
		High	2679.99	535998
30	Downlink & Uplink	Low	2511	502200
		Mid	2592.99	518598
		High	2674.98	534996
40	Downlink & Uplink	Low	2516.01	503202
		Mid	2592.99	518598
		High	2670	534000
50	Downlink & Uplink	Low	2521.02	504204
		Mid	2592.99	518598
		High	2664.99	532998
60	Downlink & Uplink	Low	2526	505200
		Mid	2592.99	518598
		High	2659.98	531996
80	Downlink & Uplink	Low	2536.02	507204
		Mid	2592.99	518598
		High	2649.99	529998
90	Downlink & Uplink	Low	2541	508200
		Mid	2592.99	518598
		High	2644.98	528996
100	Downlink & Uplink	Low	2546.01	509202
		Mid	2592.99	518598
		High	2640	528000

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 39 of 63

2.9.12 Reference test frequencies for NR operating band n48**2.9.12.1 Test frequencies for NR operating band n48 and SCS 30 kHz**

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	3555	637000
		Mid	3624.99	641666
		High	3694.98	646332
15	Downlink & Uplink	Low	3557.52	637168
		Mid	3624.99	641666
		High	3692.49	646166
20	Downlink & Uplink	Low	3560.01	637334
		Mid	3624.99	641666
		High	3690	646000
40	Downlink & Uplink	Low	3570	638000
		Mid	3624.99	641666
		High	3679.98	645332

Report No.: SEWM2311000473RG02
Rev.: 01
Page: 40 of 63

2.9.13 Reference test frequencies for NR operating band n66

2.9.13.1 Test frequencies for NR operating band n66 and SCS 15 kHz

RX 2110-2180

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	2112.5	422500
		Mid	2145	429000
		High	2177.5	435500
	Uplink	Low	1712.5	342500
		Mid	1745	349000
		High	1777.5	355500
10	Downlink	Low	2115	423000
		Mid	2145	429000
		High	2175	435000
	Uplink	Low	1715	343000
		Mid	1745	349000
		High	1775	355000
15	Downlink	Low	2117.5	423500
		Mid	2145	429000
		High	2172.5	434500
	Uplink	Low	1717.5	343500
		Mid	1745	349000
		High	1772.5	354500
20	Downlink	Low	2120	424000
		Mid	2145	429000
		High	2170	434000
	Uplink	Low	1720	344000
		Mid	1745	349000
		High	1770	354000
25	Downlink	Low	2122.5	424500
		Mid	2145	429000
		High	2167.5	433500
	Uplink	Low	1722.5	344500
		Mid	1745	349000
		High	1767.5	353500
30	Downlink	Low	2125	425000
		Mid	2145	429000
		High	2165	433000
	Uplink	Low	1725	345000
		Mid	1745	349000
		High	1765	353000
40	Downlink	Low	2130	426000
		Mid	2145	429000
		High	2160	432000
	Uplink	Low	1730	346000
		Mid	1745	349000
		High	1760	352000

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 41 of 63

RX 2110-2200

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	2112.5	422500
		Mid	2155	431000
		High	2197.5	439500
	Uplink	Low	1712.5	342500
		Mid	1745	349000
		High	1777.5	355500
10	Downlink	Low	2115	423000
		Mid	2155	431000
		High	2195	439000
	Uplink	Low	1715	343000
		Mid	1745	349000
		High	1775	355000
15	Downlink	Low	2117.5	423500
		Mid	2155	431000
		High	2192.5	438500
	Uplink	Low	1717.5	343500
		Mid	1745	349000
		High	1772.5	354500
20	Downlink	Low	2120	424000
		Mid	2155	431000
		High	2190	438000
	Uplink	Low	1720	344000
		Mid	1745	349000
		High	1770	354000
25	Downlink	Low	2122.5	424500
		Mid	2155	431000
		High	2187.5	437500
	Uplink	Low	1722.5	344500
		Mid	1745	349000
		High	1767.5	353500
30	Downlink	Low	2125	425000
		Mid	2155	431000
		High	2185	437000
	Uplink	Low	1725	345000
		Mid	1745	349000
		High	1765	353000
40	Downlink	Low	2130	426000
		Mid	2155	431000
		High	2180	436000
	Uplink	Low	1730	346000
		Mid	1745	349000
		High	1760	352000

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 42 of 63

2.9.14 Reference test frequencies for NR operating band n70**2.9.14.1 Test frequencies for NR operating band n70 and SCS 15 kHz**

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	1997.5	399500	15
		Mid	2002.5	400500	
		High	2007.5	401500	
	Uplink	Low	1697.5	339500	--
		Mid	1702.5	340500	
		High	1707.7	341500	
10	Downlink	Low	2000	400000	15
		Mid	2002.5	400500	
		High	2005	401000	
	Uplink	Low	1700	340000	--
		Mid	1702.5	340500	
		High	1705	341000	
15	Downlink	Low	/	/	15
		Mid	2002.5	400500	
		High	/	/	
	Uplink	Low	/	/	--
		Mid	1702.5	340500	
		High	/	/	

2.9.15 Reference test frequencies for NR operating band n71**2.9.15.1 Test frequencies for NR operating band n71 and SCS 15 kHz**

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	619.5	123900	15
		Mid	634.5	126900	
		High	649.5	129900	
	Uplink	Low	665.5	133100	-
		Mid	680.5	136100	
		High	695.5	139100	
10	Downlink	Low	622	124400	15
		Mid	634.5	126900	
		High	647	129400	
	Uplink	Low	668	133600	-
		Mid	680.5	136100	
		High	693	138600	
15	Downlink	Low	624.5	124900	15
		Mid	634.5	126900	
		High	644.5	128900	
	Uplink	Low	670.5	134100	-
		Mid	680.5	136100	
		High	690.5	138100	
20	Downlink	Low	627	125400	15
		Mid	634.5	126900	
		High	642	128400	
	Uplink	Low	673	134600	-
		Mid	680.5	136100	
		High	688	137600	

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 43 of 63

2.9.16 Reference test frequencies for NR operating band n77**2.9.16.1 Test frequencies for NR operating band n77 and SCS 30 kHz****3700-3980:**

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	3705	647000
		Mid	3840	656000
		High	3975	665000
15	Downlink & Uplink	Low	3707.52	647168
		Mid	3840	656000
		High	3972.48	664832
20	Downlink & Uplink	Low	3710.01	647334
		Mid	3840	656000
		High	3969.99	664666
25	Downlink & Uplink	Low	3712.5	647500
		Mid	3840	656000
		High	3967.5	664500
30	Downlink & Uplink	Low	3715.02	647668
		Mid	3840	656000
		High	3964.98	664332
40	Downlink & Uplink	Low	3720	648000
		Mid	3840	656000
		High	3960	664000
50	Downlink & Uplink	Low	3725.01	648334
		Mid	3840	656000
		High	3954.99	663666
60	Downlink & Uplink	Low	3730.02	648668
		Mid	3840	656000
		High	3949.98	663332
70	Downlink & Uplink	Low	3735	649000
		Mid	3840	656000
		High	3945	663000
80	Downlink & Uplink	Low	3740.01	649334
		Mid	3840	656000
		High	3939.99	662666
90	Downlink & Uplink	Low	3745.02	649668
		Mid	3840	656000
		High	3934.98	662332
100	Downlink & Uplink	Low	3750	650000
		Mid	3840	656000
		High	3930	662000

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 44 of 63

3450-3550:

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	3455.01	630334
		Mid	3500.01	633334
		High	3544.98	636332
15	Downlink & Uplink	Low	3457.5	630500
		Mid	3500.01	633334
		High	3542.49	636166
20	Downlink & Uplink	Low	3460.02	630668
		Mid	3500.01	633334
		High	3540	636000
25	Downlink & Uplink	Low	3462.51	630834
		Mid	3500.01	633334
		High	3537.48	635832
30	Downlink & Uplink	Low	3465	631000
		Mid	3500.01	633334
		High	3534.99	635666
40	Downlink & Uplink	Low	3470.01	631334
		Mid	3500.01	633334
		High	3529.98	635332
50	Downlink & Uplink	Low	3475.02	631668
		Mid	3500.01	633334
		High	3525	635000
60	Downlink & Uplink	Low	3480	632000
		Mid	3500.01	633334
		High	3519.99	634666
70	Downlink & Uplink	Low	3485.01	632334
		Mid	3500.01	633334
		High	3514.98	634332
80	Downlink & Uplink	Low	3490.02	632668
		Mid	3500.01	633334
		High	3510	634000
90	Downlink & Uplink	Low	3495	633000
		Mid	3500.01	633334
		High	3504.99	633666
100	Downlink & Uplink	Low	\	\
		Mid	3500.01	633334
		High	\	\

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 45 of 63

2.9.17 Reference test frequencies for NR operating band n78**2.9.17.1 Test frequencies for NR operating band n78 and SCS 30 kHz****3700-3800:**

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	3705	647000
		Mid	3750	650000
		High	3795	653000
15	Downlink & Uplink	Low	3707.52	647168
		Mid	3750	650000
		High	3792.48	652832
20	Downlink & Uplink	Low	3710.01	647334
		Mid	3750	650000
		High	3789.99	652666
25	Downlink & Uplink	Low	3712.5	647500
		Mid	3750	650000
		High	3787.5	652500
30	Downlink & Uplink	Low	3715.02	647668
		Mid	3750	650000
		High	3784.98	652332
40	Downlink & Uplink	Low	3720	648000
		Mid	3750	650000
		High	3780	652000
50	Downlink & Uplink	Low	3725.01	648334
		Mid	3750	650000
		High	3774.99	651666
60	Downlink & Uplink	Low	3730.02	648668
		Mid	3750	650000
		High	3769.98	651332
70	Downlink & Uplink	Low	3735	649000
		Mid	3750	650000
		High	3765	651000
80	Downlink & Uplink	Low	3740.01	649334
		Mid	3750	650000
		High	3759.99	650666
90	Downlink & Uplink	Low	3745.02	649668
		Mid	3750	650000
		High	3754.98	650332
100	Downlink & Uplink	Low	/	/
		Mid	3750	650000
		High	/	/

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 46 of 63

3450-3550:

CBW [MHz]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
10	Downlink & Uplink	Low	3455.01	630334
		Mid	3500.01	633334
		High	3545.01	636334
15	Downlink & Uplink	Low	3457.5	630500
		Mid	3500.01	633334
		High	3542.49	636166
20	Downlink & Uplink	Low	3460.02	630668
		Mid	3500.01	633334
		High	3540	636000
25	Downlink & Uplink	Low	3462.51	630834
		Mid	3500.01	633334
		High	3537.48	635832
30	Downlink & Uplink	Low	3465	631000
		Mid	3500.01	633334
		High	3534.99	635666
40	Downlink & Uplink	Low	3470.01	631334
		Mid	3500.01	633334
		High	3530.01	635334
50	Downlink & Uplink	Low	3475.02	631668
		Mid	3500.01	633334
		High	3525	635000
60	Downlink & Uplink	Low	3480	632000
		Mid	3500.01	633334
		High	3519.99	634666
70	Downlink & Uplink	Low	3485.01	632334
		Mid	3500.01	633334
		High	3515.01	634334
80	Downlink & Uplink	Low	3490.02	632668
		Mid	3500.01	633334
		High	3510	634000
90	Downlink & Uplink	Low	3495	633000
		Mid	3500.01	633334
		High	3504.99	633666
100	Downlink & Uplink	Low	\	\
		Mid	3500.01	633334
		High	\	\

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 47 of 63

3 Main Test Instruments

RF conducted Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	11/9/2022	11/8/2025
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	1/20/2025	1/19/2026
Measurement Software	TST	TST-271-2.0	SUWI-03-55-01	NCR	NCR
Measurement Software	Tonscend	J1120 RF Auto Test System	SUWI-02-03-01		
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/19/2024	11/18/2025
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	5/8/2025	5/7/2026
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	11/19/2024	11/18/2025
Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/19/2024	11/18/2025
RF Control Unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
RF Control Unit	TST	TSCB3023R2	SUWI-02-21-01	NCR	NCR

Remark: NCR=No Calibration Requirement.

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 48 of 63

RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2024/6/4	2027/6/3
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2025/1/16	2026/1/15
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2024/8/29	2025/8/28
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2022/7/28	2025/7/27
Receiving antenna(1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2022/7/28	2025/7/27
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2022/7/23	2025/7/22
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP9K3G32	XAW01-41-01	2025/5/13	2026/5/12
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2024/8/29	2025/8/28
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2024/8/16	2025/8/15
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2024/8/29	2025/8/28
Temperature and humidity meter	MingGao	TH101B	XAW01-01-02	2024/9/3	2025/9/2
Wireless Test platform	StarPoint	SP9500E	XAW01-45-02	2025/5/15	2026/5/14
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-07	2024/8/16	2025/8/15
Measurement Software	Tonscend	TS+ V4.0.0.0	XAW02-05-01	NCR	NCR
Radio Communication Analyzer	ANRITSU	MT8821	XAW01-03-24	2024/8/16	2025/8/15
Loop Antenna	Schwarzbeck	FMZB 1519B	XAW01-48-02	2024/5/23	2026/5/22

Remark: NCR=No Calibration Requirement.

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 49 of 63

4 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Lab A:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.41\text{dB}$
2	RF power density, conducted	$\pm 1.96\text{dB}$
3	Spurious emissions, conducted	$\pm 0.41\text{dB}$
4	Radio Frequency	$\pm 1.0\%$
5	Duty Cycle	$\pm 0.49\%$
6	Occupied Bandwidth	$\pm 1.0\%$

Lab B:

No.	Item	Measurement Uncertainty
1	Radiated Emission	$\pm 4.6\text{dB}$ (9KHz~30MHz)
		$\pm 4.9\text{dB}$ (30MHz~1GHz)
		$\pm 4.9\text{dB}$ (1GHz to 6GHz)
		$\pm 4.7\text{dB}$ (6GHz to 18GHz)
		$\pm 4.6\text{dB}$ (9KHz~30MHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{cispri/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

Report No.: SEWM2311000473RG02
Rev.: 01
Page: 50 of 63

5 Description of Tests

5.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 51 of 63

5.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 52 of 63

5.3 EIRP Power Density

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.3

Test Settings

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

5.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5\%$ of the expected OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within $1 - 5\%$ of the 99% occupied bandwidth observed in Step 7

5.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 55 of 63

5.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

5.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

5.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

$E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + (\text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{AMP(dB)})$

$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20 \log D - 104.8$; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:
 $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + (\text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{AMP(dB)})$
 $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20 \log D - 104.8$; where D is the measurement distance in meters
- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by $20 \times \text{LOG}(3/1) = 9.54 \text{ dB}$.

Remark: Reference test setup 2

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

- 2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

- 3) All modes have been tested, but only the worst case data displayed in this report.

Report No.: SEWM2311000473RG02

Rev.: 01

Page: 58 of 63

5.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5 \text{ ppm}$) of the center frequency.


Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3

5.10 Test Sets

5.10.1 Test Setup 1

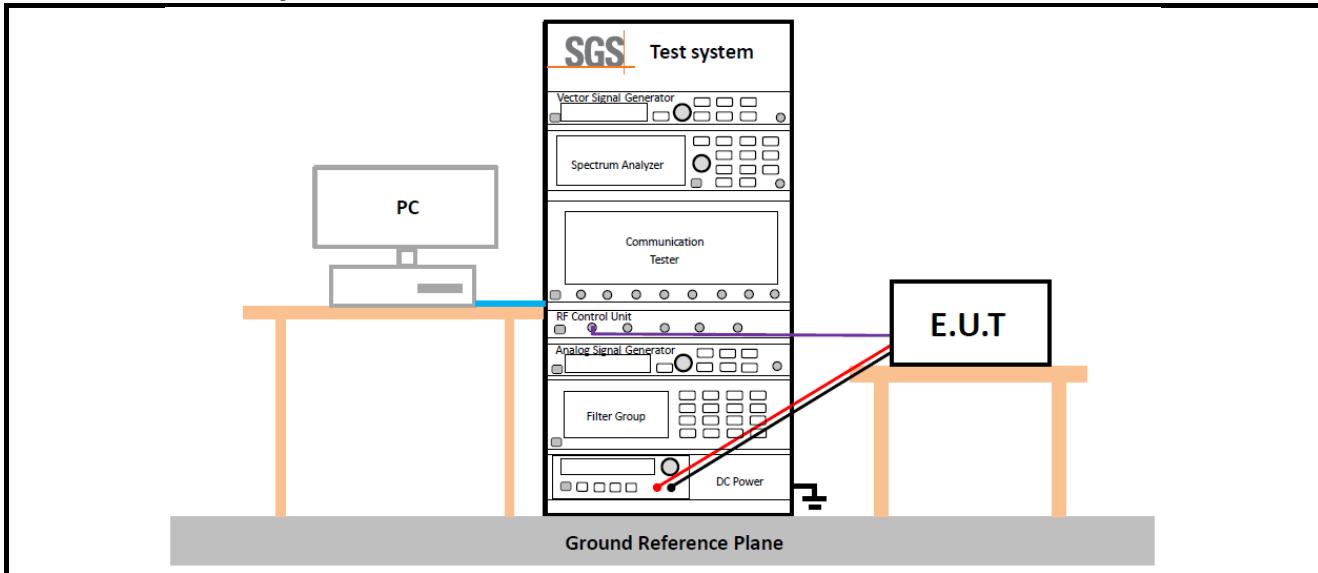

5.10.2 Test Setup 2

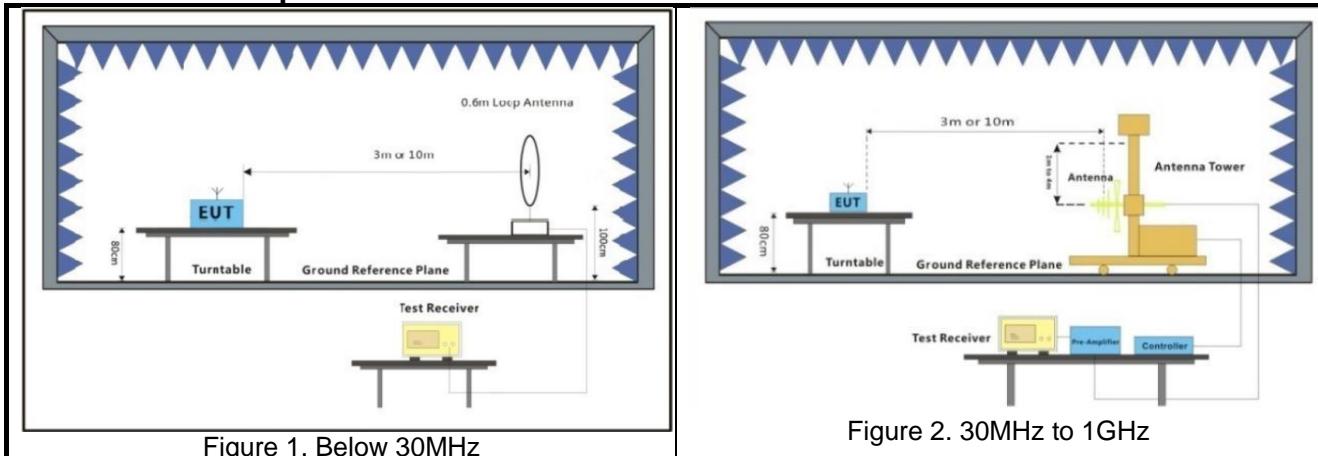


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz


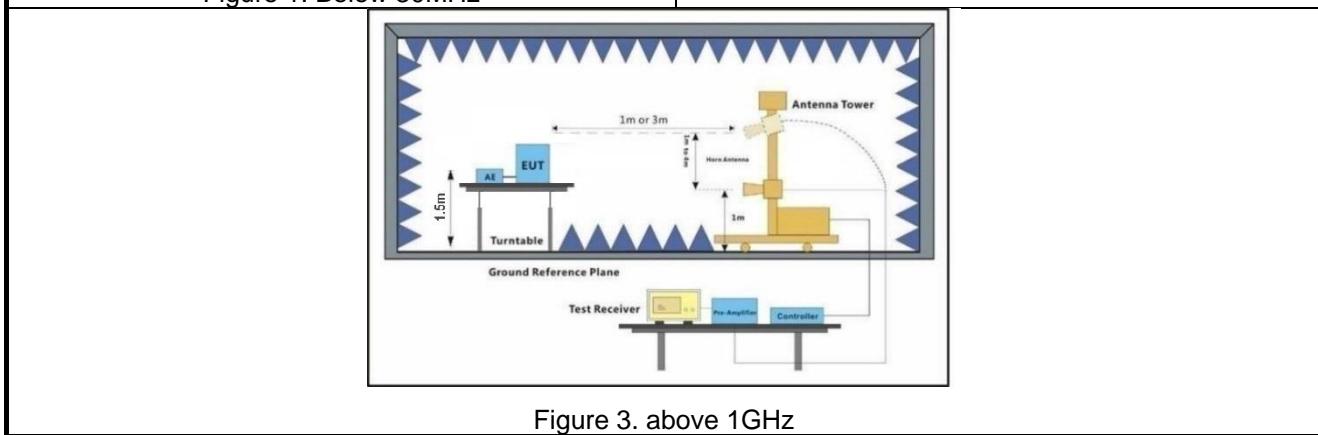


Figure 3. above 1GHz

5.10.3 Test Setup 3

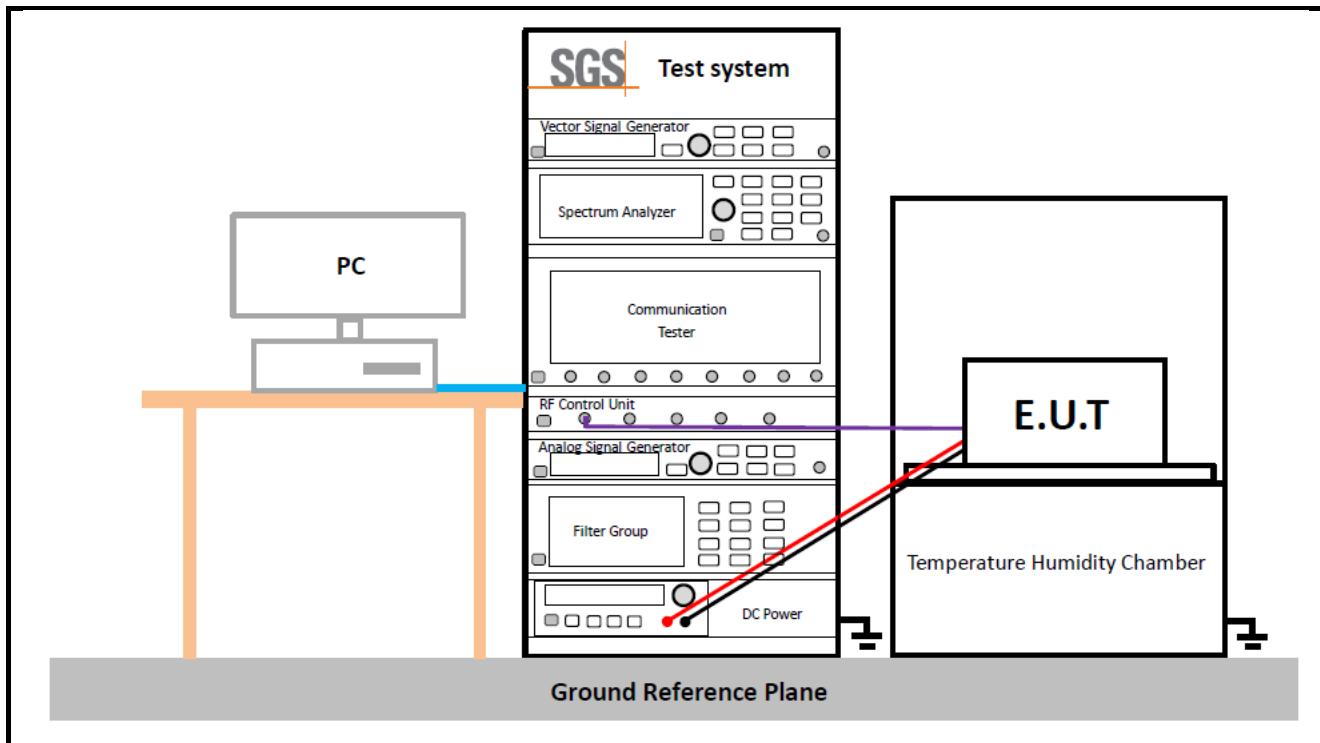

5.11 Test Conditions

Transmit Output Power Data - Average Power, Spectral Density	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
Peak-to-Average Ratio	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM5; NR/TM9
Bandwidth - Occupied Bandwidth	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
Bandwidth - Emission Bandwidth	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
Band Edges Compliance	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, H (L= low channel, H= high channel)
Test Mode	NR/TM1; NR/TM6
Spurious Emission at Antenna Terminals	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1

Report No.: SEWM2311000473RG02
Rev.: 01
Page: 62 of 63

RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1
Field Strength of Spurious Radiation	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 2
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.
Frequency Stability	
Test Case	Test Conditions
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.
Test Setup	Test Setup 3
RF Channels (TX)	M (M= middle channel)
Test Mode	NR/TM1; NR/TM6 The report only show the bandwidth with the worst case.

6 Appendixes

Appendix A.2	WWAN Setup Photos
Appendix B.28	NR Band n2
Appendix B.29	NR Band n5
Appendix B.30	NR Band n7
Appendix B.31	NR Band n12
Appendix B.32	NR Band n13
Appendix B.33	NR Band n14
Appendix B.34	NR Band n25
Appendix B.35	NR Band n26(814-824)
Appendix B.36	NR Band n26(824-849)
Appendix B.37	NR Band n30
Appendix B.38	NR Band n38
Appendix B.39	NR Band n41
Appendix B.40	NR Band n48
Appendix B.41	NR Band n66
Appendix B.42	NR Band n70
Appendix B.43	NR Band n71
Appendix B.44	NR Band n77(3450-3550)
Appendix B.45	NR Band n77(3700-3980)
Appendix B.46	NR Band n78(3450-3550)
Appendix B.47	NR Band n78(3700-3800)
Appendix C.2	Field Strength of Spurious Radiation for SA
Appendix C.3	Field Strength of Spurious Radiation for NR CA
Appendix C.4	Field Strength of Spurious Radiation for NSA
Appendix C.5	Field Strength of Spurious Radiation for UL MIMO

---End of Report---