


RF Test Report

Applicant: NETPRISMA INC.
Address: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
Product: LTE-A Cat 12 LGA Module
Model No.: LUK66-LD
Brand Name: Vrileg
FCC ID: 2BEY3LUK66LDA
Standards: 47 CFR Part 2
47 CFR Part 22
47 CFR Part 24
47 CFR Part 27
47 CFR Part 90
47 CFR Part 96
Report No.: PD20250055-R3A
Issue Date: 2025/05/06
Test Result: PASS *

* Testing performed at Hefei Panwin Technology Co., Ltd. on the above equipment indicates the product meets the requirements of the relevant standards.



Reviewed By: Charlie Wang



Approved By: Alec Yang

Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin
Avenue, High-tech Zone, Hefei City, Anhui Province, China
TEL: +86-0551-63811775

Revision History

Report No.	Version	Description	Issue Date	Note
PD20250055-R3A	01	Initial Report	2025/05/06	Valid

CONTENTS

1 Test Laboratory	15
1.1 Notes of the Test Report	15
1.2 Test Facility	15
1.3 Testing Laboratory	15
2 General Description of Equipment under Test	15
2.1 Details of Application	15
2.2 Details of EUT	16
2.3 Frequency List of Low/Middle/High Channels	18
2.4 Application Standards	25
3 Test Condition	26
3.1 Test Environmental Conditions	26
3.2 Test Configuration	26
3.3 Equipment List	27
3.4 Test Uncertainty	28
4 Test Items Description	29
4.1 RF Output Power & Effective (Isotropic) Radiated Power	29
4.2 EIRP Power Density	30
4.3 Peak-to-Average Ratio	31
4.4 Occupied Bandwidth	32
4.5 Conducted Band Edge Measurement	33
4.6 Spurious Emissions at Antenna Terminals	34
4.7 Frequency Stability	35
4.8 Radiated Spurious Emission	36
ANNEX A: Test Results	38
ANNEX B: The EUT Appearance	39
ANNEX C: Test Setup Photographs	40

Test Summary

LTE Band 2 / 25

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §24.232(c)	EIRP ≤2 Watt	PASS
2	Peak-to-Average Ratio	§24.232(d)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §24.235	Within authorized bands of operation/frequency block.	PASS

LTE Band 4 / 66

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(d)(4)	EIRP $\leq$ 1 Watt	PASS
2	Peak-to-Average Ratio	§27.50(d)(5)	≤ 13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS


LTE Band 5 / 26(824~849 MHz) / LTE CA_5B

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046 §22.913 (a)(5)	ERP ≤ 7 Watt	PASS
2	Peak-to-Average Ratio	§22.913 (d)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051 §22.917 (a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051 §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053 §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	PASS
7	Frequency Stability	§2.1055 §22.355	< ±2.5 ppm	PASS

LTE Band 26(814~824 MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §90.635(b)	< 100 W	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §90.691	< $43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of- band emissions	PASS
6	Radiated Spurious Emission	§2.1053, §90.691		PASS
7	Frequency Stability	§2.1055 §90.213	Within authorized bands of operation/frequency block.	PASS

LTE Band 7 / 41 / LTE CA_7C / CA_41C

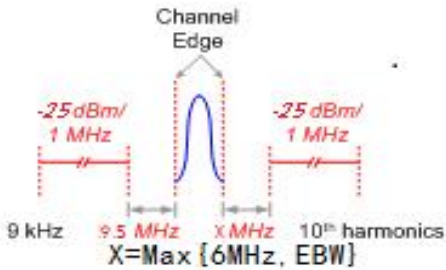No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(h)(2)	$EIRP \leq 2 \text{ Watt}$	PASS
2	Peak-to-Average Ratio	--	$\leq 13 \text{ dB}$	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P) \text{ dB}$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) \text{ dB}$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) \text{ dB}$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P) \text{ dB}$ on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P) \text{ dB}$ at or below 2490.5 MHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(m)		PASS
6	Radiated Spurious Emission	§2.1053, §27.53(m)		PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

LTE Band 13

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(b)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(c)	On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations; For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

LTE Band 14

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §90.542(d)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Emission Mask	§2.1051 §90.210(n)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards. Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB. (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB. (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	PASS
5	Conducted Band Edge Measurement	§2.1051, §90.543(e) (2)(3)	(1)On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations. (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log(P) dB in a 6.25 kHz band segment, for mobile and portable stations. (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10log (P) dB.	PASS
6	Spurious Emissions at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz	PASS
7	Radiated Spurious Emission	§2.1053, §90.543(c) §90.543(f)	equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	PASS
8	Frequency Stability	§2.1055 §90.213	Within authorized bands of operation/frequency block.	PASS

LTE Band 12

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(c)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

LTE Band 30

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(a)(3)	$EIRP \leq 50mW/1MHz$ $EIRP \leq 250mW/5MHz$	PASS
2	Peak-to-Average Ratio	--	≤ 13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(a)(4)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(a)(4)	(4) For mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz; (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz; (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(a)(4)	≤ -40 dBm/MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	within the range of the operating frequency blocks	PASS

LTE Band 48

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §96.41	EIRP ≤ 23dBm/10MHz	PASS
2	Peak-to-Average Ratio	§96.41	≤13 dB	PASS
3	Occupied Bandwidth	§96.41	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz.	PASS
6	Radiated Spurious Emission	§2.1051, §96.41	(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.	PASS
7	Frequency Stability	§2.1055	Fundamental emission stays within authorized frequency block	PASS
8	Adjacent Channel Leakage Ratio	§2.1051, §96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.	PASS

LTE Band 71

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(c)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	within the authorized bands of operation.	PASS

Conducted detection date: 2025/04/03 to 2025/05/01

Radiated detection date: 2025/04/11 to 2025/04/17

Date of sample received: 2025/04/03

- The samples tested have been evaluated in accordance with the procedures given in the application standards in **Section 2.4** of this report and have been shown to comply with the applicable technical standards.
- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

1 Test Laboratory

1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

1.2 Test Facility

A2LA (Certificate Number: 6849.01)

Hefei Panwin Technology Co., Ltd. has been accredited by American Association for Laboratory Accreditation to perform measurement.

FCC (Designation Number: CN1361, Test Firm Registration Number: 473156)

Hefei Panwin Technology Co., Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform measurements.

1.3 Testing Laboratory

Company Name	Hefei Panwin Technology Co., Ltd.
Address	Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
Telephone	+86-0551-63811775
Post Code	230031

2 General Description of Equipment under Test

2.1 Details of Application

Applicant	NETPRISMA INC.
Applicant Address	1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES
Manufacturer	NETPRISMA INC.
Manufacturer Address	1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES

2.2 Details of EUT

Product		LTE-A Cat 12 LGA Module							
Model		LUK66-LD							
Hardware Version		R1.0							
Software Version		LUK66LDBL0101							
E-UTRA Specification									
Single Band		Band 2, 4, 5, 7, 12, 13, 14, 25, 26, 30, 41, 48, 66, 71							
Intra CA		LTE UL CA_5B, LTE UL CA_7C, LTE UL CA_41C							
Power Class for LTE		PC3							
Type of Modulation		UL: QPSK, 16QAM, 64QAM DL: QPSK, 16QAM, 64QAM, 256QAM							
Antenna Type		☒ External ☐ Integrated							
Antenna Gain		LTE Band 2: 1.59dBi LTE Band 25: 1.59dBi LTE Band 4: 2.00dBi LTE Band 26: 3.19dBi LTE Band 5: 2.53dBi LTE Band 30: -5.70dBi LTE Band 7: 3.00dBi LTE Band 41: 3.00dBi LTE Band 12: 3.95dBi LTE Band 48: -1.36dBi LTE Band 13: 4.45dBi LTE Band 66: 2.00dBi LTE Band 14: 3.63dBi LTE Band 71: 1.66dBi							
Frequency Band(s)	SISO Band	Supported Channel Bandwidth (MHz)						Tx (MHz)	Rx (MHz)
		1.4	3	5	10	15	20		
	LTE Band 2	v	v	v	v	v	v	1850 to 1910	1930 to 1990
	LTE Band 4	v	v	v	v	v	v	1710 to 1755	2110 to 2155
	LTE Band 5	v	v	v	v	-	-	824 to 849	869 to 894
	LTE Band 7	-	-	v	v	v	v	2500 to 2570	2620 to 2690
	LTE Band 12	v	v	v	v	-	-	699 to 716	729 to 746
	LTE Band 13	-	-	v	v	-	-	777 to 787	746 to 756
	LTE Band 14	-	-	v	v	-	-	788 to 798	758 to 768
	LTE Band 25	v	v	v	v	v	v	1850 to 1915	1930 to 1995
	LTE Band 26	v	v	v	v	v	-	814 to 849	859 to 894
	LTE Band 30	-	-	v	v	-	-	2305 to 2315	2350 to 2360
	LTE Band 41	-	-	v	v	v	v	2496 to 2690	2496 to 2690
	LTE Band 48	-	-	v	v	v	v	3550 to 3700	3550 to 3700
	LTE Band 66	v	v	v	v	v	v	1710 to 1780	2110 to 2180
	LTE Band 71	-	-	v	v	v	v	663 to 698	617 to 652

Note 1: The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 2: From C63.26: As an alternative, the highest power level measured in a narrower RBW (relative to the specified reference bandwidth) can be scaled by applying a correction factor determined from: $10 \log [(reference\ bandwidth) / (resolution\ or\ measurement\ bandwidth)]$. When using a smaller RBW, the current usage limit needs to be converted from the original limit.

Support Equipment

Equipment	Manufacturer	Description	Model	Serial Number
EVb	NETPRISMA	-	-	-
Adapter	Shenzhen Keyu Power Technology Co., LTD	AC to DC power supply to EVb	KA1801A-0503000DE	-
Base Station Simulator	Anritsu	-	MT8821C	PWC0039

2.3 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
10	Channel	20450	20525	20600
	Frequency	829	836.5	844

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
10	Channel	23060	23095	23130
	Frequency	704	707.5	711

LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5
10	Channel	23230	23230	23230
	Frequency	782	782	782

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5
10	Channel	23330	23330	23330
	Frequency	793	793	793

LTE Band 25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	26047	26365	26683
	Frequency	1850.7	1882.5	1914.3

3	Channel	26055	26365	26675
	Frequency	1851.5	1882.5	1913.5
5	Channel	26065	26365	26665
	Frequency	1852.5	1882.5	1912.5
10	Channel	26090	26365	26640
	Frequency	1855	1882.5	1910
15	Channel	26115	26365	26615
	Frequency	1857.5	1882.5	1907.5
20	Channel	26140	26365	26590
	Frequency	1860	1882.5	1905

LTE Band 26 (814 to 824MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	26697	26740	26783
	Frequency	814.7	819	823.3
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5
10	Channel	26740	26740	26740
	Frequency	819	819	819

LTE Band 26 (824 to 849MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
10	Channel	26840	26915	26990
	Frequency	829.0	836.5	844.0
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5
10	Channel	27710	27710	27710
	Frequency	2310	2310	2310

LTE Band 41 (2496 to 2690MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	39675	40620	41565
	Frequency	2498.5	2593	2687.5
10	Channel	39700	40620	41540
	Frequency	2501	2593	2685
15	Channel	39725	40620	41515
	Frequency	2503.5	2593	2682.5
20	Channel	39750	40620	41490
	Frequency	2506	2593	2680

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	55265	55990	56715
	Frequency	3552.5	3625	3697.5
10	Channel	55290	55990	56690
	Frequency	3555	3625	3695
15	Channel	55315	55990	56665
	Frequency	3557.5	3625	3692.5
20	Channel	55340	55990	56640
	Frequency	3560	3625	3690

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770

LTE Band 71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	133147	133297	133447
	Frequency	665.5	680.5	695.5
10	Channel	133172	133297	133422

	Frequency	668	680.5	693
15	Channel	133197	133297	133397
	Frequency	670.5	680.5	690.5
20	Channel	133222	133322	133372
	Frequency	673	683	688

Table 4.3.1.1.5A-1: Test frequencies for CA_5B

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	15+25	15	20416	825.6	2416	870.6	25	20455	829.5	2455	874.5
		25	20425	826.5	2425	871.5	15	20464	830.4	2464	875.4
	25+50	25	20428	826.8	2428	871.8	50	20500	834	2500	879
	50+25	50	20450	829	2450	874	25	20522	836.2	2522	881.2
	50+50	50	20450	829	2450	874	50	20549	838.9	2549	883.9
Mid	15+25	15	20501	834.1	2501	879.1	25	20540	838.0	2540	883.0
		25	20510	835.0	2510	880.0	15	20549	838.9	2549	883.9
	25+50	25	20478	831.8	2478	876.8	50	20550	839	2550	884
	50+25	50	20500	834	2500	879	25	20572	841.2	2572	886.2
	50+50	50	20476	831.6	2476	876.6	50	20575	841.5	2575	886.5
High	15+25	15	20586	842.6	2586	887.6	25	20625	846.5	2625	891.5
		25	20595	843.5	2595	888.5	15	20634	847.4	2634	892.4
	25+50	25	20528	836.8	2528	881.8	50	20600	844	2600	889
	50+25	50	20550	839	2550	884	25	20622	846.2	2622	891.2
	50+50	50	20501	834.1	2501	879.1	50	20600	844	2600	889

Note 1: Carriers in increasing frequency order.

Table 4.3.1.1.7A-1: Test frequencies for CA_7C

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1: Carriers in increasing frequency order.											

Table 4.3.1.2.9A-1: Test frequencies for CA_41C

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
	75+100	75	39728	2503.8	100	39899	2520.9
		100	39750	2506	75	39921	2523.1
100+100	100	39750	2506	100	39948	2525.8	
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
		100	40546	2585.6	75	40717	2602.7
	100+100	100	40521	2583.1	100	40719	2602.9
100+100 ²	100	40529	2583.9	100	40712	2602.2	
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
		100	41341	2665.1	75	41512	2682.2
100+100	100	41292	2660.2	100	41490	2680	
Note 1:	Carriers in increasing frequency order.						
Note 2:	This test frequency is applicable only for intra-band contiguous CA which requires channel spacing to be less than nominal channel spacing.						

2.4 Application Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2

- 47 CFR Part 22

- 47 CFR Part 24

- 47 CFR Part 27

- 47 CFR Part 90

- 47 CFR Part 96

- ANSI C63.26-2015

- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

3 Test Condition

3.1 Test Environmental Conditions

During testing, environmental conditions are described below.

Normal Configuration		Extreme Configuration		
Voltage	3.8V	Voltage	High: 4.4V	Low: 3.3V

3.2 Test Configuration

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in ' Z ' position and the worst case was recorded.

LTE										
Test Case	BW	Modulation				RB		CH		
		QPSK	16QAM	64QAM	256QAM	1	full	L	M	H
RF Output Power & Effective (Isotropic) Radiated	all	v	v	v	--	v	v	v	v	v
Occupied Bandwidth	all	v	v	v	--	--	v	--	v	--
Conducted Band Edge	all	v	--	--	--	v	v	v	--	v
Spurious Emissions at Antenna Terminals	all	v	--	--	--	v	--	v	v	v
Peak-to-Average Ratio	all	v	v	v	--	--	v	--	v	--
Frequency Stability	max	v	--	--	--	--	v	--	v	--
Radiated Spurious Emission	worst case									

Note:

- 1.The mark " V " means that this configuration is chosen for testing.
- 2.The mark " -- " means that this bandwidth is not supported.
- 3.The device is investigated from 30Hz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- 4.Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.3V. ; High Voltage =4.4V

3.3 Equipment List

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
Conducted					
Base Station Simulator	R&S	CMW500	PWC0052	1 Year	2025/09/12
Spectrum Analyzer	R&S	FSV3044	PWC0036	1 Year	2025/10/20
Spectrum Analyzer	Keysight	N9020B	PWC0047	1 Year	2025/09/11
DC Power	KEYSIGHT	E3640A	PWC0043	1 Year	2025/09/12
Climate Chamber	Boyi	B-T-48C	PWC0051	1 Year	2025/09/12
Shielded Chamber	Mao Rui	MR534	PWC0041	3 Years	2026/08/26
RF cable	TIMES Microwave Systems	SFT205PUR-NMSWSM-1.50M	PWD0165	1 Year	2025/09/12
RF cable	TIMES Microwave Systems	HF160-KMKMR-1.50M	PWD0166	1 Year	2025/09/12
Coupling unit	COM-MW	ZDC6-10M1	PWD0167	1 Year	2025/09/12
Trigger cable	-	ZT06-BNCJ-BNCJ-1M	-	-	-
Test Software	Tonscend	JS1120 V3.1.46	-	-	-
Radiated					
Receiver	R&S	ESR7	PWB0023	1 Year	2025/09/11
Spectrum Analyzer	R&S	FSV3044	PWB0024	1 Year	2025/09/11
Loop Antenna	R&S	HFH2-Z2E	PWB0026	1 Year	2025/09/13
TRILOG Broadband Antenna	Schwarzbeck	VULB9162	PWB0029	1 Year	2025/09/09
Double-Ridged Guide Antenna	ETS-Lindgren	3117	PWB0031	1 Year	2025/09/26
k Type Horn Antenna	Steatite Antennas	QMS-00880	PWB0035	1 Year	2025/09/08
Pre-Amplifier	R&S	OSP220 (OSP-B155G)	PWB0042	1 Year	2025/09/11
Pre-Amplifier	COM-MW	DLNA8	PWB0094	1 Year	2025/09/11
Pre-Amplifier	R&S	SCU18F	PWB0034	1 Year	2025/09/11
Pre-Amplifier	R&S	SCU40F1	PWB0036	1 Year	2025/09/11
Anechoic Chamber	ETS-Lindgren	Fact 3-2m	PWB0003	3 Years	2026/06/05
Test Software	Tonscend	TS+ V5.0.0	-	-	-

3.4 Test Uncertainty

No.	Parameter	Uncertainty
1	Maximum transmit power	0.677dB
2	Frequency error	37.064Hz
3	Bandwidth occupied	5.9kHz
4	Emission spurious, Band edge and PAPR	10Hz-3.5GHz: 0.982dB 3.5GHz-18GHz: 1dB 18GHz-26.5GHz: 0.777dB 26.5GHz-40GHz: 1.066dB
5	Radiated Spurious Emission	Below 1GHz: 4.88 dB Above 1GH: 5.06 dB
6	Temperature	3°C
7	Humidity	1.3 %
8	Supply voltages	0.006 V

4 Test Items Description

Ambient condition

Shielded Chamber

Temperature [°C]	20.3 to 25.2
Humidity [%RH]	30 to 45
Pressure [kPa]	100.1 to 101.6

Anechoic Chamber

Temperature [°C]	21.2 to 23.2
Humidity [%RH]	34 to 42
Pressure [kPa]	99.9 to 101.4

4.1 RF Output Power & Effective (Isotropic) Radiated Power

Methods of Measurement

Base Station Simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

According to KDB 412172 D01 Power Approach,


$EIRP = PT + GT - LC$, $ERP = EIRP - 2.15$, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Test Setup

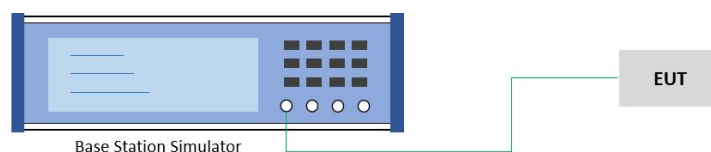


- 1.The testing follows ANSI C63.26 Section 5.2.
- 2.The transmitter output port was connected to the base station simulator.
- 3.Set EUT at maximum power through the base station simulator
- 4.Select lowest, middle, and highest channels for each band and different modulation.
- 5.Measure and record the power level from the system simulator.

4.2 EIRP Power Density

Methods of Measurement

Measurement Procedure: C63.26 -2015 section 5.2.4

Test Setup

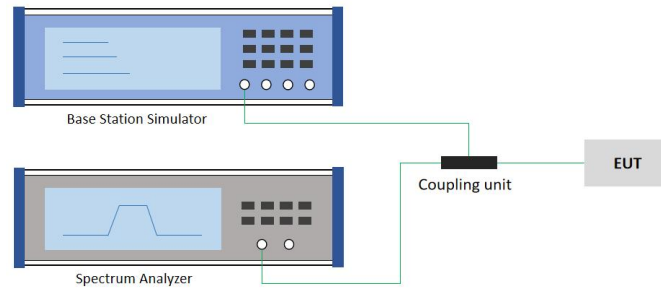


- 1.Set instrument center frequency to OBW center frequency.
- 2.Set span to at least 1.5 times the OBW.
- 3.Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4.Set VBW $\geq 3 \times$ RBW.
- 5.Detector = RMS (power averaging).
- 6.Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- 7.Sweep time = auto couple.
- 8.Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 9.Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

4.3 Peak-to-Average Ratio

Methods of Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.

Test Setup

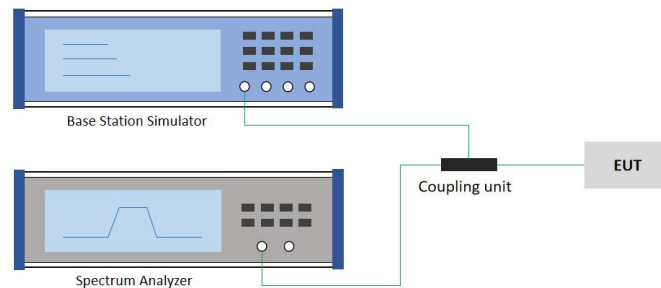

- 1.The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
- 2.The EUT was connected to spectrum and system simulator via a coupling unit.
- 3.Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 4.The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 5.Record the deviation as Peak to Average Ratio.


4.4 Occupied Bandwidth

Methods of Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

Test Setup

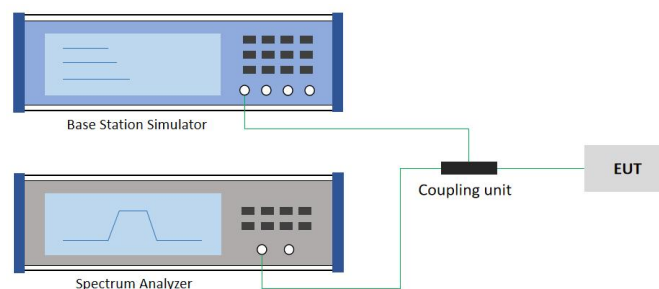

The testing follows ANSI C63.26 Section 5.4.

The EUT was connected to spectrum analyzer and system simulator via a coupling unit.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value).

Determine the '-26 dB down amplitude' as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the '-X dB down amplitude' determined in step 6. If a marker is below this '-X dB down amplitude' value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.


4.5 Conducted Band Edge Measurement

Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel). In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to RMS.

Test Setup

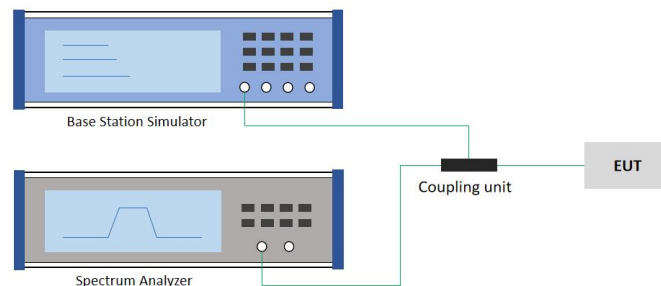

- 1.The testing follows ANSI C63.26 section 5.7
- 2.The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
- 3.The band edges of low and high channels for the highest RF powers were measured.
- 4.Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 5.Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used and the measured power was integrated over the full required measurement bandwidth of 1 MHz.
- 6.Set spectrum analyzer with RMS detector.
- 7.The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


4.6 Spurious Emissions at Antenna Terminals

Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Test Setup

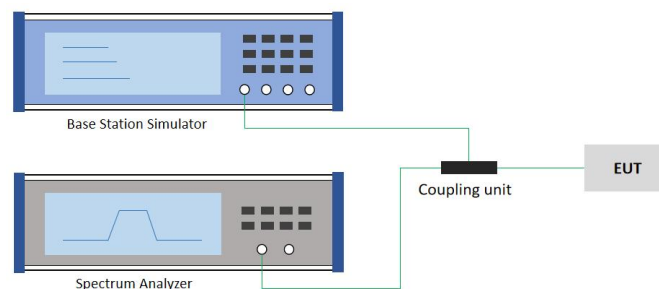

- 1.The testing follows ANSI C63.26 section 5.7
- 2.The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
- 3.The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4.The middle channel for the highest RF power within the transmitting frequency was measured.
- 5.The conducted spurious emission for the whole frequency range was taken.
- 6.Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 7.Set spectrum analyzer with RMS detector.
- 8.Taking the record of maximum spurious emission.
- 9.The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Note: As described in Section C63.26 4.2.3: Generally, the measurement must be corrected by adding $10 \log [(reference\ bandwidth) / (resolution\ or\ measurement\ bandwidth)]$ to the measured value (such bandwidth scaling is limited to cases where the measurement bandwidth used to perform the measurement is less than the reference bandwidth). Therefore, the converted limit value is the standard limit value minus the conversion factor.

4.7 Frequency Stability

Methods of Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

Test Setup

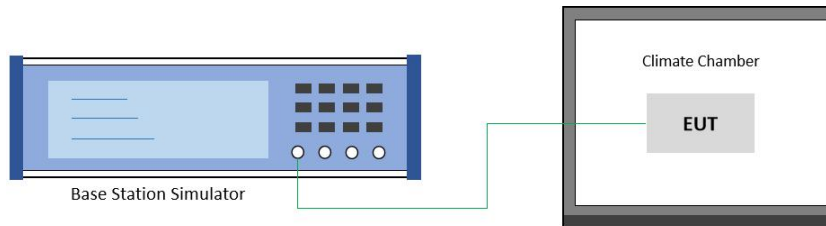

Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4.8 Radiated Spurious Emission

Methods of Measurement


The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


Test Setup

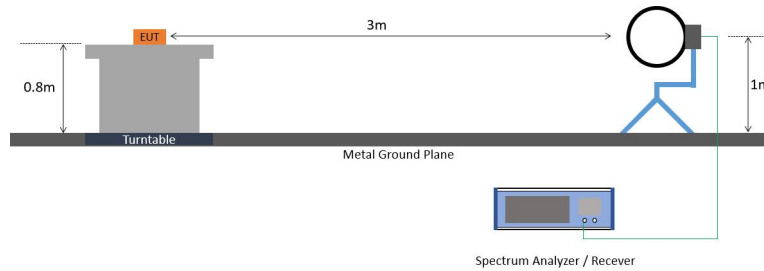

For radiated test below 30MHz

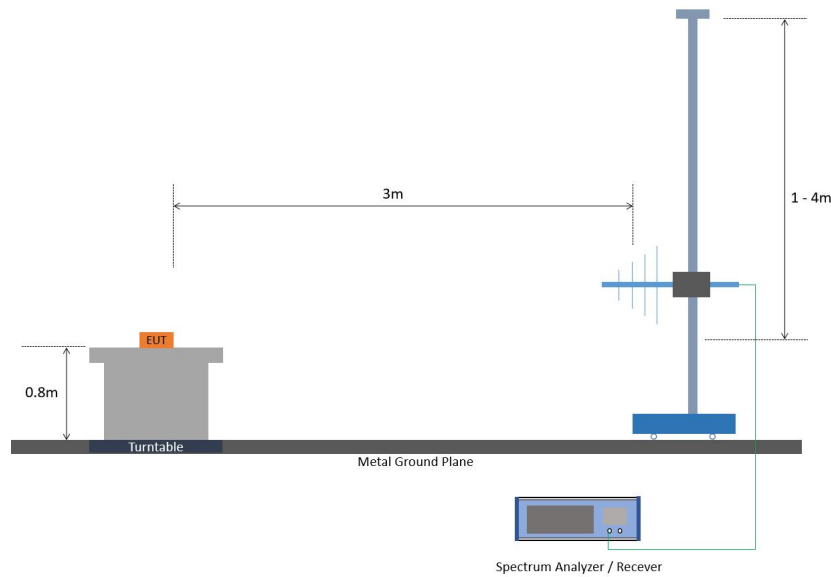

For radiated test from 30MHz to 1GHz

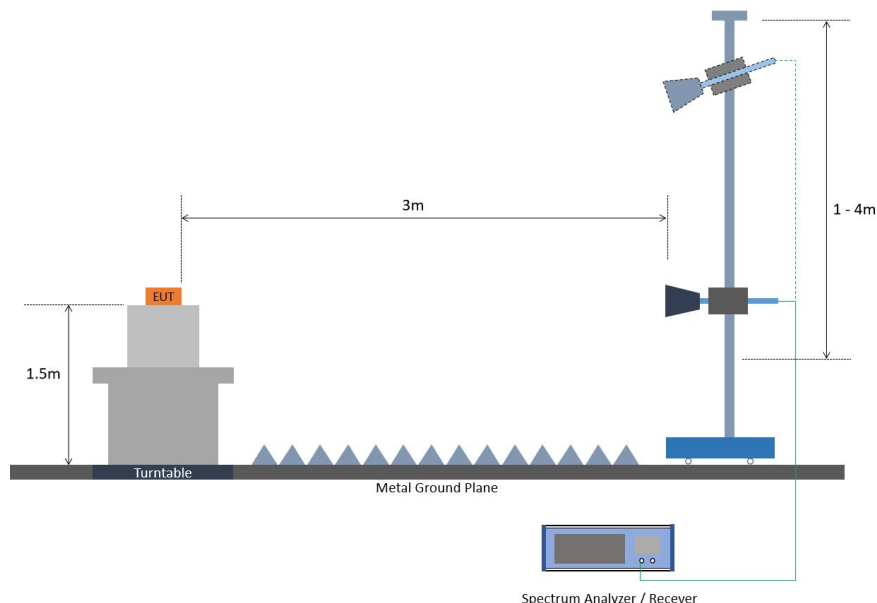

For radiated test above 1GHz

- 1.The testing follows ANSI C63.26 Section 5.5
- 2.The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
- 3.The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 4.The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5.The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
- 6.During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
- 7.Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 8.A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 9.Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 10.EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
- 11.ERP (dBm) = EIRP - 2.15
- 12.The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Remark: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

----- THE END -----

ANNEX A: Test Results

Test Results of Conducted Test

LTE Band 2	Refer to ANNEX A.1
LTE Band 4	Refer to ANNEX A.2
LTE Band 5	Refer to ANNEX A.3
LTE Band 7	Refer to ANNEX A.4
LTE Band 12	Refer to ANNEX A.5
LTE Band 13	Refer to ANNEX A.6
LTE Band 14	Refer to ANNEX A.7
LTE Band 25	Refer to ANNEX A.8
LTE Band 26(814 to 824MHz)	Refer to ANNEX A.9
LTE Band 26(824 to 849MHz)	Refer to ANNEX A.10
LTE Band 30	Refer to ANNEX A.11
LTE Band 41	Refer to ANNEX A.12
LTE Band 48	Refer to ANNEX A.13
LTE Band 66	Refer to ANNEX A.14
LTE Band 71	Refer to ANNEX A.15
LTE CA_5B	Refer to ANNEX A.16
LTE CA_7C	Refer to ANNEX A.17
LTE CA_41C	Refer to ANNEX A.18

Test Results of Radiated Test

Radiated Emission	Refer to ANNEX A.19
-------------------	---------------------

ANNEX B: The EUT Appearance

The EUT Appearance (internal and external photographs) are submitted separately.

ANNEX C: Test Setup Photographs

The Test Setup Photographs are submitted separately.