





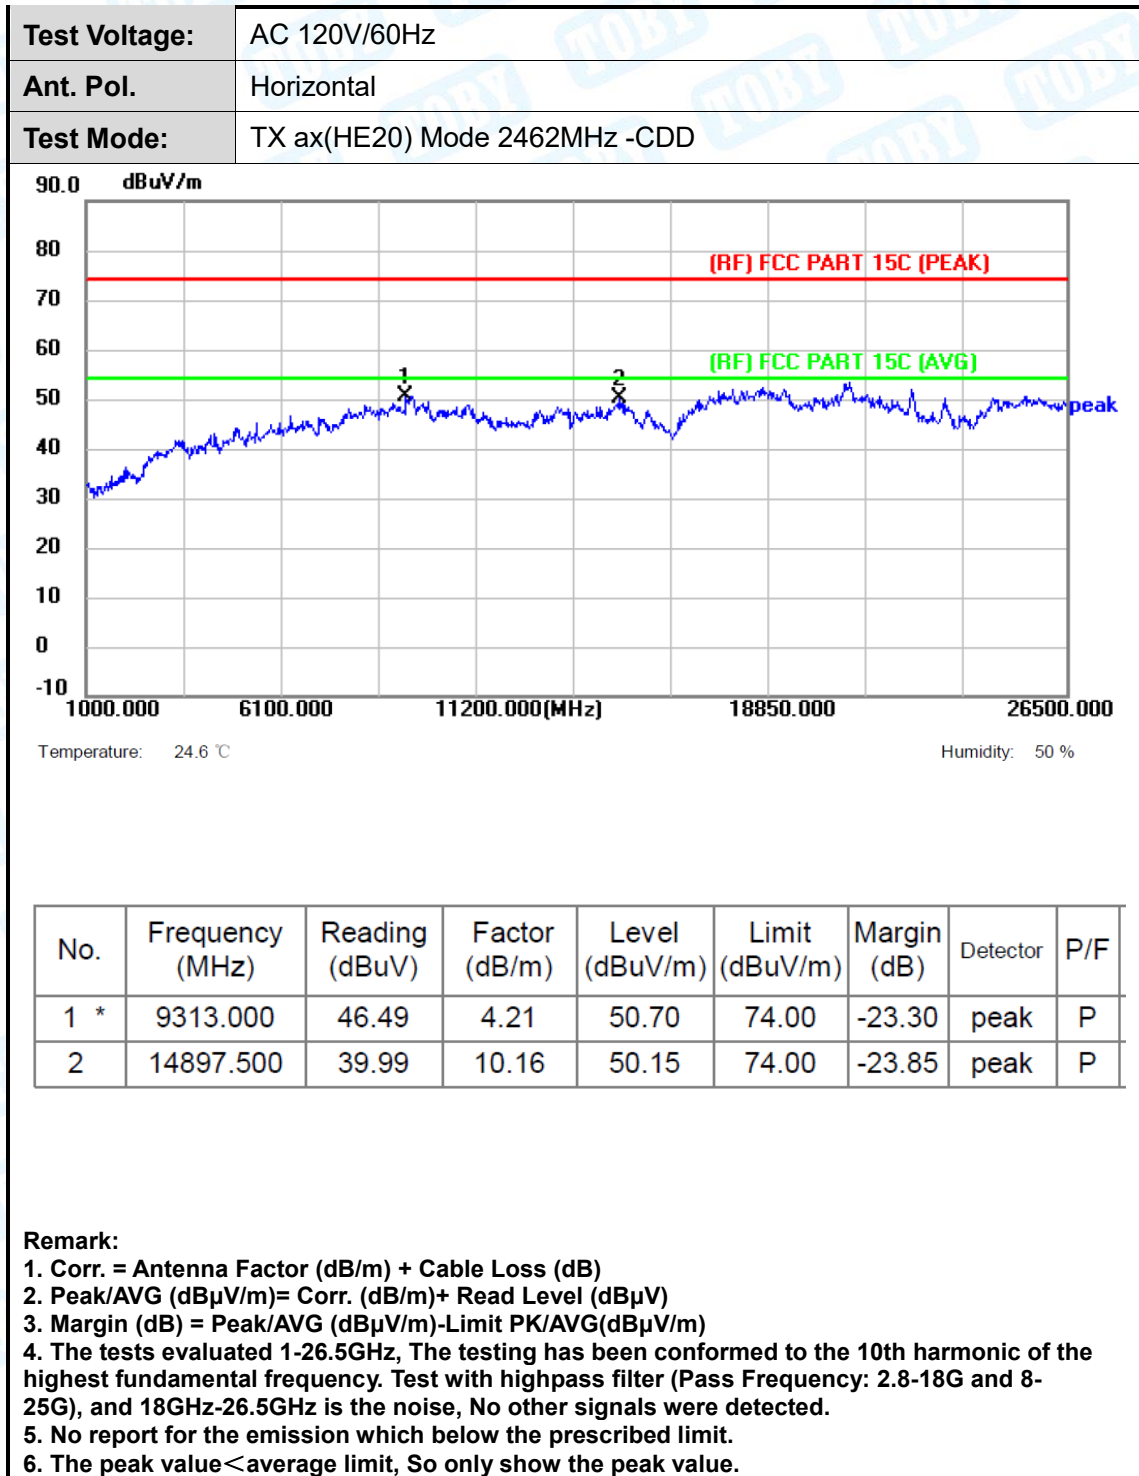


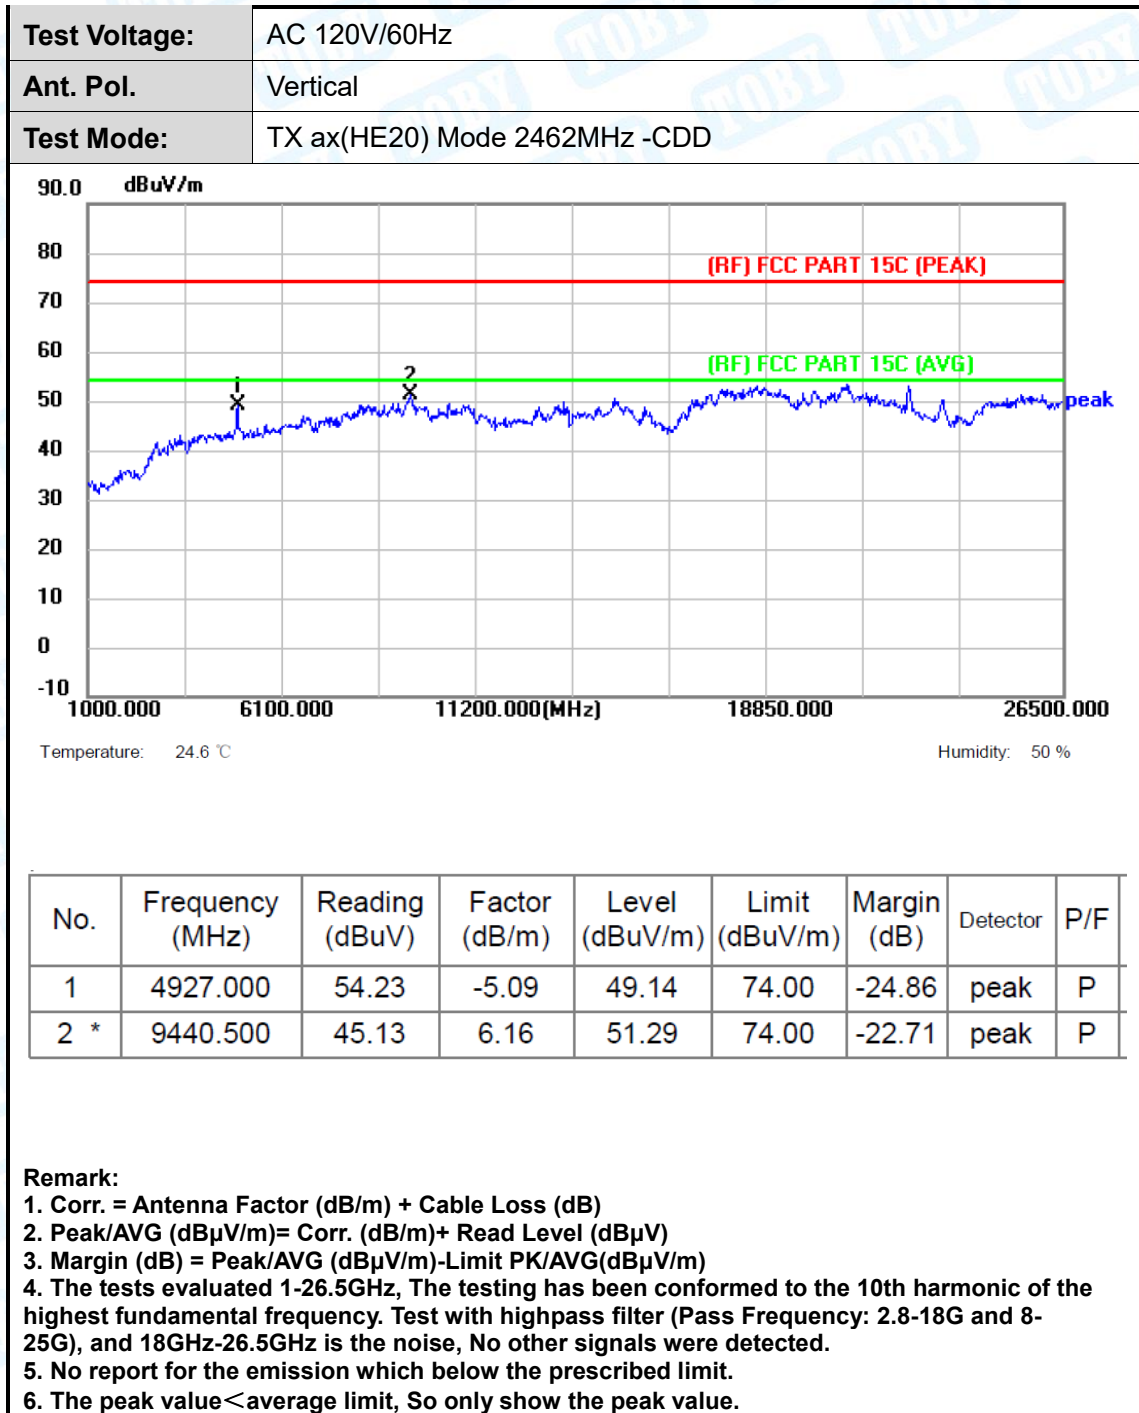

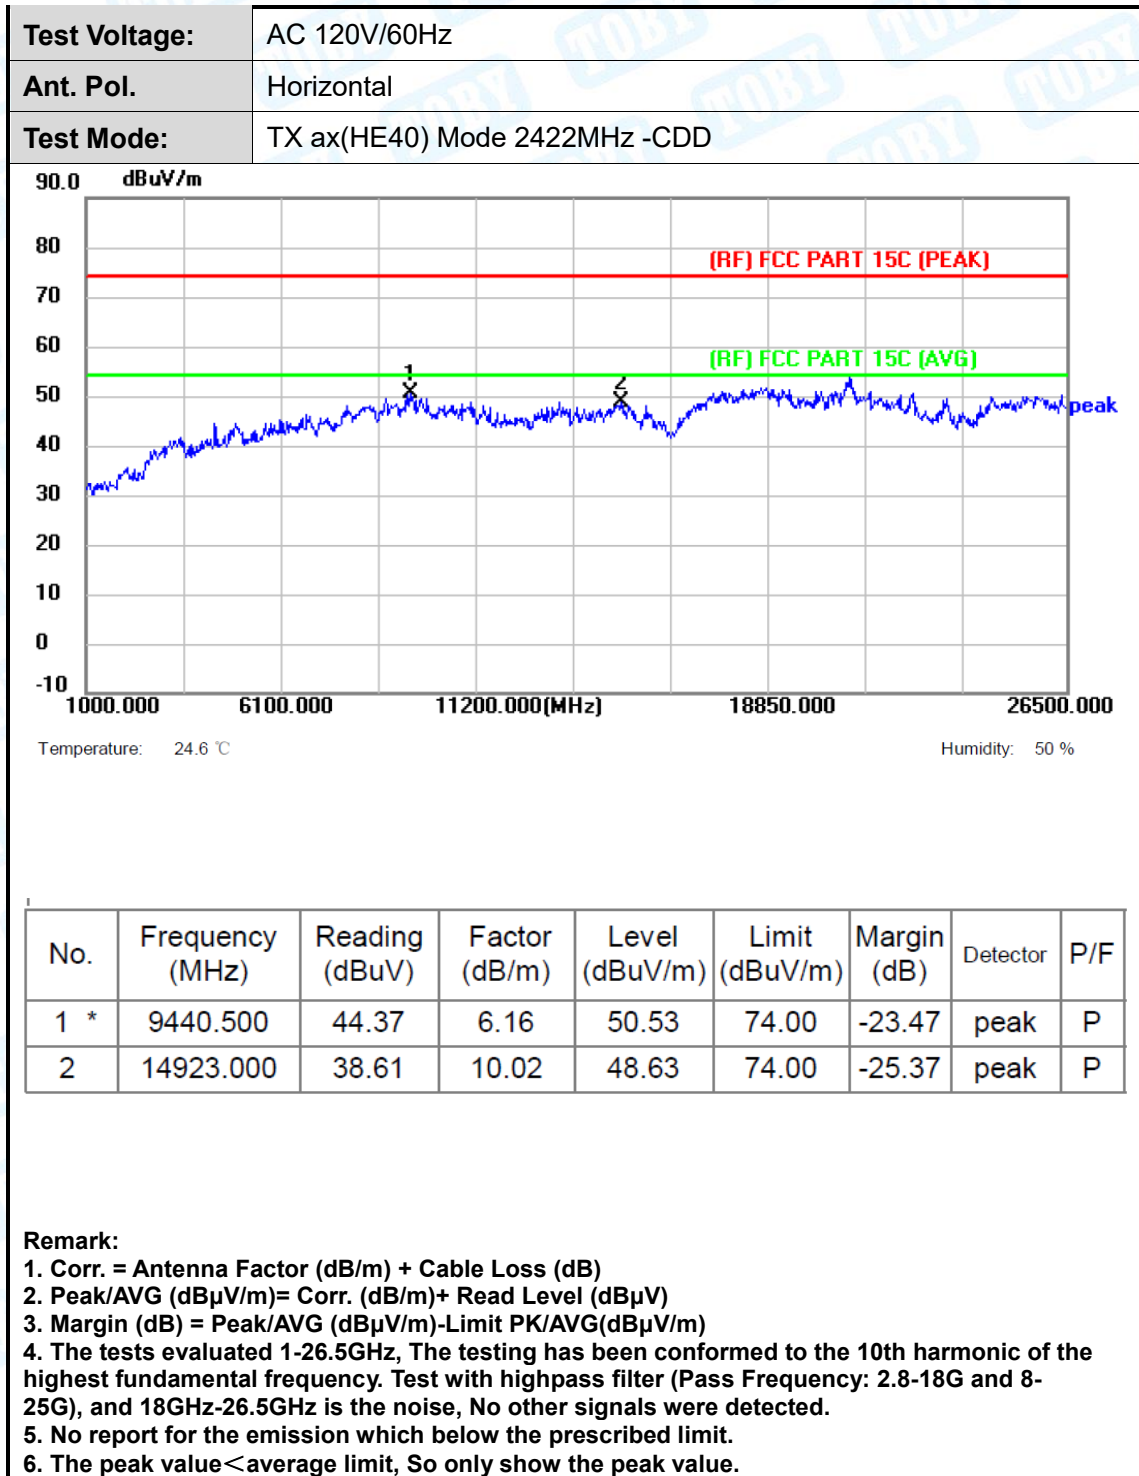

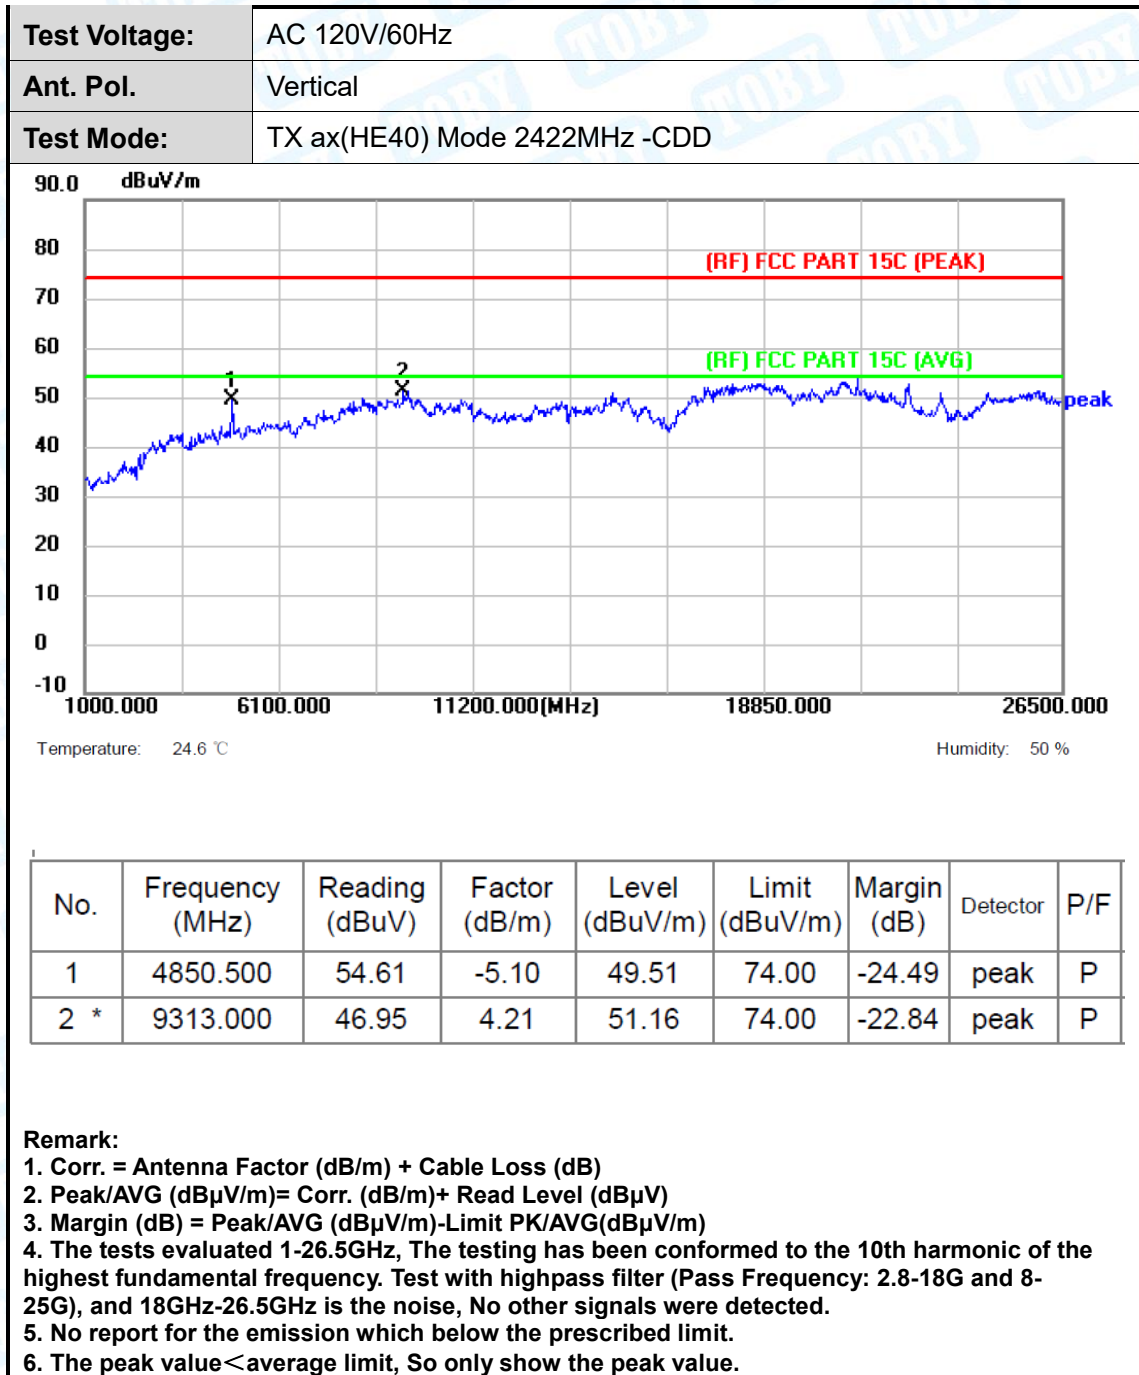

|               |                               |
|---------------|-------------------------------|
| Test Voltage: | AC 120V/60Hz                  |
| Ant. Pol.     | Horizontal                    |
| Test Mode:    | TX ax(HE40) Mode 2437MHz -CDD |

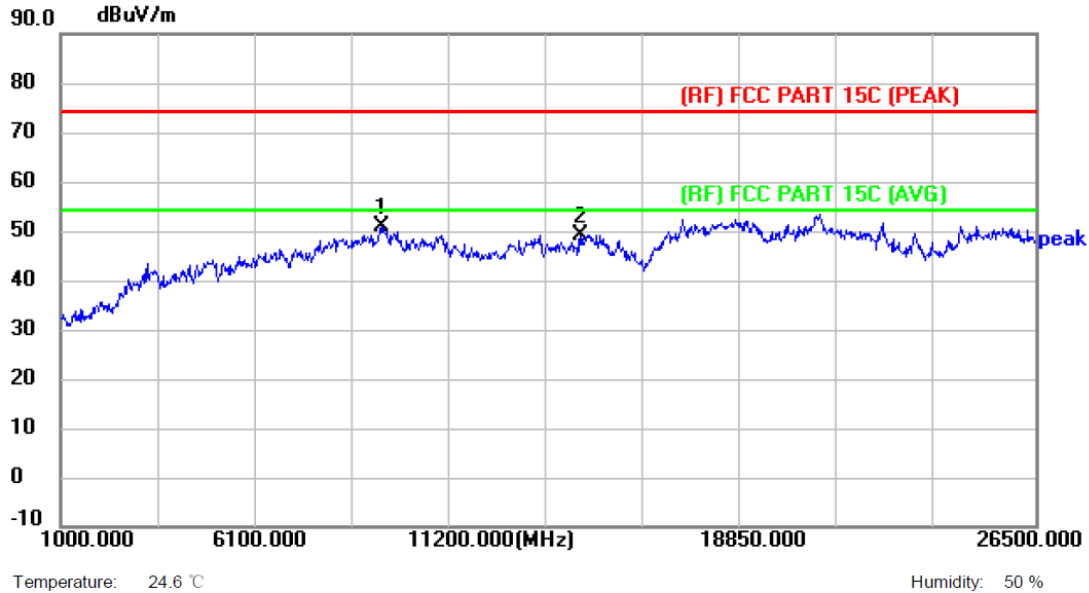


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 9415.000        | 45.00          | 5.76          | 50.76          | 74.00          | -23.24      | peak     | P   |
| 2   | 14617.000       | 40.43          | 8.85          | 49.28          | 74.00          | -24.72      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



|               |                               |
|---------------|-------------------------------|
| Test Voltage: | AC 120V/60Hz                  |
| Ant. Pol.     | Vertical                      |
| Test Mode:    | TX ax(HE40) Mode 2437MHz -CDD |

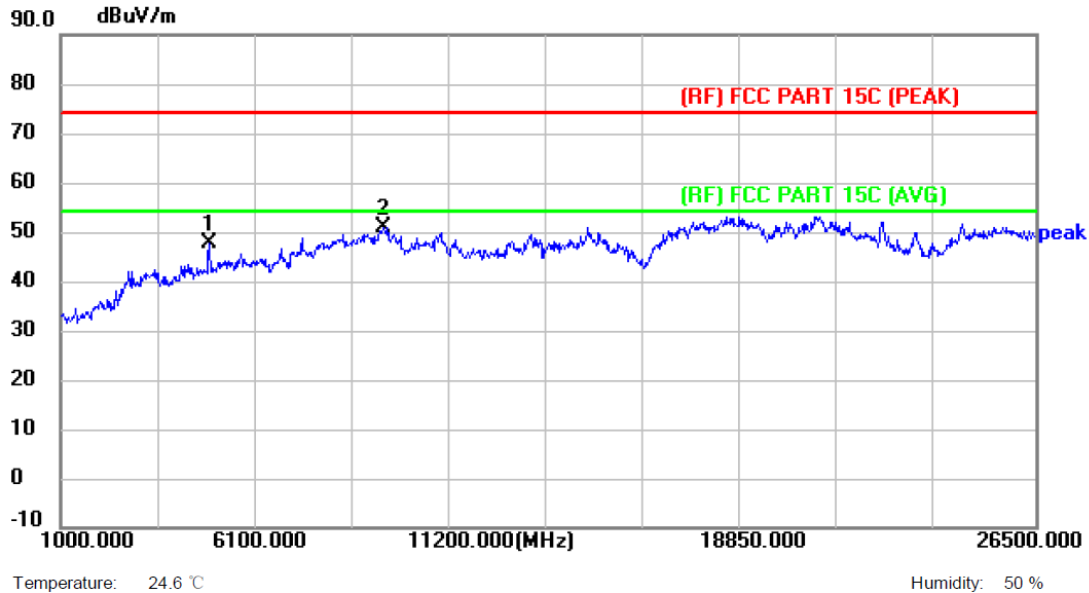



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 4876.000        | 52.75          | -5.10         | 47.65          | 74.00          | -26.35      | peak     | P   |
| 2 * | 9466.000        | 44.42          | 6.35          | 50.77          | 74.00          | -23.23      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value<average limit, So only show the peak value.




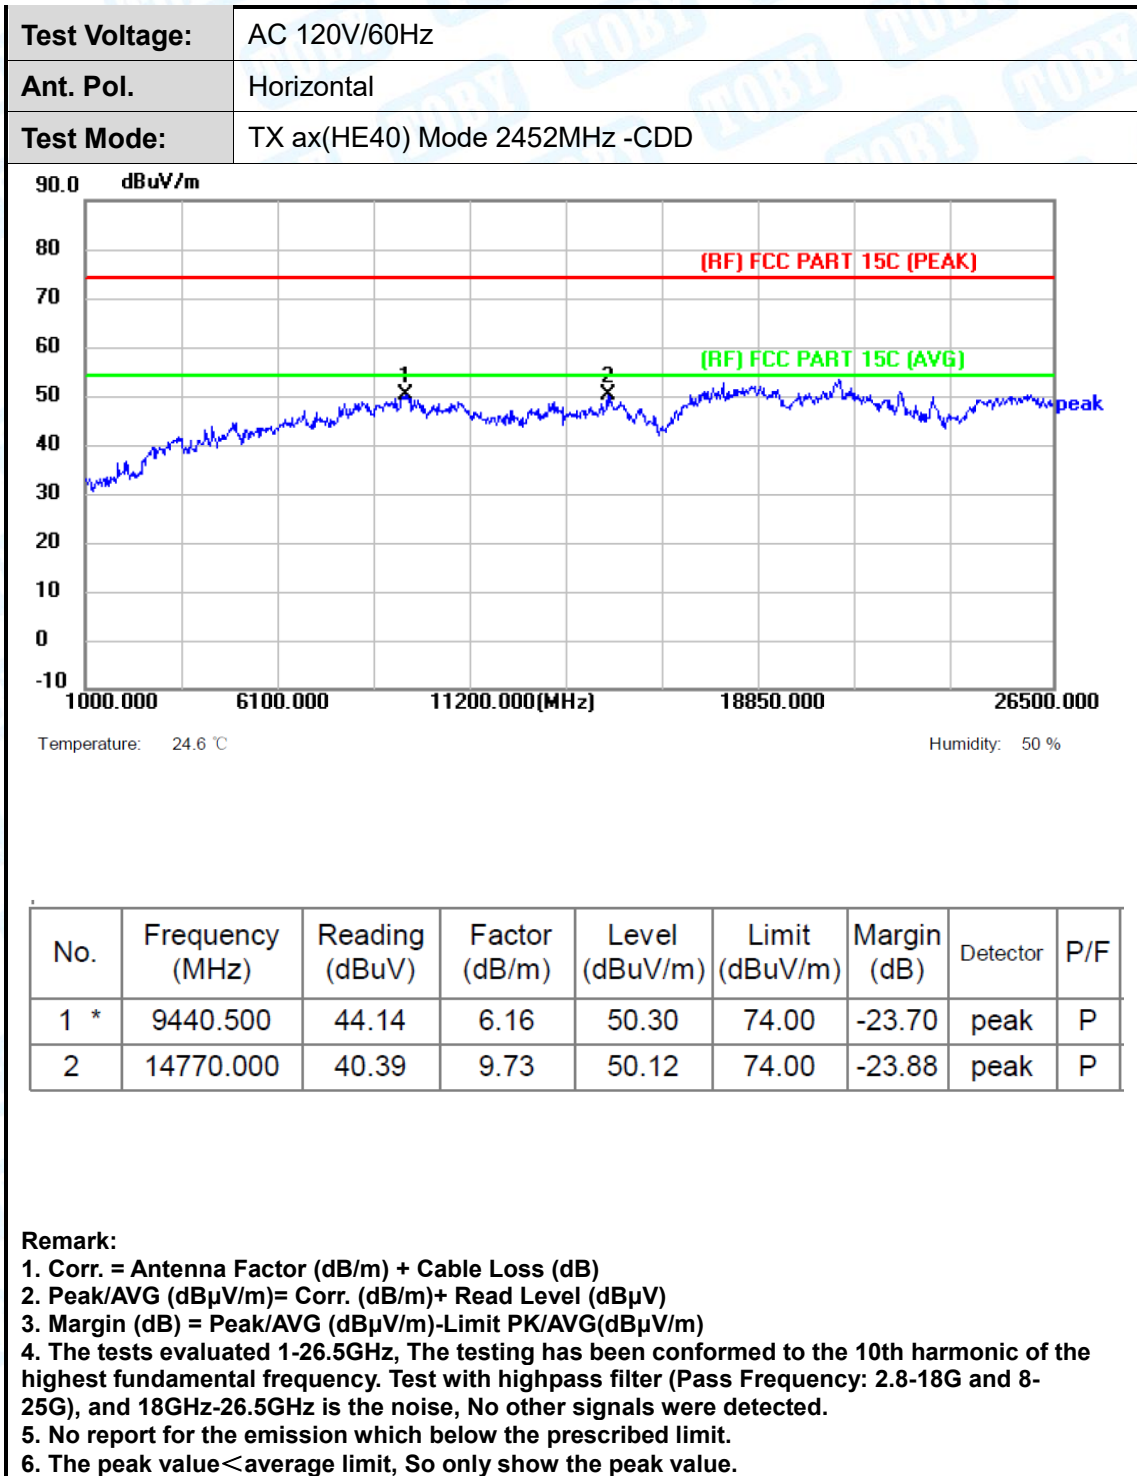

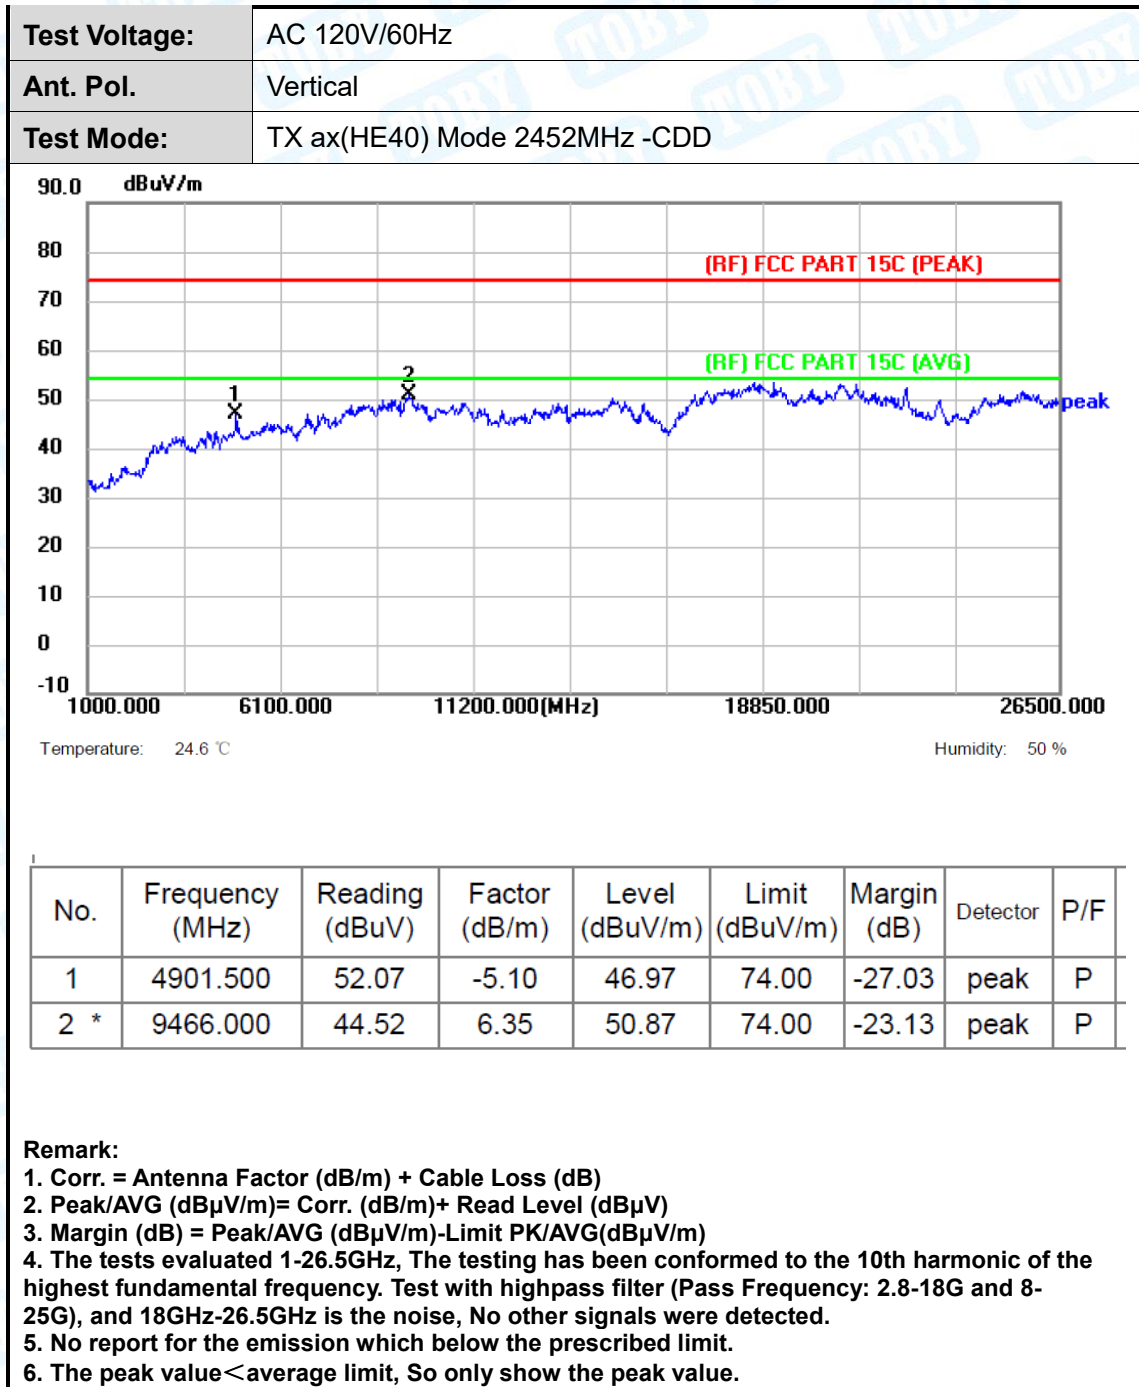


## Attachment C-- Restricted Bands Requirement Test Data

### Radiation Test

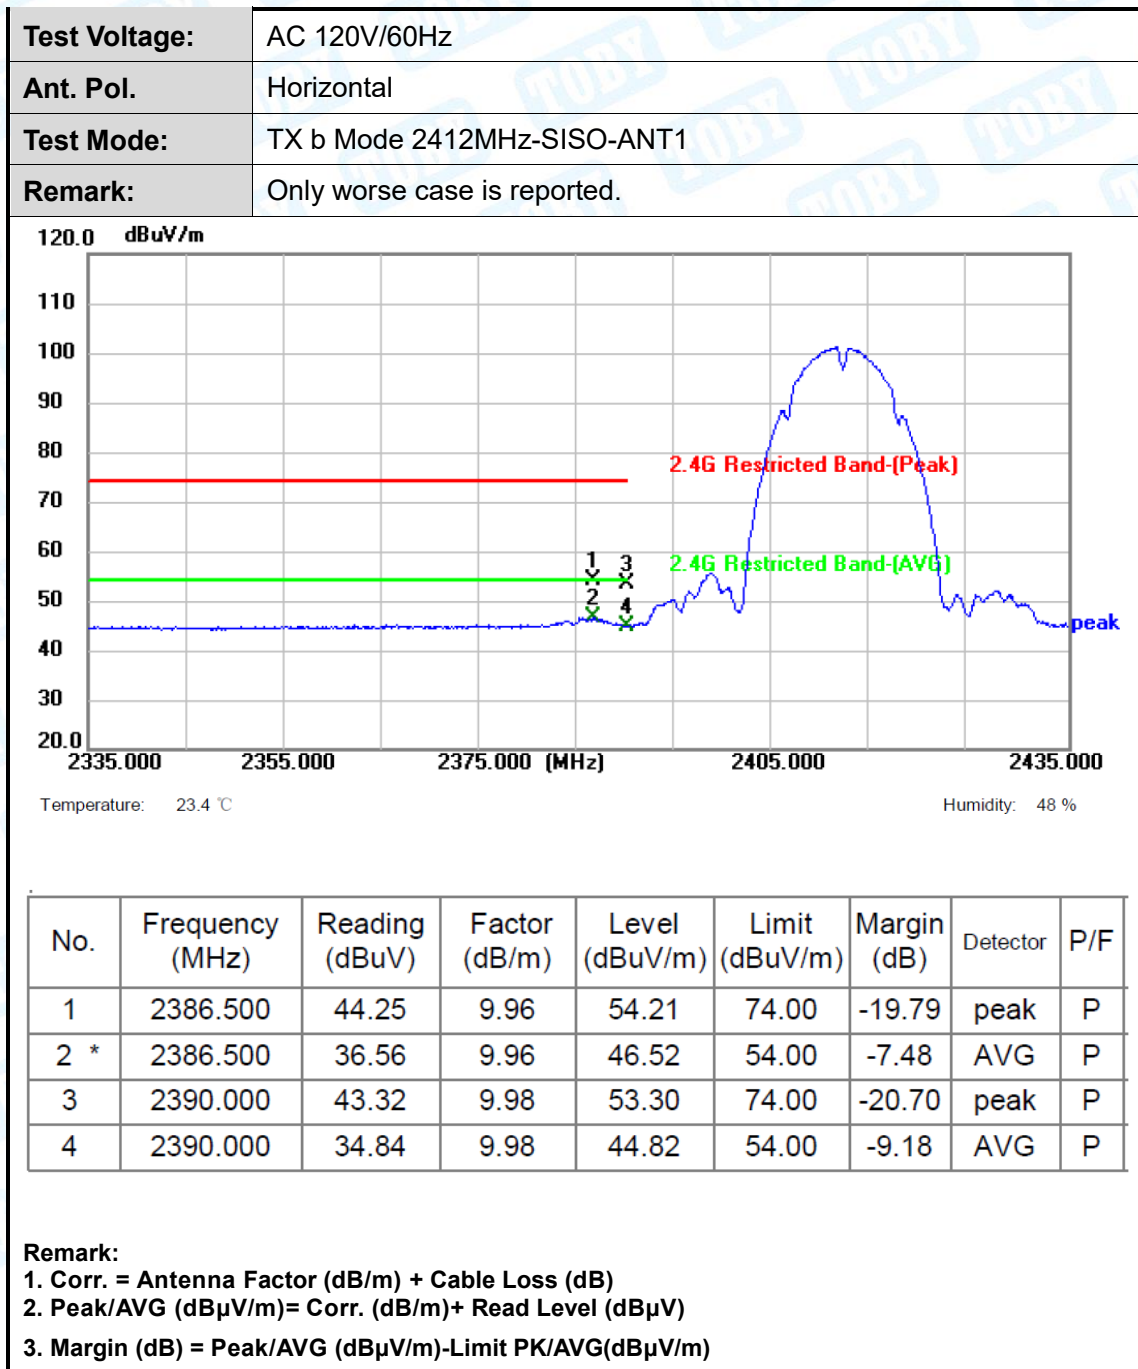

|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Vertical                     |
| Test Mode:    | TX b Mode 2412MHz-SISO-ANT1  |
| Remark:       | Only worse case is reported. |

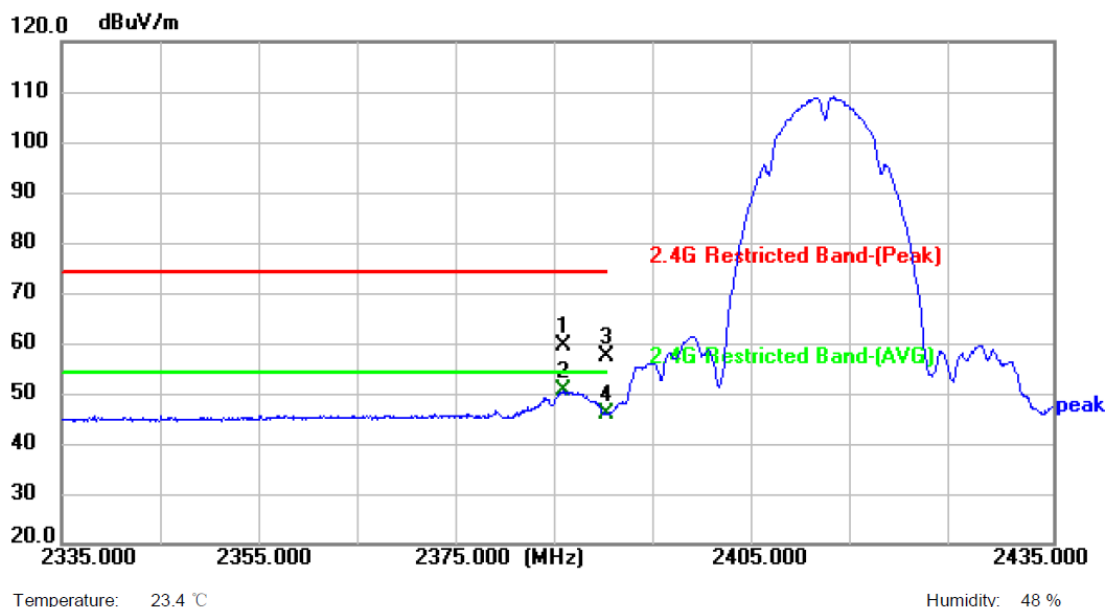


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2385.600        | 49.37          | 9.95          | 59.32          | 74.00          | -14.68      | peak     | P   |
| 2 * | 2385.600        | 40.46          | 9.95          | 50.41          | 54.00          | -3.59       | AVG      | P   |
| 3   | 2390.000        | 47.40          | 9.98          | 57.38          | 74.00          | -16.62      | peak     | P   |
| 4   | 2390.000        | 36.08          | 9.98          | 46.06          | 54.00          | -7.94       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Horizontal                   |
| Test Mode:    | TX b Mode 2462MHz-SISO-ANT1  |
| Remark:       | Only worse case is reported. |

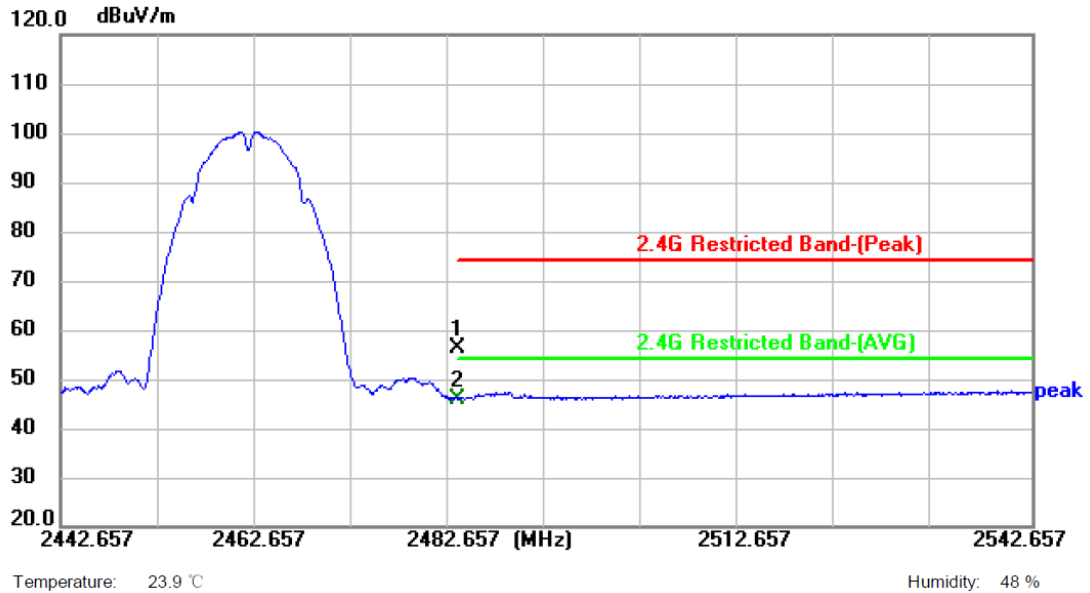



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 46.16          | 10.20         | 56.36          | 74.00          | -17.64      | peak     | P   |
| 2 * | 2483.500        | 35.76          | 10.20         | 45.96          | 54.00          | -8.04       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




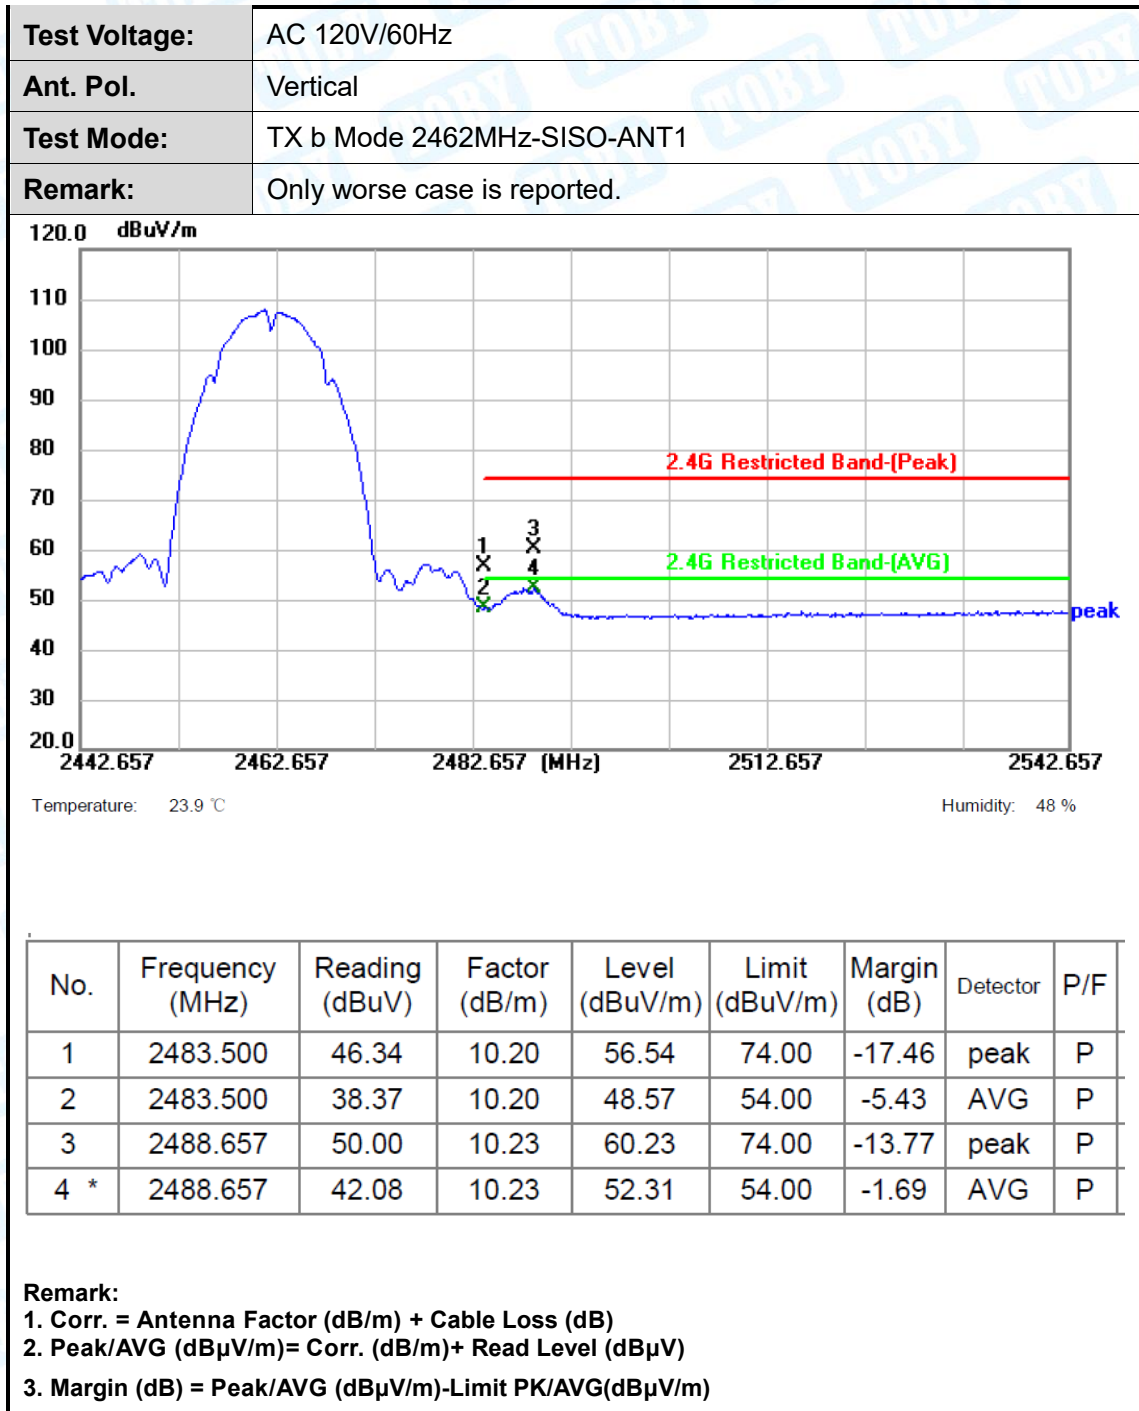

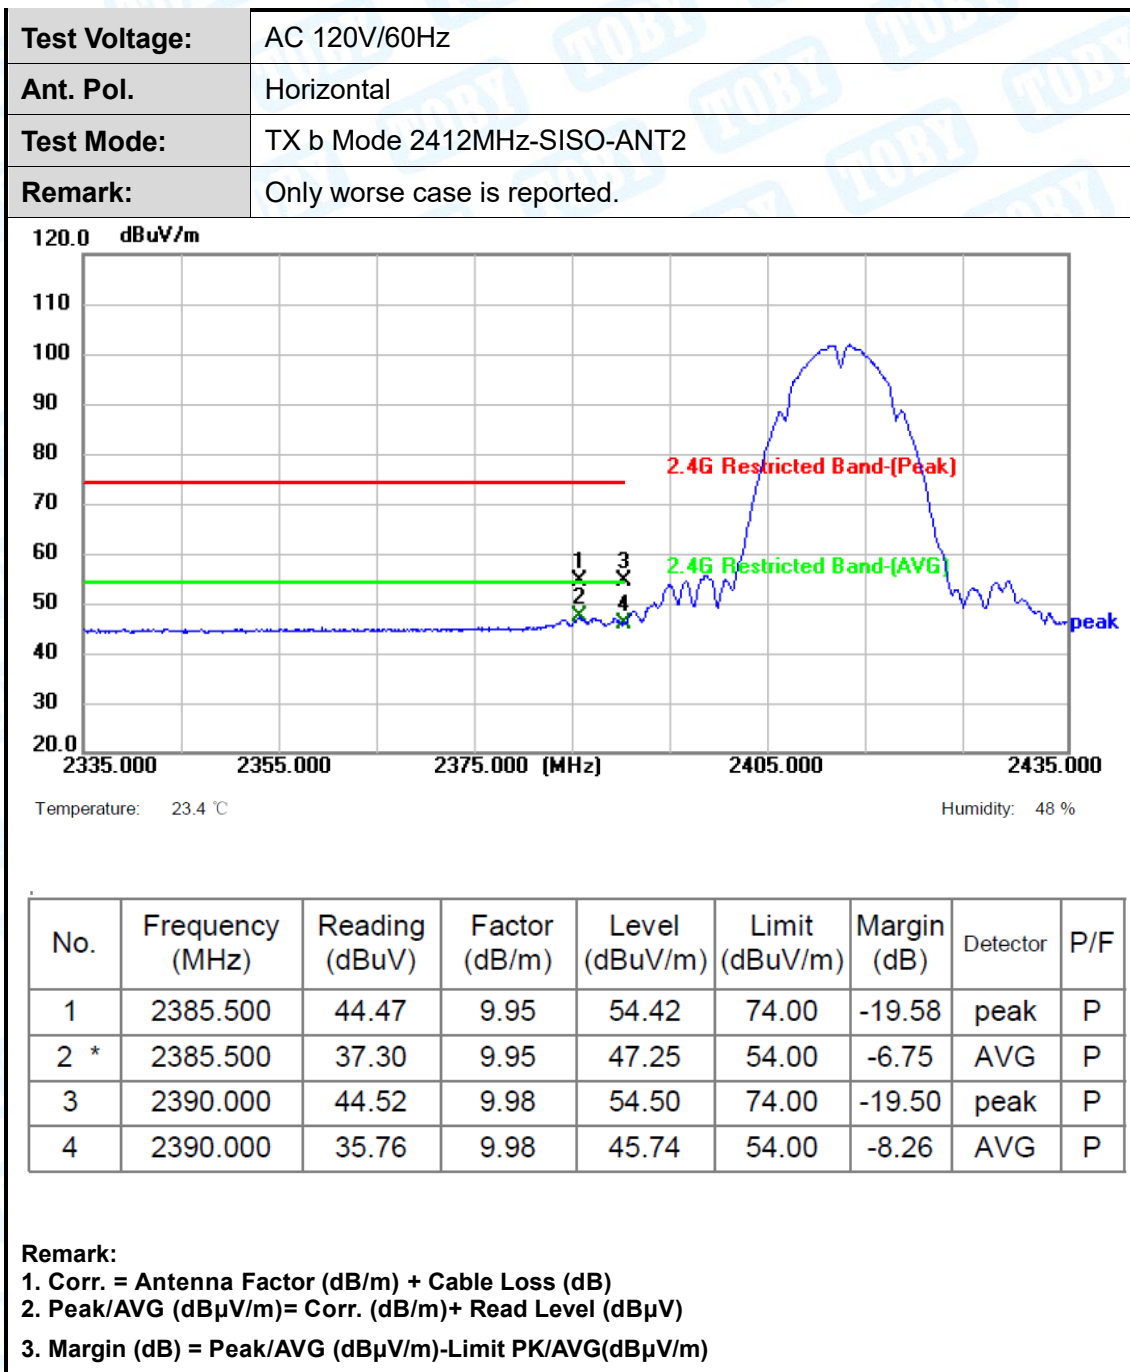

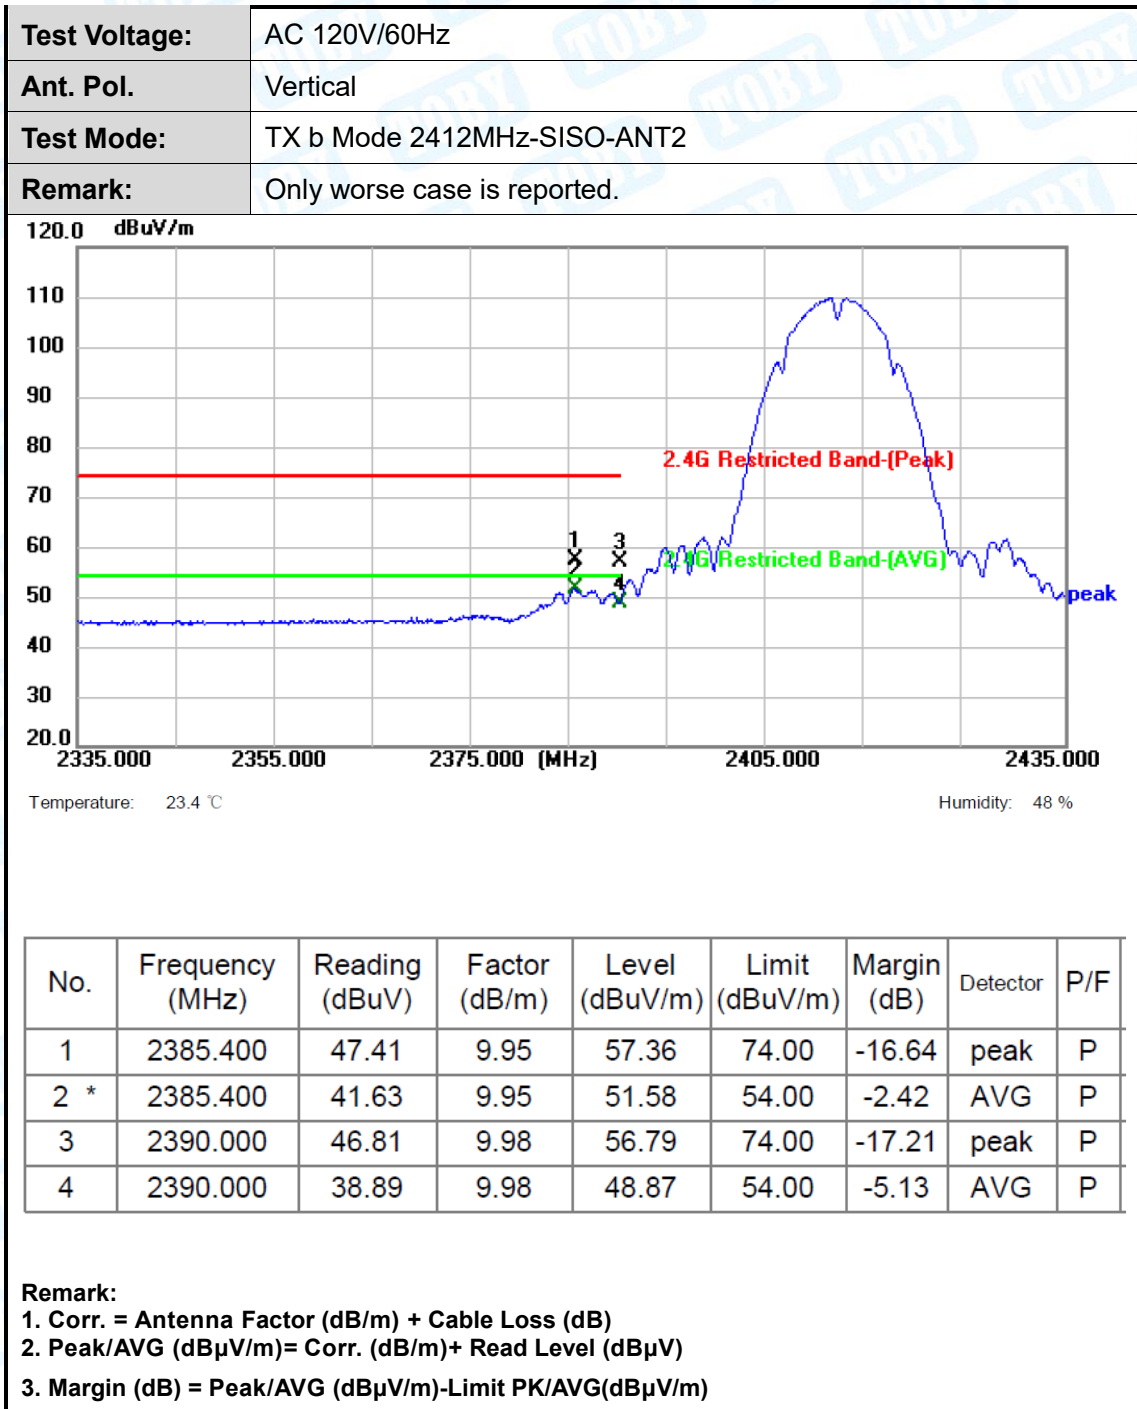

|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Horizontal                   |
| Test Mode:    | TX b Mode 2462MHz-SISO-ANT2  |
| Remark:       | Only worse case is reported. |

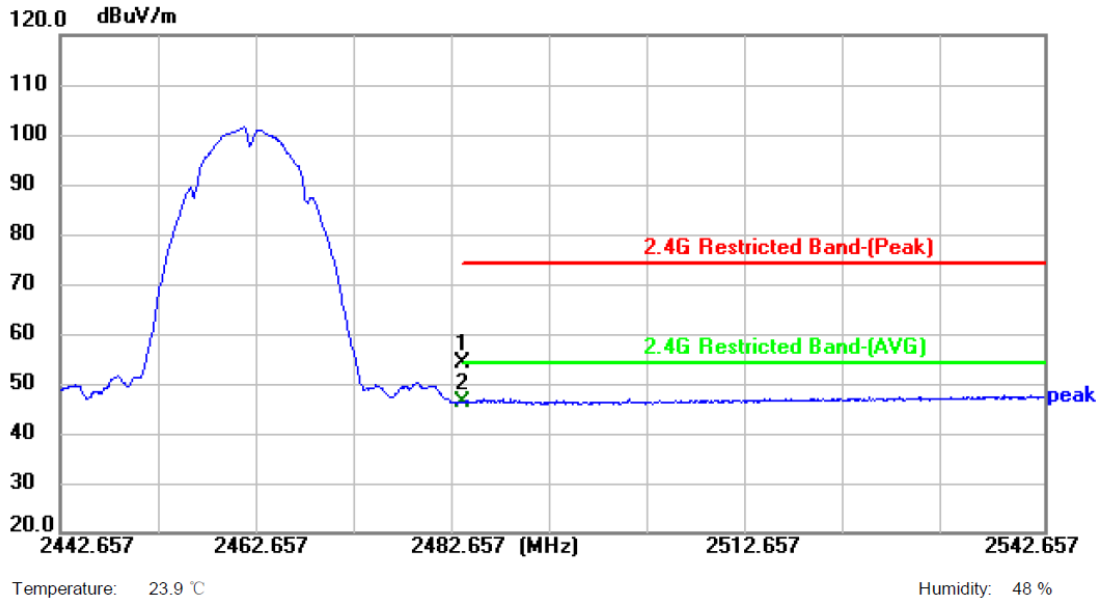



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 44.03          | 10.20         | 54.23          | 74.00          | -19.77      | peak     | P   |
| 2 * | 2483.500        | 35.96          | 10.20         | 46.16          | 54.00          | -7.84       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




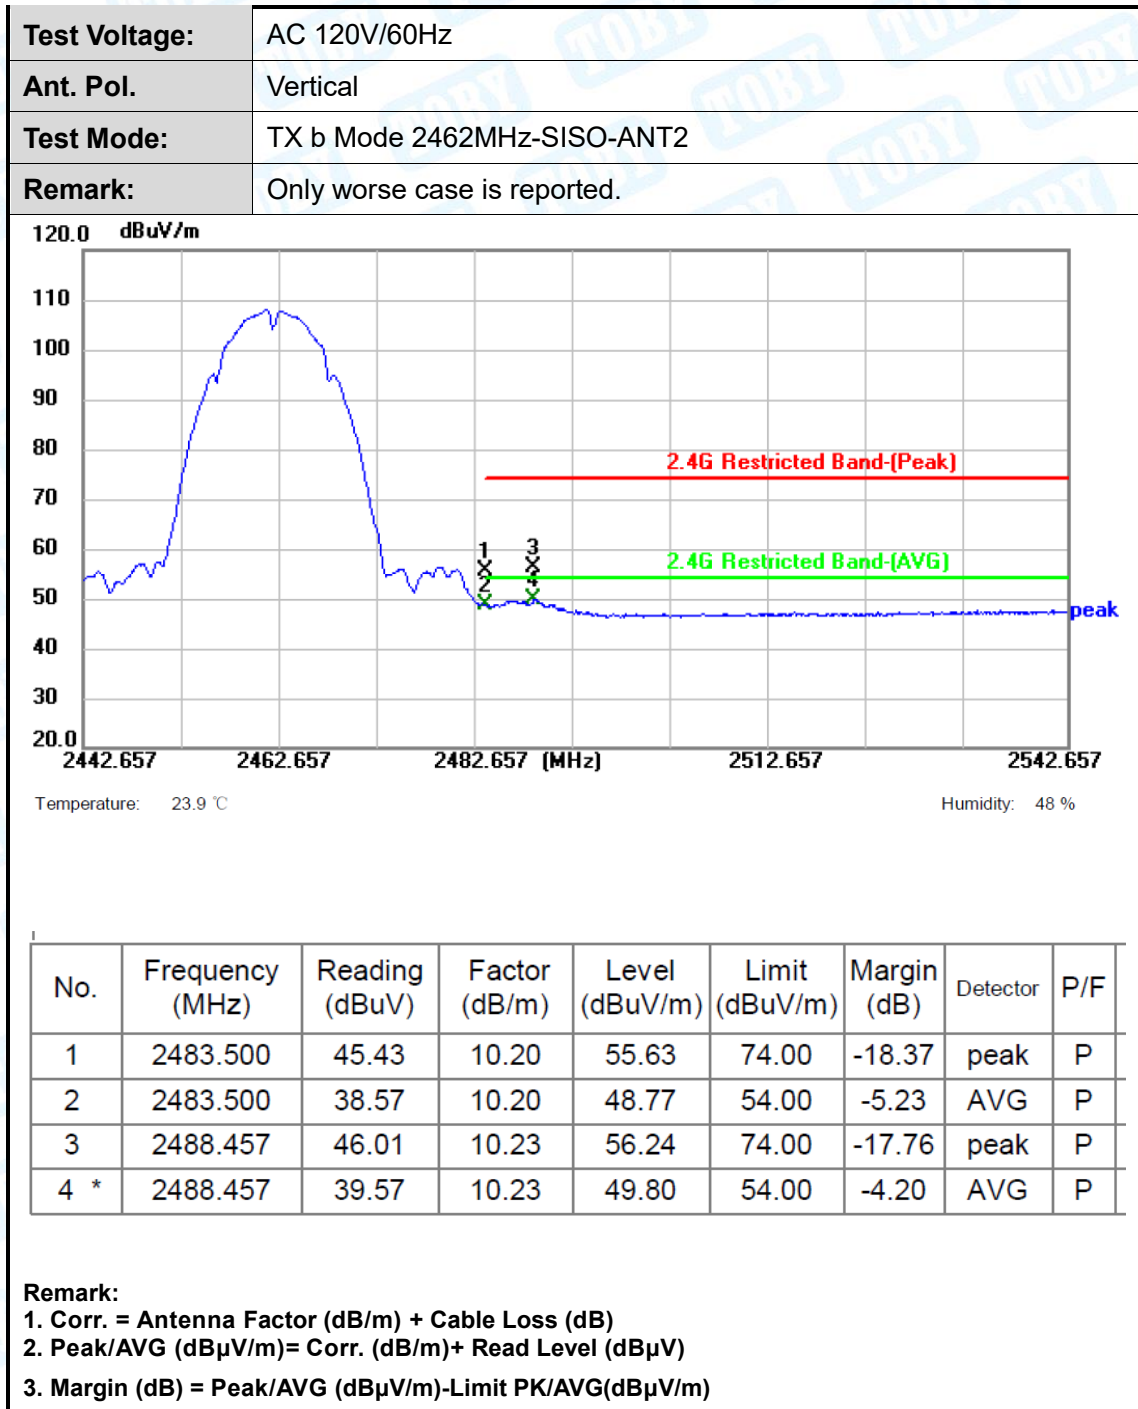

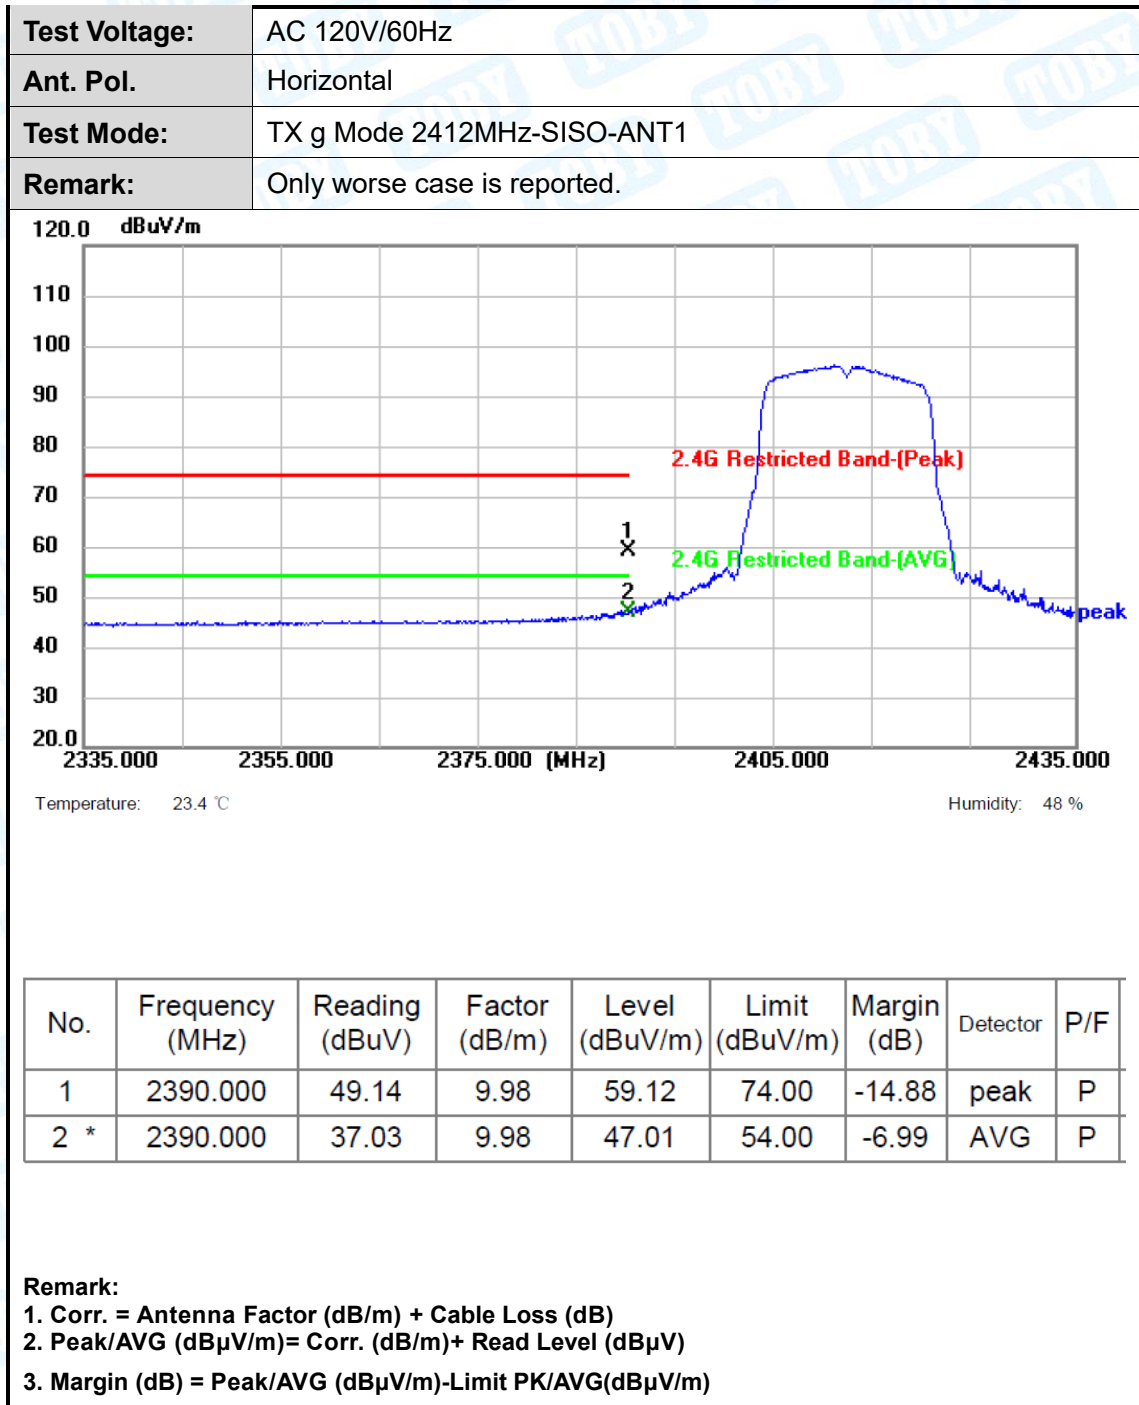

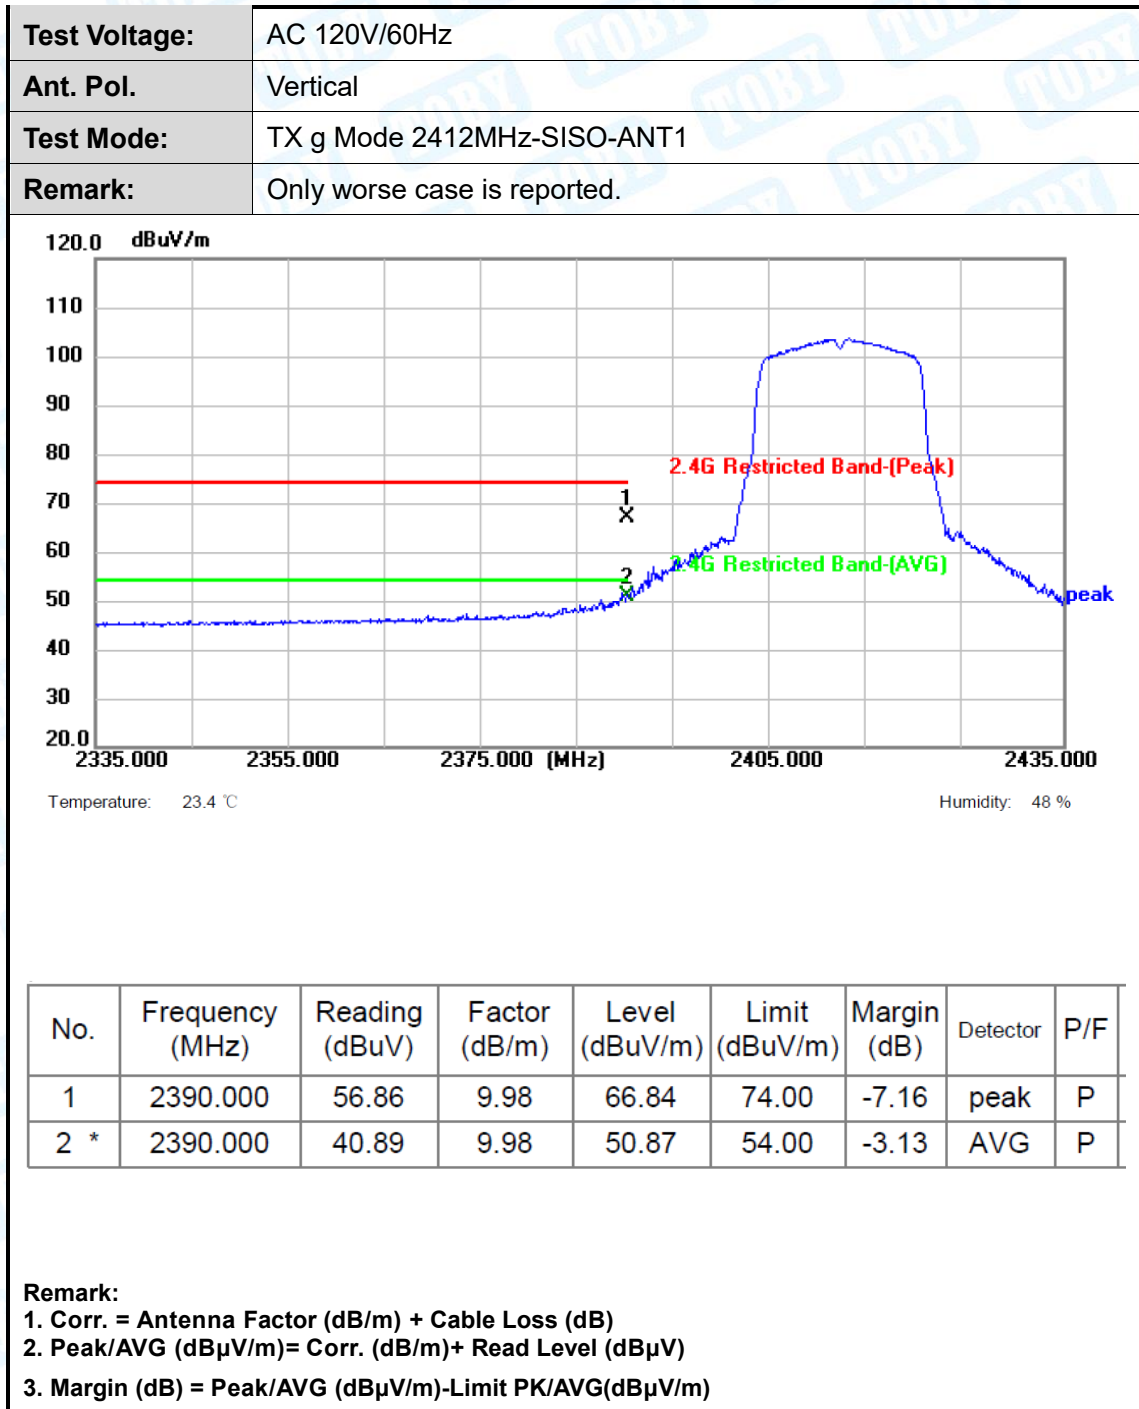

|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Horizontal                   |
| Test Mode:    | TX g Mode 2462MHz-SISO-ANT1  |
| Remark:       | Only worse case is reported. |

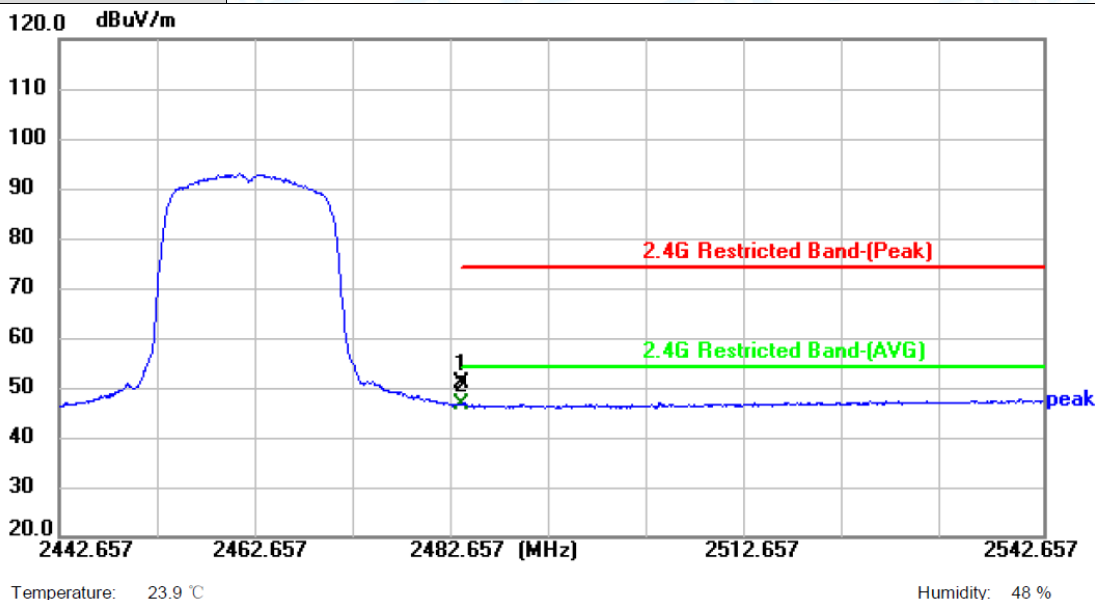



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 40.52          | 10.20         | 50.72          | 74.00          | -23.28      | peak     | P   |
| 2 * | 2483.500        | 36.27          | 10.20         | 46.47          | 54.00          | -7.53       | AVG      | P   |

**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



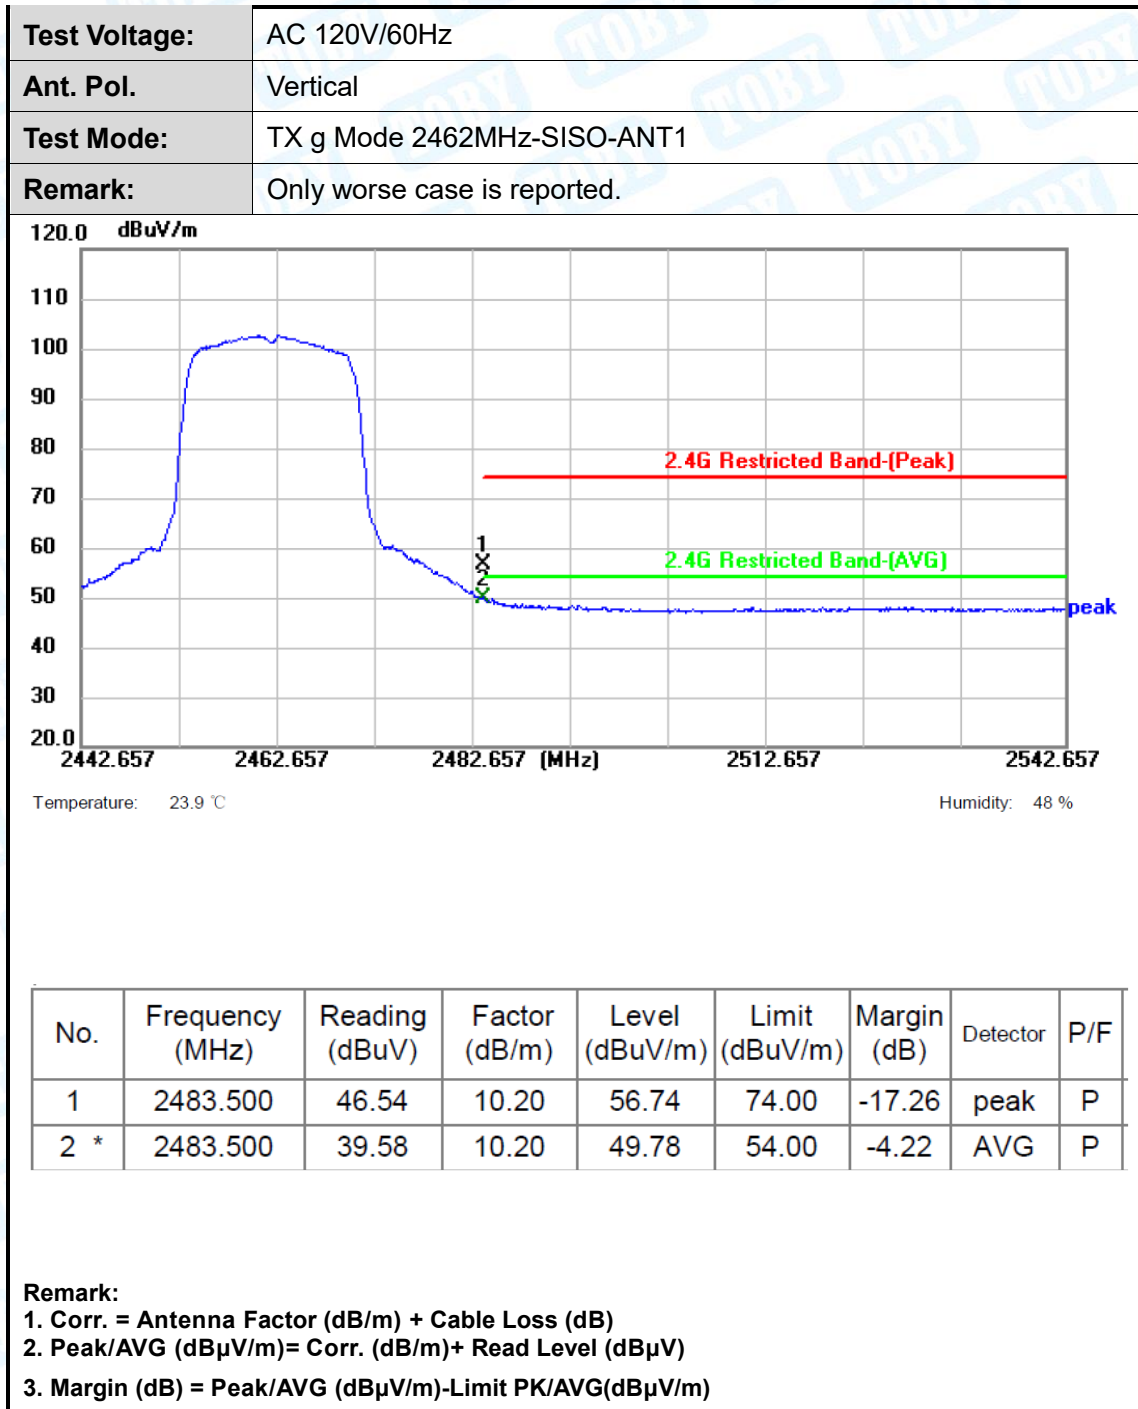

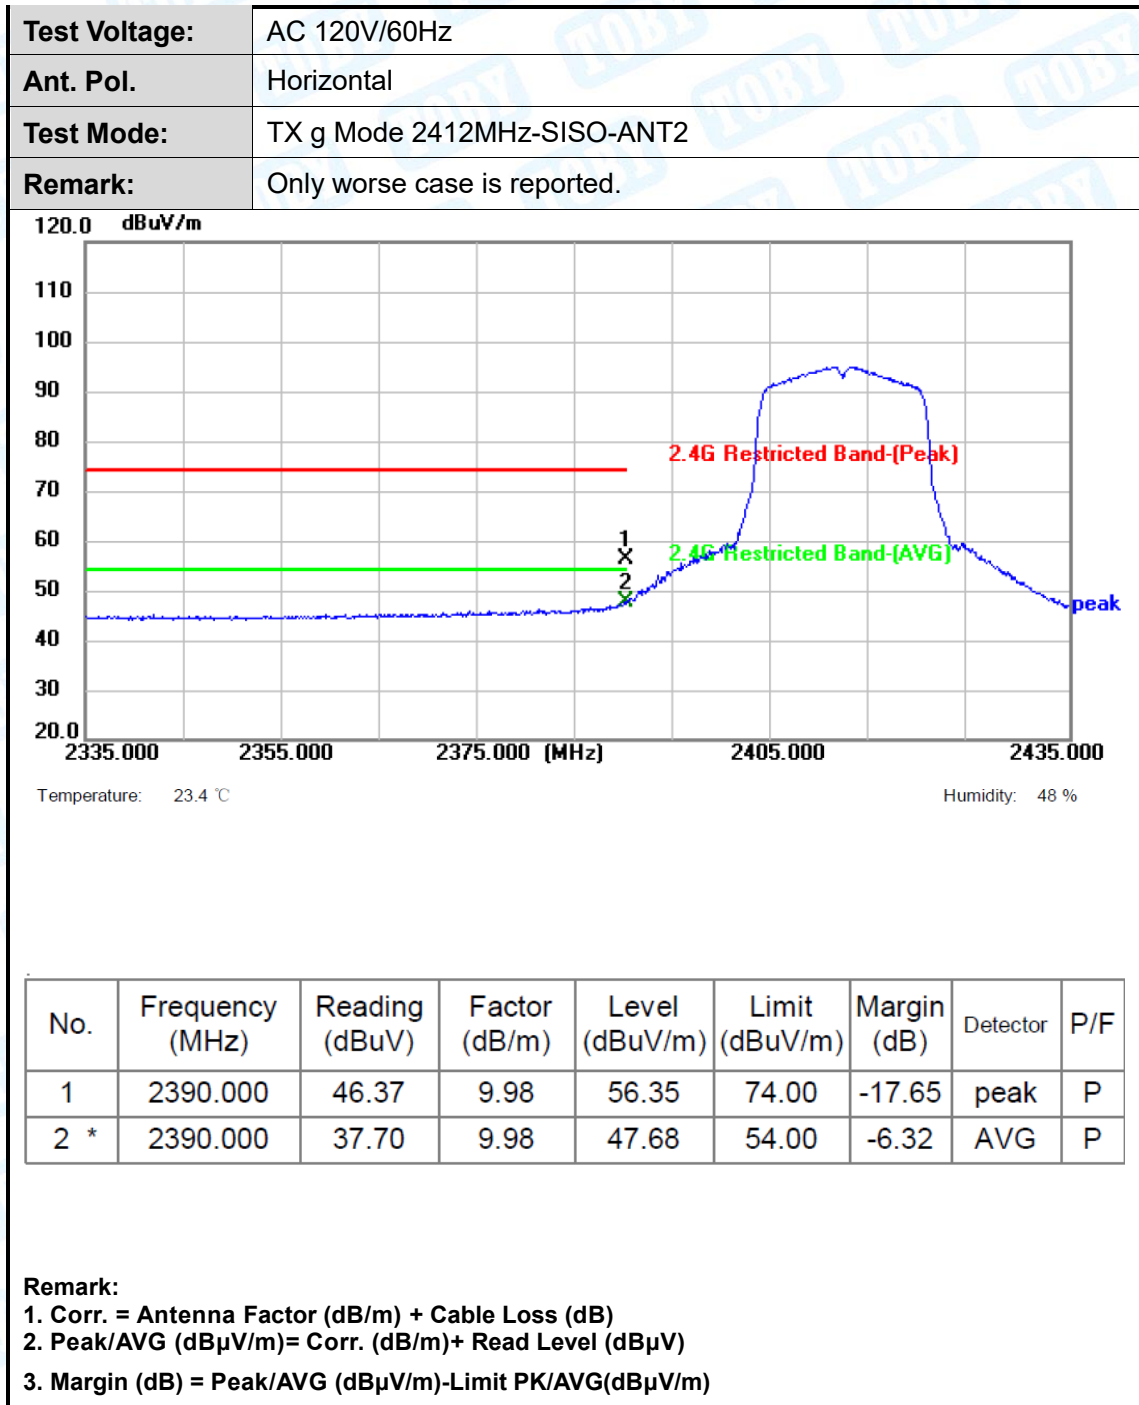

|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Vertical                     |
| Test Mode:    | TX g Mode 2412MHz-SISO-ANT2  |
| Remark:       | Only worse case is reported. |

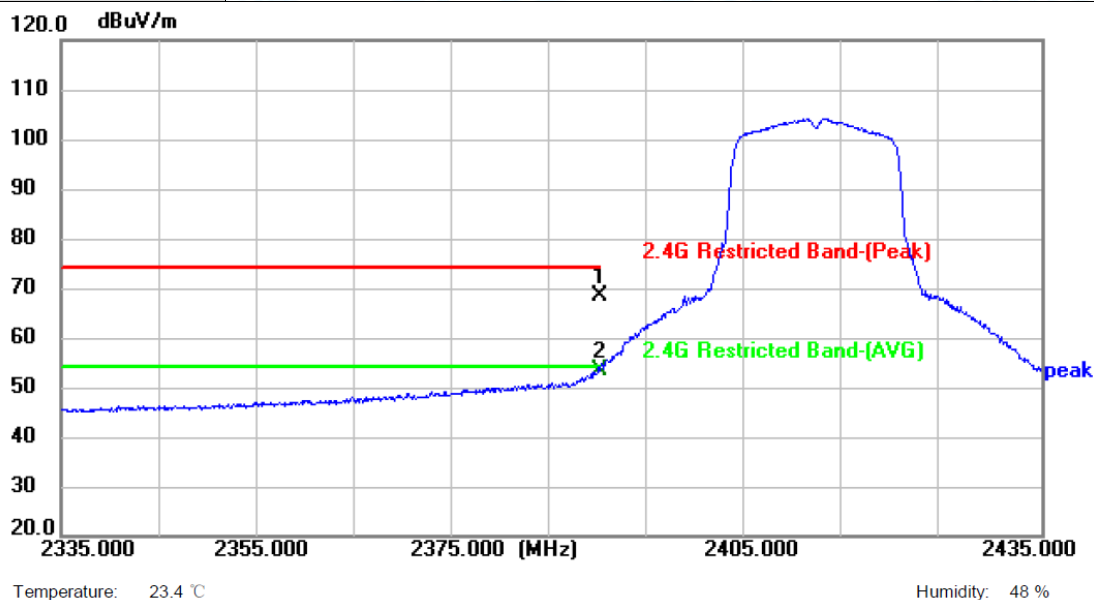



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2390.000        | 58.57          | 9.98          | 68.55          | 74.00          | -5.45       | peak     | P   |
| 2 * | 2390.000        | 43.46          | 9.98          | 53.44          | 54.00          | -0.56       | AVG      | P   |


**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



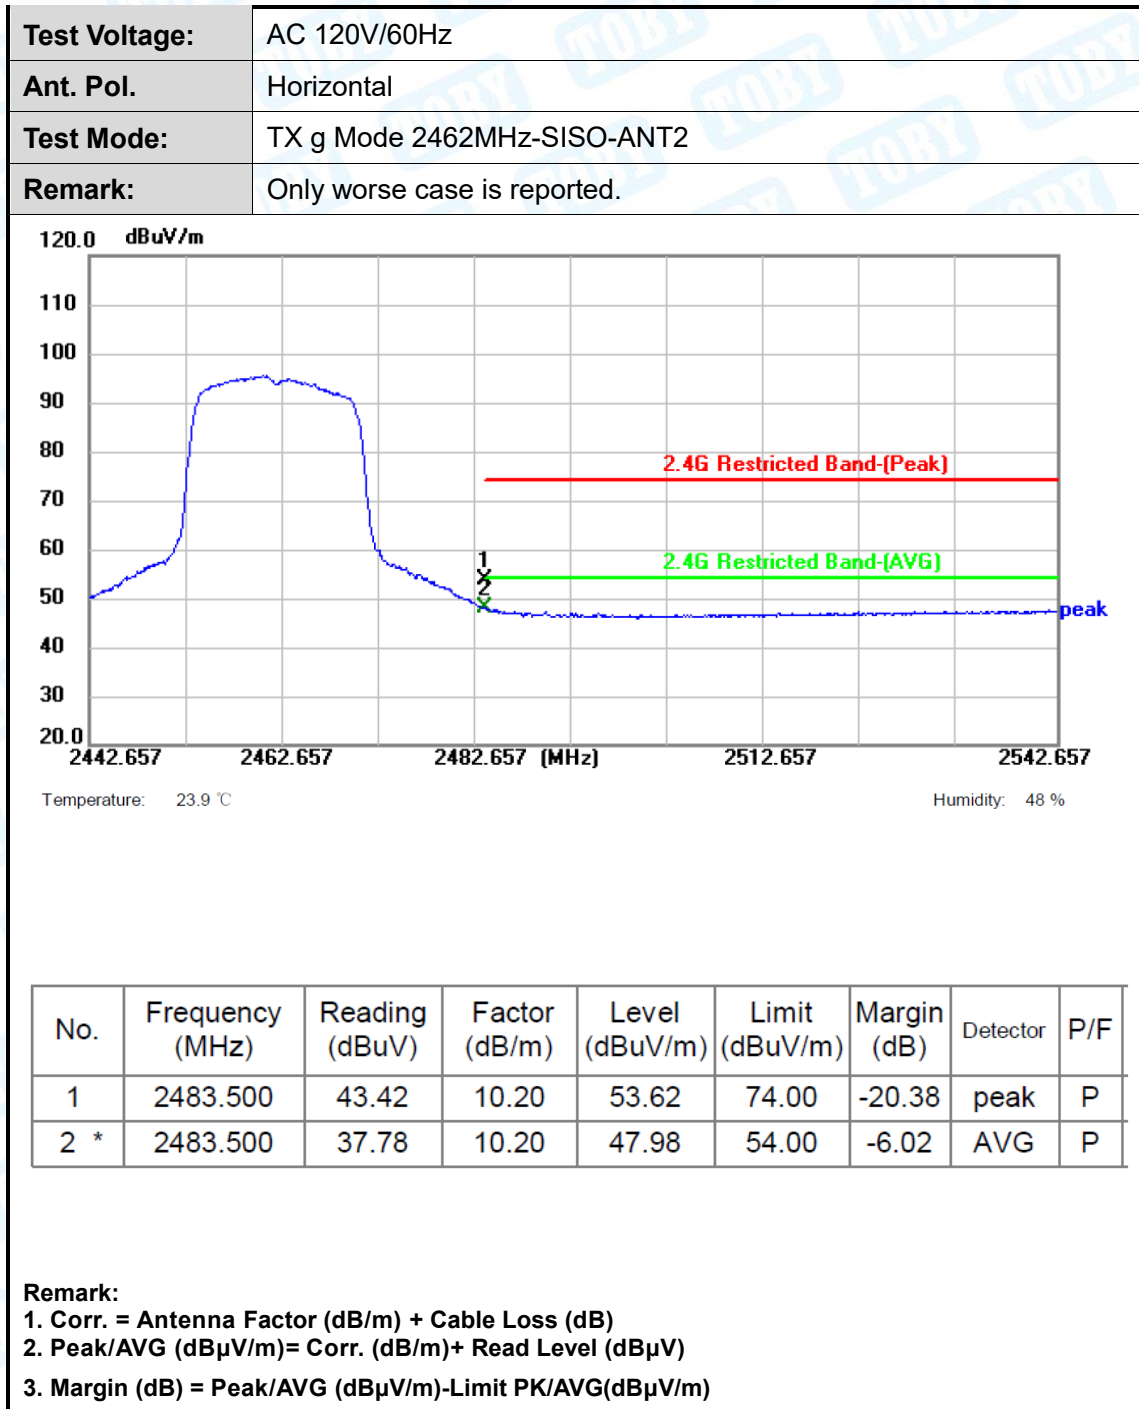


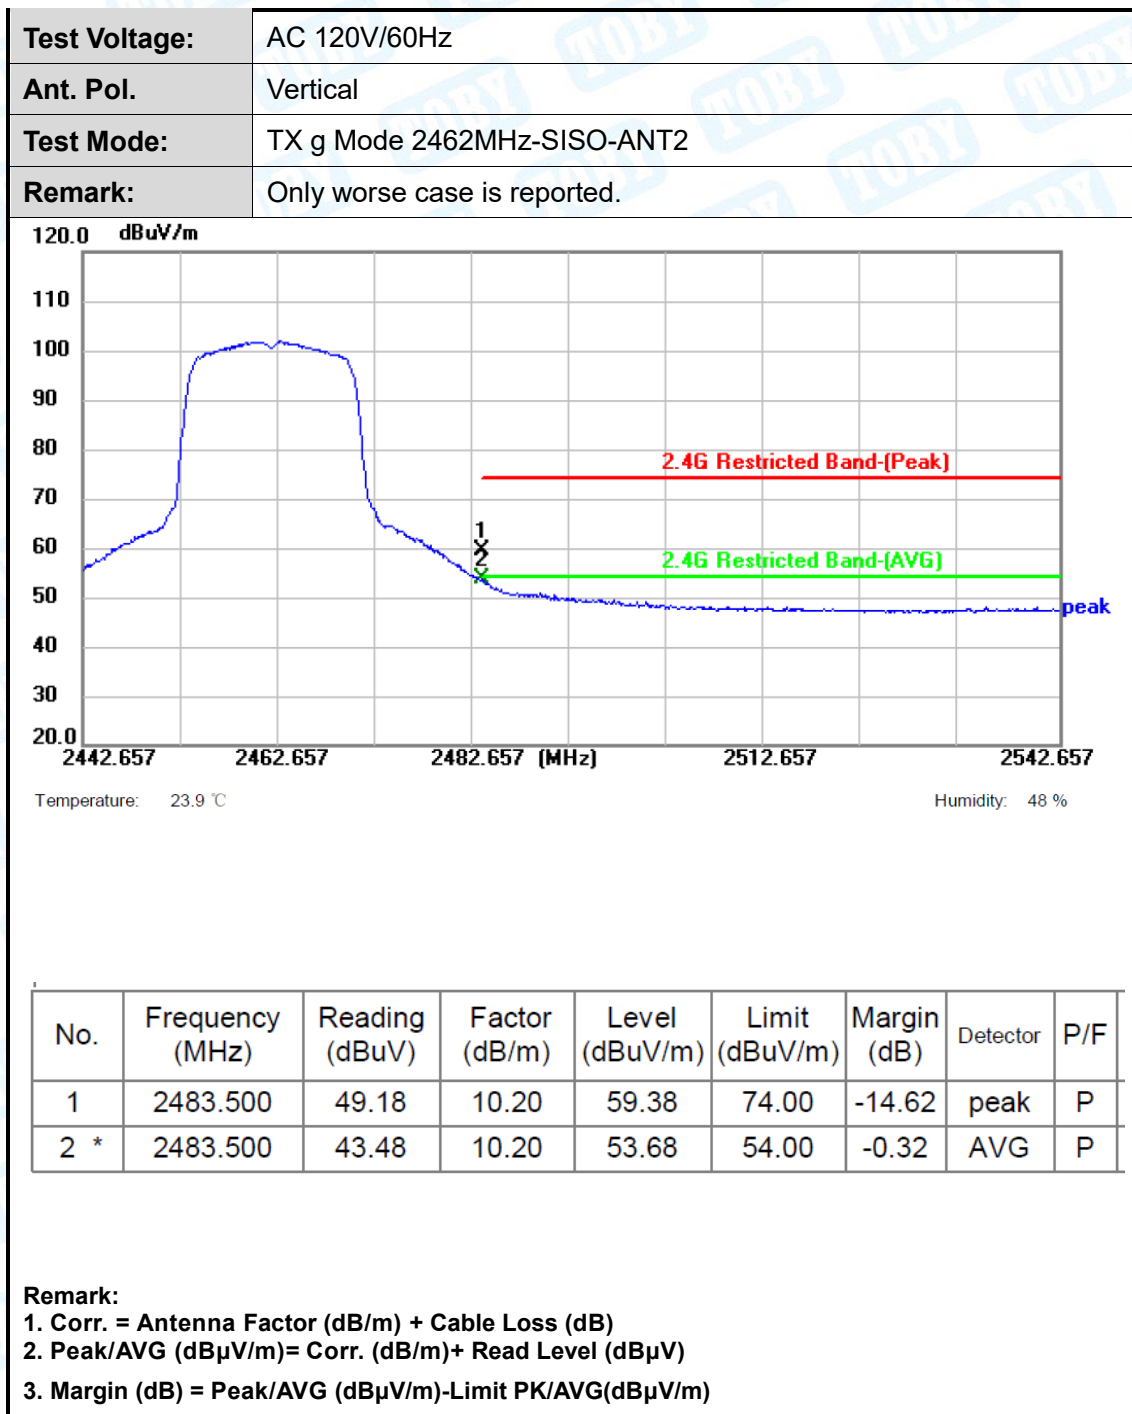

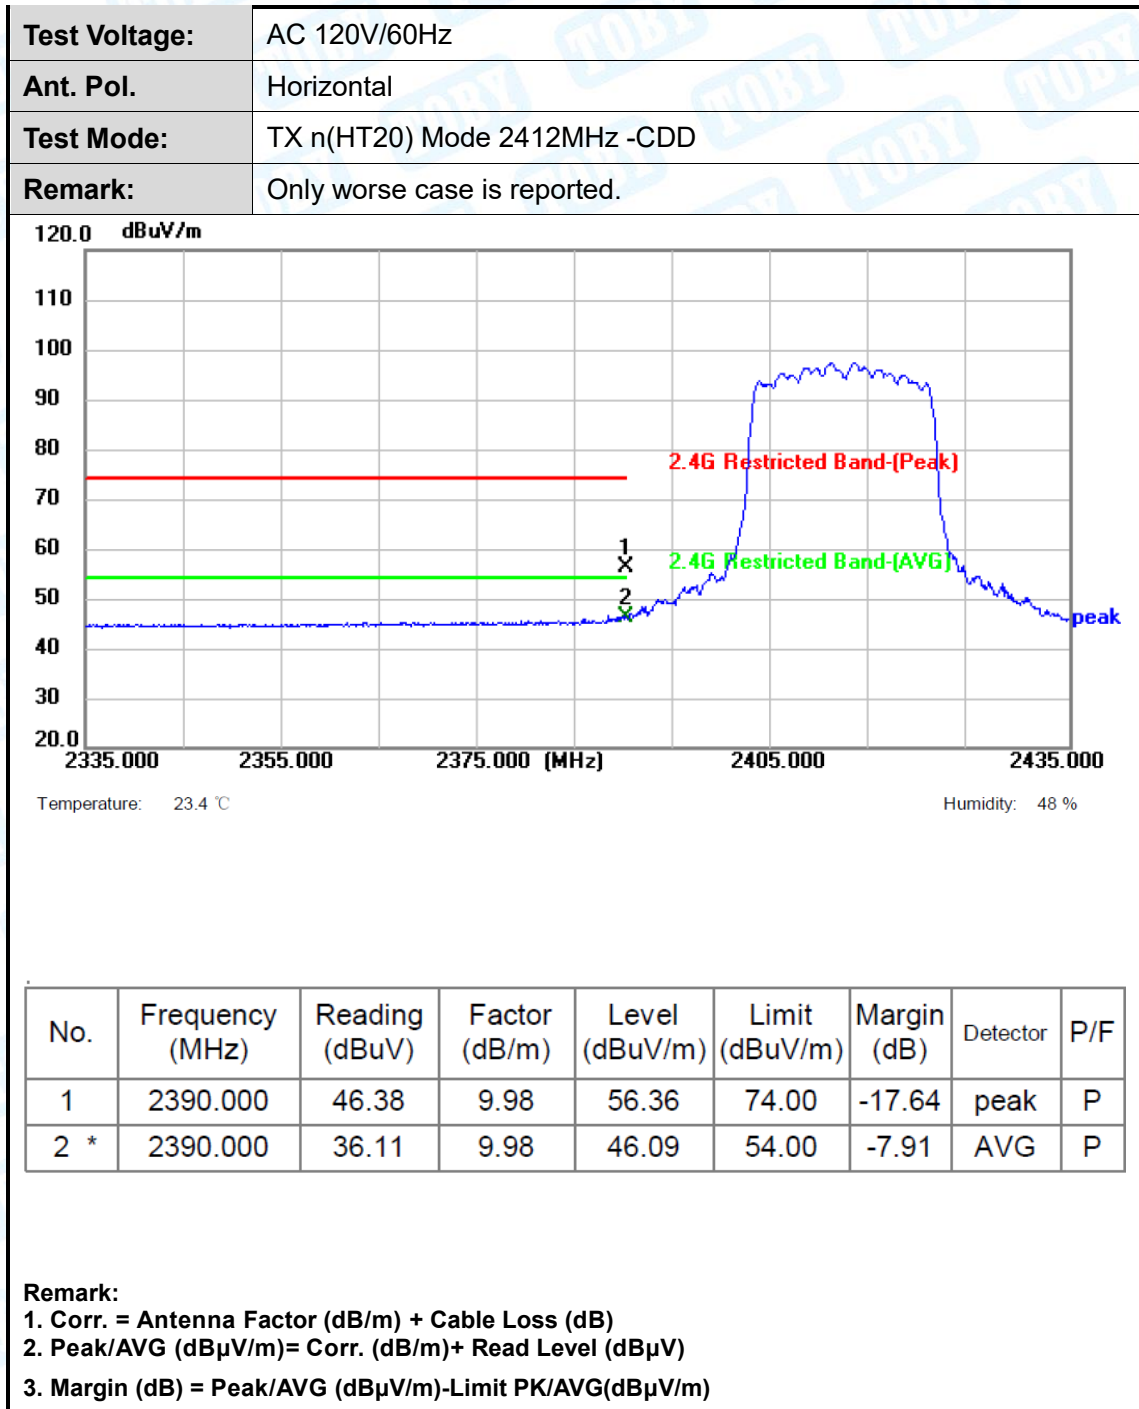

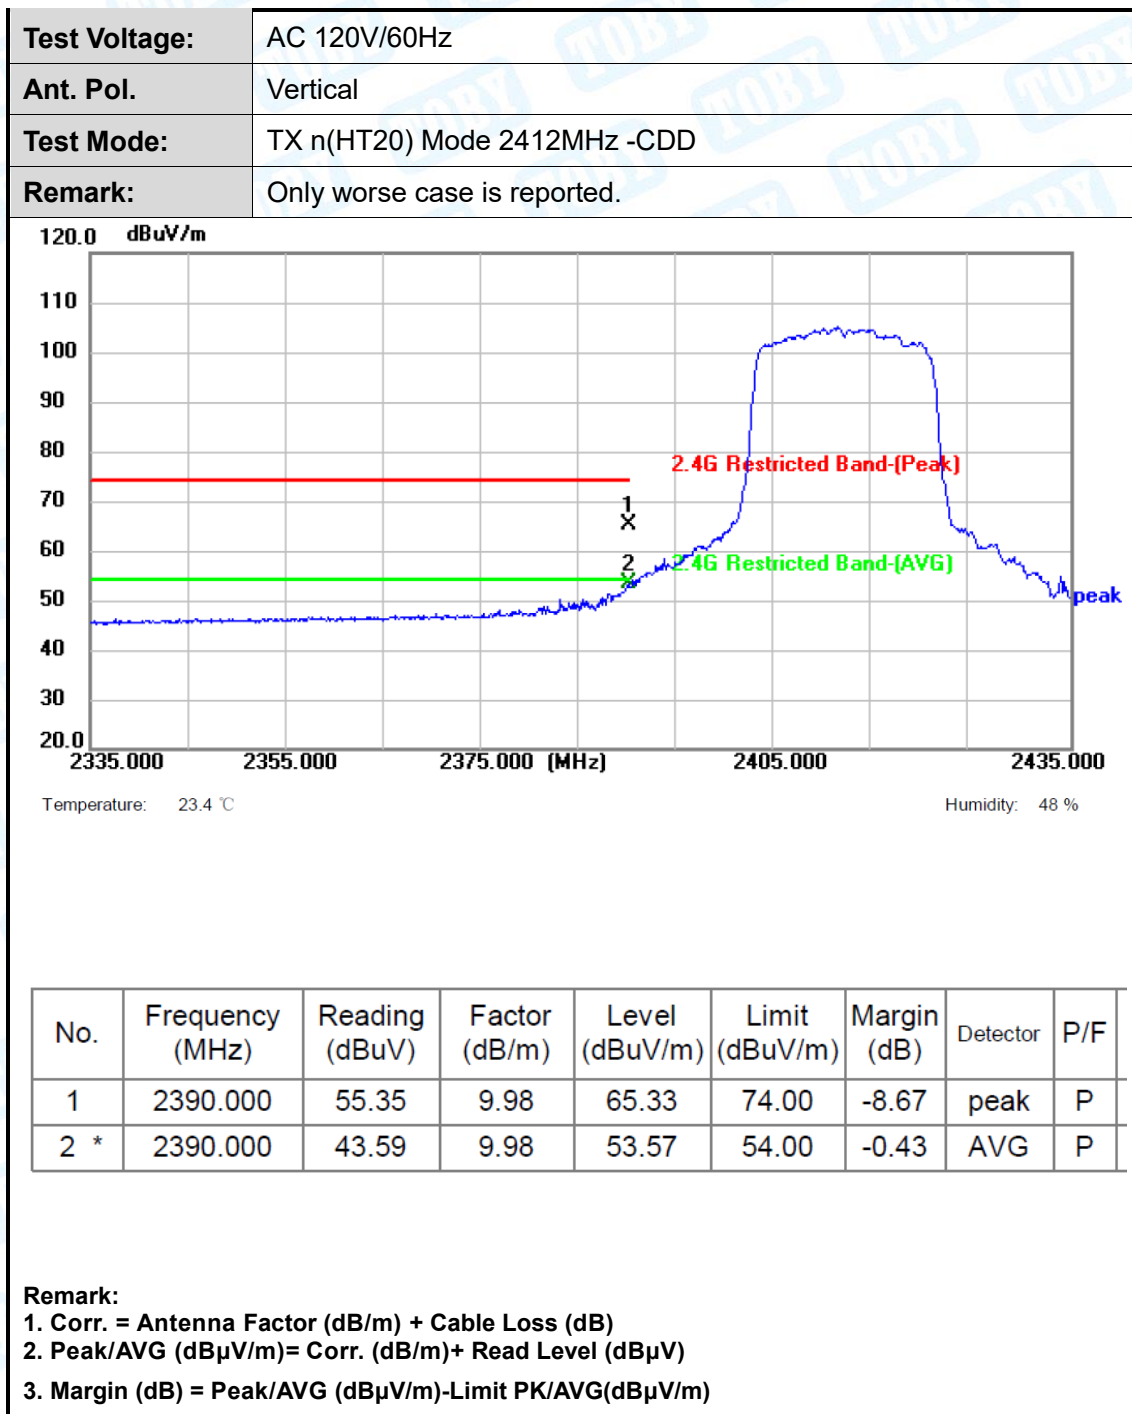

|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Horizontal                   |
| Test Mode:    | TX n(HT20) Mode 2462MHz -CDD |
| Remark:       | Only worse case is reported. |

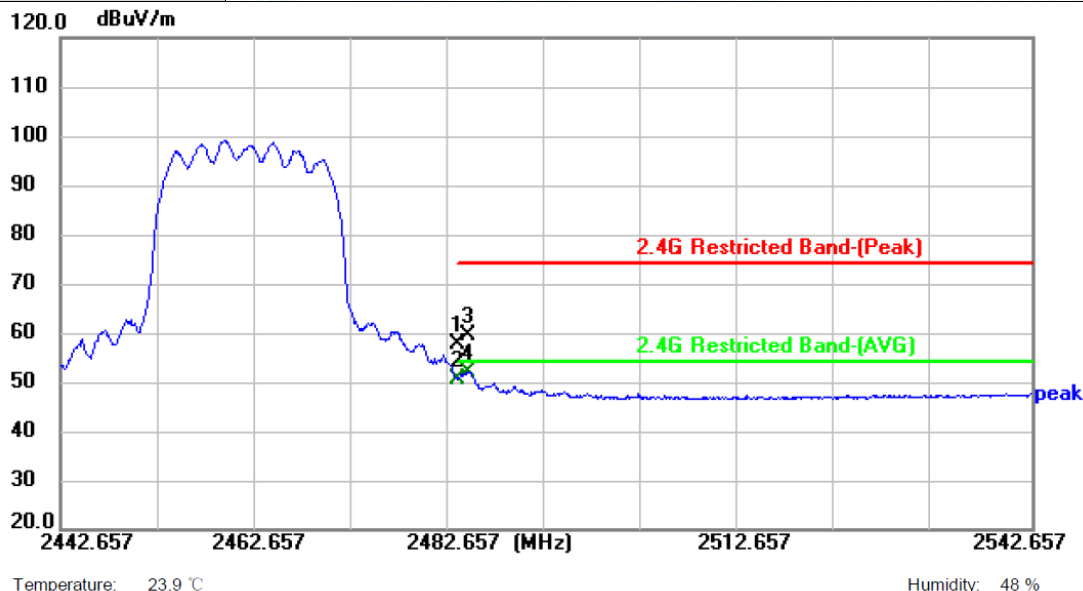



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 47.36          | 10.20         | 57.56          | 74.00          | -16.44      | peak     | P   |
| 2   | 2483.500        | 40.51          | 10.20         | 50.71          | 54.00          | -3.29       | AVG      | P   |
| 3   | 2484.757        | 49.33          | 10.21         | 59.54          | 74.00          | -14.46      | peak     | P   |
| 4 * | 2484.757        | 41.91          | 10.21         | 52.12          | 54.00          | -1.88       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




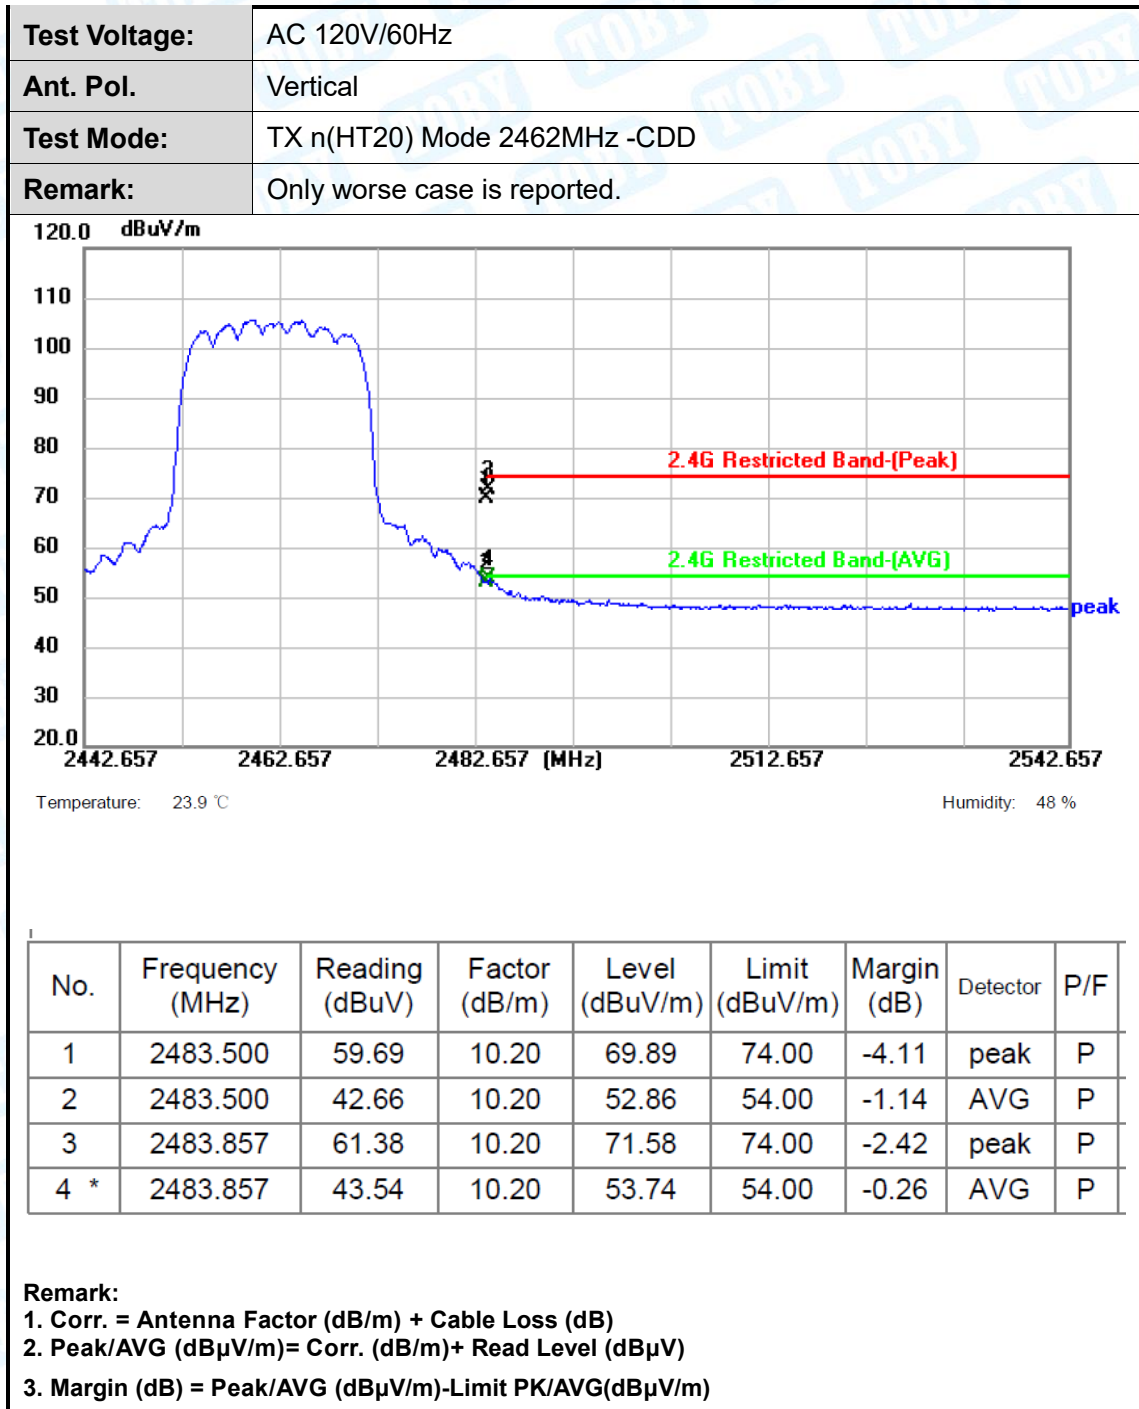

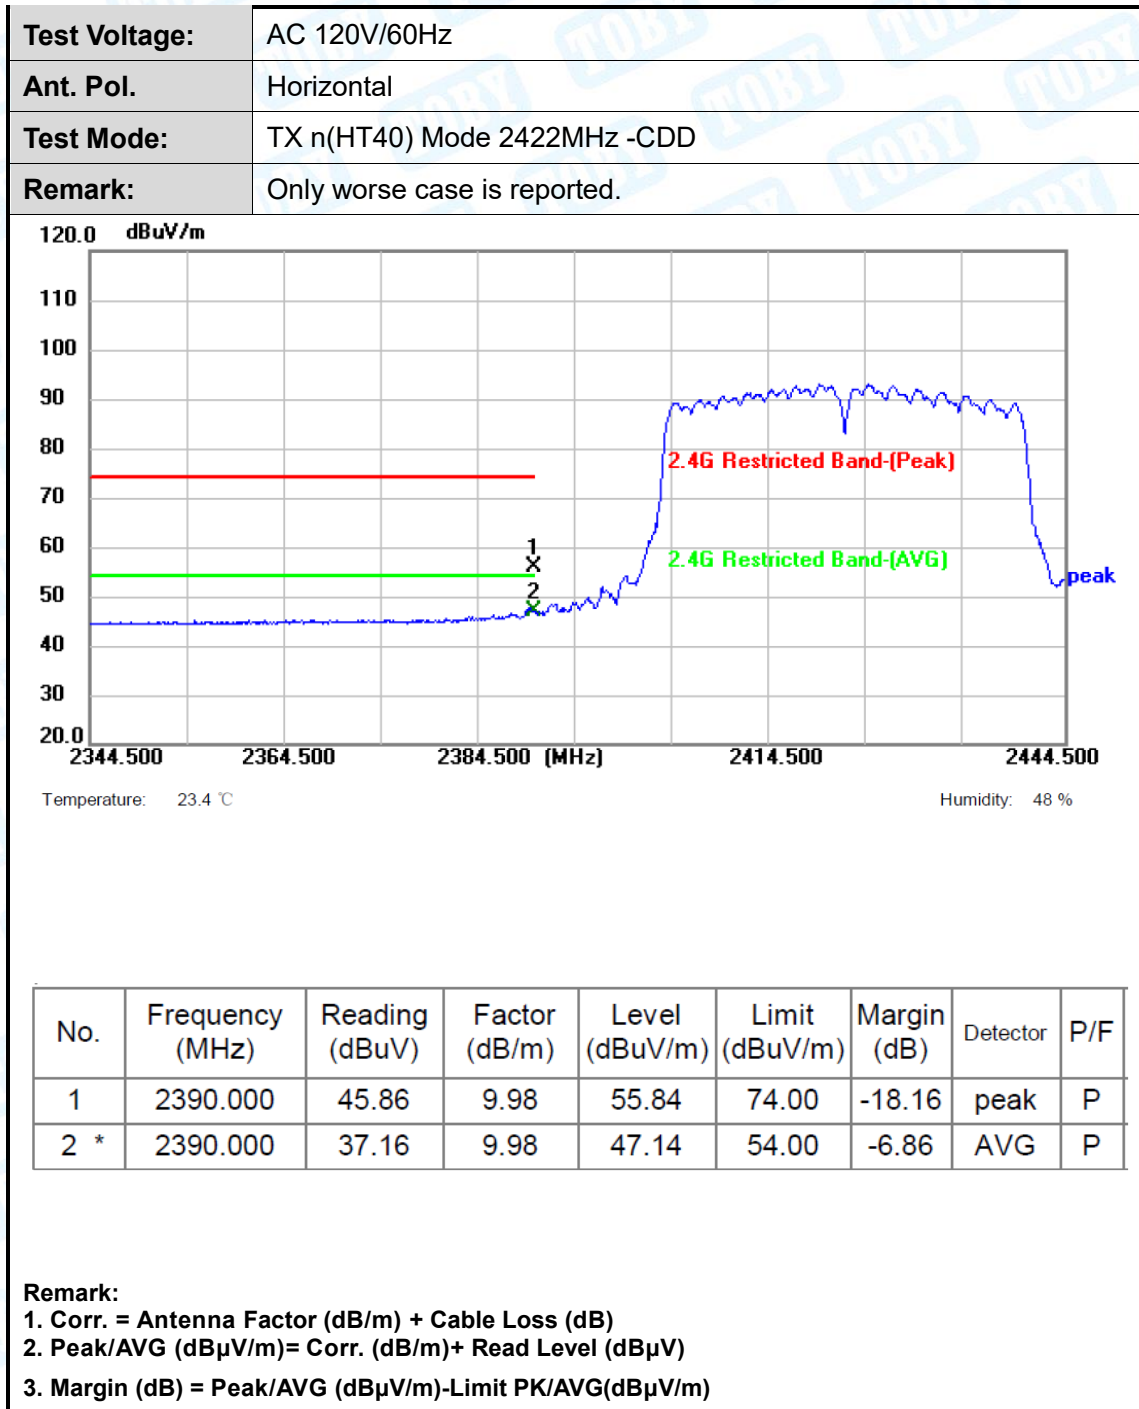

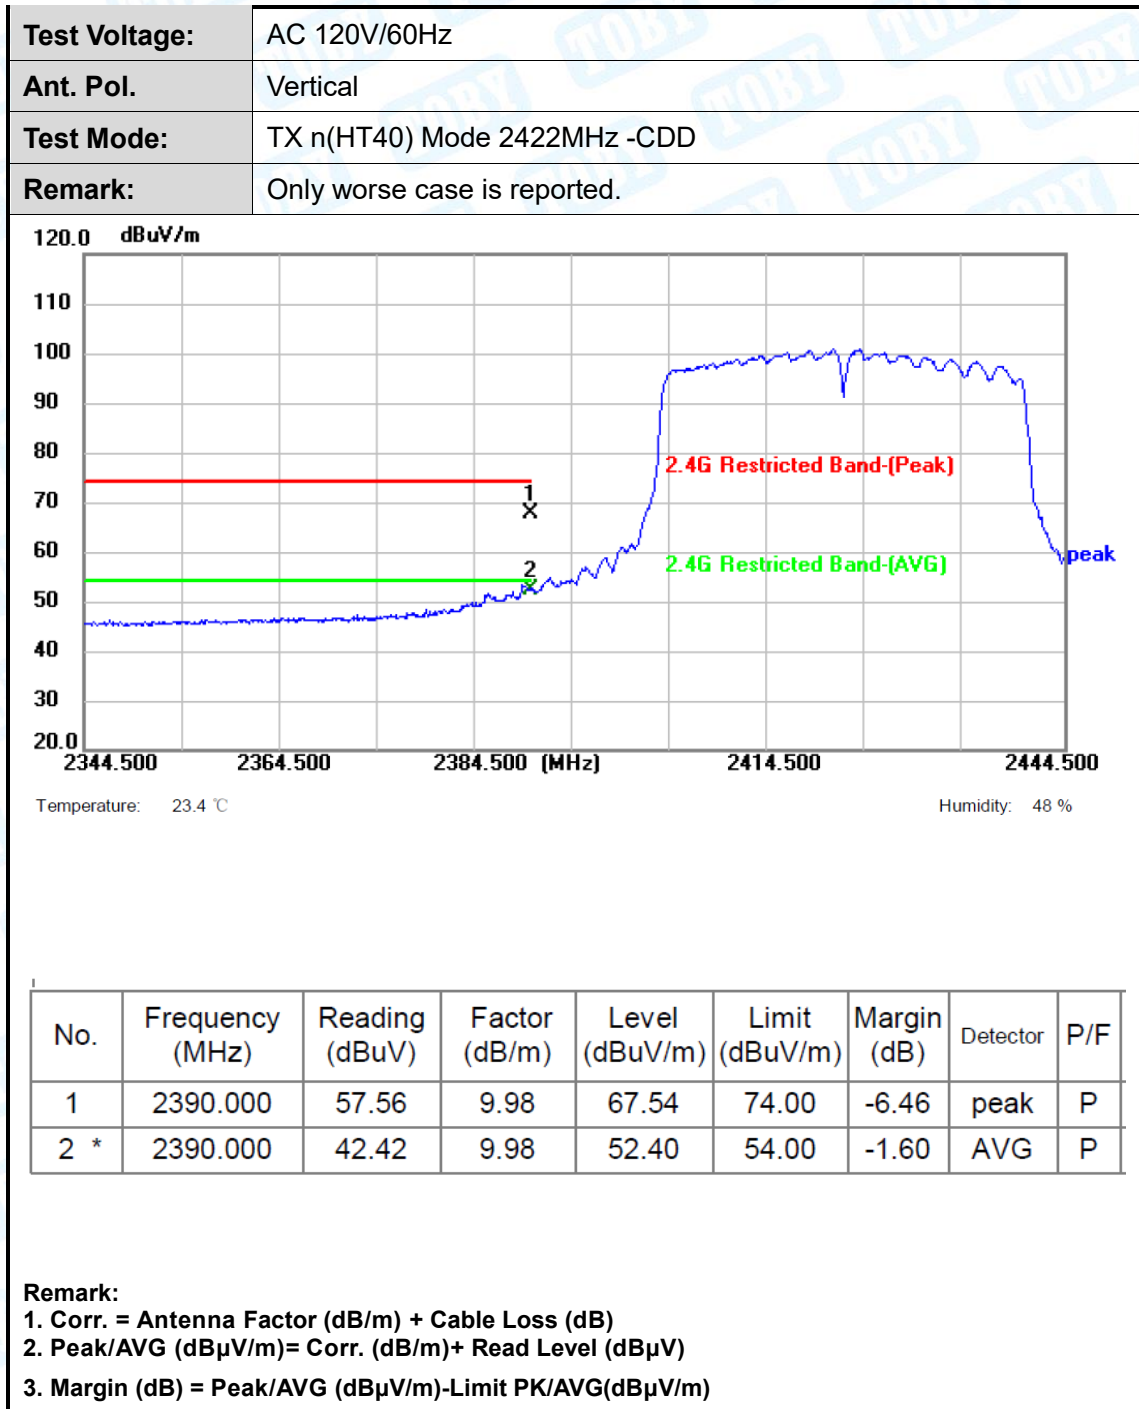

|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Horizontal                   |
| Test Mode:    | TX n(HT40) Mode 2452MHz -CDD |
| Remark:       | Only worse case is reported. |

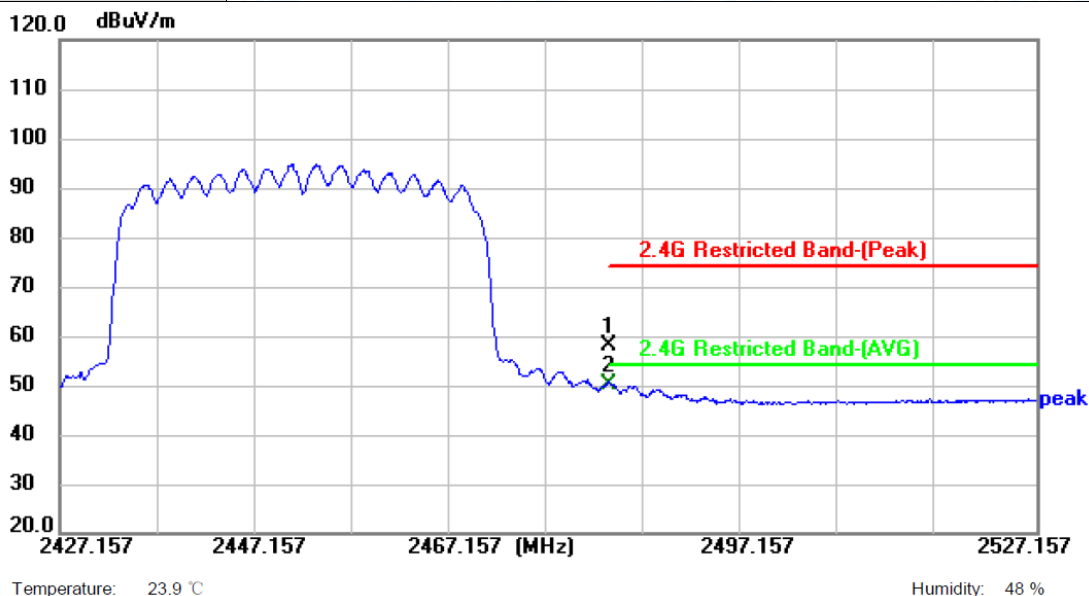


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 47.67          | 10.20         | 57.87          | 74.00          | -16.13      | peak     | P   |
| 2 * | 2483.500        | 40.06          | 10.20         | 50.26          | 54.00          | -3.74       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                              |
|---------------|------------------------------|
| Test Voltage: | AC 120V/60Hz                 |
| Ant. Pol.     | Vertical                     |
| Test Mode:    | TX n(HT40) Mode 2452MHz -CDD |
| Remark:       | Only worse case is reported. |

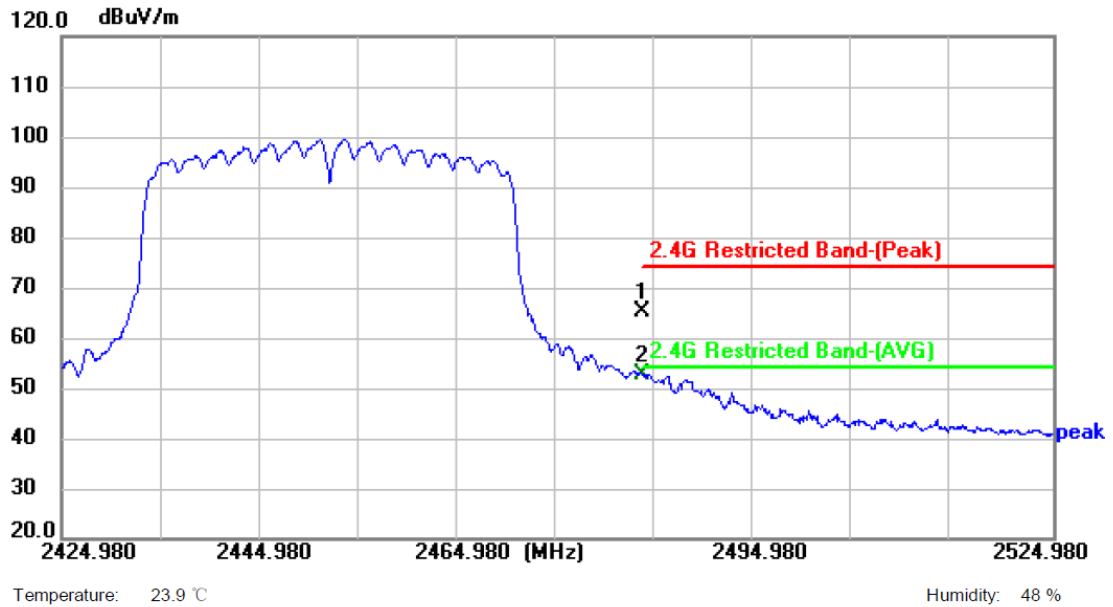


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 59.13          | 6.20          | 65.33          | 74.00          | -8.67       | peak     | P   |
| 2 * | 2483.500        | 46.58          | 6.20          | 52.78          | 54.00          | -1.22       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                               |
|---------------|-------------------------------|
| Test Voltage: | AC 120V/60Hz                  |
| Ant. Pol.     | Horizontal                    |
| Test Mode:    | TX ax(HE20) Mode 2412MHz -CDD |
| Remark:       | Only worse case is reported.  |

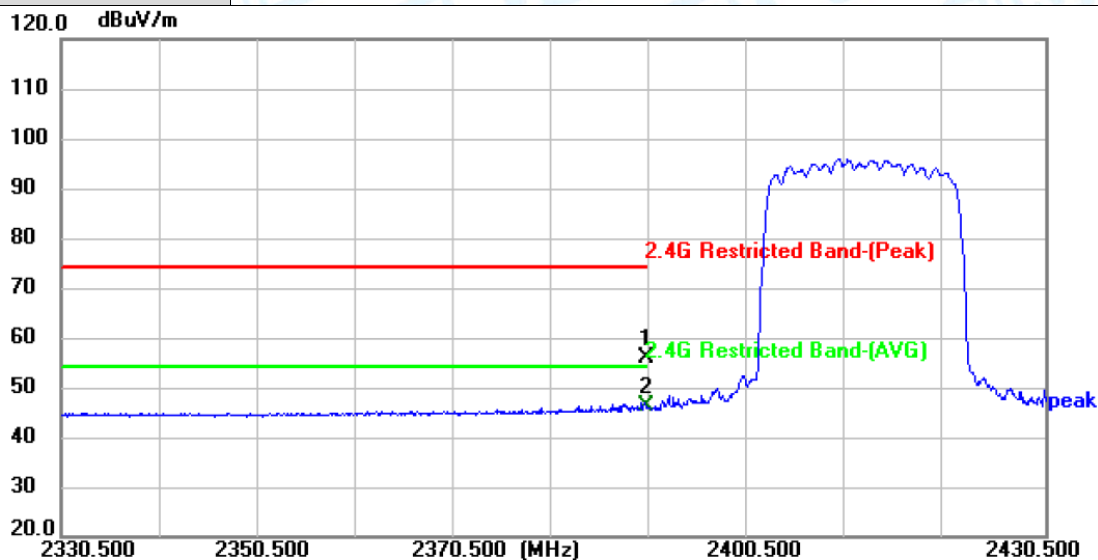

Temperature: 23.4 °C

Humidity: 48 %


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2390.000        | 46.07          | 9.98          | 56.05          | 74.00          | -17.95      | peak     | P   |
| 2 * | 2390.000        | 36.22          | 9.98          | 46.20          | 54.00          | -7.80       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                               |
|---------------|-------------------------------|
| Test Voltage: | AC 120V/60Hz                  |
| Ant. Pol.     | Vertical                      |
| Test Mode:    | TX ax(HE20) Mode 2412MHz -CDD |
| Remark:       | Only worse case is reported.  |

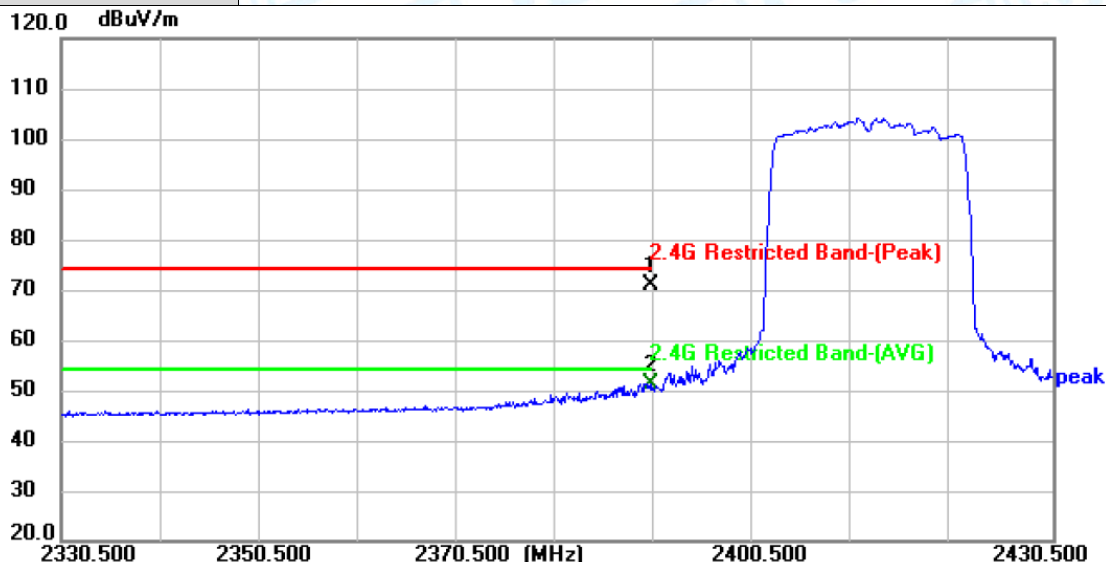

Temperature: 23.4 °C


Humidity: 48 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2390.000        | 61.05          | 9.98          | 71.03          | 74.00          | -2.97       | peak     | P   |
| 2 * | 2390.000        | 41.17          | 9.98          | 51.15          | 54.00          | -2.85       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



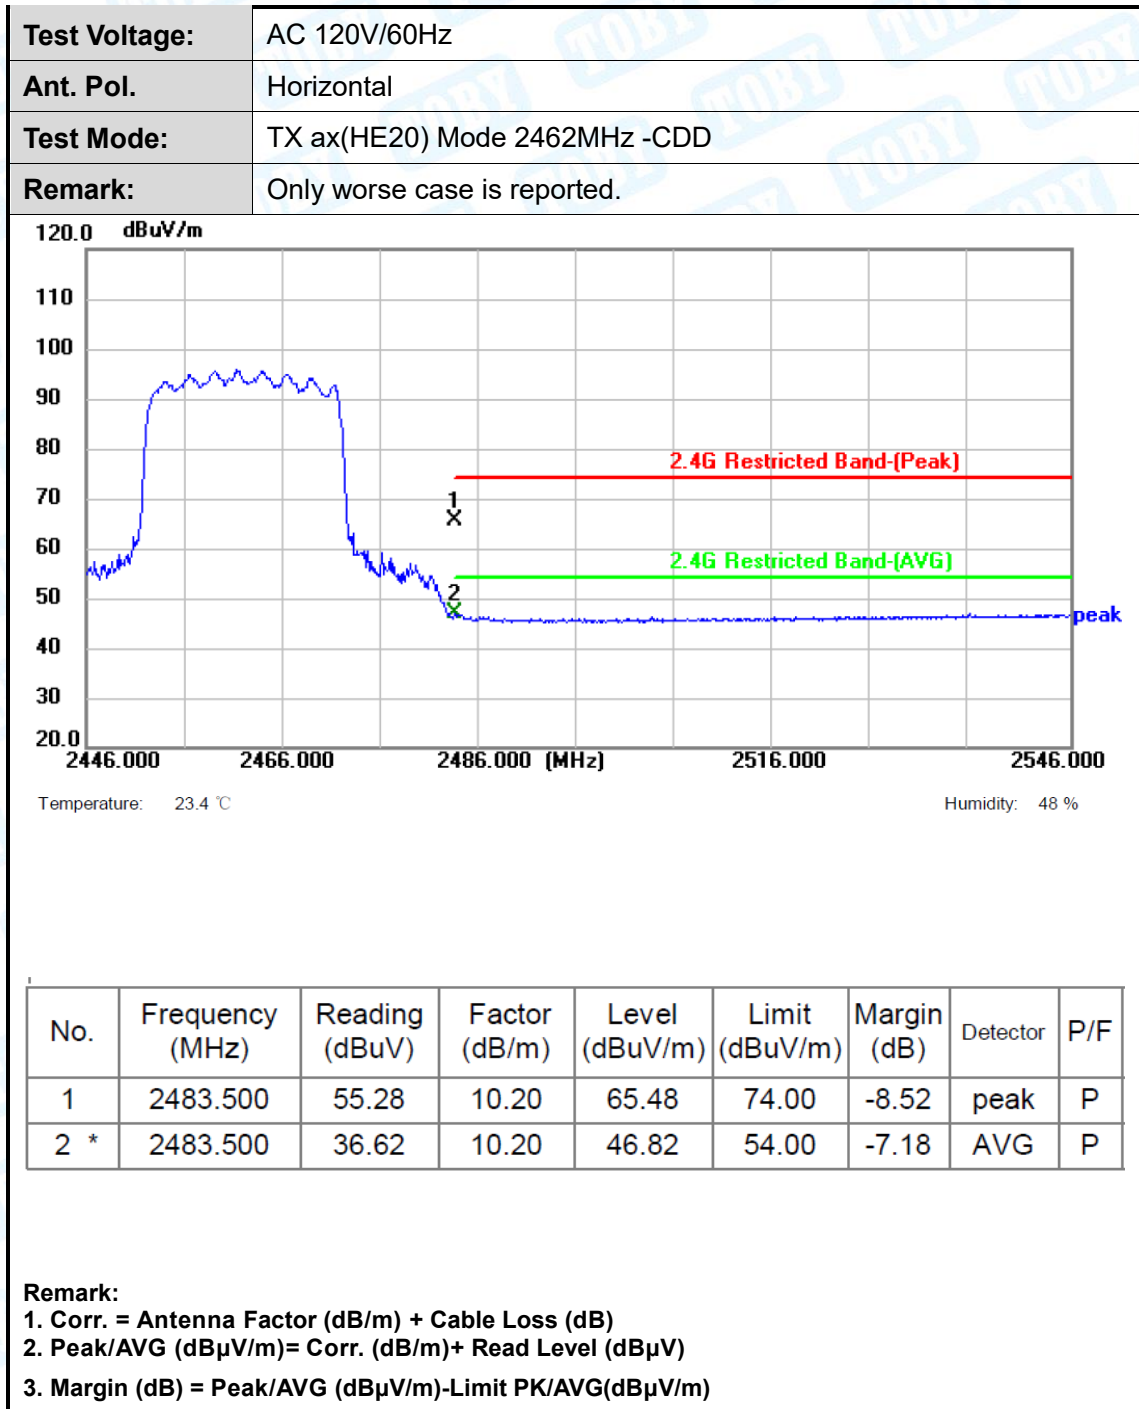

|               |                               |
|---------------|-------------------------------|
| Test Voltage: | AC 120V/60Hz                  |
| Ant. Pol.     | Vertical                      |
| Test Mode:    | TX ax(HE20) Mode 2462MHz -CDD |
| Remark:       | Only worse case is reported.  |

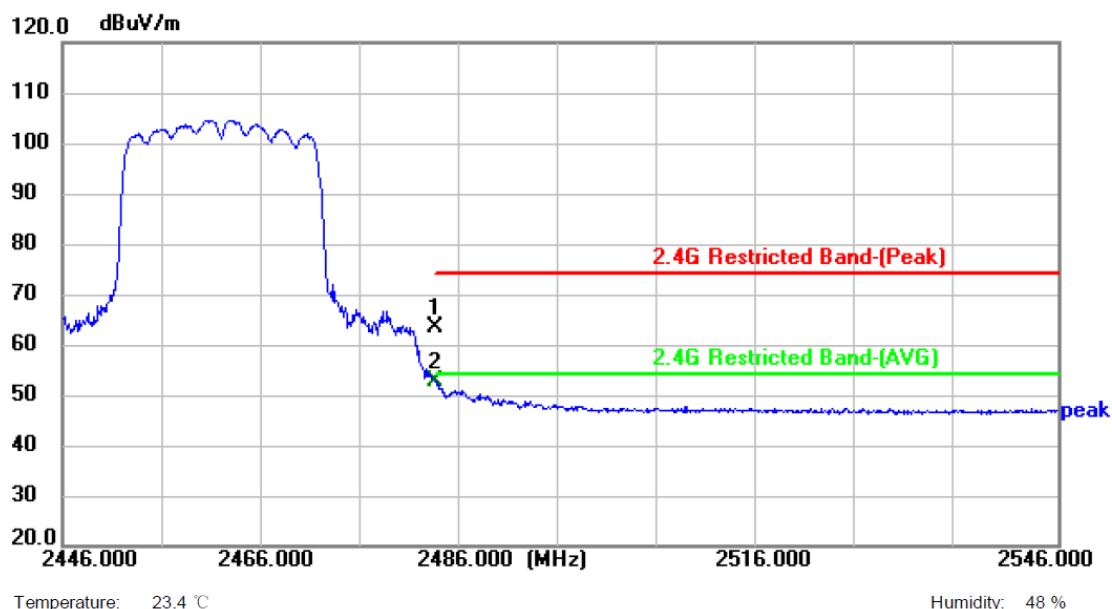



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 53.05          | 10.20         | 63.25          | 74.00          | -10.75      | peak     | P   |
| 2 * | 2483.500        | 42.64          | 10.20         | 52.84          | 54.00          | -1.16       | AVG      | P   |

**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



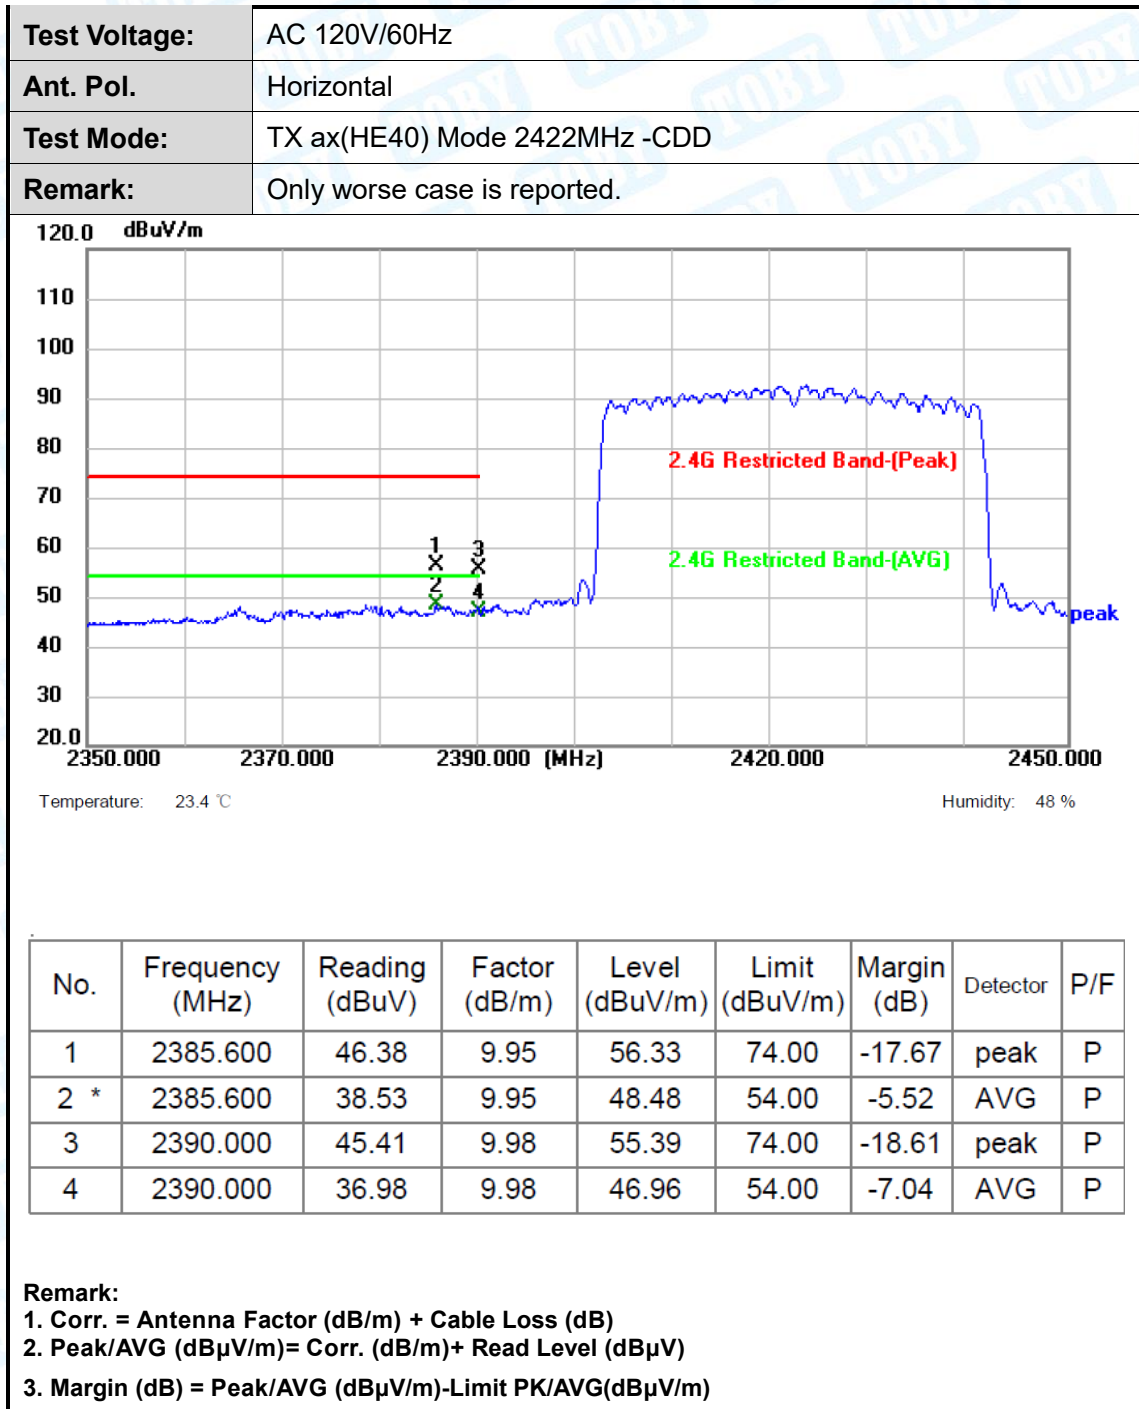

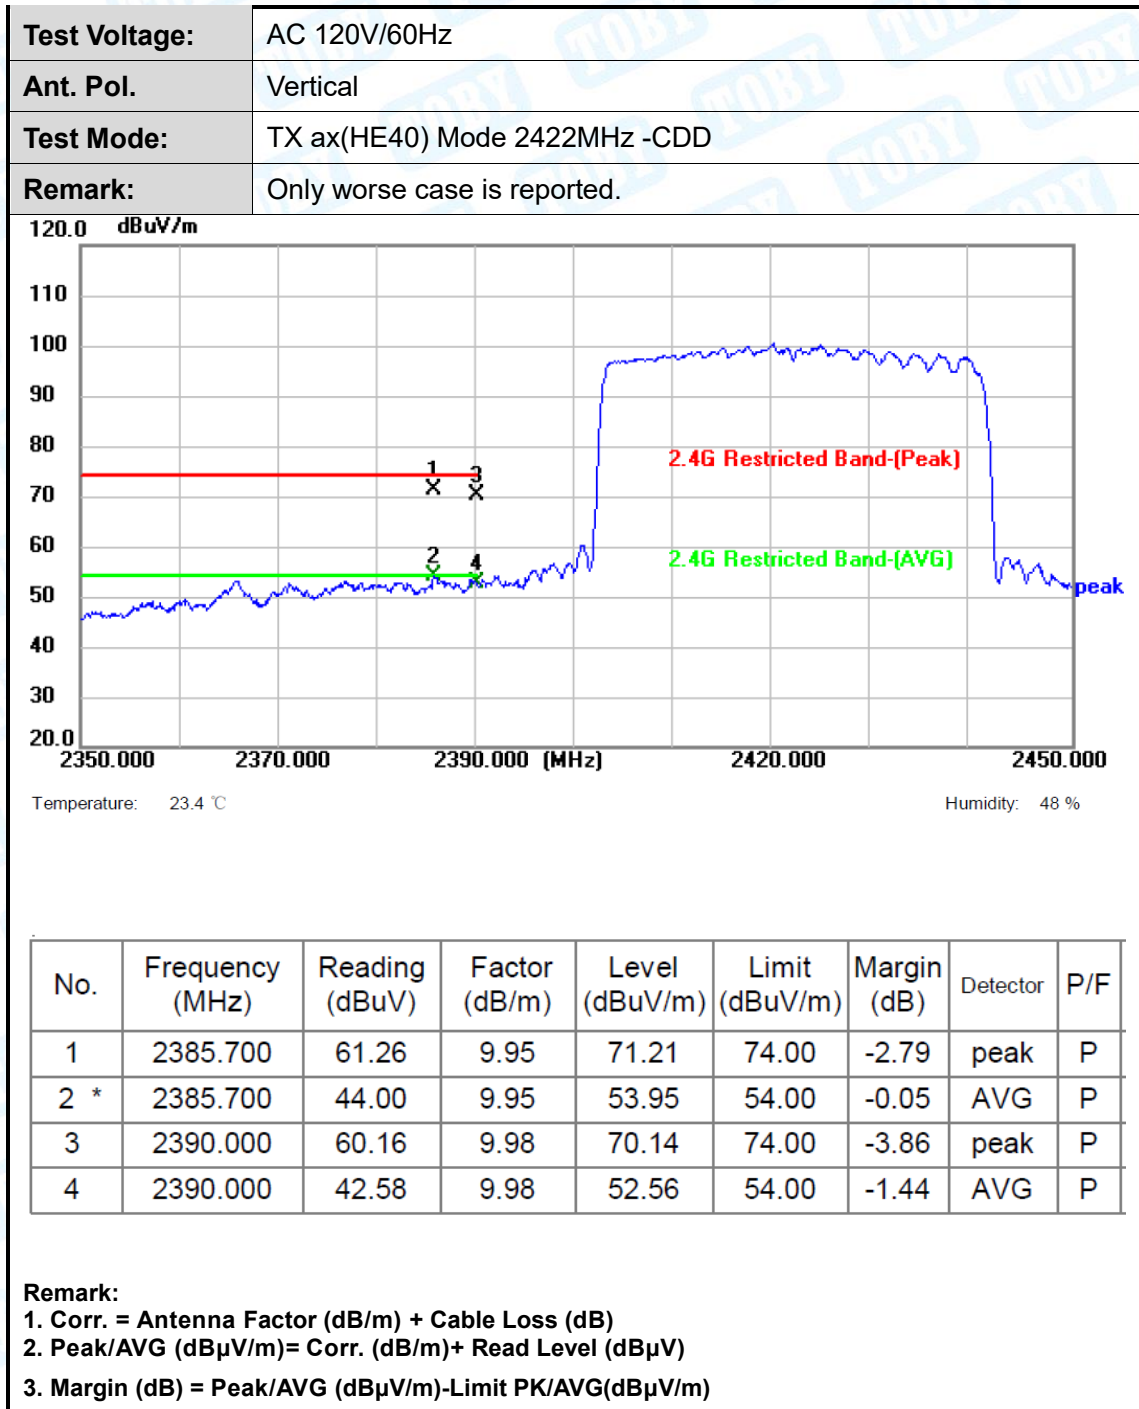

|               |                               |
|---------------|-------------------------------|
| Test Voltage: | AC 120V/60Hz                  |
| Ant. Pol.     | Horizontal                    |
| Test Mode:    | TX ax(HE40) Mode 2452MHz -CDD |
| Remark:       | Only worse case is reported.  |

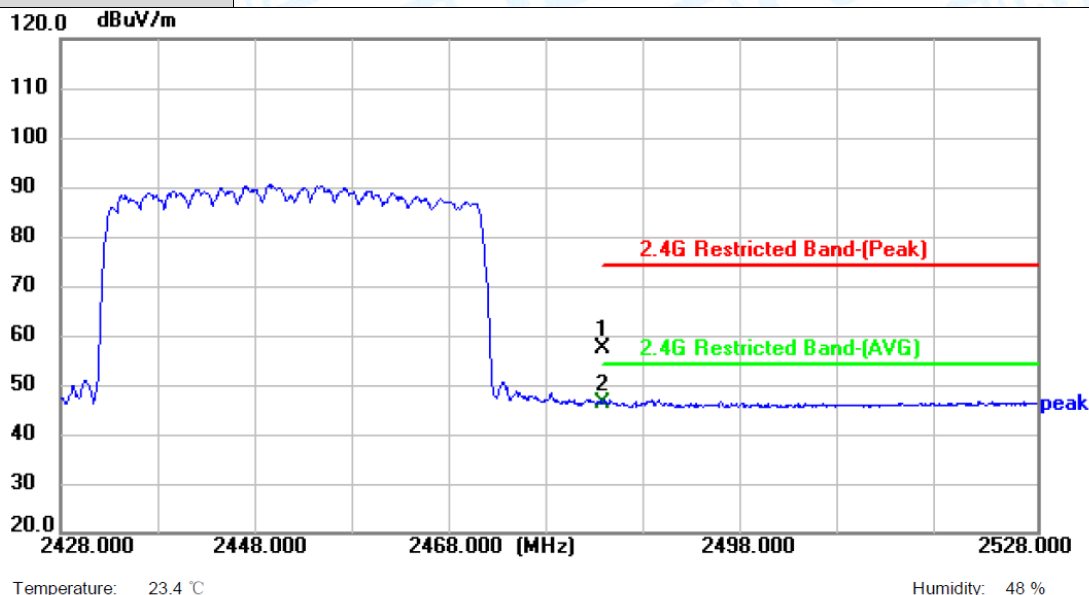


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2483.500        | 47.17          | 10.20         | 57.37          | 74.00          | -16.63      | peak     | P   |
| 2 * | 2483.500        | 36.09          | 10.20         | 46.29          | 54.00          | -7.71       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



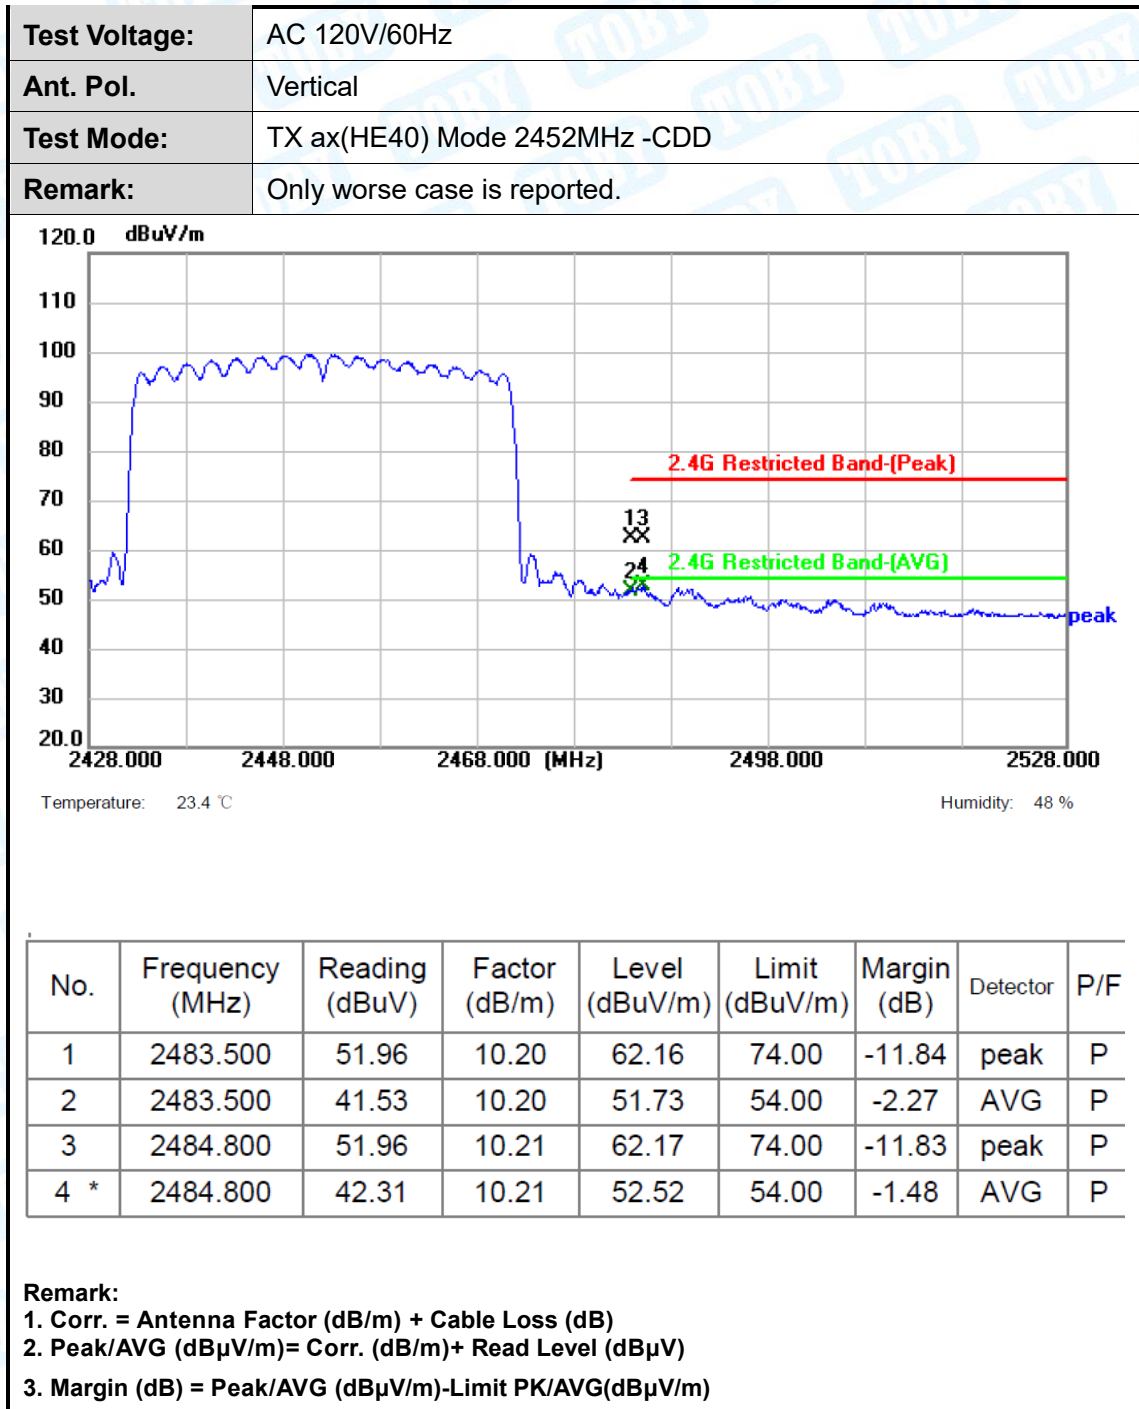

-----END OF THE REPORT-----

