







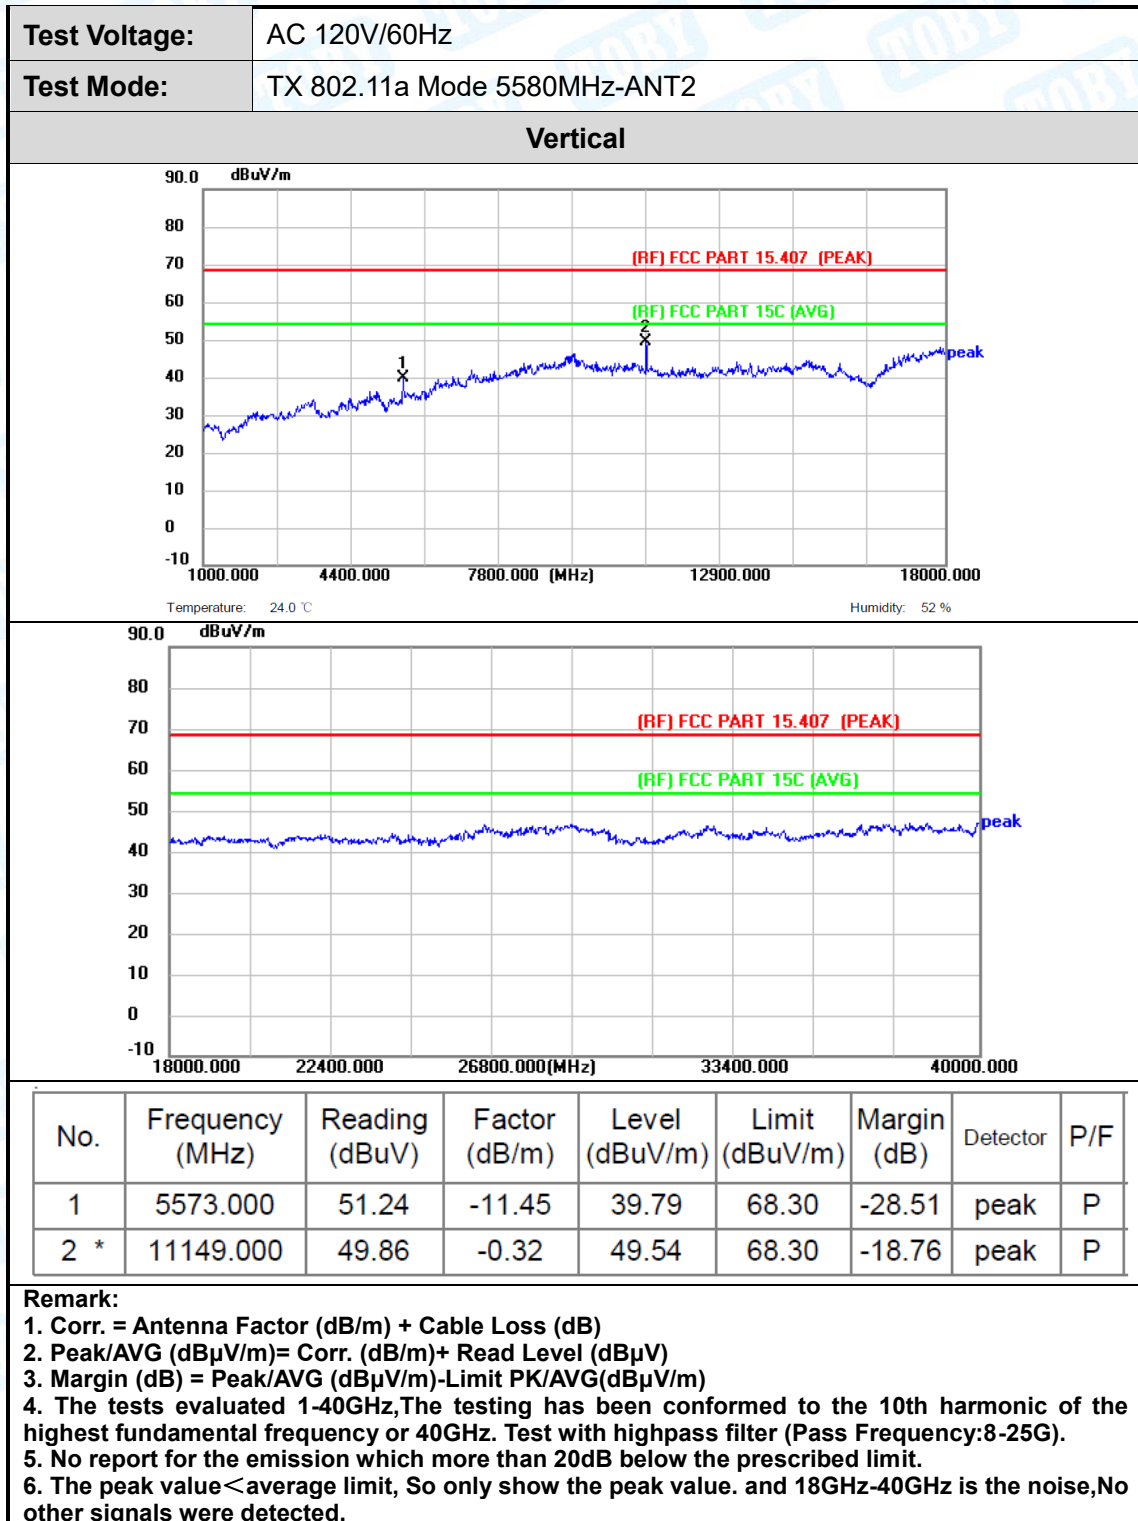


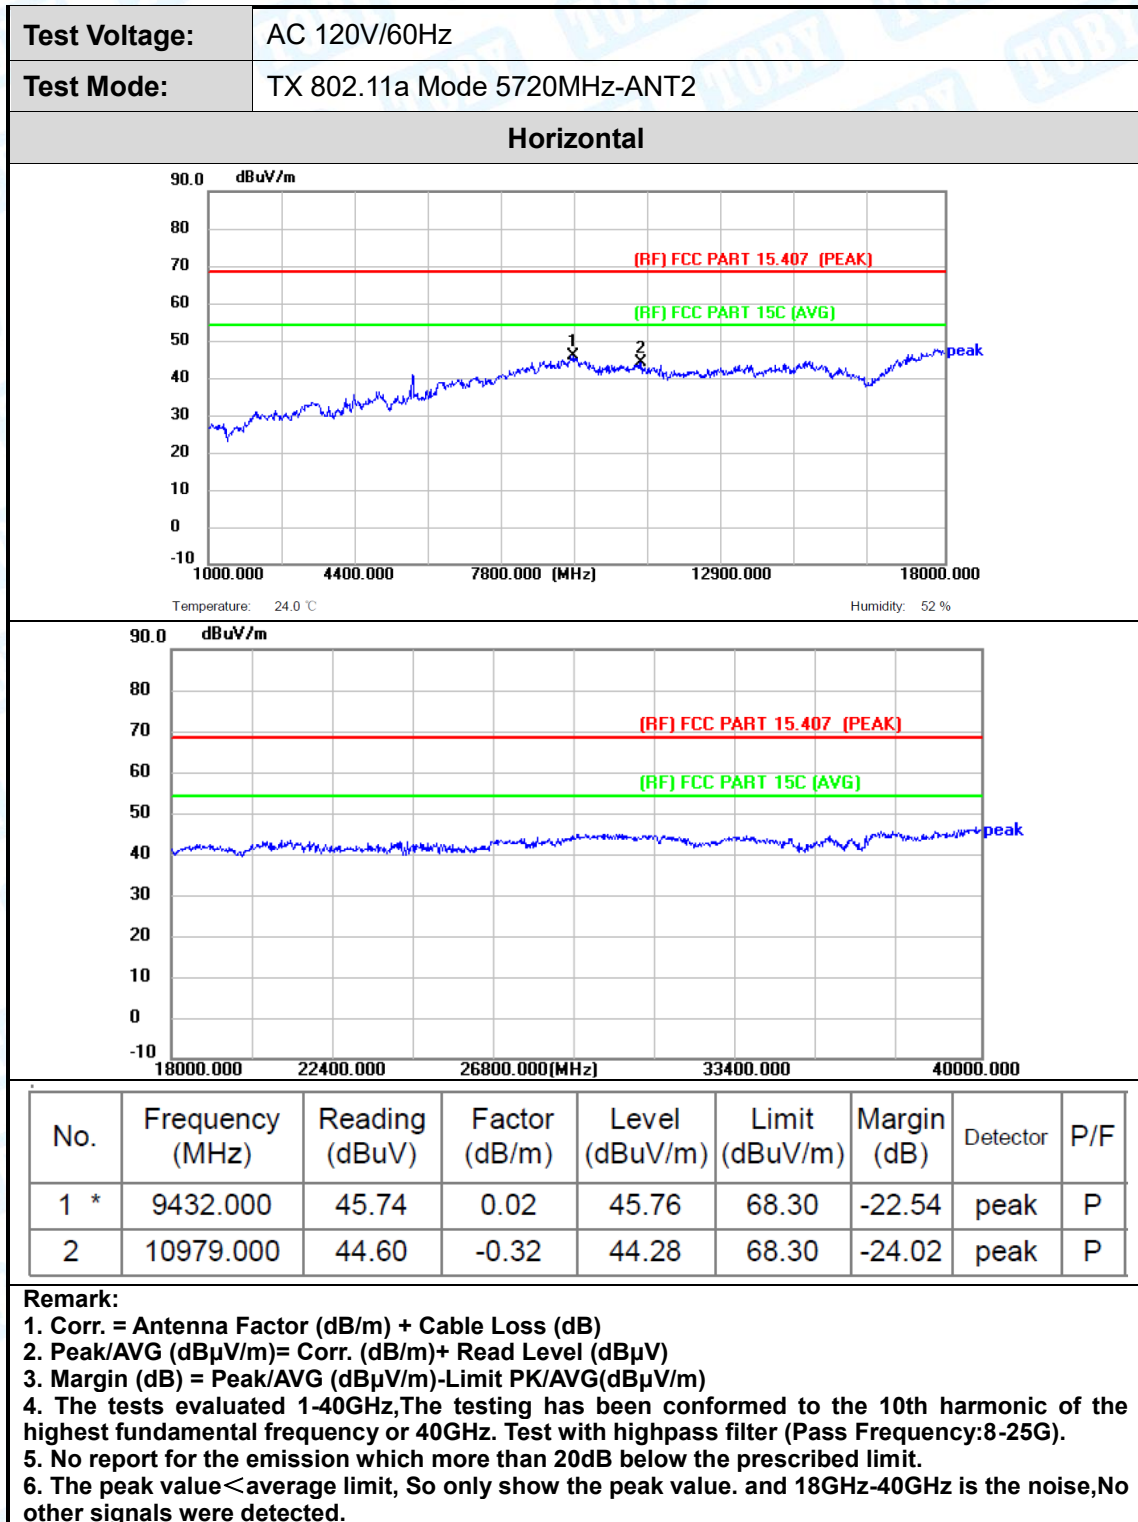


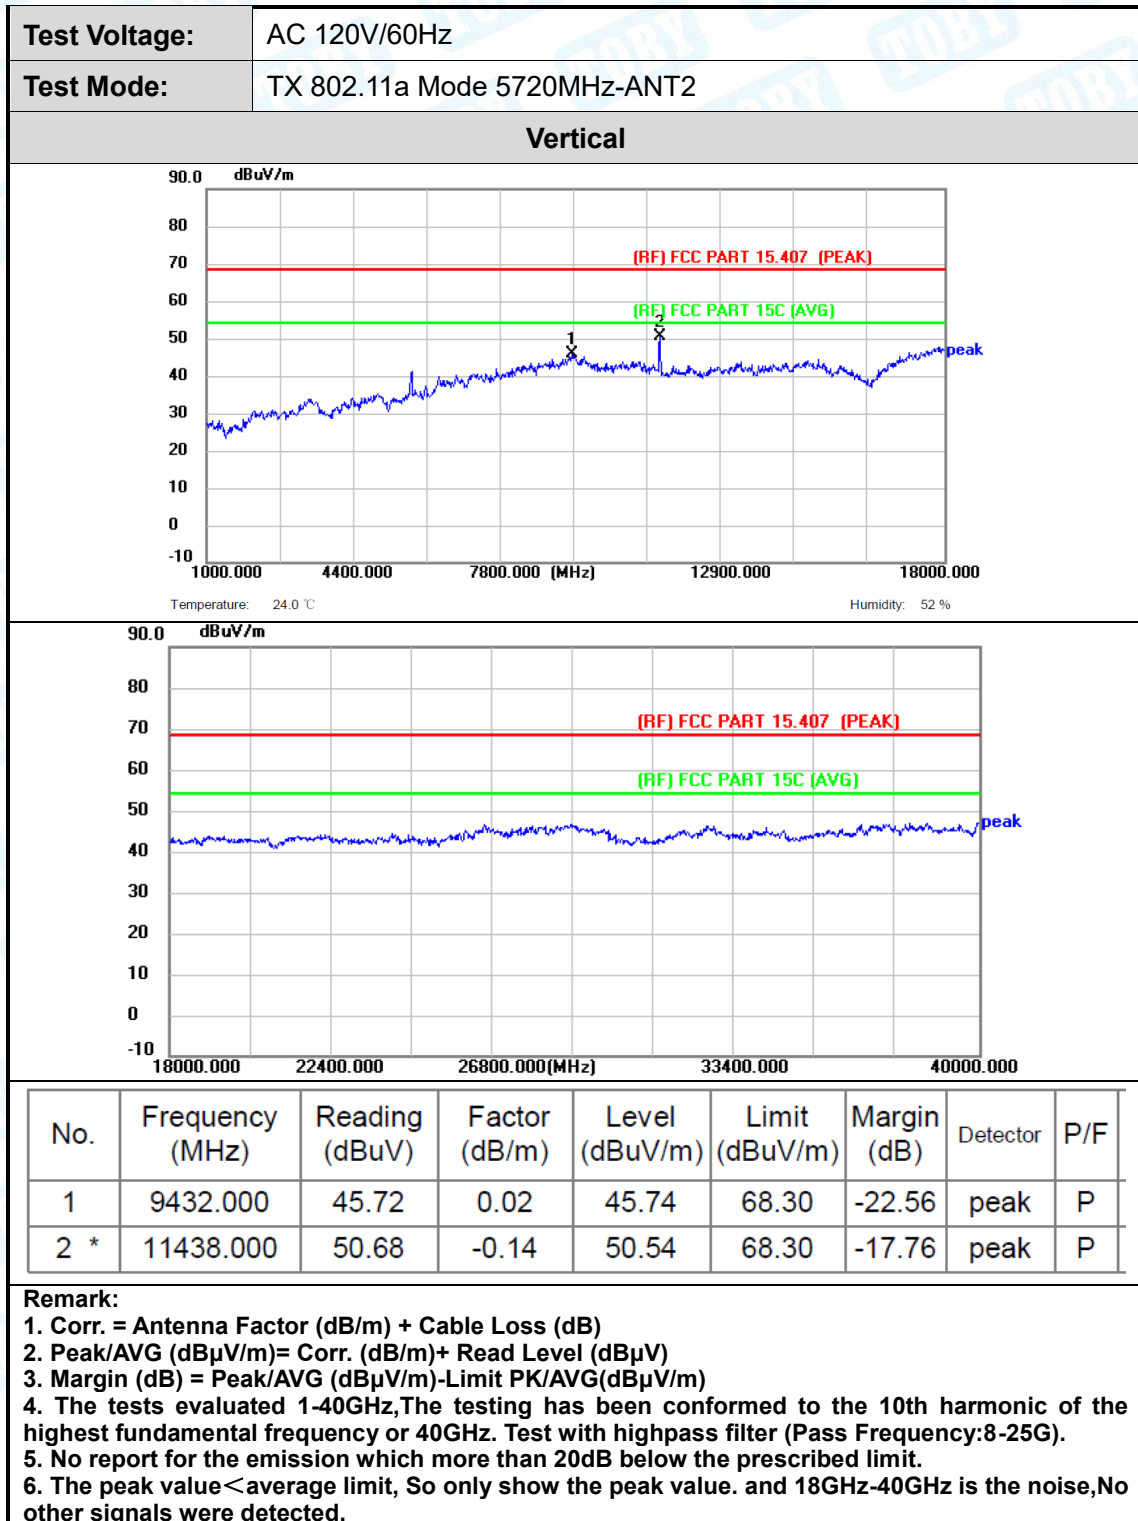

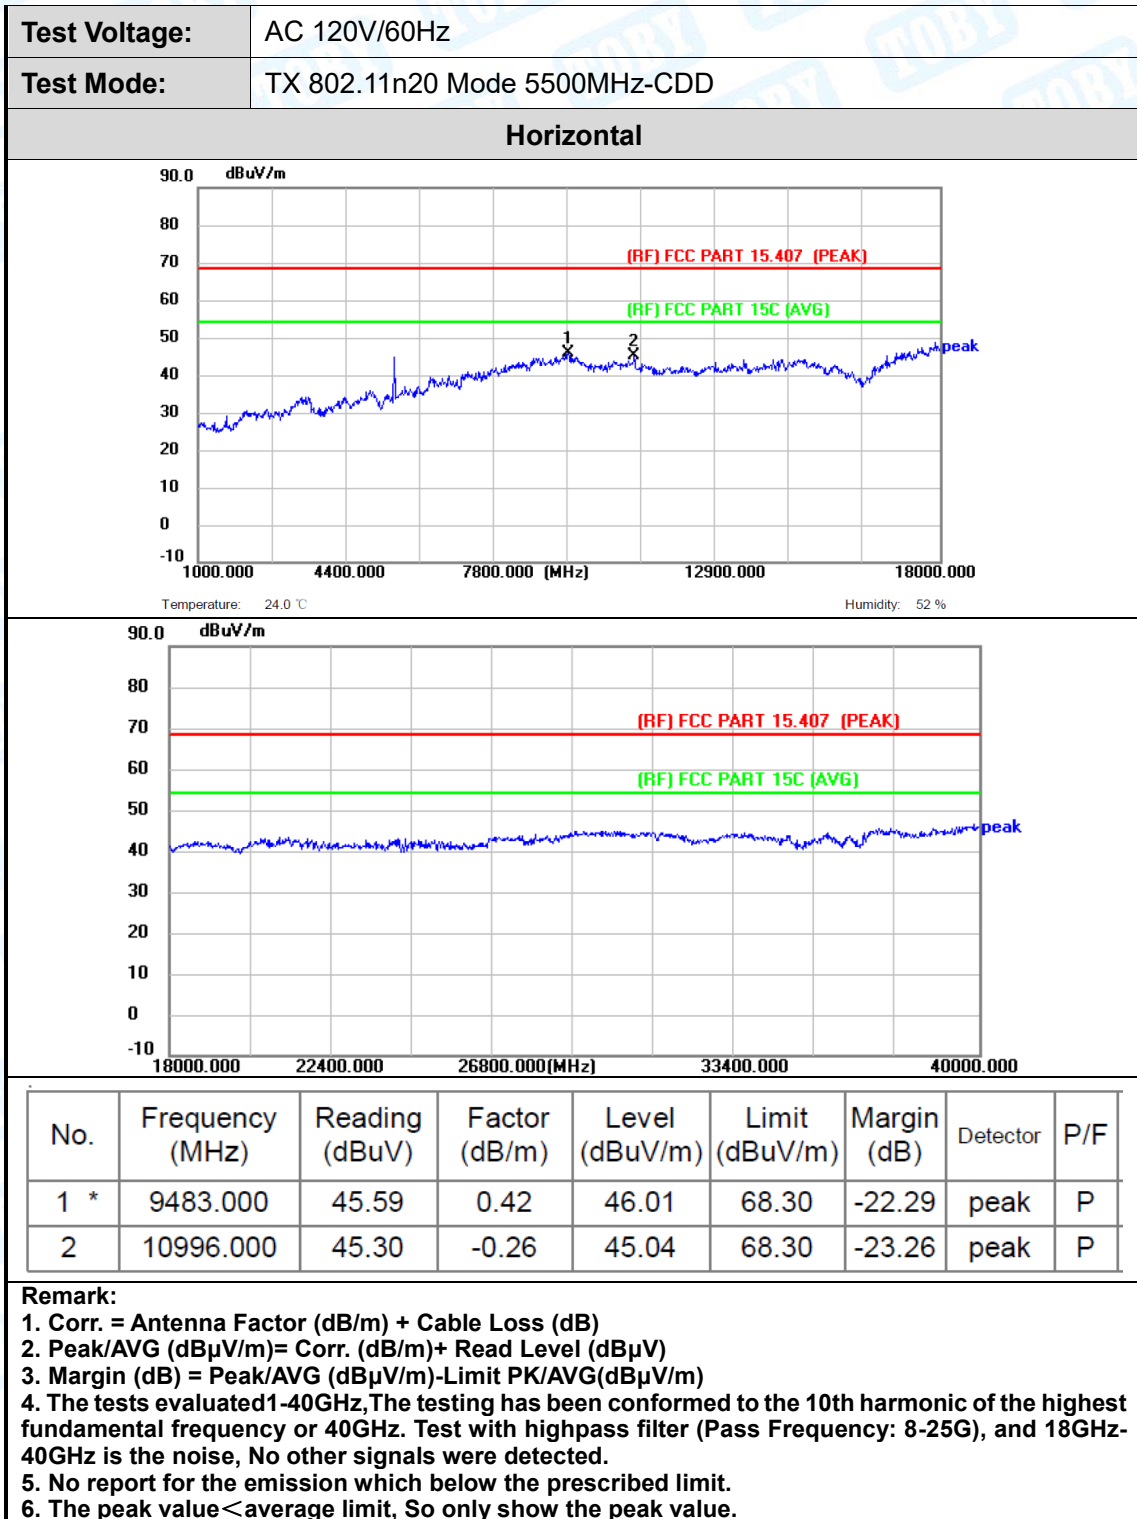





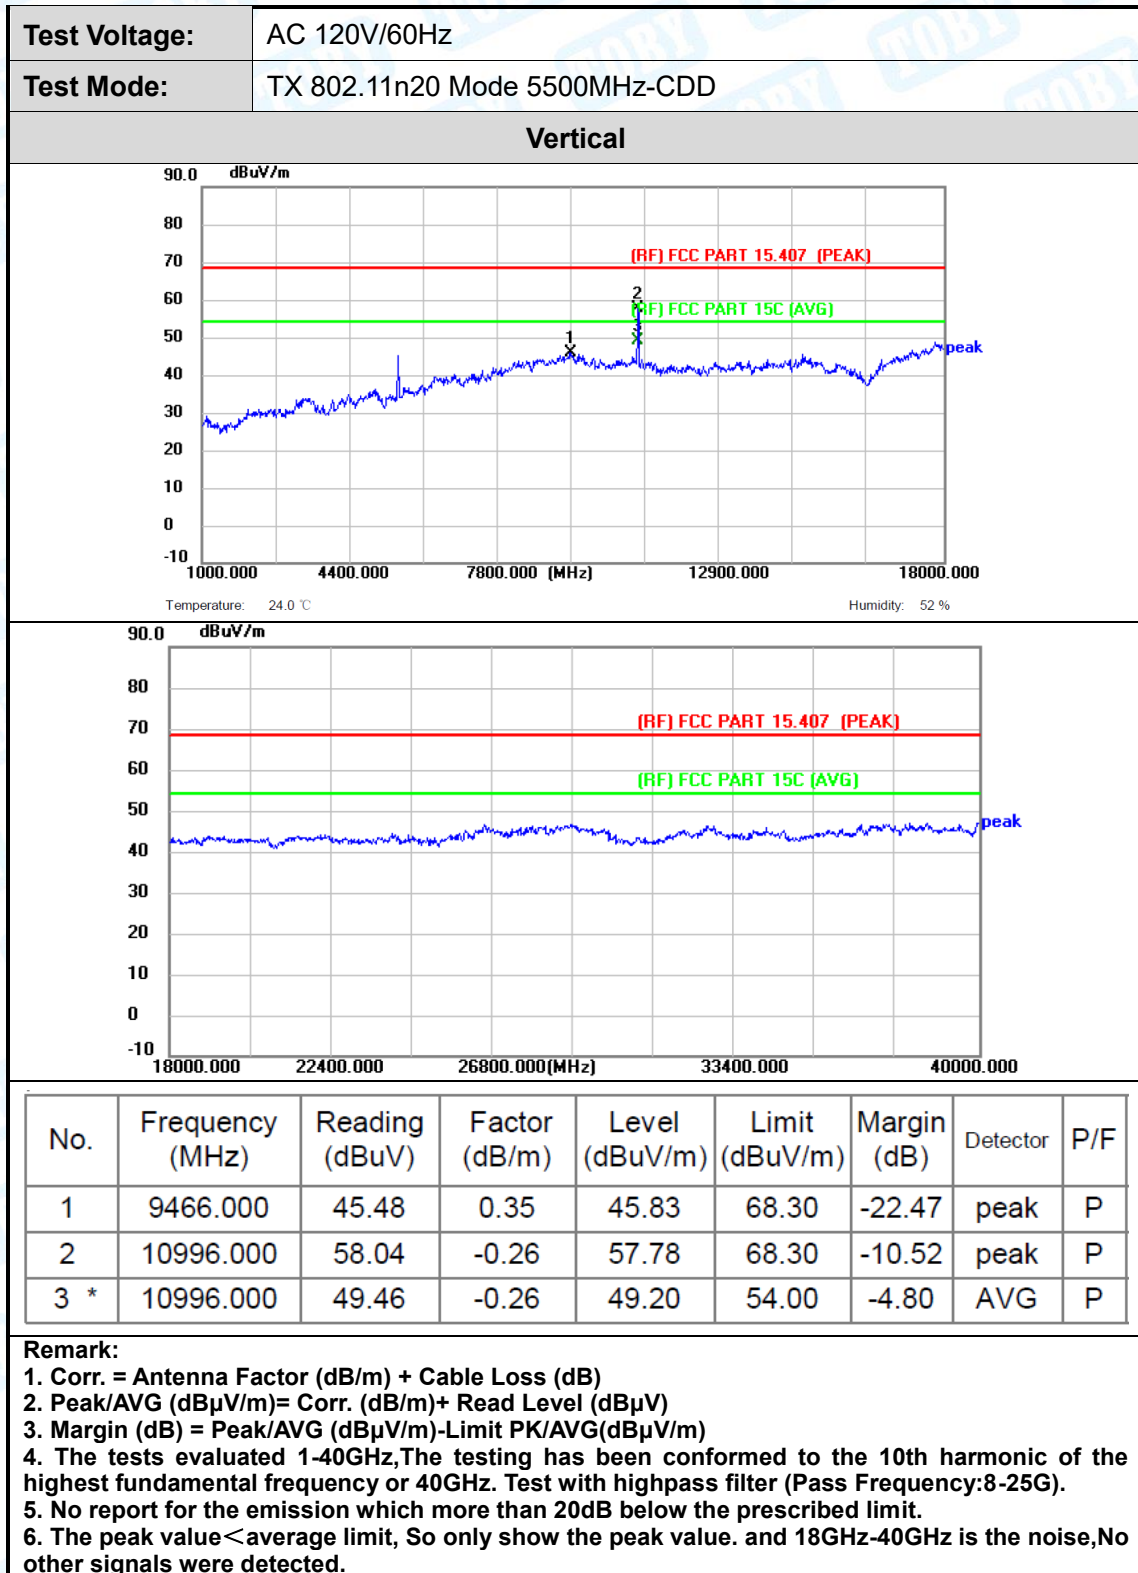

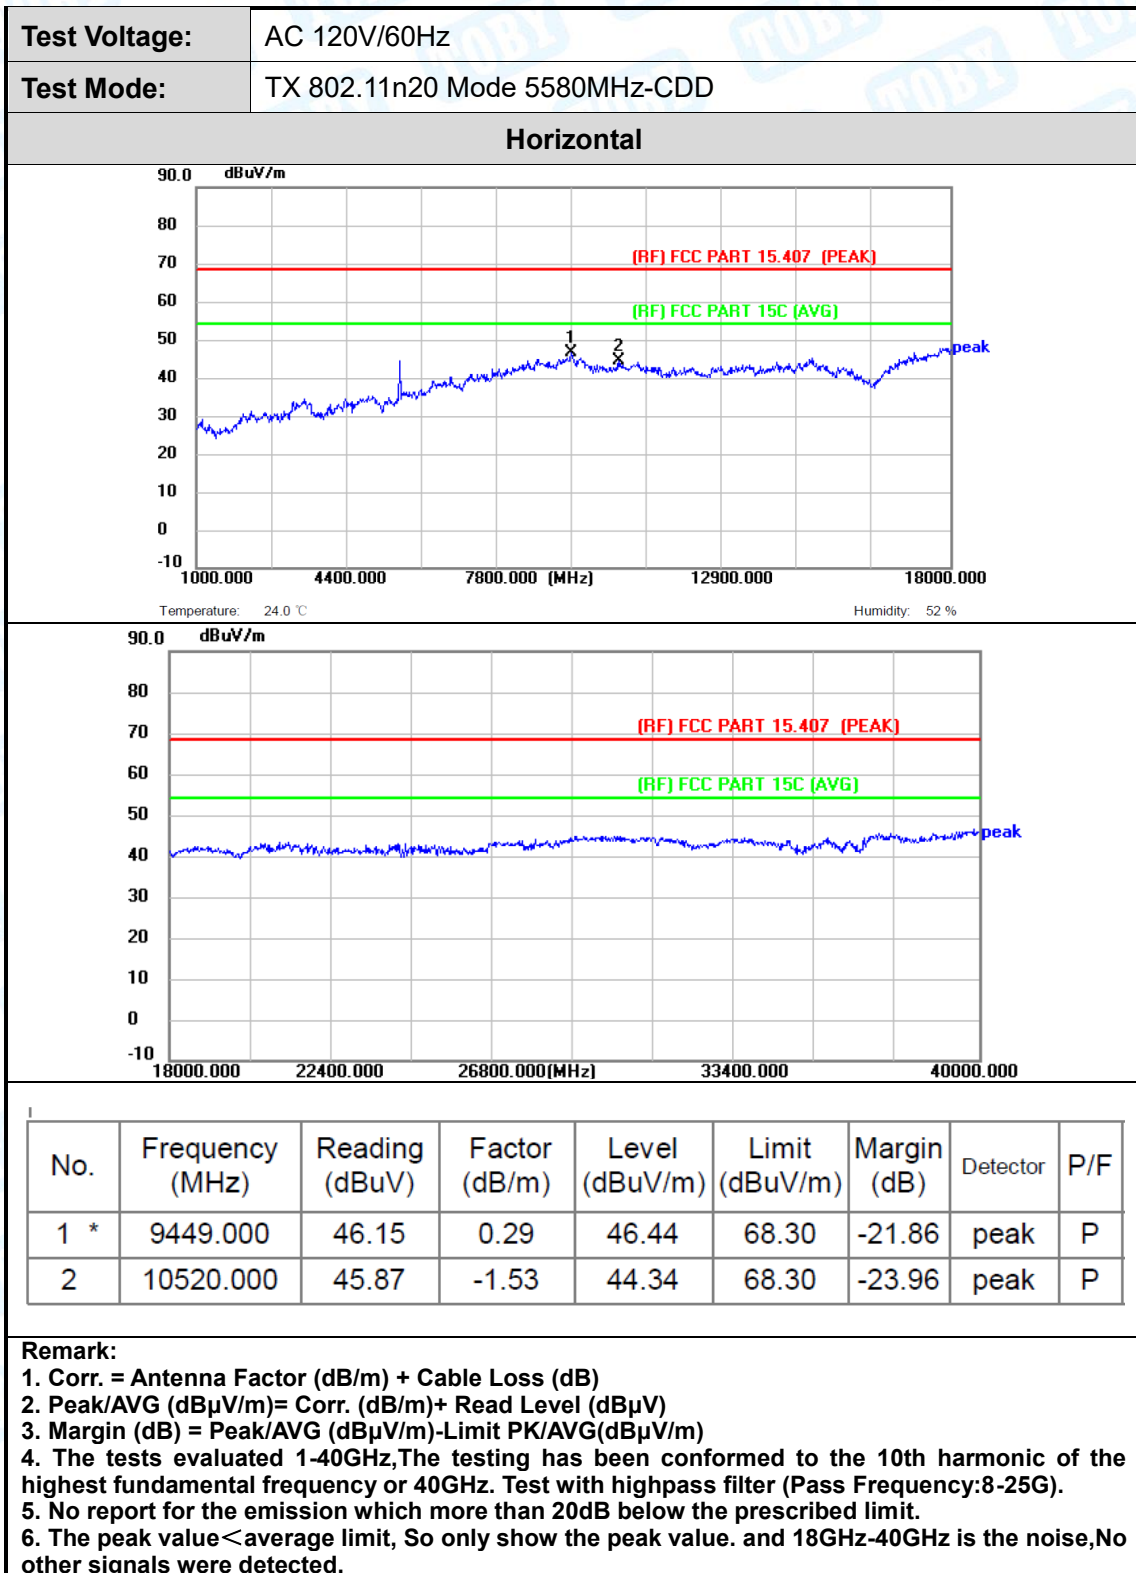





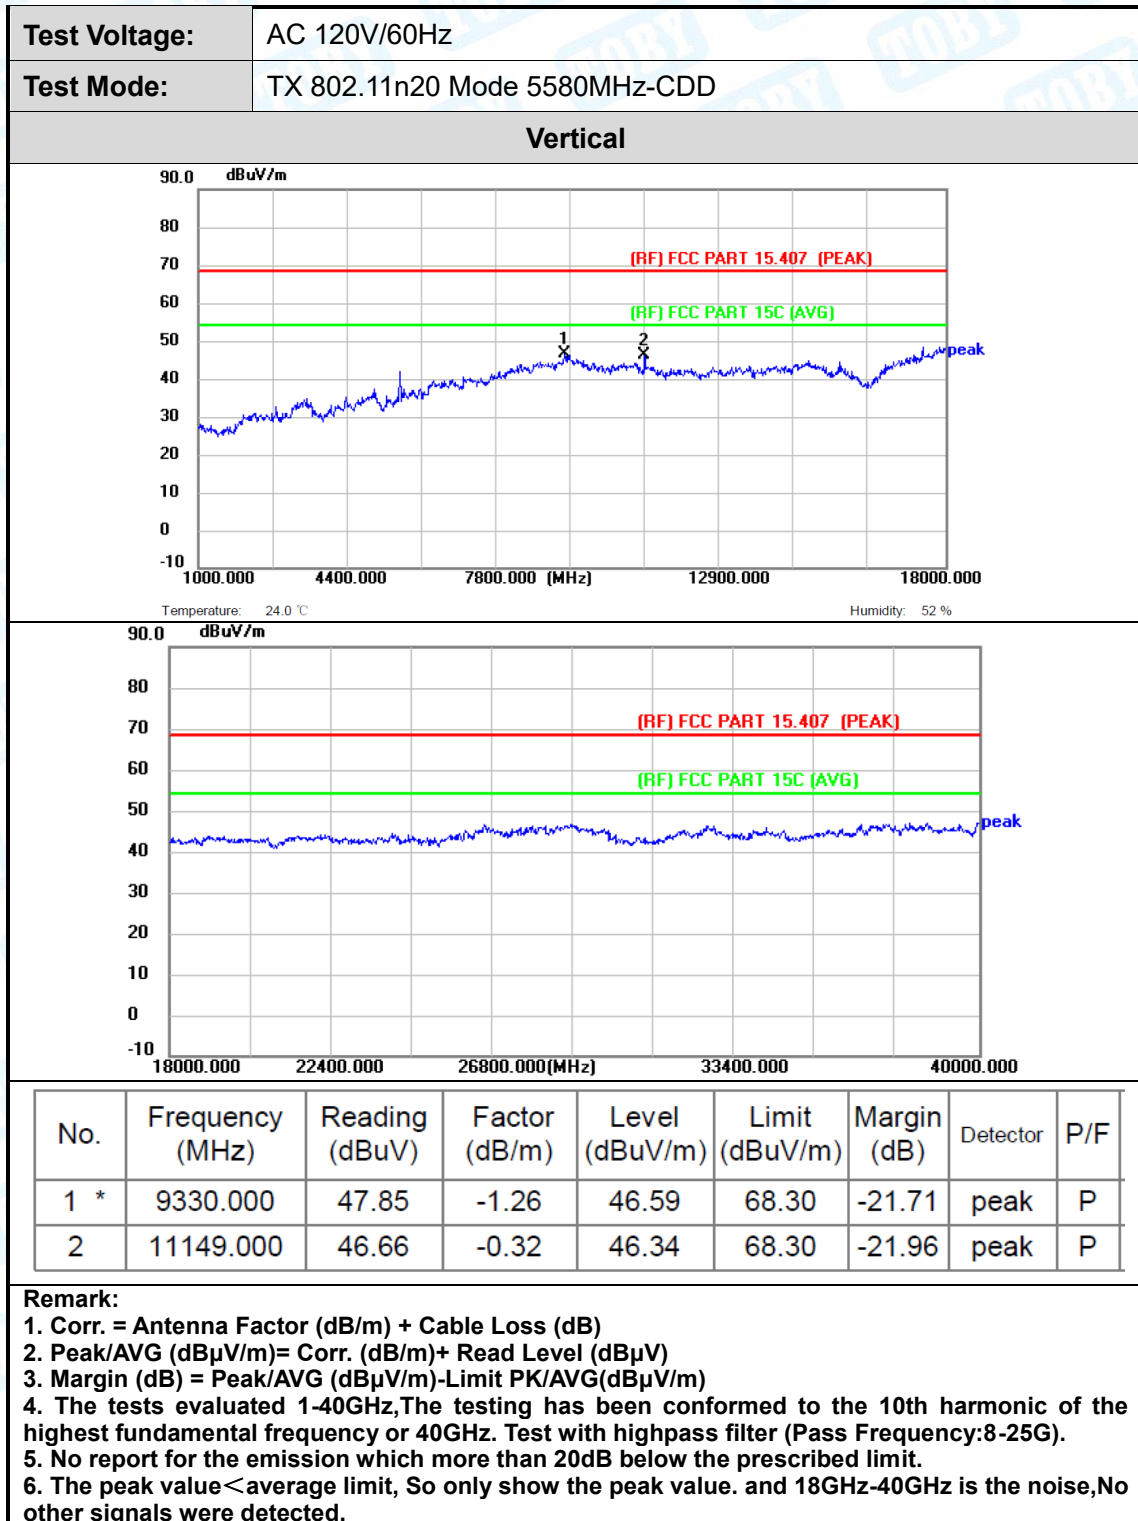

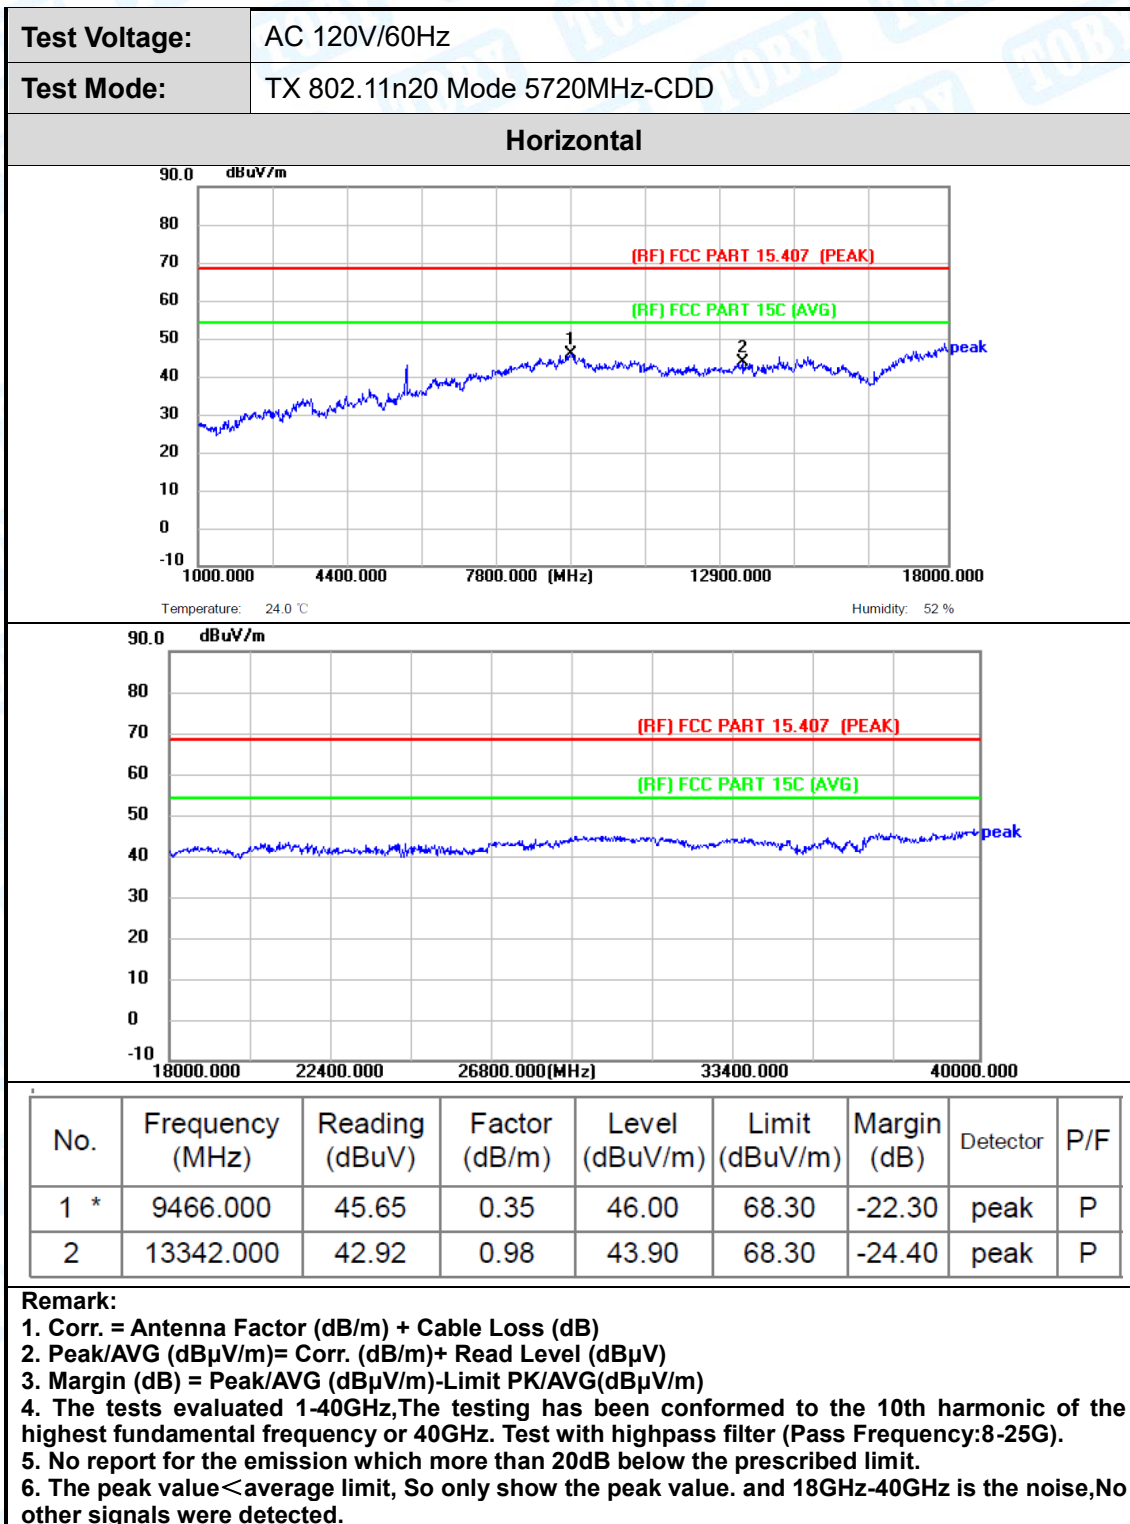





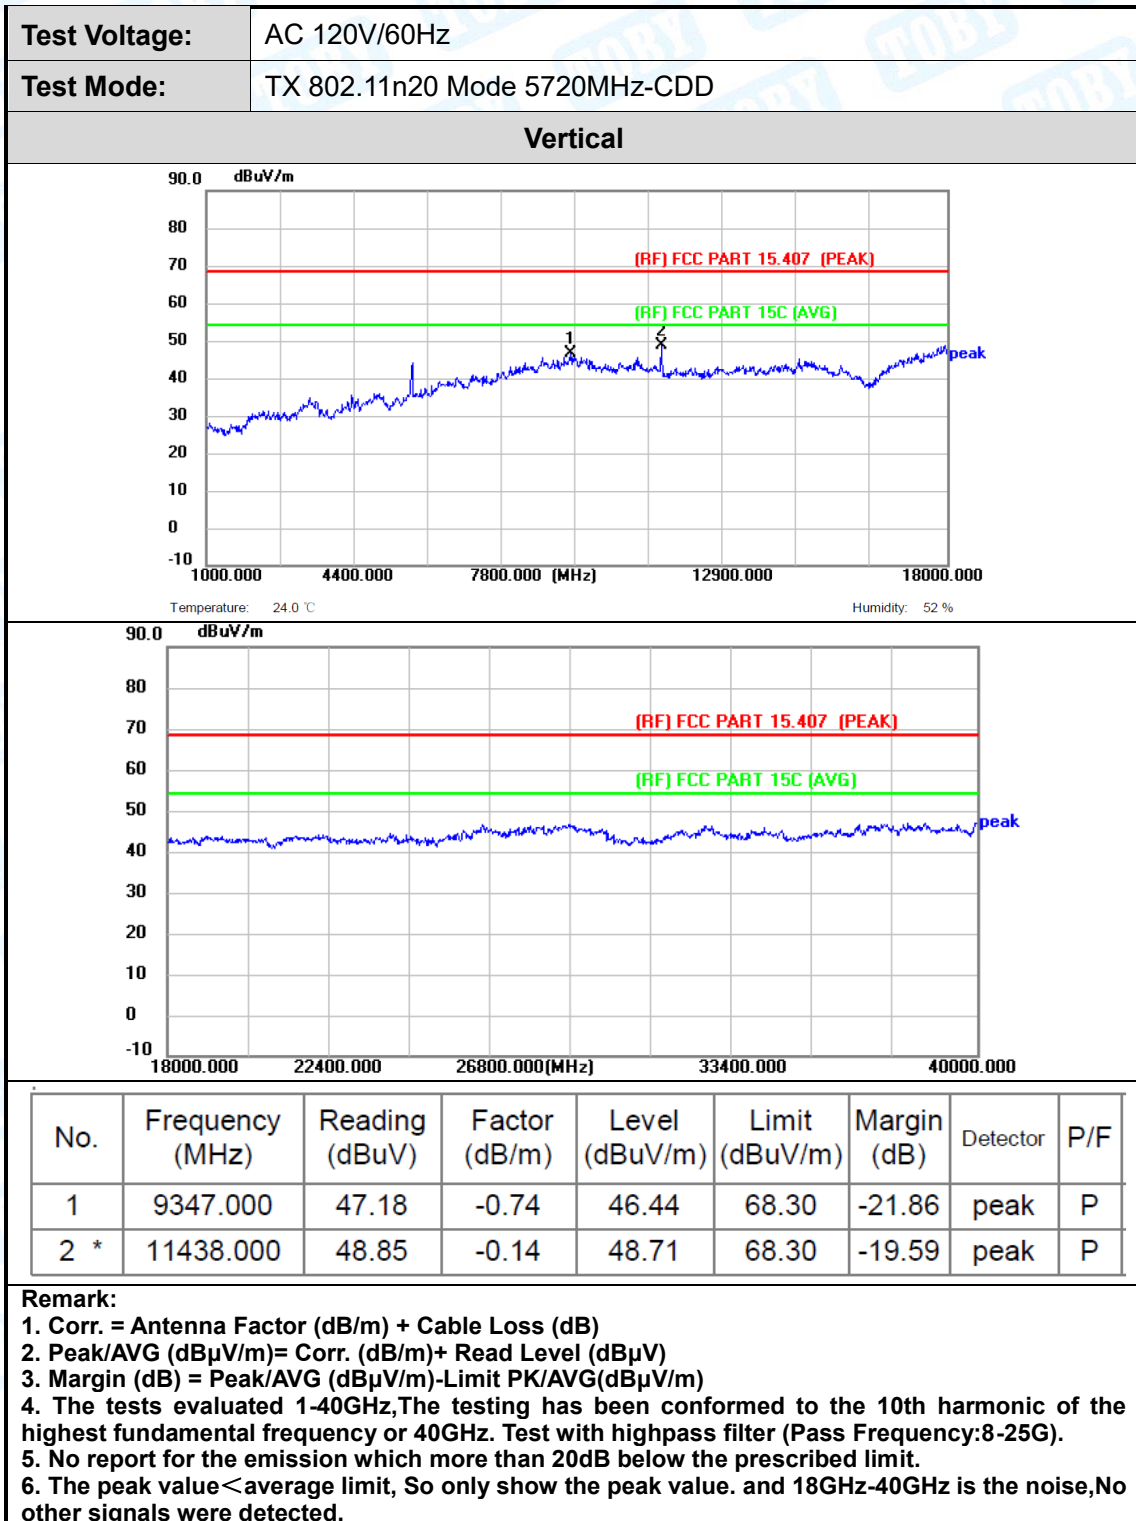

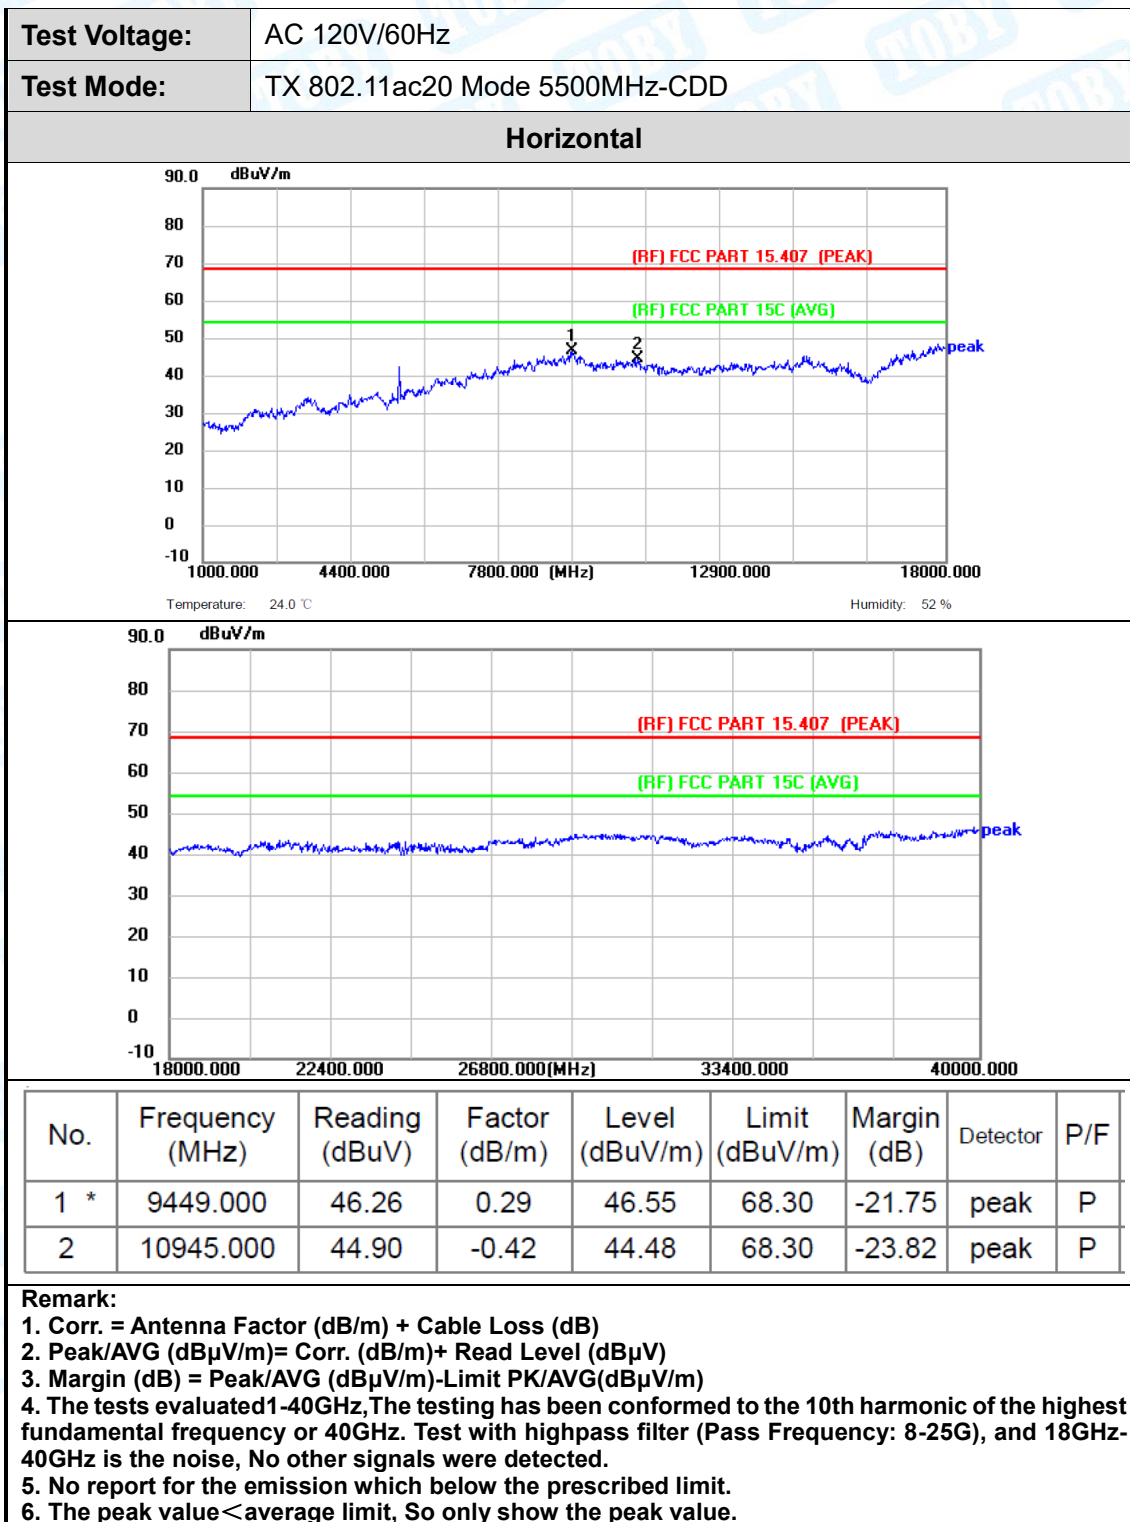





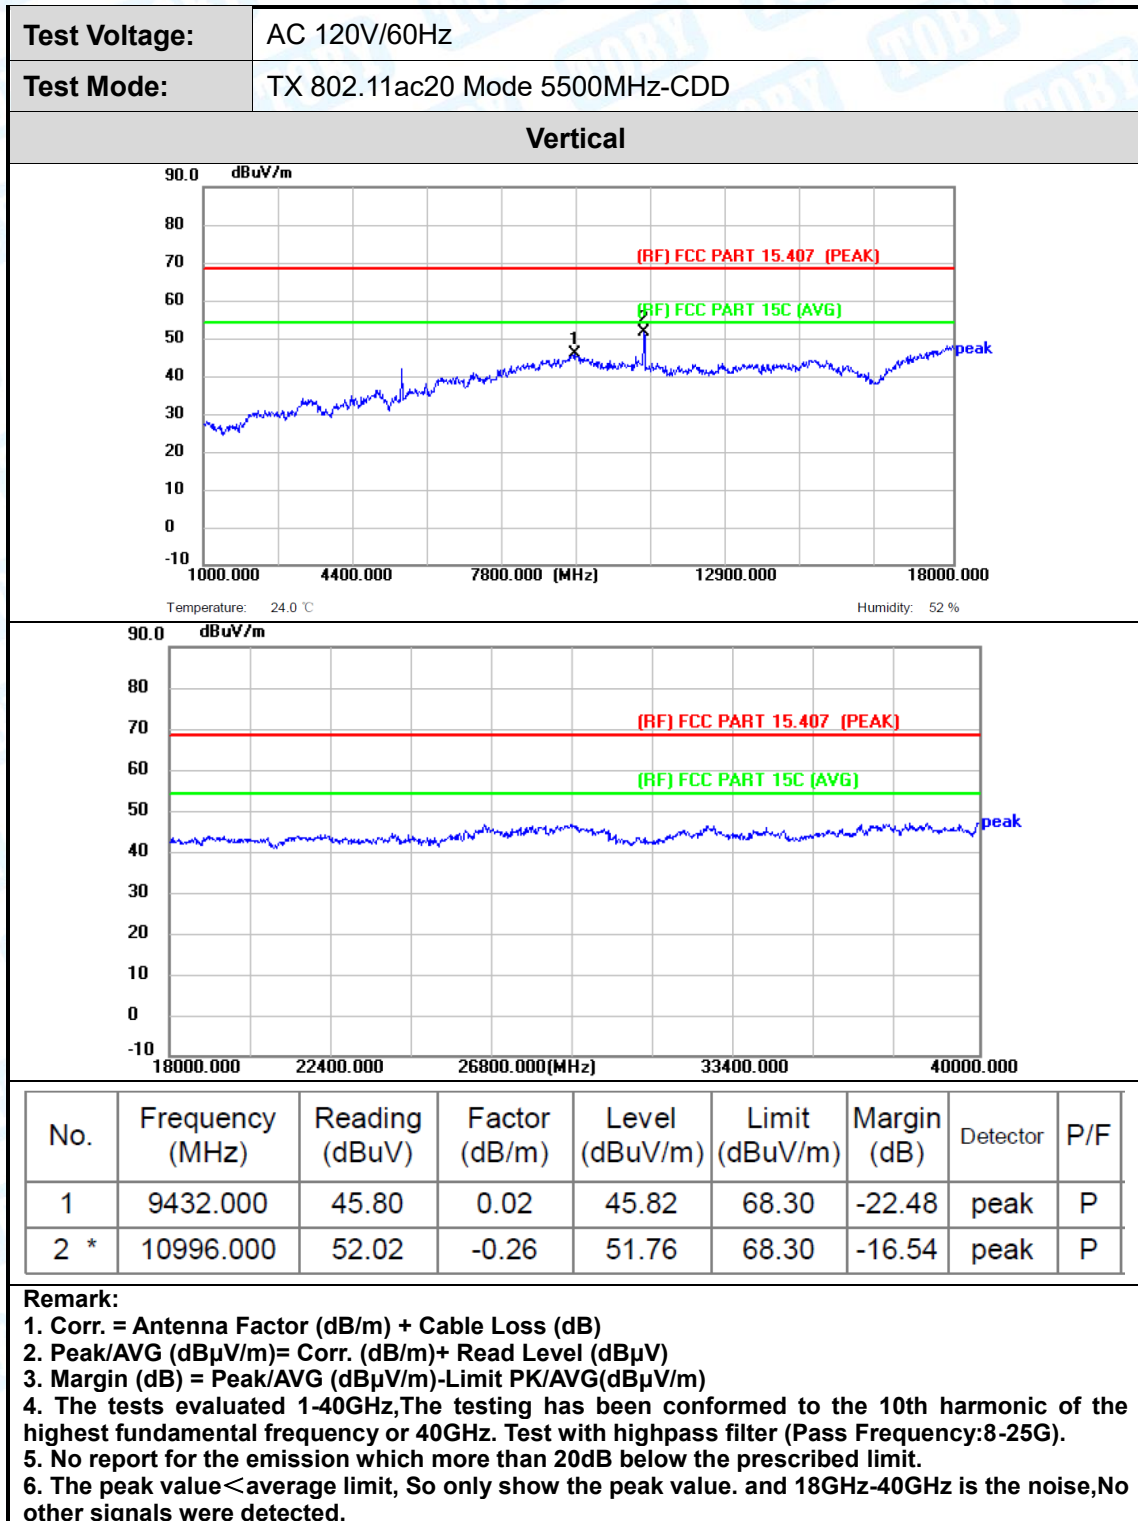

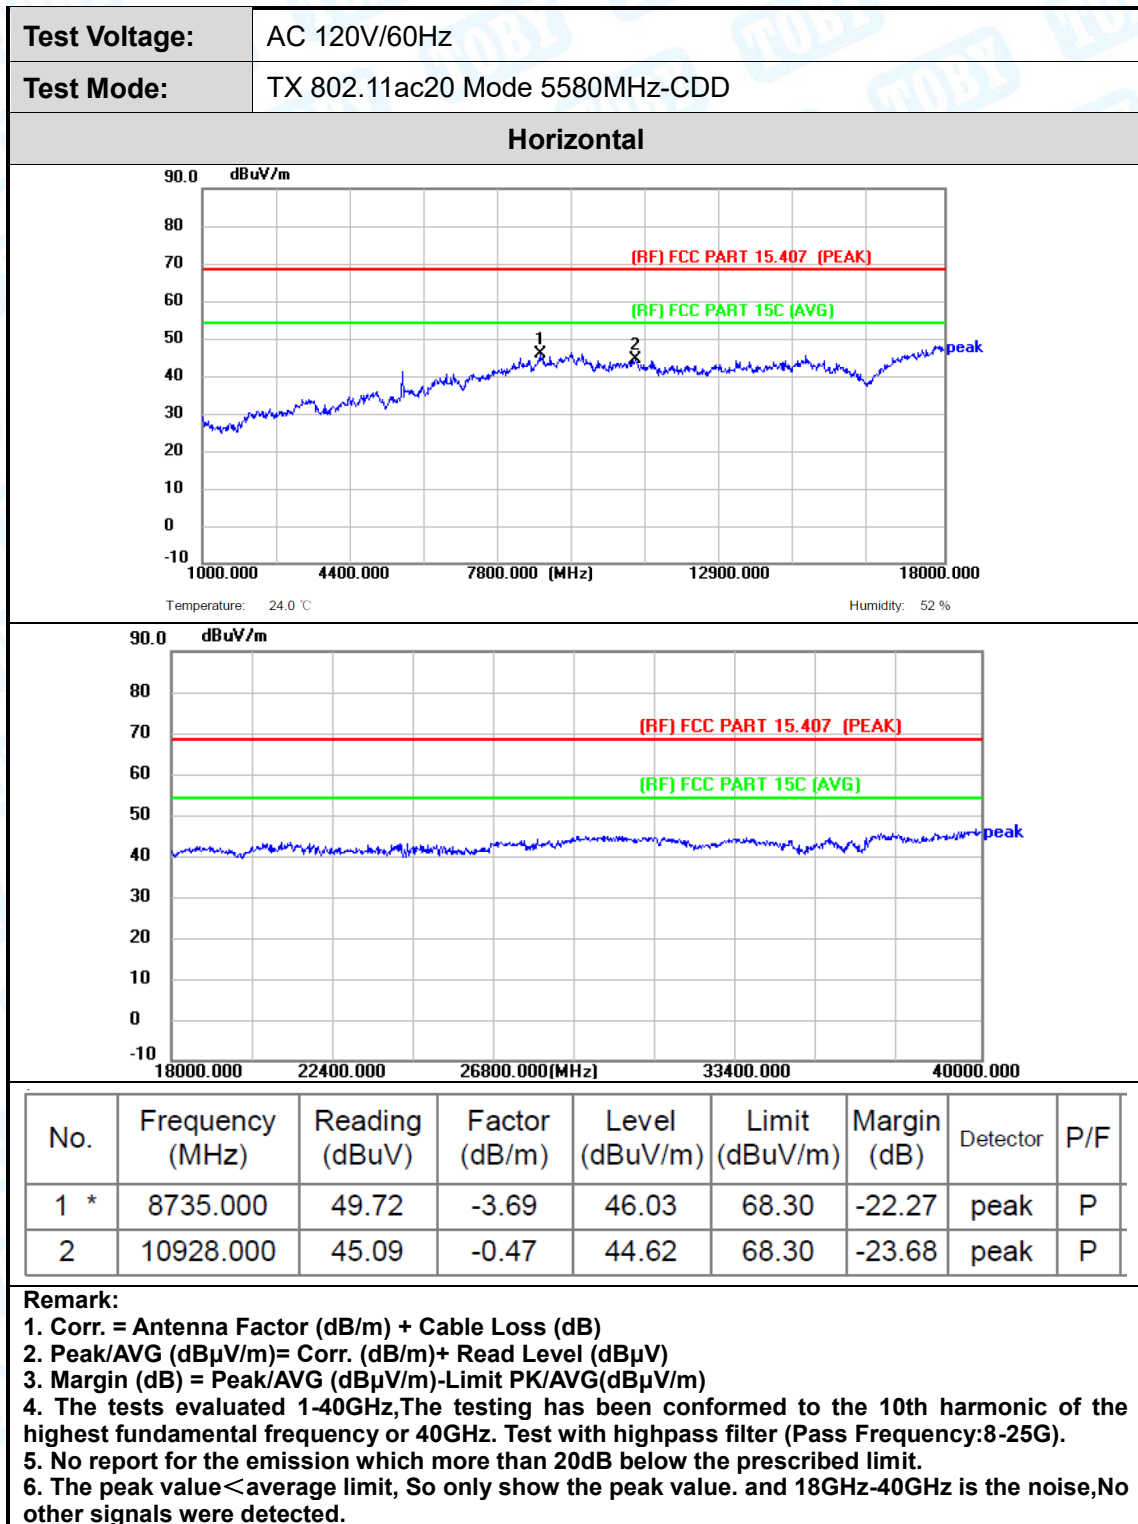





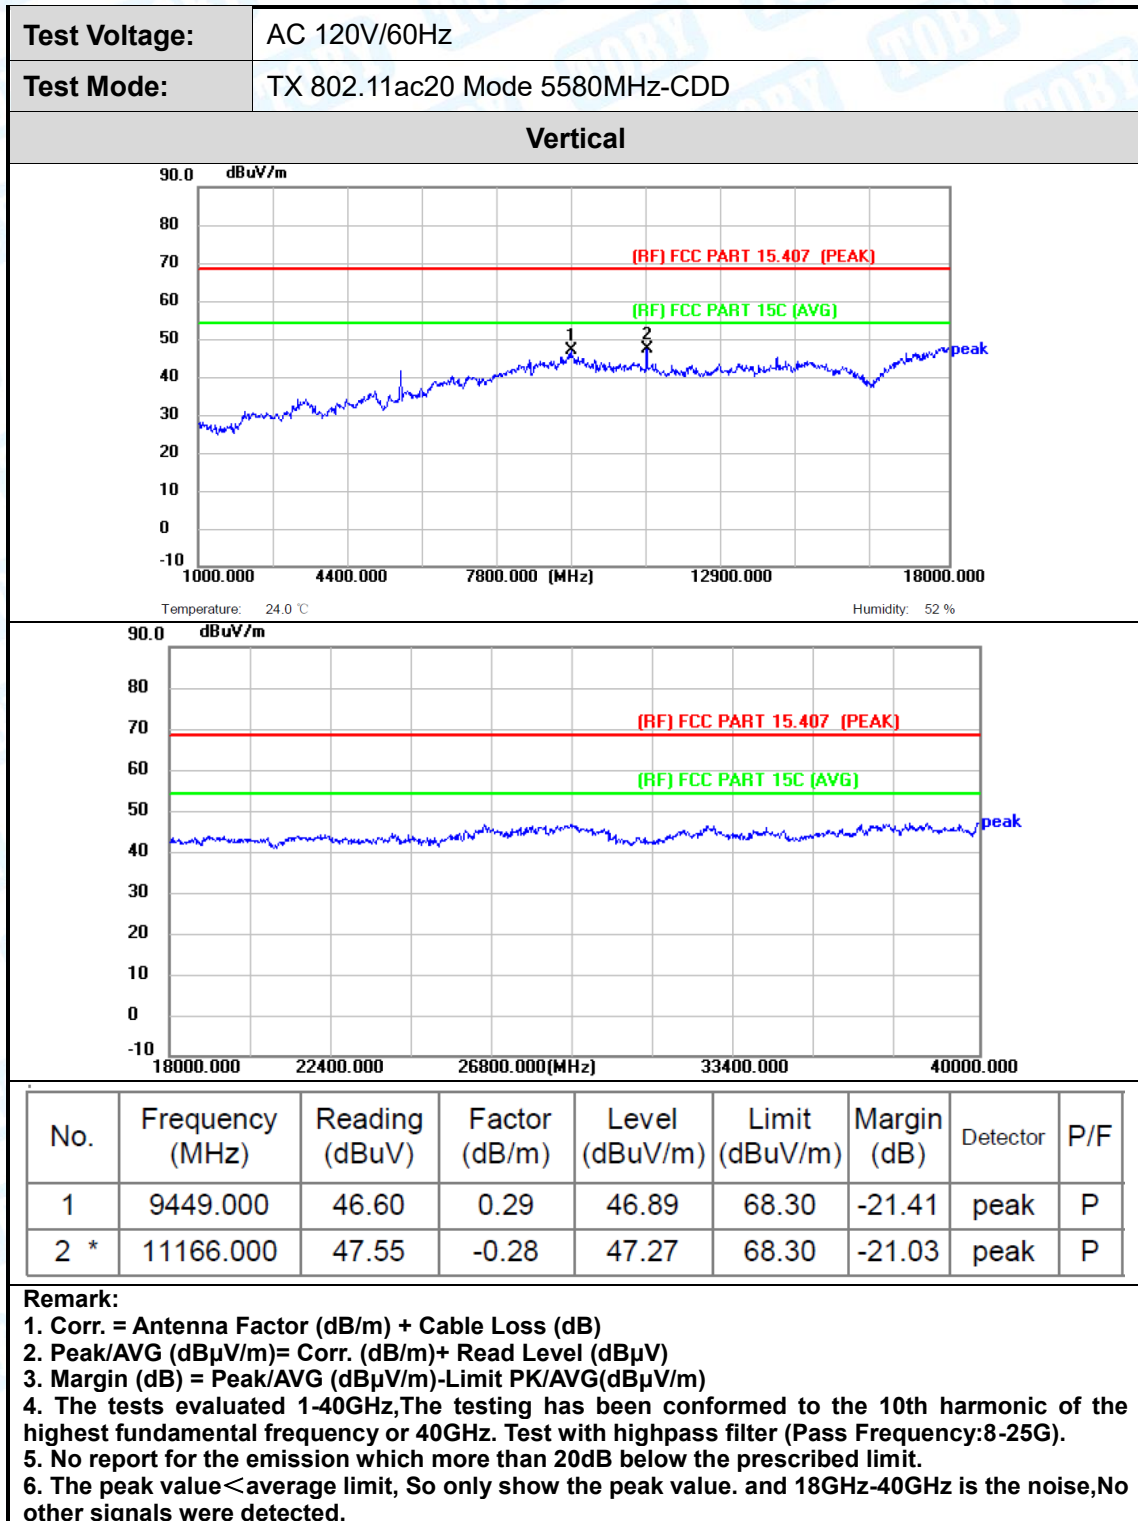

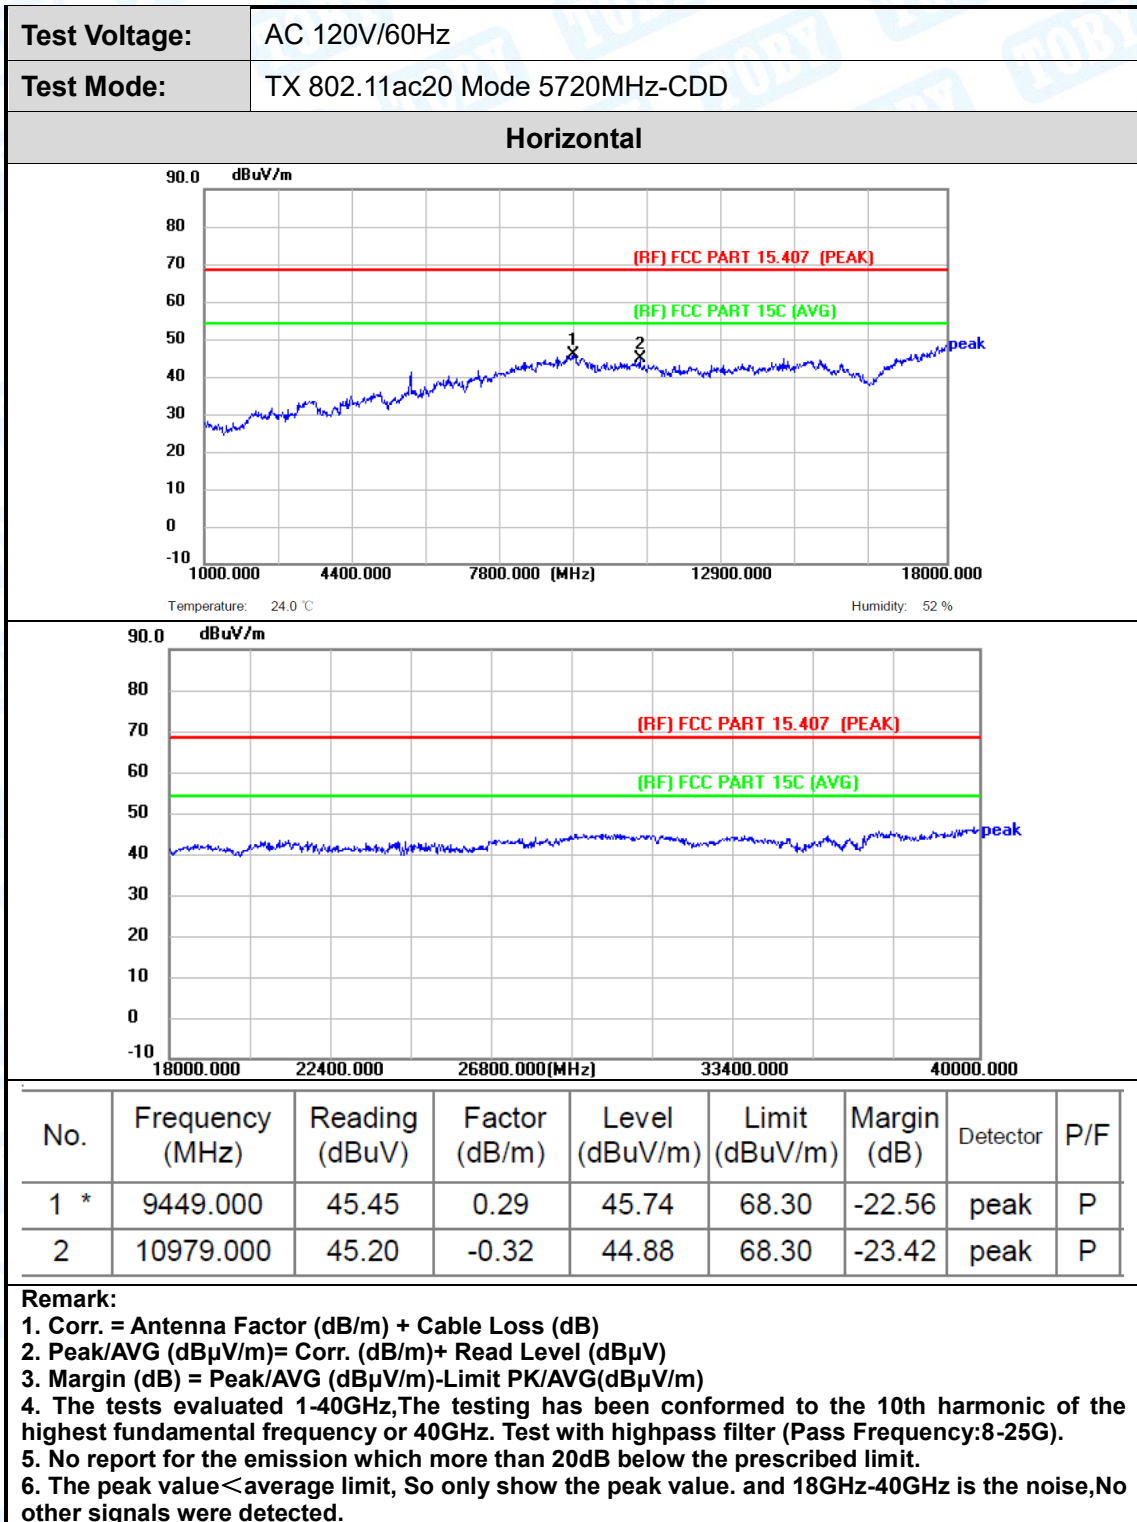





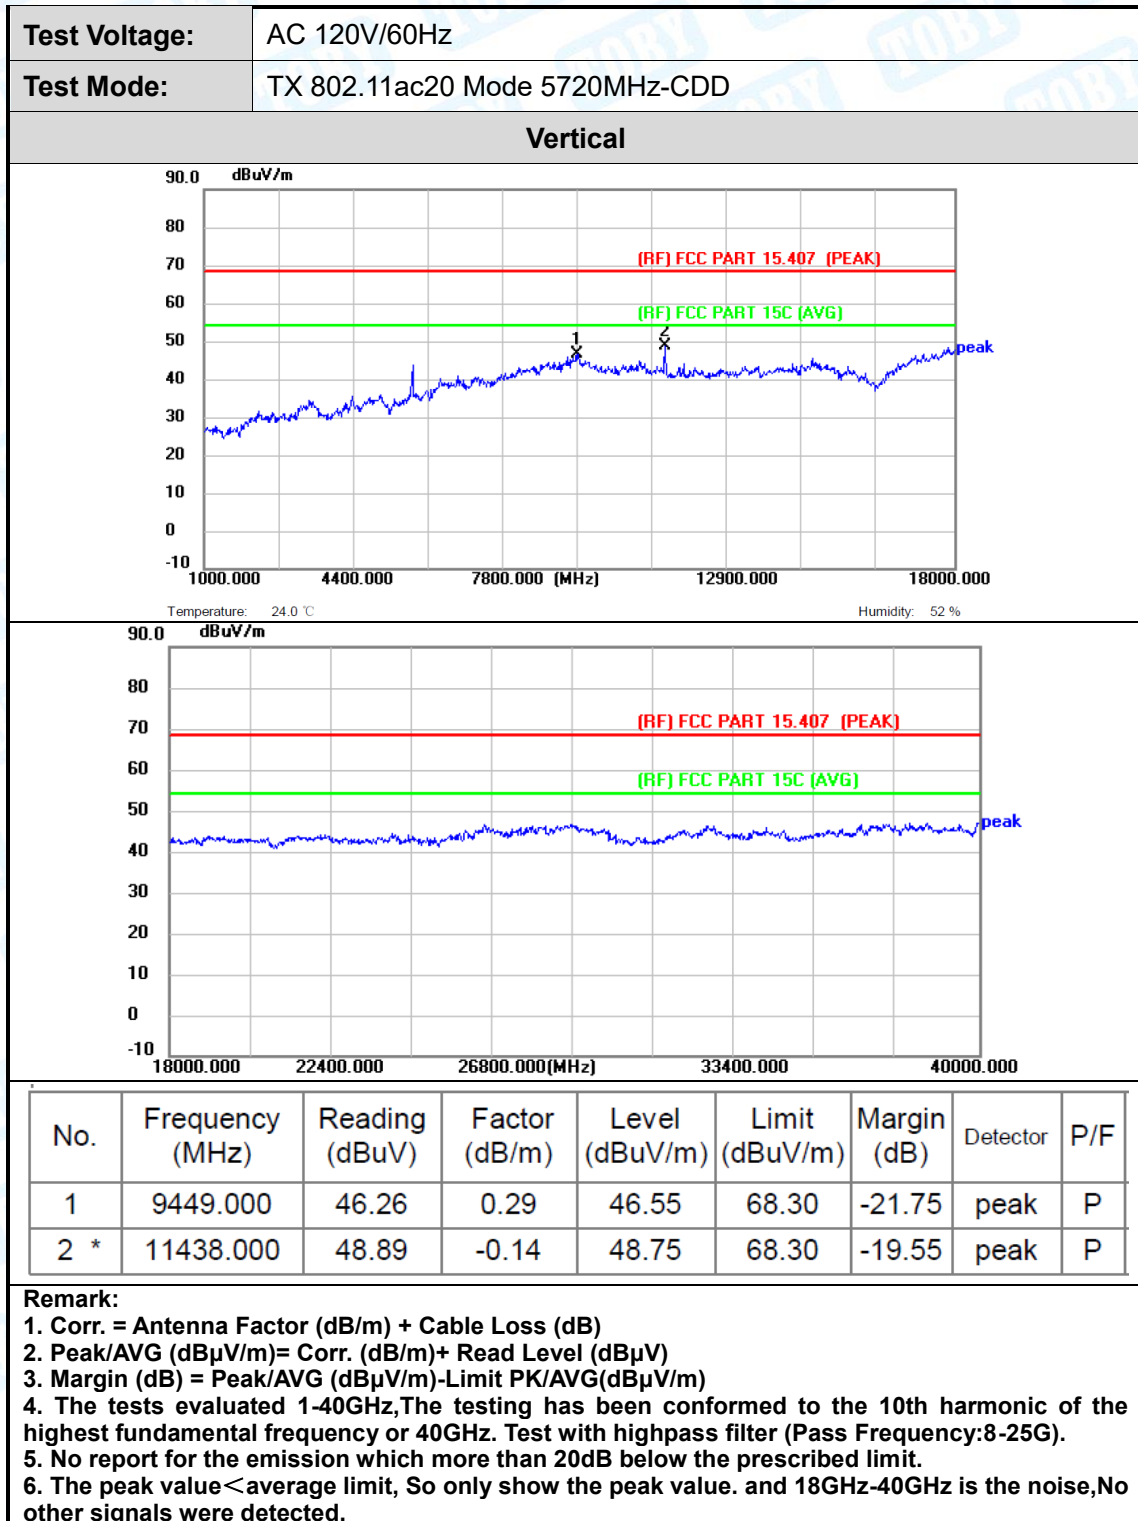

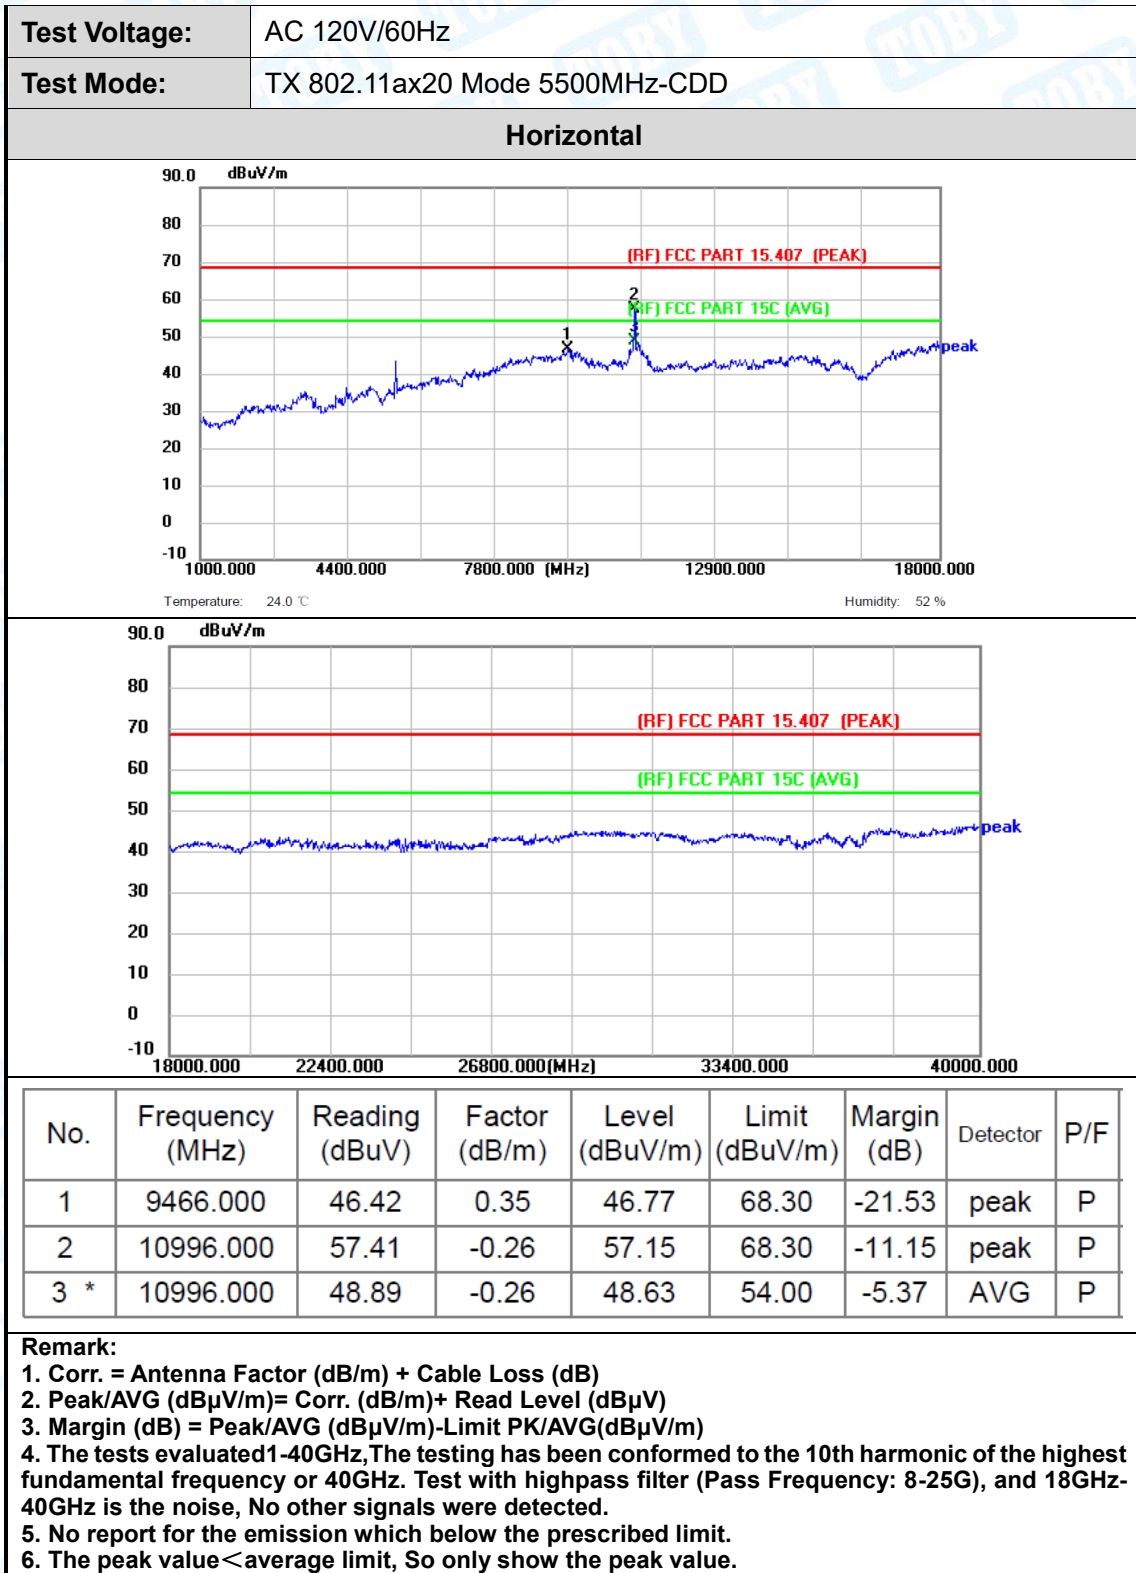





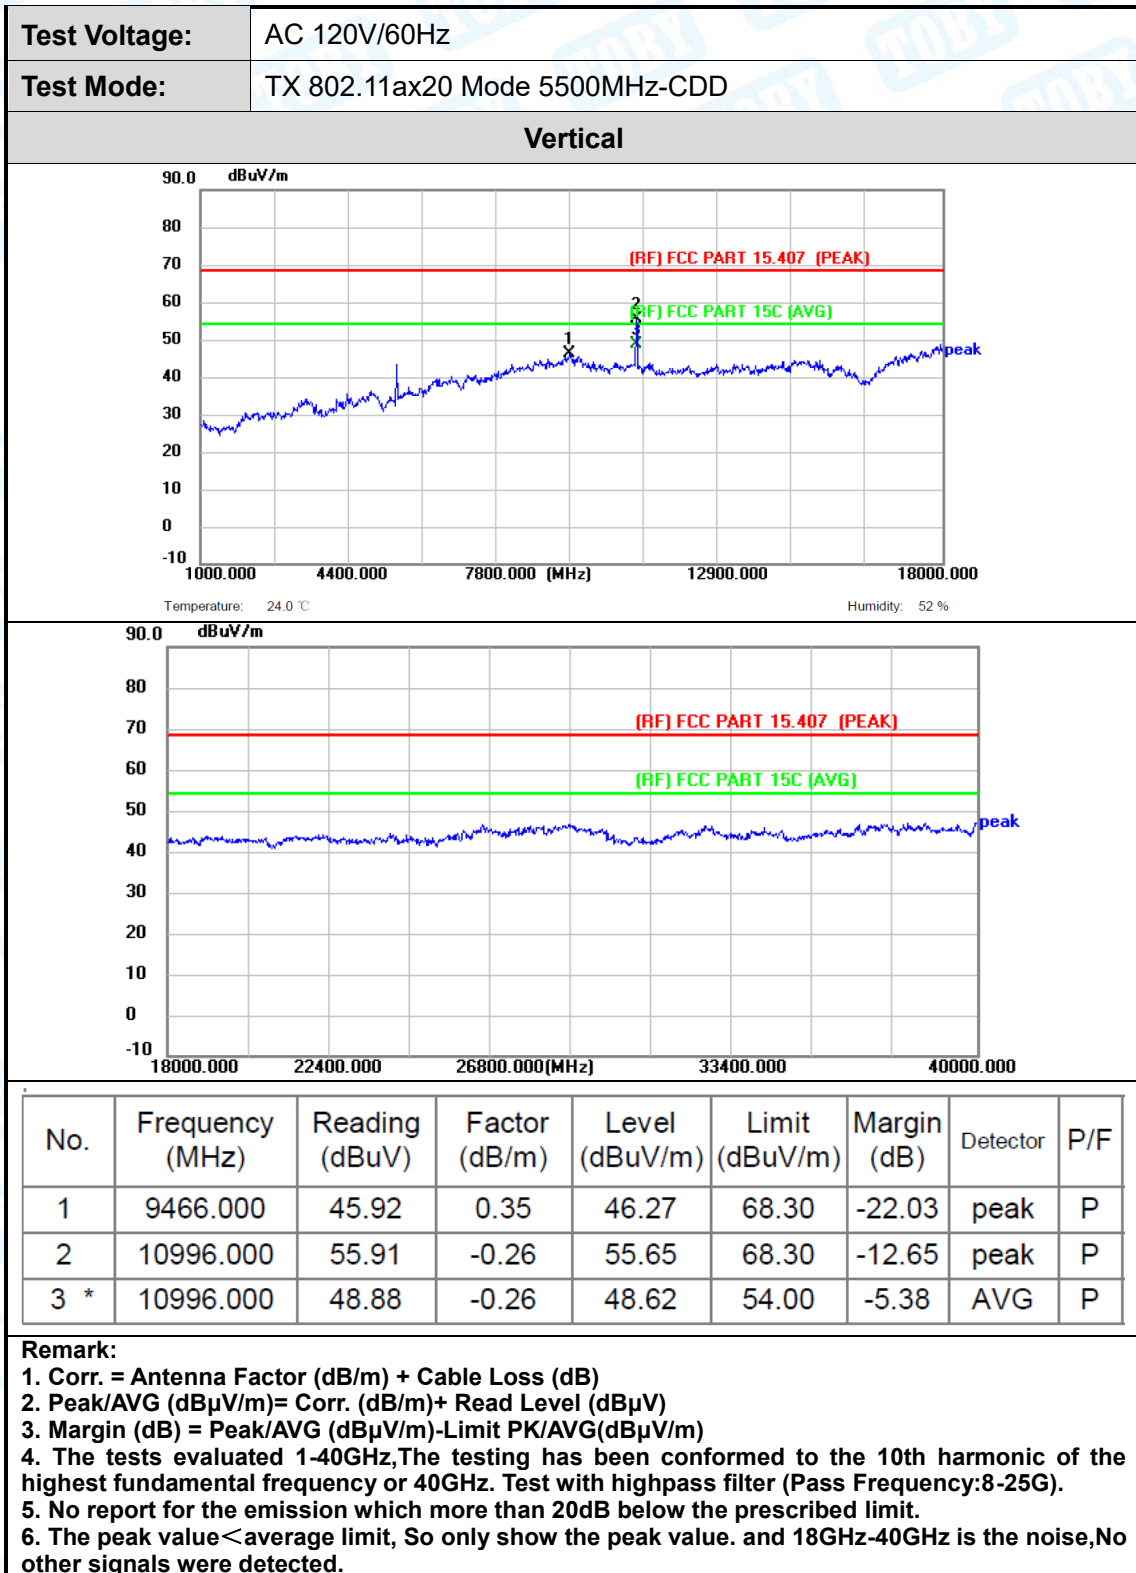

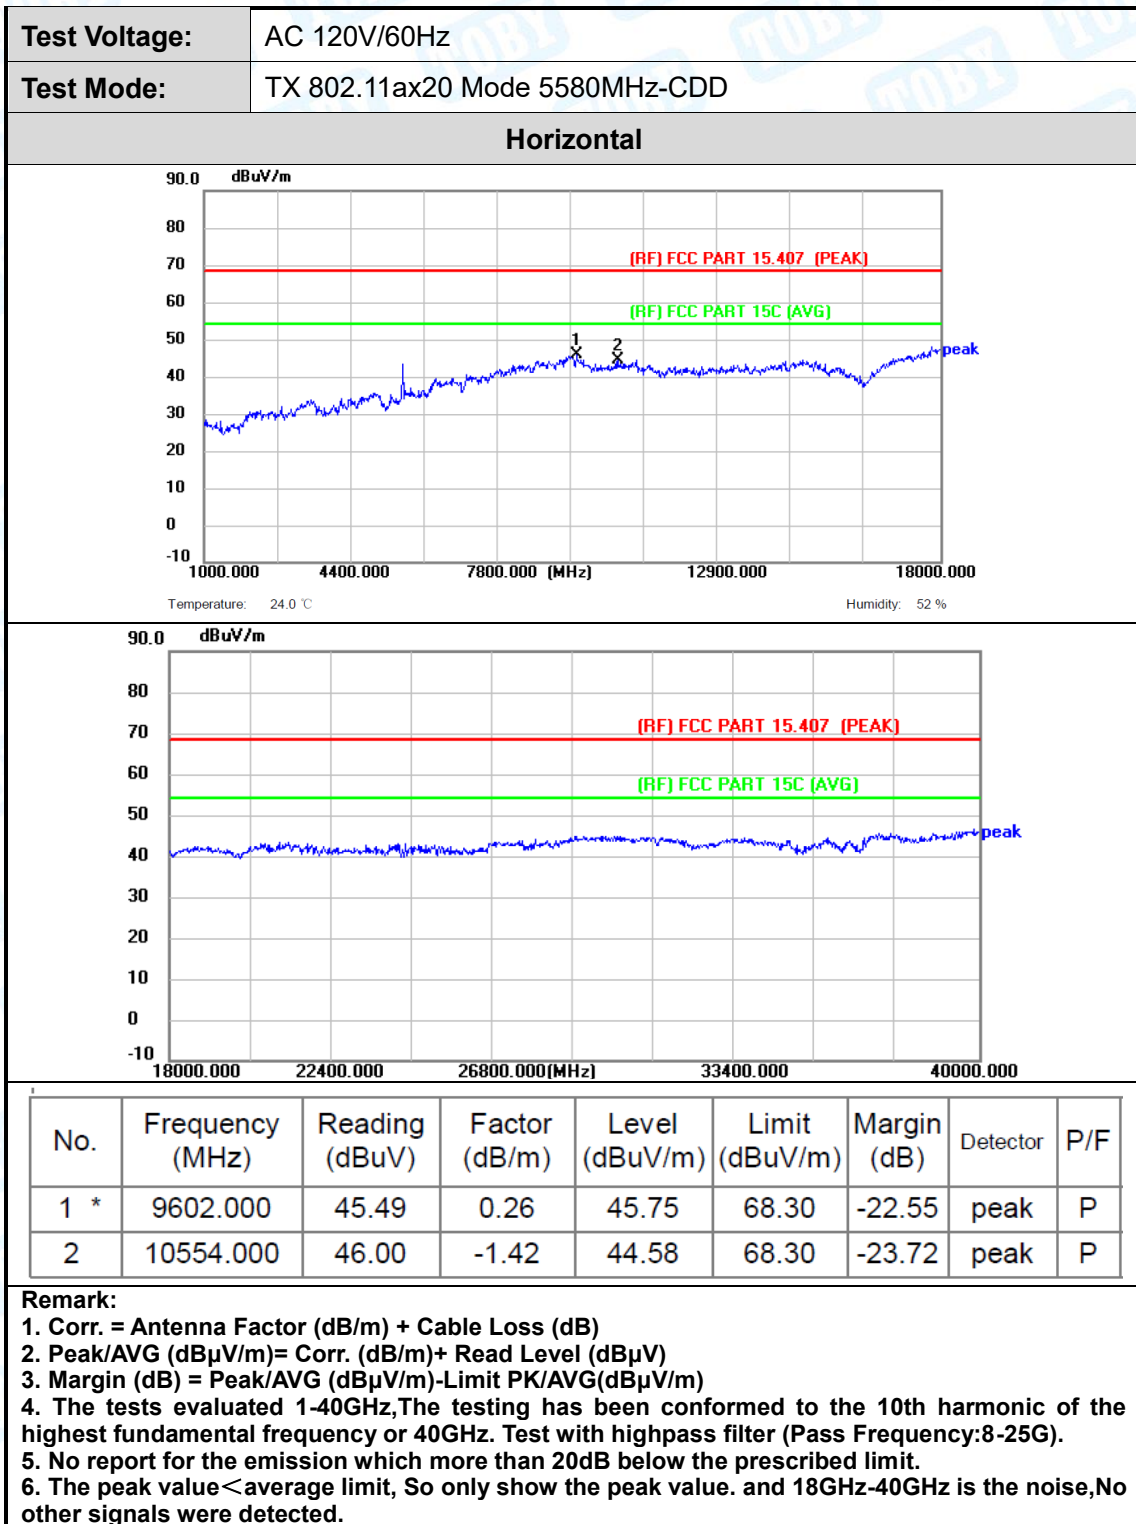





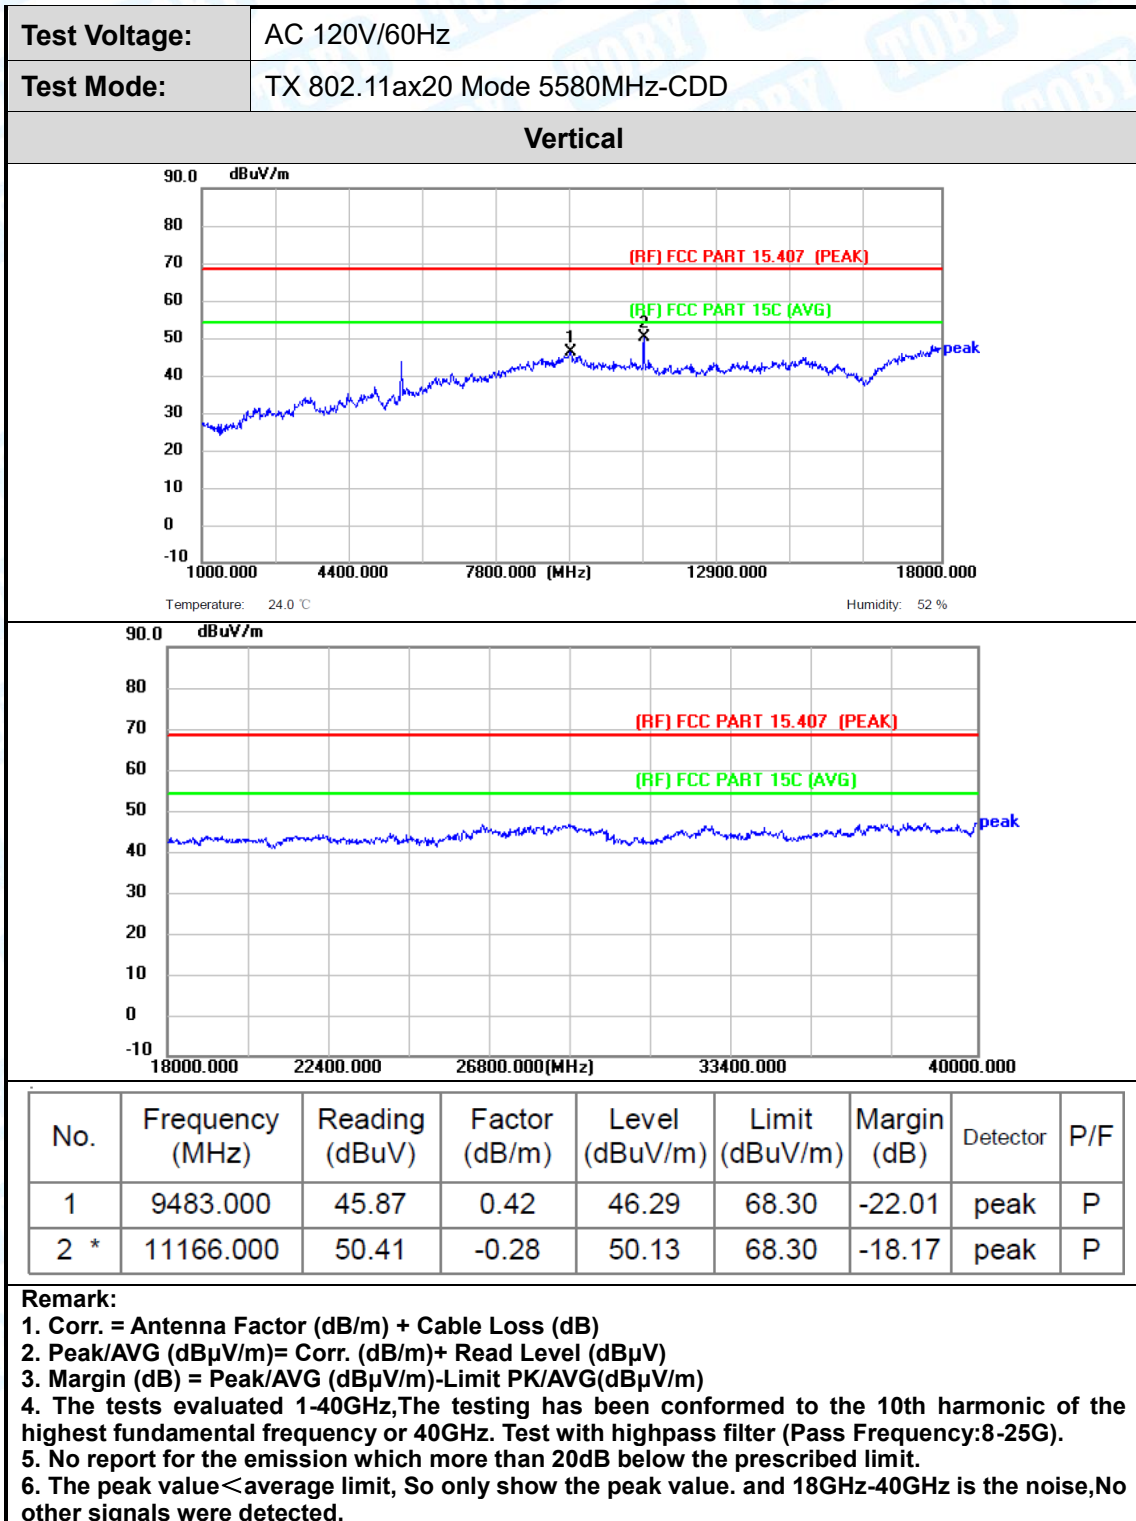

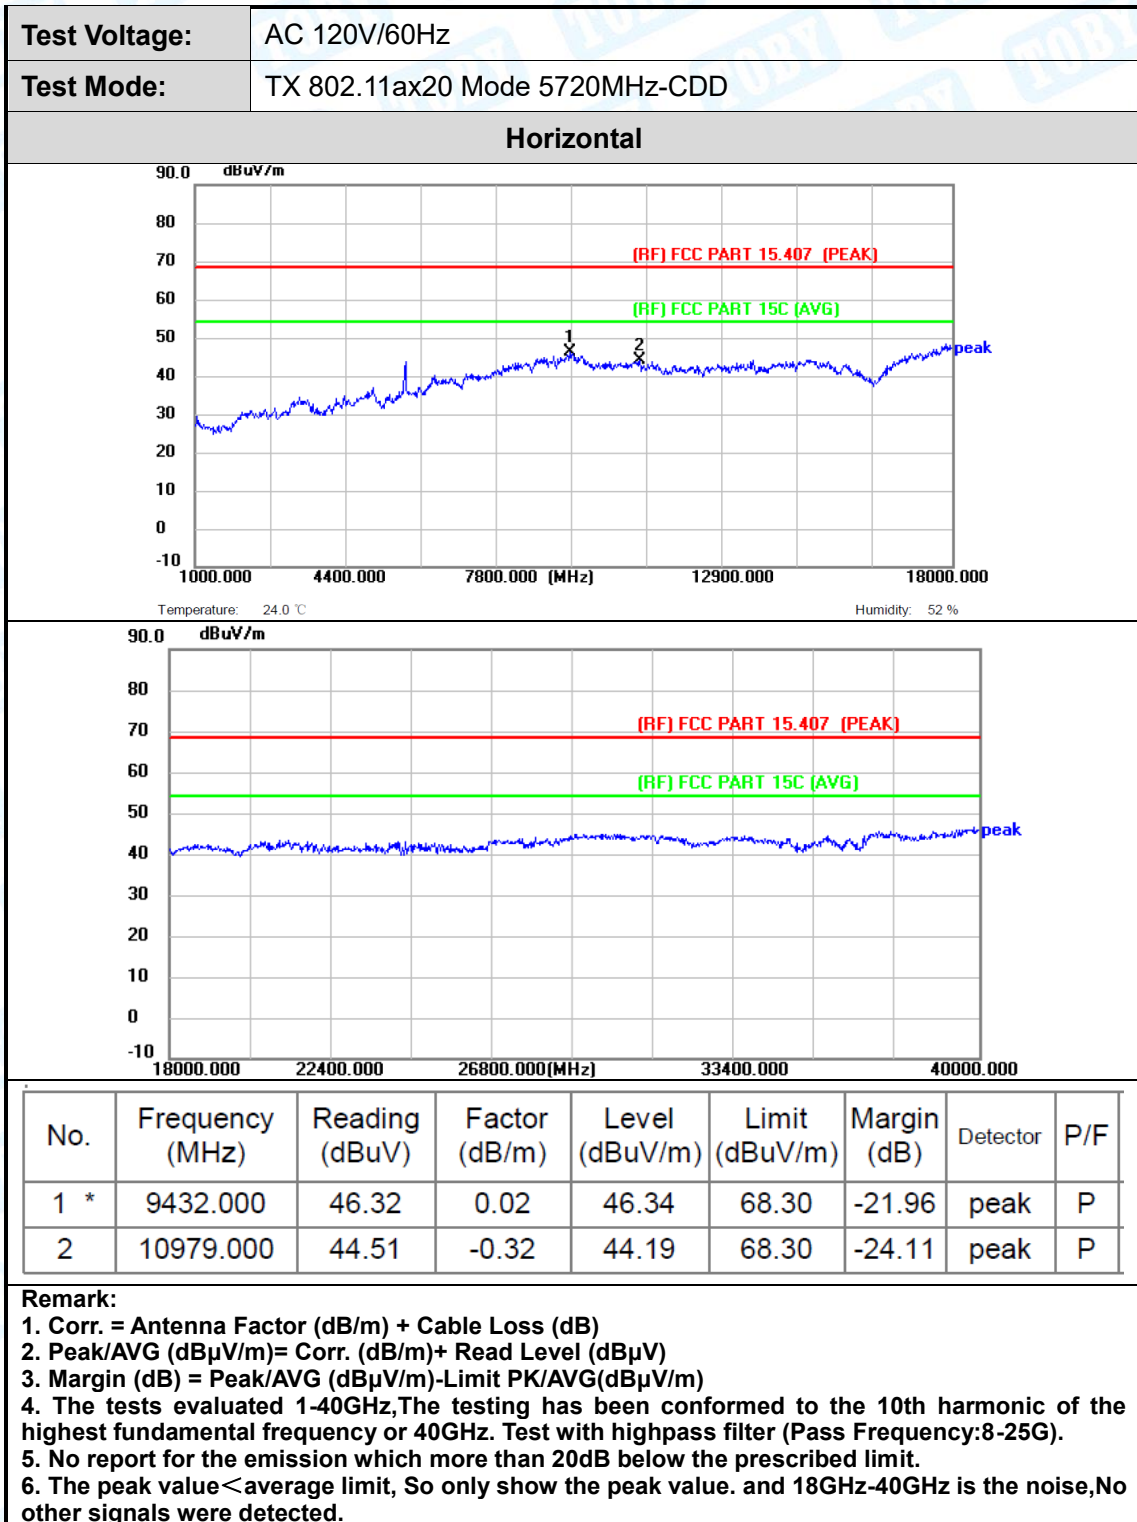





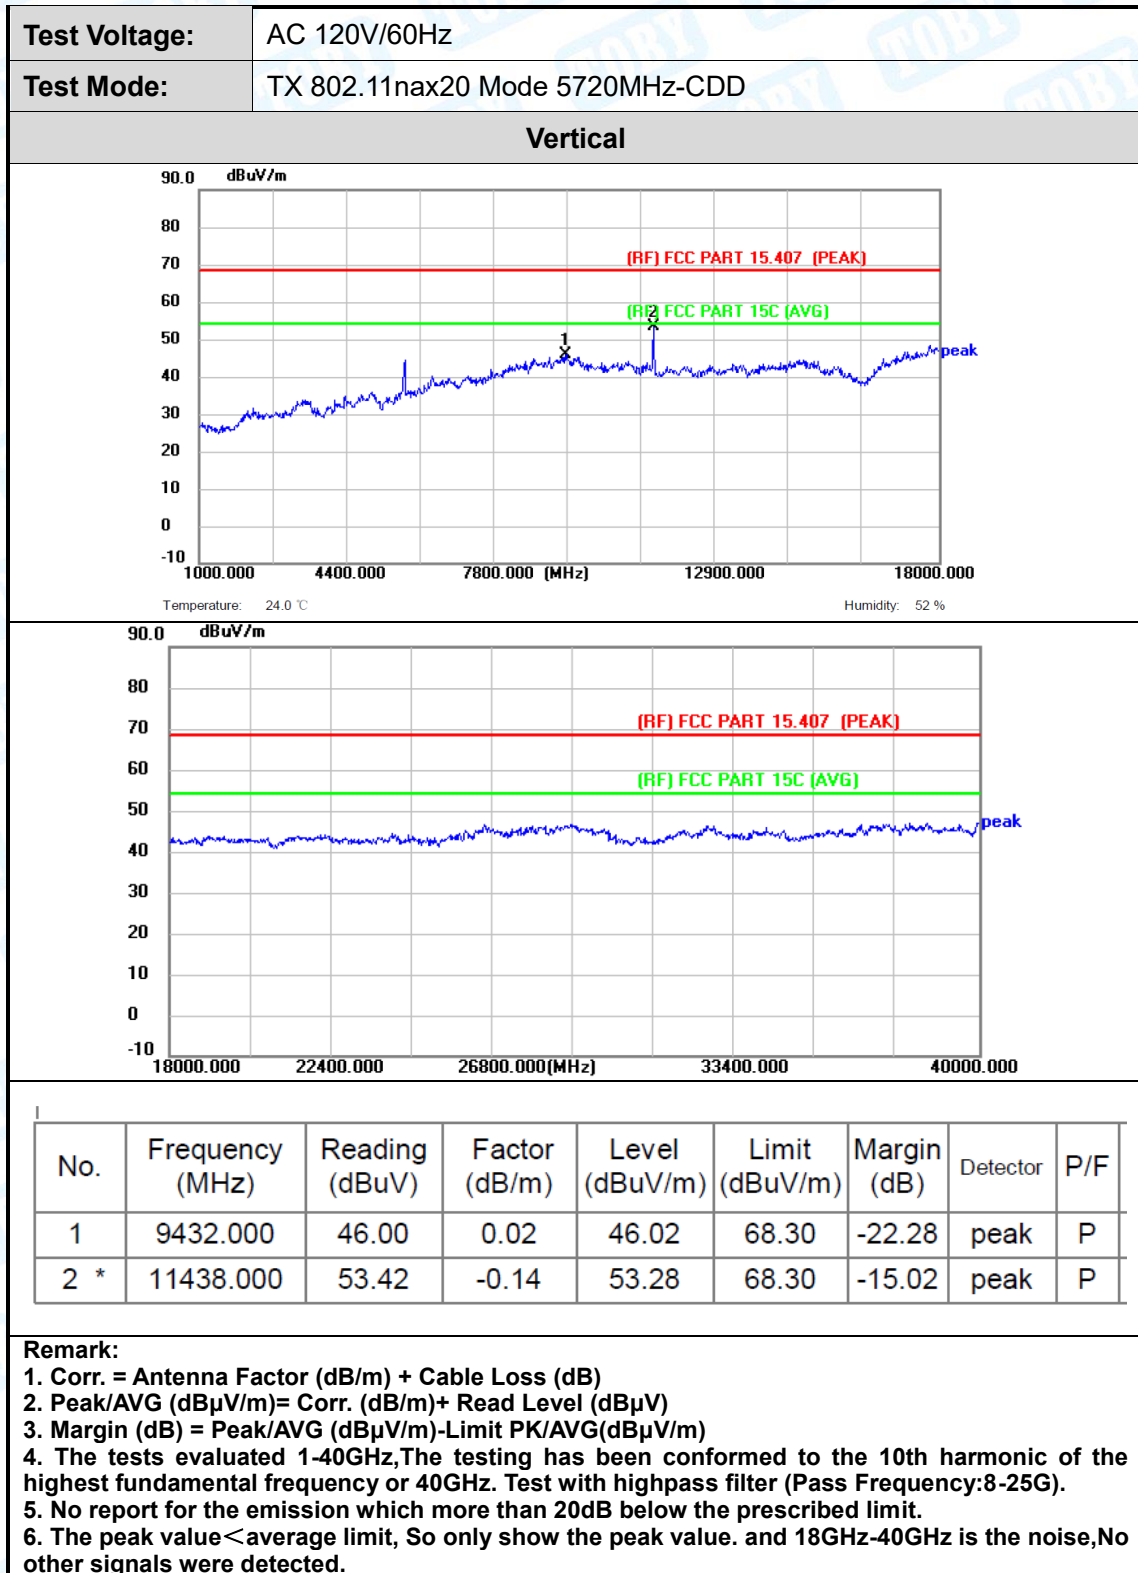

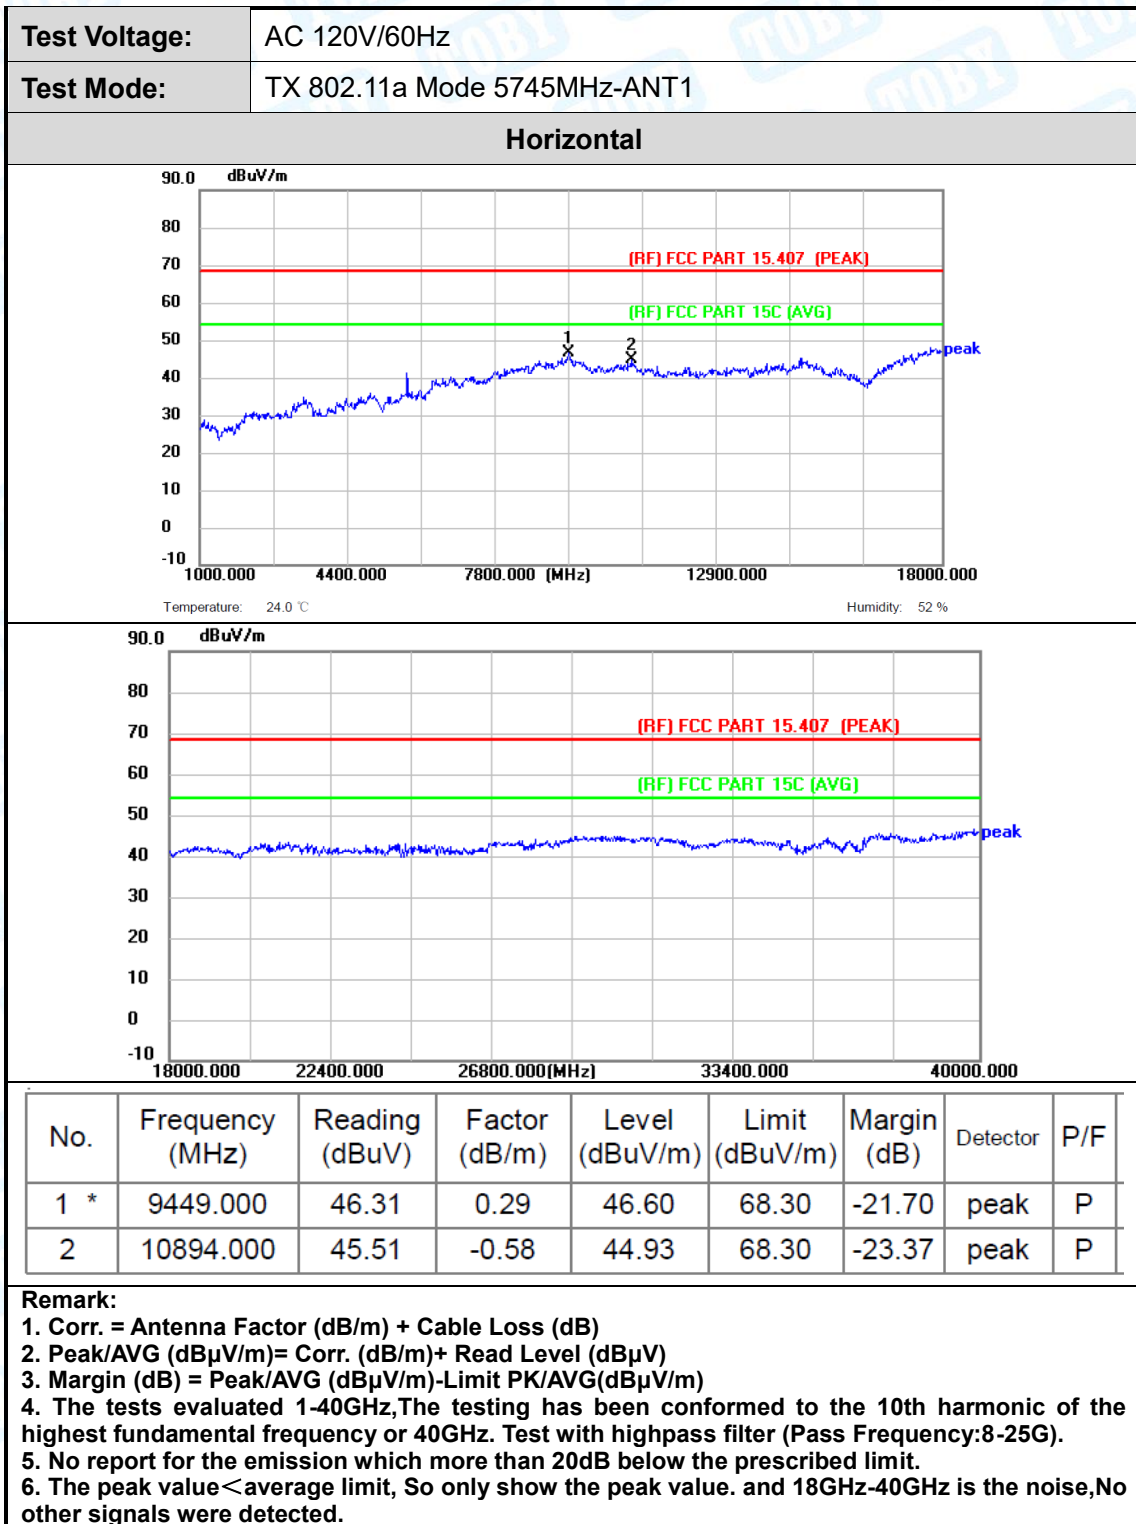





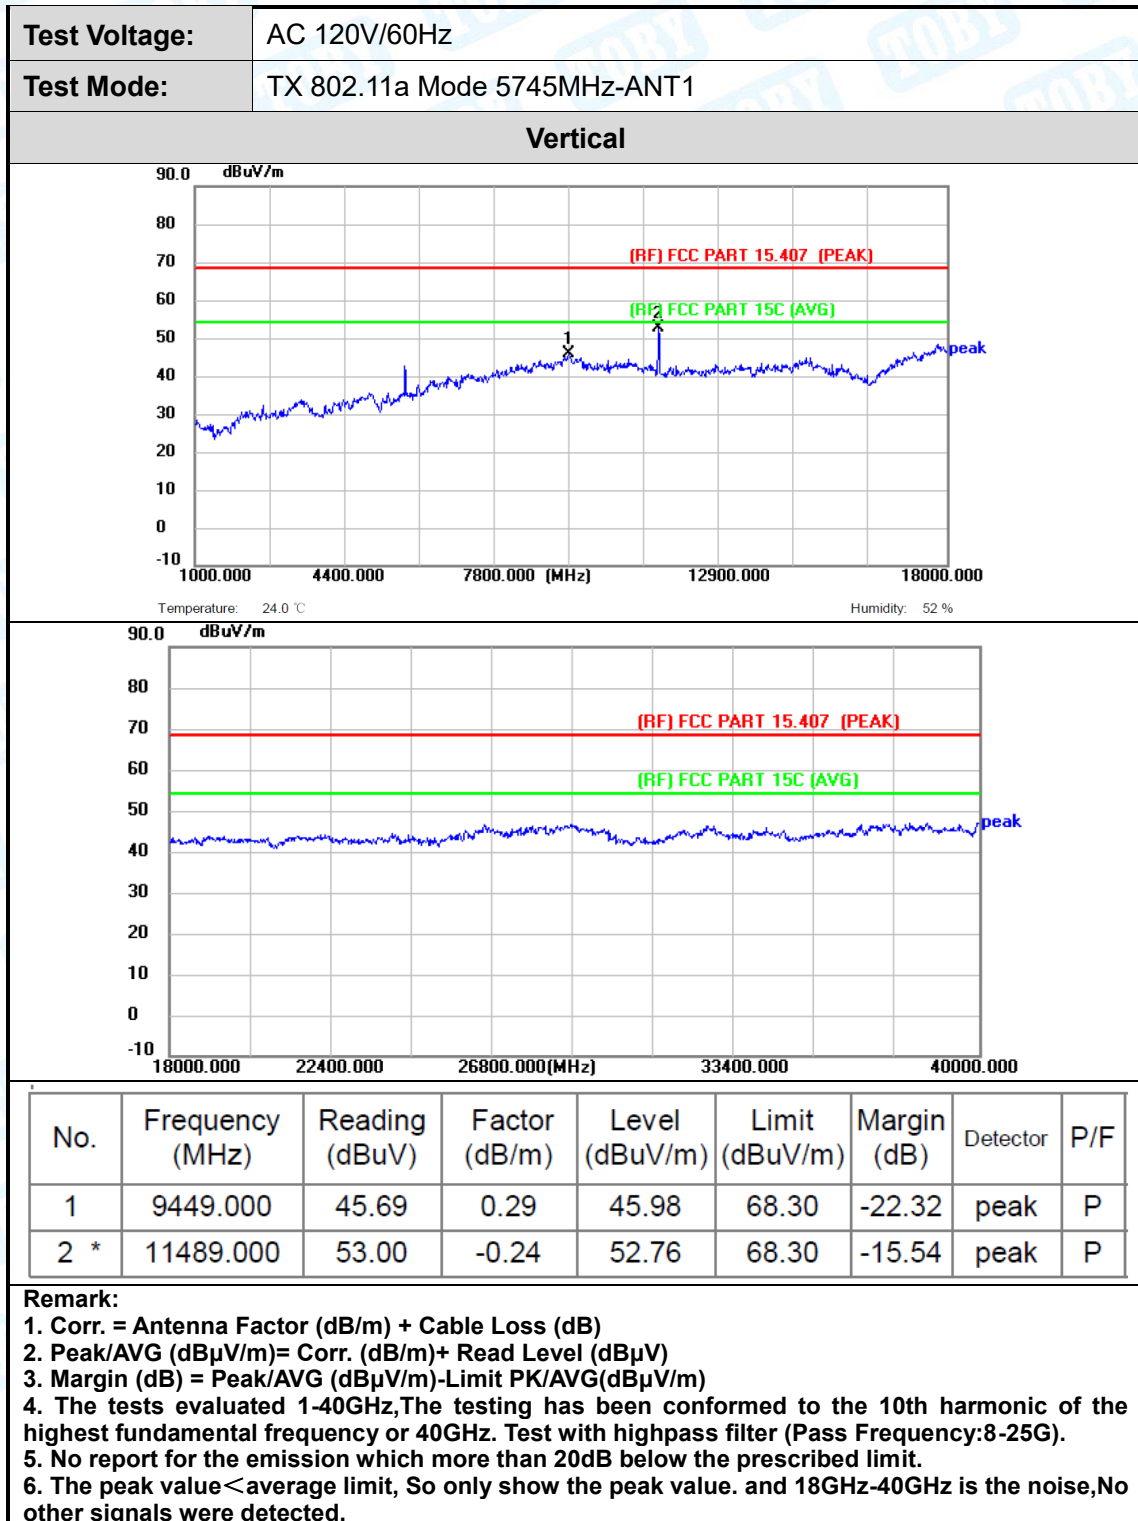

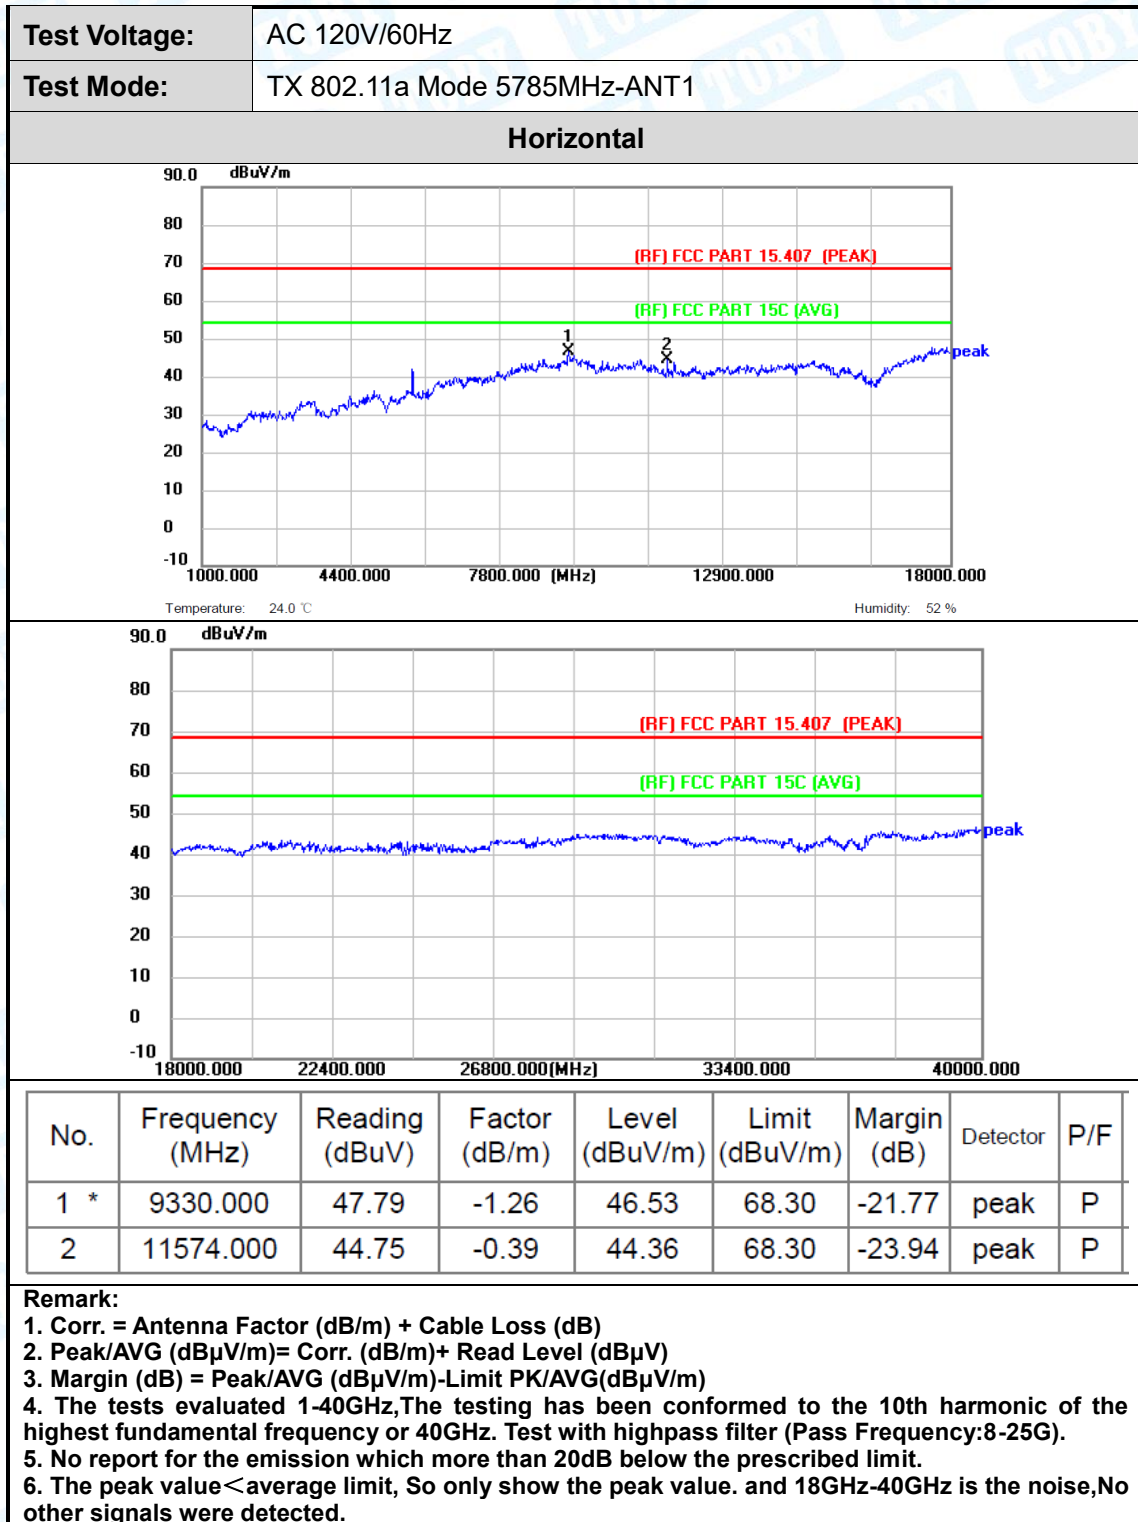





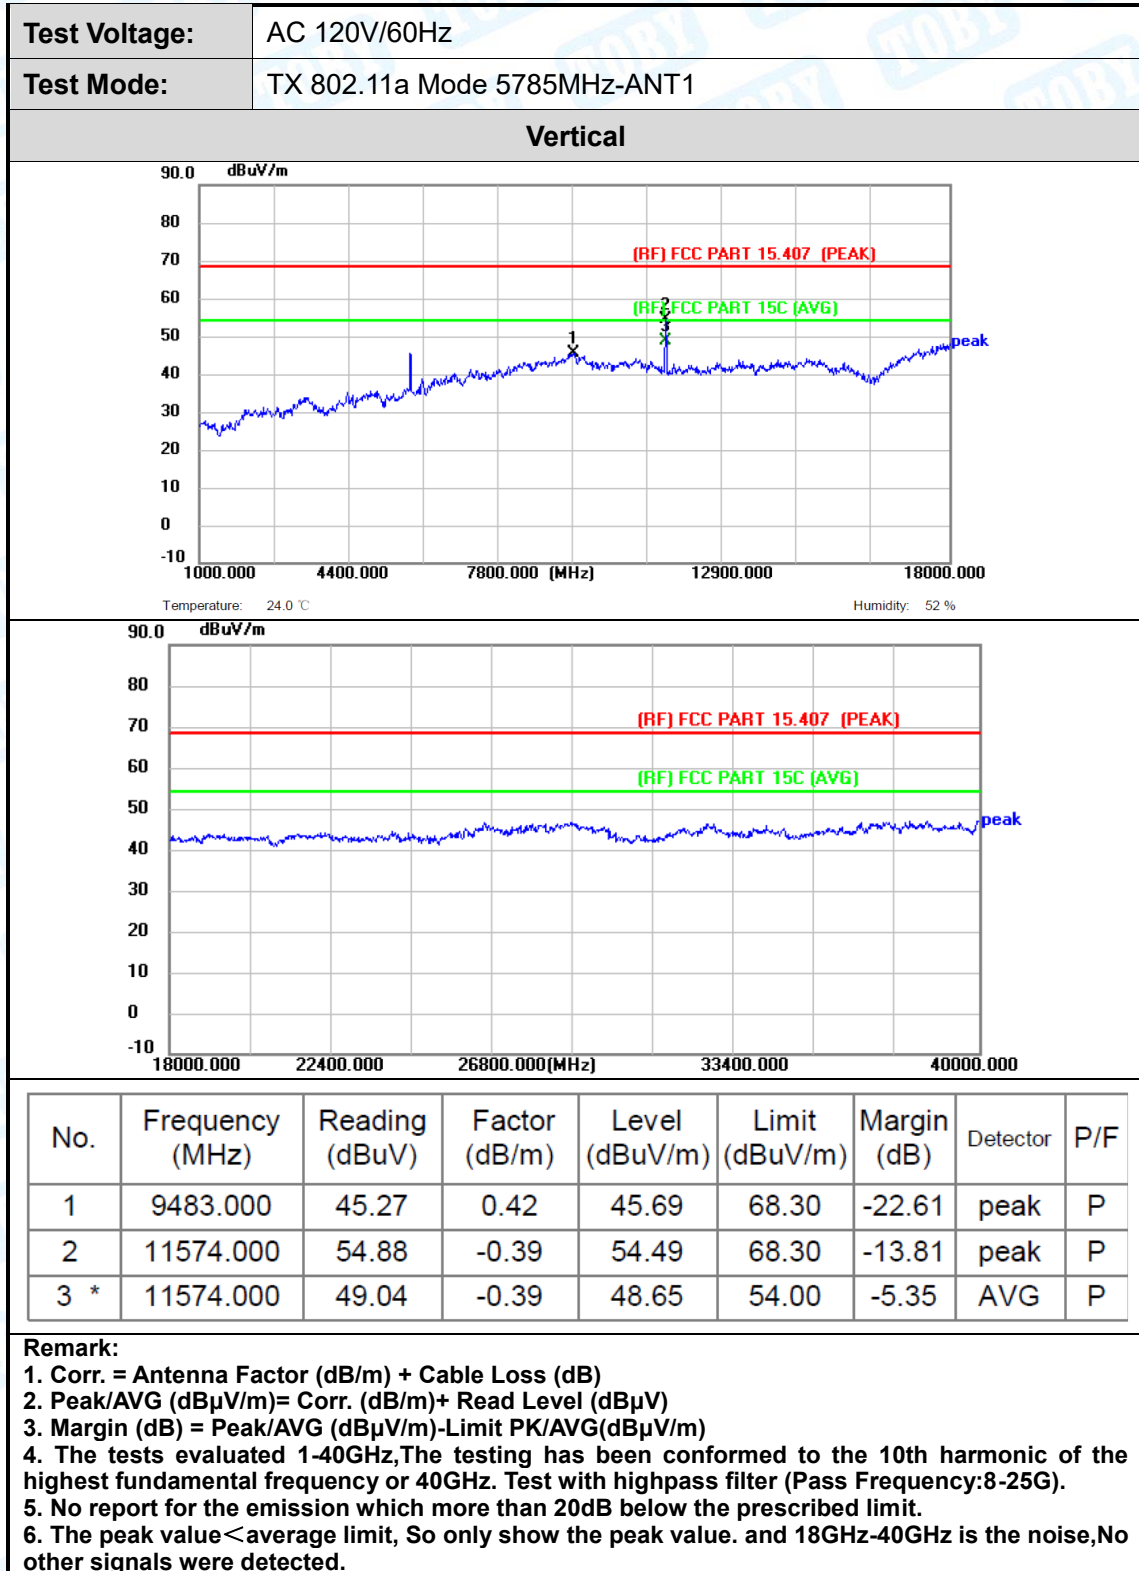

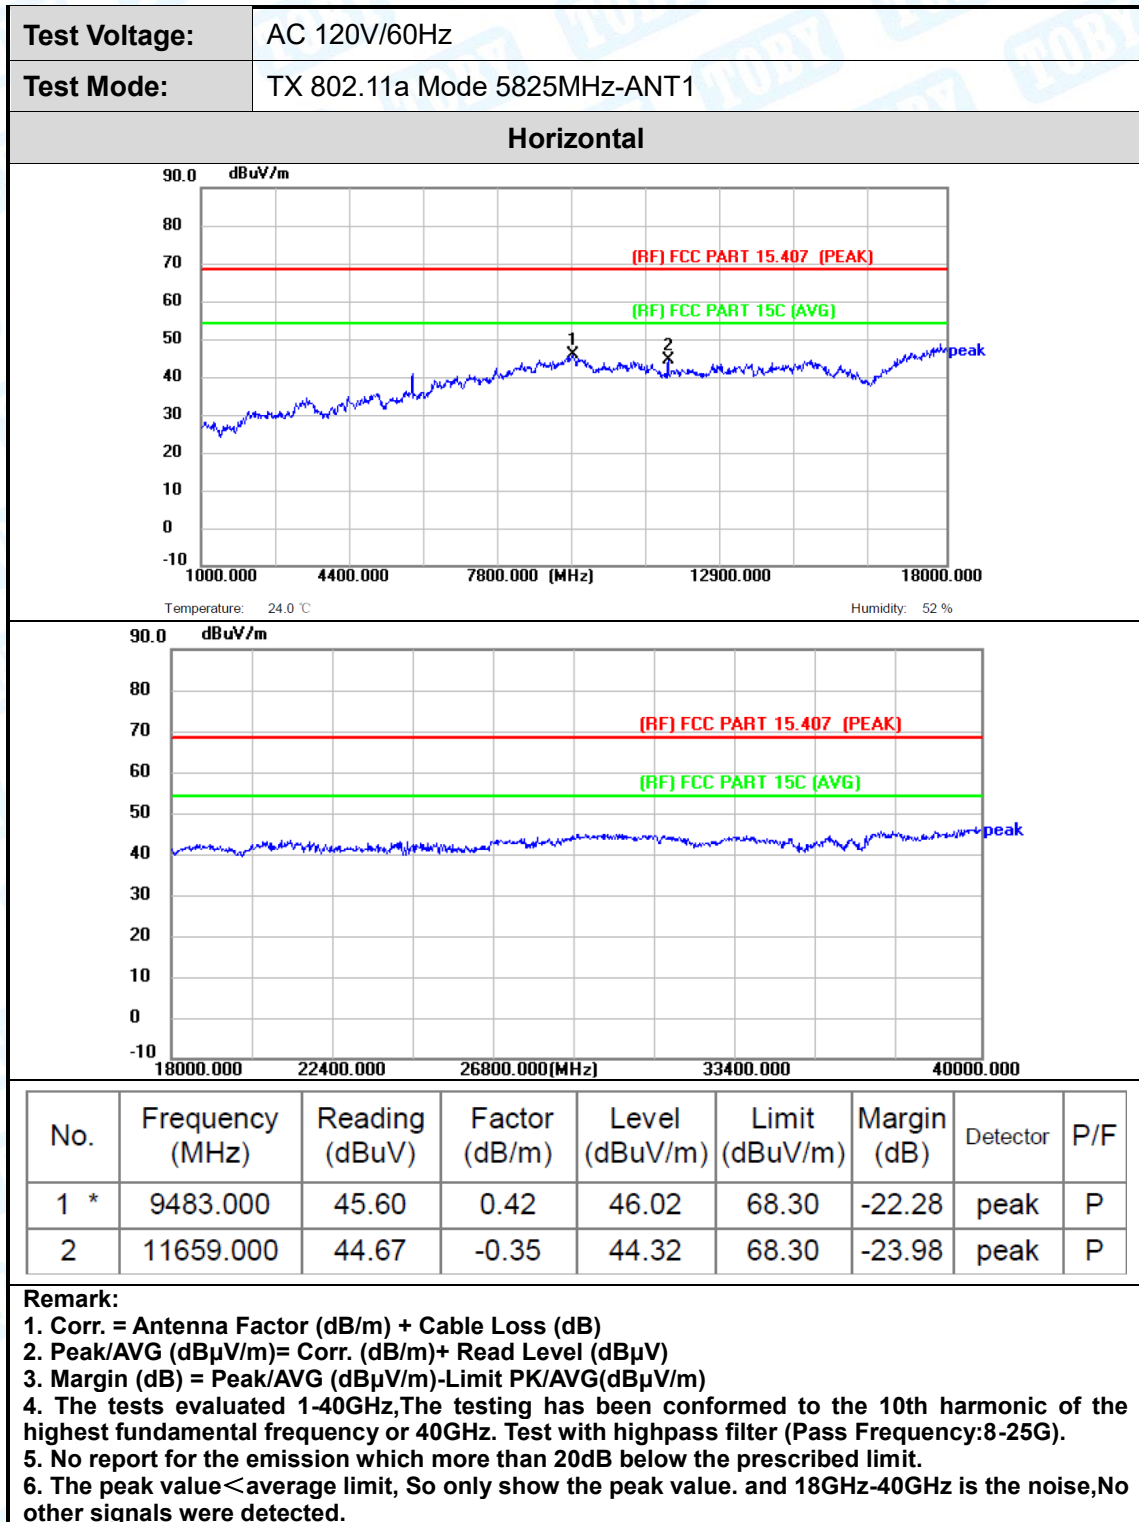





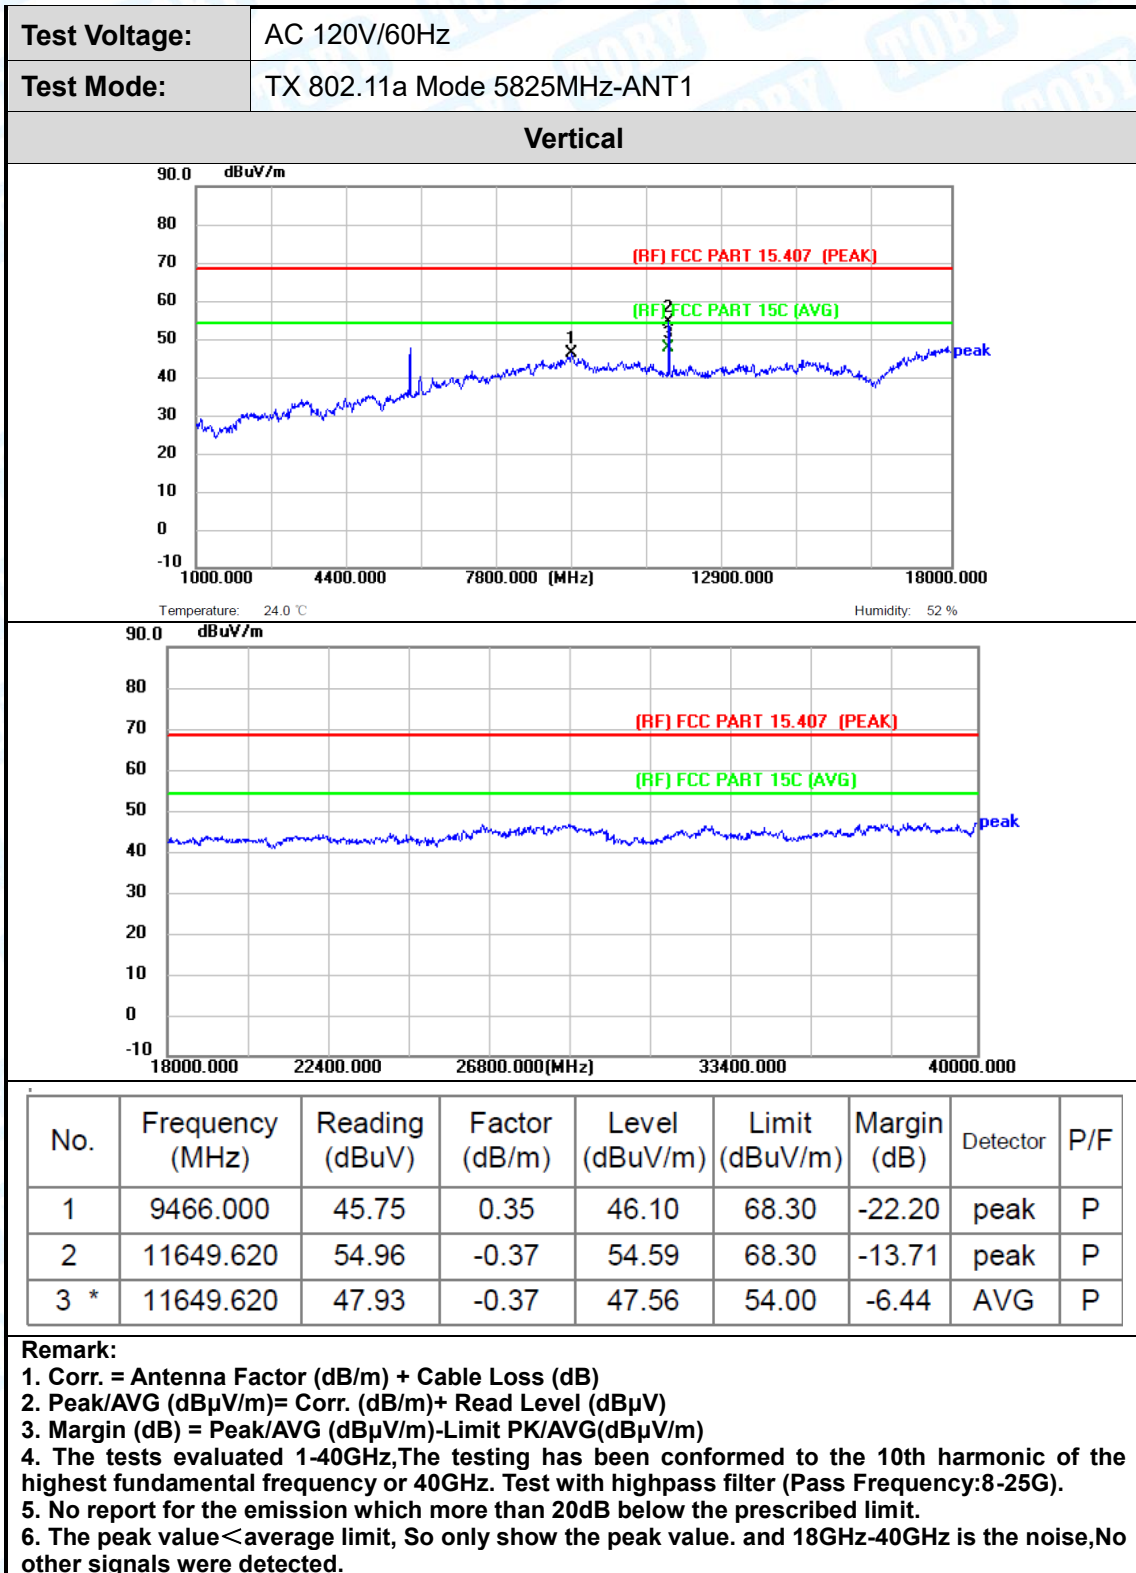

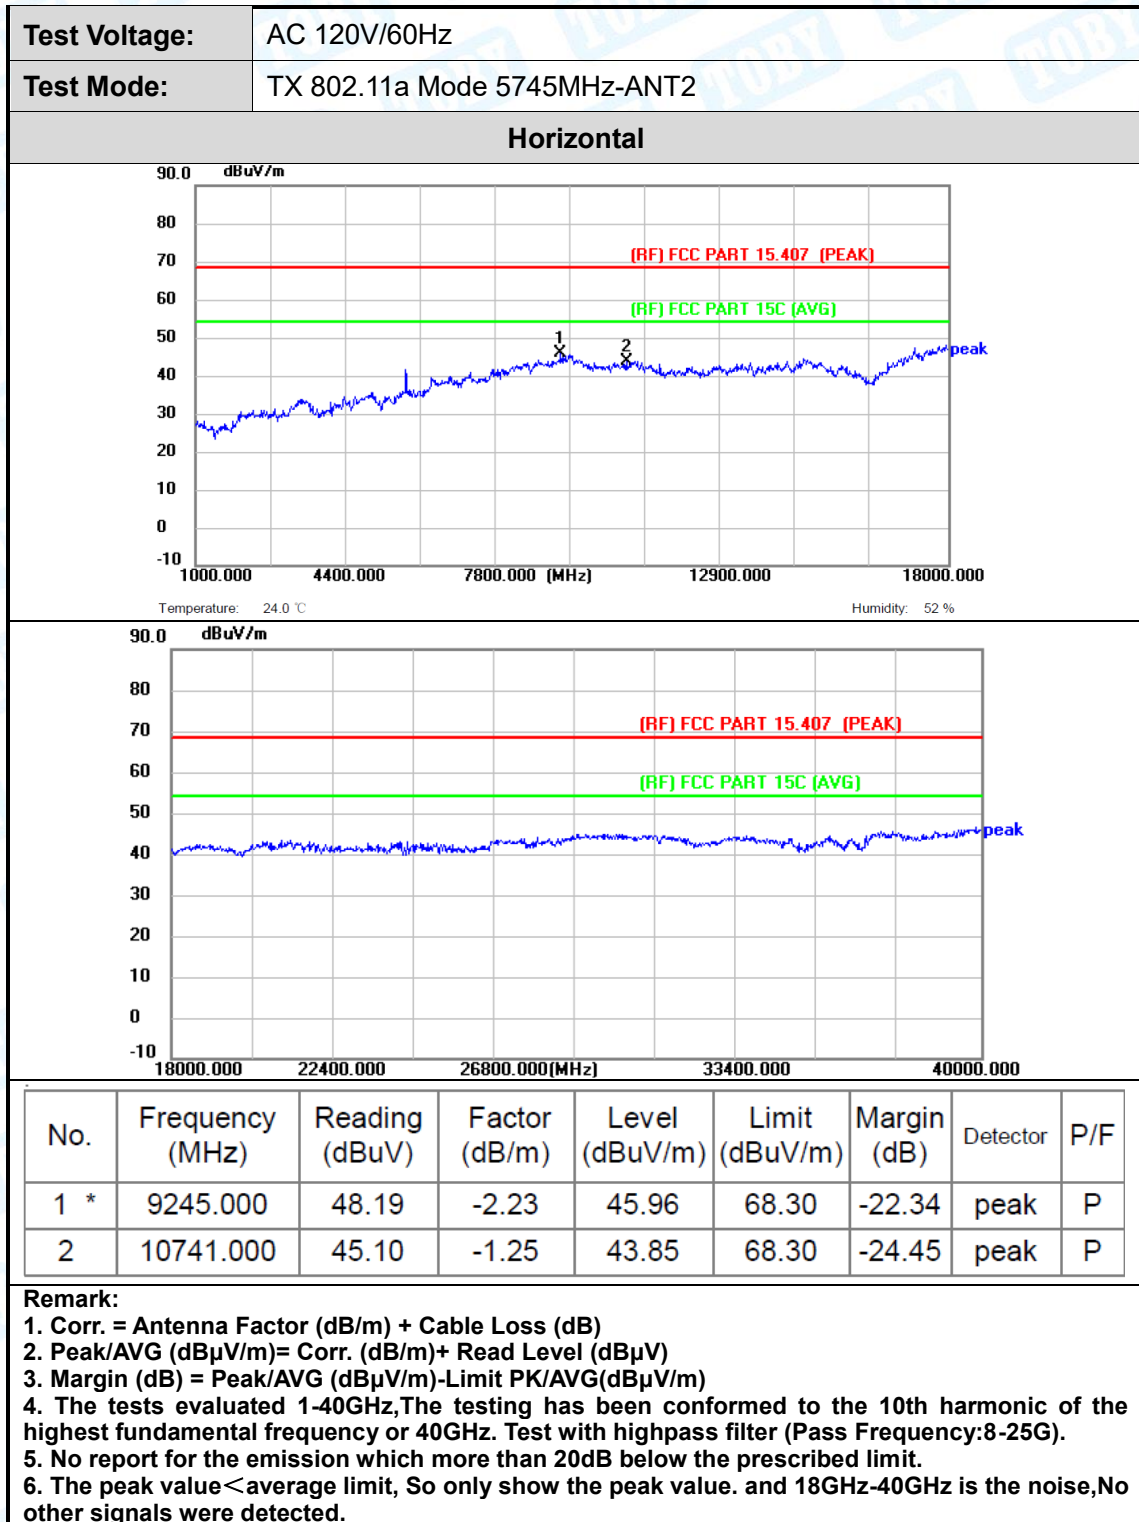





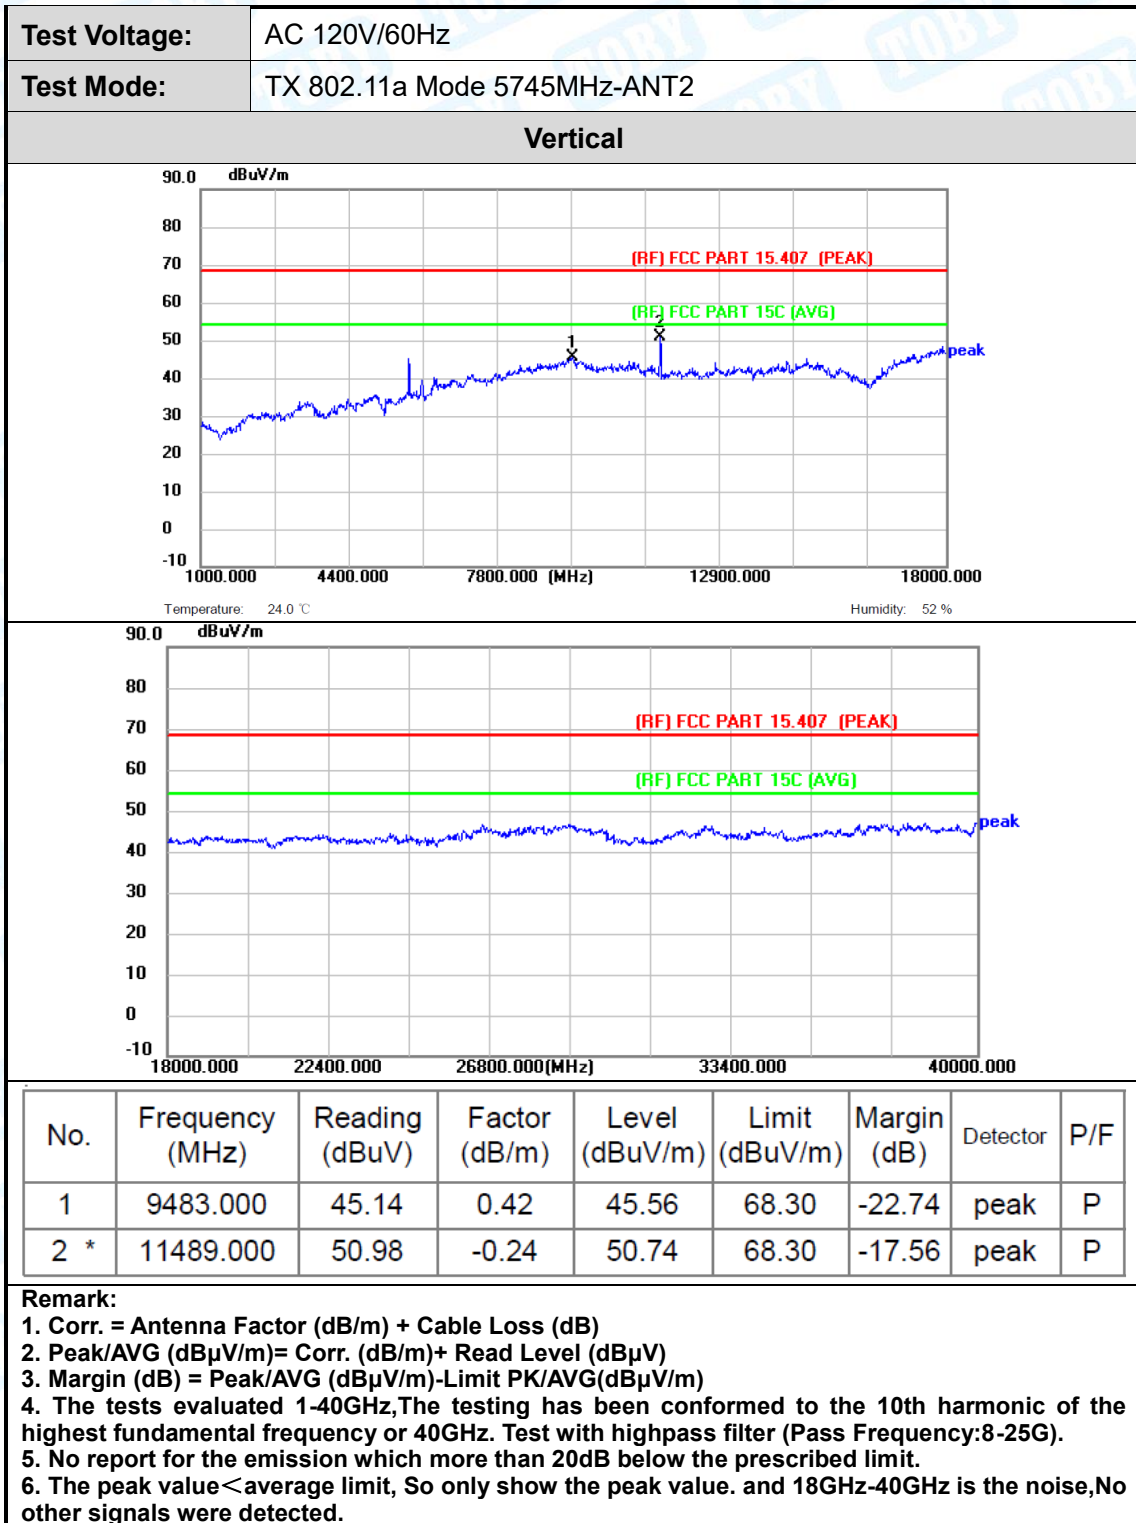

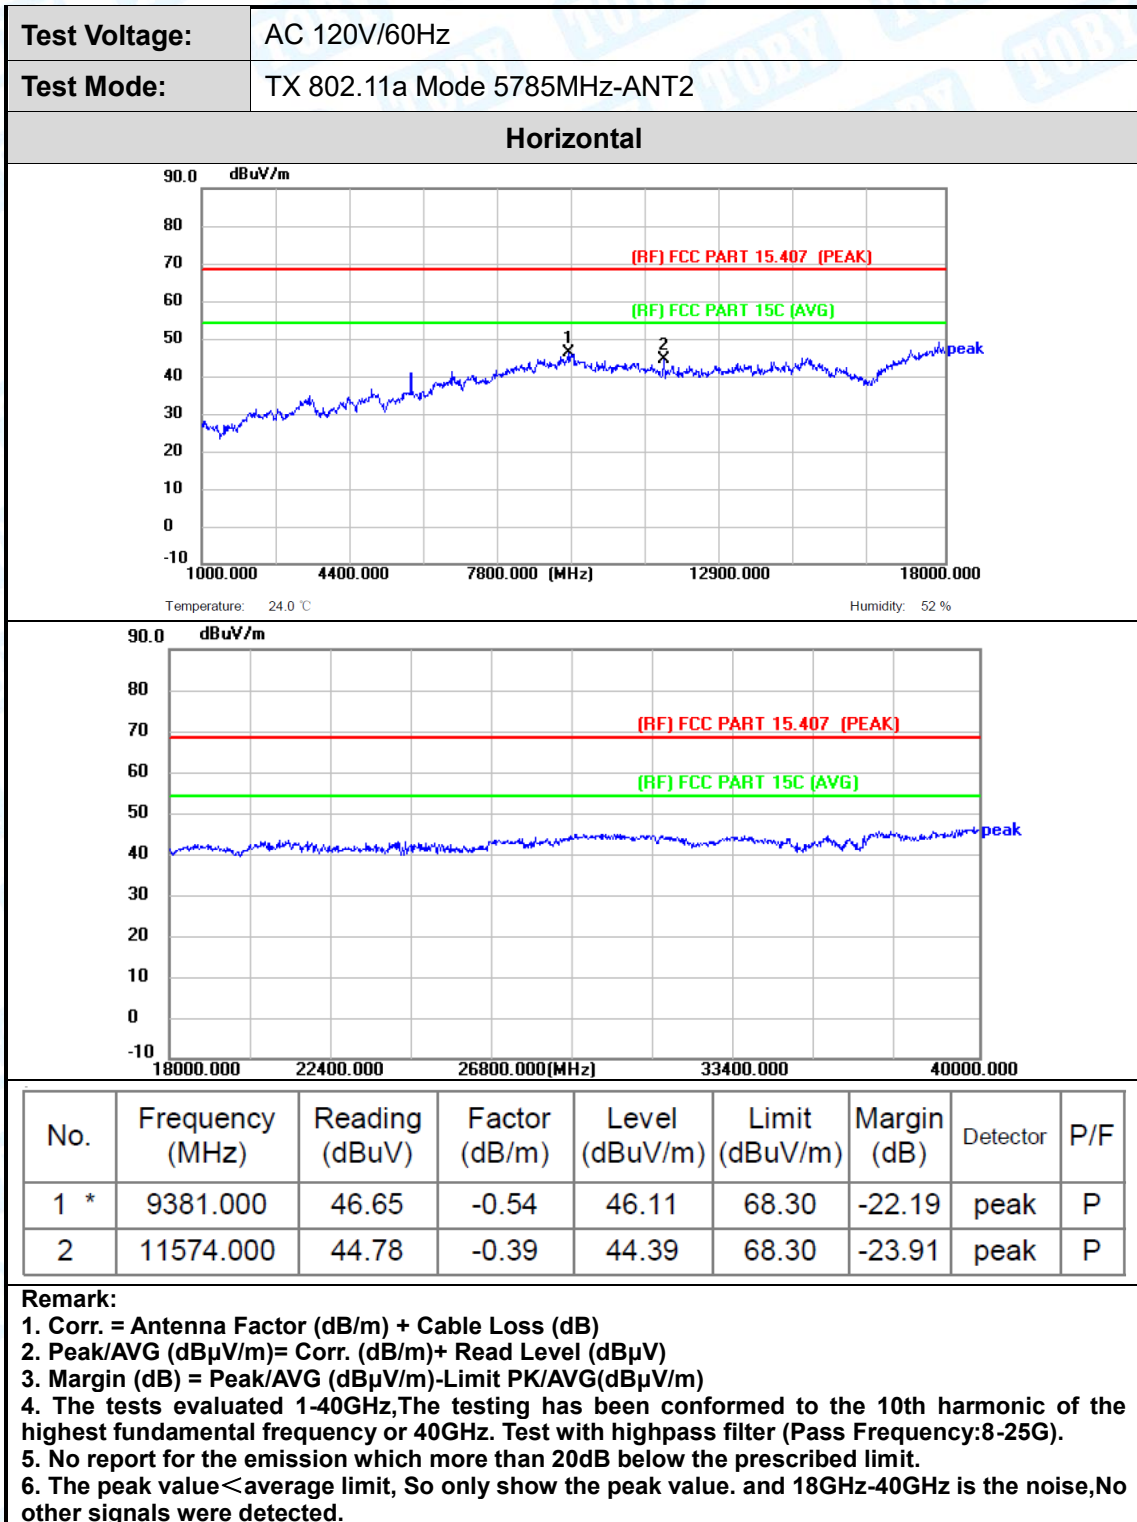





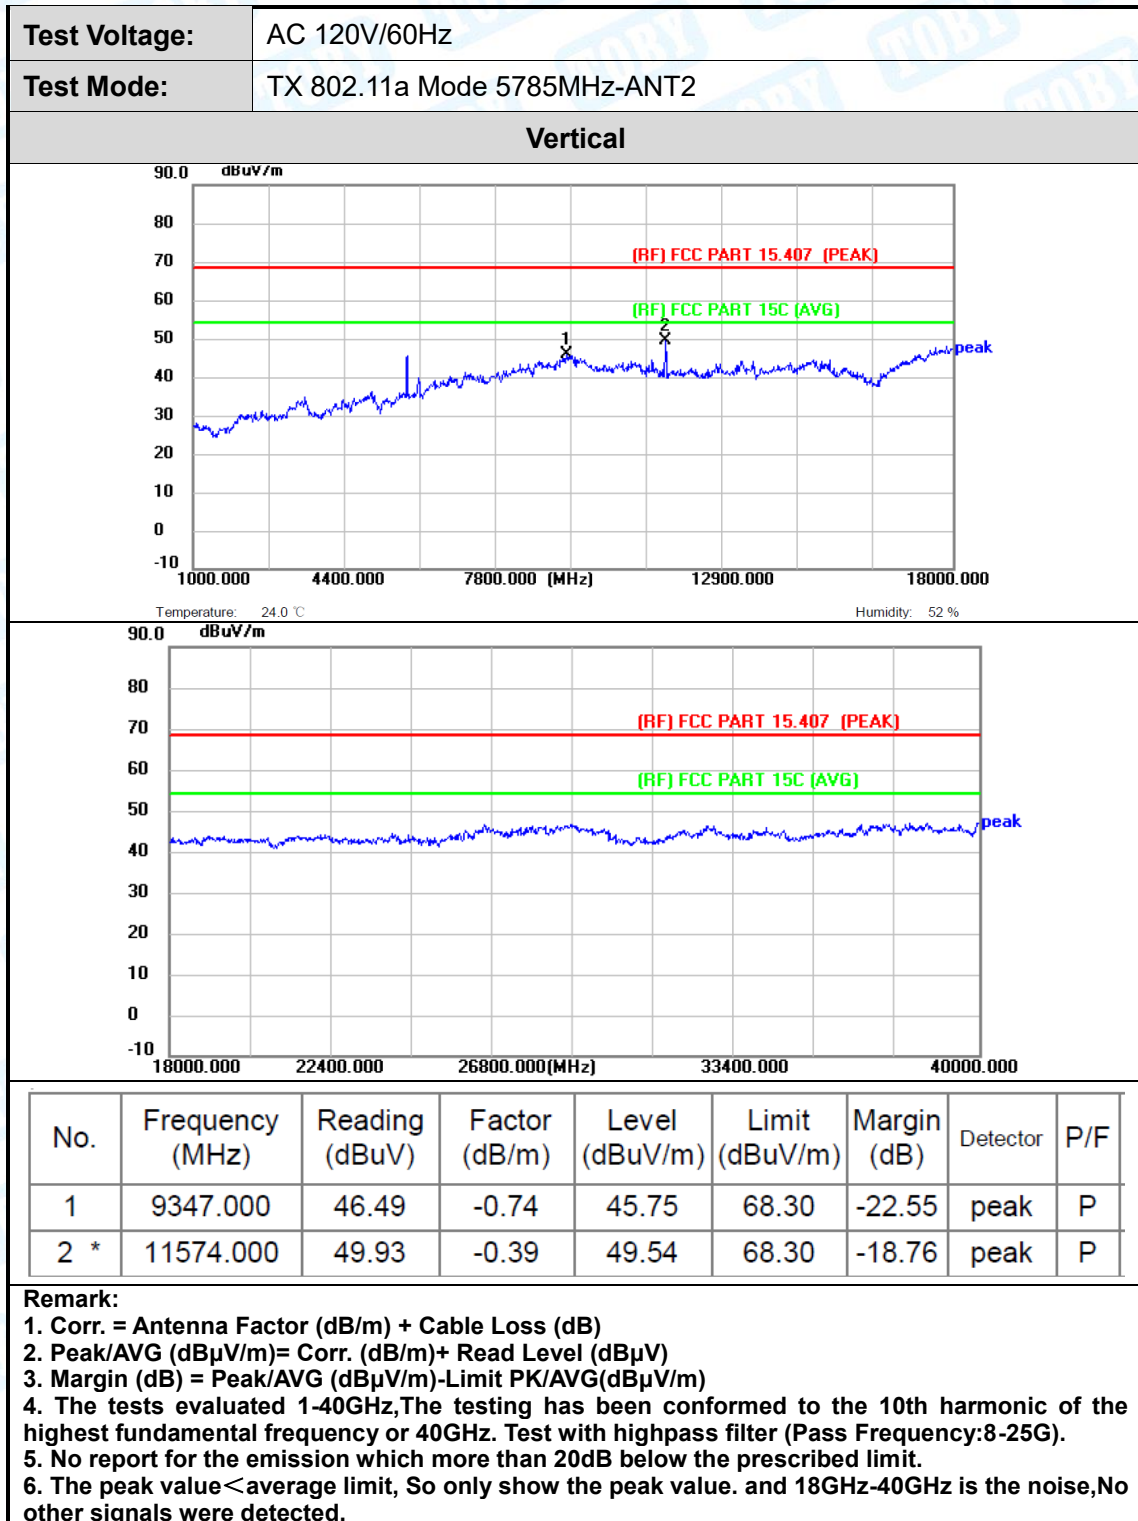

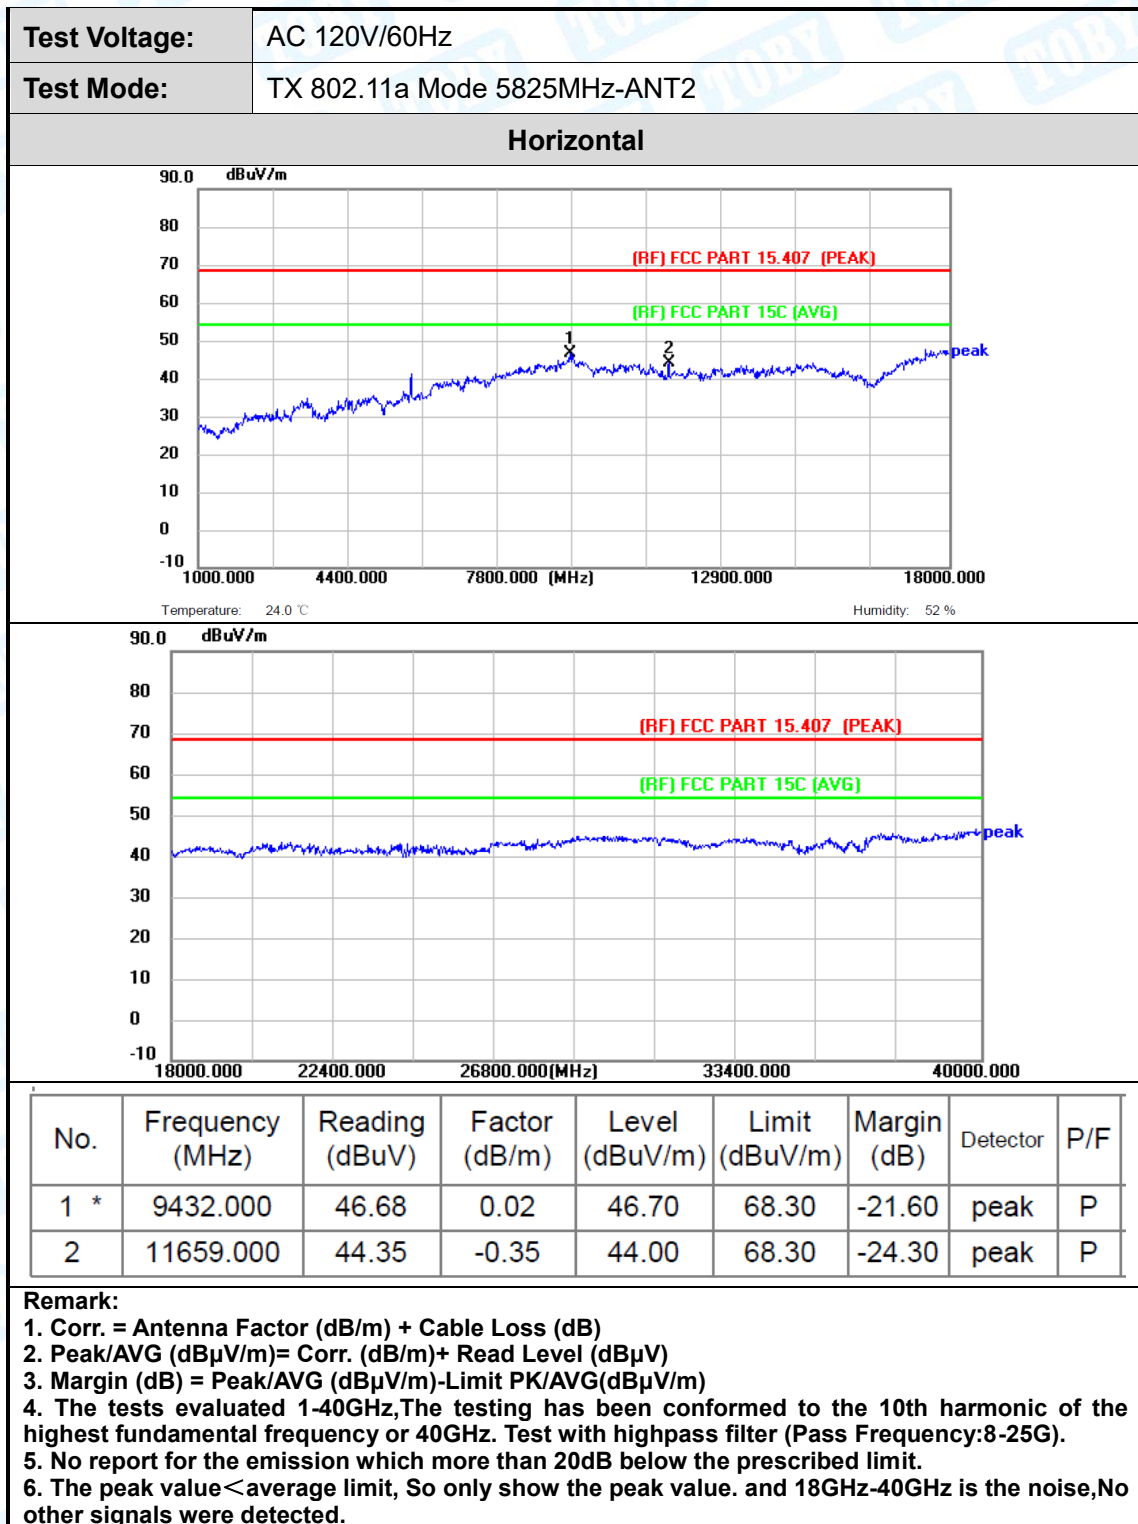





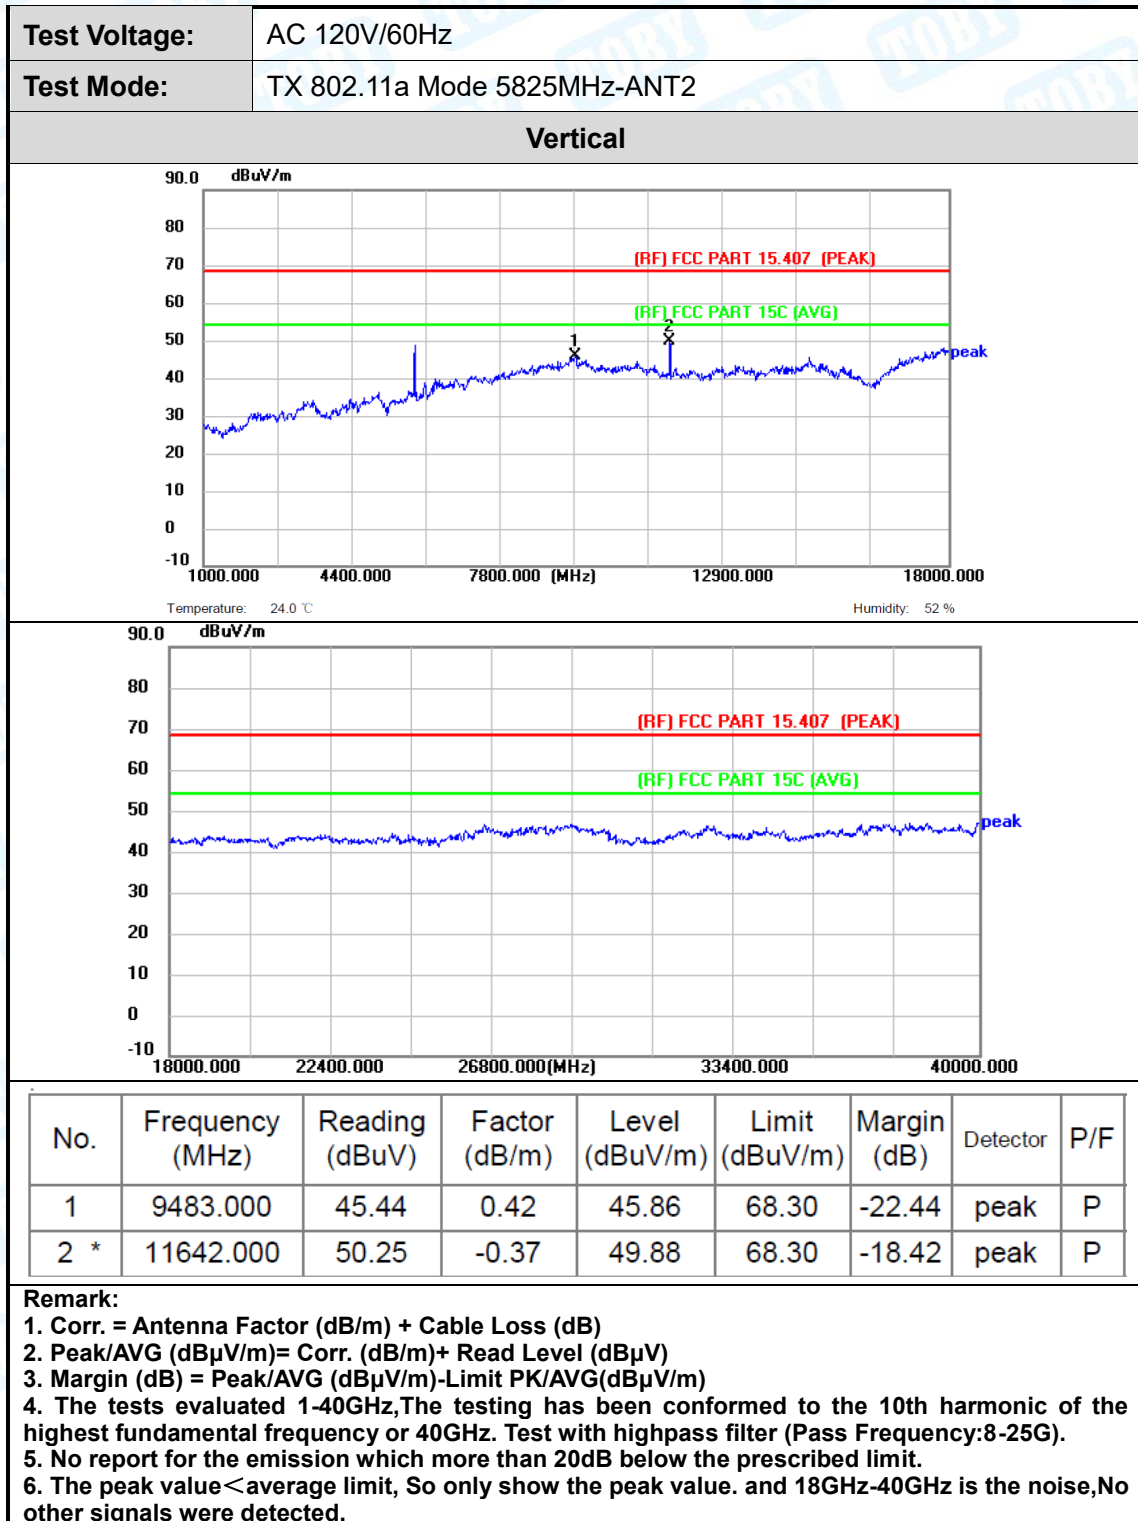

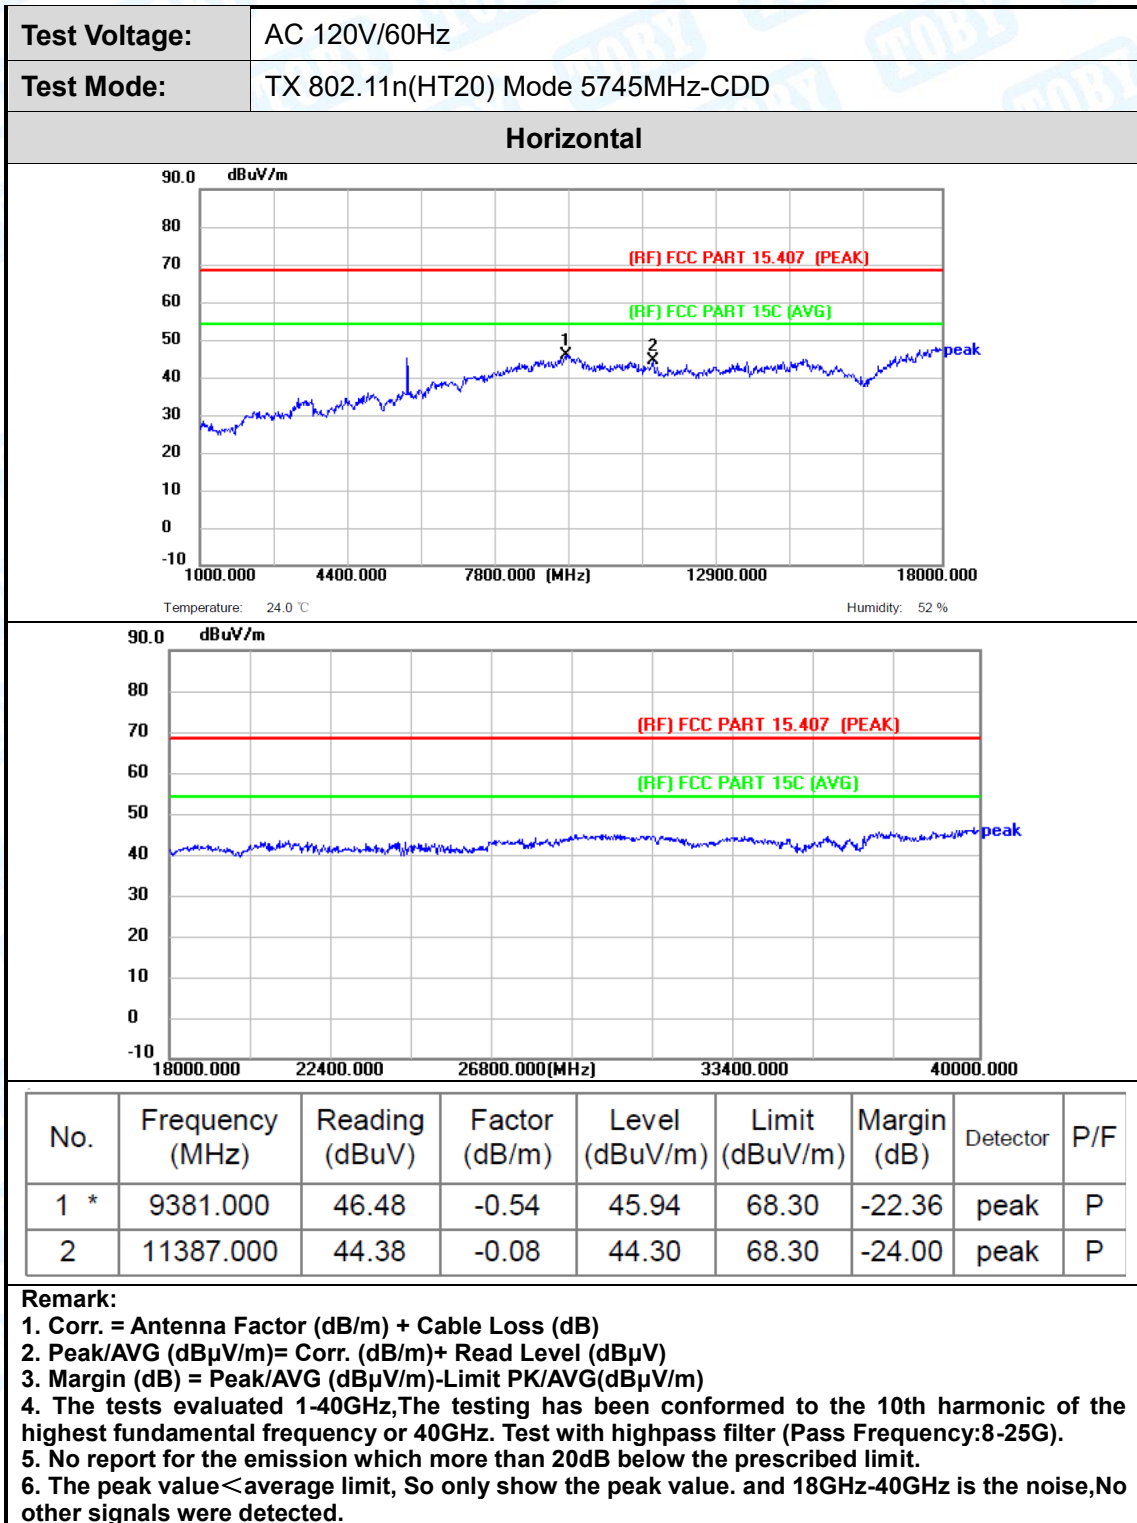





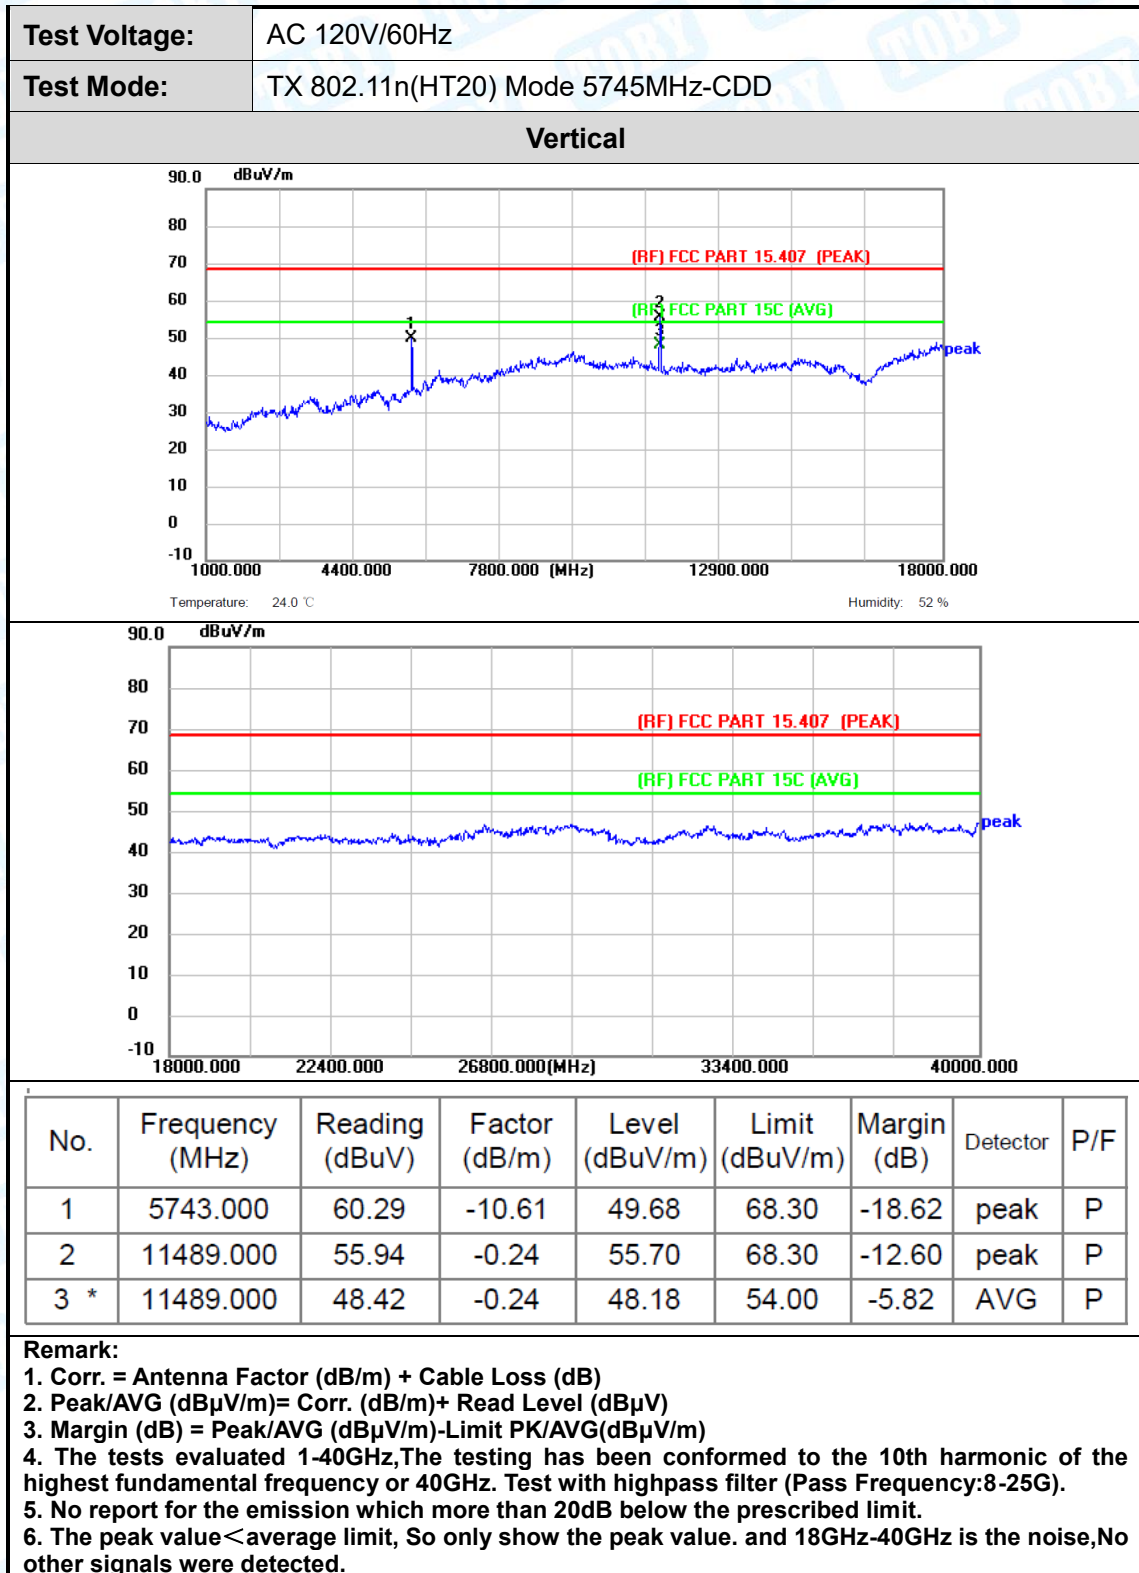

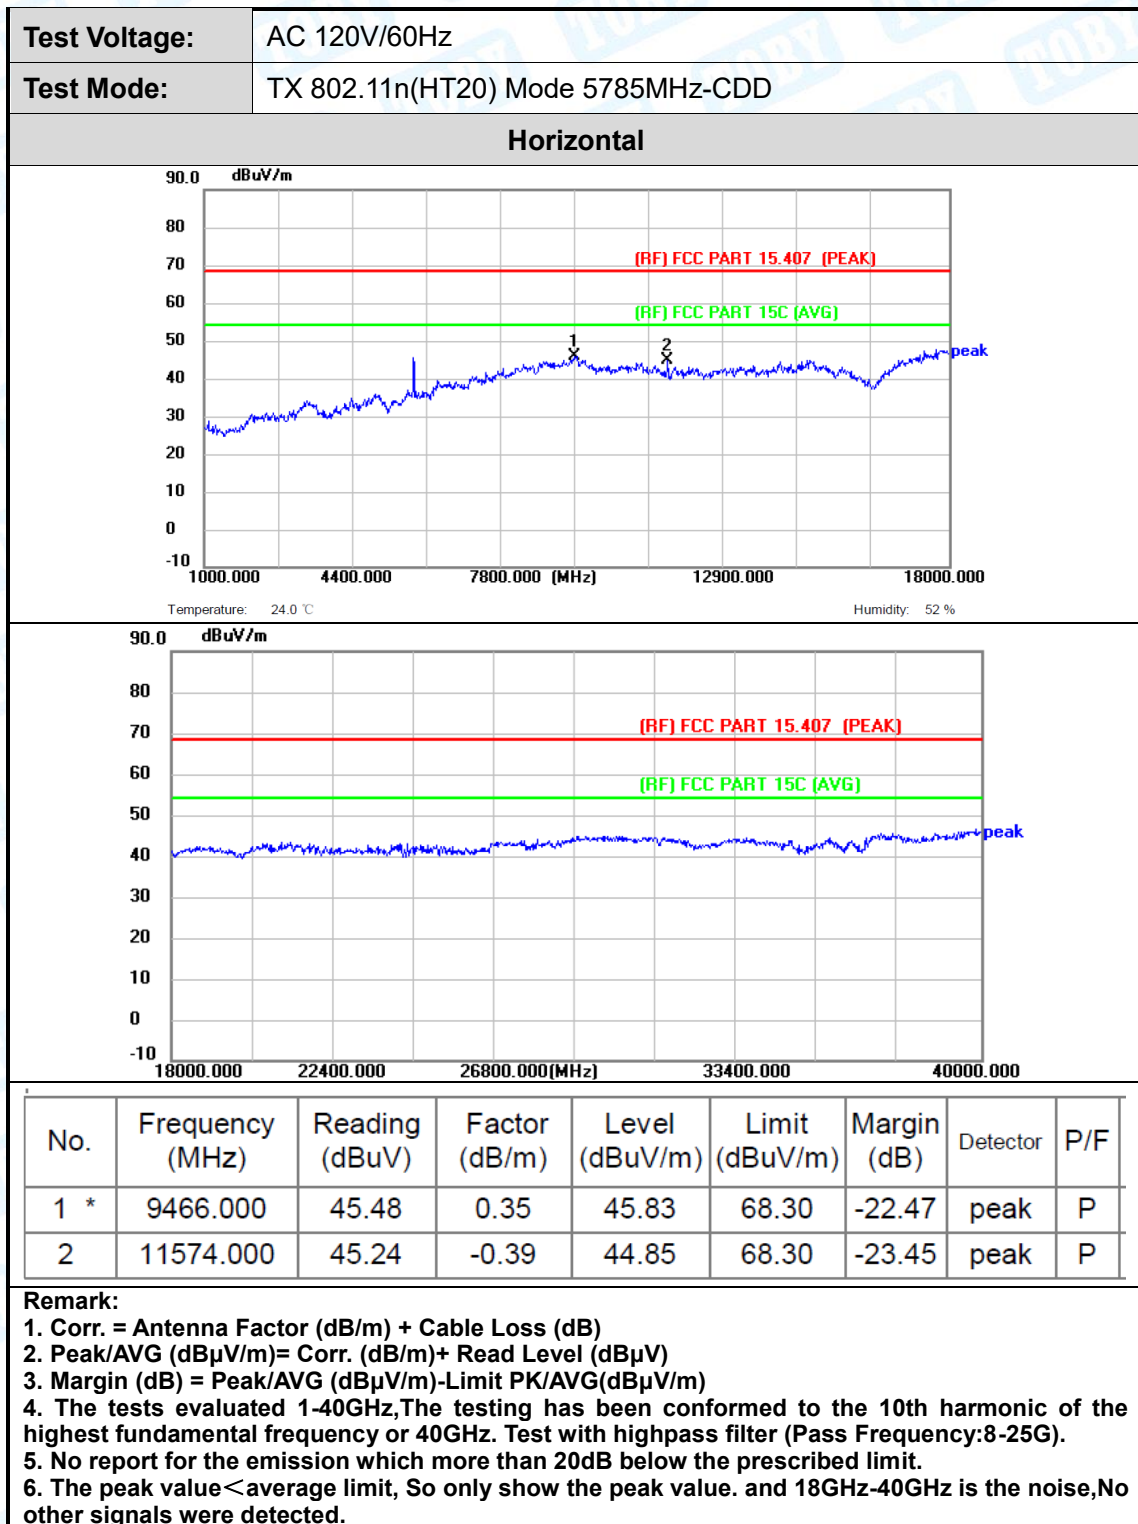





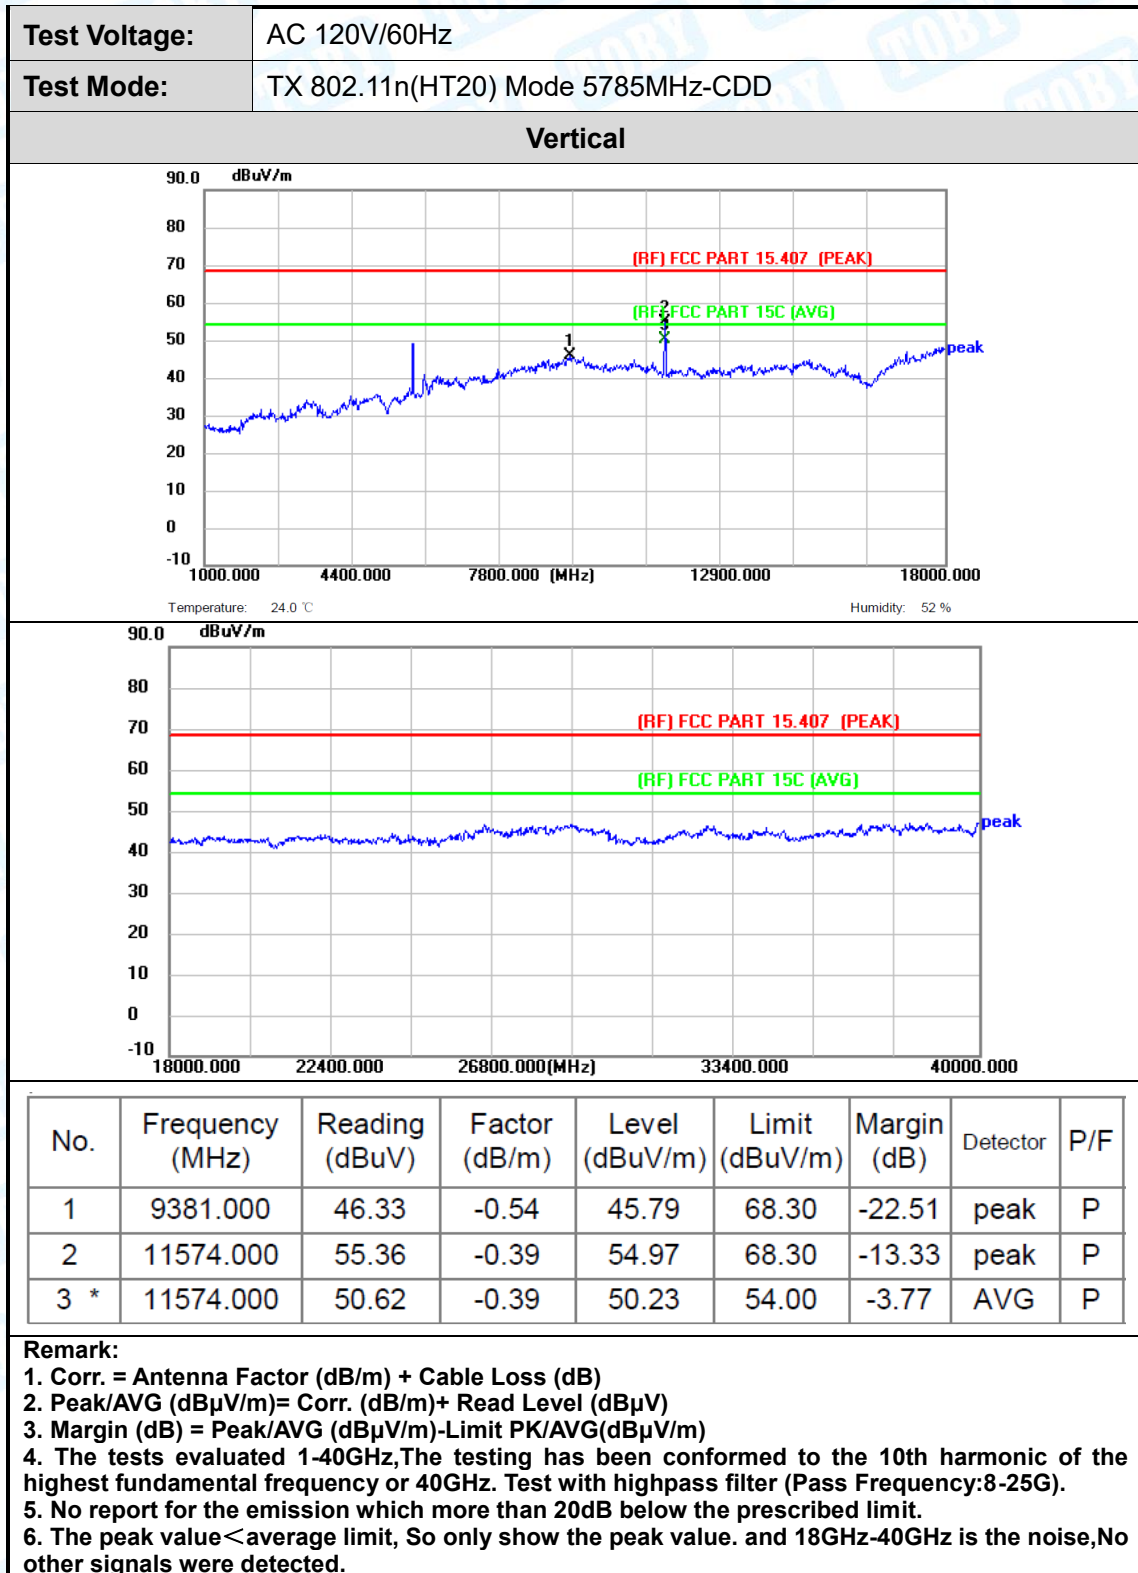

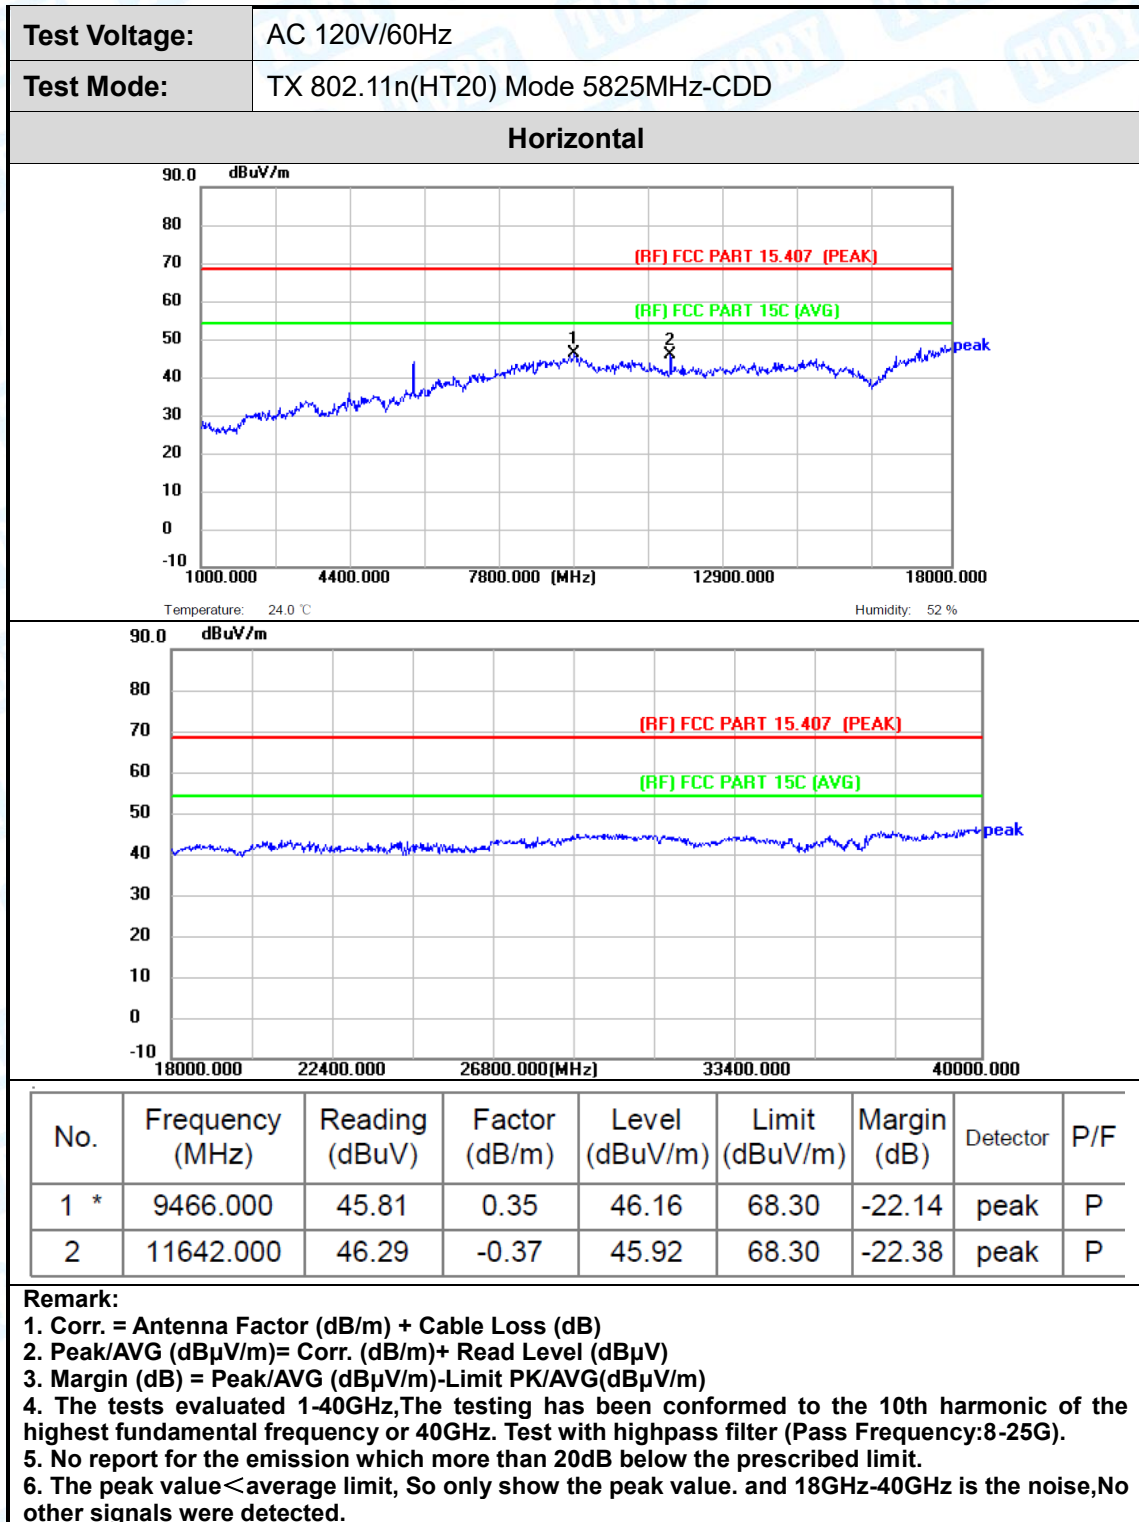





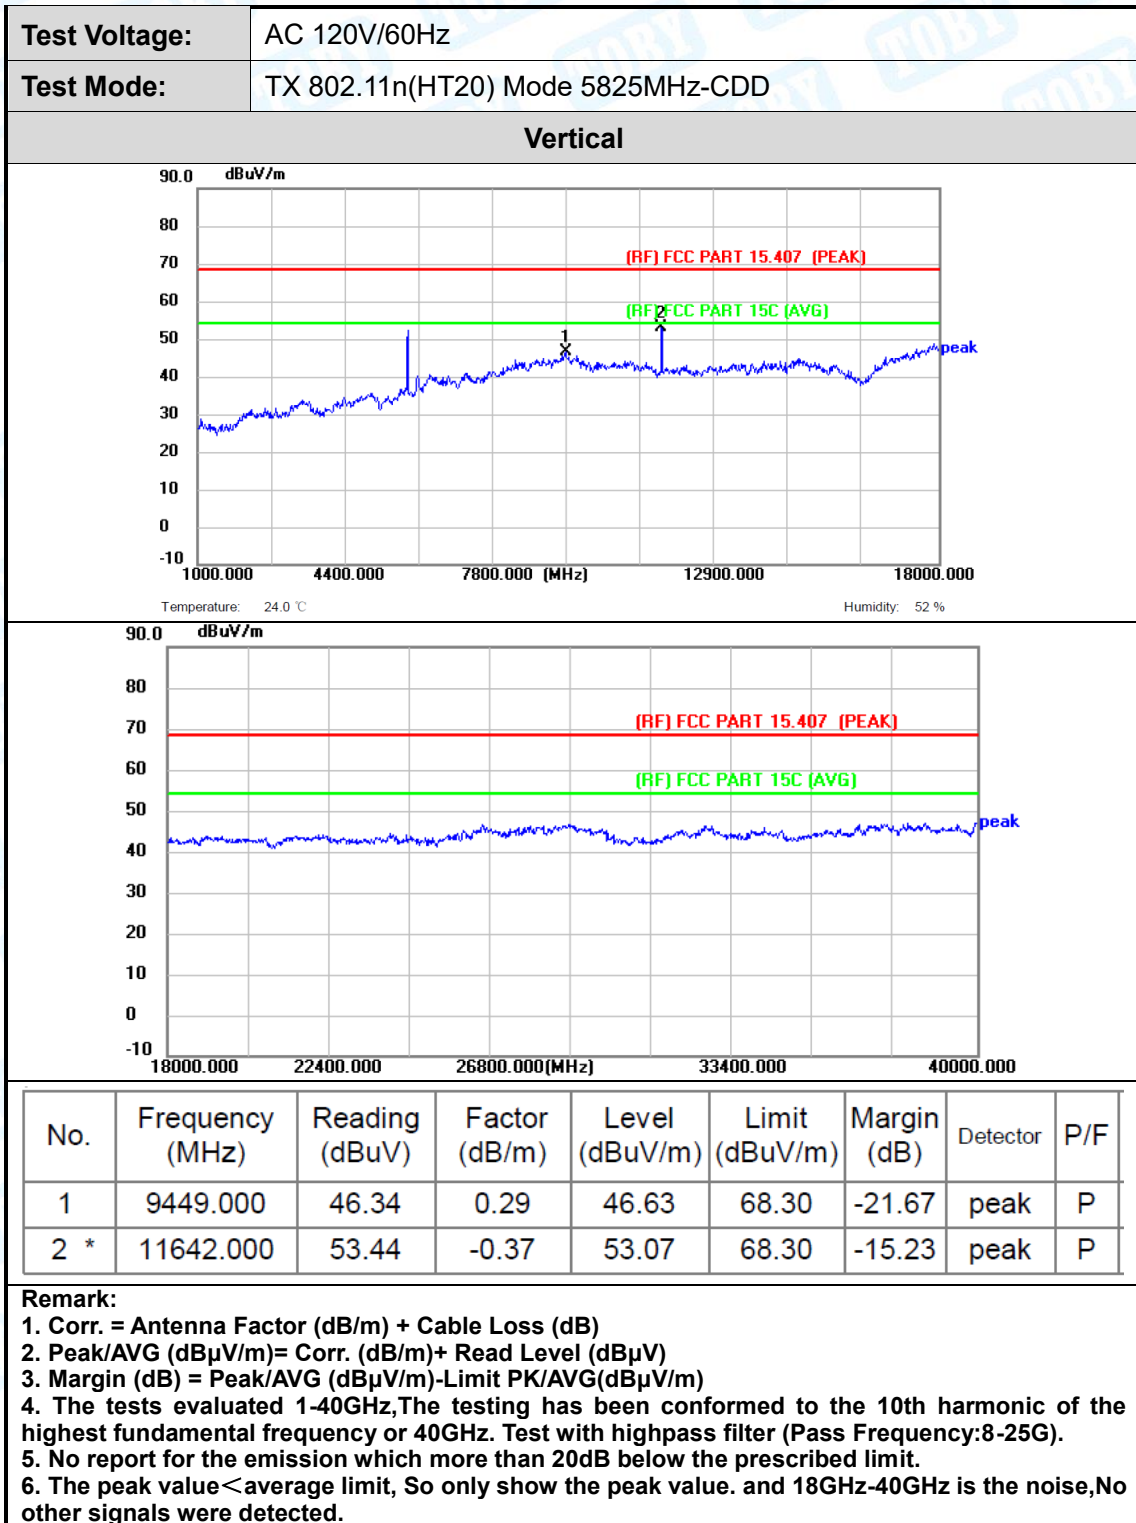

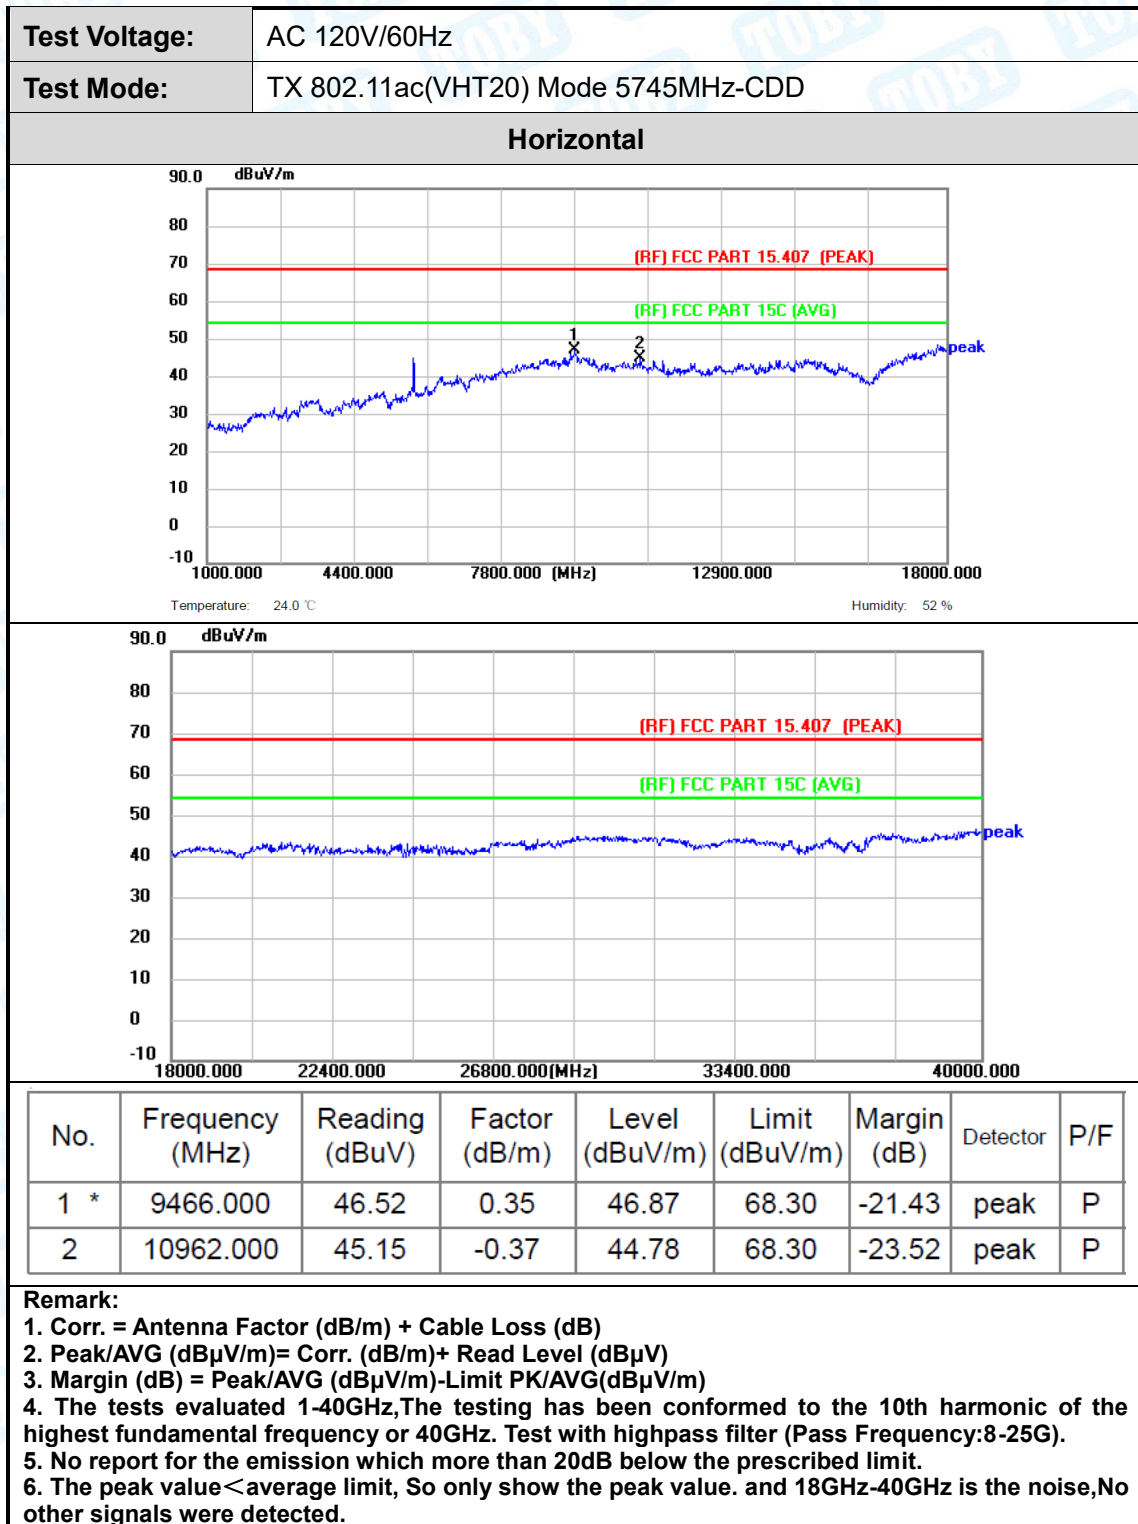





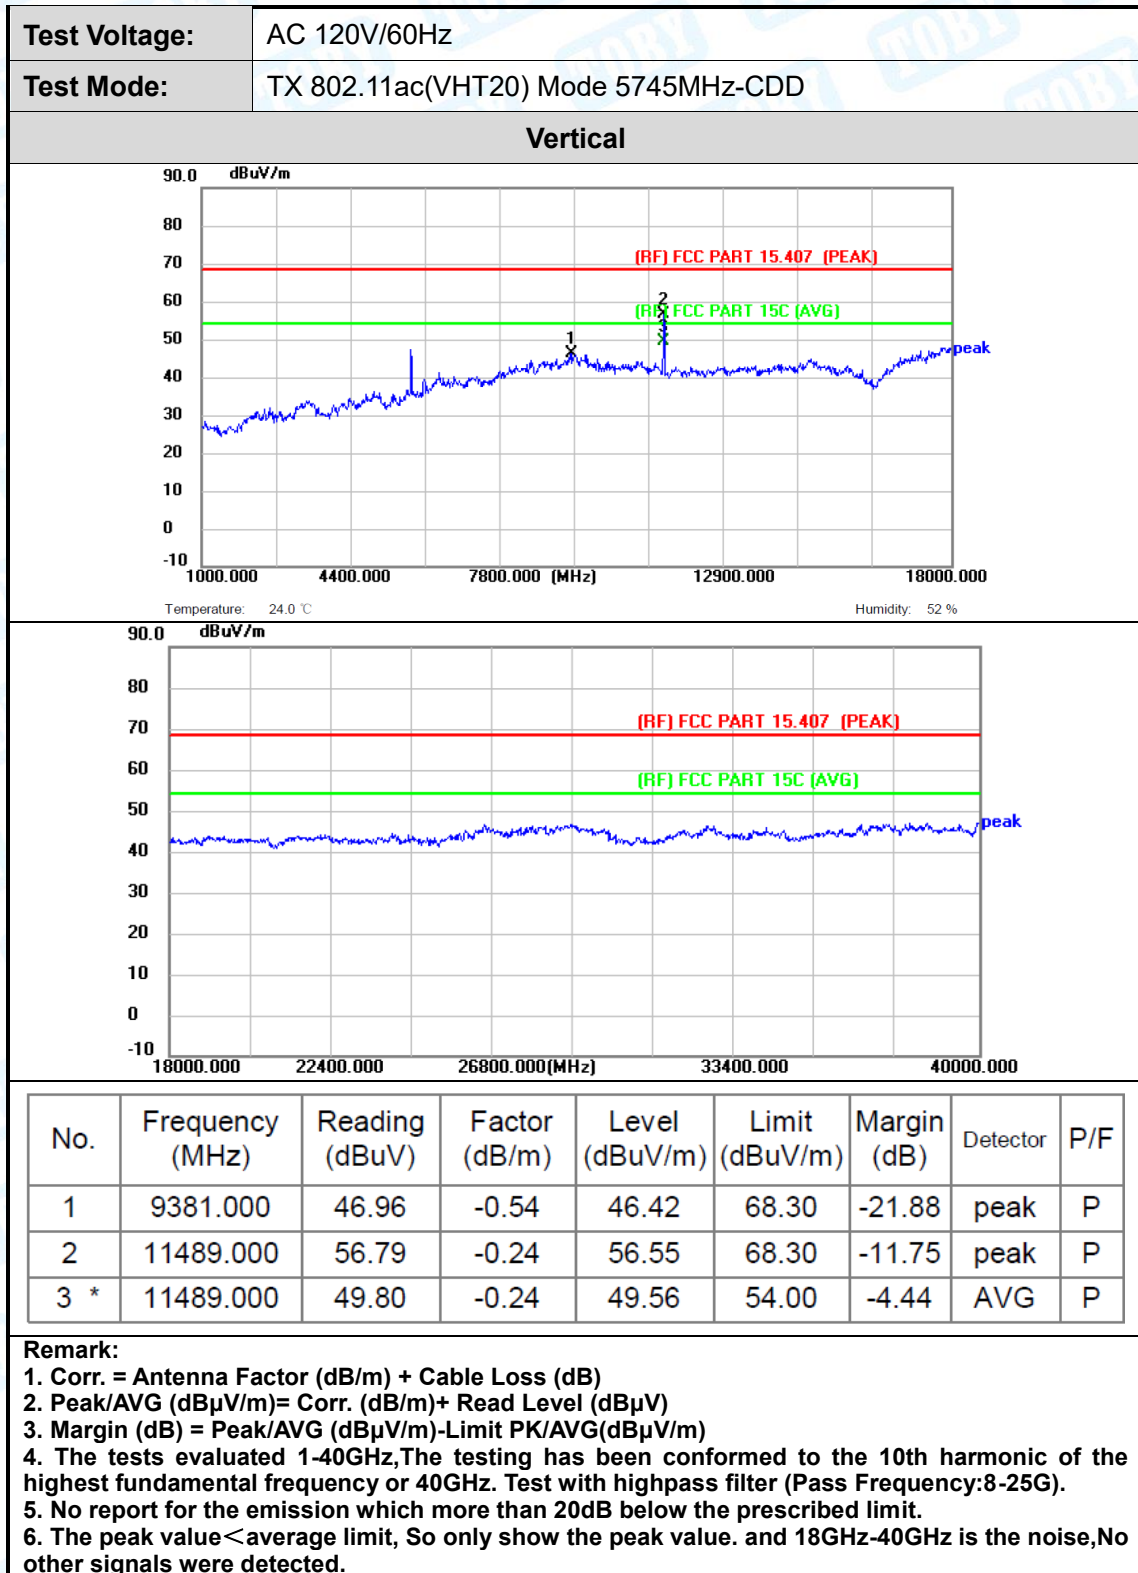

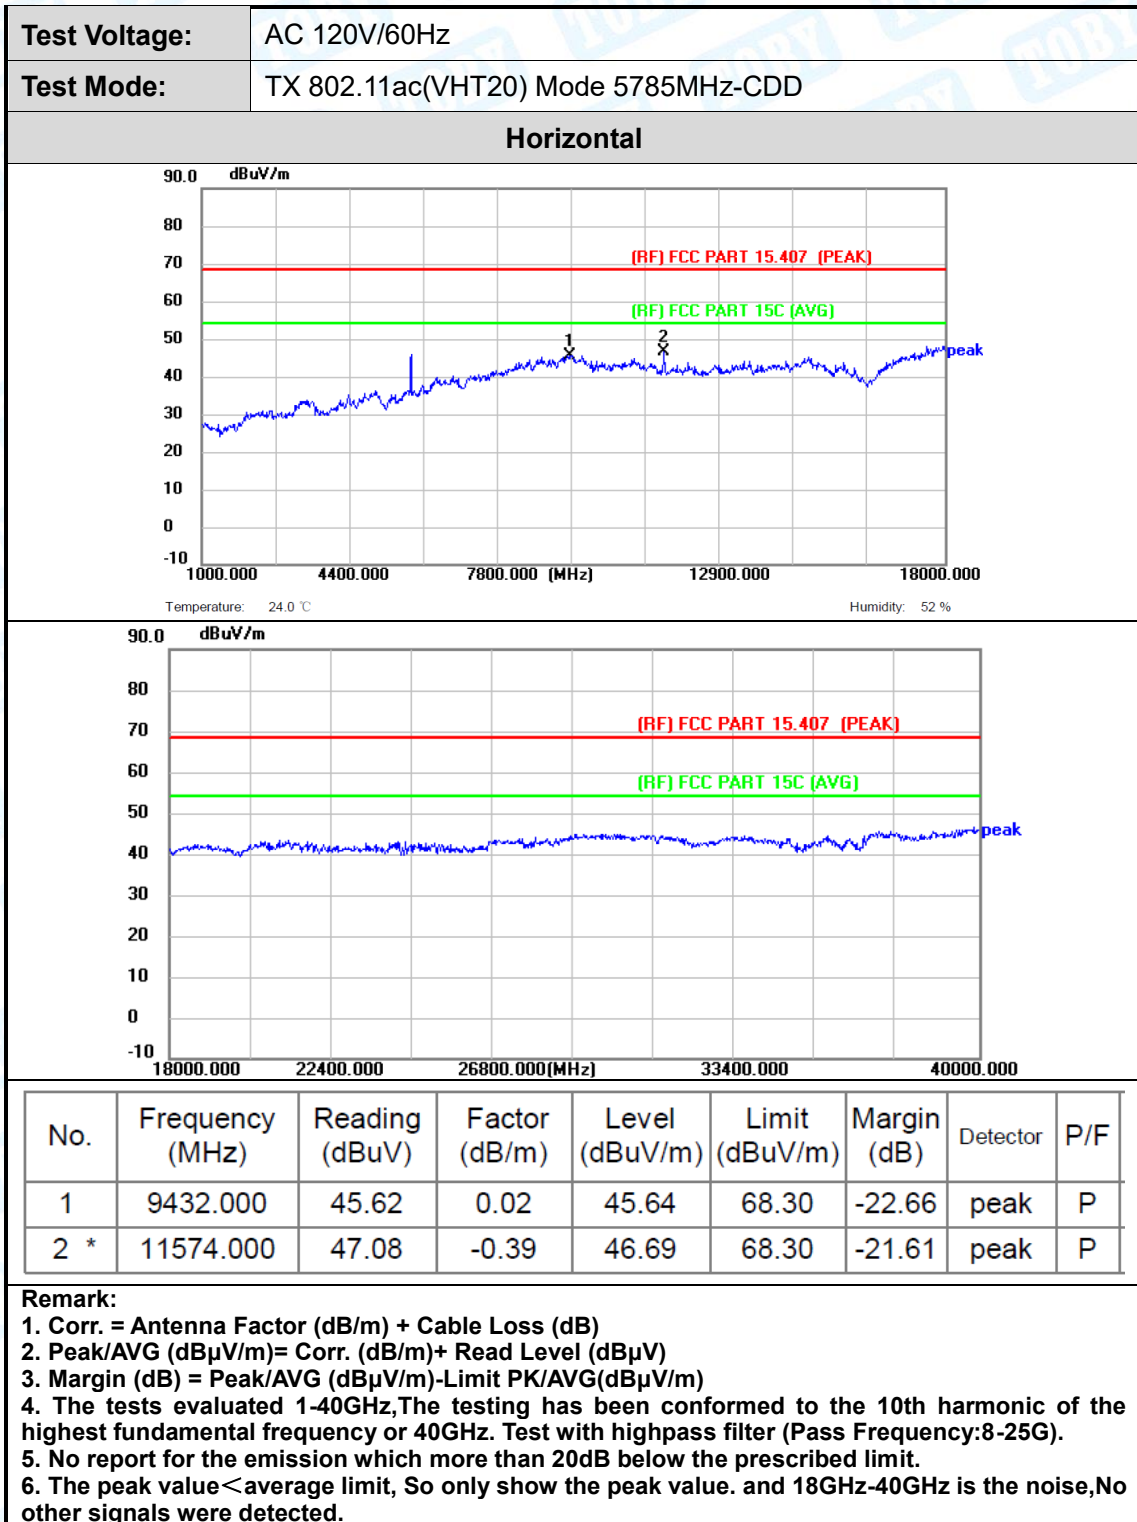





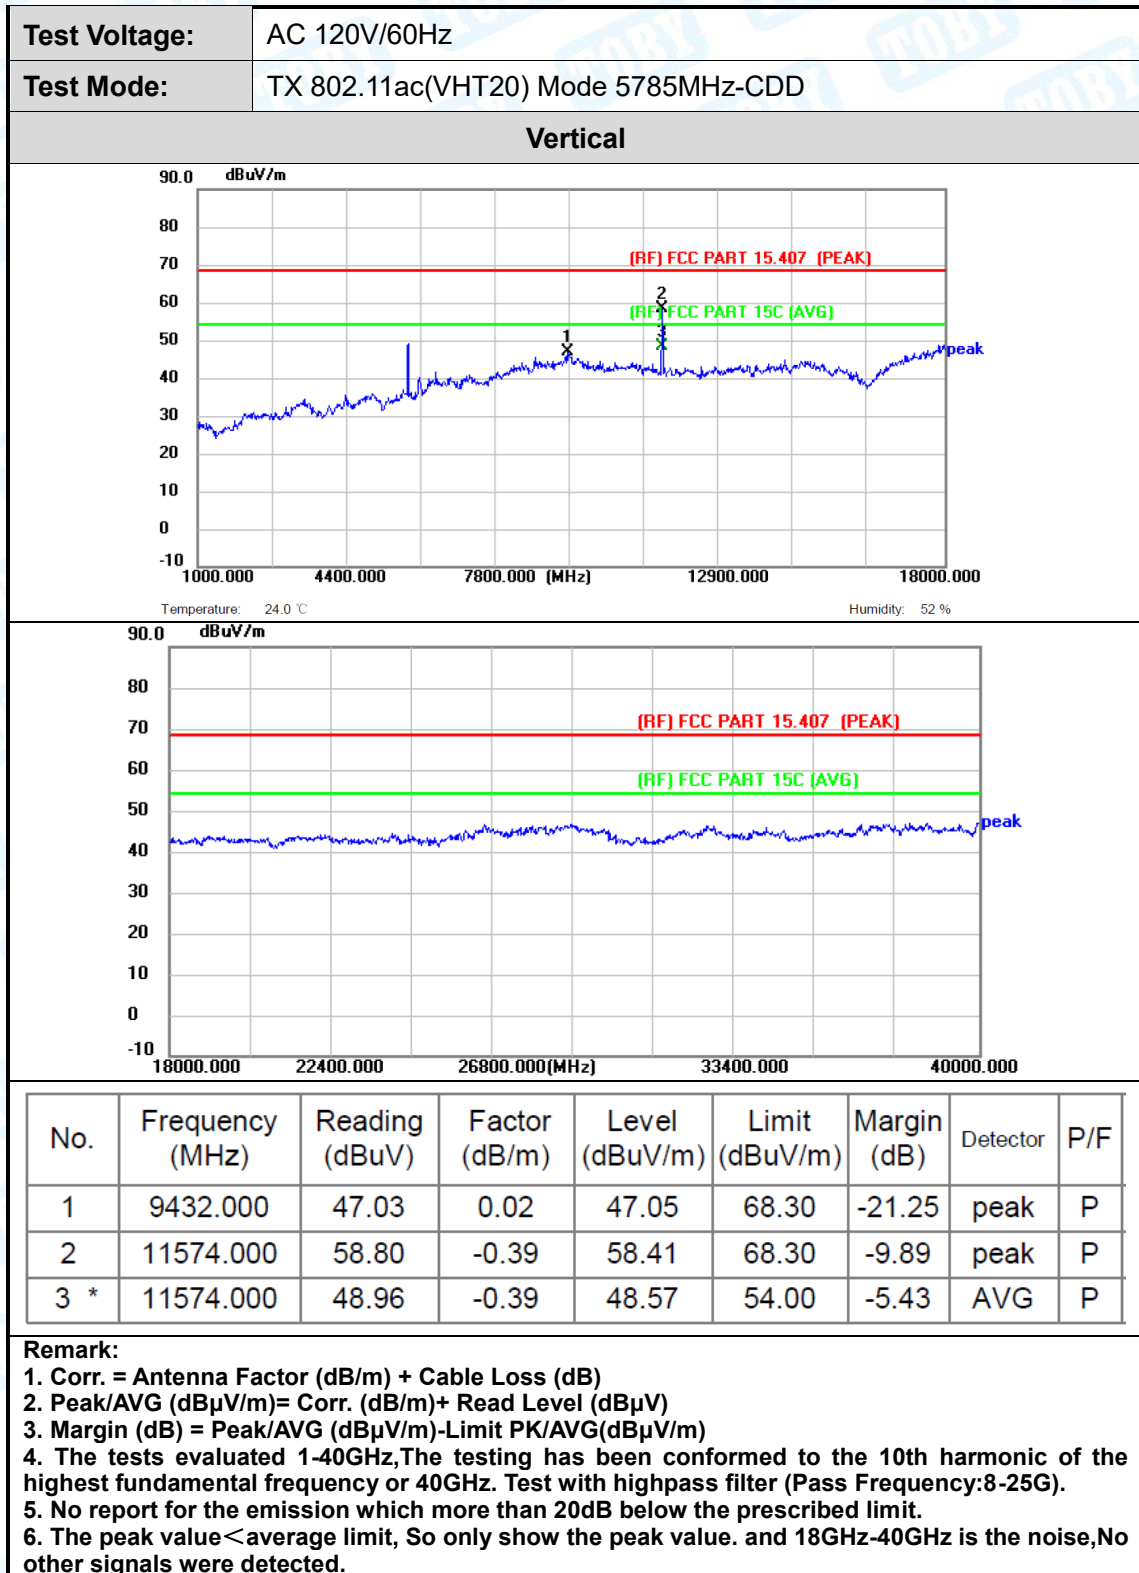

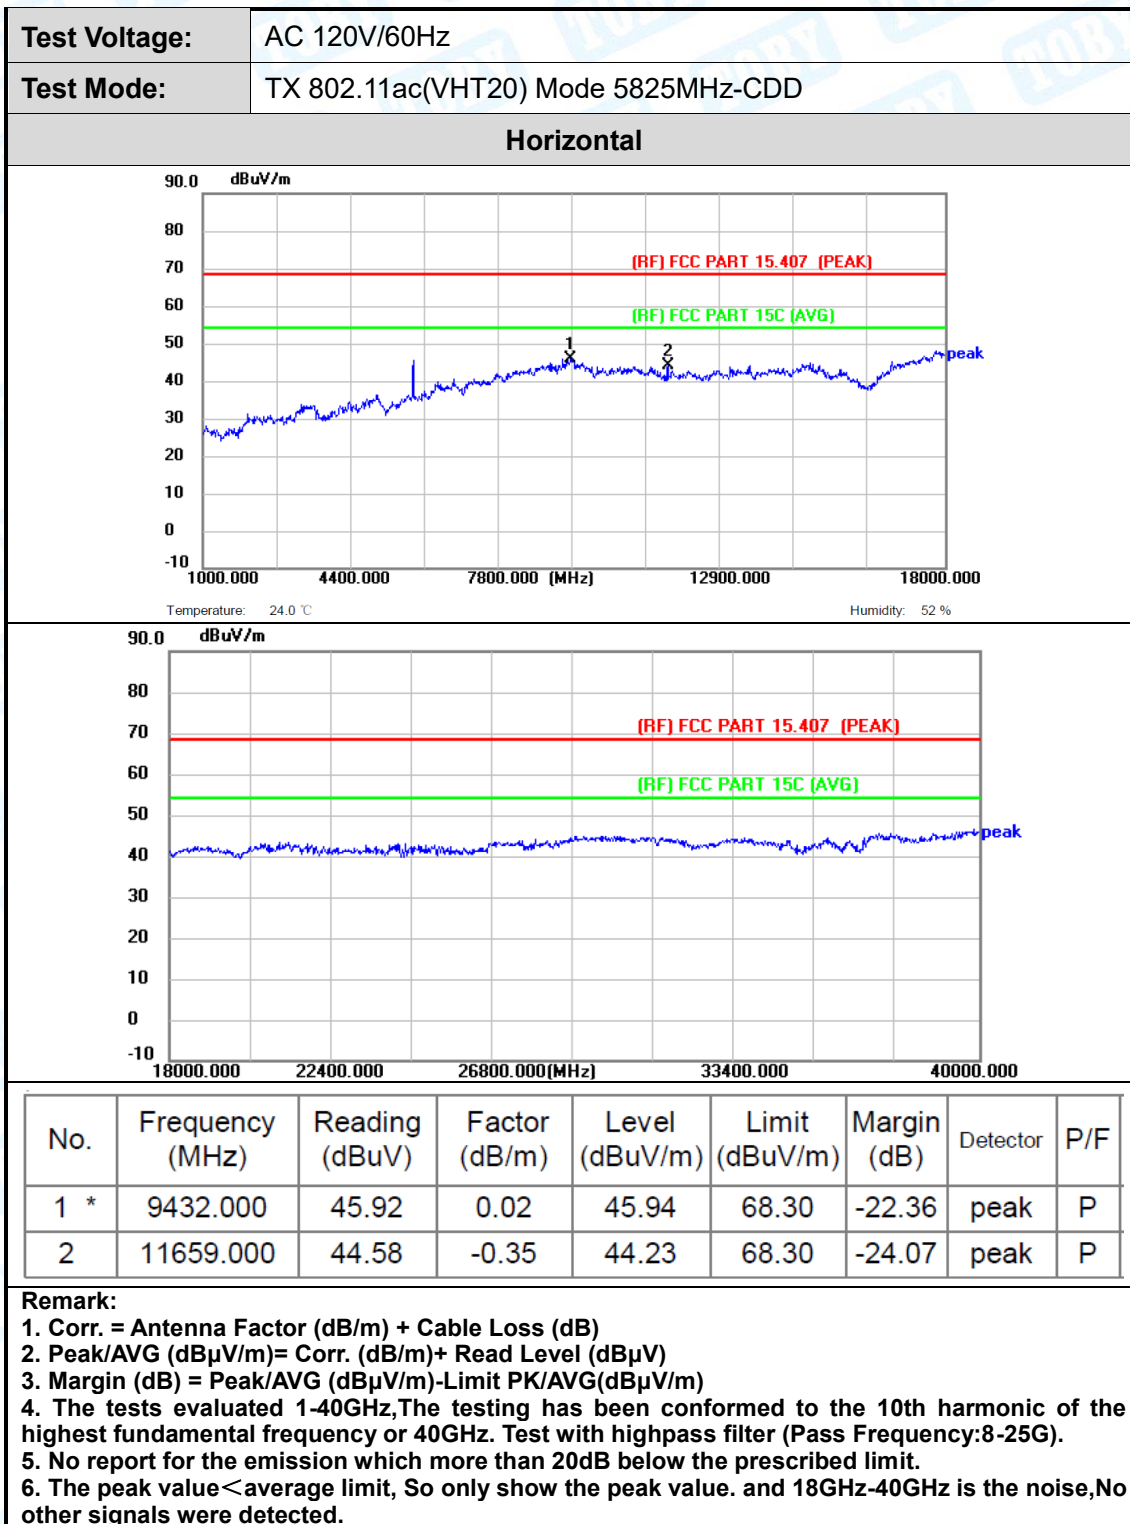





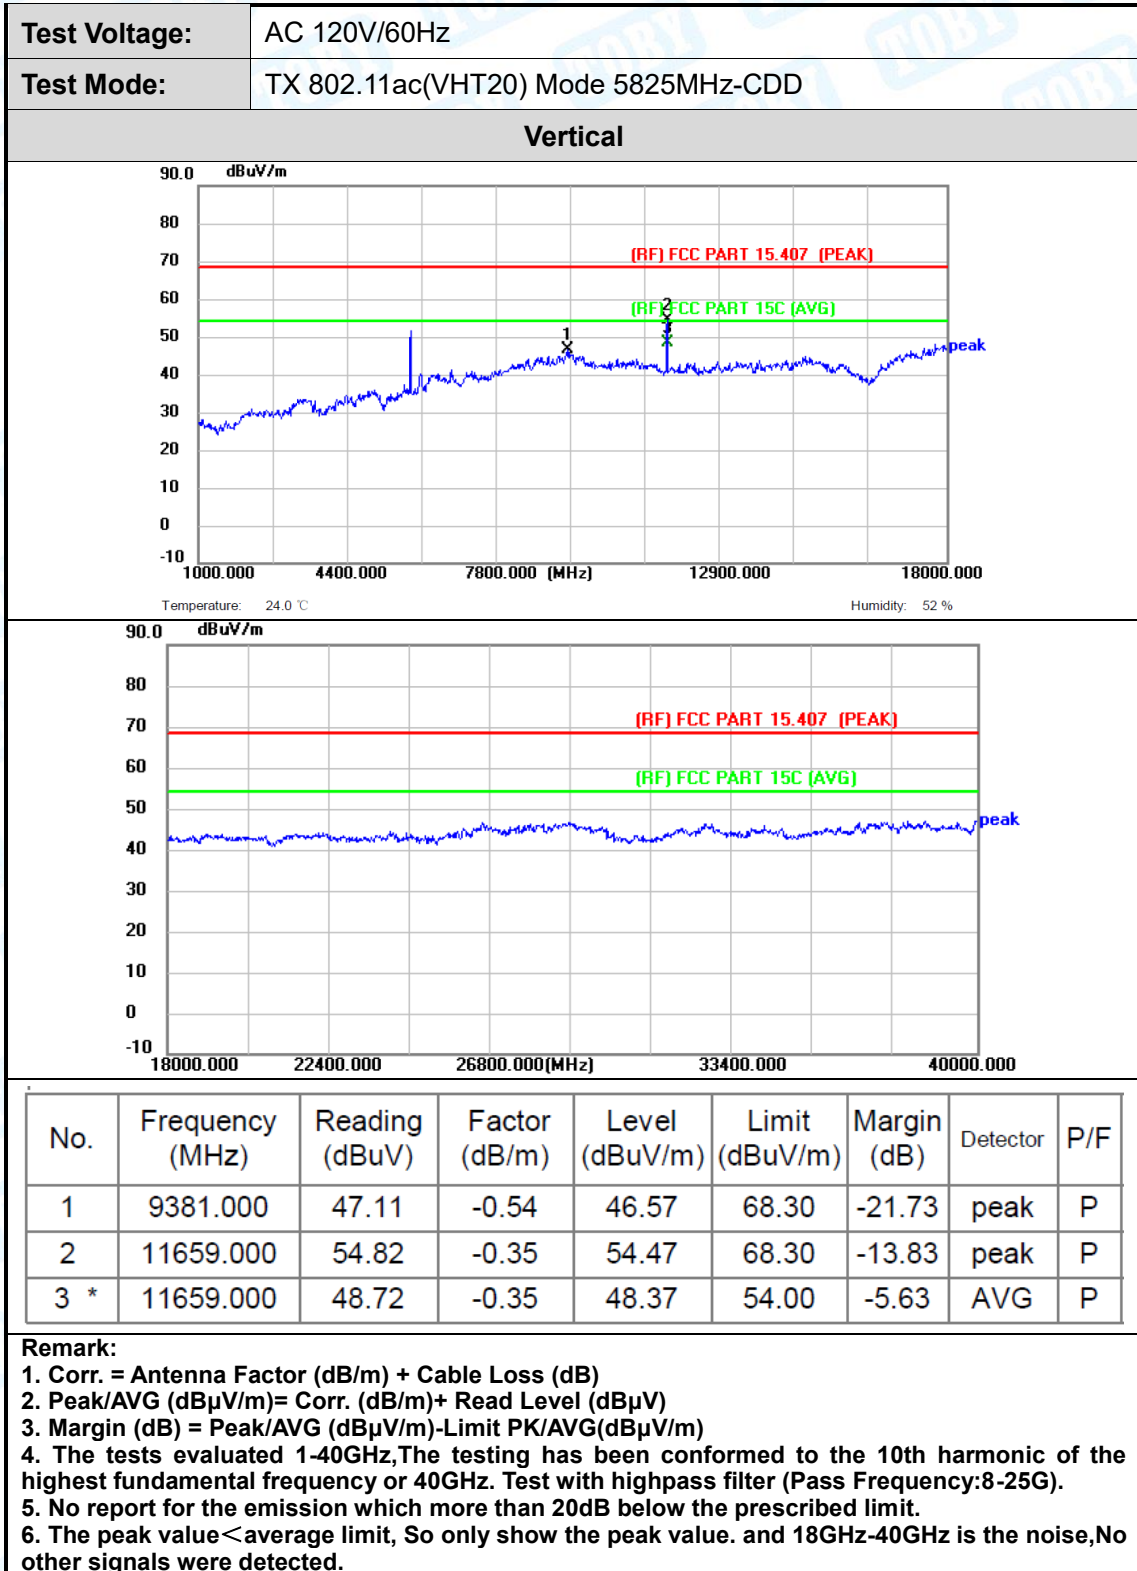

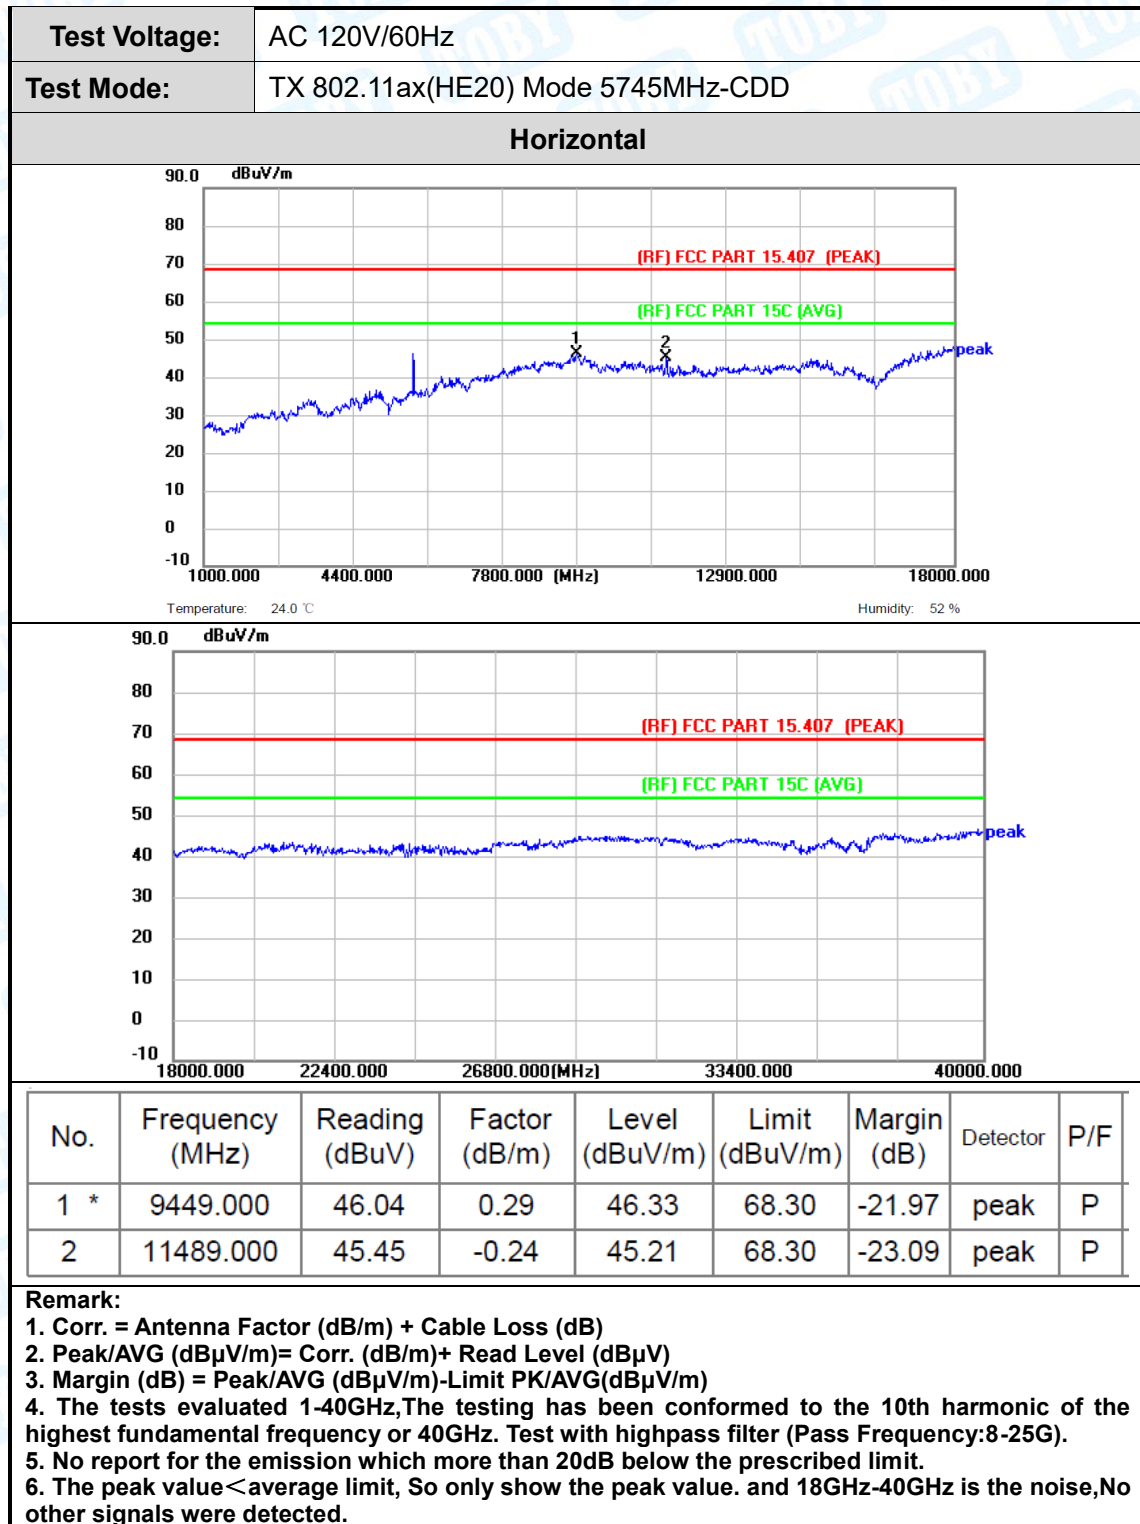





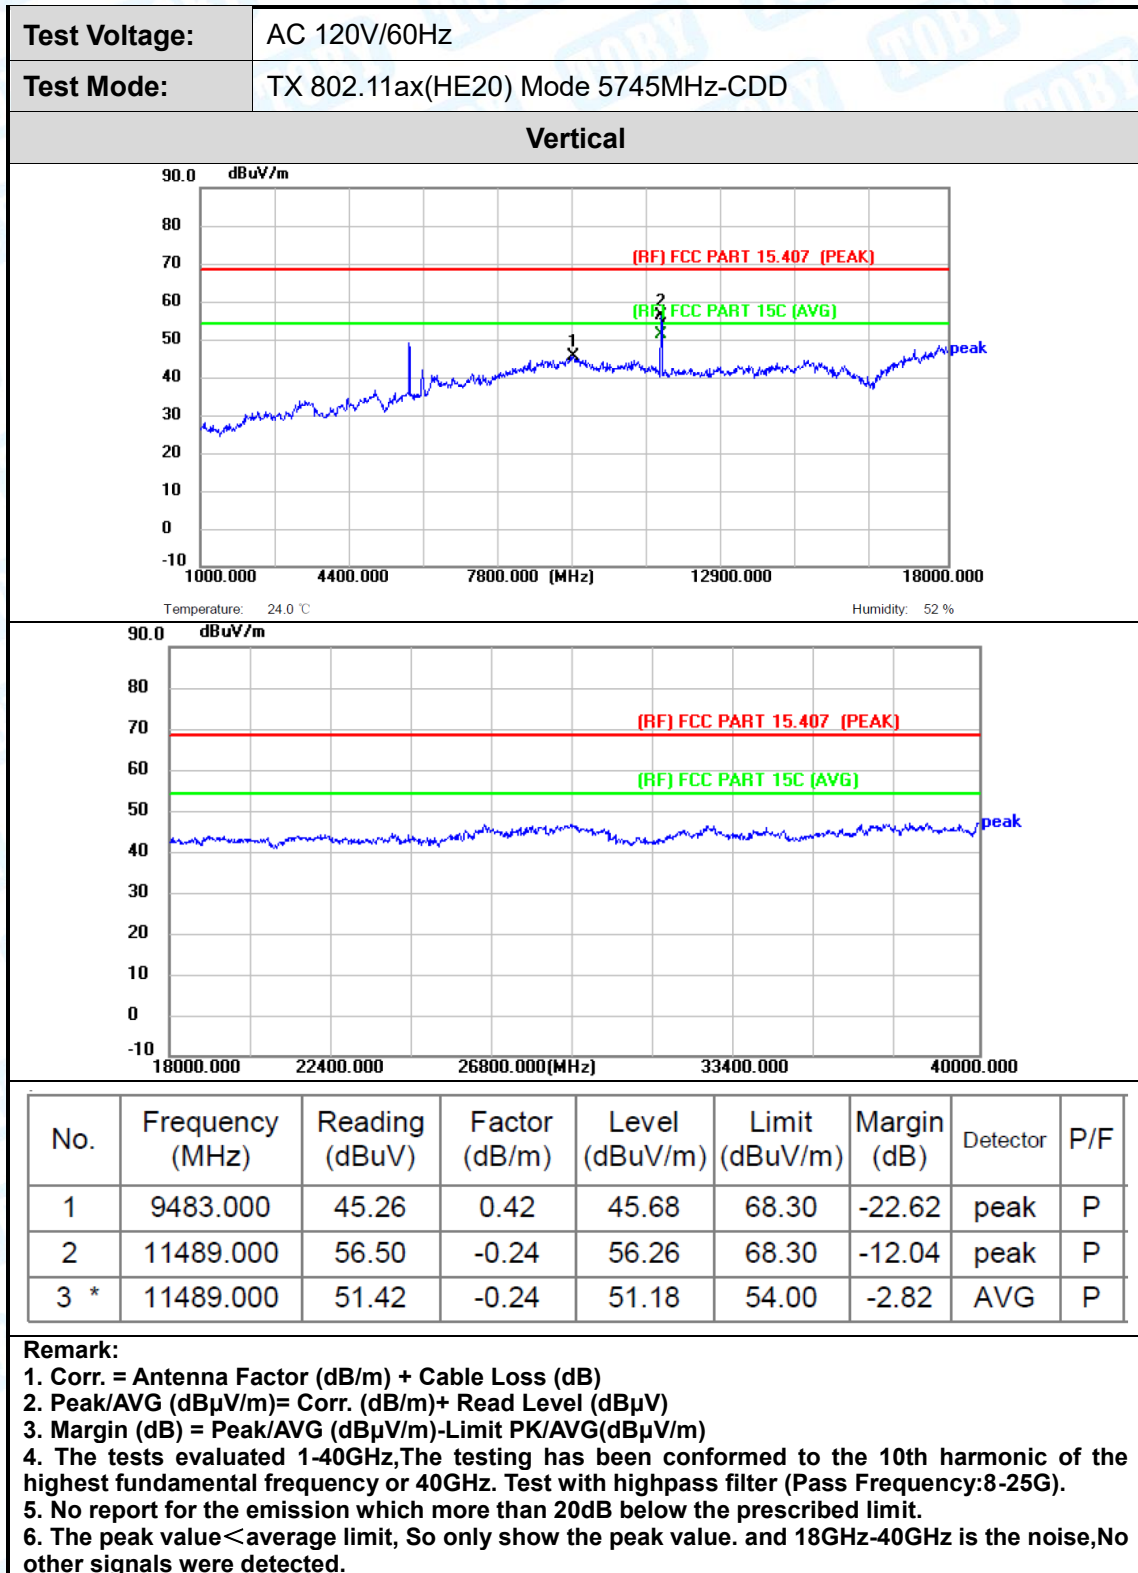

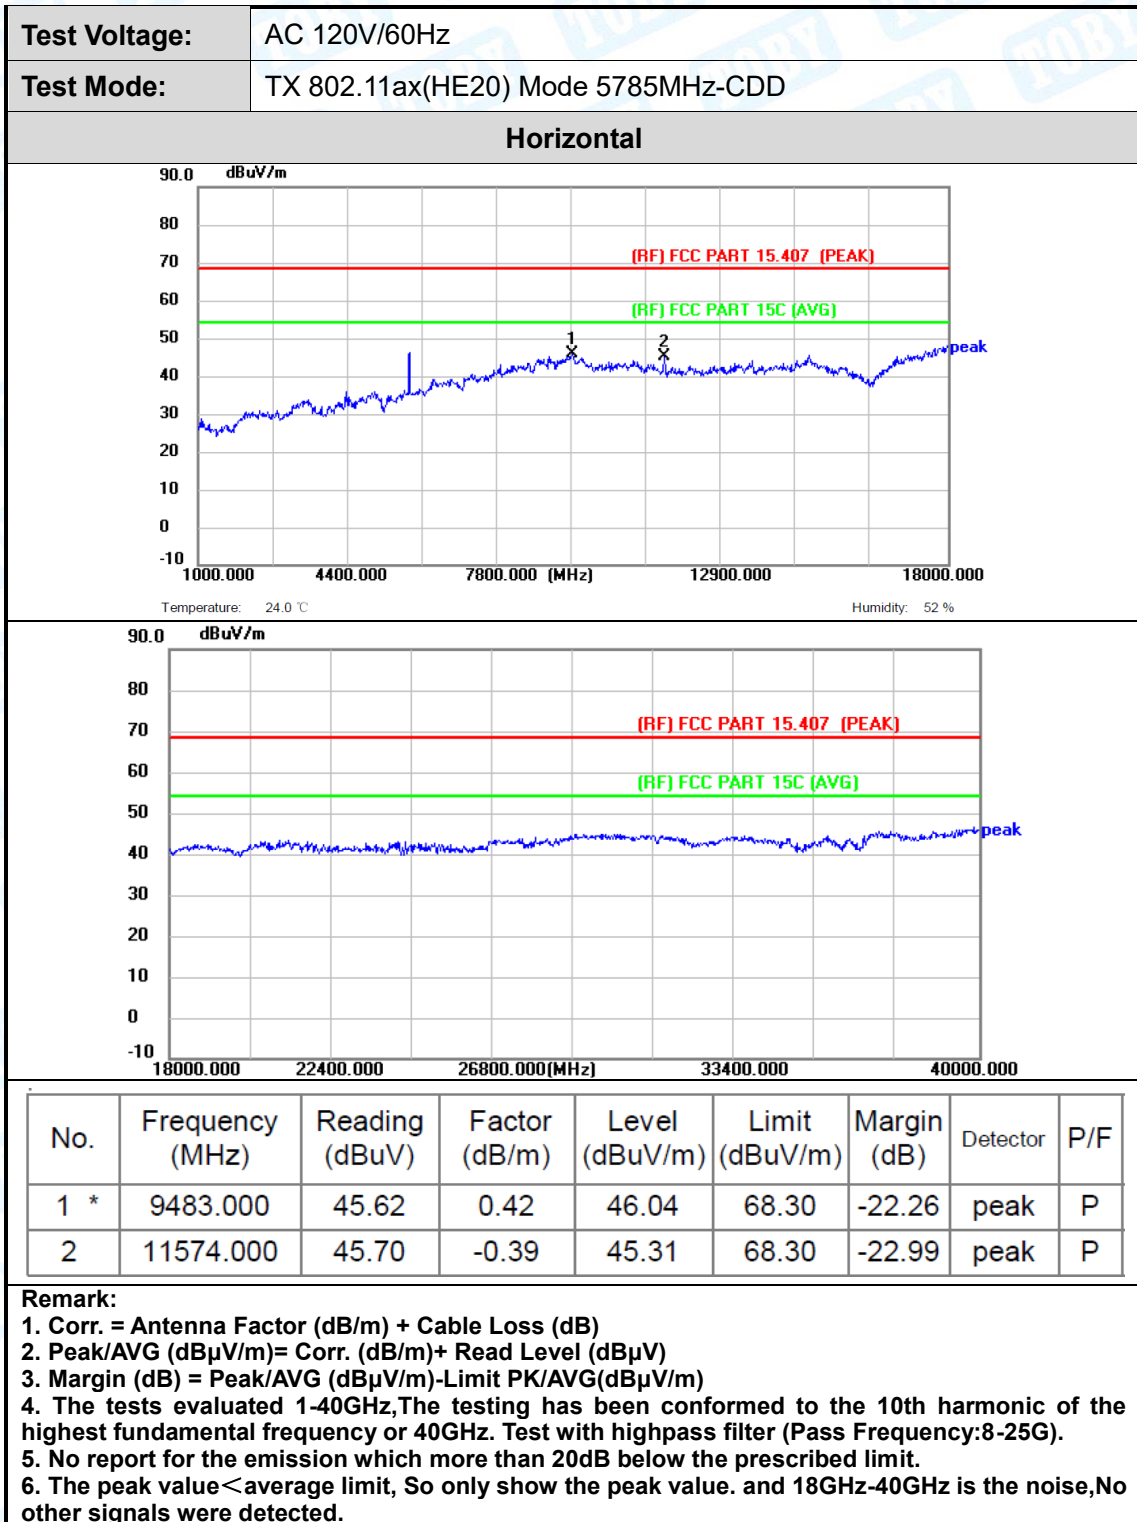





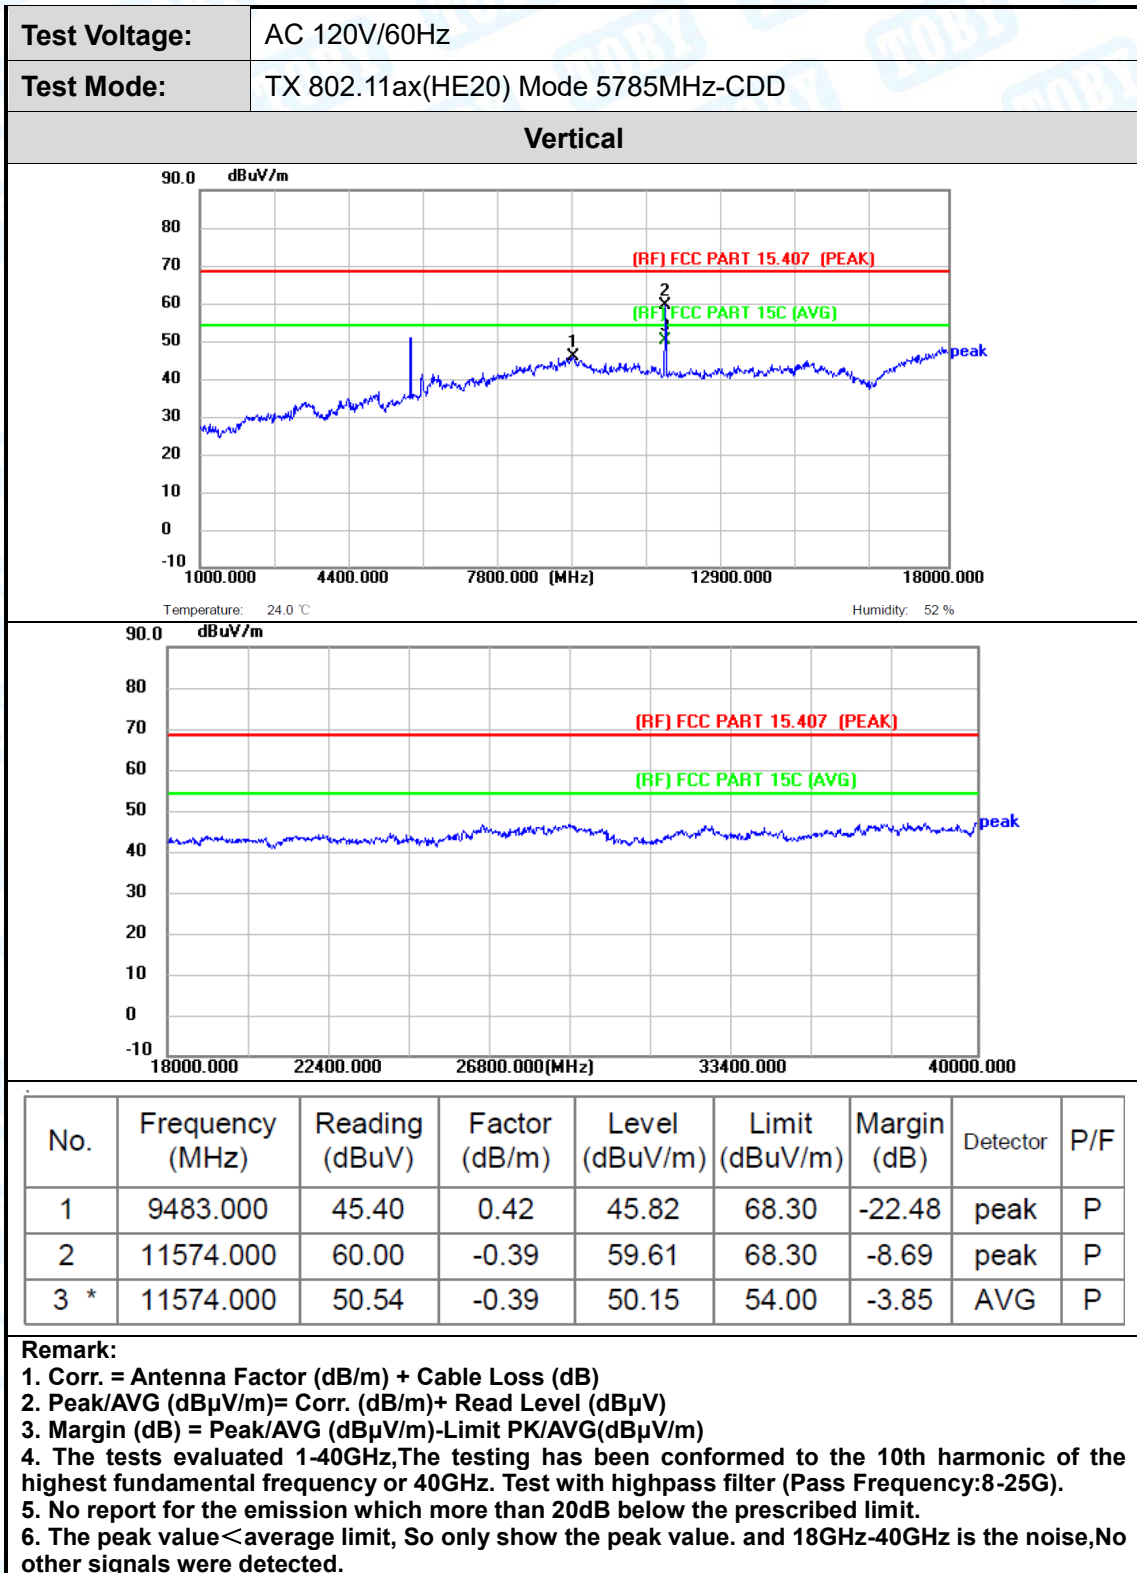

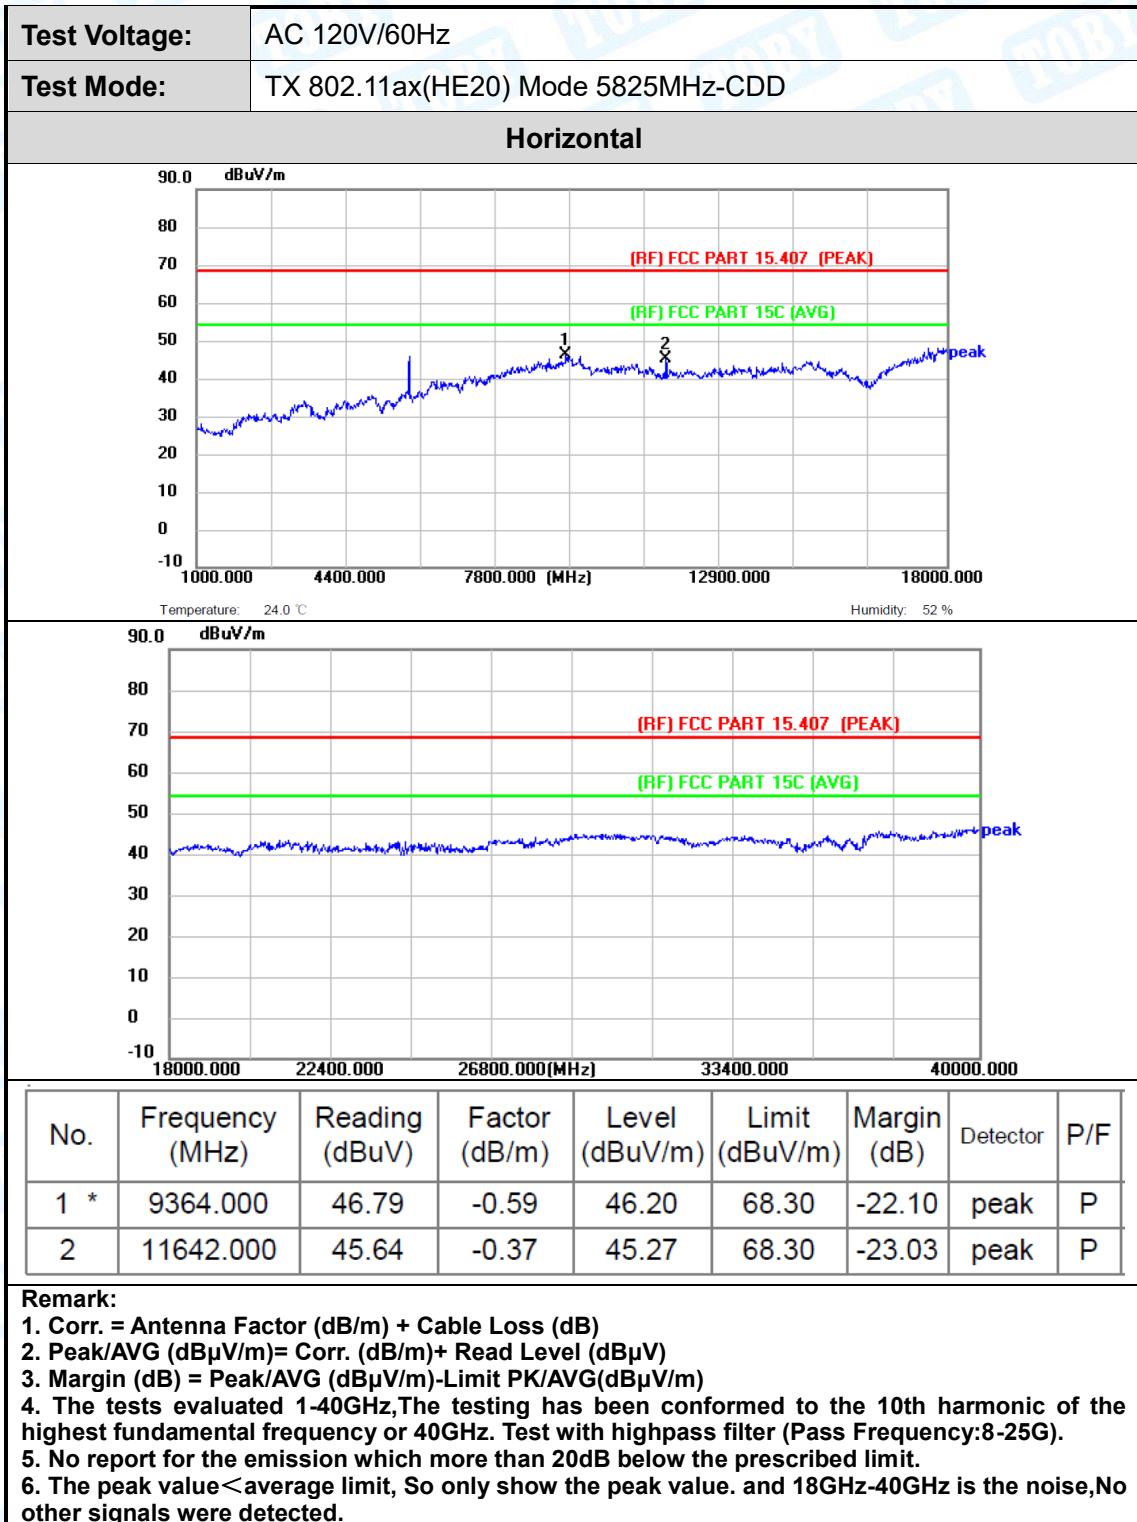





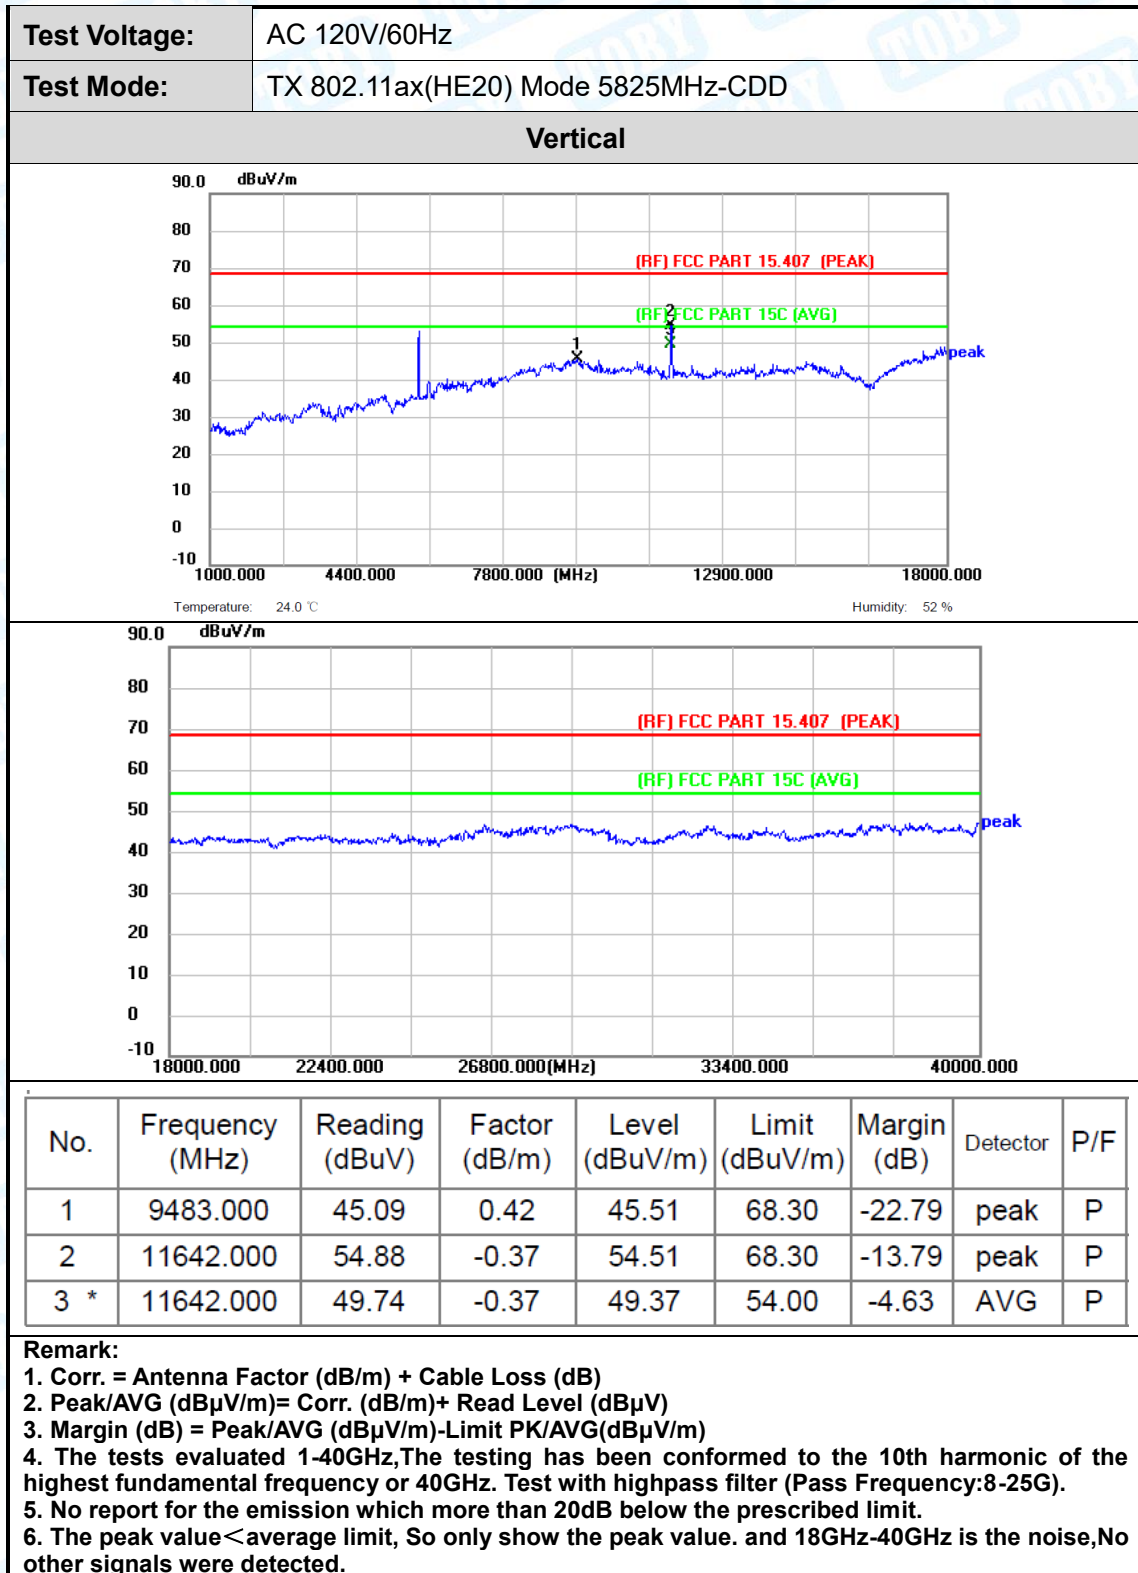

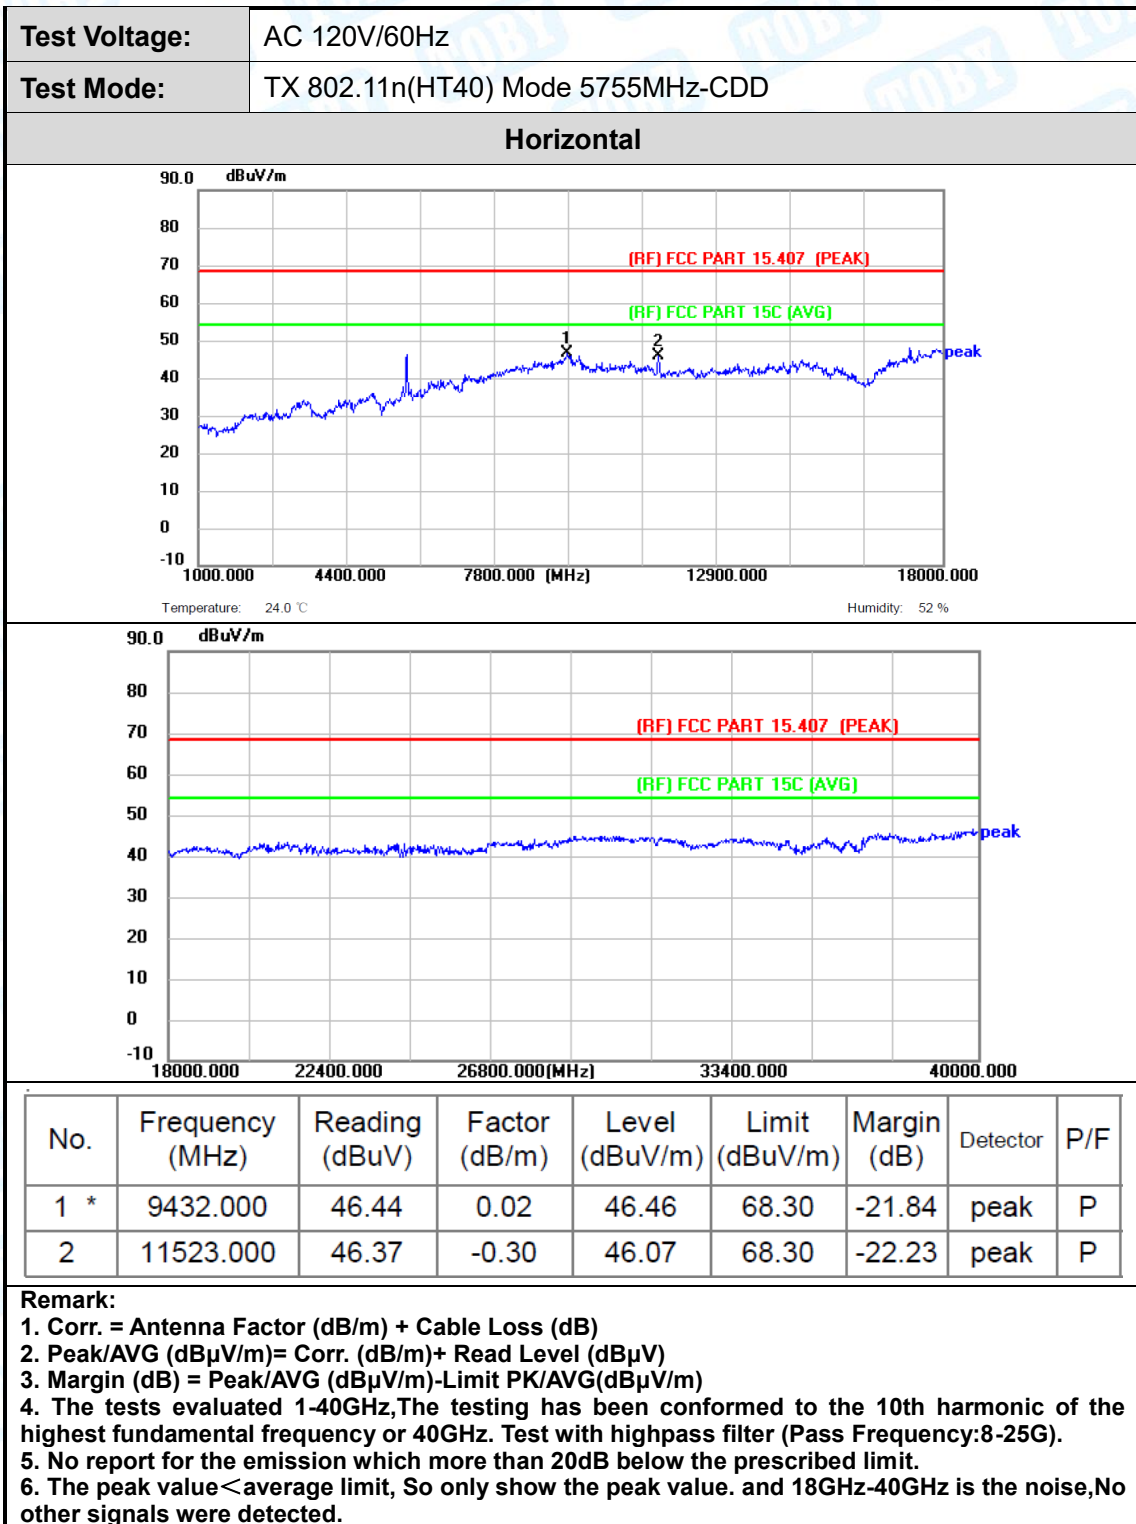





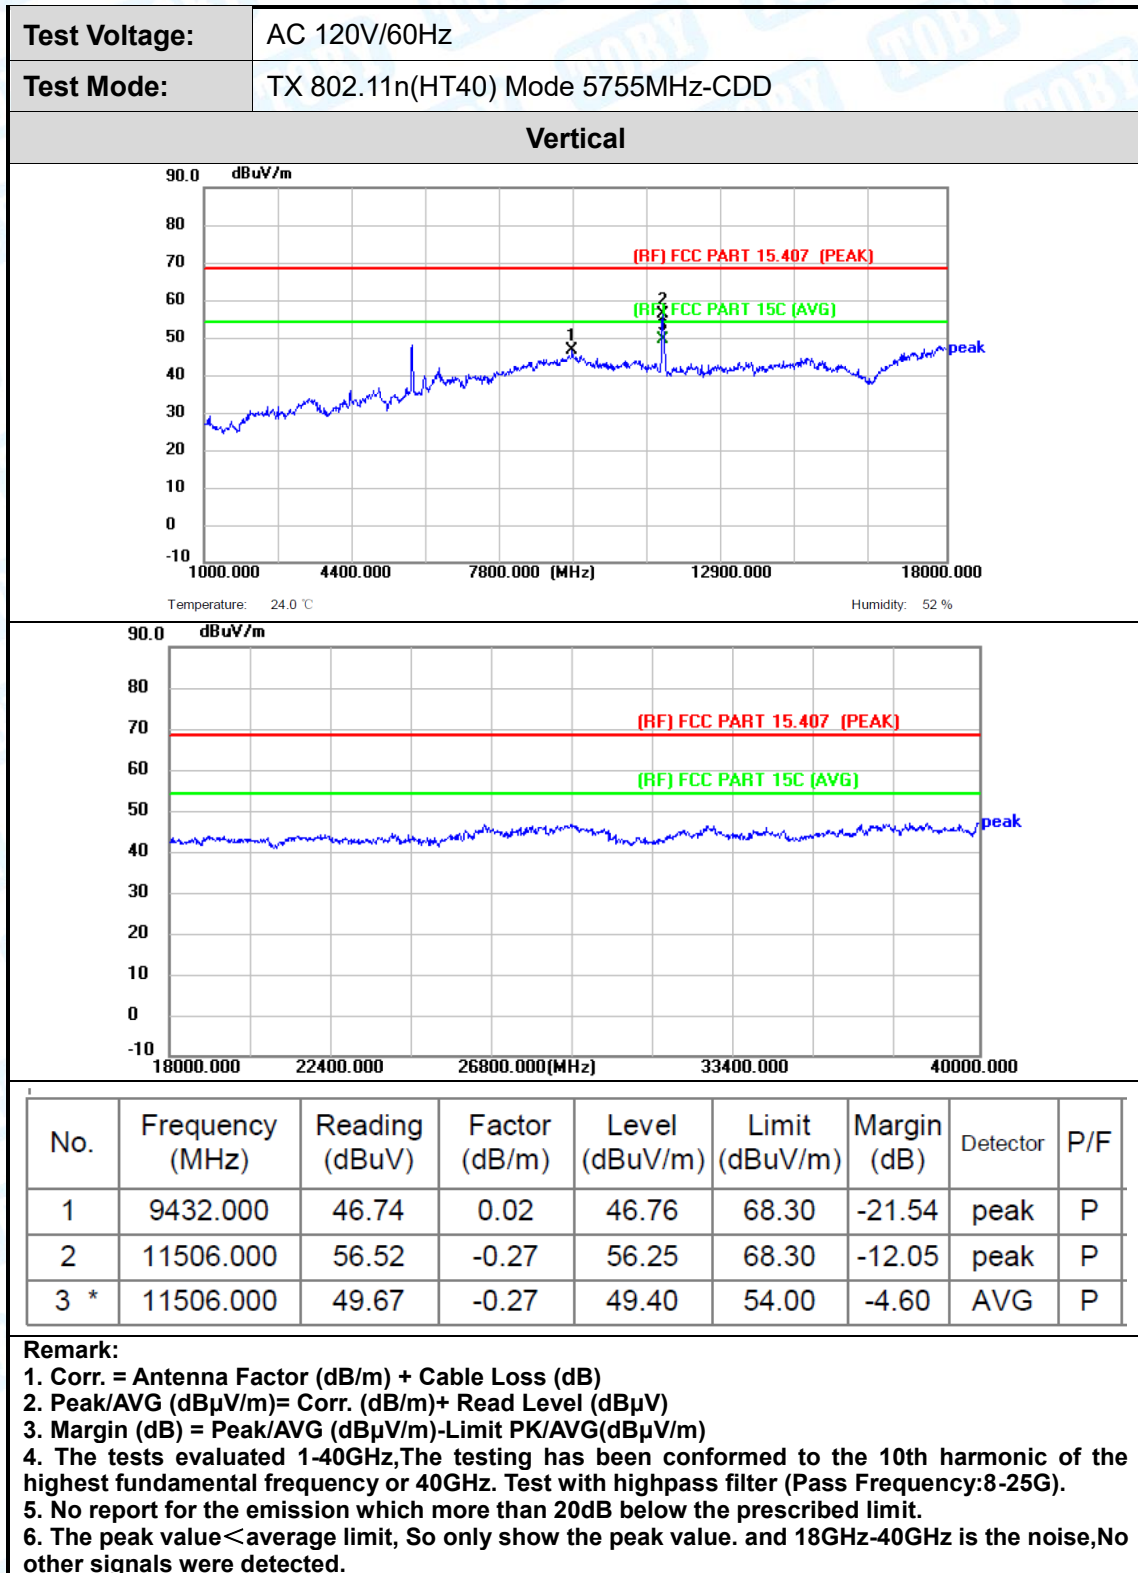

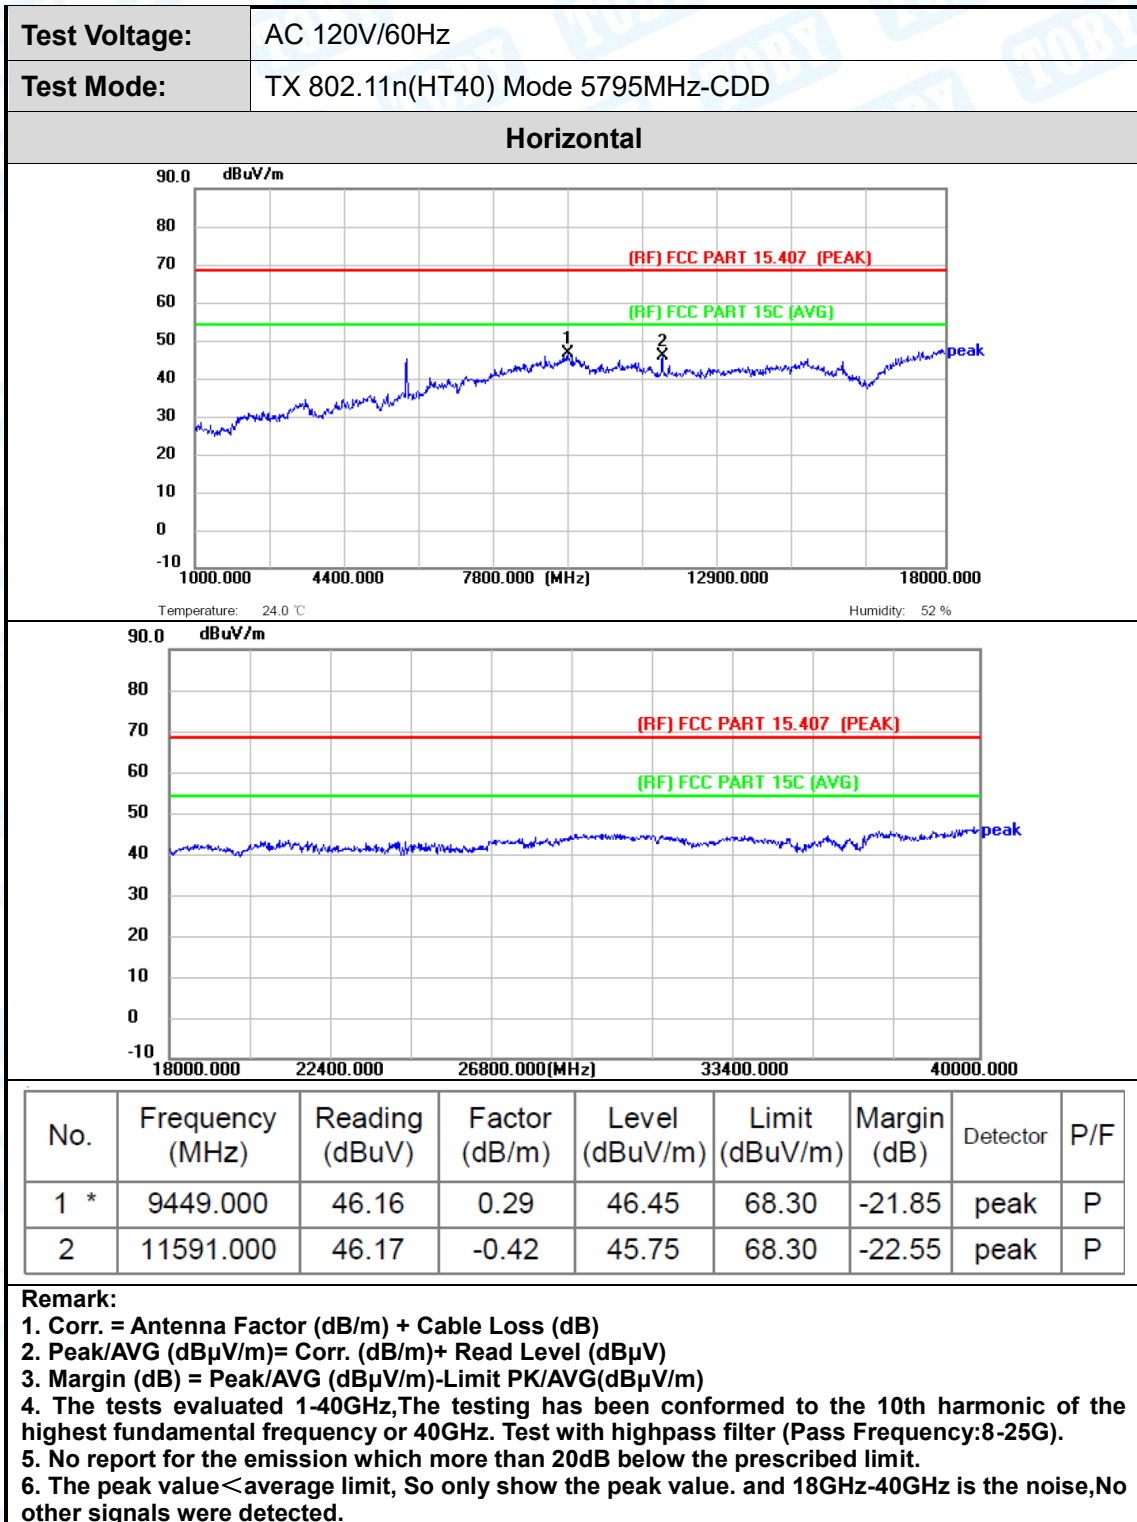





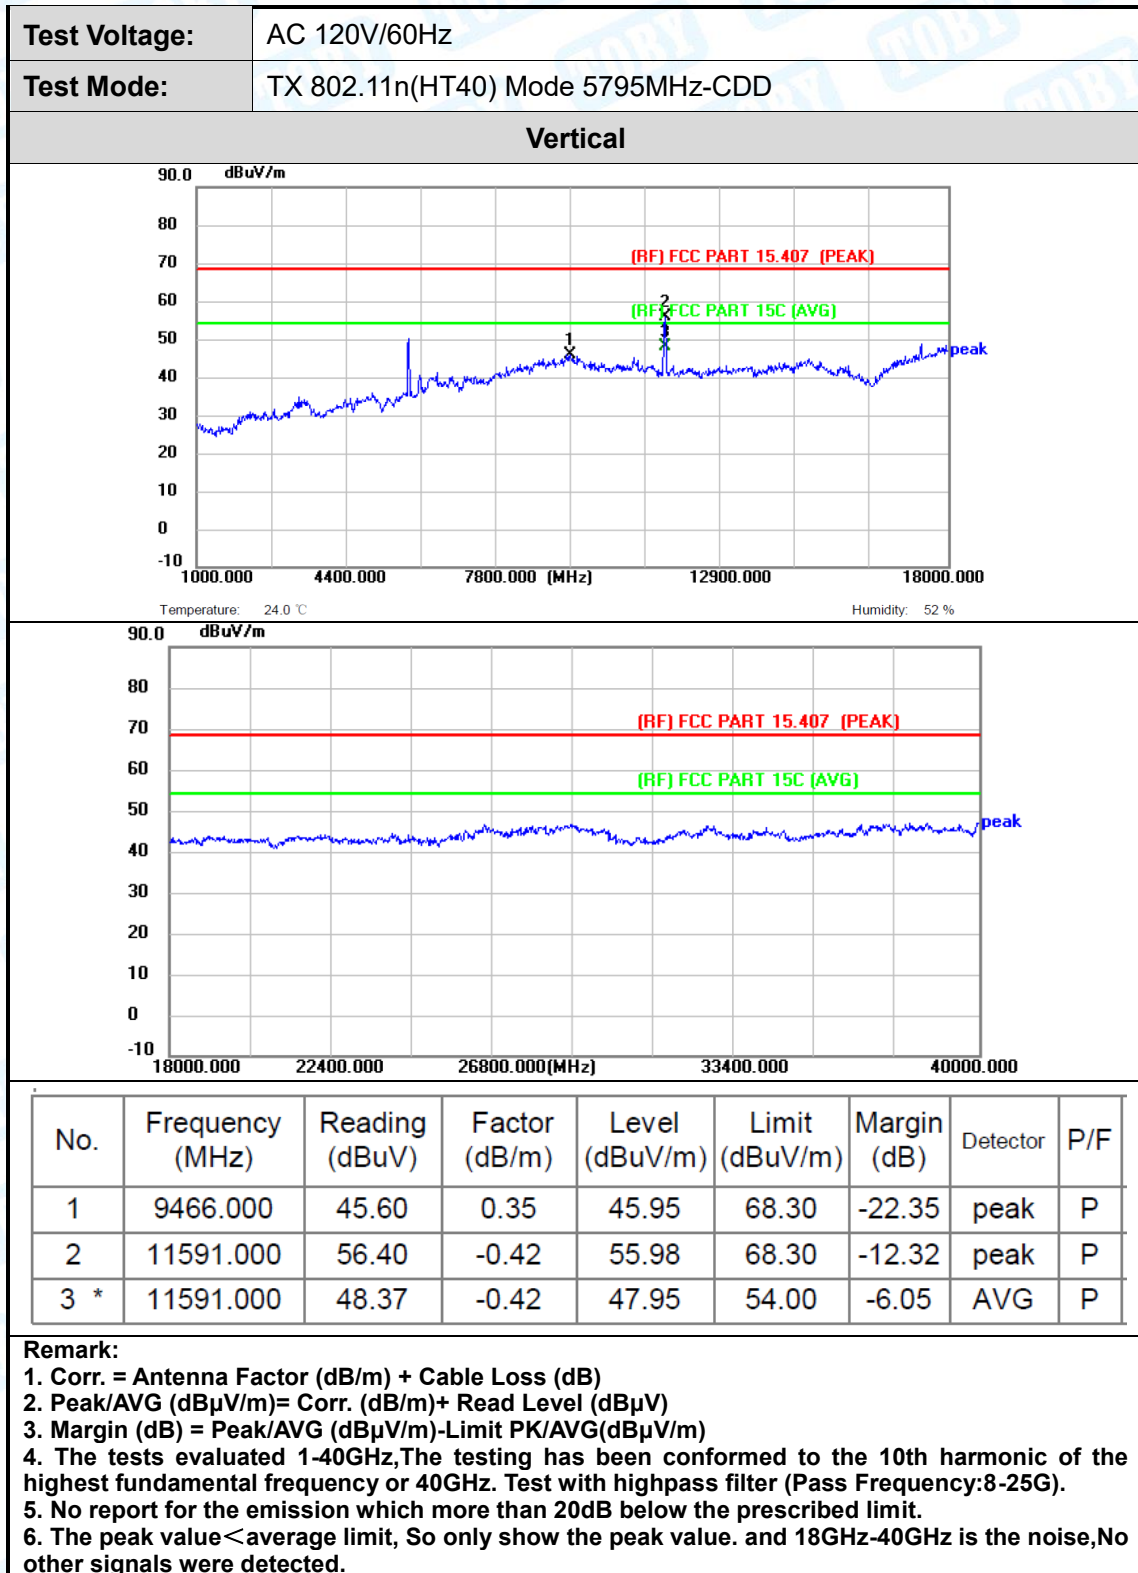

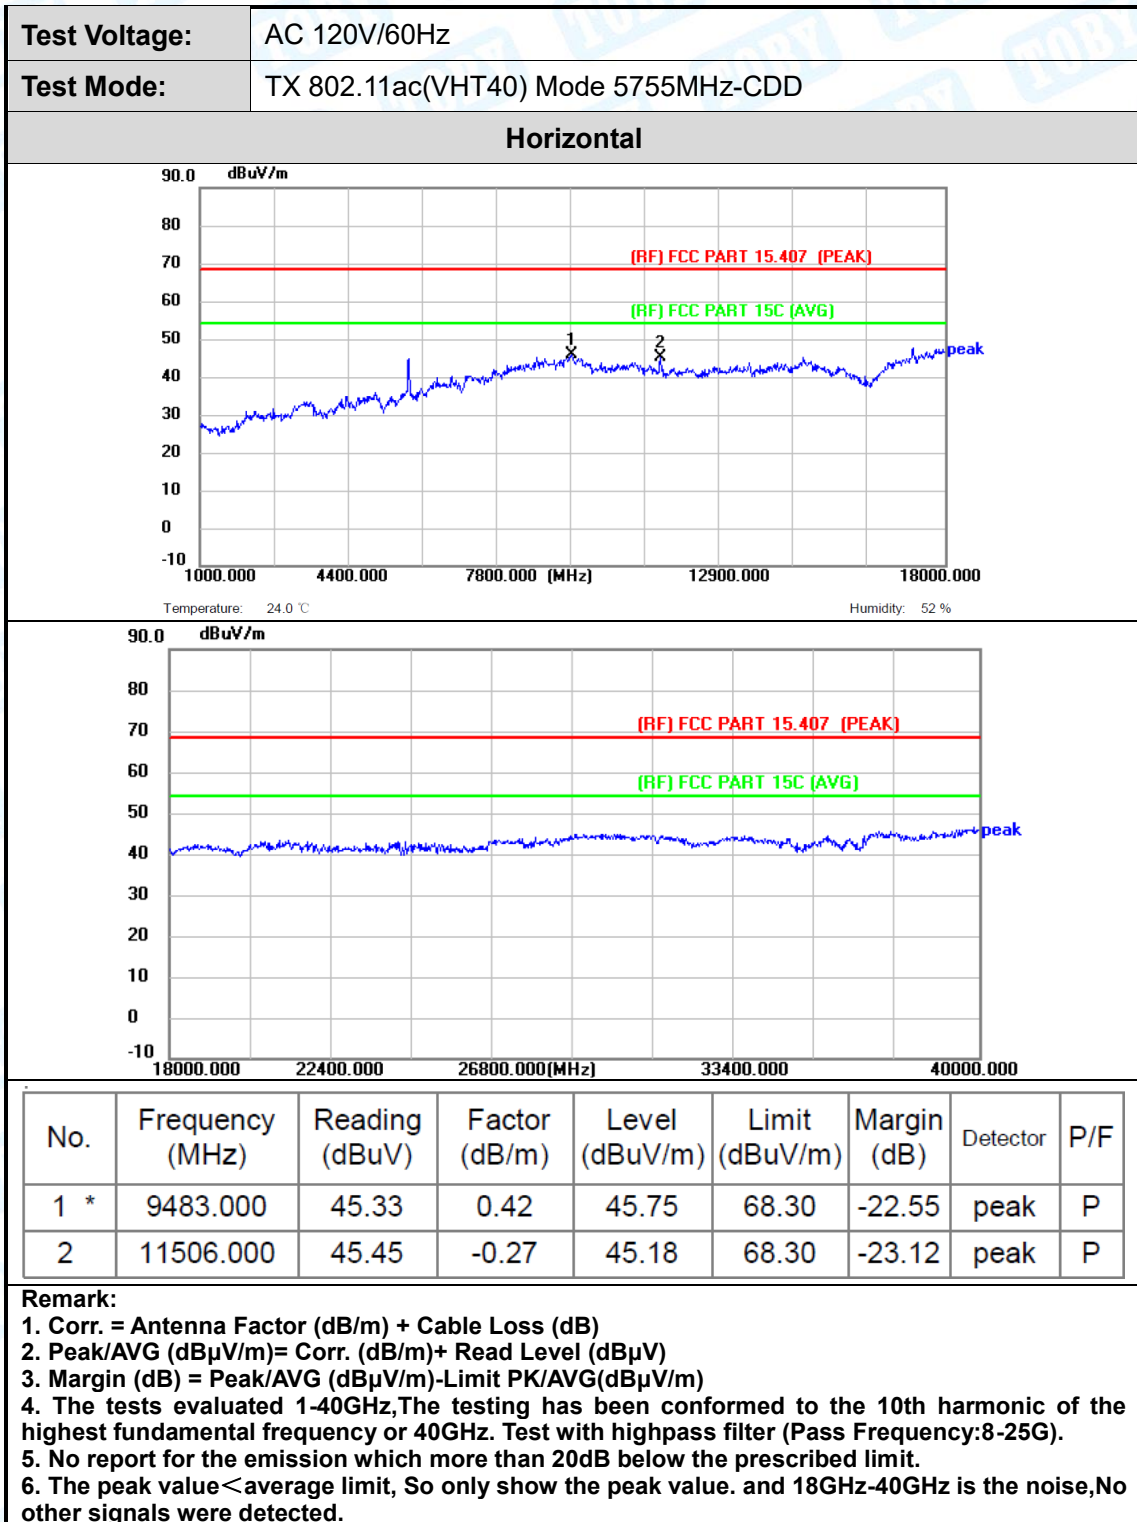





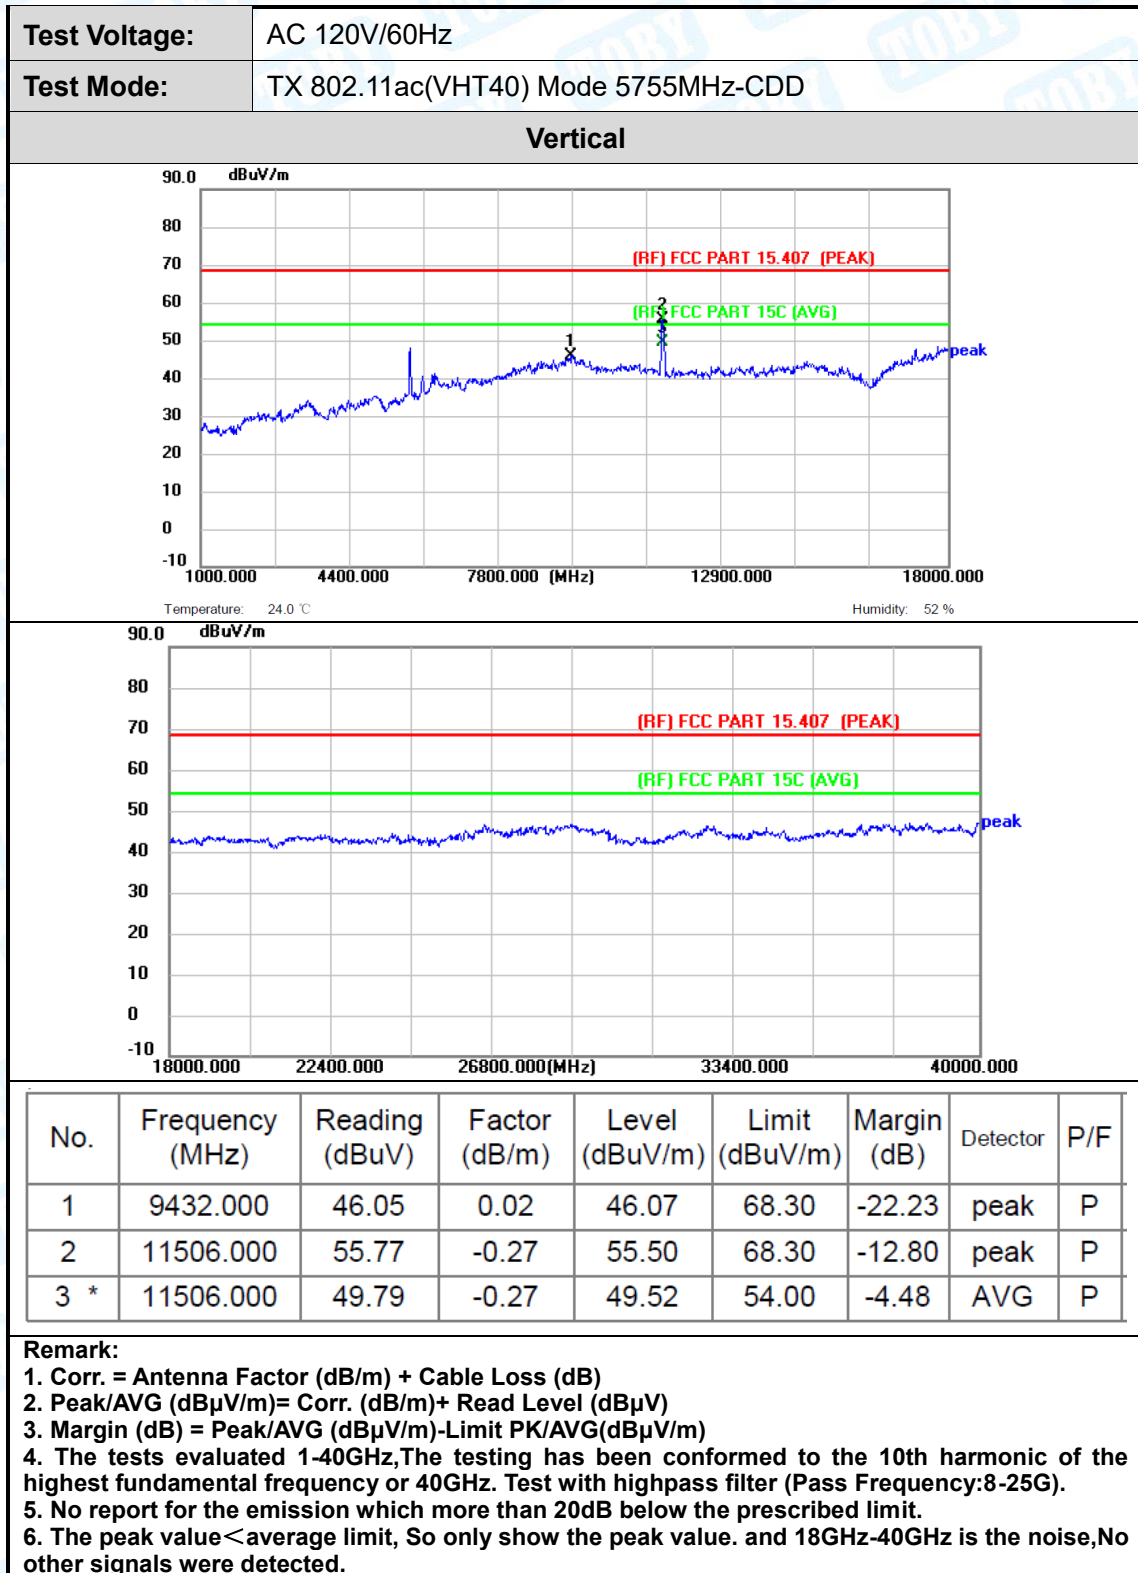

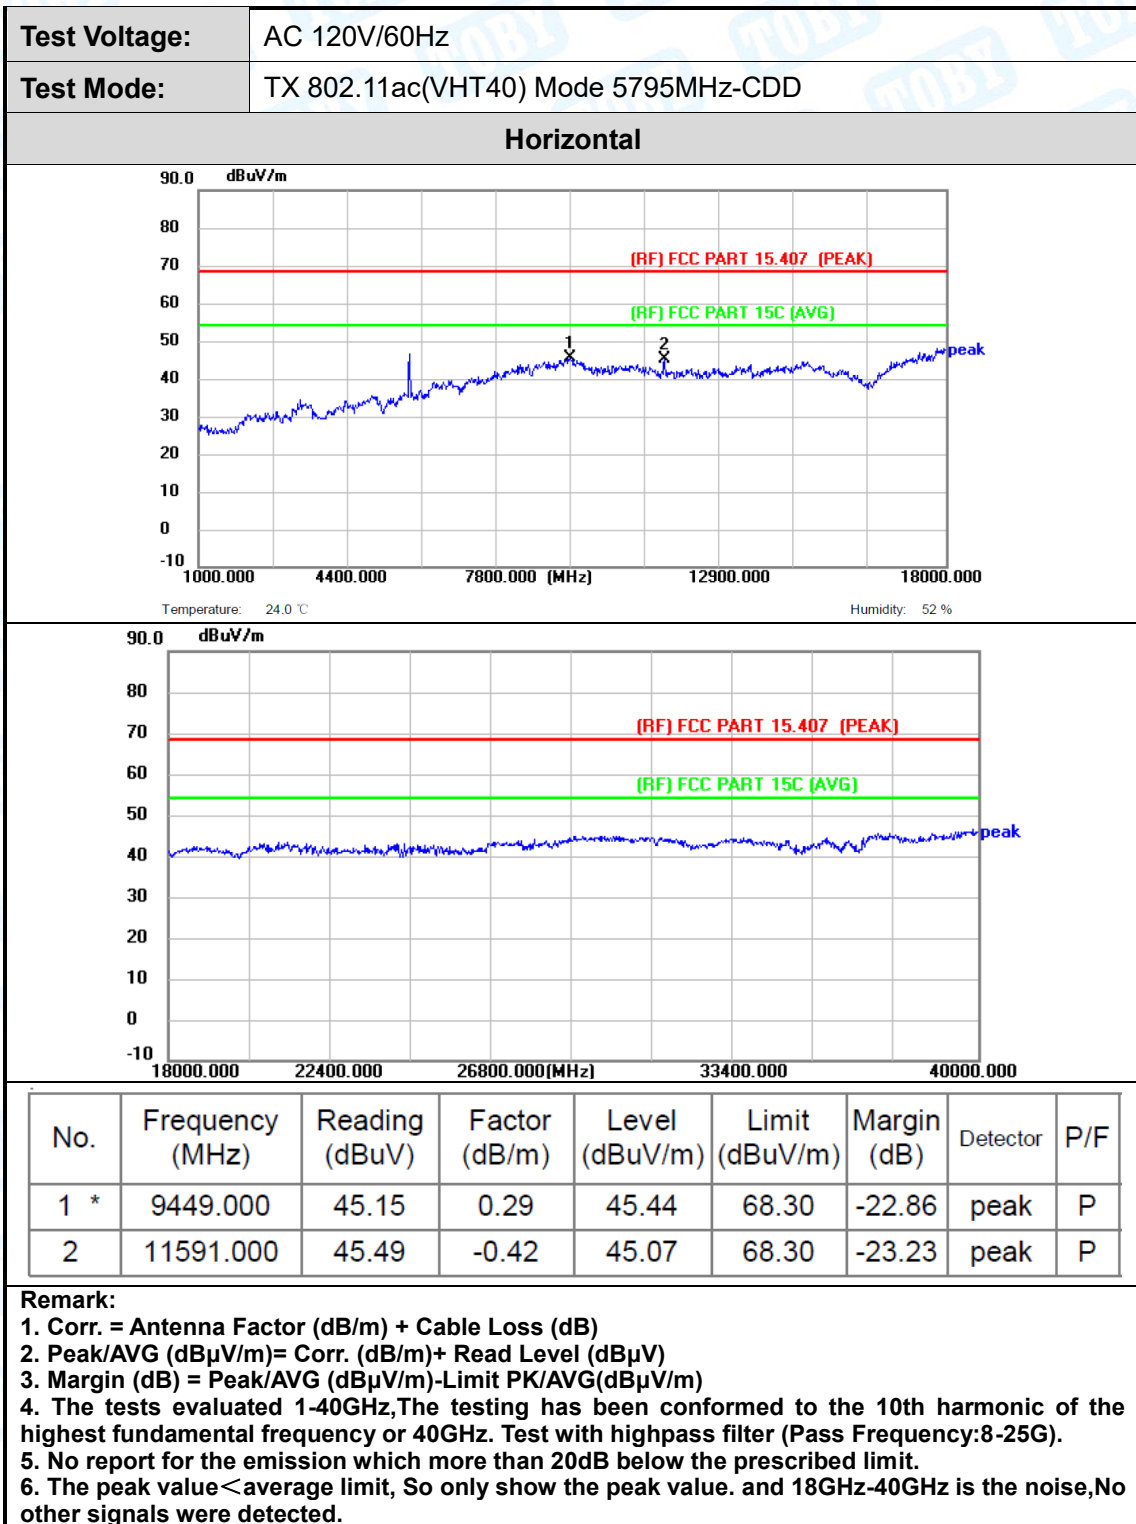





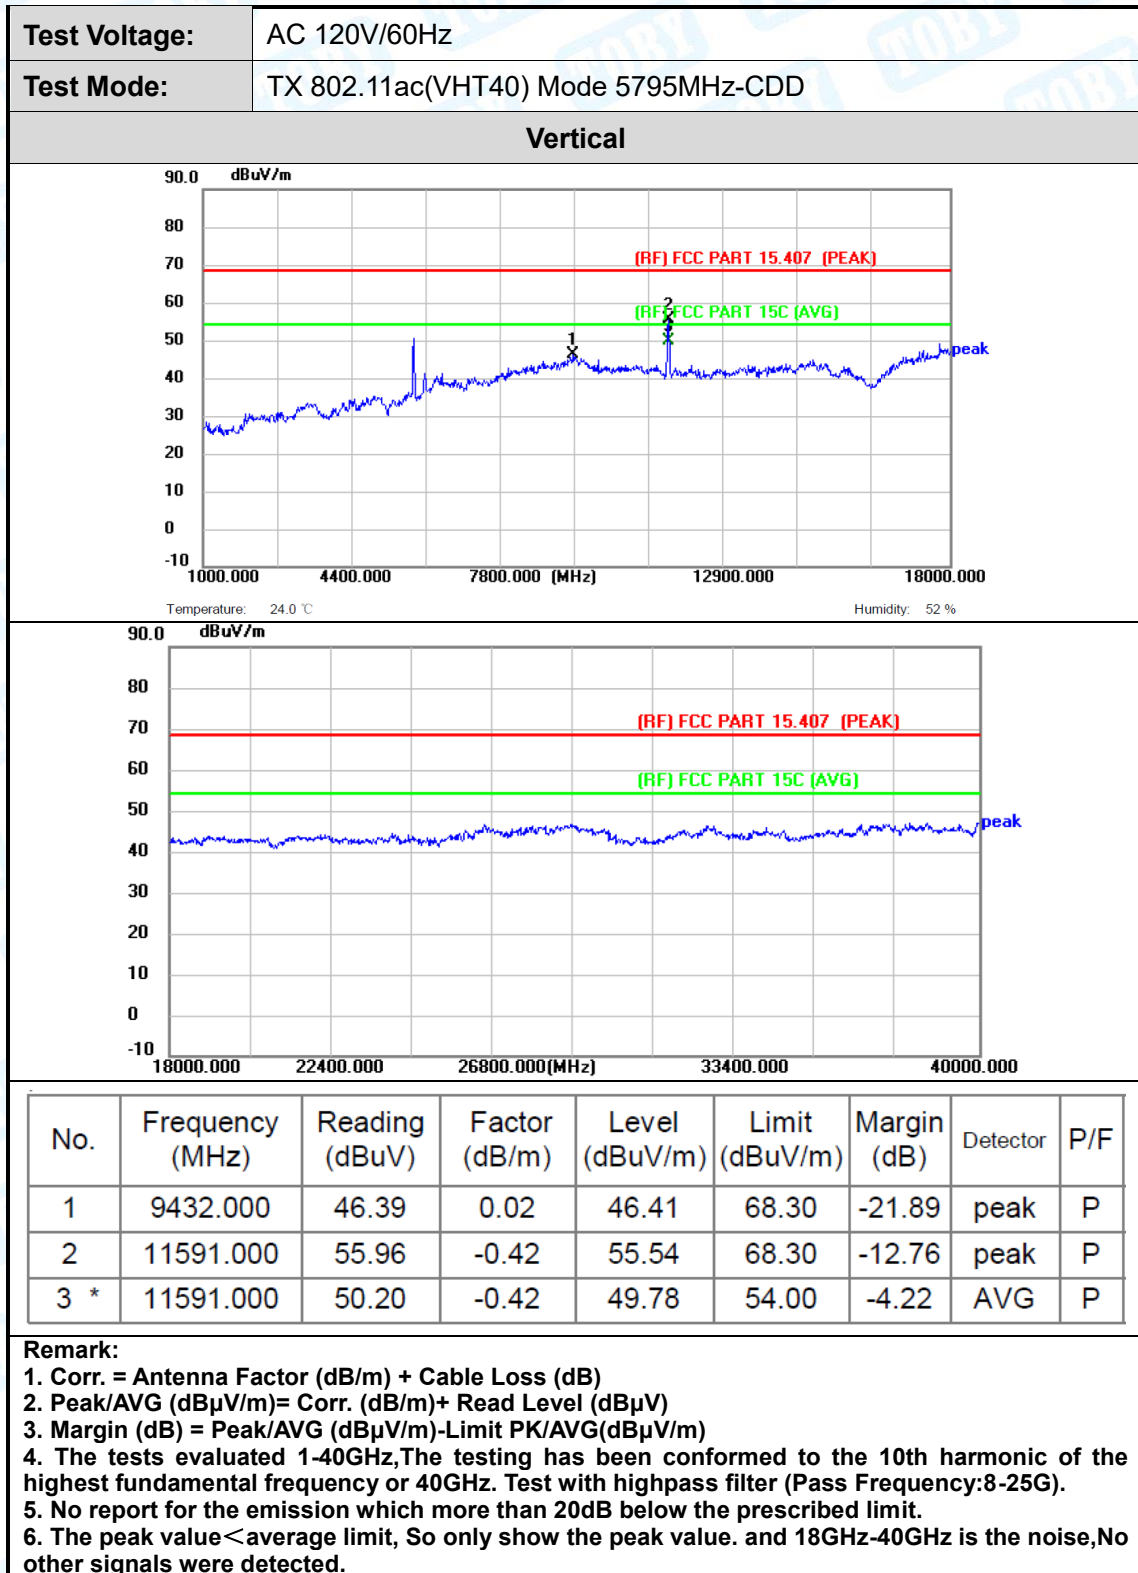

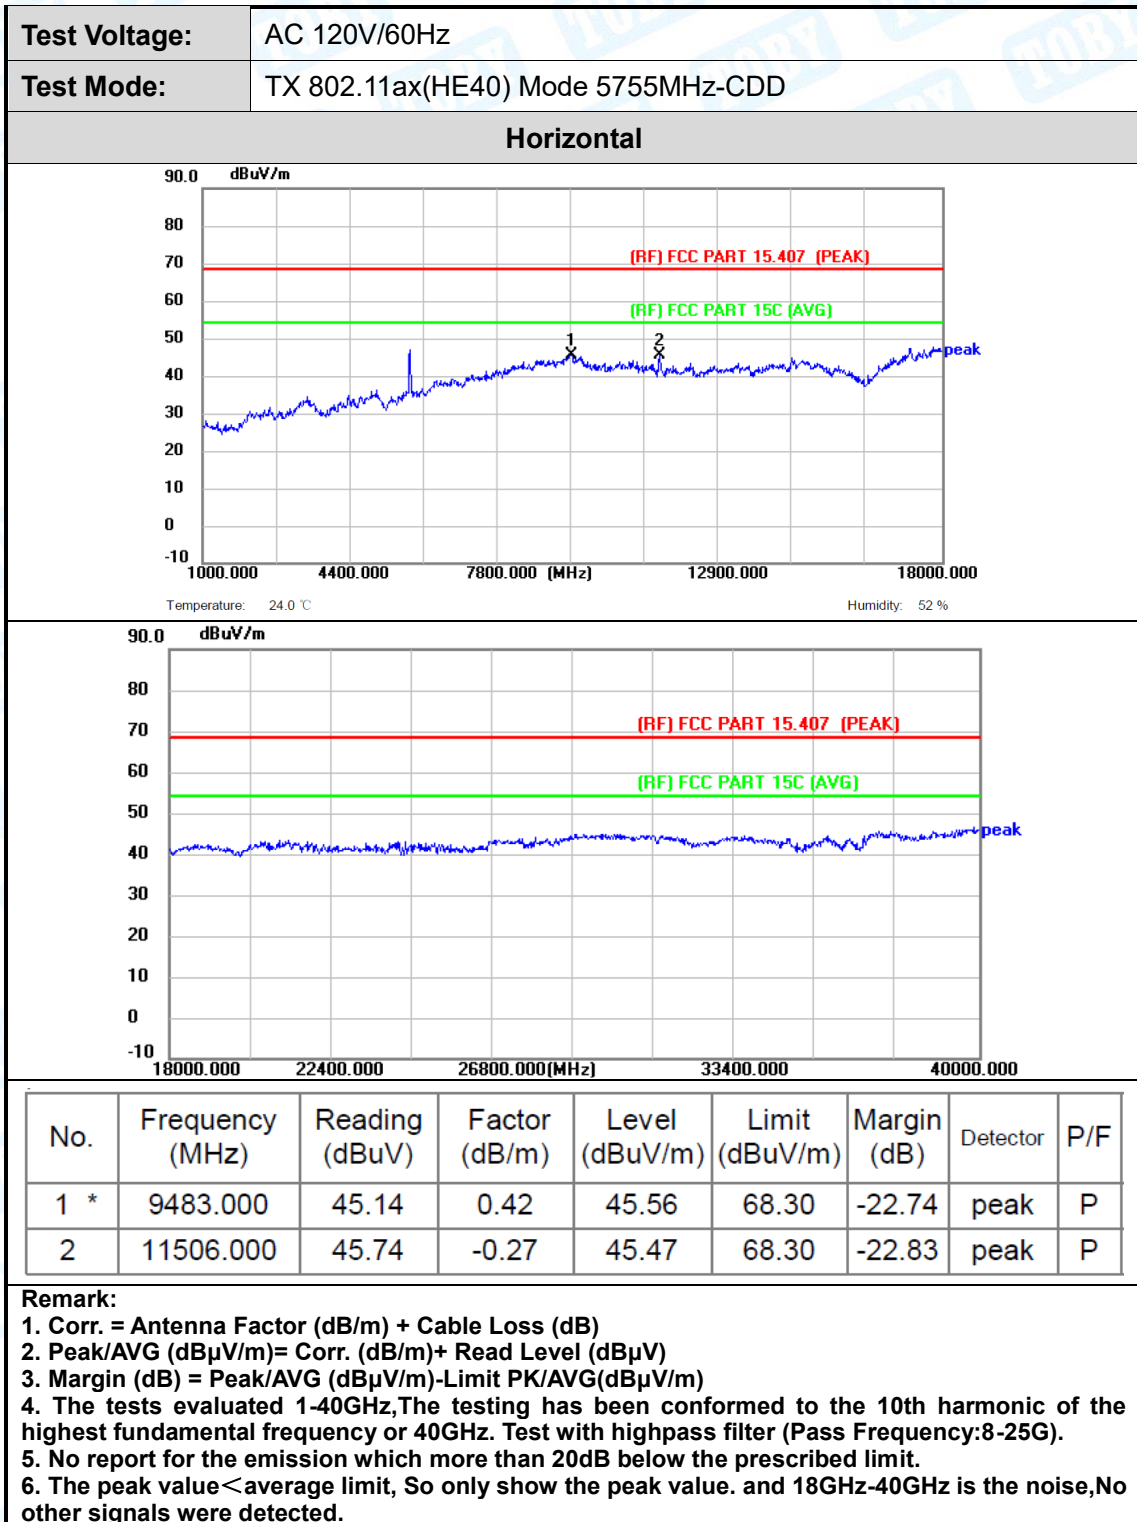





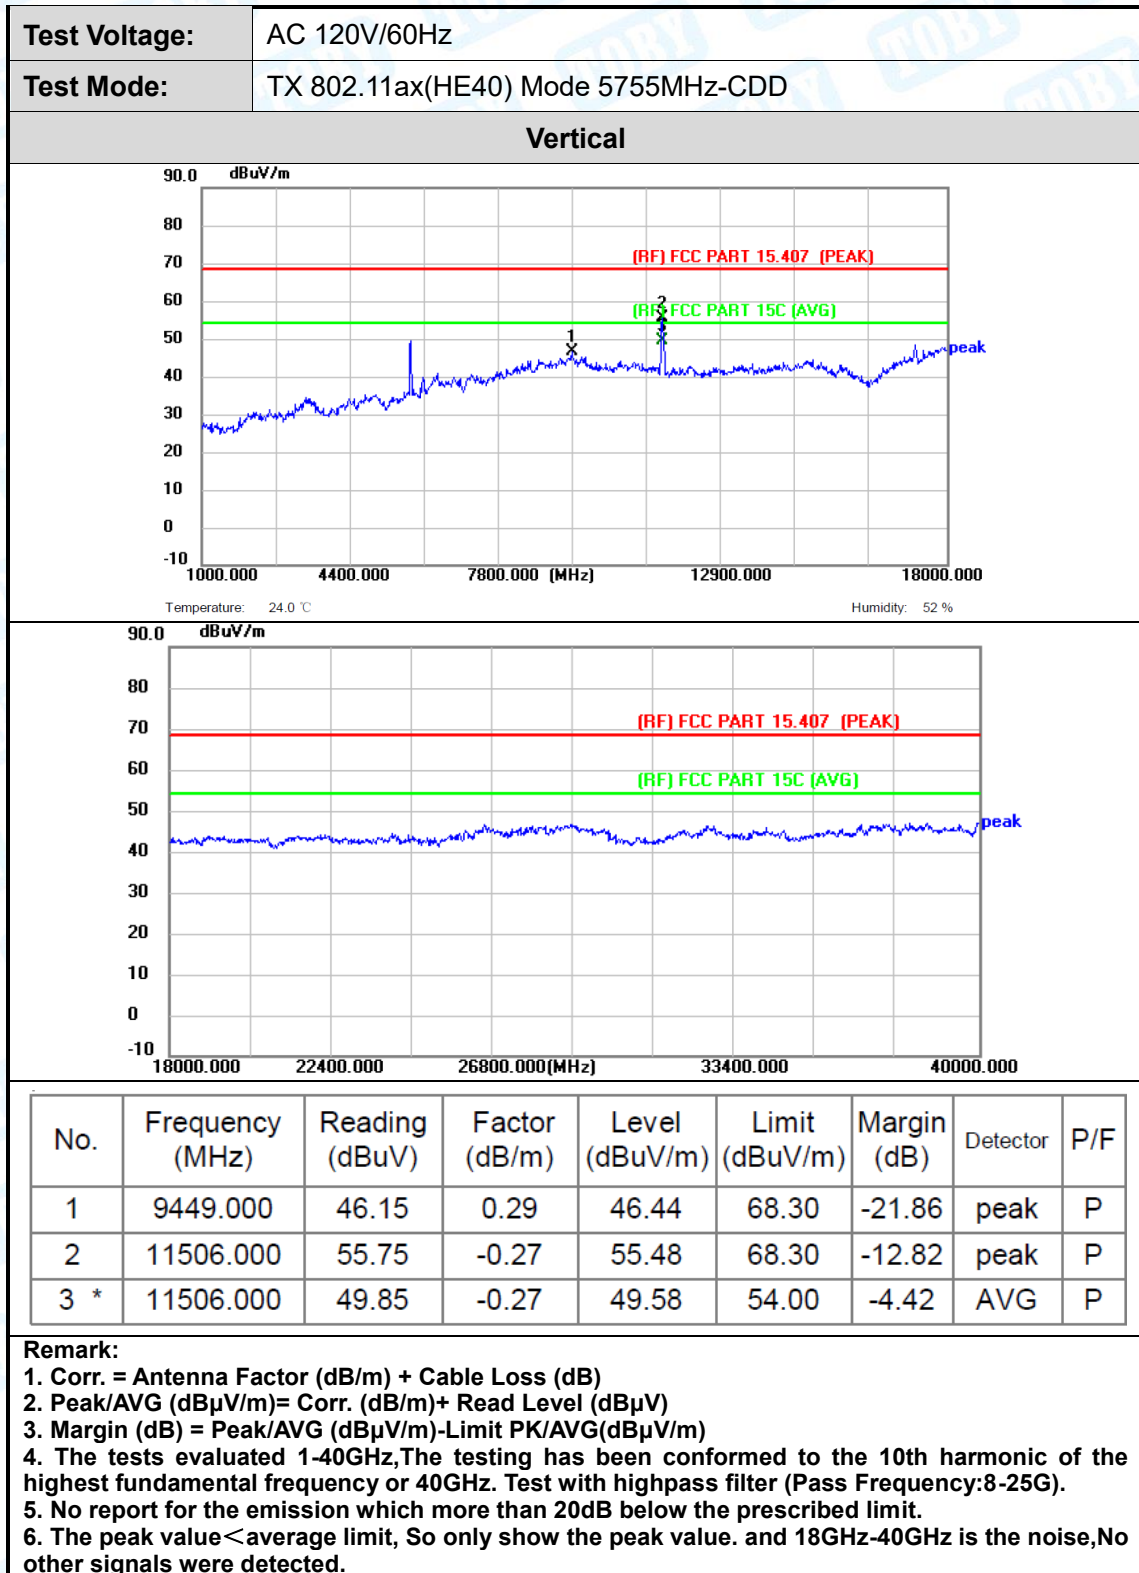

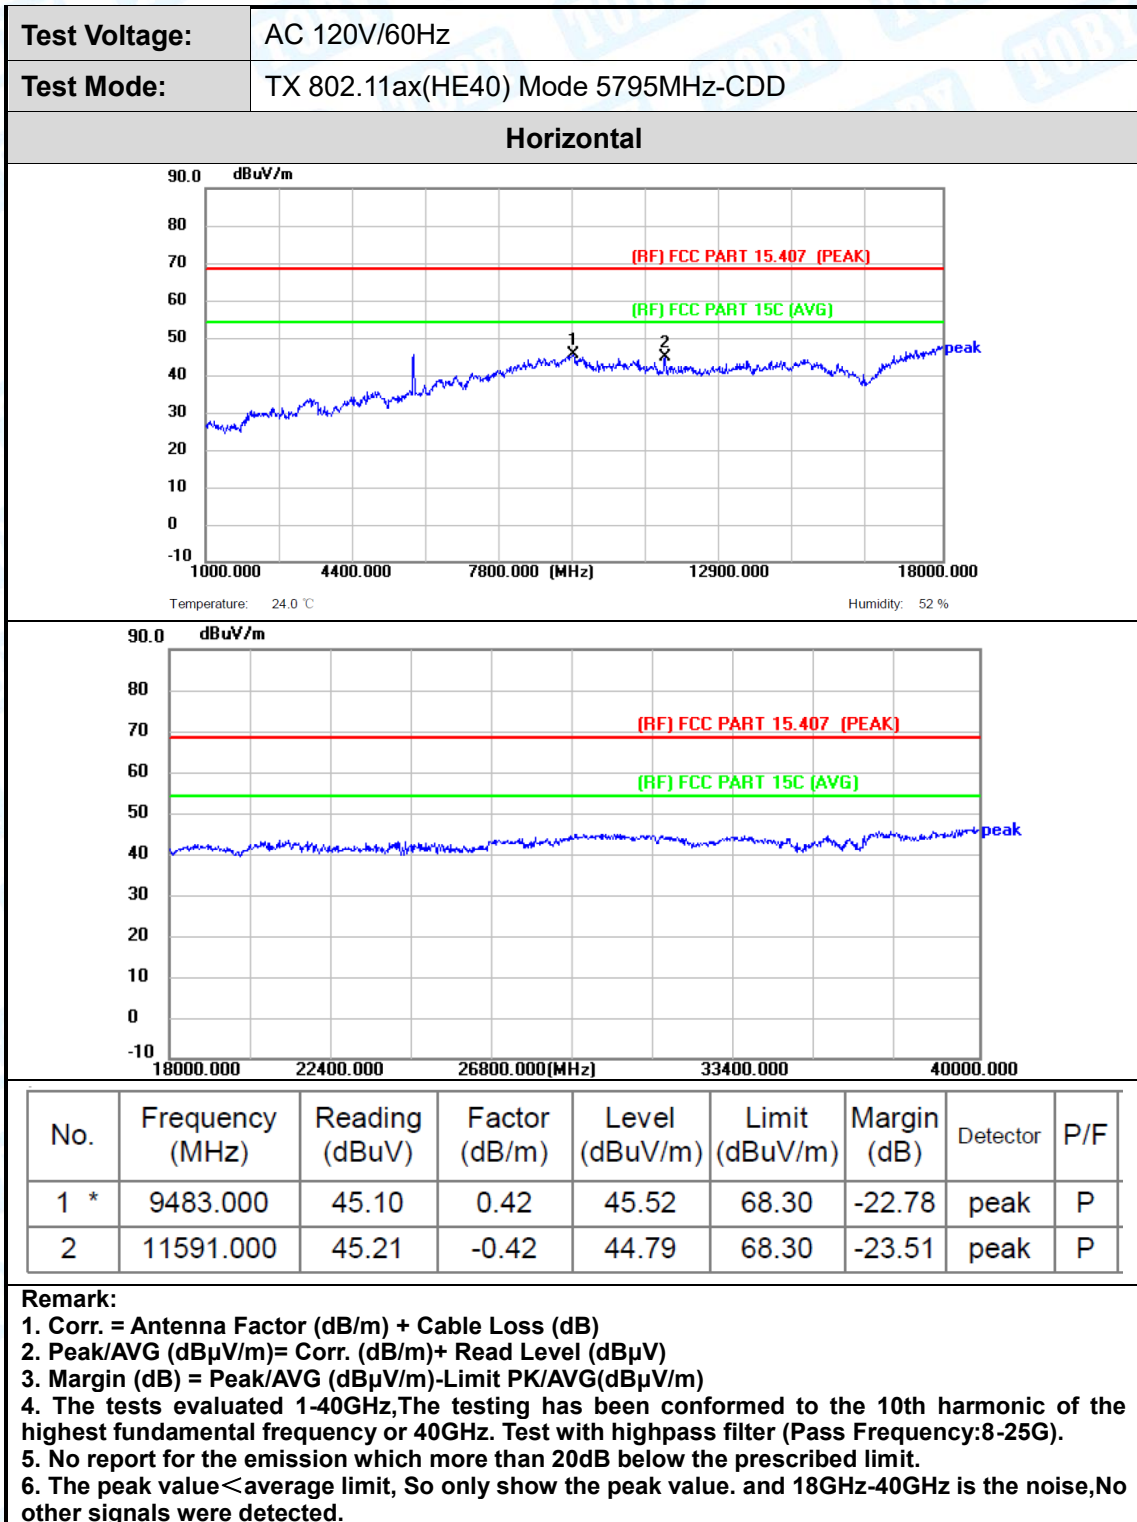





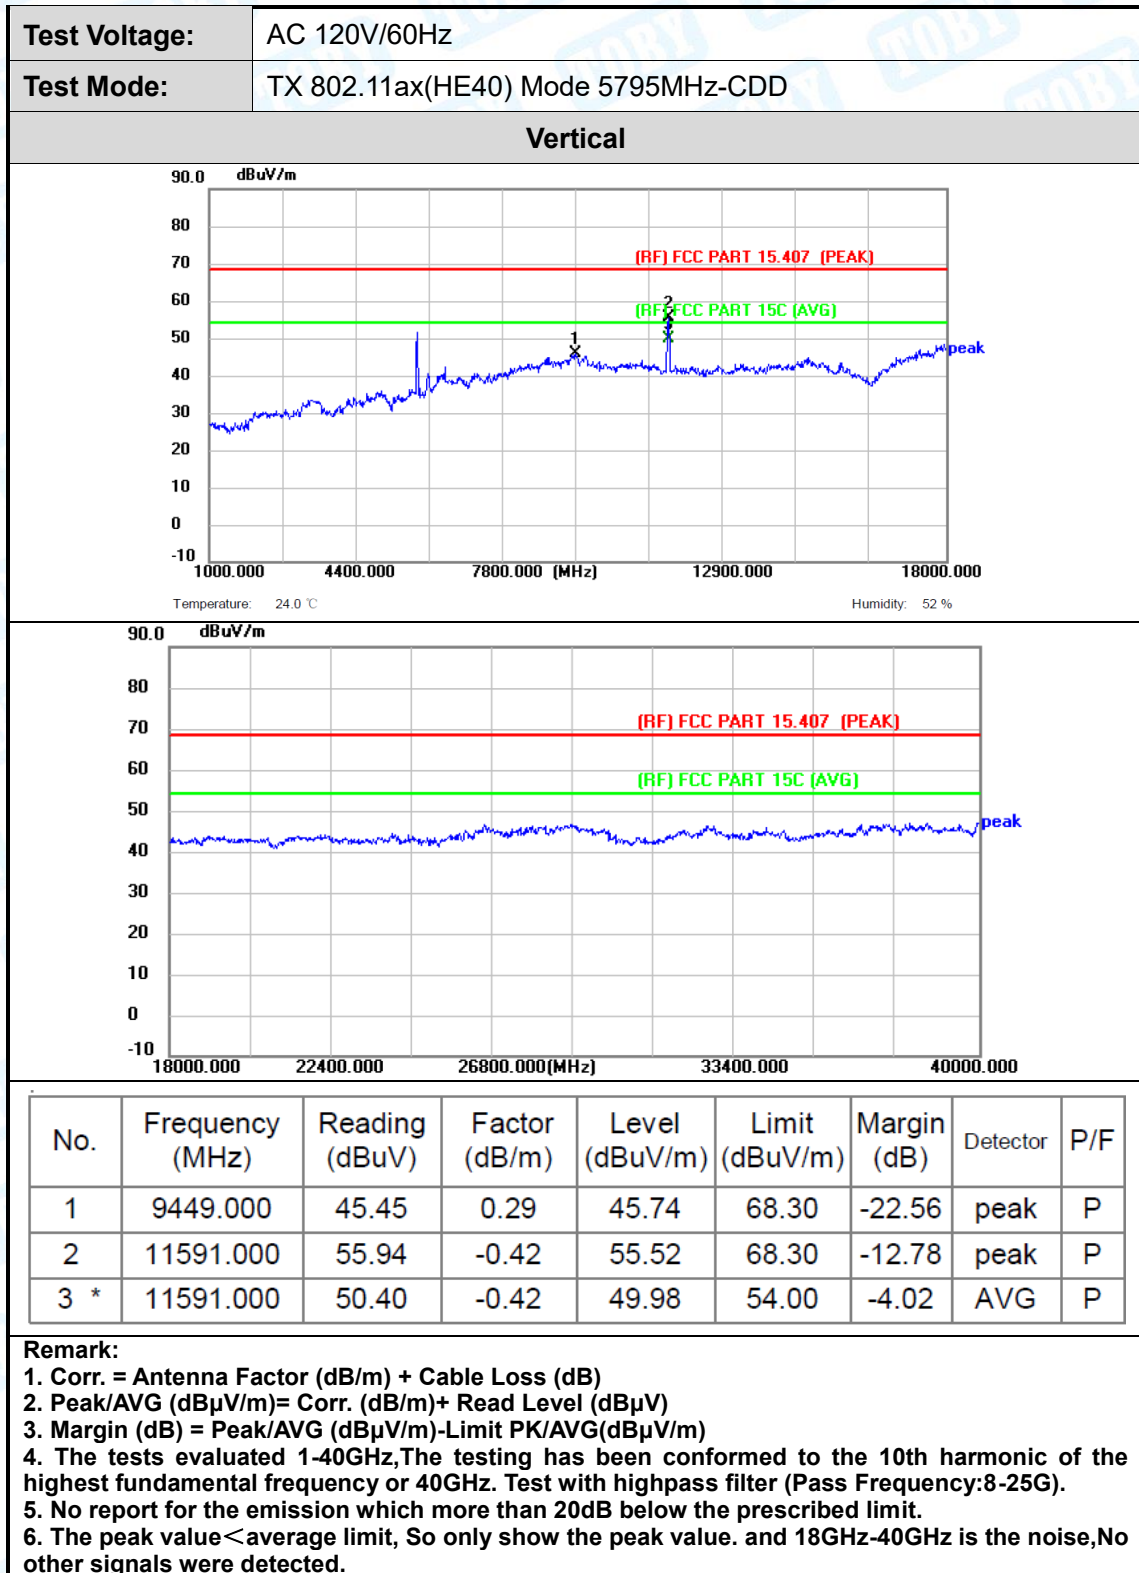

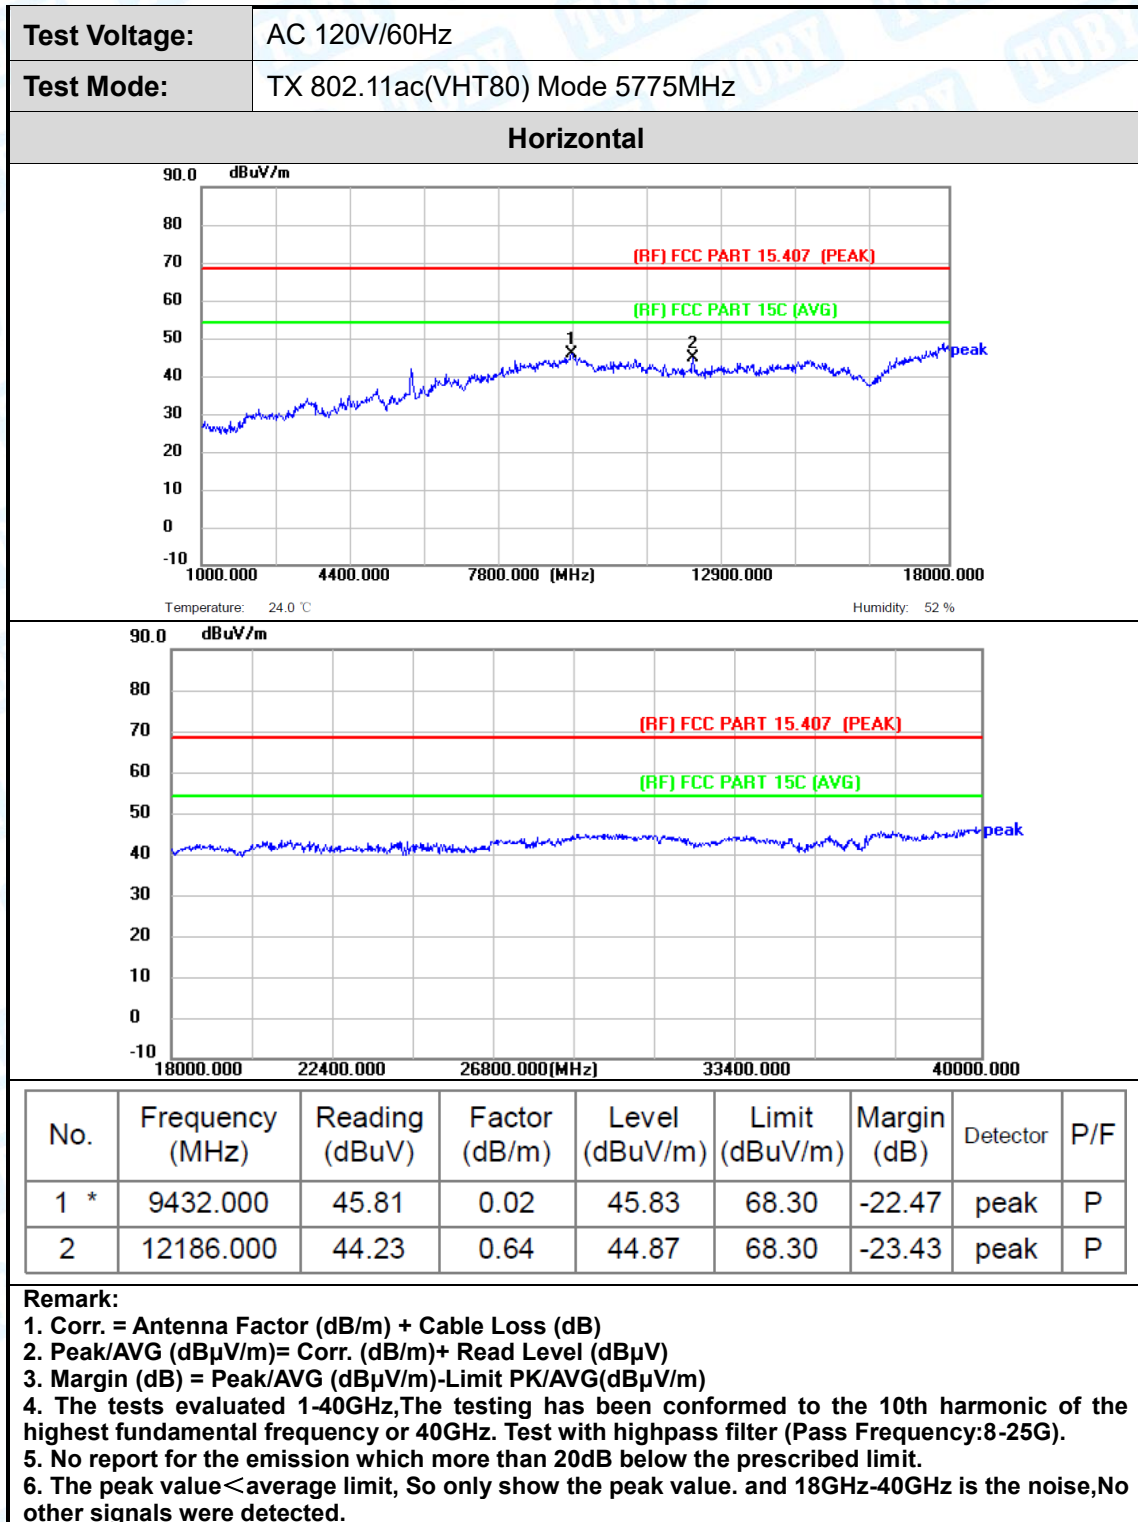




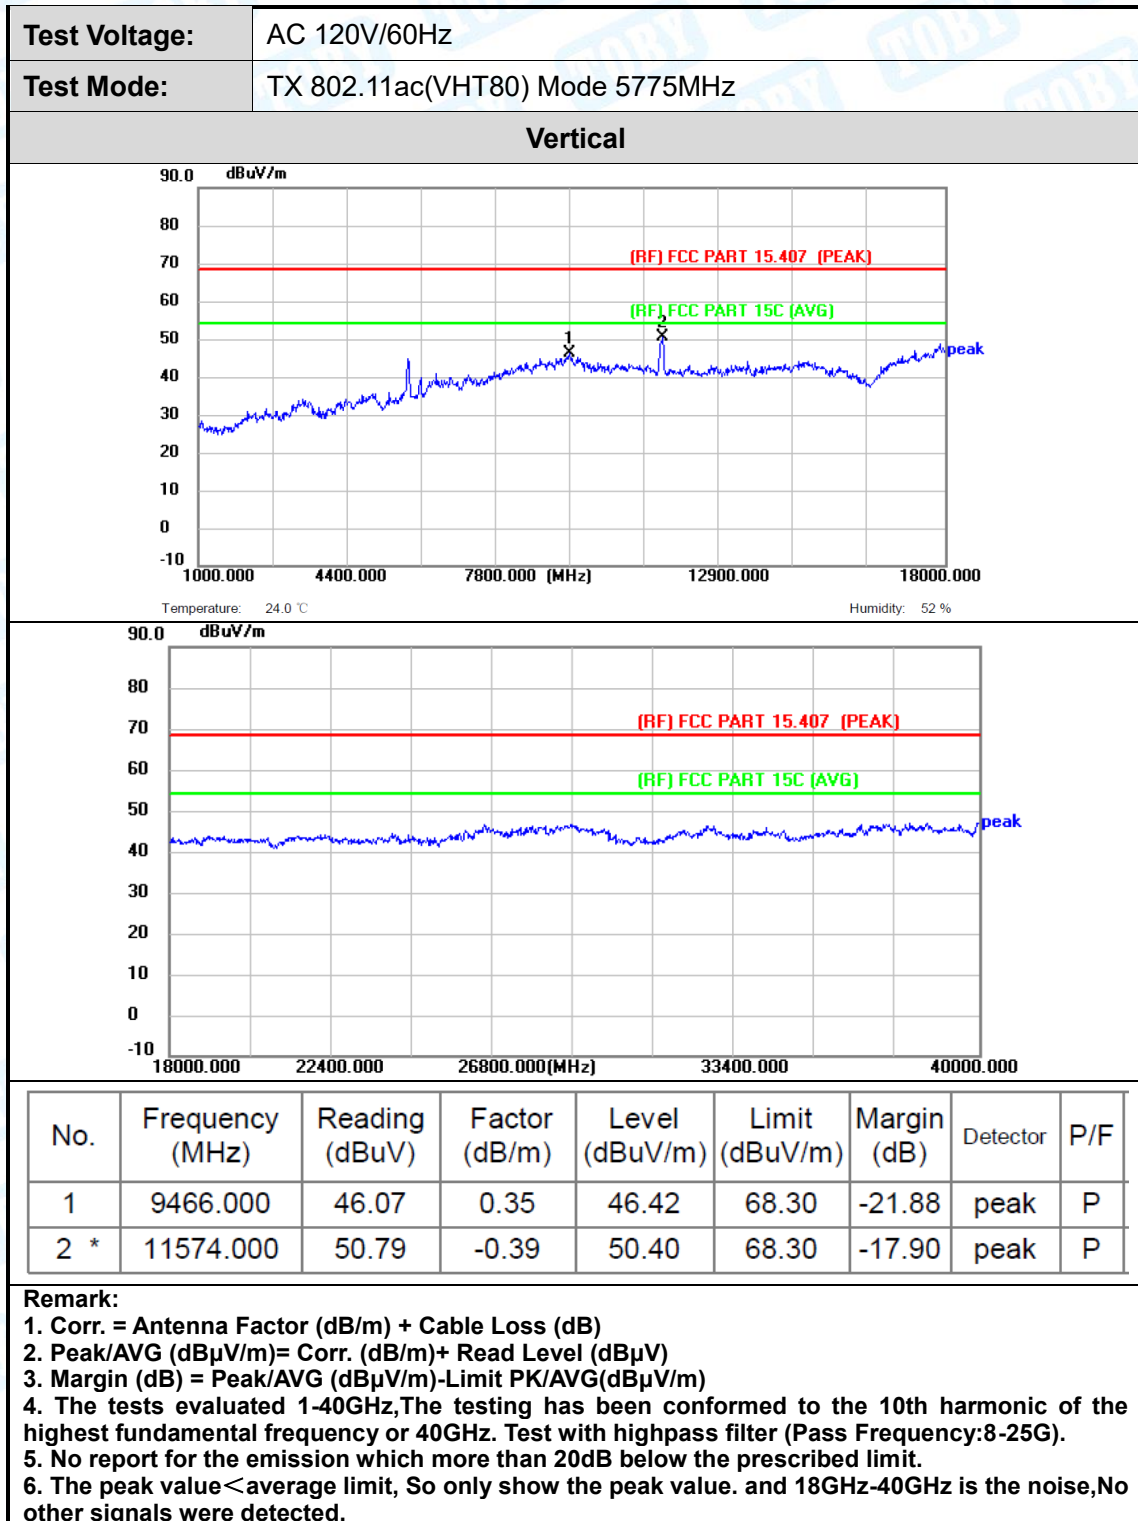

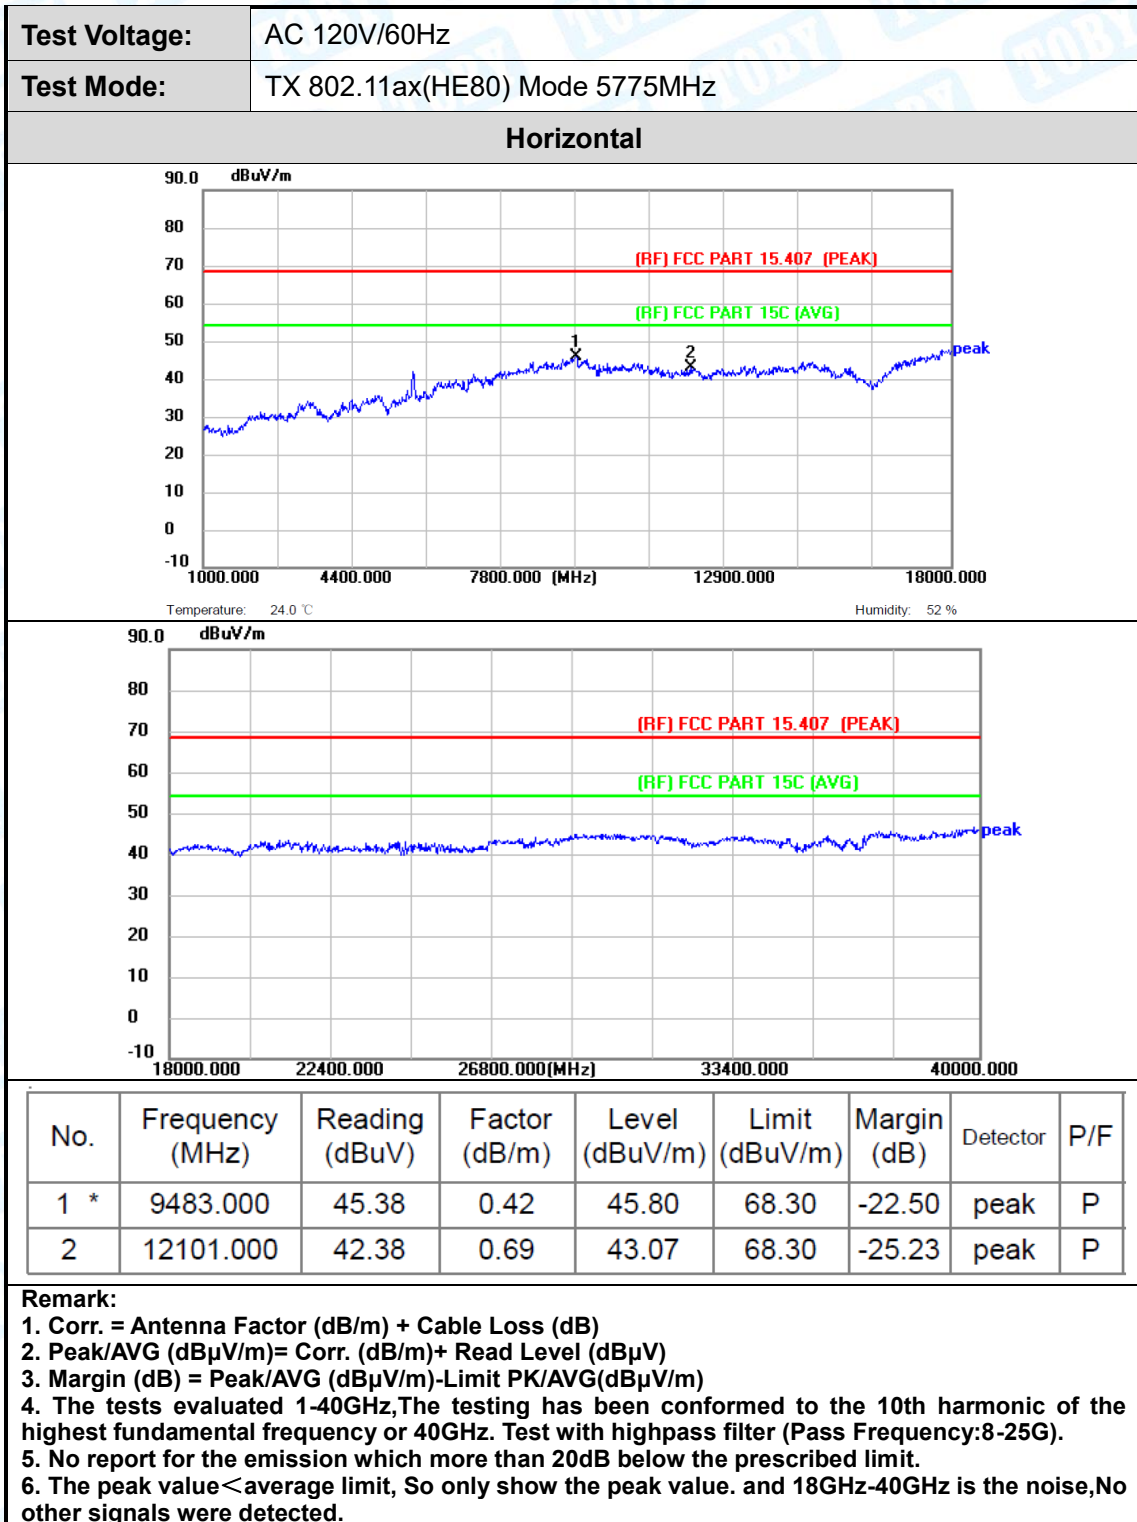




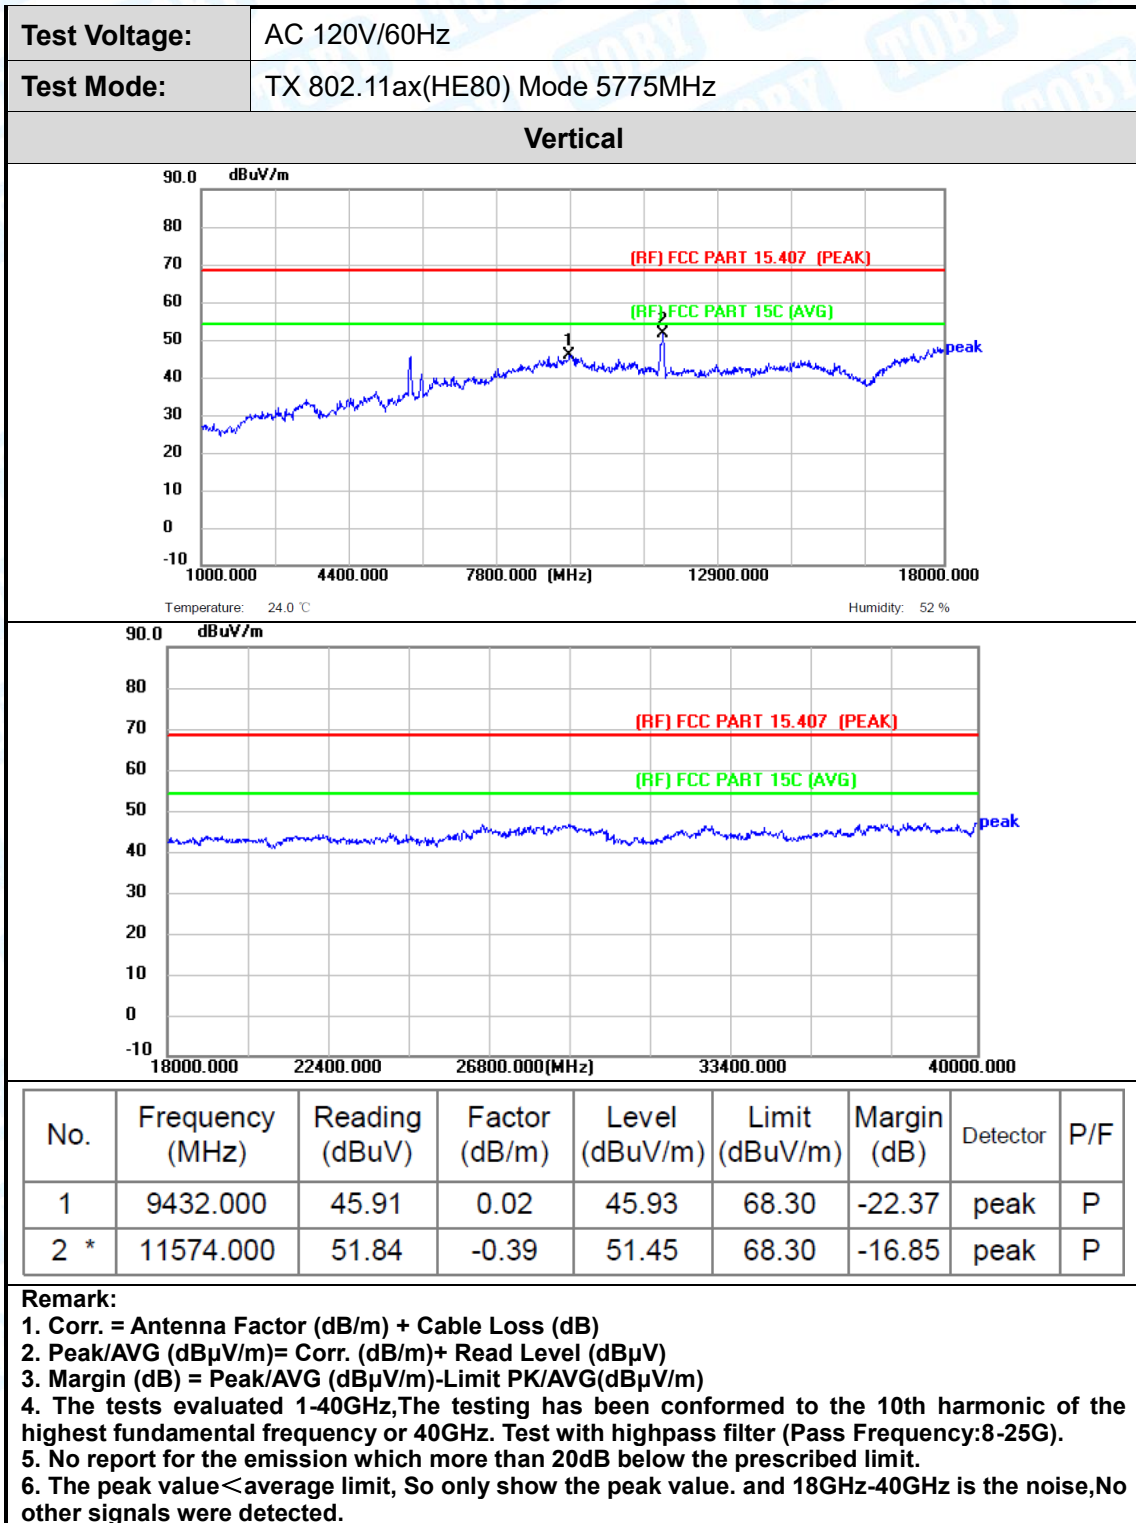

## Attachment C-- Restricted Bands Requirement Test Data

Radiation Test(only show the worst case data)

|               |                                         |                    |     |
|---------------|-----------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                  | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                            |                    |     |
| Ant. Pol.     | Horizontal                              |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1)-ANT1 |                    |     |
| Remark:       |                                         |                    |     |

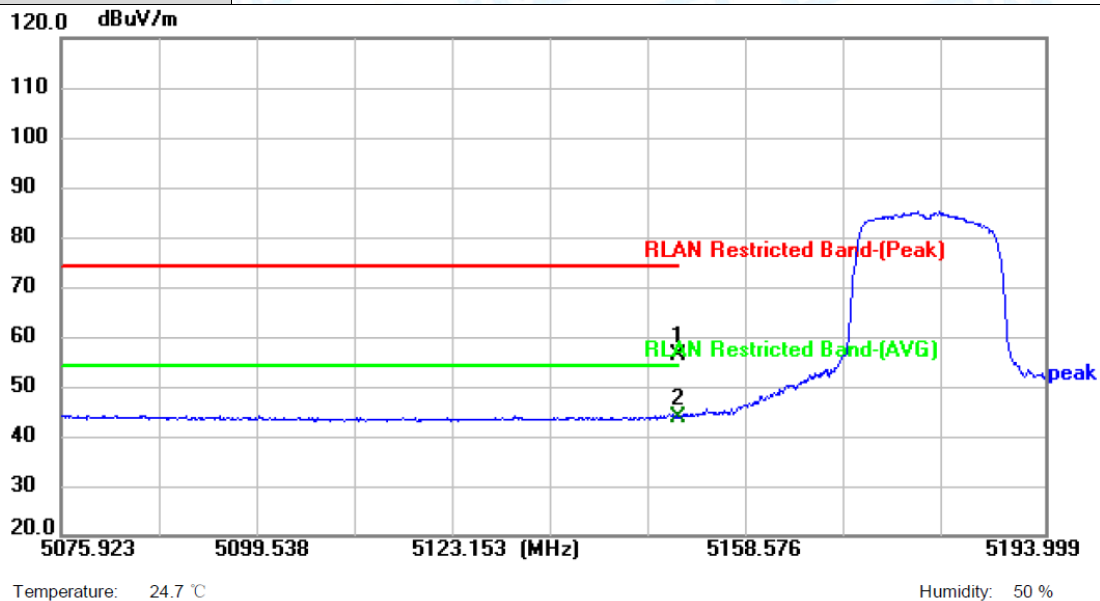

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 36.65          | 19.66         | 56.31          | 74.00          | -17.69      | peak     | P   |
| 2 * | 5150.000        | 24.16          | 19.66         | 43.82          | 54.00          | -10.18      | AVG      | P   |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)


2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                   | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1) –ANT1 |                    |     |
| Remark:       |                                          |                    |     |

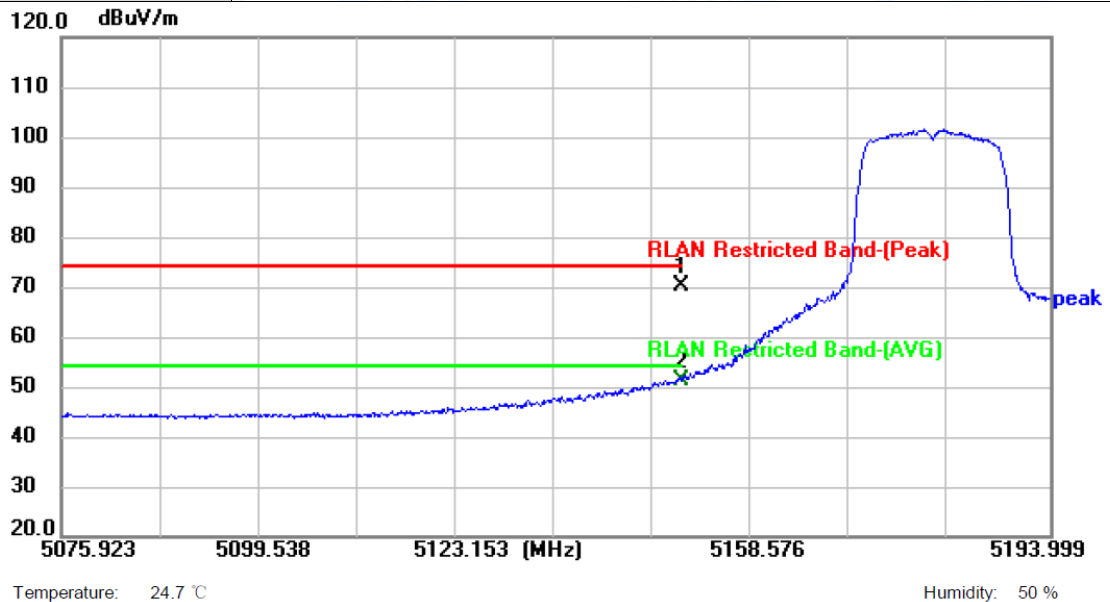


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 50.67          | 19.66         | 70.33          | 74.00          | -3.67       | peak     | P   |
| 2 * | 5150.000        | 31.64          | 19.66         | 51.30          | 54.00          | -2.70       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                         |                    |     |
|---------------|-----------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                  | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                            |                    |     |
| Ant. Pol.     | Horizontal                              |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1)-ANT2 |                    |     |
| Remark:       |                                         |                    |     |

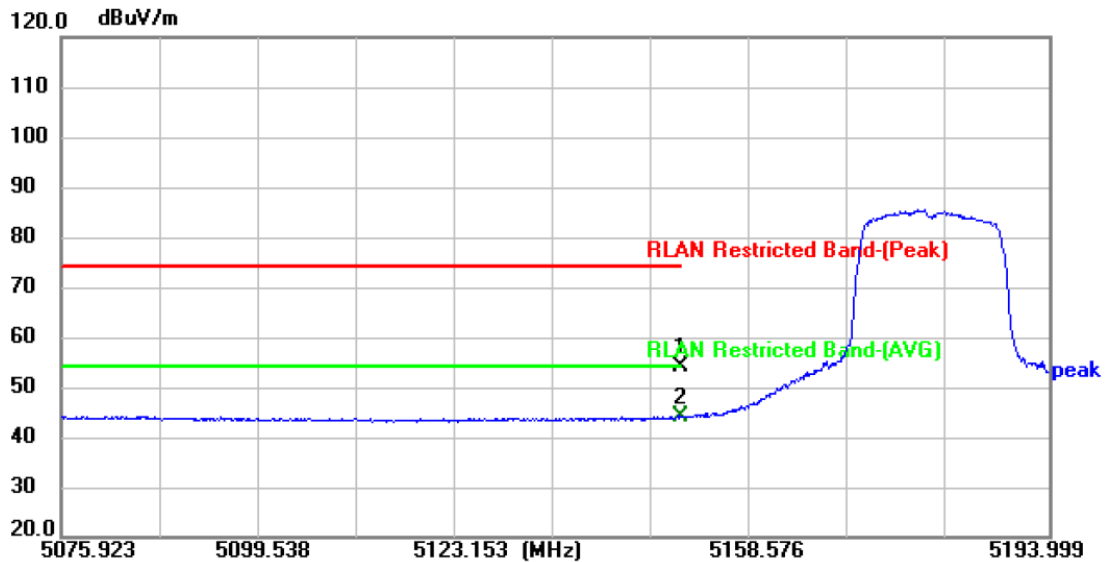

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 34.62          | 19.66         | 54.28          | 74.00          | -19.72      | peak     | P   |
| 2 * | 5150.000        | 24.59          | 19.66         | 44.25          | 54.00          | -9.75       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                   | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1) –ANT2 |                    |     |
| Remark:       |                                          |                    |     |

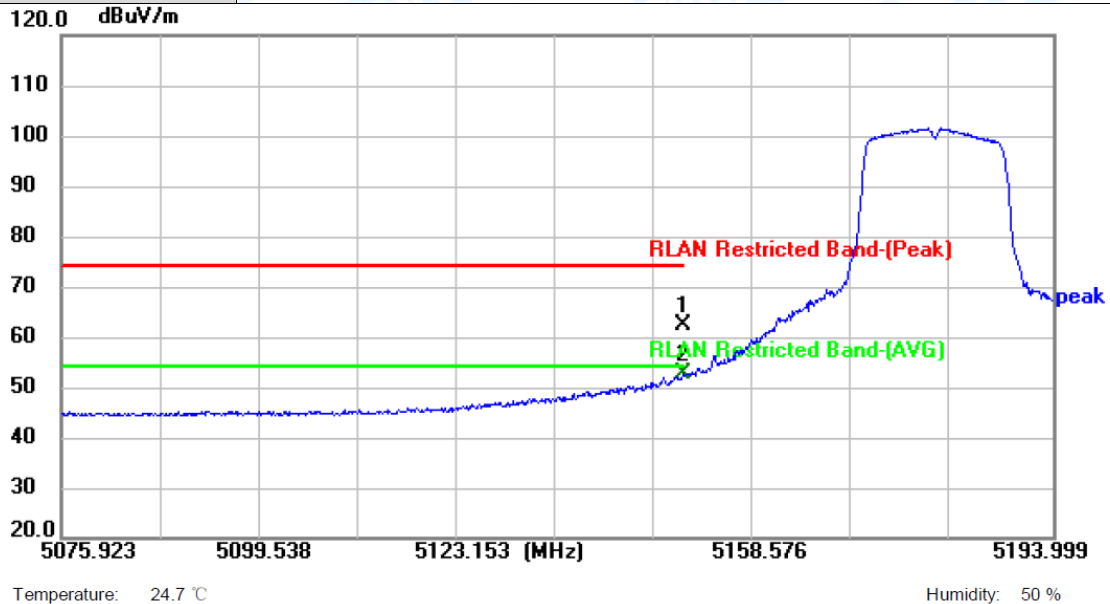


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 42.49          | 19.66         | 62.15          | 74.00          | -11.85      | peak     | P   |
| 2 * | 5150.000        | 32.90          | 19.66         | 52.56          | 54.00          | -1.44       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                    | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz (U-NII-2A) –ANT1 |                    |     |
| Remark:       |                                           |                    |     |

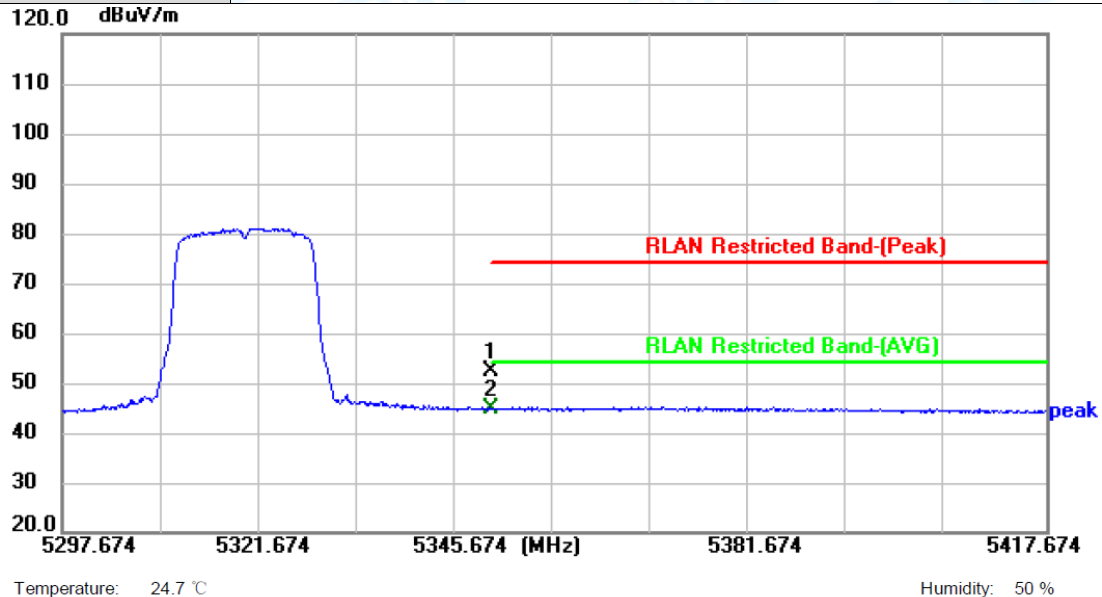

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 32.29          | 20.07         | 52.36          | 74.00          | -21.64      | peak     | P   |
| 2 * | 5350.000        | 24.68          | 20.07         | 44.75          | 54.00          | -9.25       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)





|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                    | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz (U-NII-2A) –ANT1 |                    |     |
| Remark:       |                                           |                    |     |

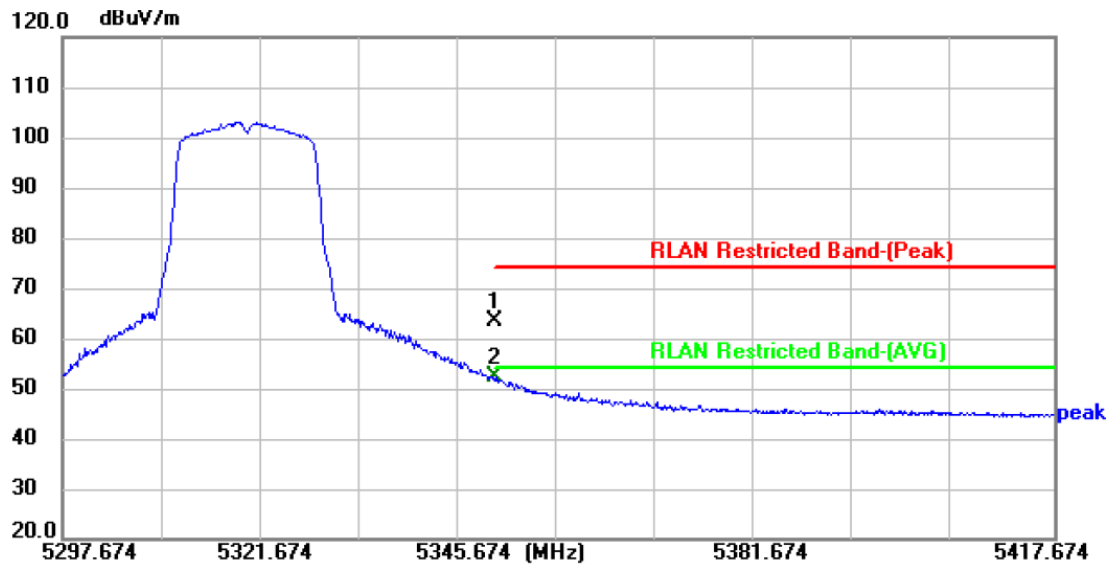


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 43.25          | 20.07         | 63.32          | 74.00          | -10.68      | peak     | P   |
| 2 * | 5350.000        | 32.14          | 20.07         | 52.21          | 54.00          | -1.79       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                    | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz (U-NII-2A) –ANT2 |                    |     |
| Remark:       |                                           |                    |     |

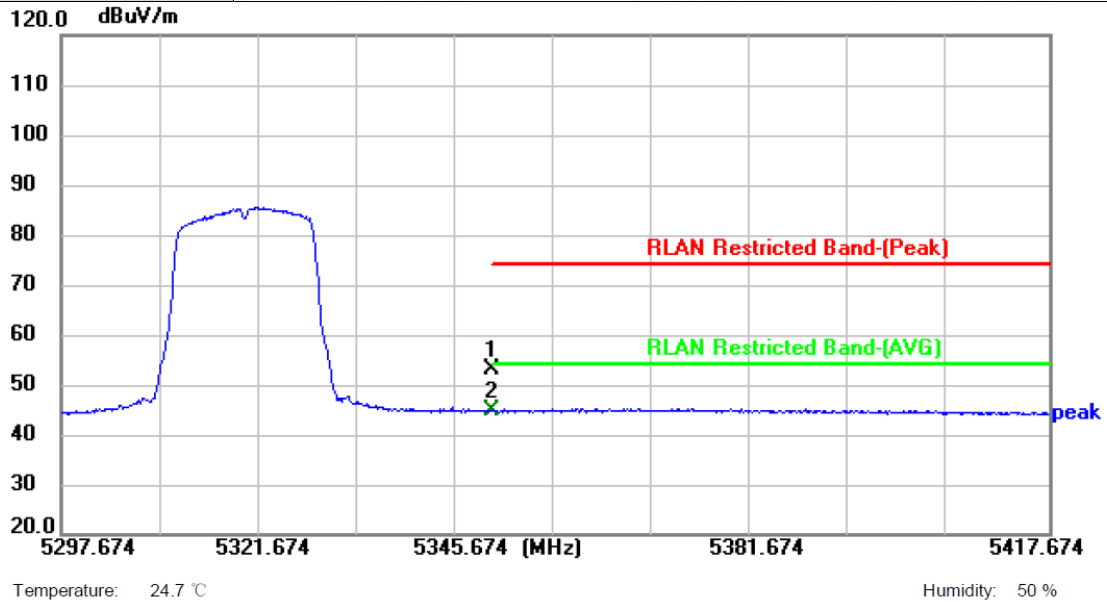

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 33.14          | 20.07         | 53.21          | 74.00          | -20.79      | peak     | P   |
| 2 * | 5350.000        | 24.77          | 20.07         | 44.84          | 54.00          | -9.16       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                    | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz (U-NII-2A) –ANT2 |                    |     |
| Remark:       |                                           |                    |     |

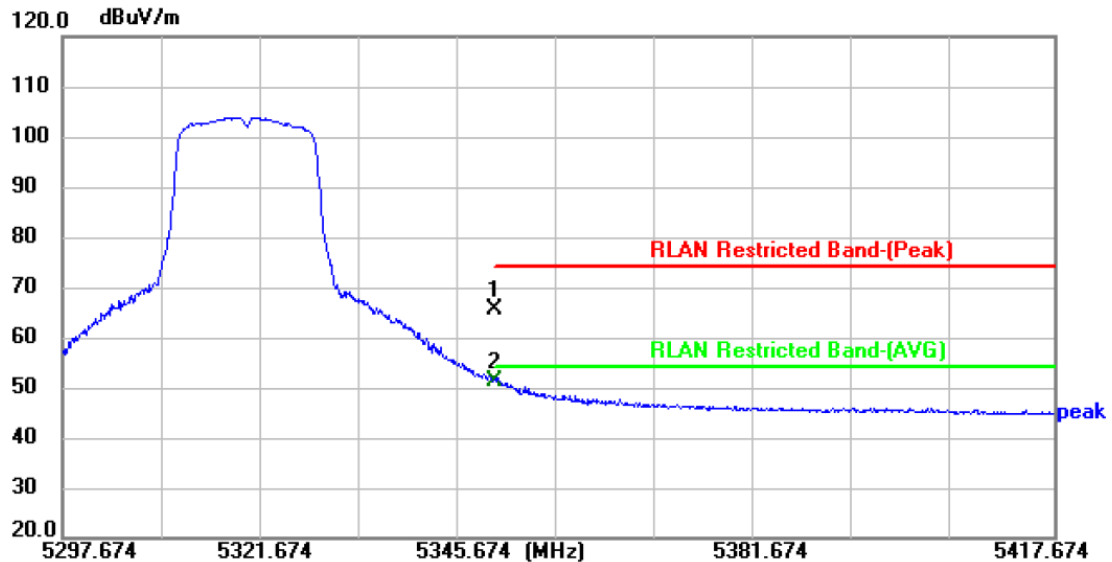


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 45.31          | 20.07         | 65.38          | 74.00          | -8.62       | peak     | P   |
| 2 * | 5350.000        | 31.17          | 20.07         | 51.24          | 54.00          | -2.76       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                              |                    |     |
|---------------|----------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                       | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                 |                    |     |
| Ant. Pol.     | Horizontal                                   |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)-CDD |                    |     |
| Remark:       |                                              |                    |     |

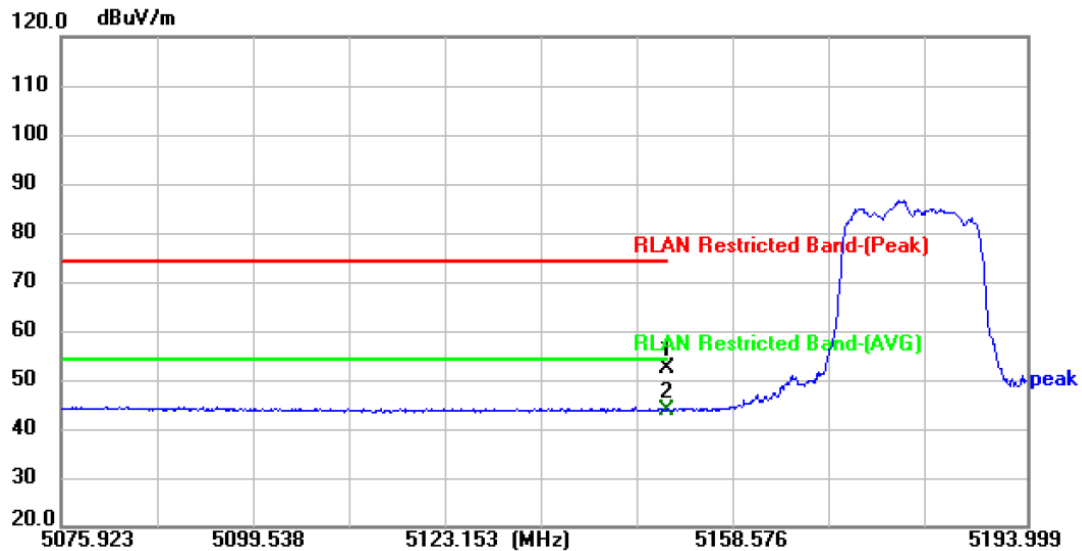

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 32.76          | 19.66         | 52.42          | 74.00          | -21.58      | peak     | P   |
| 2 * | 5150.000        | 24.03          | 19.66         | 43.69          | 54.00          | -10.31      | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)





|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                        | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -CDD |                    |     |
| Remark:       |                                               |                    |     |

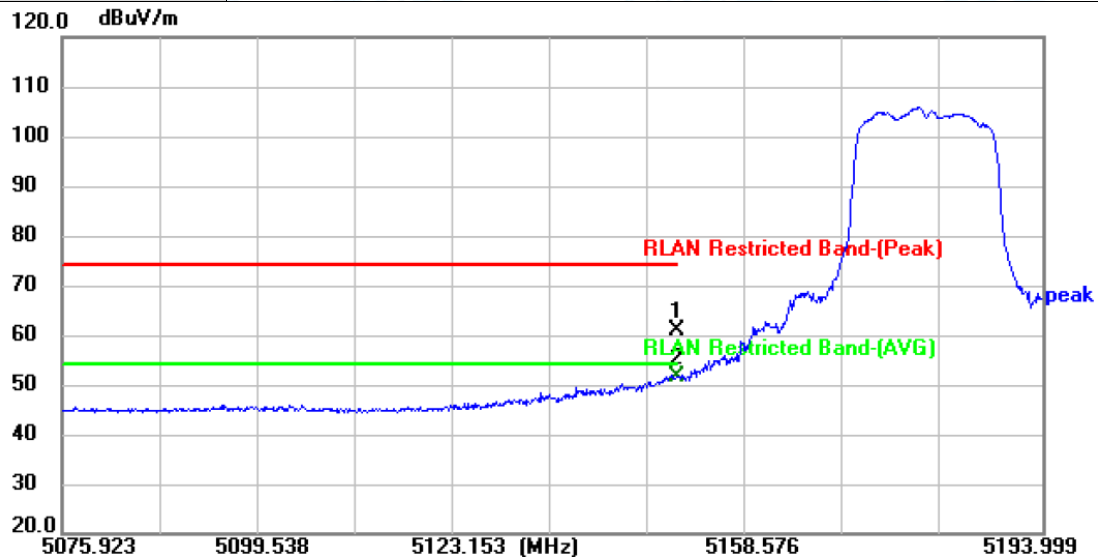


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 41.25          | 19.66         | 60.91          | 74.00          | -13.09      | peak     | P   |
| 2 * | 5150.000        | 32.12          | 19.66         | 51.78          | 54.00          | -2.22       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                        | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -CDD |                    |     |
| Remark:       |                                               |                    |     |

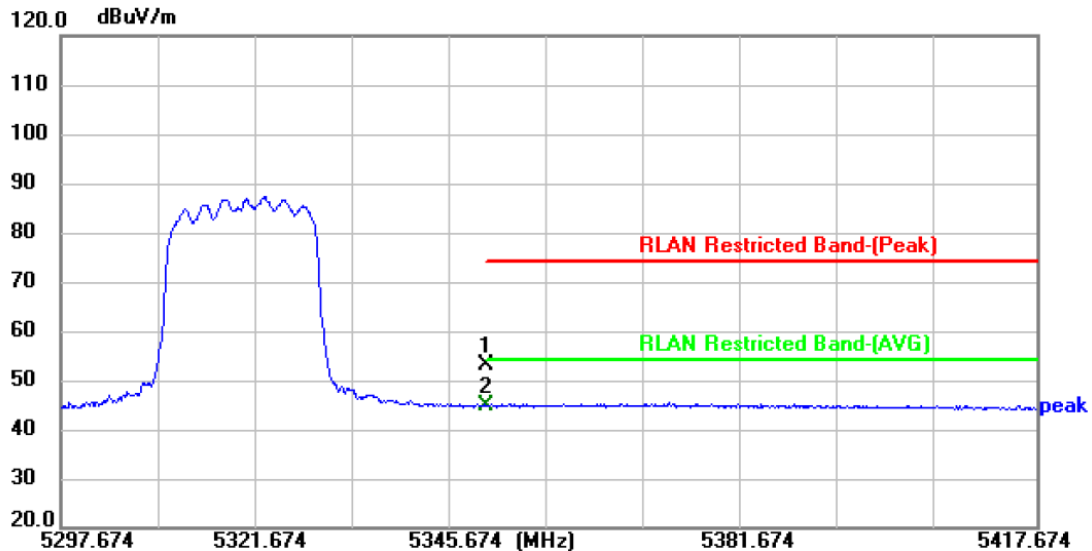

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 33.10          | 20.07         | 53.17          | 74.00          | -20.83      | peak     | P   |
| 2 * | 5350.000        | 24.85          | 20.07         | 44.92          | 54.00          | -9.08       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)





|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                         | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) -CDD |                    |     |
| Remark:       |                                                |                    |     |

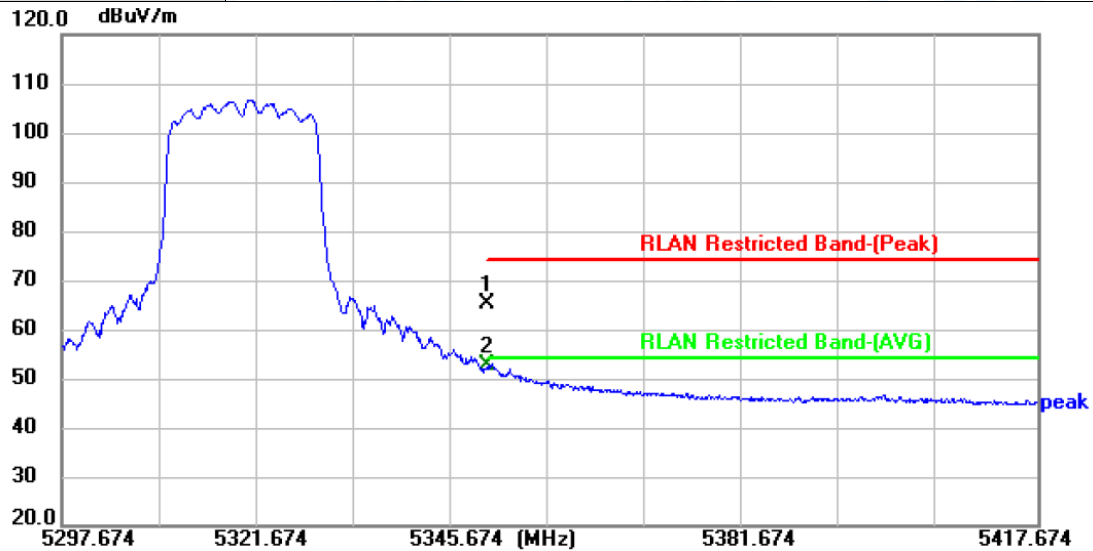


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 45.25          | 20.07         | 65.32          | 74.00          | -8.68       | peak     | P   |
| 2 * | 5350.000        | 32.73          | 20.07         | 52.80          | 54.00          | -1.20       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                          | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Horizontal                                      |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

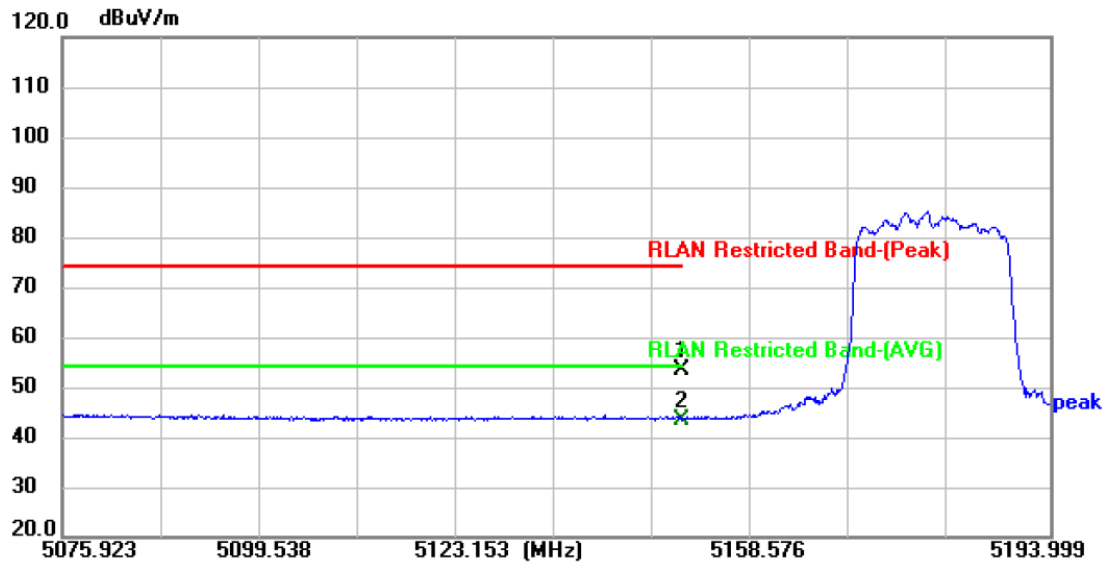

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 33.58          | 19.66         | 53.24          | 74.00          | -20.76      | peak     | P   |
| 2 * | 5150.000        | 23.86          | 19.66         | 43.52          | 54.00          | -10.48      | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)





|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                          | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

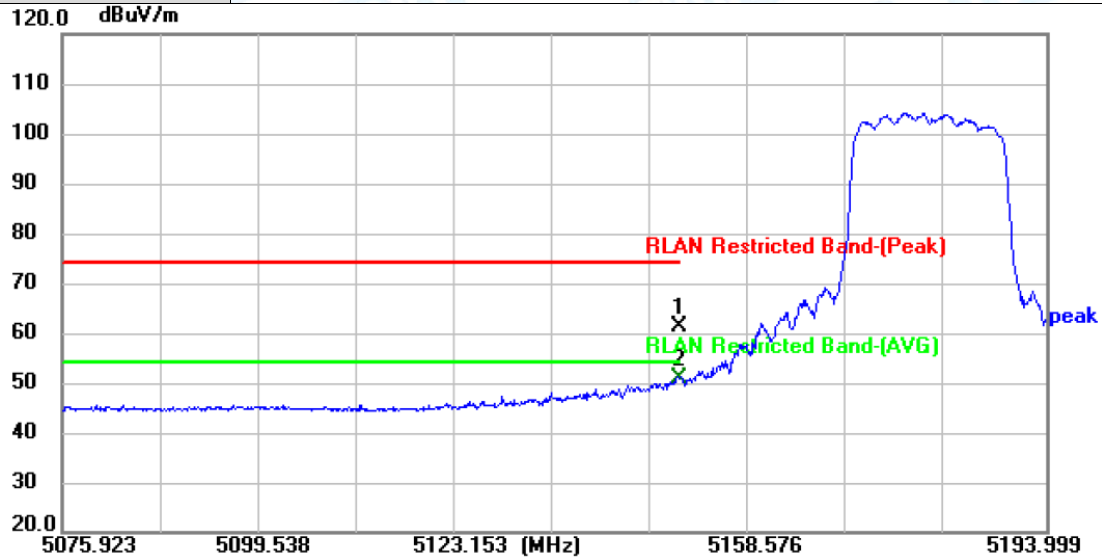


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 41.70          | 19.66         | 61.36          | 74.00          | -12.64      | peak     | P   |
| 2 * | 5150.000        | 31.08          | 19.66         | 50.74          | 54.00          | -3.26       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                  |                    |     |
|---------------|--------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                           | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                     |                    |     |
| Ant. Pol.     | Horizontal                                       |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD |                    |     |
| Remark:       |                                                  |                    |     |

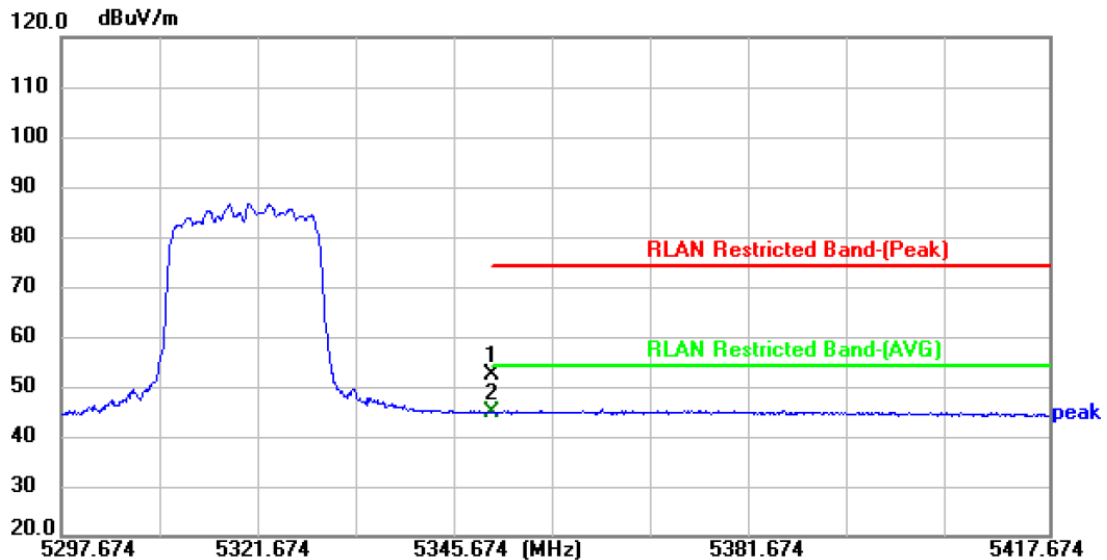

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 32.19          | 20.07         | 52.26          | 74.00          | -21.74      | peak     | P   |
| 2 * | 5350.000        | 24.88          | 20.07         | 44.95          | 54.00          | -9.05       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                                  |                    |     |
|---------------|--------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                           | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                     |                    |     |
| Ant. Pol.     | Vertical                                         |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD |                    |     |
| Remark:       |                                                  |                    |     |

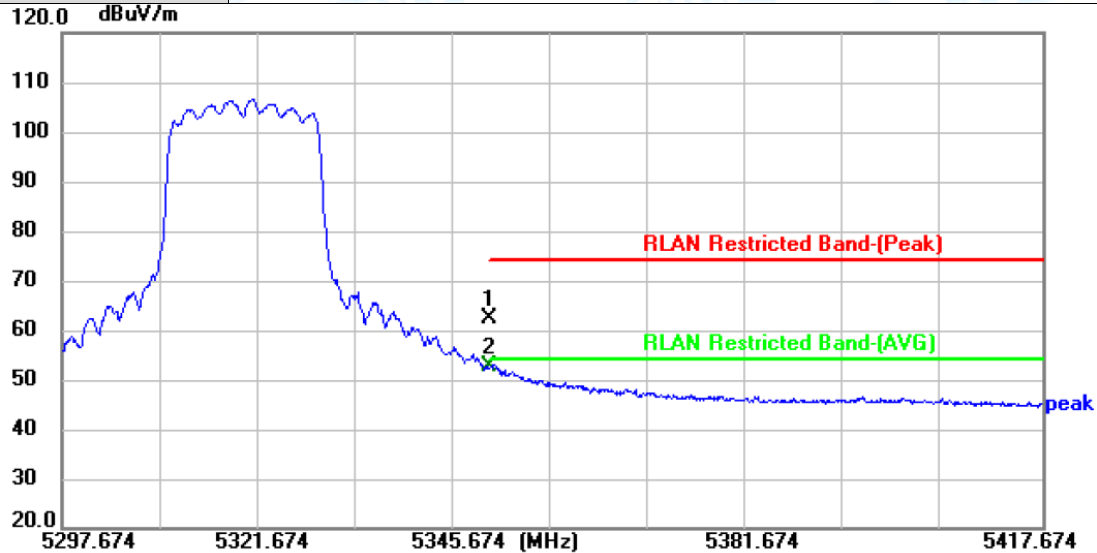


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 42.14          | 20.07         | 62.21          | 74.00          | -11.79      | peak     | P   |
| 2 * | 5350.000        | 32.68          | 20.07         | 52.75          | 54.00          | -1.25       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                         | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -CDD |                    |     |
| Remark:       |                                                |                    |     |

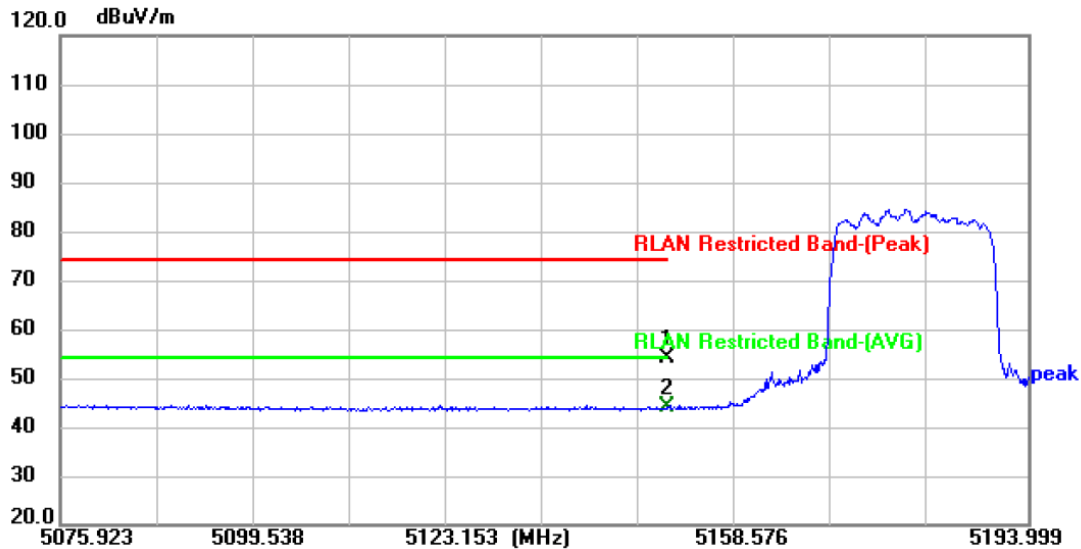

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 34.30          | 19.66         | 53.96          | 74.00          | -20.04      | peak     | P   |
| 2 * | 5150.000        | 24.34          | 19.66         | 44.00          | 54.00          | -10.00      | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)





|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.7°C                                         | Relative Humidity: | 50% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -CDD |                    |     |
| Remark:       |                                                |                    |     |

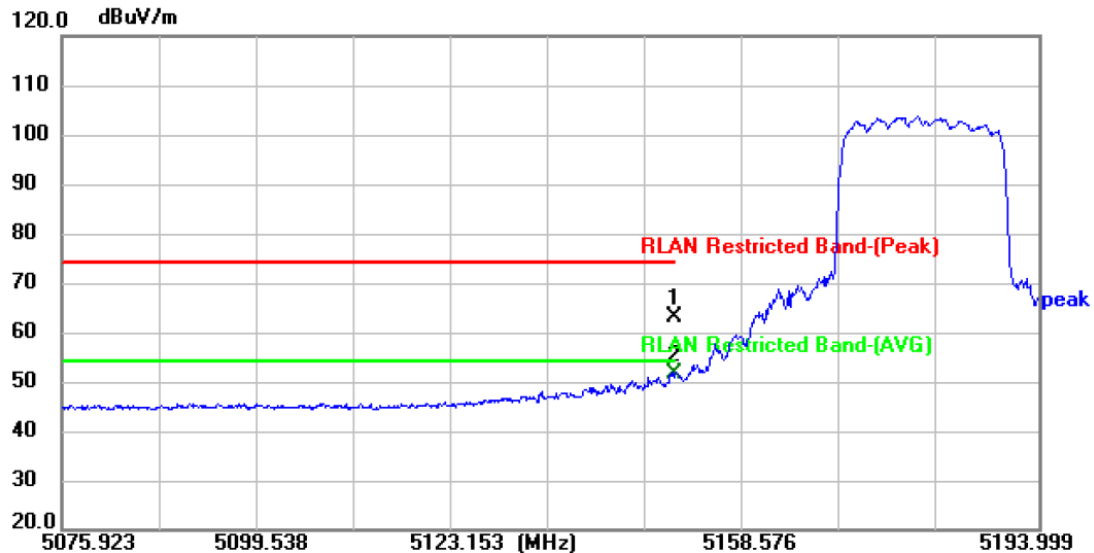

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 43.20          | 19.66         | 62.86          | 74.00          | -11.14      | peak     | P   |
| 2 * | 5150.000        | 31.96          | 19.66         | 51.62          | 54.00          | -2.38       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

