

FCC Measurement/Technical Report on SARA-R510M8S

FCC ID: XPYUBX19KM01
IC: 8595A-UBX19KM01

Test Report Reference: MDE_UBLOX_1905_FCC_02

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/

Managing Directors:

Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:

Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	6
1.3	Measurement Summary / Signatures	9
2	Revision History	13
3	Administrative Data	14
3.1	Testing Laboratory	14
3.2	Project Data	14
3.3	Applicant Data	14
3.4	Manufacturer Data	14
4	Test object Data	15
4.1	General EUT Description	15
4.2	EUT Main components	15
4.3	Ancillary Equipment	15
4.4	Auxiliary Equipment	15
4.5	EUT Setups	16
4.6	Operating Modes	16
4.7	Product labelling	17
5	Test Results	18
5.1	RF Output power	18
5.2	RF Output power	21
5.3	RF Output Power	24
5.4	Field strength of spurious radiation	29
5.5	RF Output Power	38
6	Test Equipment	41
7	Antenna Factors, Cable Loss and Sample Calculations	45
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	45
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	46
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	47
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	48
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	49
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	50
8	Measurement Uncertainties	51
9	Photo Report	52

Applied Standards and Test Summary

1.1 APPLIED STANDARDS

Type of Authorization

Certification for a cellular mobile device.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 22, (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 22, Subpart H – Cellular Radiotelephone Service

§ 22.905 – Channels for cellular service

§ 22.913 – Effective radiated power limits

§ 22.917 – Emission limitations for cellular equipment

The tests were selected and performed with reference to:

- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03r01, 2018-04-09
- ANSI C63.26: 2015

Type of Authorization

Certification for a cellular mobile device.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 90, (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 90; Private Land Mobile Radio Services

Subpart S—REGULATIONS GOVERNING LICENSING AND USE OF FREQUENCIES IN THE 806-824, 851-869, 896-901, AND 935-940 MHZ BANDS

Subpart R—REGULATIONS GOVERNING THE LICENSING AND USE OF FREQUENCIES IN THE 763-775 AND 793-805 MHZ BANDS

§ 90.635 – Limitations on power and antenna height
§ 90.543 – Emission limitations
§ 90.539 – Frequency stability

The tests were selected and performed with reference to:

- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03r01, 2018-04-09
- ANSI C63.26: 2015

Type of Authorization

Certification for a cellular mobile device.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 24, (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 24, Subpart E – Broadband PCS

§ 24.232 – Power and antenna height limits
§ 24.235 – Frequency stability
§ 24.238 – Emission limitations for Broadband PCS equipment

The tests were selected and performed with reference to:

- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03r01, 2018-04-09
- ANSI C63.26: 2015

Type of Authorization

Certification for a cellular mobile device.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 27, (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 27; Miscellaneous Wireless Communications Services
Subpart C – Technical standards

§ 27.50 – Power and duty cycle limits
§ 27.53 – Emission limits
§ 27.54 – Frequency stability

The tests were selected and performed with reference to:

- FCC Public Notice 971168 applying “Measurement guidance for certification of licensed digital transmitters” 971168 D01 v03r01, 2018-04-09
- ANSI C63.26: 2015

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for Cellular Mobile Devices from FCC and ISED Canada

FCC Part 22

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 22.913	RSS-GEN Issue 5, 6.12 RSS-132 Issue 3, 5.4
Peak-Average-Ratio	-	RSS 132 Issue 3: 5.4
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 22.917	RSS-GEN Issue 5, 6.13 RSS-132 Issue 3, 5.5
Band Edge Compliance	§ 2.1051 § 22.917	RSS-GEN Issue 4, 6.13 RSS-132 Issue 3, 5.5
Frequency stability	§ 2.1055 § 22.355	RSS-GEN Issue 5, 6.11 RSS-132 Issue 3: 5.3
Field strength of spurious radiation	§ 2.1053 § 22.917	RSS-GEN Issue 5, 6.13 RSS-132 Issue 3: 5.5

FCC Part 90

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 90.635	RSS-GEN Issue 5, 6.12
Peak to Average-Ratio	§ 90.635	
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 90.543	RSS-GEN Issue 5, 6.13
Band Edge Compliance	§ 2.1051 § 90.543	RSS-GEN Issue 5, 6.13
Frequency stability	§ 2.1055 § 90.539	RSS-GEN Issue 5, 6.11
Field strength of spurious radiation	§ 2.1053 § 90.543	RSS-GEN Issue 5, 6.13

FCC Part 24

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 24.232	RSS-GEN Issue 5, 6.12 RSS-133 Issue 6, 6.4
Peak-Average-Ratio	§ 24.232	RSS 133 Issue 6: 6.4
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 24.238	RSS-GEN Issue 5, 6.13 RSS-133 Issue 6, 6.5
Band Edge Compliance	§ 2.1051 § 24.238	RSS-GEN Issue 5, 6.13 RSS-133 Issue 6, 6.5
Frequency stability	§ 2.1055 § 24.235	RSS-GEN Issue 5, 6.11 RSS-133 Issue 6: 6.3
Field strength of spurious radiation	§ 2.1053 § 24.236	RSS-GEN Issue 5, 6.13 RSS-133 Issue 6: 6.5

FCC Part 27

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 27.50	RSS-GEN Issue 5, 6.12 RSS-130 Issue 2, 4.6.2/4.6.3 RSS-139 Issue 3, 6.5 RSS-199 Issue 3, 4.4
Peak to Average-Ratio	§ 27.50	RSS-130 Issue 2: 4.6.1 RSS 139 Issue 3: 6.5 RSS-199 Issue 3, 4.4
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 27.53	RSS-GEN Issue 5, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 3, 6.6 RSS-199 Issue 3, 4.5
Band Edge Compliance	§ 2.1051 § 27.53	RSS-GEN Issue 5, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 3, 6.6 RSS-199 Issue 3, 4.5
Frequency stability	§ 2.1055 § 27.54	RSS-GEN Issue 5, 6.11 RSS-130 Issue 2: 4.5 RSS-139 Issue 3: 6.4 RSS-199 Issue 3, 4.3
Field strength of spurious radiation	§ 2.1053 § 27.53	RSS-GEN Issue 5, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 3: 6.6 RSS-199 Issue 3, 4.5

1.3 MEASUREMENT SUMMARY / SIGNATURES

47 CFR CHAPTER I FCC PART 22

§ 2.1046 § 22.913

Subpart H

RF Output power

The measurement was performed according to ANSI C63.26: 2015

Final Result

OP-Mode

Technology, Radio Technology, Operating Frequency, ChBW, Resource Blocks, Measurement method

Setup

Date

FCC

IC

CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed

47 CFR CHAPTER I FCC PART 24

§ 2.1046 § 24.232

Subpart E

RF Output power

The measurement was performed according to ANSI C63.26: 2015

Final Result

OP-Mode

Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method

OP-Mode	Setup	Date	FCC	IC
CAT-M1, eFDD 2 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed

47 CFR CHAPTER I FCC PART 27

§ 2.1046 § 27.50

Subpart C

RF Output Power

The measurement was performed according to ANSI C63.26: 2015

Final Result

OP-Mode

Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method

OP-Mode	Setup	Date	FCC	IC
CAT-M1, eFDD 12 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed

47 CFR CHAPTER I FCC PART 27

§ 2.1046 § 27.50

Subpart C

RF Output Power

The measurement was performed according to ANSI C63.26: 2015

Final Result

OP-Mode

Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method

OP-Mode	Setup	Date	FCC	IC
CAT-M1, eFDD 12 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 13 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_AW16	2020-05-19	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_AW16	2020-05-19	Passed	Passed

47 CFR CHAPTER I FCC PART 27

§ 2.1053 § 27.53

Subpart C

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26: 2015

Final Result

OP-Mode

Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method

Setup

Date

FCC

IC

CAT-M1, eFDD 13 QPSK, mid channel, 1.4 MHz, 1, radiated

S01_AW16

2020-05-28

Passed

Passed

47 CFR CHAPTER I FCC PART 90

§ 2.1046 § 90.635

Subpart S

RF Output Power

The measurement was performed according to ANSI C63.26: 2015

Final Result

OP-Mode

Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method

Setup

Date

FCC

IC

CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 1, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 5, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 1, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 5, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 1, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 5, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 1, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 3, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 6, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 1, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 3, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 6, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 1, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 3, conducted

S01_AW16

2020-05-19

Passed

Passed

CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 6, conducted

S01_AW16

2020-05-19

Passed

Passed

N/A: Not applicable

N/P: Not performed

2 REVISION HISTORY

Report version control			
Version	Release date	Change Description	Version validity
initial	2020-06-18	--	valid
-	-	-	-

COMMENT: -

D. Gall

(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall

J. Dörwald

(responsible for testing and report)
B.Sc. Jens Dörwald



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKkS D-PL-12140-01-01 | D-PL-12140-01-02 | D-PL-12140-01-03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier: DE0007; ISED#: 3699A
Responsible for accreditation scope: Dipl.-Ing. Daniel Gall
Report Template Version: 2019-12-16

3.2 PROJECT DATA

Responsible for testing and report: B.Sc. Jens Dörwald
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2020-06-18
Testing Period: 2020-05-19 to 2020-05-28

3.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
8800 Thalwil
Switzerland
Contact Person: Mr. Giulio Comar

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data
Address:
Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	LTE CAT-M1 module.
Product name	SARA-R510M8S
Type	-
Declared EUT data by the supplier	
Power Supply Type	DC
General product description	The EUT is LTE CAT-M1 module. It supports the relevant bands for FCC Approval LTE CAT-M1: eFDD2 / LTE eFDD4 / eFDD5 / eFDD12 / eFDD13 / eFDD25 /eFDD26
Nominal Voltage / Frequency	3.8 V DC

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
aw16	DE1015116aw16	radiated & conducted sample
Sample Parameter	Value	
Serial No.	357862090060932	
HW Version	352F00	
SW Version	01.04	
Comment	-	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT

which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
Antenna	-	-

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AW16	aw16	radiated & conducted sample

4.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

4.6.1 TEST CHANNELS

FCC Part 24

LTE CAT-M1 eFDD 2	LOW	MID	HIGH
Channel	18607	18900	19193
Frequency [MHz]	1850.7	1880	1909.3

FCC Part 27

LTE CAT-M1 eFDD 4	LOW	MID	HIGH
Channel	19957	20175	20393
Frequency [MHz]	1710.7	1732.5	1754.3

FCC Part 22

LTE CAT-M1 eFDD 5	LOW	MID	HIGH
Channel	20407	20525	20643
Frequency [MHz]	824.7	836.5	848.3

FCC Part 27

LTE CAT-M1 eFDD 12	LOW	MID	HIGH
Channel	23017	23095	23173
Frequency [MHz]	699.7	707.5	715.3

FCC Part 27

LTE CAT-M1 eFDD 13	LOW	MID	HIGH
Channel	23205	23230	23255
Frequency [MHz]	777.7	780.3	786.3

FCC Part 24

LTE CAT-M1 eFDD 25	LOW	MID	HIGH
Channel	26047	26365	26683
Frequency [MHz]	1850.7	1882.5	1914.3

FCC Part 22

LTE CAT-M1 eFDD 26	LOW	MID	HIGH
Channel	26797	26915	27033
Frequency [MHz]	824.7	836.5	848.3

FCC Part 90

LTE CAT-M1 eFDD26	LOW	MID	HIGH
Channel	26697	26740	26783
Frequency [MHz]	814.7	819	823.3

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 RF OUTPUT POWER


Standard **FCC PART 22 Subpart H**

The test was performed according to:
ANSI C63.26: 2015

5.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

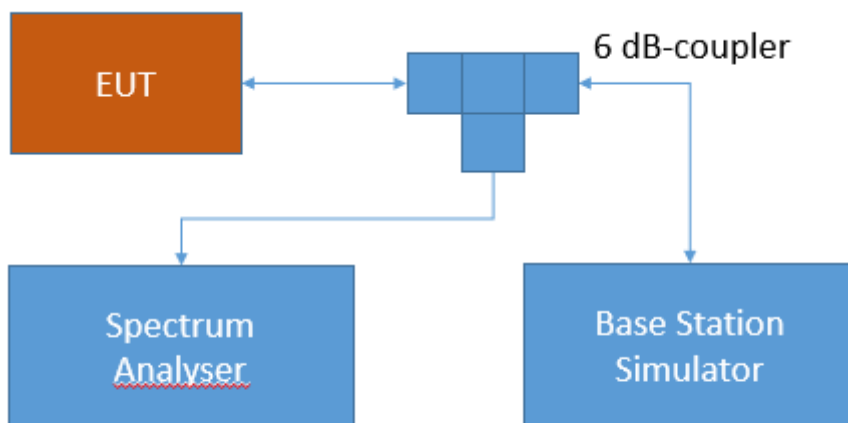

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 22, § 22.913

(a) *Maximum ERP.* The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

RSS-132; 5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

5.1.3 TEST PROTOCOL

Temperature 22 °C


Humidity 36 %

Radio Technology	Channel	Ressource Blocks / Subcarrier	Band-width [MHz]	Initial EUT: RMS Cond. Power [dBm]	New EUT: RMS Cond. Power [dBm]	Deviation [dBm]
CAT-M1 eFDD 5 QPSK	low	1	1.4	23	22.96	0.04
CAT-M1 eFDD 5 QPSK	low	3	1.4	21.88	21.75	0.13
CAT-M1 eFDD 5 QPSK	low	6	1.4	20.84	20.82	0.02
CAT-M1 eFDD 5 QPSK	mid	1	1.4	22.81	23.07	-0.26
CAT-M1 eFDD 5 QPSK	mid	3	1.4	21.83	21.66	0.17
CAT-M1 eFDD 5 QPSK	mid	6	1.4	20.93	20.74	0.19
CAT-M1 eFDD 5 QPSK	high	1	1.4	22.81	22.99	-0.18
CAT-M1 eFDD 5 QPSK	high	3	1.4	21.85	21.76	0.09
CAT-M1 eFDD 5 QPSK	high	6	1.4	20.85	20.82	0.03
CAT-M1 eFDD 5 16QAM	low	1	1.4	21.63	21.45	0.18
CAT-M1 eFDD 5 16QAM	low	5	1.4	21.02	21.01	0.01
CAT-M1 eFDD 5 16QAM	mid	1	1.4	21.52	21.34	0.18
CAT-M1 eFDD 5 16QAM	mid	5	1.4	21.13	21.09	0.04
CAT-M1 eFDD 5 16QAM	high	1	1.4	21.72	21.47	0.25
CAT-M1 eFDD 5 16QAM	high	5	1.4	21.08	21.04	0.04
CAT-M1 eFDD 26 QPSK	low	1	1.4	22.57	22.81	-0.24
CAT-M1 eFDD 26 QPSK	low	3	1.4	21.45	21.59	-0.14
CAT-M1 eFDD 26 QPSK	low	6	1.4	20.38	20.68	-0.3
CAT-M1 eFDD 26 QPSK	mid	1	1.4	22.36	22.78	-0.42
CAT-M1 eFDD 26 QPSK	mid	3	1.4	21.39	21.62	-0.23
CAT-M1 eFDD 26 QPSK	mid	6	1.4	20.49	20.71	-0.22
CAT-M1 eFDD 26 QPSK	high	1	1.4	22.37	22.73	-0.36
CAT-M1 eFDD 26 QPSK	high	3	1.4	21.4	21.49	-0.09
CAT-M1 eFDD 26 QPSK	high	6	1.4	20.41	20.57	-0.16
CAT-M1 eFDD 26 16QAM	low	1	1.4	21.26	21.3	-0.04
CAT-M1 eFDD 26 16QAM	low	5	1.4	20.6	20.87	-0.27
CAT-M1 eFDD 26 16QAM	mid	1	1.4	21.01	21.38	-0.37
CAT-M1 eFDD 26 16QAM	mid	5	1.4	20.73	20.91	-0.18
CAT-M1 eFDD 26 16QAM	high	1	1.4	21.14	21.22	-0.08
CAT-M1 eFDD 26 16QAM	high	5	1.4	20.64	20.79	-0.15

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

CAT-M1 eFDD 5 QPSK, RB=1, Channel = mid

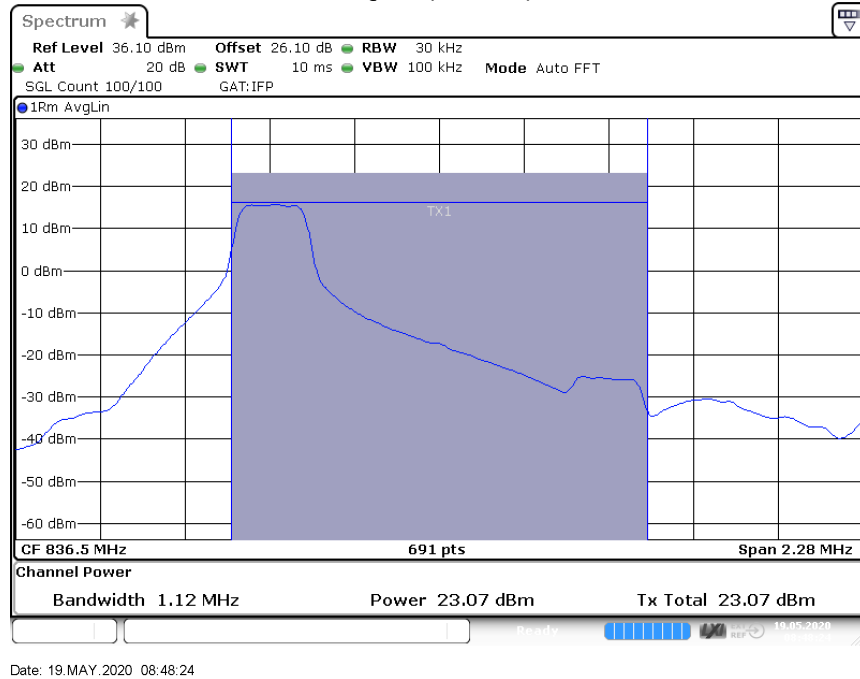

5.1.5 TEST EQUIPMENT USED

- Radio Lab

5.2 RF OUTPUT POWER


Standard **FCC PART 24 Subpart E**

The test was performed according to:
ANSI C63.26: 2015

5.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

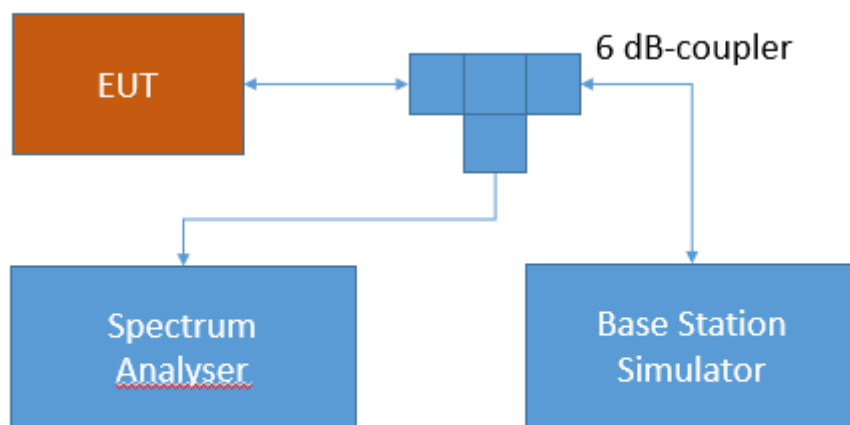

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 24, § 24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

RSS-133; 6.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

Radio Technology	Channel	Res- source Blocks / Sub- carrier	Band- width [MHz]	Initial EUT: RMS Cond. Power [dBm]	New EUT: RMS Cond. Power [dBm]	Deviation [dBm]
CAT-M1 eFDD 2 QPSK	low	1	1.4	22.57	22.92	-0.35
CAT-M1 eFDD 2 QPSK	low	3	1.4	21.42	21.7	-0.28
CAT-M1 eFDD 2 QPSK	low	6	1.4	20.4	20.7	-0.3
CAT-M1 eFDD 2 QPSK	mid	1	1.4	22.43	22.75	-0.32
CAT-M1 eFDD 2 QPSK	mid	3	1.4	21.38	21.76	-0.38
CAT-M1 eFDD 2 QPSK	mid	6	1.4	20.27	20.62	-0.35
CAT-M1 eFDD 2 QPSK	high	1	1.4	22.67	22.93	-0.26
CAT-M1 eFDD 2 QPSK	high	3	1.4	21.48	21.91	-0.43
CAT-M1 eFDD 2 QPSK	high	6	1.4	20.52	20.8	-0.28
CAT-M1 eFDD 2 16QAM	low	1	1.4	20.87	21.34	-0.47
CAT-M1 eFDD 2 16QAM	low	5	1.4	20.62	20.89	-0.27
CAT-M1 eFDD 2 16QAM	mid	1	1.4	20.9	21.39	-0.49
CAT-M1 eFDD 2 16QAM	mid	5	1.4	20.41	20.78	-0.37
CAT-M1 eFDD 2 16QAM	high	1	1.4	21.16	21.5	-0.34
CAT-M1 eFDD 2 16QAM	high	5	1.4	20.64	20.89	-0.25
CAT-M1 eFDD 25 QPSK	low	1	1.4	22.62	22.96	-0.34
CAT-M1 eFDD 25 QPSK	low	3	1.4	21.43	21.74	-0.31
CAT-M1 eFDD 25 QPSK	low	6	1.4	20.42	20.76	-0.34
CAT-M1 eFDD 25 QPSK	mid	1	1.4	22.5	22.83	-0.33
CAT-M1 eFDD 25 QPSK	mid	3	1.4	21.45	21.83	-0.38
CAT-M1 eFDD 25 QPSK	mid	6	1.4	20.38	20.68	-0.3
CAT-M1 eFDD 25 QPSK	high	1	1.4	22.59	22.88	-0.29
CAT-M1 eFDD 25 QPSK	high	3	1.4	21.52	21.84	-0.32
CAT-M1 eFDD 25 QPSK	high	6	1.4	20.37	20.71	-0.34
CAT-M1 eFDD 25 16QAM	low	1	1.4	20.89	21.37	-0.48
CAT-M1 eFDD 25 16QAM	low	5	1.4	20.53	20.89	-0.36
CAT-M1 eFDD 25 16QAM	mid	1	1.4	20.88	21.44	-0.56
CAT-M1 eFDD 25 16QAM	mid	5	1.4	20.55	20.78	-0.23
CAT-M1 eFDD 25 16QAM	high	1	1.4	20.95	21.44	-0.49
CAT-M1 eFDD 25 16QAM	high	5	1.4	20.61	20.83	-0.22

SRSP-510; 5.1.2 Radiated Power and Antenna Height Limits – Mobile Stations

Mobile stations and hand-held portables are limited to 2 watts maximum e.i.r.p. The equipment shall employ means to limit the power to the minimum necessary for successful communication.


5.2.3 TEST PROTOCOL

Ambient temperature: 24 °C
Relative humidity: 38 %

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

CAT-M1 eFDD 25 QPSK, RB = 1, Channel = high

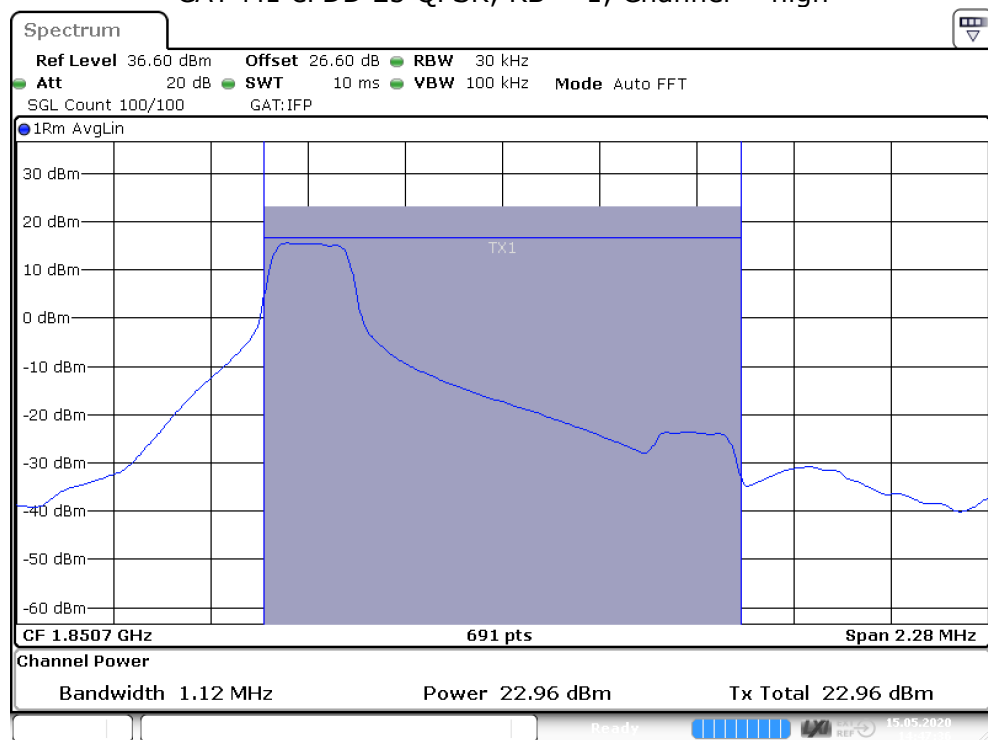

Date: 15.MAY.2020 14:47:36

5.2.5 TEST EQUIPMENT USED

- Radio Lab

5.3 RF OUTPUT POWER


Standard **FCC PART 27 Subpart C**

The test was performed according to:
ANSI C63.26: 2015

5.3.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

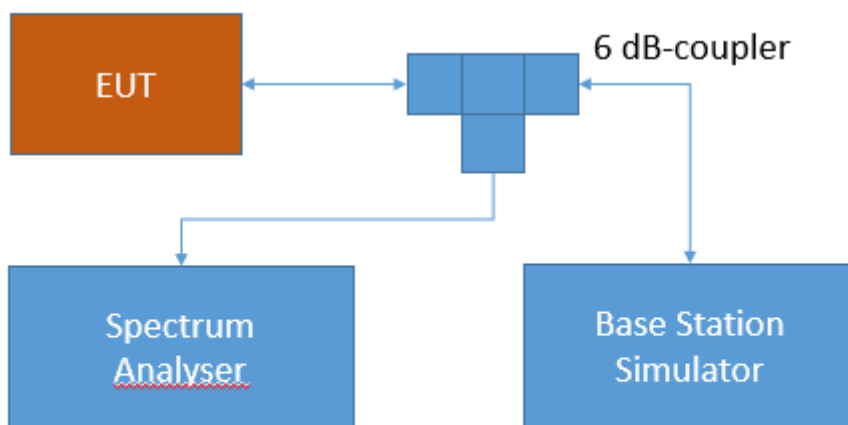

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.3.2 TEST REQUIREMENTS / LIMITS

FCC Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§ 27.50 - Power limits and duty cycle

Band 13:

(b) The following power limits apply to transmitters operating in the 746-758 MHz, 775-788 MHz and 805-806 MHz bands:

(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

RSS-130; 4.6.3 Transmitter Output Power

The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

Band 12:

c) The following power and antenna height requirements apply to stations transmitting in the 600 MHz band and the 698-746 MHz band:

(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

RSS-130; 4.6.3 Transmitter Output Power

The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

Band 4/10/66:

d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum.

RSS-139; 6.5 Transmitter Output Power

The equivalent isotropically radiated power (e.i.r.p.) for mobile and portable transmitters shall not exceed one watt.

Band 17:

(c) The following power requirements apply to stations transmitting in the 600 MHz band and the 698-746 MHz band:

(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

RSS-130; 4.6.3 Transmitter Output

The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

Band 7:

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

RSS-199; 4.4 Transmitter output power and equivalent isotropically power (e.i.r.p.)

The transmitter output power shall be measured in terms of average value.

For mobile subscriber equipment, the e.i.r.p. shall not exceed 2 W. For fixed subscriber equipment, the transmitter output power shall not exceed 2 W and the e.i.r.p. shall be limited to 40 W.

For equipment with multiple antennas, the transmitter output power and e.i.r.p shall be measured according to ANSI C63.26-2015.

5.3.3 TEST PROTOCOL


Ambient temperature: 24 °C
Relative humidity: 38 %

Radio Technology	Channel	Res- source Blocks	Band- width [MHz]	Initial EUT: RMS Cond. Power [dBm]	New EUT: RMS Cond. Power [dBm]	Deviation [dBm]
CAT-M1 eFDD 4 QPSK	low	1	1.4	23.17	22.92	0.25
CAT-M1 eFDD 4 QPSK	low	3	1.4	21.91	21.69	0.22
CAT-M1 eFDD 4 QPSK	low	6	1.4	20.35	20.62	-0.27
CAT-M1 eFDD 4 QPSK	mid	1	1.4	22.93	23.28	-0.35
CAT-M1 eFDD 4 QPSK	mid	3	1.4	21.63	22.04	-0.41
CAT-M1 eFDD 4 QPSK	mid	6	1.4	20.24	21	-0.76
CAT-M1 eFDD 4 QPSK	high	1	1.4	23	22.91	0.09
CAT-M1 eFDD 4 QPSK	high	3	1.4	21.68	21.81	-0.13
CAT-M1 eFDD 4 QPSK	high	6	1.4	20.61	20.7	-0.09
CAT-M1 eFDD 4 16QAM	low	1	1.4	21.3	21.37	-0.07
CAT-M1 eFDD 4 16QAM	low	5	1.4	20.45	20.75	-0.3
CAT-M1 eFDD 4 16QAM	mid	1	1.4	21.03	21.67	-0.64
CAT-M1 eFDD 4 16QAM	mid	5	1.4	20.4	21.15	-0.75
CAT-M1 eFDD 4 16QAM	high	1	1.4	21.32	21.45	-0.13
CAT-M1 eFDD 4 16QAM	high	5	1.4	20.77	20.87	-0.1
CAT-M1 eFDD 12 QPSK	low	1	1.4	22.21	22.88	-0.67
CAT-M1 eFDD 12 QPSK	low	3	1.4	20.94	21.72	-0.78
CAT-M1 eFDD 12 QPSK	low	6	1.4	20.14	20.67	-0.53
CAT-M1 eFDD 12 QPSK	mid	1	1.4	22.13	22.85	-0.72
CAT-M1 eFDD 12 QPSK	mid	3	1.4	21.15	21.65	-0.5
CAT-M1 eFDD 12 QPSK	mid	6	1.4	20.06	20.52	-0.46
CAT-M1 eFDD 12 QPSK	high	1	1.4	22.12	23	-0.88
CAT-M1 eFDD 12 QPSK	high	3	1.4	21.11	21.79	-0.68
CAT-M1 eFDD 12 QPSK	high	6	1.4	20.09	20.76	-0.67
CAT-M1 eFDD 12 16QAM	low	1	1.4	20.77	21.43	-0.66
CAT-M1 eFDD 12 16QAM	low	5	1.4	20.35	20.86	-0.51
CAT-M1 eFDD 12 16QAM	mid	1	1.4	20.66	21.27	-0.61
CAT-M1 eFDD 12 16QAM	mid	5	1.4	20.31	20.67	-0.36
CAT-M1 eFDD 12 16QAM	high	1	1.4	20.35	21.24	-0.89
CAT-M1 eFDD 12 16QAM	high	5	1.4	20.31	20.93	-0.62
CAT-M1 eFDD 13 QPSK	low	1	1.4	22.59	23.05	-0.46
CAT-M1 eFDD 13 QPSK	low	3	1.4	21.47	21.8	-0.33
CAT-M1 eFDD 13 QPSK	low	6	1.4	20.26	20.79	-0.53
CAT-M1 eFDD 13 QPSK	mid	1	1.4	22.62	23.15	-0.53
CAT-M1 eFDD 13 QPSK	mid	3	1.4	21.48	21.89	-0.41
CAT-M1 eFDD 13 QPSK	mid	6	1.4	20.27	20.77	-0.5
CAT-M1 eFDD 13 QPSK	high	1	1.4	22.6	23.11	-0.51
CAT-M1 eFDD 13 QPSK	high	3	1.4	21.46	21.88	-0.42
CAT-M1 eFDD 13 QPSK	high	6	1.4	20.17	20.75	-0.58
CAT-M1 eFDD 13 16QAM	low	1	1.4	20.77	21.46	-0.69
CAT-M1 eFDD 13 16QAM	low	5	1.4	20.44	20.93	-0.49
CAT-M1 eFDD 13 16QAM	mid	1	1.4	20.95	21.62	-0.67
CAT-M1 eFDD 13 16QAM	mid	5	1.4	20.55	21.01	-0.46
CAT-M1 eFDD 13 16QAM	high	1	1.4	20.98	21.52	-0.54
CAT-M1 eFDD 13 16QAM	high	5	1.4	20.51	20.98	-0.47

Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

CAT-M1 eFDD 4 QPSK, RB = 1, Channel = mid

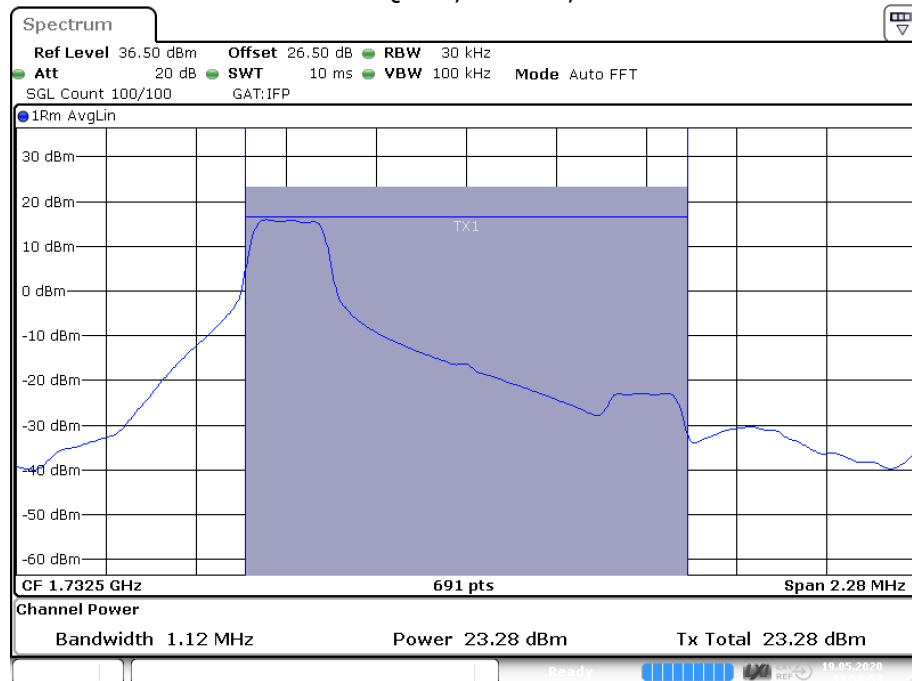

Date: 19.MAY.2020 13:58:53

5.3.5 TEST EQUIPMENT USED

- Radio Lab

5.4 FIELD STRENGTH OF SPURIOUS RADIATION

Standard **FCC PART 27 Subpart C**


The test was performed according to:
ANSI C63.26: 2015

5.4.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable radiated spurious emission measurements per § 2.1053 and RSS-GEN 6.13. The limit and requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.


The EUT was connected to the test setup according to the following diagram:

Frequency Range: 30 MHz – 1 GHz:

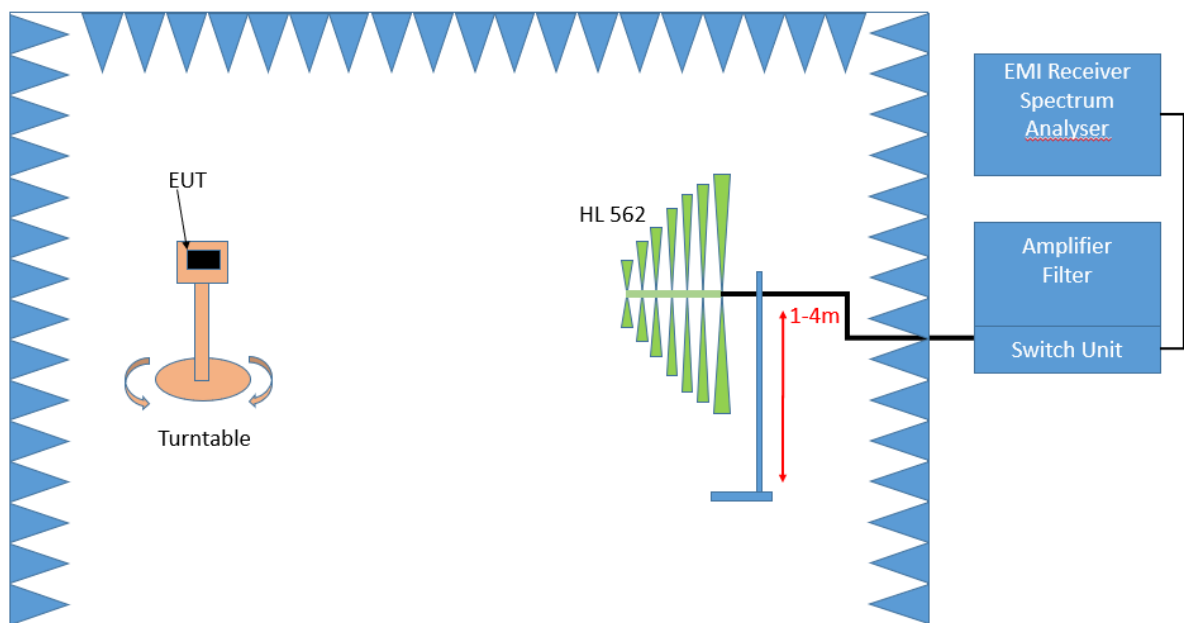

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Frequency Range: 1 GHz – 26.5 GHz

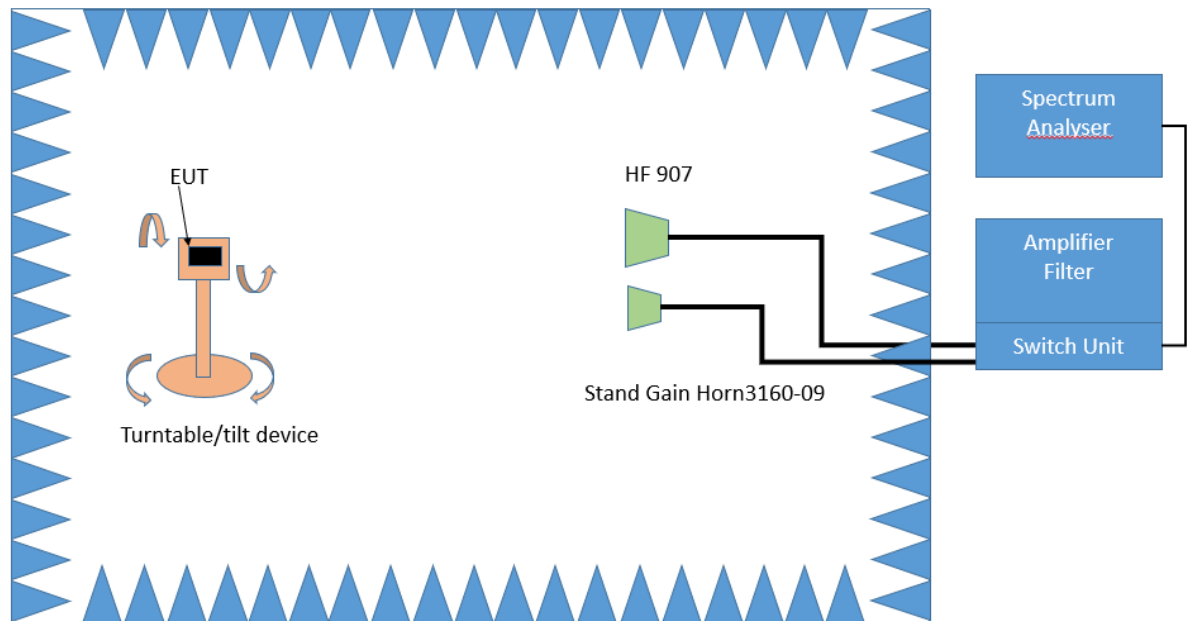

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

The test set-up was made in accordance to the general provisions of ANSI C63.26 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: coupled
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by $\pm$

100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak
- Measured frequencies: in step 1 determined frequencies
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: coupled
- Turntable angle range: $\pm 45^\circ$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with RMS detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: RMQ
- Measured frequencies: in step 1 determined frequencies
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 45° .

The turn table step size (azimuth angle) for the preliminary measurement is 45° .

- Antenna distance: 3 m
- Detector: Peak
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: coupled
- Turntable angle range: -180° to 135°
- Turntable step size: 45°
- Polarisation: Horizontal + Vertical

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna in step 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak,
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: coupled

Step 3:

Spectrum analyser settings for step 3:

- Detector: RMS
- Measured frequencies: in step 1 determined frequencies
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep Time: 1 s

5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1053; Measurement required: Field strength of spurious radiation:

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate.

FCC Part 27; Miscellaneous Wireless Communication Services**Subpart C – Technical standards****§27.53 – Emission limits****Band 13**

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

RSS-130; 4.7.1 General unwanted emissions limits

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

RSS-130; 4.7.2 Additional unwanted emissions limits

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

- a. the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment and
 - ii. $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment
- b. the e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

Band 12:

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

RSS-130; 4.7.1 General unwanted emissions limits

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

RSS-130; 4.7.2 Additional unwanted emissions limits

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

- a. the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment and
 - ii. $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment
- b. the e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

Band 4/10/66:

(h) *AWS emission limits*—(1) *General protection levels*. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

RSS-139; 6.6 Transmitter Unwanted Emissions

Equipment shall comply with the limits in (i) and (ii) below.

- i. In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.
- ii. After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

Band 7:

(m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.

(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199; 4.5 Transmitter unwanted emissions

In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

b. for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:

$40 + 10 \log_{10} p$ from the channel edges to 5 MHz away

$43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and

$55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.

In (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

Band 17:

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

RSS-130; 4.7.1 General unwanted emissions limits

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

RSS-130; 4.7.2 Additional unwanted emissions limits

In attenuated addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

- a. the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment and
 - ii. $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment
- b. the e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

5.4.3 TEST PROTOCOL

Ambient temperature: 24 °C
Relative humidity: 38 %

Initial EUT

Radio Technology	Channel	Detector	Trace	Resolution Bandwidth /kHz	Frequency /MHz	Peak Value /dBm	Limit /dBm	Margin to Limit /dB
eFDD13	mid	rms	maxhold	1000	1563.8	-44.9	-40	4.9


New EUT

Radio Technology	Channel	Detector	Trace	Resolution Bandwidth /kHz	Frequency /MHz	Peak Value /dBm	Limit /dBm	Margin to Limit /dB
eFDD13	mid	rms	maxhold	1000	1560.0	-45.8	-40	5.8

Remark: Please see next sub-clause for the measurement plot.

5.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

1 GHz – 10 GHz

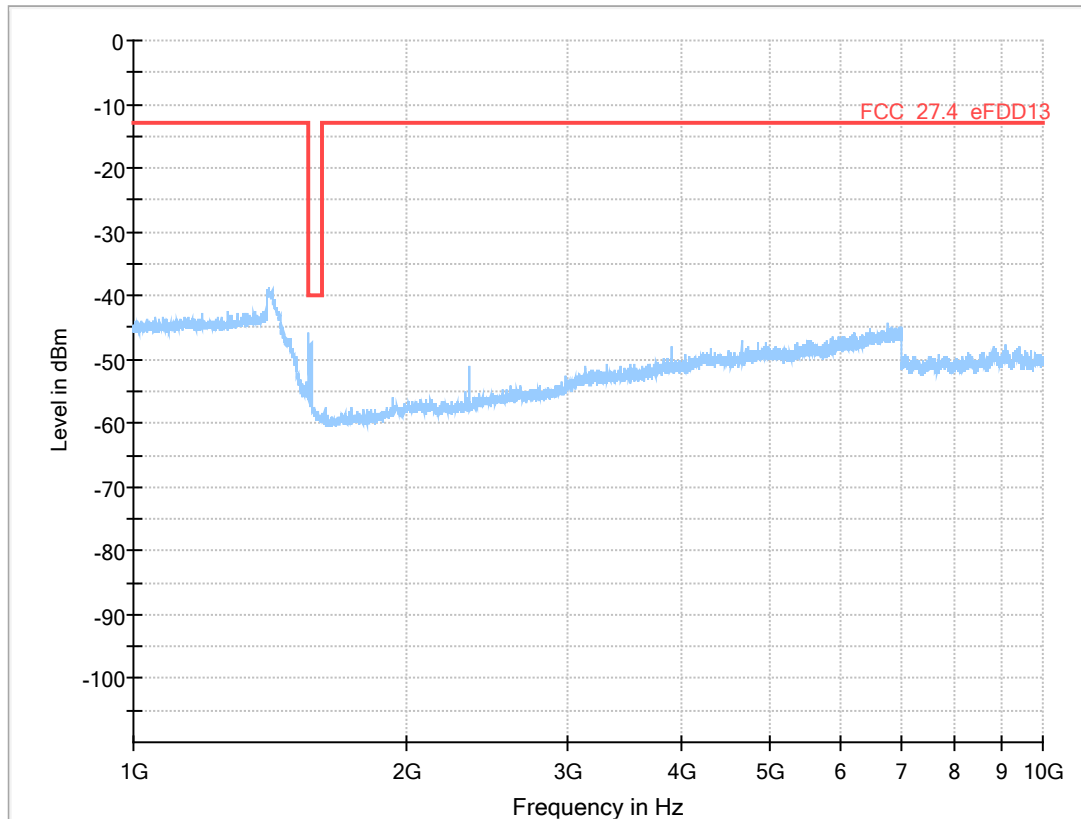

5.4.5 TEST EQUIPMENT USED

- Radiated Emissions

5.5 RF OUTPUT POWER


Standard **FCC PART 90 Subpart S**

The test was performed according to:
ANSI C63.26: 2015

5.5.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

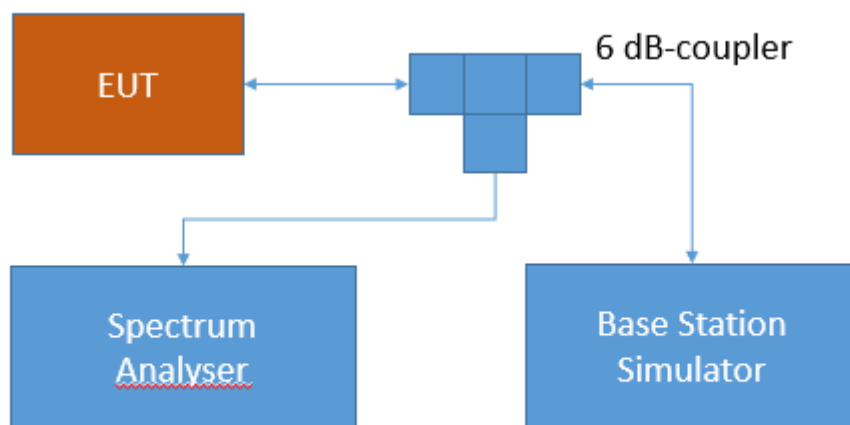

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.5.2 TEST REQUIREMENTS / LIMITS

Part 90; PRIVATE LAND MOBILE RADIO SERVICES

Subpart S—Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901, and 935-940 MHz Bands

§90.635 Limitations on power and antenna height.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

5.5.3 TEST PROTOCOL


Ambient temperature: 24 °C
Relative humidity: 38 %

Radio Technology	Channel	Res- source Blocks	Band- width [MHz]	Initial EUT: RMS Cond. Power [dBm]	New EUT: RMS Cond. Power [dBm]	Deviation [dBm]
CAT-M1 eFDD 26 QPSK	low	1	1.4	22.56	22.73	-0.17
CAT-M1 eFDD 26 QPSK	low	3	1.4	21.46	21.57	-0.11
CAT-M1 eFDD 26 QPSK	low	6	1.4	20.46	20.69	-0.23
CAT-M1 eFDD 26 QPSK	mid	1	1.4	22.64	22.71	-0.07
CAT-M1 eFDD 26 QPSK	mid	3	1.4	21.54	21.56	-0.02
CAT-M1 eFDD 26 QPSK	mid	6	1.4	20.48	20.65	-0.17
CAT-M1 eFDD 26 QPSK	high	1	1.4	22.57	22.75	-0.18
CAT-M1 eFDD 26 QPSK	high	3	1.4	21.48	21.53	-0.05
CAT-M1 eFDD 26 QPSK	high	6	1.4	20.41	20.61	-0.2
CAT-M1 eFDD 26 16QAM	low	1	1.4	21.17	21.05	0.12
CAT-M1 eFDD 26 16QAM	low	5	1.4	20.65	20.83	-0.18
CAT-M1 eFDD 26 16QAM	mid	1	1.4	21.19	21.33	-0.14
CAT-M1 eFDD 26 16QAM	mid	5	1.4	20.73	20.72	0.01
CAT-M1 eFDD 26 16QAM	high	1	1.4	21.26	21.23	0.03
CAT-M1 eFDD 26 16QAM	high	5	1.4	20.62	20.8	-0.18

Remark: Please see next sub-clause for the measurement plot.

5.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

CAT-M1 eFDD 26 QPSK, RB = 1, Channel = high

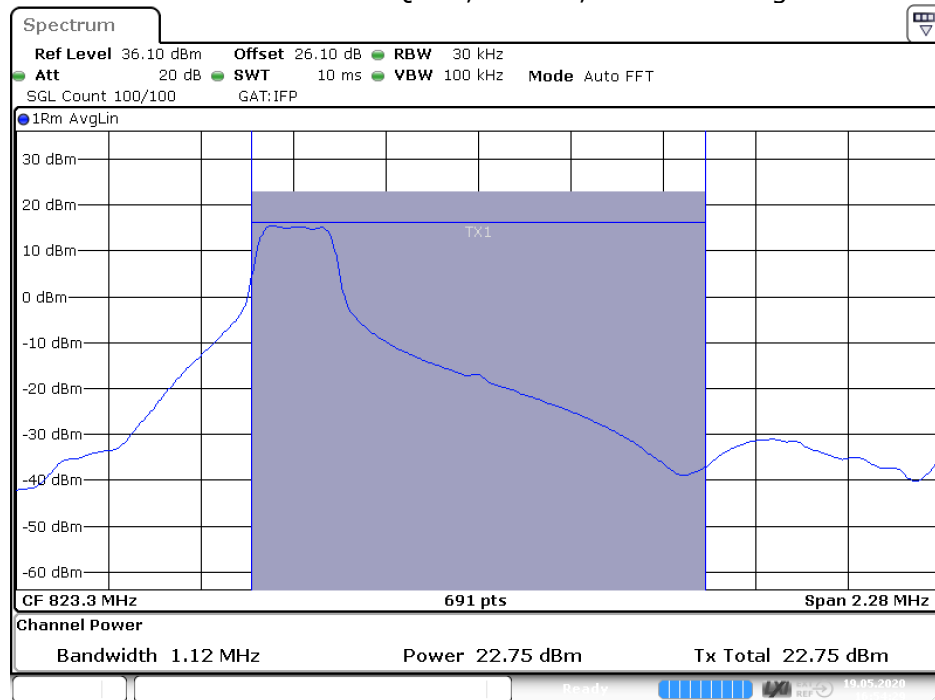

Date: 19.MAY.2020 16:54:29

5.5.5 TEST EQUIPMENT USED

- Radio Lab

6 TEST EQUIPMENT

- 1 Radiated Emissions
Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2019-10	2020-10
1.2	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515		
1.3	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2019-05	2021-05
1.4	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2019-12	2021-12
1.5	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia	none	2018-06	2020-06
1.6	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2018-07	2021-07
1.7	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq			
1.8	5HC2700/12750-1.5-KK	High Pass Filter	Trilithic	9942012		
1.9	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
1.10	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2018-06	2020-06
1.11	SMBV100A	Vector Signal Generator 9 kHz - 3.2 GHz (GNSS / Broadcast Signalling Unit)	Rohde & Schwarz GmbH & Co. KG	260001	2018-01	2021-01
1.12	WRD1920/1980-5/22-5EESD	Tunable Band Reject Filter	Wainwright Instruments GmbH	11		
1.13	TDS 784C	Digital Oscilloscope [SA2] (Aux)	Tektronix	B021311		
1.14	foRS232 Unit 2	Fibre optic link RS232	PONTIS Messtechnik GmbH	4031516037		
1.15	PONTIS Con4101	PONTIS Camera Controller		6061510370		
1.16	NRVD	Power Meter	Rohde & Schwarz GmbH & Co. KG	828110/016	2019-08	2020-08
1.17	OLS-1 R	Fibre optic link USB 1.1	Ingenieurbüro Scheiba	018		

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.18	HF 906	Double-ridged horn	Rohde & Schwarz	357357/002	2018-09	2021-09
1.19	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
1.20	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2019-02	2021-02
1.21	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
1.22	foRS232 Unit 1	Fibre optic link RS232	PONTIS Messtechnik GmbH	4021516036		
1.23	FSP3	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	836722/011		
1.24	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09		
1.25	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99		
1.26	4HC1600/12750-1.5-KK	High Pass Filter	Trilithic	9942011		
1.27	foUSB-M Converter 2	Fibre optic link USB 2.0	PONTIS Messtechnik GmbH	4471520061		
1.28	WRCD1879.8-0.2/40-10EE	Notch Filter Ultra Stable	Wainwright Instruments GmbH	16		
1.29	SMB100A	Signal Generator 100 kHz - 40 GHz	Rohde & Schwarz Vertriebs-GmbH	181486	2019-11	2021-11
1.30	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
1.31	TT 1.5 WI	Turn Table	Maturo GmbH	-		
1.32	HL 562 ULTRALOG	Biconical-log-per Antenna (30 MHz - 3 GHz)	Rohde & Schwarz GmbH & Co. KG	100609	2019-05	2022-05
1.33	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03
1.34	foCAN (v 4.0)	Fibre optic link CAN	Audivo GmbH (PONTIS EMC)	492 1607 014		
1.35	CMW 500	CMW 500 Flex 2	Rohde & Schwarz GmbH & Co. KG	155999-Ei	2019-09	2022-09
1.36	CMU 200	"CMU1" Universal Radio Communication Tester	Rohde & Schwarz GmbH & Co. KG	102366	2017-12	2020-12
1.37	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
1.38	MA4985-XP-ET	Bore Sight Antenna Mast	innco systems GmbH	none		
1.39	CBT	Bluetooth Tester "CBT-02" incl. BLE-Option	Rohde & Schwarz	100302	2018-03	2021-03

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.40	CMW 500	callbox with SUA, BT, 2G, 3G, LTE, AUDIO, UL/DL fading	Rohde & Schwarz GmbH & Co. KG	163529-bw	2017-07	2020-07
1.41	A8455-4	4 Way Power Divider (SMA)		-		
1.42	JUN-AIR Mod. 6-15	Air Compressor	JUN-AIR Deutschland GmbH	612582		
1.43	foEthernet_M	Fibre optic link Ethernet / Gb-LAN	PONTIS Messtechnik GmbH	4841516023		
1.44	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008		
1.45	OLS-1 M	Fibre optic link USB 1.1	Ingenieurbüro Scheiba	018		
1.46	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
1.47	Voltcraft M-3860M	Digital Multimeter 01 (Multimeter)	Conrad	IJ096055		
1.48	CMW 500	callbox, 2G, 3G, LTE, WLAN, BT, Audio	Rohde & Schwarz GmbH & Co. KG	149268-Qf	2018-04	2021-04
1.49	Opus10 THI (8152.00)	T/H Logger 12	Lufft Mess- und Regeltechnik GmbH	12482	2019-06	2021-06
1.50	UNI-T UT195E	True RMS Digital Multimeter	UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD.	C190729561		
1.51	foEthernet_M	Fibre optic link Ethernet / Gb-LAN	PONTIS Messtechnik GmbH	4841516022		
1.52	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
1.53	AS 620 P	Antenna Mast (pneumatic polarisation)	HD GmbH	620/37		
1.54	6005D (30 V / 5 A)	Laboratory Power Supply 120 V 60 Hz	Peaktech	81062045		
1.55	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709		
1.56	Innco Systems CO3000	Controller for bore sight mast SAC	innco systems GmbH	CO3000/967/39371016/L		
1.57	NRV-Z1	Sensor Head B	Rohde & Schwarz GmbH & Co. KG	827753/006	2019-08	2020-08
1.58	HF 907-2	Double-ridged horn	Rohde & Schwarz	102817	2019-04	2022-04
1.59	foCAN (v 4.0)	Fibre optic link CAN	Audivo GmbH (PONTIS EMC)	492 1607 013		
1.60	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
1.61	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.62	WRCA800/960-0.2/40-6EEK	Tunable Notch Filter	Wainwright Instruments GmbH	20		
1.63	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/11920513		
1.64	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2018-07	2021-07
1.65	E4408B	Spectrum Analyser (9 kHz to 26.5 GHz)	Agilent Technologies Deutschland GmbH	MY45103714		

2 Radio Lab
Conducted Radio Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
2.2	1575	Broadband Resistive Power Divider DC to 40 GHz	API Weinschel, Inc.	4070		
2.3	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2020-05	2022-05
2.4	WRD1920/1980-5/22-5EESD	Tunable Band Reject Filter	Wainwright Instruments GmbH	11		
2.5	WRCD1879.8-0.2/40-10EE	Notch Filter Ultra Stable	Wainwright Instruments GmbH	16		
2.6	FSIQ26	Signal Analyser 20 Hz to 26.5 GHz	Rohde & Schwarz GmbH & Co. KG	840061/005	2019-06	2021-06
2.7	Chroma 6404	AC Source	Chroma ATE INC.	64040001304		
2.8	A8455-4	4 Way Power Divider (SMA)		-		
2.9	Opus10 THI (8152.00)	T/H Logger 03	Lufft Mess- und Regeltechnik GmbH	7482	2019-06	2021-06
2.10	UNI-T UT195E	True RMS Digital Multimeter	UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD.	C190729561		
2.11	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2019-11	2022-11
2.12	WRCA800/960-0.2/40-6EEK	Tunable Notch Filter	Wainwright Instruments GmbH	20		

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3- Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF	Corr.	cable loss 1	cable loss 2	cable loss 3	cable loss 4	distance corr.	d _{Limit}	d _{used}
MHz	dB (1/m)	dB	(inside chamber)	(outside chamber)	(switch unit)	(to receiver)	(-40 dB/decade)	(meas. distance (limit))	(meas. distance (used))
			dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 $\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency	AF EMCO 3160-10	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d _{Limit} (meas. distance (limit))	d _{used} (meas. distance (used))
GHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

Test Case(s)	Parameter	Uncertainty
- Field strength of spurious radiation	Field Strength	± 5.5 dB
- Emission and Occupied Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
- RF Output Power - Peak to Average Ratio	Power	± 2.2 dB
- Band Edge Compliance - Spurious Emissions at Antenna Terminal	Power Frequency	± 2.2 dB ± 11.2 kHz
- Frequency Stability	Frequency	± 25 Hz

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

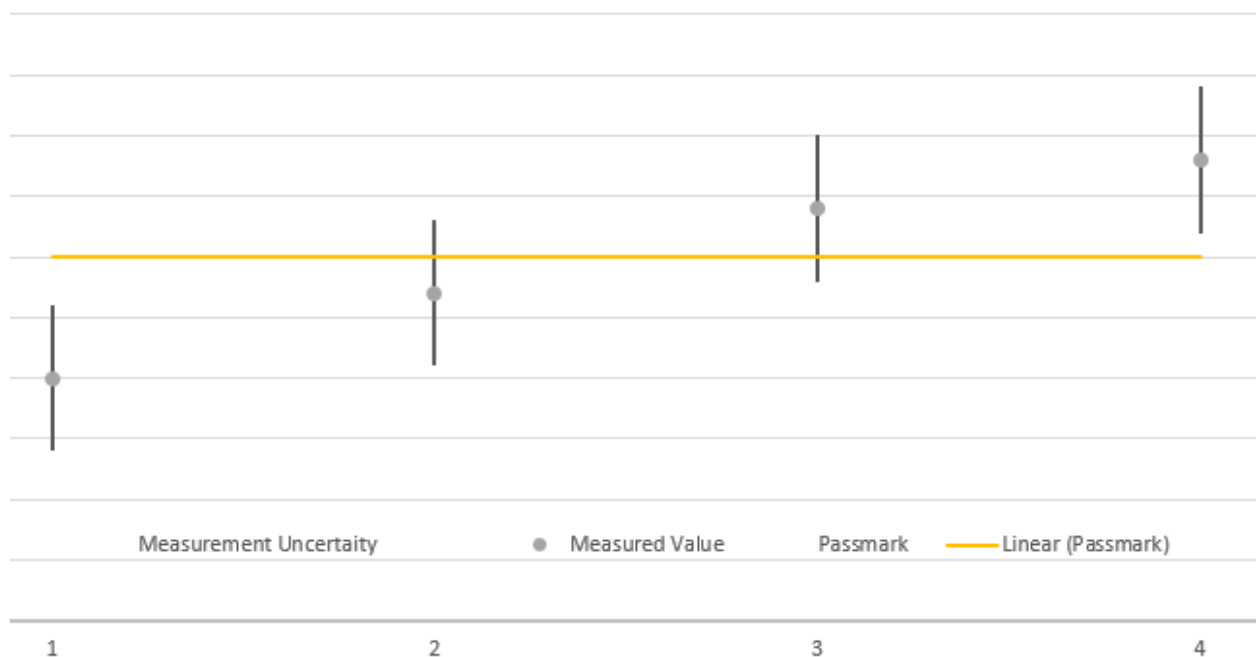

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.