



FCC Test Report

Report No: FCS202501286W01

Issued for

Applicant:	Aishang Interactive (Shenzhen) Technology Co., Ltd
Address:	608, 708, 709, Building 36, Chentian Industrial Zone, Chentian Community, Xixiang Street, Bao'an District, Shenzhen
Product Name:	VIDEO PROJECTOR
Brand Name:	N/A
Model Name:	X2
Series Model:	X200,A10,A1,A2,A3,A4,A5,A6,A7,A8
FCC ID:	2BF3V-X2
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

**TEST RESULT CERTIFICATION**

Applicant's Name: Aishang Interactive (Shenzhen) Technology Co., Ltd
Address.....: 608, 708, 709, Building 36, Chentian Industrial Zone, Chentian Community, Xixiang Street, Bao'an District, Shenzhen
Manufacture's Name: Aishang Interactive (Shenzhen) Technology Co., Ltd
Address.....: 608, 708, 709, Building 36, Chentian Industrial Zone, Chentian Community, Xixiang Street, Bao'an District, Shenzhen

Product Description

Product Name: VIDEO PROJECTOR
Brand Name: N/A
Model Name.....: X2
Series Model: X200,A10,A1,A2,A3,A4,A5,A6,A7,A8
Test Standards: CFR 47 FCC Part15E section 15.407
ANSI C63.10-2013
Test Procedure.....: KDB 789033 D02 General UNII Test Procedures New Rules v02r01

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test :

Date (s) of performance of tests : Jan. 15, 2025 ~ Feb. 13, 2025

Date of Issue.....: Feb. 13, 2025

Test Result: Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)



Table of contents

Revision History	4
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST Radiation Test equipment	12
3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth	13
3.1 Limit	13
3.2 Test Procedure	13
3.3 Test setup	13
3.4 Test results	14
3.5 Original Test Data	15
4 CONDUCTED OUTPUT POWER	37
4.1 limit	37
4.2 test procedure	37
4.3 TEST SETUP	37
4.4 test results	38
5. POWER SPECTRAL DENSITY	39
5.1 LIMIT	39
5.2 TEST PROCEDURE	39
5.3 TEST SETUP	40
5.4 TEST RESULTS	40
5.5 original test data	41
6. FREQUENCY STABILITY MEASUREMENT	55
6.1 LIMIT	55
6.2 TEST PROCEDURE	55
6.3 TEST SETUP	55
6.4 TEST RESULTS	56
7. Conducted spurious emission and Band edge	57
7.1 LIMIT	57
7.2 TEST PROCEDURE	57
7.3 TEST SETUP	57
7.4 TEST RESULTS	58
8. Duty Cycle	84
8.1 TEST REQUIREMENT	84
8.2 TEST PROCEDURE	84
8.3 TEST SETUP	84
8.4 TEST RESULTS	85
9 RADIATED EMISSION MEASUREMENT	86
9.1 RADIATED EMISSION LIMITS	86
9.2 TEST PROCEDURE	87
9.3 TESTSETUP	88
9.4. TEST RESULTS	90
10. ANTENNA REQUIREMENT	116
10.1 STANDARD REQUIREMENT	116
10.2 RESULT	116

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	Feb. 13, 2025	FCS202501286W01	N/A	N/A

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(9)	PASS
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407(a)	PASS
26dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407(a)	PASS
99%Occupied bandwidth	\	PASS
6dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407(e)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407(a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407(g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407(b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407(b)	PASS
Remark:		

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 9KHz-30MHz	± 5.2 dB
6	All emissions, radiated (<1G) 30MHz-1000MHz	± 5.2 dB
7	All emissions, radiated 1GHz -18GHz	± 4.66 dB
8	All emissions, radiated 18GHz -40GHz	± 4.31 dB
9	Occupied bandwidth	4(%)
10	PSD	± 1.73 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	VIDEO PROJECTOR
Trade Name	N/A
Model Name	X2
Series Model	X200,A10,A1,A2,A3,A4,A5,A6,A7,A8
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, the only difference is the model name and colour.
Channel List	Please refer to the Note 2.
Operation frequency	IEEE 802.11a/n(HT20)/ac(HT20)/n(HT40)/ac(HT40)/ac(HT80): U-NII-1 5180MHz ~5240MHZ U-NII-3 5745MHZ-5825 MHz
Number of channel	5150MHz ~5250MHZ 5725MHZ-5850 MHz
Antenna Type	PCB Antenna
Antenna Gain (dBi)	4.18
Modulation:	OFDM
Power supply	AC 100~240V
Battery	N/A
Hardware version number	V1.0
Software version number	V1.0
Sample type	mobile device
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		

U-NII-3 (5.725-5.85GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	151	5755
153	5765	155	5775
157	5785	159	5795
161	5805	165	5825


Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	AE001-PA-96	PCB antenna	N/A	4.18	5G Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Block diagram of EUT configuration for test



Test software: the QA tool

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

For 802.11a/n/ac(HT20)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	157	5785
165	5825		

For 802.11n/ac(HT40)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
151	5755	159	5795



For 802.11ac(HT80)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
155	5775		

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2024.08.28	2025.08.27
Signal Analyzer	R&S	FSV40-N	FCS-E012	2024.08.28	2025.08.27
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2024.08.28	2025.08.27
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2024.08.28	2025.08.27
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2024.08.28	2025.08.27
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2024.08.28	2025.08.27
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2024.08.28	2025.08.27
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2024.08.28	2025.08.27
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2024.08.28	2025.08.27
Temperature & Humidity	HTC-1	victor	FCS-E005	2024.08.28	2025.08.27

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	FCS-E020	2024.08.28	2025.08.27
LISN	R&S	ENV216	FCS-E007	2024.08.28	2025.08.27
LISN	ETS	3810/2NM	FCS-E009	2024.08.28	2025.08.27
Temperature & Humidity	HTC-1	victor	FCS-E008	2024.08.28	2025.08.27

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2024.08.28	2025.08.27
Spectrum Analyzer	Agilent	E4447A	MY50180039	2024.08.28	2025.08.27
Spectrum Analyzer	R&S	FSV-40	101499	2024.08.28	2025.08.27

3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth

3.1 Limit


FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150-5250
	26 dB Bandwidth	5250-5350
	26 dB Bandwidth	For FCC:5470-5725 For IC:5470-5600 5650-5725
	Minimum 500kHz 6dB Bandwidth	5725-5850

3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth: RBW=100kHz For 26dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6dB Bandwidth: VBW=300kHz For 26dB Bandwidth: >3RBW
Trace	Max hold
Sweep	Auto couple

(2) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26dB and 6dB relative to the maximum level measured in the fundamental emission.

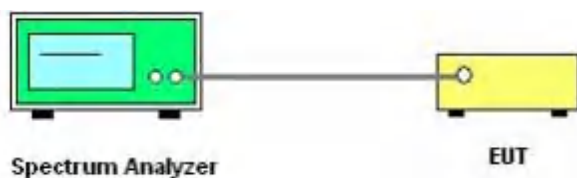

3.3 Test setup


3.4 Test results

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	20.28	20.71	20.63	16.543	16.552	16.546
	802.11n(HT20)	20.35	20.50	20.37	17.613	17.605	17.624
	802.11n(HT40)	43.50	/	50.48	36.263	/	36.334
	802.11ac(HT20)	20.51	20.49	20.29	17.607	17.611	17.646
	802.11ac(HT40)	43.16	/	50.69	36.256	/	36.339
	802.11ac(HT80)	81.77	/	/	75.884	/	/


Band	Operation mode	6 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-3	802.11a	17.01	17.26	17.51	16.532	16.568	16.606
	802.11n(HT20)	17.00	17.05	17.17	17.653	17.674	17.730
	802.11n(HT40)	35.60	/	35.63	36.241	/	36.289
	802.11ac(HT20)	17.35	17.05	16.96	16.550	16.558	16.629
	802.11ac(HT40)	35.61	/	35.75	36.239	/	36.260
	802.11ac(HT80)	75.38	/	/	75.638	/	/

3.4 Original Test Data


U-NII-1 11a Low CH 5180MHZ

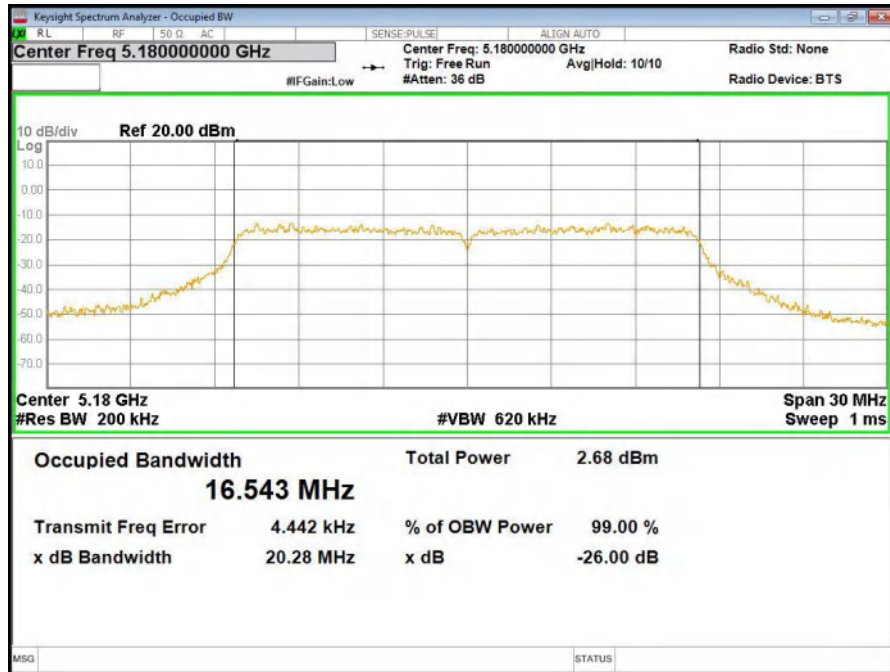


U-NII-1 11a Middle CH 5200MHZ

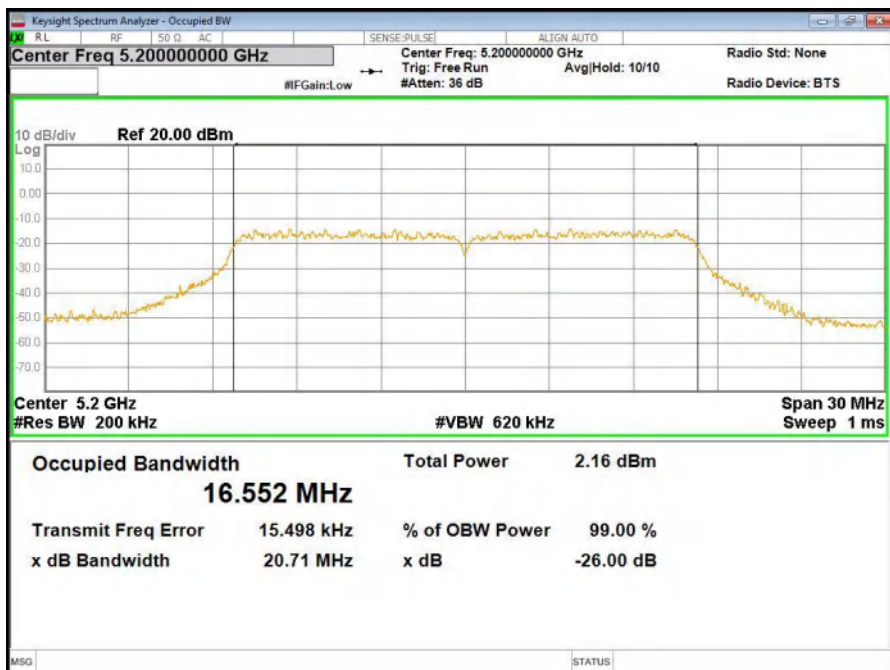

U-NII-1 11a High CH 5240MHZ

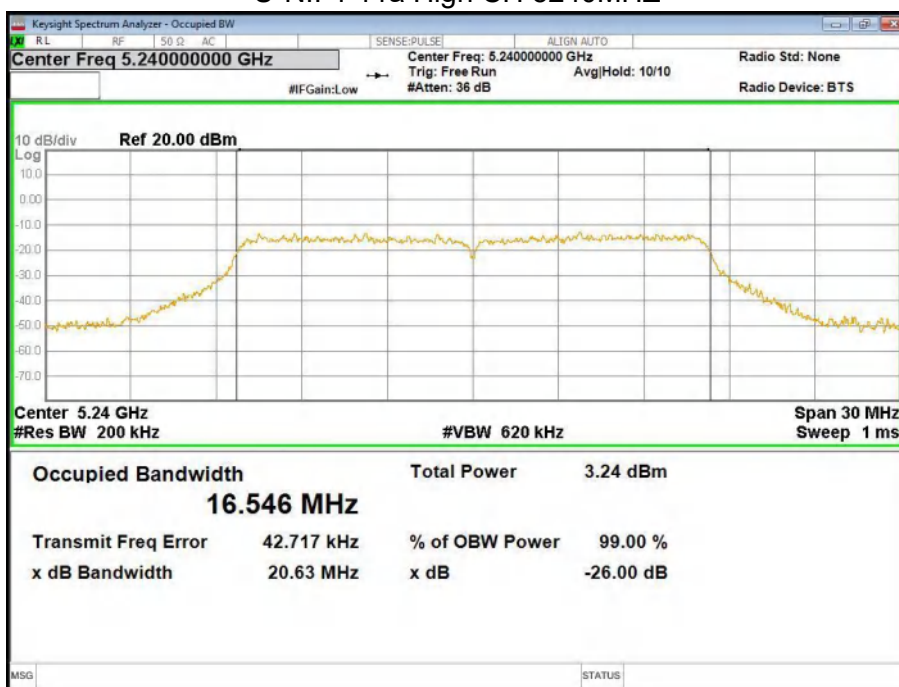


U-NII-1 11n(HT20) Low CH 5180MHZ

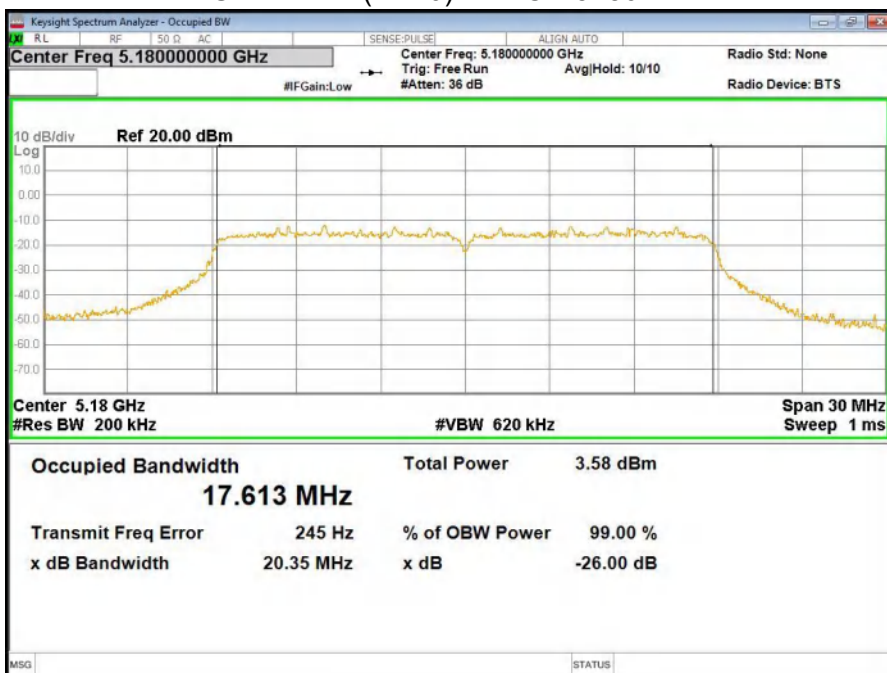


U-NII-1 11n(HT20) Middle CH 5200MHZ




U-NII-1 11n(HT20)High CH 5240MHZ

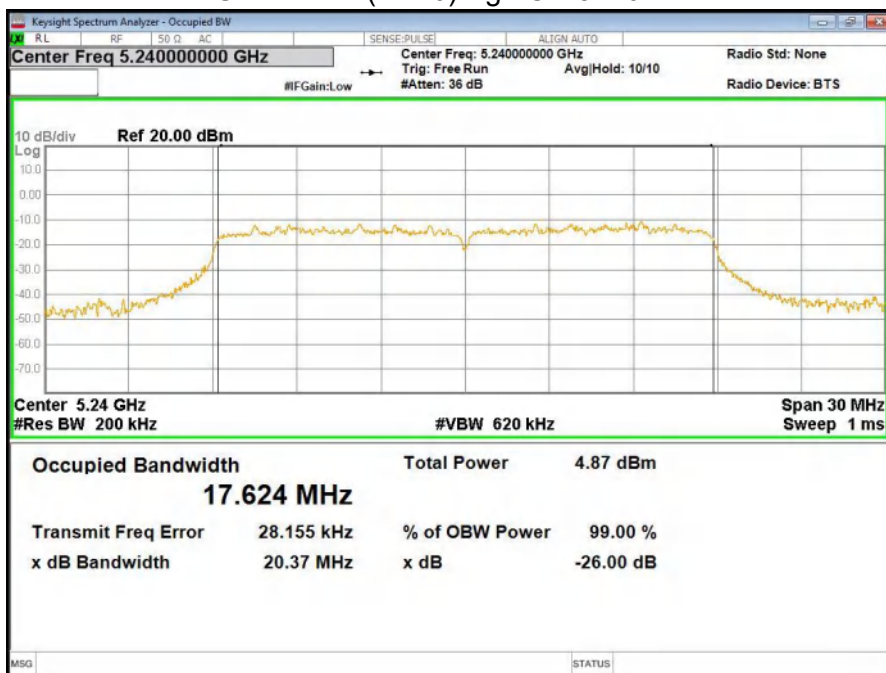

U-NII-1 11n(HT40) Low CH 5190MHZ

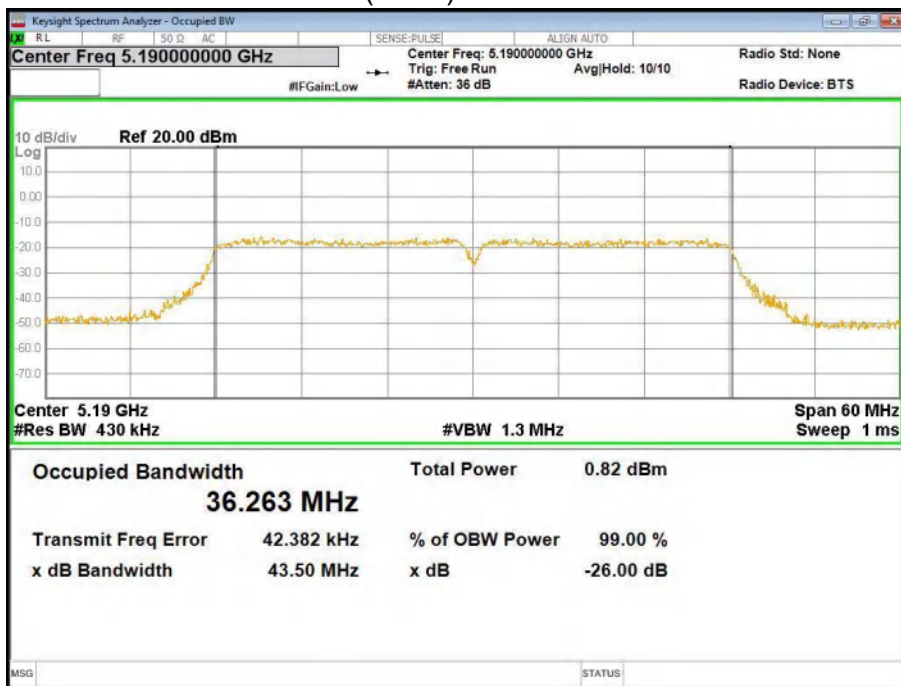


U-NII-1 11n(HT40) High CH 5230MHZ

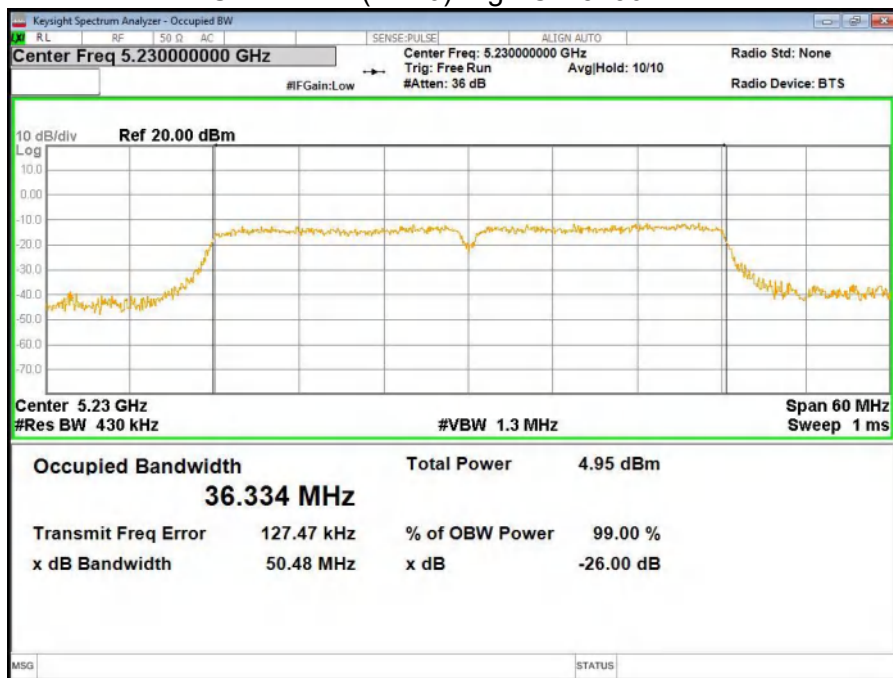





U-NII-1 ac(HT20) Low CH 5180MHZ

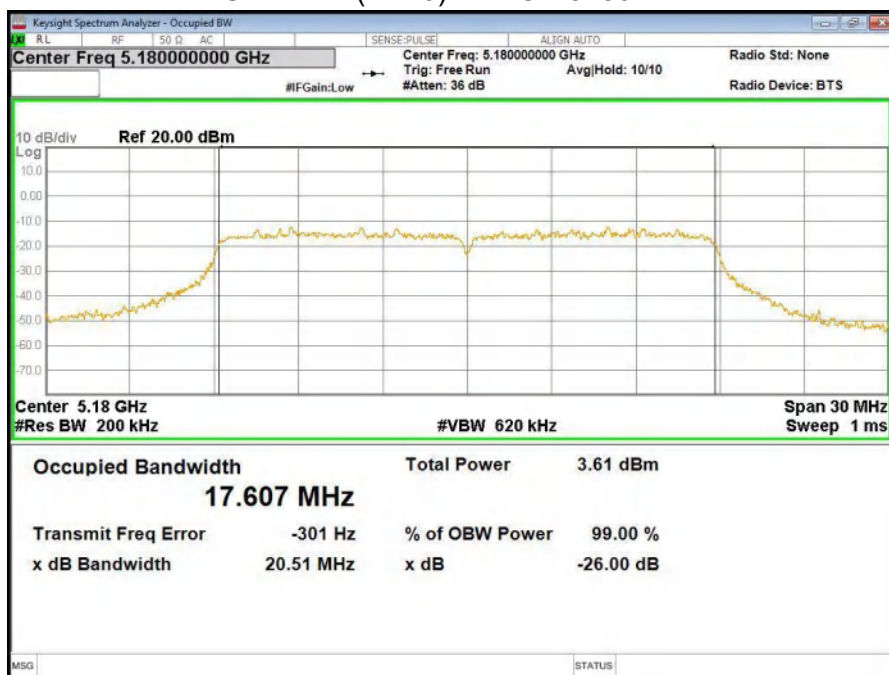


U-NII-1 ac(HT20) Middle CH 5200MHZ

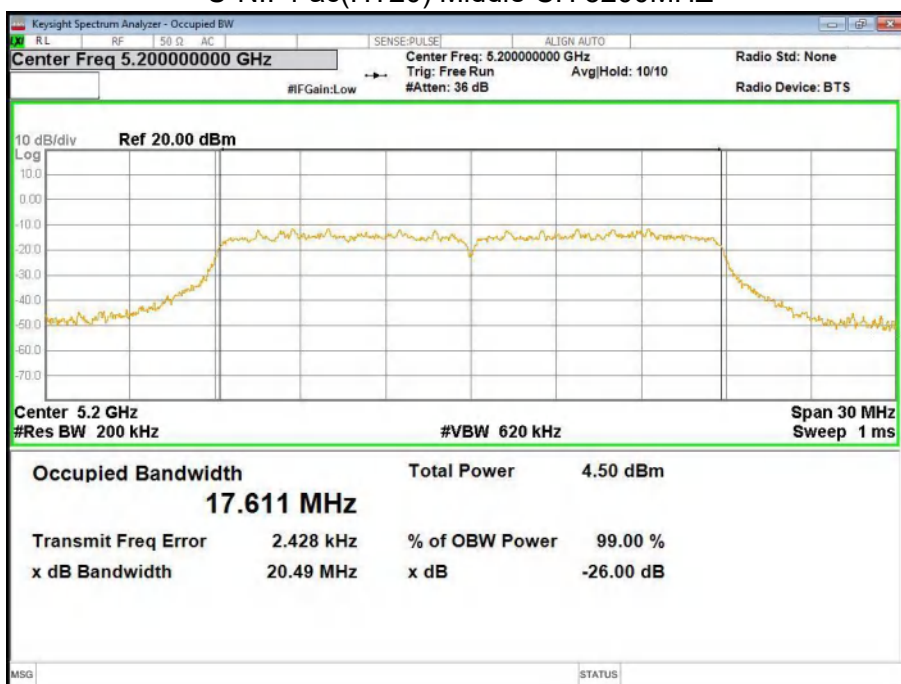


U-NII-1 ac(HT20)High CH 5240MHZ

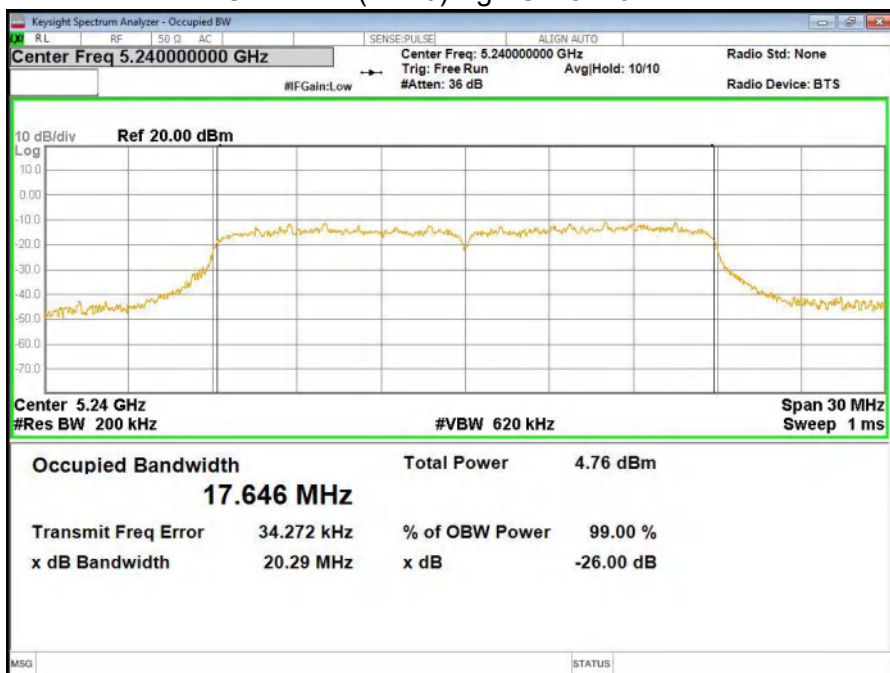


U-NII-1 ac(HT40) Low CH 5190MHz

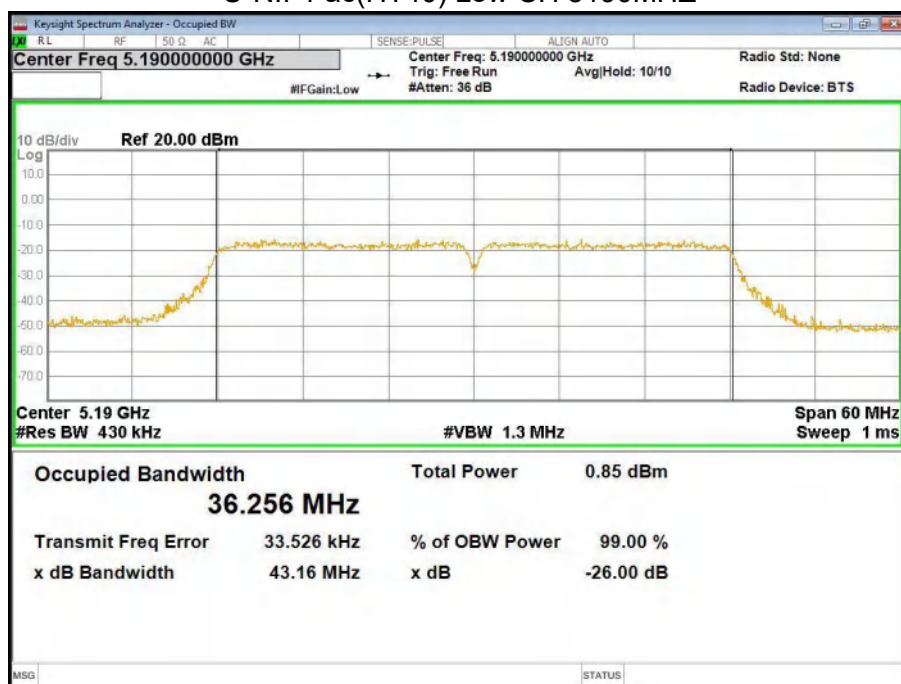


U-NII-1 ac(HT40) High CH 5230MHz

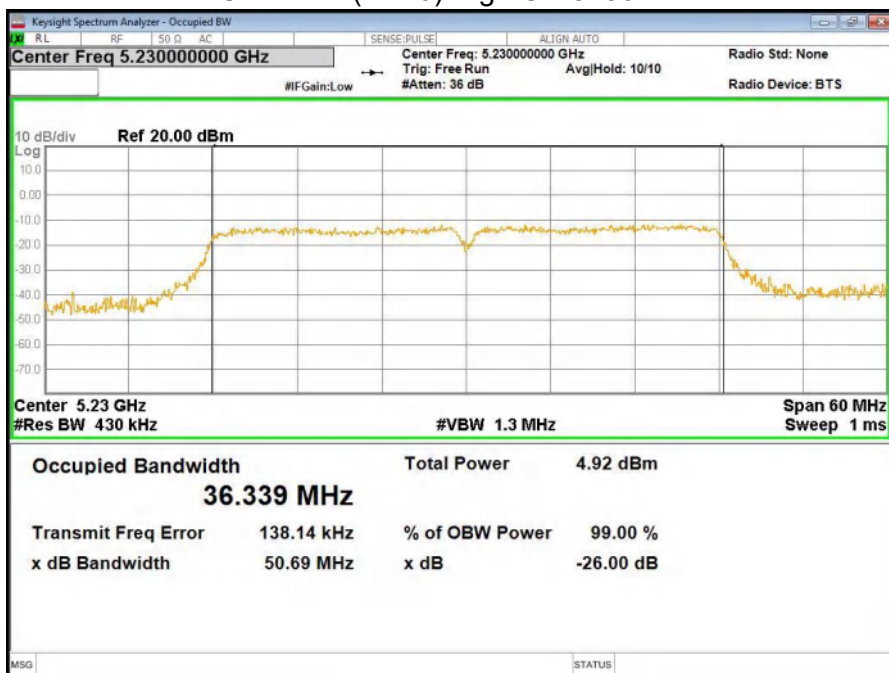


U-NII-1 ac(HT80) Low CH 5210MHZ

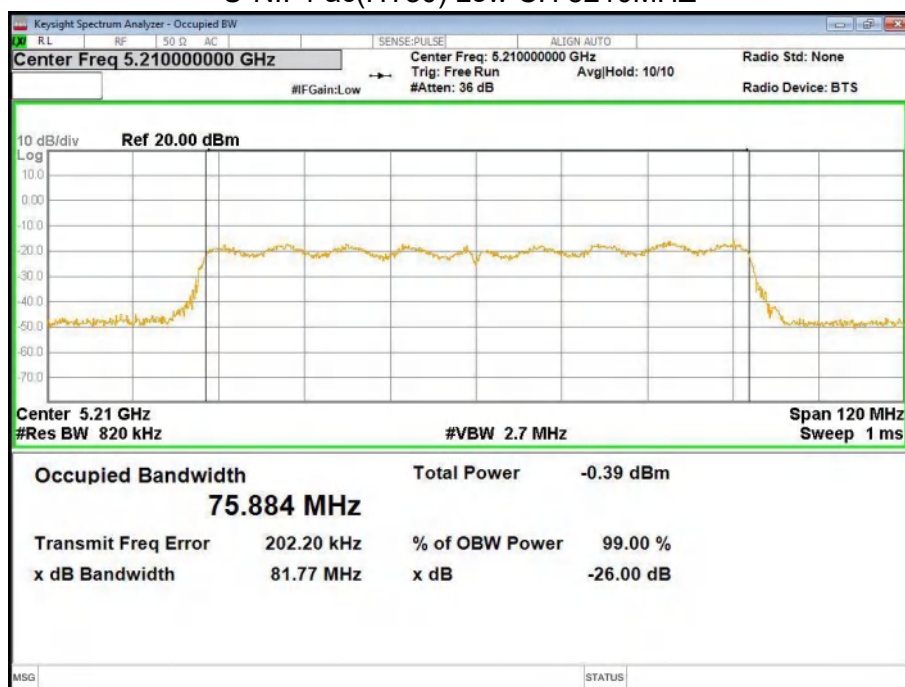


U-NII-3 11a Low CH 5745MHZ

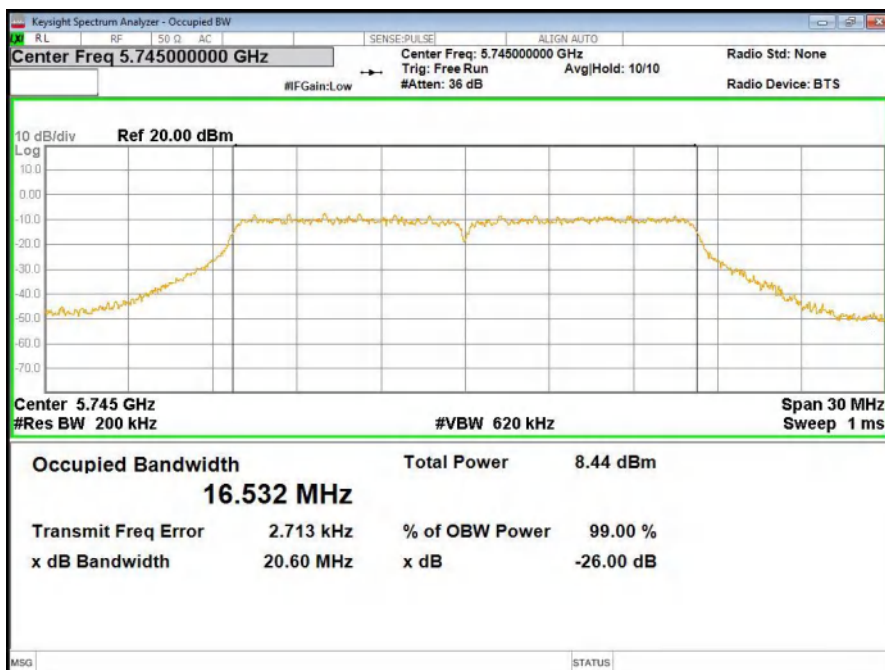

U-NII-3 11a Middle CH 5785MHZ

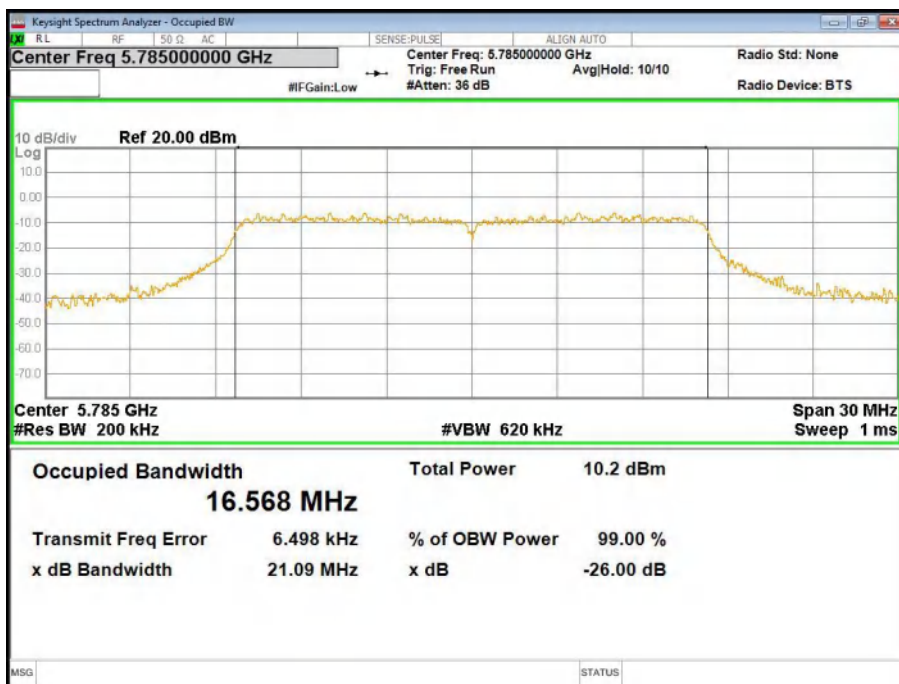


U-NII-3 11a High CH 5825MHZ

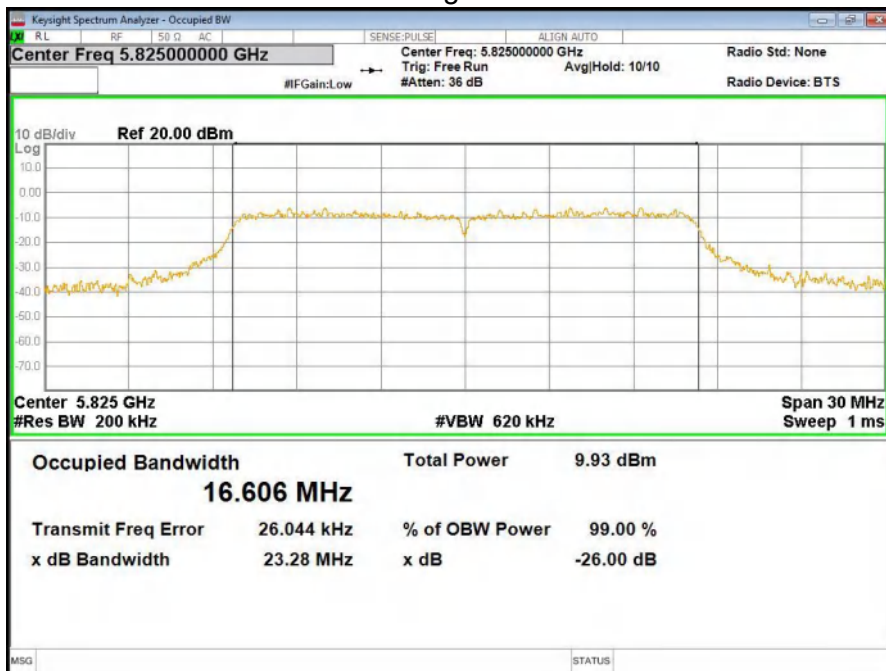


U-NII-3 11n(HT 20) Low CH 5745MHZ




U-NII-3 11n(HT 20) Middle CH 5785MHZ

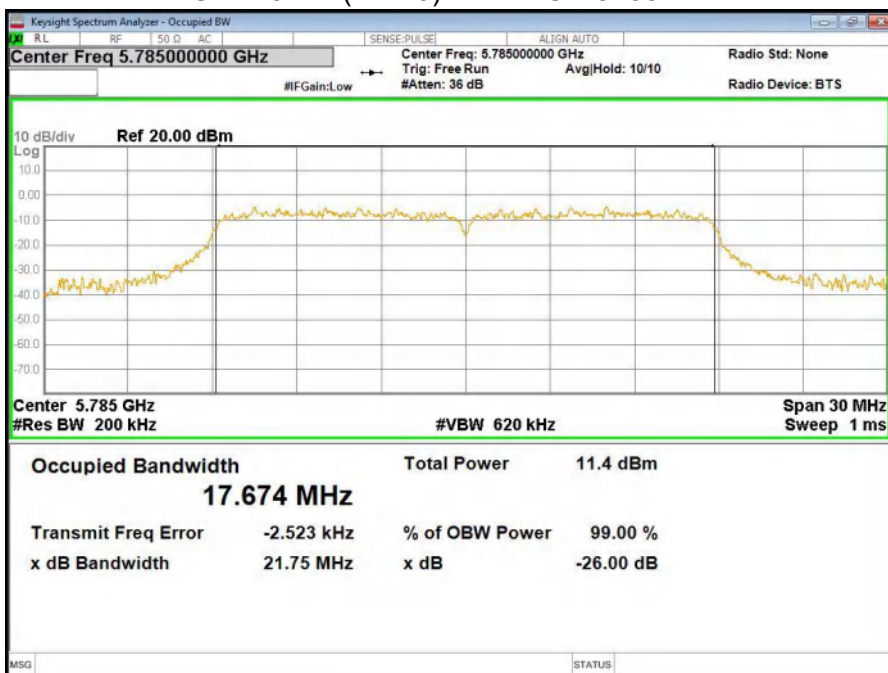


U-NII-3 11n(HT 20) High CH 5825MHZ

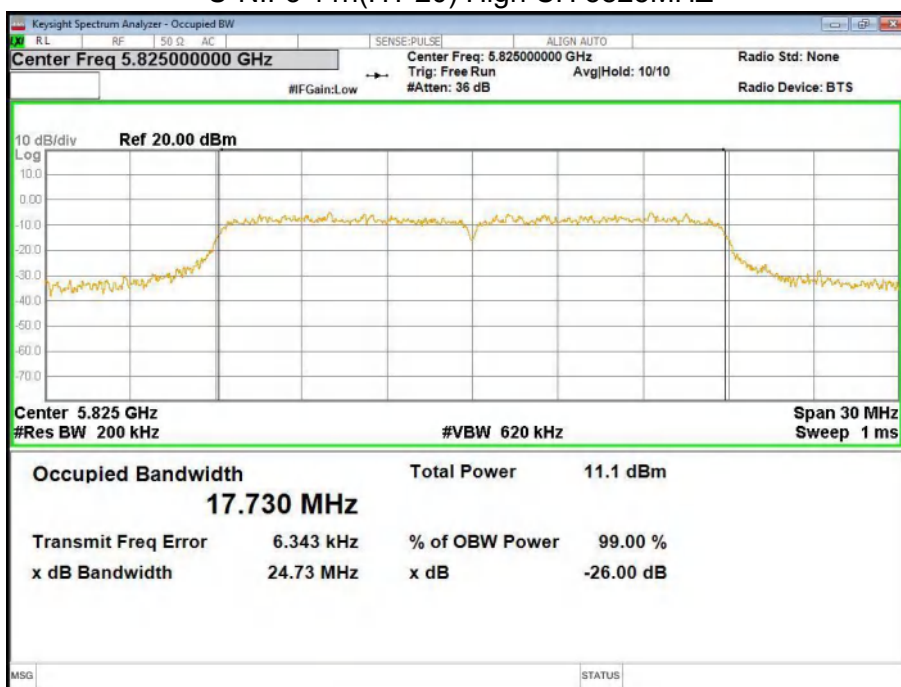


U-NII-3 11n(HT 40) Low CH 5755MHZ

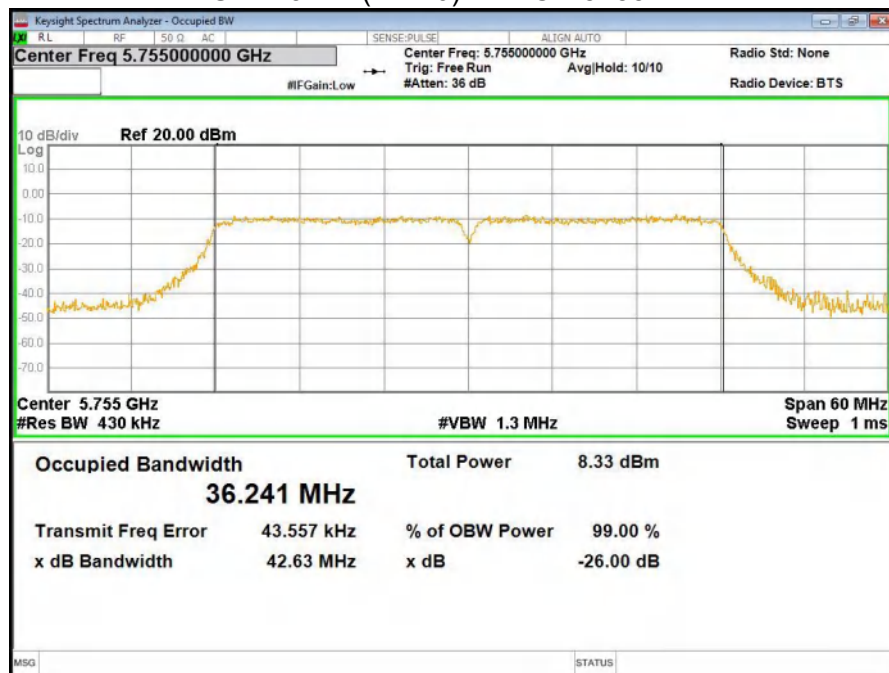

U-NII-3 11n(HT 40) High CH 5795MHZ

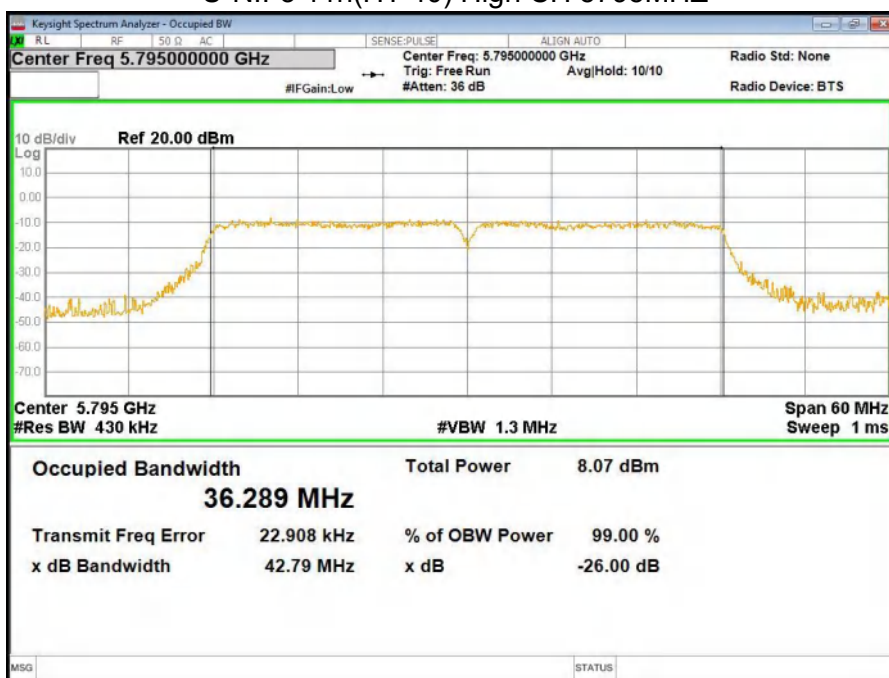


U-NII-3 ac(HT20) Low CH 5745MHZ

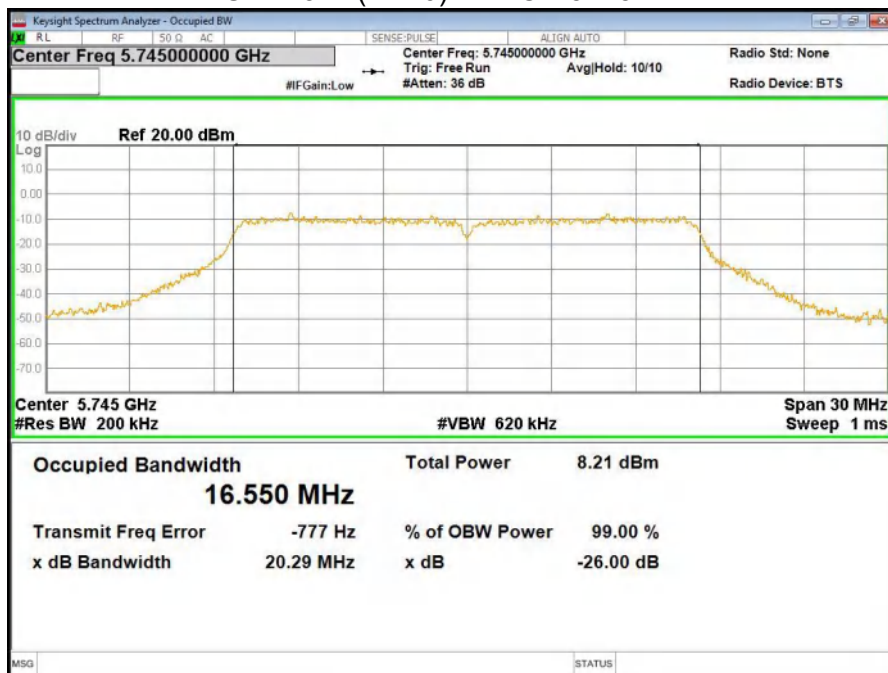


U-NII-3 ac(HT20) Middle CH 5785MHZ




U-NII-3 ac(HT20) High CH 5825MHZ

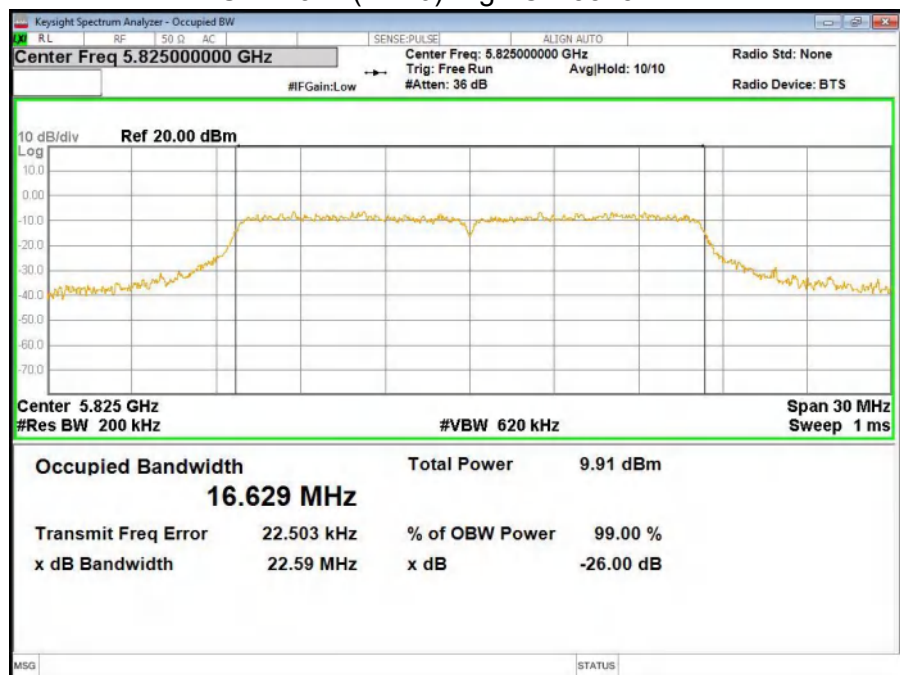


U-NII-3 ac(HT40) Low CH 5755MHz

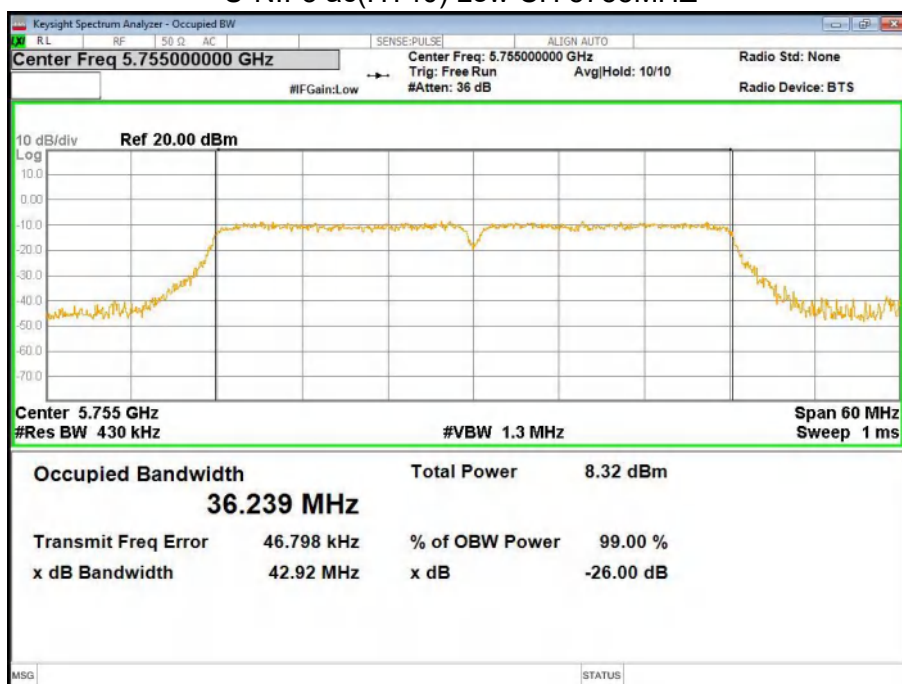

U-NII-3 ac(HT40) High CH 5795MHz

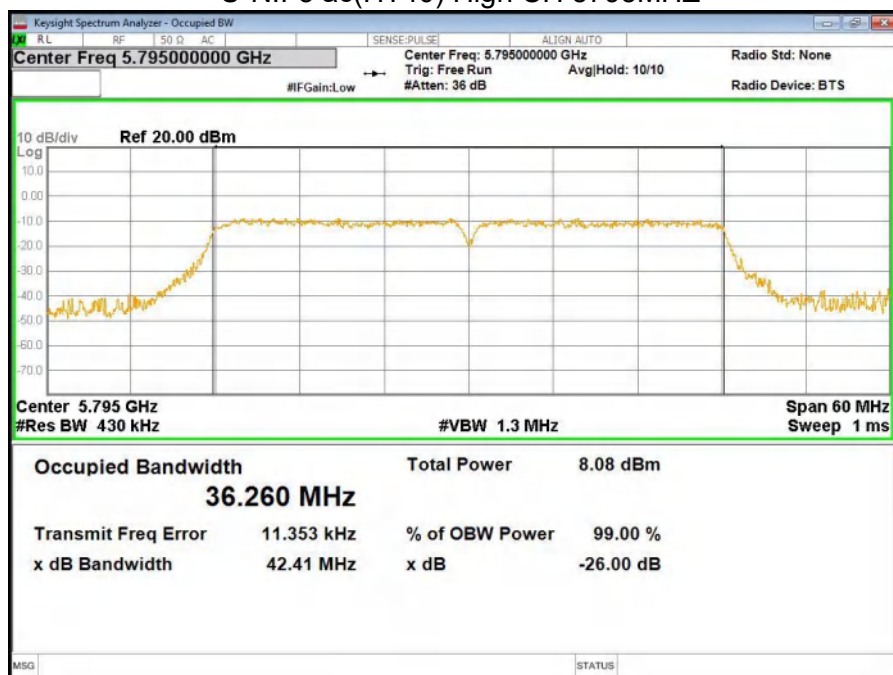


U-NII-3 ac(HT80) Low CH 5775MHZ

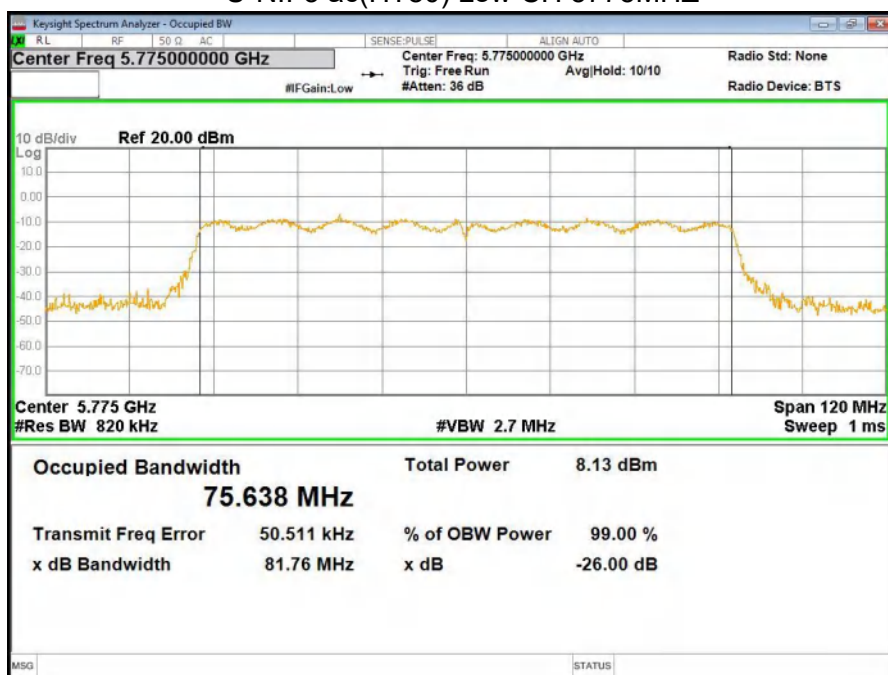


6dB Bandwidth test result


U-NII-3 11a Low CH 5745MHZ

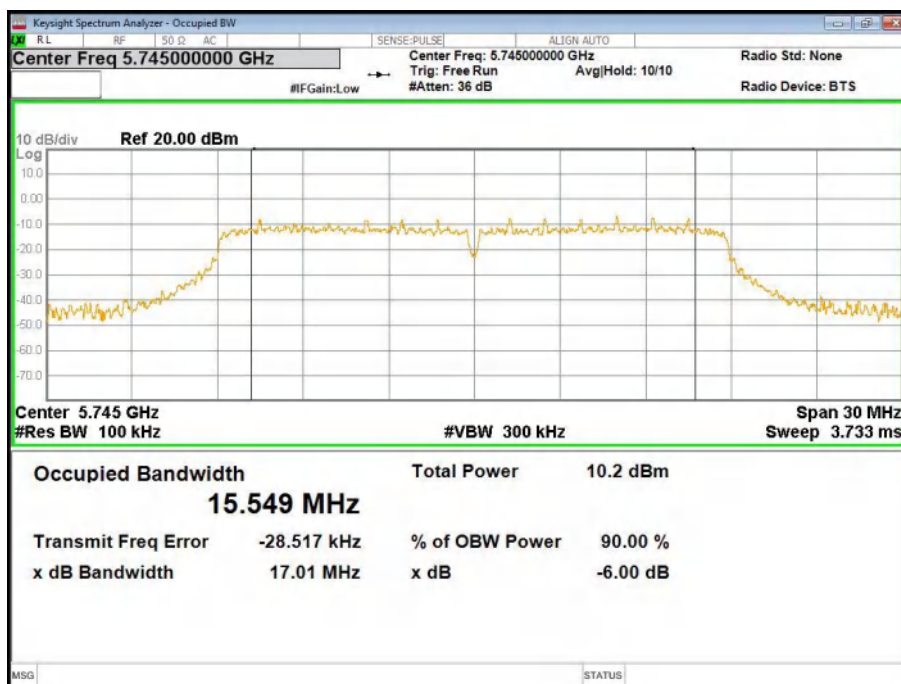


U-NII-3 11a Middle CH 5785MHZ

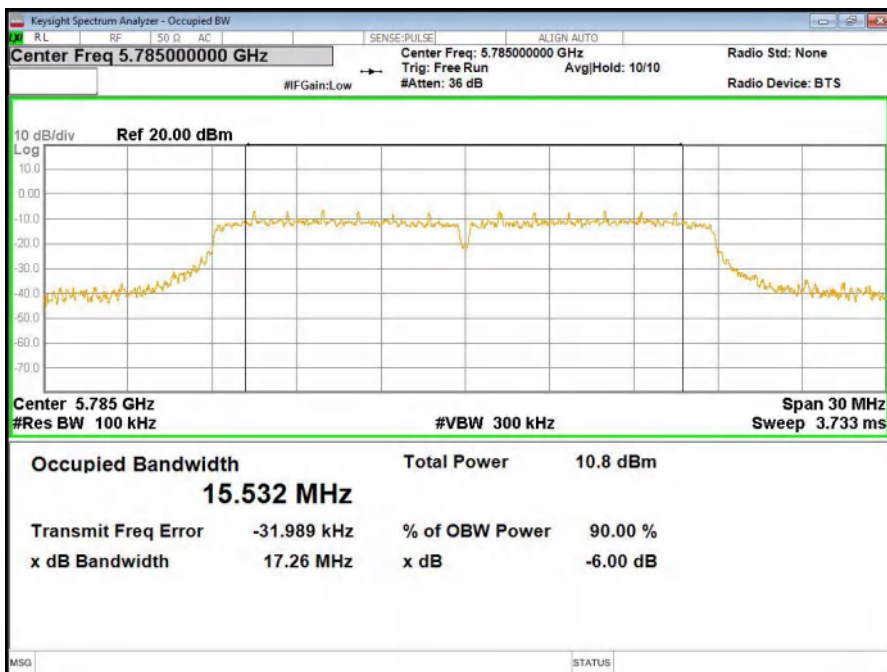


U-NII-3 11a High CH 5825MHZ

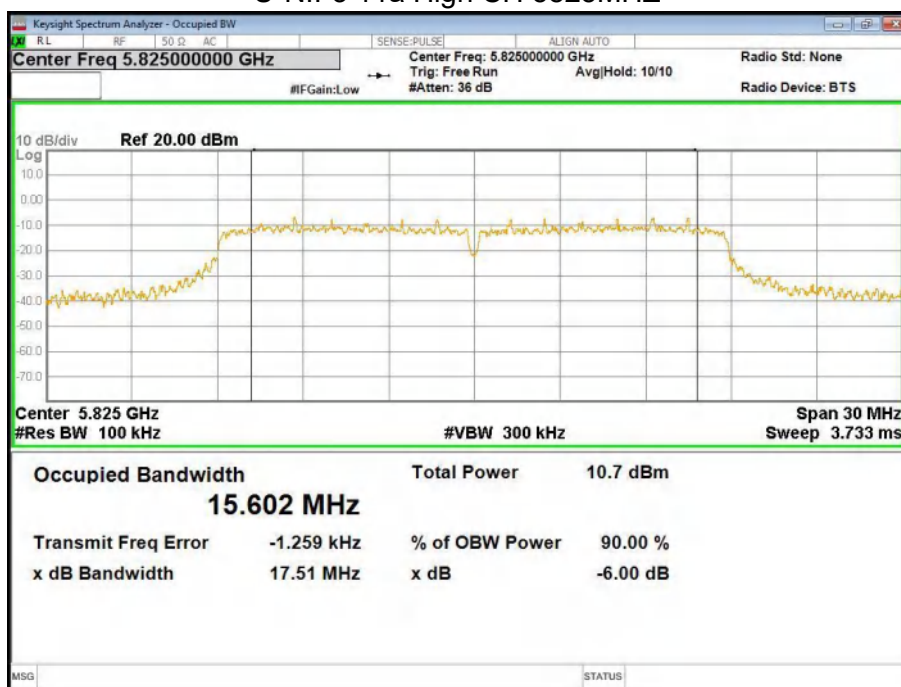


U-NII-3 11n(HT20) Low CH 5745MHZ

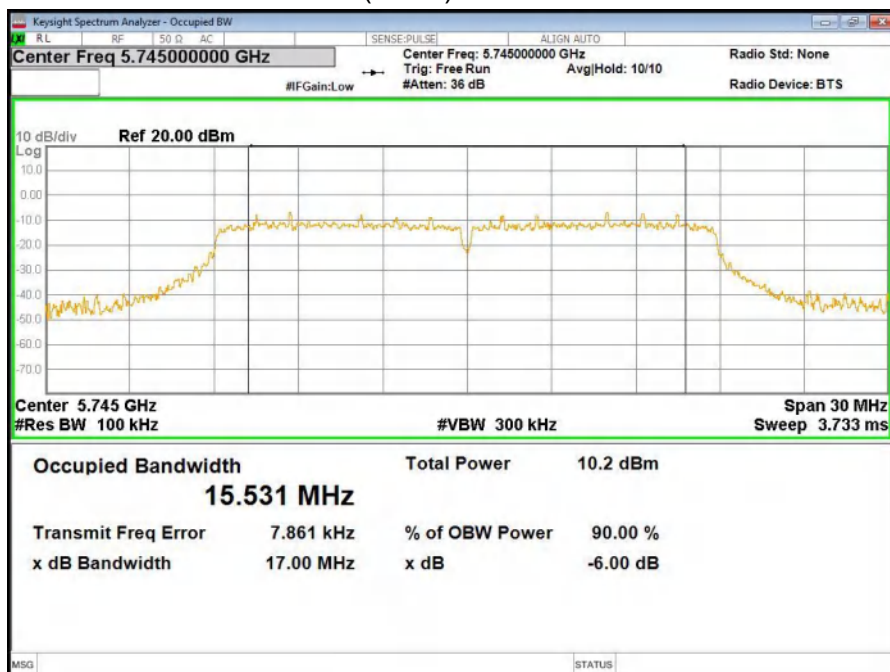


U-NII-3 11n(HT20) Middle CH 5785MHZ

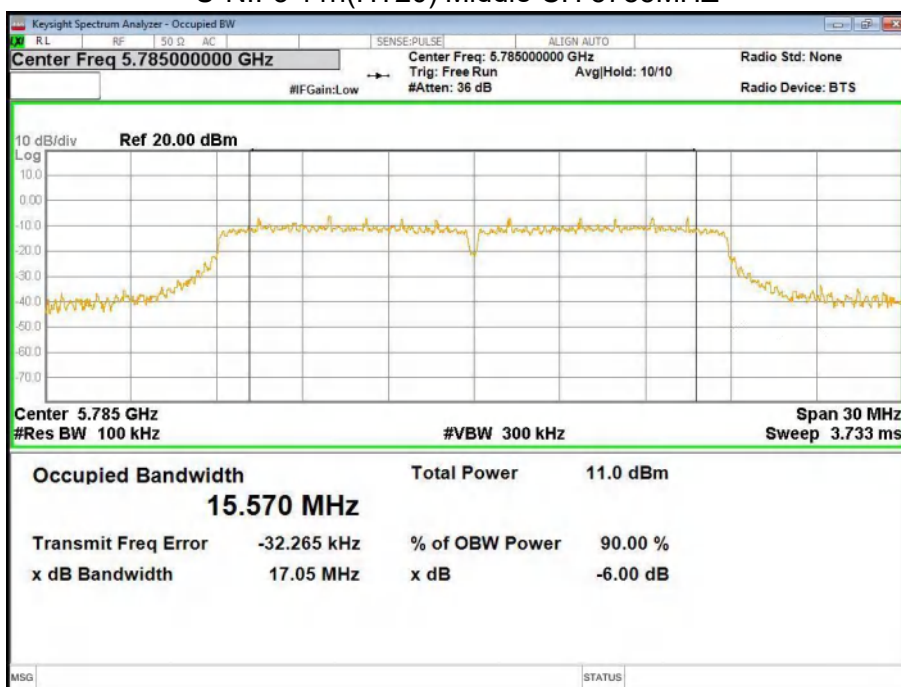


U-NII-3 11n(HT20) High CH 5825MHZ

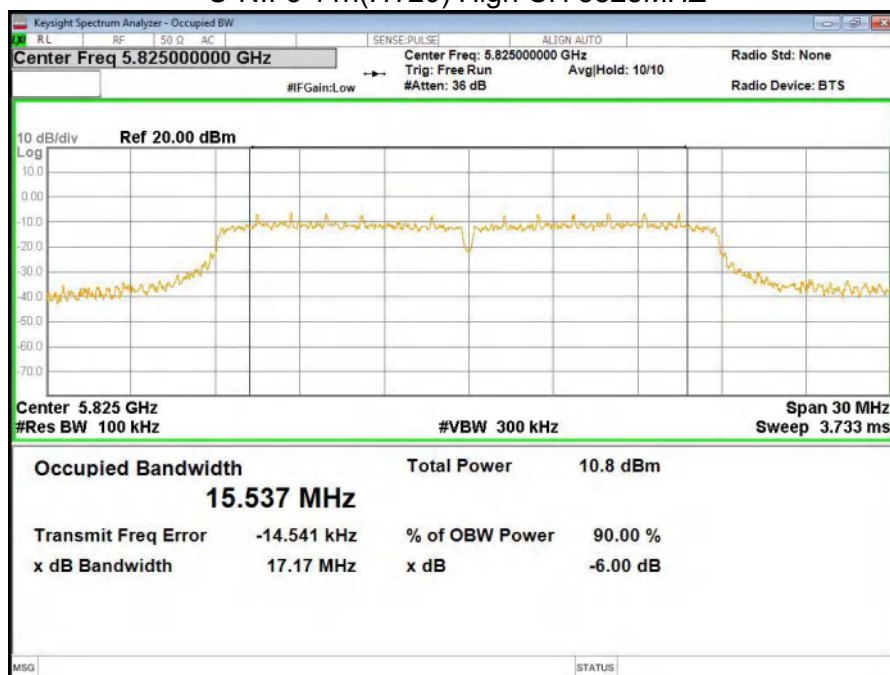


U-NII-3 11n(HT40) Low CH 5755MHZ

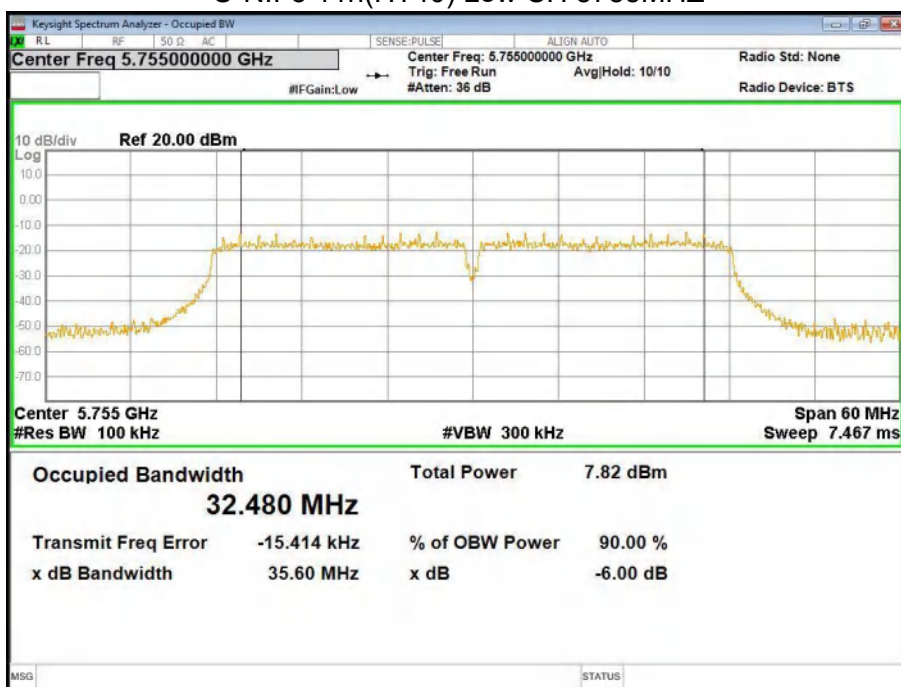


U-NII-3 11n(HT40) High CH 5795MHZ

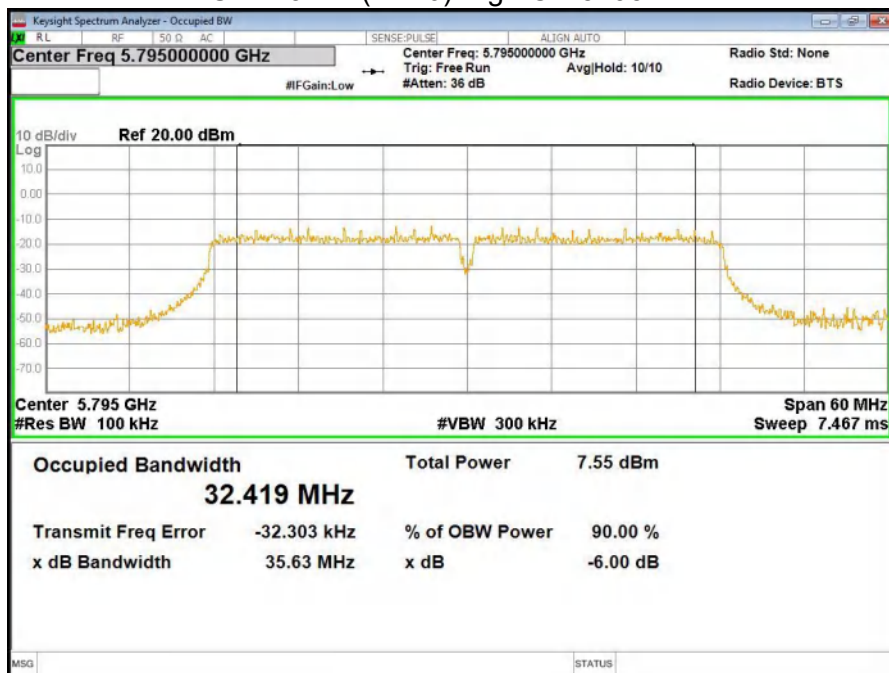


U-NII-3 11ac(HT20) Low CH 5745MHZ

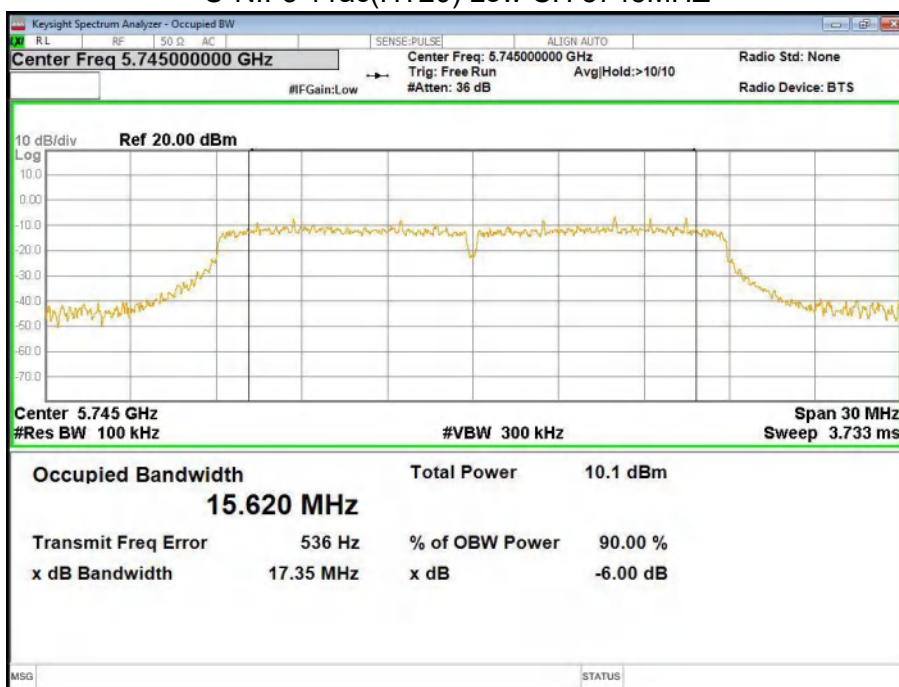


U-NII-3 11ac(HT20) Middle CH 5785MHZ

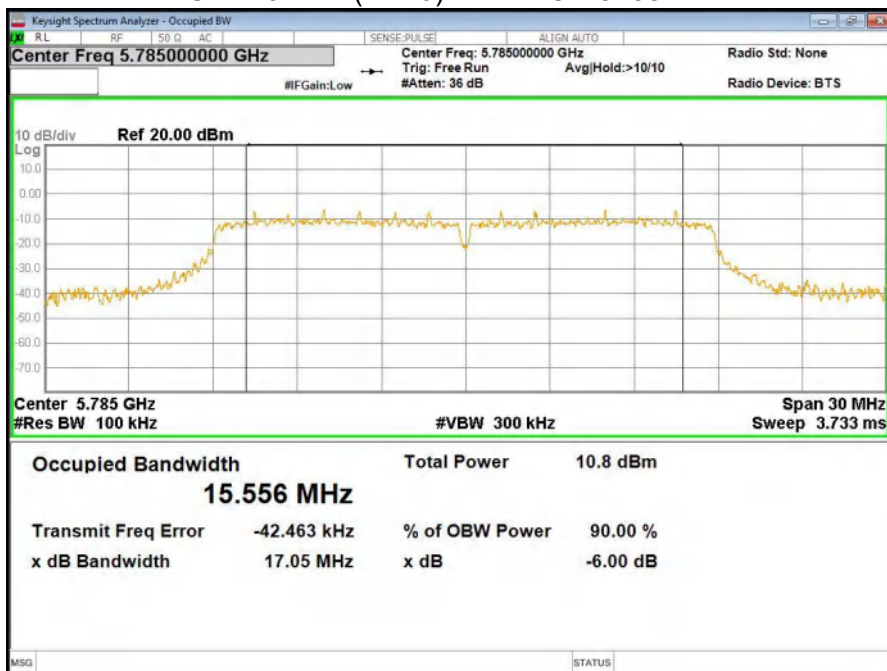


U-NII-3 11ac(HT20) High CH 5825MHZ

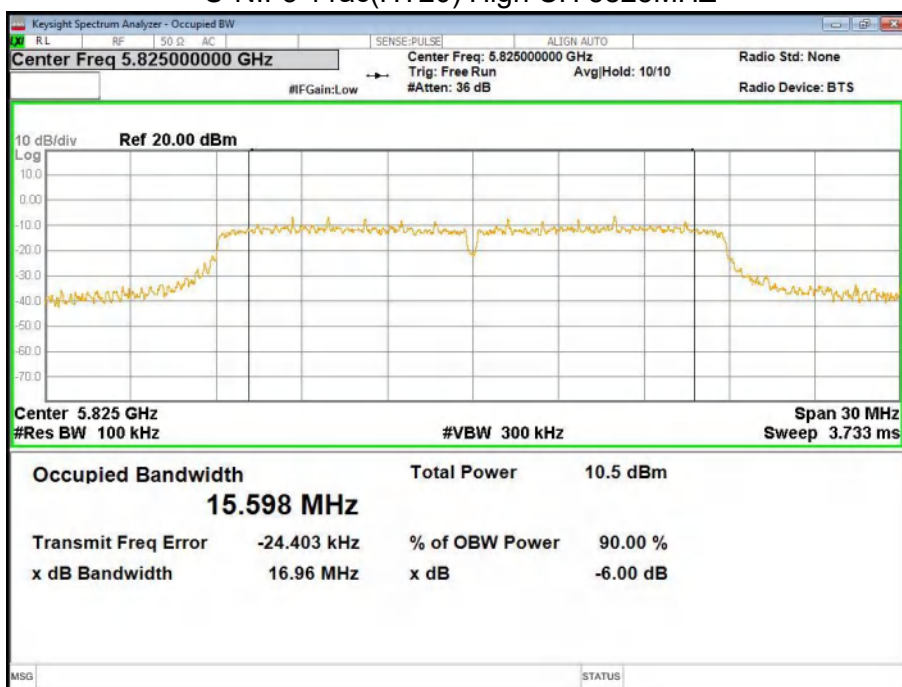


U-NII-3 11ac(HT40) Low CH 5755MHZ

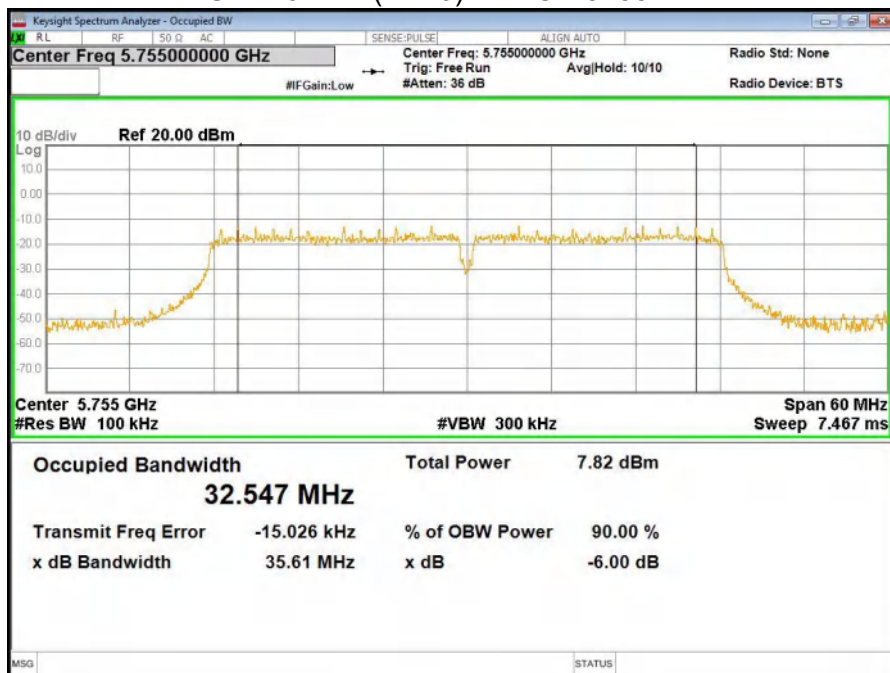

U-NII-3 11ac(HT40) High CH 5795MHZ

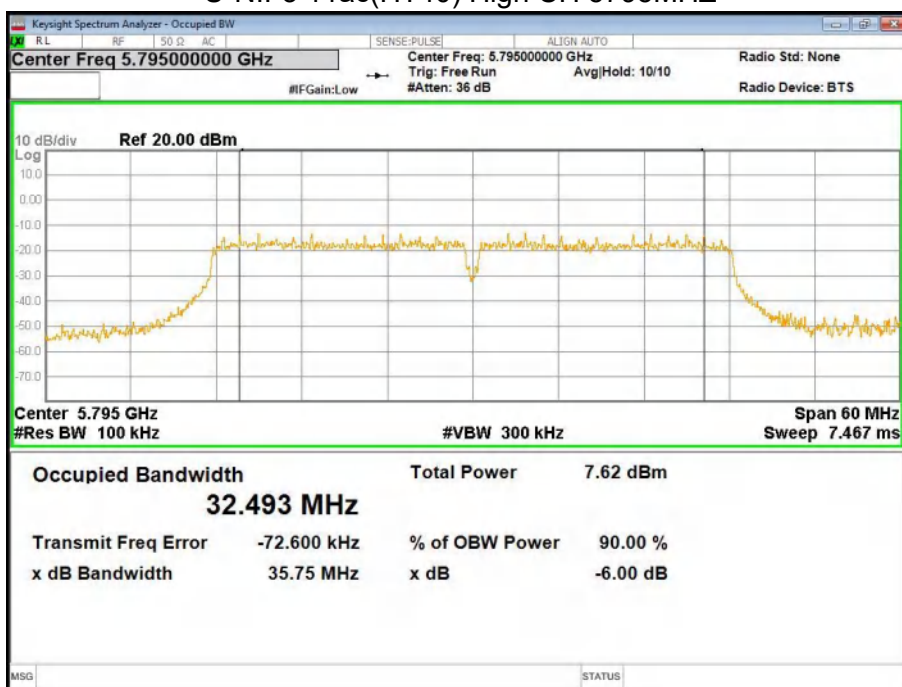

U-NII-3 11ac(HT80) Low CH 5775MHZ

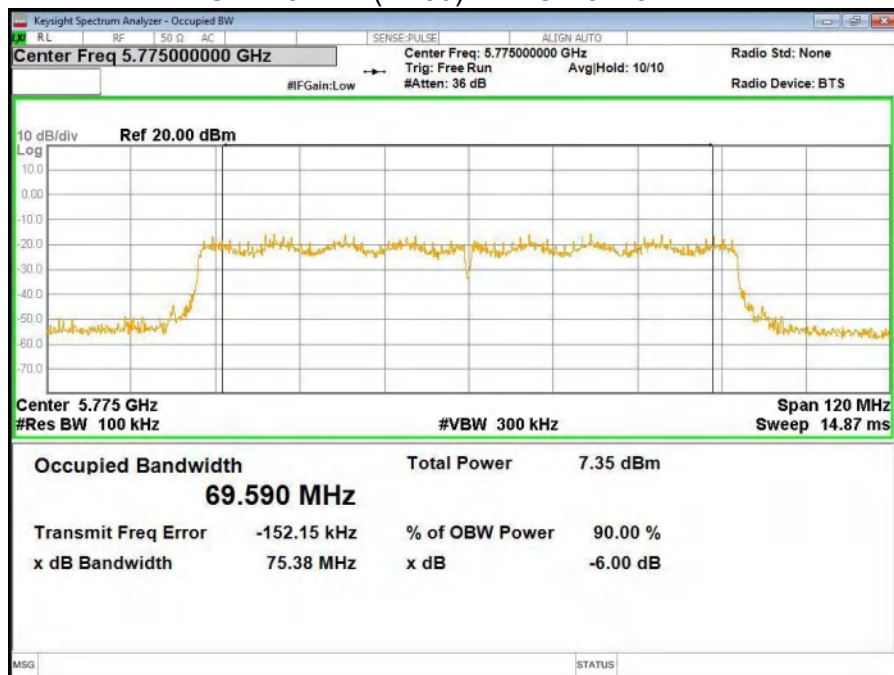

4 CONDUCTED OUTPUT POWER

4.1 limit

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices: 250mW (24dBm)	5150-5250
	For RSS: e.i.r.p. power: not exceed 200 mW(23dBm) or $10 + 10 \log_{10} B$	
	250mW (24dBm) or $11 + 10 \log_{10} B$	5250-5350
	250mW (24dBm) or $11 + 10 \log_{10} B$	For FCC:5470-5725 For IC:5470-5600 5650-5725
	1 Watt (30dBm)	5725-5850
Note: For ISSED: B=99% bandwidth.		

4.2 test procedure

- Connect each EUT's antenna output to power meter by RF cable and attenuator
- Get each antenna port's output power of EUT.

4.3 TEST SETUP



4.4 test results

ANT 1

Band	Operation mode	Coneucted Output Power(dBm)		
		Low	Middle	High
U-NII-1	802.11a	5.35	6.21	6.39
	802.11 n(HT20)	5.10	5.84	6.26
	802.11 n(HT40)	3.21	/	7.34
	802.11ac(HT20)	5.01	5.87	6.56
	802.11ac(HT40)	3.19	/	7.38
	802.11ac(HT80)	2.18	/	/
U-NII-3	802.11a	12.52	13.11	12.86
	802.11 n(HT20)	12.32	13.02	12.47
	802.11 n(HT40)	7.58	/	7.14
	802.11ac(HT20)	12.17	13.13	12.74
	802.11ac(HT40)	7.36	/	7.39
	802.11ac(HT80)	10.88	/	/

5. POWER SPECTRAL DENSITY

5.1 LIMIT

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	For FCC: Other than Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250
	For RSS eirp:10dBm/MHz	
	11dBm/MHz	5250-5350
	11dBm/MHz	For FCC:5470-5725 For IC:5470-5600 5650-5725
	30dBm/500kHz	5725-5850

5.2 TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5725MHz-5850MHz

Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is - 3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

5.3 TEST SETUP



5.4 TEST RESULTS

Band	Operation mode	Power Spectral Density(dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	3.991	3.634	3.825
	802.11 n(HT20)	3.641	3.440	3.899
	802.11 n(HT40)	0.255	/	0.396
	802.11ac(HT20)	2.491	2.845	2.860
	802.11ac(HT40)	-0.456	/	-0.412
	802.11ac(HT80)	-2.698	/	/

Band	Operation mode	Power Spectral Density(dBm/500KHz)		
		Low	Middle	High
U-NII-3	802.11a	1.536	1.334	1.595
	802.11 n(HT20)	0.359	0.879	0.524
	802.11 n(HT40)	-2.629	/	-2.813
	802.11ac(HT20)	-0.015	-0.781	-0.671
	802.11ac(HT40)	-2.520	/	-2.877
	802.11ac(HT80)	-5.998	/	/


Note:

RB factor= $10 \cdot \log(510/500\text{kHz})=0.086$


Results are already included with the RB factor.

5.5 original test data


U-NII-1 802.11a Low CH

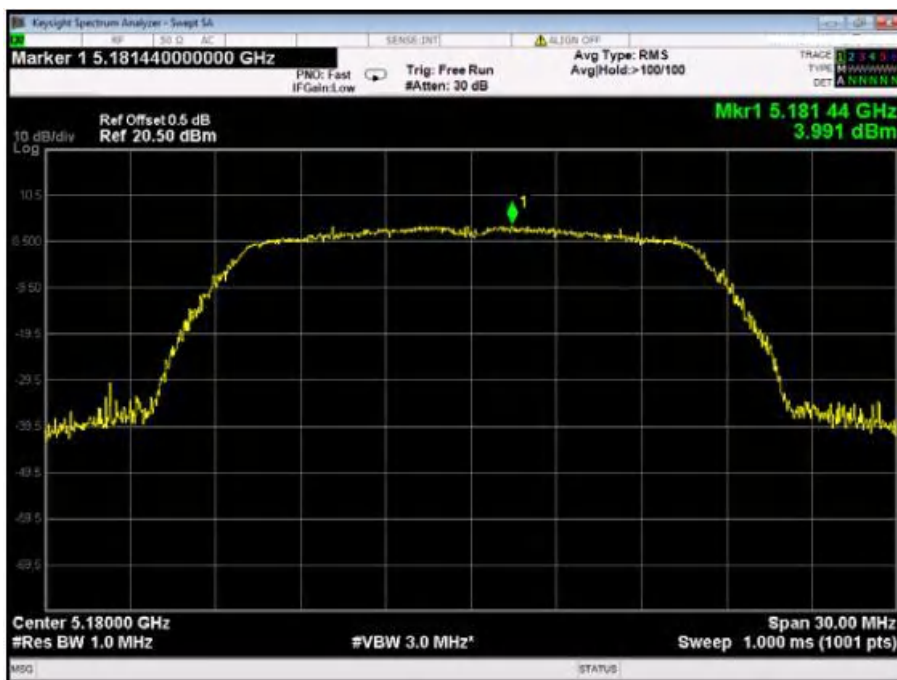


U-NII-1 802.11a Middle CH

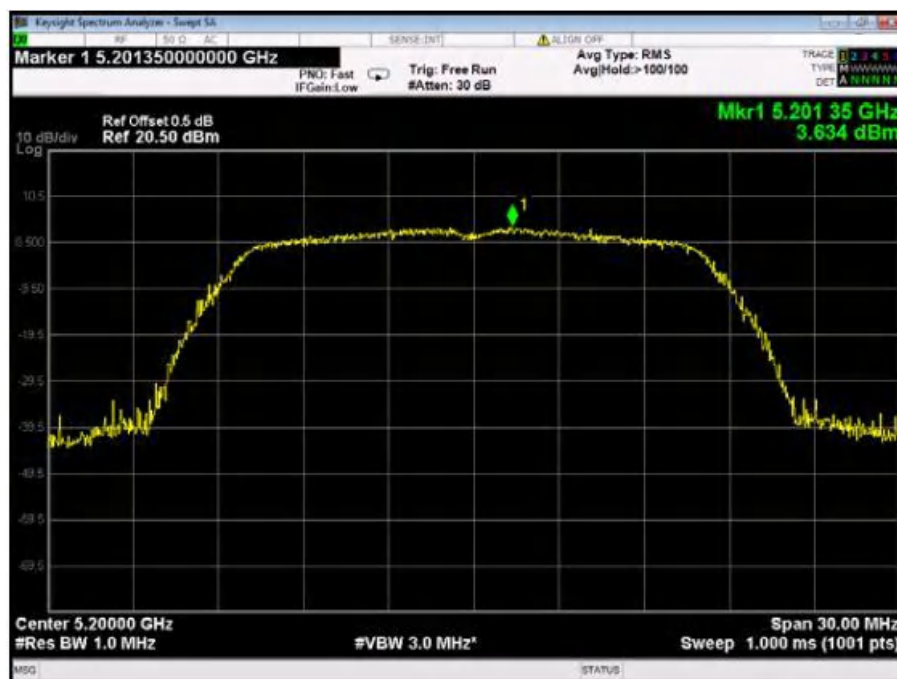


U-NII-1 802.11a High CH

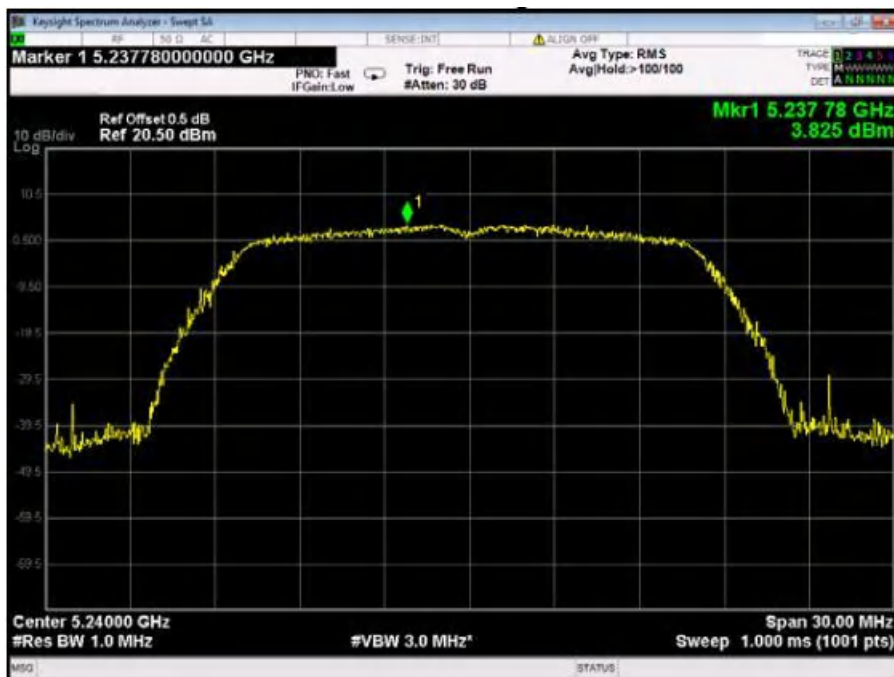

U-NII-1 802.11n(HT20) Low CH

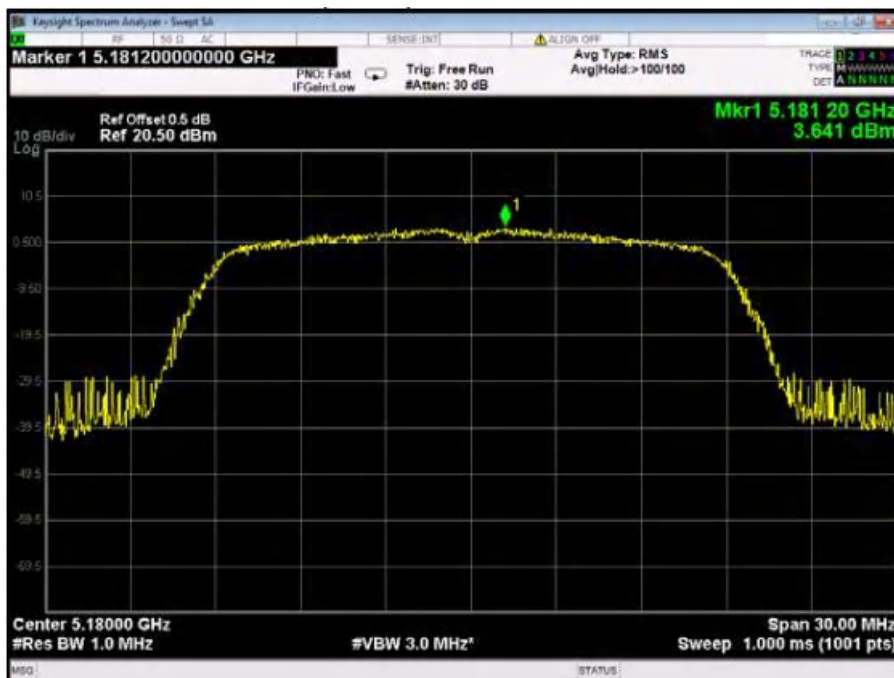


U-NII-1 802.11n(HT20) Middle CH

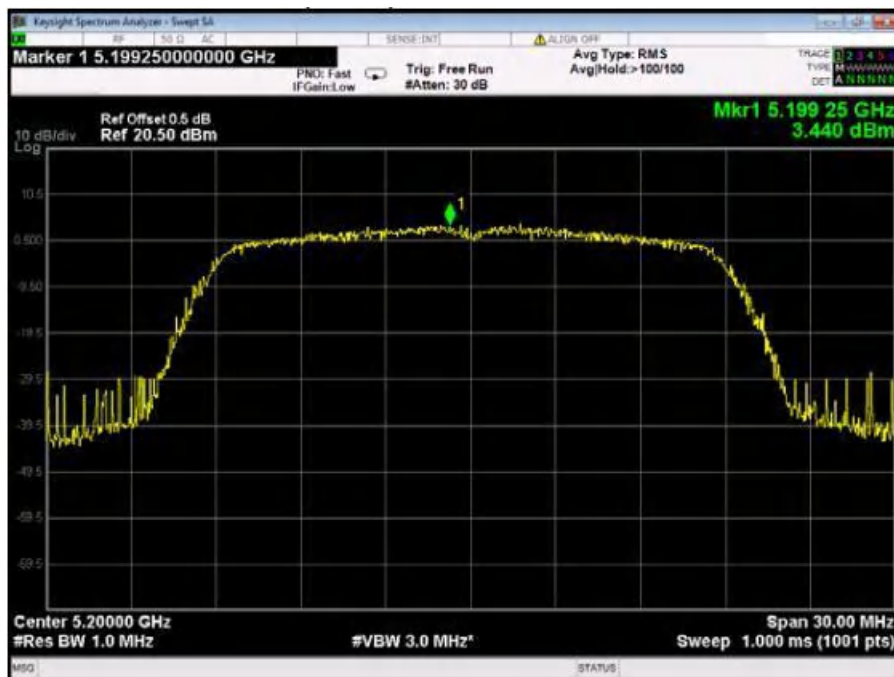


U-NII-1 802.11n(HT20) High CH




U-NII-1 802.11n(HT40) Low CH

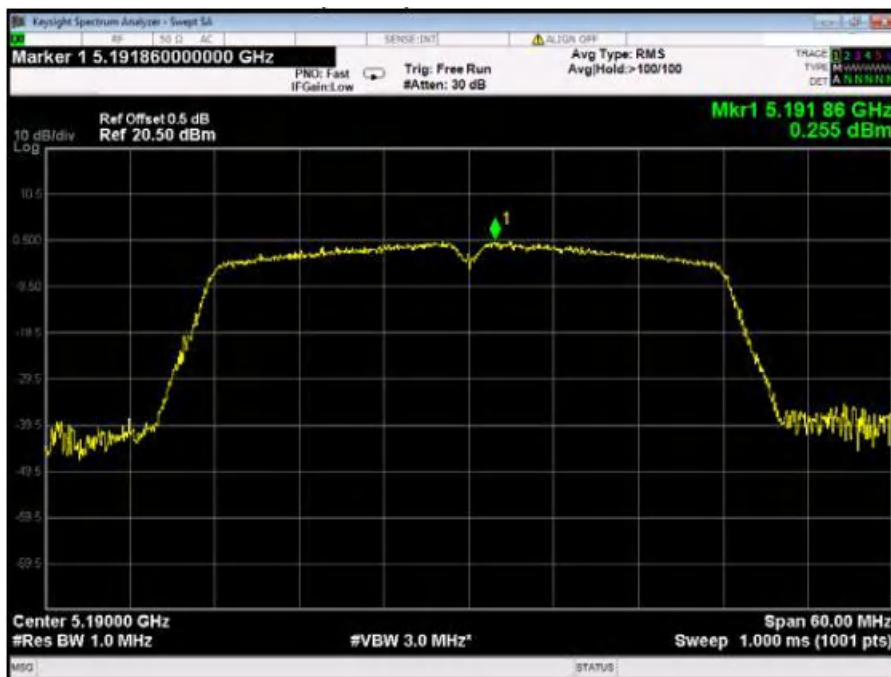

U-NII-1 802.11n(HT40) High CH

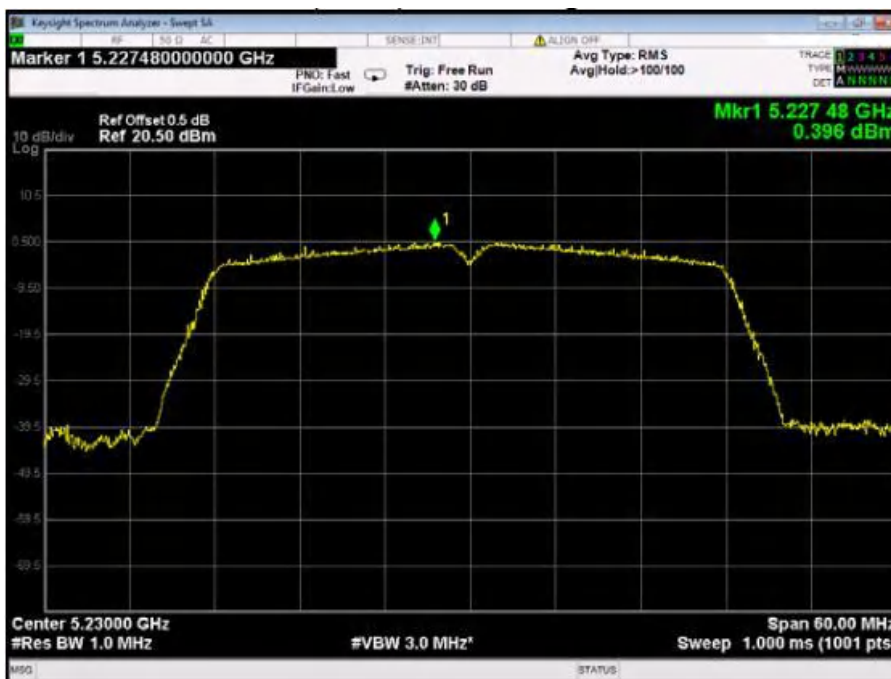


U-NII-1 802.11ac(HT20) Low CH

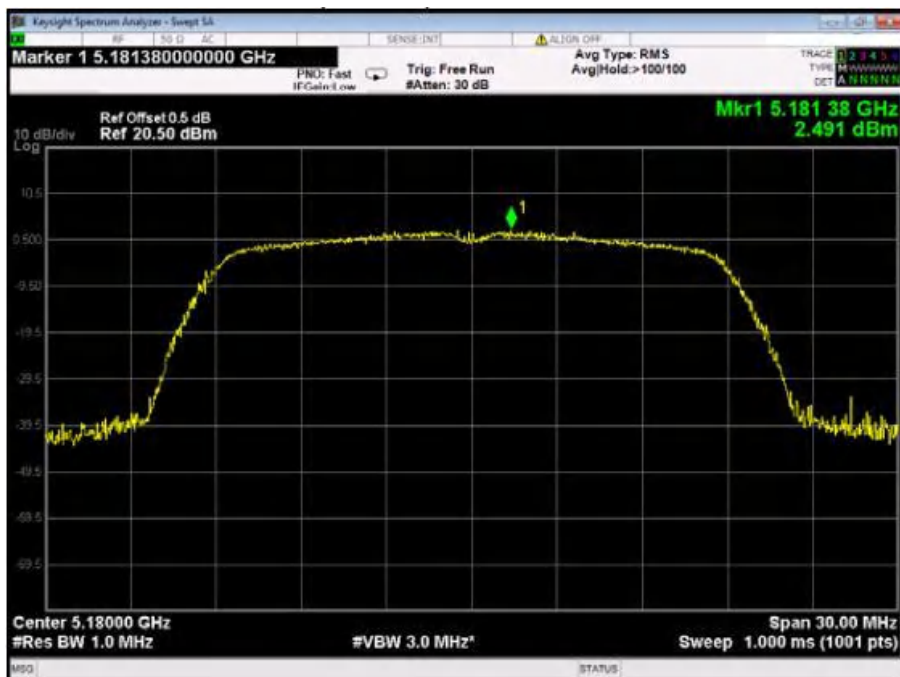

U-NII-1 802.11ac(HT20) Middle CH




U-NII-1 802.11ac(HT20) High CH

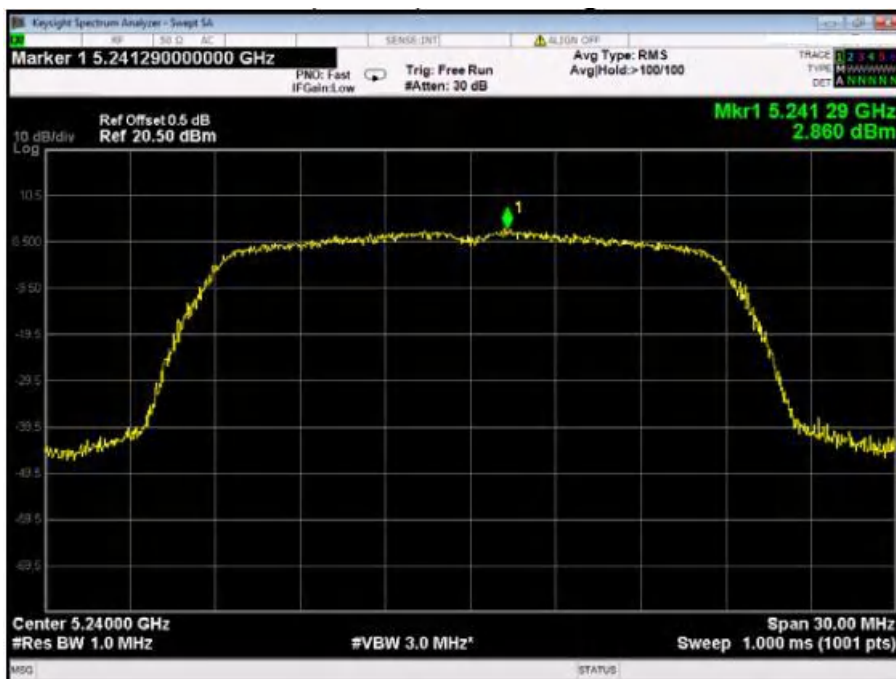


U-NII-1 802.11ac(HT40) Low CH




U-NII-1 802.11ac(HT40) High CH

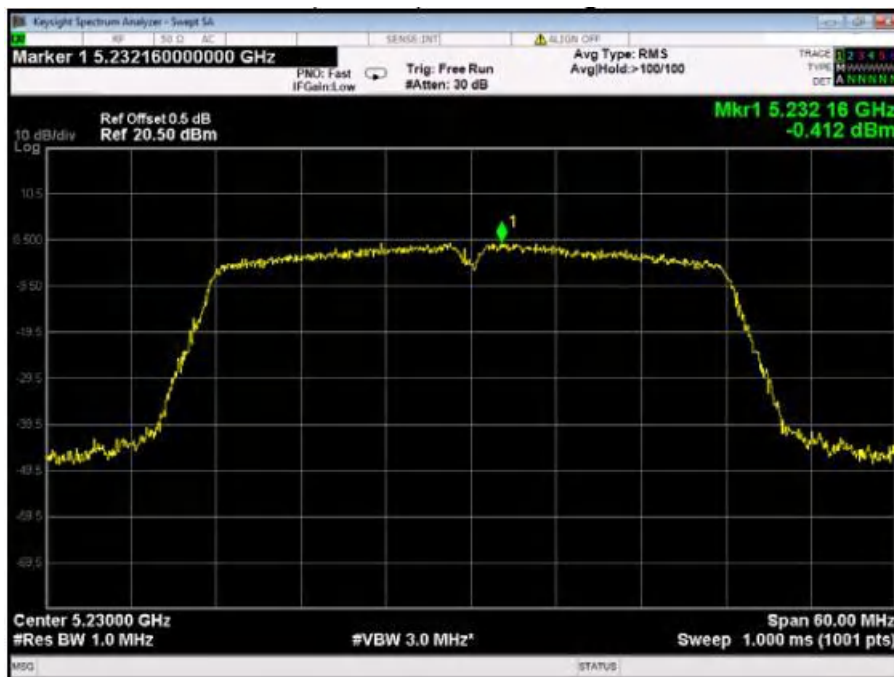


U-NII-1 802.11ac(HT80) Low CH

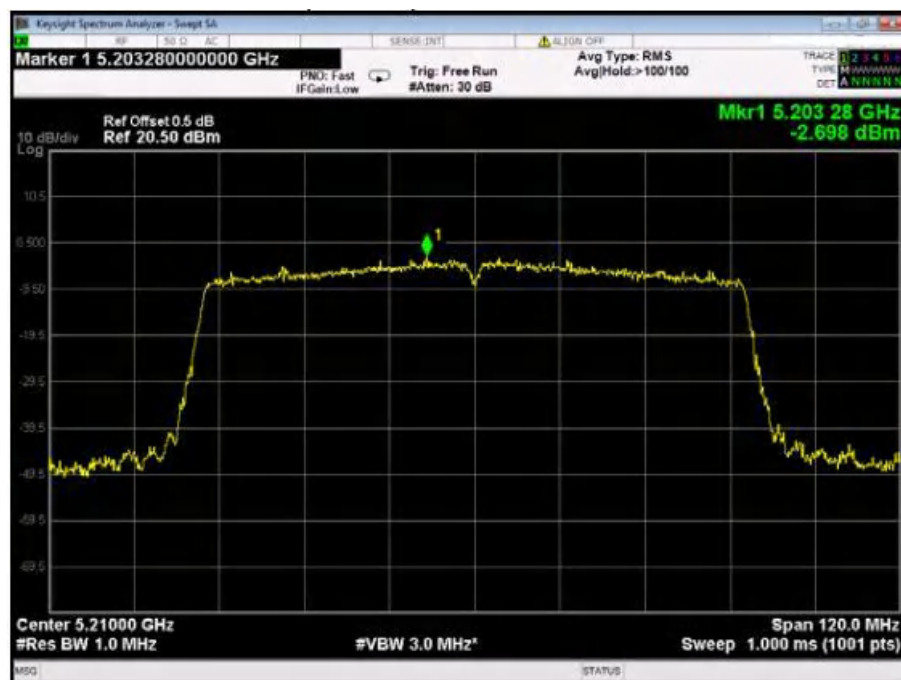


U-NII-3 802.11a Low CH

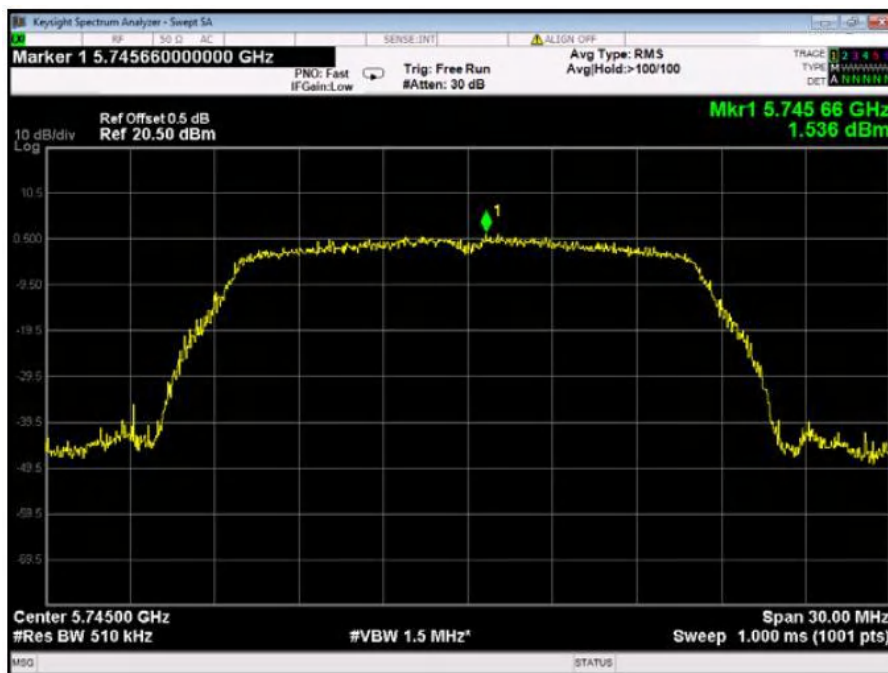


U-NII-3 802.11a Middle CH

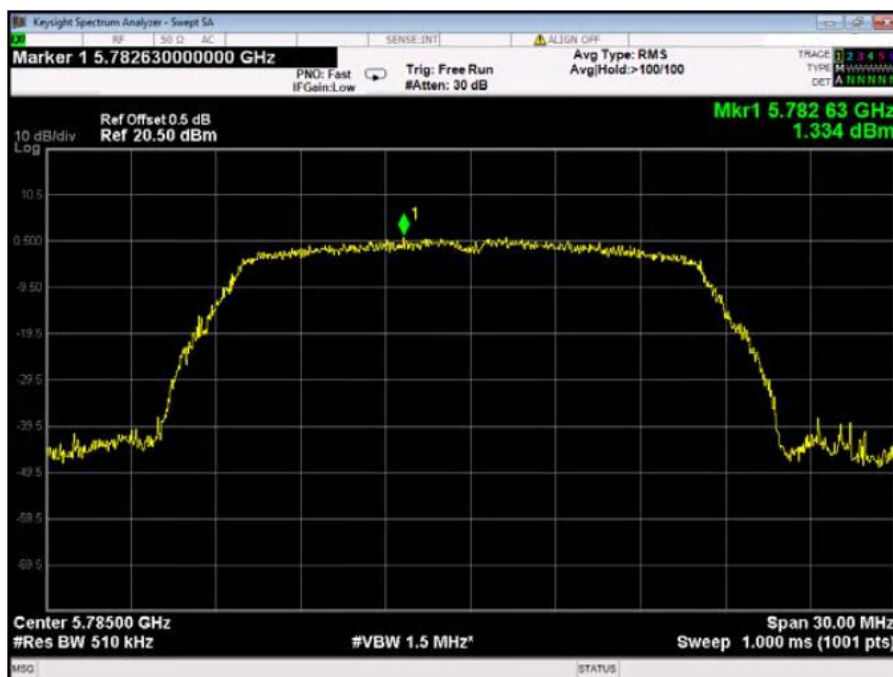

U-NII-3 802.11a High CH

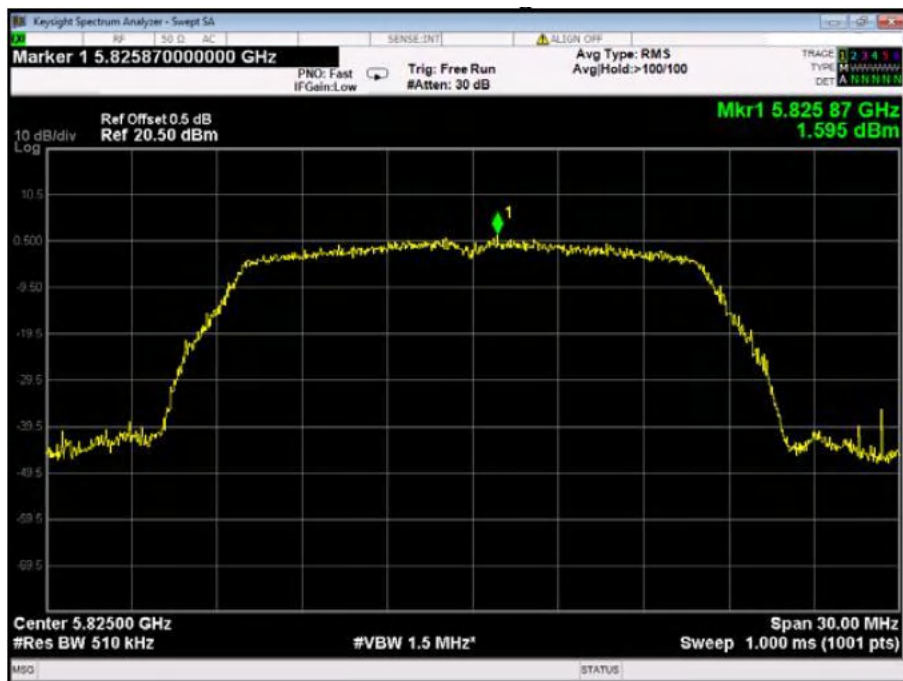


U-NII-3 802.11n(HT20) Low CH

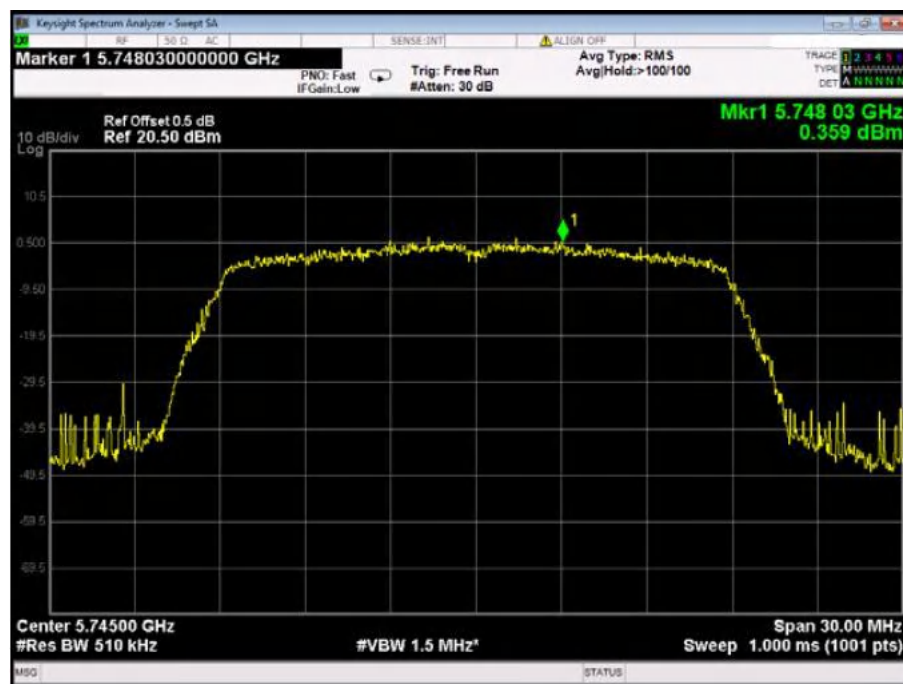


U-NII-3 802.11n(HT20) Middle CH



U-NII-3 802.11n(HT20) High CH

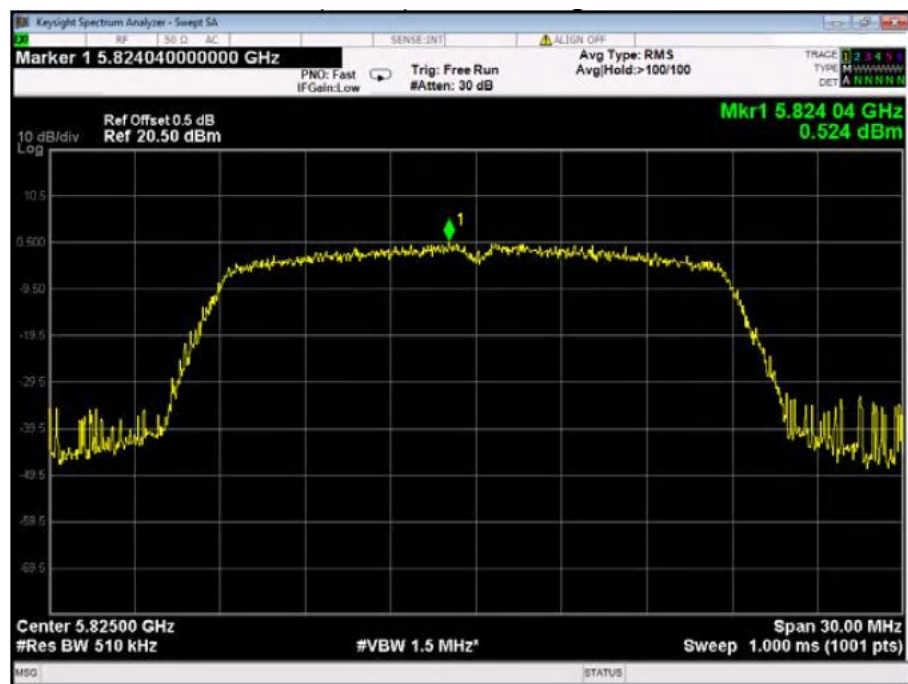


U-NII-3 802.11n(HT40) Low CH

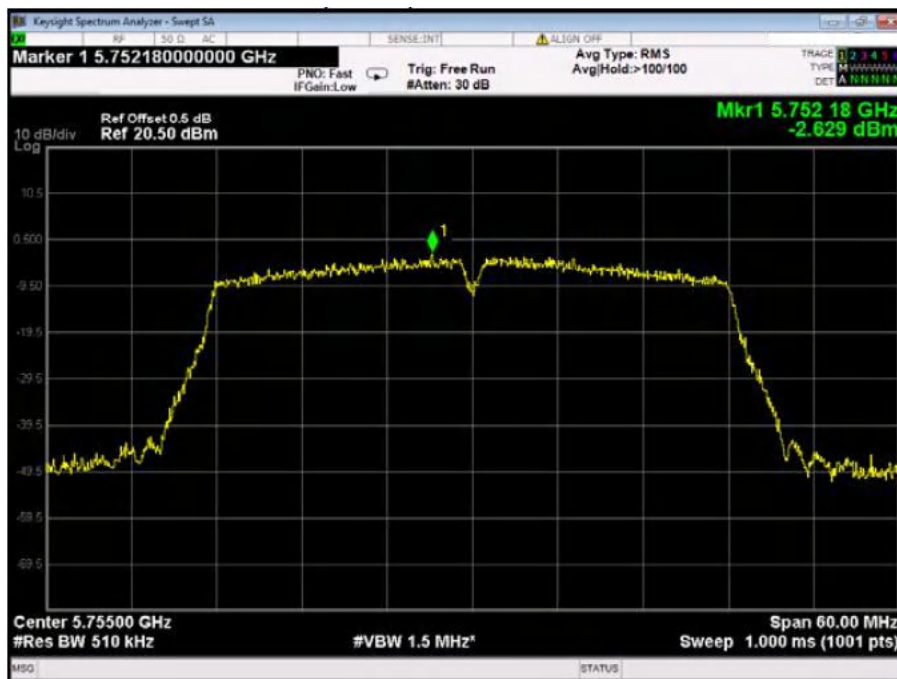


U-NII-3 802.11n(HT40) High CH




U-NII-3 802.11ac(HT20) Low CH

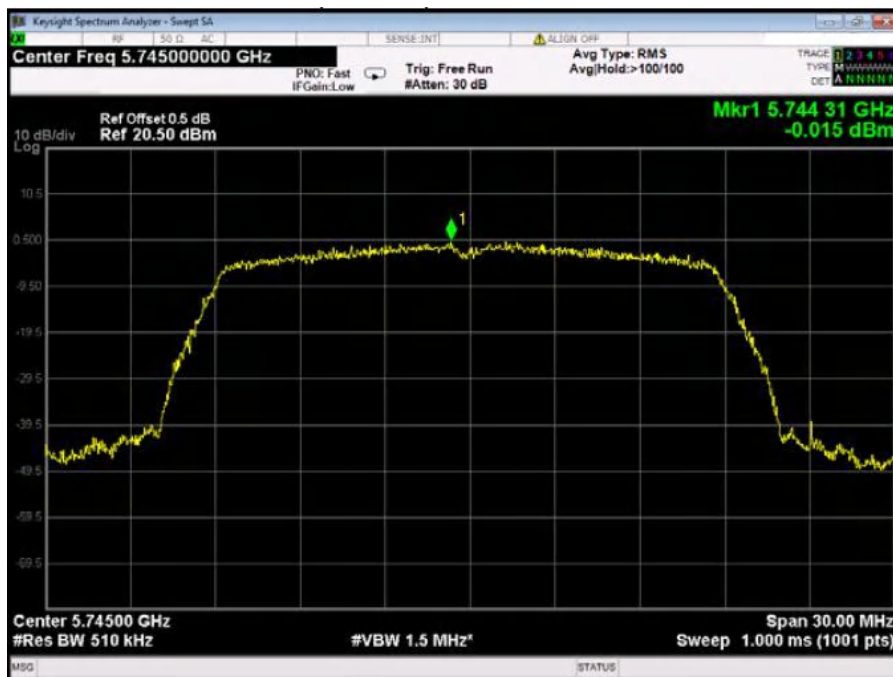


U-NII-3 802.11ac(HT20) Middle CH

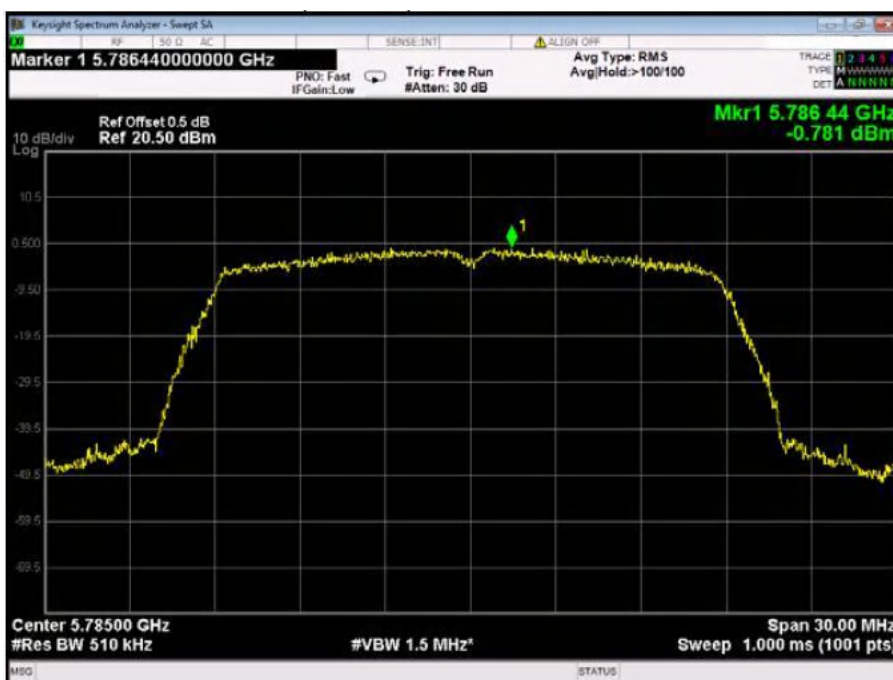


U-NII-3 802.11ac(HT20) High CH

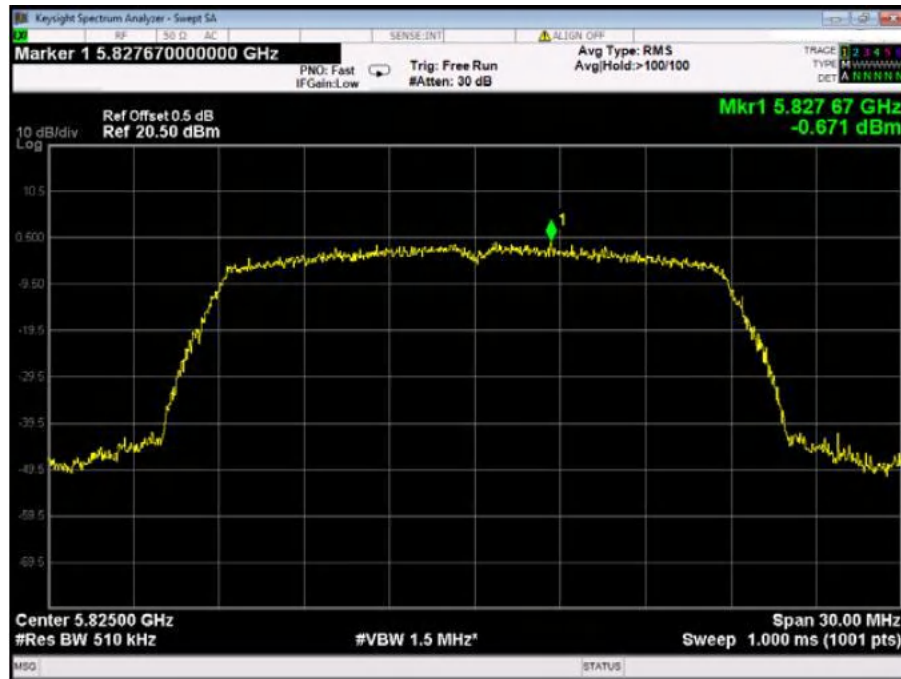


U-NII-3 802.11ac(HT40) Low CH

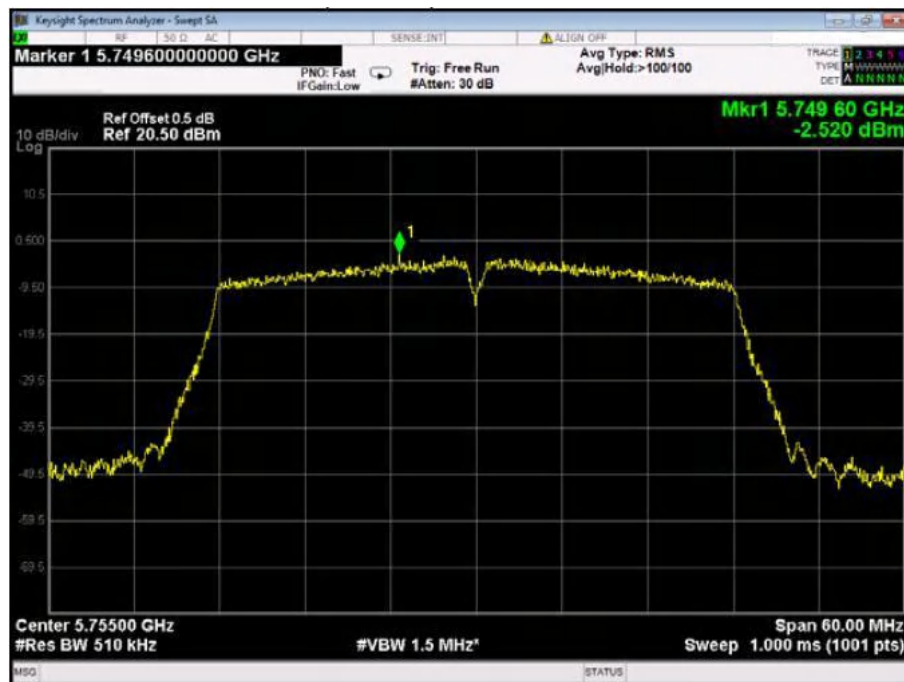

U-NII-3 802.11ac(HT40) High CH

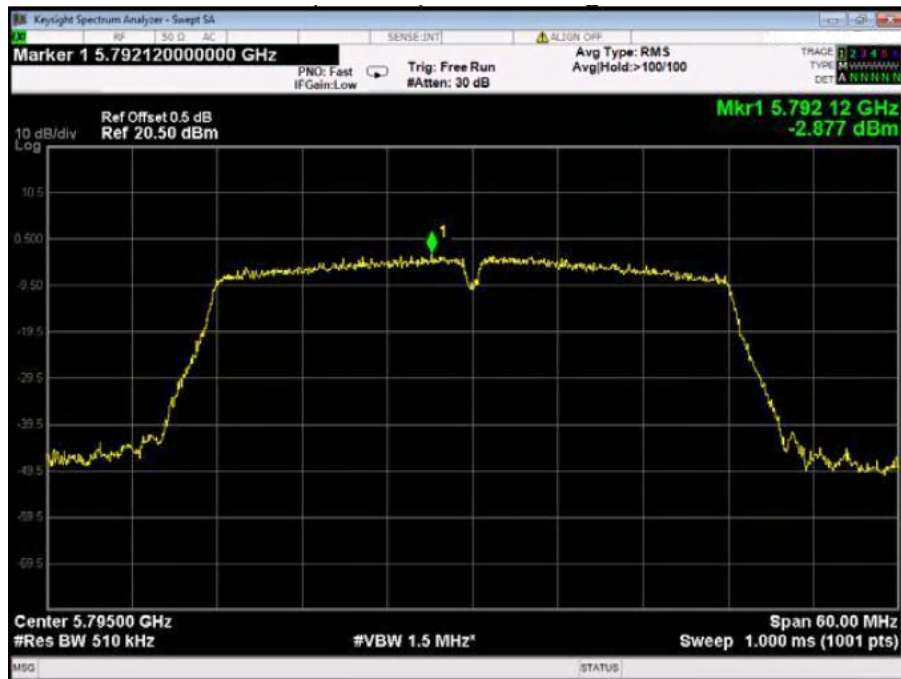

U-NII-3 802.11ac(HT80) Low CH

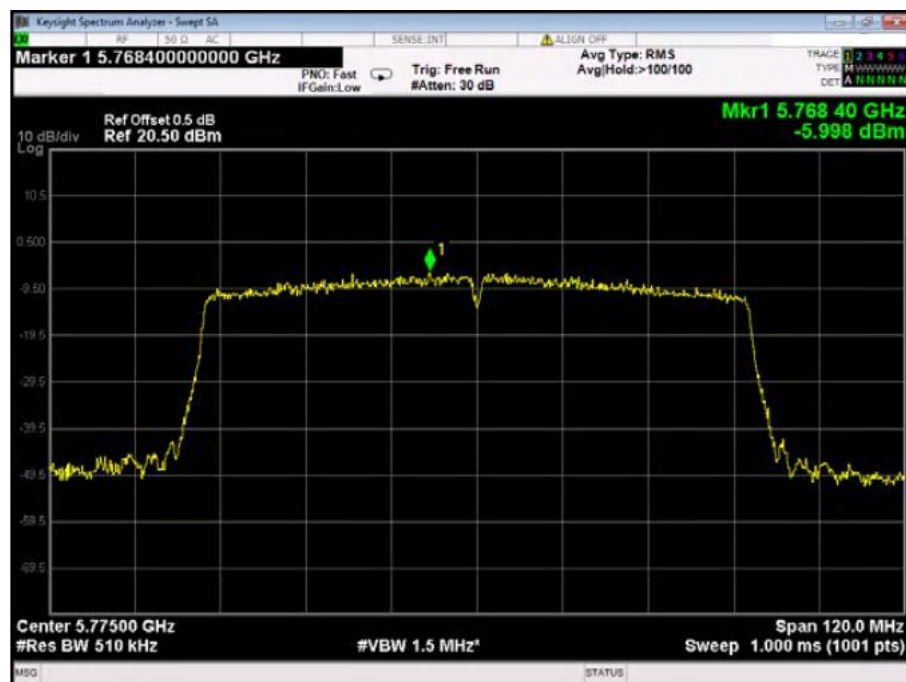

6. FREQUENCY STABILITY MEASUREMENT


6.1 LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual

6.2 TEST PROCEDURE

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

6.3 TEST SETUP

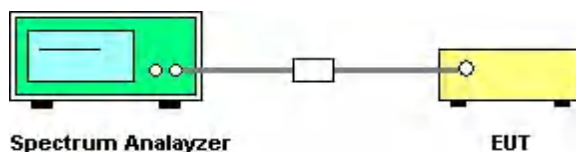

6.4 TEST RESULTS

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (DC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	120 V	/	/	/
45		1807	2.1599	20
30		1800	2.1516	20
20		1806	2.1587	20
10		1800	2.1516	20
0		1803	2.1552	20
-10		1800	2.1516	20
-15		1809	2.1623	20
-30		/	/	/
20	102 V	1810	2.1635	20
20	138 V	1798	2.1492	20

U-NII-3 Test Frequency:5785MHz				
Temperature (°C)	Power Supply (DC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	120 V	/	/	/
45		1919	2.2938	20
30		1911	2.2842	20
20		1915	2.2890	20
10		1923	2.2986	20
0		1907	2.2795	20
-10		1908	2.2807	20
-15		1914	2.2878	20
-30		/	/	/
20	102 V	1918	2.2926	20
20	138 V	1906	2.2783	20

7. Conducted spurious emission and Band edge

7.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

Frequency Band (MHz)	Limit
5150-5250	Outside of the 5.15-5.35 GHz band:EIRP-27 dBm/MHz
5250-5350	Outside of the 5.15-5.35 GHz band:EIRP-27 dBm/MHz
5470-5725	Outside of the 5.47-5.725 GHz band:EIRP-27 dBm/MHz
5725-5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

7.2 TEST PROCEDURE

Use the following spectrum analyzer settings:


Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz VBW > RBW

Sweep = auto Detector function = peak Trace = max hold


Allow the trace to stabilize

7.3 TEST SETUP

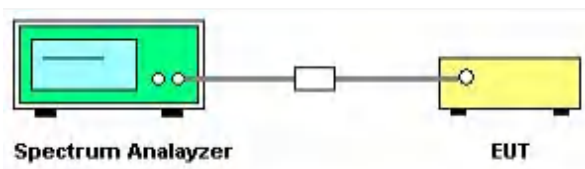


7.4 TEST RESULTS


U-NII-1 802.11a left side

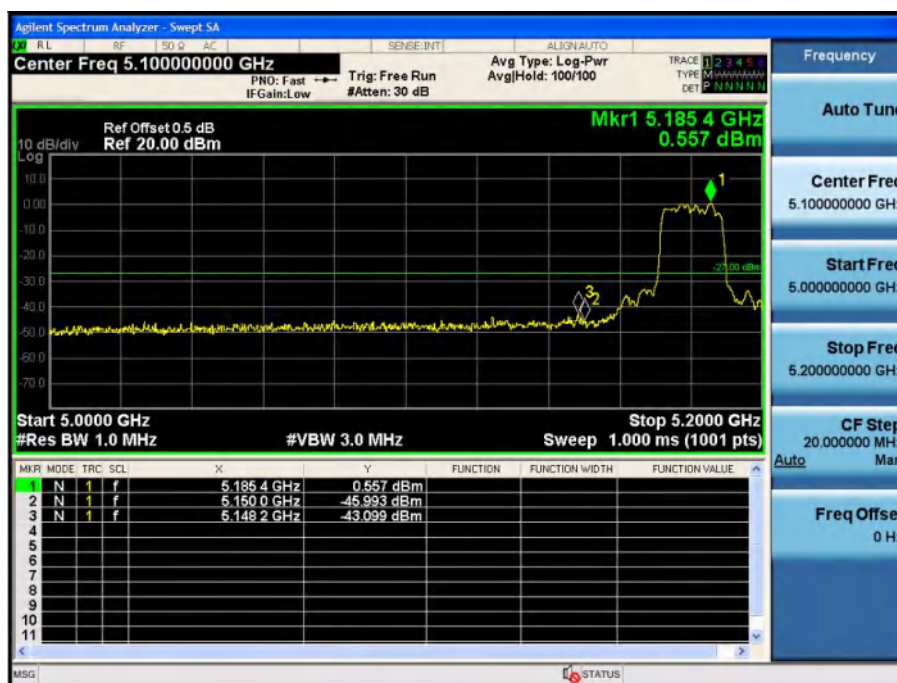


U-NII-1 802.11a Right side

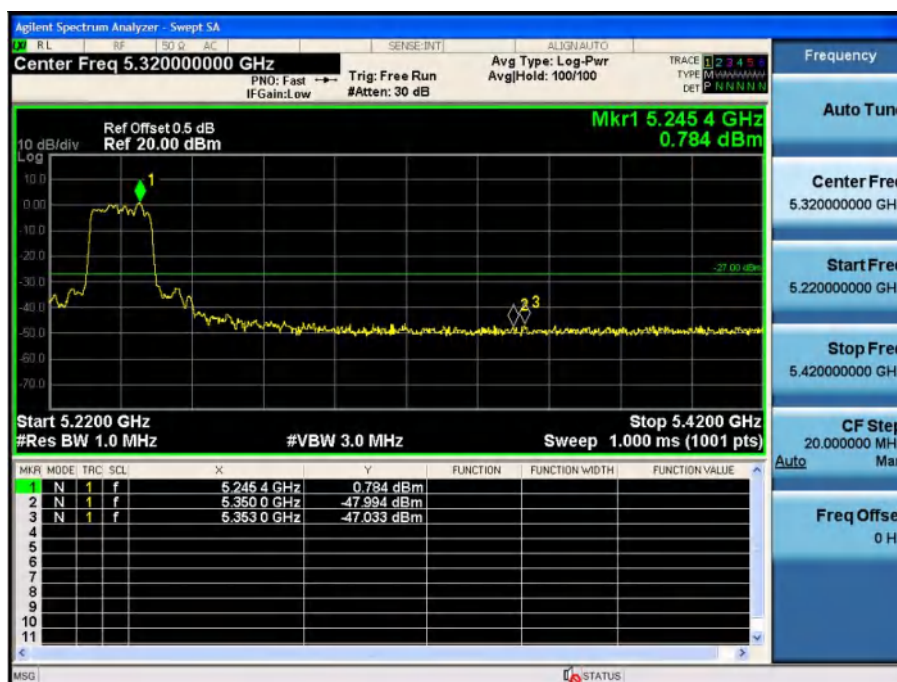


U-NII-3 802.11a left side

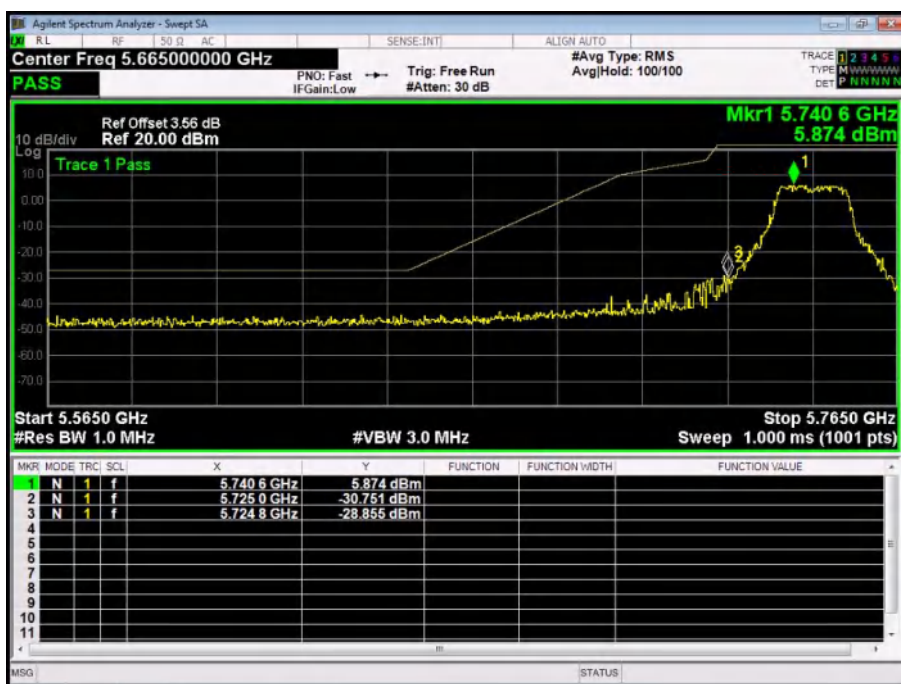


U-NII-3 802.11a right side

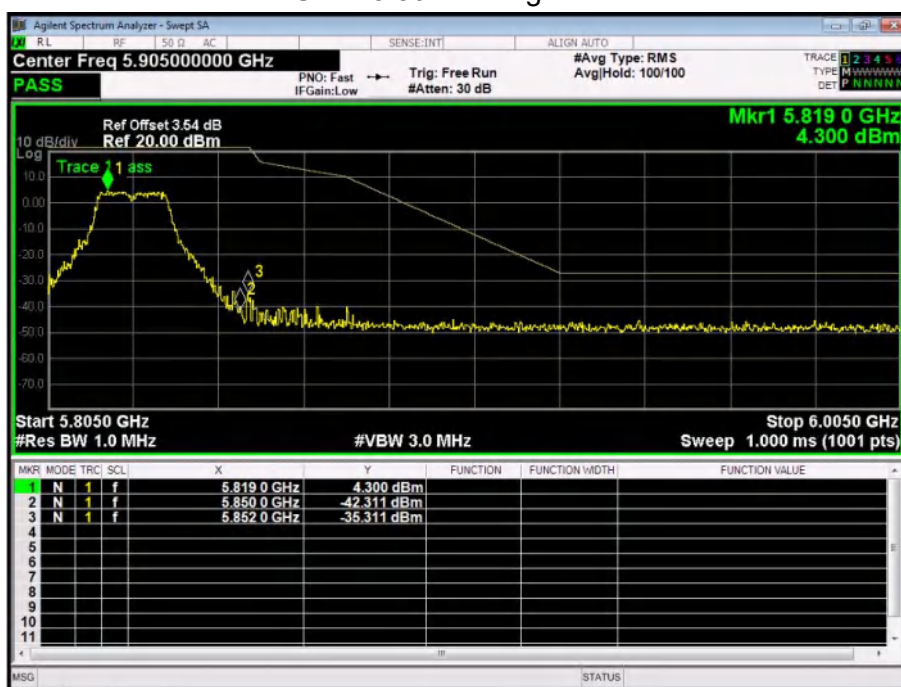


U-NII-1 802.11n(HT20) left side

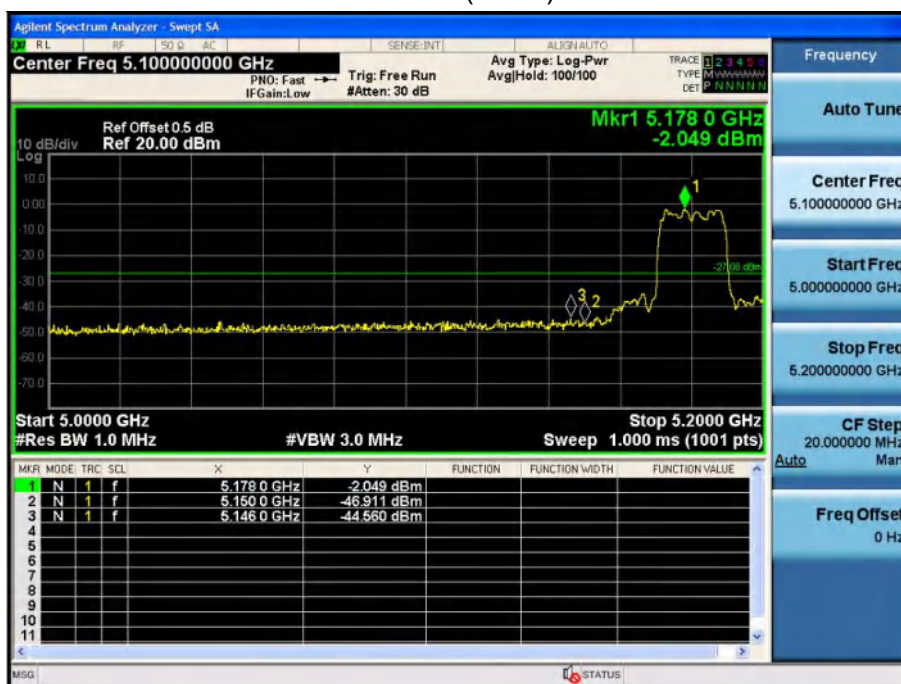


U-NII-1 802.11n(HT20) Right side

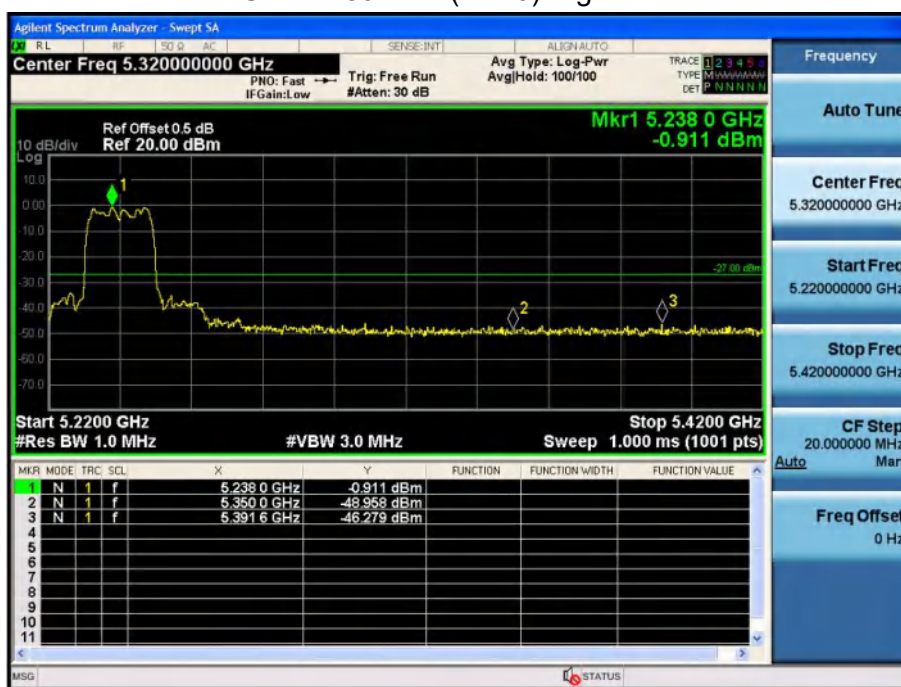


U-NII-3 802.11n(HT20) left side

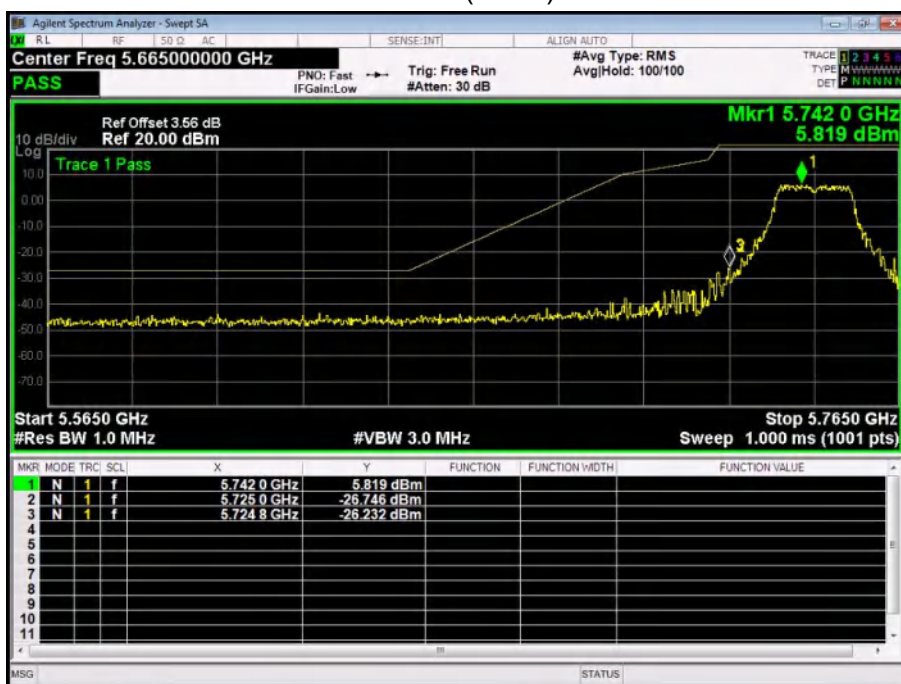


U-NII-3 802.11n(HT20) Right side

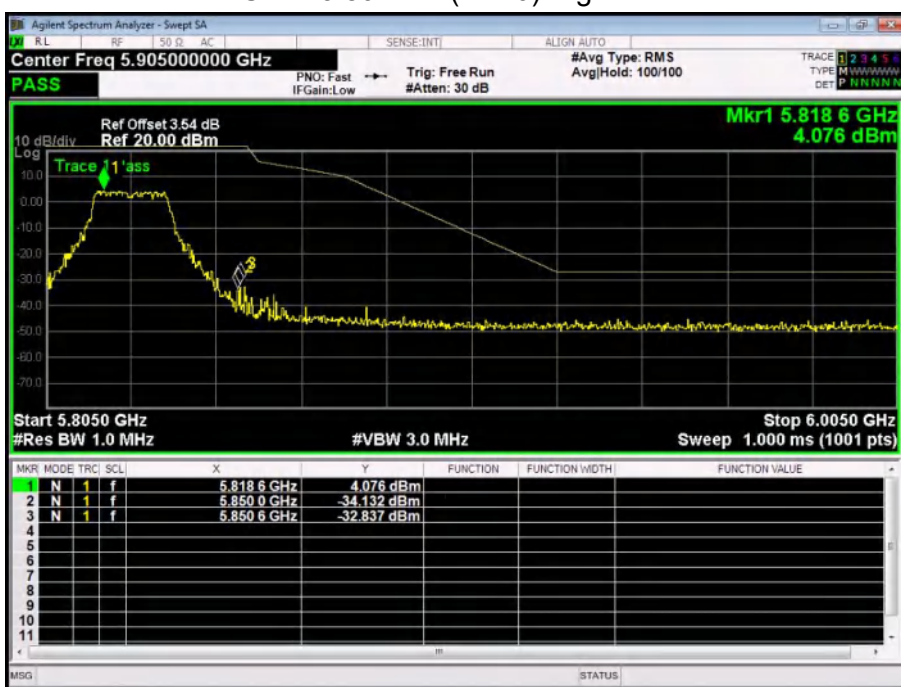


U-NII-1 802.11n(HT40) left side

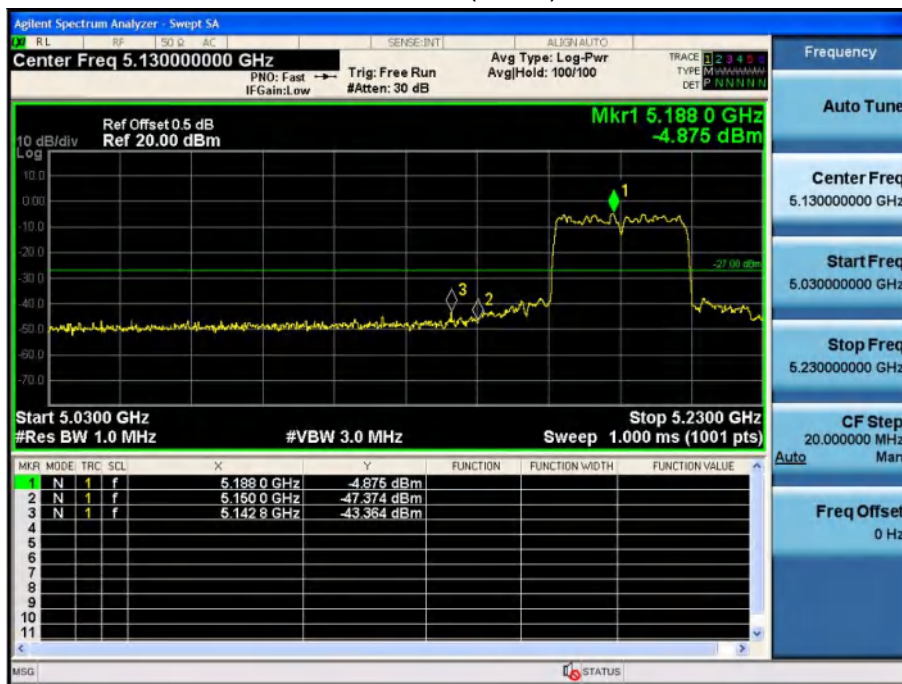

U-NII-1 802.11n(HT40) Right side

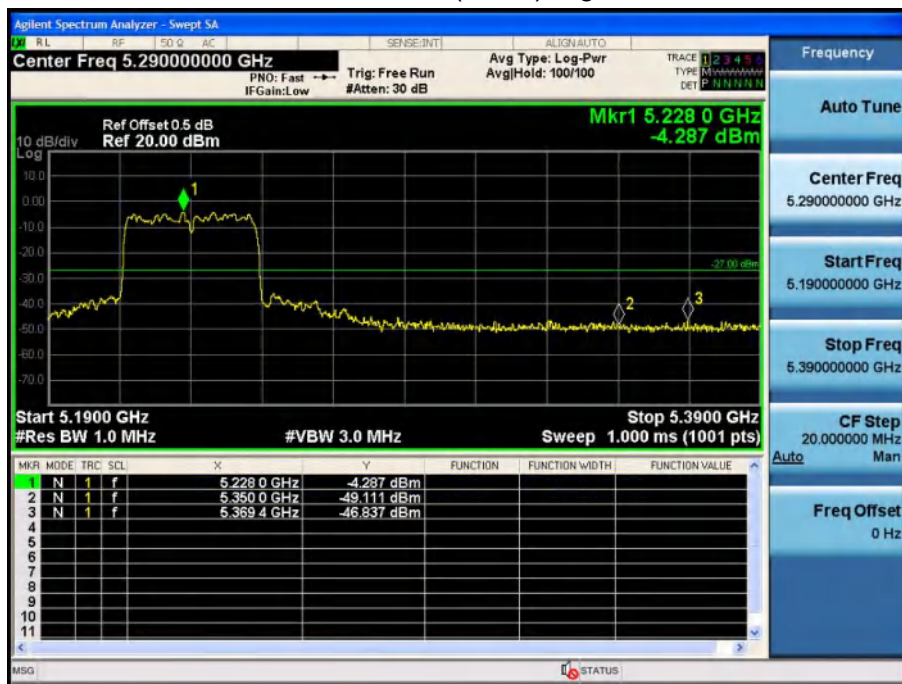


U-NII-3 802.11n(HT40) left side

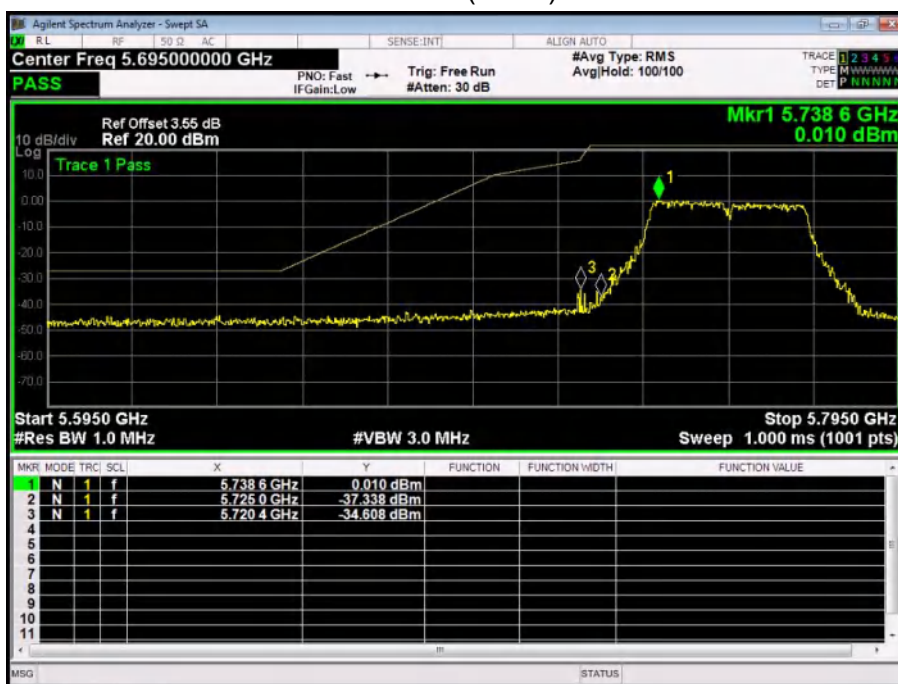


U-NII-3 802.11n(HT40) Right side




U-NII-1 802.11ac(HT20) left side

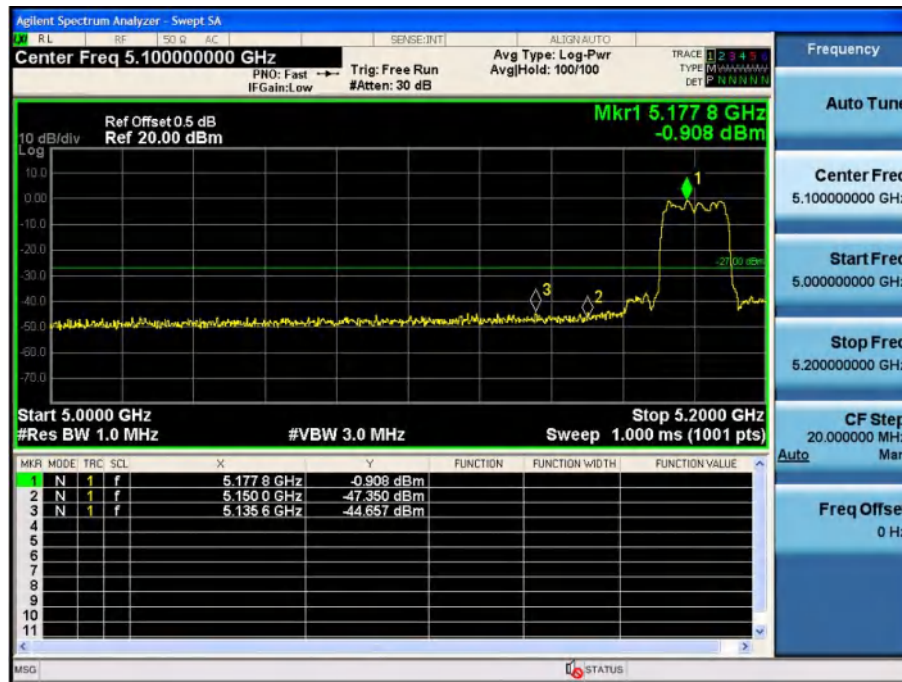


U-NII-1 802.11ac(HT20) Right side

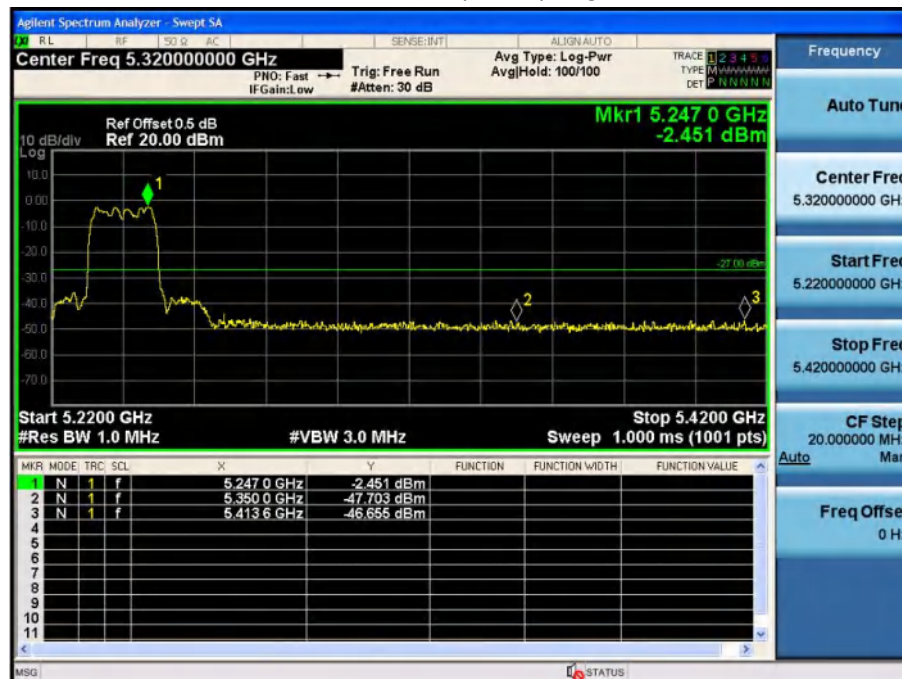


U-NII-3 802.11ac(HT20) left side

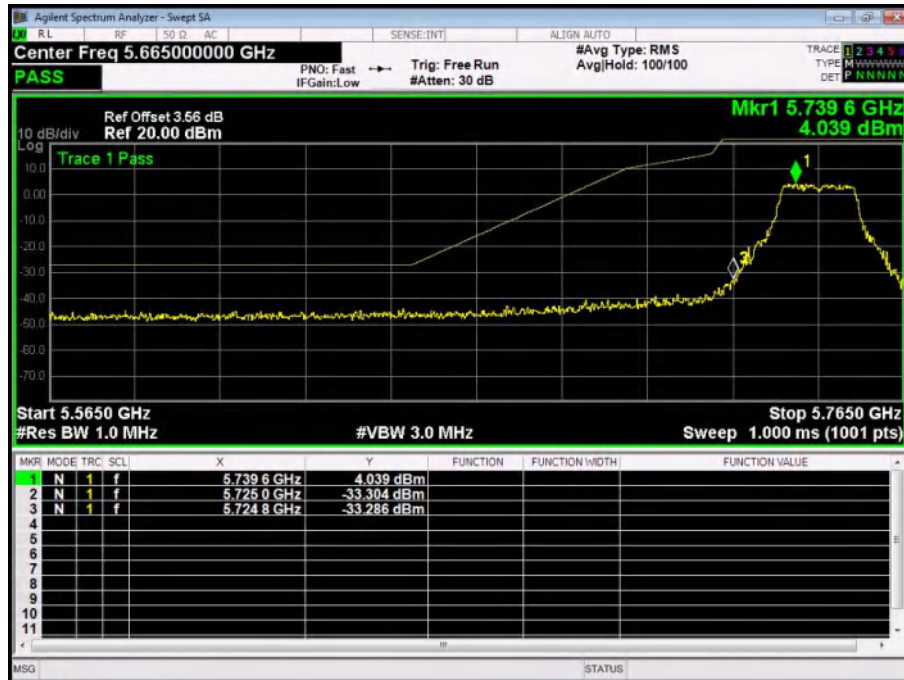

U-NII-3 802.11ac(HT20) Right side

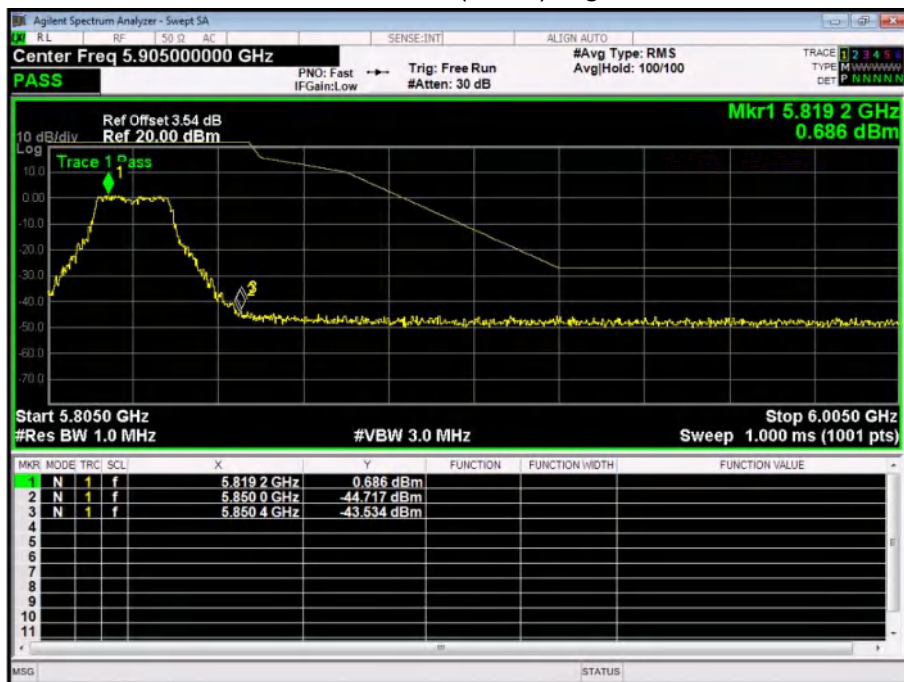


U-NII-1 802.11ac(HT40) left side

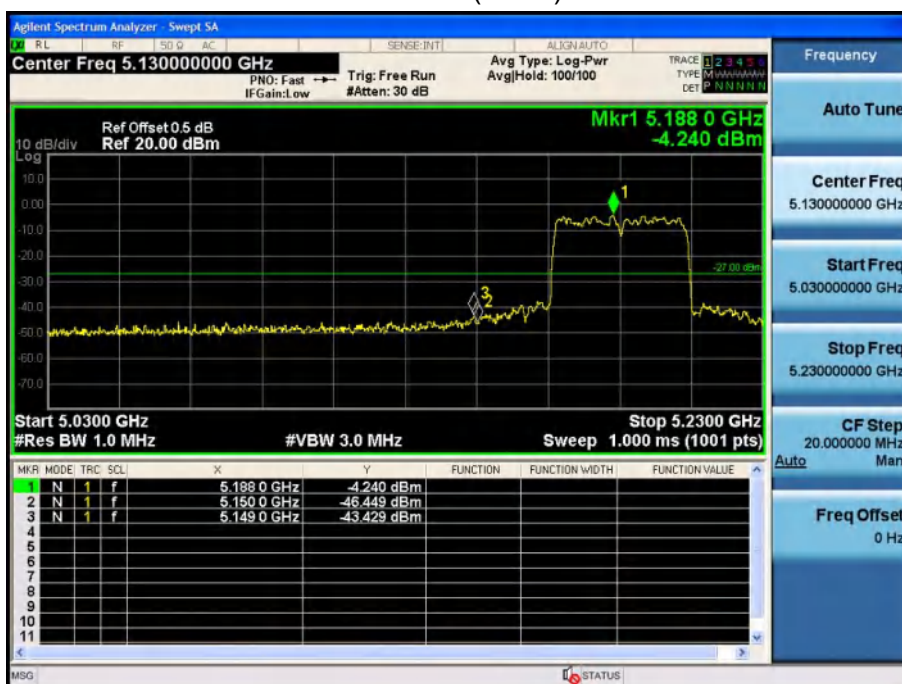


U-NII-1 802.11ac(HT40) Right side




U-NII-3 802.11ac(HT40) left side

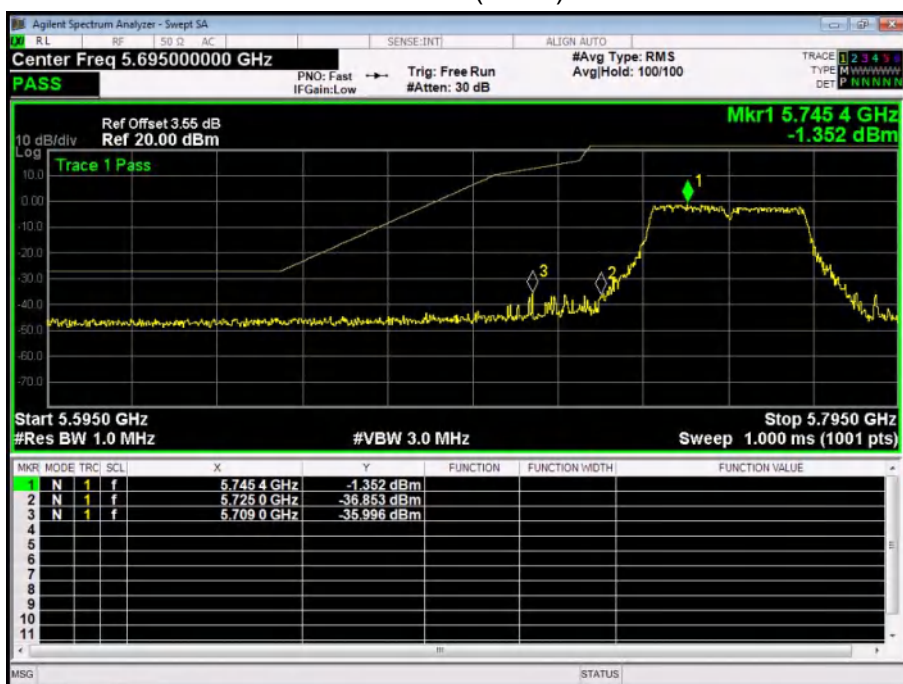

U-NII-3 802.11ac(HT40) Right side

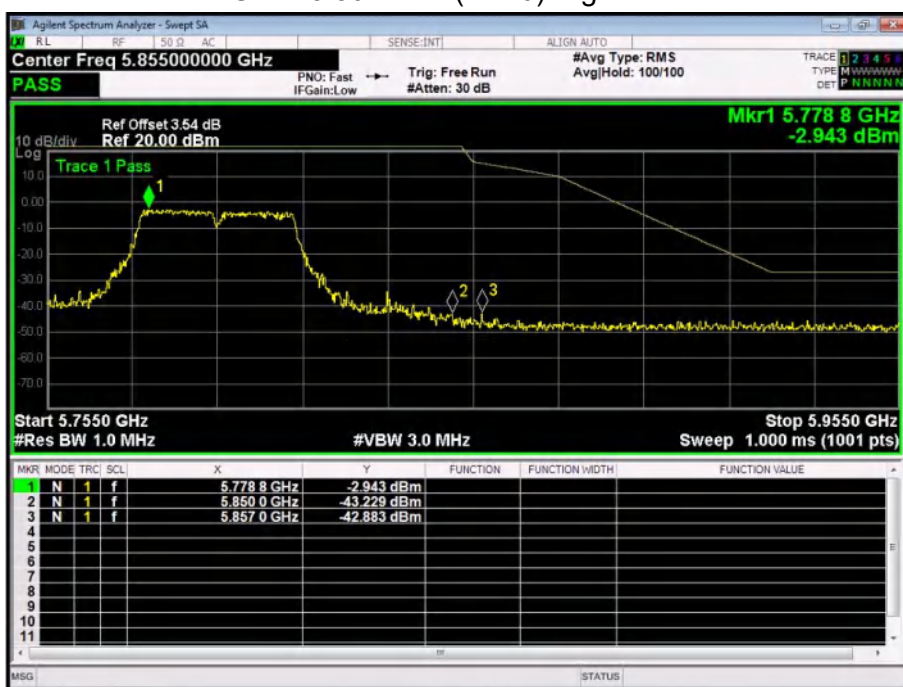


U-NII-1 802.11ac(HT80) left side

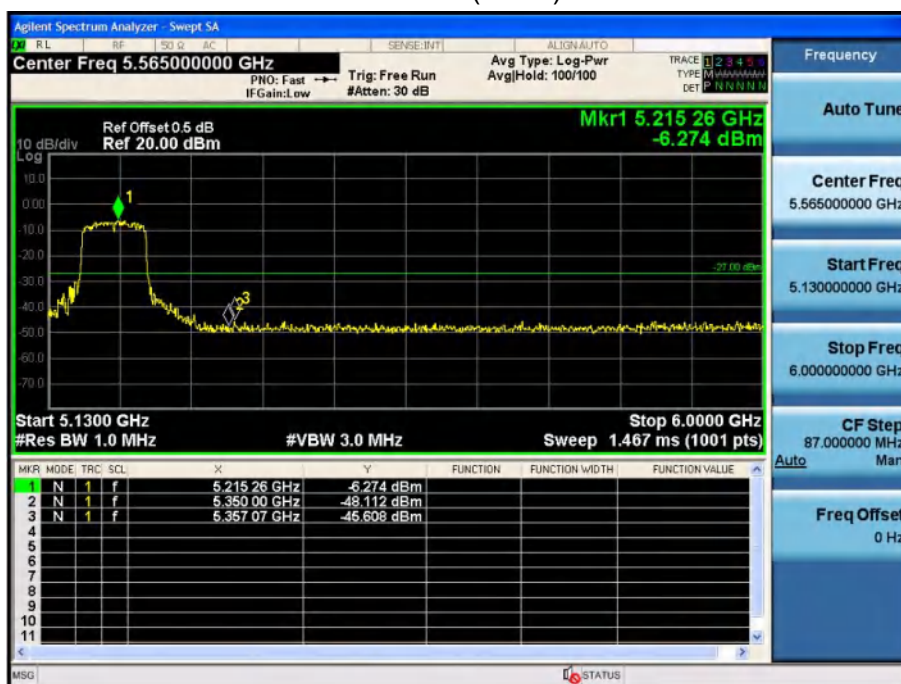

U-NII-1 802.11ac(HT80) Right side



U-NII-3 802.11ac(HT80) left side

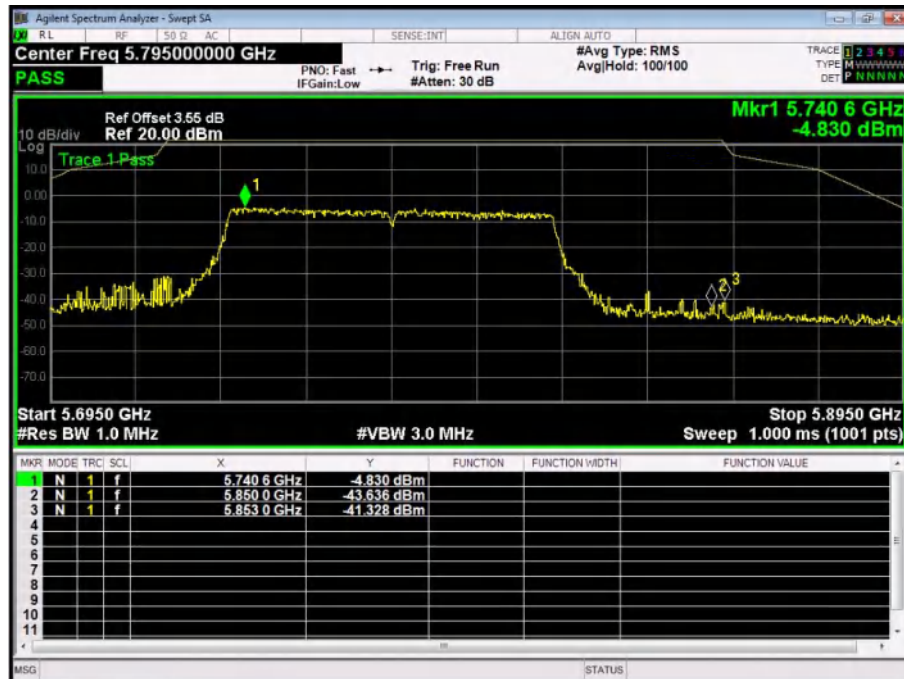

U-NII-3 802.11ac(HT80) Right side



conducted spurious

U-NII-1 802.11a Low CH



U-NII-1 802.11a Middle CH

