



RF MEASUREMENT REPORT

FCC ID: 2BF3W-7161
Applicant: Wireless (US) Inc
Product: SkyNet IAB Node
Model No.: SkyNet SR7161, SkyNet SC7161
Brand Name: SkyNet
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2024-06-28
Test Date: 2024-07-12 ~ 2024-08-10

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2407RSU001-U1	V01	Initial Report	2024-08-27	Invalid
2407RSU001-U1	V02	Update Product Model	2024-08-28	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Testing Facility.....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test.....	7
1.6. Working Frequencies	7
1.7. Antenna Details	8
2. Test Configuration.....	9
2.1. Test Mode	9
2.2. Test System Connection Diagram	10
2.3. Test Software	10
2.4. Applied Standards	11
2.5. Test Environment Condition.....	11
3. Antenna Requirements.....	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty.....	14
5.1. Decision Rules	14
5.2. Measurement Uncertainty	14
6. Test Result	15
6.1. Summary	15
6.2. 6dB Bandwidth Measurement	16
6.2.1. Test Limit.....	16
6.2.2. Test Procedure	16
6.2.3. Test Setting	16
6.2.4. Test Setup	16
6.2.5. Test Result	16
6.3. Output Power Measurement	17
6.3.1. Test Limit.....	17
6.3.2. Test Procedure	17
6.3.3. Test Setting	17
6.3.4. Test Setup	17
6.3.5. Test Result	17
6.4. Power Spectral Density Measurement.....	18
6.4.1. Test Limit.....	18

6.4.2.	Test Procedure	18
6.4.3.	Test Setting	18
6.4.4.	Test Setup	18
6.4.5.	Test Result	19
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	20
6.5.1.	Test Limit.....	20
6.5.2.	Test Procedure	20
6.5.3.	Test Setting	20
6.5.4.	Test Setup	21
6.5.5.	Test Result	21
6.6.	Radiated Spurious Emission Measurement	22
6.6.1.	Test Limit.....	22
6.6.2.	Test Procedure	22
6.6.3.	Test Setting	22
6.6.4.	Test Setup	24
6.6.5.	Test Result	25
6.7.	Radiated Restricted Band Edge Measurement	26
6.7.1.	Test Limit.....	26
6.7.2.	Test Procedure	27
6.7.3.	Test Setting	27
6.7.4.	Test Setup	28
6.7.5.	Test Result	28
6.8.	AC Conducted Emissions Measurement	29
6.8.1.	Test Limit.....	29
6.8.2.	Test Setup	29
6.8.3.	Test Result	29
Appendix A	- Test Result	30
A.1	Duty Cycle Test Result	30
A.2	6dB Bandwidth Test Result	32
A.3	Output Power Test Result	41
A.4	Power Spectral Density Test Result.....	43
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result	76
A.6	Radiated Spurious Emission Test Result	141
A.7	Radiated Restricted Band Edge Test Result.....	151
A.8	AC Conducted Emissions Test Result	295
Appendix B	- Test Setup Photograph	297
Appendix C	- EUT Photograph	298

1. General Information

1.1. Applicant

Wireless (US) Inc
10 CORPORATE PARK STE 330 IRVINE, CA 92606, USA

1.2. Manufacturer

Wireless (US) Inc
10 CORPORATE PARK STE 330 IRVINE, CA 92606, USA

1.3. Testing Facility

☐	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☒	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	SkyNet IAB Node
Model No.	SkyNet SR7161, SkyNet SC7161
EUT Identification No.	20240628Sample#01 (For Conducted) 20240705Sample#01 (For Bandedge) 20240705Sample#03 (For Radiated)
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Antenna Information	Refer to selection 1.7
Working Voltage	By PoE
Operating Temp.	-40 ~ 55°C
Operating Environment	Outdoor Use
Accessory	
PoE Injector	Model: UPI3301-PSC Input: AC 100-240V, 50/60Hz Output: 54V, DC
Remark: - The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. - SkyNet SR7161 with built-in omnidirectional antenna, SkyNet SC7161 with built-in directional antenna and 2.4G Wi-Fi is disabled by SW based on SkyNet SR7161 hardware. The circuit parts of SkyNet SR7161 and SkyNet SC7161 are the same. - This report was assessed the SkyNet SR7161 model.	

1.5. Radio Specification under Test

Frequency Range	802.11b/g/n-HT20/ax-HE20/be-EHT20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40/be-EHT40: 2422 ~ 2452MHz	
Channel Number	802.11b/g/n-HT20/ax-HE20/be-EHT20: 11 802.11n-HT40/ax-HE40/be-EHT40: 7	
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM 802.11ax/be: OFDMA	
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ax: up to 1147.2Mbps 802.11be: up to 1376Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11b/g/n-HT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency	Antenna Gain (dBi)				Directional Gain (dBi)		30°elevation
	Range (MHz)	Ant 0	Ant 1	Ant 2	Ant 3	For Power	For PSD	Gain (dBi)
Model No.: SkyNet SR7161								
Built-in omni antenna	2412 ~ 2462	7.53	6.85	7.26	6.50	7.53	13.55	--
	5150 ~ 5850	6.97	7.65	7.80	8.12	8.12	14.14	7.65
	5925 ~ 6425	8.01	9.30	7.79	9.86	9.86	15.88	9.62
	6525 ~ 6875	6.51	8.81	6.78	8.71	8.81	14.83	8.70
Model No.: SkyNet SC7161								
Built-in directional antenna	5150 ~ 5850	8.58	10.19	10.12	10.32	10.32	16.34	3.92
	5925 ~ 6425	12.53	11.50	11.91	11.55	12.53	18.55	1.23
	6525 ~ 6875	12.24	11.25	12.72	11.29	12.72	18.74	-0.63
Note 1: The antenna gain and directional gain refer to manufacturer’s antenna specification.								
Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode for 802.11a/b/g/n/ac/ax/be.								
Note 3: Software automatically backs power down based on CDD power for beamforming operation.								
Note 4: The transmit power of SkyNet SC7161 will be adjusted according to the difference in antenna gain between the two models.								


2. Test Configuration

2.1. Test Mode

CDD Mode
Mode 1: Transmit by 802.11b _Nss=1 (1Mbps)
Mode 2: Transmit by 802.11g _Nss=1 (6Mbps)
Mode 3: Transmit by 802.11n-HT20 _Nss=1 (MCS0)
Mode 4: Transmit by 802.11n-HT40 _Nss=1 (MCS0)
Mode 5: Transmit by 802.11ax-HE20 _Nss=1 (MCS0)
Mode 6: Transmit by 802.11ax-HE40 _Nss=1 (MCS0)
Mode 7: Transmit by 802.11be-EHT20_Nss=1 (MCS0)
Mode 8: Transmit by 802.11be-EHT40_Nss=1 (MCS0)
Note: 1. The modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. For CDD mode, this device supports 4 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1. 3. As Designated by manufacturer, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

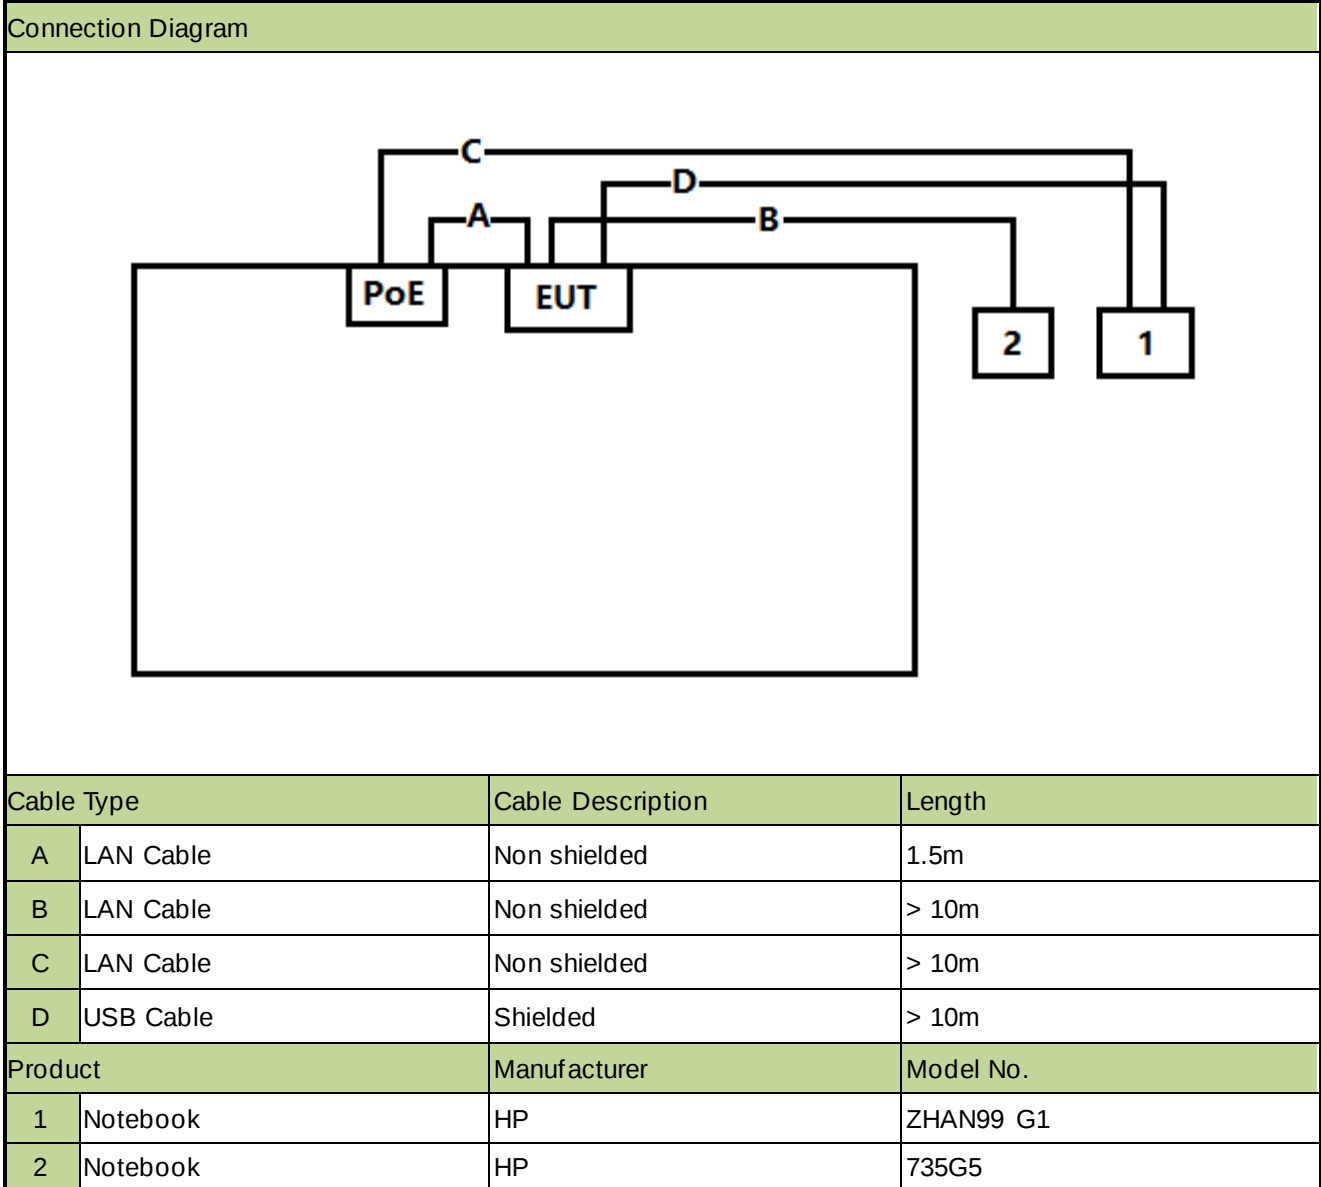

2.3. Test Software

The test utility software used during testing was "QSPR", and the version was 6.00.00130.1.
Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2024-09-17	NS-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06573	1 year	2025-05-12	NS-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06572	1 year	2025-03-15	NS-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06292	1 year	2024-10-21	NS-AC1
Anechoic Chamber	BOOMWAVE	NS-AC1	MRTSUE06496	1 year	2025-07-05	NS-AC1
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06574	1 year	2025-07-06	NS-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2025-01-07	NS-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06575	1 year	2025-06-10	NS-AC1
Signal Analyzer	Agilent	N9010A	MRTSUE06195	1 year	2024-12-10	NS-AC1
Thermohygrometer	testo	608-H1	MRTSUE11294	1 year	2025-05-14	NS-AC1
Two-Line V-Network	R&S	ENV216	MRTSUE06578	1 year	2025-04-06	NS-SR2
Thermohygrometer	testo	608-H1	MRTSUE11106	1 year	2025-04-08	NS-SR2
Shielding Room	BOOMWAVE	NS-SR2	MRTSUE06551	5 years	2029-06-10	NS-SR2
Thermohygrometer	DELI	NO.8813	MRTSUE06783	1 year	2024-12-05	NS-TR2
Temperature Chamber	OUKE	OK-TH-100C	MRTSUE06899	1 year	2025-04-06	NS-TR2
Signal Analyzer	Keysight	N9020A	MRTSUE10075	1 year	2025-07-16	NS-AC1
USB Power Sensor	Keysight	U2021XA	MRTSUE06581	1 year	2025-06-29	NS-TR2
Attenuator	MVE	MVE2213	MRTSUE11062	1 year	2025-06-06	NS
Attenuator	MVE	MVE2213	MRTSUE11063	1 year	2025-06-06	NS
Attenuator	MVE	MVE2213	MRTSUE11064	1 year	2025-06-06	NS

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_T-E-TAC-2	1.02	RE Antenna & Turntable
BenchVue Power Meter	2021	Power
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.49dB 200MHz~1GHz: 4.03dB 1GHz~40GHz: 4.70dB Vertical: 30MHz~200MHz: 4.07dB 200MHz~1GHz: 5.42dB 1GHz~40GHz: 4.63dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.3dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.3dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize.

6.2.4. Test Setup

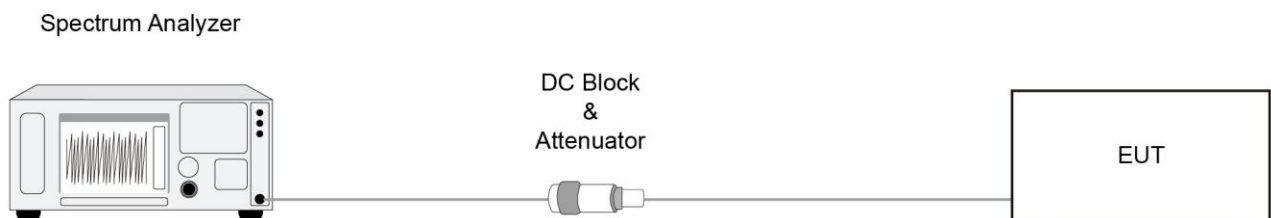

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure


ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

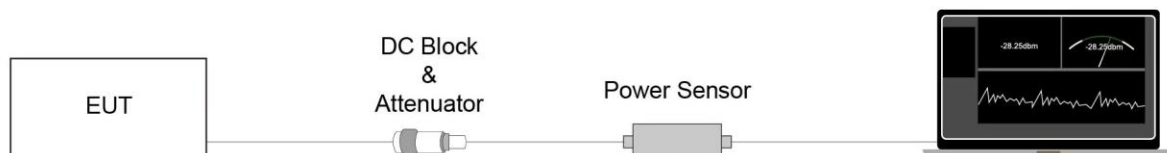

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2. Test Procedure


ANSI C63.10 - 2013 - Section 11.10.5

6.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

6.4.4. Test Setup

Spectrum Analyzer

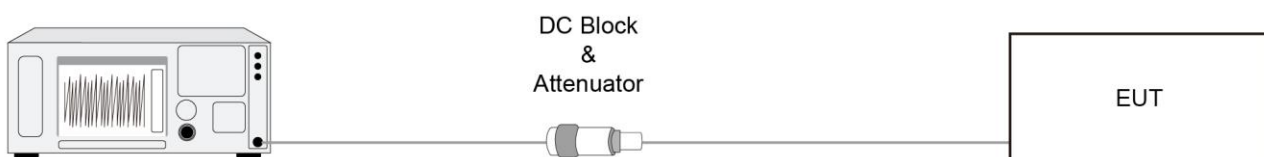

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

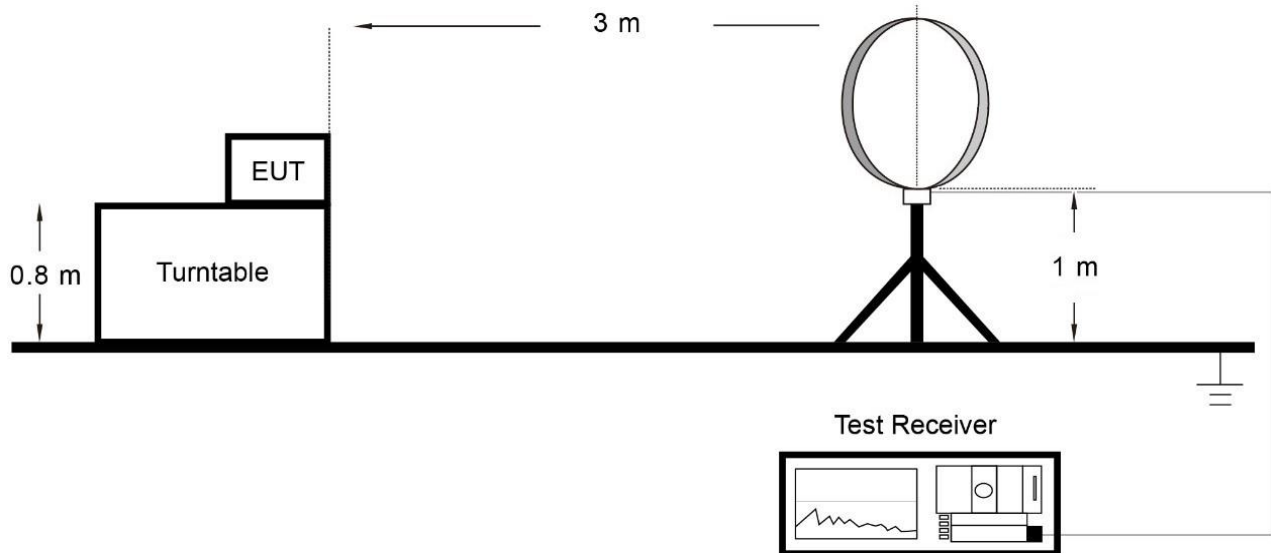

Below 1GHz Test Setup:

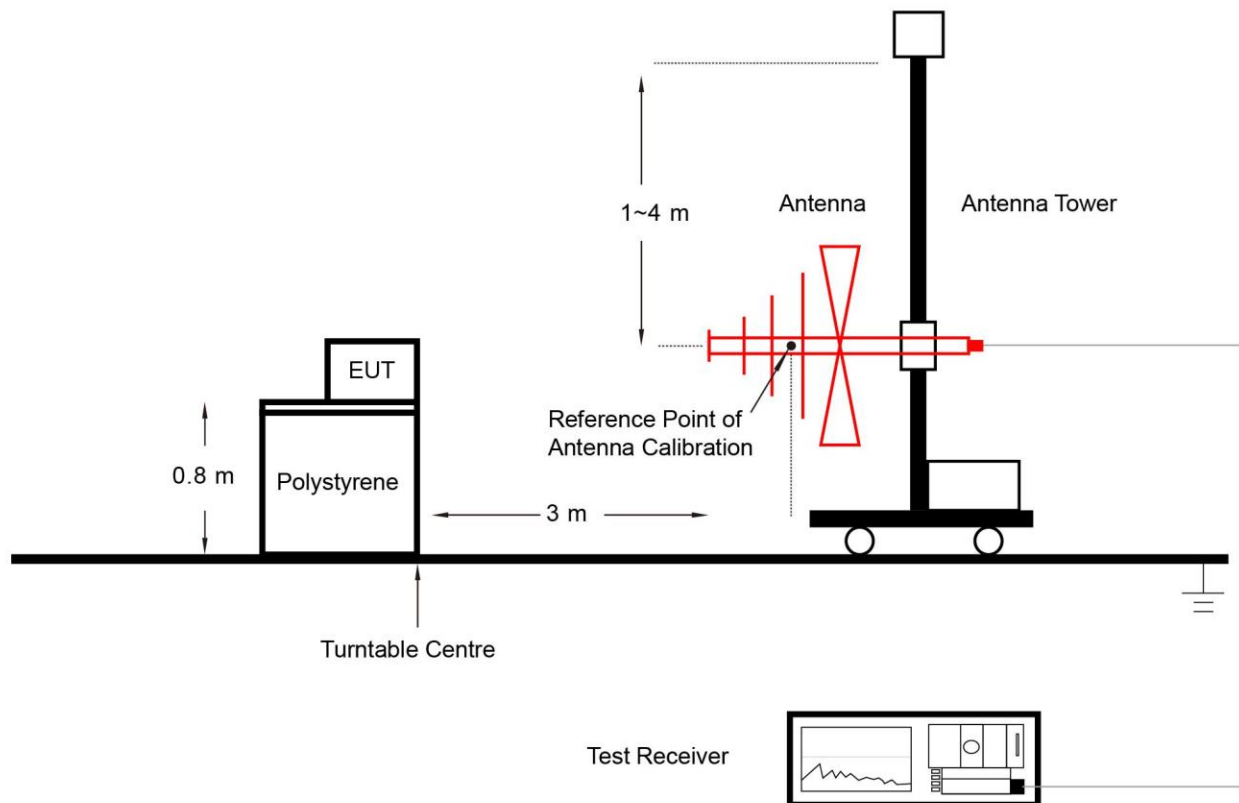

Above 1GHz Test Setup:

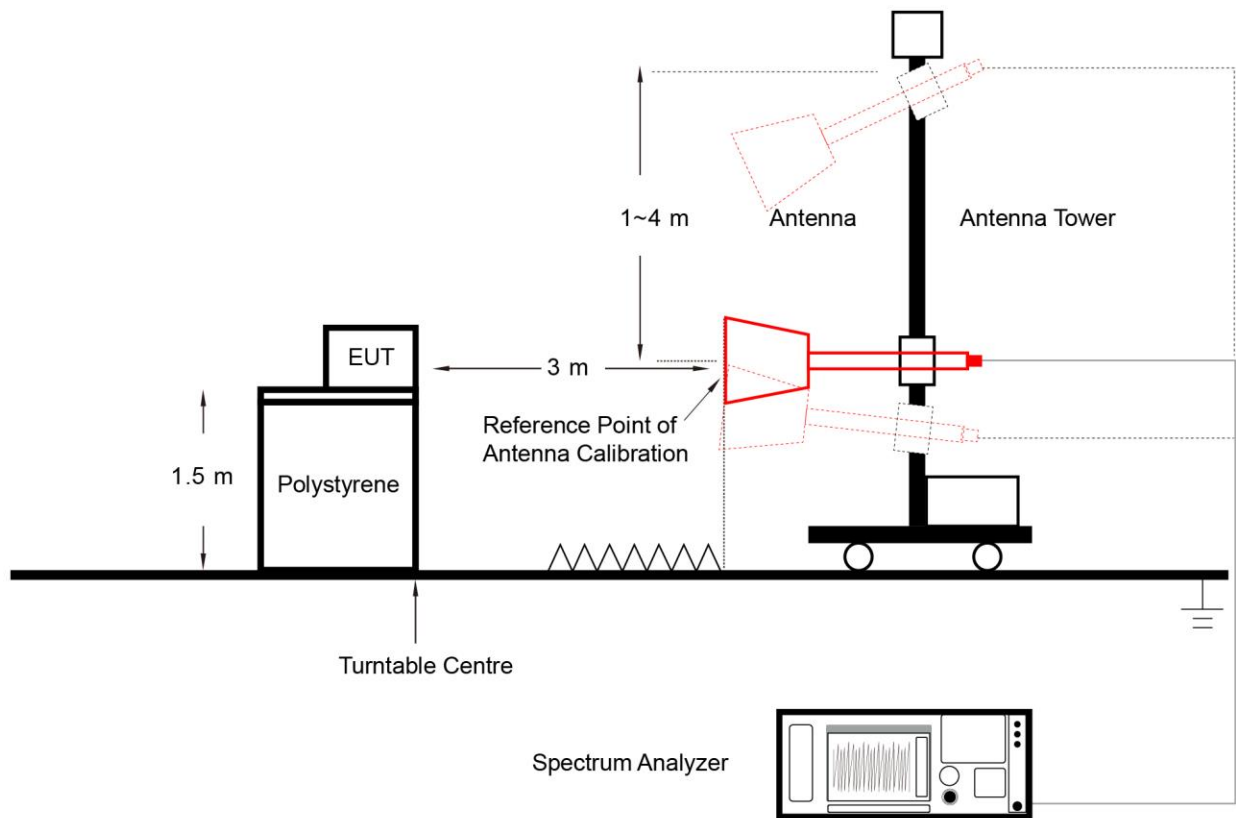

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

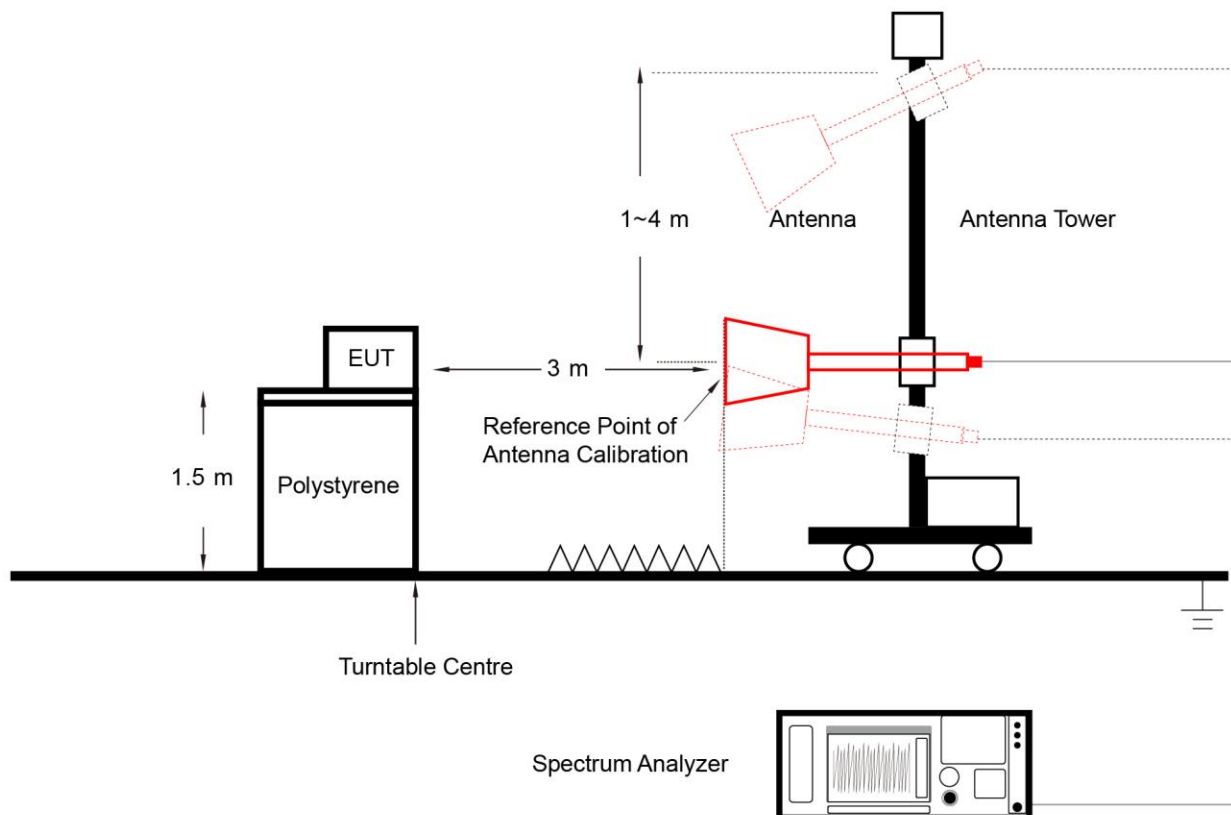

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

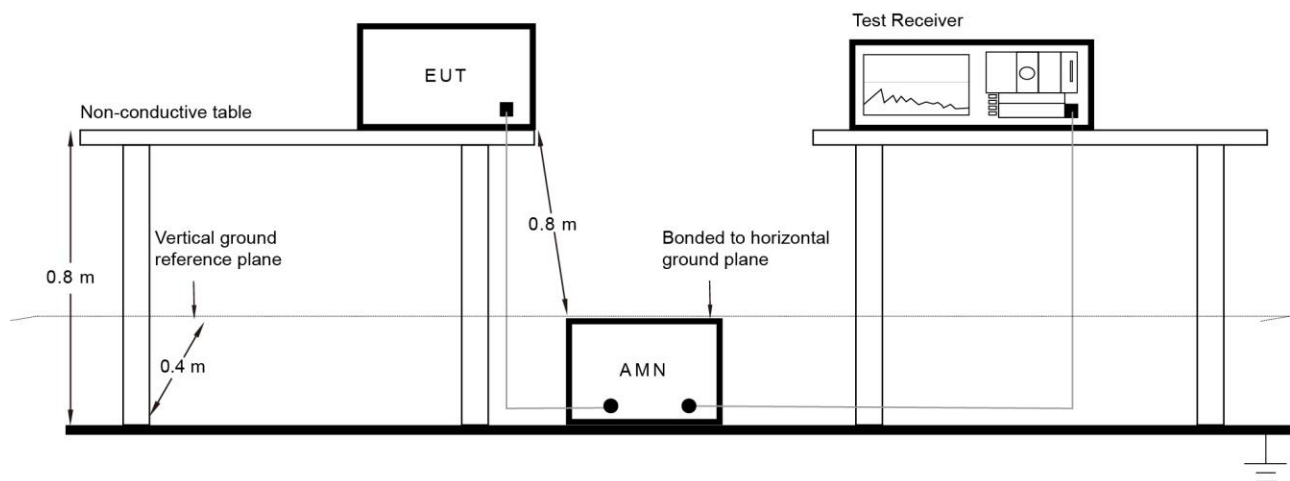

6.8.3. Test Result


Refer to Appendix A.8.

Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Site	NS-SR1	Test Engineer	Summer Tang
Test Date	2024-07-12		

Test Mode	Duty Cycle
802.11b	91.60%
802.11g	98.65%
802.11n-HT20	98.00%
802.11n-HT40	97.83%
802.11ax-HE20	98.19%
802.11ax-HE40	98.55%
802.11be-EHT20	97.30%
802.11be-EHT40	97.84%

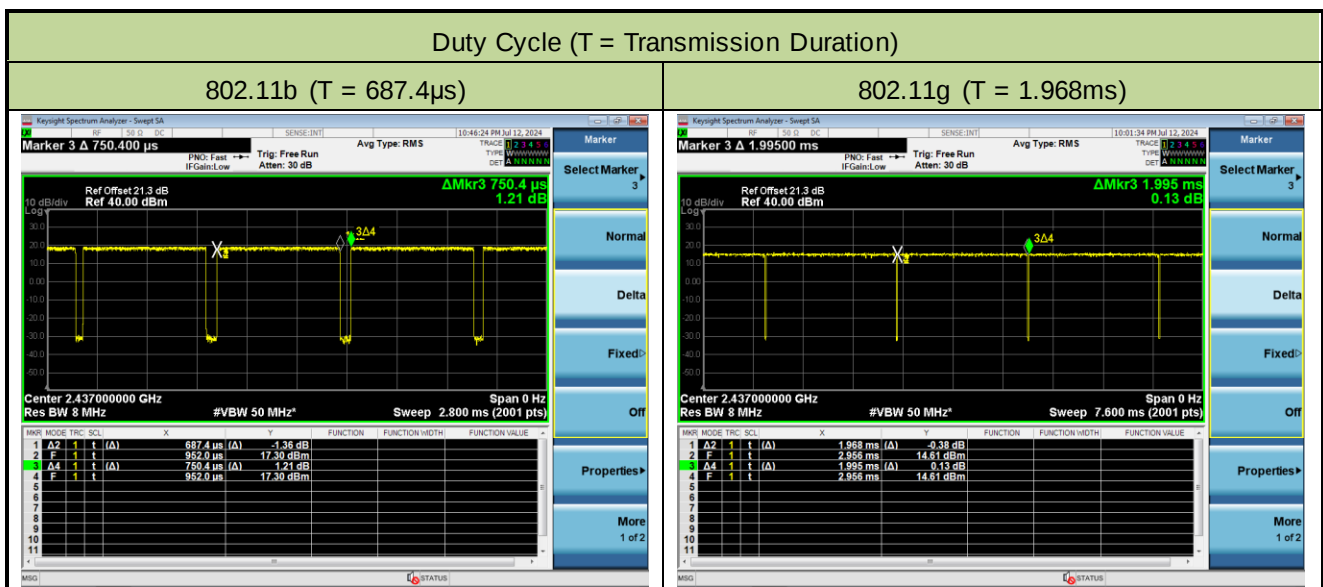


Duty Cycle (T = Transmission Duration)


802.11n-HT20 (T = 5.400ms)

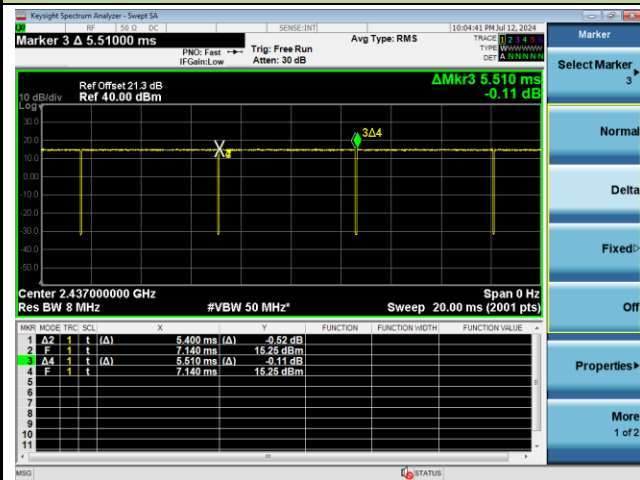


802.11n-HT40 (T = 5.410ms)

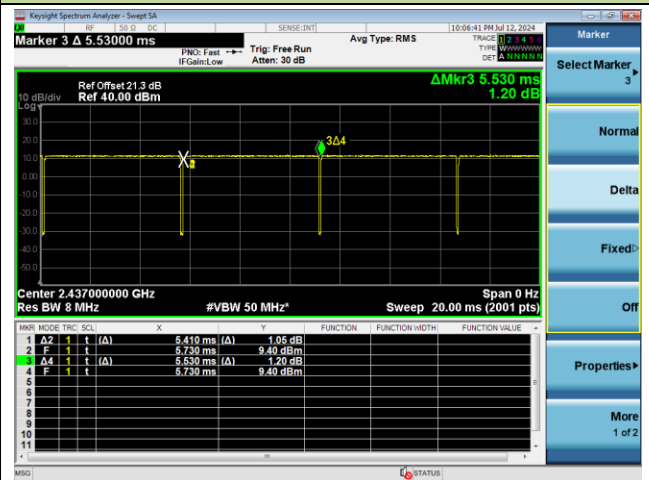


802.11ax-HE20 (T = 5.420ms)

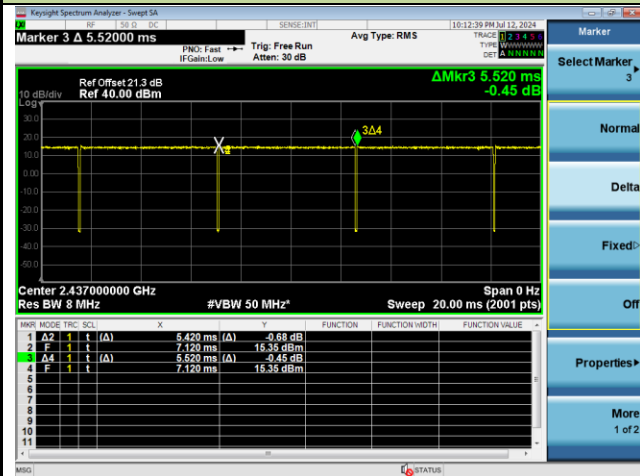


802.11ax-HE40 (T = 5.420ms)

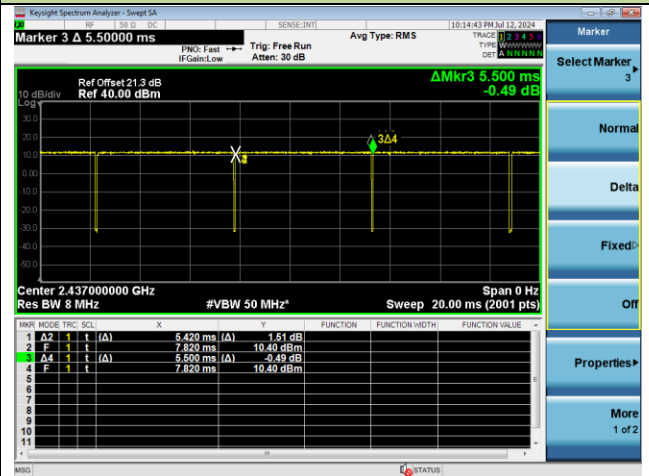

802.11be-EHT20 (T = 5.400ms)

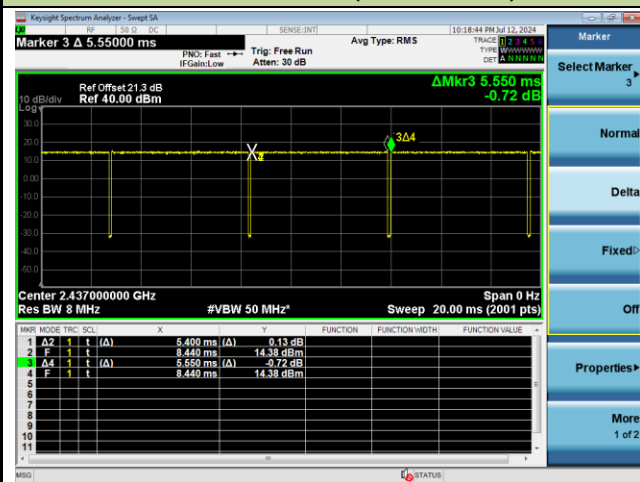

802.11be-EHT40 (T = 5.440ms)

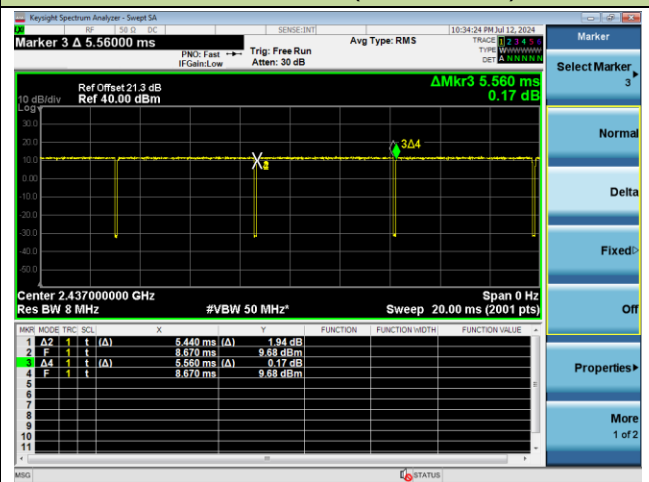


A.2 6dB Bandwidth Test Result

Test Site	NS-SR1	Test Engineer	Summer Tang
Test Date	2024-07-22		


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1Mbps	01	2412	7.606	≥ 0.5
11b	1Mbps	06	2437	7.607	≥ 0.5
11b	1Mbps	11	2462	8.073	≥ 0.5
11g	6Mbps	01	2412	16.39	≥ 0.5
11g	6Mbps	06	2437	16.38	≥ 0.5
11g	6Mbps	11	2462	16.37	≥ 0.5
11n-HT20	MCS0	01	2412	17.65	≥ 0.5
11n-HT20	MCS0	06	2437	17.62	≥ 0.5
11n-HT20	MCS0	11	2462	17.62	≥ 0.5
11n-HT40	MCS0	03	2422	36.38	≥ 0.5
11n-HT40	MCS0	06	2437	36.38	≥ 0.5
11n-HT40	MCS0	09	2452	36.35	≥ 0.5
11ax-HE20	MCS0	01	2412	19.08	≥ 0.5
11ax-HE20	MCS0	06	2437	19.03	≥ 0.5
11ax-HE20	MCS0	11	2462	19.07	≥ 0.5
11ax-HE40	MCS0	03	2422	38.22	≥ 0.5
11ax-HE40	MCS0	06	2437	38.21	≥ 0.5
11ax-HE40	MCS0	09	2452	38.18	≥ 0.5
11be-EHT20	MCS0	01	2412	19.10	≥ 0.5
11be-EHT20	MCS0	06	2437	19.05	≥ 0.5
11be-EHT20	MCS0	11	2462	19.07	≥ 0.5
11be-EHT40	MCS0	03	2422	38.19	≥ 0.5
11be-EHT40	MCS0	06	2437	38.21	≥ 0.5
11be-EHT40	MCS0	09	2452	38.16	≥ 0.5

802.11b 6dB Bandwidth


Channel 01 (2412MHz)

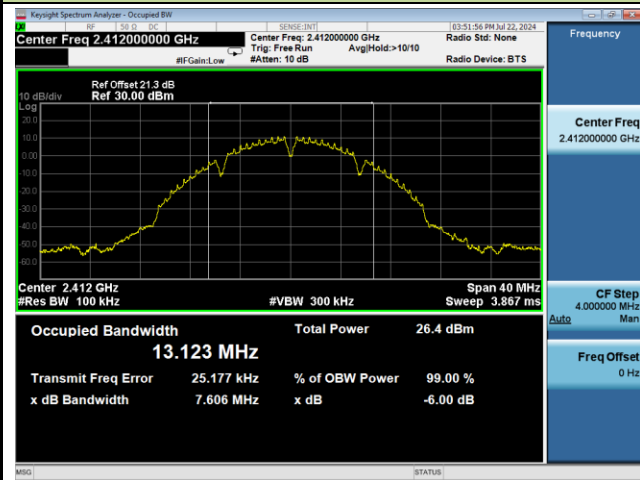

Channel 06 (2437MHz)

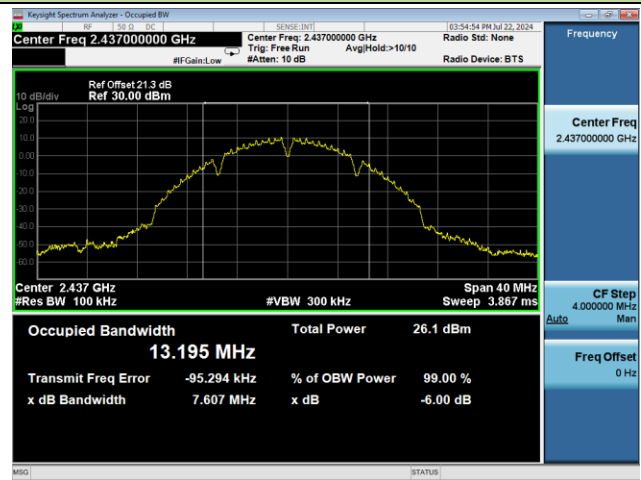


Channel 11 (2462MHz)

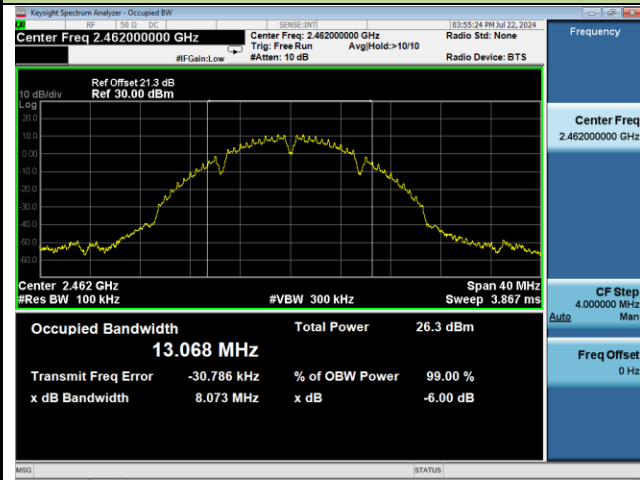


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

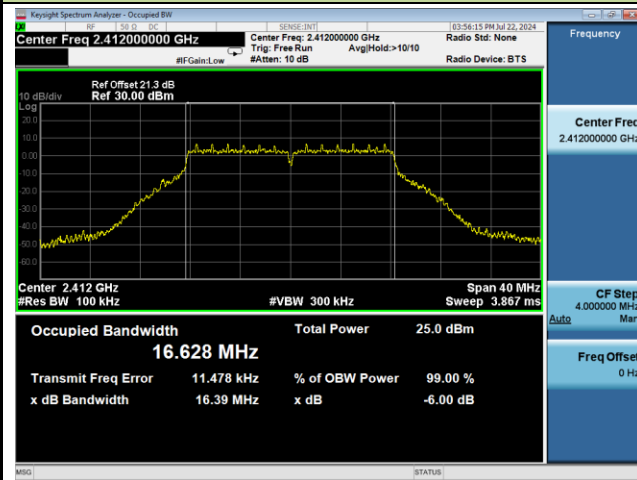

Channel 06 (2437MHz)

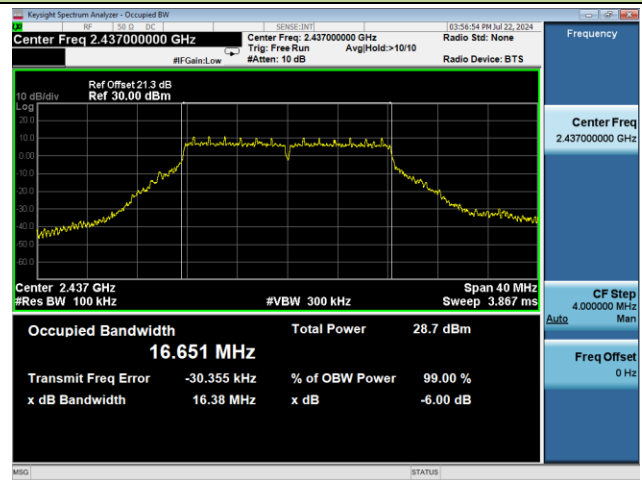


Channel 11 (2462MHz)

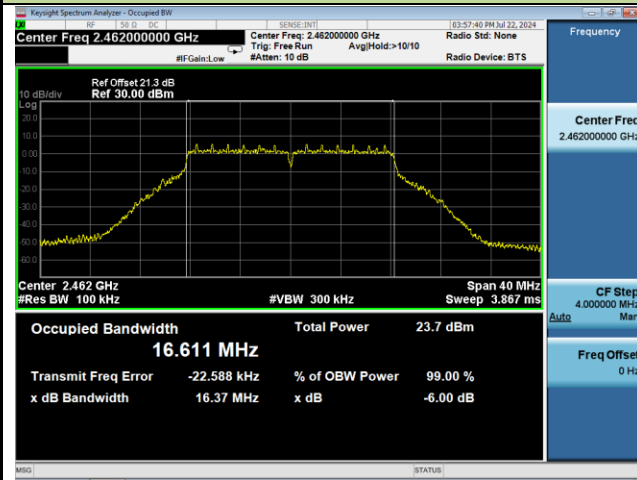


802.11n-HT20 6dB Bandwidth


Channel 01 (2412MHz)

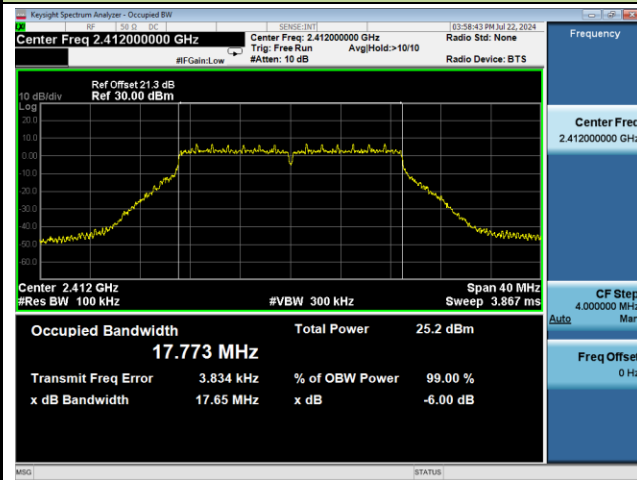

Channel 06 (2437MHz)

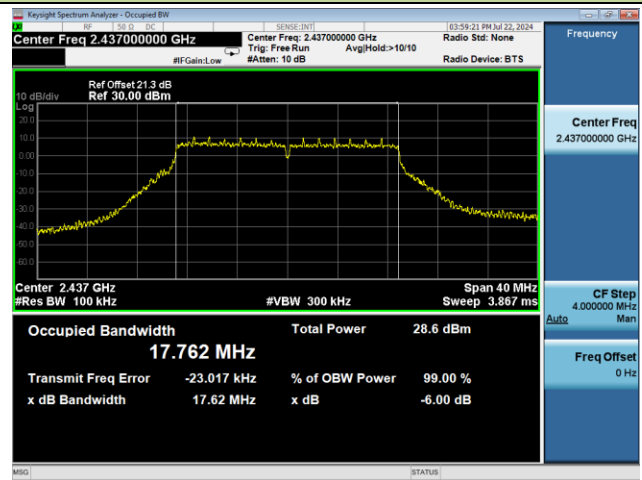


Channel 11 (2462MHz)

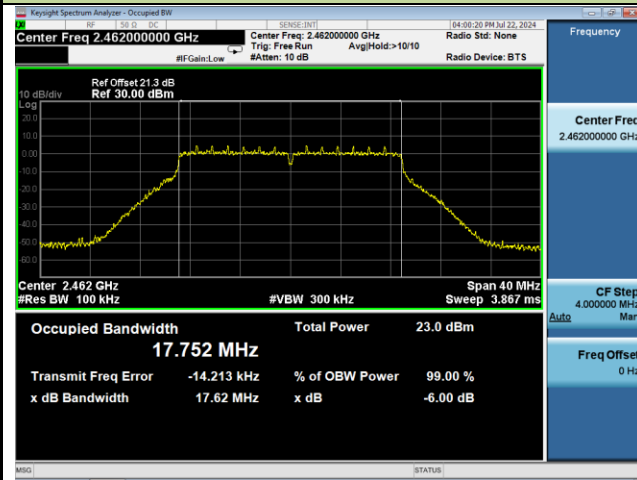


802.11n-HT40 6dB Bandwidth


Channel 03 (2422MHz)

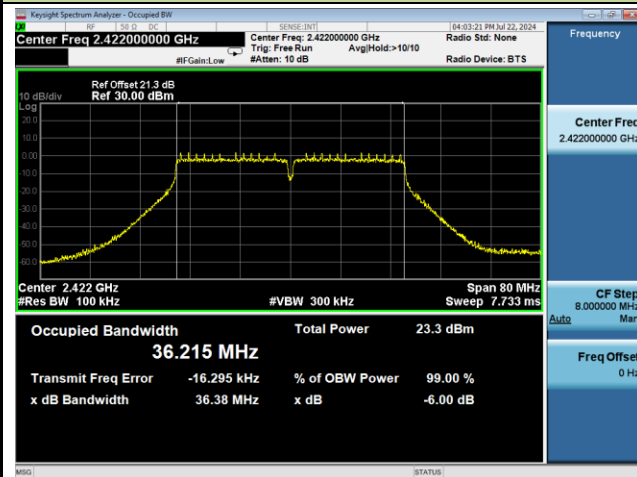

Channel 06 (2437MHz)

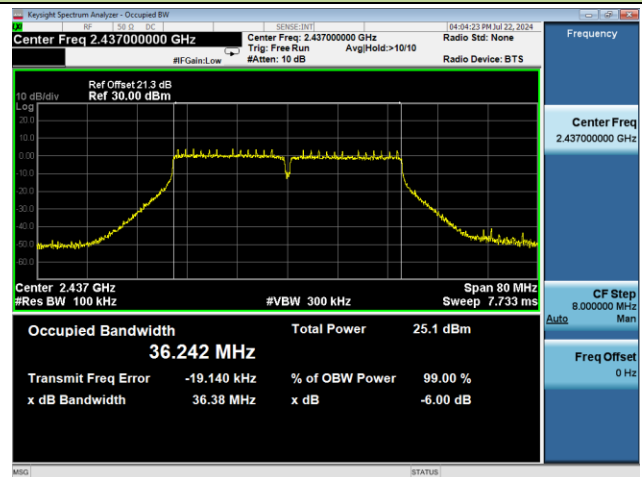


Channel 09 (2452MHz)

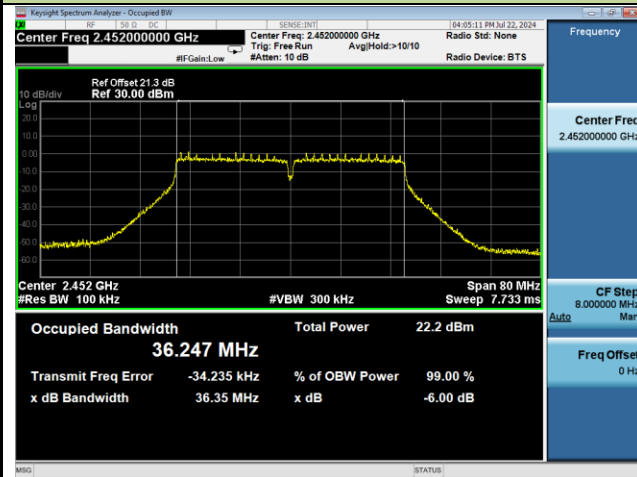


802.11ax-HE20 6dB Bandwidth


Channel 01 (2412MHz)


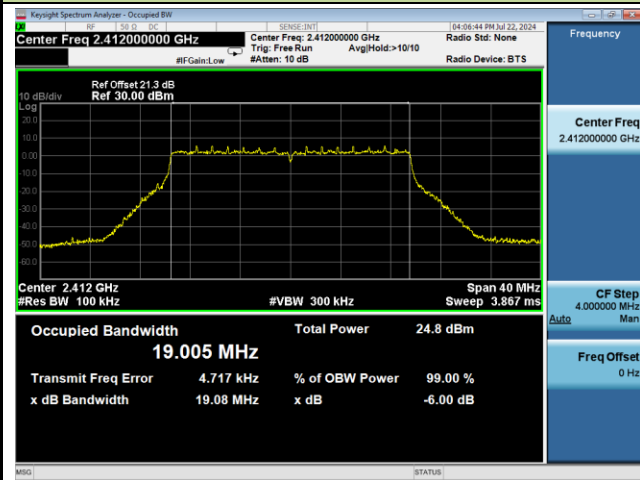


Channel 06 (2437MHz)

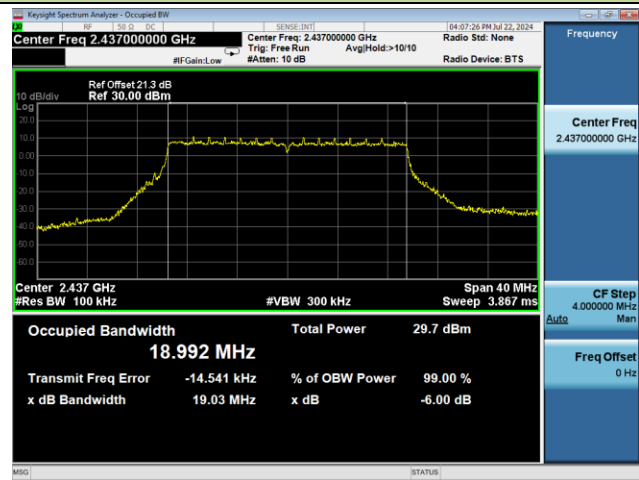


Channel 11 (2462MHz)

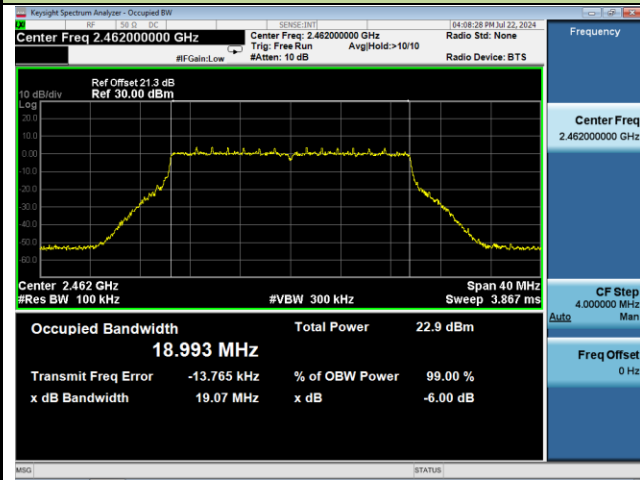




802.1be-EHT20 6dB Bandwidth


Channel 01 (2412MHz)

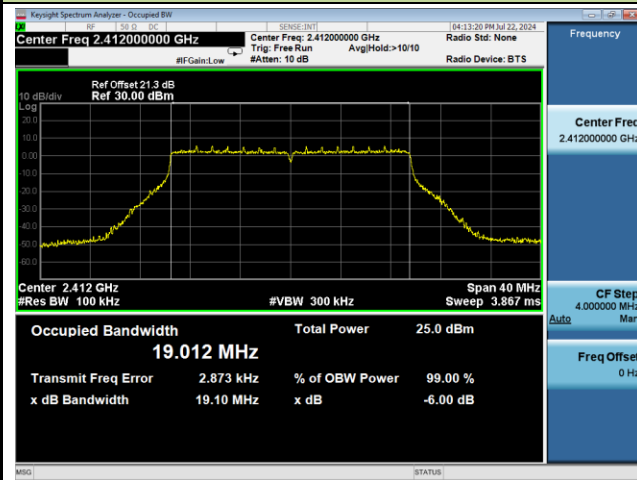

Channel 06 (2437MHz)

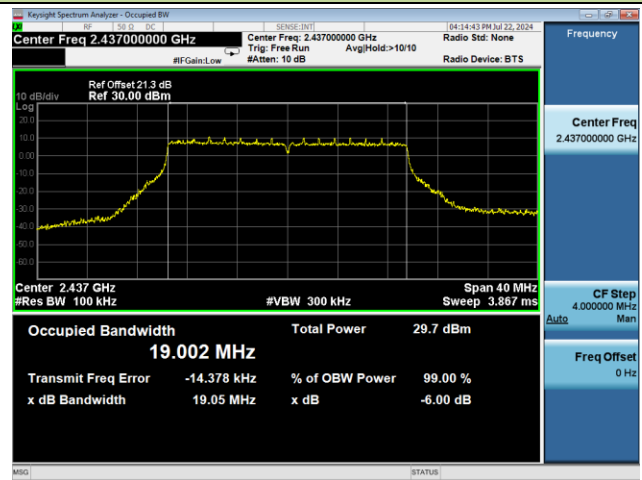


Channel 11 (2462MHz)

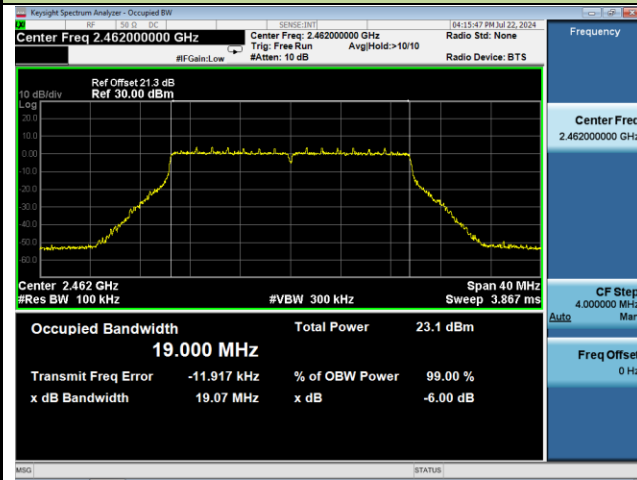


802.11be-EHT40 6dB Bandwidth


Channel 03 (2422MHz)

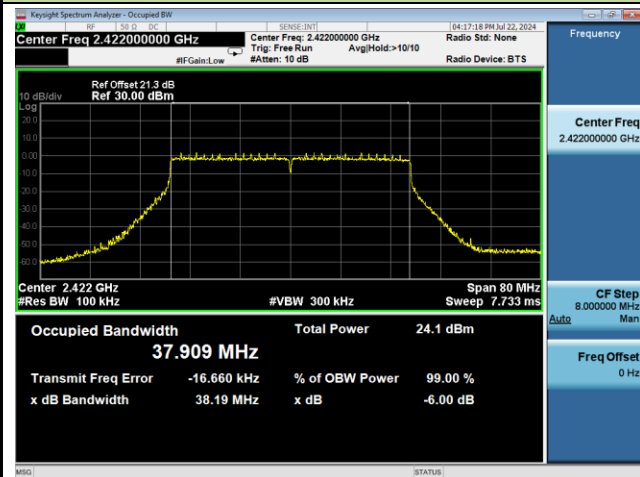

Channel 06 (2437MHz)

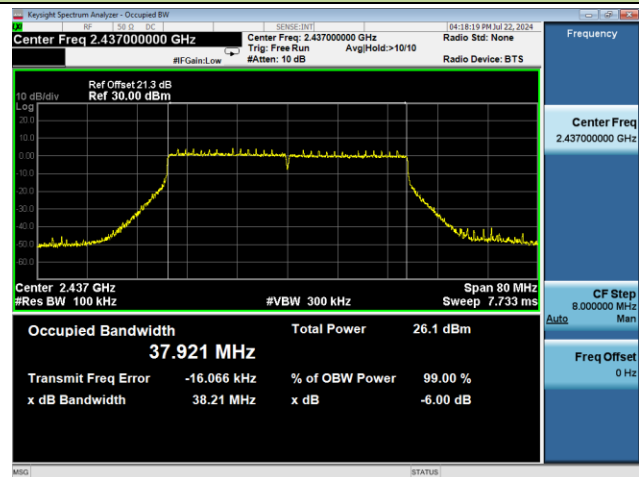

Channel 09 (2452MHz)

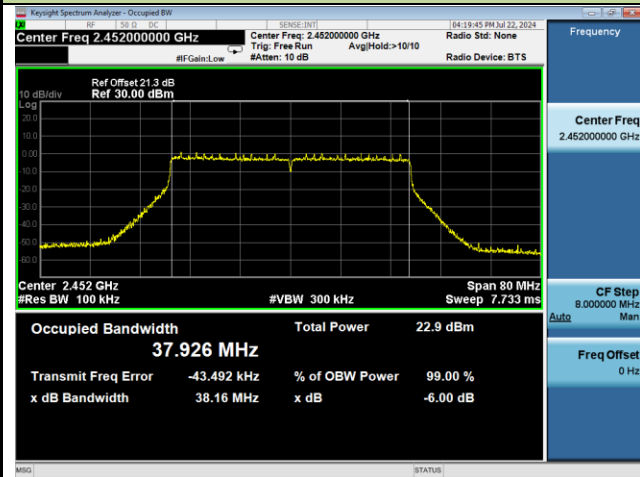

A.3 Output Power Test Result

Test Site	NS-SR1	Test Engineer	Summer Tang
Test Date	2024-07-12 ~ 2024-07-24		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11b	1Mbps	01	2412	14.74	14.67	14.69	14.77	20.74	≤ 28.47
11b	1Mbps	06	2437	15.65	15.83	15.86	15.65	21.77	≤ 28.47
11b	1Mbps	11	2462	14.48	14.76	14.77	14.56	20.66	≤ 28.47
11g	6Mbps	01	2412	17.95	18.03	18.02	17.83	23.98	≤ 28.47
11g	6Mbps	02	2417	22.11	22.17	22.13	21.96	28.11	≤ 28.47
11g	6Mbps	06	2437	21.86	21.99	22.06	21.84	27.96	≤ 28.47
11g	6Mbps	09	2452	20.63	21.01	21.02	20.81	26.89	≤ 28.47
11g	6Mbps	10	2457	18.49	18.98	18.99	18.81	24.84	≤ 28.47
11g	6Mbps	11	2462	16.65	16.89	16.97	16.72	22.83	≤ 28.47
11n-HT20	MCS0	01	2412	17.92	18.08	18.04	17.89	24.00	≤ 28.47
11n-HT20	MCS0	02	2417	22.11	22.20	22.18	22.02	28.15	≤ 28.47
11n-HT20	MCS0	06	2437	21.70	22.10	22.14	22.13	28.04	≤ 28.47
11n-HT20	MCS0	09	2452	20.70	21.09	21.02	20.83	26.93	≤ 28.47
11n-HT20	MCS0	10	2457	18.54	18.90	19.05	18.93	24.88	≤ 28.47
11n-HT20	MCS0	11	2462	15.74	15.94	16.20	15.85	21.96	≤ 28.47
11n-HT40	MCS0	03	2422	16.01	16.24	16.37	16.17	22.22	≤ 28.47
11n-HT40	MCS0	06	2437	17.96	18.01	18.34	18.10	24.13	≤ 28.47
11n-HT40	MCS0	09	2452	14.92	15.40	15.33	15.03	21.20	≤ 28.47
11ax-HE20	MCS0	01	2412	17.01	17.34	17.19	16.96	23.15	≤ 28.47
11ax-HE20	MCS0	02	2417	20.11	20.22	20.07	20.08	26.14	≤ 28.47
11ax-HE20	MCS0	06	2437	21.25	21.48	21.57	21.28	27.42	≤ 28.47
11ax-HE20	MCS0	09	2452	19.78	20.24	20.14	19.78	26.01	≤ 28.47
11ax-HE20	MCS0	10	2457	17.57	17.98	18.11	17.87	23.91	≤ 28.47
11ax-HE20	MCS0	11	2462	14.89	15.12	15.22	14.92	21.06	≤ 28.47
11ax-HE40	MCS0	03	2422	16.12	16.33	16.47	16.18	22.30	≤ 28.47
11ax-HE40	MCS0	06	2437	17.13	17.14	17.42	17.26	23.26	≤ 28.47
11ax-HE40	MCS0	09	2452	14.94	15.41	15.34	15.00	21.20	≤ 28.47

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11be-EHT20	MCS0	01	2412	17.09	17.32	17.27	16.94	23.18	≤ 28.47
11be-EHT20	MCS0	02	2417	20.19	20.33	20.18	20.15	26.23	≤ 28.47
11be-EHT20	MCS0	06	2437	21.14	21.52	21.54	21.48	27.44	≤ 28.47
11be-EHT20	MCS0	09	2452	19.73	20.26	20.09	19.82	26.00	≤ 28.47
11be-EHT20	MCS0	10	2457	15.79	16.24	16.14	16.08	22.09	≤ 28.47
11be-EHT20	MCS0	11	2462	14.96	15.25	15.26	15.01	21.14	≤ 28.47
11be-EHT40	MCS0	03	2422	15.83	16.15	16.19	16.01	22.07	≤ 28.47
11be-EHT40	MCS0	06	2437	17.80	17.83	18.17	17.95	23.96	≤ 28.47
11be-EHT40	MCS0	08	2447	16.81	16.93	17.25	17.06	23.04	≤ 28.47
11be-EHT40	MCS0	09	2452	14.85	15.18	15.16	14.80	21.02	≤ 28.47

Note: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$ (dBm).

A.4 Power Spectral Density Test Result

Test Site	NS-SR1	Test Engineer	Summer Tang
Test Date	2024-07-22 ~ 2024-08-05		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/ 10kHz)				Duty Cycle (%)	10*log (1/x)	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)
				Ant 0	Ant 1	Ant 2	Ant 3				
11b	1Mbps	01	2412	-10.604	-10.836	-11.110	-10.874	91.60	0.38	-4.45	≤ 0.45
11b	1Mbps	06	2437	-10.139	-9.830	-9.890	-9.859	91.60	0.38	-3.53	≤ 0.45
11b	1Mbps	11	2462	-10.901	-10.923	-10.733	-11.007	91.60	0.38	-4.49	≤ 0.45
11g	6Mbps	01	2412	-11.337	-11.381	-11.341	-11.461	98.65	0.06	-5.36	≤ 0.45
11g	6Mbps	06	2437	-6.840	-6.839	-6.992	-7.334	98.65	0.06	-0.98	≤ 0.45
11g	6Mbps	11	2462	-12.705	-12.252	-12.040	-12.268	98.65	0.06	-6.29	≤ 0.45
11n-HT20	MCS0	01	2412	-11.744	-11.434	-11.179	-11.561	98.00	0.09	-5.45	≤ 0.45
11n-HT20	MCS0	06	2437	-7.297	-7.315	-7.354	-7.285	98.00	0.09	-1.29	≤ 0.45
11n-HT20	MCS0	11	2462	-13.723	-13.367	-13.179	-13.213	98.00	0.09	-7.34	≤ 0.45
11n-HT40	MCS0	03	2422	-16.586	-16.143	-16.101	-16.115	97.83	0.10	-10.12	≤ 0.45
11n-HT40	MCS0	06	2437	-14.333	-14.210	-13.354	-14.351	97.83	0.10	-7.93	≤ 0.45
11n-HT40	MCS0	09	2452	-17.511	-16.753	-17.230	-17.404	97.83	0.10	-11.10	≤ 0.45
11ax-HE20	MCS0	01	2412	-13.396	-13.003	-12.925	-12.918	98.19	0.08	-7.04	≤ 0.45
11ax-HE20	MCS0	06	2437	-9.082	-8.685	-8.443	-9.089	98.19	0.08	-2.80	≤ 0.45
11ax-HE20	MCS0	11	2462	-14.954	-15.064	-14.761	-15.153	98.19	0.08	-8.96	≤ 0.45
11ax-HE40	MCS0	03	2422	-17.093	-16.834	-16.516	-17.029	98.55	0.06	-10.84	≤ 0.45
11ax-HE40	MCS0	06	2437	-15.425	-15.449	-15.414	-15.780	98.55	0.06	-9.49	≤ 0.45
11ax-HE40	MCS0	09	2452	-17.820	-17.144	-17.629	-17.948	98.55	0.06	-11.60	≤ 0.45
11be-EHT20	MCS0	01	2412	-13.250	-13.213	-12.913	-12.469	97.30	0.12	-6.81	≤ 0.45
11be-EHT20	MCS0	06	2437	-8.978	-8.286	-8.434	-8.810	97.30	0.12	-2.48	≤ 0.45
11be-EHT20	MCS0	11	2462	-15.531	-14.852	-14.900	-14.979	97.30	0.12	-8.92	≤ 0.45
11be-EHT40	MCS0	03	2422	-17.139	-17.146	-16.693	-17.350	97.84	0.09	-10.96	≤ 0.45
11be-EHT40	MCS0	06	2437	-14.761	-15.234	-14.803	-14.954	97.84	0.09	-8.82	≤ 0.45
11be-EHT40	MCS0	09	2452	-18.030	-17.464	-17.898	-18.154	97.84	0.09	-11.76	≤ 0.45

Note 1:


When EUT duty cycle ≥ 98%, Total PSD (dBm / 10kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm / 10kHz).

When EUT duty cycle < 98%, Total PSD (dBm / 10kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm / 10kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.

Note 2: Limit (dBm/3kHz) = 8 – (13.55-6) = 0.45 dBm/3kHz.

802.11b - AVGPDS - Ant 0


Channel 01 (2412MHz)

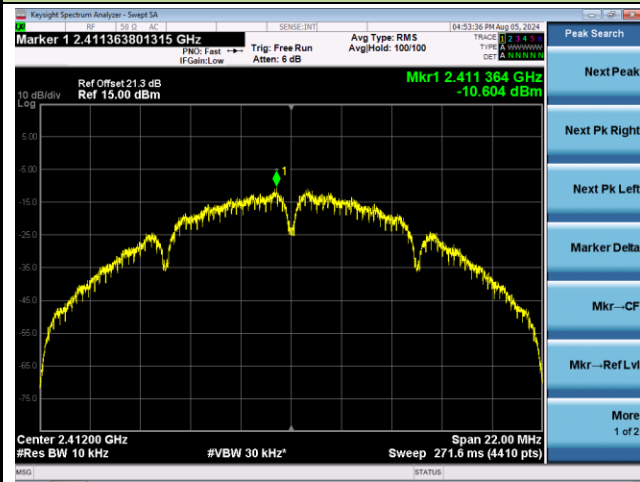

Channel 06 (2437MHz)




Channel 11 (2462MHz)

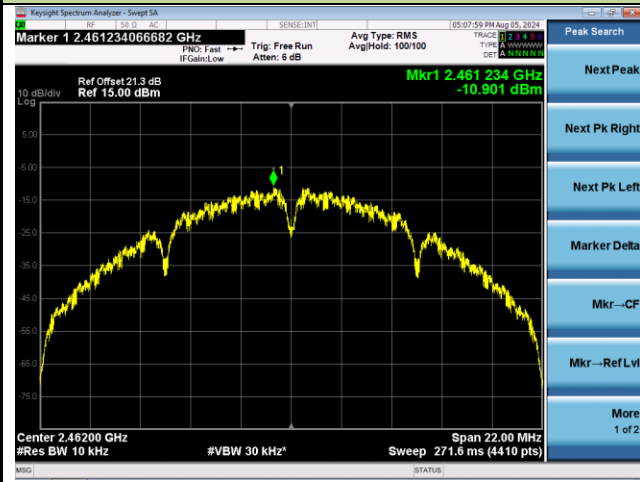


802.11g - AVGPDS - Ant 0


Channel 01 (2412MHz)

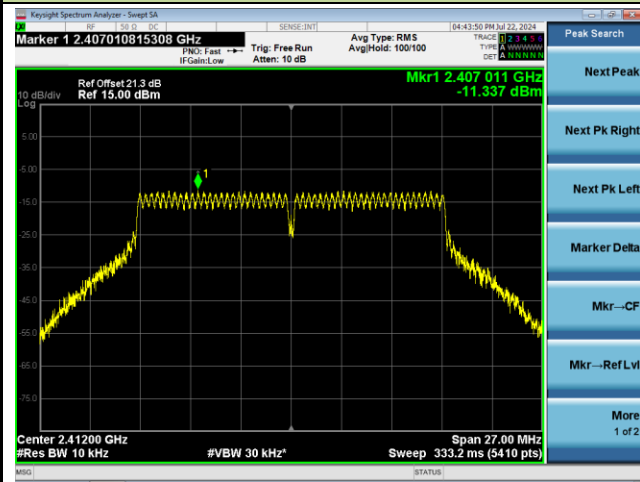

Channel 06 (2437MHz)

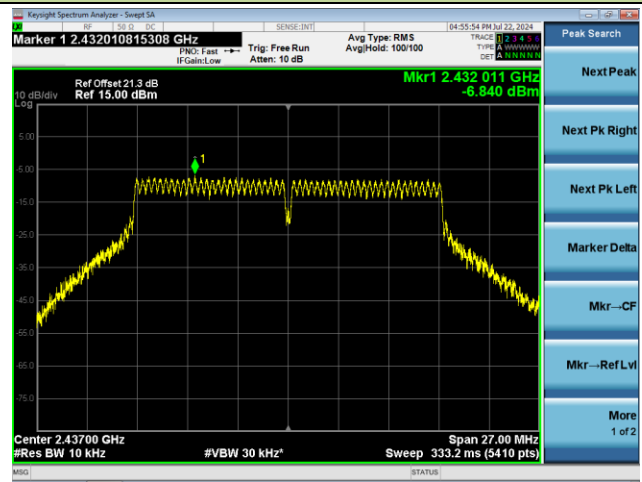


Channel 11 (2462MHz)

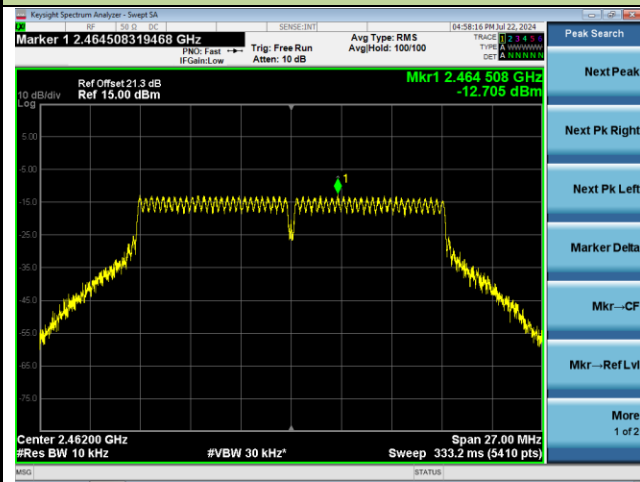


802.11n-HT20 - AVGPSD - Ant 0


Channel 01 (2412MHz)

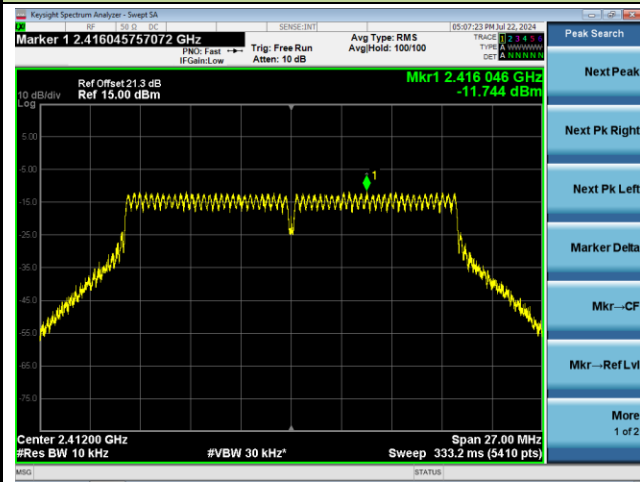

Channel 06 (2437MHz)

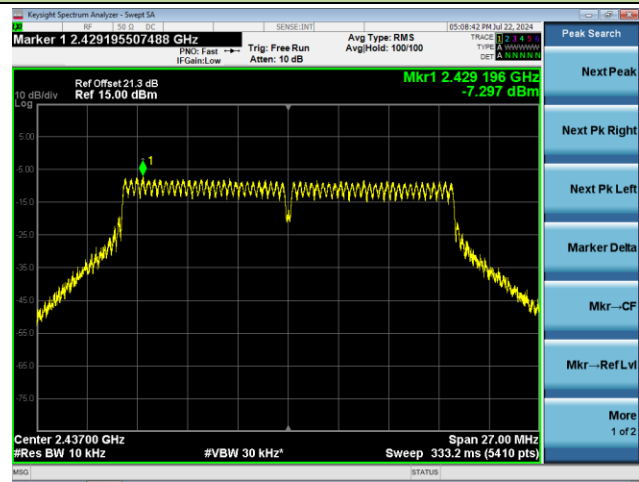


Channel 11 (2462MHz)

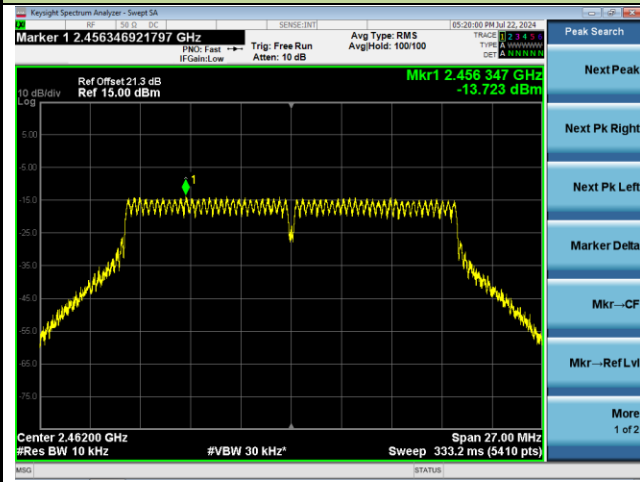


802.11n-HT40 - AVGPSD - Ant 0


Channel 03 (2422MHz)

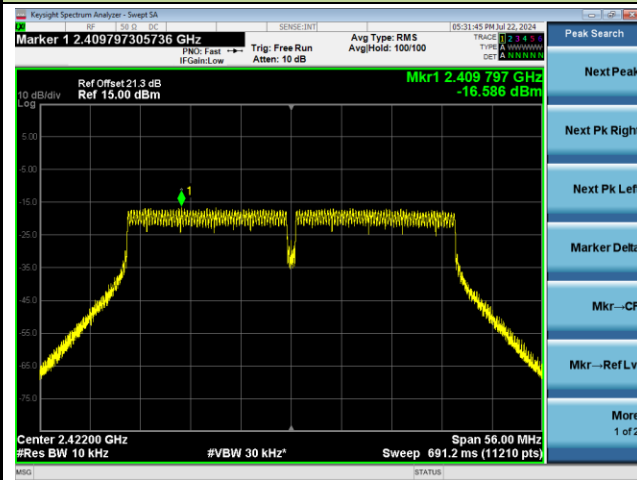

Channel 06 (2437MHz)

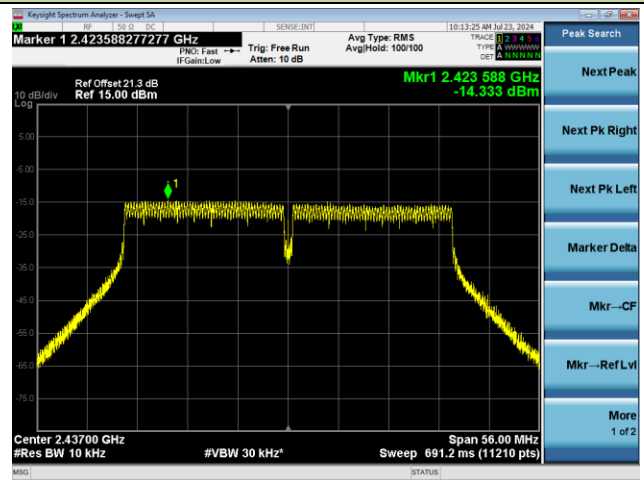


Channel 09 (2452MHz)

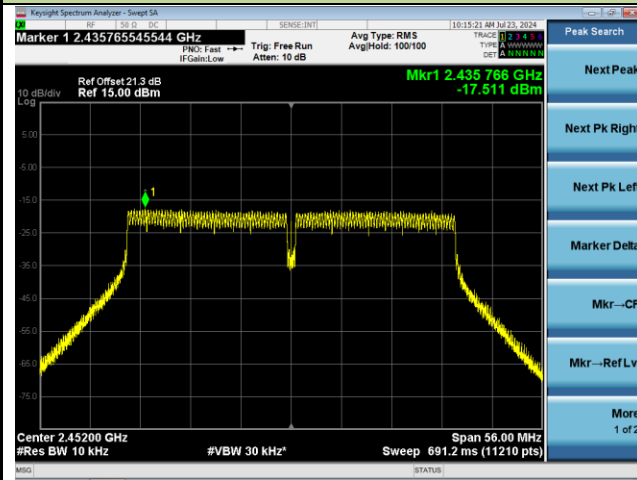


802.11ax-HE20 - AVGPSD - Ant 0


Channel 01 (2412MHz)

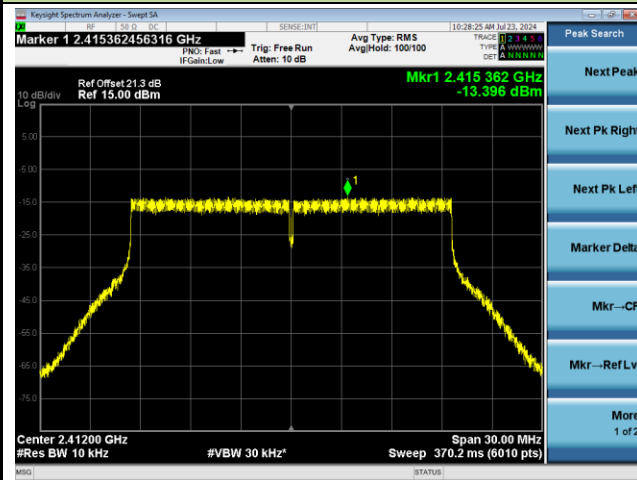

Channel 06 (2437MHz)

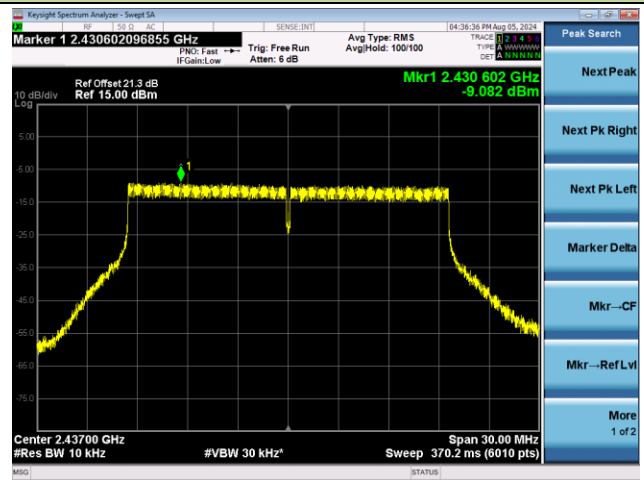


Channel 11 (2462MHz)

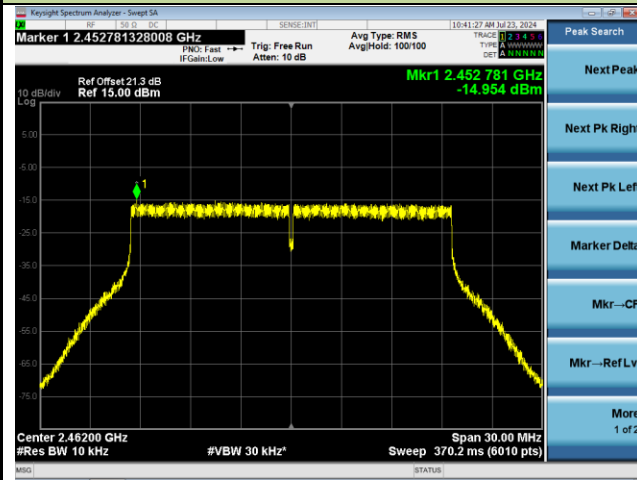


802.11ax-HE40 - AVGPSD - Ant 0


Channel 03 (2422MHz)

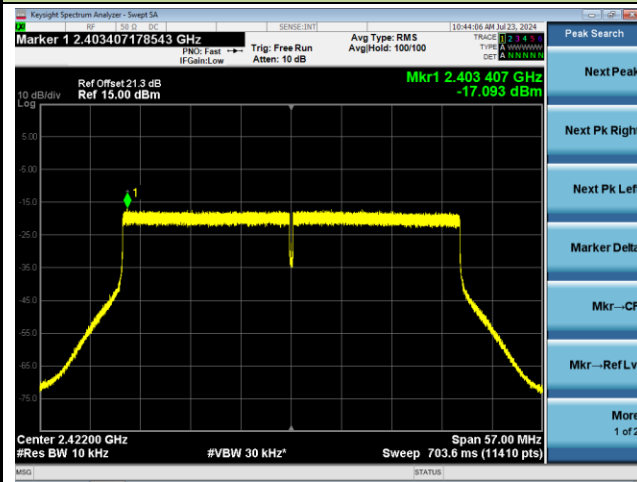

Channel 06 (2437MHz)

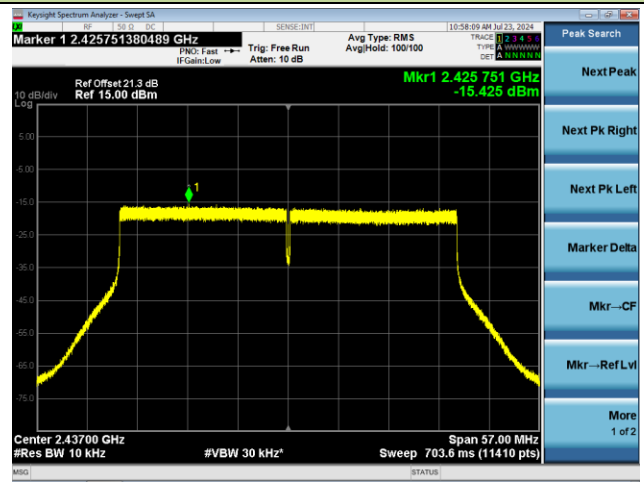


Channel 09 (2452MHz)

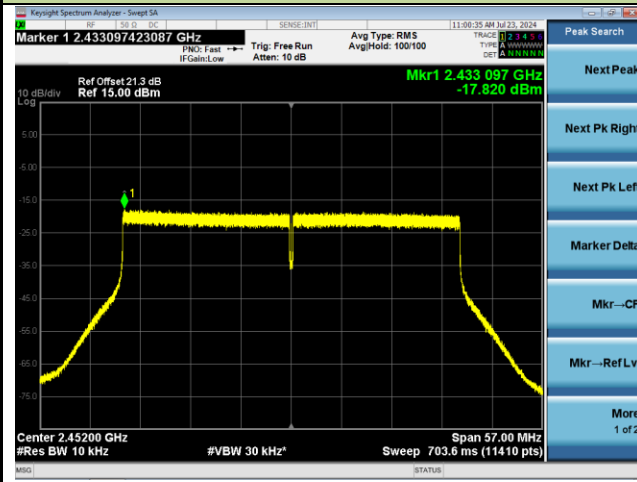


802.11be-EHT20 - AVGPST - Ant 0


Channel 01 (2412MHz)

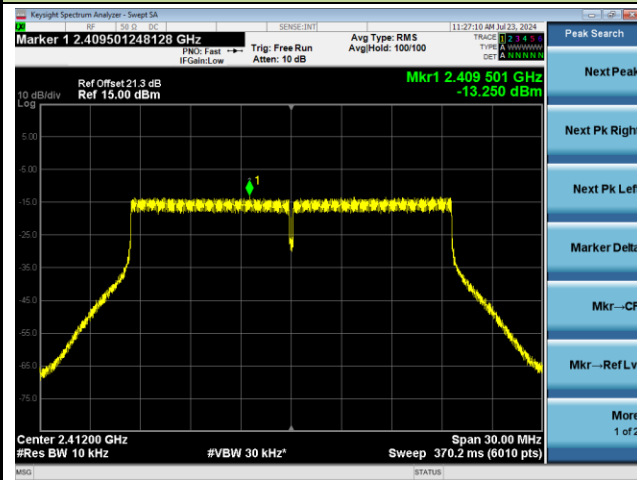

Channel 06 (2437MHz)

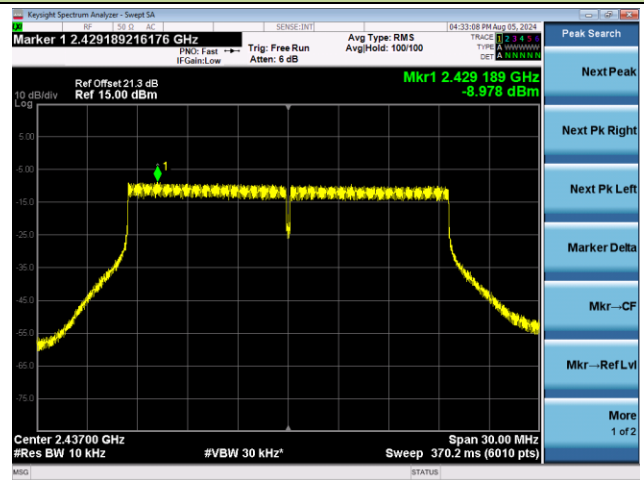


Channel 11 (2462MHz)

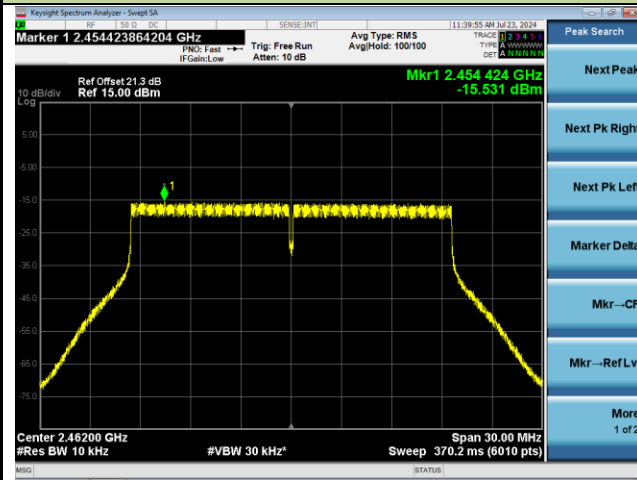


802.11be-EHT40 - AVGPSD - Ant 0


Channel 03 (2422MHz)

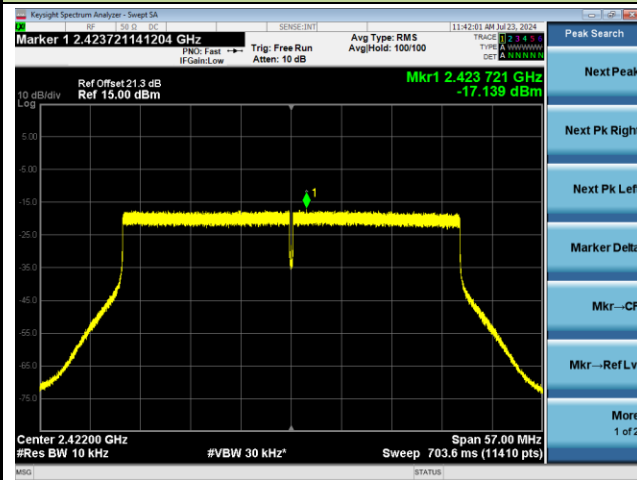

Channel 06 (2437MHz)

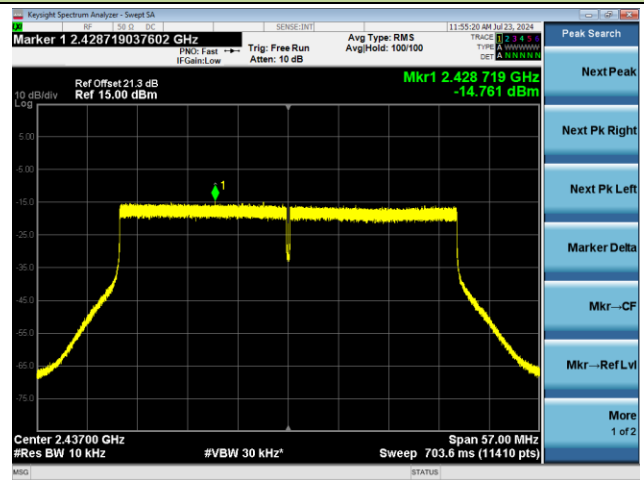


Channel 09 (2452MHz)

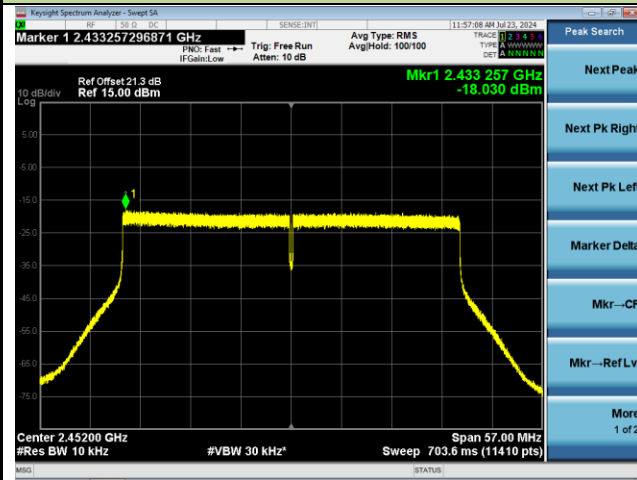

802.11b - AVGPDS - Ant 1


Channel 01 (2412MHz)

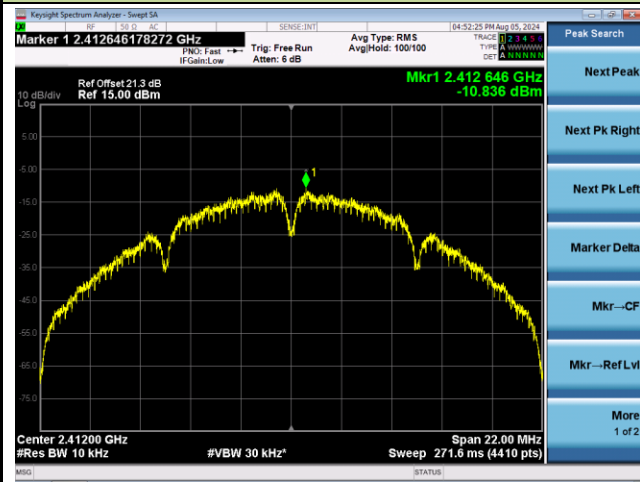

Channel 06 (2437MHz)




Channel 11 (2462MHz)

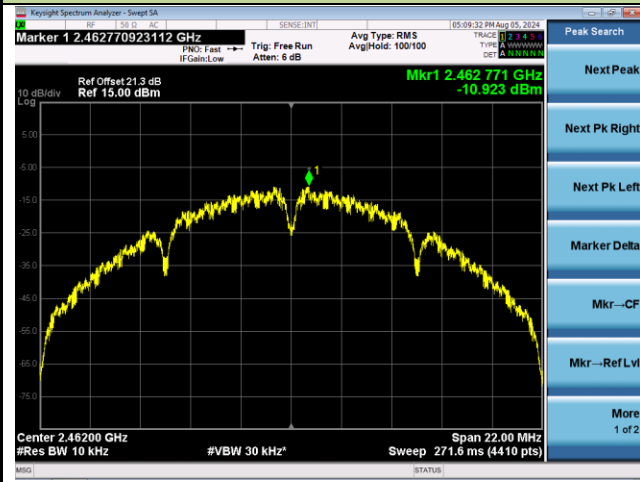


802.11g - AVGPDS - Ant 1


Channel 01 (2412MHz)

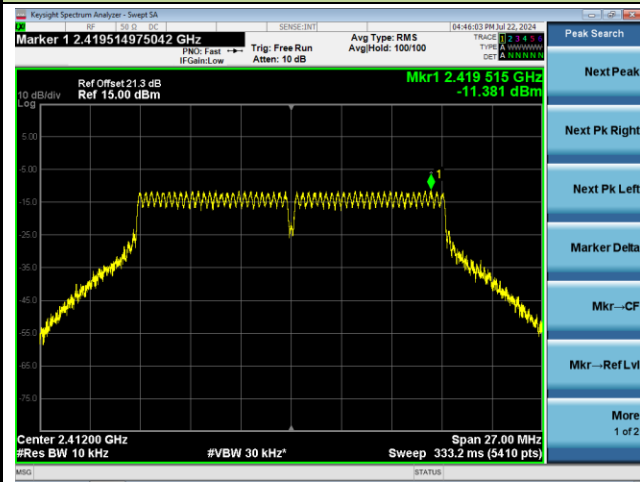

Channel 06 (2437MHz)

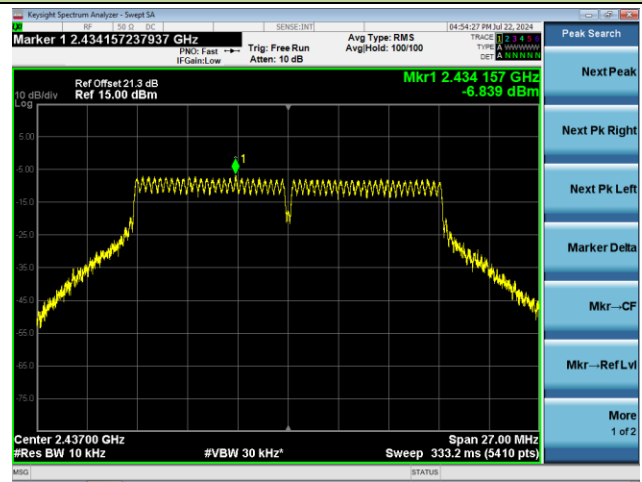


Channel 11 (2462MHz)

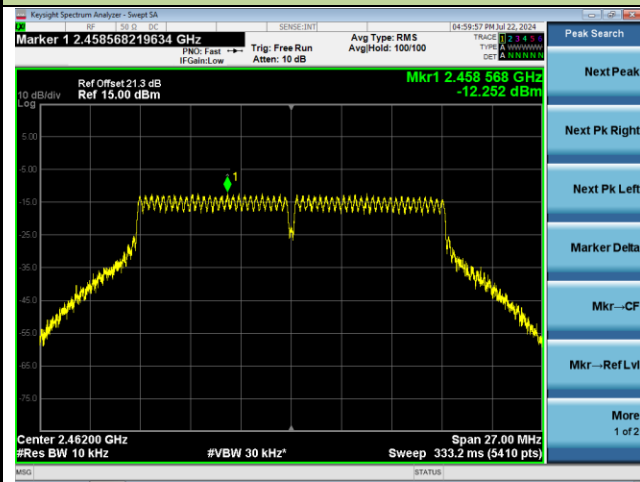


802.11n-HT20 - AVG PSD - Ant 1

Channel 01 (2412MHz)

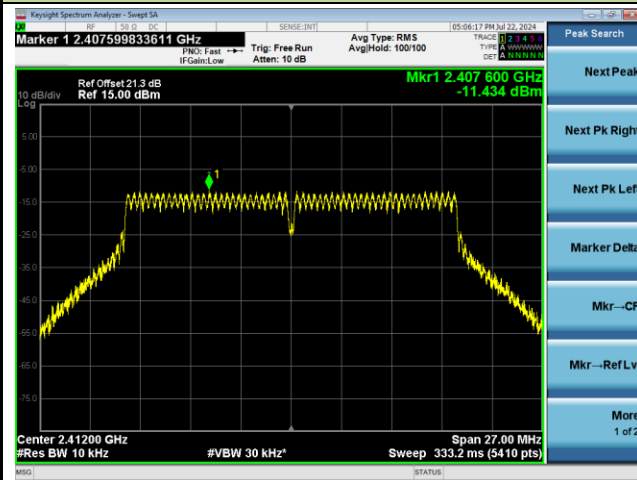

Channel 06 (2437MHz)

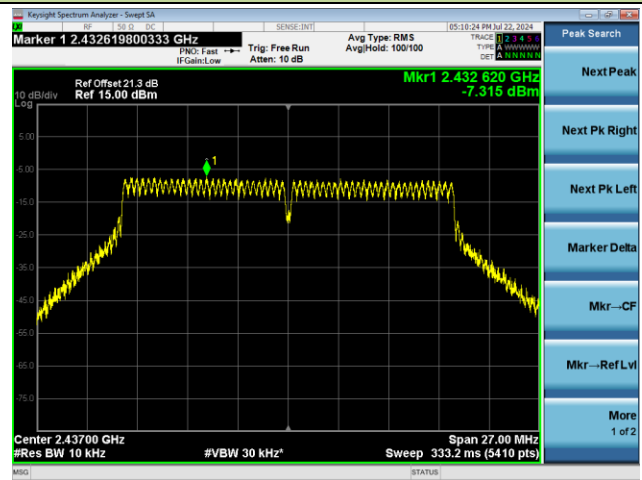

Channel 11 (2462MHz)

