

TEST REPORT

Applicant: Shenzhen Taiyang Technology Co., Ltd

Address of Applicant: 1005B-1006, Building F, Xinghe WORLD, No.1 Yabao Road, Bantian Street, Longgang District, Shenzhen, China

Manufacturer: Shenzhen Taiyang Technology Co., Ltd

Address of Manufacturer: 1005B-1006, Building F, Xinghe WORLD, No.1 Yabao Road, Bantian Street, Longgang District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Smart Watch

Model No.: K62, K35, K31, K32, K8, K9, K15, K16, K19, K50, K51, K52, K53, K55, K56, K57, K58, K59, K61, K63

FCC ID: 2BF3Z-K62

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: December 23, 2024

Date of Test: December 24, 2024-January 02, 2025

Date of report issued: January 02, 2025

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A red circular stamp with a star in the center. The text around the star reads "深圳市环球众一科技有限公司" (Shenzhen Global United Technology Services Co., Ltd.) and "检验检测专用章" (Inspection and Testing Services Special Seal). Below the star, it says "Inspection/Testing Services".

Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	January 02, 2025	Original

Prepared By:




Project Engineer

Date:

January 02, 2025

Check By:



Reviewer

Date:

January 02, 2025

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	5
5 GENERAL INFORMATION	6
5.1 GENERAL DESCRIPTION OF EUT	6
5.2 TEST MODE	8
5.3 DESCRIPTION OF SUPPORT UNITS	8
5.4 DEVIATION FROM STANDARDS	8
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.6 TEST FACILITY	8
5.7 TEST LOCATION	8
5.8 ADDITIONAL INSTRUCTIONS	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	11
7.1 ANTENNA REQUIREMENT	11
7.2 CONDUCTED EMISSIONS	12
7.3 CONDUCTED PEAK OUTPUT POWER	15
7.4 20dB EMISSION BANDWIDTH	16
7.5 CARRIER FREQUENCIES SEPARATION	17
7.6 HOPPING CHANNEL NUMBER	18
7.7 DWELL TIME	19
7.8 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	20
7.8.1 Conducted Emission Method	20
7.8.2 Radiated Emission Method	21
8 TEST SETUP PHOTO	30
9 EUT CONSTRUCTIONAL DETAILS	30
10 APPENDIX FOR BT EDR	31
10.1 20dB EMISSION BANDWIDTH	31
10.1.1 Test Result	31
10.1.2 Test Graphs	32
10.2 OCCUPIED CHANNEL BANDWIDTH	34
10.2.1 Test Result	34
10.2.2 Test Graphs	35
10.3 MAXIMUM CONDUCTED OUTPUT POWER	37
10.3.1 Test Result	37
10.3.2 Test Graphs	38
10.4 CARRIER FREQUENCY SEPARATION	40
10.4.1 Test Result	40
10.4.2 Test Graphs	40
10.5 TIME OF OCCUPANCY	41
10.5.1 Test Result	41
10.5.2 Test Graphs	42

10.6 NUMBER OF HOPPING CHANNELS..... 44

10.6.1 Test Result..... 44

10.6.2 Test Graphs..... 44

10.7 BAND EDGE MEASUREMENTS 45

10.7.1 Test Result..... 45

10.7.2 Test Graphs..... 46

10.8 CONDUCTED SPURIOUS EMISSION..... 48

10.8.1 Test Result..... 48

10.8.2 Test Graphs..... 49

10.9 DUTY CYCLE 54

10.9.1 Test Result..... 54

10.9.2 Test Graphs..... 54

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013

Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	Smart Watch
Model No.:	K62, K35, K31, K32, K8, K9, K15, K16, K19, K50, K51, K52, K53, K55, K56, K57, K58, K59, K61, K63
Test Model No:	K62
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTS2024120554-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Wire Antenna
Antenna gain:	0.86dBi(Declared by applicant)
Power supply:	DC 3.8V, 1000mAh, 3.8Wh for Li-ion battery The battery is charged via USB DC 5V

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Apple adapter	USB Charger	A1443	N/A
HUAWEI	Mobile Phone	MATE 30	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: • FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. • ISED—Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing • NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).
--

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test software provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Jun. 22, 2024	Jun. 21, 2027
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 11, 2024	Apr. 10, 2025
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Mar. 19, 2023	Mar. 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 17, 2023	Apr. 16, 2025
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Apr. 11, 2024	Apr. 10, 2025
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.12, 2024	Nov.11, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2024	Apr. 10, 2025
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2024	Apr. 10, 2025
10	Horn Antenna (15GH-40GHz)	SCHWARZBECK	01296	GTS691	Mar. 07, 2024	Mar. 06, 2025
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 12, 2024	Mar. 11, 2025
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2024	Apr. 10, 2025
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 07, 2024	Nov. 06, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2024	Apr. 10, 2025
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 18, 2024	Apr. 17, 2025
16	RE cable 1	GTS	N/A	GTS675	Jul. 02, 2024	Jul. 01, 2025
17	RE cable 2	GTS	N/A	GTS676	Jul. 02, 2024	Jul. 01, 2025
18	RE cable 3	GTS	N/A	GTS677	Jul. 02, 2024	Jul. 01, 2025
19	RE cable 4	GTS	N/A	GTS678	Jul. 02, 2024	Jul. 01, 2025
20	RE cable 5	GTS	N/A	GTS679	Jul. 02, 2024	Jul. 01, 2025
21	RE cable 6	GTS	N/A	GTS680	Jul. 02, 2024	Jul. 01, 2025
22	RE cable 7	GTS	N/A	GTS681	Jul. 05, 2024	Jul. 04, 2025
23	RE cable 8	GTS	N/A	GTS682	Jul. 05, 2024	Jul. 04, 2025
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 11, 2024	Apr. 10, 2025
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2024	Apr. 10, 2025
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 18, 2024	Apr. 17, 2025
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 11, 2024	Apr. 10, 2025
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2024	Apr. 10, 2025
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2024	Apr. 10, 2025
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2024	Apr. 10, 2025
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 13, 2024	Apr. 12, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 13, 2024	Apr. 12, 2025
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 13, 2024	Apr. 12, 2025
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 13, 2024	Apr. 12, 2025
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 13, 2024	Apr. 12, 2025
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 13, 2024	Apr. 12, 2025
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 13, 2024	Apr. 12, 2025
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 13, 2024	Apr. 12, 2025
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 18, 2024	Apr. 17, 2025
10	EXA Signal Analyzer	Keysight	N9010B	MY60241168	Nov. 02, 2024	Nov. 01, 2025


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Apr. 18, 2024	Apr. 17, 2025

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The antenna is wire antenna, reference to the EUT constructional details.	

7.2 Conducted Emissions

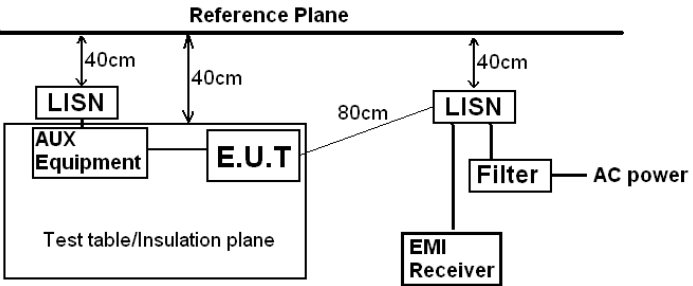Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						


Measurement data:

Pre-scan all test modes, found worst case at GFSK 2402MHz, and so only show the test result of it
Line:

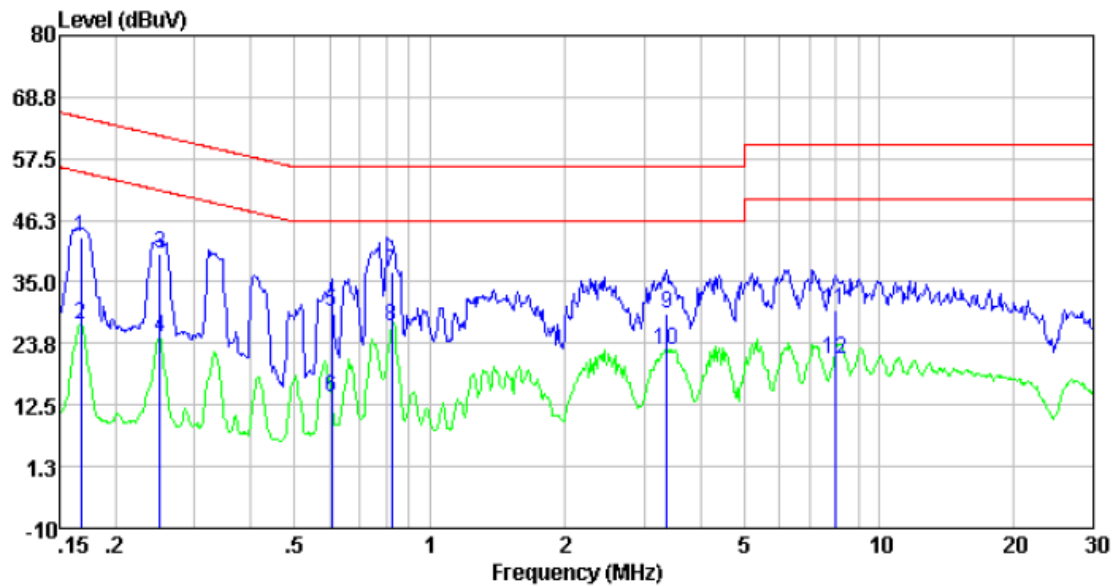

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.17	33.06	9.90	0.01	42.97	65.08	-22.11	QP
0.17	17.30	9.90	0.01	27.21	55.08	-27.87	Average
0.25	30.40	9.59	0.01	40.00	61.73	-21.73	QP
0.25	15.29	9.59	0.01	24.89	51.73	-26.84	Average
0.60	19.88	9.61	0.02	29.51	56.00	-26.49	QP
0.60	4.42	9.61	0.02	14.05	46.00	-31.95	Average
0.82	27.08	9.75	0.03	36.86	56.00	-19.14	QP
0.82	16.99	9.75	0.03	26.77	46.00	-19.23	Average
3.36	19.82	9.44	0.05	29.31	56.00	-26.69	QP
3.36	13.20	9.44	0.05	22.69	46.00	-23.31	Average
7.98	19.96	9.73	0.09	29.78	60.00	-30.22	QP
7.98	11.20	9.73	0.09	21.02	50.00	-28.98	Average

Neutral:

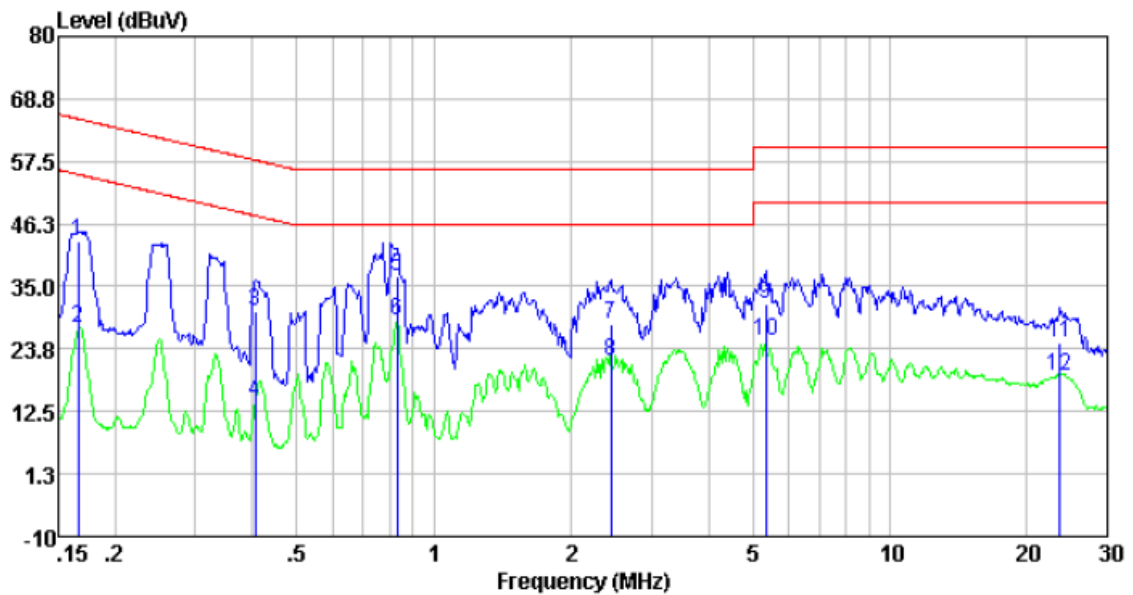


Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.17	33.20	9.95	0.01	43.16	65.16	-22.00	QP
0.17	17.53	9.95	0.01	27.49	55.16	-27.67	Average
0.41	20.97	9.65	0.01	30.63	57.73	-27.10	QP
0.41	4.66	9.65	0.01	14.32	47.73	-33.41	Average
0.83	26.89	9.91	0.03	36.83	56.00	-19.17	QP
0.83	18.76	9.91	0.03	28.70	46.00	-17.30	Average
2.45	18.42	9.60	0.05	28.07	56.00	-27.93	QP
2.45	11.86	9.60	0.05	21.51	46.00	-24.49	Average
5.33	22.01	9.73	0.07	31.81	60.00	-28.19	QP
5.33	15.26	9.73	0.07	25.06	50.00	-24.94	Average
23.64	14.72	9.90	0.19	24.81	60.00	-35.19	QP
23.64	8.95	9.90	0.19	19.04	50.00	-30.96	Average

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Conducted Peak Output Power

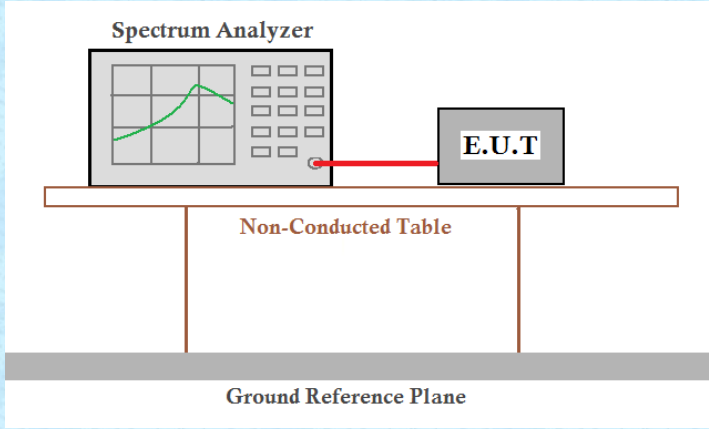Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	GFSK: 30dBm $\pi/4$ -DQPSK, 8-DPSK: 20.97dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for BT EDR.

7.4 20dB Emission Bandwidth

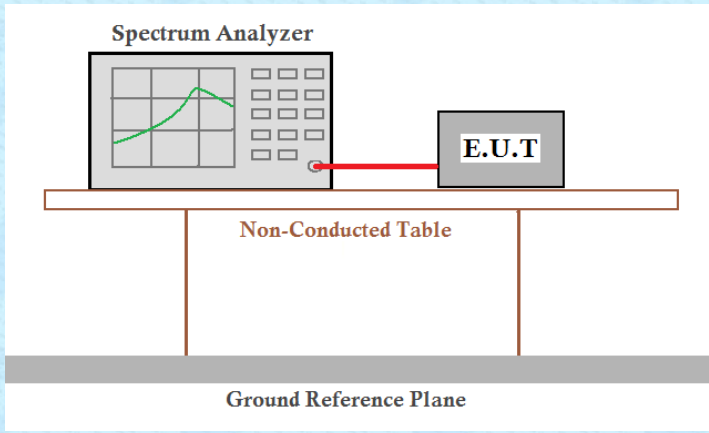Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for BT EDR.

7.5 Carrier Frequencies Separation

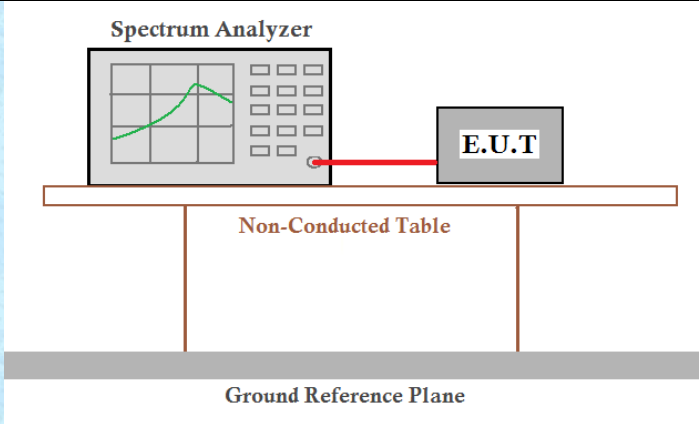Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=300KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for BT EDR.

7.6 Hopping Channel Number

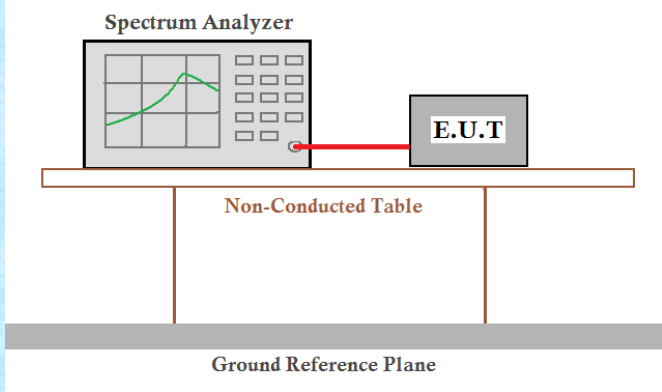Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for BT EDR.


7.7 Dwell Time

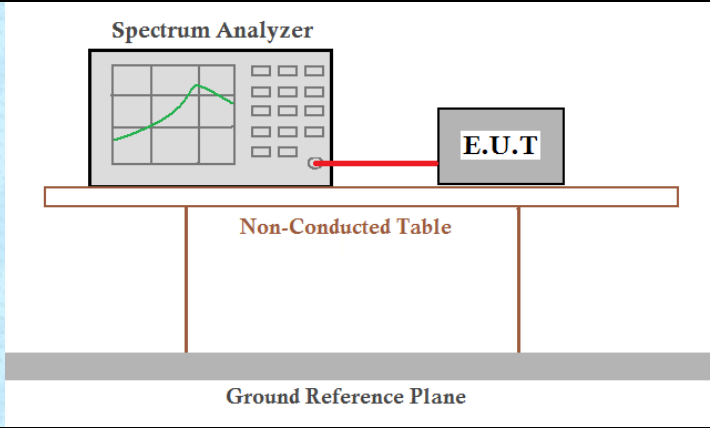Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for BT EDR.


7.8 Spurious Emission in Non-restricted & restricted Bands



7.8.1 Conducted Emission Method

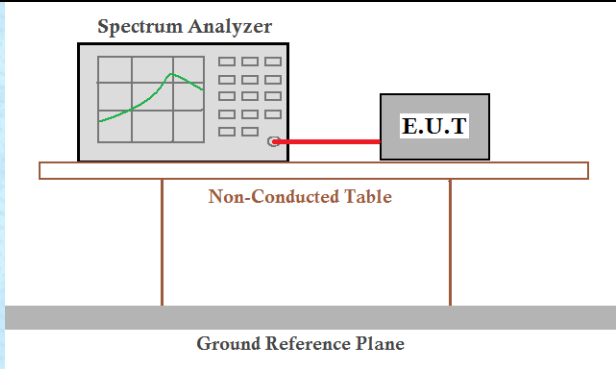Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for BT EDR.

7.8.2 Radiated Emission Method

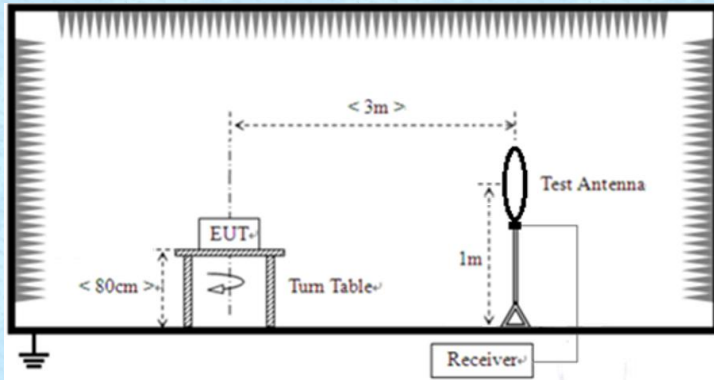Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
	Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T				
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	PK/QP/AV	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

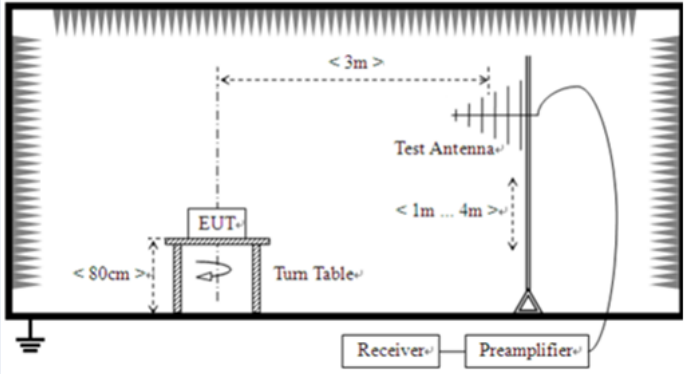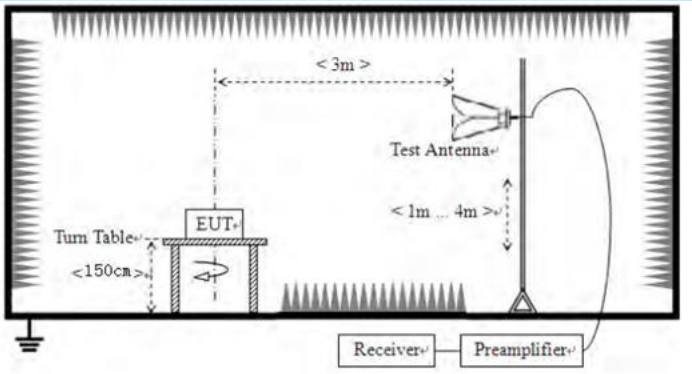	For radiated emissions from 30MHz to1GHz  For radiated emissions above 1GHz 					
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					

Test results:	Pass
---------------	------

Measurement data:

Remarks:


1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


■ Below 1GHz

Pre-scan all test modes, found worst case at GFSK 2402MHz, and so only show the test result of it
Horizontal:

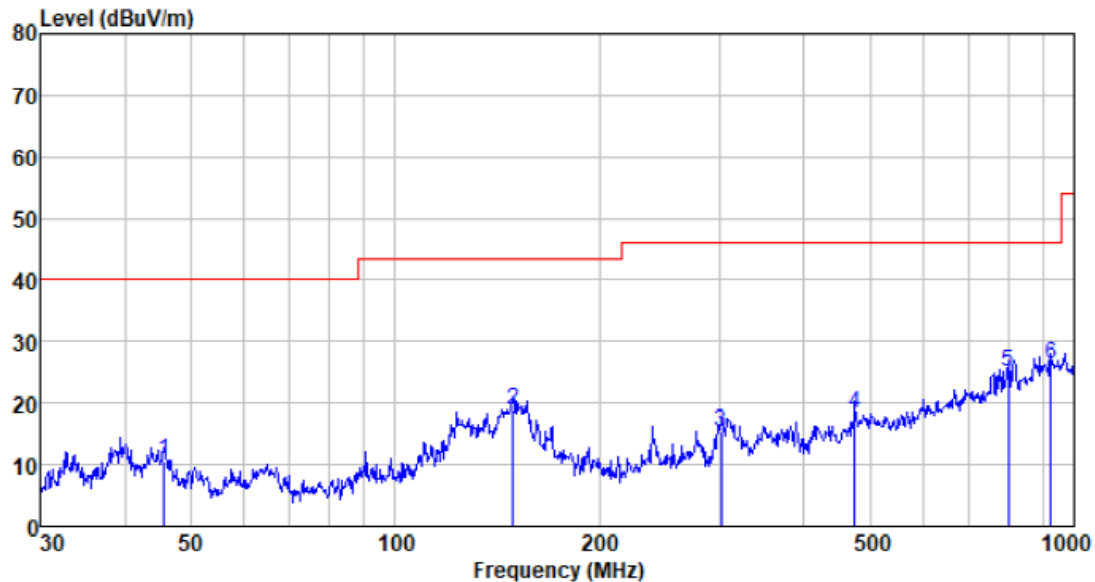

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
45.695	28.29	13.43	1.34	32.30	10.76	40.00	-29.24	QP
148.963	34.27	14.70	2.46	32.45	18.98	43.50	-24.52	QP
302.481	31.73	12.45	3.43	32.30	15.31	46.00	-30.69	QP
475.499	29.97	16.41	4.12	32.21	18.29	46.00	-27.71	QP
798.980	28.62	21.98	5.47	31.10	24.97	46.00	-21.03	QP
925.756	28.11	23.32	5.81	31.10	26.14	46.00	-19.86	QP

Vertical:

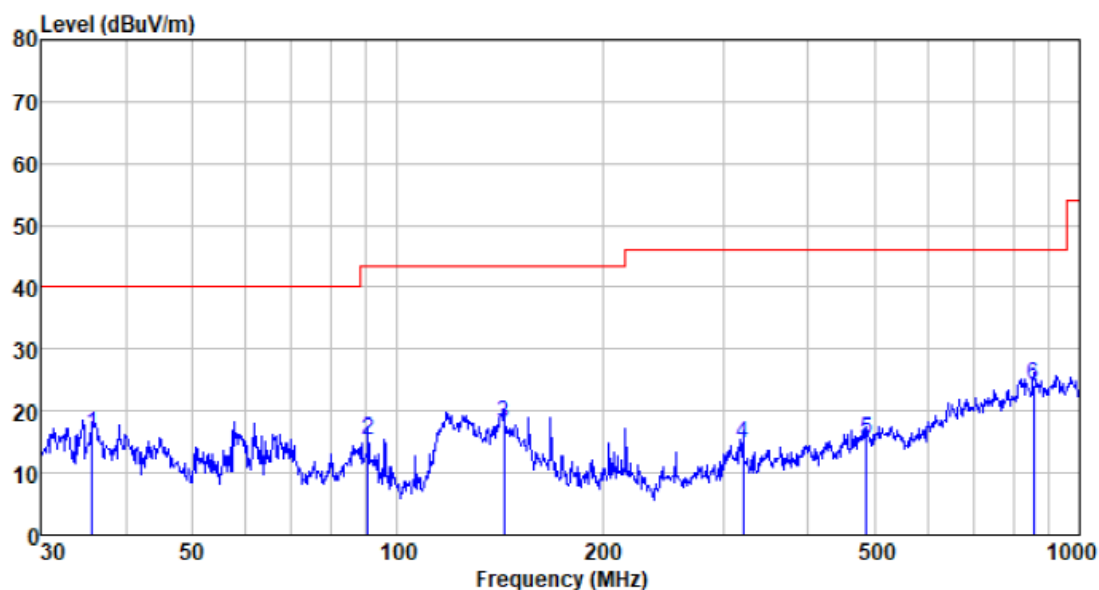

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
35.749	34.22	13.25	1.20	32.30	16.37	40.00	-23.63	QP
90.537	37.47	8.65	1.78	32.46	15.44	43.50	-28.06	QP
143.326	34.17	14.03	2.41	32.46	18.15	43.50	-25.35	QP
321.061	30.71	12.92	3.53	32.29	14.87	46.00	-31.13	QP
487.315	26.84	16.55	4.15	32.21	15.33	46.00	-30.67	QP
857.025	27.04	22.64	5.62	31.10	24.20	46.00	-21.80	QP

- Above 1GHz
- Unwanted Emissions in Non-restricted Frequency Bands

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	34.88	32.01	6.01	38.54	34.36	74.00	-39.64	Vertical
7206.00	30.22	36.21	7.92	39.14	35.21	74.00	-38.79	Vertical
9608.00	30.04	38.20	14.87	40.22	42.89	74.00	-31.11	Vertical
4804.00	38.68	32.01	6.01	38.54	38.16	74.00	-35.84	Horizontal
7206.00	31.77	36.21	7.92	39.14	36.76	74.00	-37.24	Horizontal
9608.00	29.23	38.20	14.87	40.22	42.08	74.00	-31.92	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.16	32.01	6.01	38.54	23.64	54.00	-30.36	Vertical
7206.00	19.18	36.21	7.92	39.14	24.17	54.00	-29.83	Vertical
9608.00	18.41	38.20	14.87	40.22	31.26	54.00	-22.74	Vertical
4804.00	28.12	32.01	6.01	38.54	27.60	54.00	-26.40	Horizontal
7206.00	21.20	36.21	7.92	39.14	26.19	54.00	-27.81	Horizontal
9608.00	17.94	38.20	14.87	40.22	30.79	54.00	-23.21	Horizontal

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	35.08	32.10	6.03	38.52	34.69	74.00	-39.31	Vertical
7323.00	30.35	36.30	8.04	39.22	35.47	74.00	-38.53	Vertical
9764.00	30.15	38.20	11.35	40.25	39.45	74.00	-34.55	Vertical
4882.00	38.91	32.10	6.03	38.52	38.52	74.00	-35.48	Horizontal
7323.00	31.91	36.30	8.04	39.22	37.03	74.00	-36.97	Horizontal
9764.00	29.36	38.20	11.35	40.25	38.66	74.00	-35.34	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	24.31	32.10	6.03	38.52	23.92	54.00	-30.08	Vertical
7323.00	19.29	36.30	8.04	39.22	24.41	54.00	-29.59	Vertical
9764.00	18.51	38.20	11.35	40.25	27.81	54.00	-26.19	Vertical
4882.00	28.30	32.10	6.03	38.52	27.91	54.00	-26.09	Horizontal
7323.00	21.32	36.30	8.04	39.22	26.44	54.00	-27.56	Horizontal
9764.00	18.05	38.20	11.35	40.25	27.35	54.00	-26.65	Horizontal

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	34.97	32.20	6.05	38.51	34.71	74.00	-39.29	Vertical
7440.00	30.28	36.30	8.16	39.31	35.43	74.00	-38.57	Vertical
9920.00	30.09	38.24	10.76	40.28	38.81	74.00	-35.19	Vertical
4960.00	38.79	32.20	6.05	38.51	38.53	74.00	-35.47	Horizontal
7440.00	31.83	36.30	8.16	39.31	36.98	74.00	-37.02	Horizontal
9920.00	29.29	38.24	10.76	40.28	38.01	74.00	-35.99	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.24	32.20	6.05	38.51	23.98	54.00	-30.02	Vertical
7440.00	19.24	36.30	8.16	39.31	24.39	54.00	-29.61	Vertical
9920.00	18.47	38.24	10.76	40.28	27.19	54.00	-26.81	Vertical
4960.00	28.22	32.20	6.05	38.51	27.96	54.00	-26.04	Horizontal
7440.00	21.26	36.30	8.16	39.31	26.41	54.00	-27.59	Horizontal
9920.00	18.00	38.24	10.76	40.28	26.72	54.00	-27.28	Horizontal

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

■ Unwanted Emissions in Restricted Frequency Bands

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	46.47	27.00	4.13	39.14	38.46	74.00	-35.54	Horizontal
2390.00	46.85	27.08	4.17	39.34	38.76	74.00	-35.24	Horizontal
2310.00	45.75	27.00	4.13	39.14	37.74	74.00	-36.26	Vertical
2390.00	39.07	27.08	4.17	39.34	30.98	74.00	-43.02	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	38.43	27.00	4.13	39.14	30.42	54.00	-23.58	Horizontal
2390.00	38.92	27.08	4.17	39.34	30.83	54.00	-23.17	Horizontal
2310.00	39.34	27.00	4.13	39.14	31.33	54.00	-22.67	Vertical
2390.00	38.78	27.08	4.17	39.34	30.69	54.00	-23.31	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	47.15	27.27	4.08	39.56	38.94	74.00	-35.06	Horizontal
2500.00	46.67	27.30	4.06	39.60	38.43	74.00	-35.57	Horizontal
2483.50	47.30	27.27	4.08	39.56	39.09	74.00	-34.91	Vertical
2500.00	47.07	27.30	4.06	39.60	38.83	74.00	-35.17	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.13	27.27	4.08	39.56	29.92	54.00	-24.08	Horizontal
2500.00	38.60	27.30	4.06	39.60	30.36	54.00	-23.64	Horizontal
2483.50	39.38	27.27	4.08	39.56	31.17	54.00	-22.83	Vertical
2500.00	39.09	27.30	4.06	39.60	30.85	54.00	-23.15	Vertical

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.


10 Appendix for BT EDR


10.1 20dB Emission Bandwidth

10.1.1 Test Result

Test Mode	Antenna	Frequency [MHz]	20dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.954	2401.532	2402.486	---	---
DH5	Ant1	2441	0.957	2440.529	2441.486	---	---
DH5	Ant1	2480	0.954	2479.532	2480.486	---	---
2DH5	Ant1	2402	1.284	2401.367	2402.651	---	---
2DH5	Ant1	2441	1.281	2440.370	2441.651	---	---
2DH5	Ant1	2480	1.317	2479.340	2480.657	---	---
3DH5	Ant1	2402	1.302	2401.349	2402.651	---	---
3DH5	Ant1	2441	1.296	2440.349	2441.645	---	---
3DH5	Ant1	2480	1.284	2479.355	2480.639	---	---

10.1.2 Test Graphs

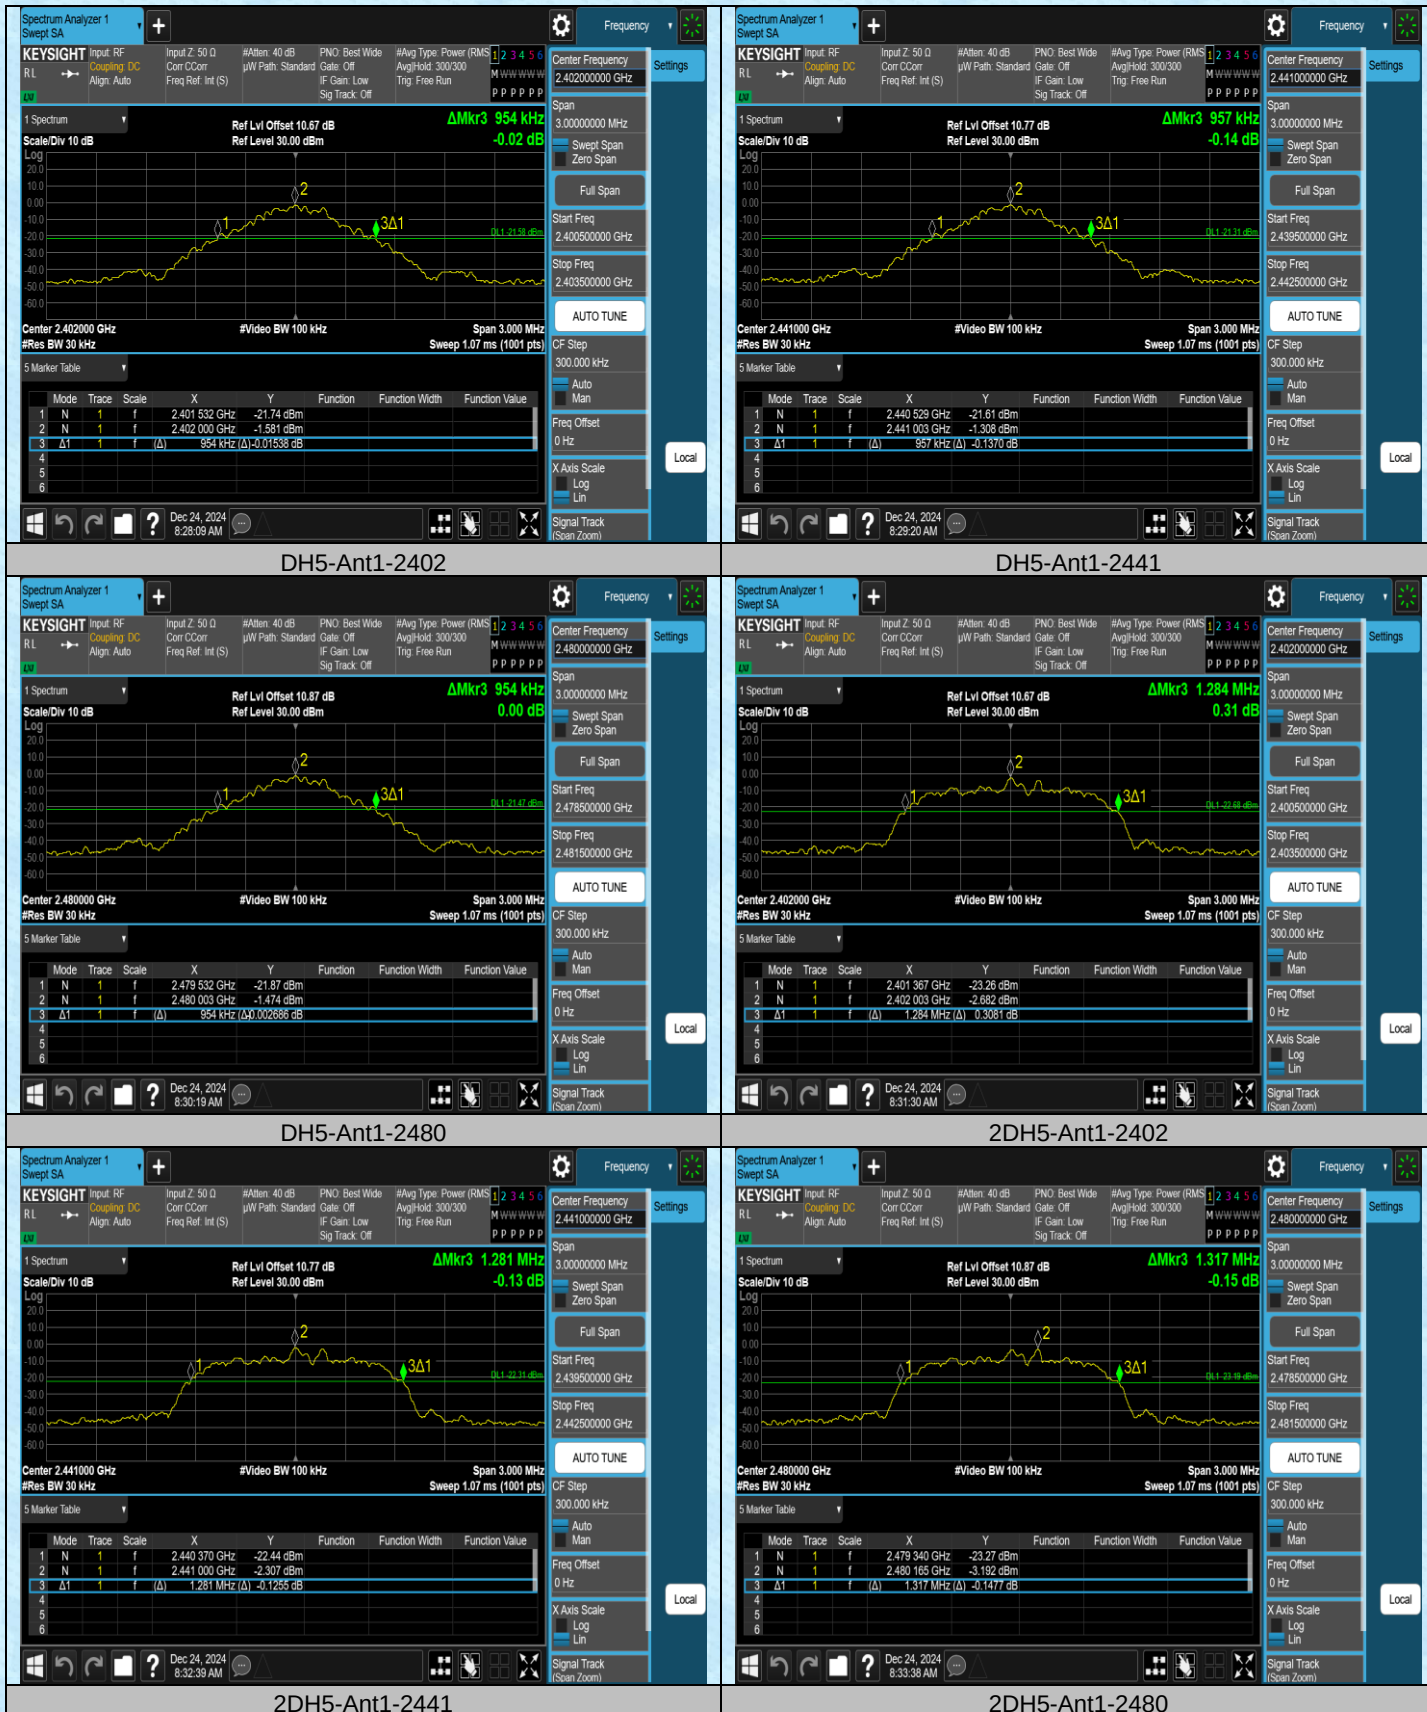

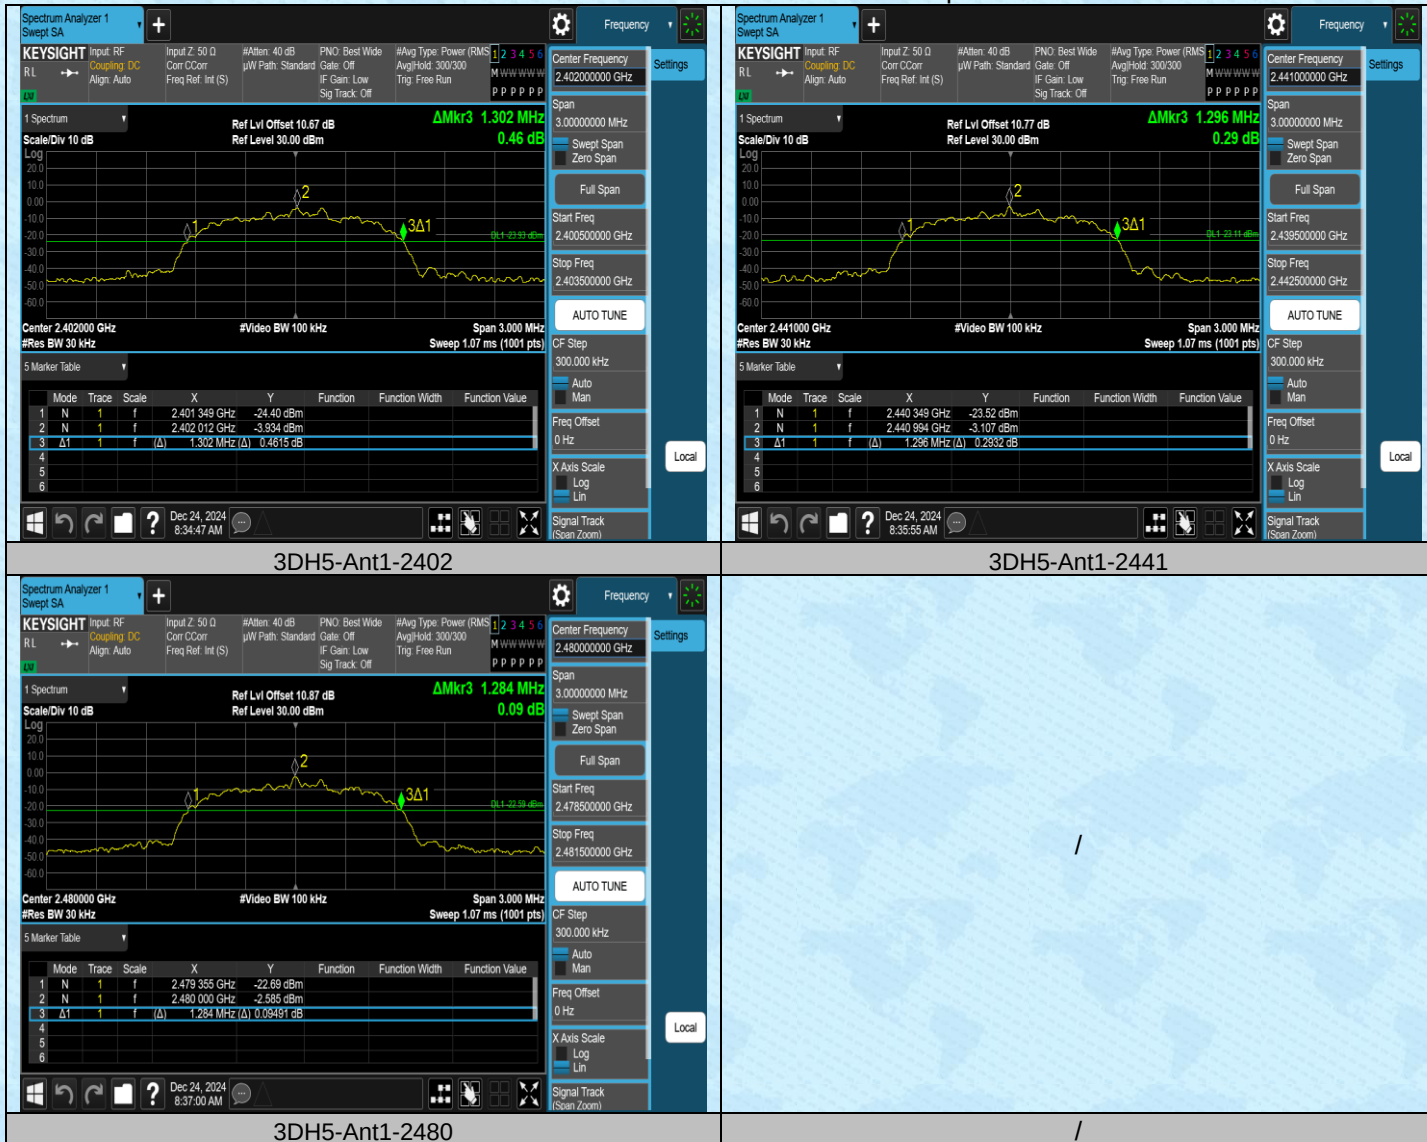



10.2 Occupied Channel Bandwidth

10.2.1 Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.88757	2401.5544	2402.4420	---	---
DH5	Ant1	2441	0.88521	2440.5557	2441.4410	---	---
DH5	Ant1	2480	0.88266	2479.5561	2480.4387	---	---
2DH5	Ant1	2402	1.1693	2401.4112	2402.5805	---	---
2DH5	Ant1	2441	1.1722	2440.4101	2441.5823	---	---
2DH5	Ant1	2480	1.1711	2479.4107	2480.5818	---	---
3DH5	Ant1	2402	1.1741	2401.4129	2402.5870	---	---
3DH5	Ant1	2441	1.1735	2440.4132	2441.5867	---	---
3DH5	Ant1	2480	1.1697	2479.4155	2480.5852	---	---

10.2.2 Test Graphs

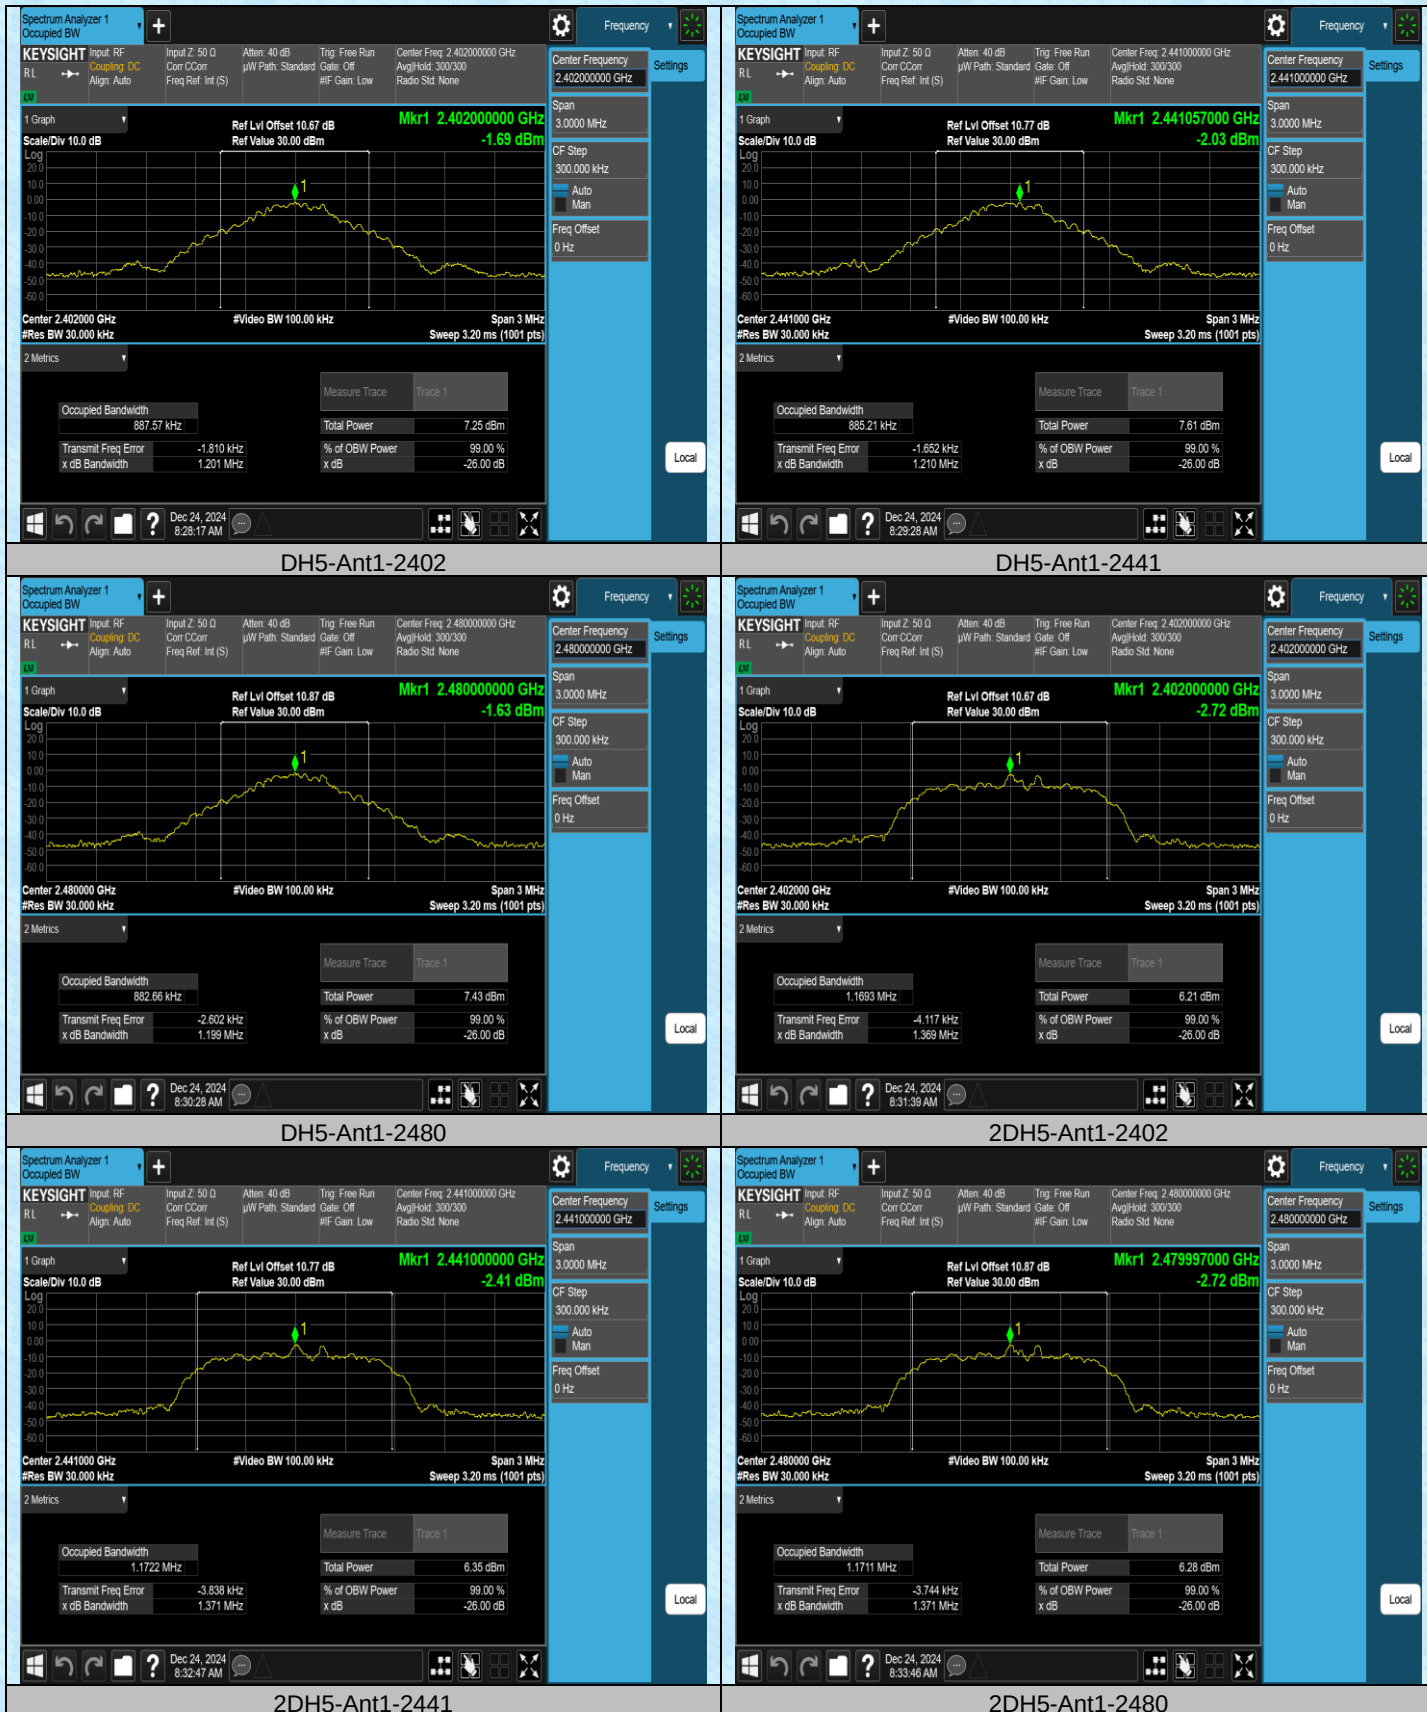

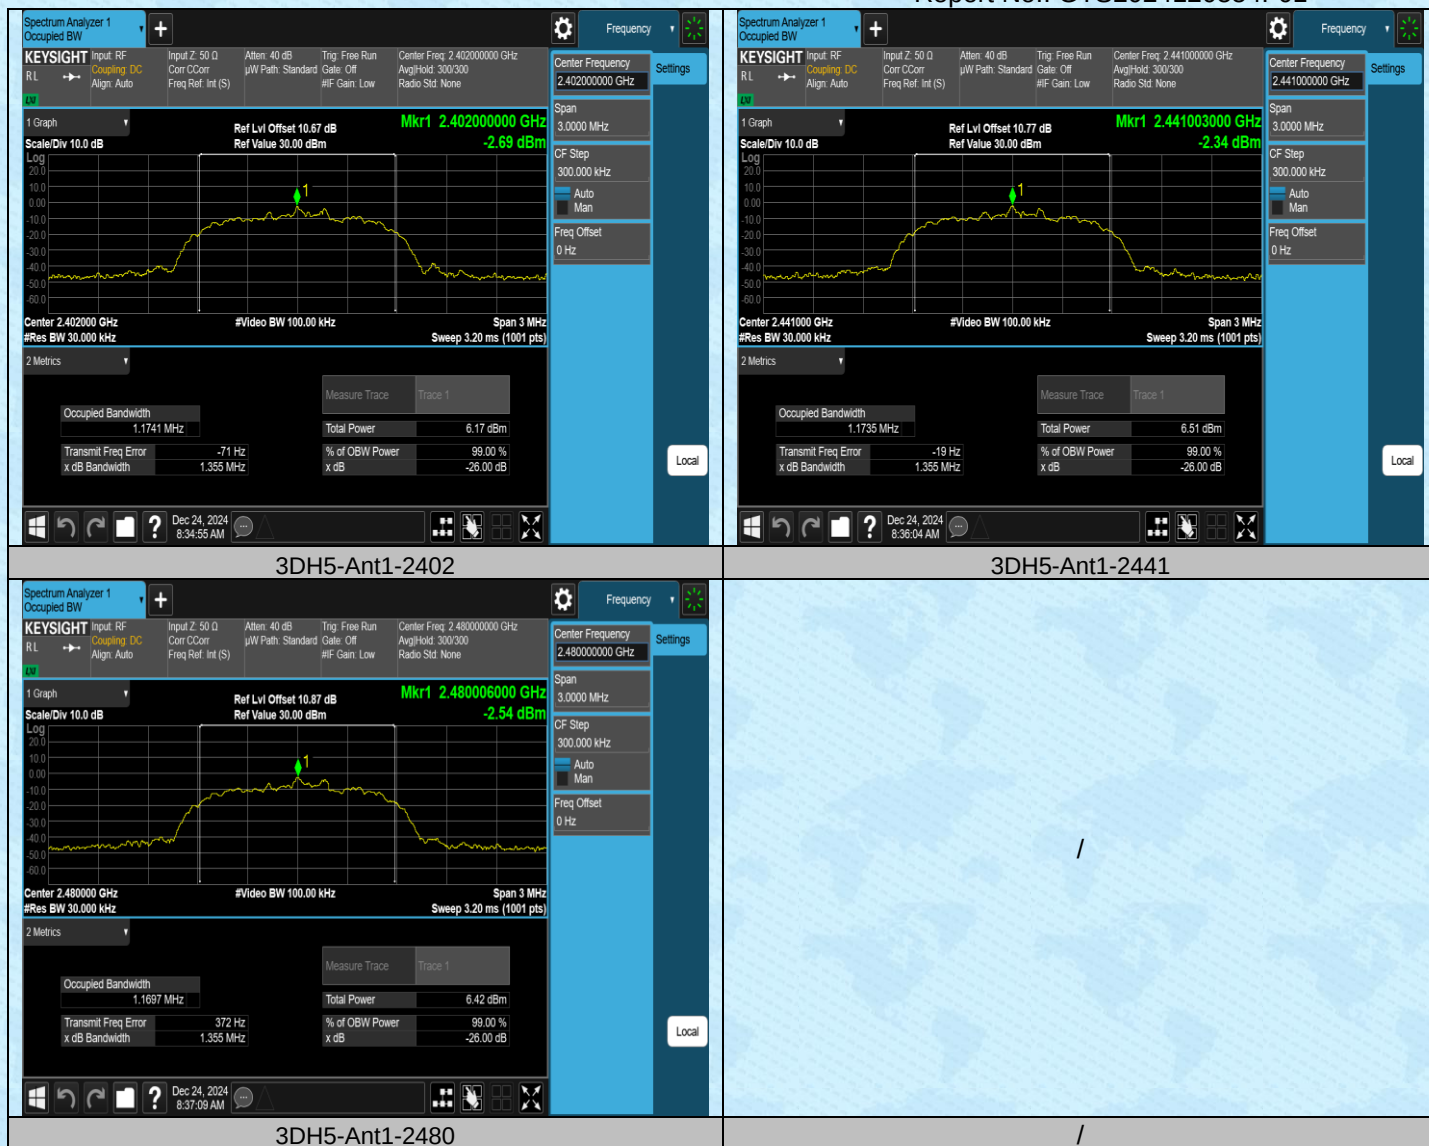


10.3 Maximum conducted output power

10.3.1 Test Result

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	1.08	≤30	PASS
DH5	Ant1	2441	1.42	≤30	PASS
DH5	Ant1	2480	1.24	≤30	PASS
2DH5	Ant1	2402	1.42	≤20.97	PASS
2DH5	Ant1	2441	1.58	≤20.97	PASS
2DH5	Ant1	2480	1.5	≤20.97	PASS
3DH5	Ant1	2402	1.87	≤20.97	PASS
3DH5	Ant1	2441	2.31	≤20.97	PASS
3DH5	Ant1	2480	1.99	≤20.97	PASS

10.3.2 Test Graphs



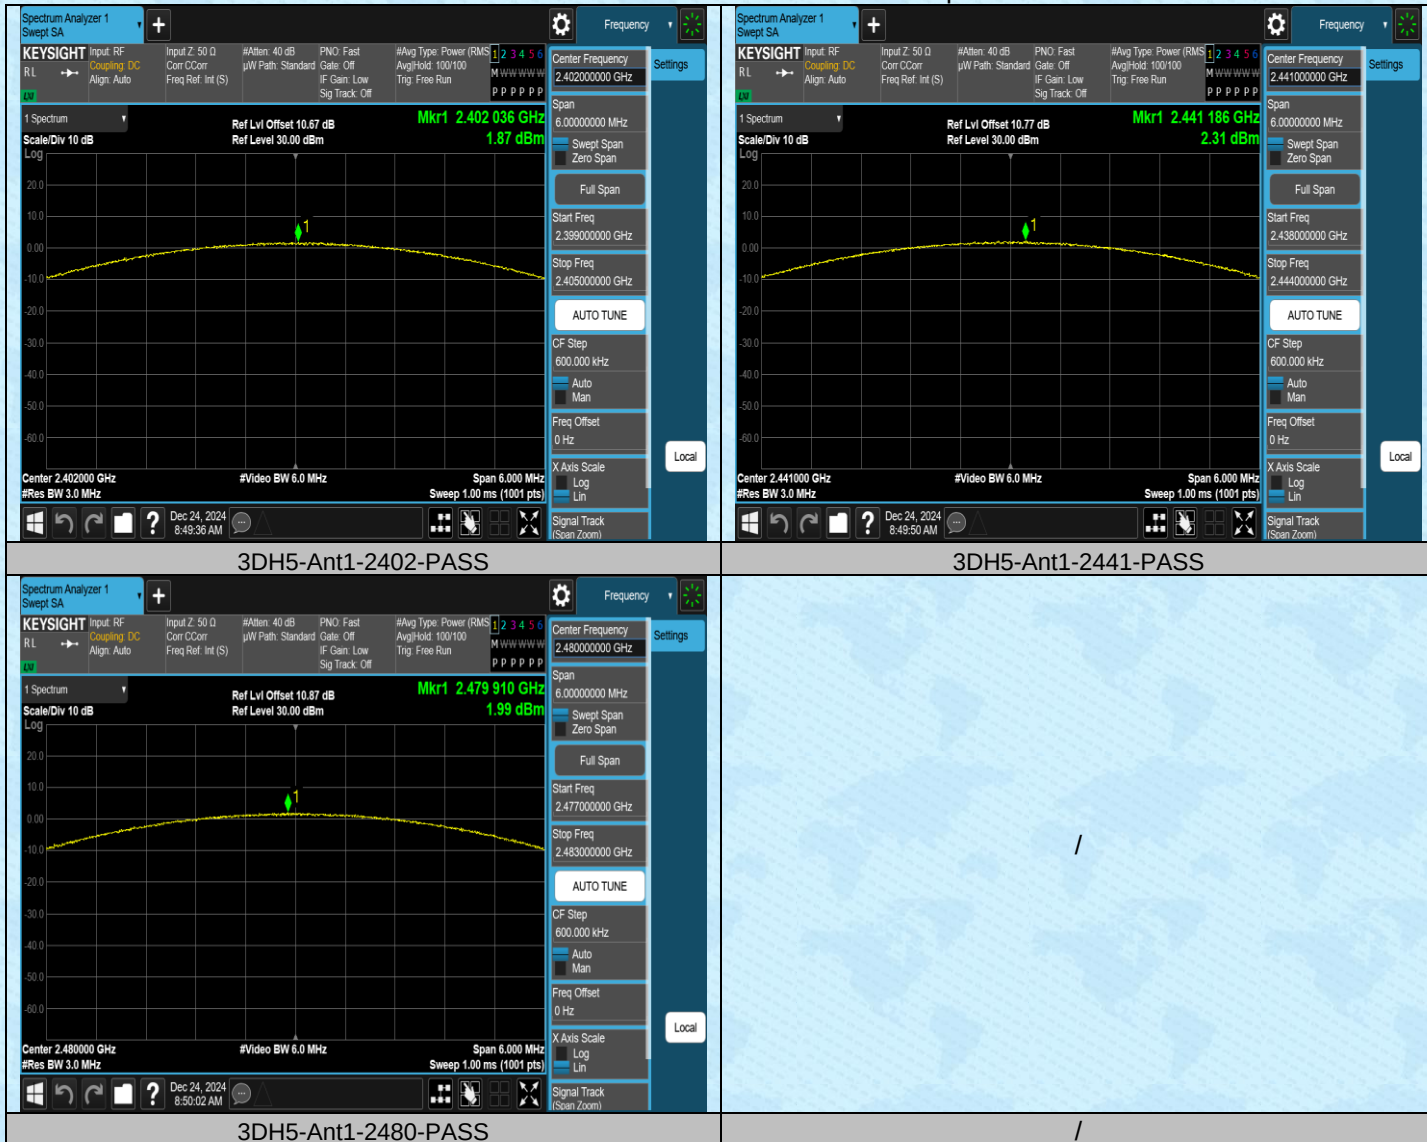


10.4 Carrier frequency separation

10.4.1 Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.012	≥ 0.957	PASS
2DH5	Ant1	Hop	1.172	≥ 0.878	PASS
3DH5	Ant1	Hop	1.028	≥ 0.868	PASS

10.4.2 Test Graphs

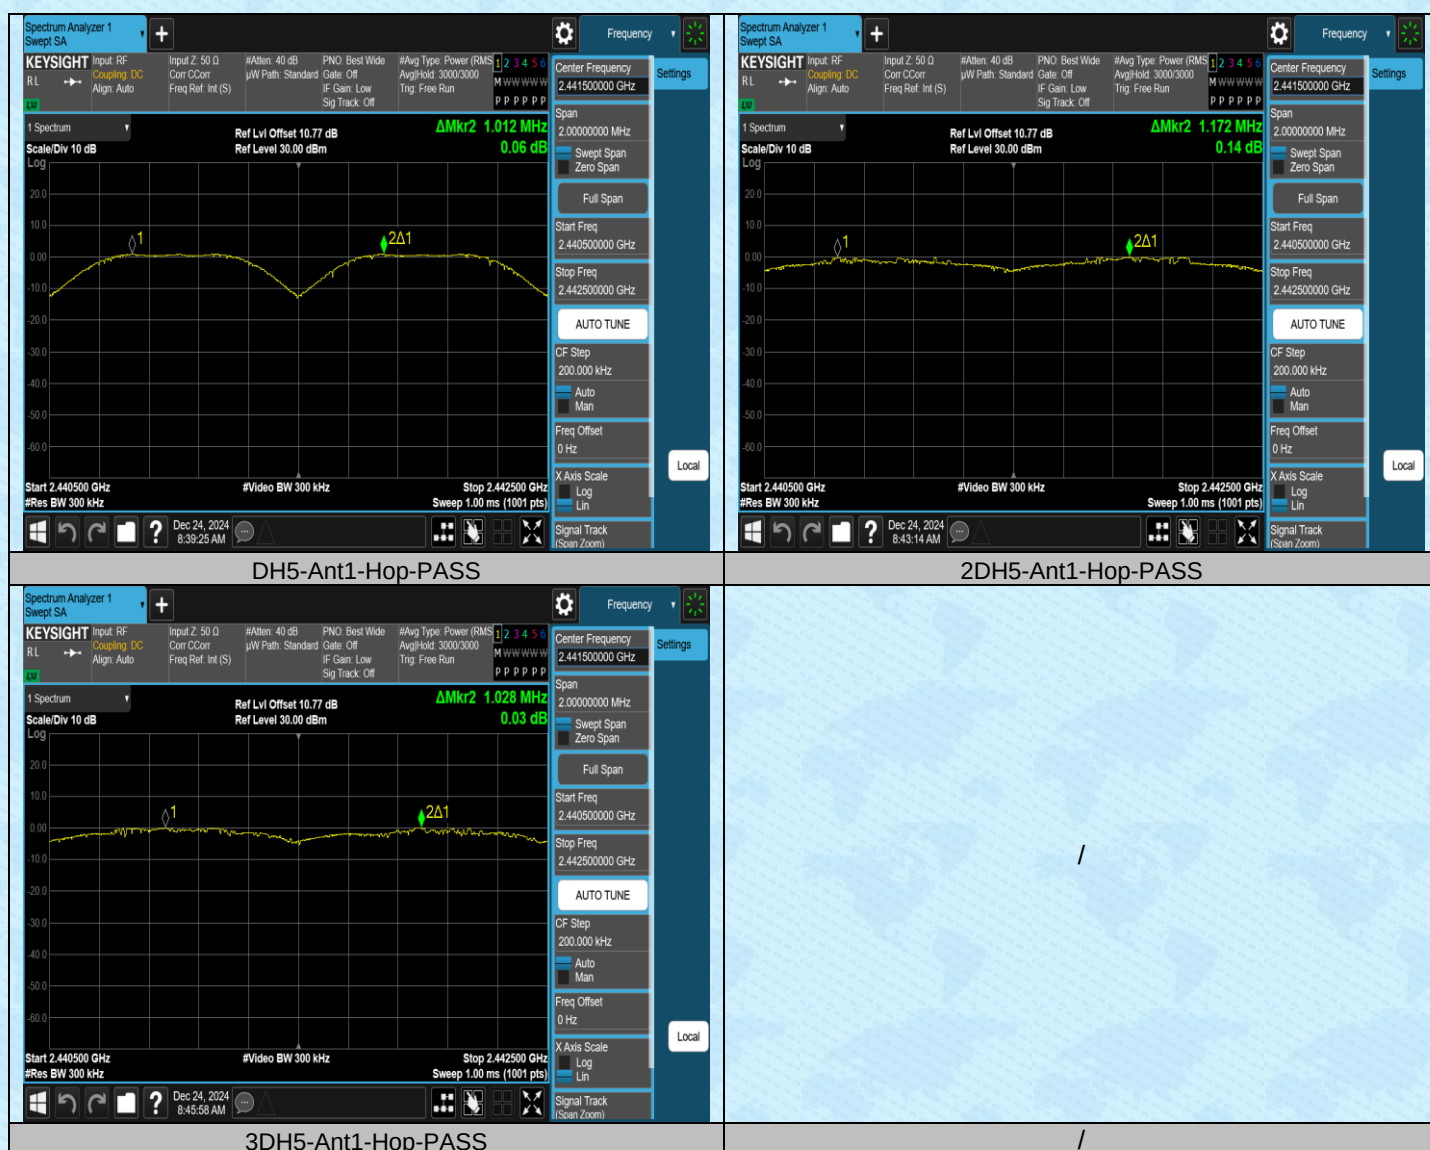

10.5 Time of occupancy

10.5.1 Test Result

Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.384	320	0.123	≤0.4	PASS
DH3	Ant1	Hop	1.640	160	0.262	≤0.4	PASS
DH5	Ant1	Hop	2.888	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.394	320	0.126	≤0.4	PASS
2DH3	Ant1	Hop	1.645	160	0.263	≤0.4	PASS
2DH5	Ant1	Hop	2.894	106.67	0.309	≤0.4	PASS
3DH1	Ant1	Hop	0.393	320	0.126	≤0.4	PASS
3DH3	Ant1	Hop	1.644	160	0.263	≤0.4	PASS
3DH5	Ant1	Hop	2.894	106.67	0.309	≤0.4	PASS

Note:

DH5/2DH5/3DH5: TotalHops=1600/79/6*0.4*79

DH5/2DH5/3DH5: Time of occupancy= TotalHops * (BurstWidth) /1000


DH3/2DH3/3DH3: TotalHops=1600/79/4*0.4*79


DH3/2DH3/3DH3: Time of occupancy= TotalHops * (BurstWidth) /1000

DH1/2DH1/3DH1: TotalHops=1600/79/2*0.4*79

DH1/2DH1/3DH1: Time of occupancy= TotalHops * (BurstWidth) /1000

10.5.2 Test Graphs

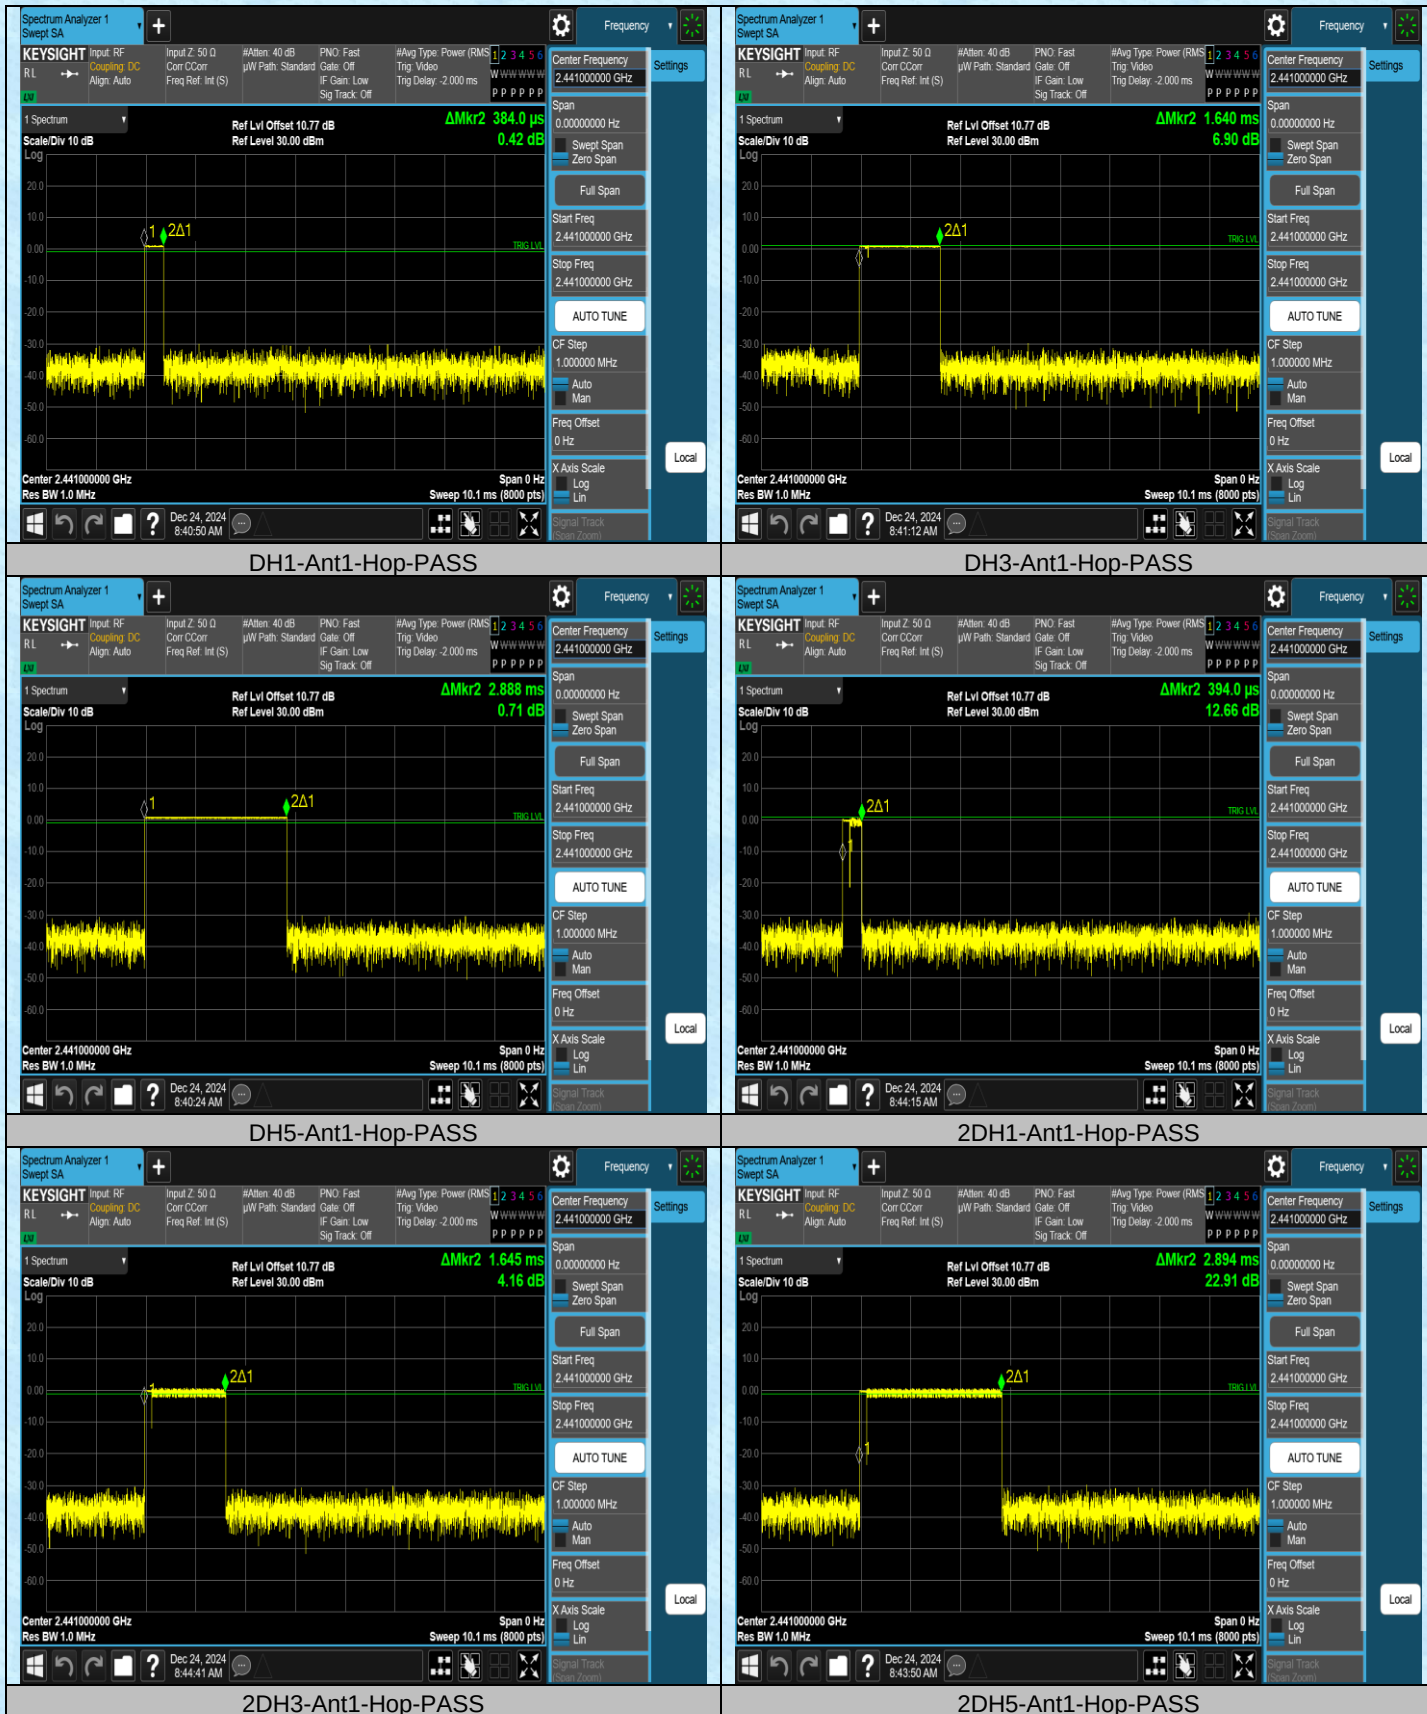

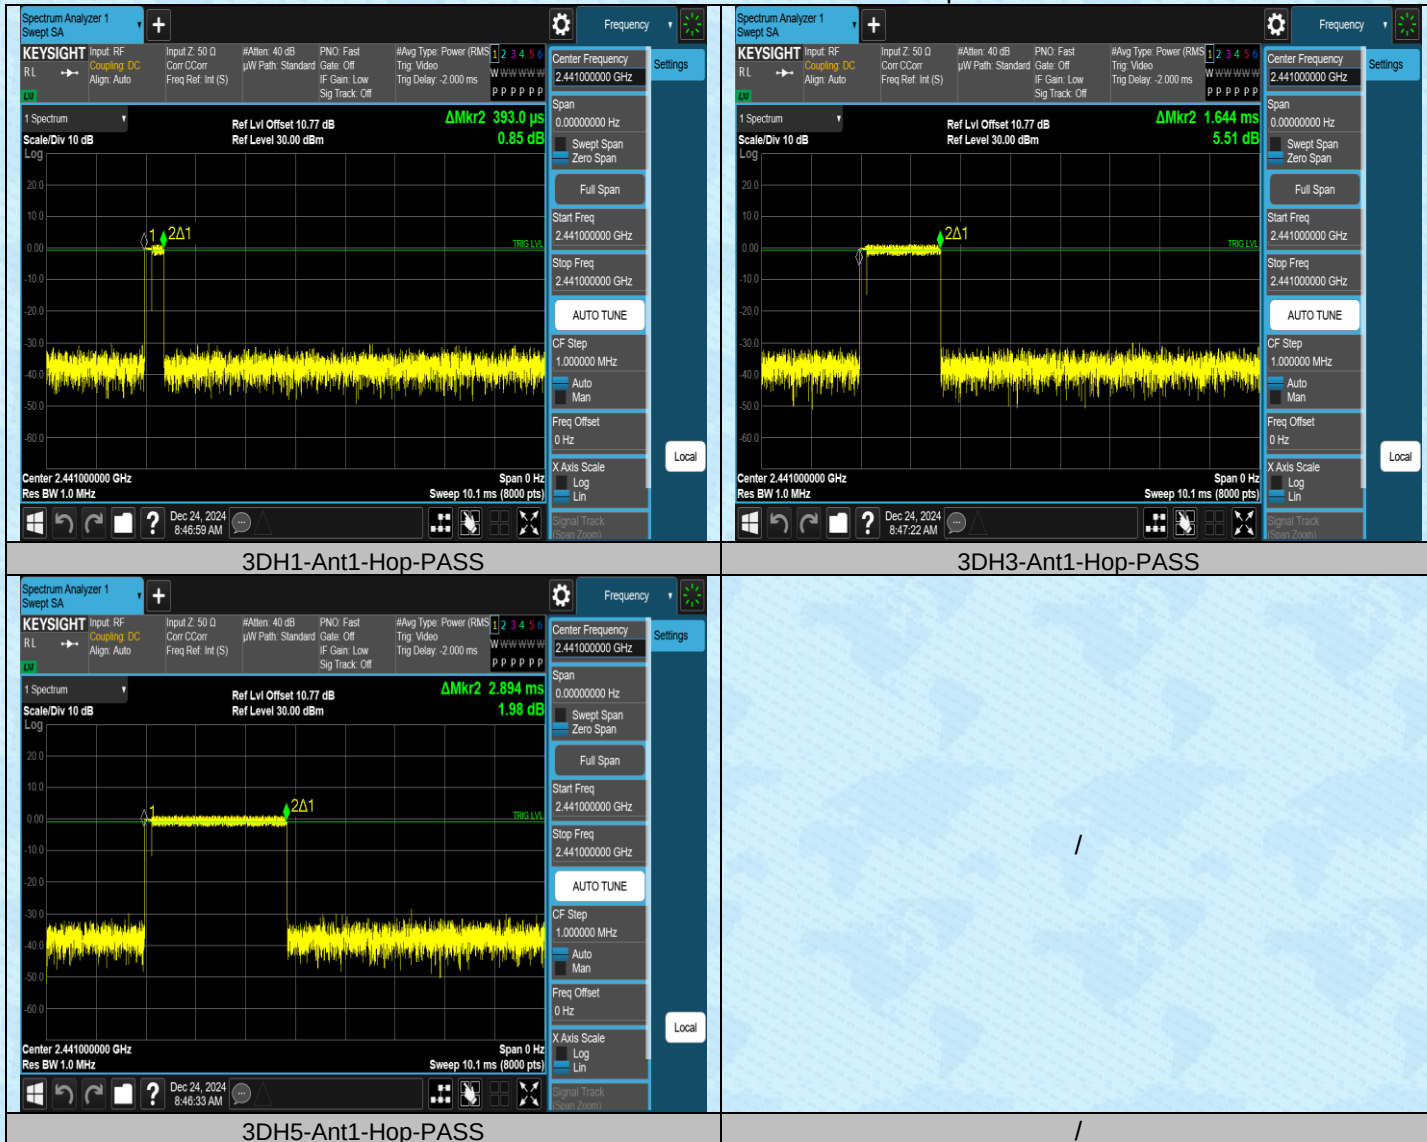


10.6 Number of hopping channels

10.6.1 Test Result

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

10.6.2 Test Graphs

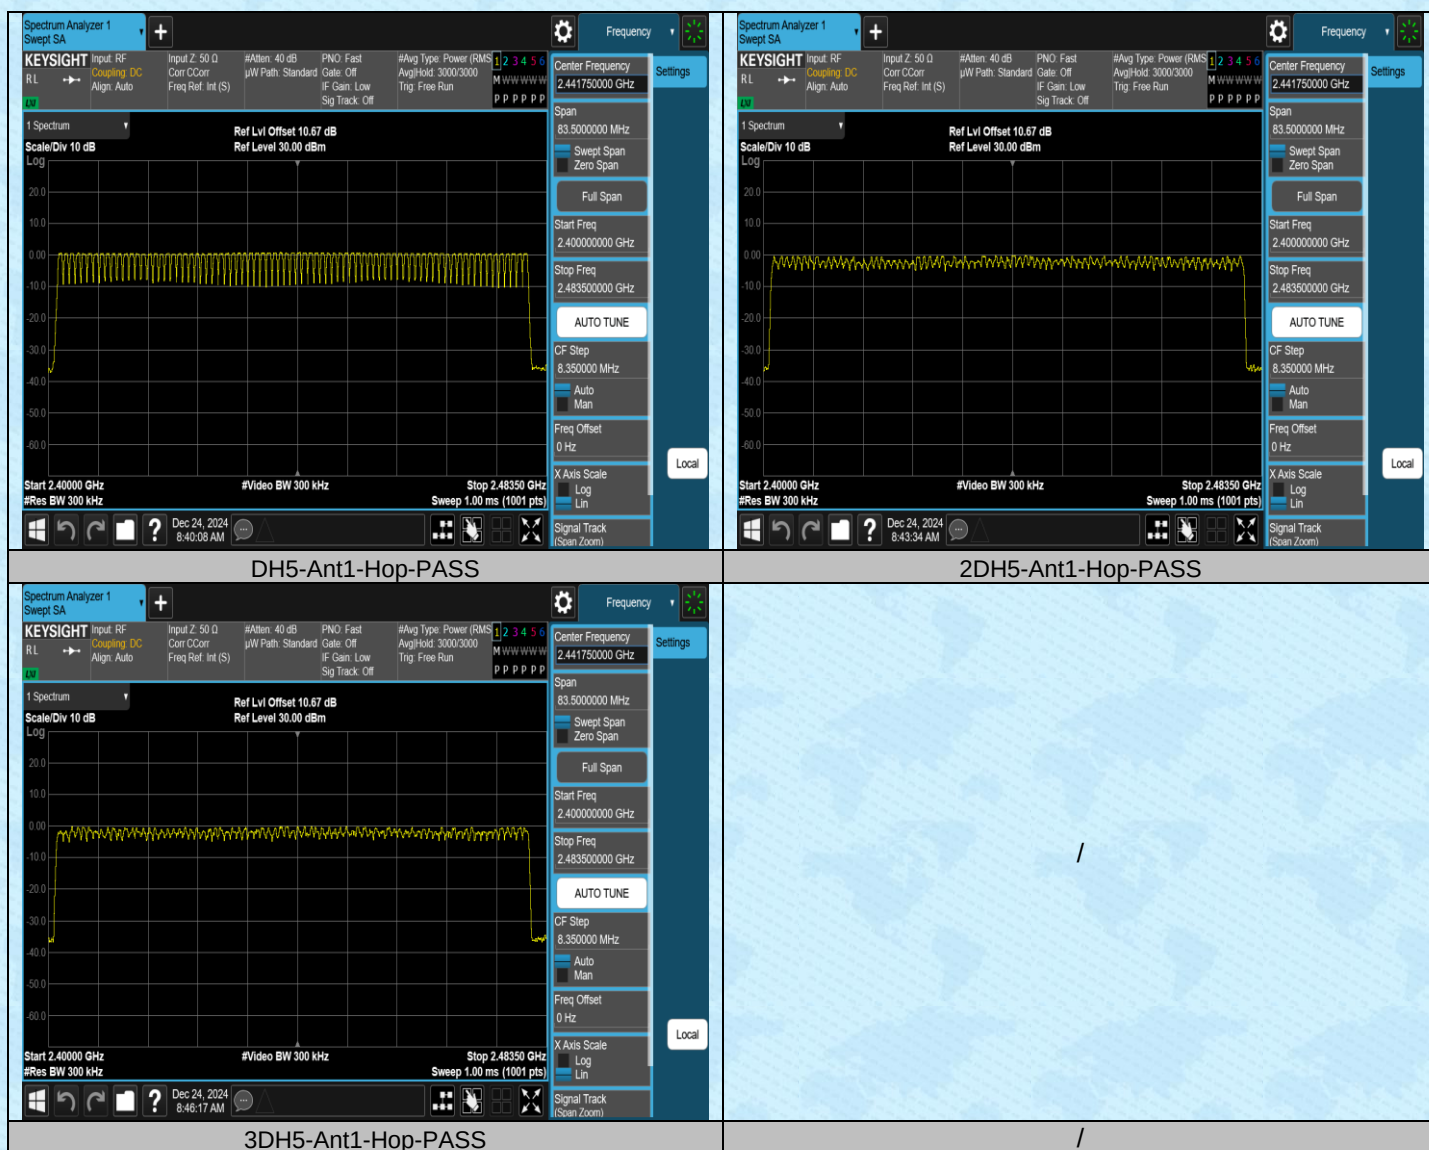

10.7 Band edge measurements

10.7.1 Test Result

Test Mode	Antenna	Channel	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.01	-49.07	≤ -19.99	PASS
DH5	Ant1	High	2480	0.35	-48.8	≤ -19.65	PASS
DH5	Ant1	Low	Hop_2402	-0.63	-49.86	≤ -20.63	PASS
DH5	Ant1	High	Hop_2480	0.08	-49.46	≤ -19.92	PASS
2DH5	Ant1	Low	2402	-1.78	-49.12	≤ -21.78	PASS
2DH5	Ant1	High	2480	-0.69	-47.99	≤ -20.69	PASS
2DH5	Ant1	Low	Hop_2402	-6.23	-49.84	≤ -26.23	PASS
2DH5	Ant1	High	Hop_2480	-0.71	-49.21	≤ -20.71	PASS
3DH5	Ant1	Low	2402	-0.64	-49.66	≤ -20.64	PASS
3DH5	Ant1	High	2480	-0.61	-48.04	≤ -20.61	PASS
3DH5	Ant1	Low	Hop_2402	-2.40	-49.98	≤ -22.4	PASS
3DH5	Ant1	High	Hop_2480	-2.00	-49.5	≤ -22	PASS