

FCC 15.247 2.4GHz Test Report


for

Pu Yuan Biotech Co., Ltd.

**4F, 4F-1, No. 51, Lane 35, Jihu Road,
Neihu Dist. Taipei City 11492, Taiwan, R.O.C**

Product Name : Mesh Nebulizer
Model Name : PY-010
Brand : PU Yuan
FCC ID : 2BF43-PY010

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	7
3.3. Reference Test Guidance	8
3.4. Antenna Information	8
3.5. EUT Specifications Assessed in Current Report	8
3.6. Descriptions of Key Components	8
3.7. Test Configuration	9
3.8. Output Power Setting	10
3.9. Tested Supporting System List	10
3.10. Setup Configuration	10
3.11. Operating Condition of EUT	10
3.12. Description of Test Facility	11
3.13. Measurement Uncertainty	12
4. MEASUREMENT EQUIPMENT LIST	13
4.1. Conducted Emission Measurement	13
4.2. Radiated Emission Measurement	13
4.3. RF Conducted Measurement	14
5. CONDUCTED EMISSION	15
5.1. Block Diagram of Test Setup	15
5.2. Conducted Emission Limit	15
5.3. Test Procedure	15
5.4. Test Results	15
6. RADIATED EMISSION	16
6.1. Block Diagram of Test Setup	16
6.2. Radiated Emission Limits	17
6.3. Test Procedure	18
6.4. Measurement Result Explanation	19
6.5. Test Results	19
7. DTS/OCCUPIED BANDWIDTH	20
7.1. Block Diagram of Test Setup	20
7.2. Specification Limits	20
7.3. Test Procedure	20
7.4. Test Results	20
8. MAXIMUM PEAK OUTPUT POWER	21
8.1. Block Diagram of Test Setup	21
8.2. Specification Limits	21
8.3. Test Procedure	22
8.4. Test Results	22
9. EMISSION LIMITATIONS	23
9.1. Block Diagram of Test Setup	23



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.2. Specification Limits.....	23
9.3. Test Procedure	23
9.4. Test Results	24
10. POWER SPECTRAL DENSITY	25
10.1. Block Diagram of Test Setup	25
10.2. Specification Limits.....	25
10.3. Test Procedure	25
10.4. Test Results	25
11. DEVIATION TO TEST SPECIFICATIONS	26

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT

Applicant : Pu Yuan Biotech Co., Ltd.

Manufacturer : Pu Yuan Biotech Co., Ltd.

EUT Description

(1) Product : Mesh Nebulizer

(2) Model : PY-010

(3) Brand : PU Yuan

(4) Power Supply: DC 5V

Applicable Standards:

Title 47 CFR FCC Part 15 Subpart C

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.


Date of Report: 2024. 04. 10

Reviewed by:



(Annie Yu/Supervisor)

Approved by:



(Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2024. 04. 10	Original Report	EM-F240077

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	DTS/Occupied Bandwidth	PASS
15.247(b)(3)	Maximum Peak Output Power	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	Compliance
Note: 1. Decision rule according to the limit of the test standard chapter, the test value is lower than the limit specified in the test chapter, and it is judged as Pass. 2. The uncertainties value is not used in determining the result. 3. N/A is an abbreviation for Not Applicable.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Pu Yuan Biotech Co., Ltd. Rm. B, 10F., No. 319, Sec. 2, Dunhua S. Rd., Taipei City 10669, Taiwan
Manufacturer	Pu Yuan Biotech Co., Ltd. Rm. B, 10F., No. 319, Sec. 2, Dunhua S. Rd., Taipei City 10669, Taiwan
Product	Mesh Nebulizer
Model	PY-010
Brand	PU Yuan

3.2. Description of EUT

Model	PY-010		
Serial Number	N/A		
Software Version	N/A		
Power Rating	DC 5V		
RF Features	BLE		
Transmit Type	1T1R		
Sample Status	Trial sample		
Test Sample	Sample No.	Test Item	Firmware
	01	RSE, Output Power	N/A
Date of Receipt	2023. 10. 30		
Date of Test	2024. 03. 27 ~ 04. 02		
Interface Ports of EUT	• DC In x1		
Accessories Supplied	• AC Adapter (2C) • USB Cable		

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information etc are provided by customer.

3.3. Reference Test Guidance

KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10:2013

3.4. Antenna Information

No.	Model	Manufacture	Antenna Type	Frequency (MHz)	Gain(dBi)
1.	SMD810X-S0X	SIGNAL ELECTRONIC CO., LTD.	PCB Antenna	2400-2500	-3.19

3.5. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK	1


Channel List							
BLE							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480

3.6. Descriptions of Key Components

Item	Supplier/Brand	Model	Specification
AC Adapter	UNIFIVE	UMB305-0512	I/P: 100-240V~, 50/60Hz, 0.16-0.12A O/P: DC 5V, 1.2A (Wall-Mount 2C)
Battery	Shenzhen JUHETUAN Science & Technology Co., Ltd.	PF782245	DC 3.8V
BLE Module	signal	SMD810X-S0X	BLE

3.7. Test Configuration

Mode	TX _{on} (ms)	TX _{on+off} (ms)	1/ TX _{on} (kHz)	Duty Cycle (x)	VBW(>1/ TX _{on}) (kHz)
BLE	0.635	0.790	1.575	0.804	1.6

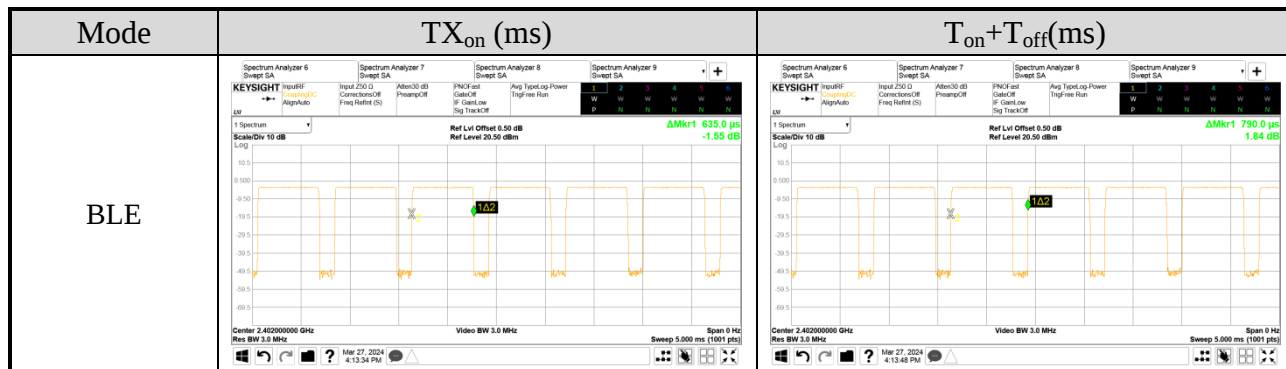

AC Conduction

Charge

Item	Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Spurious Emission(30MHz~1GHz)	---	---
	BLE	1Mbps	37
	Radiated Band Edge ^{Note1}	1Mbps	37/39
	Radiated Spurious Emission ^{Note1}	1Mbps	37/17/39

Item	Mode	Data Rate	Test Channel
Conducted Test Case	DTS/Occupied Bandwidth	1Mbps	37/17/39
	Peak Output Power	1Mbps	37/17/39
	Band Edge	1Mbps	37/39
	Spurious Emission	1Mbps	37/17/39
	Peak Power Spectral Density	1Mbps	37/17/39

Note 1: ☒ Mobile Device ☐ Portable Device
and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:
☐ Lie ☐ Side ☐ Stand

3.8. Output Power Setting

Mode	Centre Frequency (MHz)	Power Setting
BLE	2402	Default
	2440	Default
	2480	Default

3.9. Tested Supporting System List

3.9.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	Approval
1.	AC Adapter	UNIFIVE	UMB305-0512	M06-0000094	N/A
2.	Power Socket	AUDIX	N/A	N/A	N/A

3.9.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	USB Cable: Unshielded, Detachable, 1.5m
2.	AC Power Cord: Unshielded, Undetachable, 1.8m

3.10. Setup Configuration

3.10.1. EUT Configuration for Power Line & Radiated Emission (Charge Mode)



3.10.2. EUT Configuration for Radiated Emission



3.10.3. EUT Configuration for RF Conducted Test Items



3.11. Operating Condition of EUT

To set EUT on BLE function under continues transmitting and choosing channel.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.13.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test	☐	No. 7 Shielded Room	9kHz-150kHz	±3.6dB
	150kHz-30MHz		±3.3dB	
	☒	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
	150kHz-30MHz		±3.4dB	
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
	200MHz-1000MHz, 3m, Horizontal		±4.2dB	
	30MHz-200MHz, 3m, Vertical		±4.7dB	
	200MHz-1000MHz, 3m, Vertical		±4.8dB	
	1GHz-6GHz, 3m		±4.8dB	
	6GHz-18GHz, 3m		±4.3dB	
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
	200MHz-1000MHz, 3m, Horizontal		±4.2dB	
	30MHz-200MHz, 3m, Vertical		±4.7dB	
	200MHz-1000MHz, 3m, Vertical		±4.8dB	
	1GHz-6GHz, 3m		±4.5dB	
	6GHz-18GHz, 3m		±4.0dB	
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
	200MHz-1000MHz, 3m, Horizontal		±4.3dB	
	30MHz-200MHz, 3m, Vertical		±4.8dB	
	200MHz-1000MHz, 3m, Vertical		±4.9dB	
	1GHz-6GHz, 3m		±4.2dB	
	6GHz-18GHz, 3m		±3.8dB	
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
	200MHz-1000MHz, 3m, Horizontal		±4.1dB	
	30MHz-200MHz, 3m, Vertical		±4.8dB	
	200MHz-1000MHz, 3m, Vertical		±4.7dB	
	1GHz-6GHz, 3m		±4.8dB	
	6GHz-18GHz, 3m		±4.6dB	
		Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m

Remark : Uncertainty = $ku_c(y)$

Test Items	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENTLIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2024. 01. 09	1 Year
2.	A.M.N.	R&S	ENV432	101567	2023. 06. 02	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-1370-10	2024. 01. 15	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2023. 12. 14	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2023. 04. 13	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2023. 09. 06	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY52220368	2023.11.03	1 Year
2.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2023.12.05	1 Year
3.	Test Receiver	R&S	ESCI7	100923	2024.02.21	1 Year
4.	Amplifier	HP	8447D	2944A06669	2023.05.02	1 Year
5.	Microwave Amplifier	Agilent	8449B	3008A02678	2024.02.20	1 Year
6.	Microwave Amplifier	Keysight	83051A	MY56480113	2023.09.11	1 Year
7.	Loop Antenna	TESEQ	HLA 6121	60478	2024.02.20	1 Year
8.	Bilog Antenna	TESEQ	CBL6112D	33820	2024.02.17	1 Year
9.	Horn Antenna	EMCO	3115	9609-4927	2023.07.21	1 Year
10.	Horn Antenna	COM-POWER	AH-840	101092	2024.01.12	1 Year
11.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/ E130.5-O/O	2	2023.07.22	1 Year
12.	3GHz Notch Filter	Microwave	H3G018G1	484796	2023.07.22	1 Year
13.	Coaxial Cable	HUBER+SUHNER	S07212BD	RE-16	2023.05.10	1 Year
14.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2024.01.05	1 Year
15.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2023.08.21	1 Year
16.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2023.04.13	1 Year
17.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2024.02.21	1 Year
2.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2023.04.13	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.10

5.1.2. Shielded Room Setup Diagram

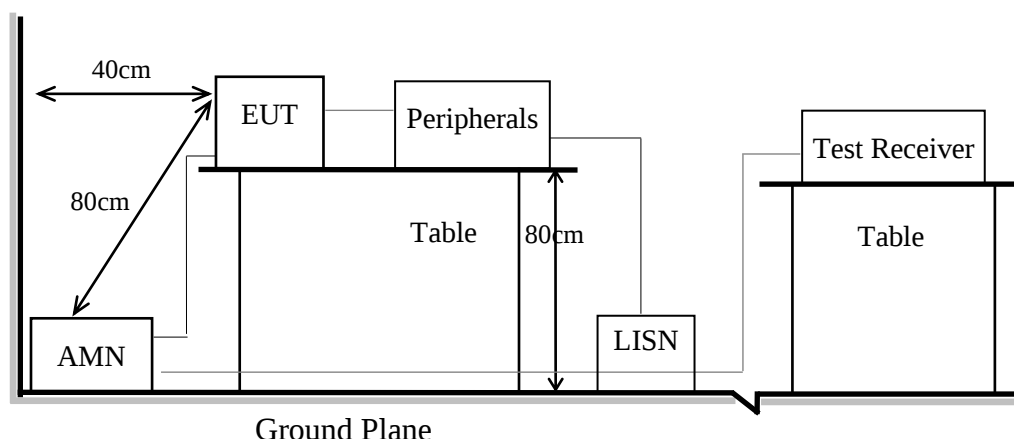

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.10


6.1.2. Setup Diagram for 9kHz-30MHz

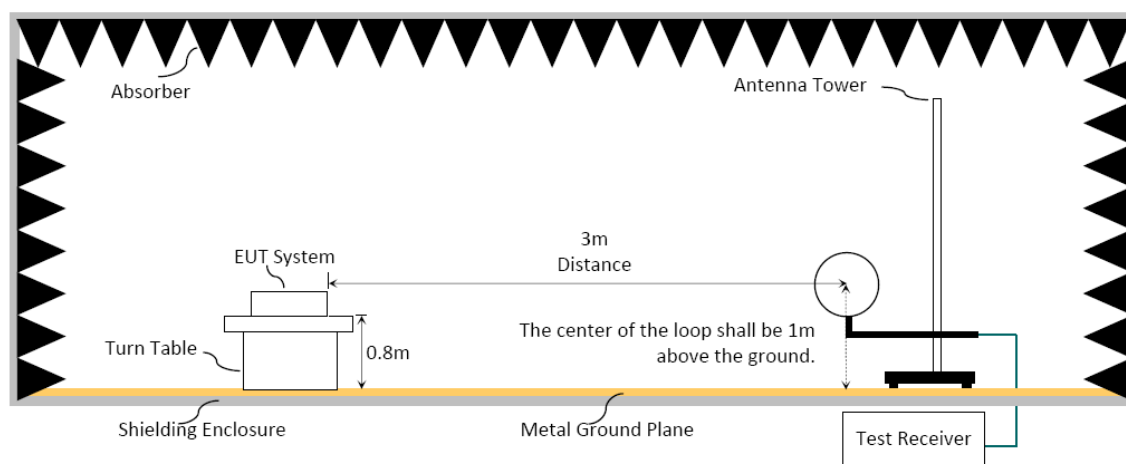

6.1.3. Setup Diagram for 30-1000MHz

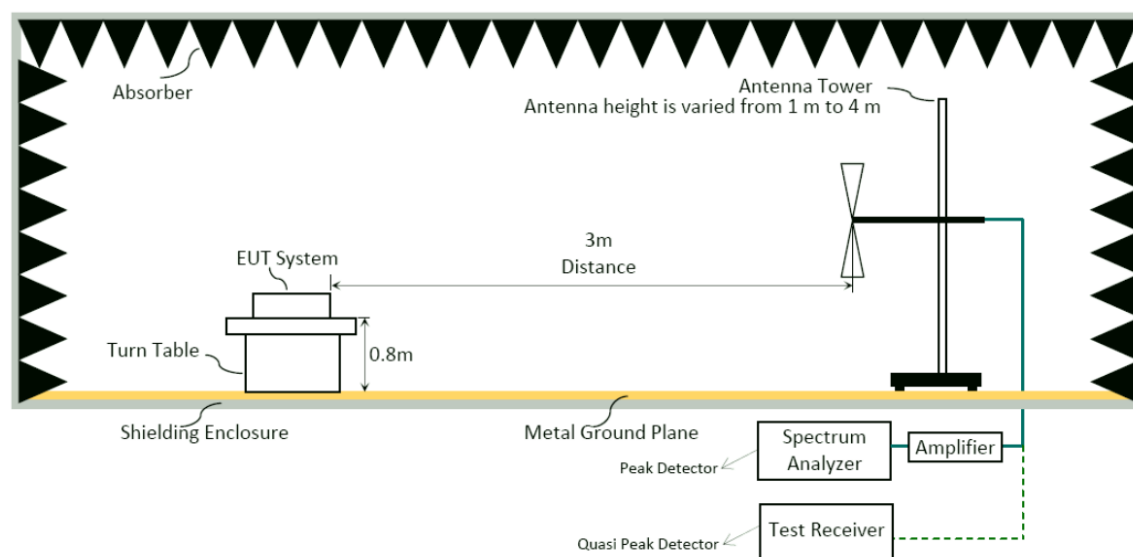

6.1.4. Setup Diagram for above 1GHz

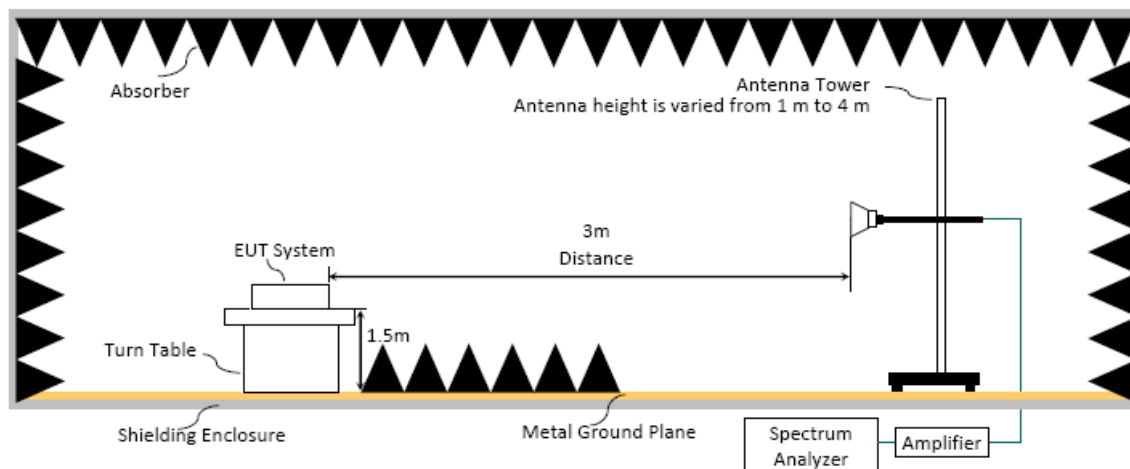

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dBμV/m	μV/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dBμV/m (Peak) 54.0 dBμV/m (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:

■ Option 1:

(1) RBW = 1MHz

(2) VBW $\geq 1/T$. (Duty Cycle $< 98\%$, when duty cycle presented in section 3.7)

Modulation Type	VBW Setting (VBW $\geq 1/T$)
BLE	1.6 kHz

(3) VBW = 10Hz (Duty Cycle $\geq 98\%$, when duty cycle presented in section 3.7)

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

□ Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

■ Peak Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB μ V).

■ Average Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB μ V).

□ Average Emission Level (dB μ V/m) = Peak Emission Level (dB μ V/m) + DCCF (dB)
Duty Cycle Correction Factor (DCCF) (dB) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7.


□ ERP (dBm) = Peak Emission Level (dB μ V/m) - 95.2 dB - 2.14 dB

6.5. Test Results

Please refer to Appendix A.

7. DTS/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

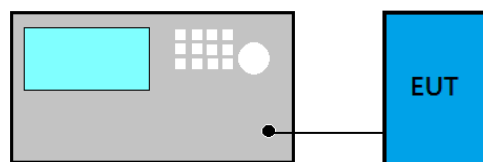

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

For DTS Bandwidth

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x to -6dB power to record the final bandwidth..

For 99% Occupied Bandwidth


- (1) Set Span range 1.5~5 times the OBW
- (2) Set RBW close to 1% to 5% of OBW.
- (3) Set $\text{VBW} \geq 3 \times \text{RBW}$.
- (4) Detector = Peak.
- (5) Trace mode = Max hold
- (6) Sweep = Auto couple.
- (7) Allow the trace to stabilize.

7.4. Test Results

Please refer to Appendix A

8. MAXIMUM PEAK OUTPUT POWER

8.1. Block Diagram of Test Setup

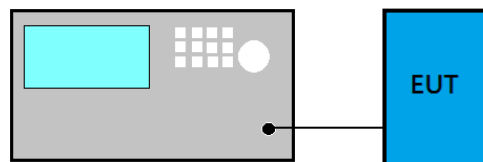

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

☐ **PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

☒ **Maximum peak conducted output power method:**

- (1) Set the RBW $\geq$ DTS bandwidth
- (2) Set VBW $\geq 3 \times$ RBW
- (3) Set span $\geq 3 \times$ RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

☐ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

☐ **Method AVGSA-2 (Spectrum channel power)**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS

9.1. Block Diagram of Test Setup

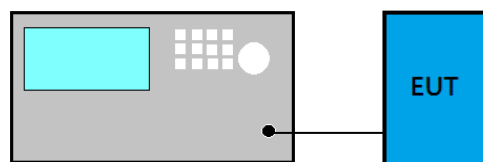

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

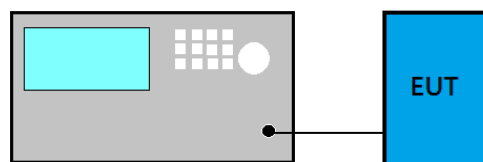

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

□ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Please refer to Appendix A



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST DATA AND PLOTS

(Model: PY-010)

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	10
A.2.3 Emissions in Non-restricted Frequency Bands:.....	11
A.3 DTS/OCCUPIED BANDWIDTH.....	12
A.3.1 DTS/Occupied Bandwidth Result.....	12
A.3.2 Measurement Plots	13
A.4 MAXIMUM PEAK OUTPUT POWER	14
A.4.1 Peak Output Power	14
A.4.2 Measurement Plots	14
A.5 EMISSION LIMITATIONS	15
A.6 POWER SPECTRAL DENSITY	17
A.6.1 Power Spectral Density Result	17
A.6.2 Measurement Plots	17

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2024/04/02	Temp./Hum.	20°C/59%
Test Voltage	AC 120V 60Hz	Tested By	Roy Hung

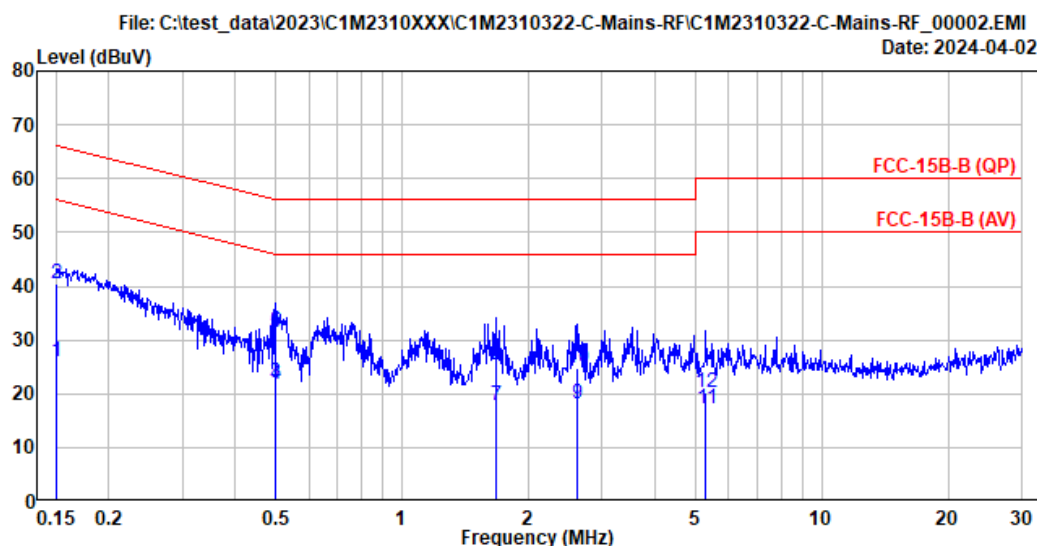

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 20°C/59%	Test Rating	: 120Vac/60Hz
EUT Model	: PY-010	Engineer	: Roy Hung
Test Mode	: Charge		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.30	0.03	9.85	5.90	26.08	55.96	29.88	Average
2	0.151	10.30	0.03	9.85	20.34	40.52	65.96	25.44	QP
3	0.501	10.28	0.03	9.85	1.85	22.01	46.00	23.99	Average
4	0.501	10.28	0.03	9.85	1.68	21.84	46.00	24.16	Average
5	0.501	10.28	0.03	9.85	11.13	31.29	56.00	24.71	QP
6	0.501	10.28	0.03	9.85	11.40	31.56	56.00	24.44	QP
7	1.682	10.31	0.05	9.86	-2.41	17.81	46.00	28.19	Average
8	1.682	10.31	0.05	9.86	5.09	25.31	56.00	30.69	QP
9	2.609	10.34	0.07	9.86	-2.26	18.01	46.00	27.99	Average
10	2.609	10.34	0.07	9.86	4.48	24.75	56.00	31.25	QP
11	5.294	10.42	0.09	9.87	-3.03	17.35	50.00	32.65	Average
12	5.294	10.42	0.09	9.87	-0.24	20.14	60.00	39.86	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/04/02	Temp./Hum.	20°C/59%
Test Voltage	AC 120V 60Hz	Tested By	Roy Hung

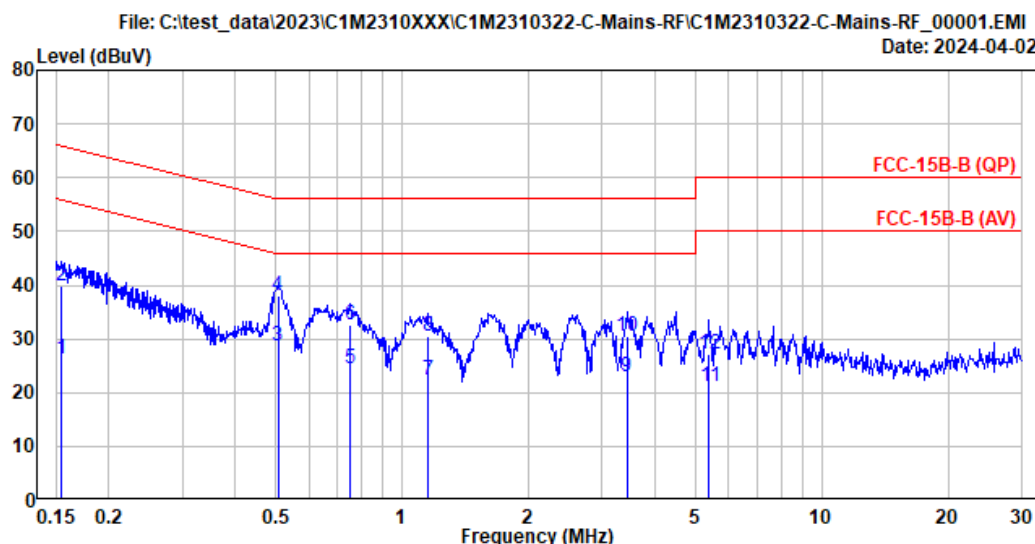

Site No. : No.8 Shielded Room
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC-15B-B (QP)
Environment : 20°C/59%
EUT Model : PY-010
Test Mode : Charge
Data No. : 1
Phase : Line
Test Rating : 120Vac/60Hz
Engineer : Roy Hung

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.30	0.03	9.85	5.98	26.16	55.79	29.63	Average
2	0.154	10.30	0.03	9.85	19.72	39.90	65.79	25.89	QP
3	0.506	10.27	0.03	9.85	8.64	28.79	46.00	17.21	Average
4	0.506	10.27	0.03	9.85	17.94	38.09	56.00	17.91	QP
5	0.750	10.28	0.04	9.85	4.16	24.33	46.00	21.67	Average
6	0.750	10.28	0.04	9.85	12.56	32.73	56.00	23.27	QP
7	1.152	10.28	0.04	9.85	2.20	22.37	46.00	23.63	Average
8	1.152	10.28	0.04	9.85	10.22	30.39	56.00	25.61	QP
9	3.432	10.32	0.08	9.86	2.55	22.81	46.00	23.19	Average
10	3.432	10.32	0.08	9.86	10.14	30.40	56.00	25.60	QP
11	5.401	10.37	0.09	9.87	0.68	21.01	50.00	28.99	Average
12	5.401	10.37	0.09	9.87	6.92	27.25	60.00	32.75	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/03/29	Temp./Hum.	24°C/67%
Test Voltage	(1)AC 120V 60Hz (2)DC 3.8V (Via Battery)	Tested By	Biran Hsieh

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	Charge	Frequency	---
------	--------	-----------	-----

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.154	23.51	1.22	26.50	30.93	29.16	40.00	10.84	Peak
122.780	16.53	2.32	26.31	33.84	26.39	43.50	17.11	Peak
437.950	21.69	5.82	26.77	36.93	37.67	46.00	8.33	Peak
679.080	24.45	7.20	27.49	32.51	36.67	46.00	9.33	Peak
923.708	26.64	9.04	26.96	32.30	41.03	46.00	4.97	Peak
980.720	26.83	9.16	26.89	34.24	43.34	54.00	10.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.120	23.53	1.22	26.50	32.01	30.26	40.00	9.74	Peak
100.620	16.53	2.32	26.31	36.57	29.12	43.50	14.38	Peak
406.968	21.69	5.82	26.77	33.54	34.28	46.00	11.72	Peak
650.122	24.49	7.26	27.49	32.97	37.23	46.00	8.77	Peak
902.640	26.18	8.74	27.14	33.39	41.18	46.00	4.82	Peak
965.380	26.71	9.09	26.93	33.79	42.66	54.00	11.34	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE				Frequency	TX 2402MHz		
------	-----	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.164	23.51	1.22	26.50	30.09	28.31	40.00	11.69	Peak
101.780	16.53	2.32	26.31	33.57	26.12	43.50	17.38	Peak
431.968	21.69	5.82	26.77	33.52	34.27	46.00	11.73	Peak
681.258	24.45	7.20	27.49	32.58	36.74	46.00	9.26	Peak
957.708	26.64	9.04	26.96	31.93	40.66	46.00	5.34	Peak
979.242	26.83	9.16	26.89	32.10	41.20	54.00	12.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.59	1.22	26.50	32.35	30.66	40.00	9.34	Peak
101.780	16.53	2.32	26.31	37.23	29.77	43.50	13.73	Peak
431.968	21.69	5.82	26.77	34.24	34.99	46.00	11.01	Peak
692.122	24.49	7.26	27.49	33.27	37.53	46.00	8.47	Peak
904.164	26.18	8.74	27.14	33.92	41.71	46.00	4.29	Peak
965.274	26.71	9.09	26.93	33.56	42.42	54.00	11.58	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

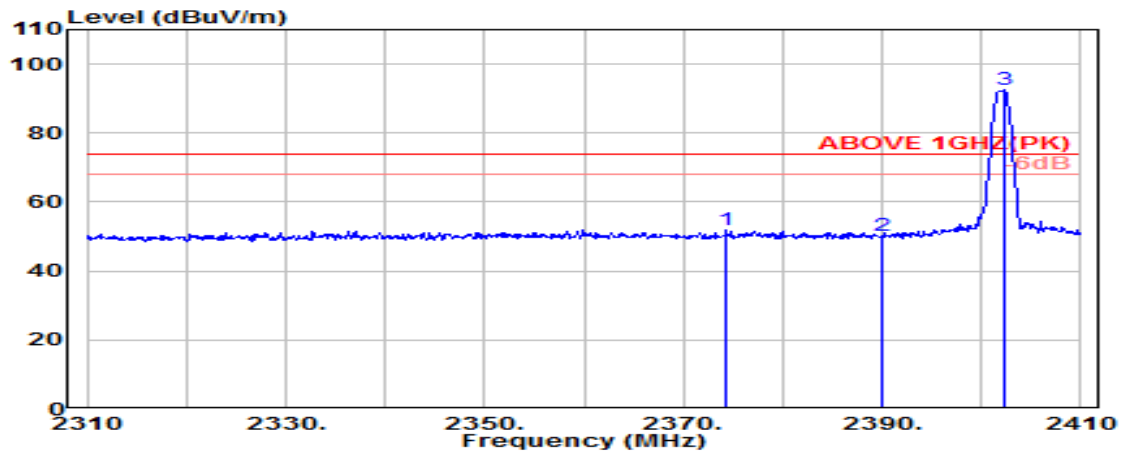

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.400	28.20	6.01	34.43	51.97	51.75	74.00	22.25	Peak
2390.000	28.20	6.03	34.44	50.63	50.43	74.00	23.57	Peak
@ 2402.300	28.21	6.05	34.44	92.57	92.39	---	---	Peak

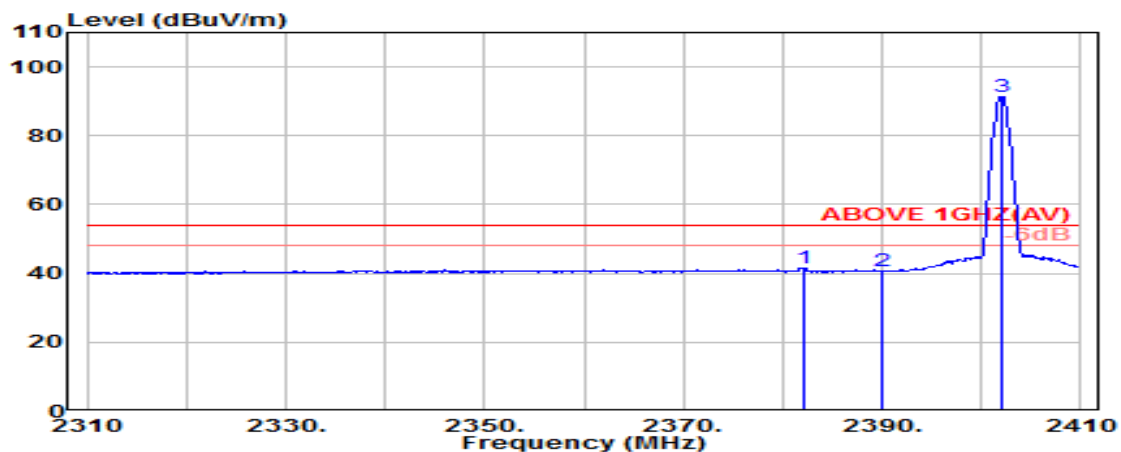


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.100	28.20	6.02	34.44	41.90	41.68	54.00	12.32	Average
2390.000	28.20	6.03	34.44	40.95	40.75	54.00	13.25	Average
@ 2402.000	28.21	6.05	34.44	91.70	91.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

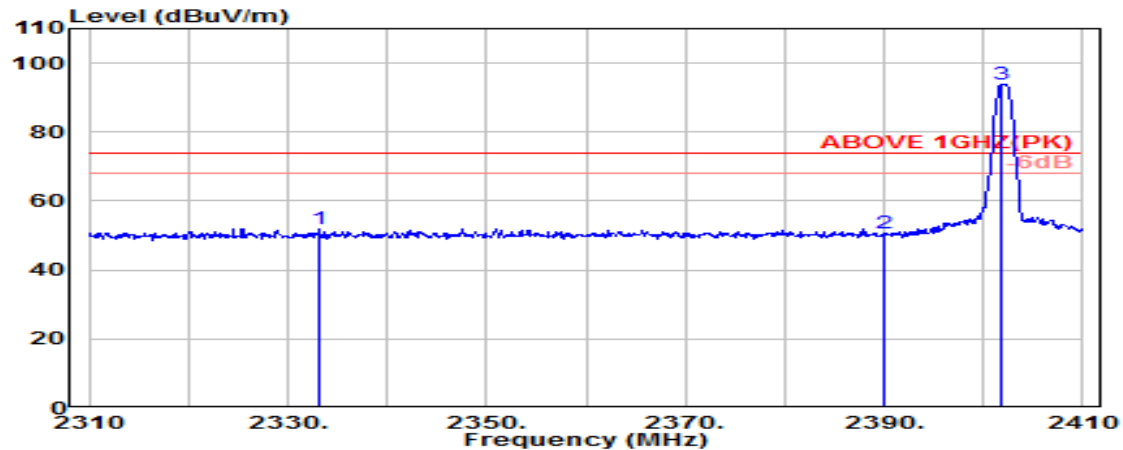

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.200	28.03	5.95	34.43	52.43	51.99	74.00	22.01	Peak
2390.000	28.20	6.03	34.44	50.95	50.75	74.00	23.25	Peak
@ 2401.800	28.21	6.05	34.44	94.07	93.89	---	---	Peak

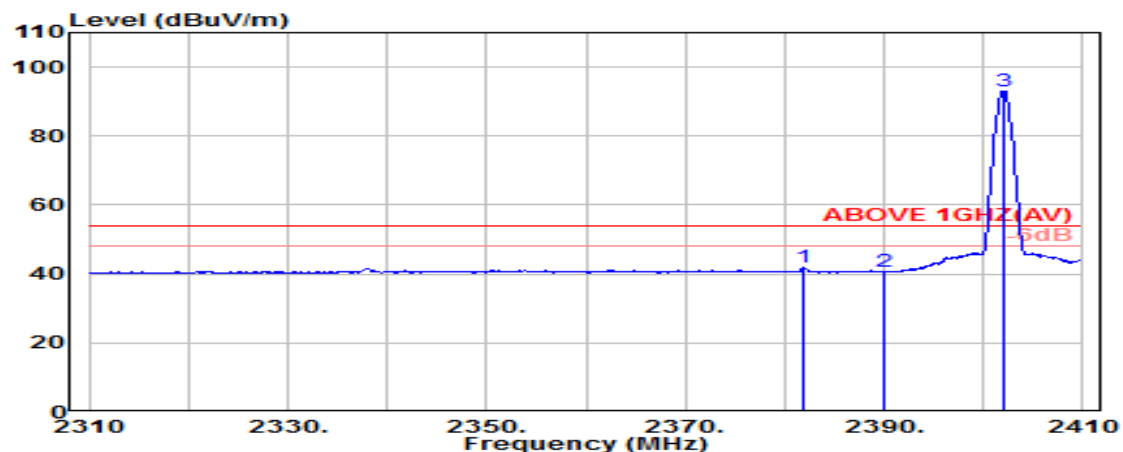


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.800	28.20	6.02	34.44	42.00	41.79	54.00	12.21	Average
2390.000	28.20	6.03	34.44	40.92	40.72	54.00	13.28	Average
@ 2402.000	28.21	6.05	34.44	93.33	93.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

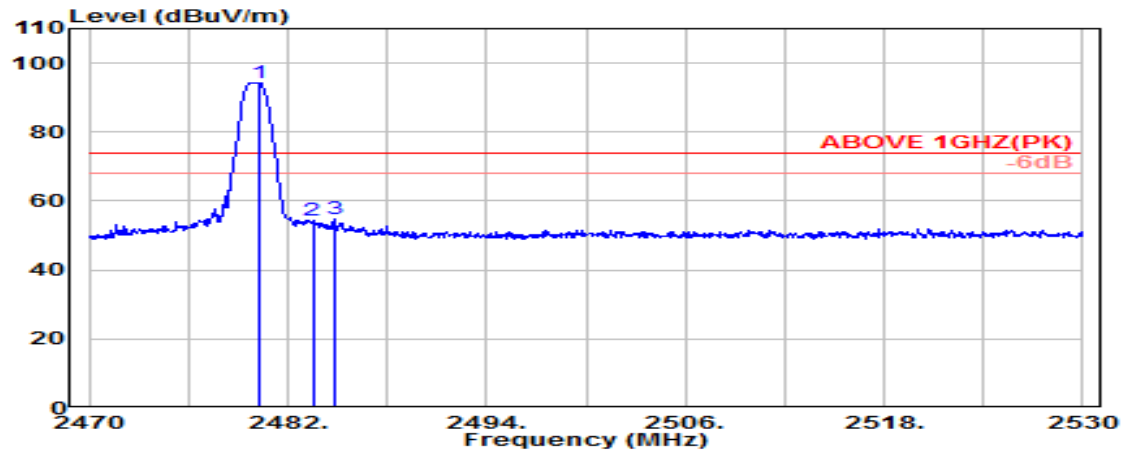

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.46	6.16	34.46	94.17	94.34	---	---	Peak
2483.500	28.47	6.17	34.46	54.09	54.27	74.00	19.73	Peak
2484.800	28.47	6.17	34.46	54.52	54.71	74.00	19.29	Peak

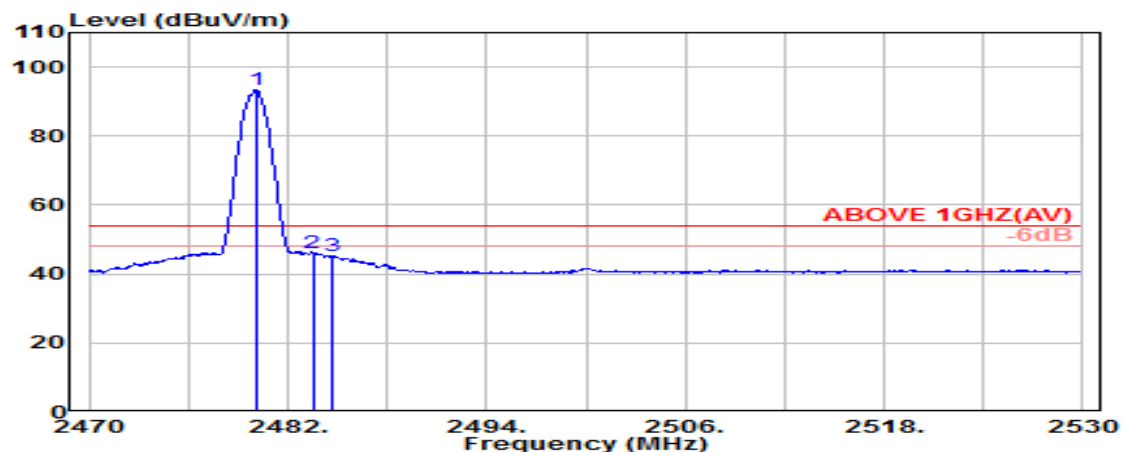


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.46	93.21	93.38	---	---	Average
2483.500	28.47	6.17	34.46	45.95	46.13	54.00	7.87	Average
2484.700	28.47	6.17	34.46	45.05	45.23	54.00	8.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

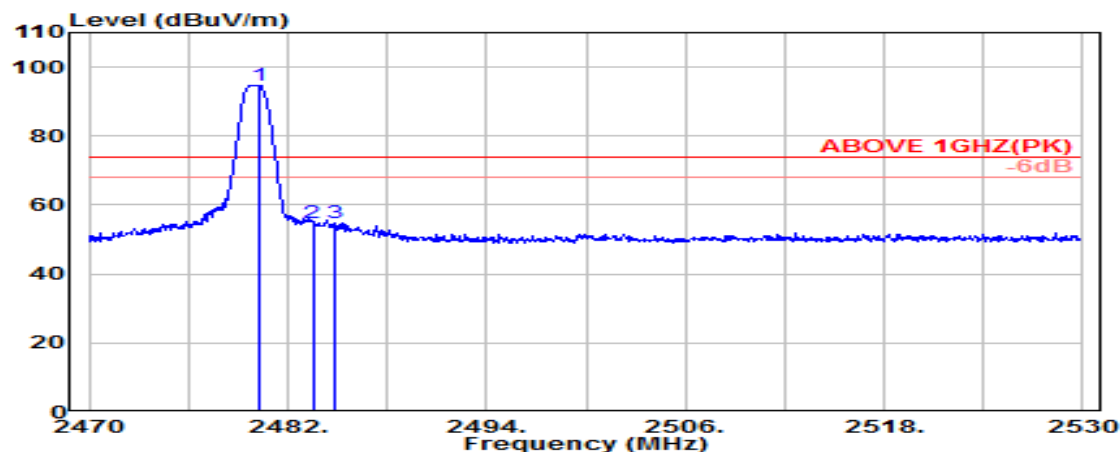

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.46	6.16	34.46	94.53	94.70	---	---	Peak
2483.500	28.47	6.17	34.46	54.71	54.89	74.00	19.11	Peak
2484.850	28.47	6.17	34.46	54.80	54.98	74.00	19.02	Peak

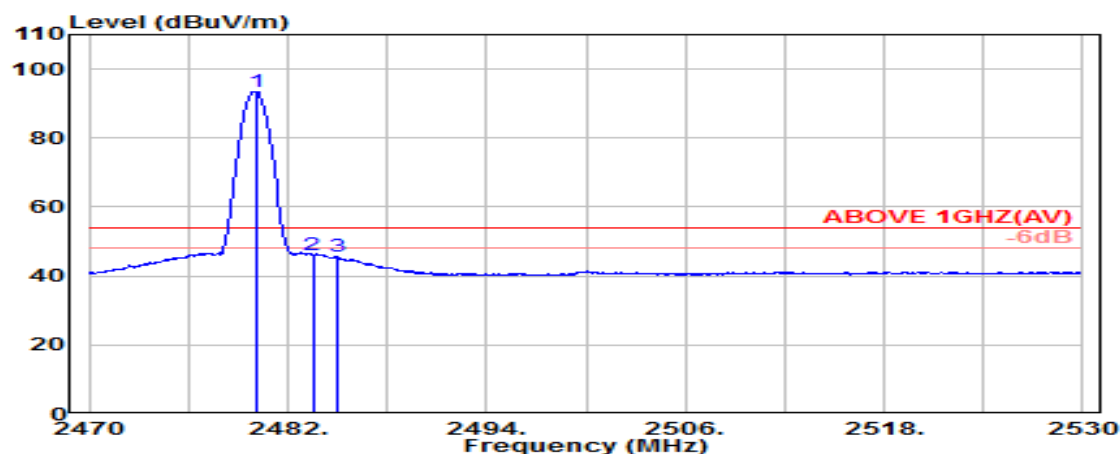

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.46	93.42	93.59	---	---	Average
2483.500	28.47	6.17	34.46	45.77	45.94	54.00	8.06	Average
2484.950	28.47	6.17	34.46	45.39	45.57	54.00	8.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.21	8.32	34.34	42.82	50.02	54.00	3.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.21	8.32	34.34	45.70	52.90	54.00	1.10	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.42	8.37	34.32	41.66	49.13	54.00	4.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.42	8.37	34.32	42.90	50.37	54.00	3.63	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.42	34.31	41.21	49.05	54.00	4.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.42	34.31	43.54	51.38	54.00	2.62	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a) general radiated emissions limits is not required.

A.3 DTS/OCCUPIED BANDWIDTH

Test Date	2024/03/27	Temp./Hum.	25°C/48%
Cable Loss	0.50dB	Tested By	Biran Hsieh
Test Voltage	DC 3.8V (Via Battery)		


A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE	2402	0.6794	1.0276	>500kHz
	2440	0.6772	1.0304	
	2480	0.6826	1.0216	

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

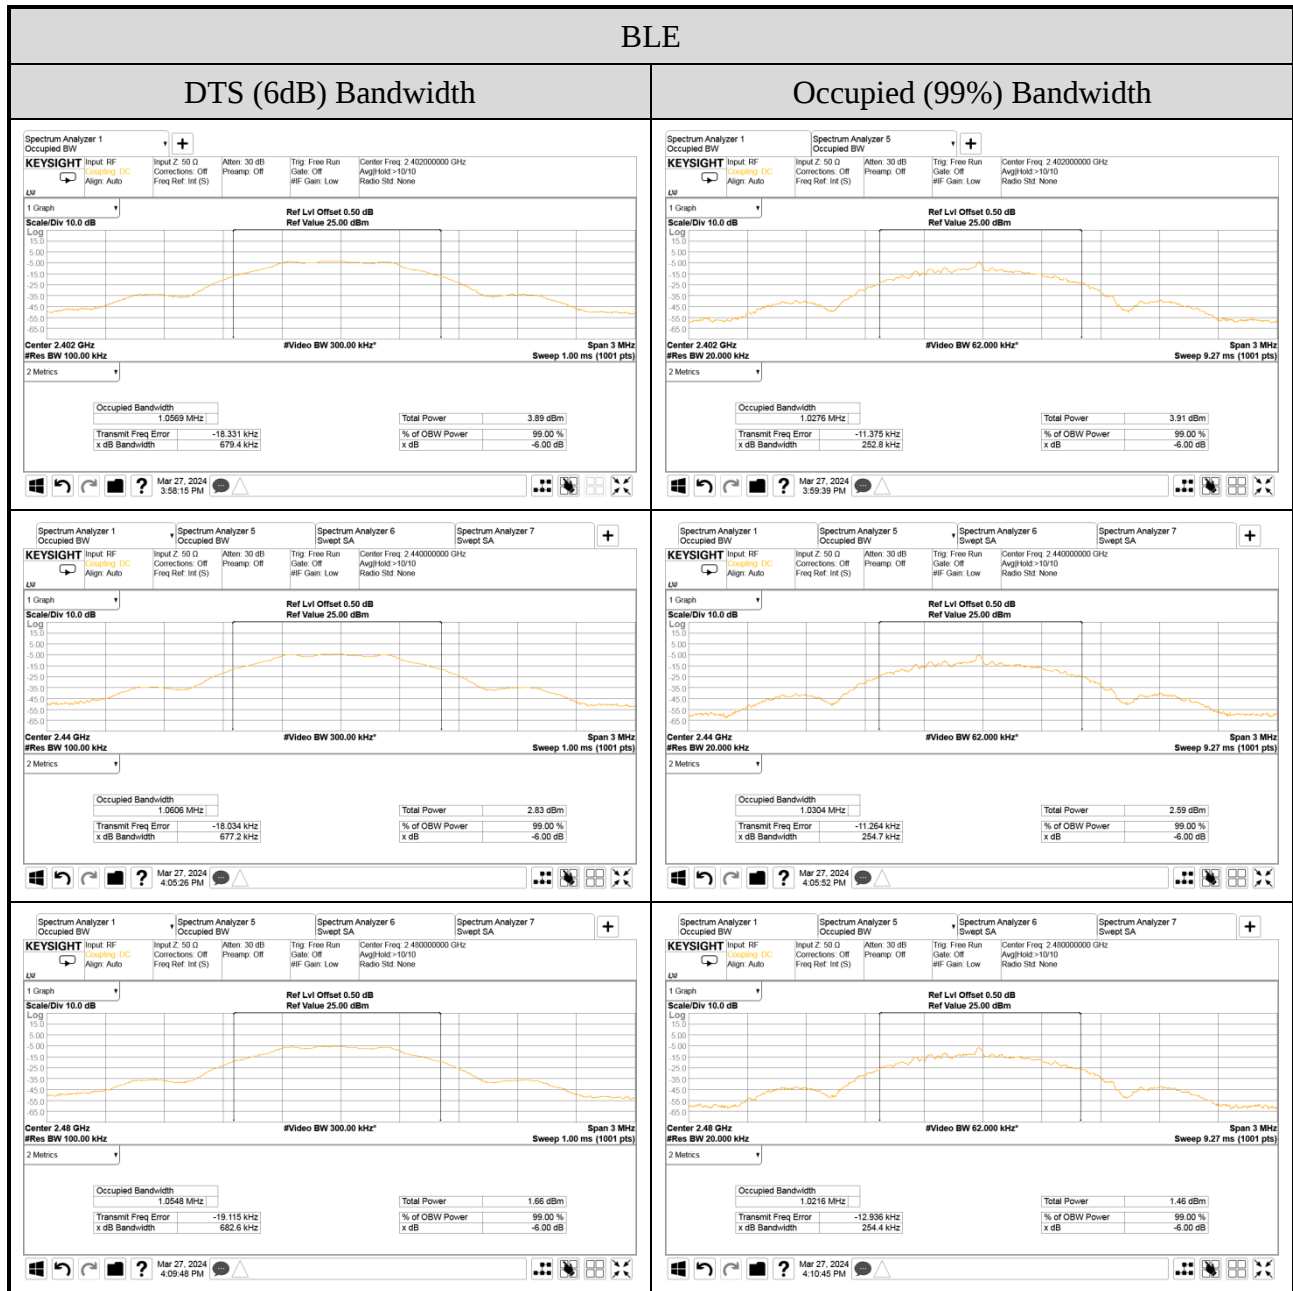

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2024/03/27	Temp./Hum.	25°C/48%
Cable Loss	0.50dB	Tested By	Biran Hsieh
Test Voltage	DC 3.8V (Via Battery)		

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)	Limit
BLE	2402	-3.04	<30dBm
	2440	-4.06	
	2480	-5.32	

Note: The results have been included cable loss.

A.4.2 Measurement Plots



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.5 EMISSION LIMITATIONS

Test Date	2024/03/27	Temp./Hum.	25°C/48%
Cable Loss	0.50dB	Tested By	Biran Hsieh
Test Voltage	DC 3.8V (Via Battery)		



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

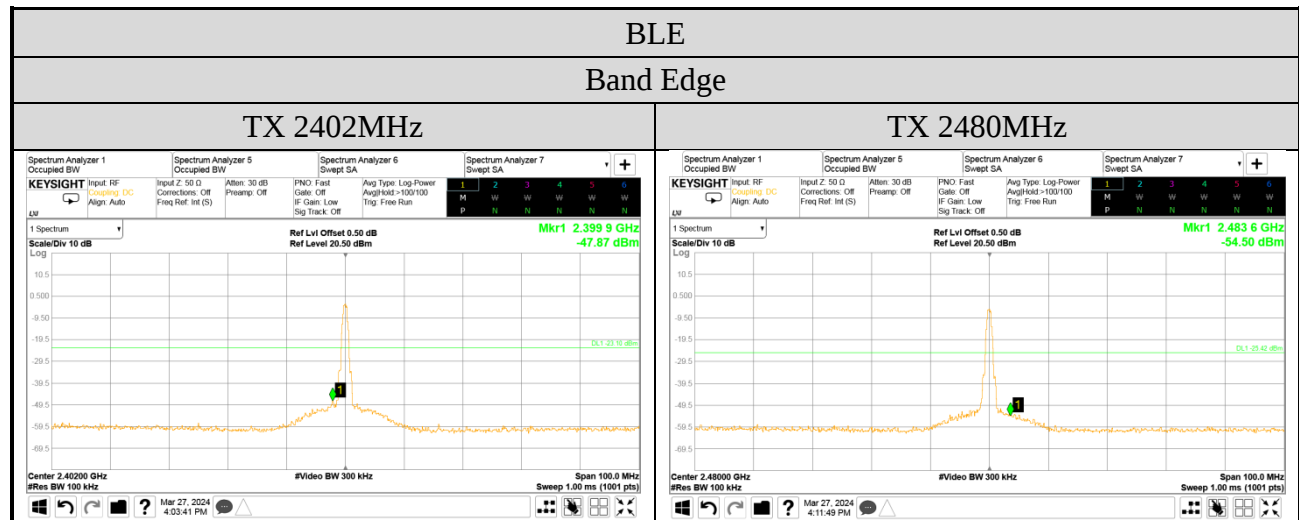

A.6 POWER SPECTRAL DENSITY

Test Date	2024/03/27	Temp./Hum.	25°C/48%
Cable Loss	0.50dB	Tested By	Biran Hsieh
Test Voltage	DC 3.8V (Via Battery)		


A.6.1 Power Spectral Density Result

Mode	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
BLE	2402	-3.09	<8 dBm/3kHz
	2440	-4.13	
	2480	-5.42	

Note: 1. All results have been included cable loss and Simultaneous Factor.

2. For KDB558074 D01V04, in the test result, when RBW set at 100kHz is stricter than 3kHz.

A.6.2 Measurement Plots

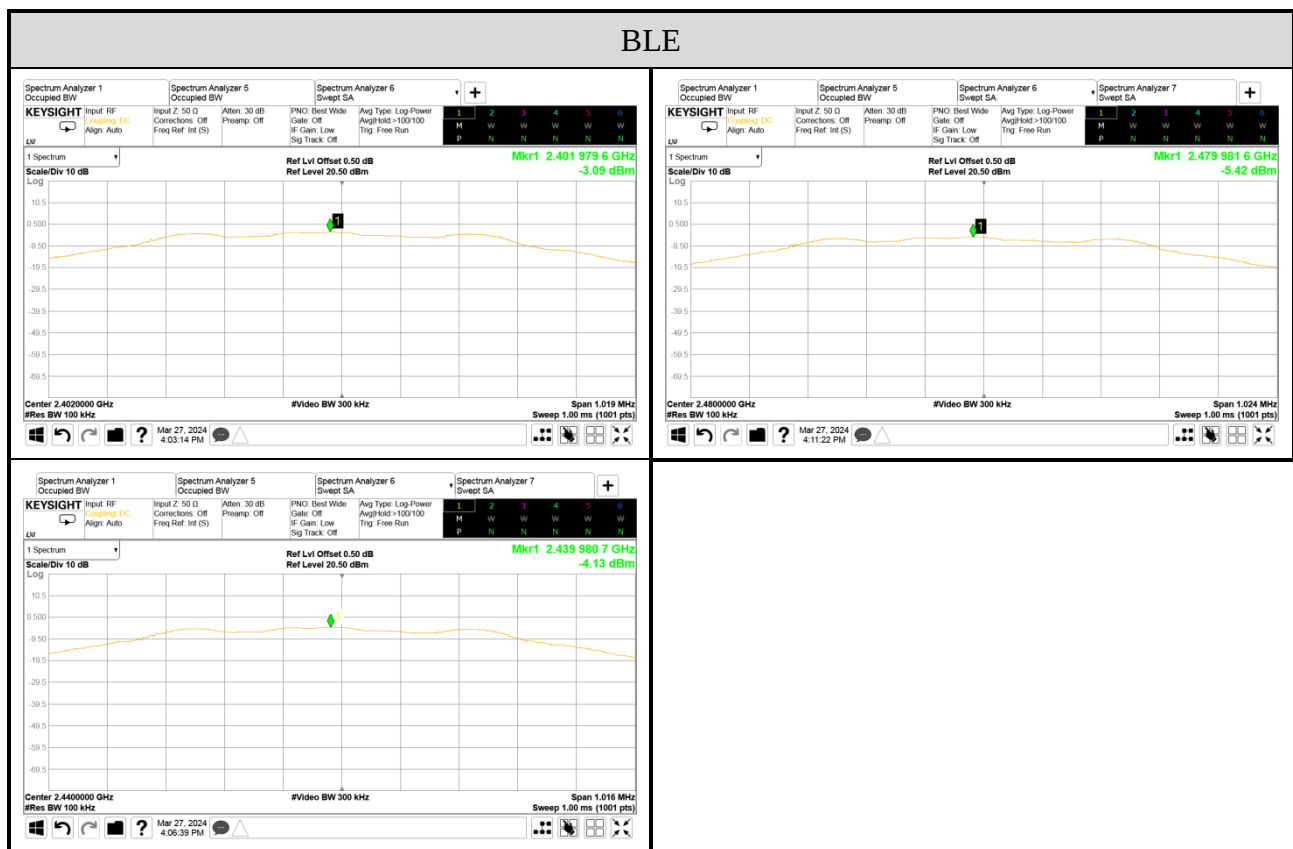

Note: All results have been included cable loss.



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX B

TEST PHOTOGRAPHS

(Model: PY-010)