



# ANTENNA TEST REPORT

Applicant	K.S. Terminals Inc No.08, Zhangbin E. 3rd Road., Xianxi Township, Changhua County 507 Taiwan
Brand	 The logo for KST, featuring the letters 'KST' in a large, bold, red, sans-serif font. A small 'TM' symbol is positioned in the top right corner of the 'ST'.
Manufacturer	K.S. Terminals Inc No.08, Zhangbin E. 3rd Road., Xianxi Township, Changhua County 507 Taiwan
Product Name	EV Charging Connectors
Model Name	VCPNXD350A0
Report No	4791194982
Received Date	2024/3/6
Test Period	2024/3/25
Issued Date	2024/8/27

**The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.**

**Release Note**

<b>Rev.</b>	<b>Date</b>	<b>Revisions</b>	<b>Revised By</b>
--	2024/8/27	-	-

## Table of Contents

1. Description of Antenna.....	3
2. Test Frequency and Polarization .....	4
3. Test Location and Address.....	5
4. Measuring Instrument List (Test Equipment) .....	6
5. Test Connection Diagram and Condition .....	7
6. Test Procedure .....	8
7. Test Result.....	9
Appendix I : Photographs of Test Configuration .....	10
Appendix II : Photographs of the Antenna Outview .....	12

## 1. Description of Antenna

Ant. No.	Brand Name	Model Name	Ant. Type	Operation Mode
1	N/A	N/A	PCB	315MHz


Note:

1. The above Antenna information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual.

## 2. Test Frequency and Polarization

The tests frequency is declared by manufacturer.

Test Frequency (MHz)
315

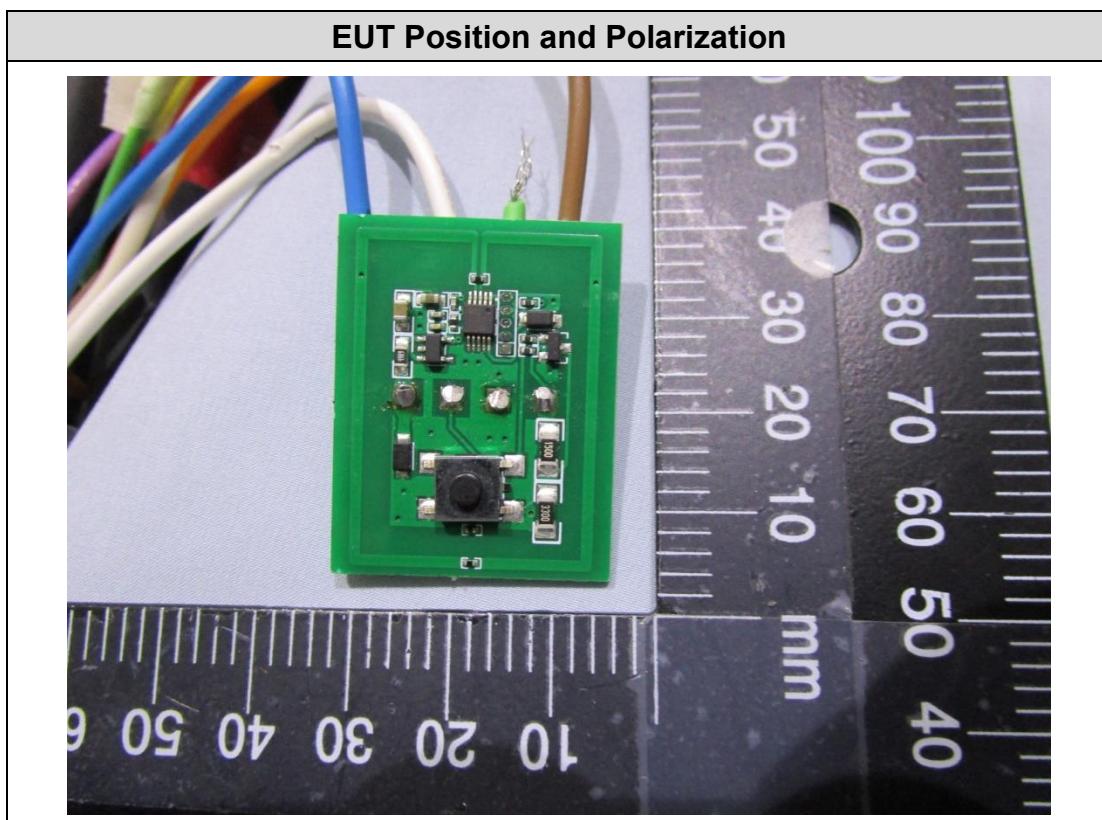

### 3. Test Location and Address

Test Location	Underwriters Laboratories Taiwan Co., Ltd.,
Address	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Description	All measurement facilities used to collect the measurement data are located at Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

## 4. Measuring Instrument List (Test Equipment)

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.


Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired Date
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	781	2023/12/27	2024/12/26
MXG Vector Signal Generator	Keysight Technologies	N5182B	MY56200244	2023/12/11	2024/12/10
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	2023/11/29	2024/11/28
Cables	Hanyitek	HPMC40KM90KF	CB038	2024/2/12	2025/2/10
Support Calibration Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired Date
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	01690	2023/12/8	2024/12/7

### UL Software

Software	Version
Antenna Pattern Measurement System	1.0.0.0

## 5. Test Connection Diagram and Condition

Test Facility	Test Site No.	Environmental Condition	Test Date	Tested by
Fully Anechoic Chamber	1277	23°C/65%RH	2024/3/25	Waternil Guan

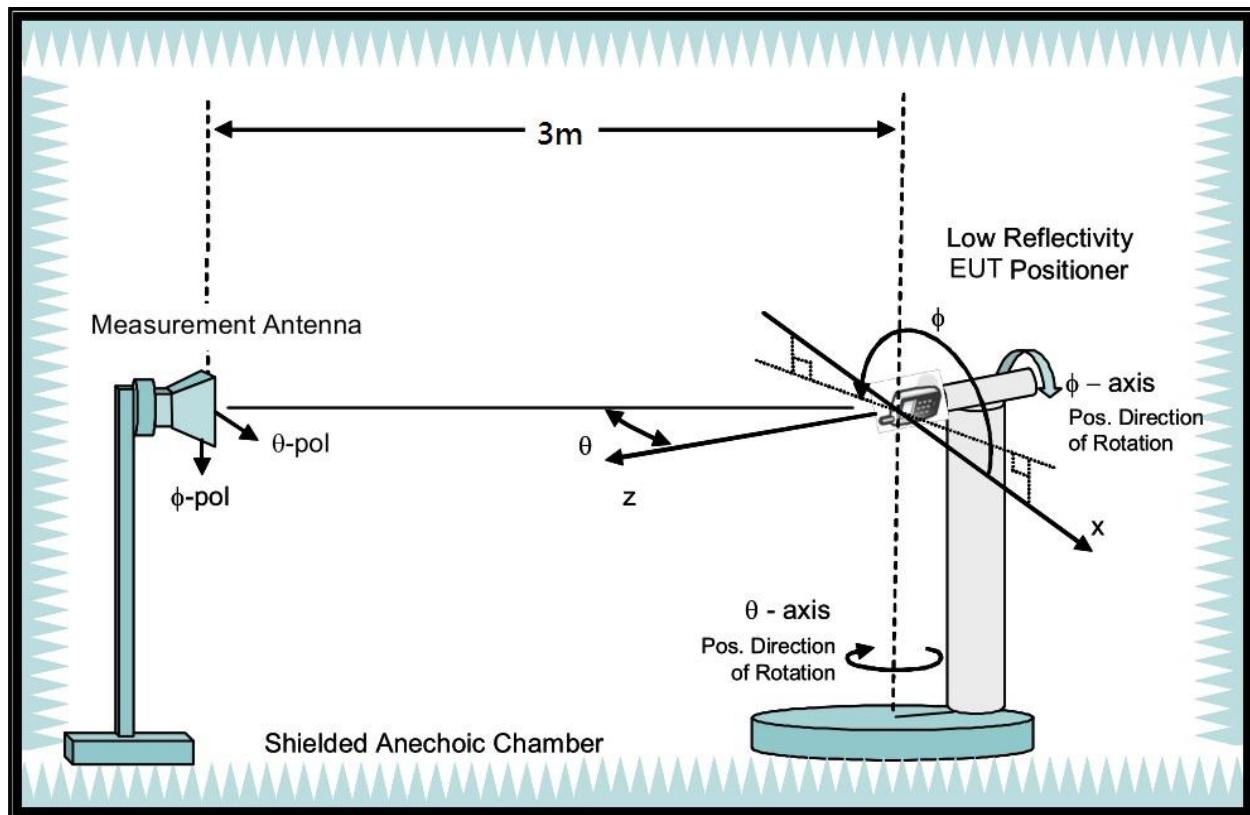

## 6. Test Procedure

1. Set the Calibration Antenna on multi-axis positioner and connect to signal generator for capture the correction factor.
2. Signal generator insertion normalize and calculate the standard antenna factor with spectrum analyzer.
3. Calibration Antenna change to the EUT's antenna.
4. The EUT is then stepped between 0 to 360 degrees along the theta axis.


## 7. Test Result

Maximum gain result refer below table:

Polarization	Test Frequency (MHz)	X-Y Plane Gain (dBi)	X-Z Plane Gain (dBi)	Y-Z Plane Gain (dBi)
Vertical	315 MHz	-24.97	-19.83	-24.45
Horizontal	315 MHz	-20.3	-17.14	-20.73

## Appendix I : Photographs of Test Configuration



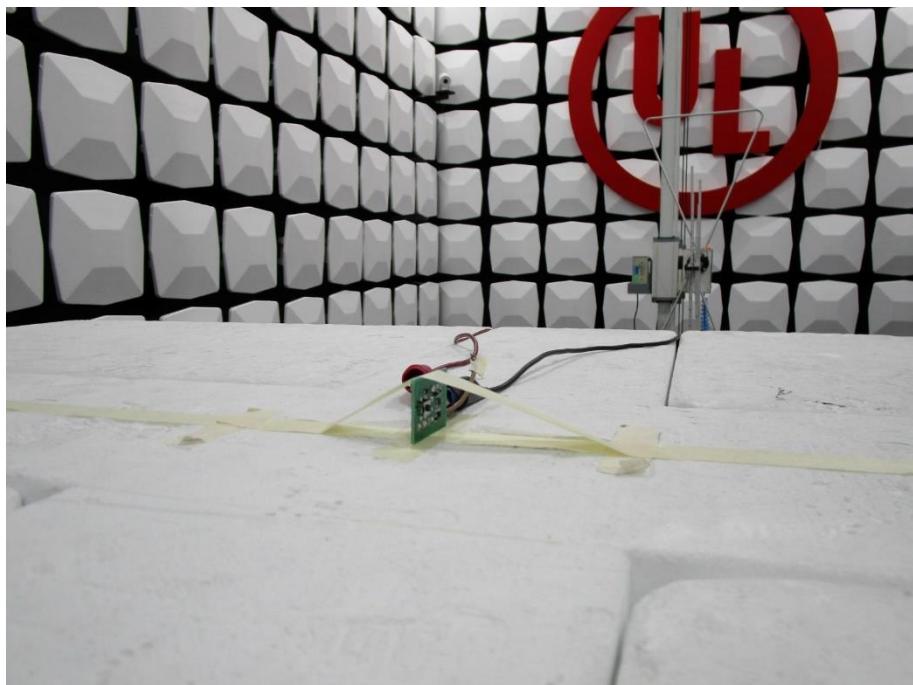

## Appendix II : Photographs of the Antenna Outview

