



Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

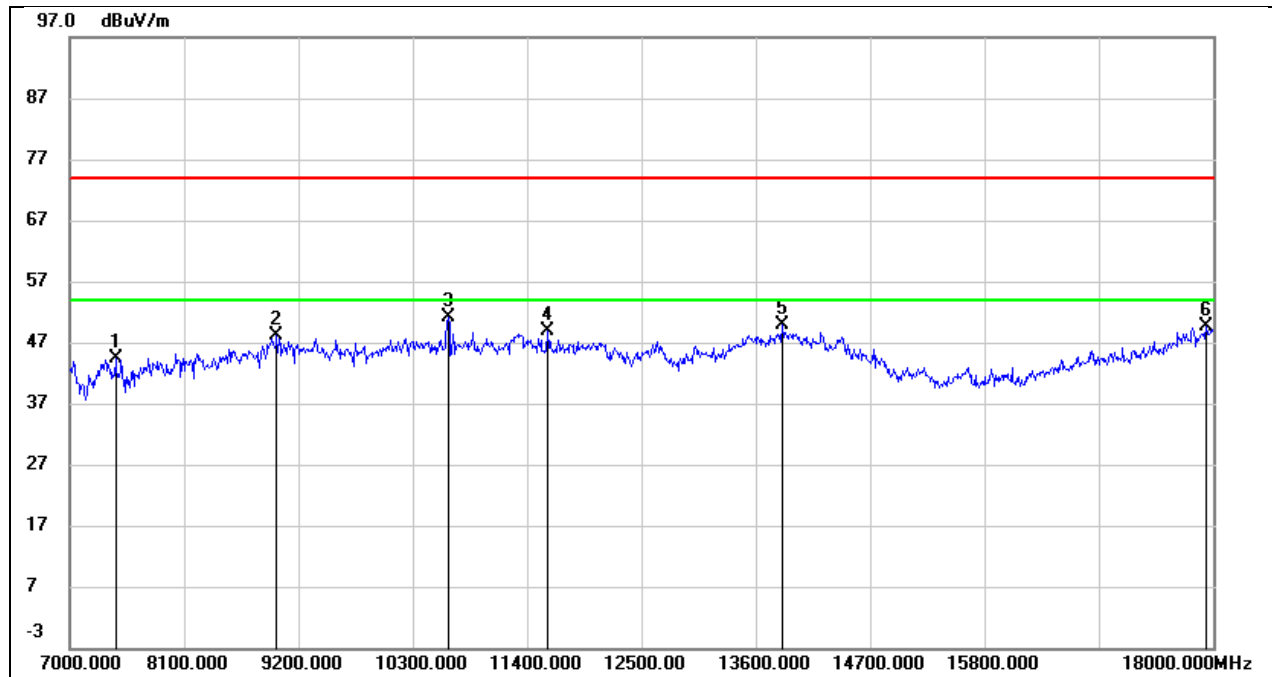


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7440.000	36.15	8.30	44.45	74.00	-29.55	peak
2	8991.000	36.27	11.83	48.10	74.00	-25.90	peak
3	10641.000	37.68	13.54	51.22	74.00	-22.78	peak
4	11598.000	32.31	16.66	48.97	74.00	-25.03	peak
5	13853.000	27.51	22.30	49.81	74.00	-24.19	peak
6	17934.000	21.52	28.09	49.61	74.00	-24.39	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

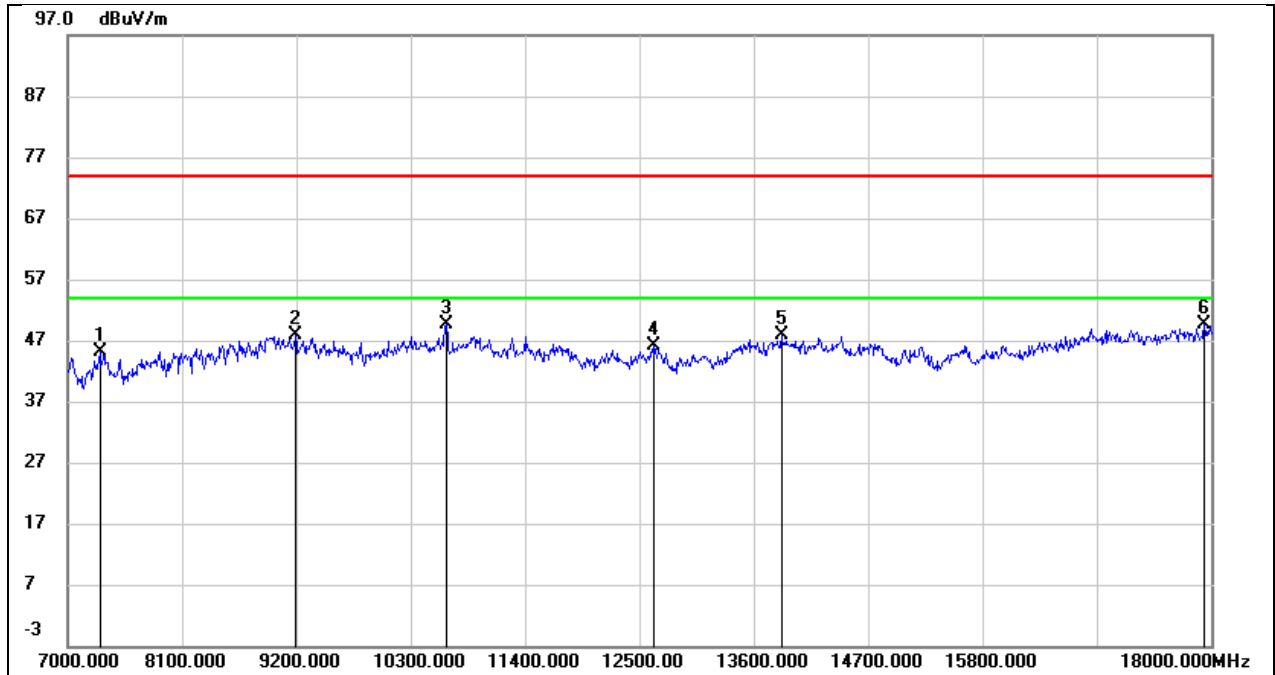


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.70	8.54	45.24	74.00	-28.76	peak
2	9189.000	37.31	10.48	47.79	74.00	-26.21	peak
3	10641.000	36.36	13.17	49.53	74.00	-24.47	peak
4	12643.000	28.95	17.07	46.02	74.00	-27.98	peak
5	13864.000	27.17	20.67	47.84	74.00	-26.16	peak
6	17934.000	23.38	26.18	49.56	74.00	-24.44	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

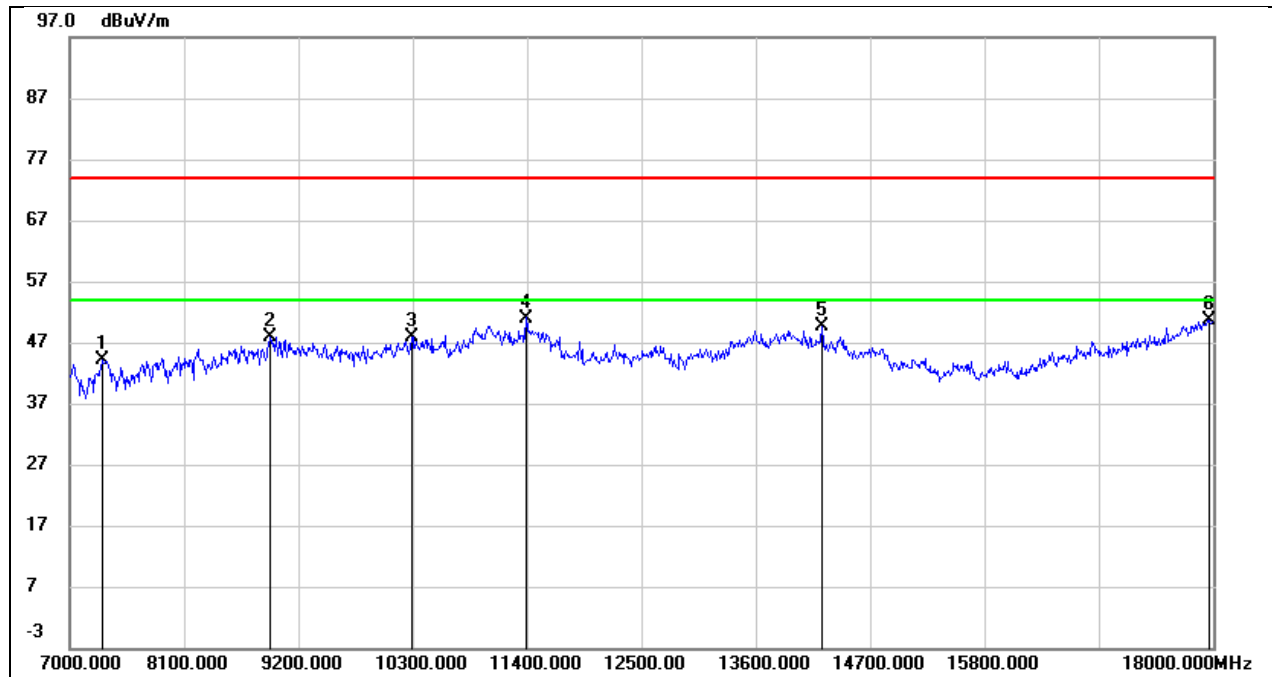


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.02	7.99	44.01	74.00	-29.99	peak
2	8925.000	37.13	10.85	47.98	74.00	-26.02	peak
3	10289.000	35.37	12.61	47.98	74.00	-26.02	peak
4	11389.000	34.74	16.26	51.00	74.00	-23.00	peak
5	14238.000	27.88	21.67	49.55	74.00	-24.45	peak
6	17956.000	22.42	28.21	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

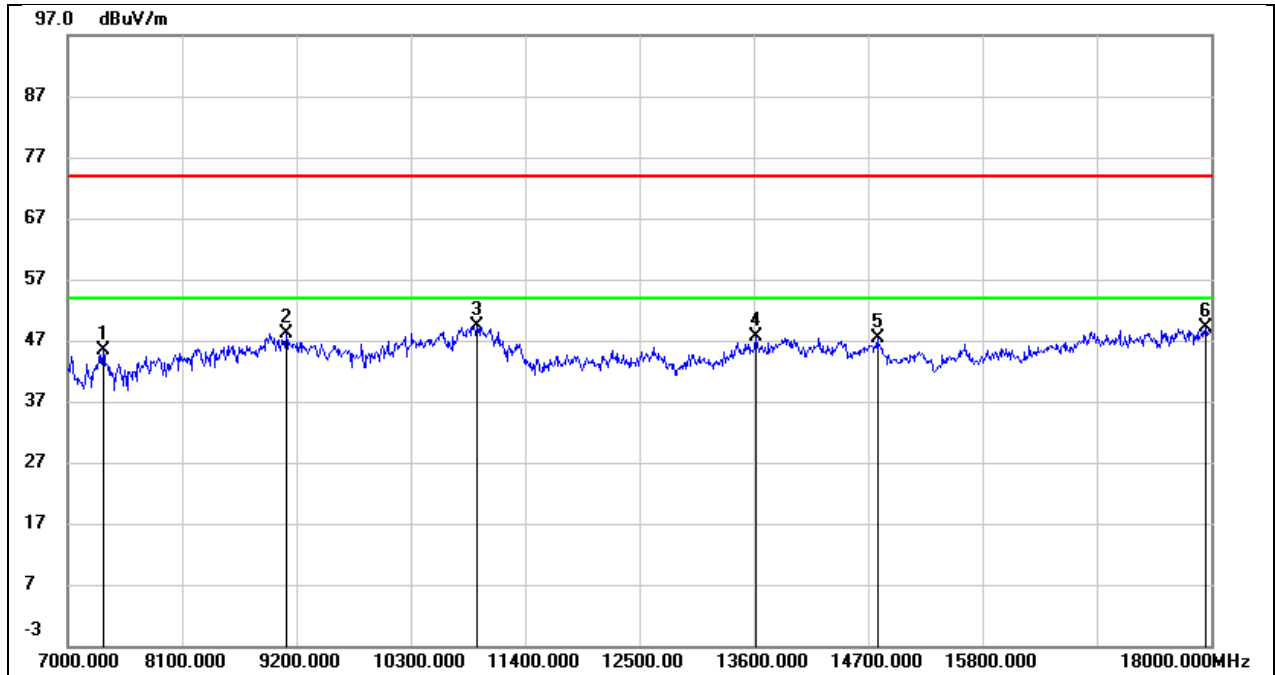


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.55	8.79	45.34	74.00	-28.66	peak
2	9101.000	36.87	11.36	48.23	74.00	-25.77	peak
3	10938.000	35.64	13.72	49.36	74.00	-24.64	peak
4	13622.000	28.01	19.60	47.61	74.00	-26.39	peak
5	14788.000	27.59	19.71	47.30	74.00	-26.70	peak
6	17945.000	22.88	26.19	49.07	74.00	-24.93	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

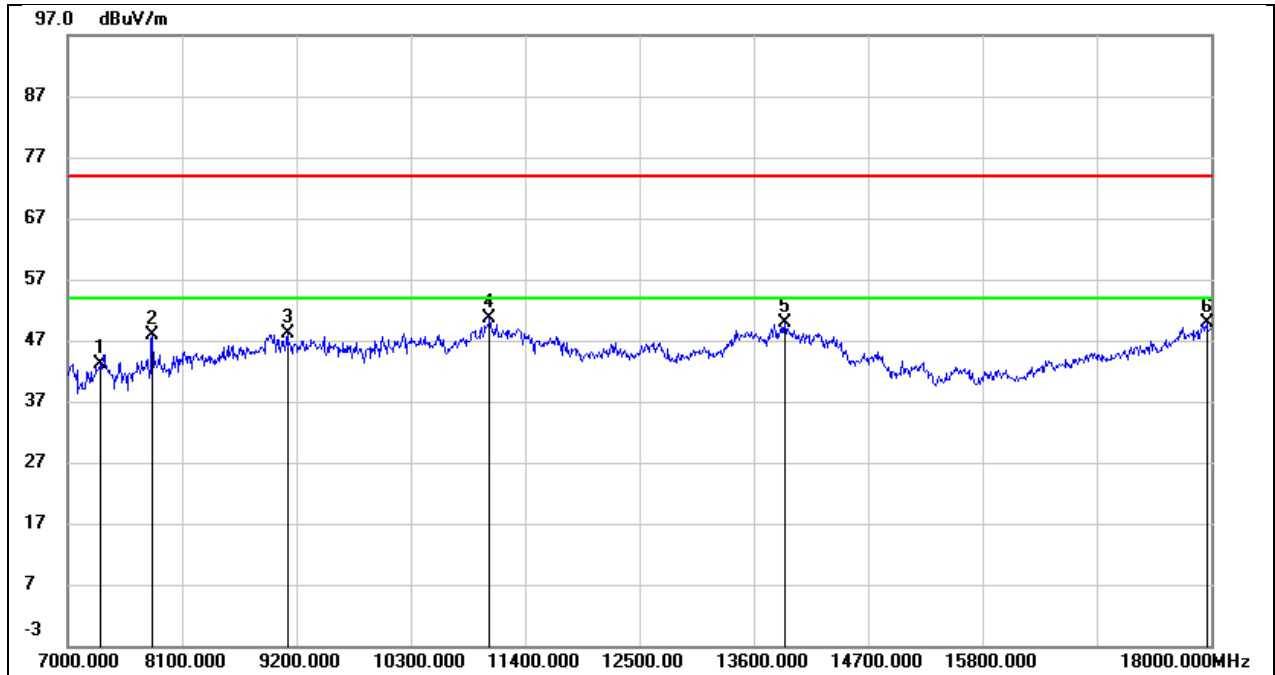


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.24	7.89	43.13	74.00	-30.87	peak
2	7814.000	40.82	6.99	47.81	74.00	-26.19	peak
3	9112.000	37.20	10.95	48.15	74.00	-25.85	peak
4	11059.000	35.66	14.90	50.56	74.00	-23.44	peak
5	13897.000	27.49	22.33	49.82	74.00	-24.18	peak
6	17956.000	21.66	28.21	49.87	74.00	-24.13	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

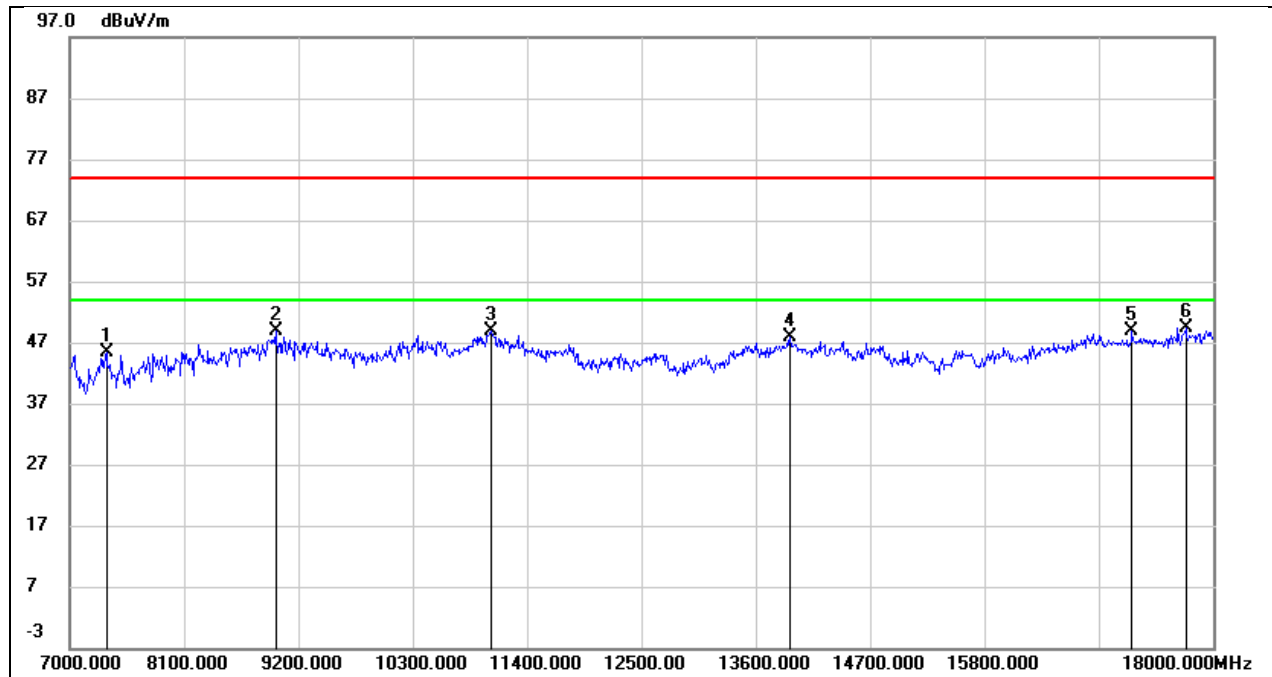


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.60	8.86	45.46	74.00	-28.54	peak
2	8980.000	36.82	12.07	48.89	74.00	-25.11	peak
3	11059.000	34.95	14.02	48.97	74.00	-25.03	peak
4	13930.000	27.18	20.76	47.94	74.00	-26.06	peak
5	17219.000	24.85	24.03	48.88	74.00	-25.12	peak
6	17736.000	23.89	25.43	49.32	74.00	-24.68	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

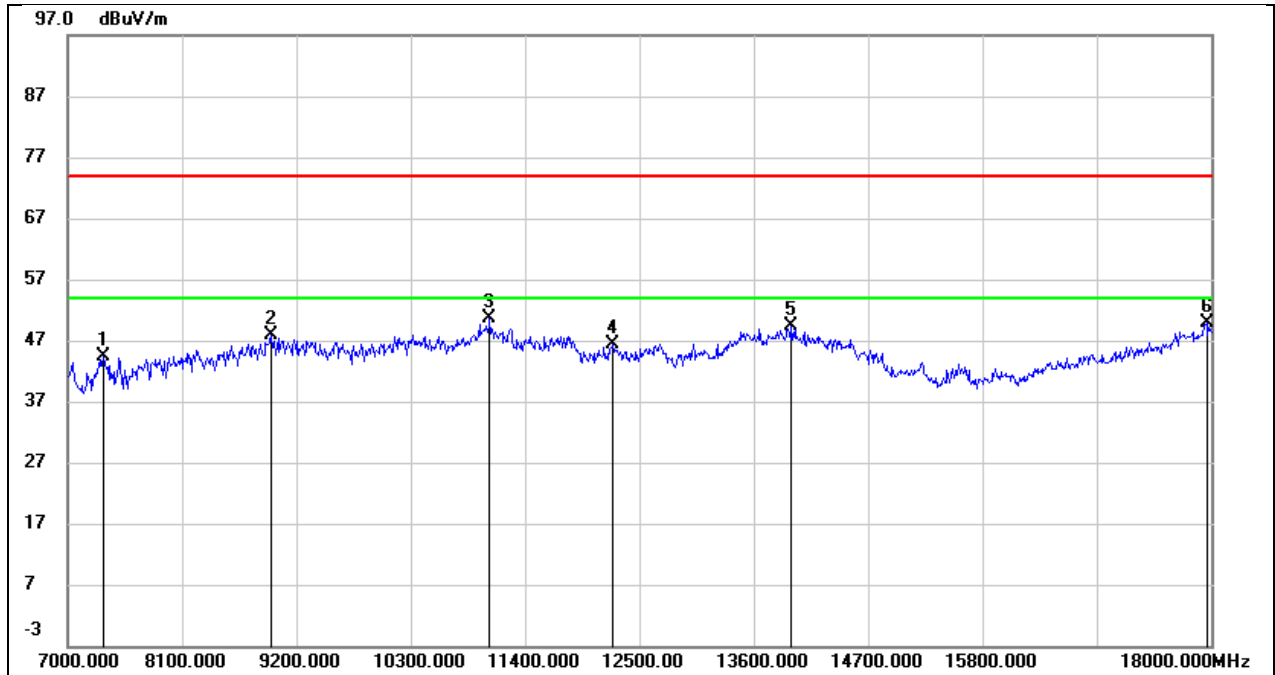


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.28	8.17	44.45	74.00	-29.55	peak
2	8958.000	36.51	11.34	47.85	74.00	-26.15	peak
3	11059.000	35.68	14.90	50.58	74.00	-23.42	peak
4	12247.000	28.28	18.18	46.46	74.00	-27.54	peak
5	13963.000	26.92	22.40	49.32	74.00	-24.68	peak
6	17956.000	21.79	28.21	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

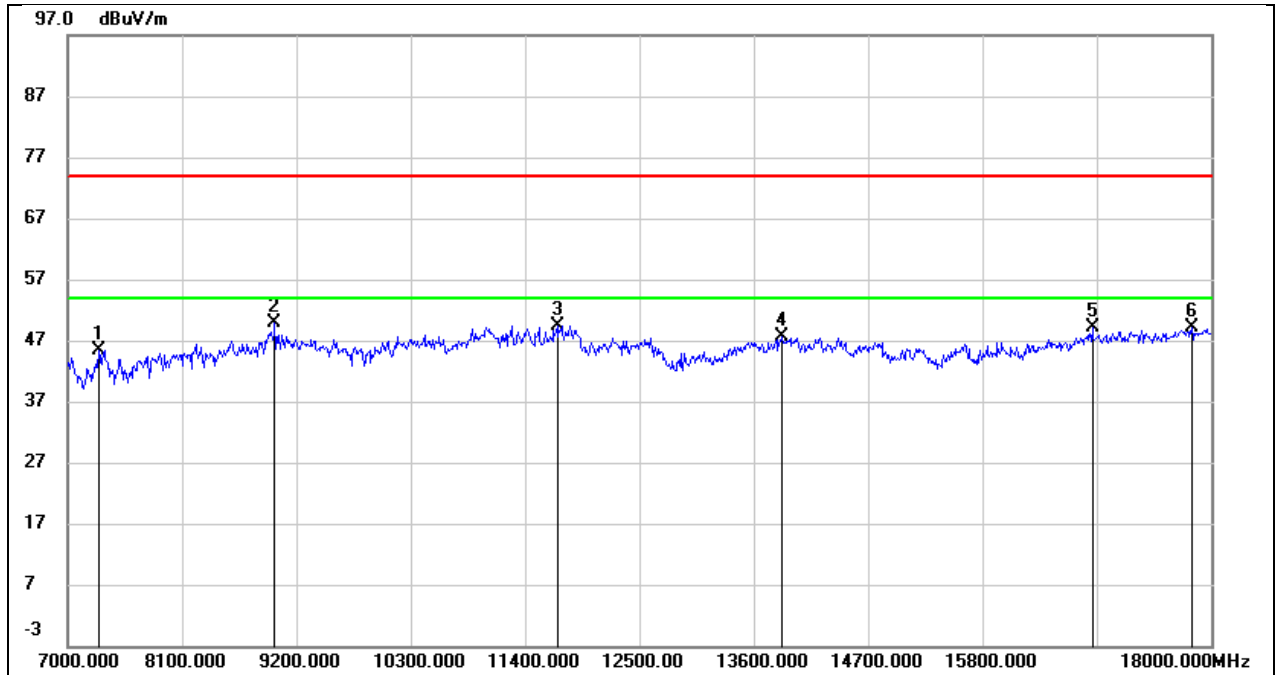


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.90	8.47	45.37	74.00	-28.63	peak
2	8991.000	37.72	12.23	49.95	74.00	-24.05	peak
3	11708.000	33.86	15.55	49.41	74.00	-24.59	peak
4	13875.000	26.94	20.69	47.63	74.00	-26.37	peak
5	16856.000	25.92	23.19	49.11	74.00	-24.89	peak
6	17813.000	23.11	26.00	49.11	74.00	-24.89	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

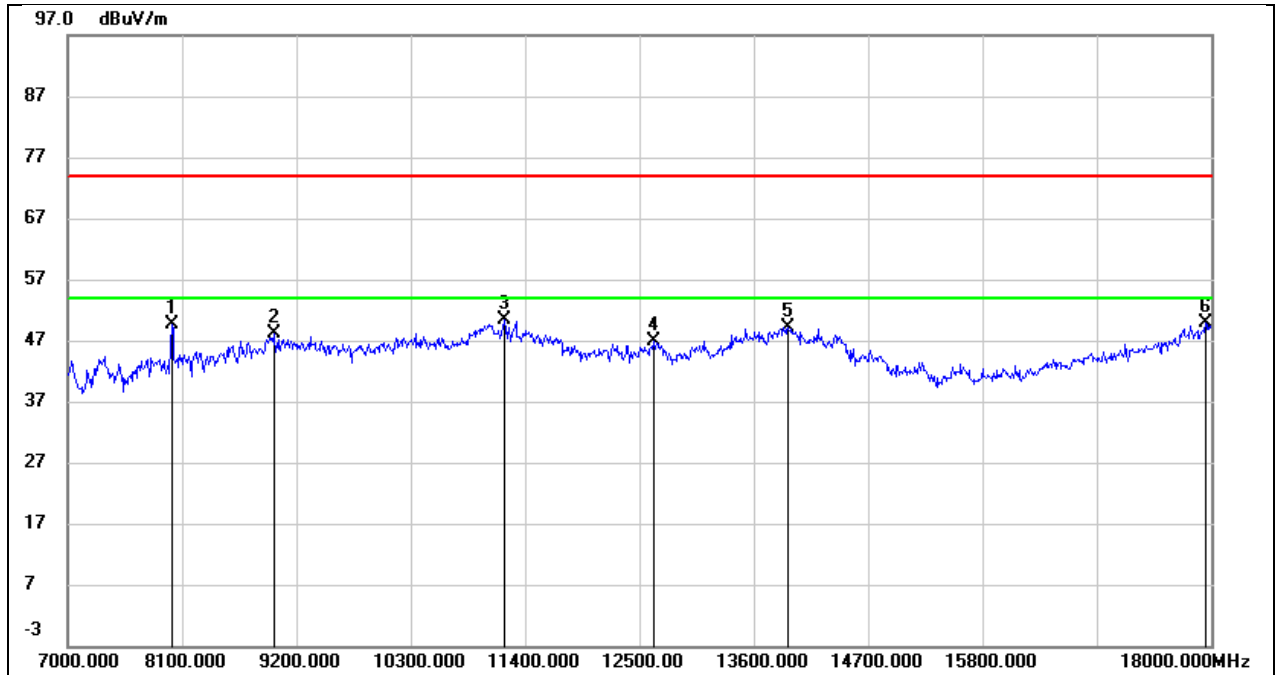


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8001.000	42.54	6.99	49.53	74.00	-24.47	peak
2	8980.000	36.42	11.67	48.09	74.00	-25.91	peak
3	11202.000	35.34	15.16	50.50	74.00	-23.50	peak
4	12632.000	28.80	18.02	46.82	74.00	-27.18	peak
5	13930.000	26.72	22.37	49.09	74.00	-24.91	peak
6	17945.000	21.62	28.15	49.77	74.00	-24.23	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

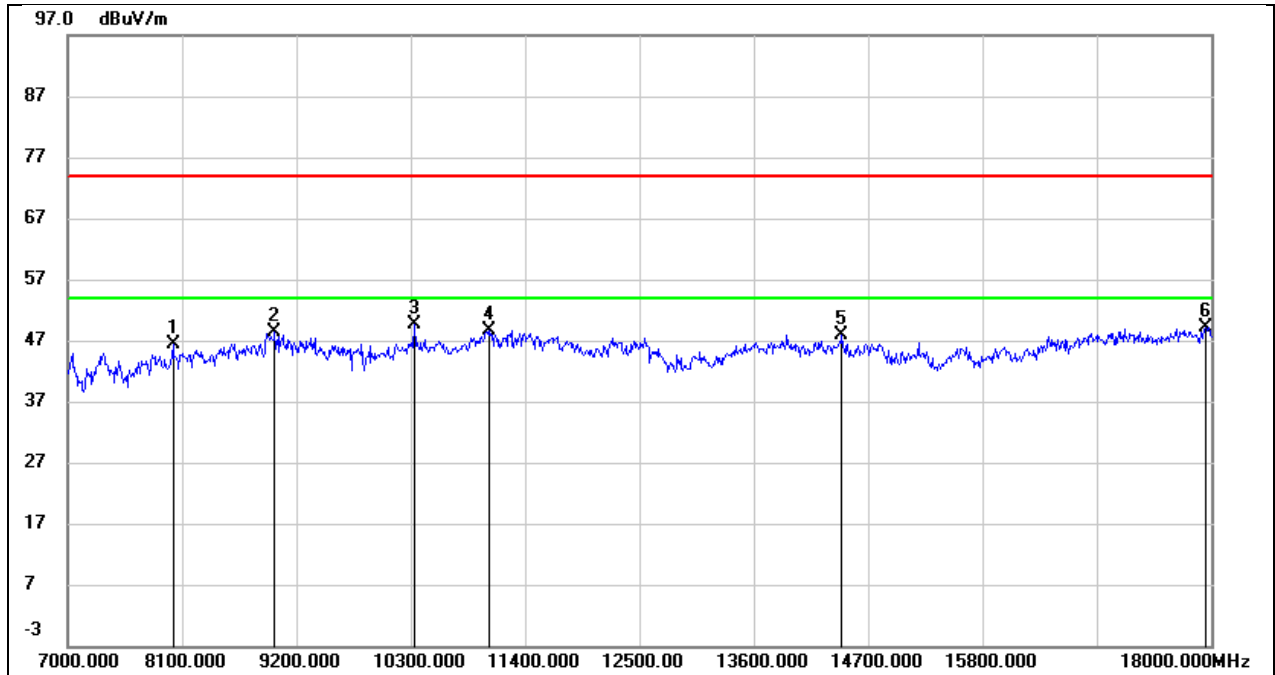


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8012.000	38.75	7.59	46.34	74.00	-27.66	peak
2	8991.000	36.15	12.23	48.38	74.00	-25.62	peak
3	10333.000	37.22	12.39	49.61	74.00	-24.39	peak
4	11059.000	34.69	14.02	48.71	74.00	-25.29	peak
5	14447.000	27.79	20.13	47.92	74.00	-26.08	peak
6	17945.000	23.03	26.19	49.22	74.00	-24.78	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

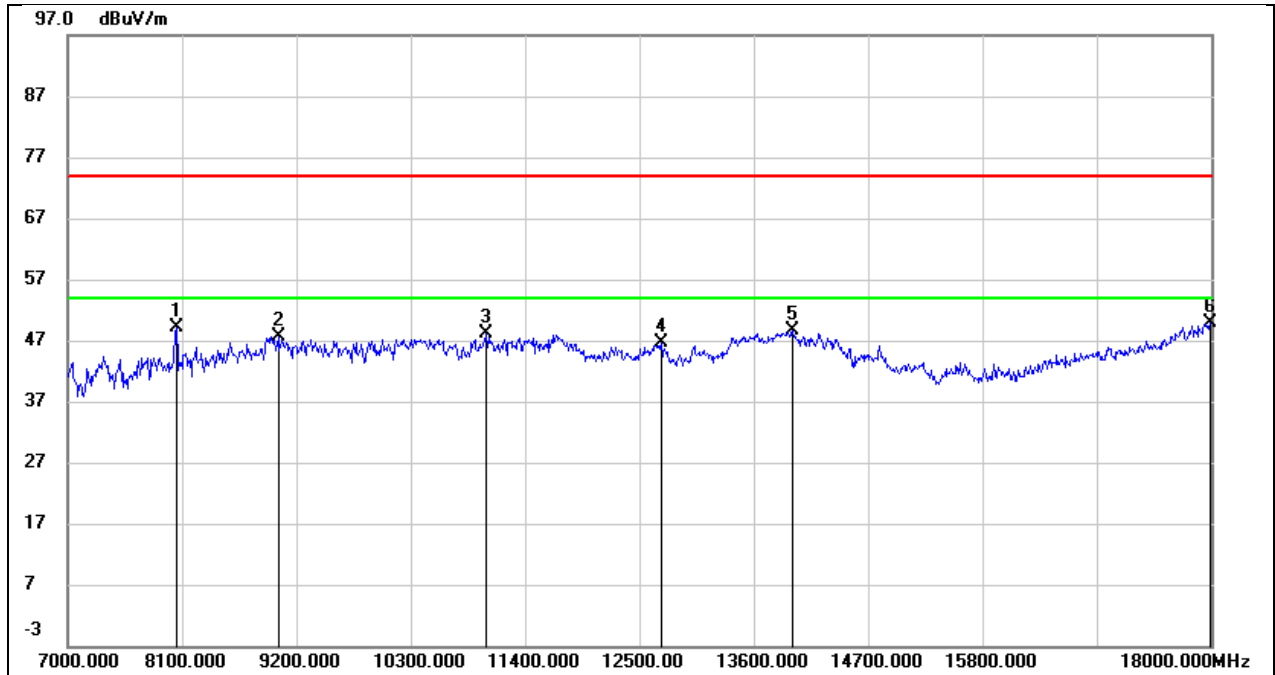


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8045.000	41.79	7.37	49.16	74.00	-24.84	peak
2	9024.000	35.88	11.75	47.63	74.00	-26.37	peak
3	11026.000	33.37	14.84	48.21	74.00	-25.79	peak
4	12709.000	28.29	18.23	46.52	74.00	-27.48	peak
5	13974.000	26.20	22.42	48.62	74.00	-25.38	peak
6	17989.000	21.39	28.41	49.80	74.00	-24.20	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

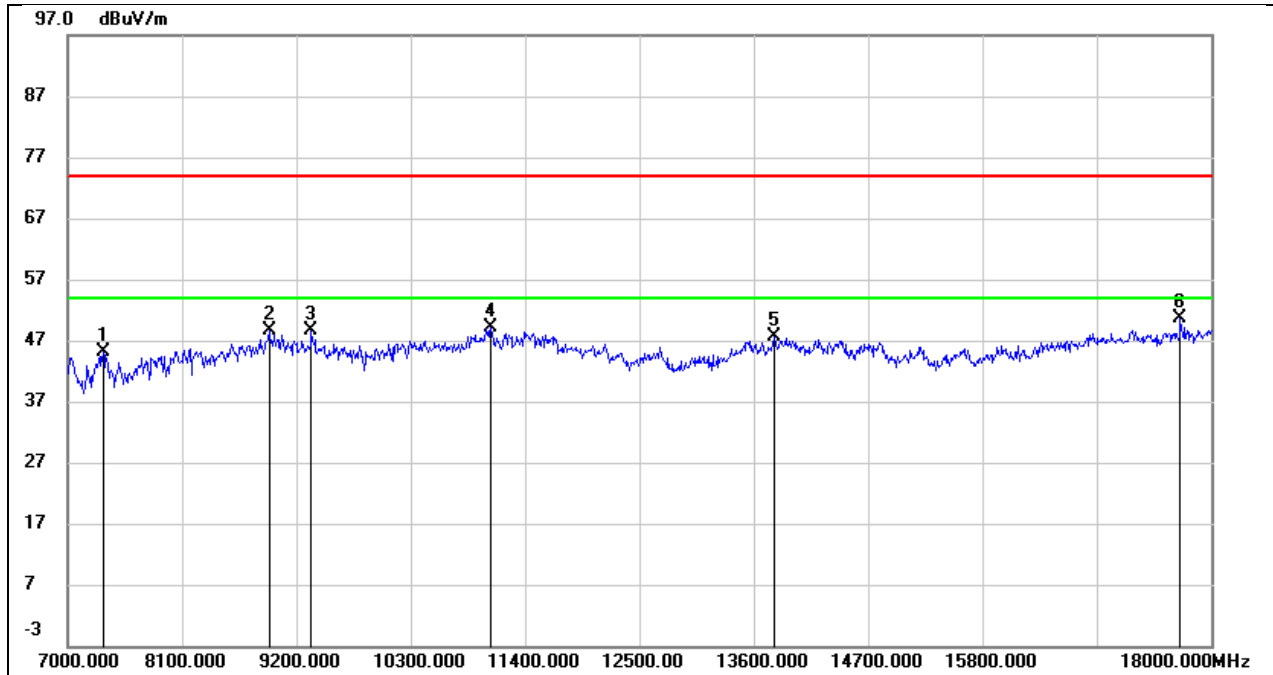


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.42	8.79	45.21	74.00	-28.79	peak
2	8936.000	37.15	11.44	48.59	74.00	-25.41	peak
3	9343.000	38.00	10.71	48.71	74.00	-25.29	peak
4	11070.000	35.15	14.02	49.17	74.00	-24.83	peak
5	13798.000	27.11	20.59	47.70	74.00	-26.30	peak
6	17703.000	25.42	25.14	50.56	74.00	-23.44	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

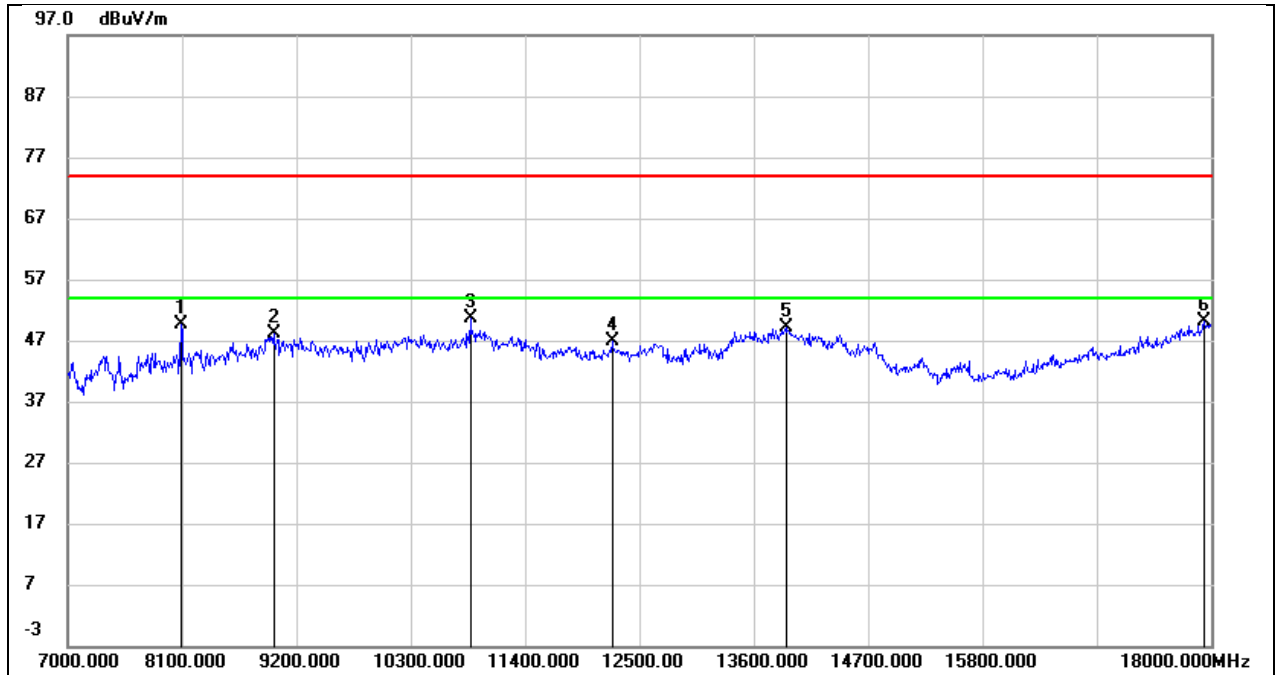


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	41.94	7.75	49.69	74.00	-24.31	peak
2	8980.000	36.42	11.67	48.09	74.00	-25.91	peak
3	10872.000	36.49	14.07	50.56	74.00	-23.44	peak
4	12236.000	28.76	18.15	46.91	74.00	-27.09	peak
5	13908.000	26.67	22.35	49.02	74.00	-24.98	peak
6	17934.000	22.13	28.09	50.22	74.00	-23.78	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

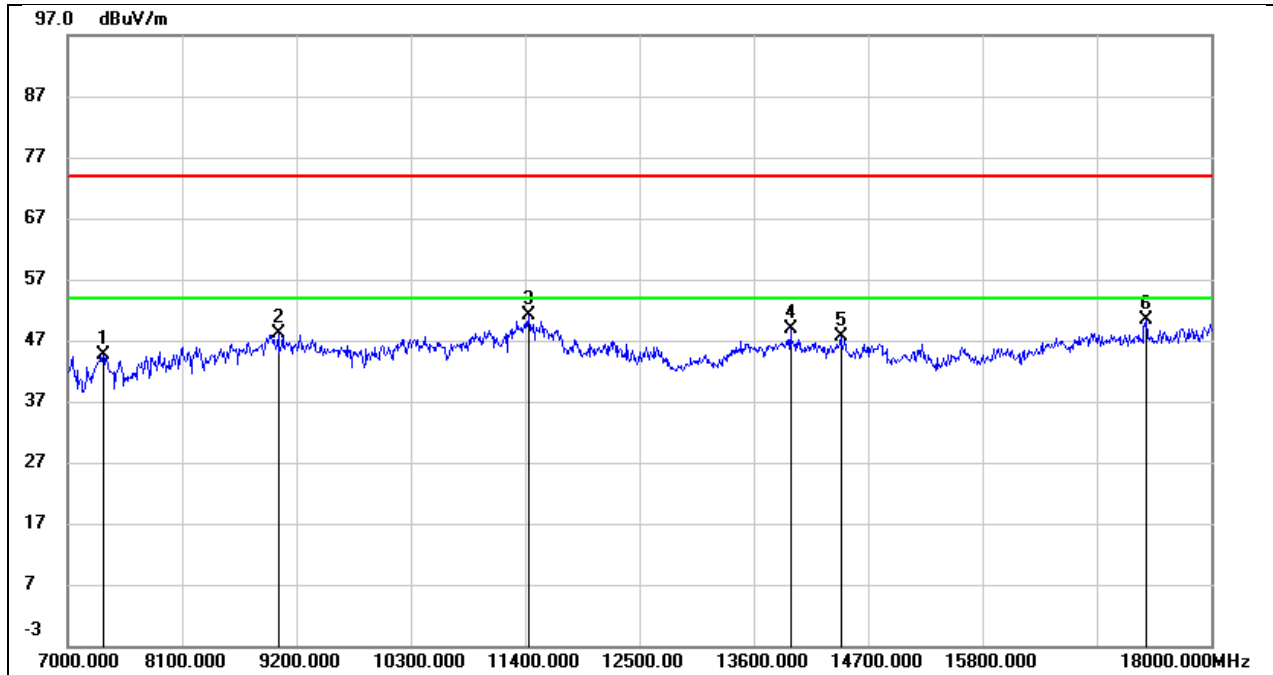


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.85	8.79	44.64	74.00	-29.36	peak
2	9024.000	35.98	12.13	48.11	74.00	-25.89	peak
3	11433.000	36.22	15.00	51.22	74.00	-22.78	peak
4	13952.000	28.21	20.78	48.99	74.00	-25.01	peak
5	14436.000	27.45	20.15	47.60	74.00	-26.40	peak
6	17373.000	26.15	24.26	50.41	74.00	-23.59	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

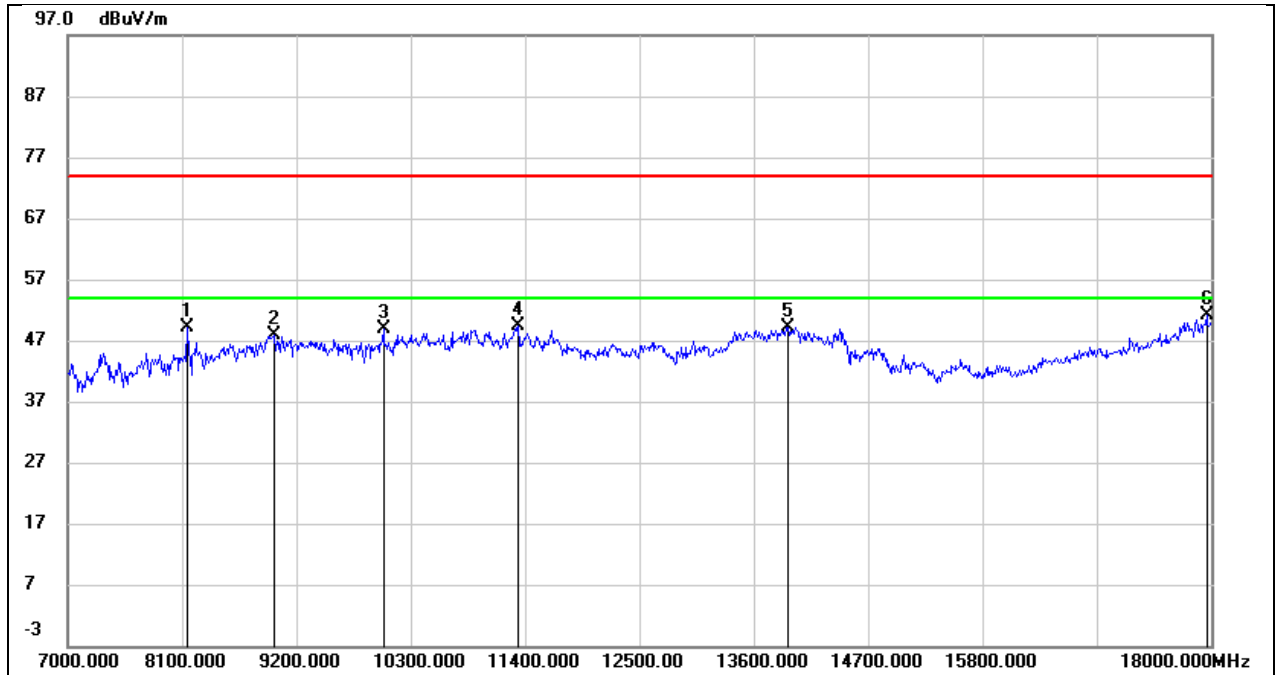


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8144.000	41.01	8.22	49.23	74.00	-24.77	peak
2	8980.000	36.29	11.67	47.96	74.00	-26.04	peak
3	10036.000	36.61	12.27	48.88	74.00	-25.12	peak
4	11334.000	33.49	15.92	49.41	74.00	-24.59	peak
5	13930.000	26.76	22.37	49.13	74.00	-24.87	peak
6	17956.000	22.91	28.21	51.12	74.00	-22.88	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

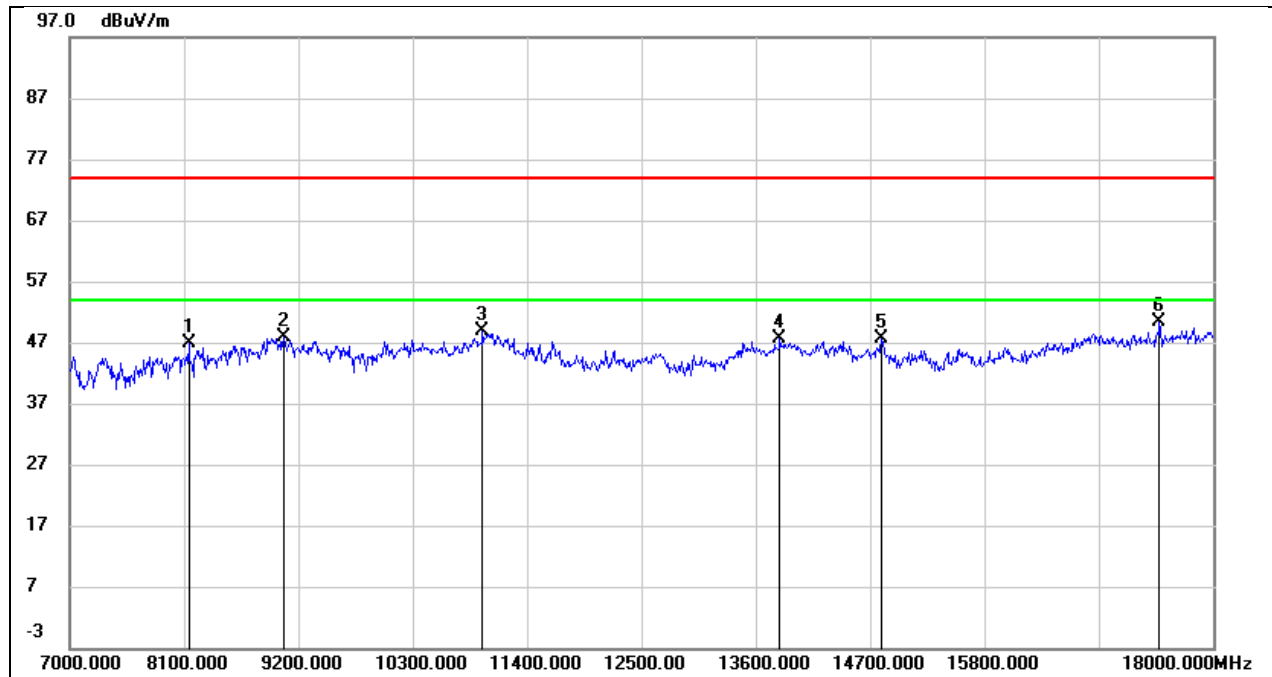


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8144.000	38.15	8.75	46.90	74.00	-27.10	peak
2	9057.000	35.96	11.81	47.77	74.00	-26.23	peak
3	10971.000	34.96	13.86	48.82	74.00	-25.18	peak
4	13831.000	27.01	20.64	47.65	74.00	-26.35	peak
5	14810.000	27.85	19.67	47.52	74.00	-26.48	peak
6	17483.000	26.16	24.19	50.35	74.00	-23.65	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

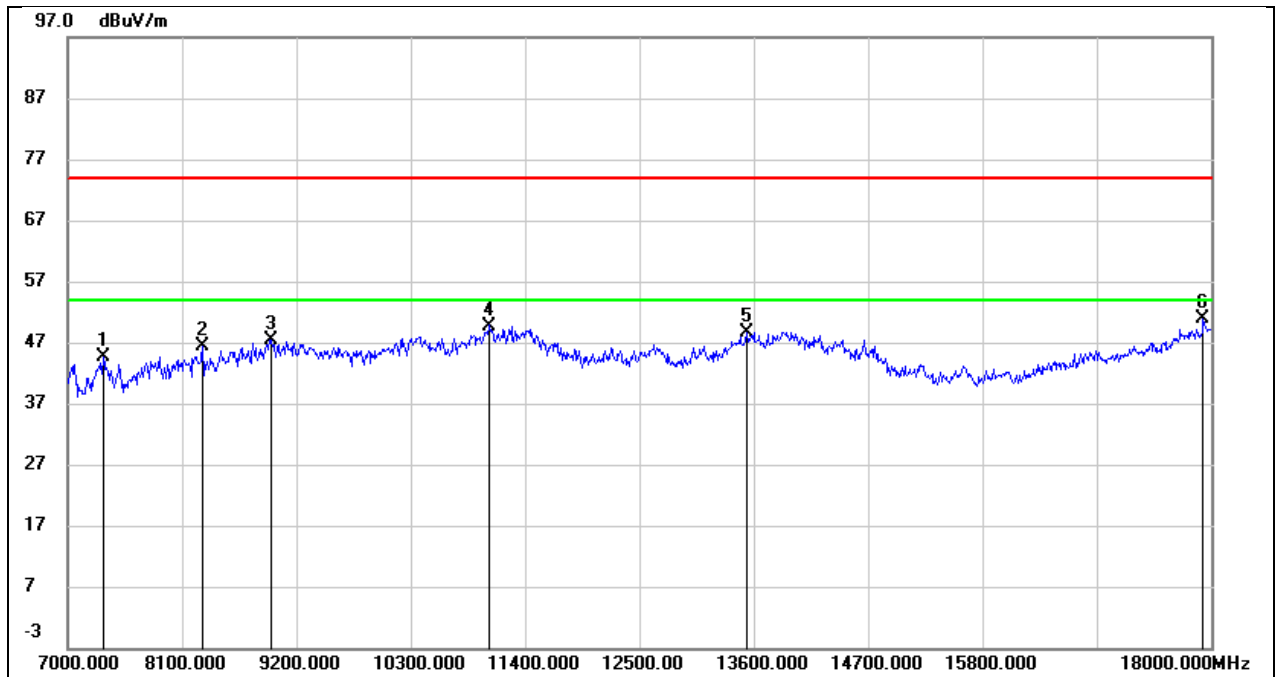


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.48	8.17	44.65	74.00	-29.35	peak
2	8298.000	38.13	8.33	46.46	74.00	-27.54	peak
3	8958.000	35.99	11.34	47.33	74.00	-26.67	peak
4	11059.000	34.85	14.90	49.75	74.00	-24.25	peak
5	13534.000	27.63	21.12	48.75	74.00	-25.25	peak
6	17923.000	22.85	28.01	50.86	74.00	-23.14	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

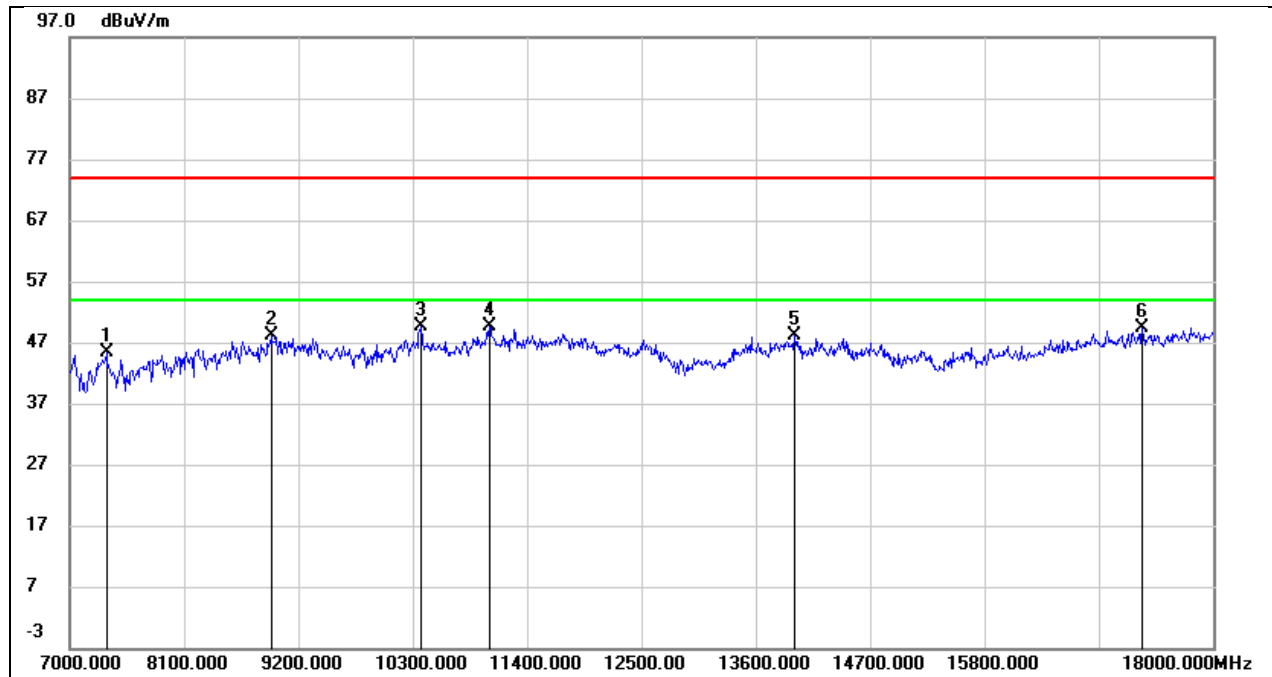


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.54	8.86	45.40	74.00	-28.60	peak
2	8936.000	36.69	11.44	48.13	74.00	-25.87	peak
3	10377.000	36.92	12.60	49.52	74.00	-24.48	peak
4	11037.000	35.64	14.01	49.65	74.00	-24.35	peak
5	13974.000	27.34	20.81	48.15	74.00	-25.85	peak
6	17318.000	25.23	24.17	49.40	74.00	-24.60	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

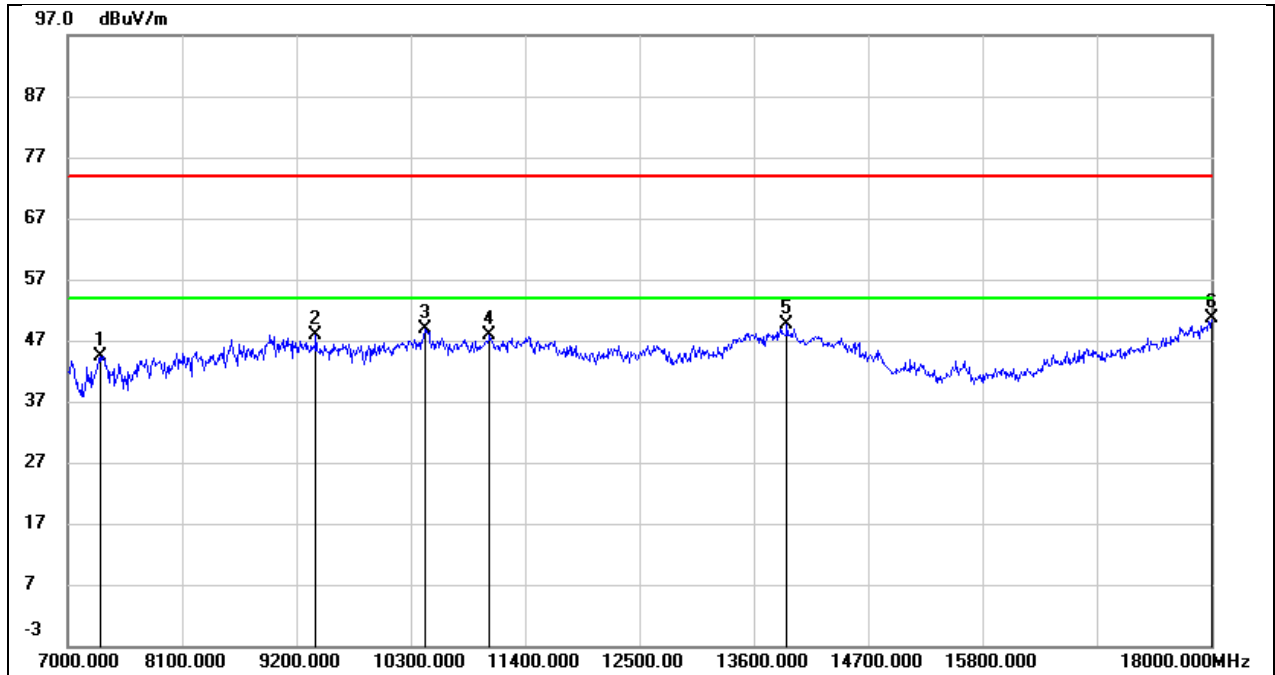


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.59	7.89	44.48	74.00	-29.52	peak
2	9387.000	37.25	10.73	47.98	74.00	-26.02	peak
3	10443.000	35.67	13.10	48.77	74.00	-25.23	peak
4	11059.000	32.97	14.90	47.87	74.00	-26.13	peak
5	13919.000	27.18	22.36	49.54	74.00	-24.46	peak
6	18000.000	22.12	28.47	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

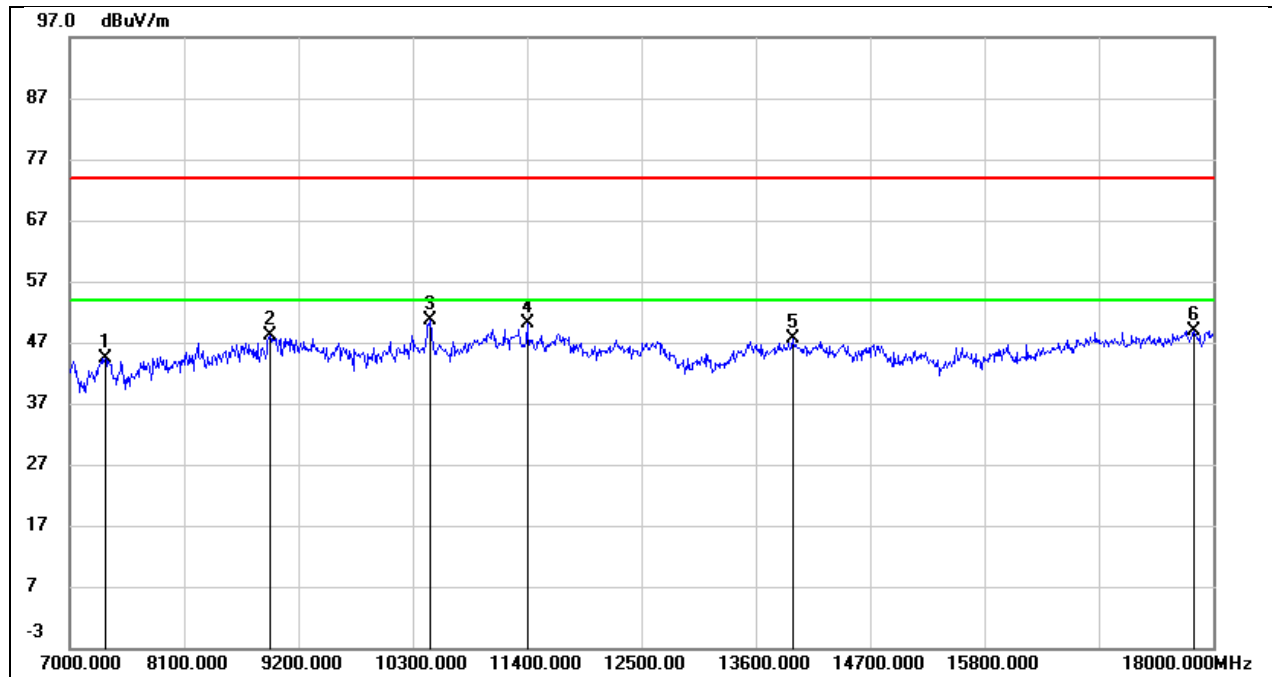


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.55	8.79	44.34	74.00	-29.66	peak
2	8925.000	36.78	11.28	48.06	74.00	-25.94	peak
3	10465.000	37.72	12.90	50.62	74.00	-23.38	peak
4	11400.000	35.18	14.95	50.13	74.00	-23.87	peak
5	13952.000	26.87	20.78	47.65	74.00	-26.35	peak
6	17813.000	22.98	26.00	48.98	74.00	-25.02	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

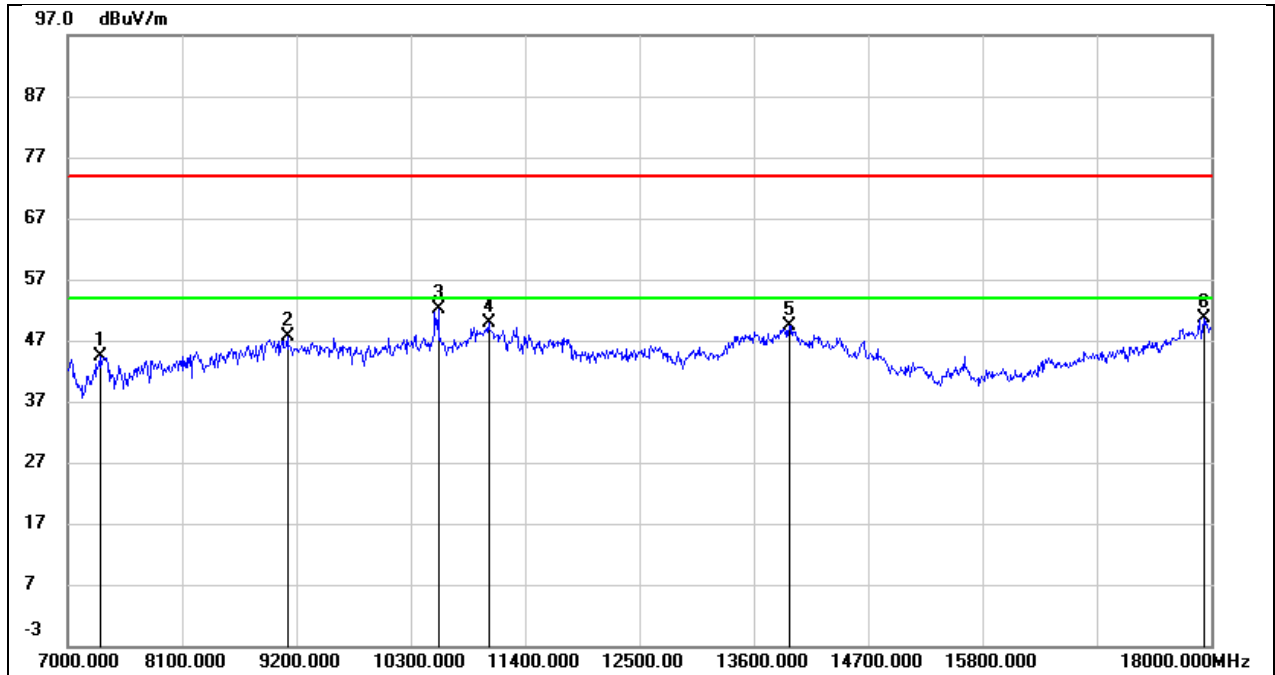


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.49	7.89	44.38	74.00	-29.62	peak
2	9112.000	36.56	10.95	47.51	74.00	-26.49	peak
3	10564.000	38.70	13.41	52.11	74.00	-21.89	peak
4	11048.000	34.95	14.88	49.83	74.00	-24.17	peak
5	13941.000	27.02	22.38	49.40	74.00	-24.60	peak
6	17934.000	22.48	28.09	50.57	74.00	-23.43	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

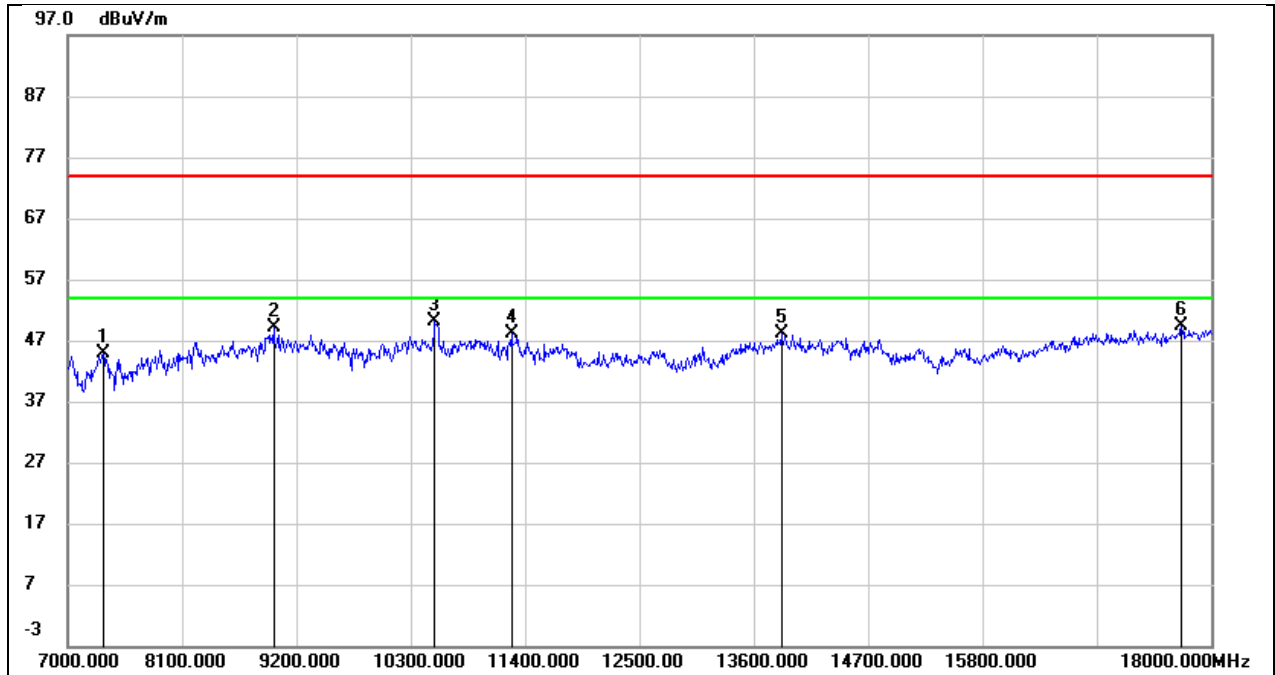


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.06	8.79	44.85	74.00	-29.15	peak
2	8980.000	37.11	12.07	49.18	74.00	-24.82	peak
3	10531.000	37.03	13.06	50.09	74.00	-23.91	peak
4	11268.000	33.83	14.37	48.20	74.00	-25.80	peak
5	13864.000	27.48	20.67	48.15	74.00	-25.85	peak
6	17714.000	24.03	25.24	49.27	74.00	-24.73	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

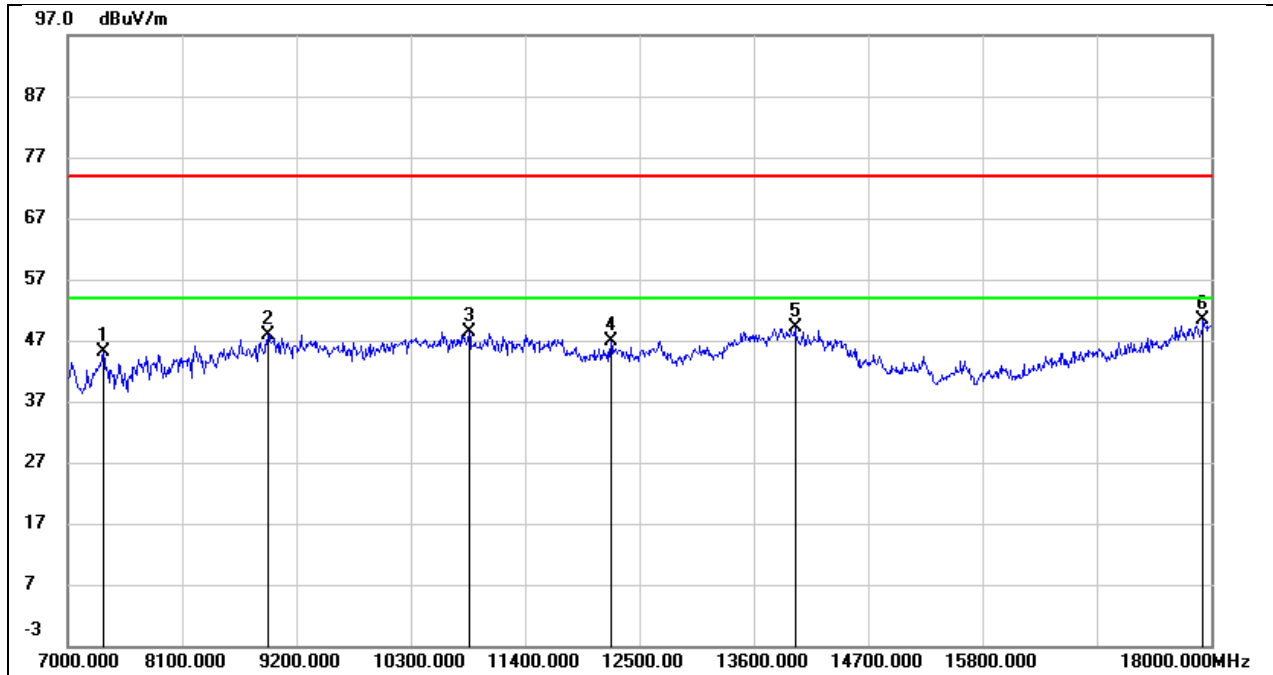


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.94	8.17	45.11	74.00	-28.89	peak
2	8925.000	37.12	10.85	47.97	74.00	-26.03	peak
3	10861.000	34.43	14.00	48.43	74.00	-25.57	peak
4	12225.000	28.69	18.12	46.81	74.00	-27.19	peak
5	13996.000	26.69	22.44	49.13	74.00	-24.87	peak
6	17923.000	22.31	28.01	50.32	74.00	-23.68	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

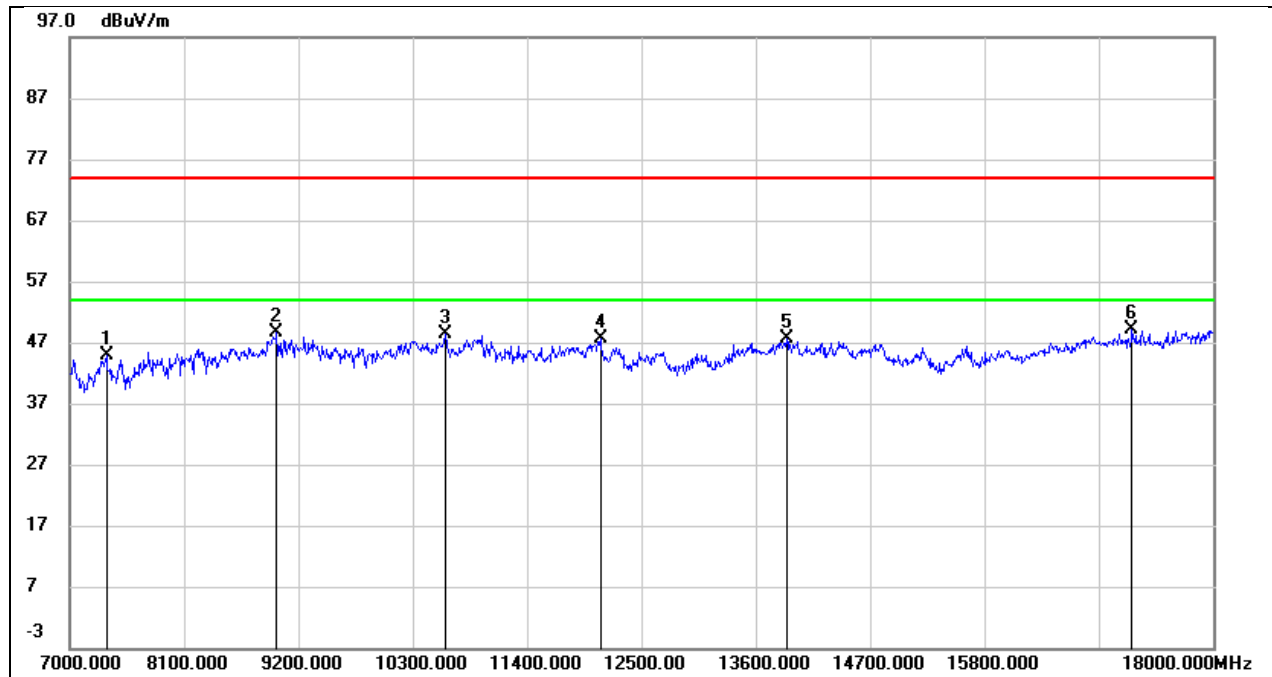


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.01	8.86	44.87	74.00	-29.13	peak
2	8991.000	36.45	12.23	48.68	74.00	-25.32	peak
3	10608.000	35.22	13.18	48.40	74.00	-25.60	peak
4	12104.000	30.66	16.97	47.63	74.00	-26.37	peak
5	13897.000	26.80	20.71	47.51	74.00	-26.49	peak
6	17219.000	25.13	24.03	49.16	74.00	-24.84	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

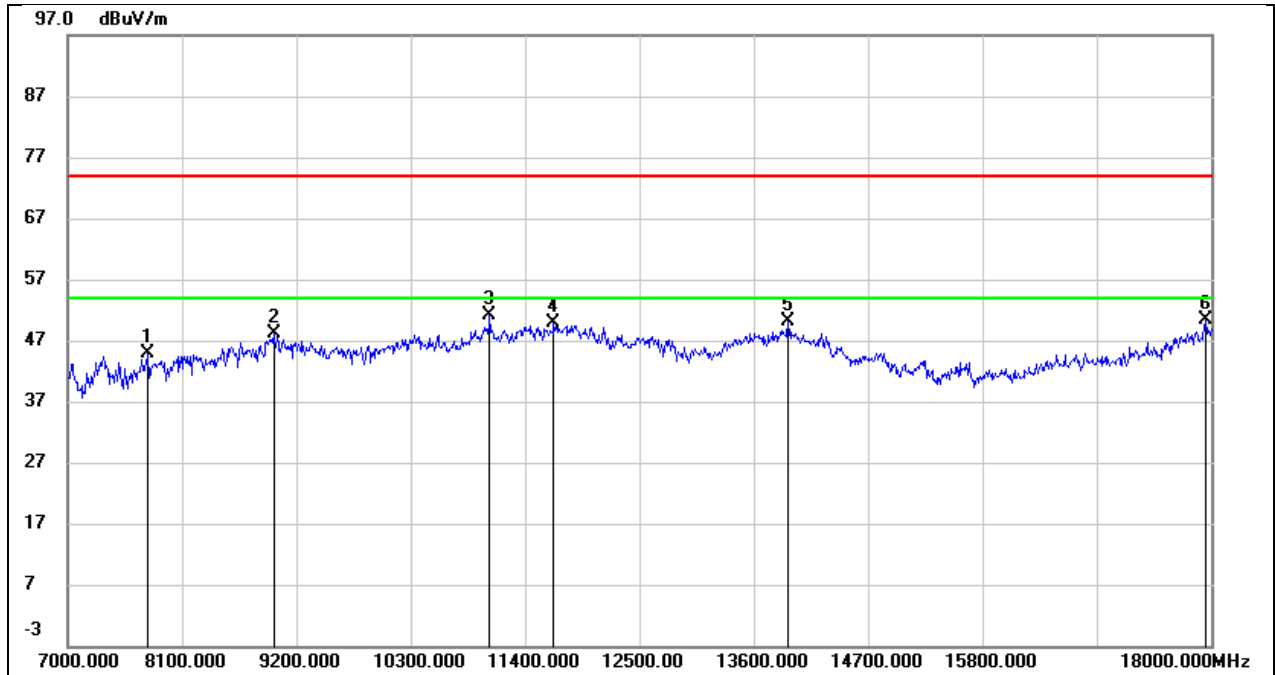


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	38.03	6.95	44.98	74.00	-29.02	peak
2	8980.000	36.43	11.67	48.10	74.00	-25.90	peak
3	11059.000	36.24	14.90	51.14	74.00	-22.86	peak
4	11675.000	33.15	16.82	49.97	74.00	-24.03	peak
5	13930.000	27.81	22.37	50.18	74.00	-23.82	peak
6	17945.000	22.11	28.15	50.26	74.00	-23.74	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

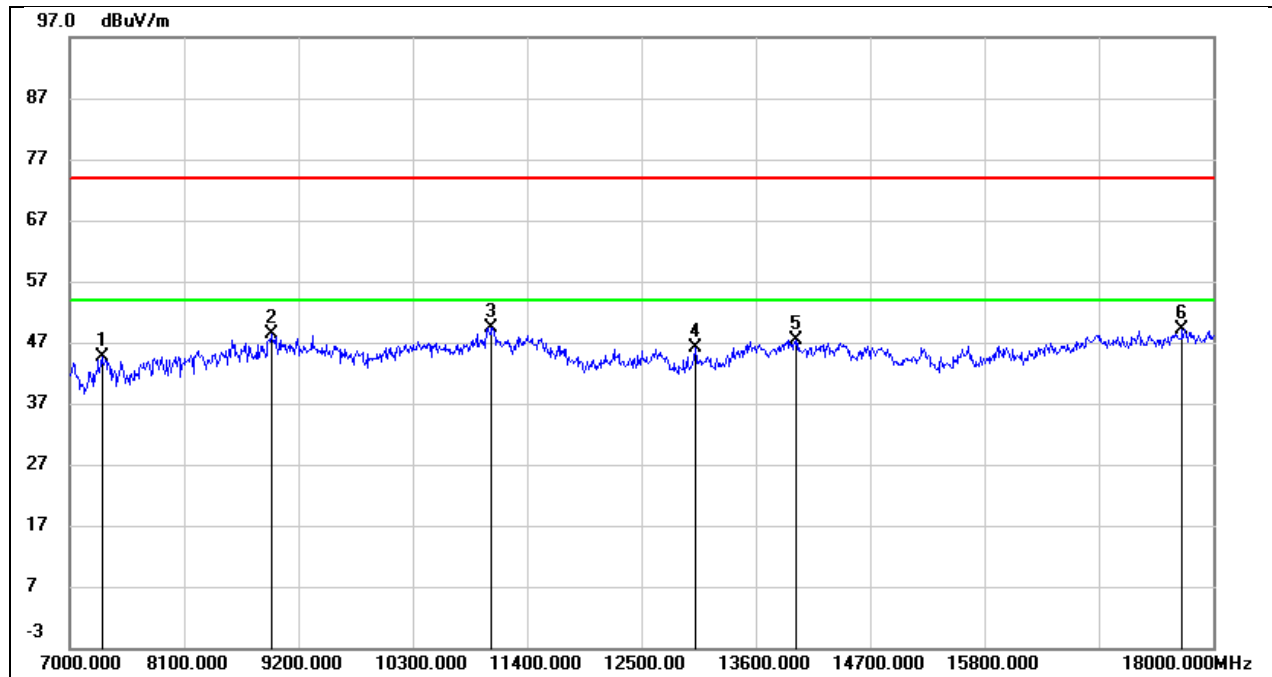


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.14	8.54	44.68	74.00	-29.32	peak
2	8936.000	36.88	11.44	48.32	74.00	-25.68	peak
3	11059.000	35.45	14.02	49.47	74.00	-24.53	peak
4	13017.000	28.39	17.66	46.05	74.00	-27.95	peak
5	13985.000	26.56	20.82	47.38	74.00	-26.62	peak
6	17703.000	24.02	25.14	49.16	74.00	-24.84	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

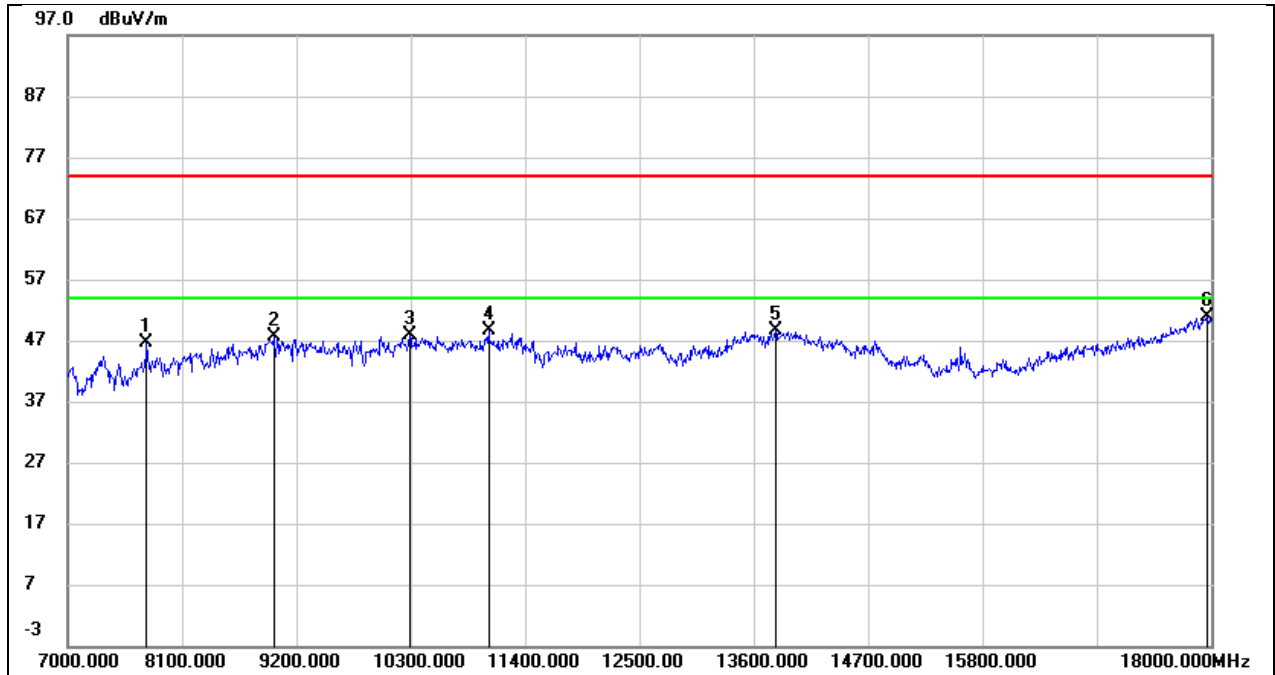


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.66	6.94	46.60	74.00	-27.40	peak
2	8980.000	36.03	11.67	47.70	74.00	-26.30	peak
3	10289.000	35.37	12.61	47.98	74.00	-26.02	peak
4	11048.000	33.77	14.88	48.65	74.00	-25.35	peak
5	13809.000	26.50	22.25	48.75	74.00	-25.25	peak
6	17956.000	22.76	28.21	50.97	74.00	-23.03	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

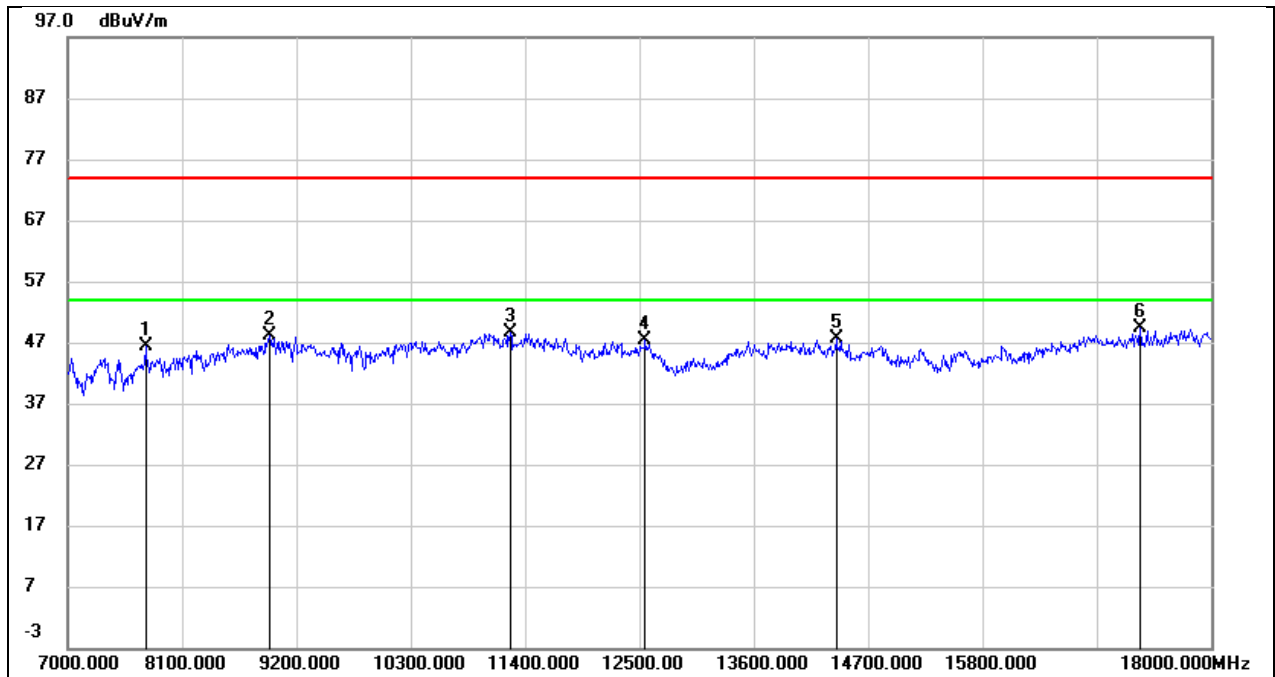


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	38.83	7.44	46.27	74.00	-27.73	peak
2	8947.000	36.57	11.60	48.17	74.00	-25.83	peak
3	11257.000	34.29	14.33	48.62	74.00	-25.38	peak
4	12555.000	30.16	17.10	47.26	74.00	-26.74	peak
5	14392.000	27.52	20.23	47.75	74.00	-26.25	peak
6	17318.000	25.14	24.17	49.31	74.00	-24.69	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

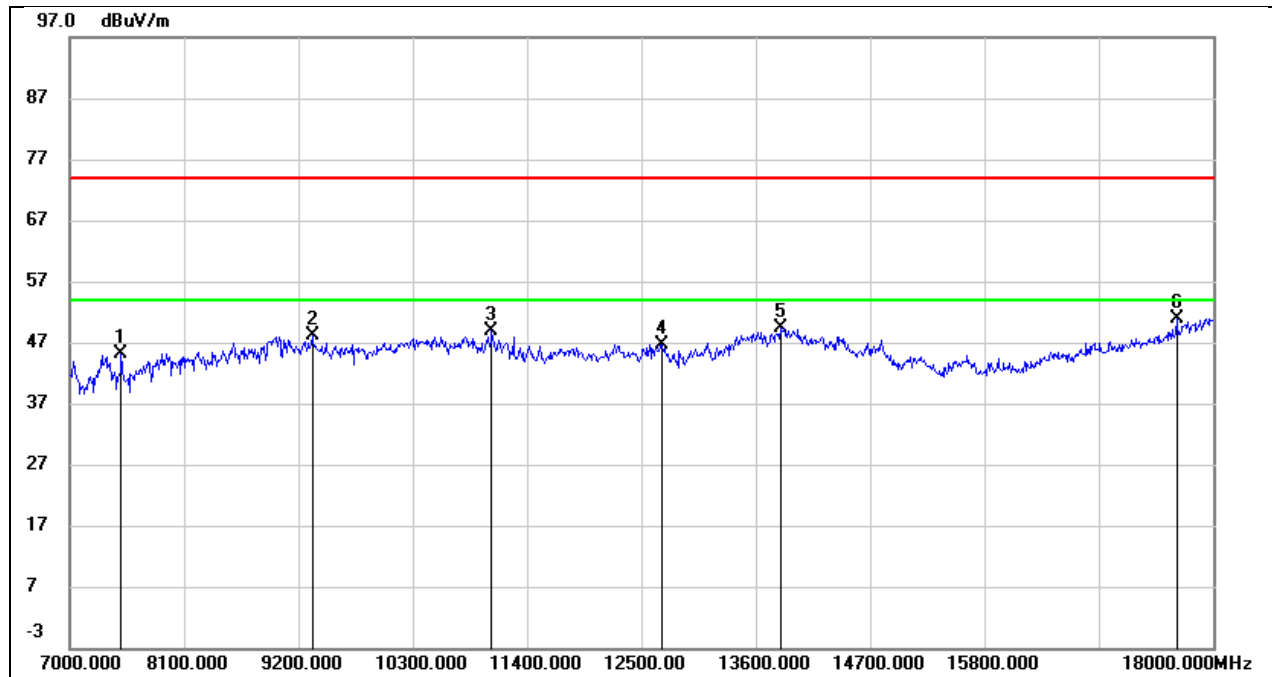


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.43	7.81	45.24	74.00	-28.76	peak
2	9332.000	37.57	10.55	48.12	74.00	-25.88	peak
3	11059.000	33.90	14.90	48.80	74.00	-25.20	peak
4	12698.000	28.52	18.20	46.72	74.00	-27.28	peak
5	13842.000	27.04	22.28	49.32	74.00	-24.68	peak
6	17648.000	25.66	25.32	50.98	74.00	-23.02	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

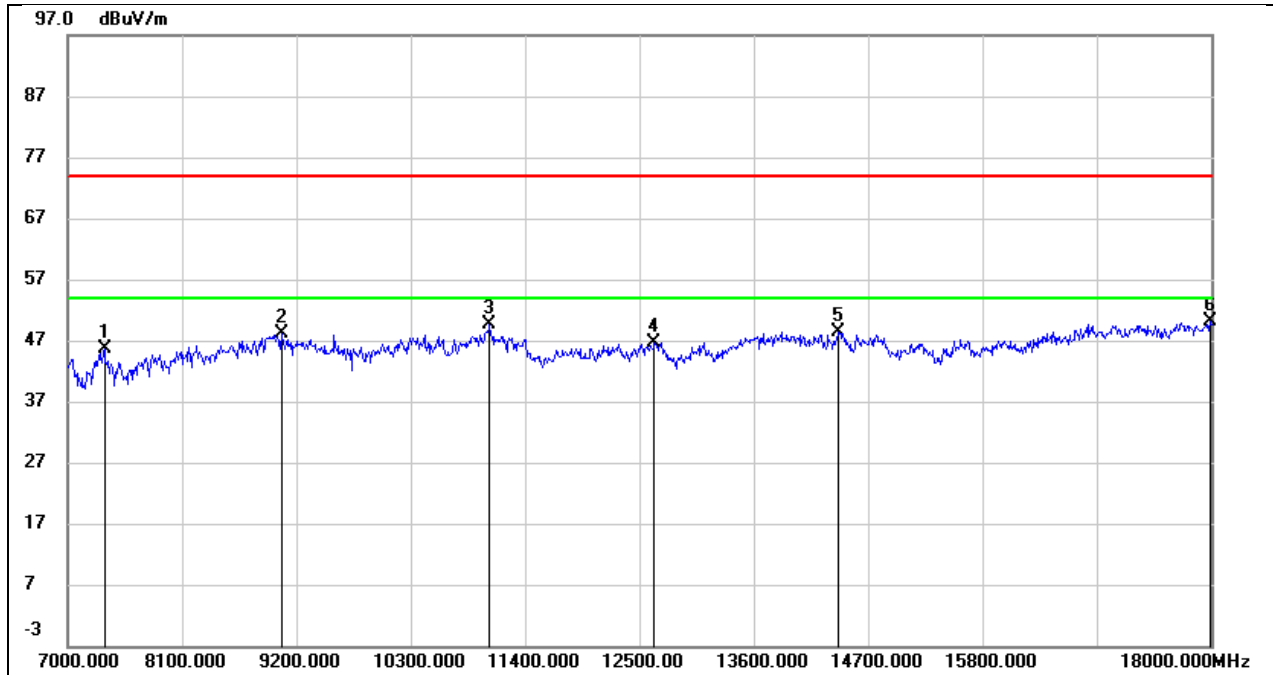


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.78	8.86	45.64	74.00	-28.36	peak
2	9057.000	36.38	11.81	48.19	74.00	-25.81	peak
3	11059.000	35.69	14.02	49.71	74.00	-24.29	peak
4	12643.000	29.56	17.07	46.63	74.00	-27.37	peak
5	14414.000	28.32	20.18	48.50	74.00	-25.50	peak
6	17989.000	23.83	26.25	50.08	74.00	-23.92	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

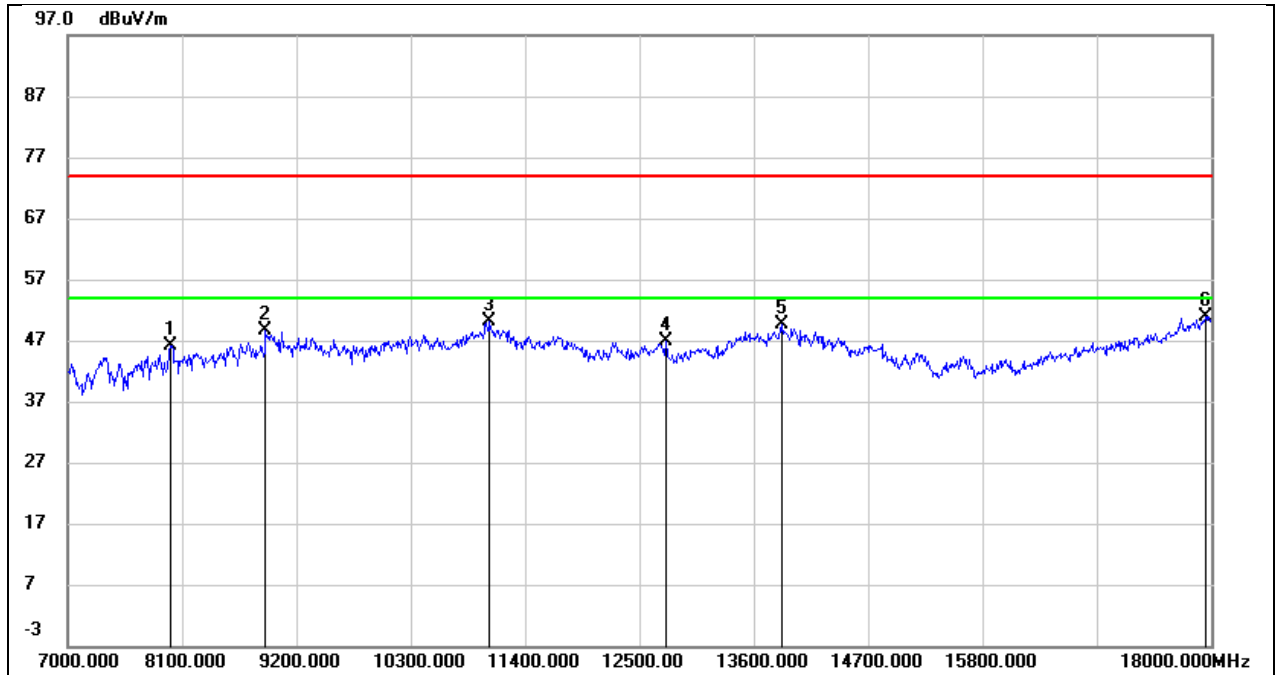


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7990.000	39.21	6.98	46.19	74.00	-27.81	peak
2	8903.000	38.10	10.51	48.61	74.00	-25.39	peak
3	11059.000	35.15	14.90	50.05	74.00	-23.95	peak
4	12753.000	28.54	18.34	46.88	74.00	-27.12	peak
5	13875.000	27.40	22.31	49.71	74.00	-24.29	peak
6	17945.000	22.84	28.15	50.99	74.00	-23.01	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

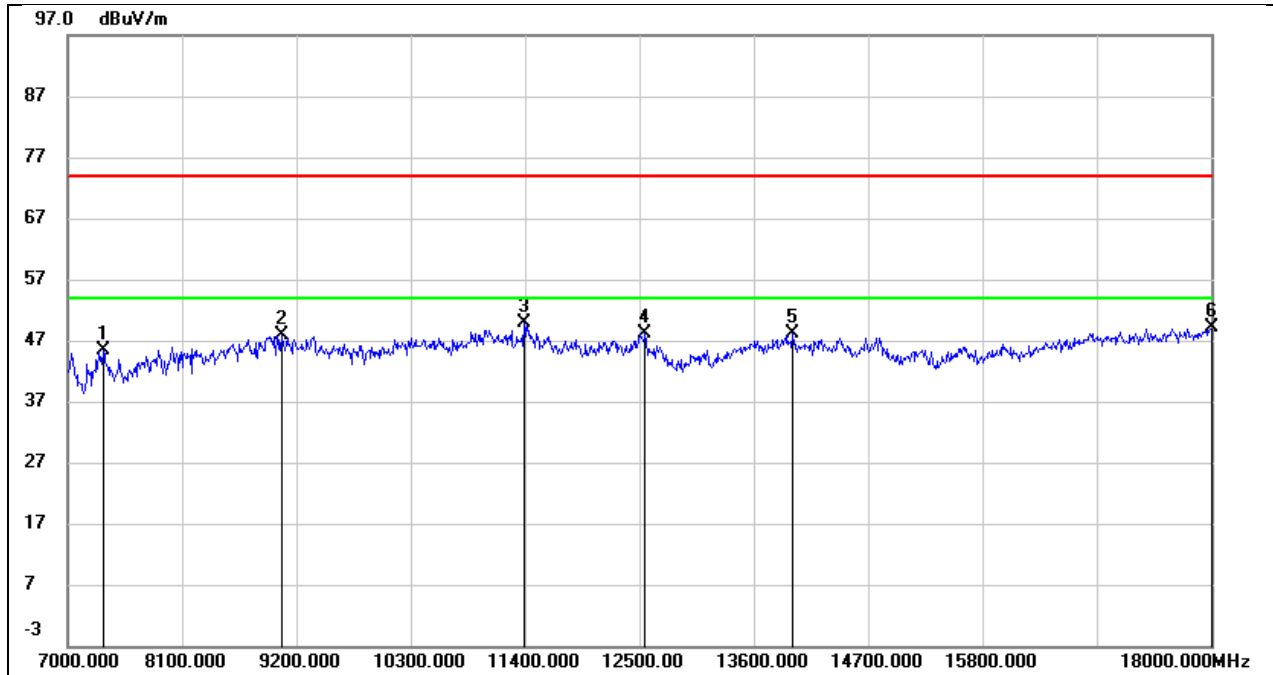


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.62	8.79	45.41	74.00	-28.59	peak
2	9057.000	36.19	11.81	48.00	74.00	-26.00	peak
3	11389.000	35.07	14.91	49.98	74.00	-24.02	peak
4	12555.000	31.00	17.10	48.10	74.00	-25.90	peak
5	13974.000	27.27	20.81	48.08	74.00	-25.92	peak
6	18000.000	22.93	26.27	49.20	74.00	-24.80	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

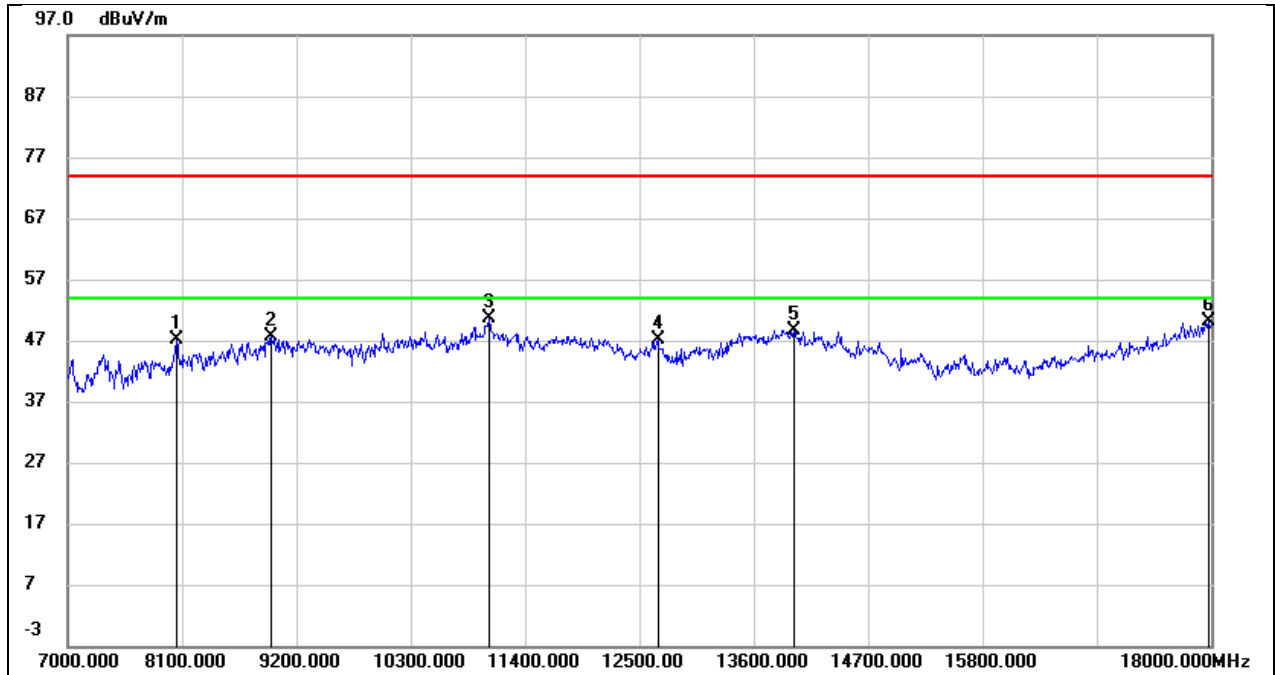


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8045.000	39.72	7.37	47.09	74.00	-26.91	peak
2	8958.000	36.23	11.34	47.57	74.00	-26.43	peak
3	11059.000	35.74	14.90	50.64	74.00	-23.36	peak
4	12676.000	29.08	18.14	47.22	74.00	-26.78	peak
5	13985.000	26.24	22.42	48.66	74.00	-25.34	peak
6	17978.000	21.86	28.34	50.20	74.00	-23.80	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

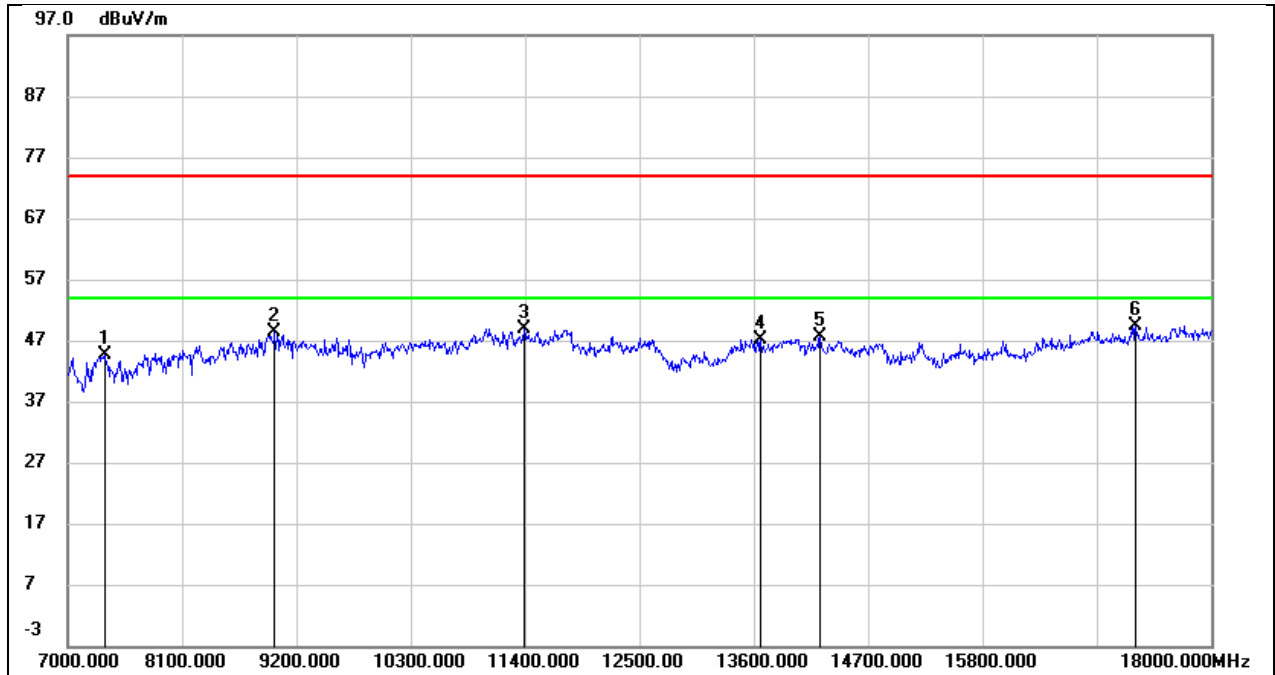


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.71	8.86	44.57	74.00	-29.43	peak
2	8991.000	36.06	12.23	48.29	74.00	-25.71	peak
3	11389.000	34.04	14.91	48.95	74.00	-25.05	peak
4	13666.000	27.39	19.85	47.24	74.00	-26.76	peak
5	14238.000	27.03	20.69	47.72	74.00	-26.28	peak
6	17274.000	25.32	24.11	49.43	74.00	-24.57	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

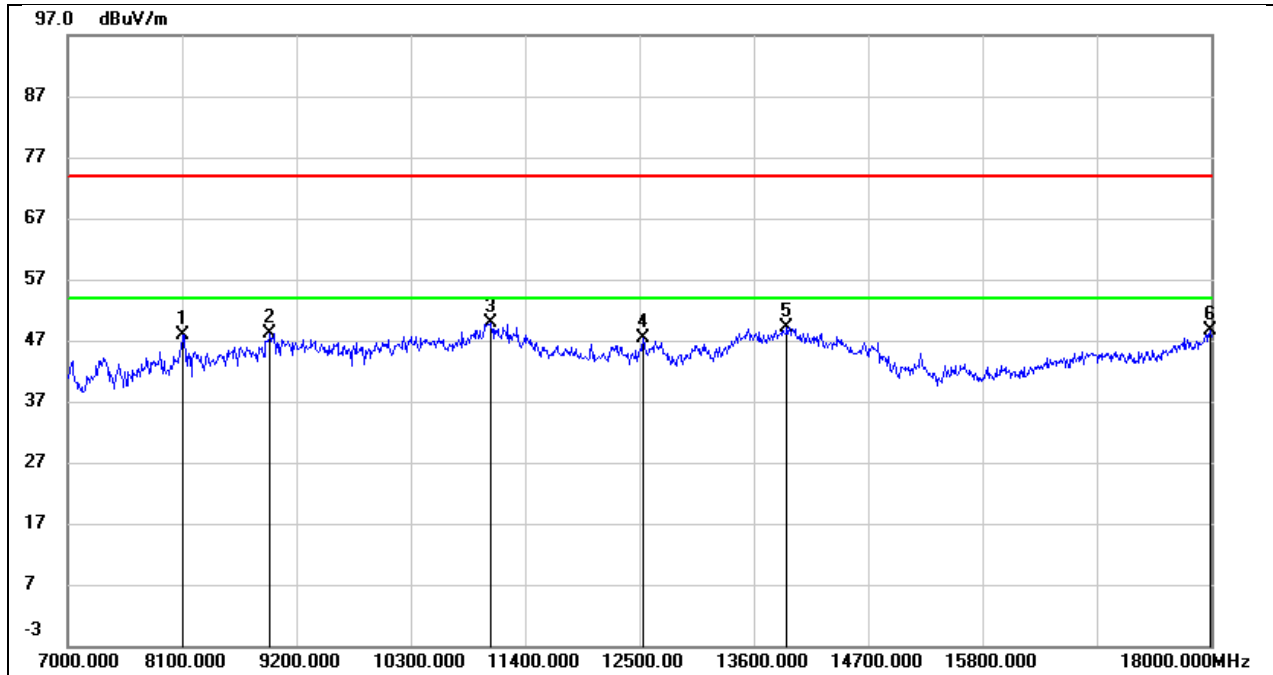


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	40.02	7.94	47.96	74.00	-26.04	peak
2	8947.000	36.89	11.18	48.07	74.00	-25.93	peak
3	11070.000	34.99	14.91	49.90	74.00	-24.10	peak
4	12533.000	29.31	18.10	47.41	74.00	-26.59	peak
5	13919.000	26.71	22.36	49.07	74.00	-24.93	peak
6	17989.000	20.23	28.41	48.64	74.00	-25.36	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

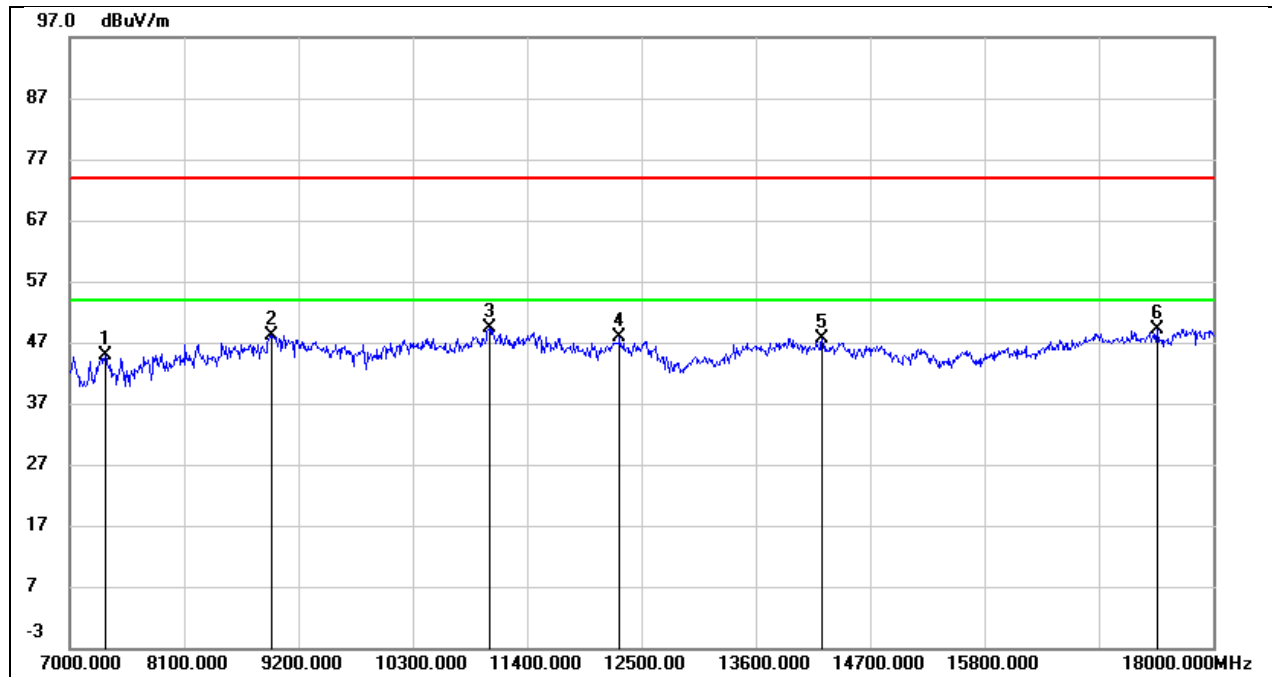


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.14	8.79	44.93	74.00	-29.07	peak
2	8936.000	36.76	11.44	48.20	74.00	-25.80	peak
3	11037.000	35.40	14.01	49.41	74.00	-24.59	peak
4	12291.000	30.68	17.30	47.98	74.00	-26.02	peak
5	14238.000	27.03	20.69	47.72	74.00	-26.28	peak
6	17461.000	25.01	24.21	49.22	74.00	-24.78	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

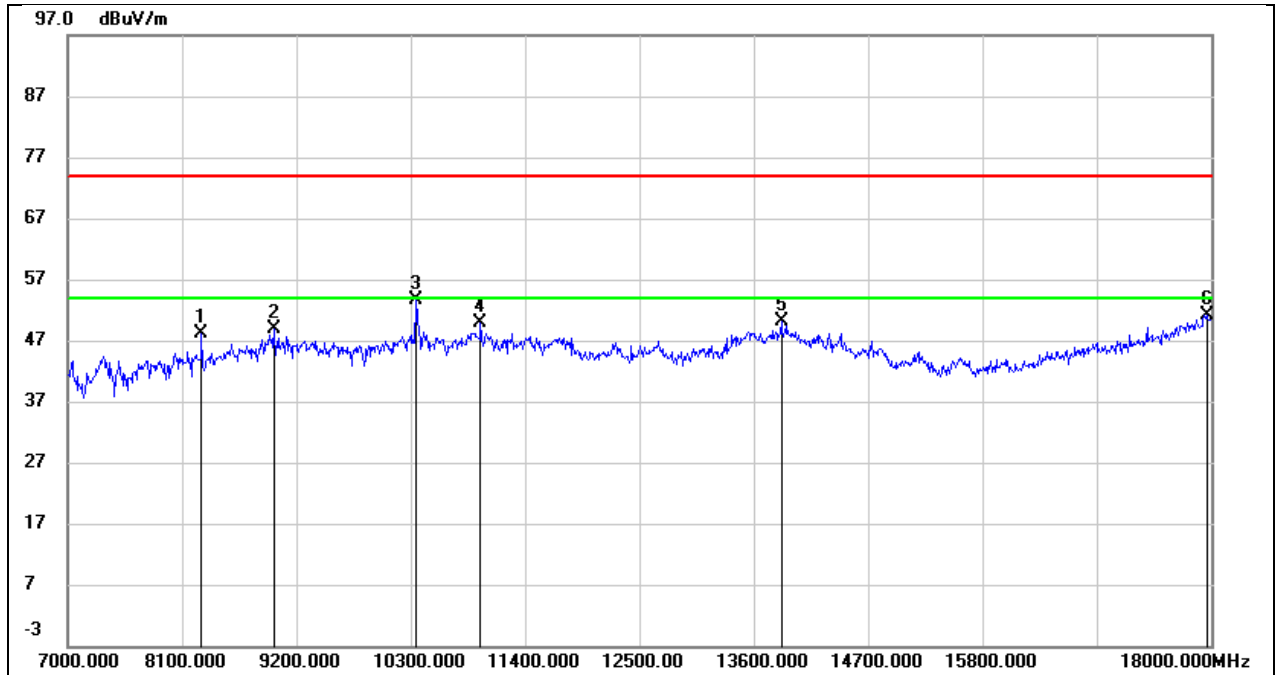


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8287.000	39.76	8.38	48.14	74.00	-25.86	peak
2	8980.000	37.10	11.67	48.77	74.00	-25.23	peak
3	10355.000	40.88	12.84	53.72	74.00	-20.28	peak
4	10971.000	35.33	14.63	49.96	74.00	-24.04	peak
5	13864.000	27.73	22.30	50.03	74.00	-23.97	peak
6	17956.000	22.92	28.21	51.13	74.00	-22.87	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

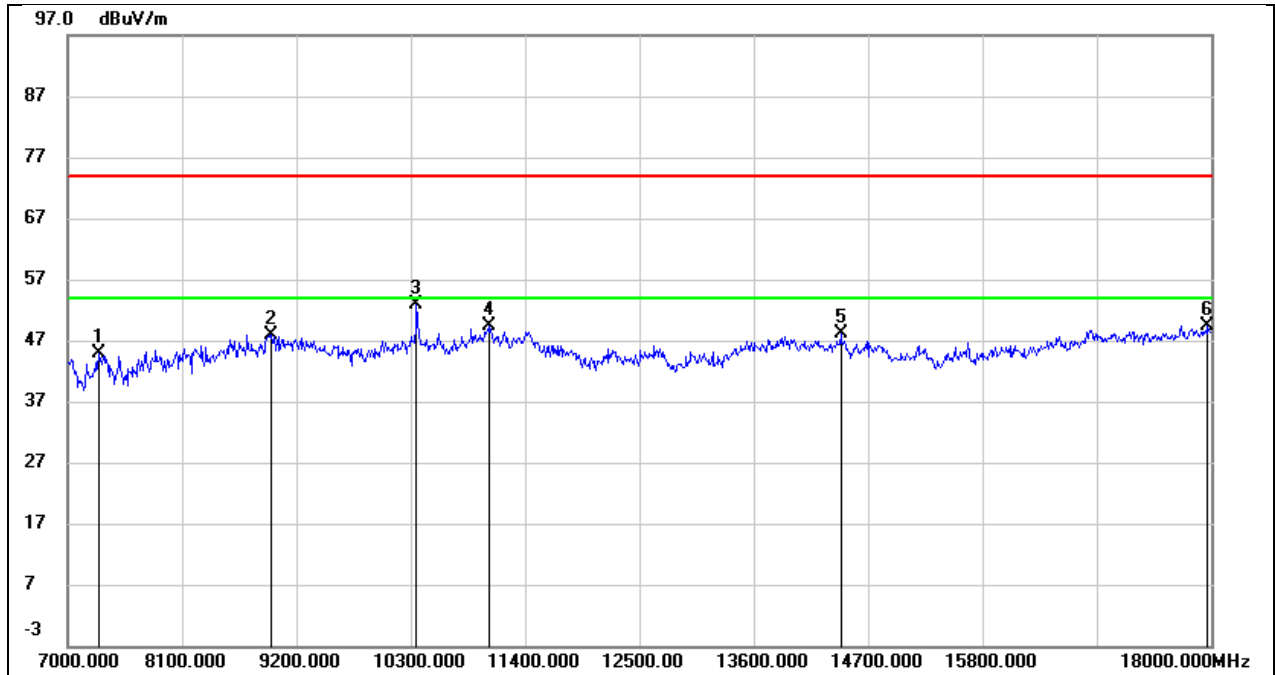


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.45	8.47	44.92	74.00	-29.08	peak
2	8958.000	36.22	11.76	47.98	74.00	-26.02	peak
3	10355.000	40.43	12.50	52.93	74.00	-21.07	peak
4	11048.000	35.31	14.01	49.32	74.00	-24.68	peak
5	14436.000	27.90	20.15	48.05	74.00	-25.95	peak
6	17967.000	23.27	26.22	49.49	74.00	-24.51	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 5 V

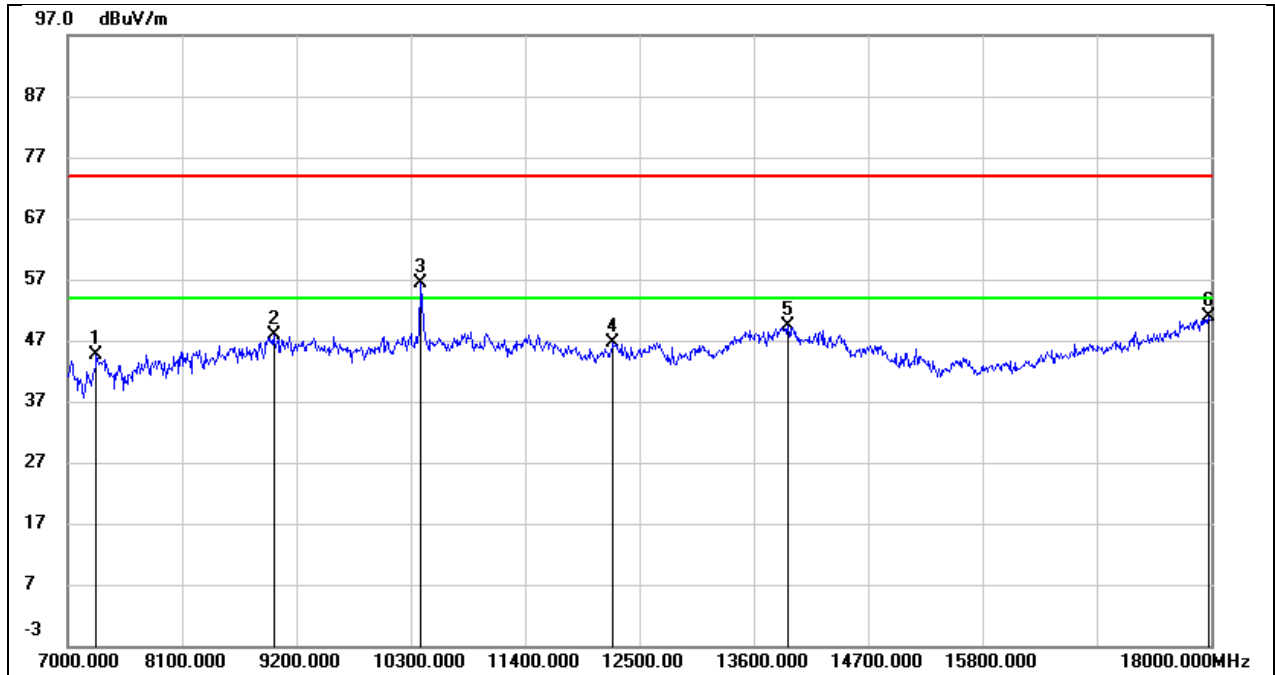


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	37.07	7.62	44.69	74.00	-29.31	peak
2	8980.000	36.12	11.67	47.79	74.00	-26.21	peak
3	10399.000	43.26	13.01	56.27	74.00	-17.73	peak
4	12247.000	28.55	18.18	46.73	74.00	-27.27	peak
5	13930.000	27.03	22.37	49.40	74.00	-24.60	peak
6	17978.000	22.53	28.34	50.87	74.00	-23.13	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 5 V

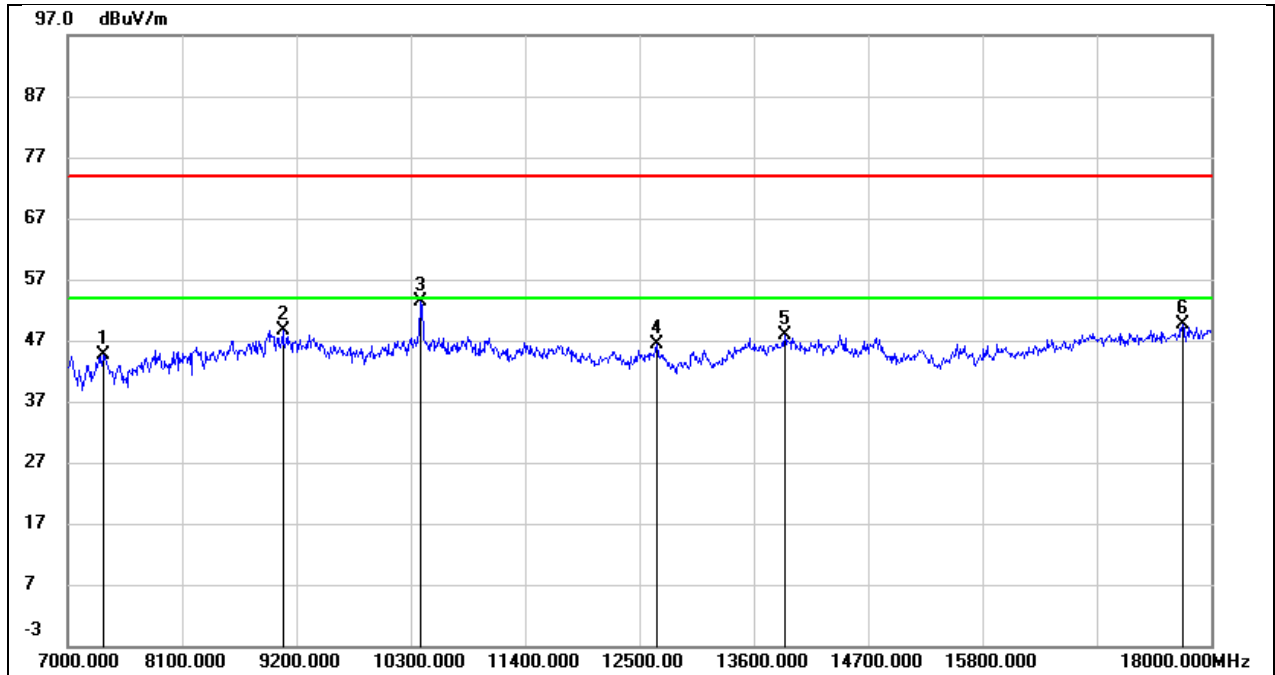


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.84	8.79	44.63	74.00	-29.37	peak
2	9068.000	36.97	11.69	48.66	74.00	-25.34	peak
3	10399.000	40.64	12.71	53.35	74.00	-20.65	peak
4	12665.000	29.16	17.11	46.27	74.00	-27.73	peak
5	13897.000	27.27	20.71	47.98	74.00	-26.02	peak
6	17725.000	24.26	25.33	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 5 V

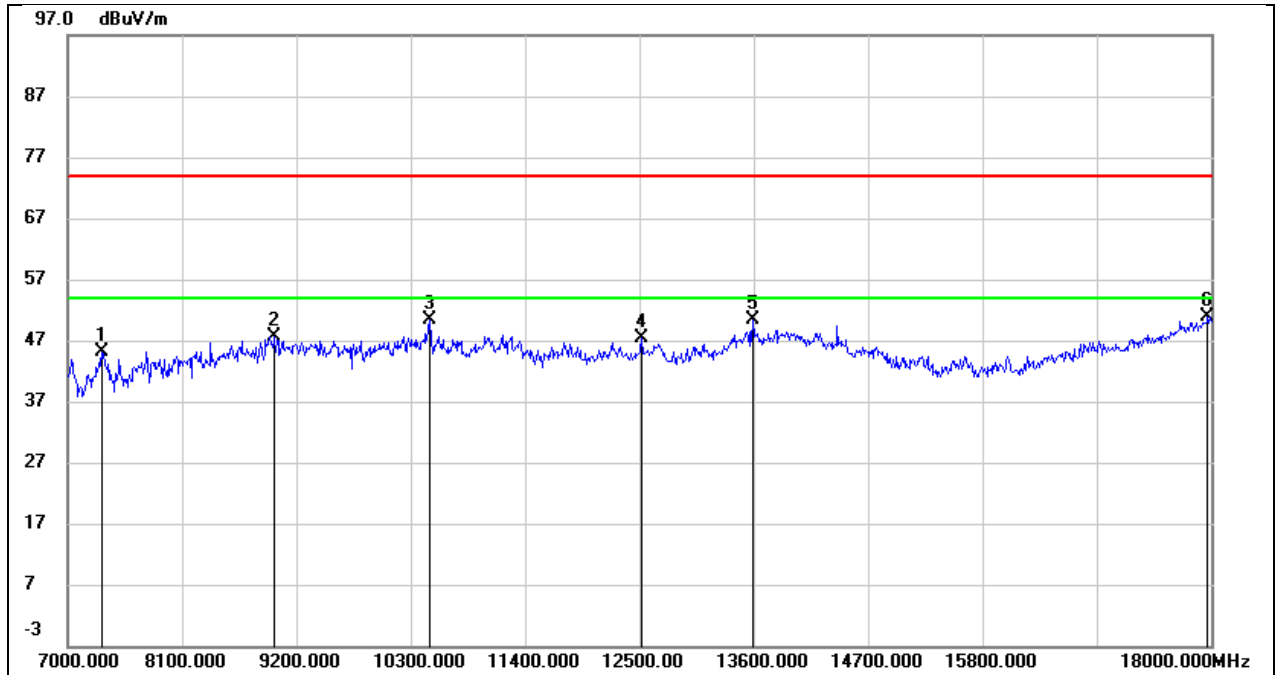


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	36.98	8.07	45.05	74.00	-28.95	peak
2	8991.000	35.86	11.83	47.69	74.00	-26.31	peak
3	10487.000	37.32	13.17	50.49	74.00	-23.51	peak
4	12522.000	29.27	18.12	47.39	74.00	-26.61	peak
5	13589.000	29.35	21.15	50.50	74.00	-23.50	peak
6	17967.000	22.55	28.28	50.83	74.00	-23.17	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5 V

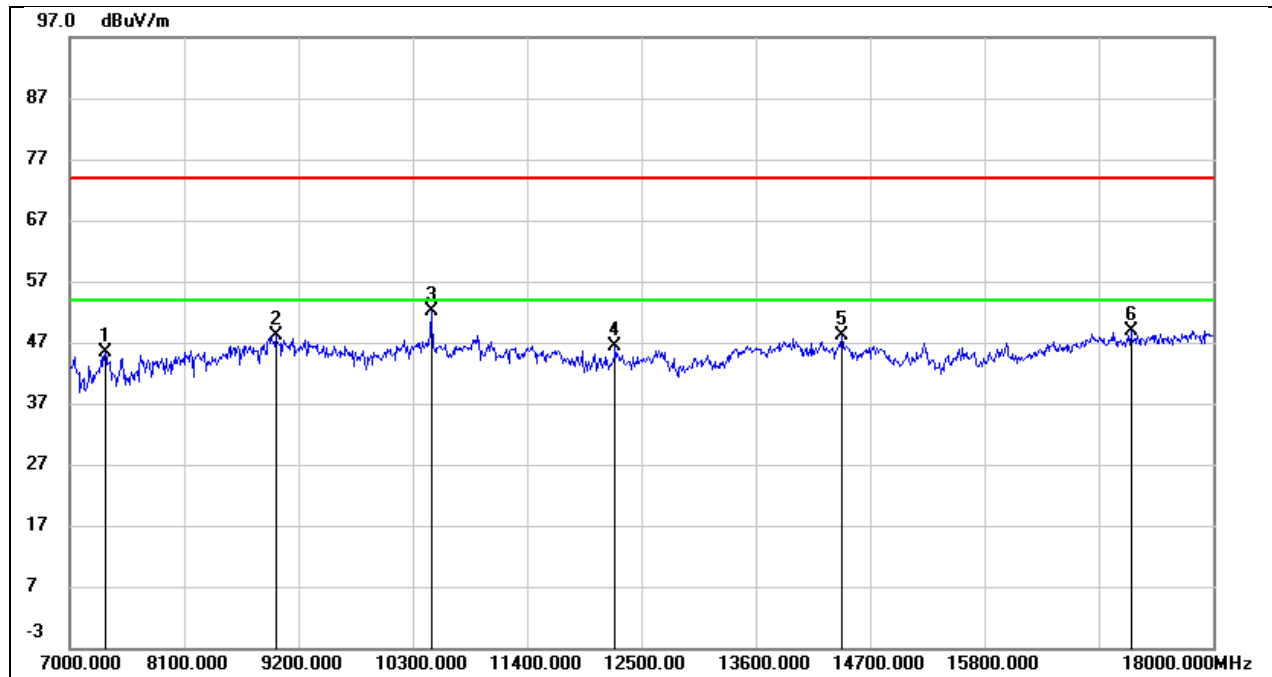


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.54	8.79	45.33	74.00	-28.67	peak
2	8980.000	36.13	12.07	48.20	74.00	-25.80	peak
3	10476.000	39.17	12.93	52.10	74.00	-21.90	peak
4	12247.000	29.25	17.18	46.43	74.00	-27.57	peak
5	14425.000	28.09	20.16	48.25	74.00	-25.75	peak
6	17208.000	24.86	24.02	48.88	74.00	-25.12	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5 V

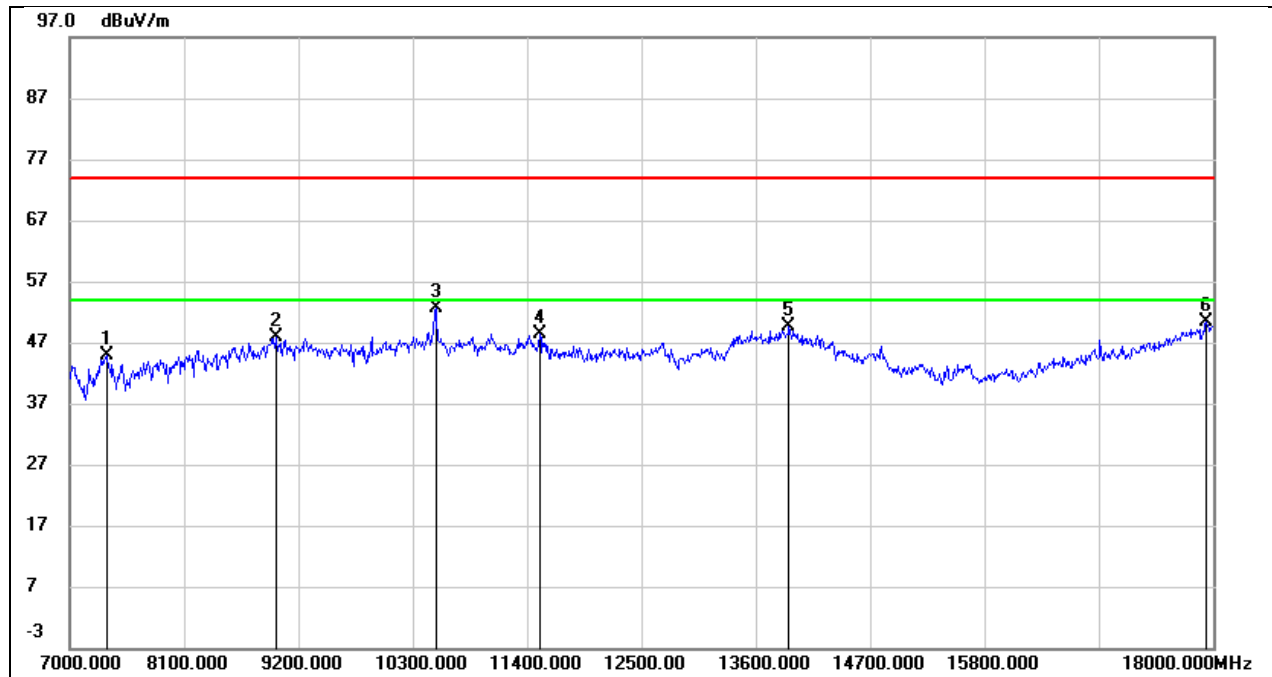


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	36.63	8.34	44.97	74.00	-29.03	peak
2	8980.000	36.17	11.67	47.84	74.00	-26.16	peak
3	10520.000	39.46	13.27	52.73	74.00	-21.27	peak
4	11521.000	31.71	16.60	48.31	74.00	-25.69	peak
5	13919.000	27.35	22.36	49.71	74.00	-24.29	peak
6	17934.000	22.32	28.09	50.41	74.00	-23.59	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5 V

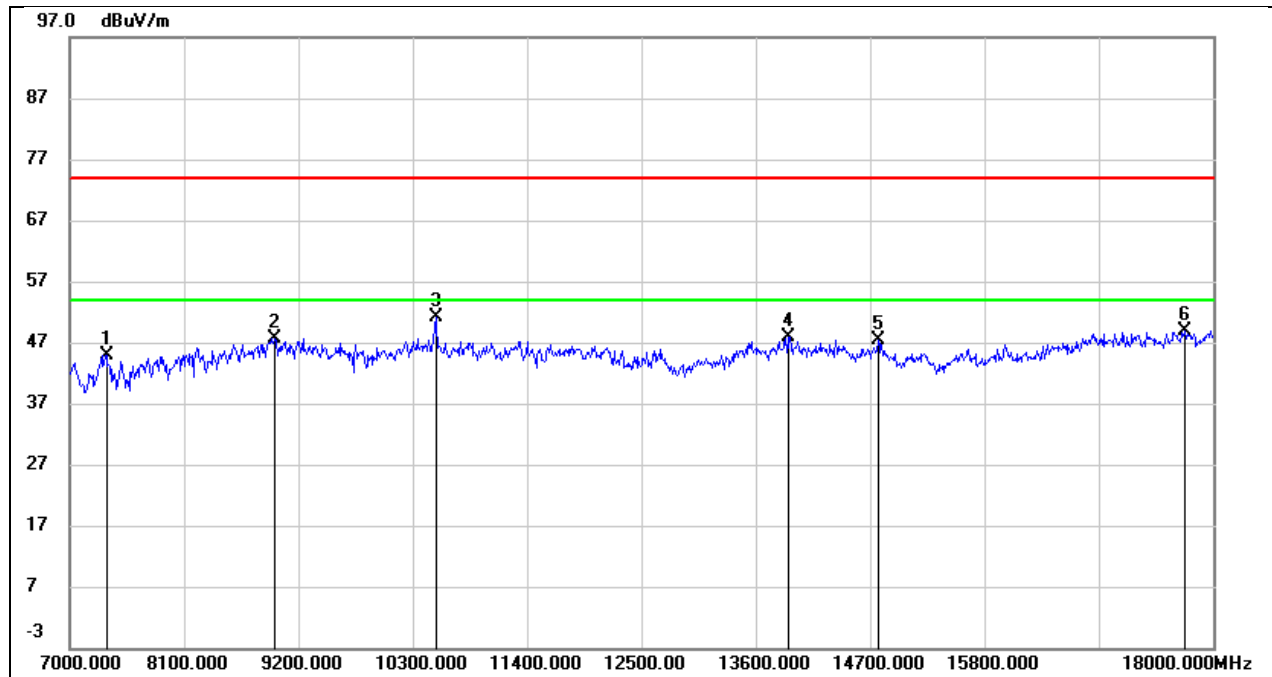


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.13	8.86	44.99	74.00	-29.01	peak
2	8969.000	35.64	11.92	47.56	74.00	-26.44	peak
3	10520.000	38.04	13.04	51.08	74.00	-22.92	peak
4	13908.000	27.14	20.73	47.87	74.00	-26.13	peak
5	14777.000	27.65	19.72	47.37	74.00	-26.63	peak
6	17725.000	23.55	25.33	48.88	74.00	-25.12	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5 V

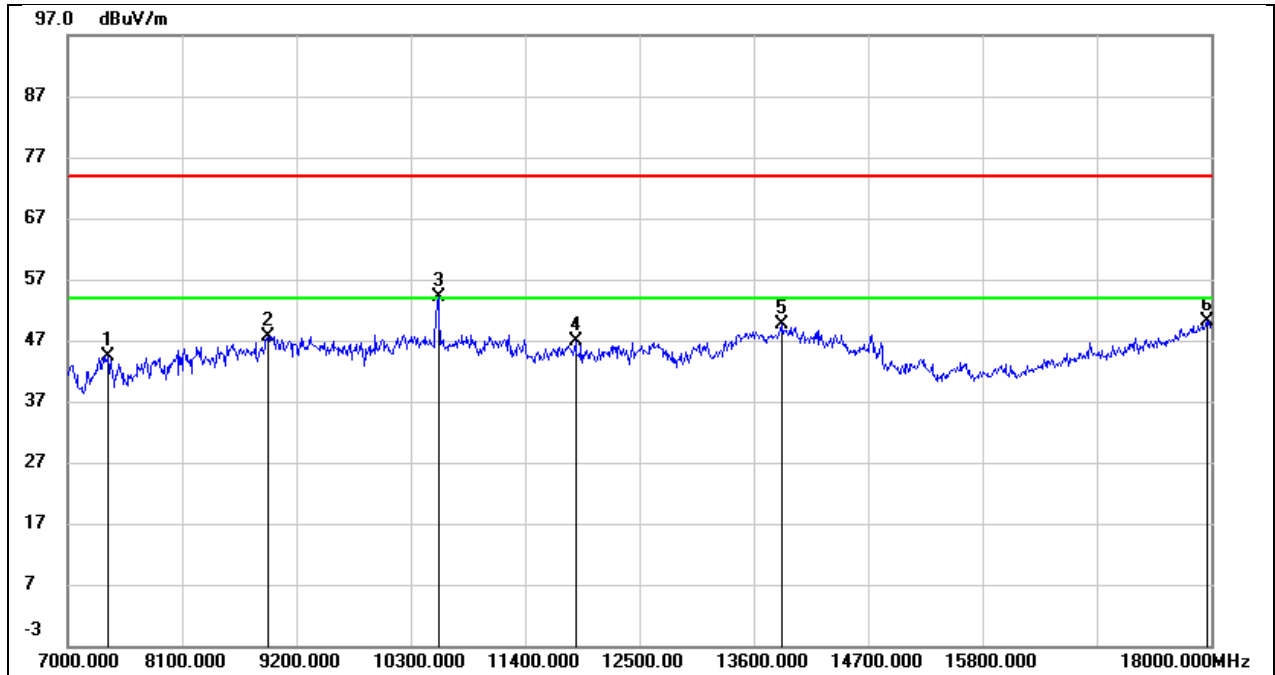


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7385.000	35.94	8.52	44.46	74.00	-29.54	peak
2	8925.000	36.86	10.85	47.71	74.00	-26.29	peak
3	10564.000	40.63	13.41	54.04	74.00	-19.96	peak
4	11884.000	29.31	17.47	46.78	74.00	-27.22	peak
5	13875.000	27.33	22.31	49.64	74.00	-24.36	peak
6	17956.000	21.99	28.21	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5 V

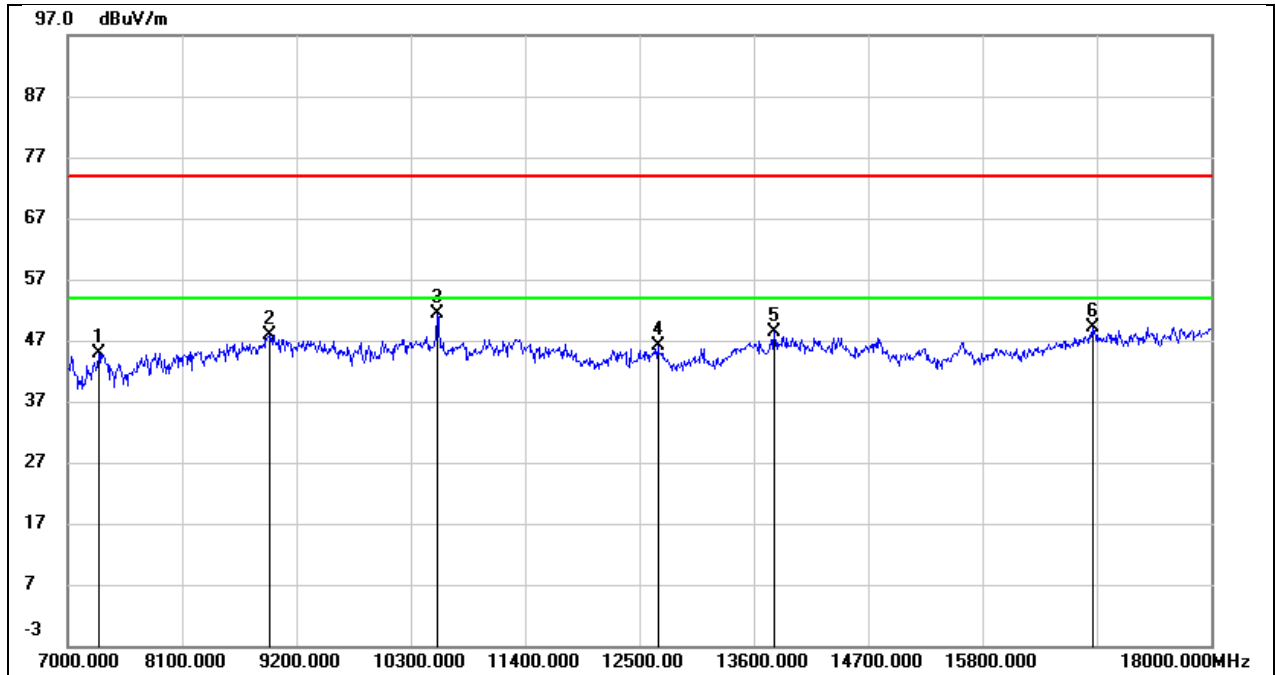


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.45	8.47	44.92	74.00	-29.08	peak
2	8936.000	36.50	11.44	47.94	74.00	-26.06	peak
3	10553.000	38.21	13.10	51.31	74.00	-22.69	peak
4	12676.000	28.88	17.13	46.01	74.00	-27.99	peak
5	13798.000	27.69	20.59	48.28	74.00	-25.72	peak
6	16856.000	25.94	23.19	49.13	74.00	-24.87	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

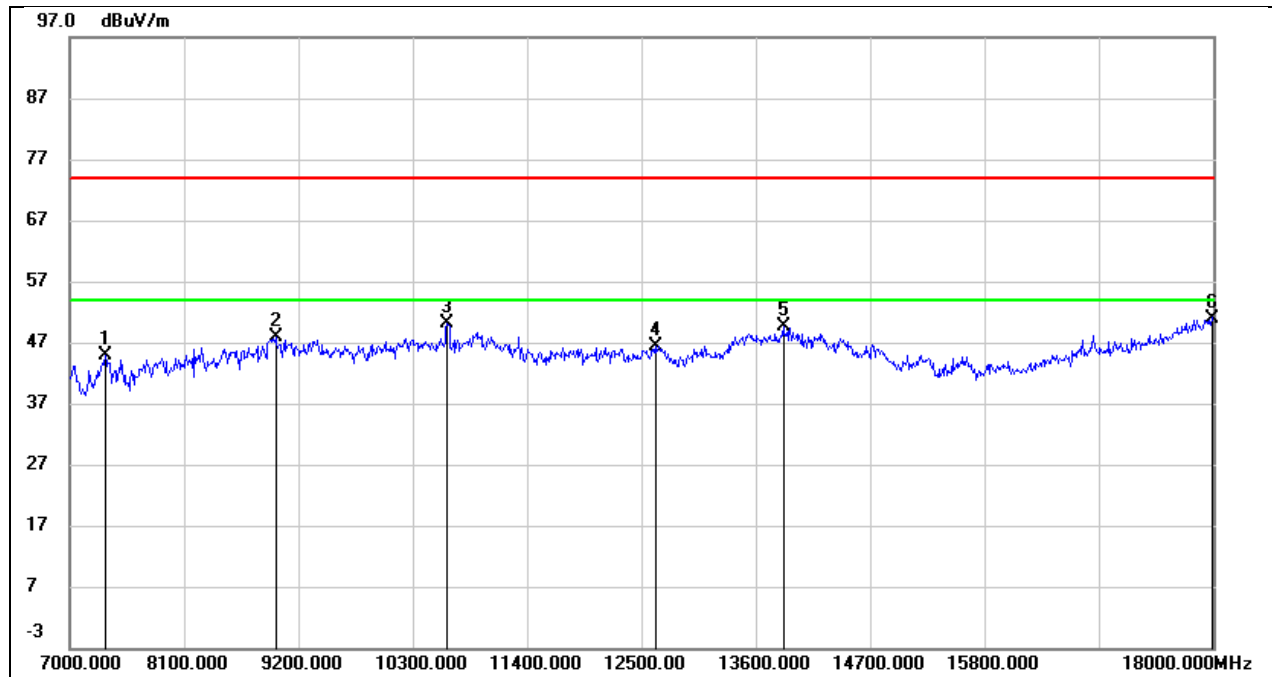


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.72	8.17	44.89	74.00	-29.11	peak
2	8980.000	36.18	11.67	47.85	74.00	-26.15	peak
3	10630.000	36.61	13.53	50.14	74.00	-23.86	peak
4	12632.000	28.43	18.02	46.45	74.00	-27.55	peak
5	13864.000	27.27	22.30	49.57	74.00	-24.43	peak
6	17989.000	22.59	28.41	51.00	74.00	-23.00	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

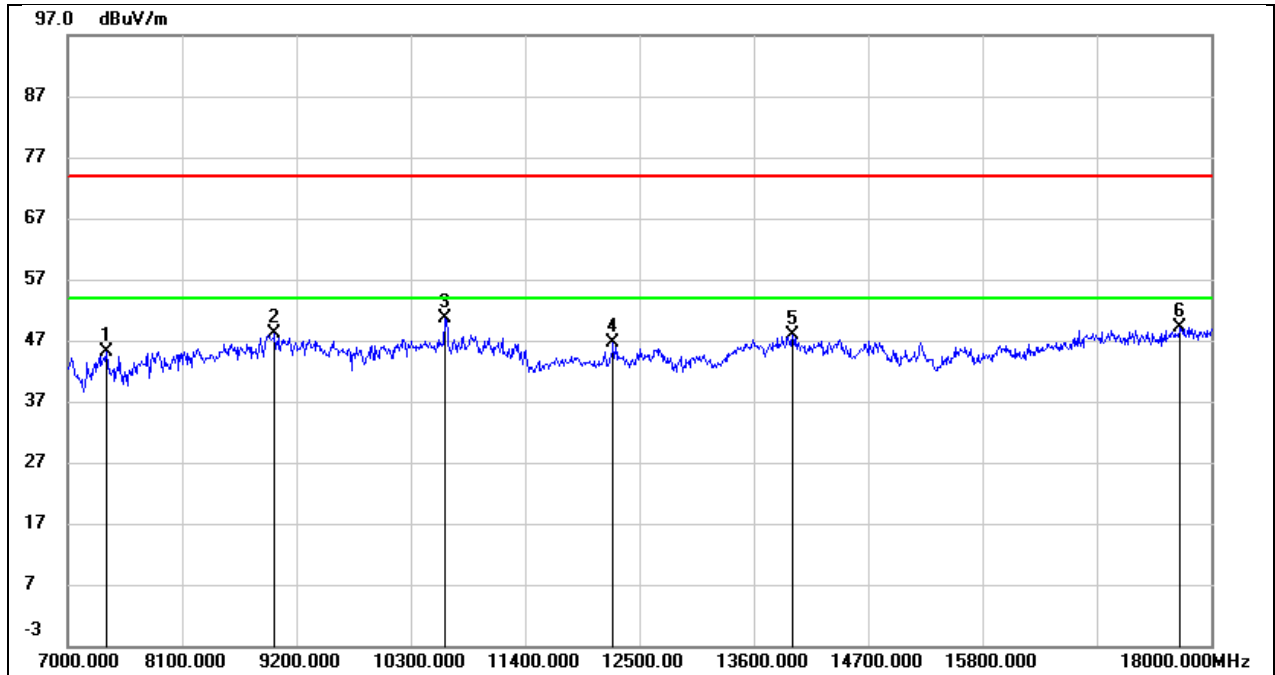


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7374.000	36.09	9.02	45.11	74.00	-28.89	peak
2	8991.000	35.85	12.23	48.08	74.00	-25.92	peak
3	10630.000	37.35	13.18	50.53	74.00	-23.47	peak
4	12247.000	29.41	17.18	46.59	74.00	-27.41	peak
5	13974.000	26.98	20.81	47.79	74.00	-26.21	peak
6	17703.000	24.08	25.14	49.22	74.00	-24.78	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

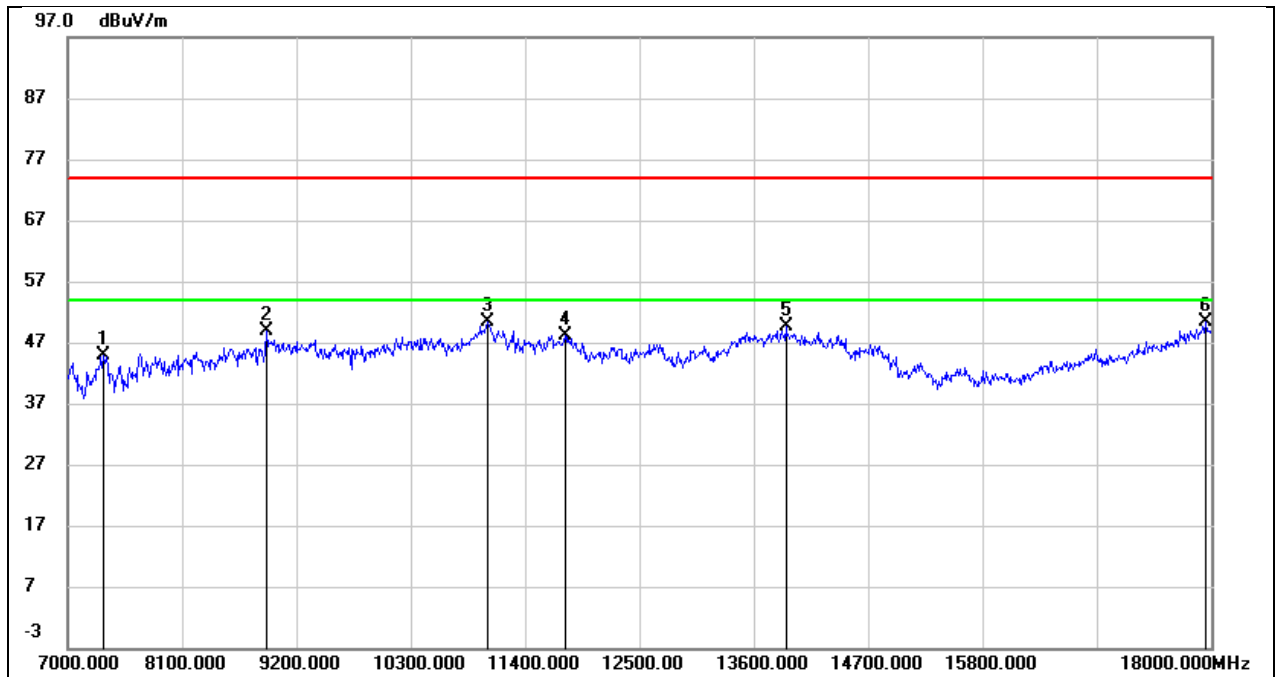


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.66	8.17	44.83	74.00	-29.17	peak
2	8914.000	38.15	10.68	48.83	74.00	-25.17	peak
3	11037.000	35.50	14.86	50.36	74.00	-23.64	peak
4	11785.000	30.98	17.05	48.03	74.00	-25.97	peak
5	13908.000	27.24	22.35	49.59	74.00	-24.41	peak
6	17945.000	22.30	28.15	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

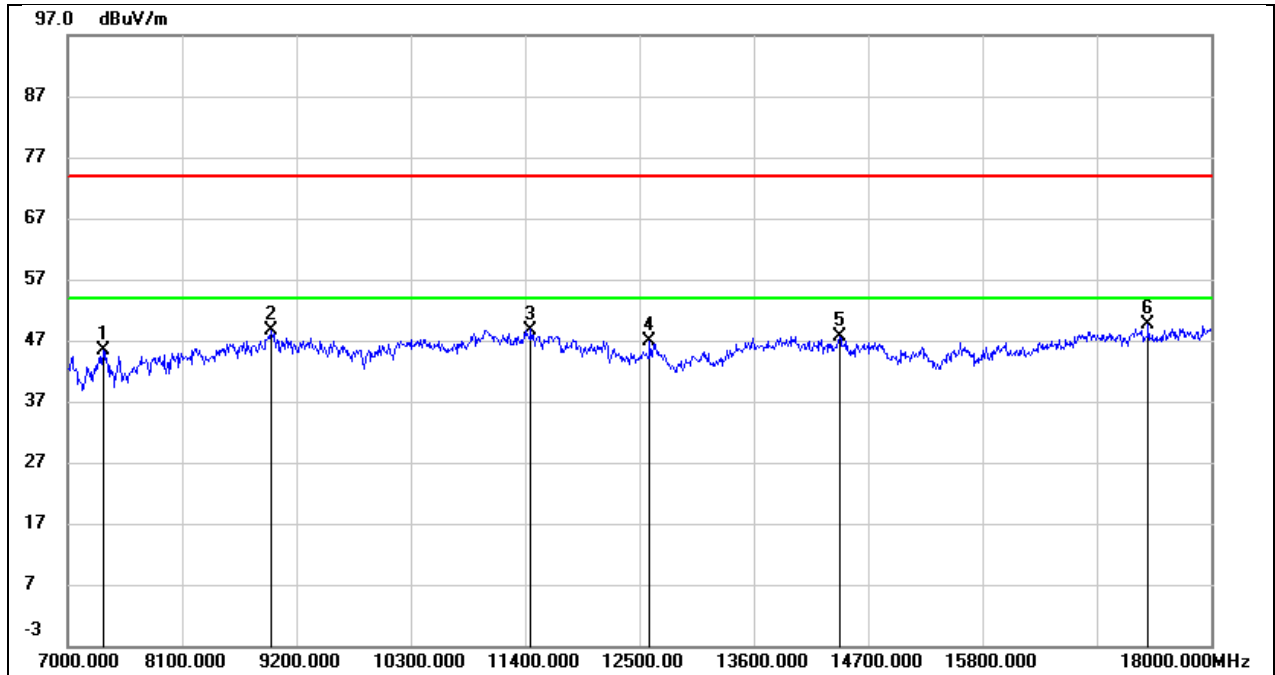


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.48	8.79	45.27	74.00	-28.73	peak
2	8958.000	36.98	11.76	48.74	74.00	-25.26	peak
3	11455.000	33.73	15.02	48.75	74.00	-25.25	peak
4	12599.000	29.84	16.98	46.82	74.00	-27.18	peak
5	14425.000	27.51	20.16	47.67	74.00	-26.33	peak
6	17395.000	25.33	24.30	49.63	74.00	-24.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

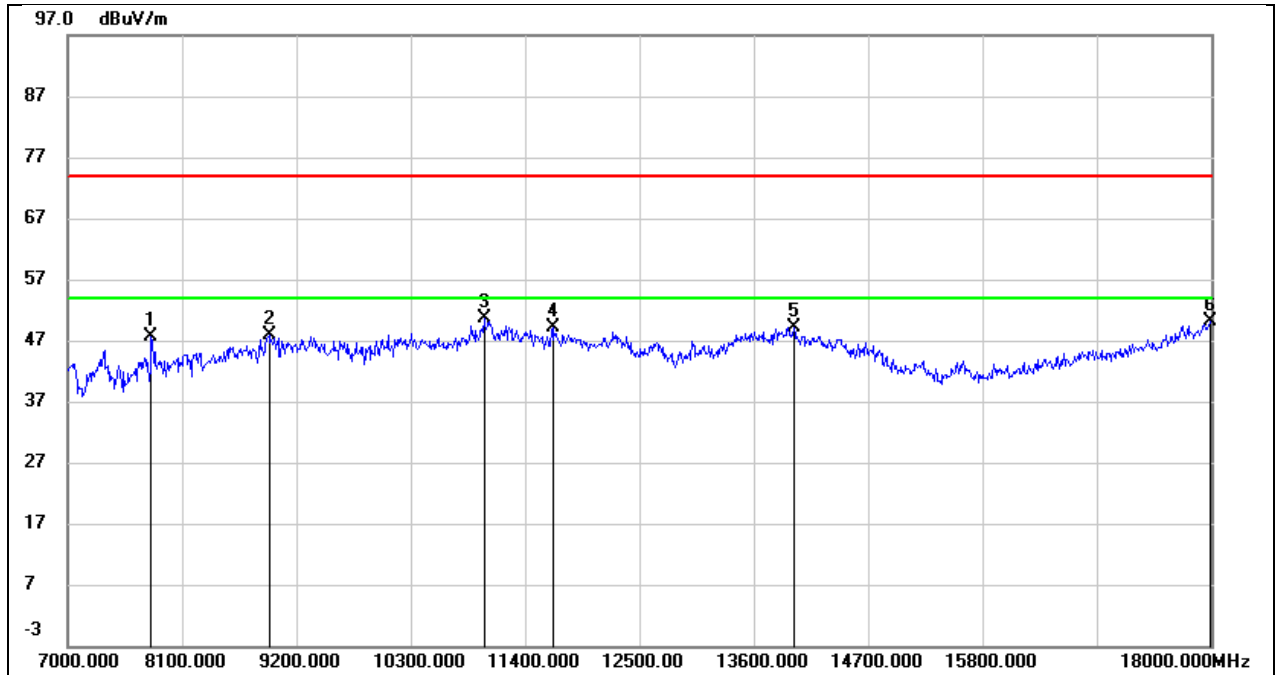


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	40.60	6.98	47.58	74.00	-26.42	peak
2	8936.000	36.81	11.01	47.82	74.00	-26.18	peak
3	11004.000	35.90	14.80	50.70	74.00	-23.30	peak
4	11664.000	32.25	16.79	49.04	74.00	-24.96	peak
5	13985.000	26.71	22.42	49.13	74.00	-24.87	peak
6	17989.000	21.75	28.41	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

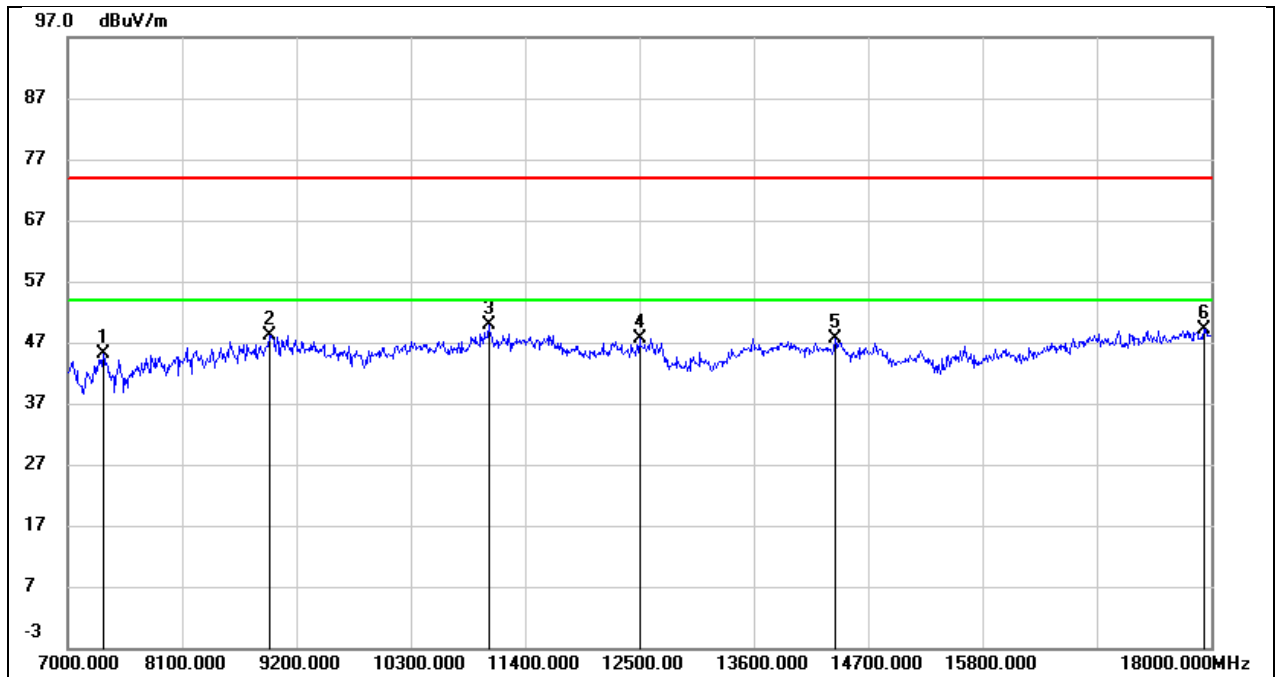


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.23	8.79	45.02	74.00	-28.98	peak
2	8936.000	36.73	11.44	48.17	74.00	-25.83	peak
3	11048.000	35.80	14.01	49.81	74.00	-24.19	peak
4	12500.000	30.29	17.26	47.55	74.00	-26.45	peak
5	14381.000	27.27	20.27	47.54	74.00	-26.46	peak
6	17934.000	23.06	26.18	49.24	74.00	-24.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

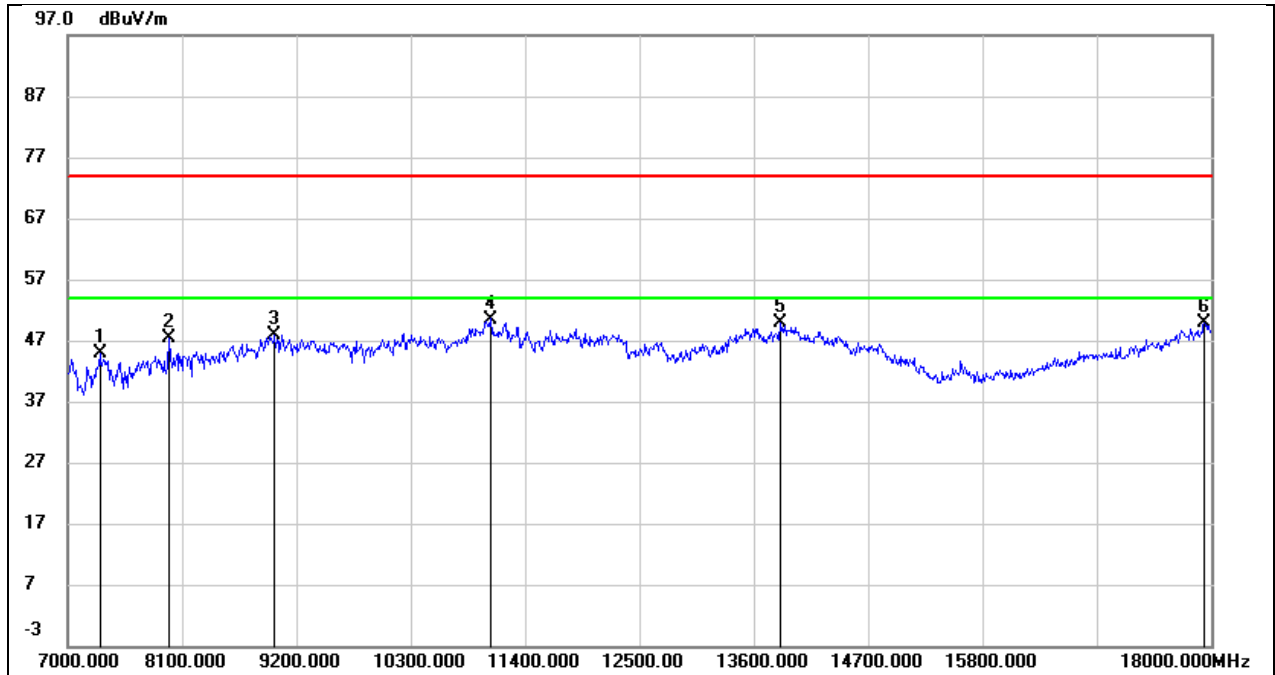


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.00	7.89	44.89	74.00	-29.11	peak
2	7968.000	40.28	6.98	47.26	74.00	-26.74	peak
3	8991.000	36.03	11.83	47.86	74.00	-26.14	peak
4	11070.000	35.59	14.91	50.50	74.00	-23.50	peak
5	13853.000	27.49	22.30	49.79	74.00	-24.21	peak
6	17934.000	21.81	28.09	49.90	74.00	-24.10	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

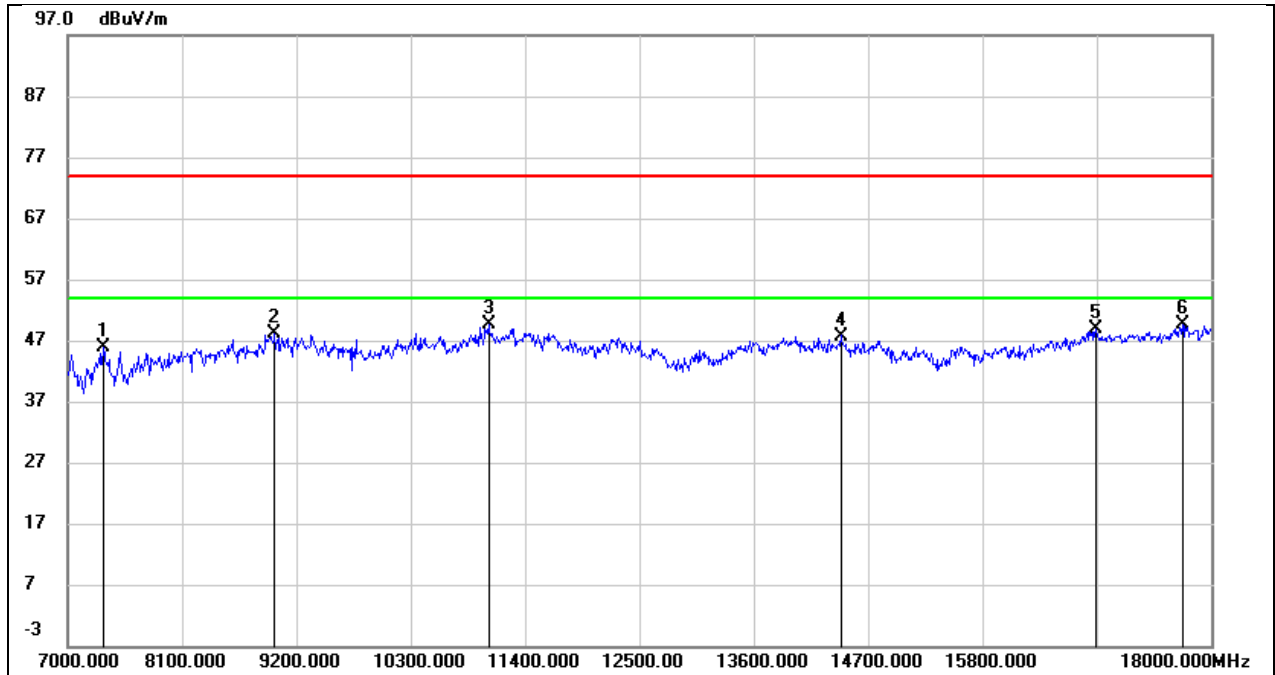


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.98	8.79	45.77	74.00	-28.23	peak
2	8991.000	35.95	12.23	48.18	74.00	-25.82	peak
3	11048.000	35.53	14.01	49.54	74.00	-24.46	peak
4	14436.000	27.60	20.15	47.75	74.00	-26.25	peak
5	16889.000	25.66	23.22	48.88	74.00	-25.12	peak
6	17725.000	24.23	25.33	49.56	74.00	-24.44	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

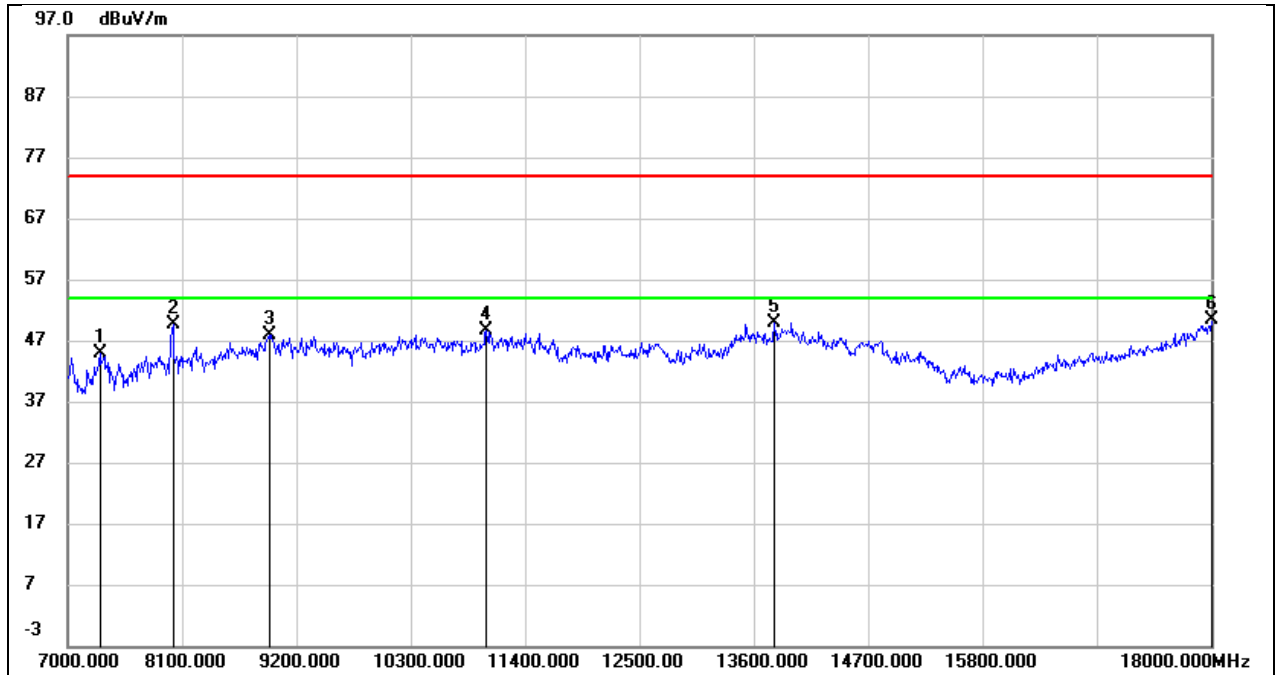


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.94	7.89	44.83	74.00	-29.17	peak
2	8012.000	42.43	7.09	49.52	74.00	-24.48	peak
3	8947.000	36.65	11.18	47.83	74.00	-26.17	peak
4	11026.000	33.73	14.84	48.57	74.00	-25.43	peak
5	13798.000	27.74	22.23	49.97	74.00	-24.03	peak
6	18000.000	21.79	28.47	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

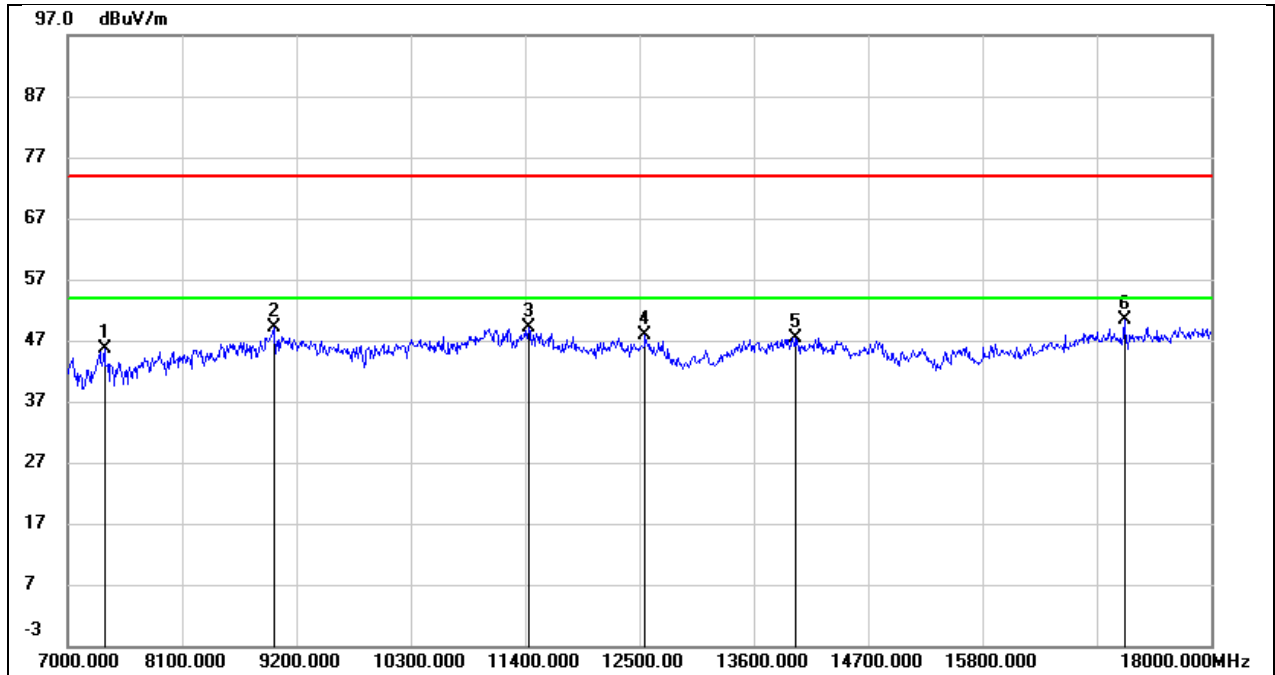


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.88	8.86	45.74	74.00	-28.26	peak
2	8980.000	37.02	12.07	49.09	74.00	-24.91	peak
3	11433.000	34.20	15.00	49.20	74.00	-24.80	peak
4	12555.000	30.66	17.10	47.76	74.00	-26.24	peak
5	13996.000	26.58	20.84	47.42	74.00	-26.58	peak
6	17164.000	26.62	23.88	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

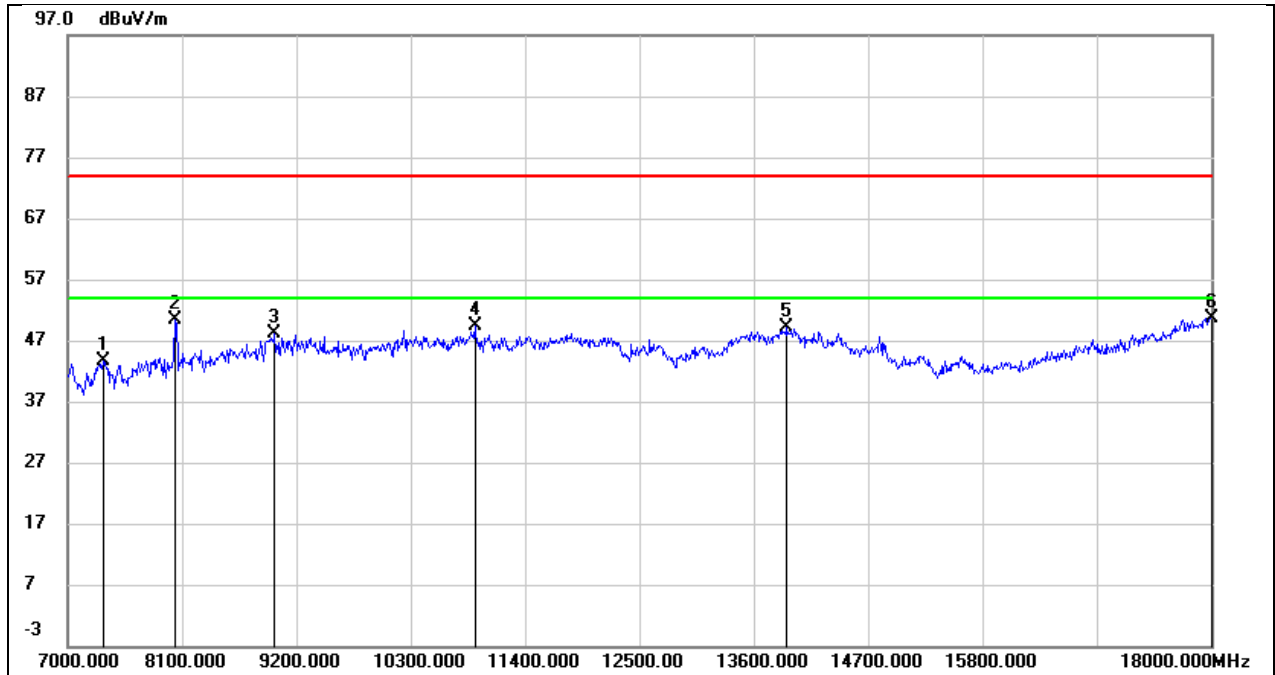


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.56	8.17	43.73	74.00	-30.27	peak
2	8034.000	43.21	7.27	50.48	74.00	-23.52	peak
3	8991.000	36.20	11.83	48.03	74.00	-25.97	peak
4	10916.000	35.05	14.32	49.37	74.00	-24.63	peak
5	13919.000	26.75	22.36	49.11	74.00	-24.89	peak
6	18000.000	22.18	28.47	50.65	74.00	-23.35	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

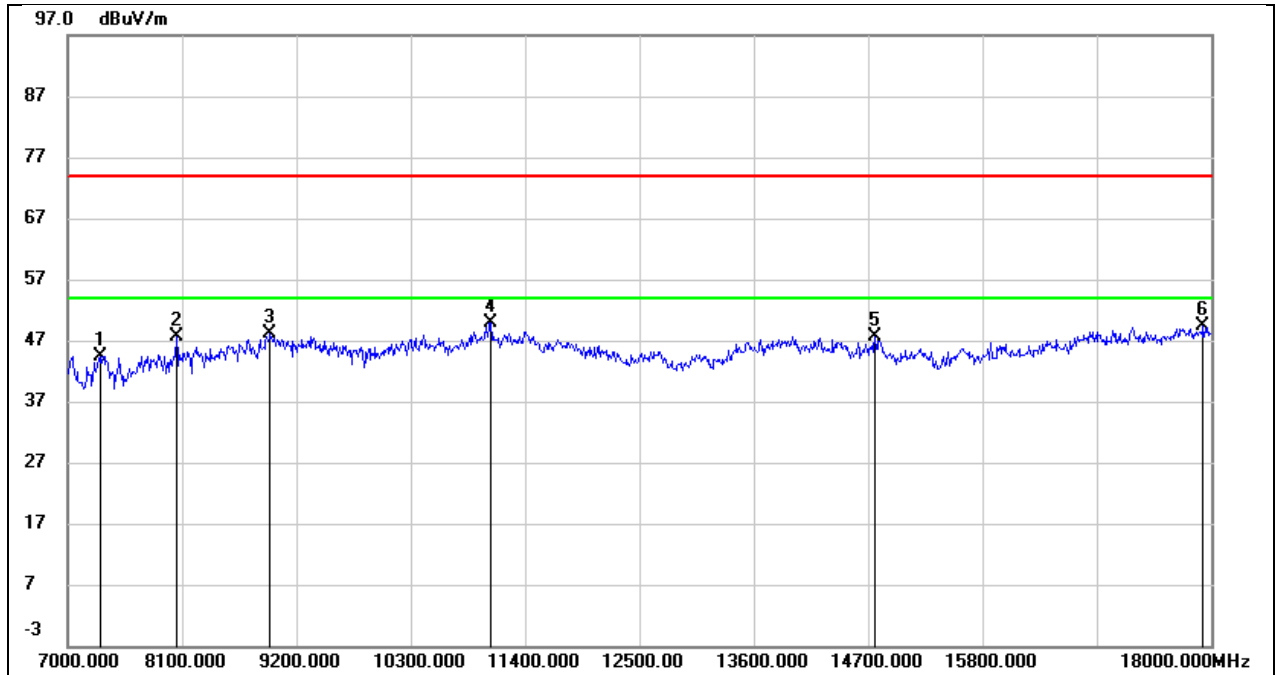


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.91	8.54	44.45	74.00	-29.55	peak
2	8045.000	39.71	7.88	47.59	74.00	-26.41	peak
3	8947.000	36.61	11.60	48.21	74.00	-25.79	peak
4	11070.000	35.88	14.02	49.90	74.00	-24.10	peak
5	14766.000	27.92	19.72	47.64	74.00	-26.36	peak
6	17923.000	23.13	26.15	49.28	74.00	-24.72	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

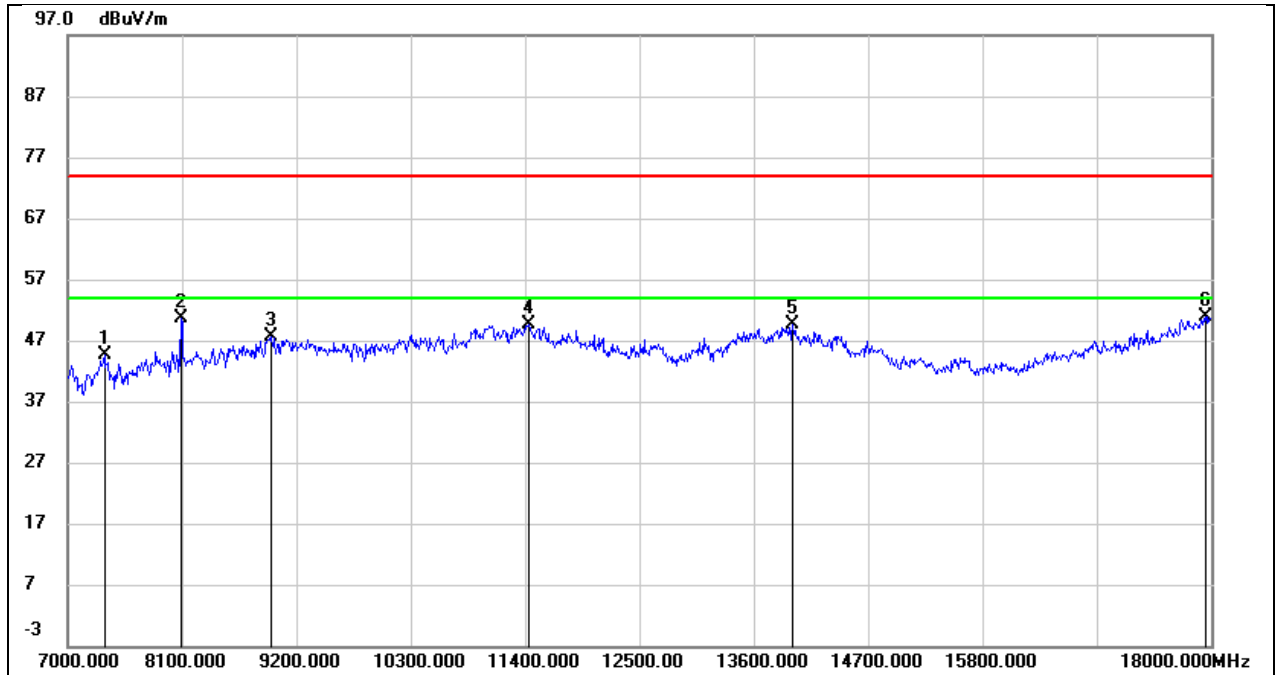


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.42	8.24	44.66	74.00	-29.34	peak
2	8089.000	42.98	7.75	50.73	74.00	-23.27	peak
3	8958.000	36.19	11.34	47.53	74.00	-26.47	peak
4	11433.000	33.19	16.40	49.59	74.00	-24.41	peak
5	13974.000	27.13	22.42	49.55	74.00	-24.45	peak
6	17945.000	22.71	28.15	50.86	74.00	-23.14	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

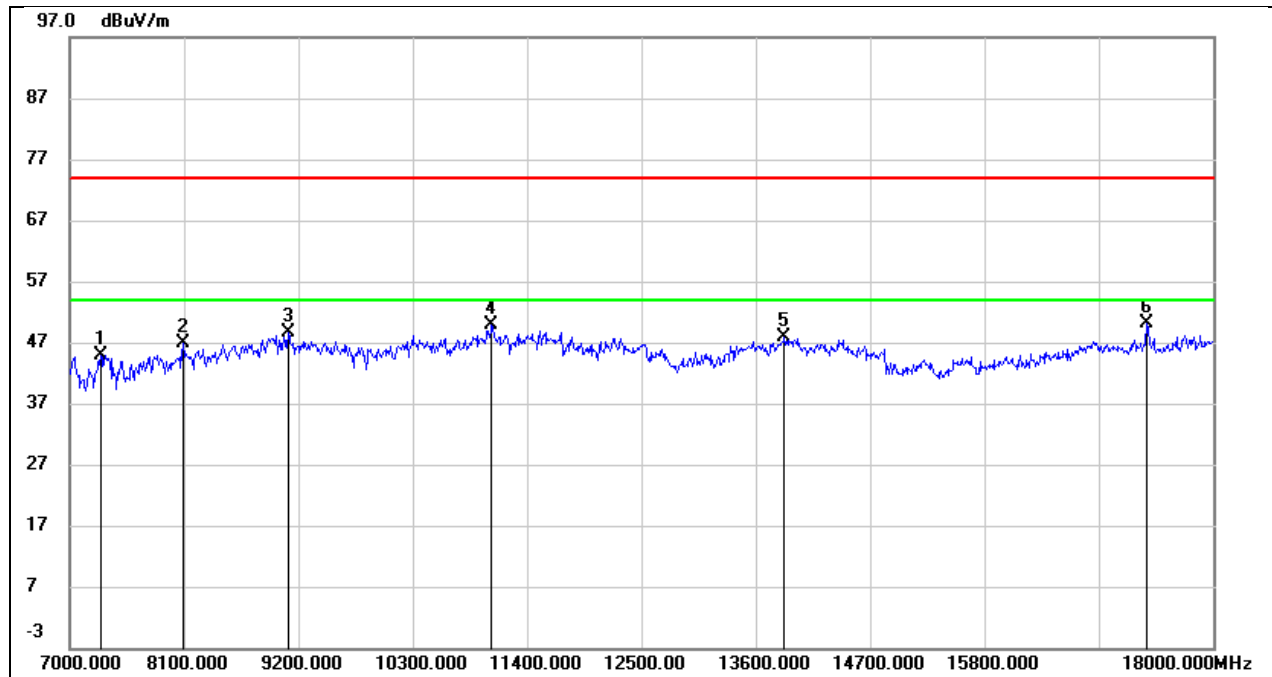


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.48	8.47	44.95	74.00	-29.05	peak
2	8089.000	38.51	8.27	46.78	74.00	-27.22	peak
3	9101.000	37.20	11.36	48.56	74.00	-25.44	peak
4	11059.000	35.79	14.02	49.81	74.00	-24.19	peak
5	13875.000	27.22	20.69	47.91	74.00	-26.09	peak
6	17362.000	25.84	24.24	50.08	74.00	-23.92	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

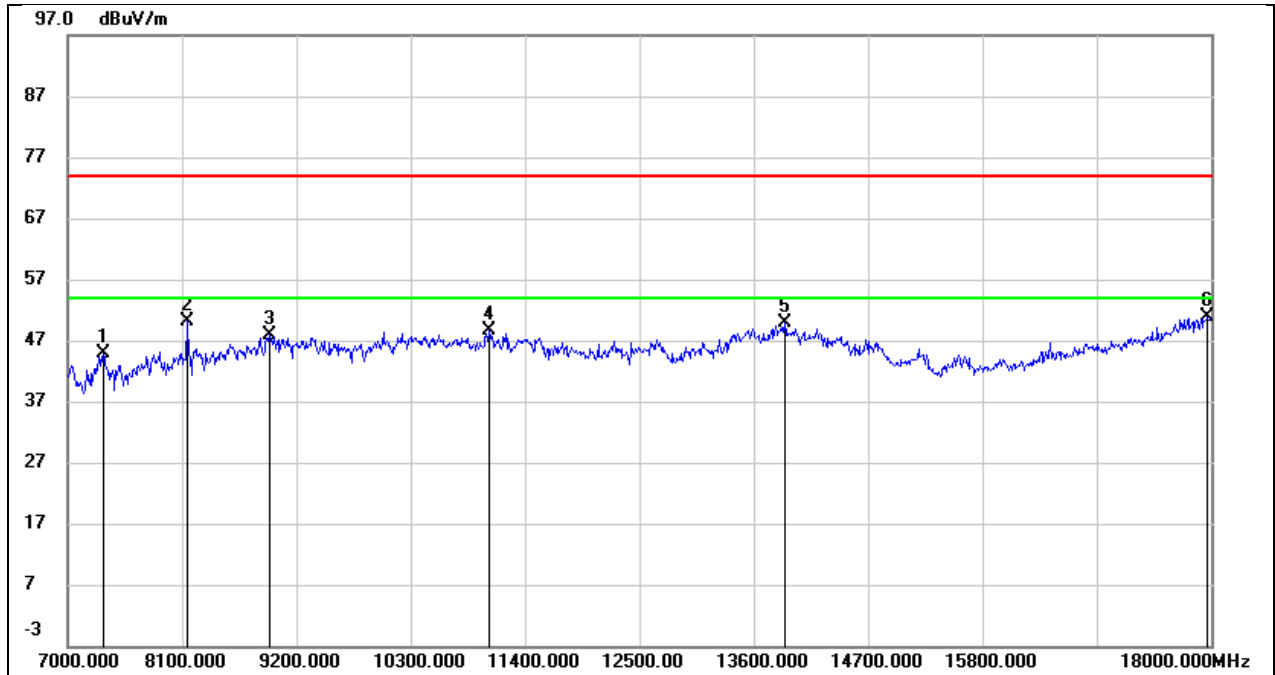


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.65	8.17	44.82	74.00	-29.18	peak
2	8144.000	41.93	8.22	50.15	74.00	-23.85	peak
3	8936.000	36.86	11.01	47.87	74.00	-26.13	peak
4	11048.000	33.77	14.88	48.65	74.00	-25.35	peak
5	13897.000	27.47	22.33	49.80	74.00	-24.20	peak
6	17967.000	22.66	28.28	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

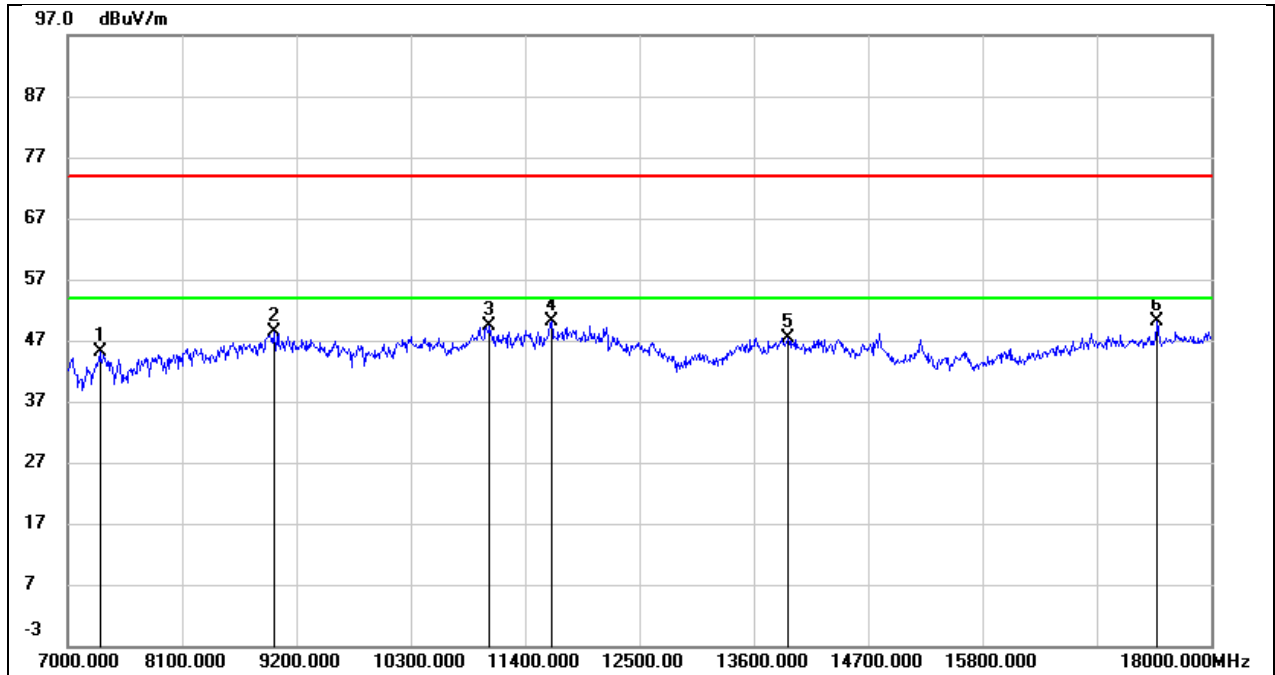


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.69	8.54	45.23	74.00	-28.77	peak
2	8991.000	36.17	12.23	48.40	74.00	-25.60	peak
3	11059.000	35.30	14.02	49.32	74.00	-24.68	peak
4	11653.000	34.78	15.39	50.17	74.00	-23.83	peak
5	13930.000	26.67	20.76	47.43	74.00	-26.57	peak
6	17483.000	25.94	24.19	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

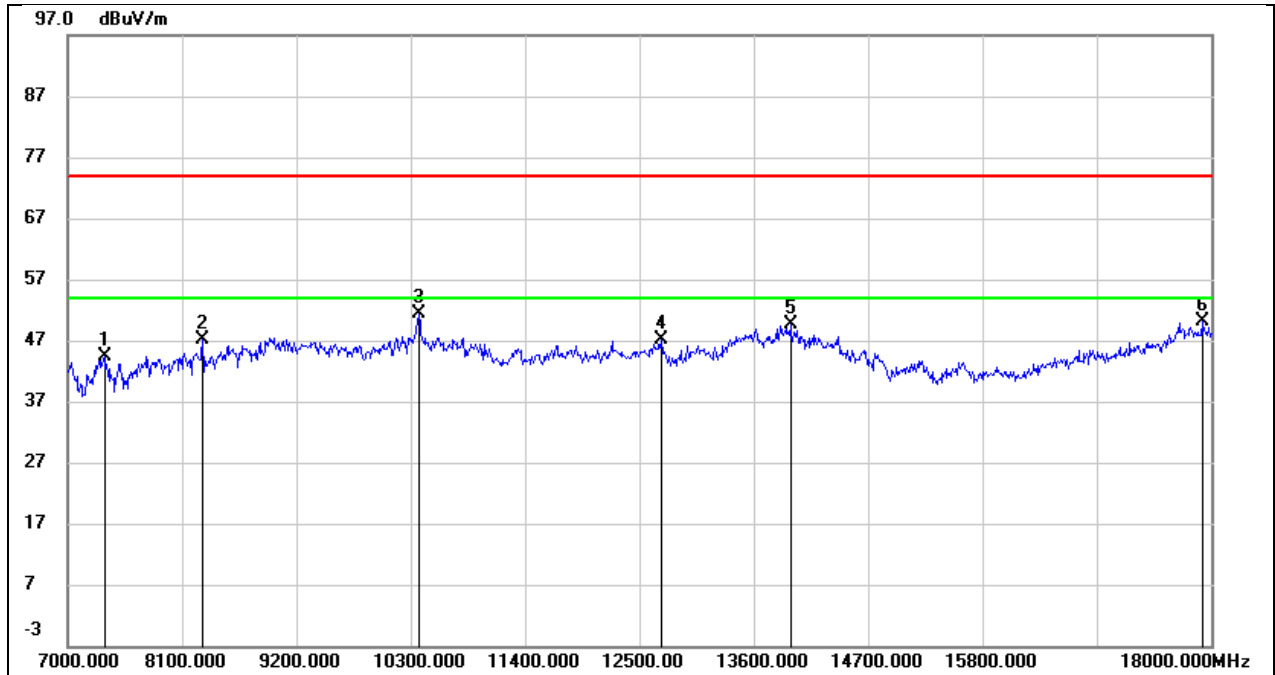


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.25	8.24	44.49	74.00	-29.51	peak
2	8298.000	38.74	8.33	47.07	74.00	-26.93	peak
3	10377.000	38.56	12.93	51.49	74.00	-22.51	peak
4	12709.000	28.81	18.23	47.04	74.00	-26.96	peak
5	13952.000	27.14	22.39	49.53	74.00	-24.47	peak
6	17912.000	22.22	27.96	50.18	74.00	-23.82	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

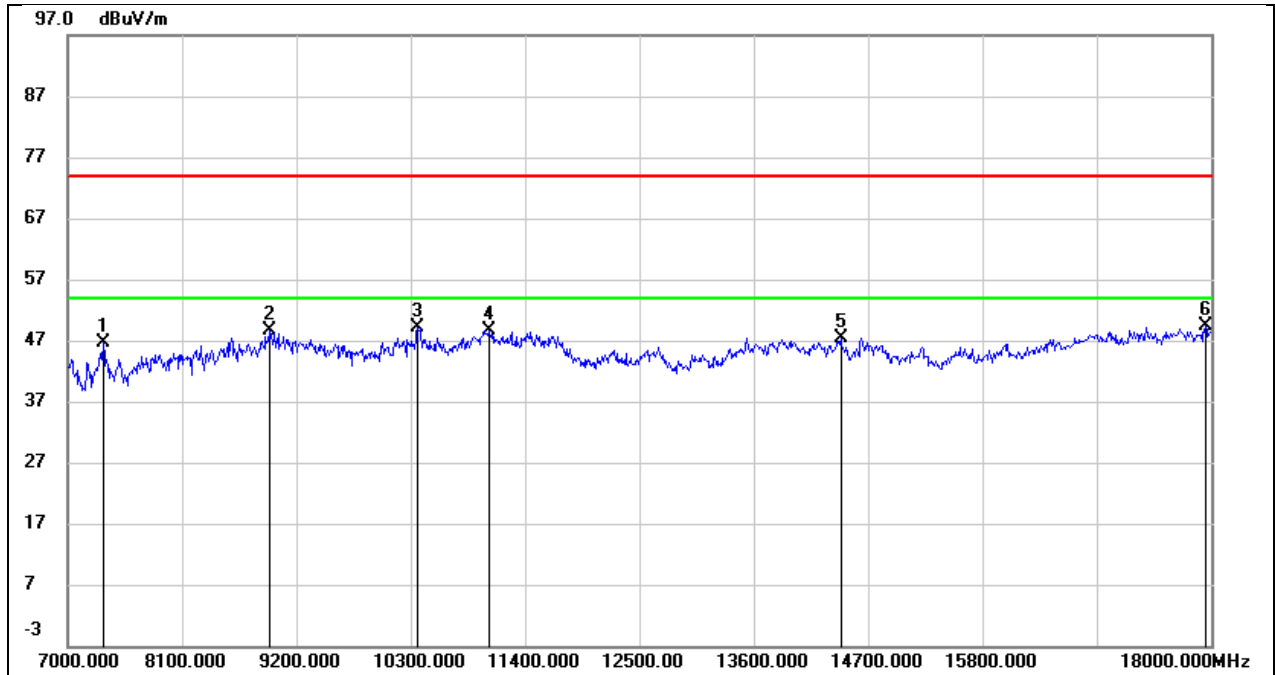


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.85	8.79	46.64	74.00	-27.36	peak
2	8936.000	37.19	11.44	48.63	74.00	-25.37	peak
3	10366.000	36.63	12.56	49.19	74.00	-24.81	peak
4	11048.000	34.68	14.01	48.69	74.00	-25.31	peak
5	14436.000	27.32	20.15	47.47	74.00	-26.53	peak
6	17945.000	23.26	26.19	49.45	74.00	-24.55	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

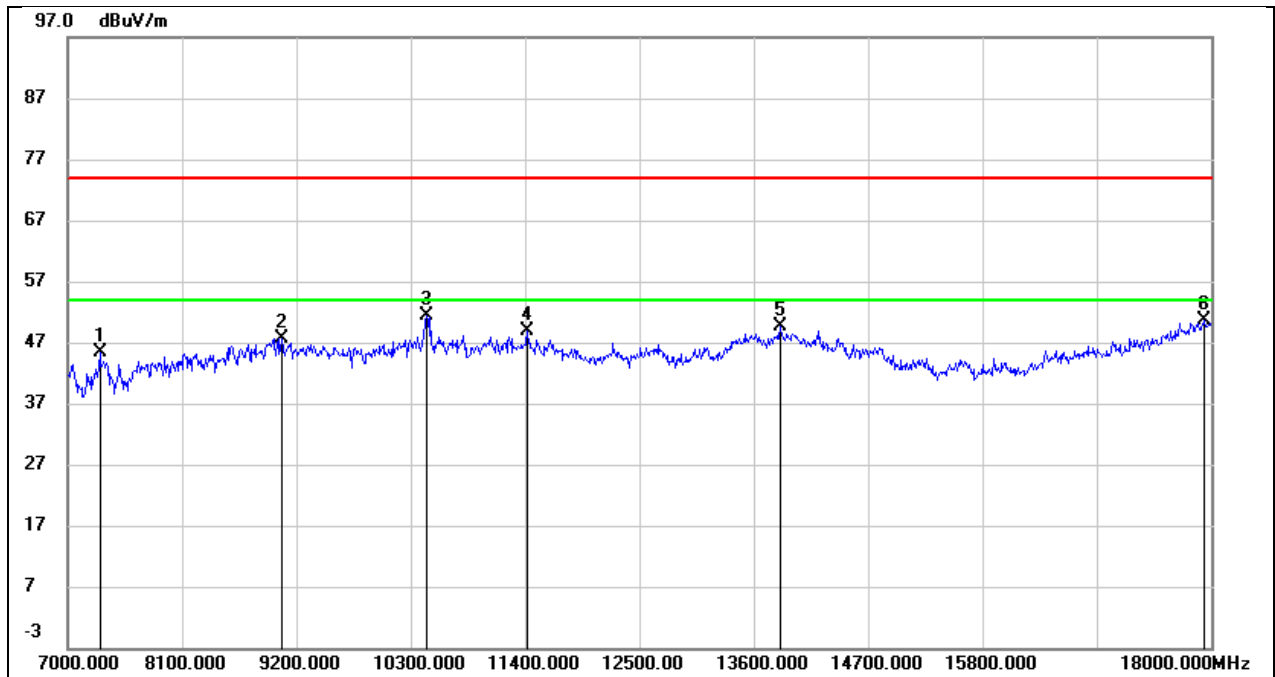


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.37	7.89	45.26	74.00	-28.74	peak
2	9057.000	36.20	11.45	47.65	74.00	-26.35	peak
3	10454.000	38.22	13.11	51.33	74.00	-22.67	peak
4	11422.000	32.52	16.37	48.89	74.00	-25.11	peak
5	13853.000	27.34	22.30	49.64	74.00	-24.36	peak
6	17934.000	22.43	28.09	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

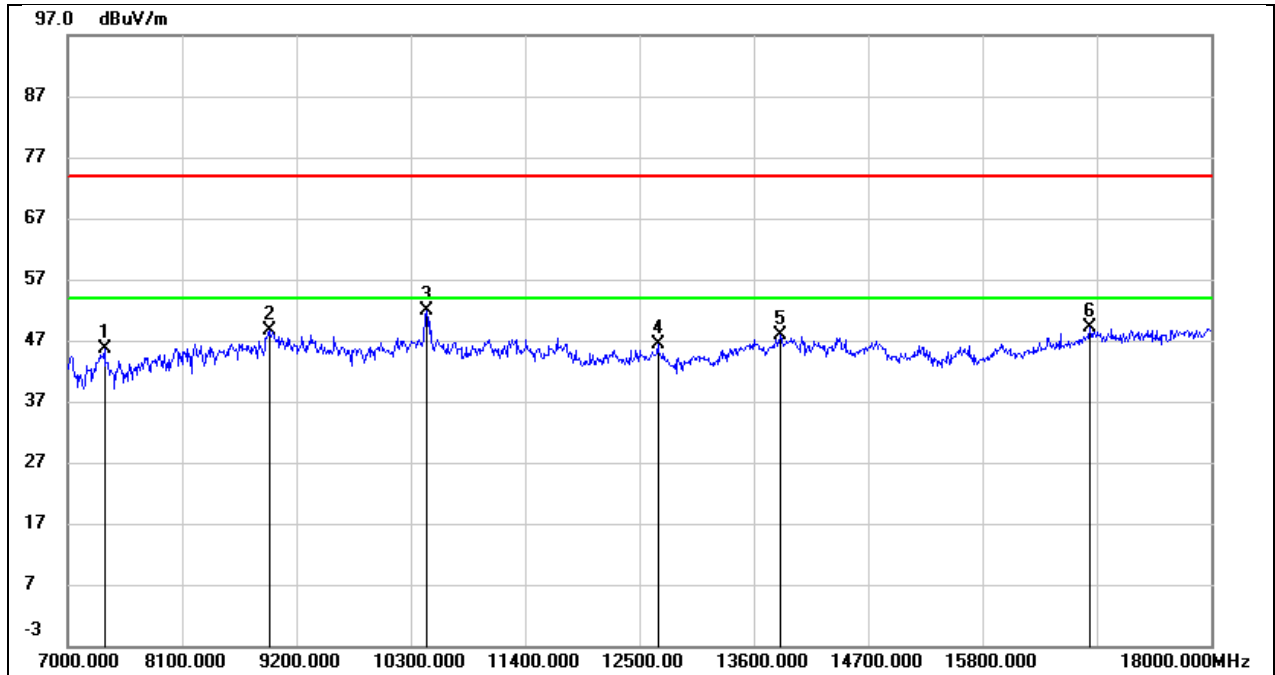


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.74	8.86	45.60	74.00	-28.40	peak
2	8936.000	37.11	11.44	48.55	74.00	-25.45	peak
3	10454.000	38.94	12.87	51.81	74.00	-22.19	peak
4	12676.000	29.24	17.13	46.37	74.00	-27.63	peak
5	13853.000	27.12	20.67	47.79	74.00	-26.21	peak
6	16834.000	26.05	23.17	49.22	74.00	-24.78	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

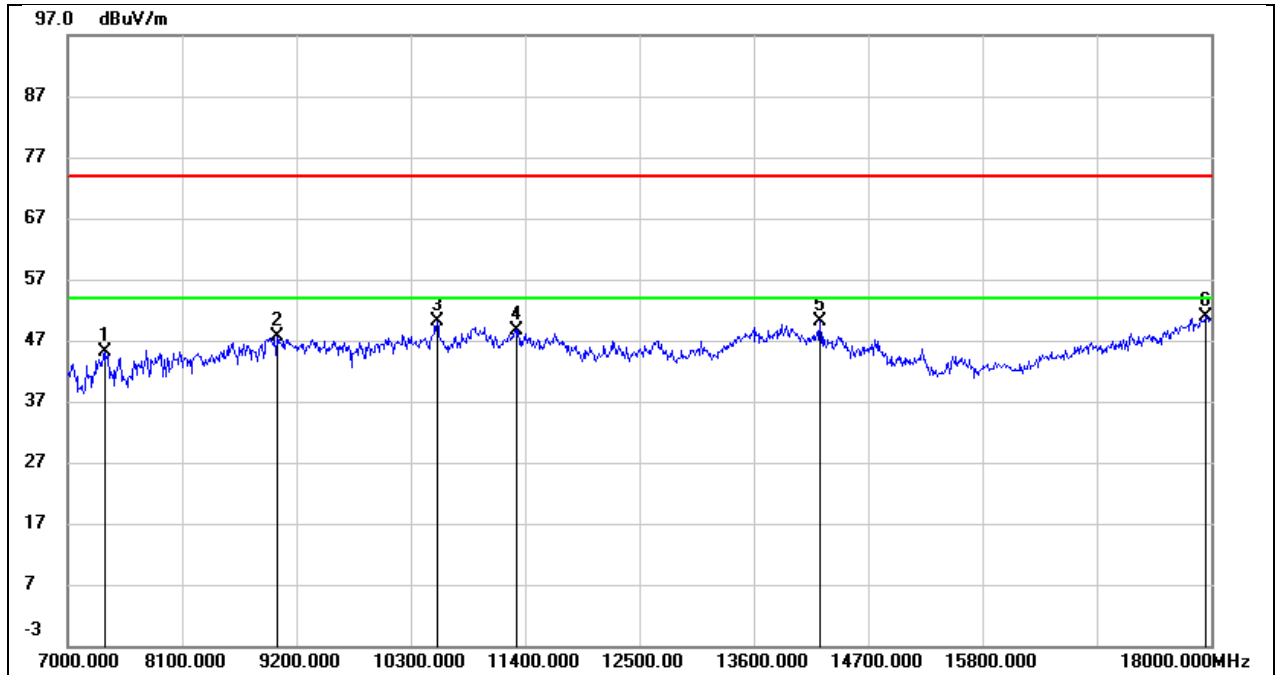


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.82	8.24	45.06	74.00	-28.94	peak
2	9013.000	35.70	11.85	47.55	74.00	-26.45	peak
3	10553.000	36.72	13.37	50.09	74.00	-23.91	peak
4	11323.000	32.79	15.87	48.66	74.00	-25.34	peak
5	14238.000	28.35	21.67	50.02	74.00	-23.98	peak
6	17945.000	22.71	28.15	50.86	74.00	-23.14	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

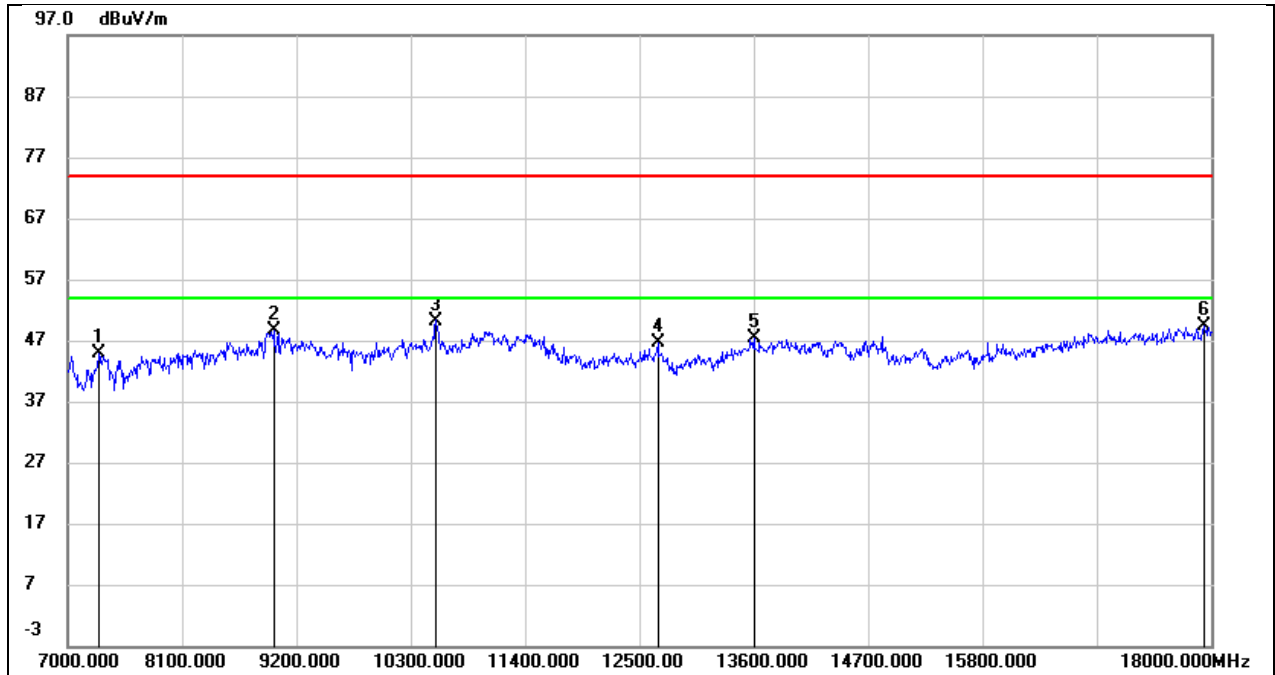


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.29	8.47	44.76	74.00	-29.24	peak
2	8980.000	36.52	12.07	48.59	74.00	-25.41	peak
3	10542.000	37.16	13.09	50.25	74.00	-23.75	peak
4	12676.000	29.56	17.13	46.69	74.00	-27.31	peak
5	13600.000	27.94	19.48	47.42	74.00	-26.58	peak
6	17934.000	23.21	26.18	49.39	74.00	-24.61	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

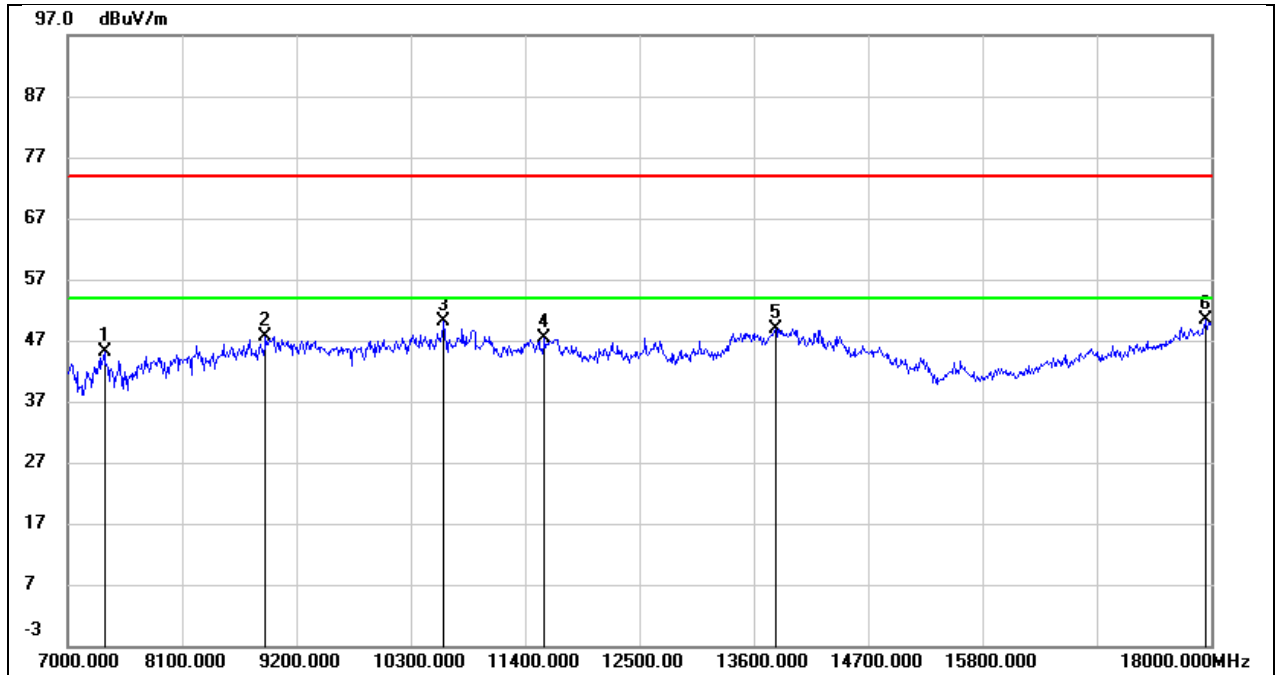


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.88	8.24	45.12	74.00	-28.88	peak
2	8903.000	37.23	10.51	47.74	74.00	-26.26	peak
3	10619.000	36.53	13.52	50.05	74.00	-23.95	peak
4	11587.000	30.69	16.65	47.34	74.00	-26.66	peak
5	13809.000	26.63	22.25	48.88	74.00	-25.12	peak
6	17945.000	22.18	28.15	50.33	74.00	-23.67	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

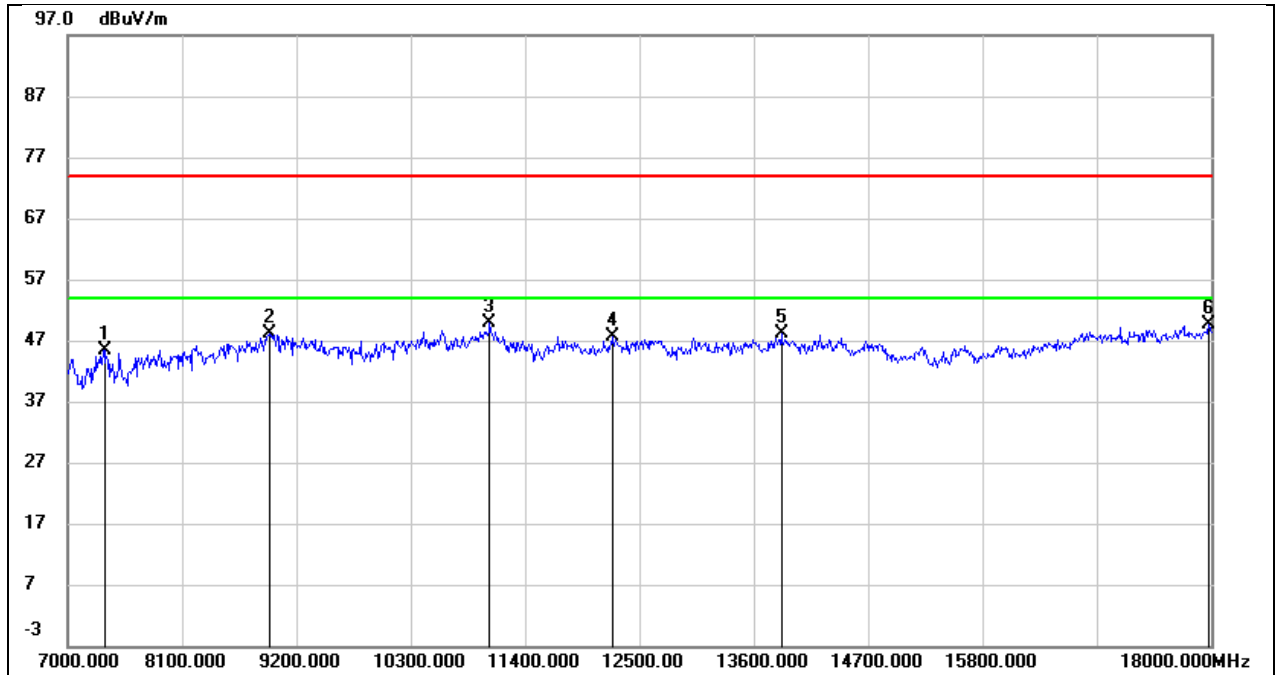


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.48	8.86	45.34	74.00	-28.66	peak
2	8936.000	36.63	11.44	48.07	74.00	-25.93	peak
3	11059.000	35.86	14.02	49.88	74.00	-24.12	peak
4	12247.000	30.41	17.18	47.59	74.00	-26.41	peak
5	13864.000	27.38	20.67	48.05	74.00	-25.95	peak
6	17978.000	23.33	26.24	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

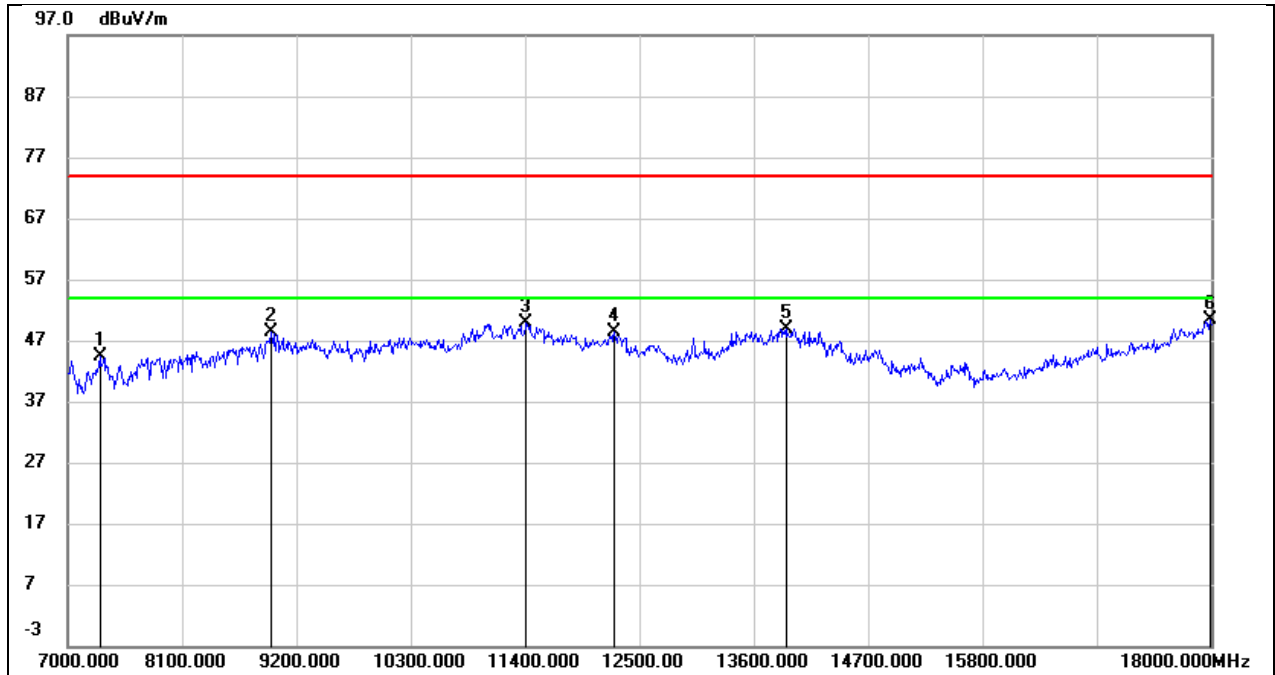


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.39	7.89	44.28	74.00	-29.72	peak
2	8958.000	36.93	11.34	48.27	74.00	-25.73	peak
3	11411.000	33.53	16.33	49.86	74.00	-24.14	peak
4	12258.000	30.19	18.20	48.39	74.00	-25.61	peak
5	13919.000	26.54	22.36	48.90	74.00	-25.10	peak
6	17989.000	22.05	28.41	50.46	74.00	-23.54	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

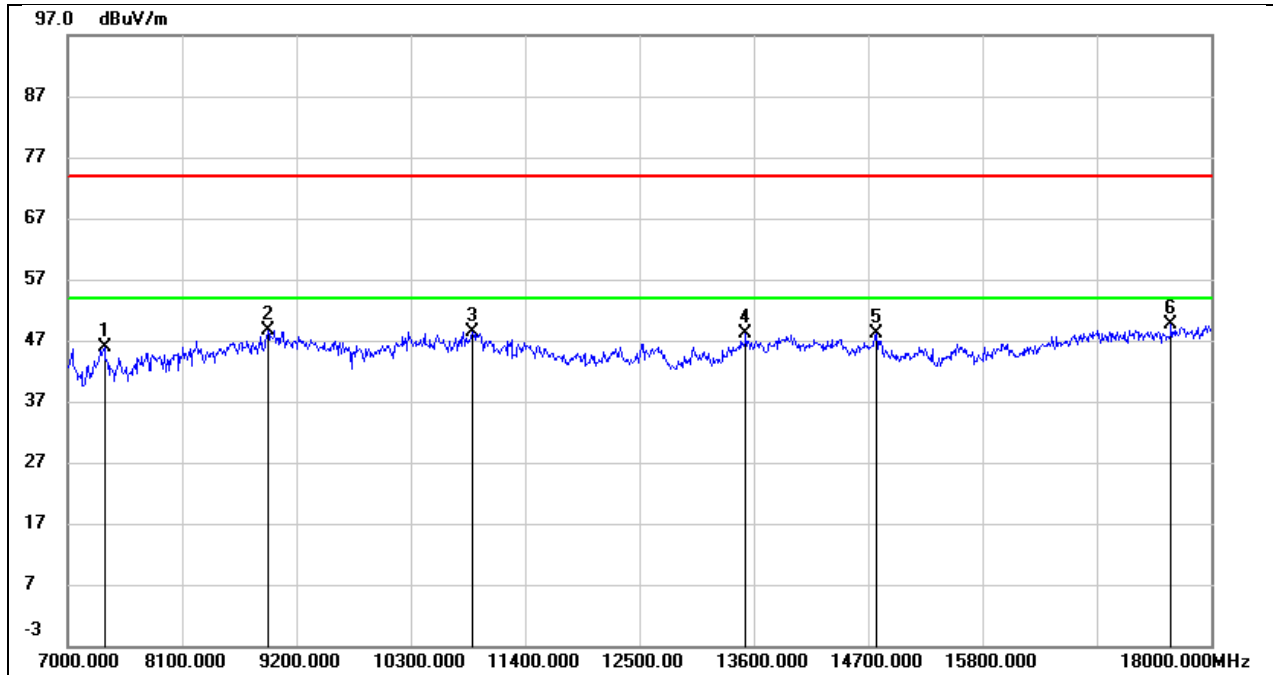


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.01	8.86	45.87	74.00	-28.13	peak
2	8925.000	37.44	11.28	48.72	74.00	-25.28	peak
3	10894.000	34.82	13.52	48.34	74.00	-25.66	peak
4	13523.000	28.73	19.42	48.15	74.00	-25.85	peak
5	14777.000	28.41	19.72	48.13	74.00	-25.87	peak
6	17615.000	25.15	24.39	49.54	74.00	-24.46	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

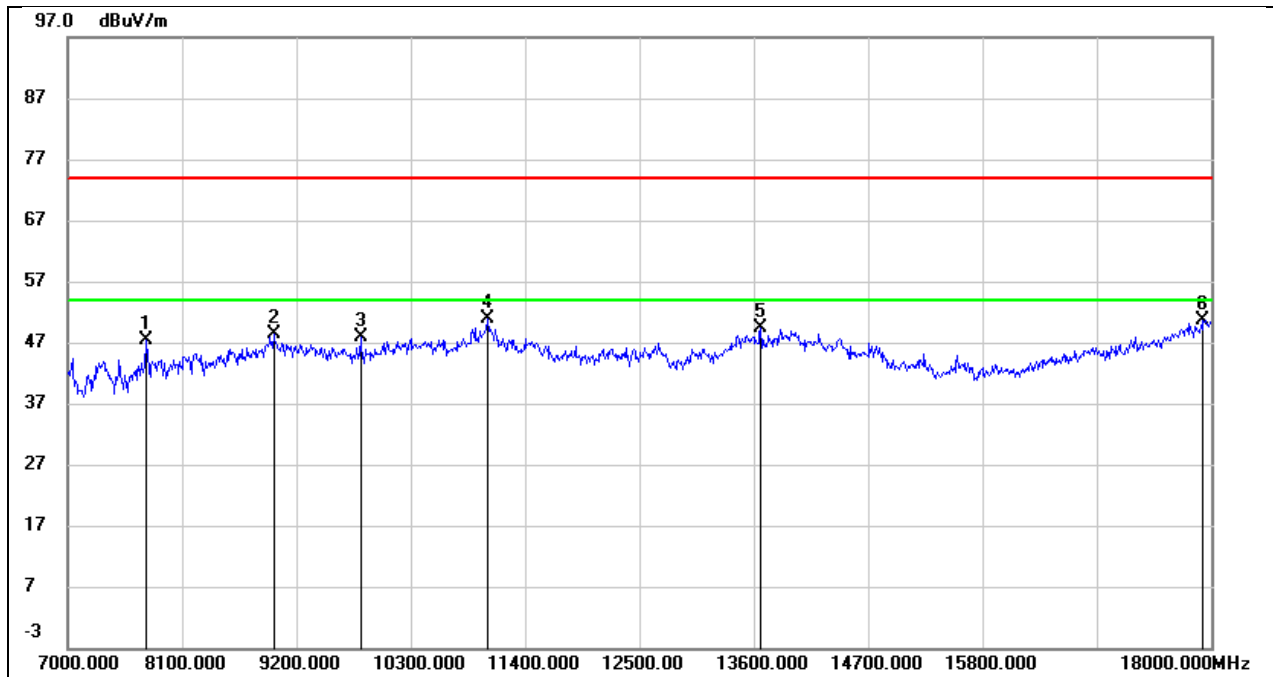


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	40.32	6.94	47.26	74.00	-26.74	peak
2	8980.000	36.74	11.67	48.41	74.00	-25.59	peak
3	9816.000	36.24	11.62	47.86	74.00	-26.14	peak
4	11037.000	35.99	14.86	50.85	74.00	-23.15	peak
5	13666.000	27.84	21.52	49.36	74.00	-24.64	peak
6	17923.000	22.54	28.01	50.55	74.00	-23.45	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

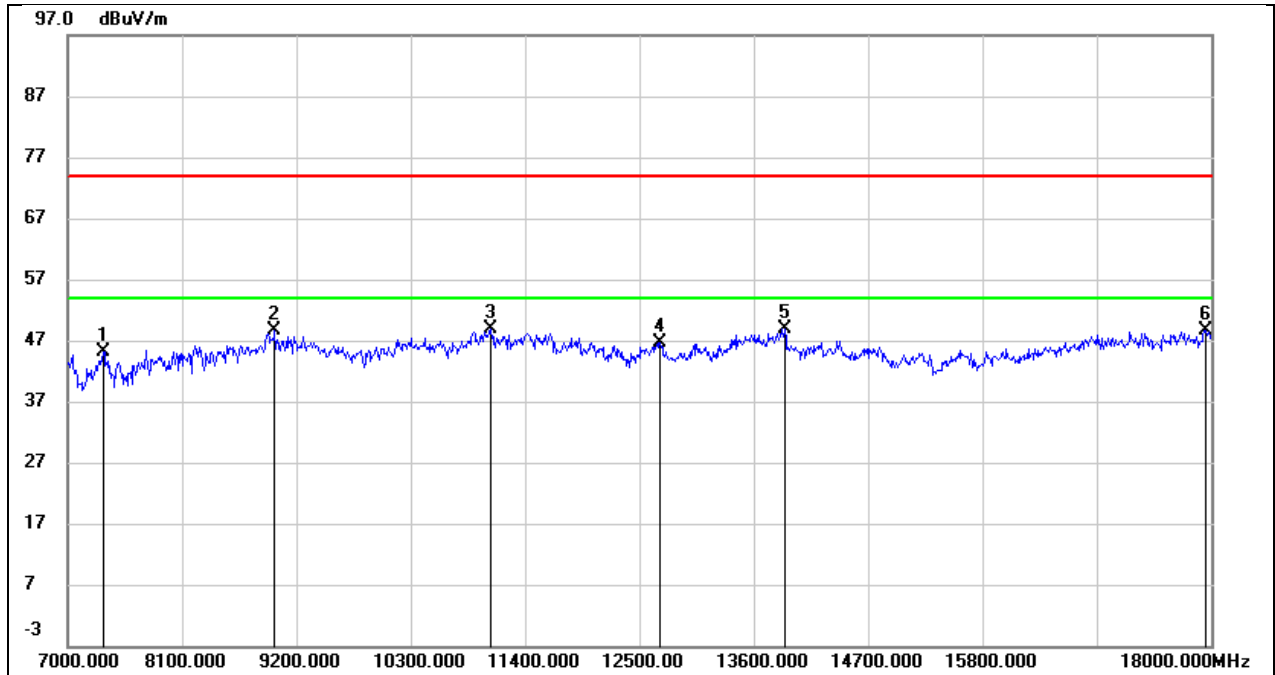


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.40	8.79	45.19	74.00	-28.81	peak
2	8991.000	36.41	12.23	48.64	74.00	-25.36	peak
3	11070.000	34.77	14.02	48.79	74.00	-25.21	peak
4	12698.000	29.48	17.18	46.66	74.00	-27.34	peak
5	13897.000	28.17	20.71	48.88	74.00	-25.12	peak
6	17945.000	22.54	26.19	48.73	74.00	-25.27	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

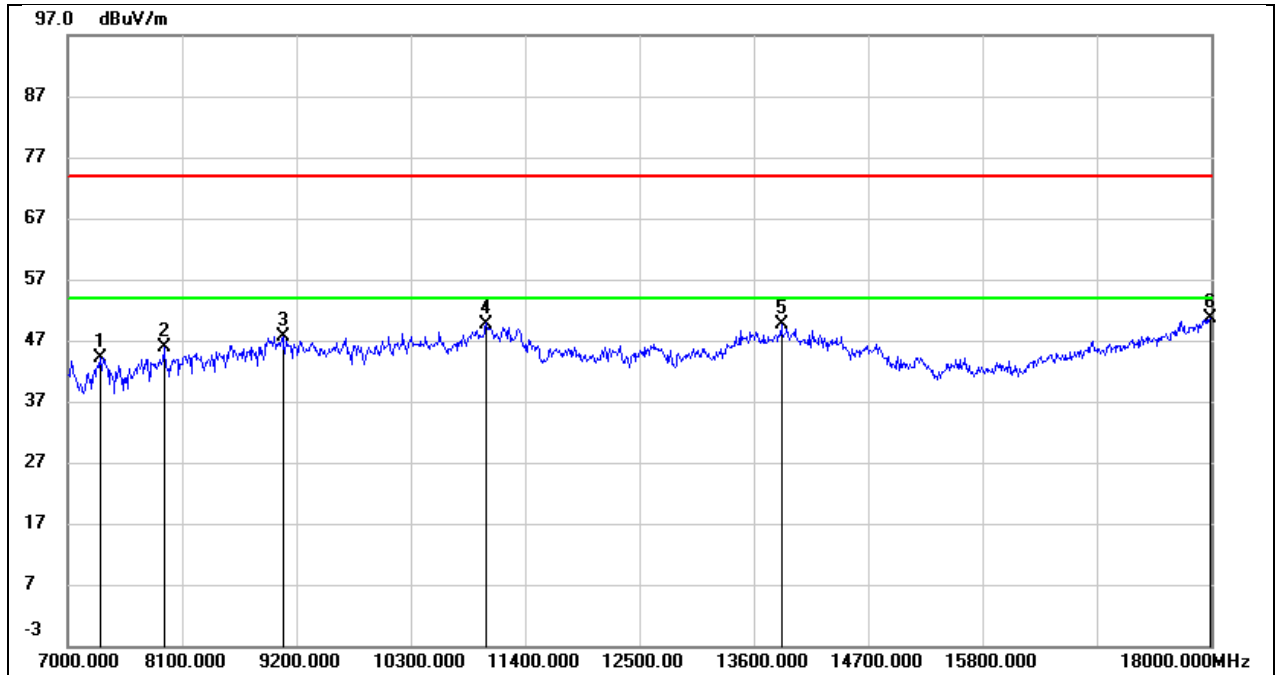


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.12	7.99	44.11	74.00	-29.89	peak
2	7924.000	38.91	6.98	45.89	74.00	-28.11	peak
3	9068.000	36.21	11.35	47.56	74.00	-26.44	peak
4	11026.000	34.91	14.84	49.75	74.00	-24.25	peak
5	13864.000	27.33	22.30	49.63	74.00	-24.37	peak
6	17989.000	22.16	28.41	50.57	74.00	-23.43	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

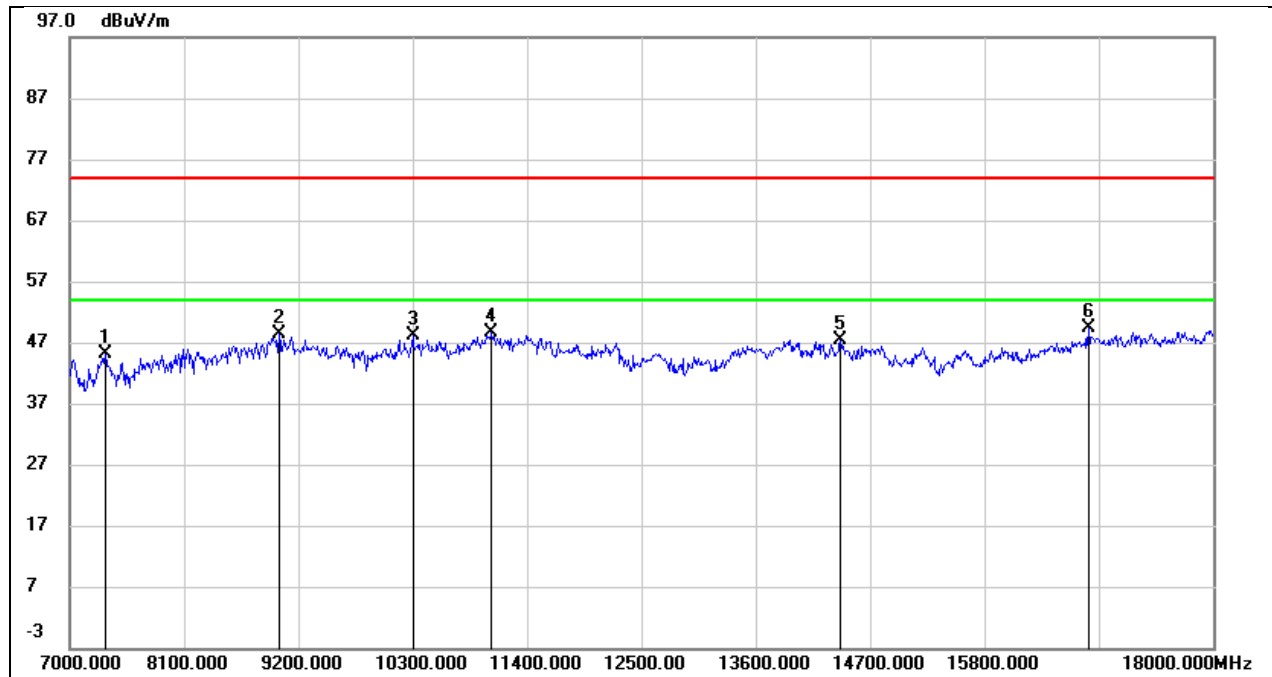


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.24	8.79	45.03	74.00	-28.97	peak
2	9013.000	36.13	12.24	48.37	74.00	-25.63	peak
3	10300.000	35.88	12.24	48.12	74.00	-25.88	peak
4	11059.000	34.58	14.02	48.60	74.00	-25.40	peak
5	14414.000	27.17	20.18	47.35	74.00	-26.65	peak
6	16801.000	26.14	23.14	49.28	74.00	-24.72	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

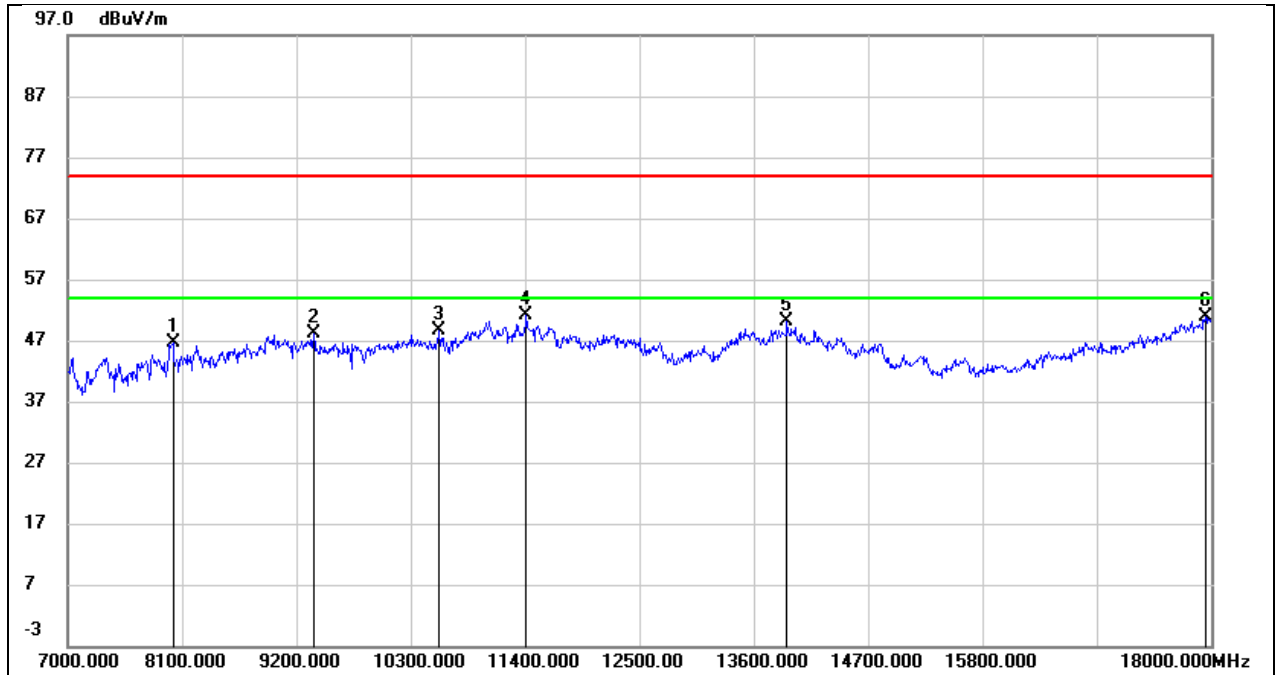


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8012.000	39.53	7.09	46.62	74.00	-27.38	peak
2	9365.000	37.48	10.65	48.13	74.00	-25.87	peak
3	10575.000	35.19	13.43	48.62	74.00	-25.38	peak
4	11411.000	34.68	16.33	51.01	74.00	-22.99	peak
5	13919.000	27.66	22.36	50.02	74.00	-23.98	peak
6	17945.000	22.77	28.15	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

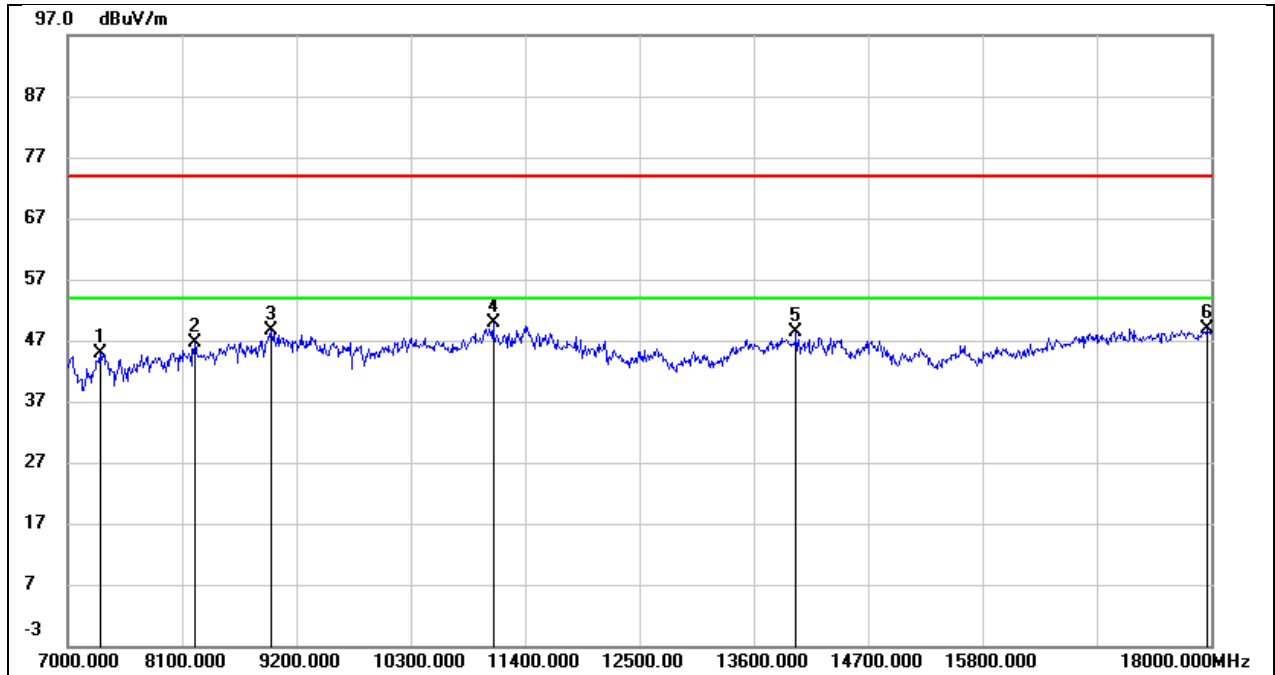


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.28	8.54	44.82	74.00	-29.18	peak
2	8221.000	37.45	9.18	46.63	74.00	-27.37	peak
3	8958.000	36.98	11.76	48.74	74.00	-25.26	peak
4	11092.000	35.80	14.03	49.83	74.00	-24.17	peak
5	14007.000	27.45	20.85	48.30	74.00	-25.70	peak
6	17967.000	22.64	26.22	48.86	74.00	-25.14	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

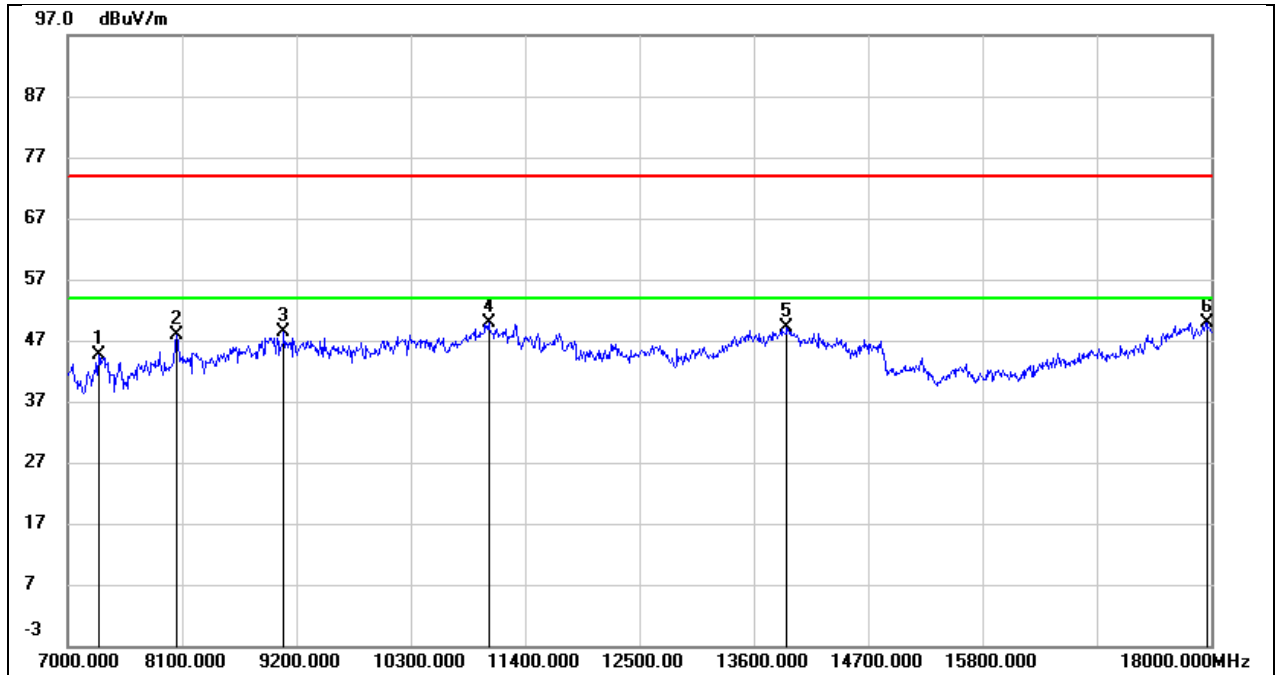

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.74	7.81	44.55	74.00	-29.45	peak
2	8045.000	40.42	7.37	47.79	74.00	-26.21	peak
3	9079.000	37.05	11.25	48.30	74.00	-25.70	peak
4	11048.000	35.09	14.88	49.97	74.00	-24.03	peak
5	13919.000	26.86	22.36	49.22	74.00	-24.78	peak
6	17956.000	21.63	28.21	49.84	74.00	-24.16	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

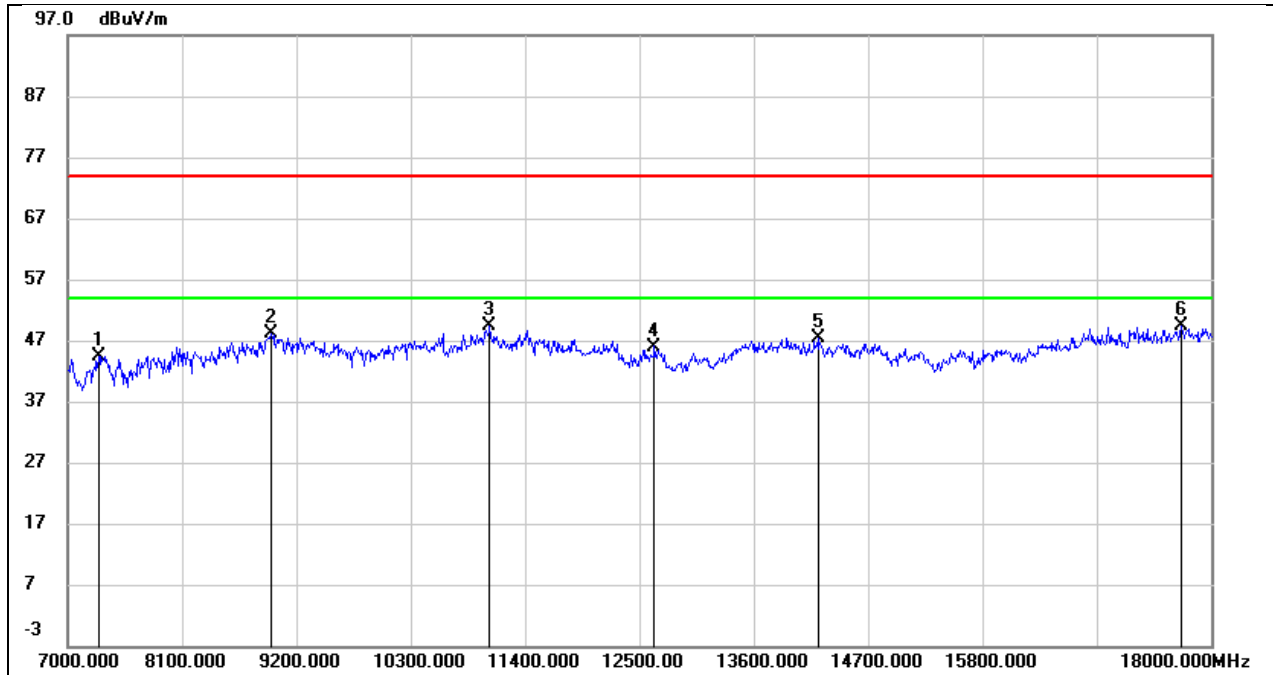

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.03	8.47	44.50	74.00	-29.50	peak
2	8958.000	36.44	11.76	48.20	74.00	-25.80	peak
3	11059.000	35.24	14.02	49.26	74.00	-24.74	peak
4	12643.000	28.93	17.07	46.00	74.00	-28.00	peak
5	14227.000	26.65	20.72	47.37	74.00	-26.63	peak
6	17714.000	24.24	25.24	49.48	74.00	-24.52	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

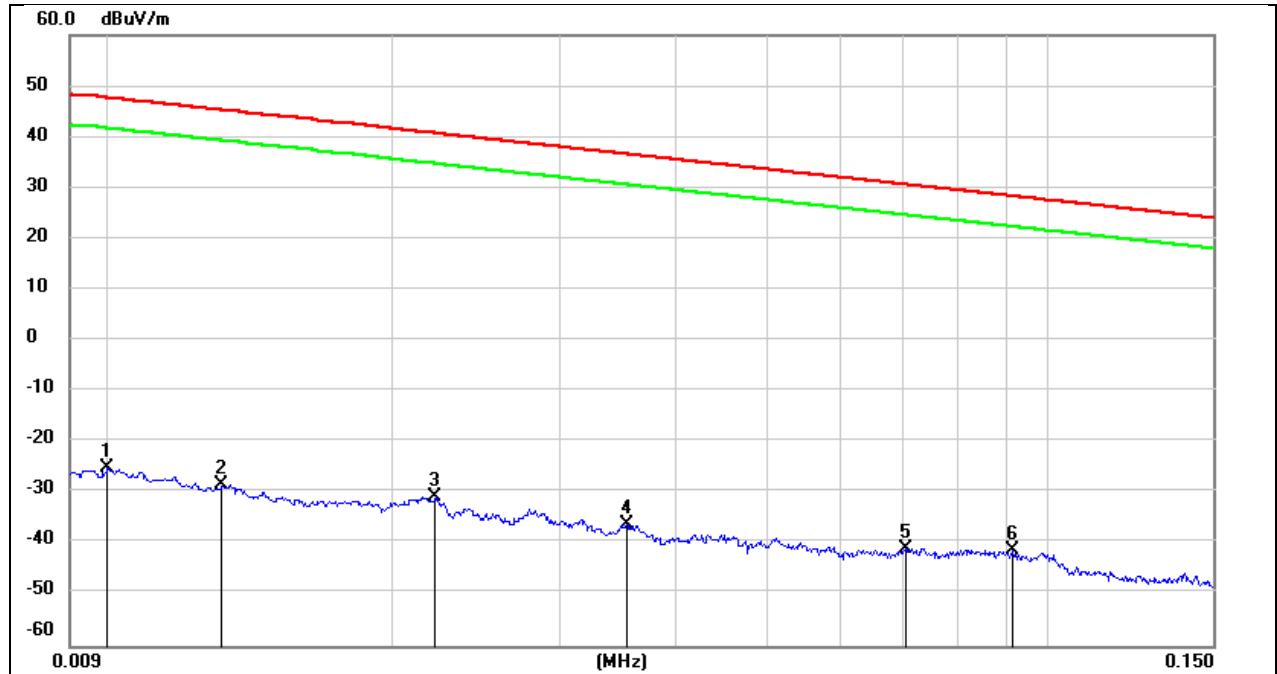


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.22	-101.40	-25.18	47.60	-76.68	-3.9	-72.78	peak
2	0.0131	72.95	-101.38	-28.43	45.25	-79.93	-6.25	-73.68	peak
3	0.0221	70.63	-101.35	-30.72	40.71	-82.22	-10.79	-71.43	peak
4	0.0354	65.26	-101.41	-36.15	36.62	-87.65	-14.88	-72.77	peak
5	0.0704	60.74	-101.57	-40.83	30.65	-92.33	-20.85	-71.48	peak
6	0.0913	60.34	-101.73	-41.39	28.39	-92.89	-23.11	-69.78	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

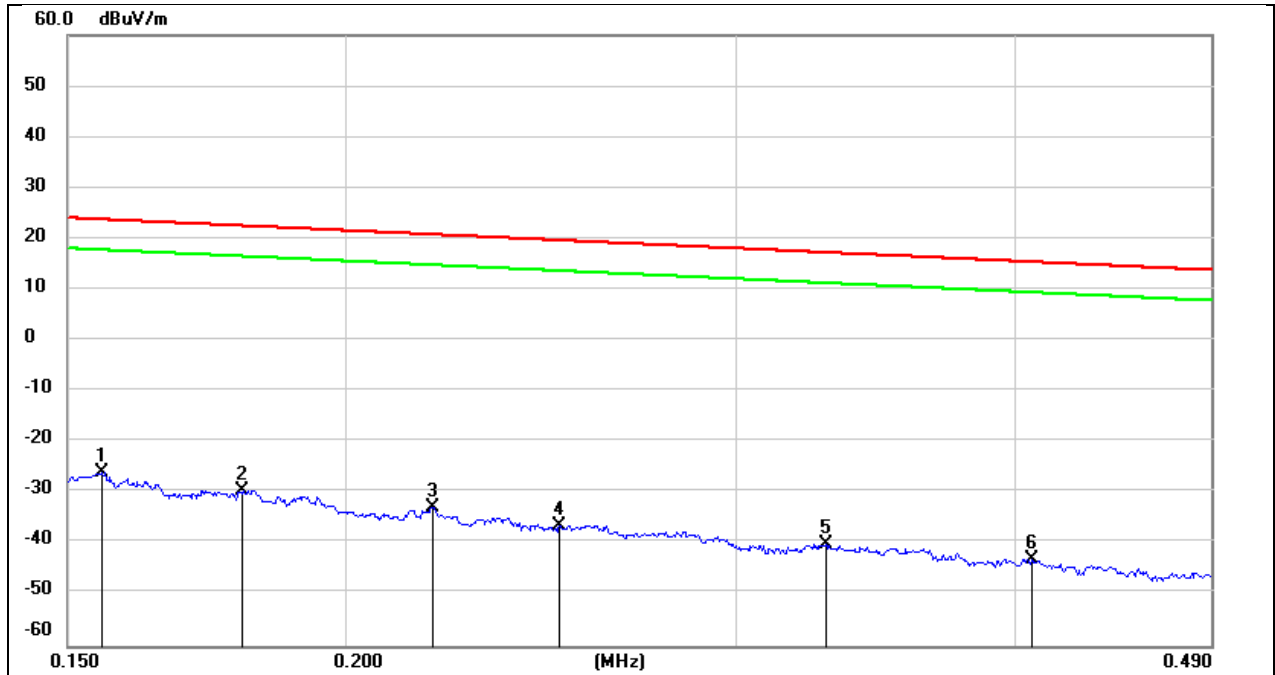

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.77	-101.65	-25.88	23.77	-77.38	-27.73	-49.65	peak
2	0.1800	72.12	-101.68	-29.56	22.50	-81.06	-29	-52.06	peak
3	0.2190	68.77	-101.75	-32.98	20.79	-84.48	-30.71	-53.77	peak
4	0.2494	65.46	-101.80	-36.34	19.66	-87.84	-31.84	-56.00	peak
5	0.3286	61.71	-101.88	-40.17	17.27	-91.67	-34.23	-57.44	peak
6	0.4066	59.02	-101.96	-42.94	15.42	-94.44	-36.08	-58.36	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

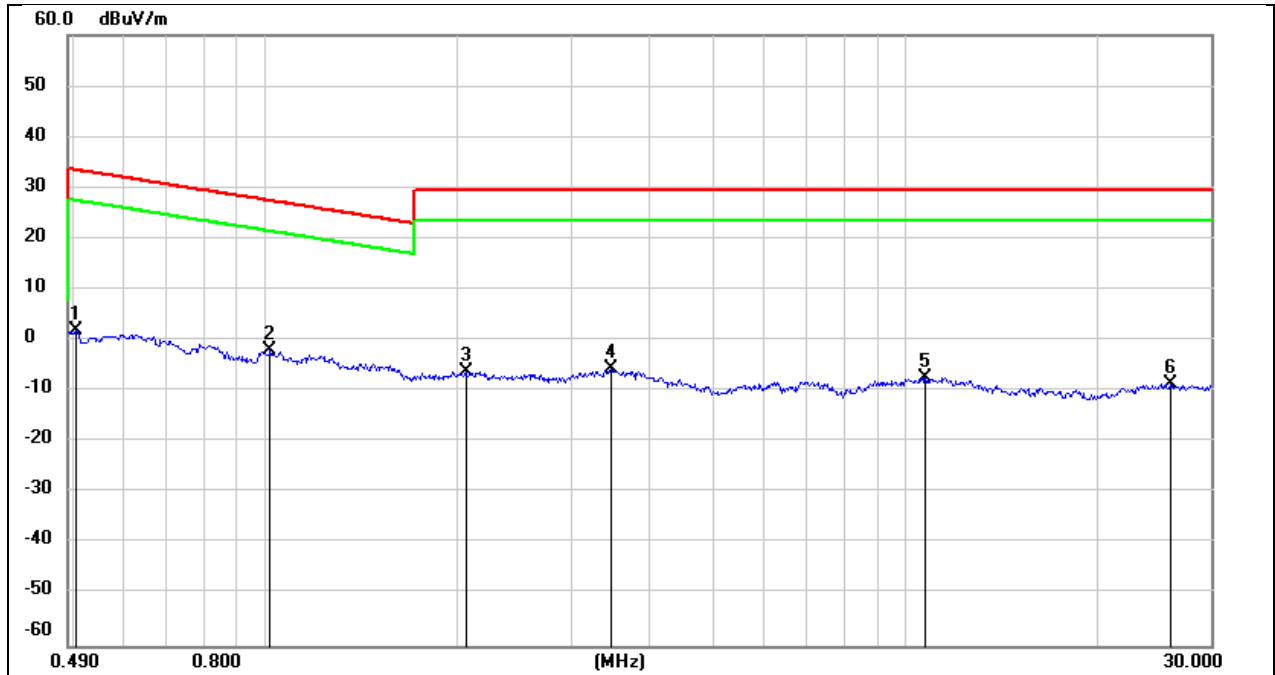

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-49.64	-17.94	-31.70	peak
2	1.0141	60.18	-62.27	-2.09	27.48	-53.59	-24.02	-29.57	peak
3	2.0539	55.70	-61.81	-6.11	29.54	-57.61	-21.96	-35.65	peak
4	3.4704	55.85	-61.46	-5.61	29.54	-57.11	-21.96	-35.15	peak
5	10.7299	53.48	-60.83	-7.35	29.54	-58.85	-21.96	-36.89	peak
6	25.8978	51.76	-60.36	-8.6	29.54	-60.1	-21.96	-38.14	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

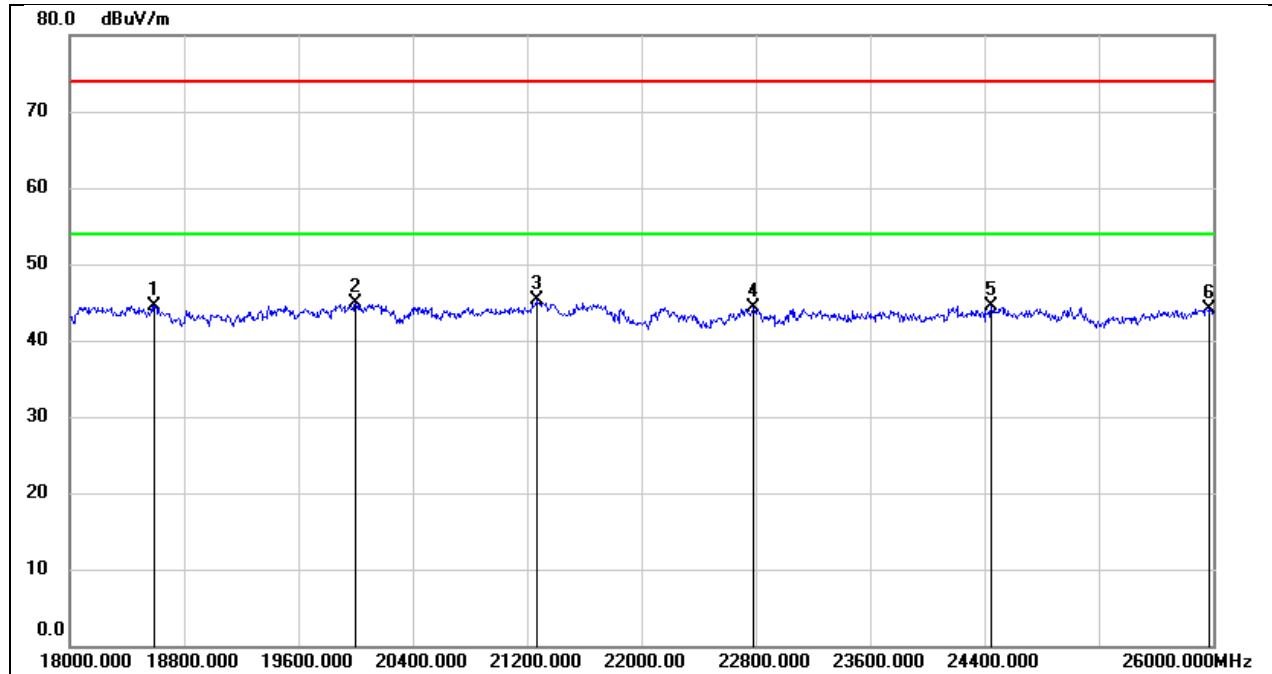

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	49.75	-5.31	44.44	74.00	-29.56	peak
2	20000.000	50.31	-5.45	44.86	74.00	-29.14	peak
3	21264.000	50.04	-4.76	45.28	74.00	-28.72	peak
4	22784.000	47.98	-3.65	44.33	74.00	-29.67	peak
5	24448.000	46.84	-2.42	44.42	74.00	-29.58	peak
6	25968.000	45.13	-1.00	44.13	74.00	-29.87	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

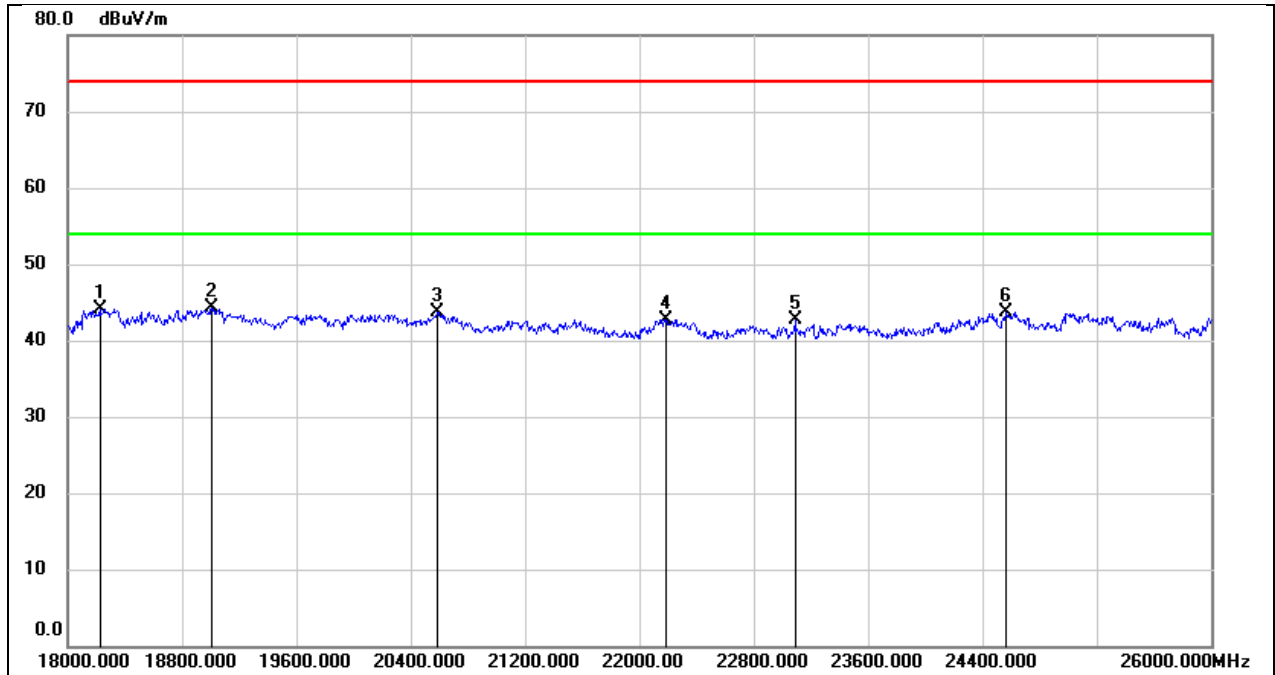

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	49.58	-5.53	44.05	74.00	-29.95	peak
2	19008.000	49.51	-5.23	44.28	74.00	-29.72	peak
3	20584.000	49.00	-5.27	43.73	74.00	-30.27	peak
4	22184.000	47.03	-4.29	42.74	74.00	-31.26	peak
5	23088.000	46.02	-3.41	42.61	74.00	-31.39	peak
6	24568.000	46.10	-2.33	43.77	74.00	-30.23	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

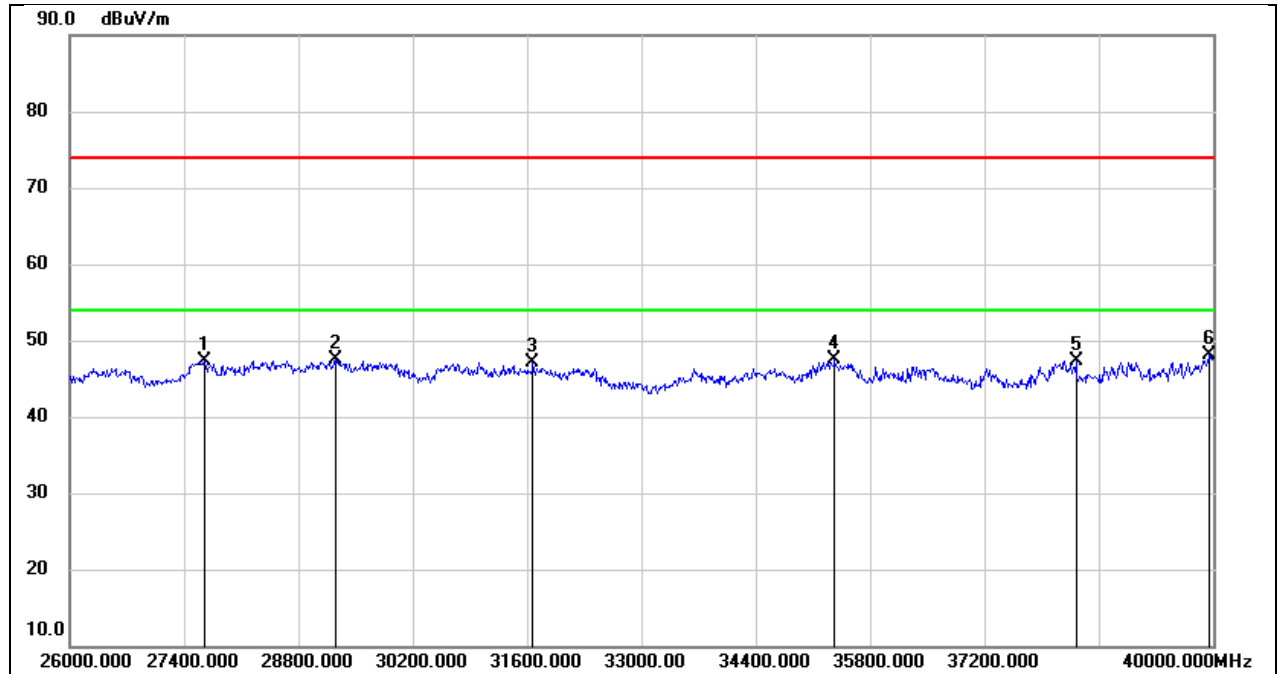

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	27652.000	50.89	-3.49	47.40	74.00	-26.60	peak
2	29248.000	48.65	-1.05	47.60	74.00	-26.40	peak
3	31670.000	48.36	-1.21	47.15	74.00	-26.85	peak
4	35366.000	44.90	2.59	47.49	74.00	-26.51	peak
5	38320.000	43.56	3.77	47.33	74.00	-26.67	peak
6	39958.000	43.08	5.12	48.20	74.00	-25.80	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

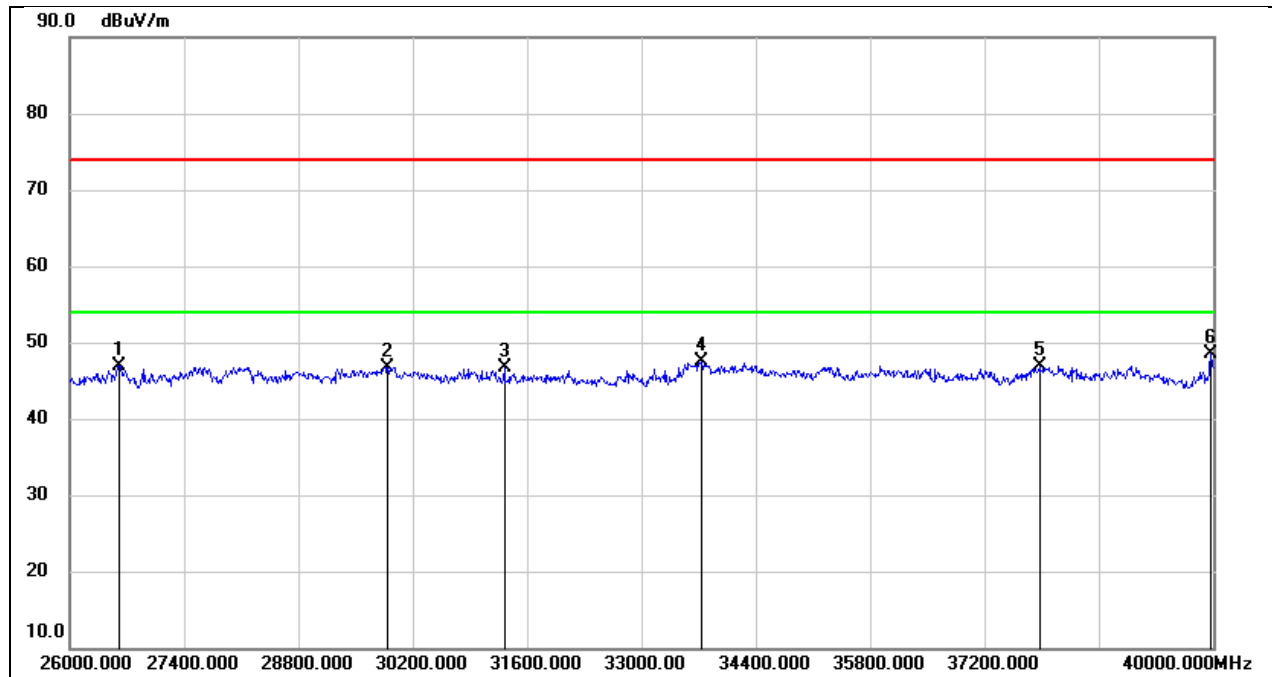

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26602.000	51.78	-4.80	46.98	74.00	-27.02	peak
2	29892.000	48.26	-1.48	46.78	74.00	-27.22	peak
3	31320.000	47.61	-0.93	46.68	74.00	-27.32	peak
4	33742.000	47.16	0.31	47.47	74.00	-26.53	peak
5	37872.000	43.47	3.48	46.95	74.00	-27.05	peak
6	39972.000	43.45	5.13	48.58	74.00	-25.42	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

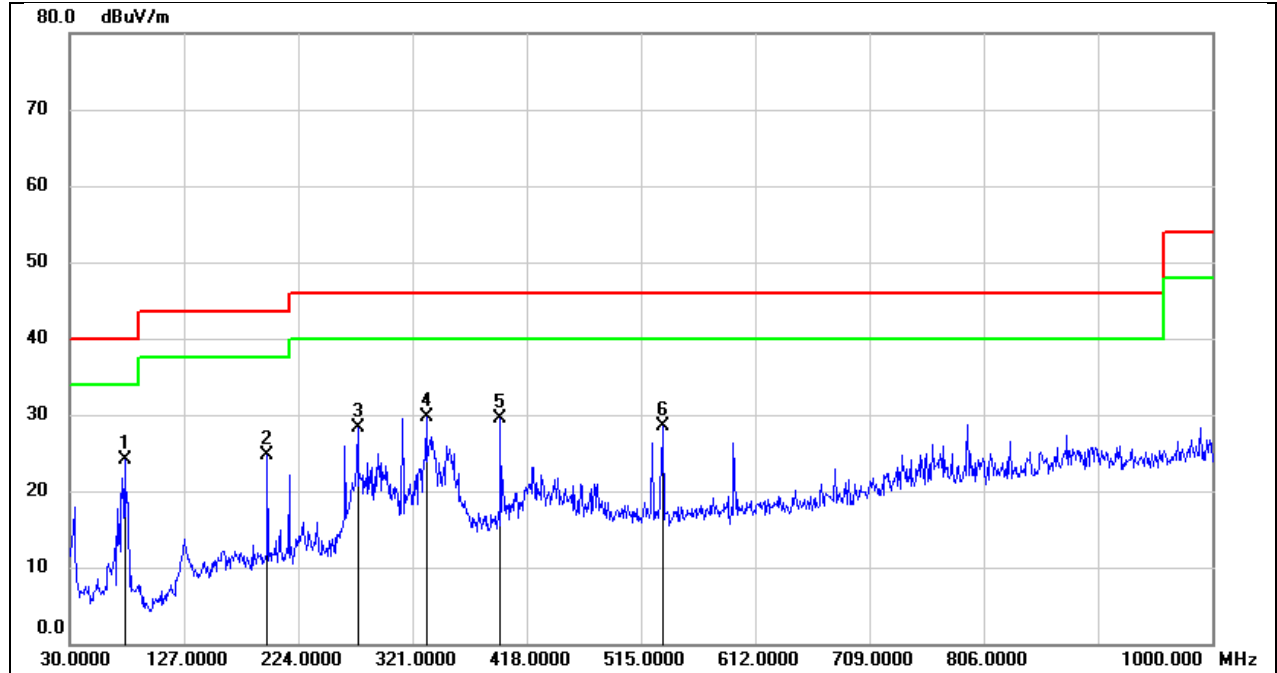

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.5600	40.36	-16.27	24.09	40.00	-15.91	QP
2	197.8100	36.33	-11.57	24.76	43.50	-18.74	QP
3	274.4400	41.10	-12.88	28.22	46.00	-17.78	QP
4	332.6400	39.67	-9.88	29.79	46.00	-16.21	QP
5	395.6900	38.84	-9.31	29.53	46.00	-16.47	QP
6	533.4300	35.55	-6.98	28.57	46.00	-17.43	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

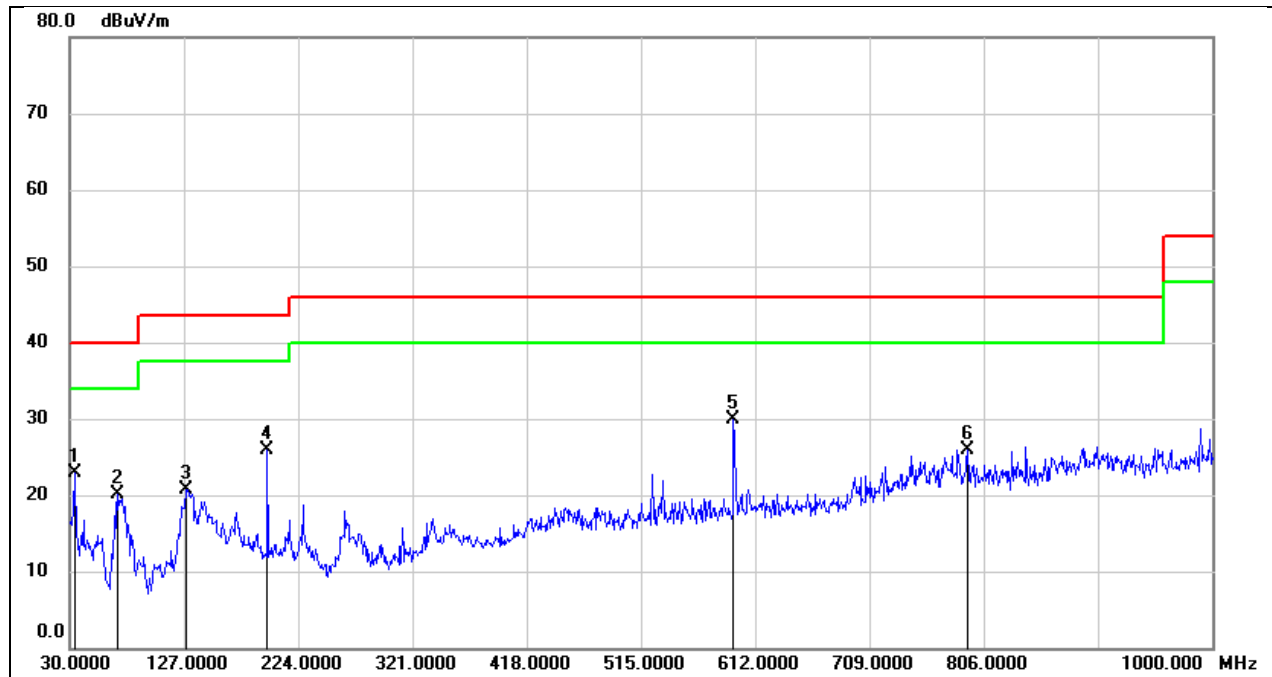

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	37.40	-14.52	22.88	40.00	-17.12	QP
2	70.7400	36.16	-16.14	20.02	40.00	-19.98	QP
3	128.9400	35.33	-14.62	20.71	43.50	-22.79	QP
4	197.8100	37.46	-11.57	25.89	43.50	-17.61	QP
5	593.5700	35.80	-5.95	29.85	46.00	-16.15	QP
6	792.4200	28.03	-2.14	25.89	46.00	-20.11	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

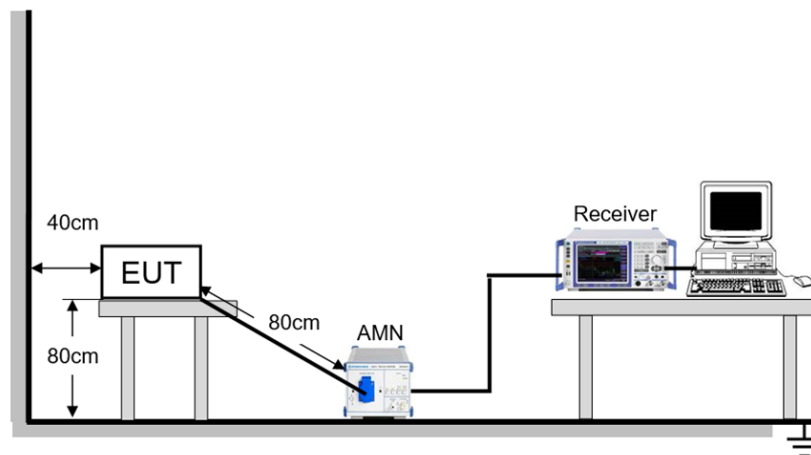

TEST ENVIRONMENT


Temperature	25.4℃	Relative Humidity	63.5%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	August 8, 2024	Test By	Fanny Huang
-----------	----------------	---------	-------------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

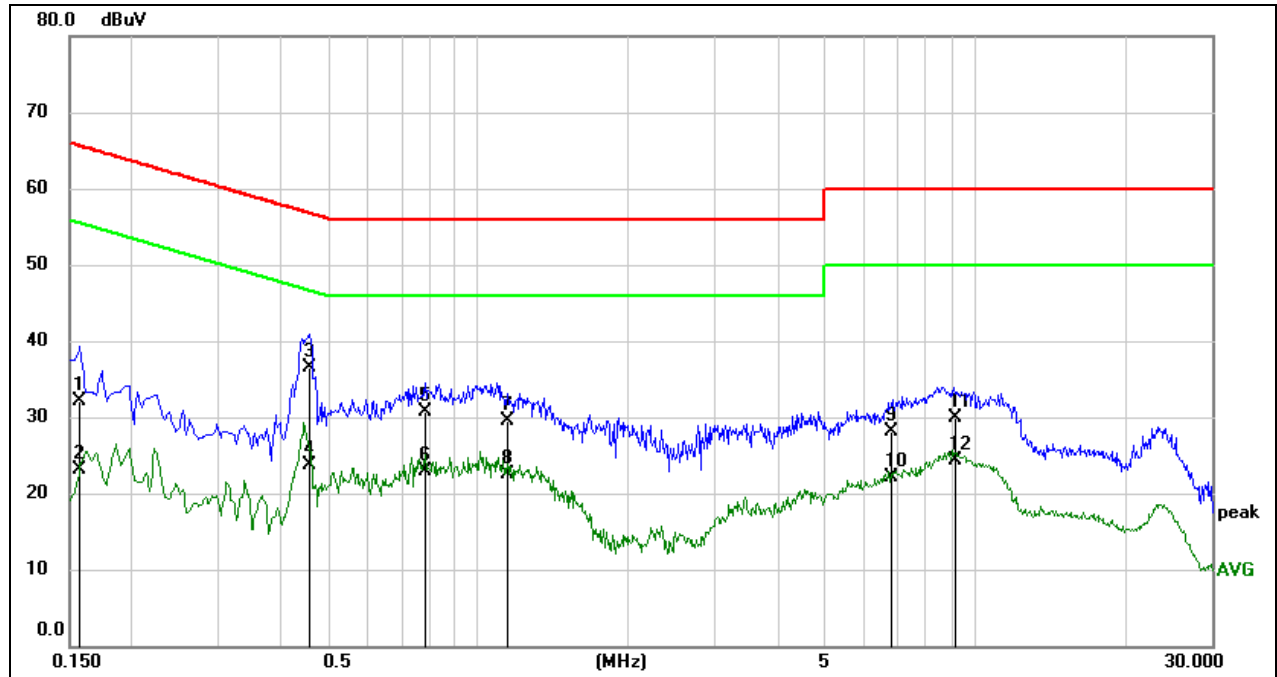


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1576	21.69	10.32	32.01	65.59	-33.58	QP
2	0.1576	12.70	10.32	23.02	55.59	-32.57	AVG
3	0.4580	26.25	10.24	36.49	56.73	-20.24	QP
4	0.4580	13.43	10.24	23.67	46.73	-23.06	AVG
5	0.7844	20.46	10.17	30.63	56.00	-25.37	QP
6	0.7844	12.76	10.17	22.93	46.00	-23.07	AVG
7	1.1484	19.49	10.02	29.51	56.00	-26.49	QP
8	1.1484	12.42	10.02	22.44	46.00	-23.56	AVG
9	6.7805	17.83	10.32	28.15	60.00	-31.85	QP
10	6.7805	11.81	10.32	22.13	50.00	-27.87	AVG
11	9.1525	19.62	10.33	29.95	60.00	-30.05	QP
12	9.1525	14.00	10.33	24.33	50.00	-25.67	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

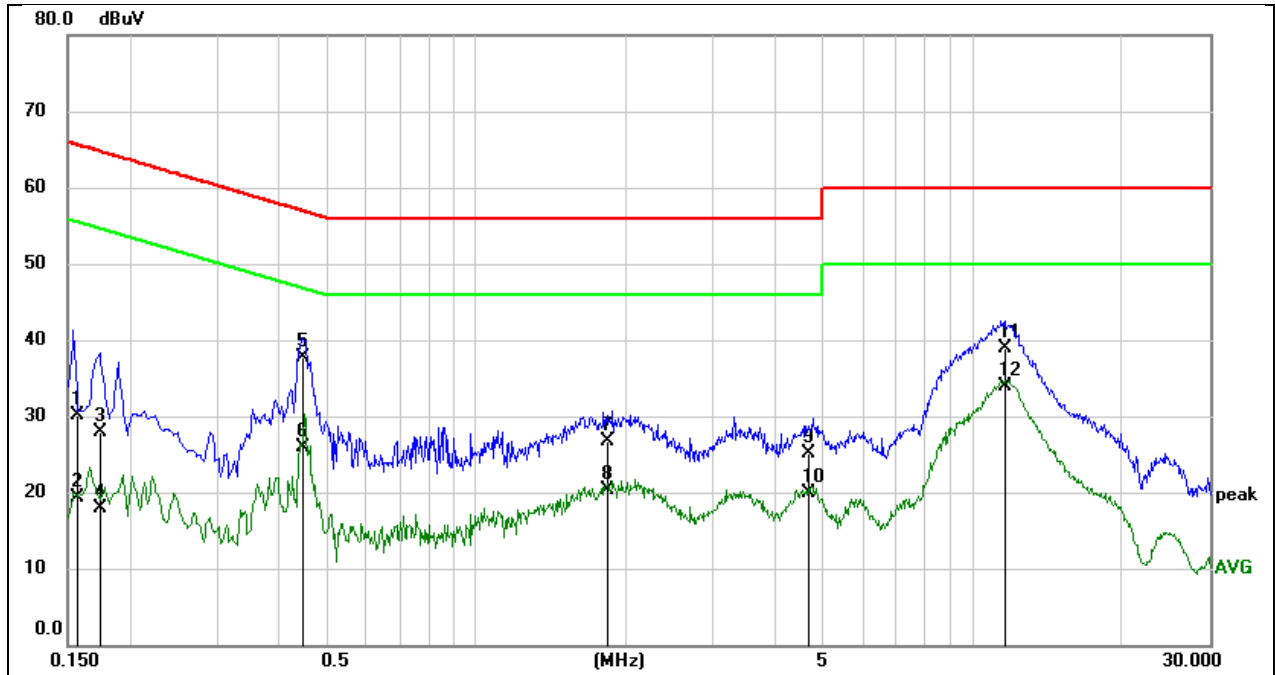

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1569	19.91	10.23	30.14	65.63	-35.49	QP
2	0.1569	9.16	10.23	19.39	55.63	-36.24	AVG
3	0.1742	17.74	10.19	27.93	64.76	-36.83	QP
4	0.1742	7.65	10.19	17.84	54.76	-36.92	AVG
5	0.4471	27.68	10.06	37.74	56.93	-19.19	QP
6	0.4471	15.84	10.06	25.90	46.93	-21.03	AVG
7	1.8241	16.77	10.00	26.77	56.00	-29.23	QP
8	1.8241	10.36	10.00	20.36	46.00	-25.64	AVG
9	4.6961	14.74	10.35	25.09	56.00	-30.91	QP
10	4.6961	9.50	10.35	19.85	46.00	-26.15	AVG
11	11.5601	28.42	10.49	38.91	60.00	-21.09	QP
12	11.5601	23.41	10.49	33.90	50.00	-16.10	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA


11.1. APPENDIX A: EMISSION BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	21.84	5168.84	5190.68
		5200	21.68	5189.20	5210.88
		5240	21.84	5228.88	5250.72
		5260	21.76	5249.20	5270.96
		5280	21.48	5269.28	5290.76
		5320	21.96	5308.68	5330.64
		5500	21.24	5489.36	5510.60
		5580	22.00	5569.12	5591.12
		5700	21.48	5689.08	5710.56
		5720	21.52	5708.96	5730.48
		5720 UNII-2C	16.04	5708.96	5725
		5720 UNII-3	5.48	5725	5730.48
		5745	21.40	5734.28	5755.68
		5785	21.76	5774.00	5795.76
		5825	21.12	5814.56	5835.68
11N20SISO	Ant1	5180	21.68	5169.32	5191.00
		5200	22.28	5188.88	5211.16
		5240	21.80	5228.92	5250.72
		5260	22.20	5248.52	5270.72
		5280	21.56	5269.08	5290.64
		5320	21.56	5309.04	5330.60
		5500	21.64	5489.04	5510.68
		5580	21.60	5569.24	5590.84
		5700	21.96	5688.92	5710.88
		5720	21.88	5708.96	5730.84
		5720 UNII-2C	16.04	5708.96	5725
		5720 UNII-3	5.84	5725	5730.84
		5745	21.72	5733.92	5755.64
		5785	21.76	5774.04	5795.80
		5825	21.48	5814.28	5835.76
11N40SISO	Ant1	5190	41.28	5169.36	5210.64
		5230	41.44	5209.36	5250.80
		5270	42.16	5249.60	5291.76
		5310	41.76	5288.88	5330.64
		5510	41.20	5489.36	5530.56
		5550	41.20	5529.52	5570.72
		5670	40.96	5649.52	5690.48
		5710	41.20	5689.36	5730.56
		5710 UNII-2C	35.64	5689.36	5725
		5710 UNII-3	5.56	5725	5730.56
		5755	41.28	5734.36	5775.64
		5795	40.96	5774.52	5815.48
		5180	22.00	5169.04	5191.04
		5200	22.16	5188.96	5211.12
		5240	22.60	5228.80	5251.40
11AX20SISO	Ant1	5260	22.28	5248.64	5270.92
		5280	22.24	5268.88	5291.12
		5320	22.36	5308.84	5331.20
		5500	22.12	5488.92	5511.04
		5580	22.04	5568.72	5590.76
		5700	22.16	5688.84	5711.00
		5720	22.36	5708.68	5731.04


		5720 UNII-2C	16.32	5708.68	5725
		5720 UNII-3	6.04	5725	5731.04
		5745	21.92	5734.04	5755.96
		5785	22.20	5773.96	5796.16
		5825	21.64	5814.44	5836.08
11AX40SISO	Ant1	5190	41.60	5169.20	5210.80
		5230	41.52	5209.28	5250.80
		5270	40.96	5249.60	5290.56
		5310	41.84	5289.36	5331.20
		5510	41.52	5489.28	5530.80
		5550	41.52	5529.44	5570.96
		5670	41.28	5649.28	5690.56
		5710	41.52	5689.28	5730.80
		5710 UNII-2C	35.72	5689.28	5725
		5710 UNII-3	5.8	5725	5730.80
		5755	41.28	5734.20	5775.48
		5795	41.44	5774.36	5815.80

11.1.2. Test Graphs

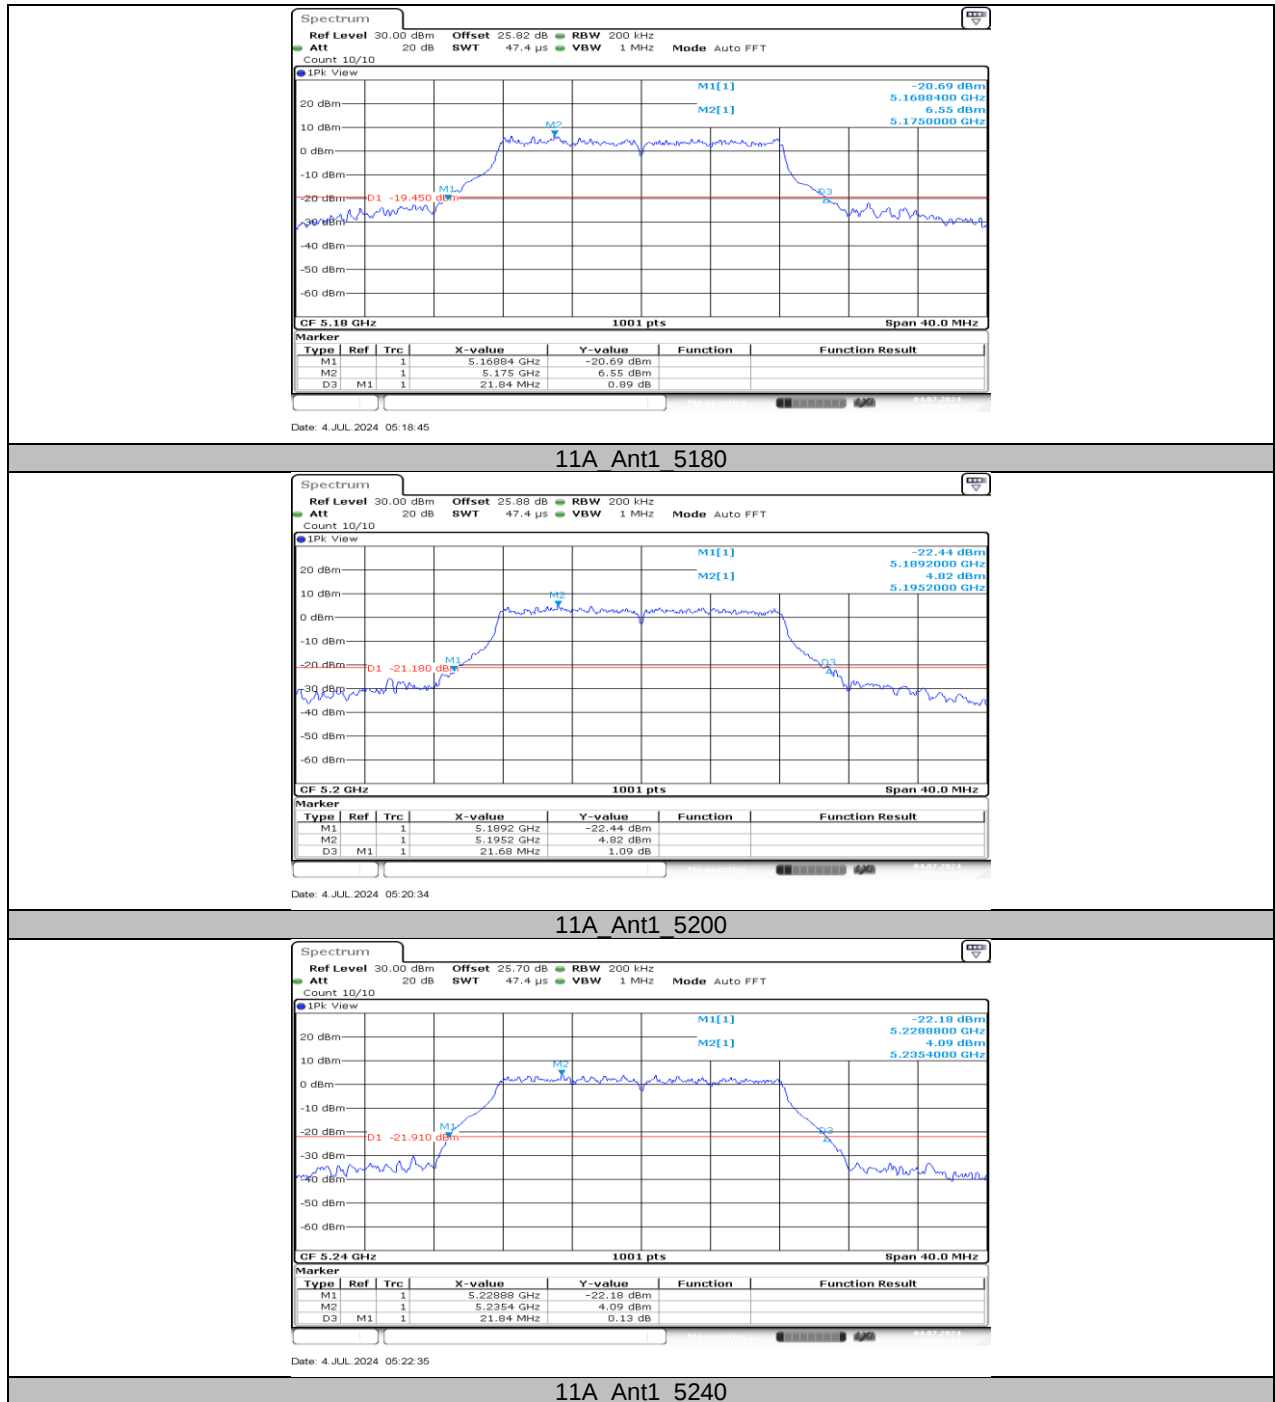


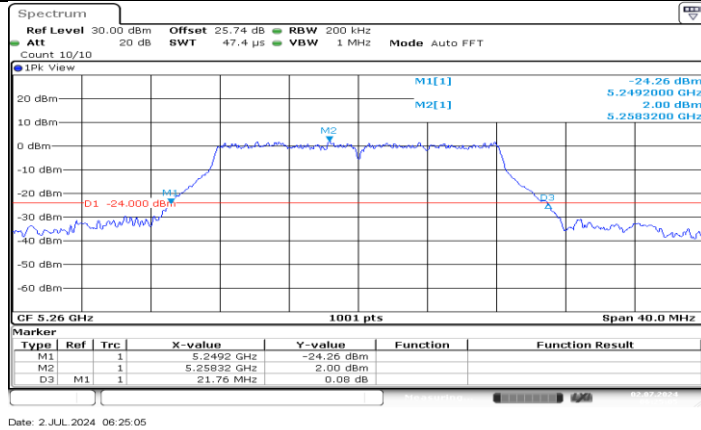


11A_Ant1_5260

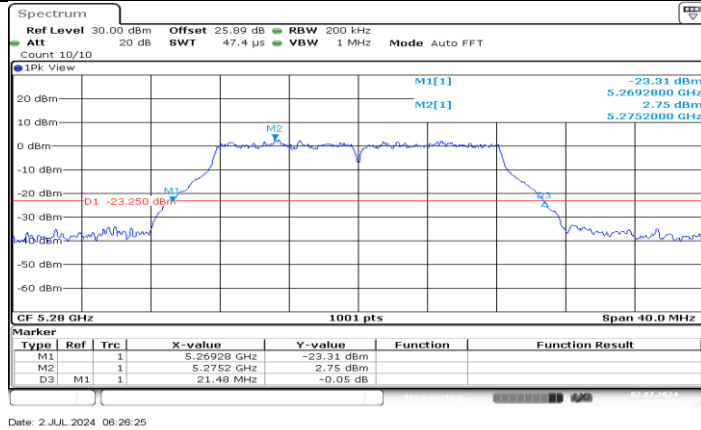


11A_Ant1_5280

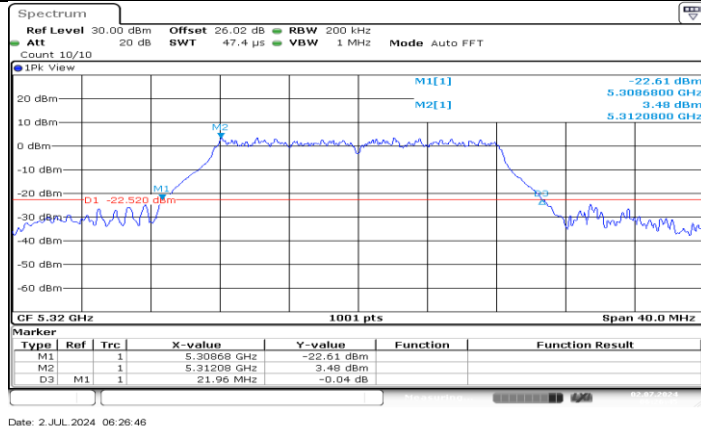


11A_Ant1_5320

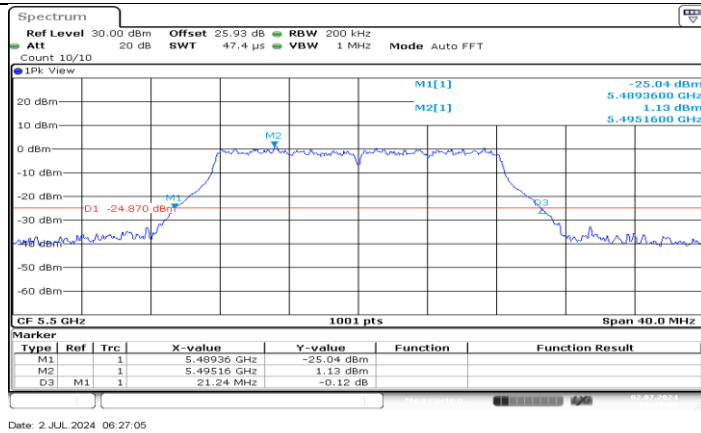


11A_Ant1_5500

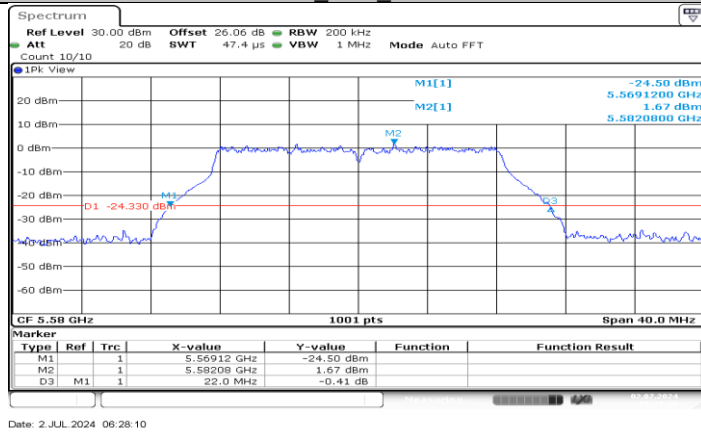


11A_Ant1_5580

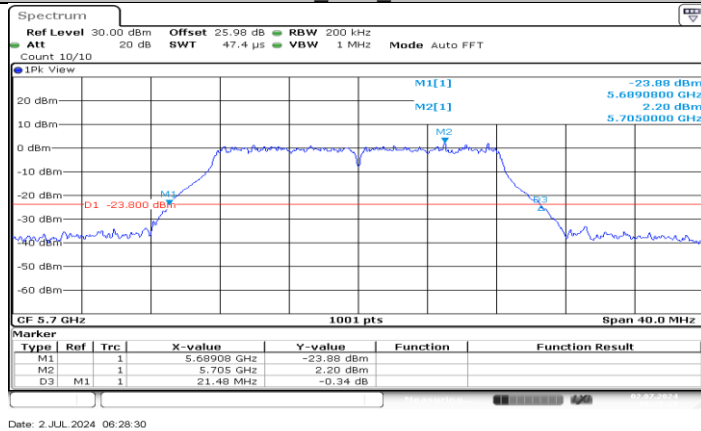


11A_Ant1_5700

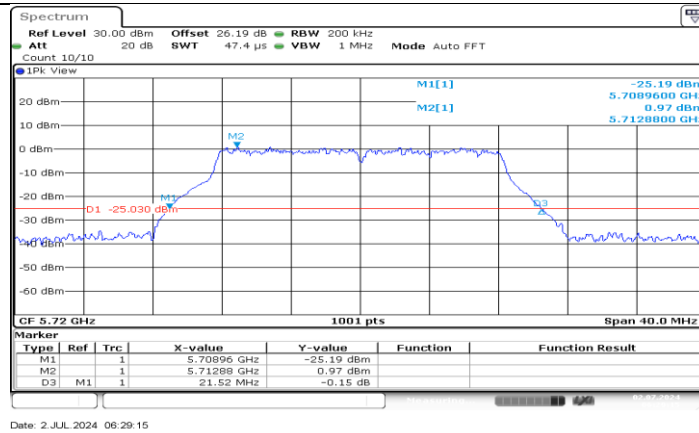


11A_Ant1_5720

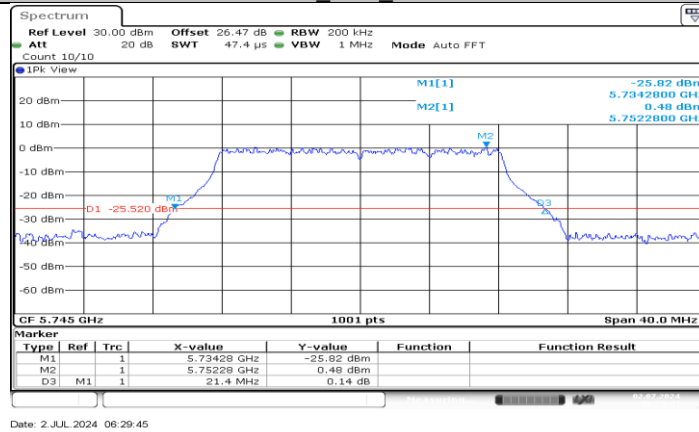


11A_Ant1_5745

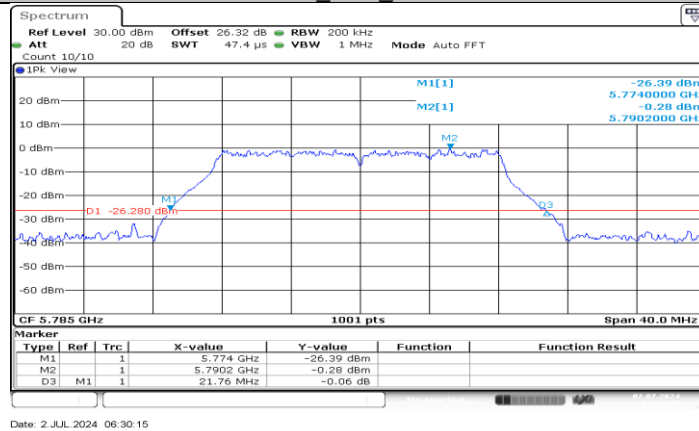


11A_Ant1_5785

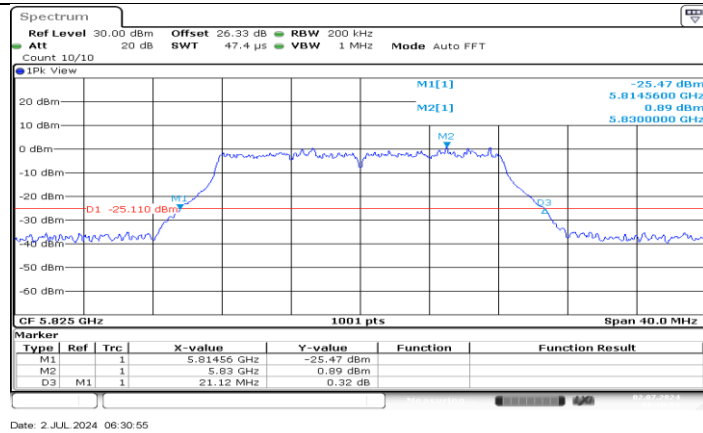


11A_Ant1_5825

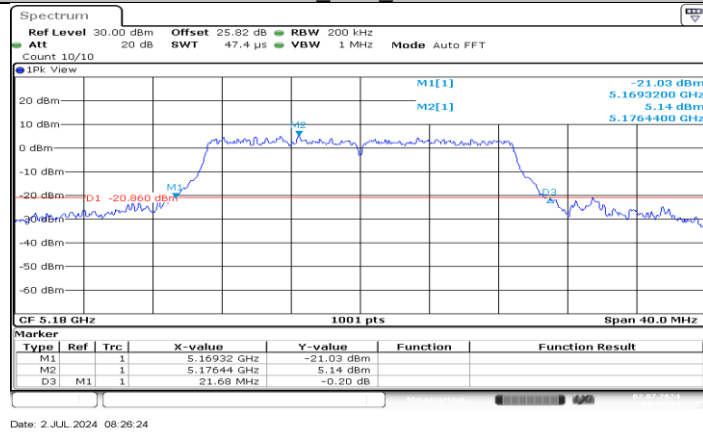


11N20SISO_Ant1_5180

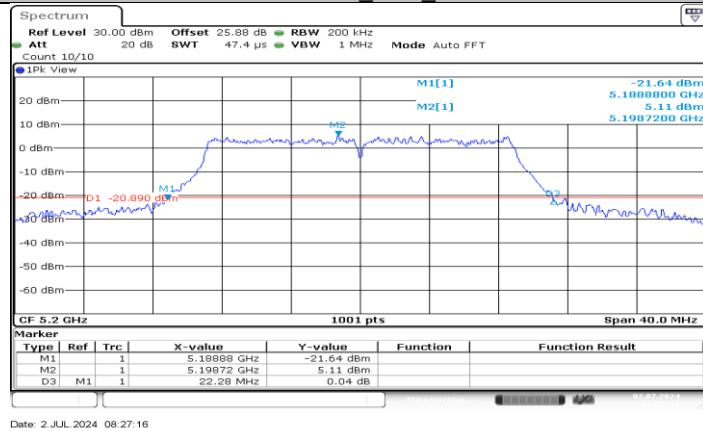


11N20SISO_Ant1_5200

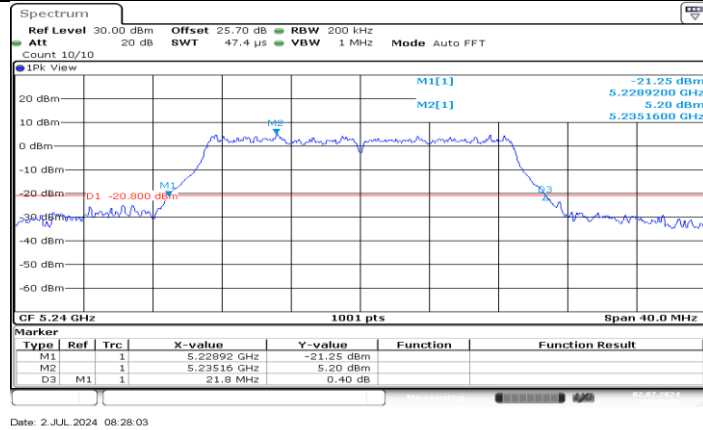


11N20SISO_Ant1_5240

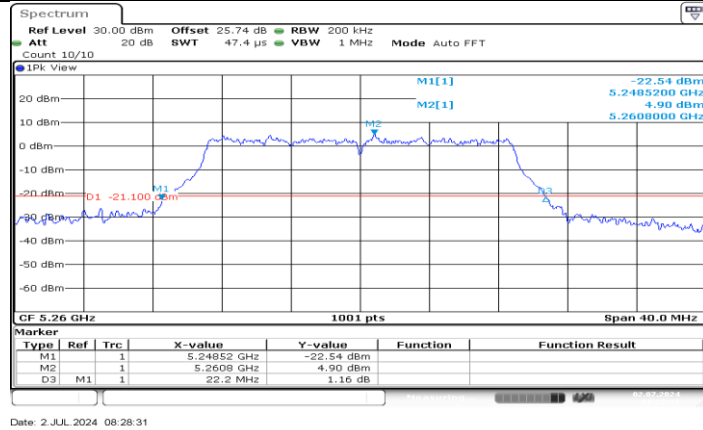


11N20SISO_Ant1_5260

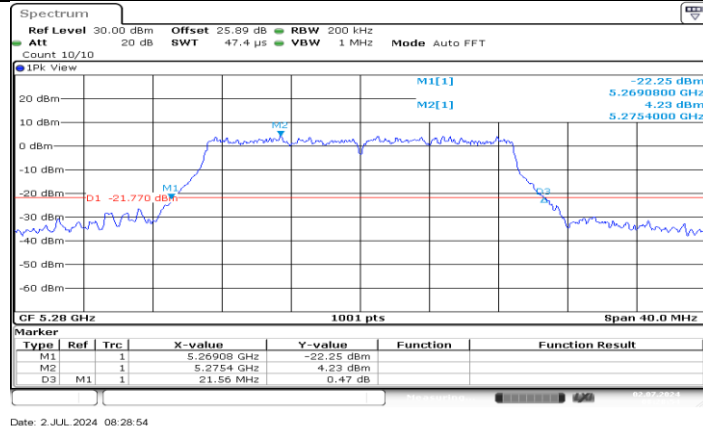


11N20SISO_Ant1_5280

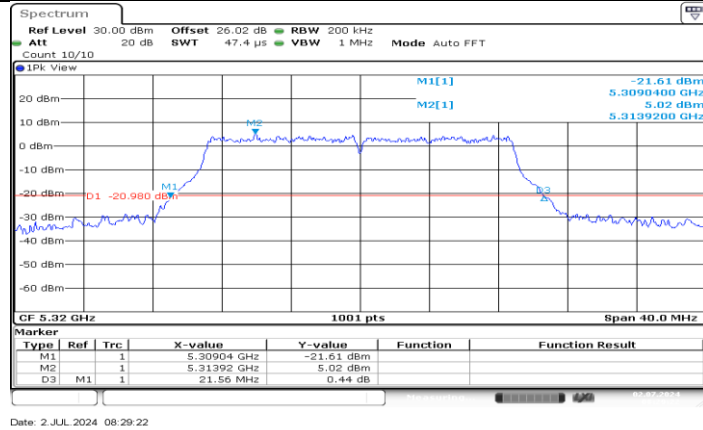


11N20SISO_Ant1_5320

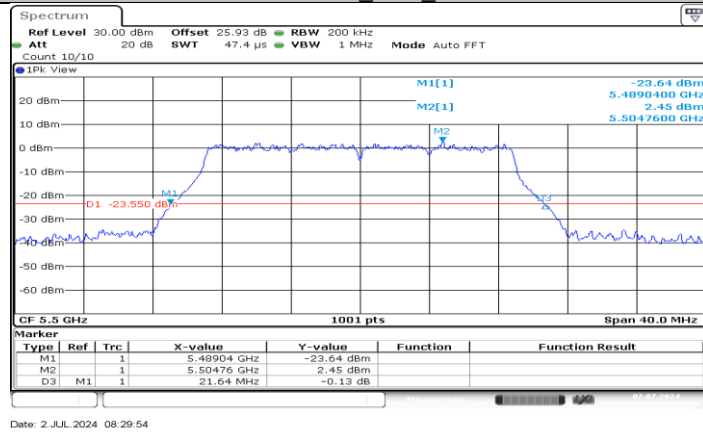


11N20SISO_Ant1_5500

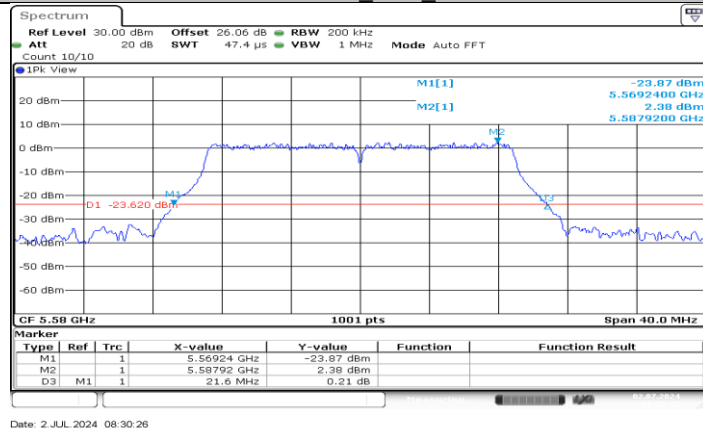


11N20SISO_Ant1_5580

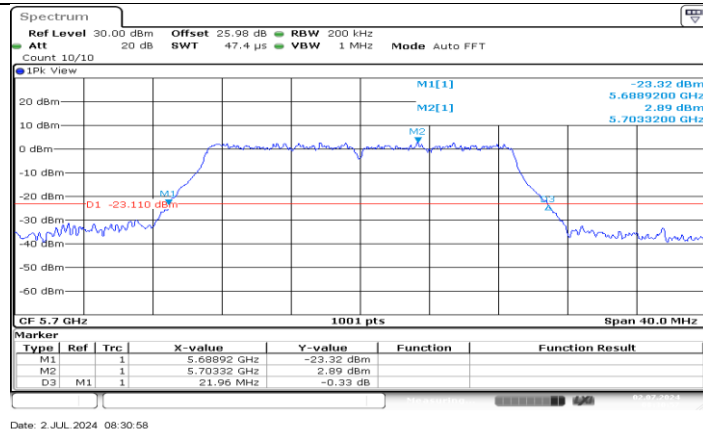


11N20SISO_Ant1_5700

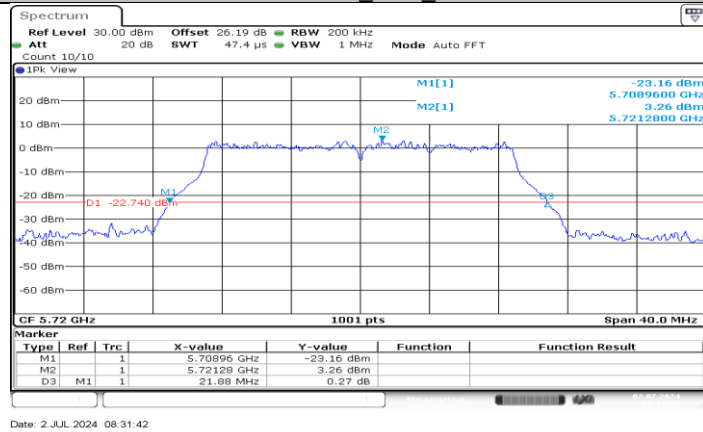


11N20SISO_Ant1_5720

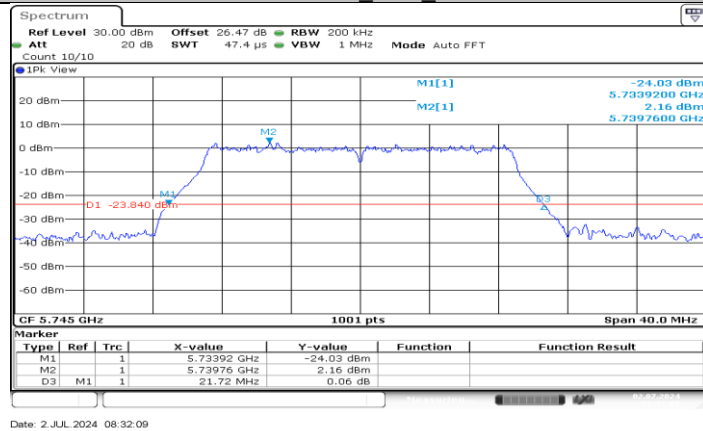


11N20SISO_Ant1_5745

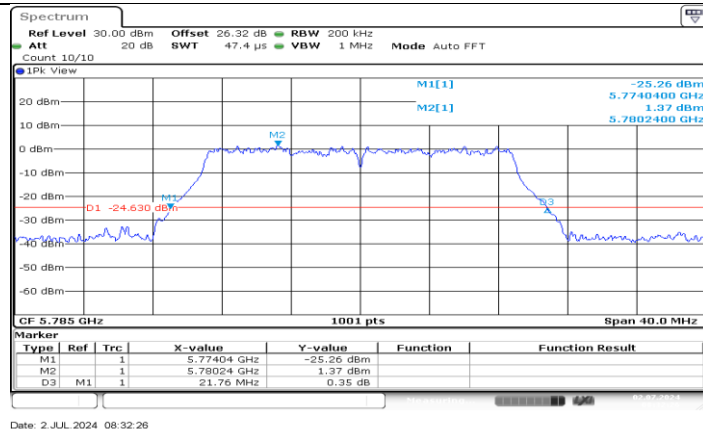


11N20SISO_Ant1_5785

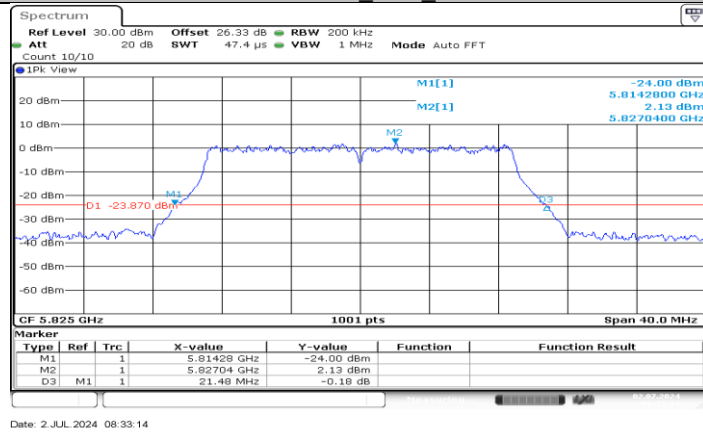


11N20SISO_Ant1_5825

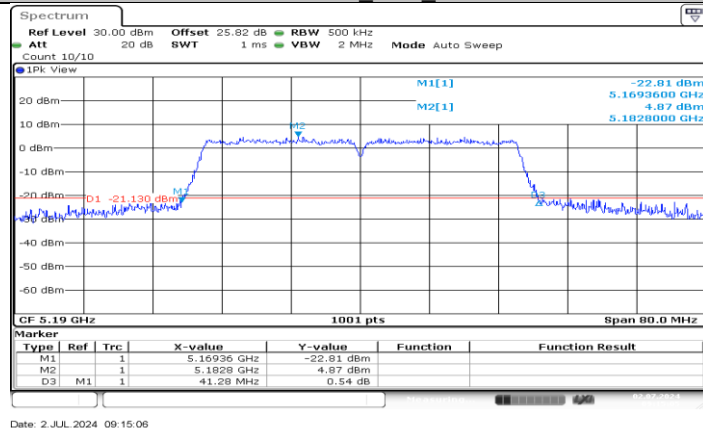


11N40SISO_Ant1_5190

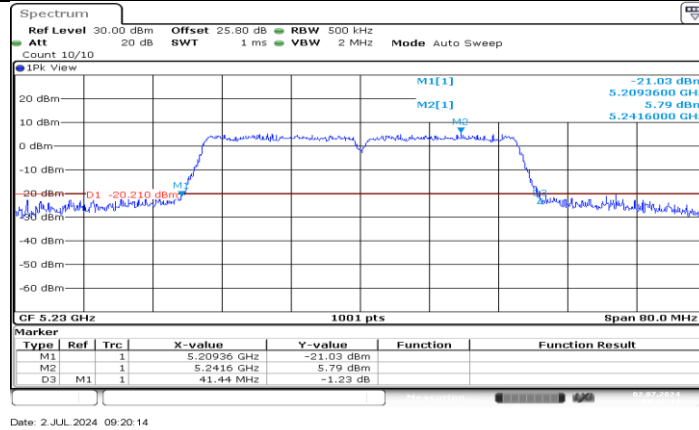


11N40SISO_Ant1_5230

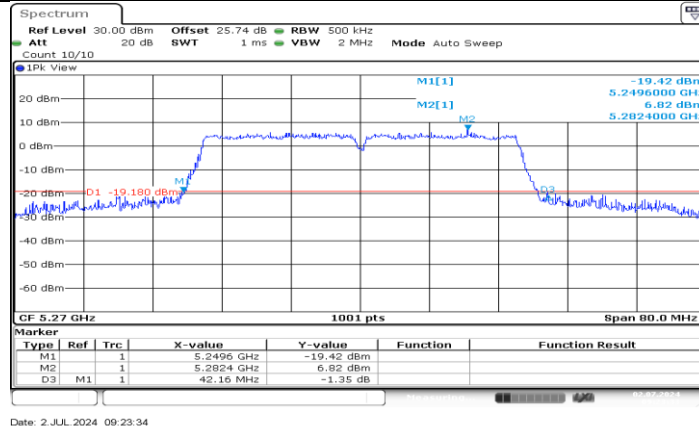


11N40SISO_Ant1_5270

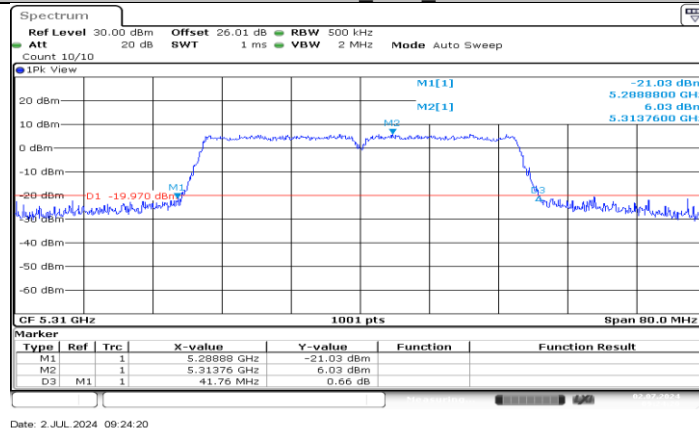


11N40SISO_Ant1_5310

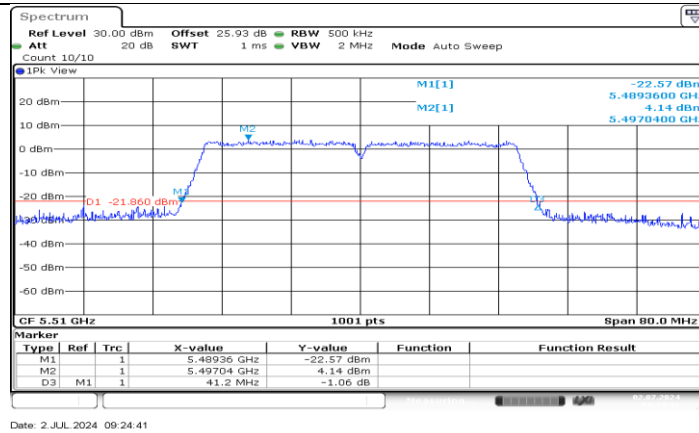


11N40SISO_Ant1_5510

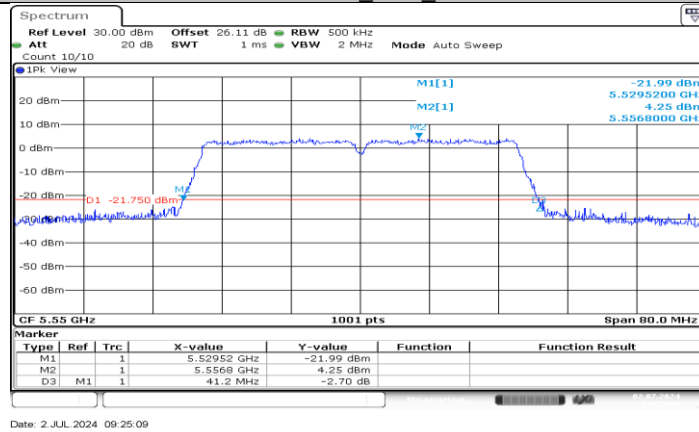


11N40SISO_Ant1_5550

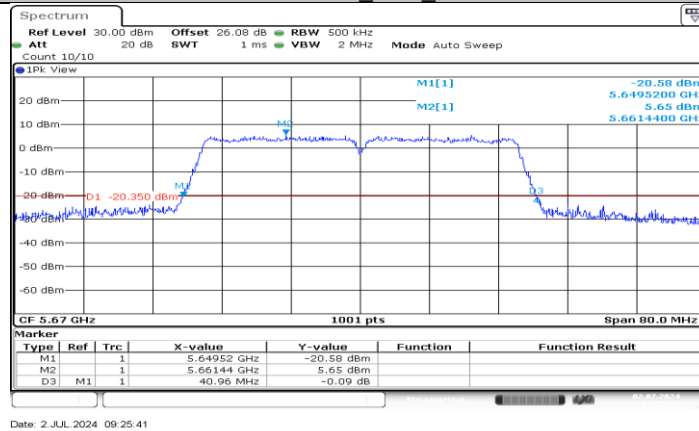


11N40SISO_Ant1_5670

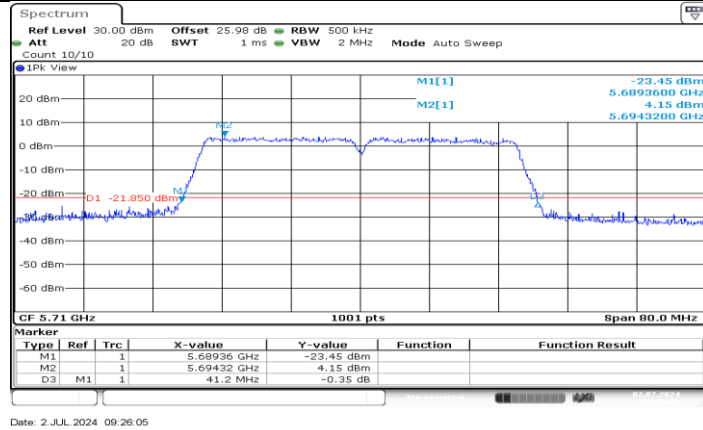


11N40SISO_Ant1_5710

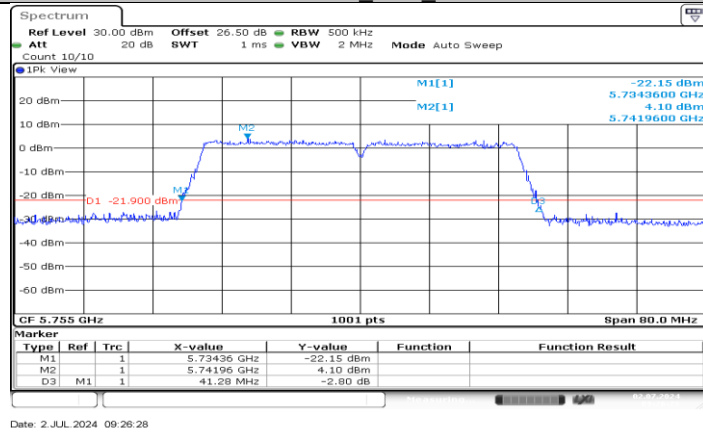


11N40SISO_Ant1_5755

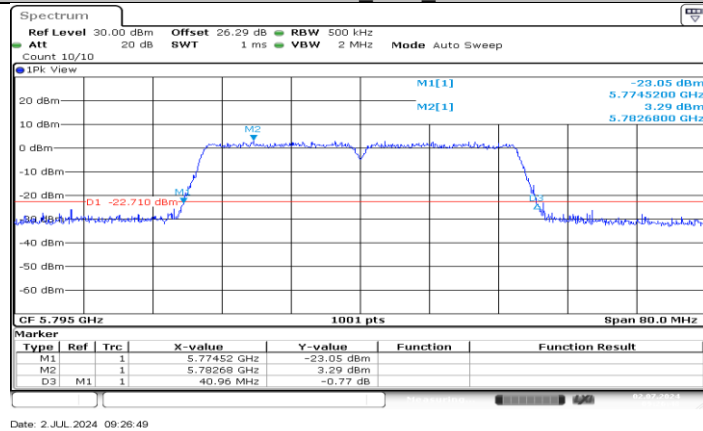


11N40SISO_Ant1_5795

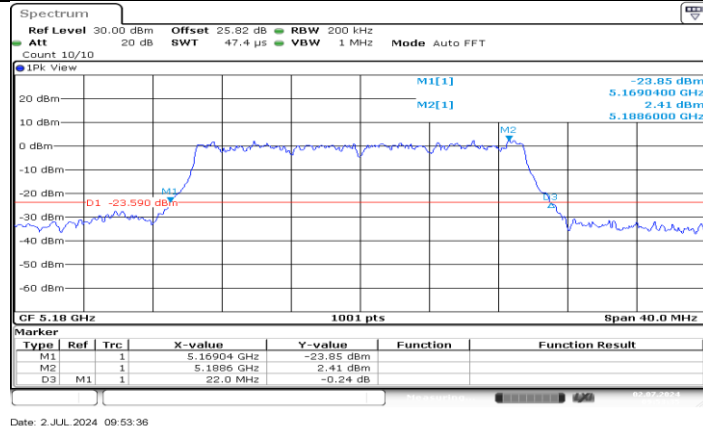


11AX20SISO_Ant1_5180

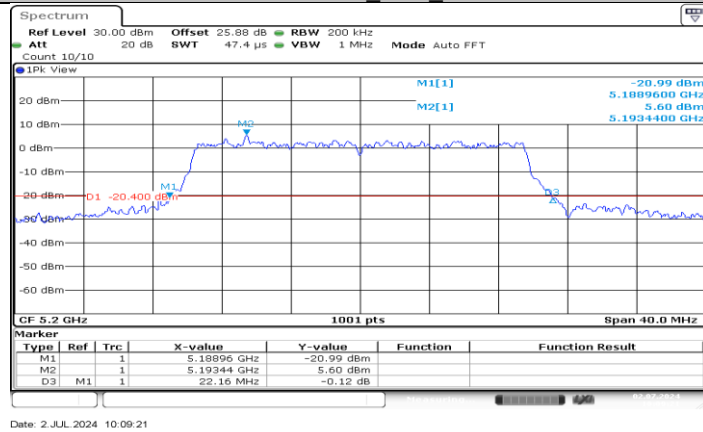


11AX20SISO_Ant1_5200

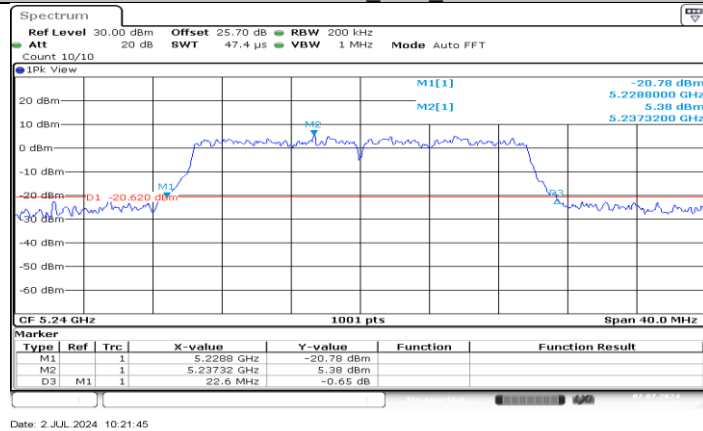


11AX20SISO_Ant1_5240

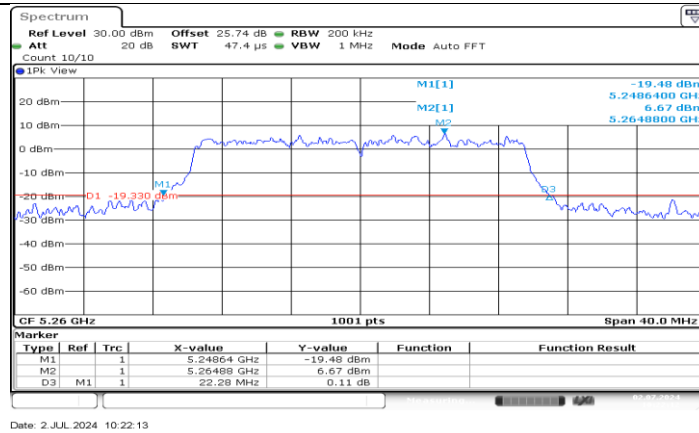


11AX20SISO_Ant1_5260

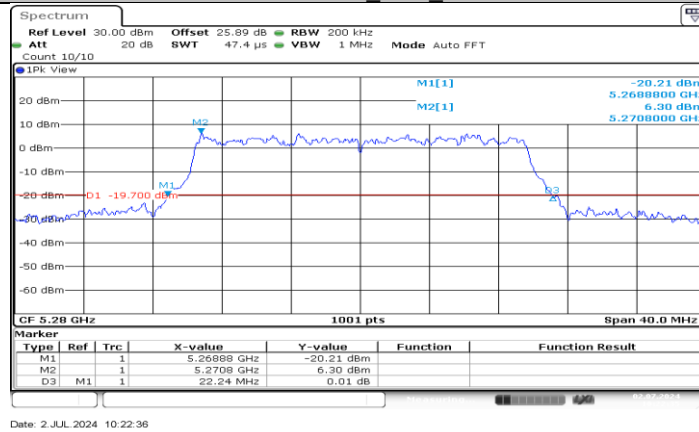


11AX20SISO_Ant1_5280

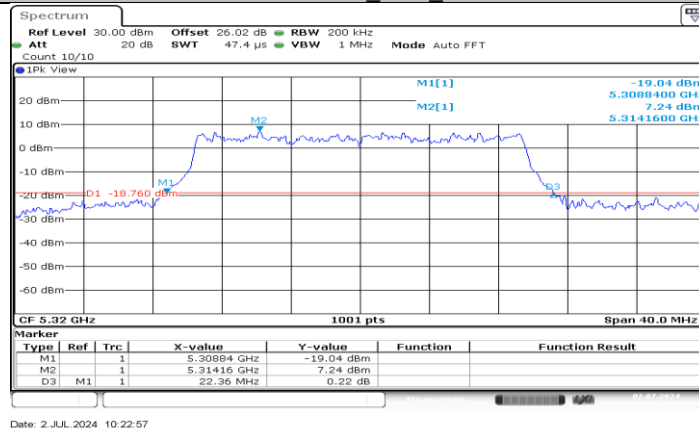


11AX20SISO_Ant1_5320

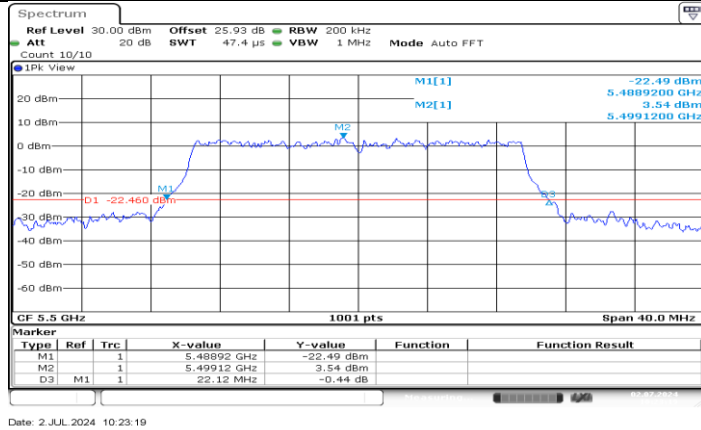

11AX20SISO_Ant1_5500

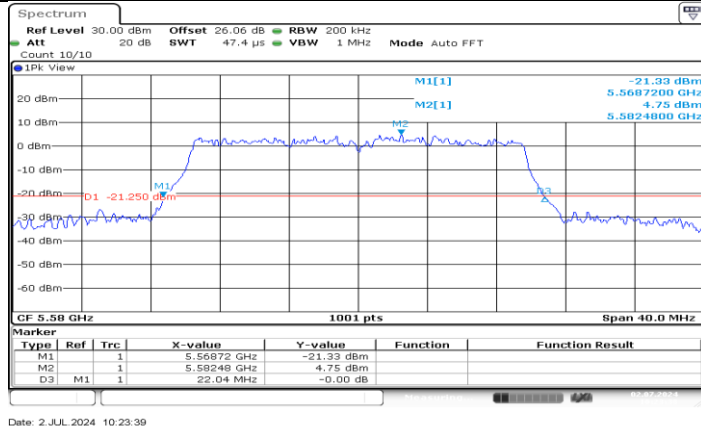

11AX20SISO_Ant1_5580

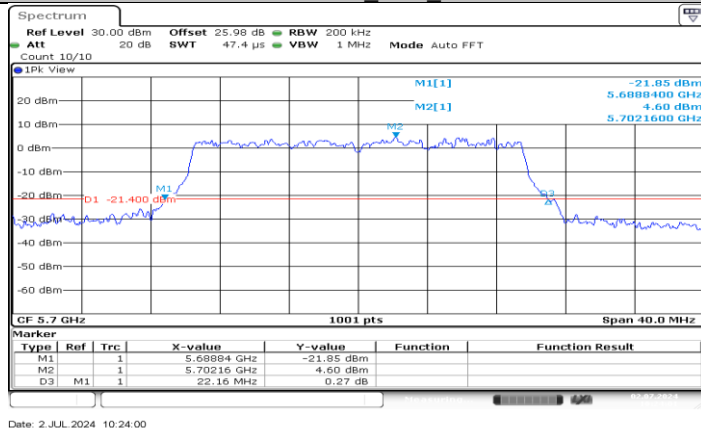

11AX20SISO_Ant1_5700