



FCC TEST REPORT
FCC ID: 2BFA8-ARGLASSES

On Behalf of

Brics Ship LLC

MyW AR GLASSES

Model No.: MyW AR Glasses, MyW1, NRMMyW1, NRMMyW, MyW AR,
NRMMyW AR, MyWXXXXXX (X can be any alphanumeric: character,
symbol or blank)

Prepared for : Brics Ship LLC
Address : 3410 Geary Blvd, Ste 243, San Francisco CA, 94118

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2311295-C01-R01
Date of Receipt : December 13, 2023
Date of Test : December 13, 2023-January 12, 2024
Date of Report : March 13, 2024
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

Description	Page
TABLE OF CONTENTS	2
1. Summary of Standards And Results	5
1.1. Description of Standards and Results	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of connection between EUT and simulators	7
2.5. Test Mode Description	7
2.6. Test Conditions	8
2.7. Test Facility	8
2.8. Measurement Uncertainty	8
2.9. Test Equipment List	9
3. Spurious Emission	10
3.1. Test Limits	10
3.2. Test Procedure	10
3.3. Test Setup	11
3.4. Test Results	12
4. Power Line Conducted Emission	23
4.1. Test Limits	23
4.2. Test Procedure	23
4.3. Test Setup	23
4.4. Test Results	23
5. Conducted Maximum peak Output Power	26
5.1. Test limits	26
5.2. Test Procedure	26
5.3. Test Setup	26
5.4. Test Results	26
6. Peak Power Spectral Density	30
6.1. Test limits	30
6.2. Test Procedure	30
6.3. Test Setup	30
6.4. Test Results	30
7. Bandwidth	35
7.1. Test limits	35
7.2. Test Procedure	35
7.3. Test Setup	35
7.4. Test Results	35
8. Band Edge Check	43
8.1. Test limits	43
8.2. Test Procedure	43
8.3. Test Setup	43
8.4. Test Results	43
9. Antenna Requirement	47
9.1. Standard Requirement	47
9.2. Antenna Connected Construction	47
9.3. Results	47
10. Test setup photo	48
10.1. Photo of Radiated Emission test	48
10.2. Photo of Conducted Emission test	49
11. EUT Photos	50

TEST REPORT DECLARATION

Applicant : Brics Ship LLC
Address : 3410 Geary Blvd, Ste 243, San Francisco CA, 94118
Manufacturer : SHENZHEN MYW TECHNOLOGY CO., LIMITED
Address : Room 1101, Building 1, Dianda Guyuan Industrial Park, Mashantou Community,
Matian Street, Guangming District, Shenzhen, China
EUT Description : MyW AR GLASSES

(A) Model No. MyW AR Glasses, MyW1, NRMMyW1, NRMMyW, MyW
AR, NRMMyW AR, MyWXXXXXX (X can be any
alphanumeric: character, symbol or blank)
MYW

(B) Trademark



Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer



Approved by (name + signature).....:

Reak Yang
Project Manager



Date of issue.....

March 13, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 13, 2024	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15	15.207	P
6dB Bandwidth	FCC PART 15	15.247 (a)(2)	P
Conducted Maximum Peak Output Power	FCC PART 15	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15	15.247 (d)	P
Power Spectral Density	FCC PART 15	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15	15.205	P
Antenna Requirement	FCC PART 15	15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: MyW AR GLASSES
Model Number	: MyW AR Glasses, MyW1, NRMyW1, NRMyW, MyW AR, NRMyW AR, MyWXXXXXX (X can be any alphanumeric: character, symbol or blank)
Diff	: There is no difference except the name of the model. All tests are made with the MyW AR Glasses model.
Power supply	: DC 3.8V from battery, DC 5V from adapter
Radio Technology	: Bluetooth BLE
Operation frequency	: 2402-2480MHz
Channel No.	: 40 Channels
Channel spacing	: 2MHz
Rate	: 1Mbps, 2Mbps
Modulation type	: GFSK
Antenna Type	: FPC antenna, Maximum Gain is 3.53dBi (Antenna information is provided by applicant.)
Coaxial cable loss	: Max. coaxial cable loss:0.5dB (Cable lossvalue is provided by applicant.)
Software version	: MyWOS nrmyw1_system_v1.0.1
Hardware version	: MyW1
Intend use environment	: Residential, commercial and light industrial environment

2.2. Accessories of Device (EUT)

Accessories : /

Manufacturer : /


Model : /

Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1	N/A	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK (1M/2Mbps)	Low :CH1	2402
	Middle: CH20	2440
	High: CH40	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 25, 2017 Certificated by IC
Registration Number: 12315A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. SPURIOUS EMISSION

3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uv/m)

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GH and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured


If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

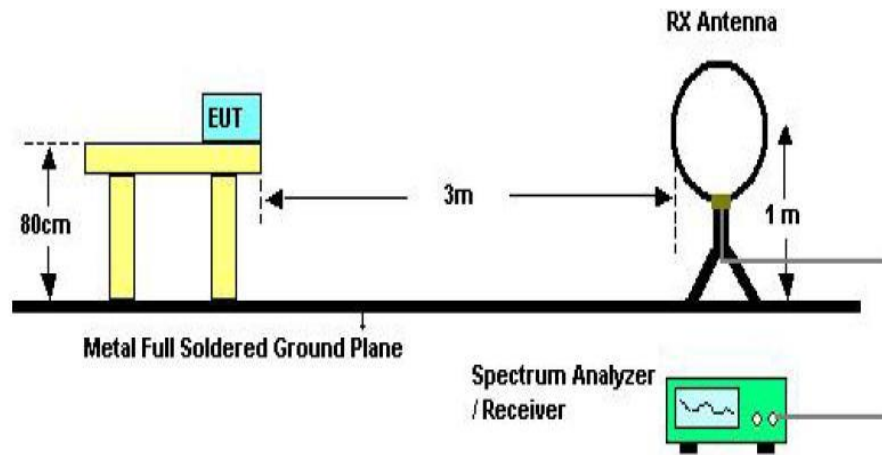

Below 30MHz Test Setup

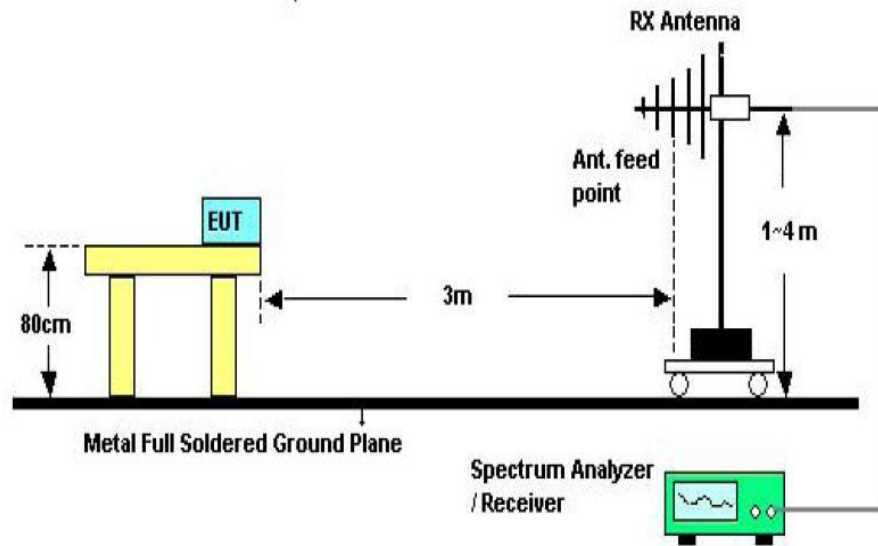

Above 30MHz Test Setup

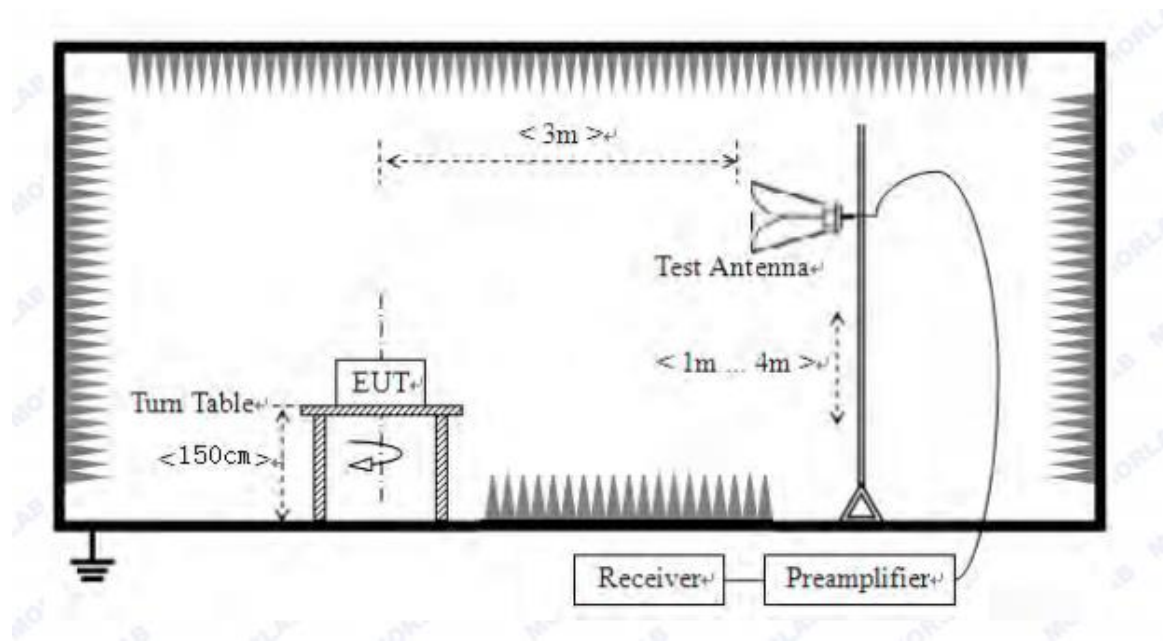

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz


We have scanned the 10th harmonic from 9 kHz to the EUT.

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2. Only show the test data of the worst Channel in this report.

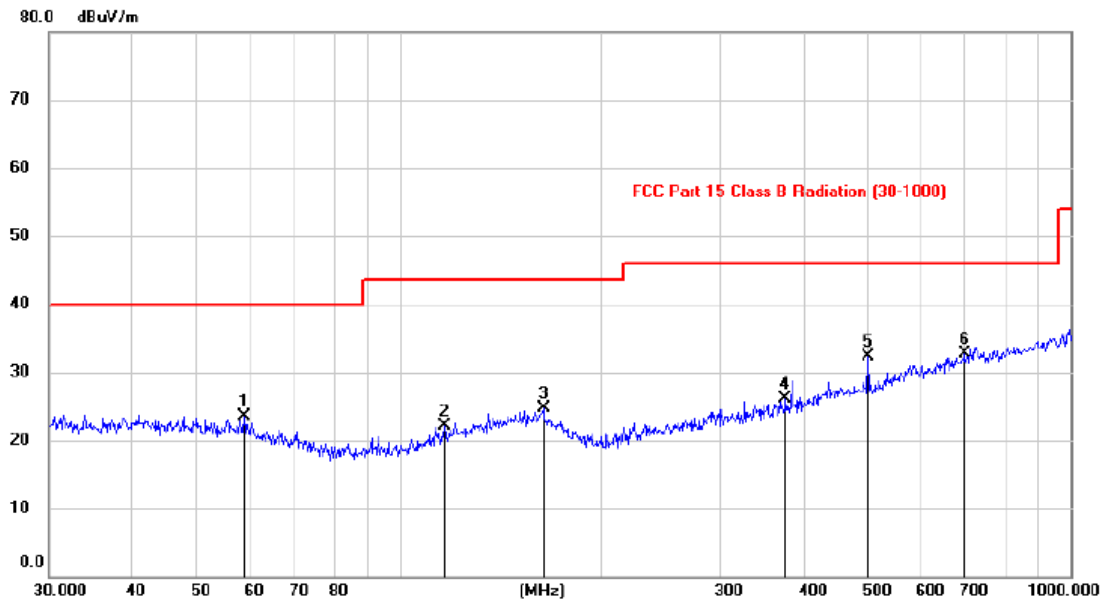Antenna polarity: Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		58.7773	10.18	13.29	23.47	40.00	-16.53	peak		
2		116.6082	9.40	12.63	22.03	43.50	-21.47	peak		
3		163.9081	10.06	14.66	24.72	43.50	-18.78	peak		
4		376.6863	10.22	15.83	26.05	46.00	-19.95	peak		
5		500.0088	14.04	18.21	32.25	46.00	-13.75	peak		
6	*	696.9382	11.03	21.68	32.71	46.00	-13.29	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

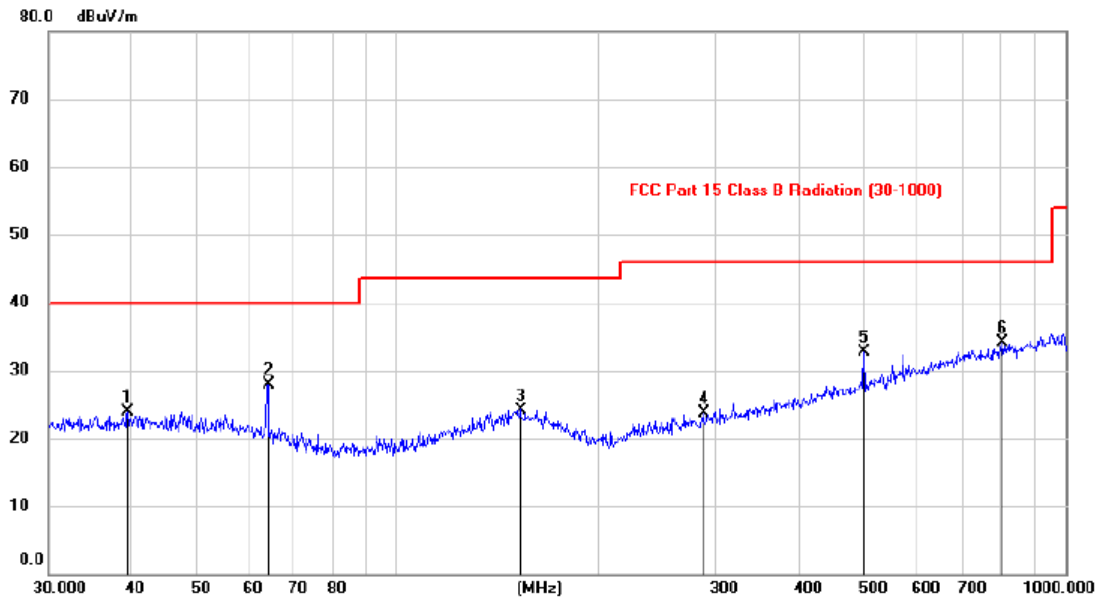Antenna polarity: Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		39.4417	9.50	14.46	23.96	40.00	-16.04	peak		
2		63.9903	15.35	12.52	27.87	40.00	-12.13	peak		
3		153.0930	9.15	15.05	24.20	43.50	-19.30	peak		
4		287.1837	9.85	13.79	23.64	46.00	-22.36	peak		
5		500.0088	14.40	18.21	32.61	46.00	-13.39	peak		
6	*	806.6744	11.11	23.02	34.13	46.00	-11.87	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Notes: Above is below 1GHz test data. This report only shall the worst case mode for GFSK 2402MHz (1Mbps).

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	41.57	V	33.95	10.18	34.26	51.44	74	-22.56	PK
4804	37.75	V	33.95	10.18	34.26	47.62	54	-6.38	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.57	H	33.95	10.18	34.26	54.44	74	-19.56	PK
4804	37.70	H	33.95	10.18	34.26	47.57	54	-6.43	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	42.87	V	33.93	10.2	34.29	52.71	74	-21.29	PK
4880	33.75	V	33.93	10.2	34.29	43.59	54	-10.41	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	44.41	H	33.93	10.2	34.29	54.25	74	-19.75	PK
4880	35.49	H	33.93	10.2	34.29	45.33	54	-8.67	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	45.22	V	33.98	10.22	34.25	55.17	74	-18.83	PK
4960	33.51	V	33.98	10.22	34.25	43.46	54	-10.54	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.04	H	33.98	10.22	34.25	52.99	74	-21.01	PK
4960	33.32	H	33.98	10.22	34.25	43.27	54	-10.73	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.07	V	33.95	10.18	34.26	54.94	74	-19.06	PK
4804	35.69	V	33.95	10.18	34.26	45.56	54	-8.44	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.57	H	33.95	10.18	34.26	54.44	74	-19.56	PK
4804	34.01	H	33.95	10.18	34.26	43.88	54	-10.12	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	41.40	V	33.93	10.2	34.29	51.24	74	-22.76	PK
4880	35.05	V	33.93	10.2	34.29	44.89	54	-9.11	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	42.81	H	33.93	10.2	34.29	52.65	74	-21.35	PK
4880	34.49	H	33.93	10.2	34.29	44.33	54	-9.67	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	44.49	V	33.98	10.22	34.25	54.44	74	-19.56	PK
4960	34.52	V	33.98	10.22	34.25	44.47	54	-9.53	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	44.38	H	33.98	10.22	34.25	54.33	74	-19.67	PK
4960	33.17	H	33.98	10.22	34.25	43.12	54	-10.88	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Conducted RF Spurious Emission

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

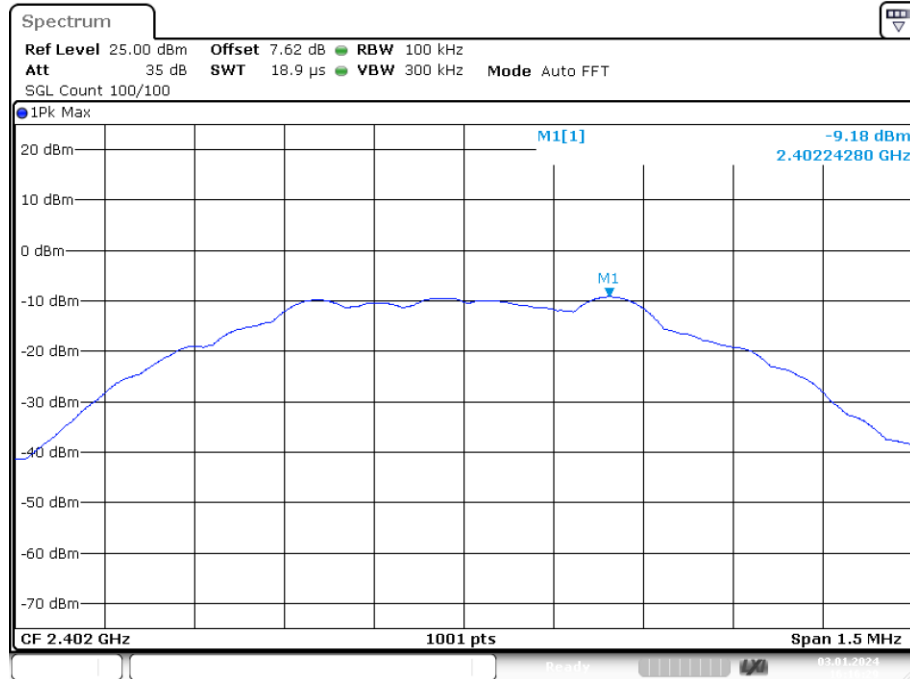


Date: 3.JAN.2024 16:16:29

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

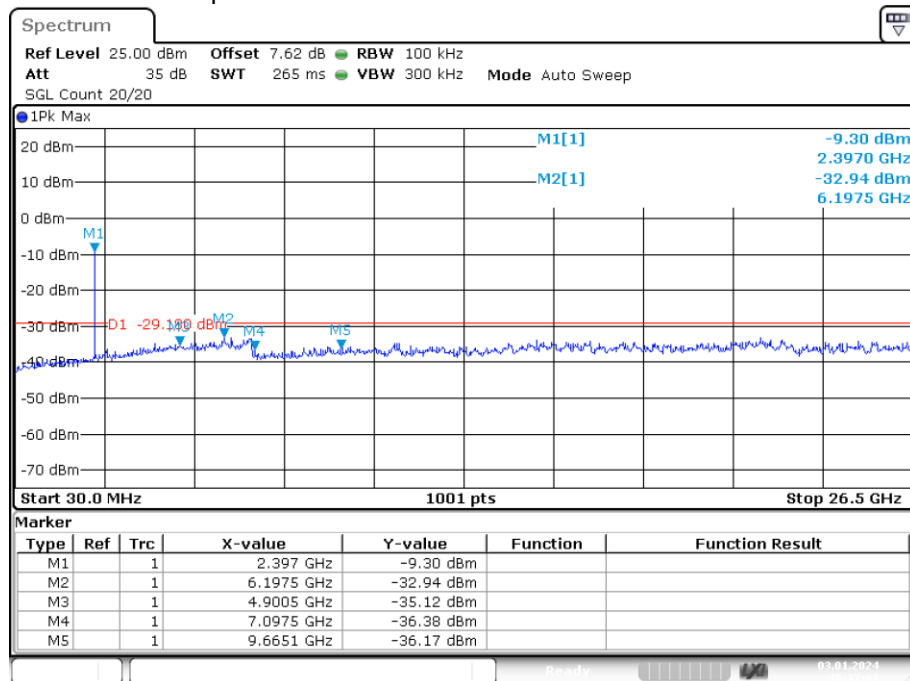


Date: 3.JAN.2024 16:17:02

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

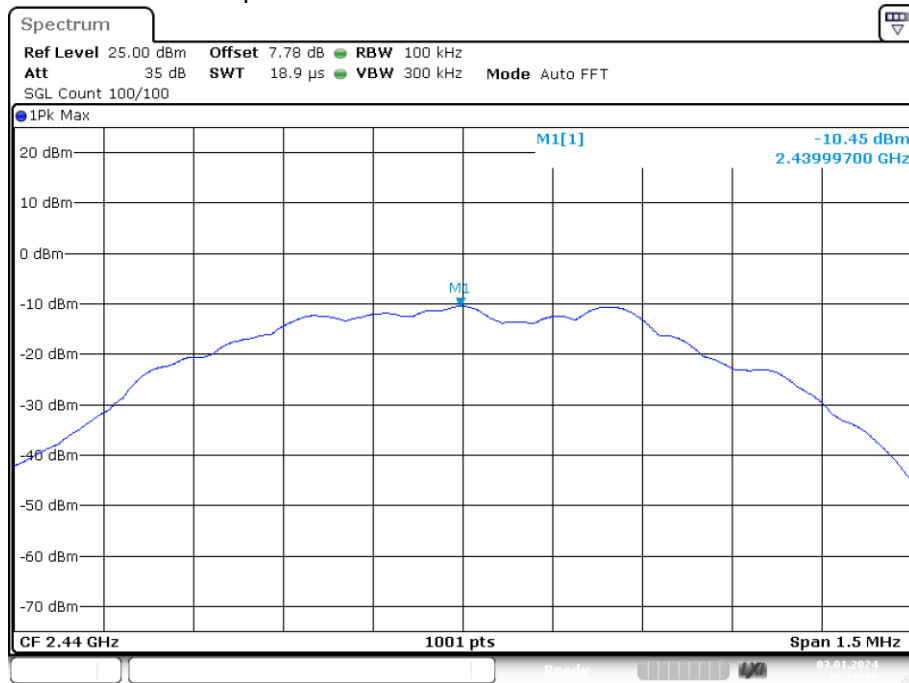


Date: 3.JAN.2024 16:18:31

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

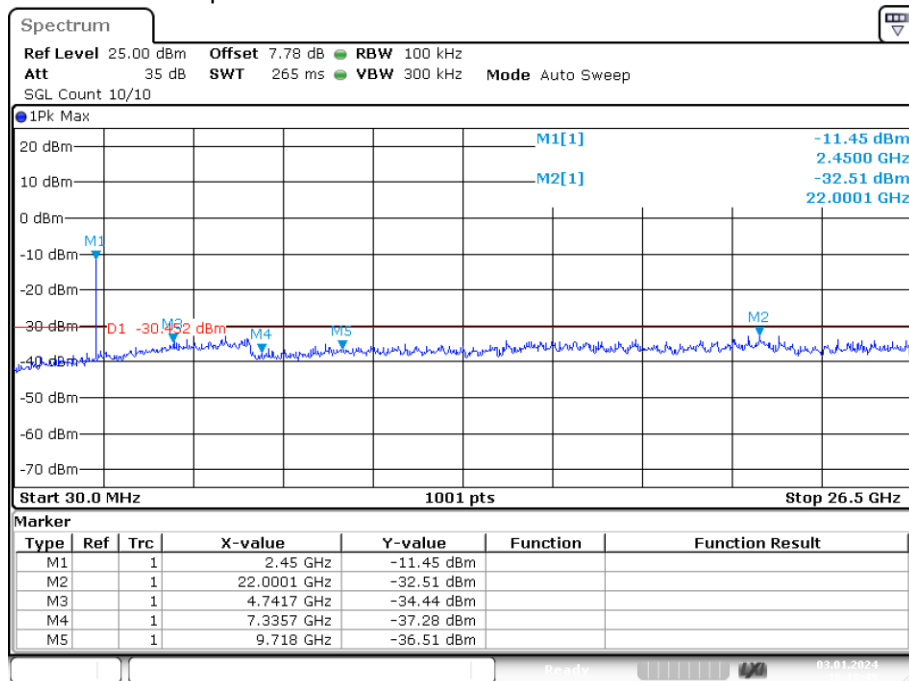


Date: 3.JAN.2024 16:18:48

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

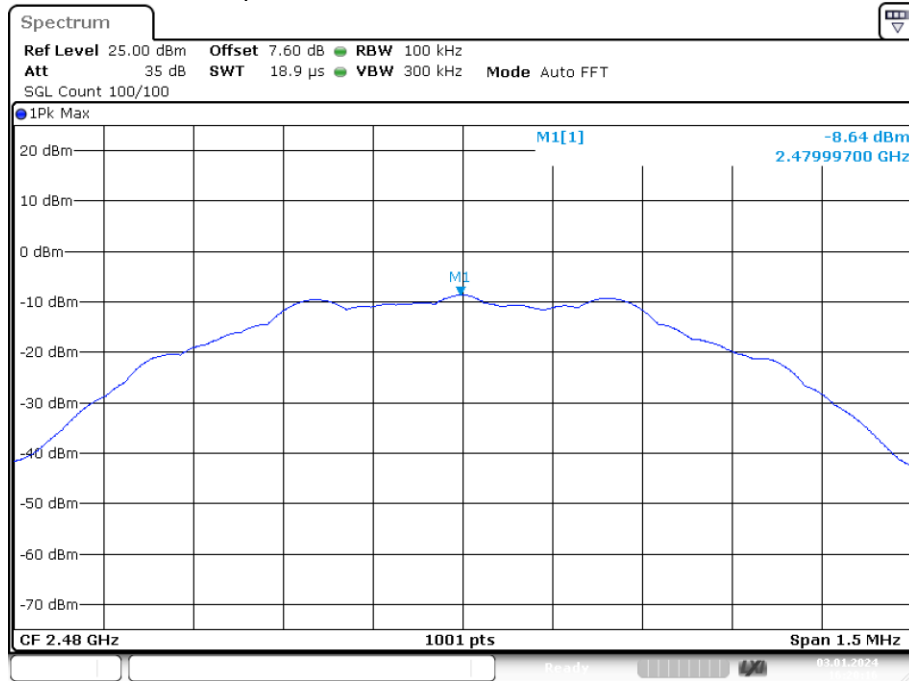


Date: 3.JAN.2024 16:20:16

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

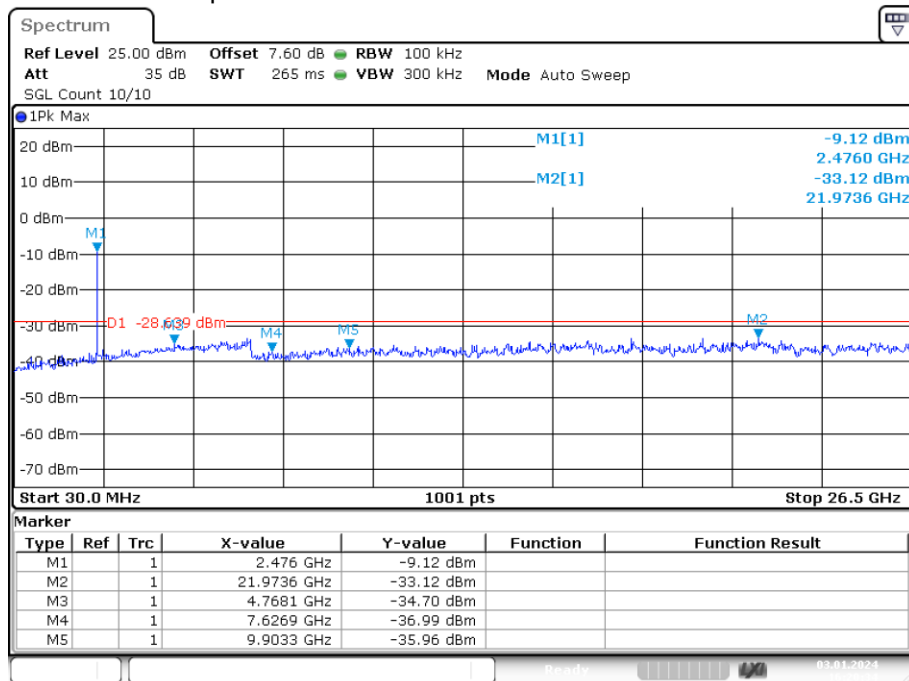


Date: 3.JAN.2024 16:20:34

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

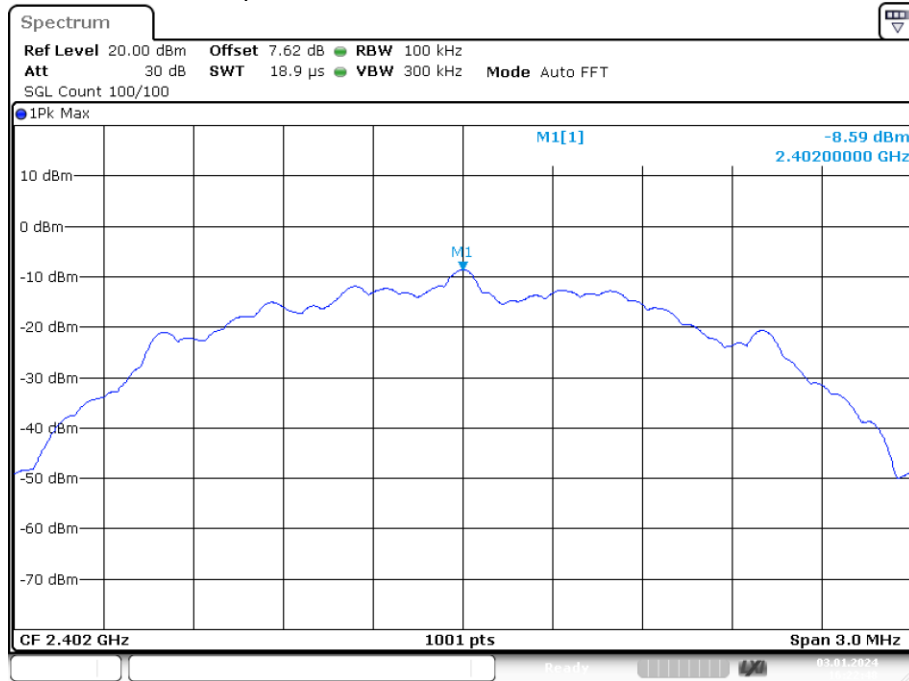


Date: 3.JAN.2024 16:22:48

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

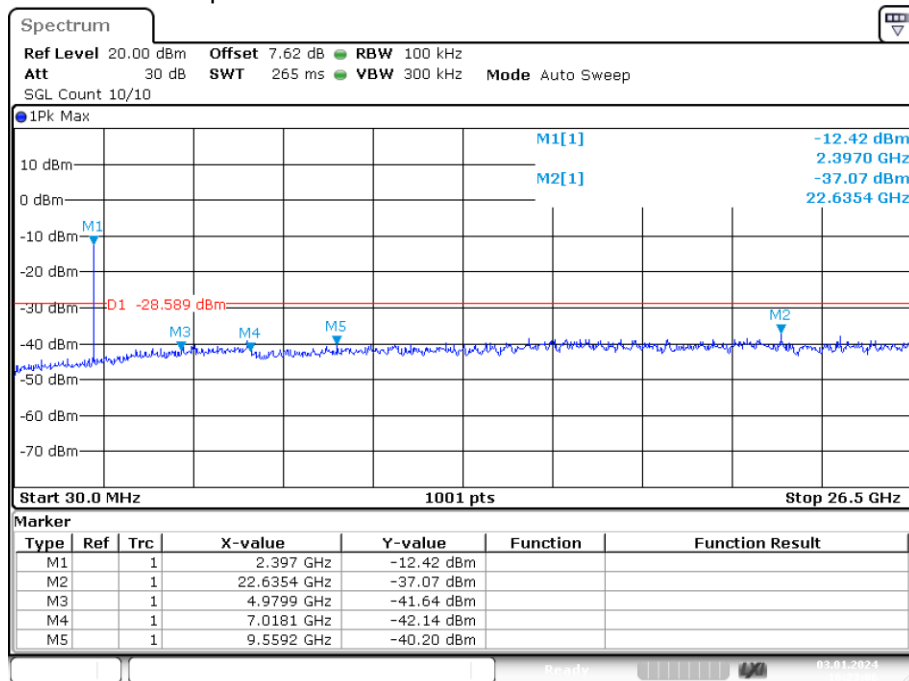


Date: 3.JAN.2024 16:23:05

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

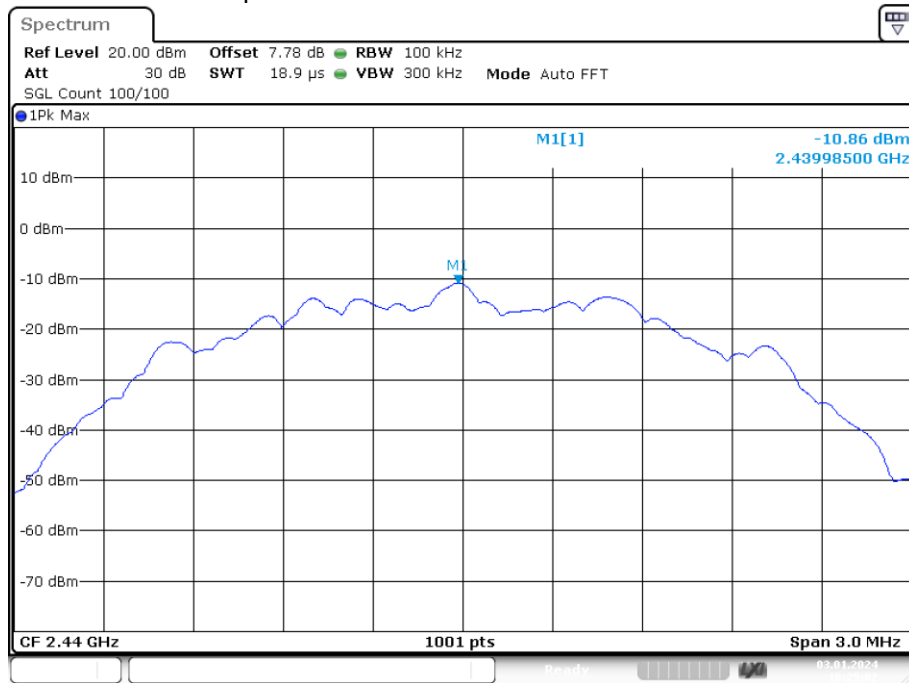


Date: 3.JAN.2024 16:25:02

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

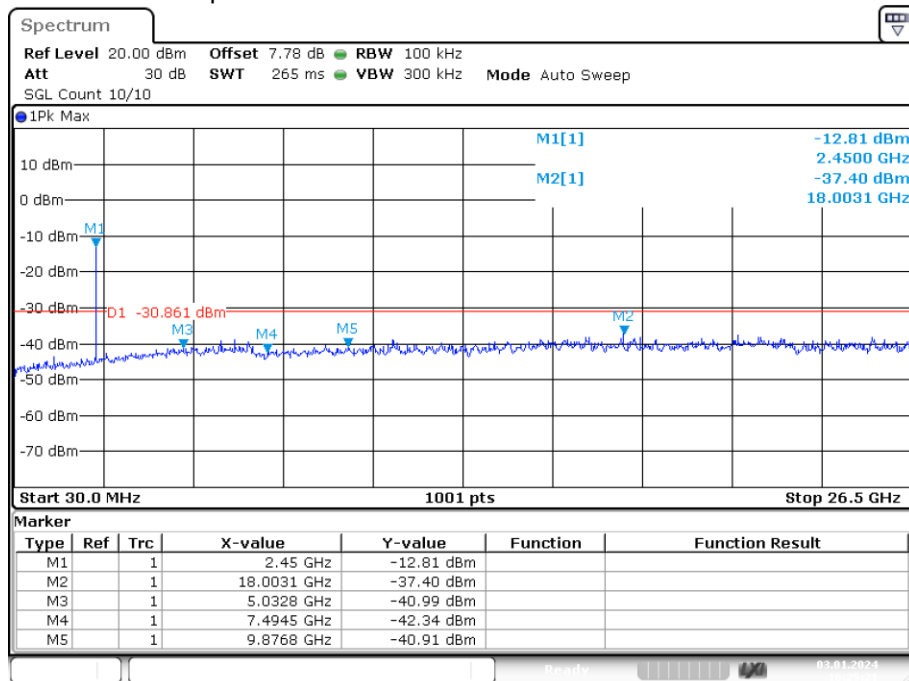


Date: 3.JAN.2024 16:25:20

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

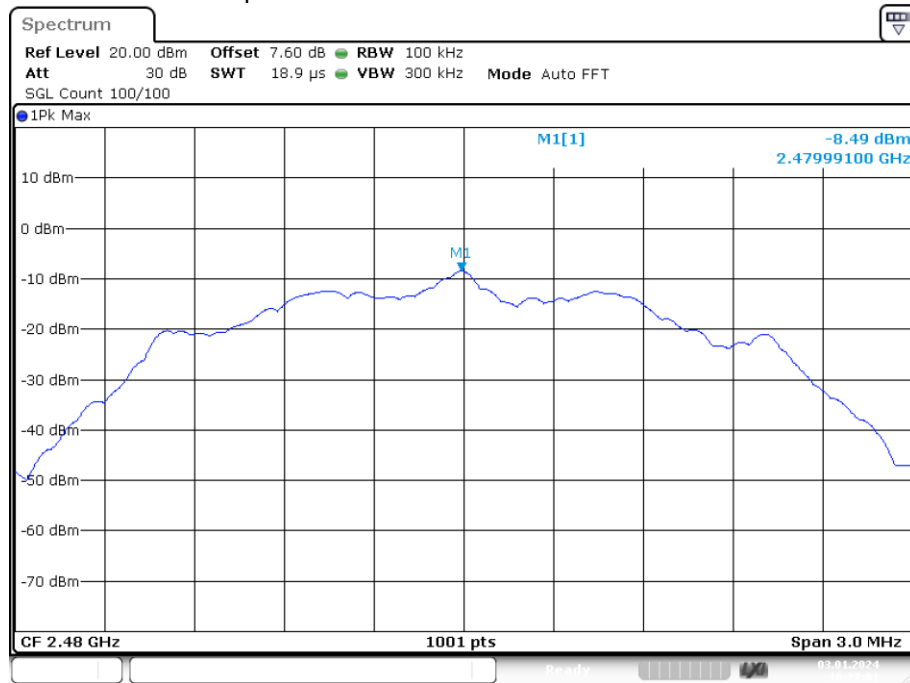

Date: 3.JAN.2024 16:27:00

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

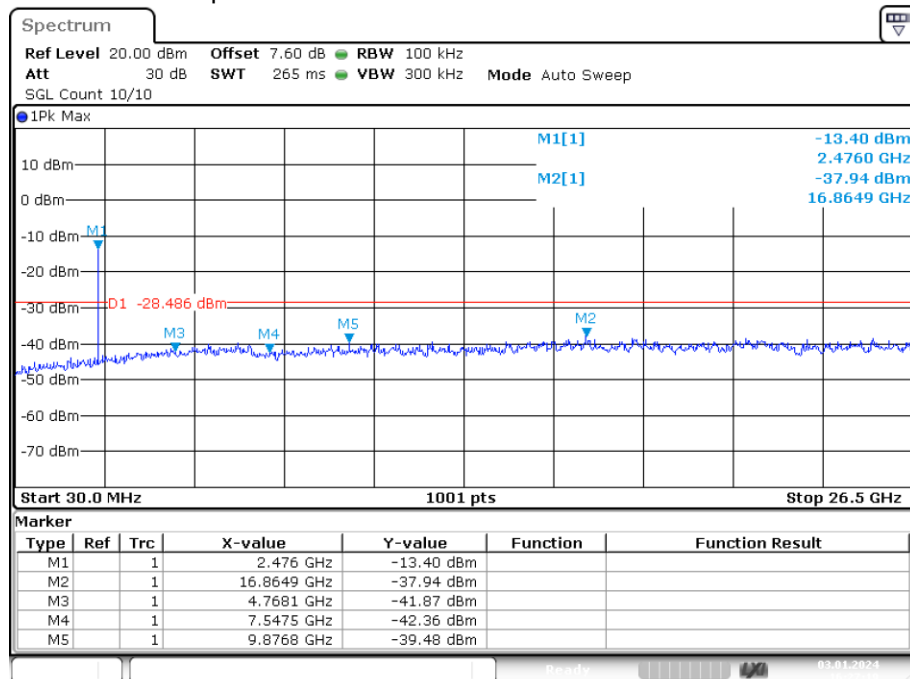

Date: 3.JAN.2024 16:27:18

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

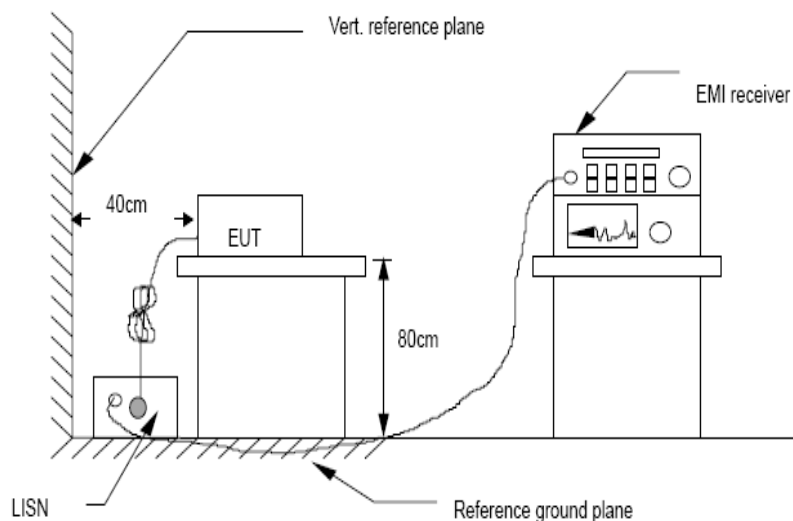

4.4. Test Results

Pass

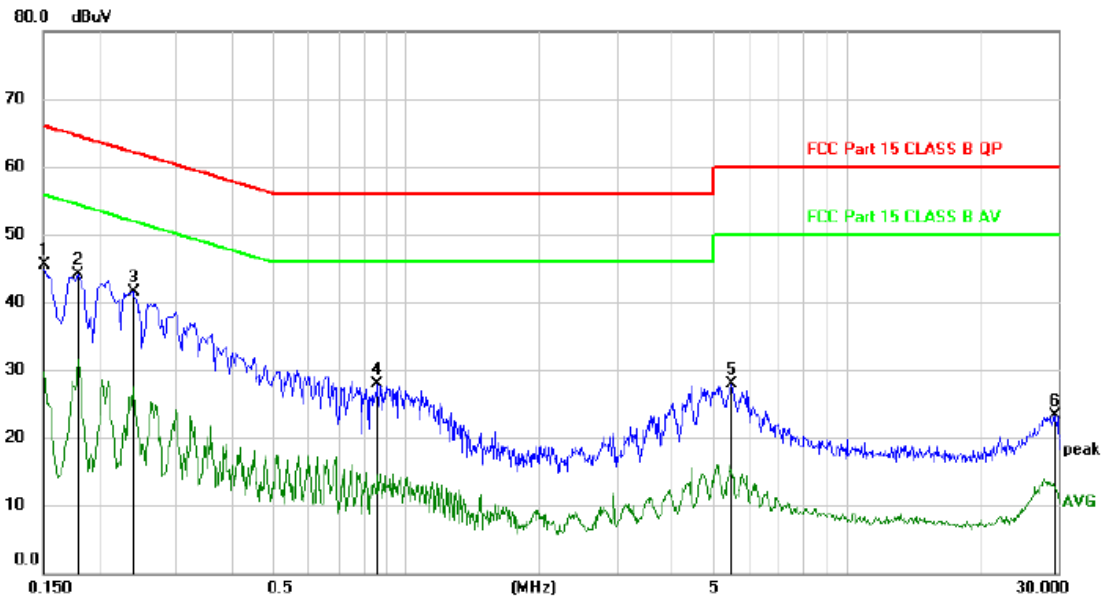Polarity: L


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.47	9.94	45.41	66.00	-20.59	peak	
2	*	0.1800	34.15	9.93	44.08	64.49	-20.41	peak	
3		0.2400	31.58	9.96	41.54	62.10	-20.56	peak	
4		0.8580	18.00	9.96	27.96	56.00	-28.04	peak	
5		5.4660	17.89	10.06	27.95	60.00	-32.05	peak	
6		29.4990	12.65	10.65	23.30	60.00	-36.70	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarity: N

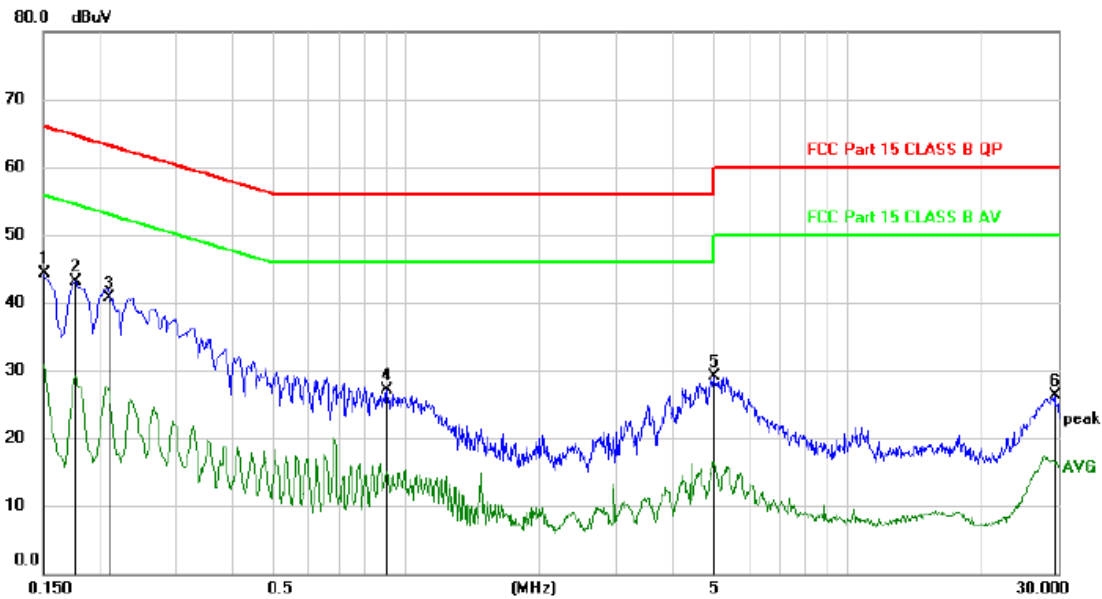

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	34.36	9.94	44.30	66.00	-21.70	peak	
2	*	0.1770	33.25	9.93	43.18	64.63	-21.45	peak	
3		0.2117	30.79	9.93	40.72	63.14	-22.42	peak	
4		0.9000	17.18	9.97	27.15	56.00	-28.85	peak	
5		4.9710	19.15	10.04	29.19	56.00	-26.81	peak	
6		29.4870	15.65	10.65	26.30	60.00	-33.70	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz(1Mbps) mode with the worst data is listed.

5. CONDUCTED MAXIMUM PEAK OUTPUT POWER

5.1. Test limits

Please refer section RSS-247 & 15.247.

5.2. Test Procedure


Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

GFSK (1M)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-9.959	-6.429	30	Pass
NVNT	BLE 1M	2440	Ant1	-13.316	-9.786	30	Pass
NVNT	BLE 1M	2480	Ant1	-11.689	-8.159	30	Pass

GFSK (2M)


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE 2M	2402	Ant1	-11.458	-7.928	30	Pass
NVNT	BLE 2M	2440	Ant1	-13.105	-9.575	30	Pass
NVNT	BLE 2M	2480	Ant1	-11.042	-7.512	30	Pass

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	BLE 1M	2402	Ant1	88.28
NVNT	BLE 1M	2440	Ant1	91.02
NVNT	BLE 1M	2480	Ant1	91.12


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	BLE 2M	2402	Ant1	79.68
NVNT	BLE 2M	2440	Ant1	83.58
NVNT	BLE 2M	2480	Ant1	84.25

Duty Cycle NVNT BLE 1M 2402MHz Ant1

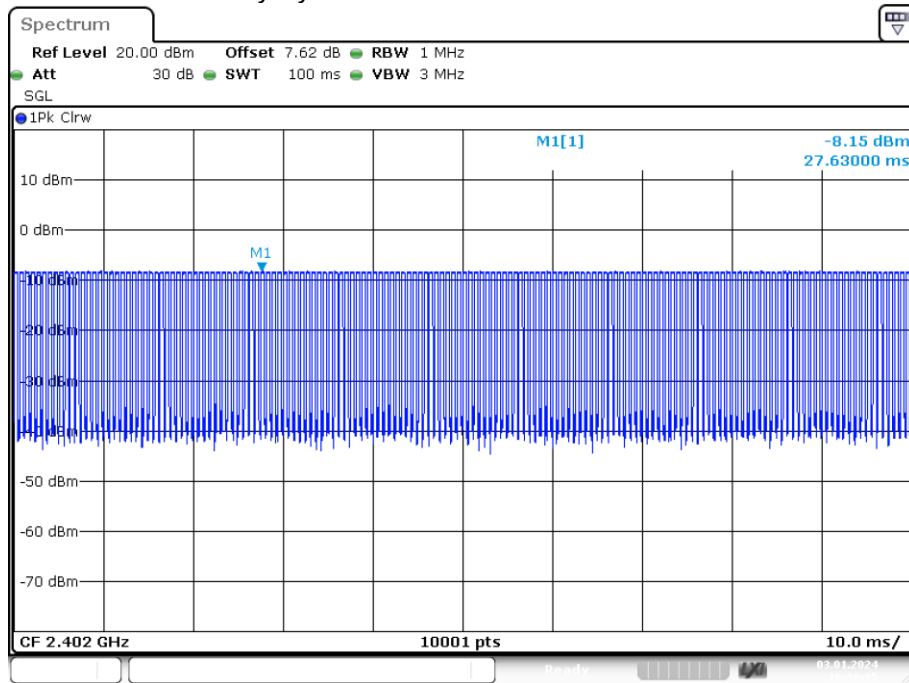


Date: 3.JAN.2024 16:30:35

Duty Cycle NVNT BLE 1M 2440MHz Ant1

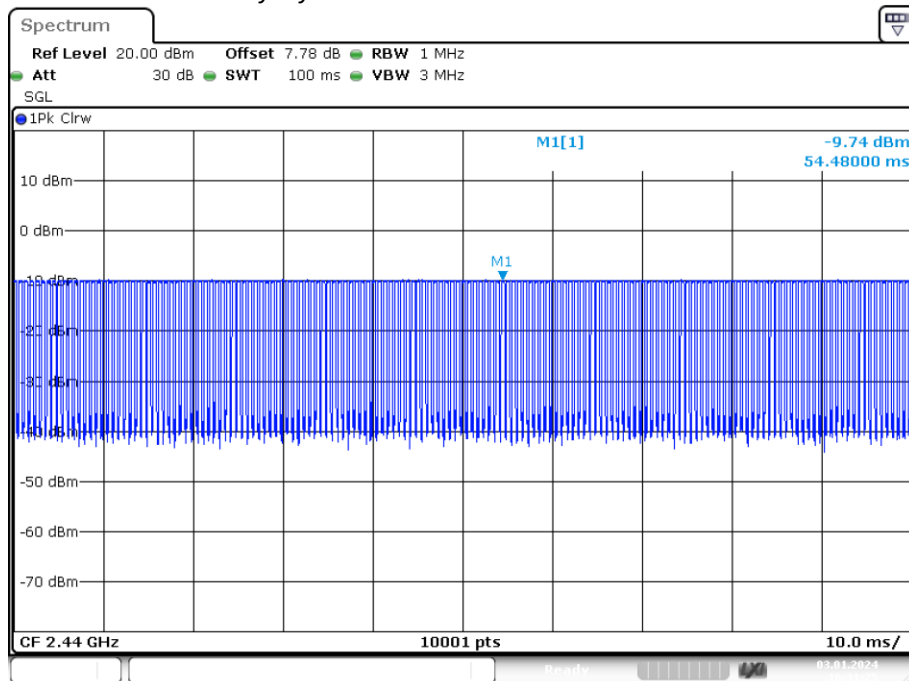


Date: 3.JAN.2024 16:31:24

Duty Cycle NVNT BLE 1M 2480MHz Ant1

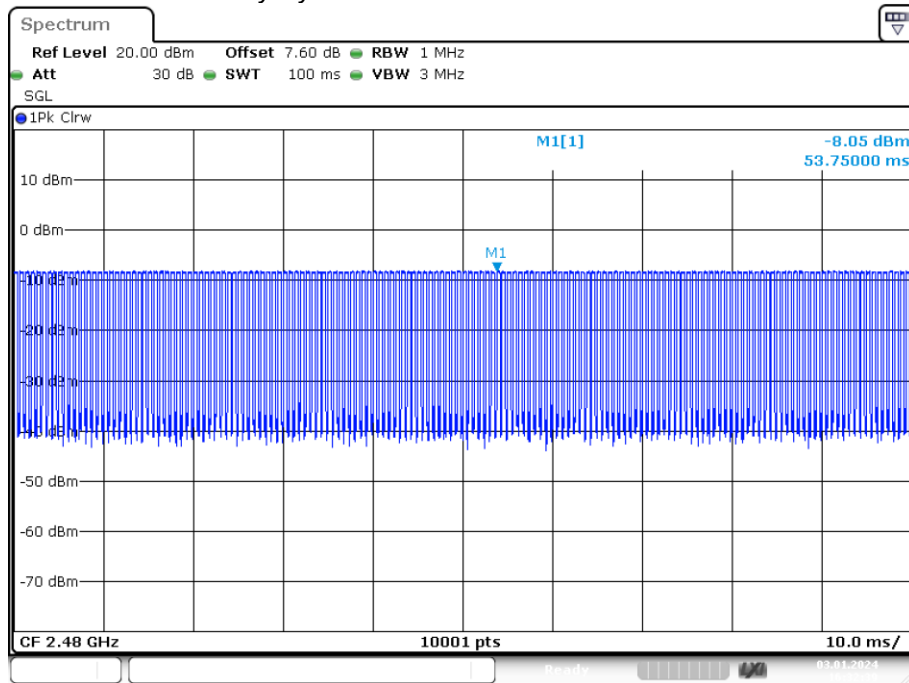


Date: 3.JAN.2024 16:32:39

Duty Cycle NVNT BLE 2M 2402MHz Ant1

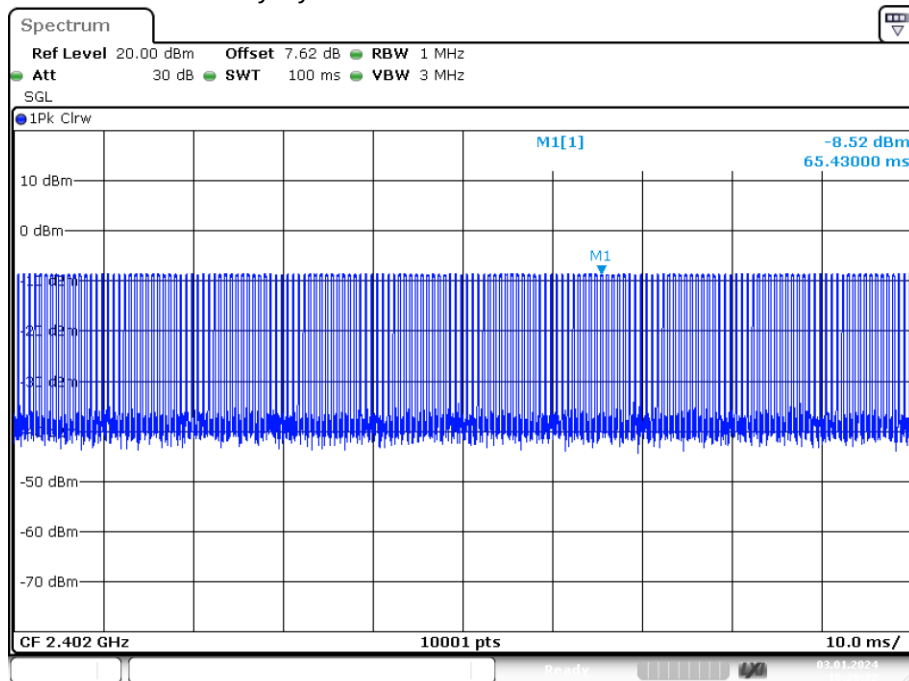


Date: 3.JAN.2024 16:29:22

Duty Cycle NVNT BLE 2M 2440MHz Ant1

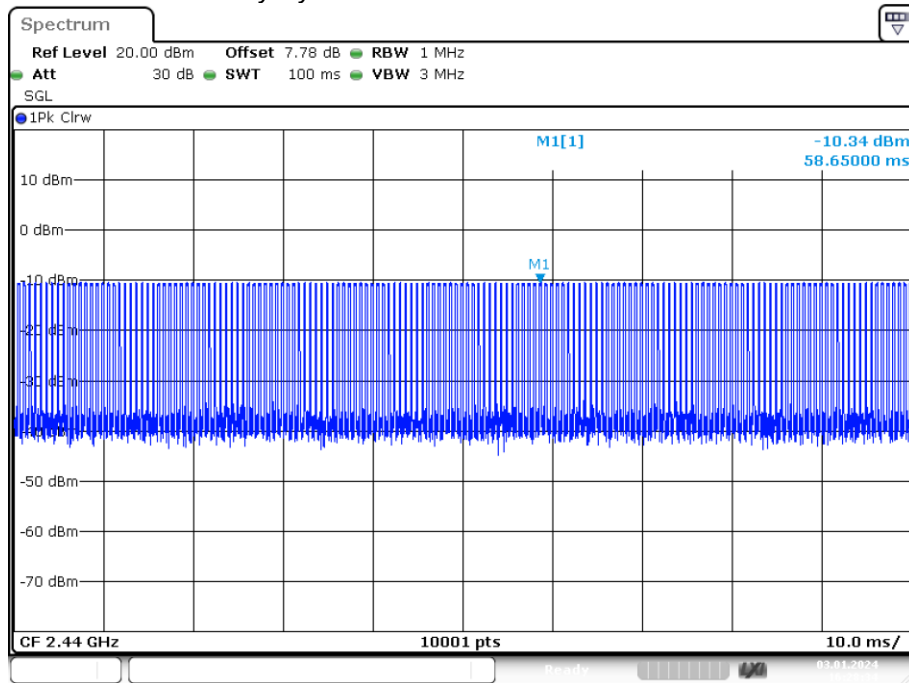

Date: 3.JAN.2024 16:28:34

Duty Cycle NVNT BLE 2M 2480MHz Ant1

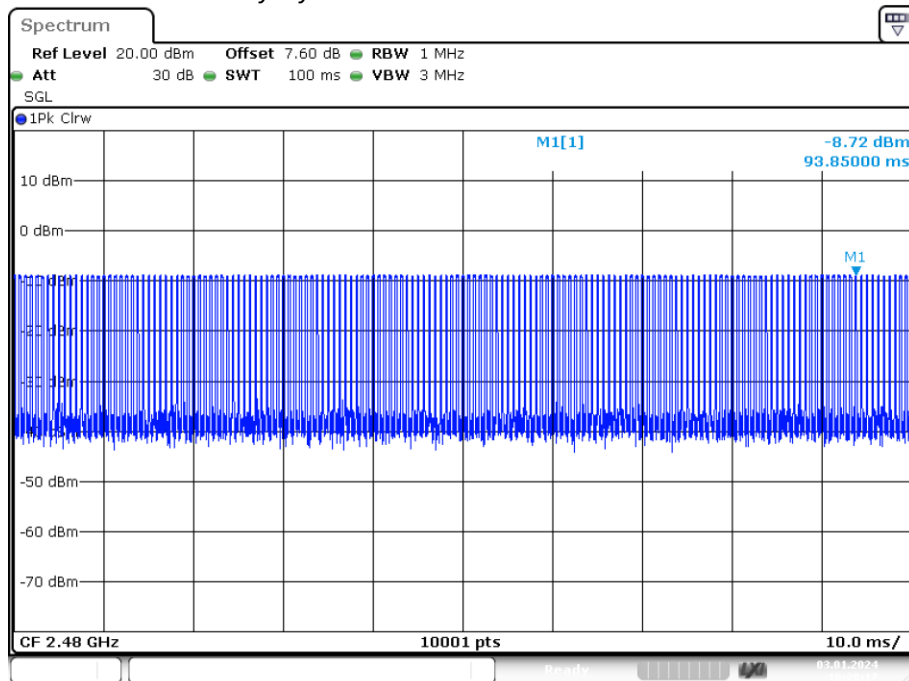

Date: 3.JAN.2024 16:28:17

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer section RSS-247 & 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.), VBW = 10kHz(Set the $\text{VBW} \geq 3 \times \text{RBW}$), span=1.5×DTS bandwidth., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

6.3. Test Setup



6.4. Test Results

Pass


The test results are listed in next pages.

.....

GFSK (1M)


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-22.158	8	Pass
NVNT	BLE 1M	2440	Ant1	-25.443	8	Pass
NVNT	BLE 1M	2480	Ant1	-23.715	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

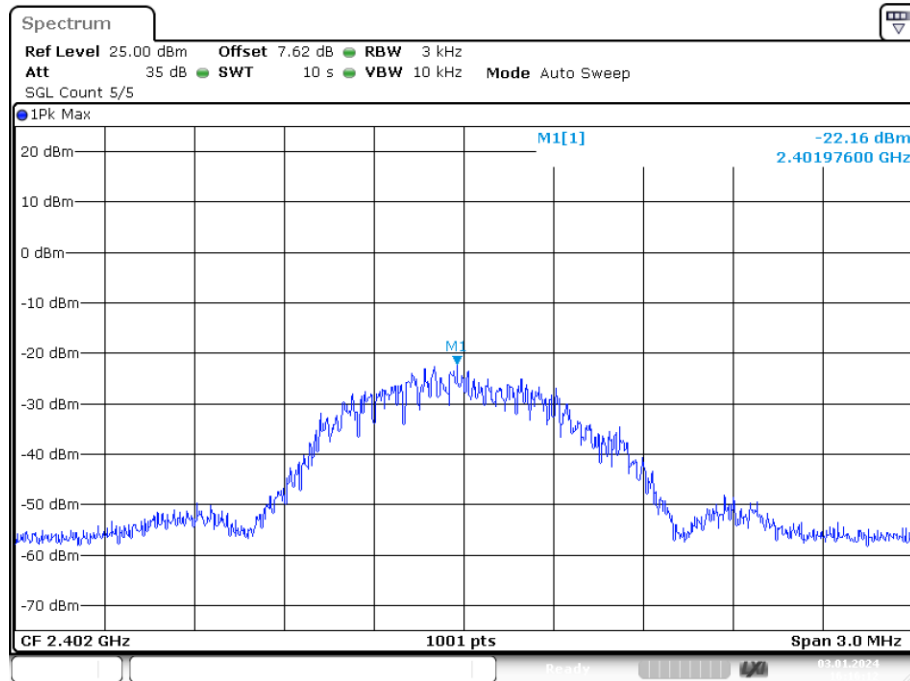


Date: 3.JAN.2024 16:16:12

PSD NVNT BLE 1M 2440MHz Ant1

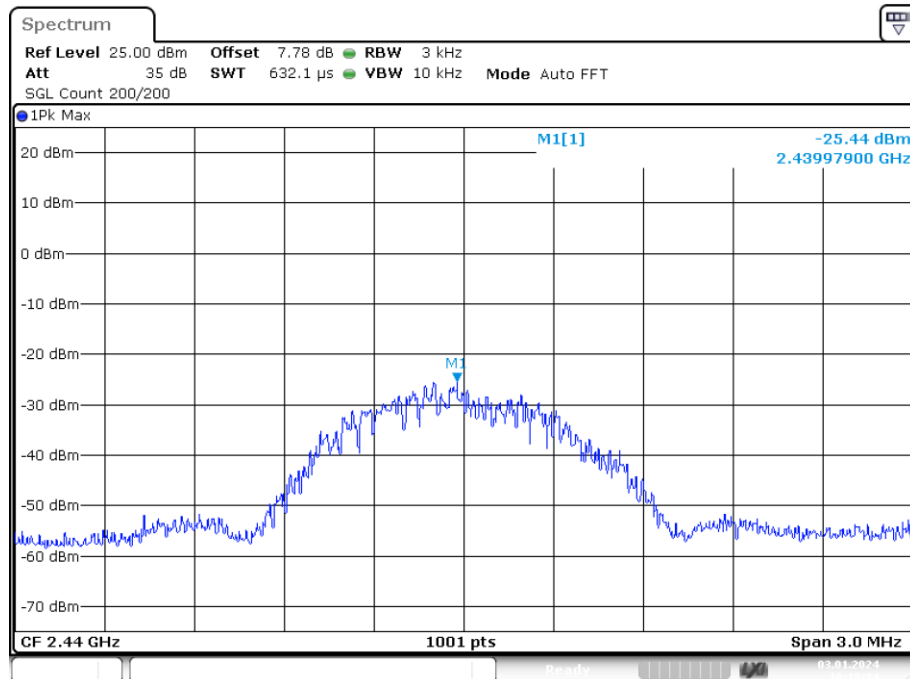

Date: 3.JAN.2024 16:18:24

PSD NVNT BLE 1M 2480MHz Ant1

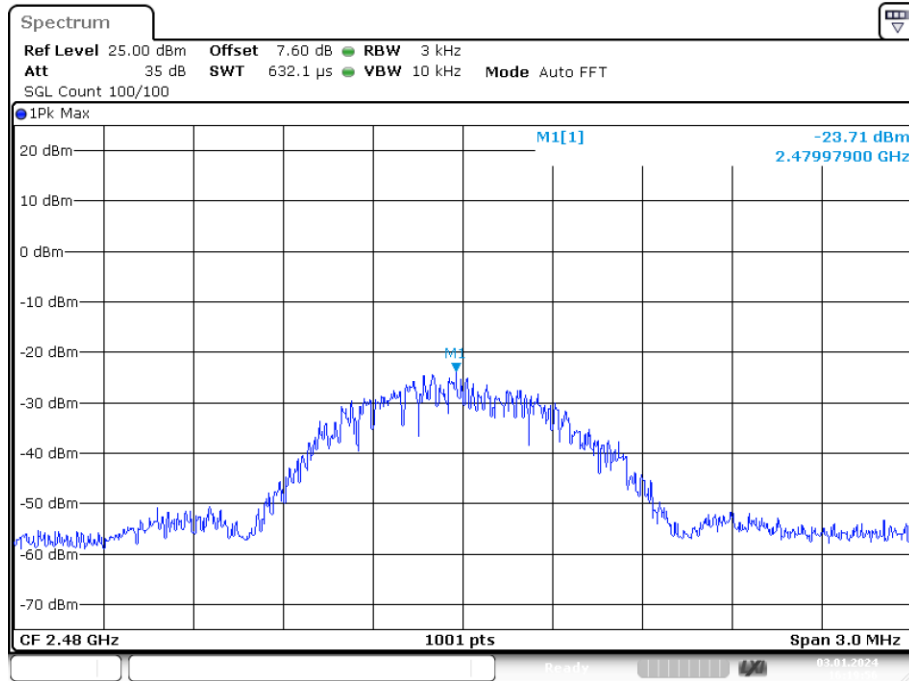


Date: 3.JAN.2024 16:19:56

GFSK (2M)


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 2M	2402	Ant1	-26.24	8	Pass
NVNT	BLE 2M	2440	Ant1	-27.736	8	Pass
NVNT	BLE 2M	2480	Ant1	-25.807	8	Pass

PSD NVNT BLE 2M 2402MHz Ant1

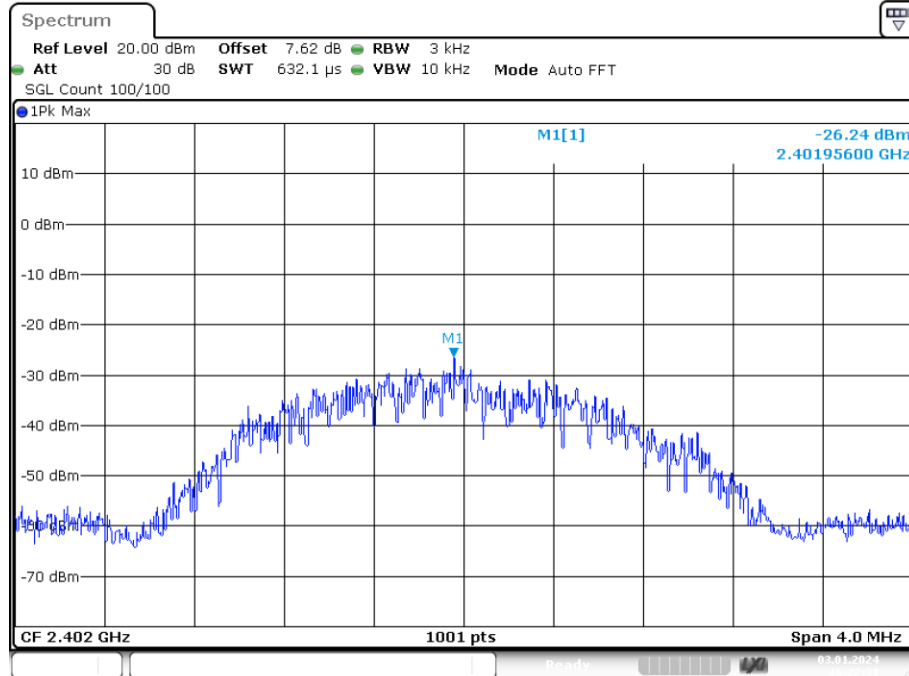


Date: 3.JAN.2024 16:22:30

PSD NVNT BLE 2M 2440MHz Ant1

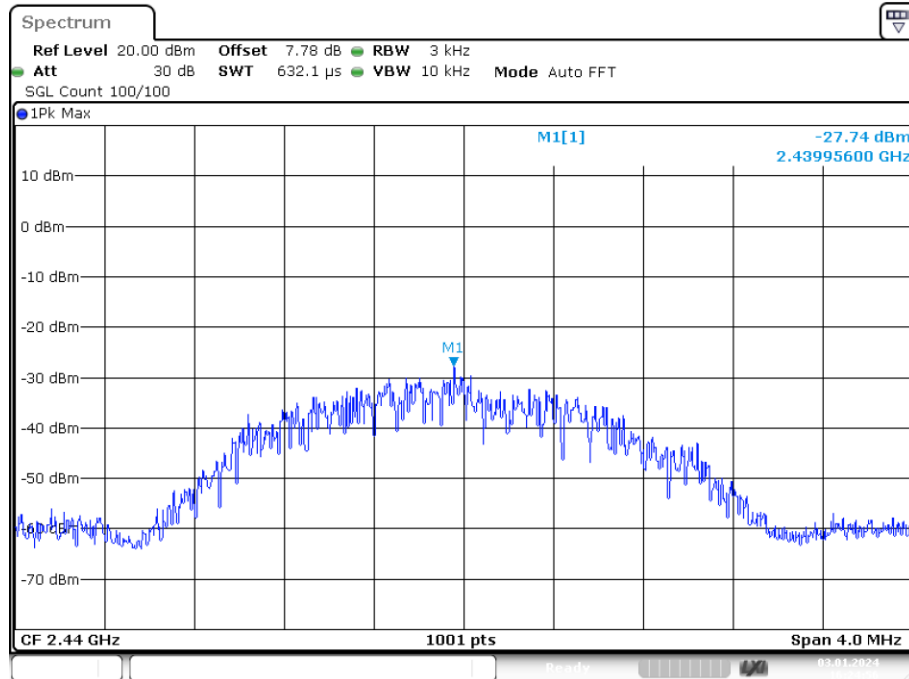

Date: 3.JAN.2024 16:24:56

PSD NVNT BLE 2M 2480MHz Ant1

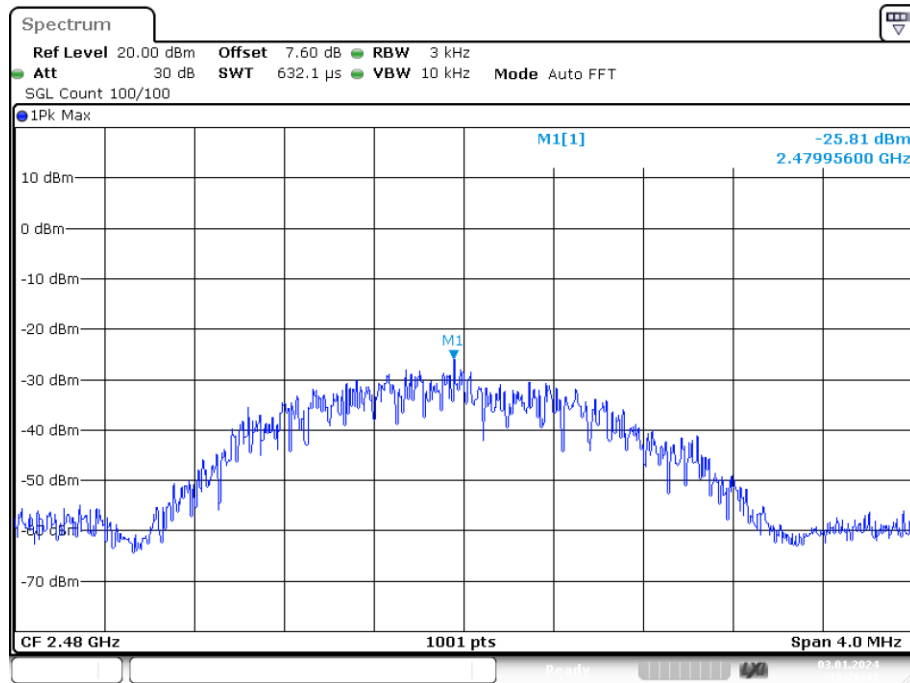

Date: 3.JAN.2024 16:26:40

7. BANDWIDTH

7.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


7.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results

GFSK(1M)

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.687	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.696	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.68	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

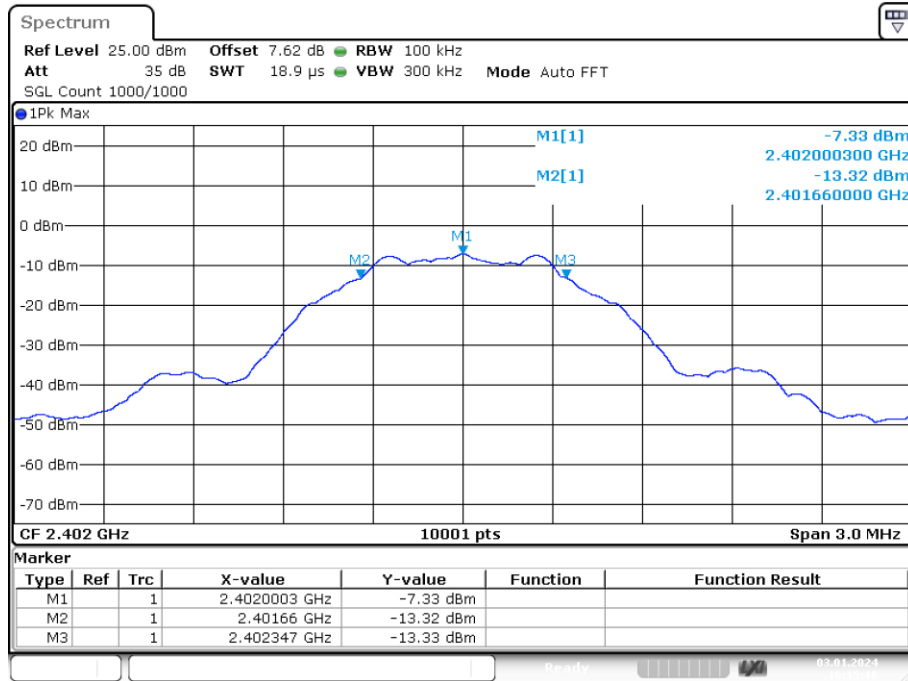


Date: 3.JAN.2024 16:15:15

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

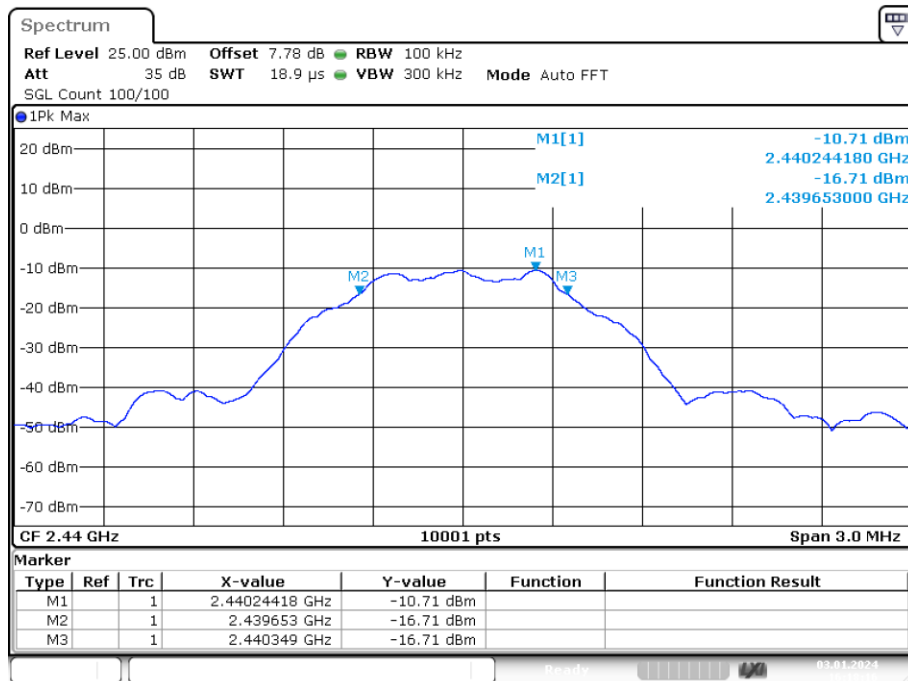

Date: 3.JAN.2024 16:18:16

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

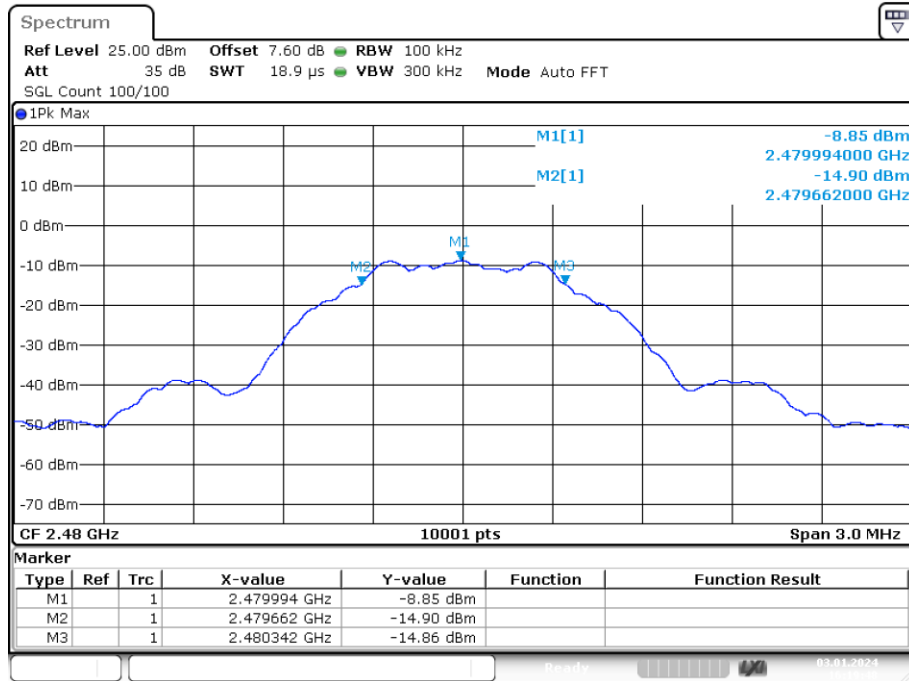


Date: 3.JAN.2024 16:19:48

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.034
NVNT	BLE 1M	2440	Ant1	1.037
NVNT	BLE 1M	2480	Ant1	1.034

OBW NVNT BLE 1M 2402MHz Ant1

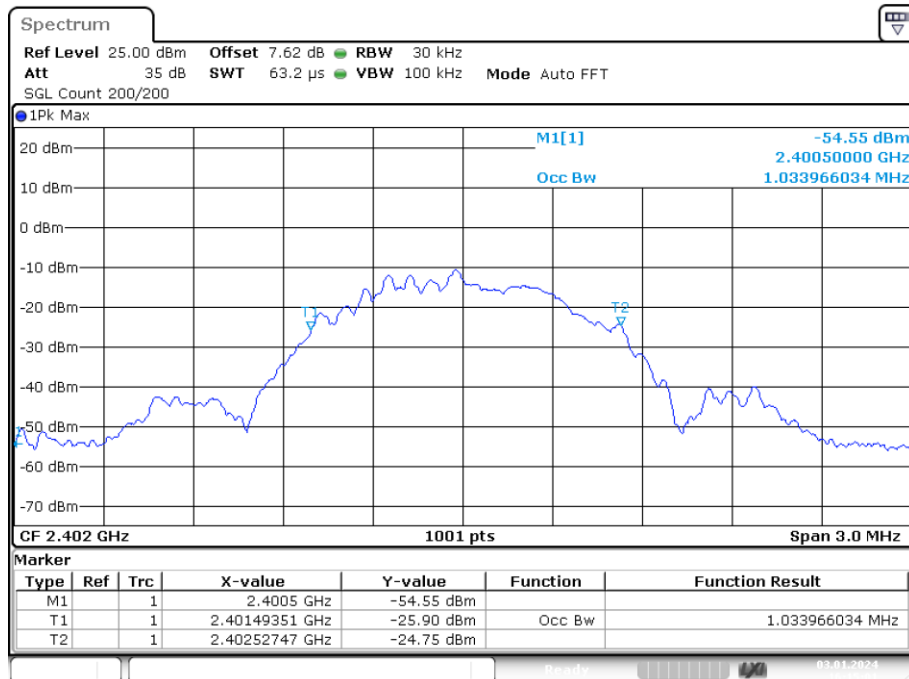


Date: 3.JAN.2024 16:15:00

OBW NVNT BLE 1M 2440MHz Ant1

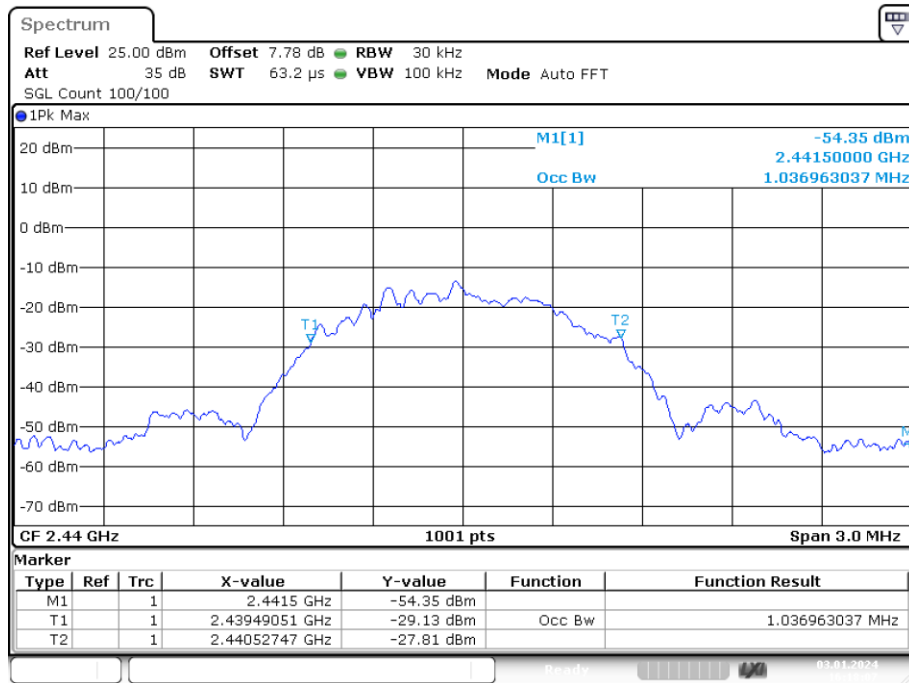

Date: 3.JAN.2024 16:18:07

OBW NVNT BLE 1M 2480MHz Ant1

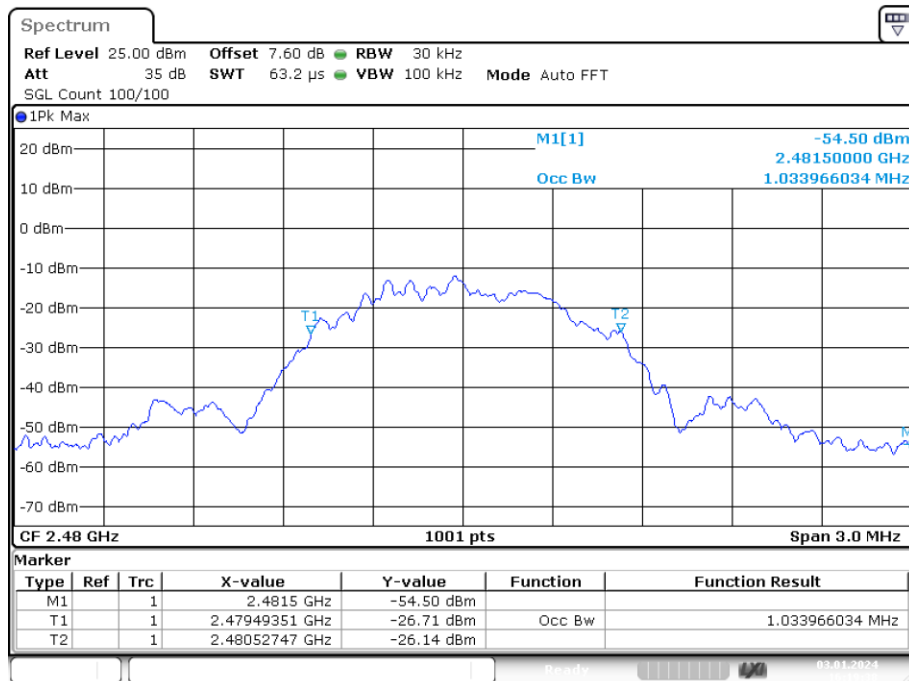


Date: 3.JAN.2024 16:19:38

GFSK(2M)


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 2M	2402	Ant1	1.307	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.116	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.024	0.5	Pass

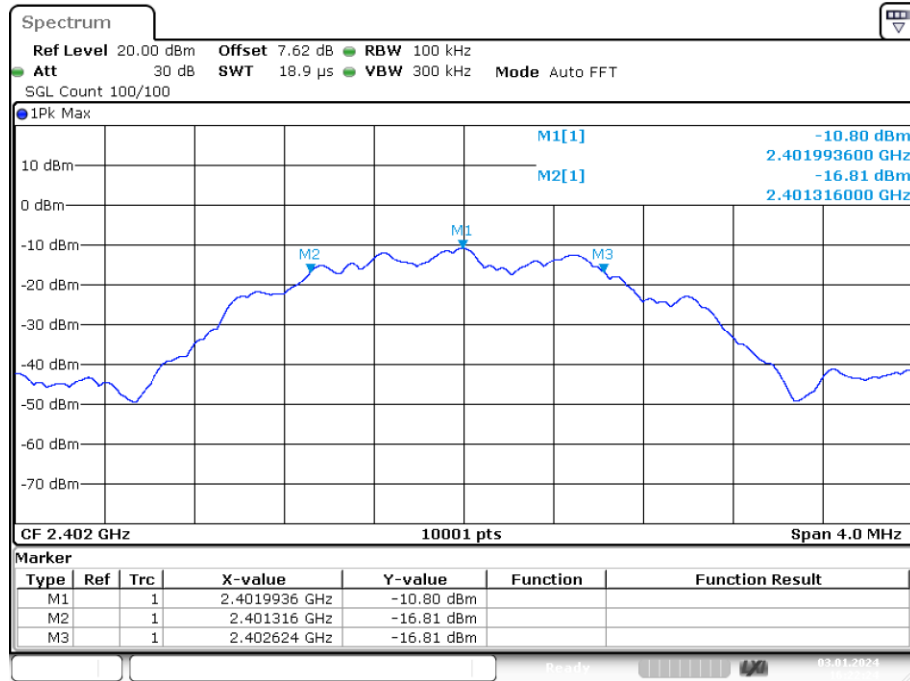-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1


Date: 3.JAN.2024 16:22:23

-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

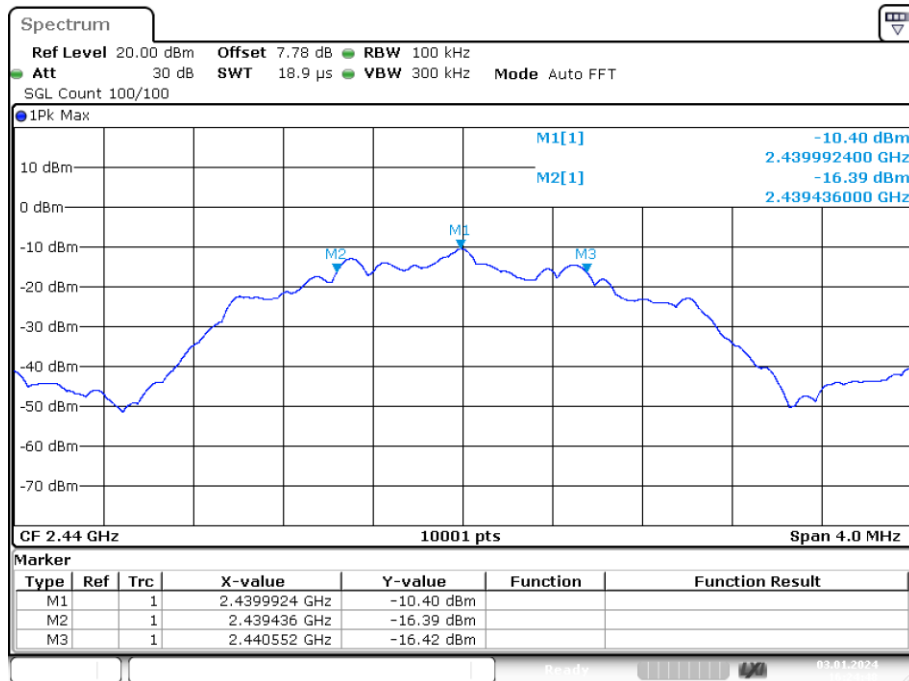

Date: 3.JAN.2024 16:24:48

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

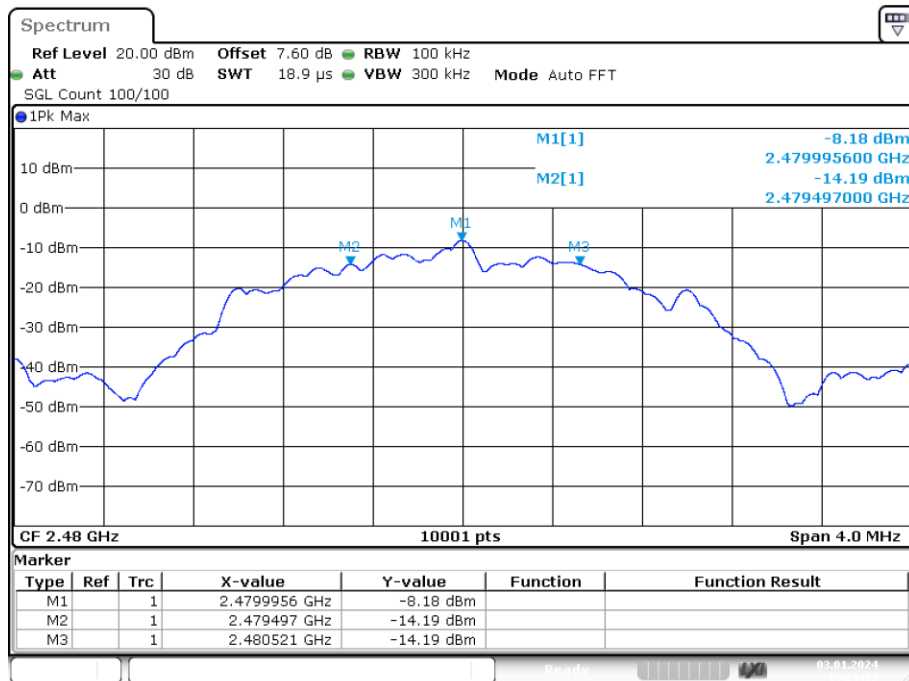


Date: 3.JAN.2024 16:26:32

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 2M	2402	Ant1	2.062
NVNT	BLE 2M	2440	Ant1	2.058
NVNT	BLE 2M	2480	Ant1	2.062

OBW NVNT BLE 2M 2402MHz Ant1

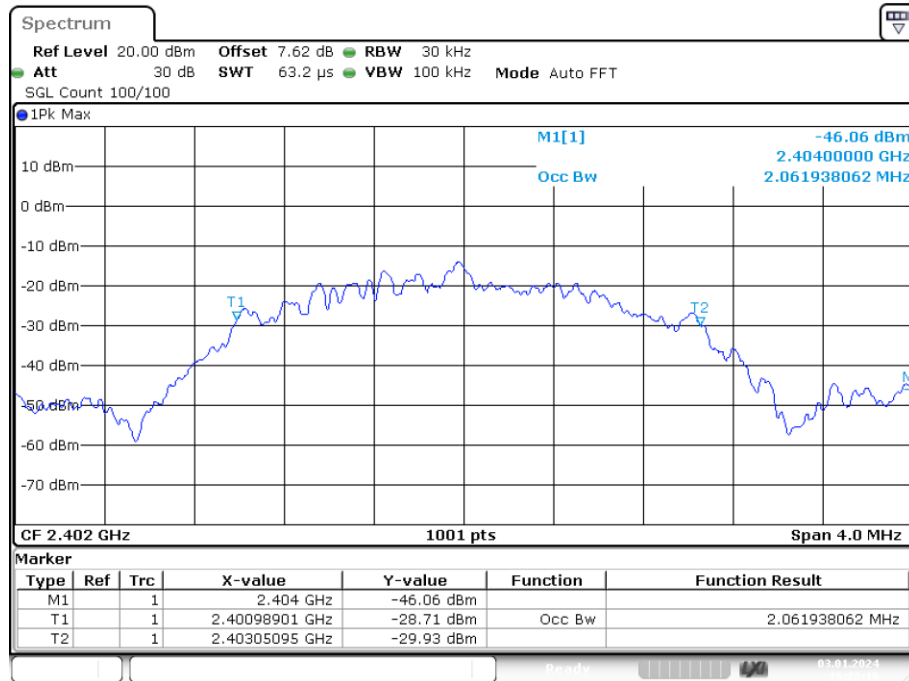


Date: 3.JAN.2024 16:22:15

OBW NVNT BLE 2M 2440MHz Ant1

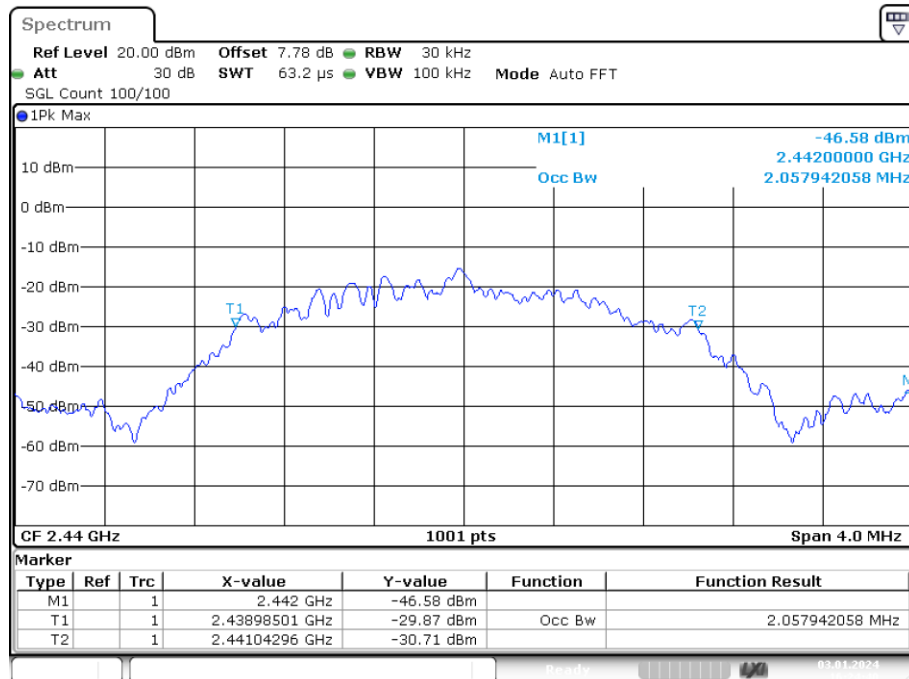

Date: 3.JAN.2024 16:24:40

OBW NVNT BLE 2M 2480MHz Ant1

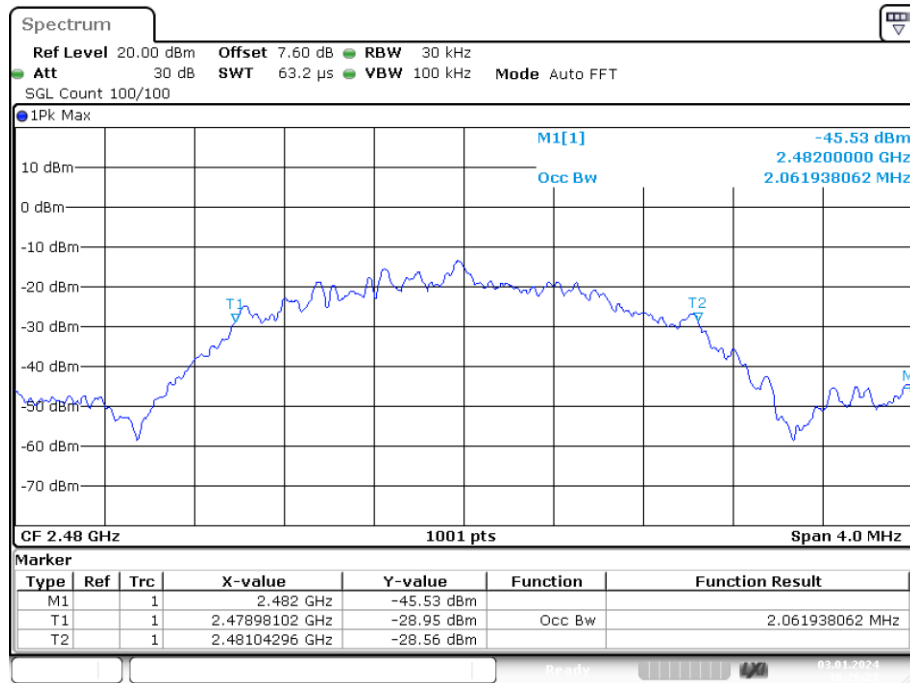

Date: 3.JAN.2024 16:26:23

8. BAND EDGE CHECK

8.1. Test limits

Please refer section RSS-GEN&15.247.

8.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.

8.3. Test Setup

Same as 5.2.2.


8.4. Test Results

Pass

The test results are listed in next pages.


GFSK (1M)

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

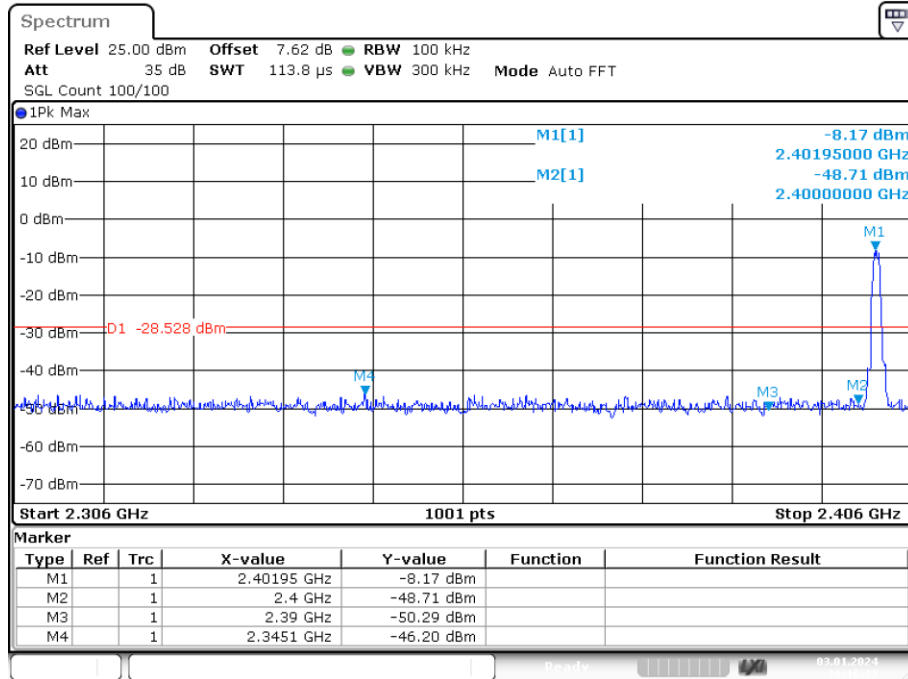


Date: 3.JAN.2024 16:16:23

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

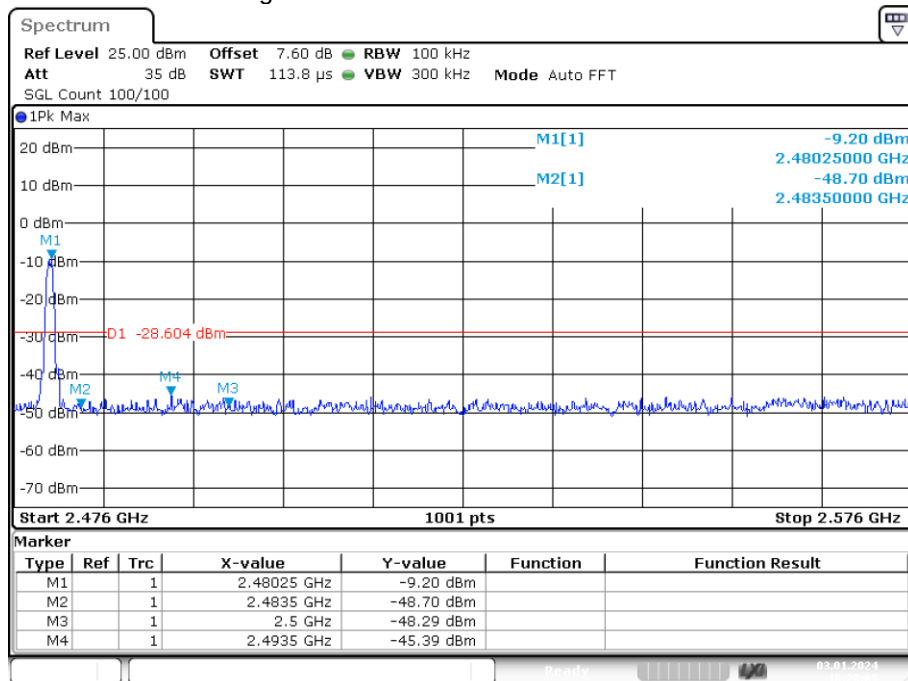


Date: 3.JAN.2024 16:20:09

GFSK (2M)
Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

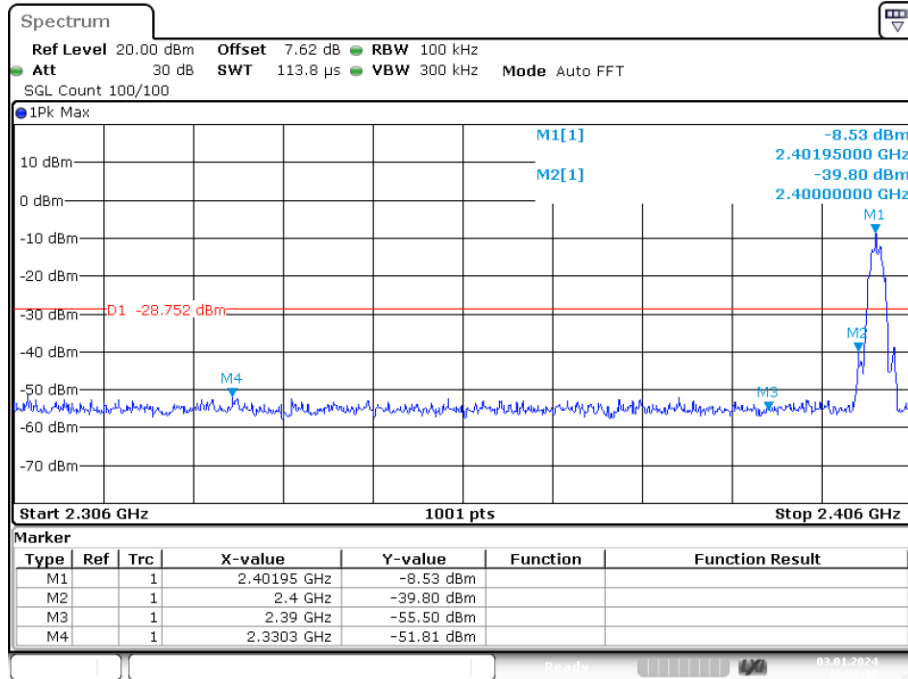

Date: 3.JAN.2024 16:22:42


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

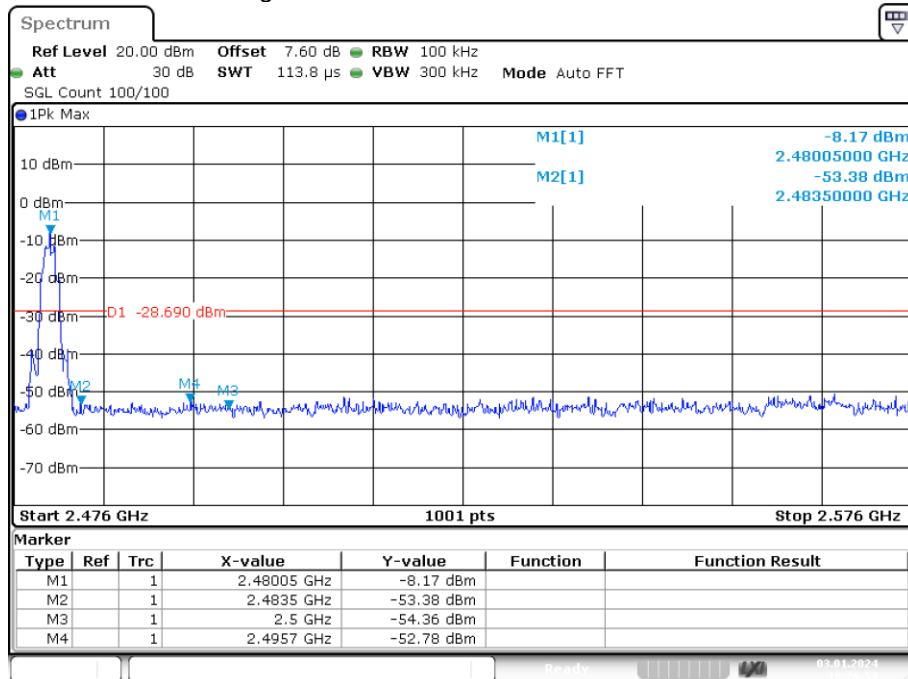


Date: 3.JAN.2024 16:26:53

Radiated Method: GFSK(1M)

Test Mode: CH-L

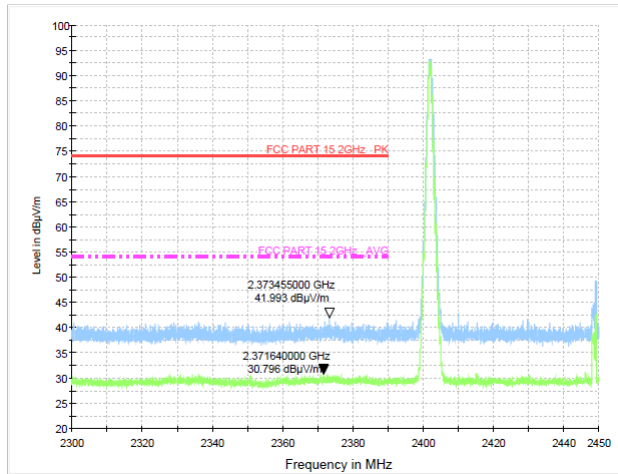


Test Mode: CH-H

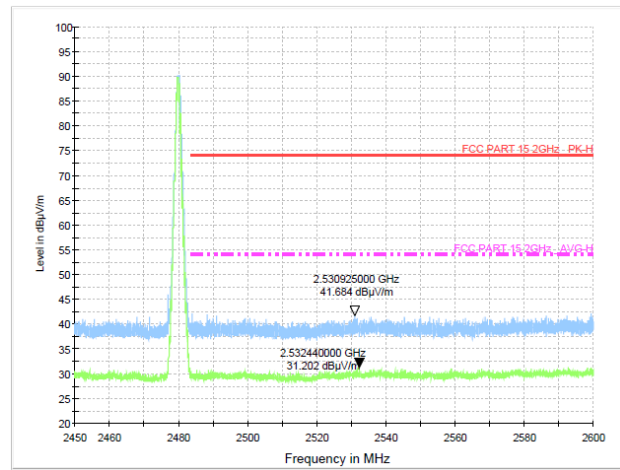


Radiated Method: GFSK(2M)

Test Mode: CH-L

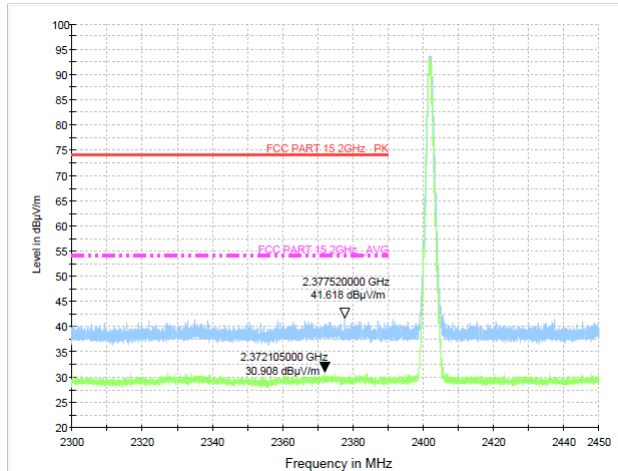

Test Mode: CH-H

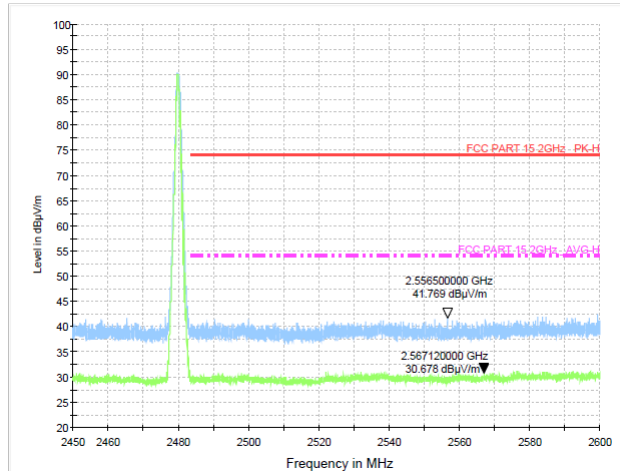

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction



The antenna is internal antenna and no consideration of replacement. Please see EUT photo for details.

9.3. Results

The EUT antenna is Internal Antenna. It complies with the standard requirement.

10. TEST SETUP PHOTO

10.1. Photo of Radiated Emission test

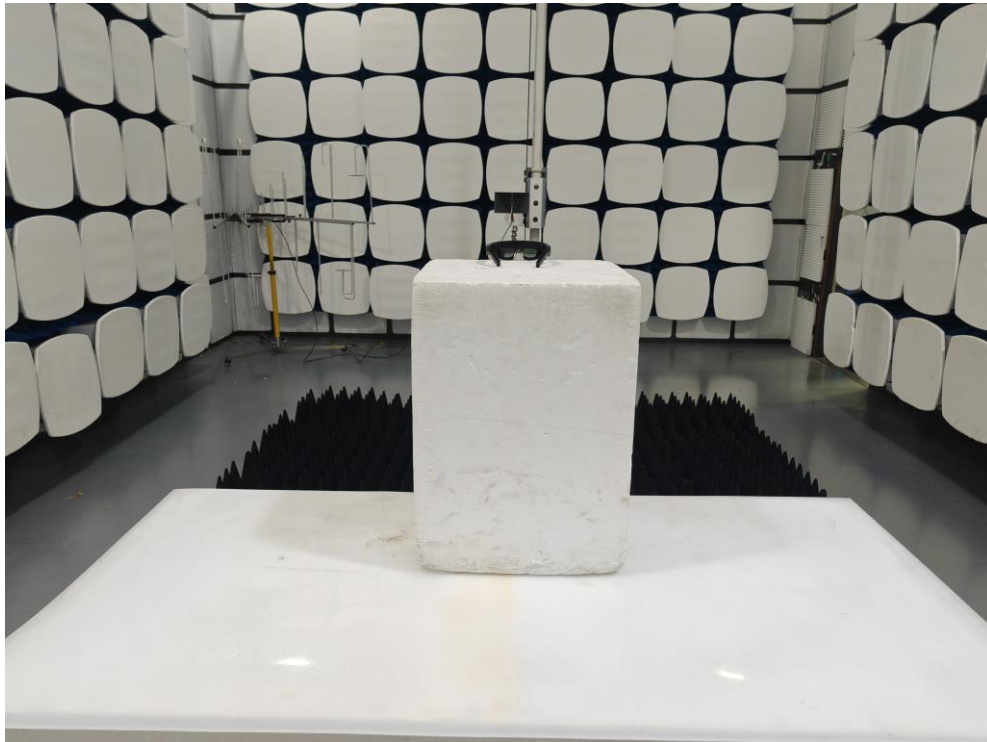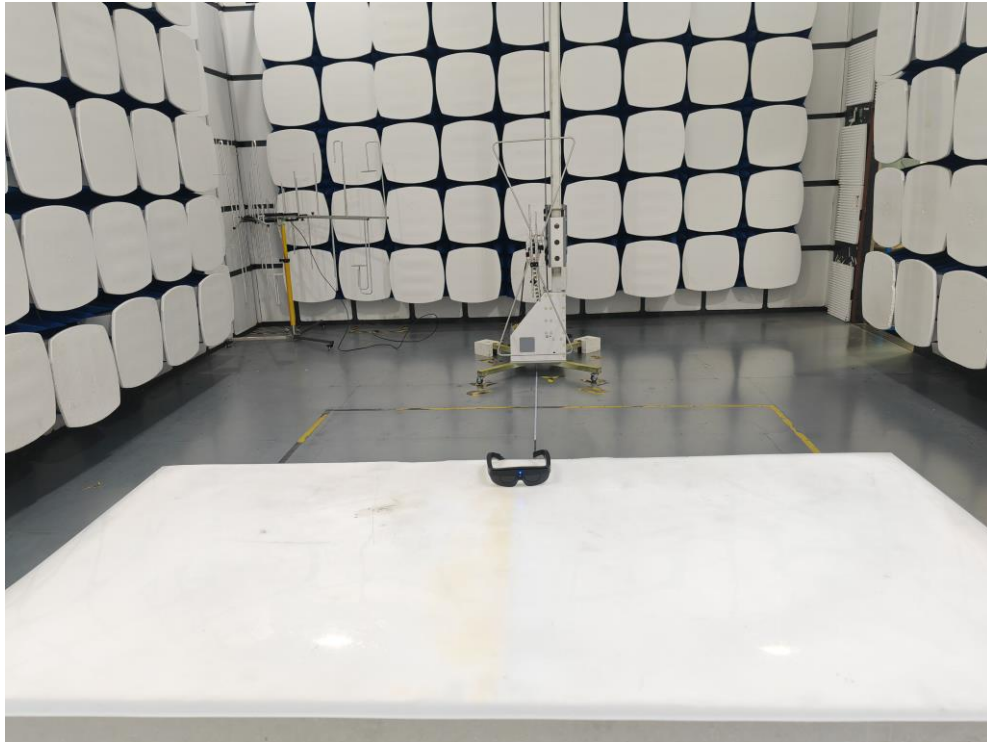

10.2.Photo of Conducted Emission test



11. EUT PHOTOS



