



TEST REPORT

Product Name: Computer
FCC ID: 2BFCN-G14
Trademark: Ninkear
Model Number: G14, G15, G16, A146G, A135G, A141N, A142N, A143N, A145G, A156N, A160N, Y140N, Y156N, U50, U56, U58, U68, U75, H37, H56, H58, H59, H68, N50, G10, G11, G12, G35, H10, H12, H13, N9, S140N, GX55, N42, A15 Air, N15 Air, N16 Pro, N15 Pro, N14 Pro, N14, N14 Air, A15 Plus, G16 Pro, A15, A15 Pro, A16
Prepared For: Shenzhen Linkebuy Technology Co., Ltd
Address: Rm212, Zongtai Future City, No.2007 Baoyuan Rd, Xixiang Street Bao'an District, Shenzhen, Guangdong, China
Manufacturer: Shenzhen Guoruitong Technology Co., Ltd.
Address: Room 329, Block D, Economic Building, Huafeng Headquarters, Baoan District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 18, 2024
Sample tested Date: Jan. 18, 2024 to Mar. 06, 2024
Issue Date: Mar. 06, 2024
Report No.: CTB240306013RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
9. CONDUCTED OUTPUT POWER	55
9.1 Block Diagram Of Test Setup	55
9.2 Limit	55
9.3 Test procedure	55
9.4 Test Result	56
10. 6DB OCCUPIED BANDWIDTH	57
10.1 Block Diagram Of Test Setup	57
10.2 Limit	57
10.3 Test procedure	57
10.4 Test Result	58
11. POWER SPECTRAL DENSITY	68
11.1 Block Diagram Of Test Setup	68
11.2 Limit	68

11.3	Test procedure	68
11.4	Test Result	69
12.	ANTENNA REQUIREMENT	78
13.	EUT TEST SETUP PHOTOGRAPHS	79

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240306013RFX	Mar. 06, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59℃
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	G14, G15, G16, A146G, A135G, A141N, A142N, A143N, A145G, A156N, A160N, Y140N, Y156N, U50, U56, U58, U68, U75, H37, H56, H58, H59, H68, N50, G10, G11, G12, G35, H10, H12, H13, N9, S140N, GX55, N42, A15 Air, N15 Air, N16 Pro, N15 Pro, N14 Pro, N14, N14 Air, A15 Plus, G16 Pro, A15, A15 Pro, A16
Model Description:	All the model are the same circuit and RF module, only different for model name .Test sample model: G14
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 8.906dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G): ANT1: 2.66dBi ANT2: 2.66dBi
Ratings:	Input: AC 100-240V 1.5A Output: DC 12V/19V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Mouse	DELL	MS116c	N/A	N/A
2	Monitor	DELL	SE2218HV	N/A	N/A
3	Laptop	DELL	Vostro 5490	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 2.66dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 5.67dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 2.66dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

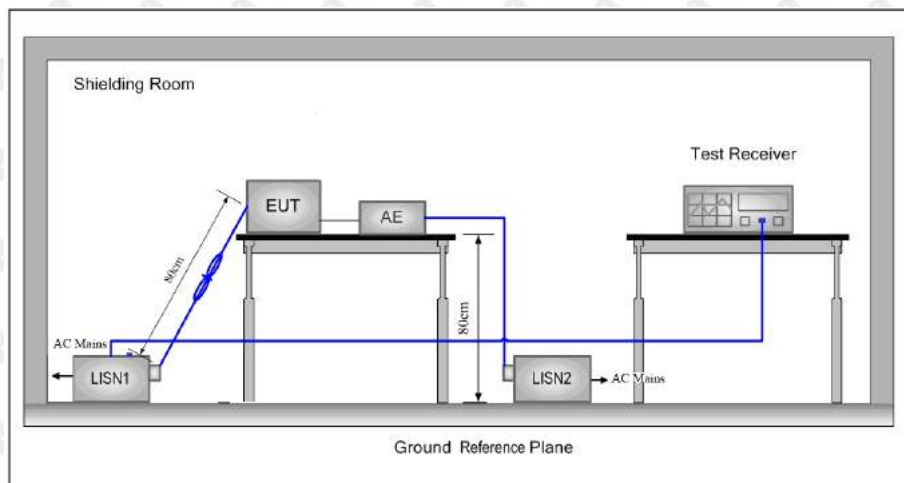

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

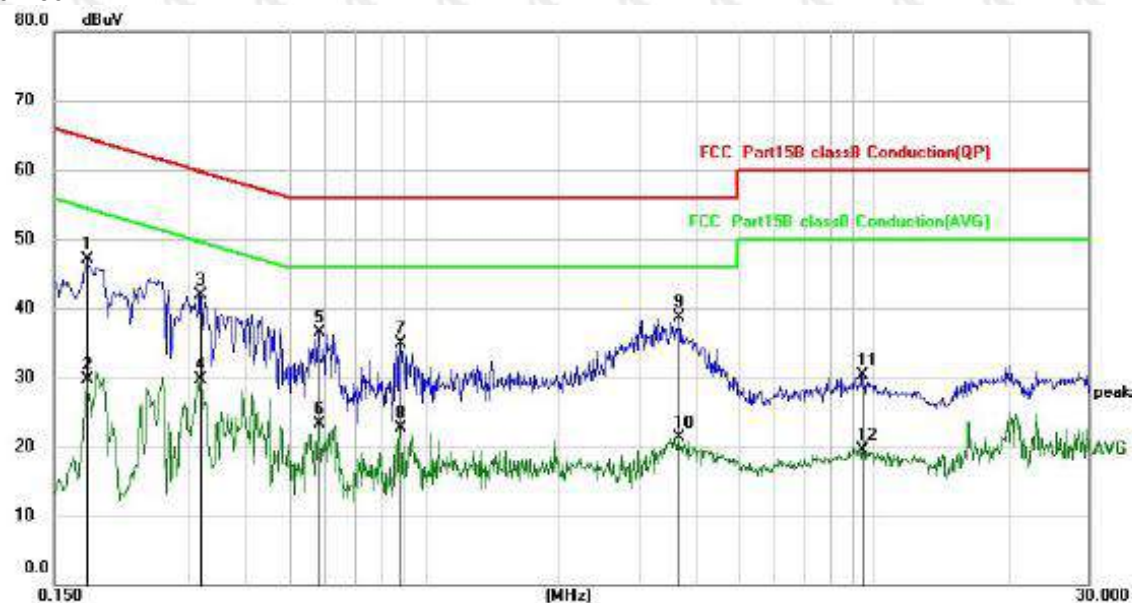

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1779	37.18	9.95	47.13	64.58	-17.45	QP
2		0.1779	19.75	9.95	29.70	54.58	-24.88	AVG
3		0.3180	31.92	9.97	41.89	59.76	-17.87	QP
4		0.3180	19.75	9.97	29.72	49.76	-20.04	AVG
5		0.5819	26.57	10.00	36.57	56.00	-19.43	QP
6		0.5819	13.23	10.00	23.23	46.00	-22.77	AVG
7		0.8820	24.93	10.01	34.94	56.00	-21.06	QP
8		0.8820	12.62	10.01	22.63	46.00	-23.37	AVG
9	*	3.6900	28.53	10.25	38.78	56.00	-17.22	QP
10		3.6900	11.10	10.25	21.35	46.00	-24.65	AVG
11		9.4138	19.73	10.57	30.30	60.00	-29.70	QP
12		9.4138	9.01	10.57	19.58	50.00	-30.42	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

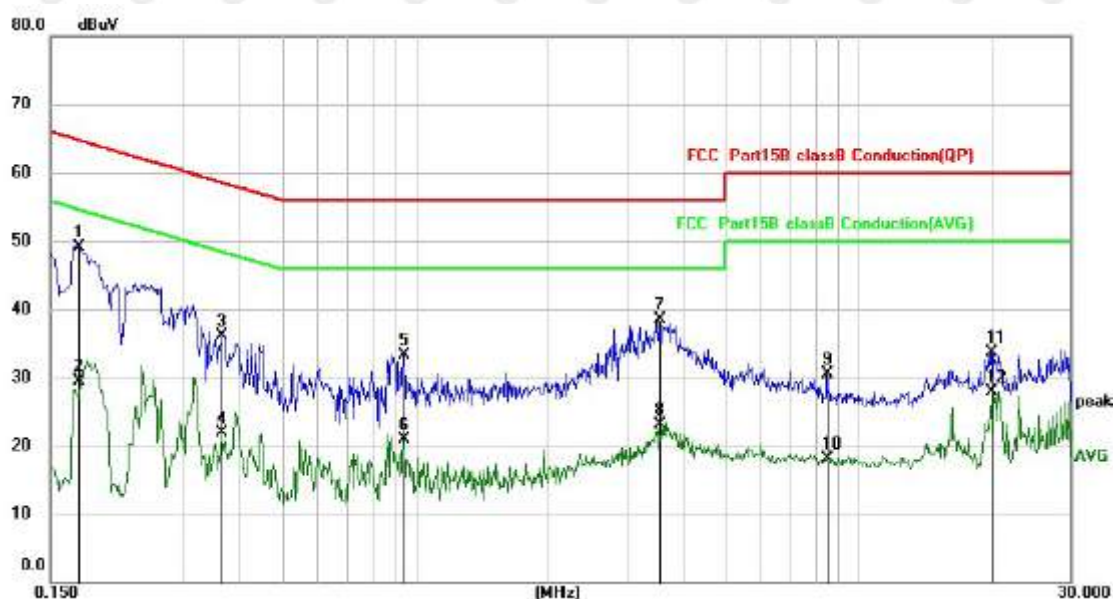

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1739	39.22	9.95	49.17	64.77	-15.60	QP
2		0.1739	19.55	9.95	29.50	54.77	-25.27	AVG
3		0.3659	26.08	9.97	36.05	58.59	-22.54	QP
4		0.3659	11.99	9.97	21.96	48.59	-26.63	AVG
5		0.9419	23.33	10.01	33.34	56.00	-22.66	QP
6		0.9419	10.89	10.01	20.90	46.00	-25.10	AVG
7		3.5619	28.18	10.24	38.42	56.00	-17.58	QP
8		3.5619	12.80	10.24	23.04	46.00	-22.96	AVG
9		8.4818	19.91	10.55	30.46	60.00	-29.54	QP
10		8.4818	7.47	10.55	18.02	50.00	-31.98	AVG
11		19.9019	22.92	10.82	33.74	60.00	-26.26	QP
12		19.9019	17.02	10.82	27.84	50.00	-22.16	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

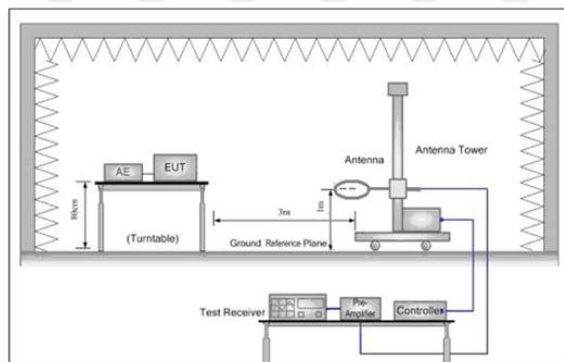


Figure 1. Below 30MHz

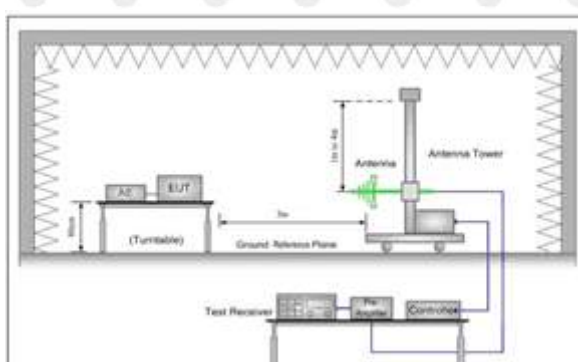


Figure 2. 30MHz to 1GHz

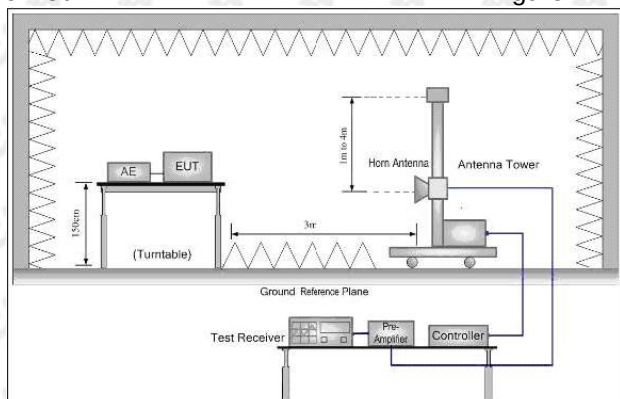


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		43.3534	38.32	-5.40	32.92	40.00	-7.08	QP
2		97.1148	38.06	-9.22	28.84	43.50	-14.66	QP
3	*	162.8959	40.80	-3.78	37.02	43.50	-6.48	QP
4		248.1165	46.12	-6.92	39.20	46.00	-6.80	QP
5		500.3011	35.06	0.05	35.11	46.00	-10.89	QP
6		768.7481	33.53	5.84	39.37	46.00	-6.63	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	45.2959	42.14	-5.76	36.38	40.00	-3.62	QP
2		55.4147	38.72	-6.69	32.03	40.00	-7.97	QP
3		153.2002	37.31	-3.29	34.02	43.50	-9.48	QP
4		231.3119	41.09	-7.11	33.98	46.00	-12.02	QP
5		628.3745	34.07	3.17	37.24	46.00	-8.76	QP
6	!	775.5168	35.24	5.96	41.20	46.00	-4.80	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.44	-3.64	61.80	74	-12.20	peak
4824	49.23	-3.64	45.59	54	-8.41	AVG
7236	59.60	-0.95	58.65	74	-15.35	peak
7236	44.97	-0.95	44.02	54	-9.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.86	-3.64	63.22	74	-10.78	peak
4824	48.41	-3.64	44.77	54	-9.23	AVG
7236	56.49	-0.95	55.54	74	-18.46	peak
7236	43.13	-0.95	42.18	54	-11.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.06	-3.51	61.55	74	-12.45	peak
4874	47.99	-3.51	44.48	54	-9.52	AVG
7311	58.24	-0.82	57.42	74	-16.58	peak
7311	44.16	-0.82	43.34	54	-10.66	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.58	-3.51	62.07	74	-11.93	peak
4874	49.34	-3.51	45.83	54	-8.17	AVG
7311	57.98	-0.82	57.16	74	-16.84	peak
7311	44.56	-0.82	43.74	54	-10.26	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.76	-3.43	60.33	74	-13.67	peak
4924	47.19	-3.43	43.76	54	-10.24	AVG
7386	58.41	-0.75	57.66	74	-16.34	peak
7386	44.14	-0.75	43.39	54	-10.61	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	65.32	-3.43	61.89	74	-12.11	peak
4924	46.78	-3.43	43.35	54	-10.65	AVG
7386	58.89	-0.75	58.14	74	-15.86	peak
7386	43.88	-0.75	43.13	54	-10.87	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.45	-3.64	61.81	74	-12.19	peak
4824	48.50	-3.64	44.86	54	-9.14	AVG
7236	59.34	-0.95	58.39	74	-15.61	peak
7236	45.64	-0.95	44.69	54	-9.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.85	-3.64	62.21	74	-11.79	peak
4824	49.35	-3.64	45.71	54	-8.29	AVG
7236	58.35	-0.95	57.40	74	-16.60	peak
7236	43.64	-0.95	42.69	54	-11.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.50	-3.51	59.99	74	-14.01	peak
4874	48.26	-3.51	44.75	54	-9.25	AVG
7311	59.09	-0.82	58.27	74	-15.73	peak
7311	43.26	-0.82	42.44	54	-11.56	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	64.89	-3.51	61.38	74	-12.62	peak
4874	49.32	-3.51	45.81	54	-8.19	AVG
7311	60.33	-0.82	59.51	74	-14.49	peak
7311	44.13	-0.82	43.31	54	-10.69	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	64.84	-3.43	61.41	74	-12.59	peak
4924	47.39	-3.43	43.96	54	-10.04	AVG
7386	59.81	-0.75	59.06	74	-14.94	peak
7386	43.57	-0.75	42.82	54	-11.18	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	64.41	-3.43	60.98	74	-13.02	peak
4924	47.32	-3.43	43.89	54	-10.11	AVG
7386	56.80	-0.75	56.05	74	-17.95	peak
7386	42.78	-0.75	42.03	54	-11.97	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.28	-3.64	60.64	74	-13.36	peak
4824	50.16	-3.64	46.52	54	-7.48	AVG
7236	58.92	-0.95	57.97	74	-16.03	peak
7236	44.89	-0.95	43.94	54	-10.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	67.13	-3.64	63.49	74	-10.51	peak
4824	48.39	-3.64	44.75	54	-9.25	AVG
7236	57.19	-0.95	56.24	74	-17.76	peak
7236	44.62	-0.95	43.67	54	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	64.23	-3.51	60.72	74	-13.28	peak
4874	49.68	-3.51	46.17	54	-7.83	AVG
7311	59.40	-0.82	58.58	74	-15.42	peak
7311	44.11	-0.82	43.29	54	-10.71	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	64.32	-3.51	60.81	74	-13.19	peak
4874	48.49	-3.51	44.98	54	-9.02	AVG
7311	58.18	-0.82	57.36	74	-16.64	peak
7311	44.98	-0.82	44.16	54	-9.84	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4924	64.96	-3.43	61.53	74	-12.47	peak
4924	46.56	-3.43	43.13	54	-10.87	AVG
7386	59.87	-0.75	59.12	74	-14.88	peak
7386	43.16	-0.75	42.41	54	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4924	64.31	-3.43	60.88	74	-13.12	peak
4924	46.66	-3.43	43.23	54	-10.77	AVG
7386	56.76	-0.75	56.01	74	-17.99	peak
7386	43.39	-0.75	42.64	54	-11.36	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.81	-3.63	61.18	74	-12.82	peak
4844	47.07	-3.63	43.44	54	-10.56	AVG
7266	58.72	-0.94	57.78	74	-16.22	peak
7266	45.49	-0.94	44.55	54	-9.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Meter Reading + Factor
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.21	-3.63	60.58	74	-13.42	peak
4844	47.69	-3.63	44.06	54	-9.94	AVG
7266	59.29	-0.94	58.35	74	-15.65	peak
7266	45.09	-0.94	44.15	54	-9.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.69	-3.51	59.18	74	-14.82	peak
4874	47.88	-3.51	44.37	54	-9.63	AVG
7311	60.57	-0.82	59.75	74	-14.25	peak
7311	44.88	-0.82	44.06	54	-9.94	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.52	-3.51	43.01	54	-10.99	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.67	-3.43	61.24	74	-12.76	peak
4904	49.04	-3.43	45.61	54	-8.39	AVG
7356	56.04	-0.75	55.29	74	-18.71	peak
7356	43.46	-0.75	42.71	54	-11.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.82	-3.43	59.39	74	-14.61	peak
4904	46.80	-3.43	43.37	54	-10.63	AVG
7356	57.41	-0.75	56.66	74	-17.34	peak
7356	44.14	-0.75	43.39	54	-10.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.08	-5.81	52.27	74	-21.73	peak
2390	/	-5.81	/	54	/	AVG
2399	65.14	-5.84	59.30	74	-14.70	peak
2399	48.25	-5.84	42.41	54	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.86	-5.81	51.05	74	-22.95	peak
2390	/	-5.81	/	54	/	AVG
2399	62.15	-5.84	56.31	74	-17.69	peak
2399	46.34	-5.84	40.50	54	-13.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.94	-5.65	50.29	74	-23.71	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.17	-5.65	51.52	74	-22.48	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.58	-5.81	52.77	74	-21.23	peak
2390	/	-5.81	/	54	/	AVG
2399	61.50	-5.84	55.66	74	-18.34	peak
2399	45.71	-5.84	39.87	54	-14.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.92	-5.81	50.11	74	-23.89	peak
2390	/	-5.81	/	54	/	AVG
2399	62.96	-5.84	57.12	74	-16.88	peak
2399	46.36	-5.84	40.52	54	-13.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.79	-5.65	51.14	74	-22.86	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.13	-5.65	52.48	74	-21.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.42	-5.81	50.61	74	-23.39	peak
2390	/	-5.81	/	54	/	AVG
2399	63.42	-5.84	57.58	74	-16.42	peak
2399	48.86	-5.84	43.02	54	-10.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.47	-5.81	51.66	74	-22.34	peak
2390	/	-5.81	/	54	/	AVG
2399	61.41	-5.84	55.57	74	-18.43	peak
2399	48.18	-5.84	42.34	54	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.09	-5.65	50.44	74	-23.56	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.68	-5.65	51.03	74	-22.97	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.16	-5.81	53.35	74	-20.65	peak
2390	/	-5.81	/	54	/	AVG
2399	62.51	-5.84	56.67	74	-17.33	peak
2399	47.26	-5.84	41.42	54	-12.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.81	-5.81	53.00	74	-21.00	peak
2390	/	-5.81	/	54	/	AVG
2399	62.18	-5.84	56.34	74	-17.66	peak
2399	46.39	-5.84	40.55	54	-13.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.17	-5.65	51.52	74	-22.48	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

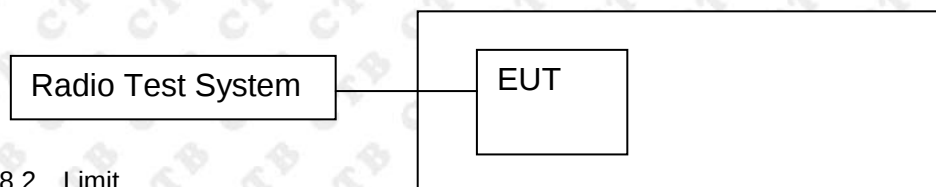

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:




BAND EDGE Graphs


802.11g/LCH

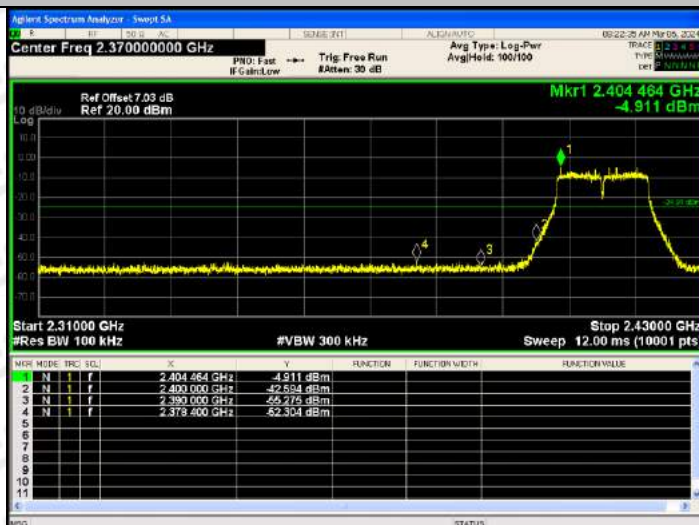


802.11g/HCH

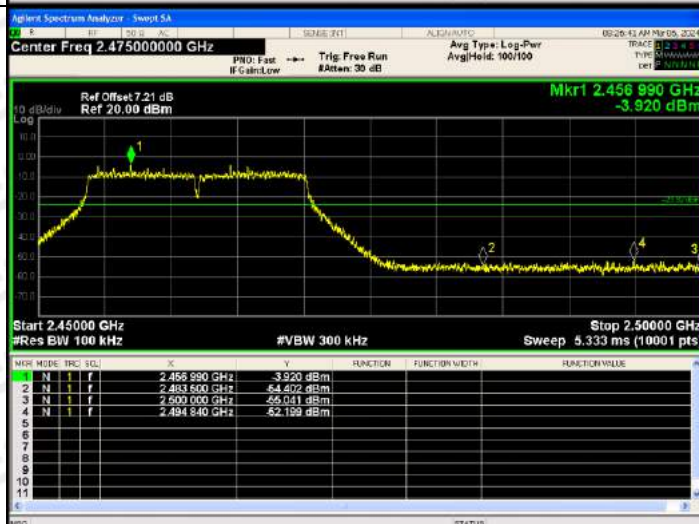


802.11n(HT20)/L
CH

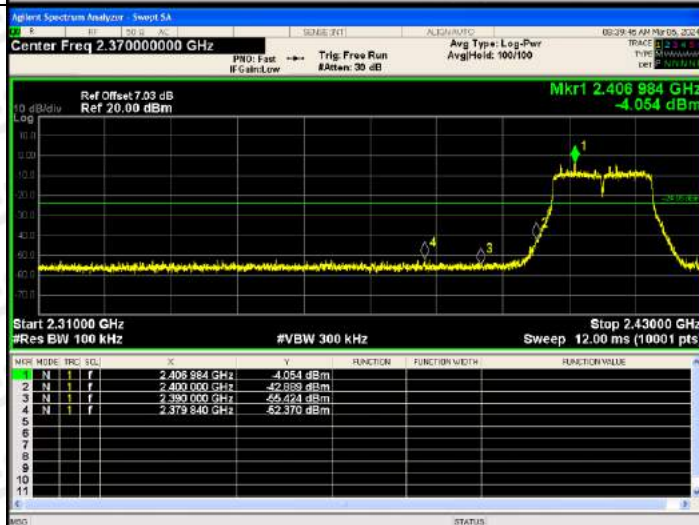

802.11n(HT20)/H
CH

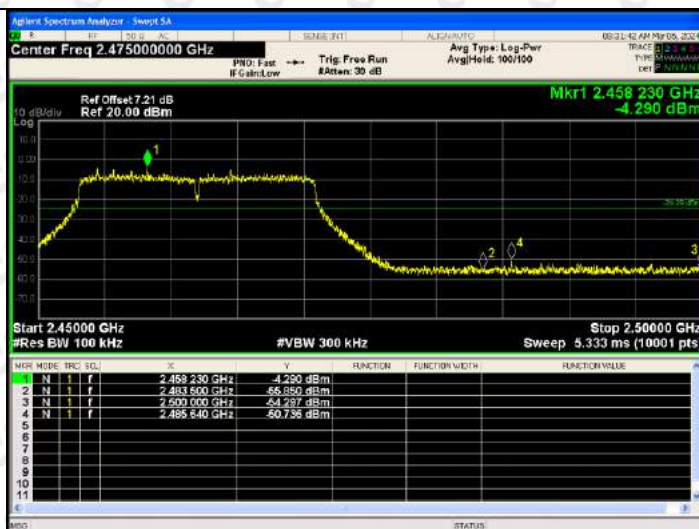

802.11n(HT40)/L
CH

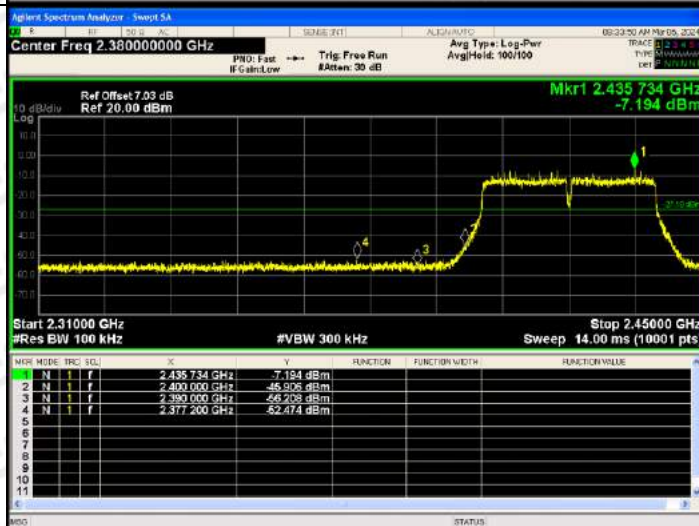


802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

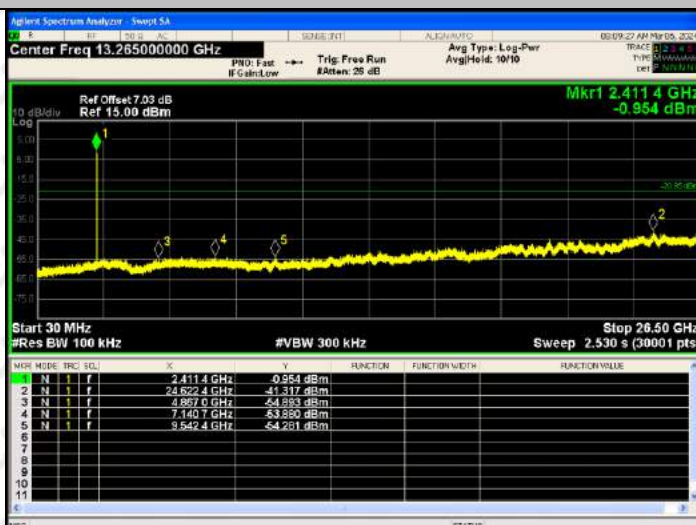

802.11b/MCH

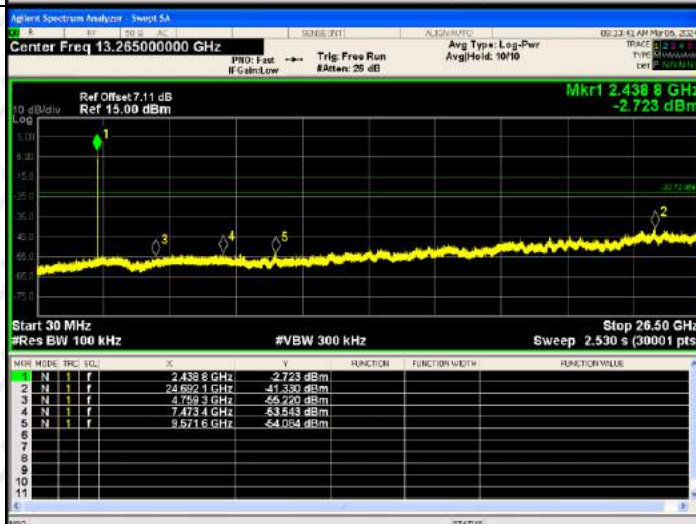


802.11b/HCH

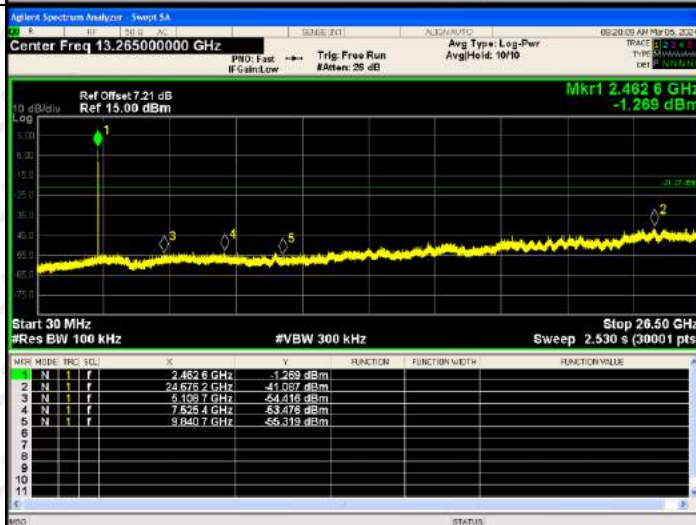


RF Conducted Spurious Emissions Graphs


802.11g/LCH

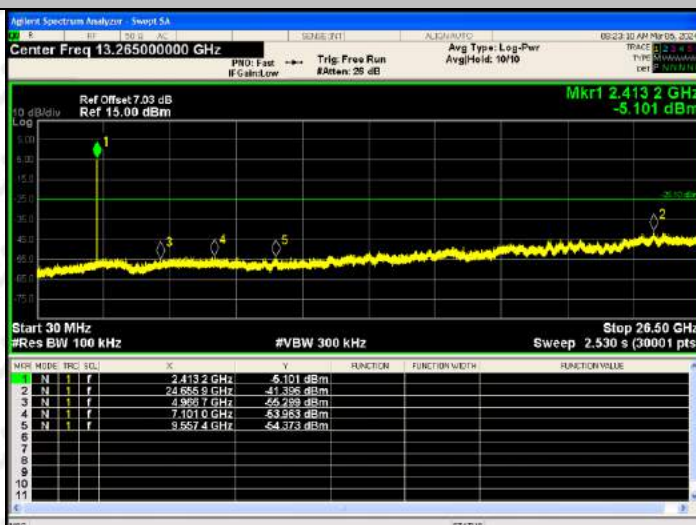

802.11g/MCH

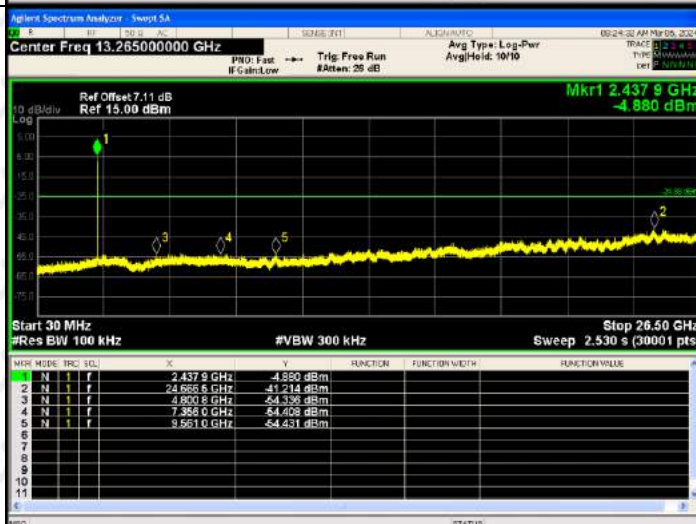


802.11g/HCH

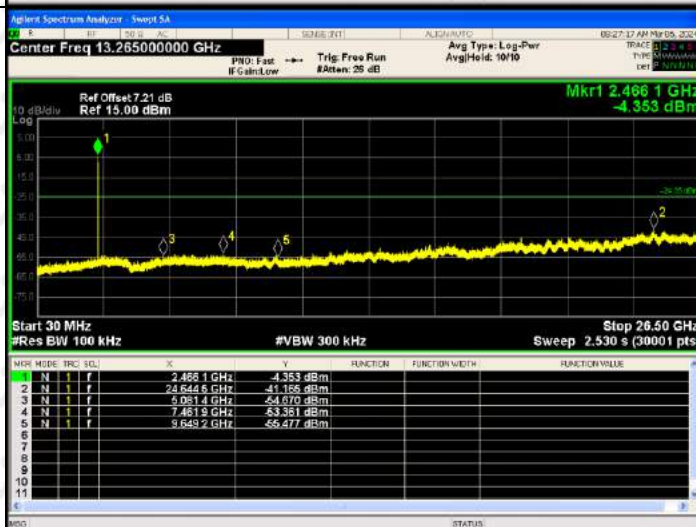


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

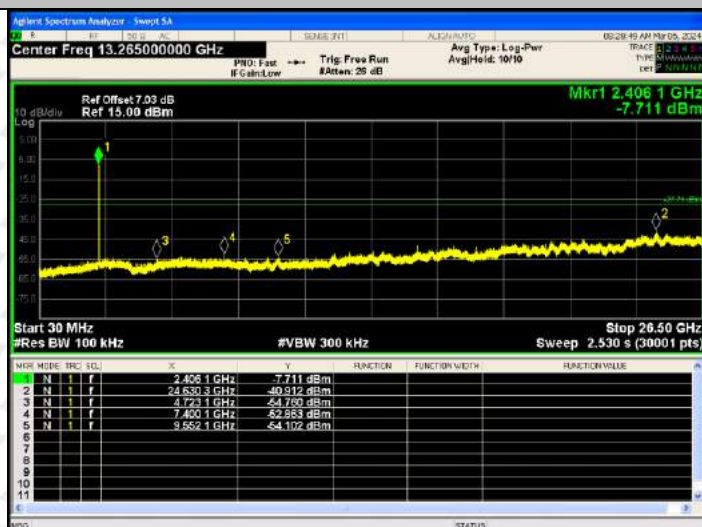


802.11 n(HT20)/MCH

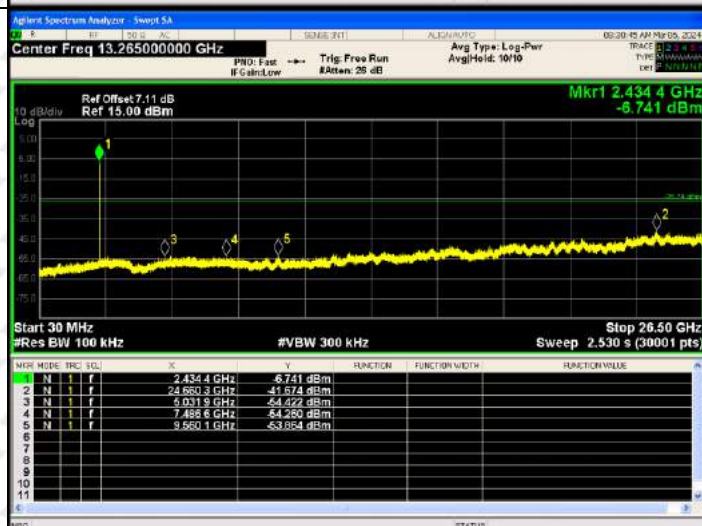


802.11 n(HT20)/HCH

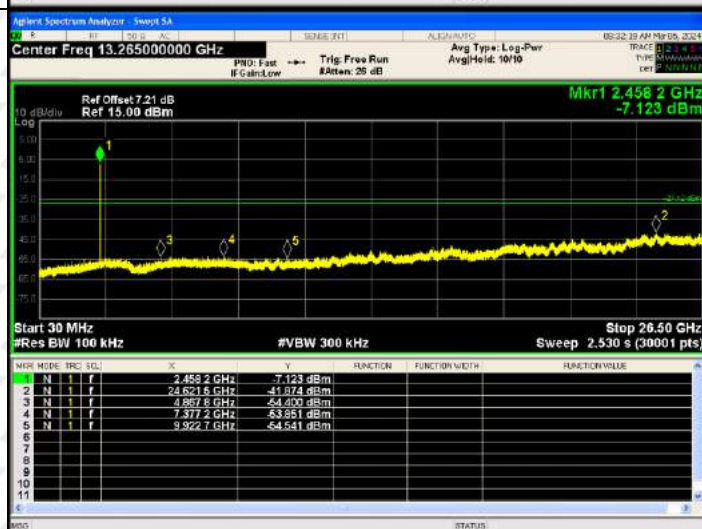


802.11n(HT40)/LCH

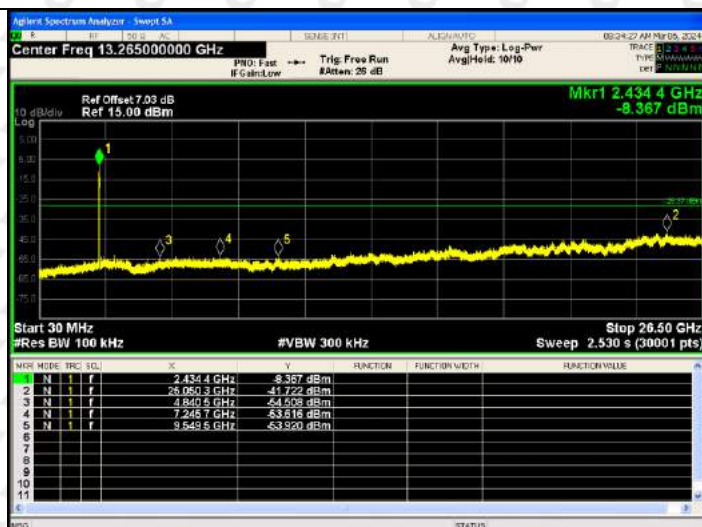

802.11 n(HT40)/MCH

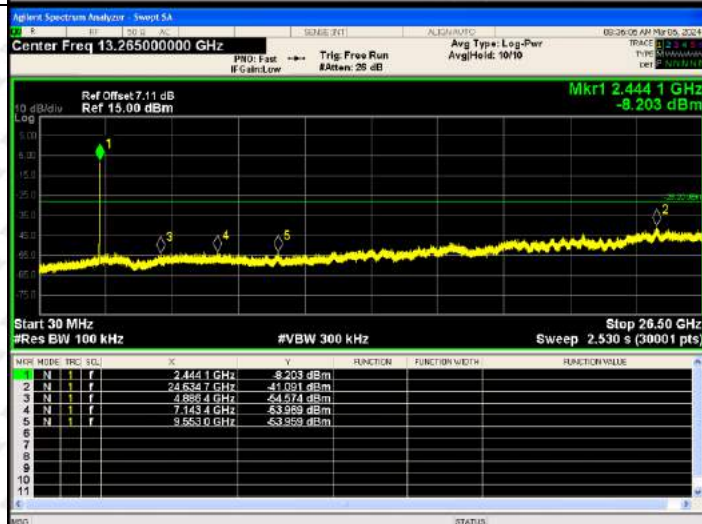


802.11 n(HT40)/HCH

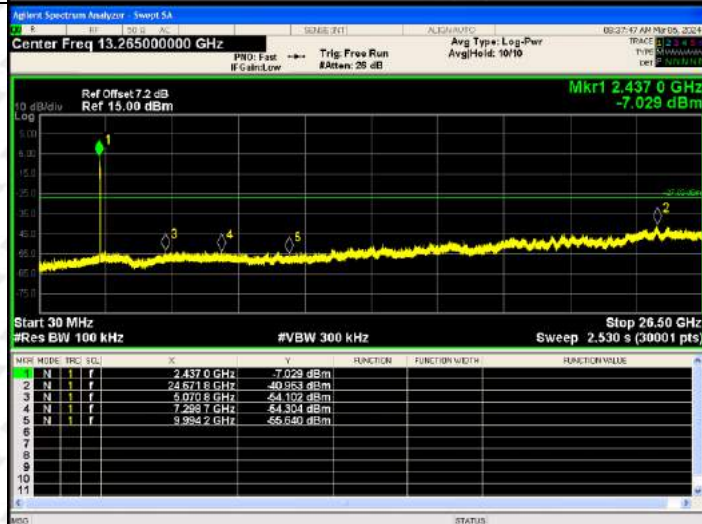


ANT2:

BAND EDGE Graphs

802.11b/LCH

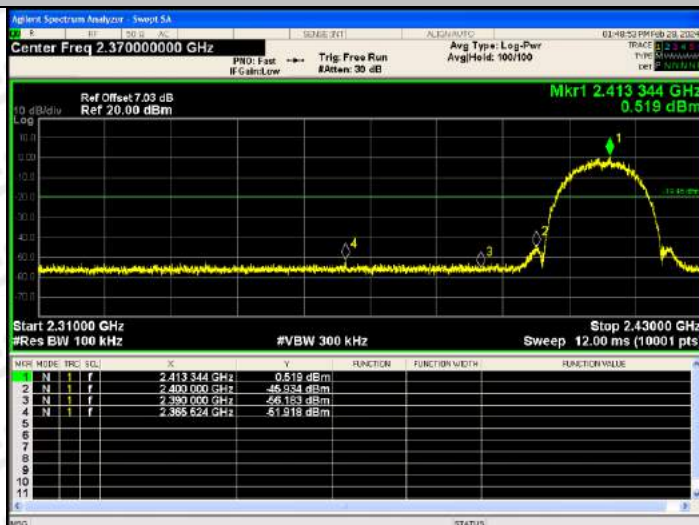


802.11b/HCH

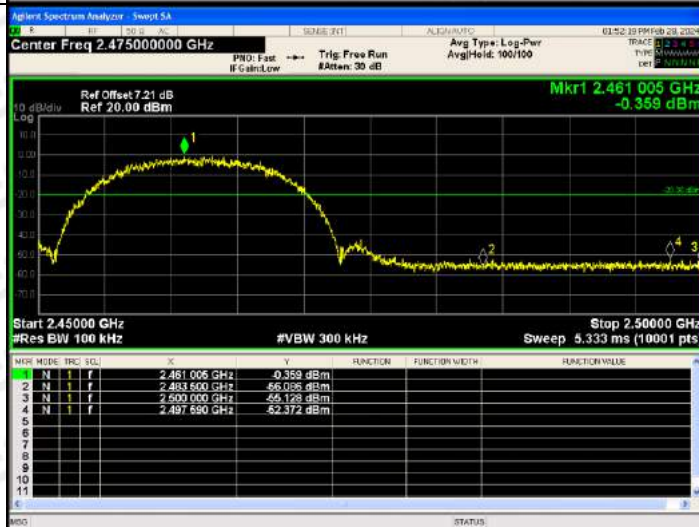


BAND EDGE Graphs

802.11g/LCH

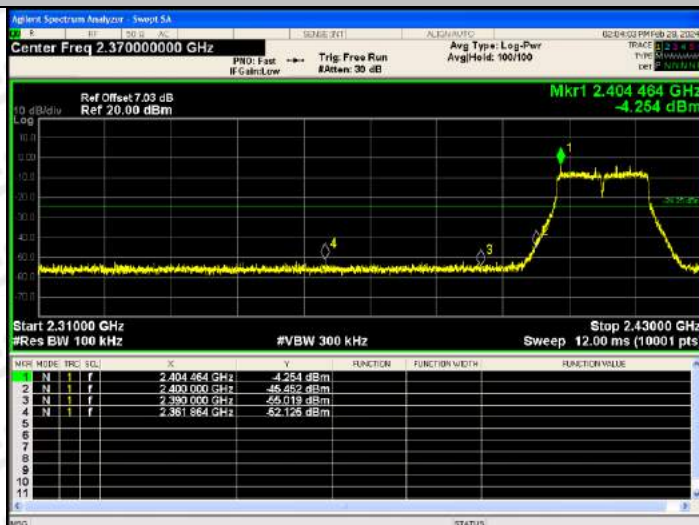


802.11g/HCH

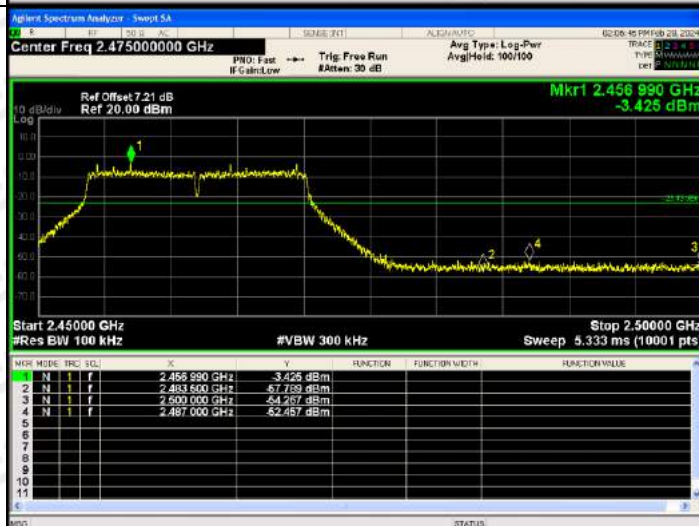


BAND EDGE Graphs

802.11n(HT20)/L
CH

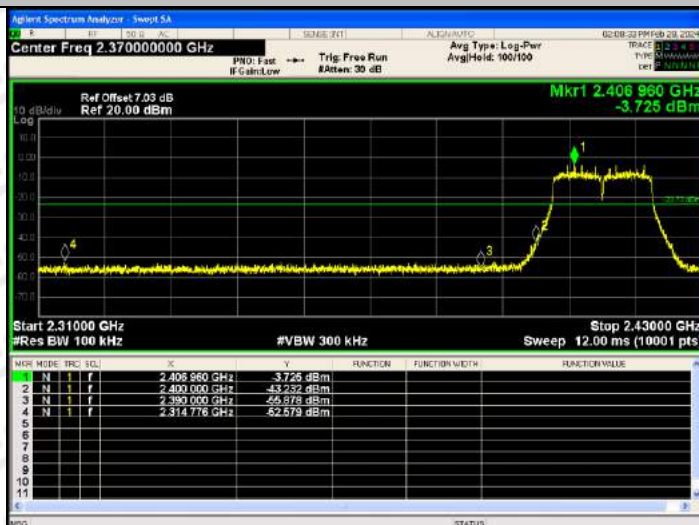


802.11n(HT20)/H
CH

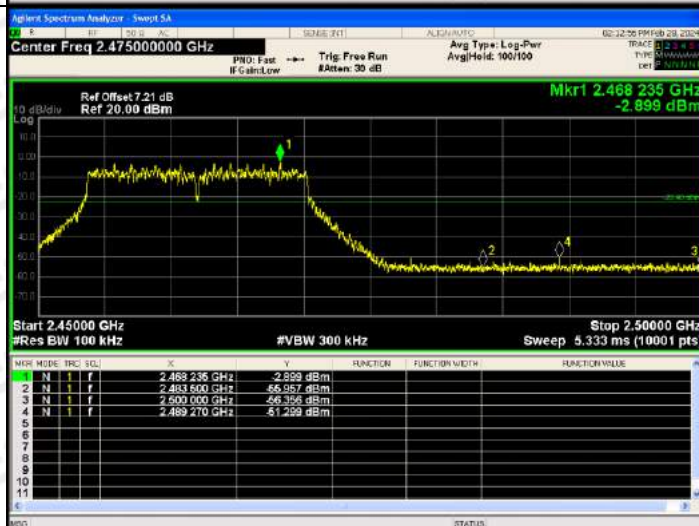

BAND EDGE Graphs




802.11n(HT40)/L
CH

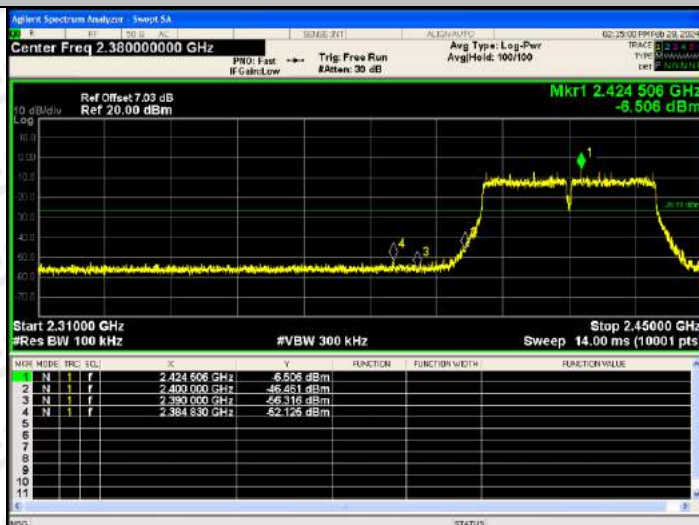

802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

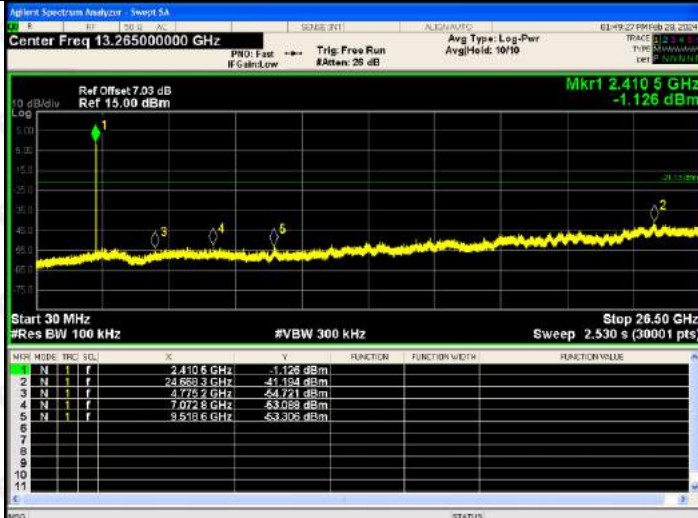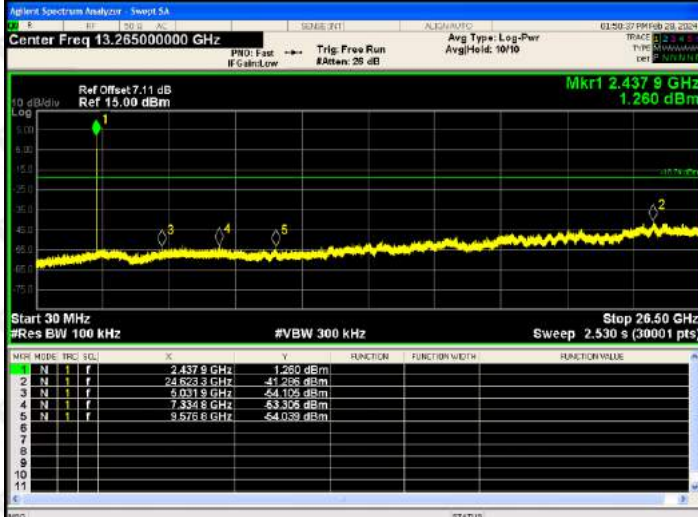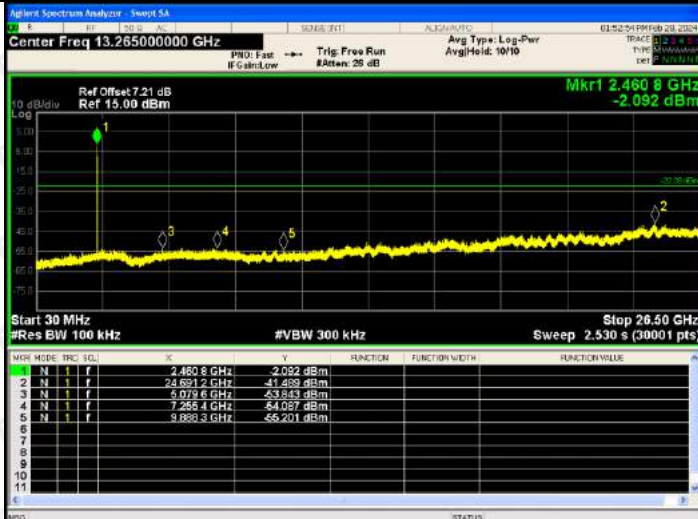802.11b /LCH	 <table><tr><th>N</th><th>F</th><th>F</th><th>F</th><th>F</th><th>F</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4105 GHz</td><td>-1.126 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6803 GHz</td><td>-41.194 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7752 GHz</td><td>-54.721 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.0728 GHz</td><td>-53.058 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5196 GHz</td><td>-53.309 dBm</td></tr></table>	N	F	F	F	F	F	1	N	1	f	2.4105 GHz	-1.126 dBm	2	N	1	f	24.6803 GHz	-41.194 dBm	3	N	1	f	4.7752 GHz	-54.721 dBm	4	N	1	f	7.0728 GHz	-53.058 dBm	5	N	1	f	9.5196 GHz	-53.309 dBm
N	F	F	F	F	F																																
1	N	1	f	2.4105 GHz	-1.126 dBm																																
2	N	1	f	24.6803 GHz	-41.194 dBm																																
3	N	1	f	4.7752 GHz	-54.721 dBm																																
4	N	1	f	7.0728 GHz	-53.058 dBm																																
5	N	1	f	9.5196 GHz	-53.309 dBm																																
802.11b /MCH	 <table><tr><th>N</th><th>F</th><th>F</th><th>F</th><th>F</th><th>F</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4379 GHz</td><td>-1.260 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6233 GHz</td><td>-41.286 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0319 GHz</td><td>-54.105 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.3348 GHz</td><td>-53.305 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5780 GHz</td><td>-54.039 dBm</td></tr></table>	N	F	F	F	F	F	1	N	1	f	2.4379 GHz	-1.260 dBm	2	N	1	f	24.6233 GHz	-41.286 dBm	3	N	1	f	5.0319 GHz	-54.105 dBm	4	N	1	f	7.3348 GHz	-53.305 dBm	5	N	1	f	9.5780 GHz	-54.039 dBm
N	F	F	F	F	F																																
1	N	1	f	2.4379 GHz	-1.260 dBm																																
2	N	1	f	24.6233 GHz	-41.286 dBm																																
3	N	1	f	5.0319 GHz	-54.105 dBm																																
4	N	1	f	7.3348 GHz	-53.305 dBm																																
5	N	1	f	9.5780 GHz	-54.039 dBm																																
802.11b /HCH	 <table><tr><th>N</th><th>F</th><th>F</th><th>F</th><th>F</th><th>F</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4608 GHz</td><td>-2.092 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6912 GHz</td><td>-41.489 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0736 GHz</td><td>-53.843 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2554 GHz</td><td>-54.087 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6803 GHz</td><td>-55.201 dBm</td></tr></table>	N	F	F	F	F	F	1	N	1	f	2.4608 GHz	-2.092 dBm	2	N	1	f	24.6912 GHz	-41.489 dBm	3	N	1	f	5.0736 GHz	-53.843 dBm	4	N	1	f	7.2554 GHz	-54.087 dBm	5	N	1	f	9.6803 GHz	-55.201 dBm
N	F	F	F	F	F																																
1	N	1	f	2.4608 GHz	-2.092 dBm																																
2	N	1	f	24.6912 GHz	-41.489 dBm																																
3	N	1	f	5.0736 GHz	-53.843 dBm																																
4	N	1	f	7.2554 GHz	-54.087 dBm																																
5	N	1	f	9.6803 GHz	-55.201 dBm																																

RF Conducted Spurious Emissions Graphs

802.11g /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.406 1 GHz -7.420 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.406 1 GHz</td><td>-7.420 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.636 6 GHz</td><td>-41.046 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.911 1 GHz</td><td>-54.814 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.312 8 GHz</td><td>-54.053 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.535 9 GHz</td><td>-52.451 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> STATUS	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.406 1 GHz	-7.420 dBm				2	N	1	f	24.636 6 GHz	-41.046 dBm				3	N	1	f	4.911 1 GHz	-54.814 dBm				4	N	1	f	7.312 8 GHz	-54.053 dBm				5	N	1	f	9.535 9 GHz	-52.451 dBm				6									7									8									9									10									11								
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.406 1 GHz	-7.420 dBm																																																																																																								
2	N	1	f	24.636 6 GHz	-41.046 dBm																																																																																																								
3	N	1	f	4.911 1 GHz	-54.814 dBm																																																																																																								
4	N	1	f	7.312 8 GHz	-54.053 dBm																																																																																																								
5	N	1	f	9.535 9 GHz	-52.451 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11g /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.443 2 GHz -5.655 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.443 2 GHz</td><td>-5.655 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.636 6 GHz</td><td>-40.117 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>6.036 4 GHz</td><td>-54.926 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.450 4 GHz</td><td>-53.854 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.540 6 GHz</td><td>-54.533 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> STATUS	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.443 2 GHz	-5.655 dBm				2	N	1	f	24.636 6 GHz	-40.117 dBm				3	N	1	f	6.036 4 GHz	-54.926 dBm				4	N	1	f	7.450 4 GHz	-53.854 dBm				5	N	1	f	9.540 6 GHz	-54.533 dBm				6									7									8									9									10									11								
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.443 2 GHz	-5.655 dBm																																																																																																								
2	N	1	f	24.636 6 GHz	-40.117 dBm																																																																																																								
3	N	1	f	6.036 4 GHz	-54.926 dBm																																																																																																								
4	N	1	f	7.450 4 GHz	-53.854 dBm																																																																																																								
5	N	1	f	9.540 6 GHz	-54.533 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11g /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.460 8 GHz -5.307 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 8 GHz</td><td>-5.307 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.645 3 GHz</td><td>-41.551 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.994 9 GHz</td><td>-54.734 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.188 4 GHz</td><td>-54.454 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.640 7 GHz</td><td>-54.514 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> STATUS	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 8 GHz	-5.307 dBm				2	N	1	f	24.645 3 GHz	-41.551 dBm				3	N	1	f	4.994 9 GHz	-54.734 dBm				4	N	1	f	7.188 4 GHz	-54.454 dBm				5	N	1	f	9.640 7 GHz	-54.514 dBm				6									7									8									9									10									11								
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.460 8 GHz	-5.307 dBm																																																																																																								
2	N	1	f	24.645 3 GHz	-41.551 dBm																																																																																																								
3	N	1	f	4.994 9 GHz	-54.734 dBm																																																																																																								
4	N	1	f	7.188 4 GHz	-54.454 dBm																																																																																																								
5	N	1	f	9.640 7 GHz	-54.514 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

RF Conducted Spurious Emissions Graphs

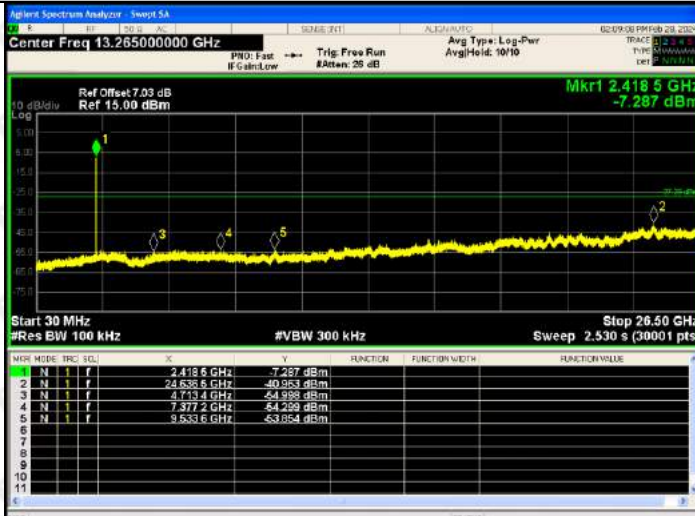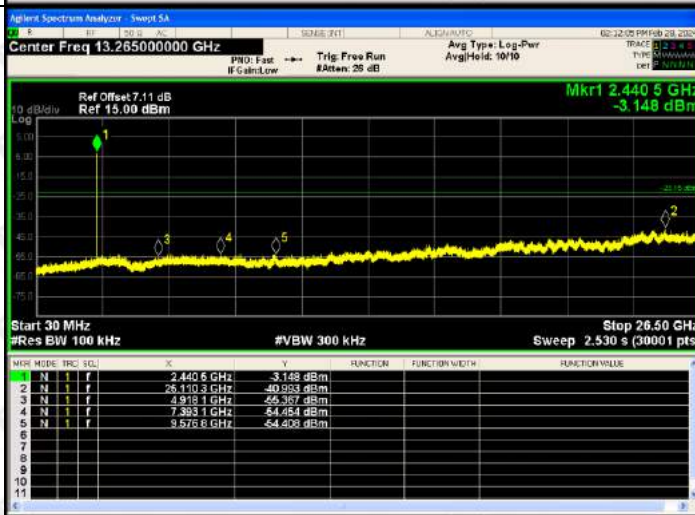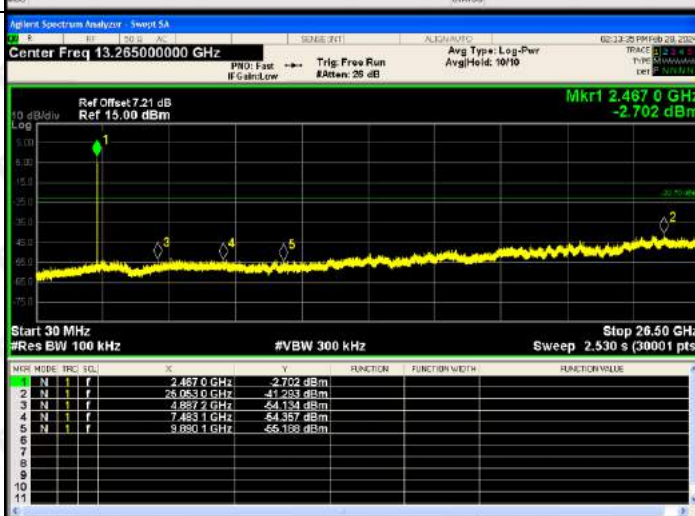802.11n (HT20)/ LCH	 <table><tr><th>Mk</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4185</td><td>-7.287</td></tr><tr><td>2</td><td>2.4385</td><td>-40.953</td></tr><tr><td>3</td><td>4.7134</td><td>-54.958</td></tr><tr><td>4</td><td>7.2772</td><td>-54.528</td></tr><tr><td>5</td><td>9.5336</td><td>-53.854</td></tr></table>	Mk	Freq (GHz)	Power (dBm)	1	2.4185	-7.287	2	2.4385	-40.953	3	4.7134	-54.958	4	7.2772	-54.528	5	9.5336	-53.854
Mk	Freq (GHz)	Power (dBm)																	
1	2.4185	-7.287																	
2	2.4385	-40.953																	
3	4.7134	-54.958																	
4	7.2772	-54.528																	
5	9.5336	-53.854																	
802.11 n(HT20) /MCH	 <table><tr><th>Mk</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4405</td><td>-3.148</td></tr><tr><td>2</td><td>2.6110</td><td>-40.953</td></tr><tr><td>3</td><td>4.9181</td><td>-55.367</td></tr><tr><td>4</td><td>7.3931</td><td>-54.454</td></tr><tr><td>5</td><td>9.5702</td><td>-54.428</td></tr></table>	Mk	Freq (GHz)	Power (dBm)	1	2.4405	-3.148	2	2.6110	-40.953	3	4.9181	-55.367	4	7.3931	-54.454	5	9.5702	-54.428
Mk	Freq (GHz)	Power (dBm)																	
1	2.4405	-3.148																	
2	2.6110	-40.953																	
3	4.9181	-55.367																	
4	7.3931	-54.454																	
5	9.5702	-54.428																	
802.11 n(HT20) /HCH	 <table><tr><th>Mk</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4670</td><td>-2.702</td></tr><tr><td>2</td><td>2.6630</td><td>-41.253</td></tr><tr><td>3</td><td>4.8872</td><td>-54.134</td></tr><tr><td>4</td><td>7.4831</td><td>-54.357</td></tr><tr><td>5</td><td>9.6801</td><td>-55.128</td></tr></table>	Mk	Freq (GHz)	Power (dBm)	1	2.4670	-2.702	2	2.6630	-41.253	3	4.8872	-54.134	4	7.4831	-54.357	5	9.6801	-55.128
Mk	Freq (GHz)	Power (dBm)																	
1	2.4670	-2.702																	
2	2.6630	-41.253																	
3	4.8872	-54.134																	
4	7.4831	-54.357																	
5	9.6801	-55.128																	

RF Conducted Spurious Emissions Graphs



9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	6.01	5.89	/	30
	MCH	5.89	5.65	/	30
	HCH	5.322	5.96	/	30
802.11g	LCH	5.588	5.968	/	30
	MCH	5.893	5.242	/	30
	HCH	6.107	5.376	/	30
802.11n(HT20)	LCH	5.632	6.09	8.877	30
	MCH	5.885	5.906	8.906	30
	HCH	6.122	5.175	8.685	30
802.11n(HT40)	LCH	5.267	5.758	8.530	30
	MCH	5.494	5.854	8.688	30
	HCH	5.735	6.008	8.884	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

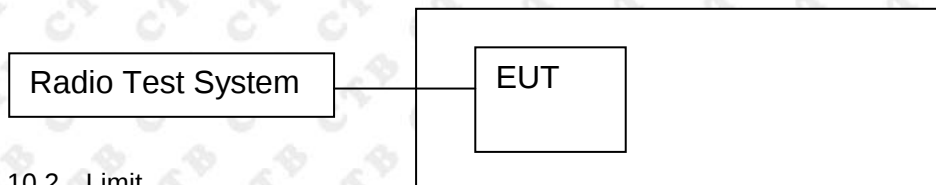

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.997	500	PASS
	MCH	8.562	500	PASS
	HCH	10.388	500	PASS
802.11g	LCH	16.346	500	PASS
	MCH	16.409	500	PASS
	HCH	16.349	500	PASS
802.11n(HT20)	LCH	17.555	500	PASS
	MCH	17.324	500	PASS
	HCH	17.563	500	PASS
802.11n(HT40)	LCH	35.778	500	PASS
	MCH	35.681	500	PASS
	HCH	36.086	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.813	500	PASS
	MCH	9.223	500	PASS
	HCH	9.748	500	PASS
802.11g	LCH	16.312	500	PASS
	MCH	16.387	500	PASS
	HCH	16.33	500	PASS
802.11n(HT20)	LCH	17.045	500	PASS
	MCH	16.468	500	PASS
	HCH	16.323	500	PASS
802.11n(HT40)	LCH	35.51	500	PASS
	MCH	35.484	500	PASS
	HCH	35.648	500	PASS

ANT1:

Test Graph:



802.11g/LCH





802.11g/MCH



802.11g/HCH




802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420753 GHz -10.942 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.620 MHz Total Power 13.0 dBm Transmit Freq Error -24.745 kHz OBW Power 99.00 % x dB Bandwidth 17.55 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.445643 GHz -10.425 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.632 MHz Total Power 13.2 dBm Transmit Freq Error -19.297 kHz OBW Power 99.00 % x dB Bandwidth 17.32 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470761 GHz -9.9496 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.625 MHz Total Power 13.2 dBm Transmit Freq Error -20.674 kHz OBW Power 99.00 % x dB Bandwidth 17.56 MHz x dB -6.00 dB

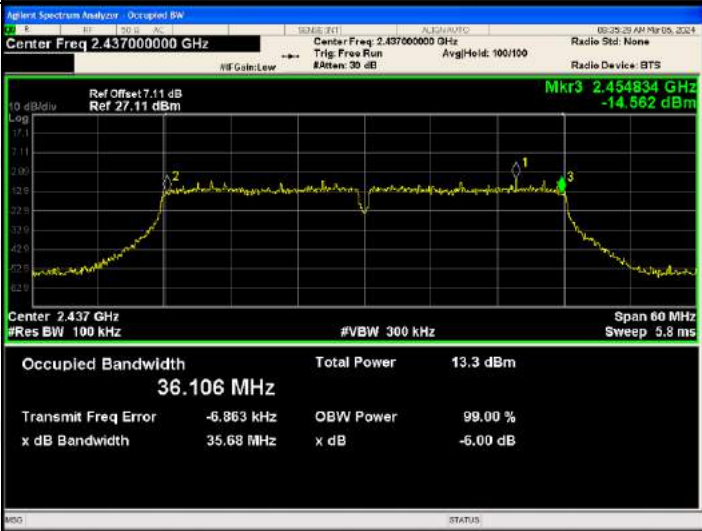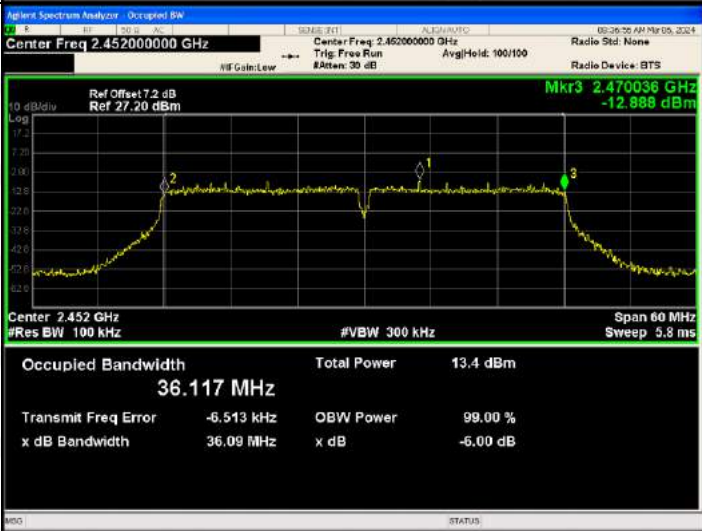802.11n(HT40)/LC H		
802.11n(HT40)/MC H		
802.11n(HT40)/HC H		

ANT2:
Test Graph:




802.11g/LCH



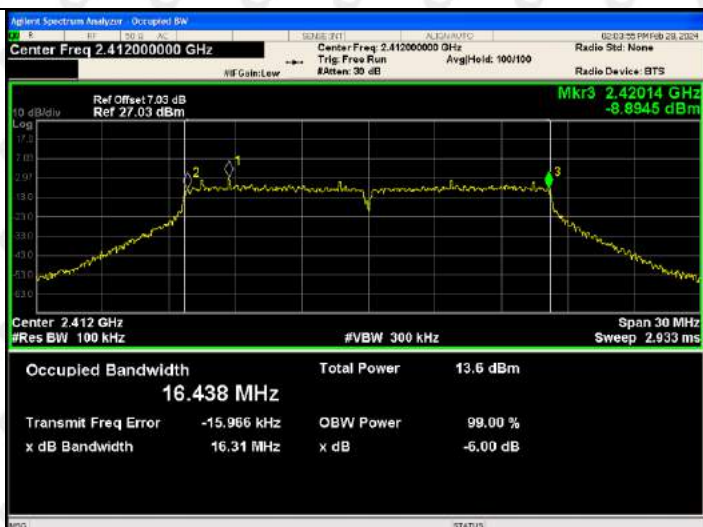




802.11g/MCH



802.11g/HCH

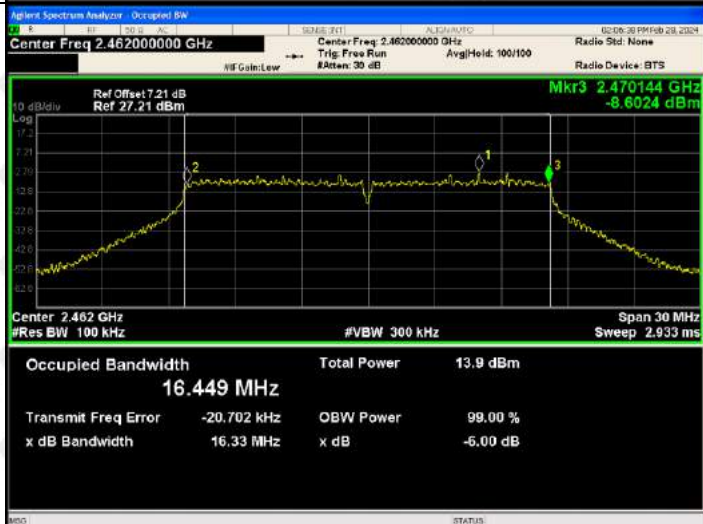


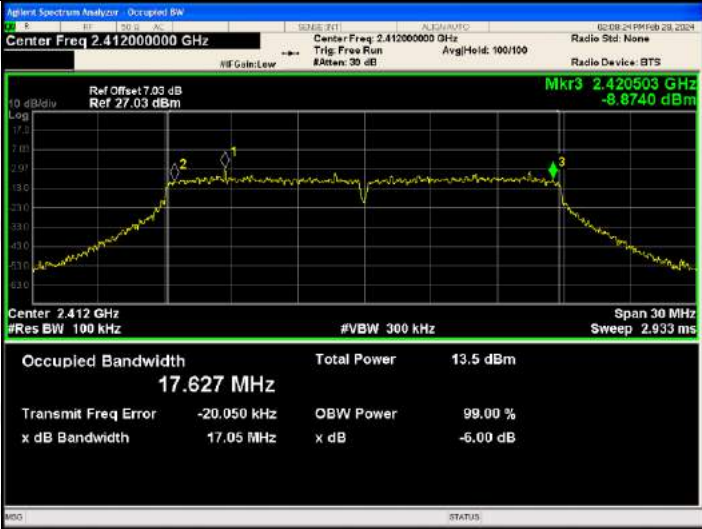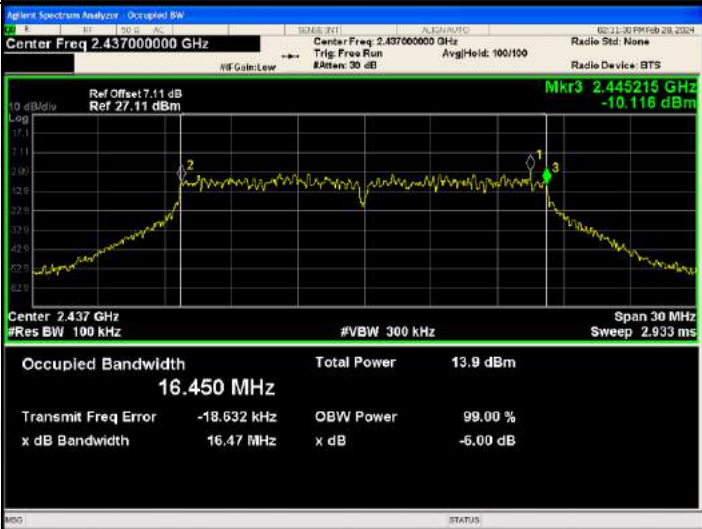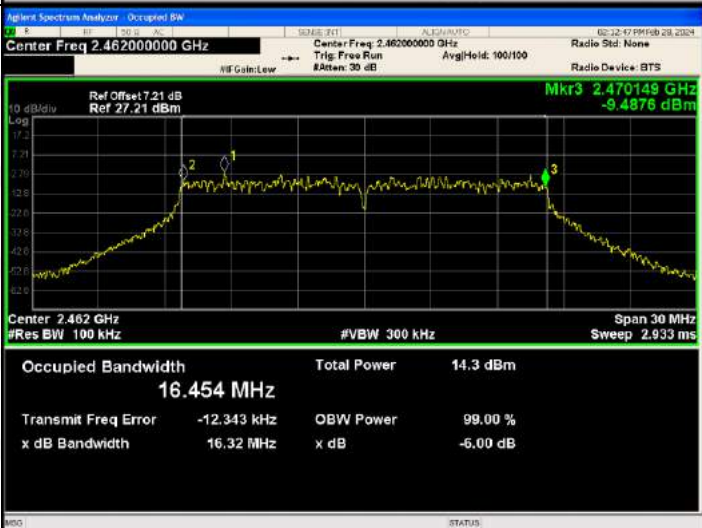802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

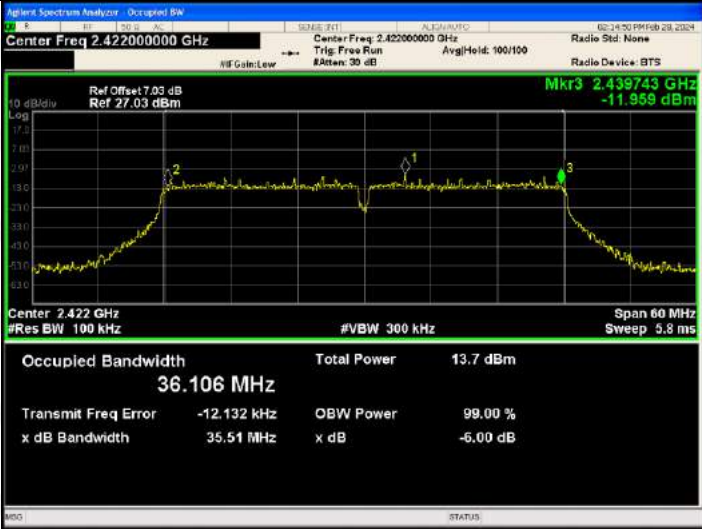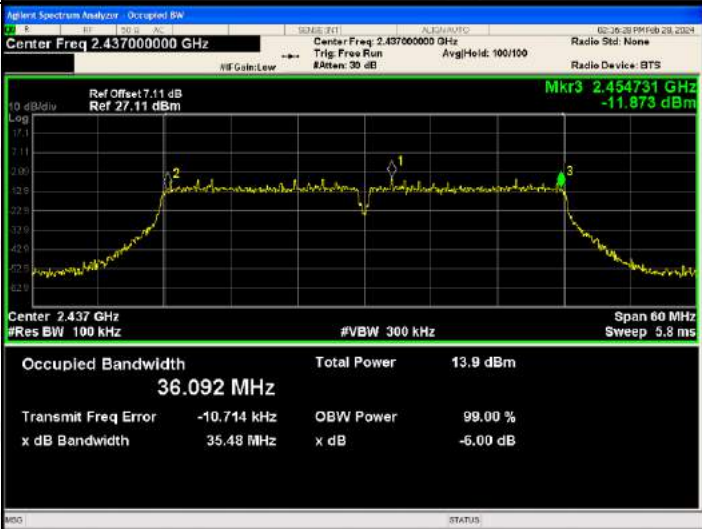802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset: 7.03 dB Ref: 27.03 dBm Mkr3 2.439743 GHz -11.959 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.106 MHz Total Power: 13.7 dBm Transmit Freq Error: -12.132 kHz OBW Power: 99.00 % x dB Bandwidth: 35.51 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset: 7.11 dB Ref: 27.11 dBm Mkr3 2.454731 GHz -11.873 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.092 MHz Total Power: 13.9 dBm Transmit Freq Error: -10.714 kHz OBW Power: 99.00 % x dB Bandwidth: 35.48 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset: 7.2 dB Ref: 27.20 dBm Mkr3 2.469812 GHz -12.676 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.091 MHz Total Power: 14.0 dBm Transmit Freq Error: -12.274 kHz OBW Power: 99.00 % x dB Bandwidth: 35.65 MHz x dB: -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

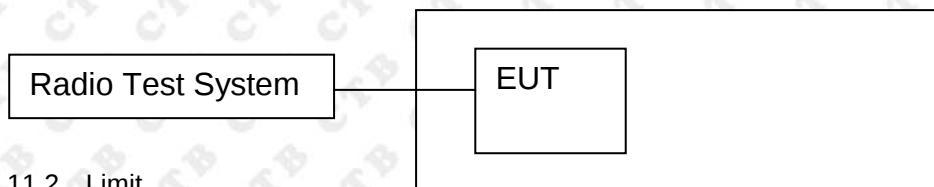

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-16.424	-14.922	/	8
	MCH	-15.252	-15.376	/	8
	HCH	-14.192	-15.282	/	8
802.11g	LCH	-17.423	-18.219	/	8
	MCH	-17.461	-19.077	/	8
	HCH	-19.612	-19.325	/	8
802.11n(H T20)	LCH	-19.626	-19.65	-16.628	8
	MCH	-19.554	-19.401	-16.467	8
	HCH	-19.574	-19.203	-16.374	8
802.11n(H T40)	LCH	-22.905	-22.063	-19.453	8
	MCH	-22.032	-20.407	-18.134	8
	HCH	-21.183	-20.379	-17.752	8


ANT1: Test Graph

Graphs

802.11b /LCH



802.11b /MCH

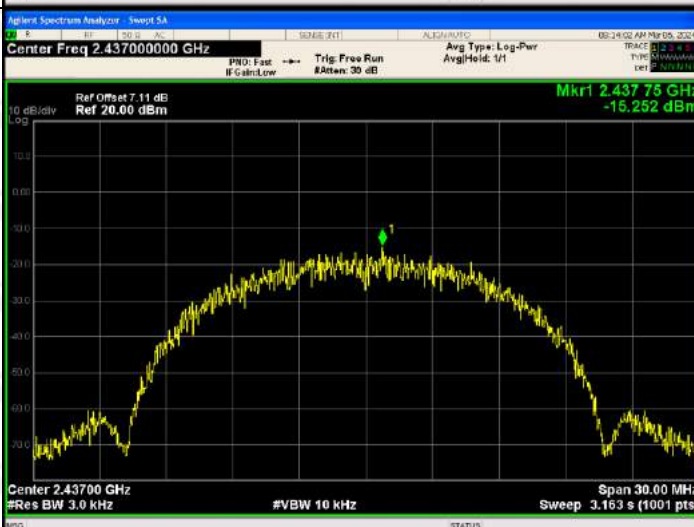

802.11b/HCH



802.11g/LCH



802.11g/MCH



802.11g/HCH



802.11n(HT20)/LCH



802.11n(HT20)/MCH



802.11n(HT20)/HCH



802.11n(HT40)/LCH



802.11n(HT40)/MCH




802.11n(HT40)/HCH



ANT 2:
Test Graph

Graphs

802.11b /LCH

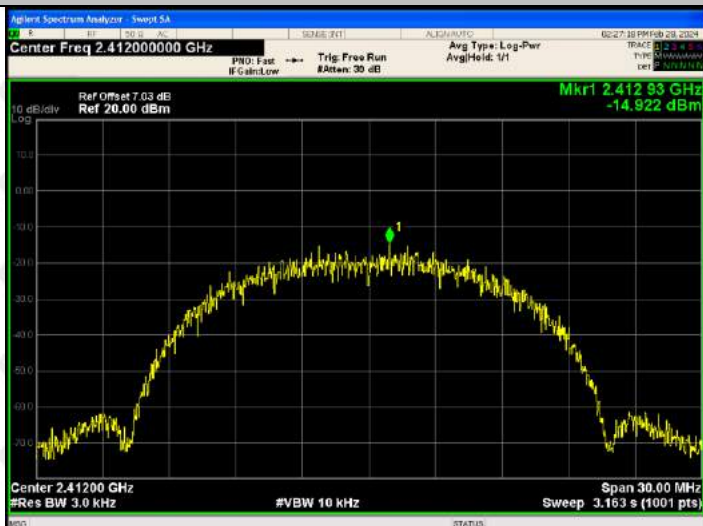


802.11b /MCH



802.11b/HCH



802.11g/LCH

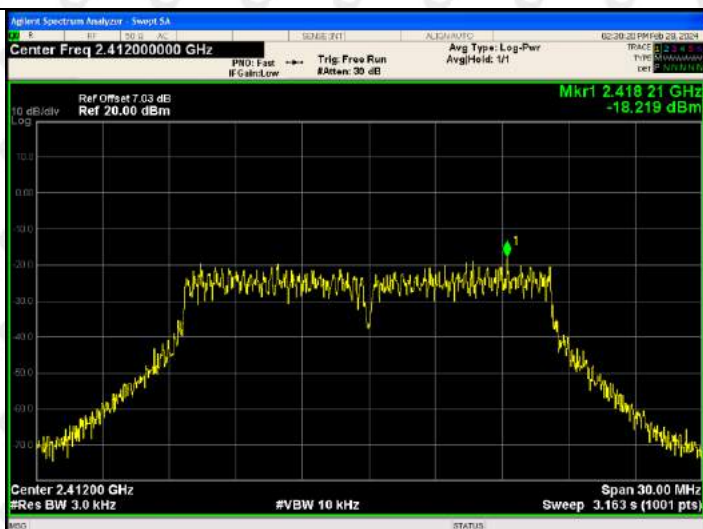

802.11g/MCH



802.11g/HCH



802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is ANT1: 2.66dBi, ANT2: 2.66dBi


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

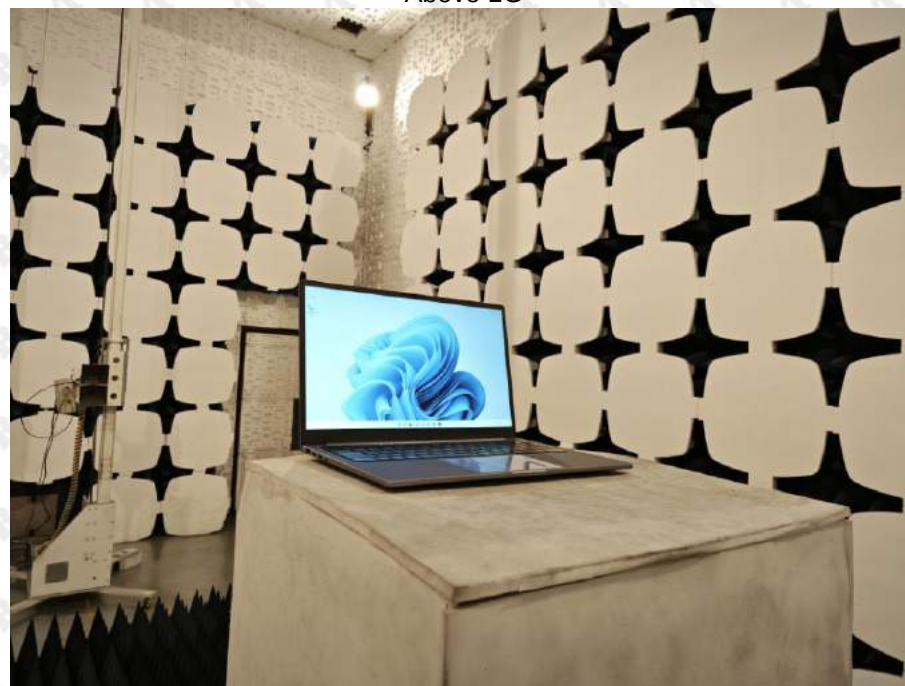

Conducted Emission



***** END OF REPORT *****