



Product characteristic specification sheet

一、 Basic product characteristics:

产 品 类 型 : PCB ANTENNA	
DESCRIPTION	VALUE
Frequency range (工作频段)	2400-2500MHz
Impedance (特性阻抗)	50 Ω
V.S.W.R (电压驻波比)	Contrast waveform
Ant. Type/Gain (天线类型/增益)	PCB antenna/2.24dBi
Radiation (方向性)	Omni-directional
Polarization (线化方式)	linear Vertical
Admitted power (功率)	1W
Connector (接头型号)	IPEX CONN
Operating temp (工作温度)	-10℃~+70℃
Storage temp (储存温度)	-10℃~+60℃

Manuafacture: HungVe Precision Technology (Shenzhen) Co.,Ltd
Add.: 4F,Fuminda Science Innovation Center,No.16 Baoji Rd, Xiangjiaotang, Bantian St,
Longgang Dist,Shenzhen, Guangdong, China


Antenna picture




Passive data

Frequency (MHz) (工作频段)	Efficiency (%) (效率)	Peak GAIN (dBi) (增益)
2400	30.42	1.47
2450	43.37	2.01
2500	41.53	2.24

2D/3D drawing

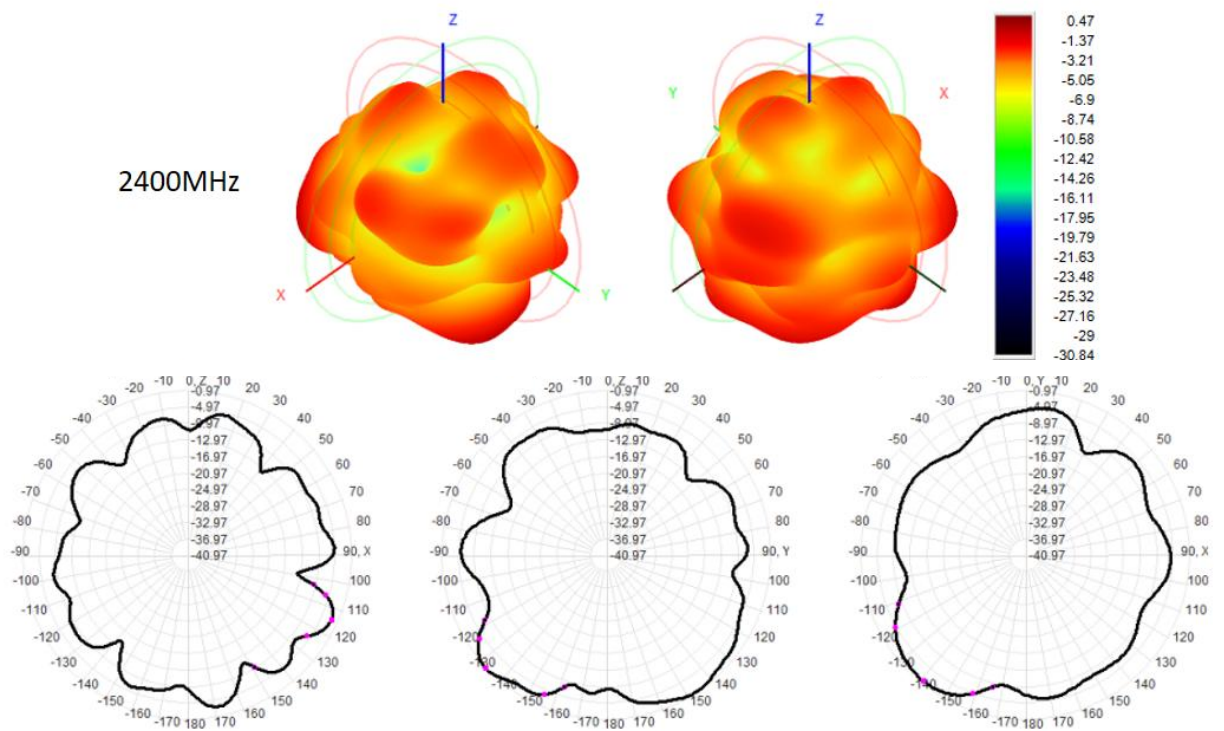

2450MHz

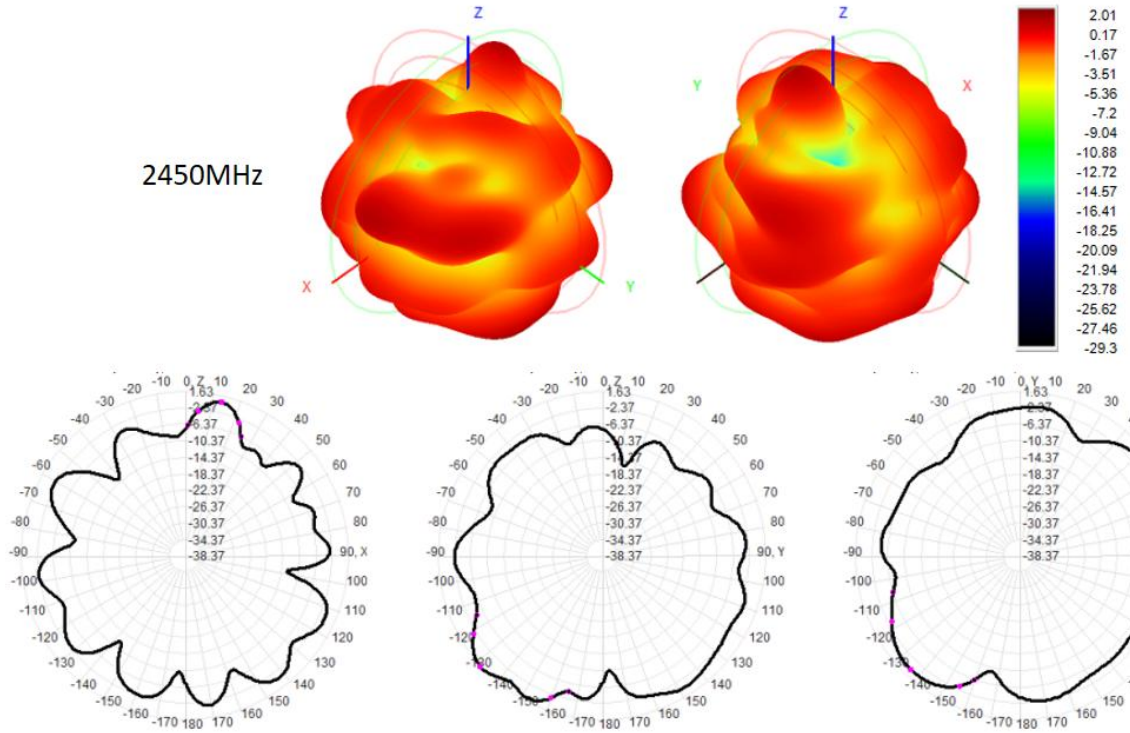

2500MHz

