

FCC RADIO TEST REPORT

FCC ID: 2BFDF-ZERO18PRO

Product: Notebook

Trade Mark: THUNDEROBOT

Model No.: ZERO 18 Pro

Family Model: ZERO 18

Report No.: S25030308003004

Issue Date: Apr. 21, 2025

Prepared for

Qingdao THUNDEROBOT Technology Co.,Ltd.

No. 1, Haier Road, Laoshan District, Qingdao.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Qingdao THUNDEROBOT Technology Co.,Ltd.
Address : No. 1, Haier Road, Laoshan District, Qingdao.
Manufacturer's Name : Qingdao THUNDEROBOT Technology Co.,Ltd.
Address : No. 1, Haier Road, Laoshan District, Qingdao.
Product description
Product name : Notebook
Trade Mark : THUNDEROBOT
Model and/or type reference : ZERO 18 Pro
Family Model : ZERO 18
Test Sample Number..... : S250303080005
Date (s) of performance of tests .: Mar. 11, 2025 ~ Apr. 21, 2025
Standards : FCC Part15.407
Test procedure.....: ANSI C63.10-2013
KDB 789033 D02 General UNII Test Procedures New Rules
v02r01
KDB 905462 D03 Client Without DFS New Rules v01r02
KDB 905462 D02 UNII DFS Compliance Procedures New
Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Prepared By : Kieron Luo
Kieron Luo
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	7
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
1 . GENERAL INFORMATION	9
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 DESCRIPTION OF TEST MODES	13
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	15
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	16
2 . EMC EMISSION TEST	18
2.1 CONDUCTED EMISSION MEASUREMENT	18
2.1.1 APPLICABLE STANDARD	18
2.1.2 CONFORMANCE LIMIT	18
2.1.3 TEST CONFIGURATION	18
2.1.4 TEST PROCEDURE	18
2.1.5 TEST RESULTS	19
2.2 RADIATED EMISSION MEASUREMENT	25
2.2.1 APPLICABLE STANDARD	25
2.2.2 CONFORMANCE LIMIT	25
2.2.3 MEASURING INSTRUMENTS	26
2.2.4 TEST CONFIGURATION	27
2.2.5 TEST PROCEDURE	28
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	29
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	30
2.2.8 TEST RESULTS (1GHZ-18GHZ)	34
2.2.10 TEST RESULTS (18GHZ-40GHZ)	38
3 . POWER SPECTRAL DENSITY TEST	54
3.1 APPLIED PROCEDURES / LIMIT	54
3.2 TEST PROCEDURE	55
3.3 DEVIATION FROM STANDARD	55
3.4 TEST SETUP	55
3.5 EUT OPERATION CONDITIONS	55
3.6 TEST RESULTS	56
4 . 26DB & 99% EMISSION BANDWIDTH	57
4.1 APPLIED PROCEDURES / LIMIT	57
4.2 TEST PROCEDURE	57
4.3 EUT OPERATION CONDITIONS	58

Table of Contents

	Page
4.4 TEST RESULTS	58
5 . MINIMUM 6 DB BANDWIDTH	59
5.1 APPLIED PROCEDURES / LIMIT	59
5.2 TEST PROCEDURE	59
5.3 DEVIATION FROM STANDARD	59
5.4 TEST SETUP	59
5.5 EUT OPERATION CONDITIONS	59
5.6 TEST RESULTS	60
6 . MAXIMUM CONDUCTED OUTPUT POWER	61
6.1 PPLIED PROCEDURES / LIMIT	61
6.2 TEST RESULTS	63
7 . OUT OF BAND EMISSIONS	64
7.1 APPLICABLE STANDARD	64
7.2 TEST PROCEDURE	64
7.3 DEVIATION FROM STANDARD	65
7.4 TEST SETUP	65
7.5 EUT OPERATION CONDITIONS	65
7.6 TEST RESULTS	66
8. FREQUENCY STABILITY MEASUREMENT	67
8.1 LIMIT	67
8.2 TEST PROCEDURES	67
8.3 TEST SETUP LAYOUT	67
8.4 EUT OPERATION DURING TEST	67
8.5 TEST RESULTS	68
9. DYNAMIC FREQUENCY SELECTION(DFS)	80
9.1 APPLICABILITY OF DFS REQUIREMENTS	80
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	80
9.3 DFS RESPONSE REQUIREMENT VALUES	81
9.4 SHORT PULSE RADAR TEST WAVEFORMS	81
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	82
9.6 CONDUCTED CALIBRATION SETUP	82
9.7 RADAR WAVEFORM CALIBRATION RESULT	82
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	83
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	

Table of Contents

	Page
AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	84
10. ANTENNA REQUIREMENT	85
10.1 STANDARD REQUIREMENT	85
10.2 EUT ANTENNA	85
11. TEST RESULTS	85

Revision History

Report No.	Version	Description	Issued Date
S25030308003004	Rev.01	Initial issue of report	Apr. 21, 2025

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407(b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	(Note 3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%
- (3) The product is a client device, and the data transmission is limited by the AP.
When the information to be sent is missing or the operation fails,
the device will automatically stop sending and directly connect to the AP correctly again.

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$
5	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
6	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
7	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$
10	Radio Frequency	$\pm 0.2\text{ppm}$
11	POWER SPECTRAL DENSITY	$\pm 1.21\text{dB}$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook		
Trade Mark	THUNDEROBOT		
Model Name	ZERO 18 Pro		
Family Model	ZERO 18		
Model Difference	All models are the same antenna and RF module, except for model names and main board. ZERO 18 Pro with A55B1_MB main board while ZERO 18 with R55B2C_MB main board.		
FCC ID	2BFDF-ZERO18PRO		
Product Description	Mode Supported	☒ 802.11a/n/ac/ax (20MHz channel bandwidth) ☒ 802.11n/ac/ax (40MHz channel bandwidth) ☒ 802.11ac/ax (80MHz channel bandwidth) ☒ 802.11ac/ax (160MHz channel bandwidth)	
	Modulation	802.11a:OFDM (BPSK / QPSK / 16QAM/64QAM) 802.11n:OFDM (QPSK/BPSK/16QAM/64QAM) 802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (QPSK/BPSK/16QAM/64QAM/256QAM/1024QAM)	
	Operating Frequency Range	☒ U-NII-1: 5180-5240MHz for 802.11a/n/ac/ax(20MHz); 5190-5230MHz for 802.11n/ac/ax(40MHz); 5210MHz for 802.11ac/ax(80MHz) 5250MHz for 802.11ac/ax(160MHz) ☒ U-NII-2A: 5260-5320MHz for 802.11a/n/ac/ax(20MHz); 5270-5310MHz for 802.11n/ac/ax(40MHz); 5290MHz for 802.11ac/ax(80MHz) 5250MHz for 802.11ac/ax(160MHz) ☒ U-NII-2C: 5500-5700MHz for 802.11a/n/ac/ax(20MHz); 5510-5670MHz for 802.11n/ac/ax(40MHz); 5530-5610MHz for 802.11ac/ax(80MHz) 5570MHz for 802.11ac/ax(160MHz) ☒ U-NII-3: 5745-5825 MHz for 802.11a/n/ac/ax(20MHz); 5755-5795 MHz for 802.11n/ac/ax(40MHz); 5775MHz for 802.11ac/ax(80MHz)	
	Number of Channels	☒ 4 channels for U-NII-1(a/n/ac/ax 20); 2 channels for U-NII-1(n/ac/ax 40); 1 channels for U-NII-1(ac/ax 80); 1 channels for U-NII-1(ac/ax 160); ☒ 4 channels for U-NII-2A(a/n/ac/ax 20); 2 channels for U-NII-2A(n/ac/ax 40); 1 channels for U-NII-2A(ac/ax 80); 1 channels for U-NII-2A(ac/ax 160); ☒ 11 channels for U-NII-2C(a/n/ac/ax 20); 5 channels for U-NII-2C(n/ac/ax 40); 2 channels for U-NII-2C(ac/ax 80); 1 channels for U-NII-2C(ac/ax 160); ☒ 5 channels for U-NII-3(a/n/ac/ax 20); 2 channels for U-NII-3(n/ac/ax 40); 1 channels for U-NII-3(ac/ax 80);	
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client	

Product Description	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection
	Support TPC	☐ YES ☒ NO
	Antenna Type	Antenna 1: PIFA Antenna Antenna 2: PIFA Antenna
	Antenna Gain	5.2G Antenna 1: 3.38 dBi; Antenna 2: 3.89 dBi 5.3G Antenna 1: 2.87 dBi; Antenna 2: 3.43 dBi 5.6G Antenna 1: 3.80 dBi; Antenna 2: 4.64 dBi 5.8G Antenna 1: 4.53 dBi; Antenna 2: 4.89dBi
	Smart system	☒ SISO for 802.11a/n/ac/ax ☒ MIMO for 802.11n/ac/ax
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		
Adapter1	Model: A948-200G50W-B31 Input: 100-240V~50/60Hz 4.5A Output: 20V---16.5A 330.0W	
Adapter2	Model: A621-2001400W-B31 Input: 100-240V~50/60Hz 4.0A Output: 20V---14A 280.0W	
Adapter3	Model: A775-195B80W-B31 Input: 100-240V~50/60Hz 3.0A Output: 19.5V---11.8A 230.1W	
Battery	DC 15.56V, 6143mAh, 95.6Wh	
Rating(s)	DC 15.56V from battery or DC 20V or DC 19.5V from adapter	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	A55B1_MB, R55B2C_MB	
SW Version	Windows 11	

for 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a/n/ac/ax	1TX, 1RX
802.11n/ac/ax	1TX/2TX, 1RX/2RX

For 5GHz mode, antennas 1 and 2 are transmitting, each with a different directional gain.

For MIMO mode,

Directional gain= $[10\log(10^{G1/20}+10^{G2/20})^2/N_{ANT}]$ dBi

5.2GWiFi=6.65dBi >6.0 dBi; 5.3GWiFi=6.66dBi >6.0 dBi;

5.6GWiFi=7.24dBi >6.0 dBi; 5.8GWiFi=7.72dBi >6.0 dBi;

5150-525MHz: Power limit reduce (6.65-6)=0.65dB

5250-5350MHz: Power limit reduce (6.66-6)=0.66dB

5470-5725MHz: Power limit reduce (7.24-6)=1.24dB

5725-5850MHz: Power limit reduce (7.72-6)=1.72dB

the 802.11n/(20/40) ac/ax(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.

G2 means antenna gain for ANT 2 in dBi.

N_{ANT} means the number of Antennas.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz		80MHz		160MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz	50	5250 MHz
	40	5200 MHz	46	5230 MHz	-	-	-	-
	44	5220 MHz						
	48	5240 MHz						
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz	50	5250 MHz
	56	5280 MHz	62	5310 MHz				
	60	5300 MHz						
	64	5320 MHz						
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz	114	5570 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz		
	108	5540 MHz	118	5590 MHz				
	112	5560 MHz	126	5630 MHz				
	116	5580 MHz	134	5670 MHz				
	120	5600 MHz						
	124	5620 MHz						
	128	5640 MHz						
	132	5660 MHz						
	136	5680 MHz						
	140	5700 MHz						
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz		
	153	5765 MHz	159	5795 MHz				
	157	5785 MHz						
	161	5805 MHz						
	165	5825 MHz						

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac/ax 20 CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165 for SISO&MIMO
Mode 3	802.11n/ac/ax 40 CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159 for SISO&MIMO
Mode 4	802.11ac/ax80 CH42/CH58/CH106/CH122/CH155
Mode 5	802.11ac/ax 160 CH 50 802.11ac/ax 160 CH 114 for SISO&MIMO


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac/ax 20 CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165 for SISO&MIMO
Mode 3	802.11n/ac/ax 40 CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159 for SISO&MIMO
Mode 4	802.11ac/ax80 CH42/CH58/CH106/CH122/CH155
Mode 5	802.11ac/ax 160 CH 50 802.11ac/ax 160 CH 114 for SISO&MIMO

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) 802.11ax supports only full RU.
- (4) There are a total of two motherboards, namely A55B1_MB motherboard and R55B2C_MB motherboard. Both motherboards have undergone testing and evaluation. But the report will only show the worst data.

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

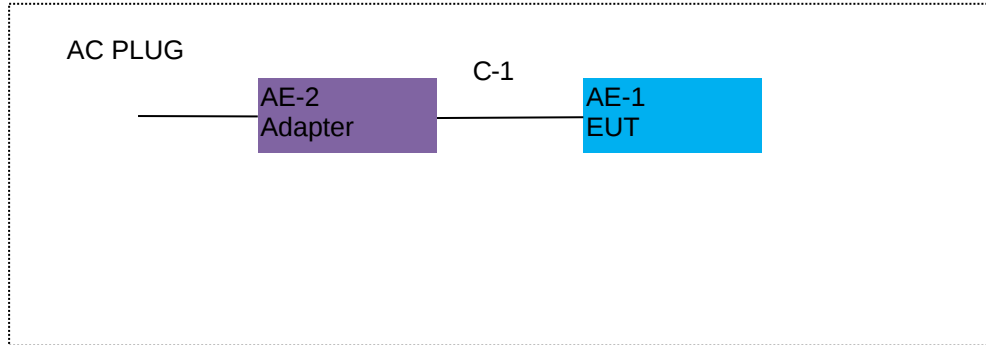

For Radiated Test Cases

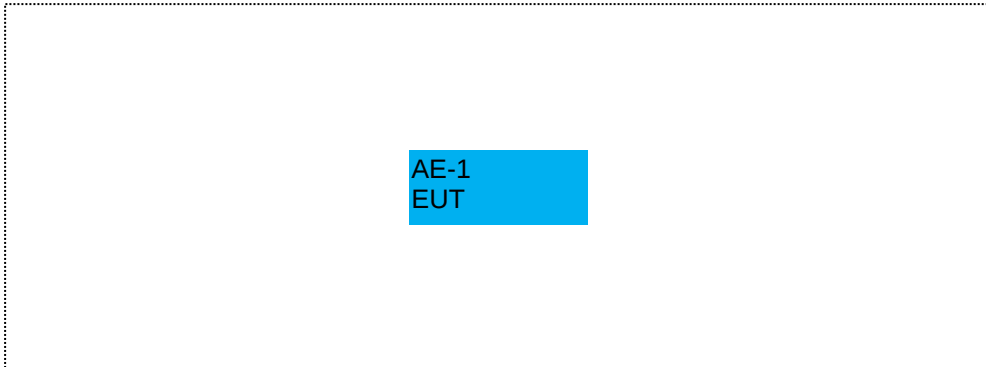

For Conducted Test Cases

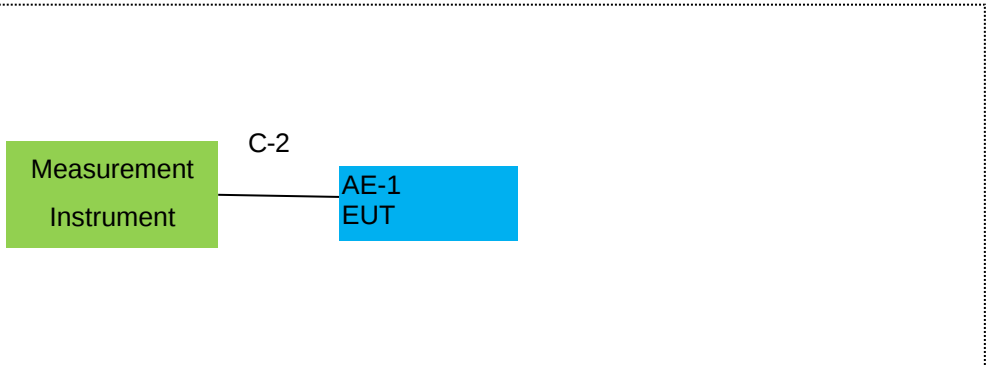

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Manufacturer	Model/Type No.	Series No.	Note
AE-1	Notebook	Qingdao THUNDERBOT Technology Co.,Ltd.	ZERO 18 Pro	N/A	EUT
			ZERO 18	N/A	
AE-2	Adapter	Dongguan Aohai Technology Co., Ltd.	A948-200G50W-B31	N/A	Peripherals
AE-2	Adapter	Dongguan Aohai Technology Co., Ltd.	A621-2001400W-B3 1	N/A	Peripherals
AE-2	Adapter	Dongguan Aohai Technology Co., Ltd.	A775-195B80W-B31	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	1.0m
C-2	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.04.26	2025.04.25	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024.04.25	2025.04.24	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2024.04.25	2025.04.24	1 year
4	Test Receiver	R&S	ESPI7	101318	2024.04.26	2025.04.25	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12	2025.05.11	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2024.04.25	2025.04.24	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	MWRFTest	MW100-PD	MW2021043	2024.12.15	2025.12.14	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2023.05.06	2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2023.05.06	2026.05.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
17	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2024.04.25	2025.04.24	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
2	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.04.25	2025.04.24	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

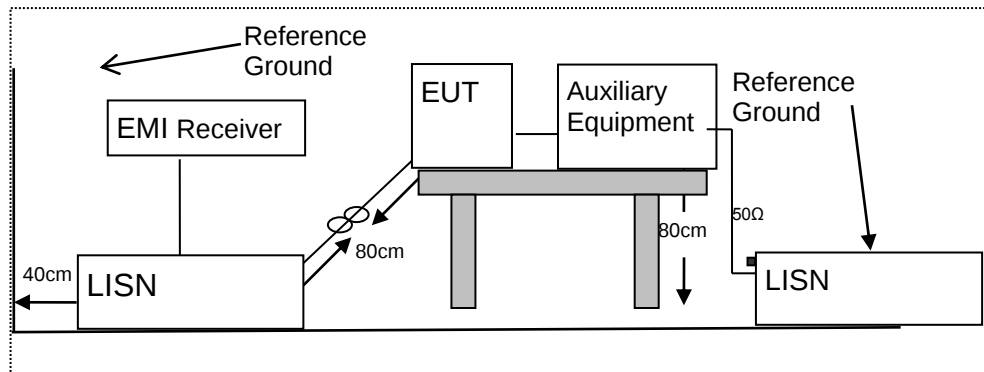

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

2.1.5 TEST RESULTS


EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	24 °C	Relative Humidity :	46%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 20V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5G)

Adapter1:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2442	39.03	10.08	49.11	61.95	-12.84	QP
0.2442	30.74	10.08	40.82	51.95	-11.13	AVG
0.3083	36.32	10.21	46.53	60.02	-13.49	QP
0.3083	29.26	10.21	39.47	50.02	-10.55	AVG
0.5180	31.04	10.66	41.70	56.00	-14.30	QP
0.5180	23.62	10.66	34.28	46.00	-11.72	AVG
0.7260	30.67	11.09	41.76	56.00	-14.24	QP
0.7220	17.41	11.07	28.48	46.00	-17.52	AVG
5.4460	33.28	9.72	43.00	60.00	-17.00	QP
5.4620	22.11	9.72	31.83	50.00	-18.17	AVG
7.2020	37.87	9.75	47.62	60.00	-12.38	QP
7.2020	17.95	9.75	27.70	50.00	-22.30	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

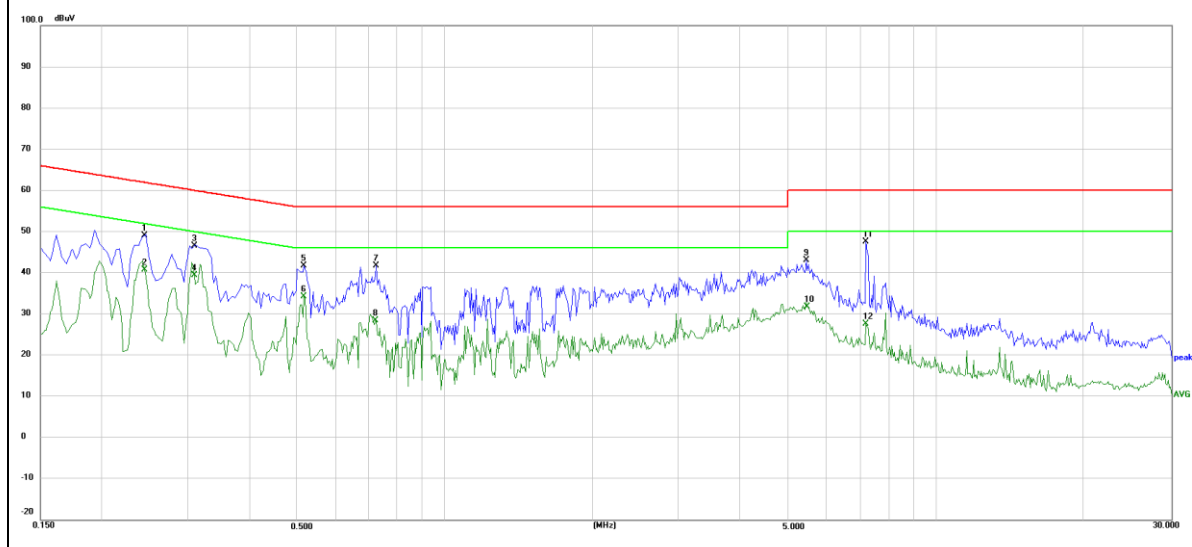


EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	24 °C	Relative Humidity :	46%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 20V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2020	41.94	9.99	51.93	63.53	-11.60	QP
0.1996	33.07	9.99	43.06	53.63	-10.57	AVG
0.2430	41.08	10.08	51.16	61.99	-10.83	QP
0.2430	32.88	10.08	42.96	51.99	-9.03	AVG
0.3116	37.91	10.21	48.12	59.93	-11.81	QP
0.3116	31.74	10.21	41.95	49.93	-7.98	AVG
0.7100	32.72	11.05	43.77	56.00	-12.23	QP
0.7100	17.66	11.05	28.71	46.00	-17.29	AVG
3.4820	38.23	9.70	47.93	56.00	-8.07	QP
3.4980	16.76	9.70	26.46	46.00	-19.54	AVG
7.3740	38.88	9.75	48.63	60.00	-11.37	QP
7.4340	13.55	9.75	23.30	50.00	-26.70	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

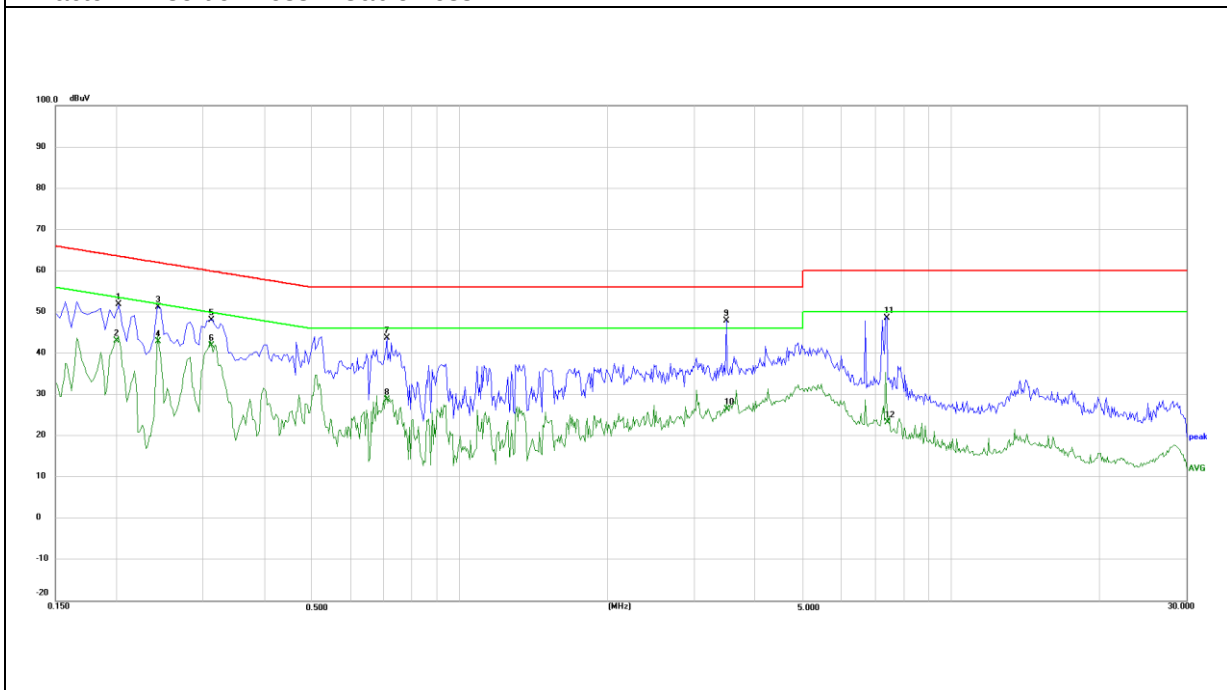


EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	24 °C	Relative Humidity :	46%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 20V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5G)

Adapter2:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1940	42.37	10.19	52.56	63.86	-11.30	QP
0.1940	31.63	10.19	41.82	53.86	-12.04	AVG
0.3020	42.17	10.46	52.63	60.19	-7.56	QP
0.3020	31.10	10.46	41.56	50.19	-8.63	AVG
0.4860	37.15	10.75	47.90	56.24	-8.34	QP
0.4860	25.48	10.75	36.23	46.24	-10.01	AVG
0.6980	30.70	11.17	41.87	56.00	-14.13	QP
0.6980	17.58	11.17	28.75	46.00	-17.25	AVG
5.9620	29.25	9.77	39.02	60.00	-20.98	QP
5.9620	18.82	9.77	28.59	50.00	-21.41	AVG
22.2099	29.58	9.95	39.53	60.00	-20.47	QP
22.2099	16.64	9.95	26.59	50.00	-23.41	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

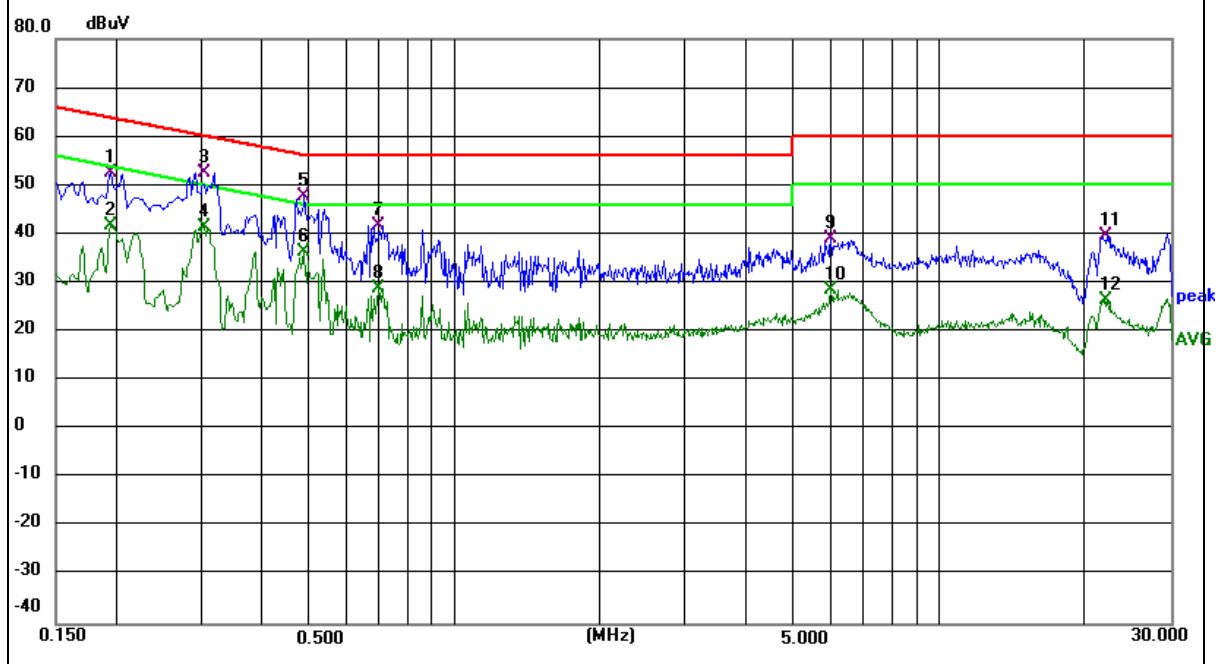


EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	24 °C	Relative Humidity :	46%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 20V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1900	40.62	10.14	50.76	64.04	-13.28	QP
0.1900	32.18	10.14	42.32	54.04	-11.72	AVG
0.2819	40.40	10.43	50.83	60.76	-9.93	QP
0.2819	31.59	10.43	42.02	50.76	-8.74	AVG
0.4460	33.71	10.59	44.30	56.95	-12.65	QP
0.4460	24.88	10.59	35.47	46.95	-11.48	AVG
5.9620	28.45	9.72	38.17	60.00	-21.83	QP
5.9620	18.99	9.72	28.71	50.00	-21.29	AVG
21.7700	30.82	10.03	40.85	60.00	-19.15	QP
21.7700	17.22	10.03	27.25	50.00	-22.75	AVG
29.4780	32.30	10.14	42.44	60.00	-17.56	QP
29.4780	17.21	10.14	27.35	50.00	-22.65	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

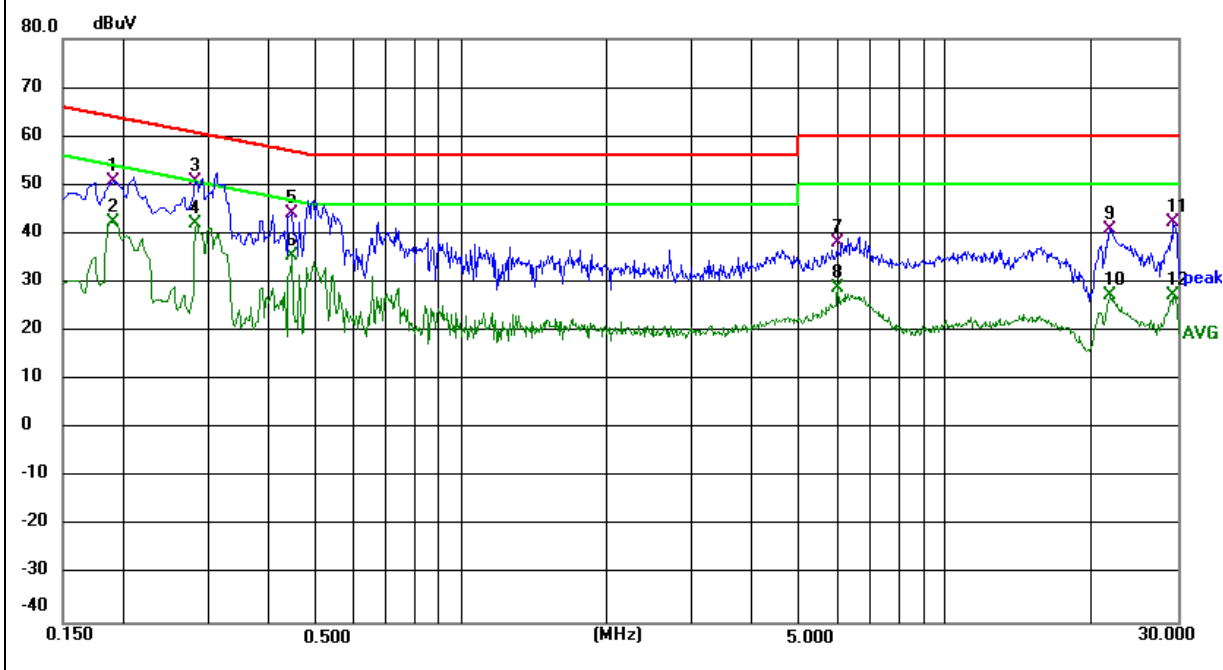


EUT :	Notebook	Model Name. :	ZERO 18
Temperature :	24 °C	Relative Humidity :	46%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 20V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5G)

Adapter3:

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1944	35.99	10.02	46.01	63.85	-17.84	QP
0.1944	12.97	10.02	22.99	53.85	-30.86	AVG
0.3060	31.94	10.27	42.21	60.08	-17.87	QP
0.3060	24.26	10.27	34.53	50.08	-15.55	AVG
0.9980	22.26	11.68	33.94	56.00	-22.06	QP
0.9980	0.18	11.68	11.86	46.00	-34.14	AVG
2.1740	28.04	9.69	37.73	56.00	-18.27	QP
2.1740	12.16	9.69	21.85	46.00	-24.15	AVG
5.1459	26.15	9.73	35.88	60.00	-24.12	QP
5.1459	9.88	9.73	19.61	50.00	-30.39	AVG
14.5099	19.69	10.06	29.75	60.00	-30.25	QP
14.5099	4.15	10.06	14.21	50.00	-35.79	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

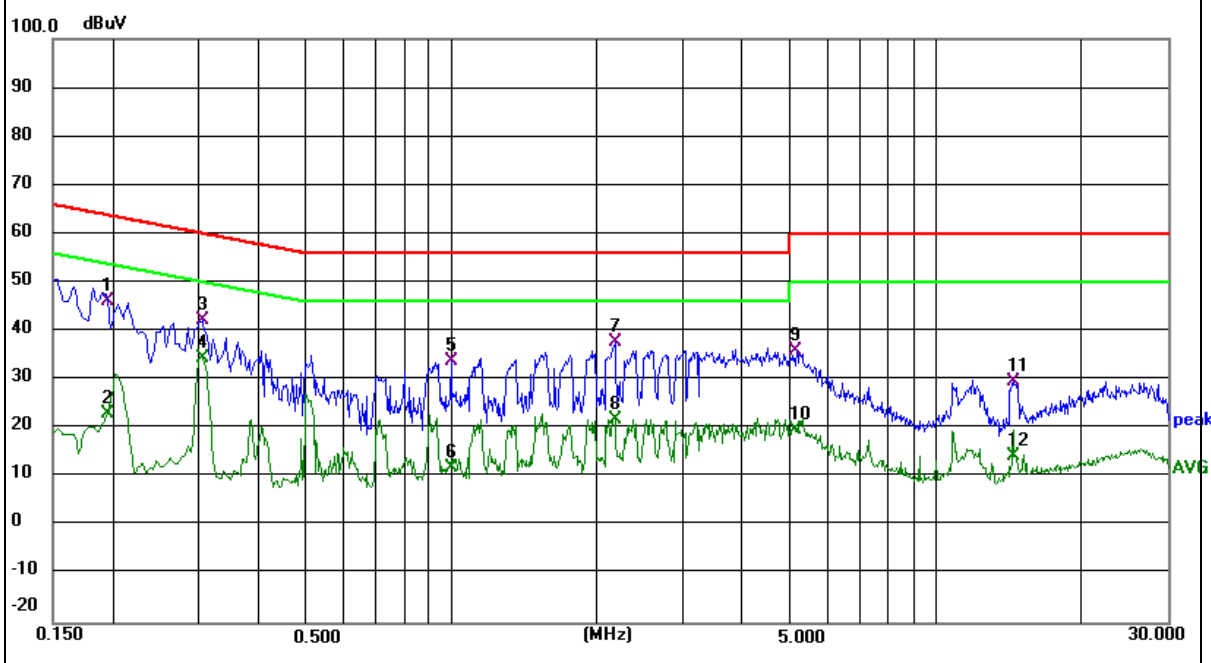


EUT :	Notebook	Model Name. :	ZERO 18
Temperature :	24 °C	Relative Humidity :	46%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 20V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1780	39.46	9.94	49.40	64.58	-15.18	QP
0.1780	21.14	9.94	31.08	54.58	-23.50	AVG
0.3060	33.15	10.22	43.37	60.08	-16.71	QP
0.3060	23.83	10.22	34.05	50.08	-16.03	AVG
0.7260	24.51	11.19	35.70	56.00	-20.30	QP
0.7260	7.29	11.19	18.48	46.00	-27.52	AVG
1.1300	21.81	11.94	33.75	56.00	-22.25	QP
1.1300	8.51	11.94	20.45	46.00	-25.55	AVG
5.0860	23.74	9.73	33.47	60.00	-26.53	QP
5.0860	8.27	9.73	18.00	50.00	-32.00	AVG
14.5420	18.28	10.09	28.37	60.00	-31.63	QP
14.5420	4.58	10.09	14.67	50.00	-35.33	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

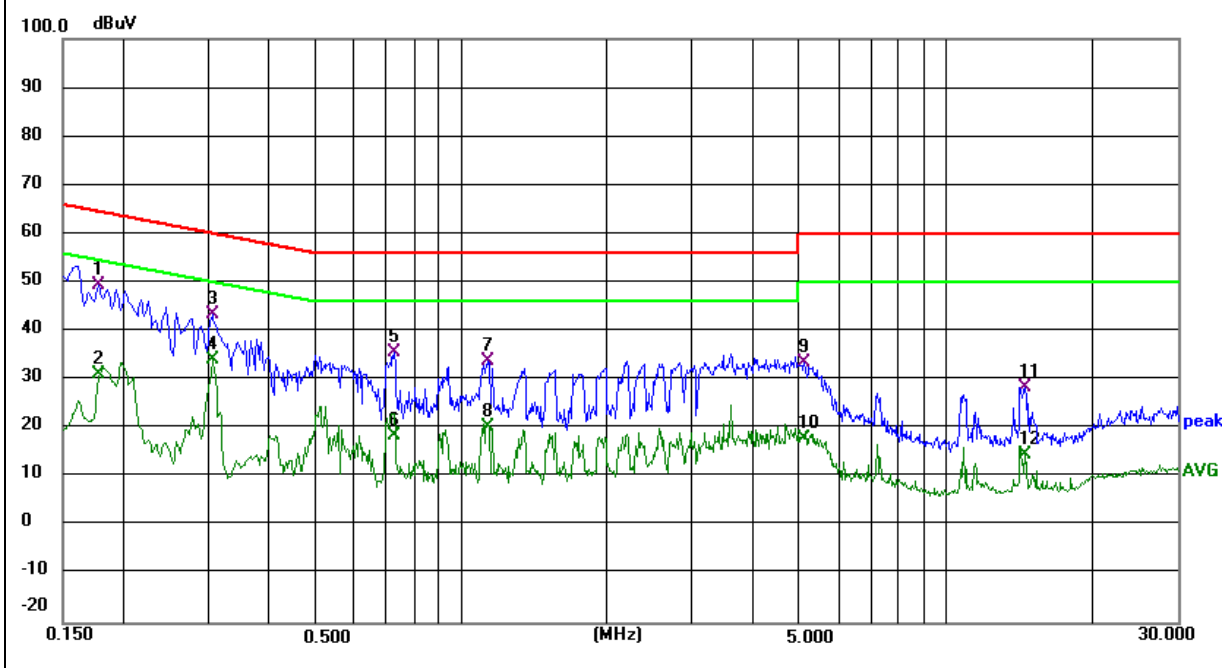

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

According to FCC §15.407(b)

For bands:5150~5250MHz

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For bands:5250~5350MHz

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or

All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text "for indoor use only."

For bands: 5470-5600 MHz and 5650-5725 MHz

Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

For bands:5725~5850MHz

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;

15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and


-27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

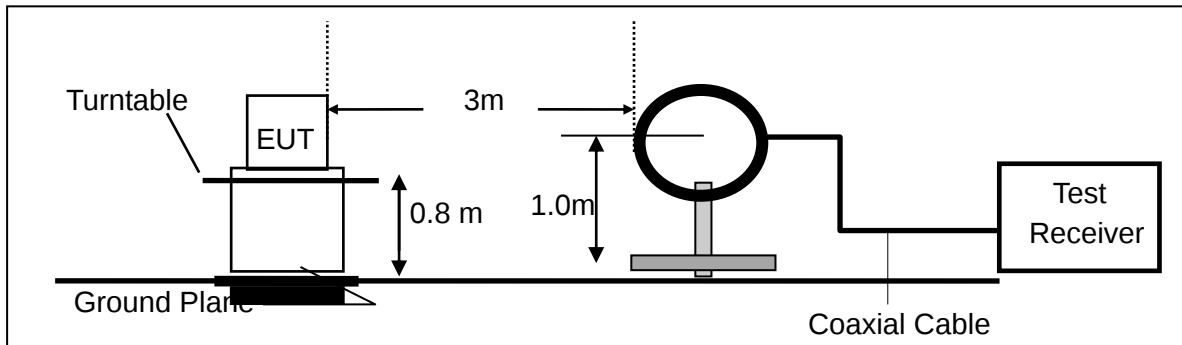

(b) For radiated emissions from 30MHz to 1000MHz

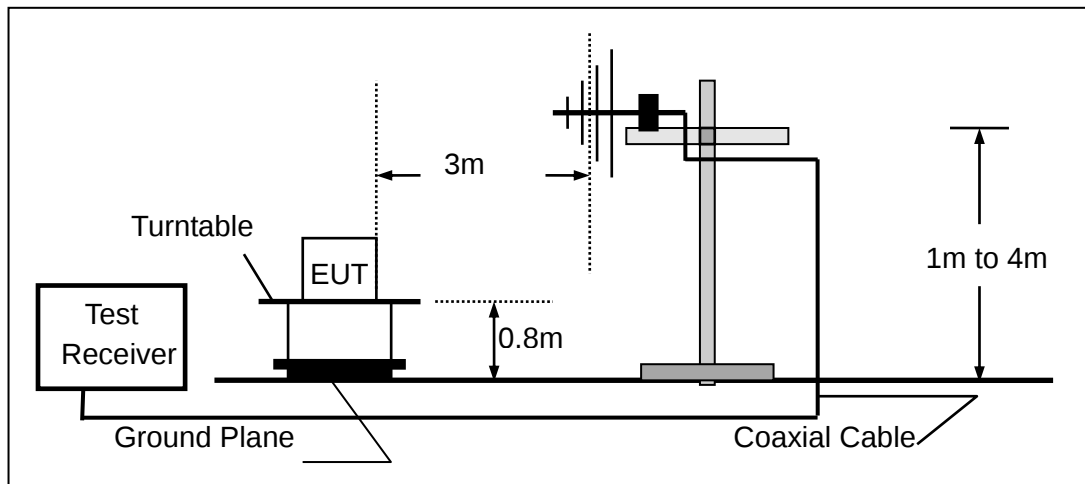

(c) For radiated emissions above 1000MHz

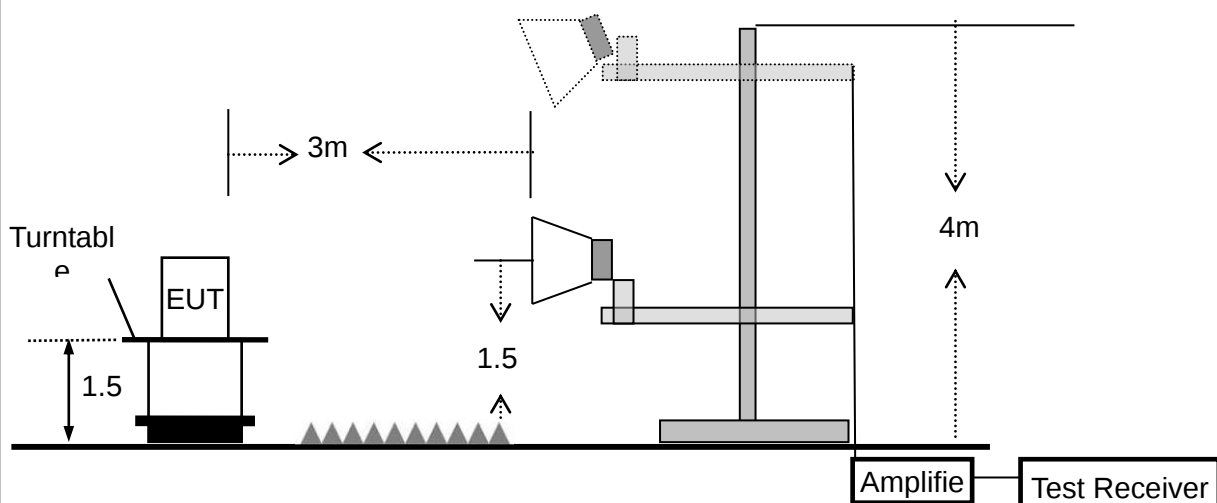

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX(WIFI 5G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	181.9202	19.75	16.36	36.11	43.50	-7.39	QP
V	215.2678	18.46	18.25	36.71	43.50	-6.79	QP
V	264.7457	18.63	19.75	38.38	46.00	-7.62	QP
V	345.5952	18.94	21.75	40.69	46.00	-5.31	QP
V	866.0880	9.68	30.58	40.26	46.00	-5.74	QP
V	986.0716	8.74	31.66	40.40	54.00	-13.60	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

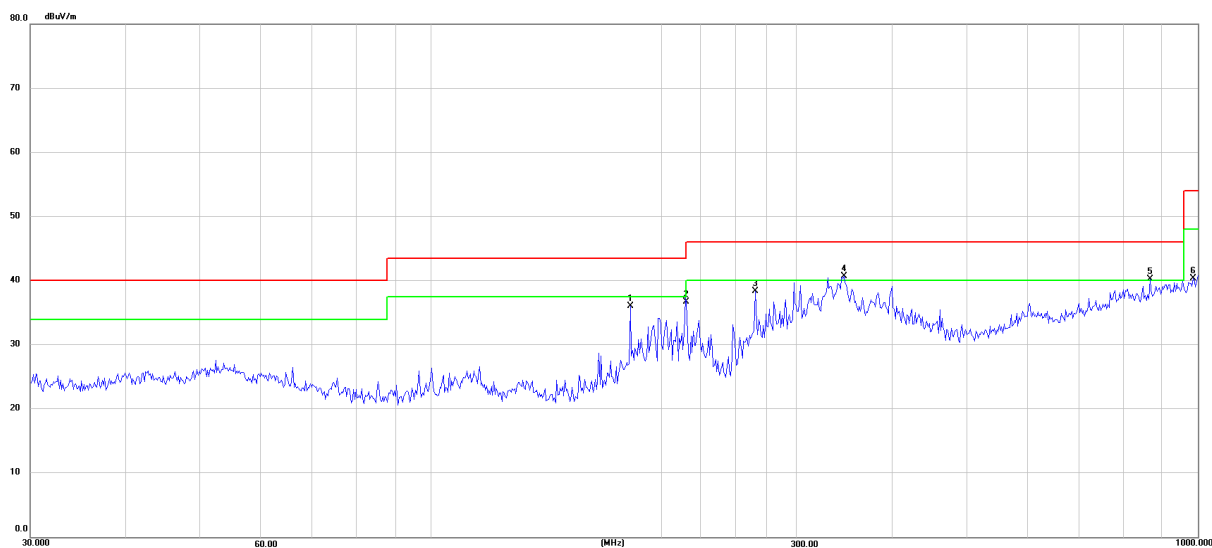

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	182.5592	12.57	16.43	29.00	43.50	-14.50	QP
H	231.7178	16.06	18.85	34.91	46.00	-11.09	QP
H	264.7457	21.11	19.75	40.86	46.00	-5.14	QP
H	330.1948	21.27	21.22	42.49	46.00	-3.51	QP
H	893.8566	11.92	30.99	42.91	46.00	-3.09	QP
H	935.5463	12.48	31.25	43.73	46.00	-2.27	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

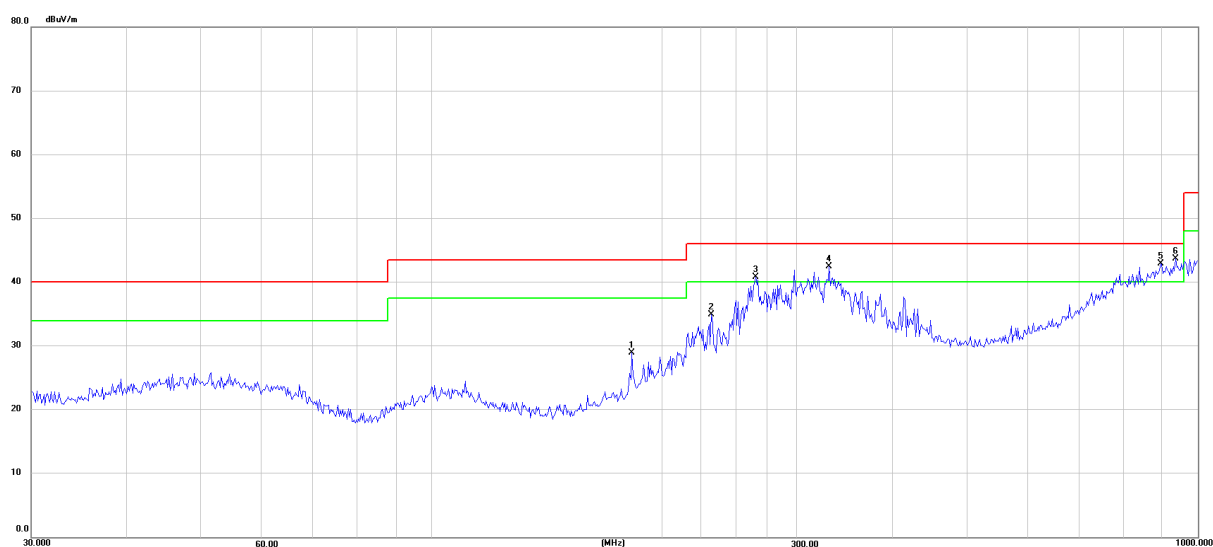


EUT :	Notebook	Model Name :	ZERO 18
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX(WIFI 5G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.7986	19.74	17.06	36.80	40.00	-3.20	QP
V	58.2030	15.74	19.21	34.95	40.00	-5.05	QP
V	185.1379	16.86	16.97	33.83	43.50	-9.67	QP
V	331.3546	17.12	21.28	38.40	46.00	-7.60	QP
V	625.0780	13.94	26.69	40.63	46.00	-5.37	QP
V	790.6188	14.62	29.12	43.74	46.00	-2.26	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

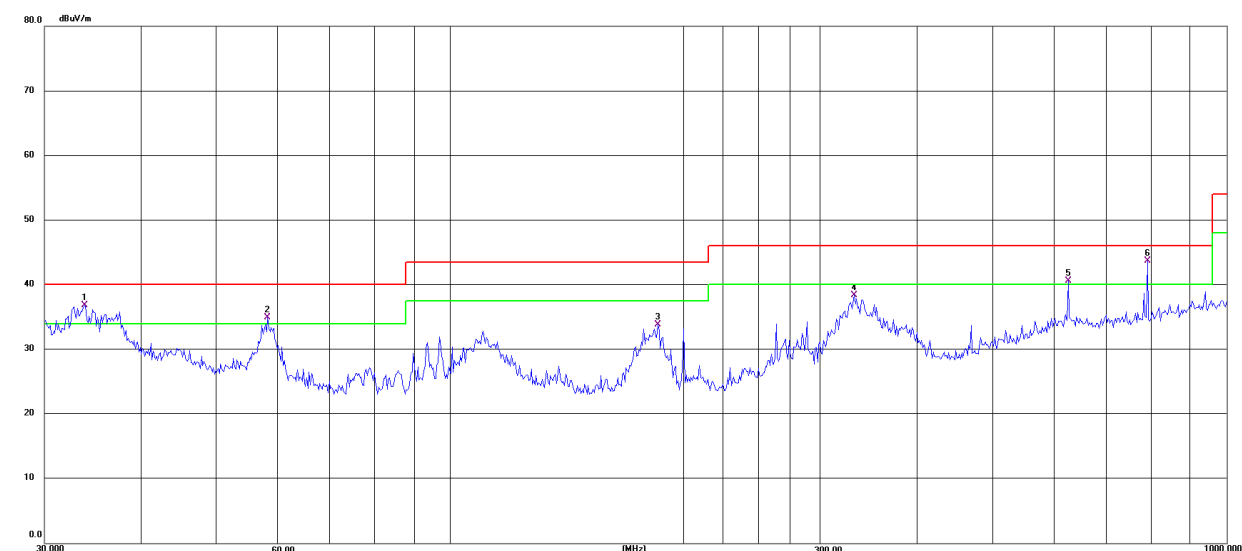

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	58.6126	12.62	19.17	31.79	40.00	-8.21	QP
H	78.6888	15.19	13.98	29.17	40.00	-10.83	QP
H	262.8955	14.12	19.68	33.80	46.00	-12.20	QP
H	312.1794	17.82	20.40	38.22	46.00	-7.78	QP
H	625.0780	16.27	26.69	42.96	46.00	-3.04	QP
H	790.6186	13.49	29.11	42.60	46.00	-3.40	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

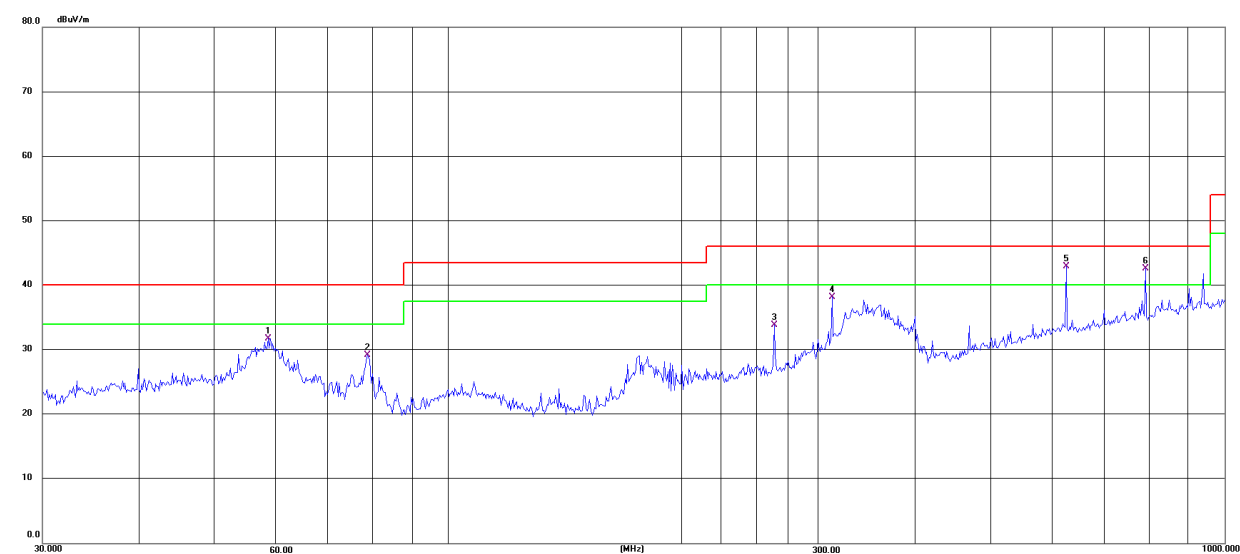

Note: All modes have been tested, just the worst mode has been recorded in the report.

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX(5.2G) - 802.11ax20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3694.94	68.49	3.25	30.50	43.23	59.01	74.00	-14.99	Pk
Vertical	3694.94	49.51	3.25	30.50	43.23	40.03	54.00	-13.97	AV
Vertical	10361.06	61.10	5.62	38.96	43.41	62.26	68.20	-5.94	Pk
Vertical	15540.75	60.67	7.54	38.98	41.24	65.95	74.00	-8.05	Pk
Vertical	15540.75	40.63	7.54	38.98	41.24	45.91	54.00	-8.09	AV
Horizontal	3743.60	69.04	3.26	31.12	43.23	60.20	74.00	-13.80	Pk
Horizontal	3743.60	50.53	3.26	31.12	43.23	41.69	54.00	-12.31	AV
Horizontal	10361.46	61.12	5.62	38.96	43.41	62.28	68.20	-5.92	Pk
Horizontal	15540.89	56.24	7.54	38.98	41.24	61.52	74.00	-12.48	Pk
Horizontal	15540.89	39.89	7.54	38.98	41.24	45.17	54.00	-8.83	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	3625.17	67.45	3.22	30.26	43.24	57.69	74.00	-16.31	Pk
Vertical	3625.17	51.75	3.22	30.26	43.24	41.99	54.00	-12.01	AV
Vertical	10401.37	60.32	5.64	38.81	43.40	61.36	68.20	-6.84	Pk
Vertical	15601.94	59.75	7.55	39.09	41.19	65.20	74.00	-8.80	Pk
Vertical	15601.94	40.69	7.55	39.09	41.19	46.14	54.00	-7.86	AV
Horizontal	4203.32	64.62	3.45	32.31	43.22	57.16	74.00	-16.84	Pk
Horizontal	4203.32	51.09	3.45	32.31	43.22	43.63	54.00	-10.37	AV
Horizontal	10401.18	63.83	5.64	38.81	43.40	64.87	68.20	-3.33	Pk
Horizontal	15601.37	59.03	7.55	39.09	41.19	64.48	74.00	-9.52	Pk
Horizontal	15601.37	40.81	7.55	39.09	41.19	46.26	54.00	-7.74	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4600.25	72.25	3.67	32.30	43.26	64.96	74.00	-9.04	Pk
Vertical	4600.25	51.80	3.67	32.30	43.26	44.51	54.00	-9.49	AV
Vertical	10482.84	60.55	5.68	39.21	43.38	62.06	68.20	-6.14	Pk
Vertical	15723.01	61.21	7.56	38.22	41.09	65.90	74.00	-8.10	Pk
Vertical	15723.01	41.85	7.56	38.22	41.09	46.54	54.00	-7.46	AV
Horizontal	4591.74	69.53	3.67	32.37	43.26	62.31	74.00	-11.69	Pk
Horizontal	4591.74	50.07	3.67	32.37	43.26	42.85	54.00	-11.15	AV
Horizontal	10482.25	63.61	5.68	39.21	43.38	65.12	68.20	-3.08	Pk
Horizontal	15721.85	59.37	7.56	38.22	41.09	64.06	74.00	-9.94	Pk
Horizontal	15721.85	42.93	7.56	38.22	41.09	47.62	54.00	-6.38	AV

Note:"802.11ax20 (5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX(5.3G) - 802.11ax20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4635.04	48.38	3.69	32.58	43.26	41.38	74.00	-32.62	Pk
Vertical	4635.04	39.79	3.69	32.58	43.26	32.79	54.00	-21.21	AV
Vertical	10521.45	62.21	5.70	39.49	43.37	64.03	68.20	-4.17	Pk
Vertical	15782.27	52.93	7.56	38.28	41.04	57.74	74.00	-16.26	Pk
Vertical	15782.27	41.65	7.56	38.28	41.04	46.46	54.00	-7.54	AV
Horizontal	4367.52	49.06	3.54	32.83	43.24	42.19	74.00	-31.81	Pk
Horizontal	4367.52	40.93	3.54	32.83	43.24	34.06	54.00	-19.94	AV
Horizontal	10521.65	58.15	5.70	39.49	43.37	59.97	68.20	-8.23	Pk
Horizontal	15782.17	40.37	7.56	38.28	41.04	45.18	74.00	-28.82	Pk
Horizontal	15782.17	40.56	7.56	38.28	41.04	45.37	54.00	-8.63	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4123.20	66.52	3.41	31.55	43.21	58.26	74.00	-15.74	Pk
Vertical	4123.20	51.12	3.41	31.55	43.21	42.86	54.00	-11.14	AV
Vertical	10562.13	60.36	5.72	39.85	43.36	62.57	68.20	-5.63	Pk
Vertical	15841.27	62.48	7.57	38.26	40.99	67.32	74.00	-6.68	Pk
Vertical	15841.27	42.34	7.57	38.26	40.99	47.18	54.00	-6.82	AV
Horizontal	3871.30	66.61	3.30	31.52	43.21	58.22	74.00	-15.78	Pk
Horizontal	3871.30	54.56	3.30	31.52	43.21	46.17	54.00	-7.83	AV
Horizontal	10561.54	56.14	5.72	39.85	43.36	58.35	68.20	-9.85	Pk
Horizontal	15841.99	60.90	7.57	38.26	40.98	65.74	74.00	-8.26	Pk
Horizontal	15841.99	40.75	7.57	38.26	40.98	45.59	54.00	-8.41	AV
High Channel (5320 MHz)-Above 1G									
Vertical	5368.09	69.78	3.94	33.77	43.23	64.27	74.00	-9.73	Pk
Vertical	5368.09	51.32	3.94	33.77	43.23	45.81	54.00	-8.19	AV
Vertical	10642.13	61.72	5.75	39.87	43.34	64.00	74.00	-10.00	Pk
Vertical	10642.13	41.48	5.75	39.87	43.34	43.76	54.00	-10.24	AV
Vertical	15960.95	60.63	7.58	38.56	40.88	65.89	74.00	-8.11	Pk
Vertical	15960.95	40.15	7.58	38.56	40.88	45.41	54.00	-8.59	AV
Horizontal	5437.78	68.53	3.95	34.27	43.21	63.54	74.00	-10.46	Pk
Horizontal	5437.78	48.36	3.95	34.27	43.21	43.37	54.00	-10.63	AV
Horizontal	10642.26	62.14	5.75	39.87	43.34	64.42	74.00	-9.58	Pk
Horizontal	10642.26	44.27	5.75	39.87	43.34	46.55	54.00	-7.45	AV
Horizontal	15961.73	60.12	7.58	38.57	40.88	65.38	74.00	-8.62	Pk
Horizontal	15961.73	43.35	7.58	38.57	40.88	48.61	54.00	-5.39	AV

Note: ANT 1 802.11ax20 (5.3G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX(5.6G) - 802.11ac40 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5433.44	67.32	3.95	34.23	43.21	62.29	74.00	-11.71	Pk
Vertical	5433.44	48.55	3.95	34.23	43.21	43.52	54.00	-10.48	AV
Vertical	11001.34	61.20	5.93	40.50	43.25	64.38	74.00	-9.62	Pk
Vertical	11001.34	43.05	5.93	40.50	43.25	46.23	54.00	-7.77	AV
Vertical	16501.56	49.14	7.79	39.60	40.42	56.11	68.20	-12.09	Pk
Horizontal	5127.11	63.07	3.91	34.18	43.27	57.89	74.00	-16.11	Pk
Horizontal	5127.11	45.65	3.91	34.18	43.27	40.47	54.00	-13.53	AV
Horizontal	11001.35	57.79	5.93	40.50	43.25	60.97	74.00	-13.03	Pk
Horizontal	11001.35	40.77	5.93	40.50	43.25	43.95	54.00	-10.05	AV
Horizontal	16500.95	54.76	7.79	39.60	40.42	61.73	68.20	-6.47	Pk
Middle Channel (5600 MHz)-Above 1G									
Vertical	4934.52	68.09	3.85	34.03	43.29	62.68	74.00	-11.32	Pk
Vertical	4934.52	48.83	3.85	34.03	43.29	43.42	54.00	-10.58	AV
Vertical	11201.82	61.36	6.04	39.21	43.20	63.41	74.00	-10.59	Pk
Vertical	11201.82	44.90	6.04	39.21	43.20	46.95	54.00	-7.05	AV
Vertical	16801.88	57.20	7.92	39.49	40.17	64.44	68.20	-3.76	Pk
Horizontal	4768.16	66.23	3.76	33.14	43.28	59.86	74.00	-14.14	Pk
Horizontal	4768.16	49.06	3.76	33.14	43.28	42.69	54.00	-11.31	AV
Horizontal	11201.61	62.14	6.04	39.21	43.20	64.19	74.00	-9.81	Pk
Horizontal	11201.61	44.18	6.04	39.21	43.20	46.23	54.00	-7.77	AV
Horizontal	16801.91	55.53	7.92	39.49	40.17	62.77	68.20	-5.43	Pk
High Channel (5700 MHz)-Above 1G									
Vertical	5648.97	67.40	3.98	34.79	43.17	63.00	68.20	-5.20	Pk
Vertical	11401.67	58.81	6.15	39.90	43.15	61.71	74.00	-12.29	Pk
Vertical	11401.67	41.34	6.15	39.90	43.15	44.24	54.00	-9.76	AV
Vertical	17101.92	53.93	8.03	39.40	40.08	61.27	68.20	-6.93	Pk
Horizontal	5433.76	66.53	3.95	34.24	43.21	61.51	74.00	-12.49	Pk
Horizontal	5433.76	47.51	3.95	34.24	43.21	42.49	54.00	-11.51	AV
Horizontal	11401.59	59.72	6.15	39.89	43.15	62.61	74.00	-11.39	Pk
Horizontal	11401.59	42.18	6.15	39.89	43.15	45.07	54.00	-8.93	AV
Horizontal	17101.15	56.30	8.03	39.40	40.08	63.65	68.20	-4.55	Pk

Note:"802.11ac40 MIMO(5.6G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5.8G) -- 802.11ax20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	5123.83	66.13	3.91	34.12	43.28	60.88	74.00	-13.12	Pk
Vertical	5123.83	47.76	3.91	34.12	43.28	42.51	54.00	-11.49	AV
Vertical	11491.81	60.85	6.20	39.44	43.13	63.37	74.00	-10.63	Pk
Vertical	11491.81	44.61	6.20	39.44	43.13	47.13	54.00	-6.87	AV
Vertical	17236.89	49.97	8.07	39.38	40.20	57.23	68.20	-10.97	Pk
Horizontal	5167.46	61.47	3.91	34.43	43.27	56.55	68.20	-11.65	Pk
Horizontal	11491.40	59.90	6.20	39.44	43.13	62.42	74.00	-11.58	Pk
Horizontal	11491.40	42.81	6.20	39.44	43.13	45.33	54.00	-8.67	AV
Horizontal	17236.37	48.76	8.07	39.38	40.20	56.02	68.20	-12.18	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	5134.22	66.08	3.95	34.24	43.21	61.05	74.00	-12.95	Pk
Vertical	5134.22	46.51	3.95	34.24	43.21	41.48	54.00	-12.52	AV
Vertical	11571.72	60.40	6.24	38.90	43.11	62.44	74.00	-11.56	Pk
Vertical	11571.72	43.27	6.24	38.90	43.11	45.31	54.00	-8.69	AV
Vertical	17357.32	53.17	8.11	39.93	40.30	60.91	68.20	-7.29	Pk
Horizontal	4868.25	65.06	3.82	33.39	43.29	58.98	74.00	-15.02	Pk
Horizontal	4868.25	48.19	3.82	33.39	43.29	42.11	54.00	-11.89	AV
Horizontal	11572.12	63.70	6.24	38.90	43.11	65.74	74.00	-8.26	Pk
Horizontal	11572.12	45.06	6.24	38.90	43.11	47.10	54.00	-6.90	AV
Horizontal	17356.32	53.55	8.11	39.92	40.30	61.29	68.20	-6.91	Pk
middle Channel (5825 MHz)-Above 1G									
Vertical	5111.85	68.99	3.92	34.12	43.25	63.78	74.00	-10.22	Pk
Vertical	5111.61	50.52	3.92	34.12	43.09	45.47	54.00	-8.53	Pk
Vertical	11652.23	60.52	6.29	38.80	43.09	62.53	74.00	-11.47	AV
Vertical	11652.23	44.11	6.29	38.80	40.39	48.81	54.00	-5.19	Pk
Vertical	17473.50	55.44	8.15	40.98	40.39	64.17	68.20	-4.03	Pk
Horizontal	5119.18	66.75	3.92	34.12	43.25	61.54	74.00	-12.46	Pk
Horizontal	5119.18	47.77	3.92	34.12	43.25	42.56	54.00	-11.44	Pk
Horizontal	11652.60	60.42	6.29	38.80	43.09	62.43	74.00	-11.57	AV
Horizontal	11652.60	45.31	6.29	38.80	43.09	47.31	54.00	-6.69	Pk
Horizontal	17475.98	54.78	8.15	40.98	40.39	63.51	68.20	-4.69	Pk

Note:"802.11ax20 MIMO(5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


2.2.10 TEST RESULTS (18GHz-40GHz)

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5.2G)-802.11ax20 MIMO;TX (5.3G)-802.11ax20 MIMO TX (5.6G)-802.11ac40 MIMO;TX (5.8G)-802.11ax20 MIMO		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G

Horizontal

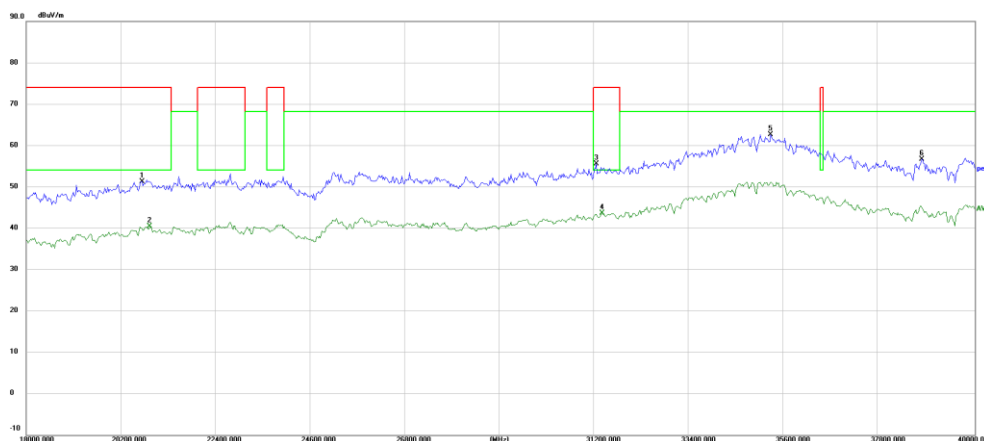

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20707.467	59.93	-8.67	51.26	74.00	-22.74	peak
2	20900.333	49.14	-8.72	40.42	54.00	-13.58	AVG
3	31244.000	61.34	-5.78	55.56	74.00	-18.44	peak
4	31405.333	49.42	-5.73	43.69	54.00	-10.31	AVG
5 *	35304.467	59.82	2.84	62.66	68.20	-5.54	peak
6	38776.800	54.95	1.80	56.75	68.20	-11.45	peak


Vertical

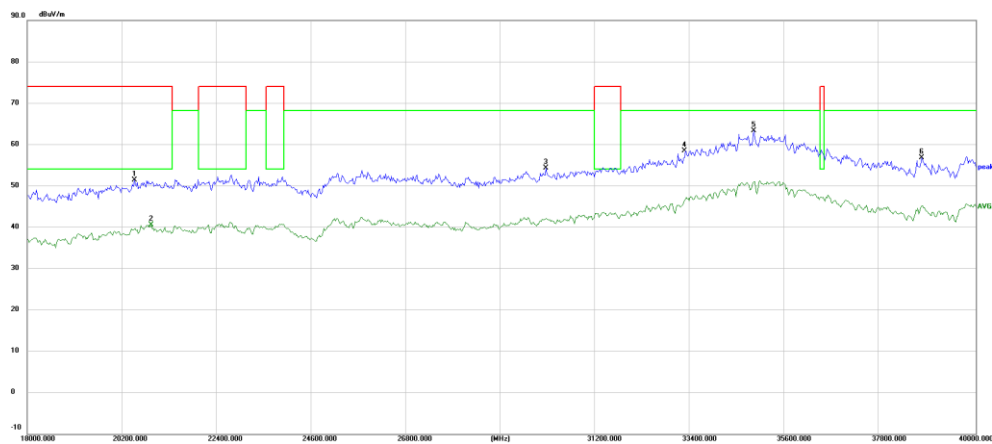

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20503.600	60.13	-8.75	51.38	74.00	-22.62	peak
2	20897.400	49.29	-8.73	40.56	54.00	-13.44	AVG
3	30051.600	61.75	-7.41	54.34	68.20	-13.86	peak
4	33292.933	59.85	-1.33	58.52	68.20	-9.68	peak
5 *	34869.600	59.90	3.40	63.30	68.20	-4.90	peak
6	38770.200	55.04	1.79	56.83	68.20	-11.37	peak


High Channel (5240 MHz)-Above 1G

Horizontal

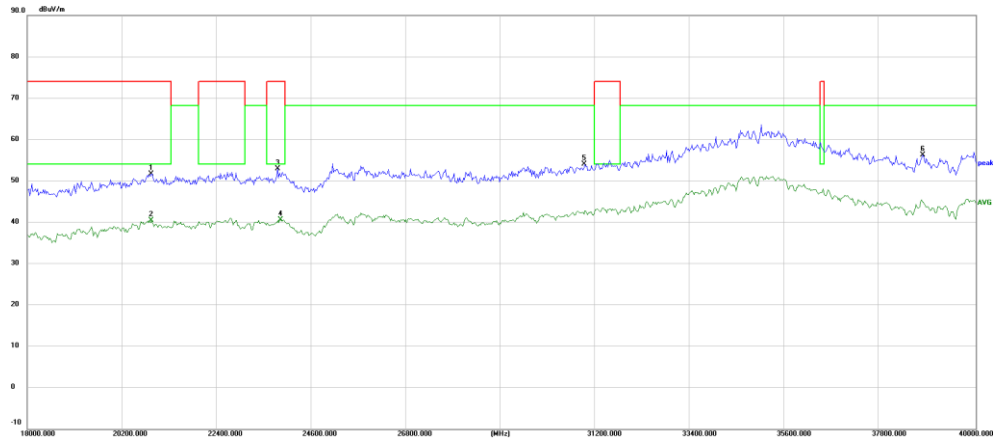

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20906.200	60.41	-8.72	51.69	74.00	-22.31	peak
2	20906.200	49.18	-8.72	40.46	54.00	-13.54	AVG
3	23833.667	59.21	-6.29	52.92	74.00	-21.08	peak
4	23899.667	46.70	-6.10	40.60	54.00	-13.40	AVG
5	30941.133	60.71	-6.69	54.02	68.20	-14.18	peak
6	38787.067	54.49	1.82	56.31	68.20	-11.89	peak

Vertical

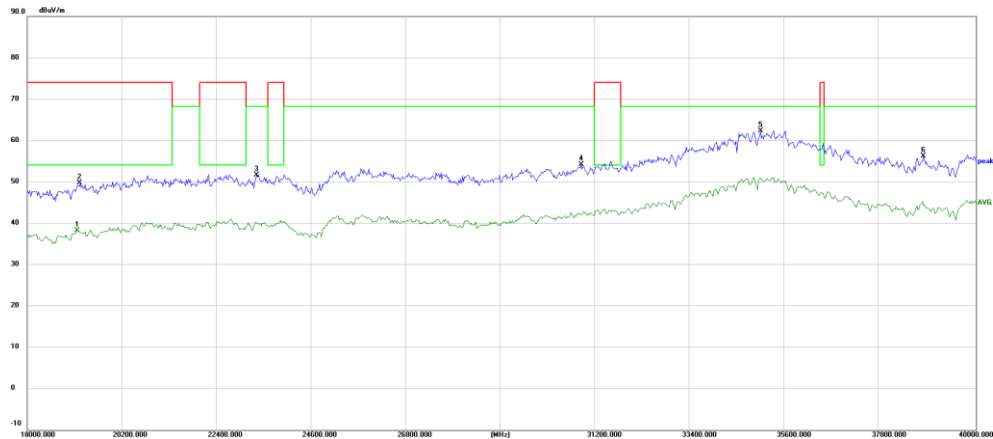


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	19200.467	48.07	-9.75	38.32	54.00	-15.68	AVG
2	19248.133	59.44	-9.74	49.70	74.00	-24.30	peak
3	23346.000	58.79	-7.11	51.68	68.20	-16.52	peak
4	30867.067	60.97	-6.77	54.20	68.20	-14.00	peak
5 *	35028.000	58.63	3.70	62.33	68.20	-5.87	peak
6	38809.067	54.37	1.86	56.23	68.20	-11.97	peak

Note:802.11n20 MIMO mode is the worst mode.

Low Channel (5260 MHz)-Above 1G

Horizontal

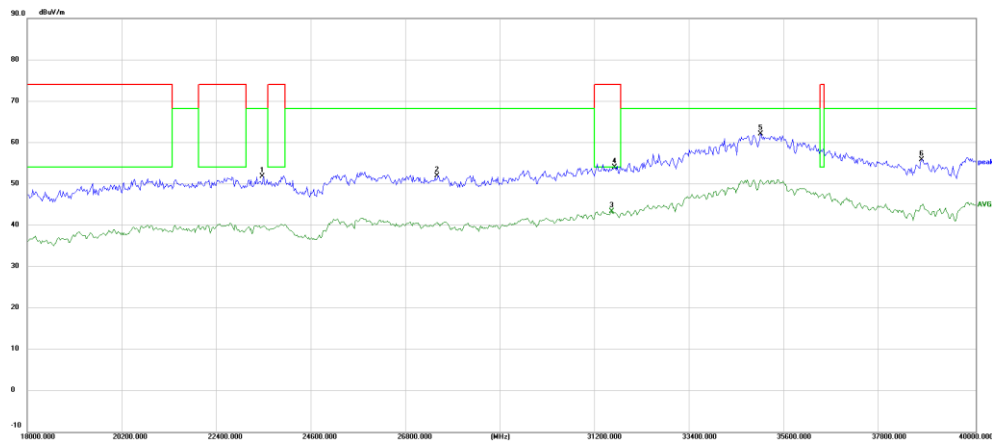

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	23498.533	58.39	-6.55	51.84	68.20	-16.36	peak
2	27546.533	60.30	-8.27	52.03	68.20	-16.17	peak
3	31577.667	48.97	-5.60	43.37	54.00	-10.63	AVG
4	31637.067	59.55	-5.52	54.03	74.00	-19.97	peak
5 *	35034.600	58.43	3.67	62.10	68.20	-6.10	peak
6	38765.800	54.11	1.78	55.89	68.20	-12.31	peak


Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	23969.333	46.36	-5.90	40.46	54.00	-13.54	AVG
2	24044.133	57.19	-5.90	51.29	68.20	-16.91	peak
3	26924.667	60.11	-7.96	52.15	68.20	-16.05	peak
4	30961.667	60.28	-6.67	53.61	68.20	-14.59	peak
5 *	35033.867	59.07	3.67	62.74	68.20	-5.46	peak
6	38789.267	53.89	1.82	55.71	68.20	-12.49	peak

High Channel (5320 MHz)-Above 1G

Horizontal

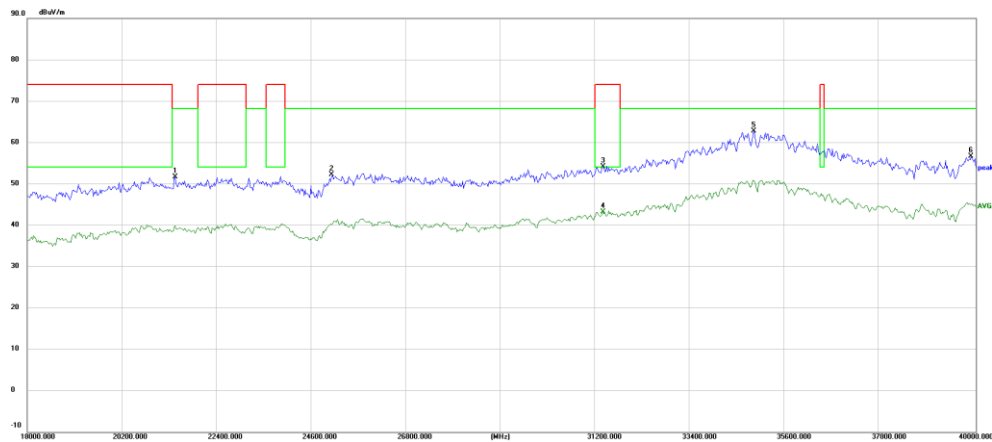

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	21451.067	60.31	-8.60	51.71	68.20	-16.49	peak
2	25113.333	56.15	-3.94	52.21	68.20	-15.99	peak
3	31373.067	59.96	-5.74	54.22	74.00	-19.78	peak
4	31373.067	48.93	-5.74	43.19	54.00	-10.81	AVG
5 *	34876.200	59.32	3.42	62.74	68.20	-5.46	peak
6	39907.600	53.49	3.26	56.75	68.20	-11.45	peak

Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	21449.600	59.12	-8.60	50.52	68.20	-17.68	peak
2	25788.000	58.99	-5.61	53.38	68.20	-14.82	peak
3	31631.200	59.98	-5.52	54.46	74.00	-19.54	peak
4	31611.400	48.15	-5.56	42.59	54.00	-11.41	AVG
5 *	35300.067	59.72	2.84	62.56	68.20	-5.64	peak
6	39792.467	53.47	3.12	56.59	68.20	-11.61	peak

Note:802.11ax20 MIMO mode is the worst mode.

Low Channel (5500 MHz)-Above 1G

Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20688.400	48.53	-8.68	39.85	54.00	-14.15	AVG
2	20813.800	61.52	-8.68	52.84	74.00	-21.16	peak
3	28290.133	60.61	-8.76	51.85	68.20	-16.35	peak
4	32316.867	59.10	-4.15	54.95	68.20	-13.25	peak
5 *	35319.133	59.87	2.82	62.69	68.20	-5.51	peak
6	38786.333	54.43	1.82	56.25	68.20	-11.95	peak


Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20451.533	59.49	-8.89	50.60	74.00	-23.40	peak
2	23937.800	57.57	-5.99	51.58	74.00	-22.42	peak
3	23937.800	46.30	-5.99	40.31	54.00	-13.69	AVG
4	27066.933	60.53	-8.15	52.38	68.20	-15.82	peak
5 *	35033.133	59.06	3.67	62.73	68.20	-5.47	peak
6	38779.000	54.27	1.80	56.07	68.20	-12.13	peak

High Channel (5700 MHz)-Above 1G

Horizontal

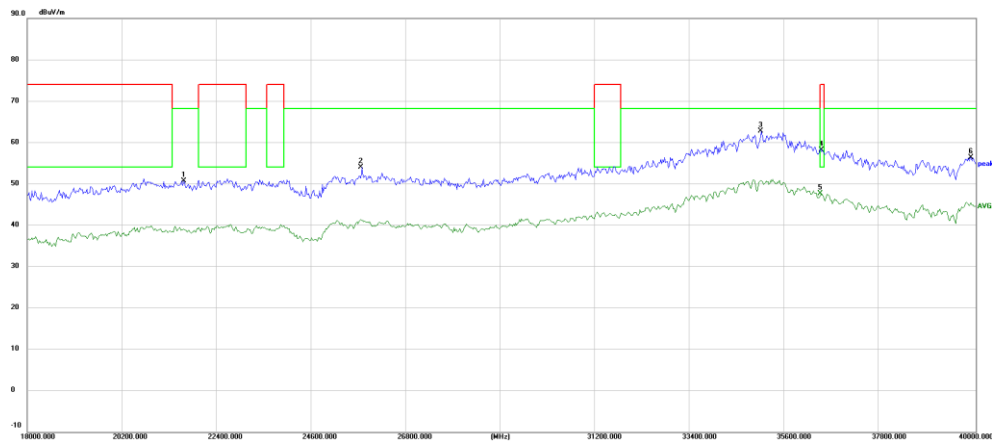

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	21655.667	59.26	-8.55	50.71	68.20	-17.49	peak
2	25786.533	59.64	-5.62	54.02	68.20	-14.18	peak
3	35033.133	59.05	3.67	62.72	68.20	-5.48	peak
4	36456.533	57.37	0.86	58.23	74.00	-15.77	peak
5 *	36447.733	46.79	0.85	47.64	54.00	-6.36	AVG
6	39914.200	53.18	3.28	56.46	68.20	-11.74	peak

Vertical




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20843.133	59.99	-8.70	51.29	74.00	-22.71	peak
2	27761.400	60.79	-8.55	52.24	68.20	-15.96	peak
3	31392.867	49.04	-5.73	43.31	54.00	-10.69	AVG
4	31540.267	60.25	-5.65	54.60	74.00	-19.40	peak
5 *	35194.467	59.41	3.08	62.49	68.20	-5.71	peak
6	38770.933	54.22	1.79	56.01	68.20	-12.19	peak

Note:802.11ax40 MIMO mode is the worst mode.

Low Channel (5745 MHz)-Above 1G

Horizontal

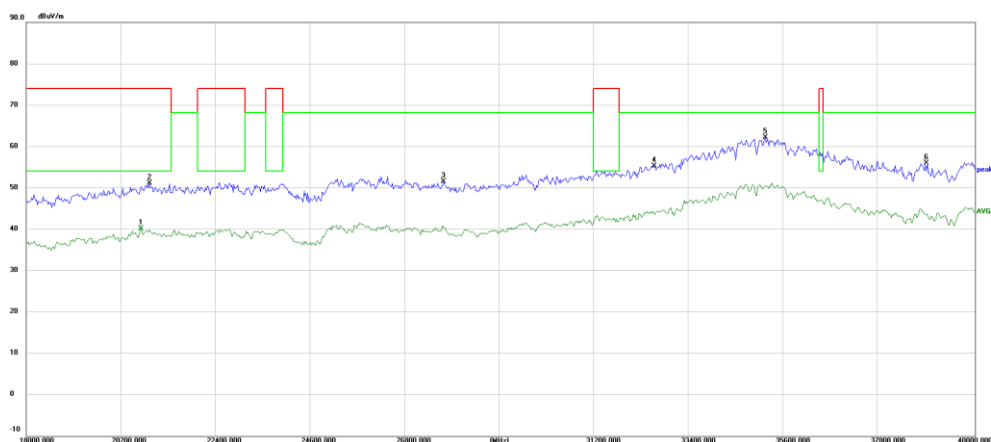

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20683.267	48.84	-8.68	40.16	54.00	-13.84	AVG
2	20897.400	59.89	-8.73	51.16	74.00	-22.84	peak
3	27701.267	59.99	-8.48	51.51	68.20	-16.69	peak
4	32587.467	58.59	-3.29	55.30	68.20	-12.90	peak
5 *	35157.067	59.08	3.21	62.29	68.20	-5.91	peak
6	38918.333	53.93	2.02	55.95	68.20	-12.25	peak


Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	20693.533	59.31	-8.68	50.63	74.00	-23.37	peak
2	20791.067	48.59	-8.67	39.92	54.00	-14.08	AVG
3	23964.933	58.06	-5.91	52.15	74.00	-21.85	peak
4	23992.067	45.94	-5.83	40.11	54.00	-13.89	AVG
5 *	35314.733	59.31	2.83	62.14	68.20	-6.06	peak
6	39741.867	52.51	3.04	55.55	68.20	-12.65	peak

High Channel (5825 MHz)-Above 1G

Horizontal

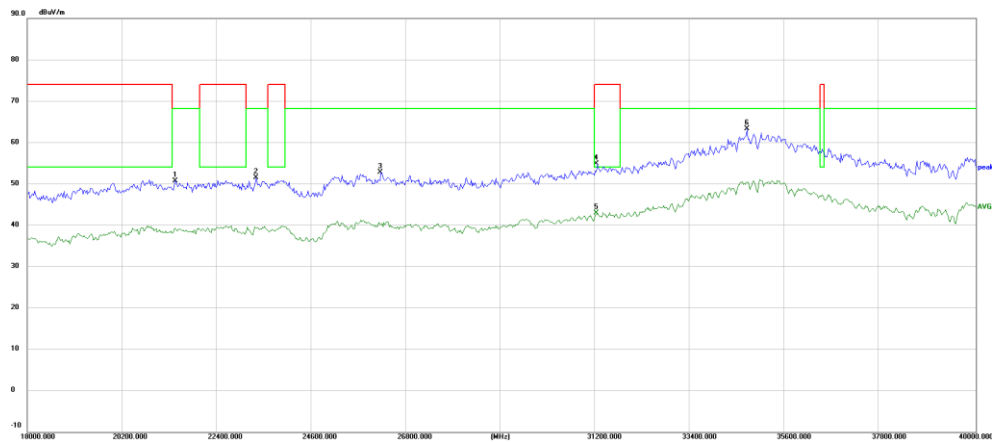

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	21453.267	59.38	-8.59	50.79	68.20	-17.41	peak
2	23332.800	58.66	-7.16	51.50	68.20	-16.70	peak
3	26213.333	59.29	-6.49	52.80	68.20	-15.40	peak
4	31235.933	60.67	-5.81	54.86	74.00	-19.14	peak
5 *	31235.933	48.82	-5.81	43.01	54.00	-10.99	AVG
6	34717.067	60.40	2.97	63.37	68.20	-4.83	peak

Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	21573.533	58.98	-8.57	50.41	68.20	-17.79	peak
2	25801.200	58.33	-5.63	52.70	68.20	-15.50	peak
3	31343.000	60.04	-5.74	54.30	74.00	-19.70	peak
4	31311.466	47.75	-5.76	41.99	54.00	-12.01	AVG
5 *	35459.933	59.33	2.71	62.04	68.20	-6.16	peak
6	39915.666	53.62	3.28	56.90	68.20	-11.30	peak

Note:802.11ax20 MIMO mode is the worst mode.

2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5.2G)-802.11ax20 MIMO		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11ax20 Mode									
4500	60.77	3.615	32.6	43.25	53.74	74	-20.27	Pk	Horizontal
4500	52.13	3.615	32.6	43.25	45.10	54	-8.90	AV	Horizontal
4500	63.12	3.615	32.6	43.25	56.09	74	-17.92	Pk	Vertical
4500	50.49	3.615	32.6	43.25	43.46	54	-10.55	AV	Vertical
5150	72.23	3.911	34.6	43.27	67.47	74	-6.53	Pk	Horizontal
5150	51.44	3.911	34.6	43.27	46.68	54	-7.32	AV	Horizontal
5150	58.99	3.911	34.6	43.27	54.23	74	-19.77	Pk	Vertical
5150	41.35	3.911	34.6	43.27	36.59	54	-17.41	AV	Vertical
5350	69.78	3.939	33.7	43.23	64.19	74	-9.81	Pk	Vertical
5350	50.81	3.939	33.7	43.23	45.22	54	-8.78	AV	Vertical
5350	63.26	3.939	33.7	43.23	57.67	74	-16.33	Pk	Horizontal
5350	49.91	3.939	33.7	43.23	44.32	54	-9.68	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamplifier Factor

(2) "802.11ax20" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5.3G)-802.11ax20 MIMO		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel (5320 MHz)-Above 1G									
Horizontal	5350	71.59	3.94	33.7	43.23	66.00	74.00	-8.00	Pk
Horizontal	5350	49.15	3.94	33.7	43.23	43.56	54.00	-10.44	AV
Vertical	5350	72.10	3.94	33.7	43.23	66.51	74.00	-7.49	Pk
Vertical	5350	51.99	3.94	33.7	43.23	46.40	54.00	-7.60	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ax20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5.6G)-802.11ac20 MIMO		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5460	69.61	3.95	34.56	43.21	64.92	74.00	-9.08	Pk
Vertical	5460	51.91	3.95	34.56	43.21	47.22	54.00	-6.78	AV
Horizontal	5460	63.96	3.95	34.56	43.21	59.27	74.00	-14.73	Pk
Horizontal	5460	49.01	3.95	34.56	43.21	44.32	54.00	-9.68	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor


(2) "802.11ac20 MIMO " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Unwanted emission for operating in the band 5725-5850 MHz

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5.8G)-802.11n MIMO 5745MHz~5825MHz		

All the modulation modes have been tested, The report just record the worst data mode.

Vertical Low Channel (5745 MHz)-Above 1G

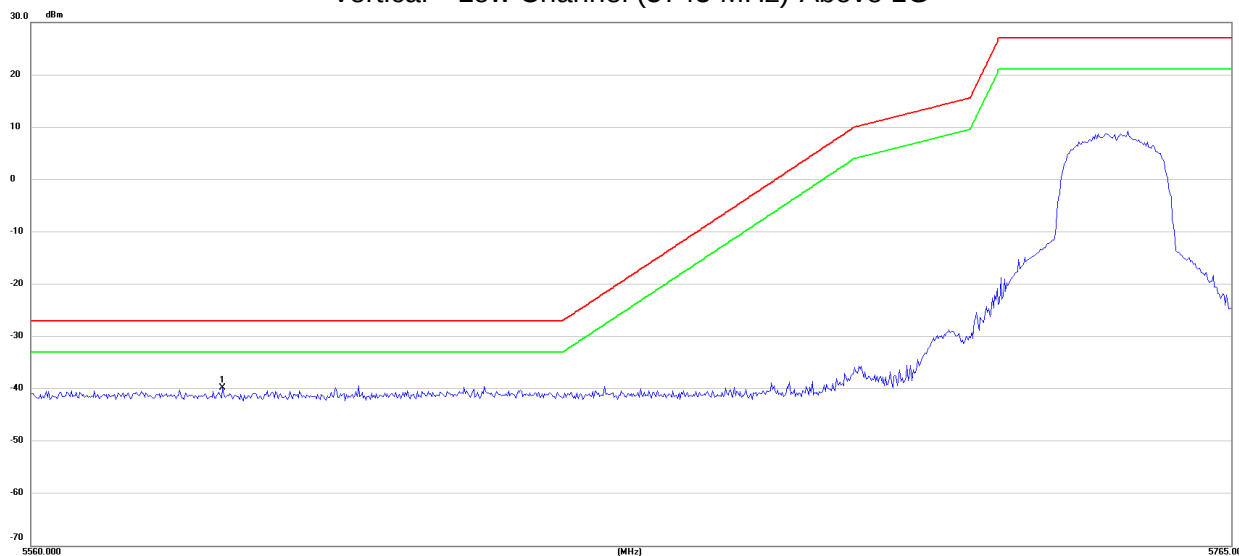


No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Det.
1	5592.350	-51.45	11.94	-39.51	-27	-12.51	peak

Horizontal Low Channel (5745 MHz)-Above 1G




No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Det.
-38.95	-27	-11.95	-38.95	-27	-11.95	-38.95	peak

Vertical High Channel (5825 MHz)-Above 1G

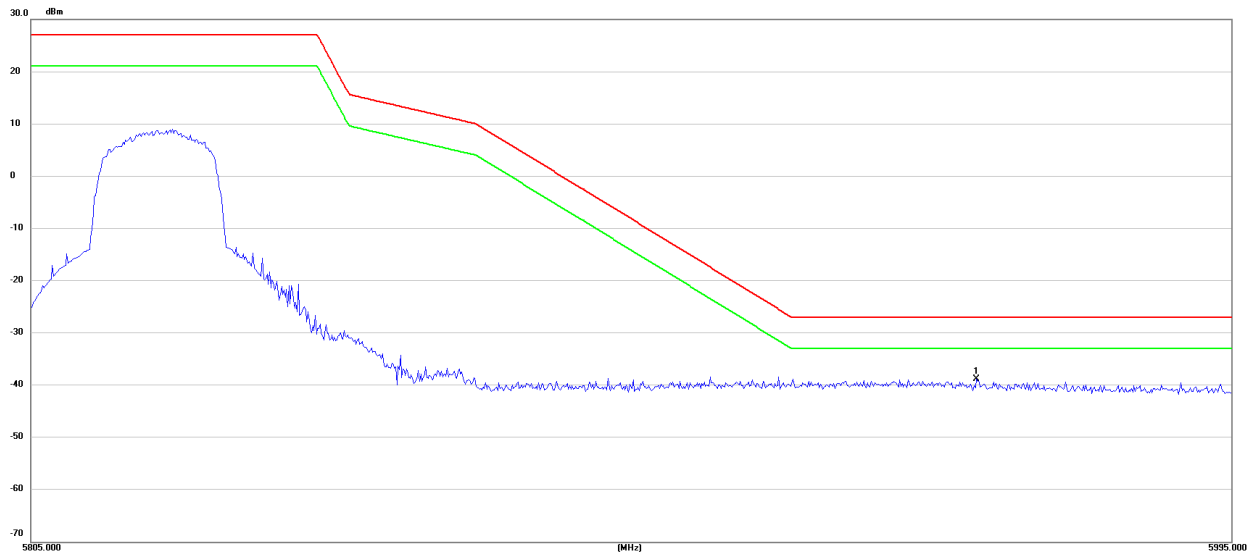

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Det.
1	5955.46	-52.88	13.33	-39.55	-27	-12.55	peak

Horizontal High Channel (5825 MHz)-Above 1G

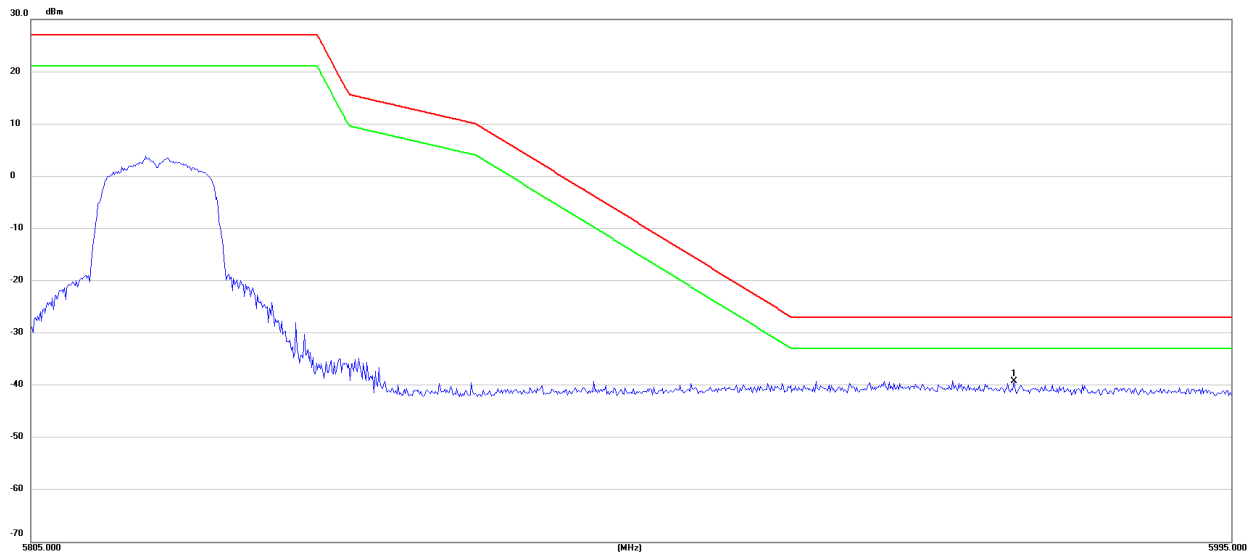

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Det.
1	5960.45	-52.56	13.22	-39.34	-27	-12.34	peak

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP

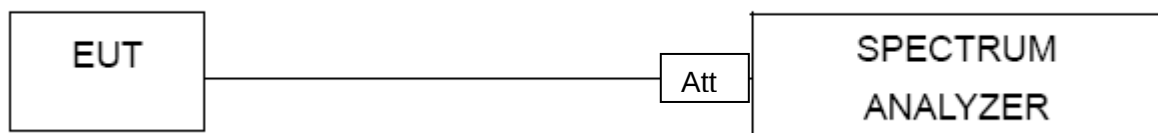

3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

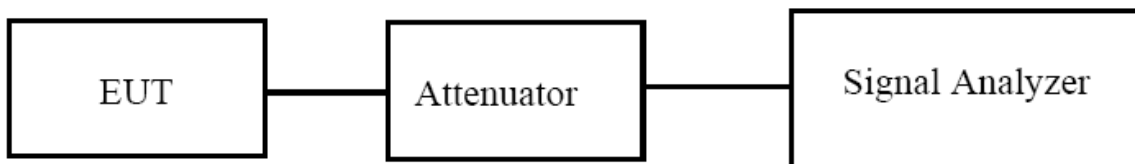

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

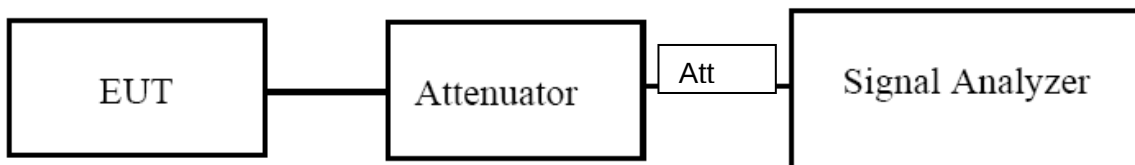

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

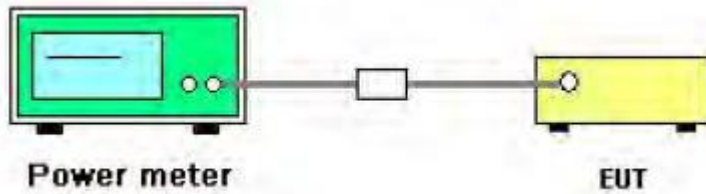

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

7.2 TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

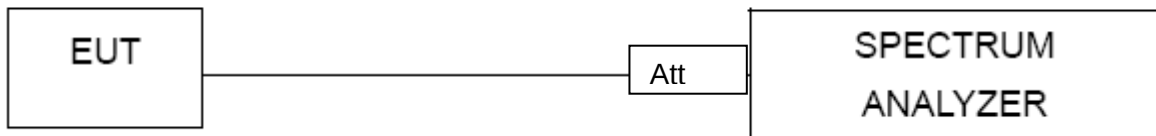

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	Notebook	Model Name :	ZERO 18 Pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V

Test data reference attachment.

8. Frequency Stability Measurement


8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

8.3 TEST SETUP LAYOUT

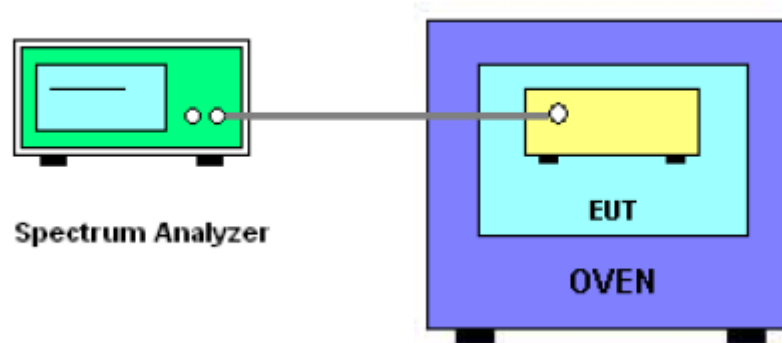

8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

8.5 TEST RESULTS

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5180.0241	5180	0.0241	4.6525
		V max (V)	17.89	5180.0077	5180	0.0077	1.4865
		V min (V)	13.23	5180.0322	5180	0.0322	6.2162
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5180.0280	5180	0.0280	5.4054
		T (°C)	-10	5180.0326	5180	0.0326	6.2934
		T (°C)	0	5180.0147	5180	0.0147	2.8378
		T (°C)	10	5180.0164	5180	0.0164	3.1660
		T (°C)	20	5180.0154	5180	0.0154	2.9730
		T (°C)	30	5180.0330	5180	0.0330	6.3707
		T (°C)	40	5180.0083	5180	0.0083	1.6023
		T (°C)	50	5180.0332	5180	0.0332	6.4093
		T (°C)	60	5180.0283	5180	0.0283	5.4633
		T (°C)	70	5180.0280	5180	0.0280	5.4054
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5200.0194	5200	0.0194	3.7308
		V max (V)	17.89	5200.0084	5200	0.0084	1.6154
		V min (V)	13.23	5200.0110	5200	0.0110	2.1154
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5200.0061	5200	0.0061	1.1731
		T (°C)	-10	5200.0226	5200	0.0226	4.3462
		T (°C)	0	5200.0177	5200	0.0177	3.4038
		T (°C)	10	5200.0221	5200	0.0221	4.2500
		T (°C)	20	5200.0237	5200	0.0237	4.5577
		T (°C)	30	5200.0066	5200	0.0066	1.2692
		T (°C)	40	5200.0183	5200	0.0183	3.5192
		T (°C)	50	5200.0388	5200	0.0388	7.4615
		T (°C)	60	5200.0251	5200	0.0251	4.8269
		T (°C)	70	5200.0237	5200	0.0237	4.5577
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5240.0228	5240	0.0228	4.3511
		V max (V)	17.89	5240.0090	5240	0.0090	1.7176
		V min (V)	13.23	5240.0170	5240	0.0170	3.2443
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5240.0238	5240	0.0238	4.5420
		T (°C)	-10	5240.0139	5240	0.0139	2.6527
		T (°C)	0	5240.0206	5240	0.0206	3.9313
		T (°C)	10	5240.0253	5240	0.0253	4.8282
		T (°C)	20	5240.0187	5240	0.0187	3.5687
		T (°C)	30	5240.0220	5240	0.0220	4.1985
		T (°C)	40	5240.0340	5240	0.0340	6.4885
		T (°C)	50	5240.0365	5240	0.0365	6.9656
		T (°C)	60	5240.0071	5240	0.0071	1.3550
		T (°C)	70	5240.0147	5240	0.0147	2.8053
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5260.0049	5260	0.00490	0.9316
		V max (V)	17.89	5260.0212	5260	0.02120	4.0304
		V min (V)	13.23	5260.0191	5260	0.01910	3.6312
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5260.0209	5260	0.02090	3.9734
		T (°C)	-10	5260.0147	5260	0.01470	2.7947
		T (°C)	0	5260.0333	5260	0.03330	6.3308
		T (°C)	10	5260.0089	5260	0.00890	1.6920
		T (°C)	20	5260.0285	5260	0.02850	5.4183
		T (°C)	30	5260.0051	5260	0.00510	0.9696
		T (°C)	40	5260.0094	5260	0.00940	1.7871
		T (°C)	50	5260.0345	5260	0.03450	6.5589
		T (°C)	60	5260.0390	5260	0.03900	7.4144
		T (°C)	70	5260.0211	5260	0.02110	4.0114
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5280.0223	5280	0.02230	4.2235
		V max (V)	17.89	5280.0323	5280	0.03230	6.1174
		V min (V)	13.23	5280.0215	5280	0.02150	4.0720
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5280.0211	5280	0.02110	3.9962
		T (°C)	-10	5280.0109	5280	0.01090	2.0644
		T (°C)	0	5280.0155	5280	0.01550	2.9356
		T (°C)	10	5280.0330	5280	0.03300	6.2500
		T (°C)	20	5280.0247	5280	0.02470	4.6780
		T (°C)	30	5280.0312	5280	0.03120	5.9091
		T (°C)	40	5280.0084	5280	0.00840	1.5909
		T (°C)	50	5280.0322	5280	0.03220	6.0985
		T (°C)	60	5280.0182	5280	0.01820	3.4470
		T (°C)	70	5280.0278	5280	0.02780	5.2652
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5320.0212	5320	0.02120	3.9850
		V max (V)	17.89	5320.0158	5320	0.01580	2.9699
		V min (V)	13.23	5320.0251	5320	0.02510	4.7180
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5320.0383	5320	0.03830	7.1992
		T (°C)	-10	5320.0222	5320	0.02220	4.1729
		T (°C)	0	5320.0218	5320	0.02180	4.0977
		T (°C)	10	5320.0317	5320	0.03170	5.9586
		T (°C)	20	5320.0212	5320	0.02120	3.9850
		T (°C)	30	5320.0241	5320	0.02410	4.5301
		T (°C)	40	5320.0143	5320	0.01430	2.6880
		T (°C)	50	5320.0152	5320	0.01520	2.8571
		T (°C)	60	5320.0169	5320	0.01690	3.1767
		T (°C)	70	5320.0041	5320	0.00410	0.7707
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5500.0185	5500	0.01850	3.3636
		V max (V)	17.89	5500.0031	5500	0.00310	0.5636
		V min (V)	13.23	5500.0292	5500	0.02920	5.3091
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5500.0108	5500	0.01080	1.9636
		T (°C)	-10	5500.0248	5500	0.02480	4.5091
		T (°C)	0	5500.0155	5500	0.01550	2.8182
		T (°C)	10	5500.0248	5500	0.02480	4.5091
		T (°C)	20	5500.0104	5500	0.01040	1.8909
		T (°C)	30	5500.0201	5500	0.02010	3.6545
		T (°C)	40	5500.0324	5500	0.03240	5.8909
		T (°C)	50	5500.0172	5500	0.01720	3.1273
		T (°C)	60	5500.0149	5500	0.01490	2.7091
		T (°C)	70	5500.0242	5500	0.02420	4.4000
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5600.0188	5600	0.01880	3.3571
		V max (V)	17.89	5600.0399	5600	0.03990	7.1250
		V min (V)	13.23	5600.0105	5600	0.01050	1.8750
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5600.0280	5600	0.02800	5.0000
		T (°C)	-10	5600.0303	5600	0.03030	5.4107
		T (°C)	0	5600.0286	5600	0.02860	5.1071
		T (°C)	10	5600.0085	5600	0.00850	1.5179
		T (°C)	20	5600.0042	5600	0.00420	0.7500
		T (°C)	30	5600.0079	5600	0.00790	1.4107
		T (°C)	40	5600.0087	5600	0.00870	1.5536
		T (°C)	50	5600.0063	5600	0.00630	1.1250
		T (°C)	60	5600.0289	5600	0.02890	5.1607
		T (°C)	70	5600.0315	5600	0.03150	5.6250
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5700.0071	5700	0.00710	1.2456
		V max (V)	17.89	5700.0447	5700	0.04470	7.8421
		V min (V)	13.23	5700.0287	5700	0.02870	5.0351
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5700.0375	5700	0.03750	6.5789
		T (°C)	-10	5700.0277	5700	0.02770	4.8596
		T (°C)	0	5700.0190	5700	0.01900	3.3333
		T (°C)	10	5700.0155	5700	0.01550	2.7193
		T (°C)	20	5700.0110	5700	0.01100	1.9298
		T (°C)	30	5700.0318	5700	0.03180	5.5789
		T (°C)	40	5700.0074	5700	0.00740	1.2982
		T (°C)	50	5700.0040	5700	0.00400	0.7018
		T (°C)	60	5700.0179	5700	0.01790	3.1404
		T (°C)	70	5700.0342	5700	0.03420	6.0000
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	Notebook	Model Name. :	ZERO 18 Pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 15.56V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

Page VS: Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5745.0163	5745	0.01630	2.8372
		V max (V)	17.89	5745.0372	5745	0.03720	6.4752
		V min (V)	13.23	5745.0183	5745	0.01830	3.1854
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5745.0327	5745	0.03270	5.6919
		T (°C)	-10	5745.0294	5745	0.02940	5.1175
		T (°C)	0	5745.0042	5745	0.00420	0.7311
		T (°C)	10	5745.0192	5745	0.01920	3.3420
		T (°C)	20	5745.0299	5745	0.02990	5.2045
		T (°C)	30	5745.0091	5745	0.00910	1.5840
		T (°C)	40	5745.0371	5745	0.03710	6.4578
		T (°C)	50	5745.0185	5745	0.01850	3.2202
		T (°C)	60	5745.0164	5745	0.01640	2.8547
		T (°C)	70	5745.0117	5745	0.01170	2.0366
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	15.56	5785.0178	5785	0.01780	3.0769
		V max (V)	17.89	5785.0208	5785	0.02080	3.5955
		V min (V)	13.23	5785.0027	5785	0.00270	0.4667
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	15.56	T (°C)	-20	5785.0272	5785	0.02720	4.7018
		T (°C)	-10	5785.0345	5785	0.03450	5.9637
		T (°C)	0	5785.0154	5785	0.01540	2.6621
		T (°C)	10	5785.0248	5785	0.02480	4.2869
		T (°C)	20	5785.0045	5785	0.00450	0.7779
		T (°C)	30	5785.0068	5785	0.00680	1.1755
		T (°C)	40	5785.0153	5785	0.01530	2.6448
		T (°C)	50	5785.0094	5785	0.00940	1.6249
		T (°C)	60	5785.0087	5785	0.00870	1.5039
		T (°C)	70	5785.0342	5785	0.03420	5.9118
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12.00	5825.0271	5825	0.02710	4.6524
		V max (V)	13.80	5825.0524	5825	0.05240	8.9957
		V min (V)	10.20	5825.0370	5825	0.03700	6.3519
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	12	T (°C)	-20	5825.0063	5825	0.00630	1.0815
		T (°C)	-10	5825.0070	5825	0.00700	1.2017
		T (°C)	0	5825.0178	5825	0.01780	3.0558
		T (°C)	10	5825.0109	5825	0.01090	1.8712
		T (°C)	20	5825.0085	5825	0.00850	1.4592
		T (°C)	30	5825.0111	5825	0.01110	1.9056
		T (°C)	40	5825.0376	5825	0.03760	6.4549
		T (°C)	50	5825.0235	5825	0.02350	4.0343
		T (°C)	60	5825.0084	5825	0.00840	1.4421
		T (°C)	70	5825.0217	5825	0.02170	3.7253
Limits				Within 5745-5850MHz			
Result				Complies			

9. DYNAMIC FREQUENCY SELECTION(DFS)

9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

9.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{min}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

9.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

9.6 CONDUCTED CALIBRATION SETUP

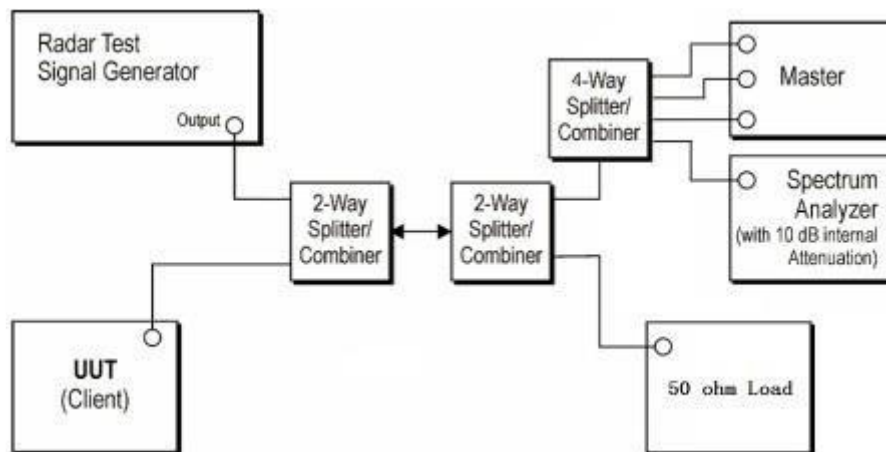

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.

2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.

3. The time required for the master and slave devices to fully start up is 120s.

4. EUT does not support TPC.


9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

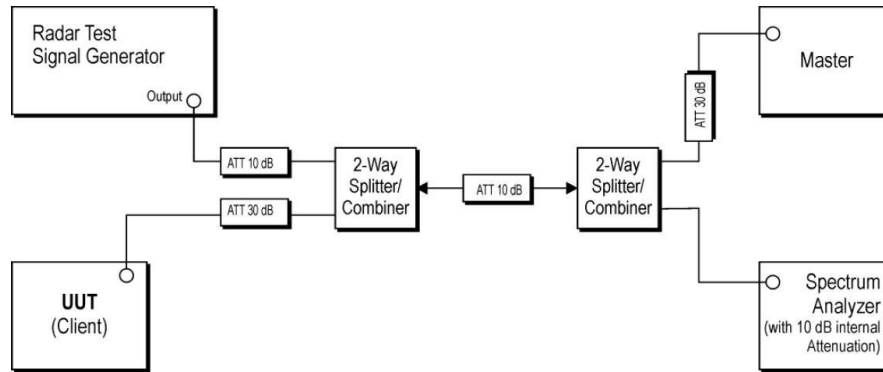

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using NotebookClassic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Mode	Frequency (MHz)
ac80	5290
ac80	5530
n40	5310
n40	5510
a	5320
a	5500

9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

Test data reference attachment.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is permanent attached PIFA Antenna. It comply with the standard requirement.

11. TEST RESULTS

Refer to attachment

END OF REPORT