



# FCC Part 15C Test Report

## FCC ID: 2BFDG-BYR-OGL-ST

Applicant: Shenzhen Liris Lighting Co, Ltd.

Address: 5/F, BUILDING B, JINXIANG INDUSTRIAL PARK, GUANCHENG COMMUNITY, GUANHU STREET, LONGHUA DISTRICT, SHENZHEN, CHINA 518110

Manufacturer: Shenzhen Liris Lighting Co, Ltd.

Address: 5/F, BUILDING B, JINXIANG INDUSTRIAL PARK, GUANCHENG COMMUNITY, GUANHU STREET, LONGHUA DISTRICT, SHENZHEN, CHINA 518110

EUT: Outdoor Ground Lights

Trade Mark: N/A

Model Number: BYR-OGL-ST-30D-30M  
BYR-OGL-ST-15D-15M, BYR-OGL-ST-12D-15M, BYR-OGL-ST-24D-30M

Date of Receipt: Jul. 17, 2025

Test Date: Jul. 17, 2025 - Aug. 13, 2025

Date of Report: Aug. 13, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250717002R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
<b>1.1 MEASUREMENT UNCERTAINTY</b>	4
<b>2 . GENERAL INFORMATION</b>	<b>5</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	5
<b>2.2 DESCRIPTION OF TEST MODES</b>	6
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	6
<b>2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	7
<b>2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING</b>	7
<b>2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	8
<b>3 . EMC EMISSION TEST</b>	<b>9</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT</b>	9
<b>3.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	9
<b>3.1.2 TEST PROCEDURE</b>	9
<b>3.1.3 DEVIATION FROM TEST STANDARD</b>	9
<b>3.1.4 TEST SETUP</b>	10
<b>3.1.5 EUT OPERATING CONDITIONS</b>	10
<b>3.1.6 TEST RESULTS</b>	10
<b>3.2 RADIATED EMISSION MEASUREMENT</b>	13
<b>3.2.1 RADIATED EMISSION LIMITS</b>	13
<b>3.2.2 TEST PROCEDURE</b>	14
<b>3.2.3 DEVIATION FROM TEST STANDARD</b>	14
<b>3.2.4 TEST SETUP</b>	14
<b>3.2.5 EUT OPERATING CONDITIONS</b>	15
<b>3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)</b>	16
<b>3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)</b>	17
<b>3.2.8 TEST RESULTS (1GHZ~25GHZ)</b>	19
<b>3.3 RADIATED BAND EMISSION MEASUREMENT</b>	20
<b>3.3.1 TEST REQUIREMENT:</b>	20
<b>3.3.2 TEST PROCEDURE</b>	20
<b>3.3.3 DEVIATION FROM TEST STANDARD</b>	20
<b>3.3.4 TEST SETUP</b>	21
<b>3.3.5 EUT OPERATING CONDITIONS</b>	21
<b>3.4 CONDUCTED BAND EDGE EMISSION&amp;CONDUCTED SPURIOUS EMISSIONS MEASUREMENT</b>	23
<b>3.4.1 APPLICABLE STANDARD</b>	23
<b>3.4.2 TEST PROCEDURE</b>	23
<b>3.4.3 DEVIATION FROM STANDARD</b>	23

**Table of Contents**

	<b>Page</b>
<b>3.4.4 TEST SETUP</b>	<b>23</b>
<b>3.4.5 EUT OPERATION CONDITIONS</b>	<b>23</b>
<b>3.4.6 TEST RESULTS</b>	<b>24</b>
<b>4 . PEAK OUTPUT POWER</b>	<b>26</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	<b>26</b>
<b>4.1.1 TEST PROCEDURE</b>	<b>26</b>
<b>4.1.2 DEVIATION FROM STANDARD</b>	<b>26</b>
<b>4.1.3 TEST SETUP</b>	<b>26</b>
<b>4.1.4 EUT OPERATION CONDITIONS</b>	<b>26</b>
<b>4.1.5 TEST RESULTS</b>	<b>27</b>
<b>5 . POWER SPECTRAL DENSITY TEST</b>	<b>29</b>
<b>5.1 APPLIED PROCEDURES / LIMIT</b>	<b>29</b>
<b>5.1.1 TEST PROCEDURE</b>	<b>29</b>
<b>5.1.2 DEVIATION FROM STANDARD</b>	<b>29</b>
<b>5.1.3 TEST SETUP</b>	<b>29</b>
<b>5.1.4 EUT OPERATION CONDITIONS</b>	<b>29</b>
<b>5.1.5 TEST RESULTS</b>	<b>29</b>
<b>6 . 6DB BANDWIDTH TEST</b>	<b>31</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>31</b>
<b>6.1.1 TEST PROCEDURE</b>	<b>31</b>
<b>6.1.2 DEVIATION FROM STANDARD</b>	<b>31</b>
<b>6.1.3 TEST SETUP</b>	<b>31</b>
<b>6.1.4 EUT OPERATION CONDITIONS</b>	<b>31</b>
<b>6.1.5 TEST RESULTS</b>	<b>31</b>
<b>7 . ANTENNA REQUIREMENT</b>	<b>33</b>
<b>7.1 STANDARD REQUIREMENT</b>	<b>33</b>
<b>7.2 EUT ANTENNA</b>	<b>33</b>
<b>8 . TEST SEUUP PHOTO</b>	<b>33</b>
<b>9 . EUT PHOTO</b>	<b>33</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.205	Band Edge Emission	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1

Address: Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\text{MHz}$
9	Power Spectral Density	$\pm 0.3\text{dBm}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Outdoor Ground Lights
Trademark	N/A
Model No.:	BYR-OGL-ST-30D-30M BYR-OGL-ST-15D-15M, BYR-OGL-ST-12D-15M, BYR-OGL-ST-24D-30M
Model Difference	All models are same as the samples except model name, they have the same structure and circuit.
Operation Frequency:	2402~2480MHz
Channel numbers:	40 Channels
Channel separation:	1MHz
Modulation technology:	GFSK
Antenna Type:	Internal Antenna
Antenna gain:	1.96dBi
Power supply:	DC 24V from adapter
Adapter:	MODEL NO:XY36SR-240150VQ-UT INPUT:100-240V~ 50/60Hz 1.0A Max OUTPUT:24.0V---1.5A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. The EUT's all information provided by client.

### 2. Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

For Conducted & Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39


Note: 1. The measurements are performed at the highest, middle, lowest available channels.

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



power line conducted emission





## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Outdoor Ground Lights	BYR-OGL-ST-30D-30M	N/A	EUT
E-2	Adapter	XY36SR-240150VQ-UT	N/A	XING YUAN ELECTRONICS CO., LTD

Item	Shielded Type	Ferrite Core	Length	Note

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	Test program: RF Test_V1.2		
Frequency	2402 MHz	2440MHz	2480 MHz
Power Setting of Softwave	10	10	10



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF test system	MAIWEI	FSV40-N	2.0.1
5	RF communication test system	MAIWEI	MTS8200	2.0.0.0



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation



### 3.1.4 TEST SETUP

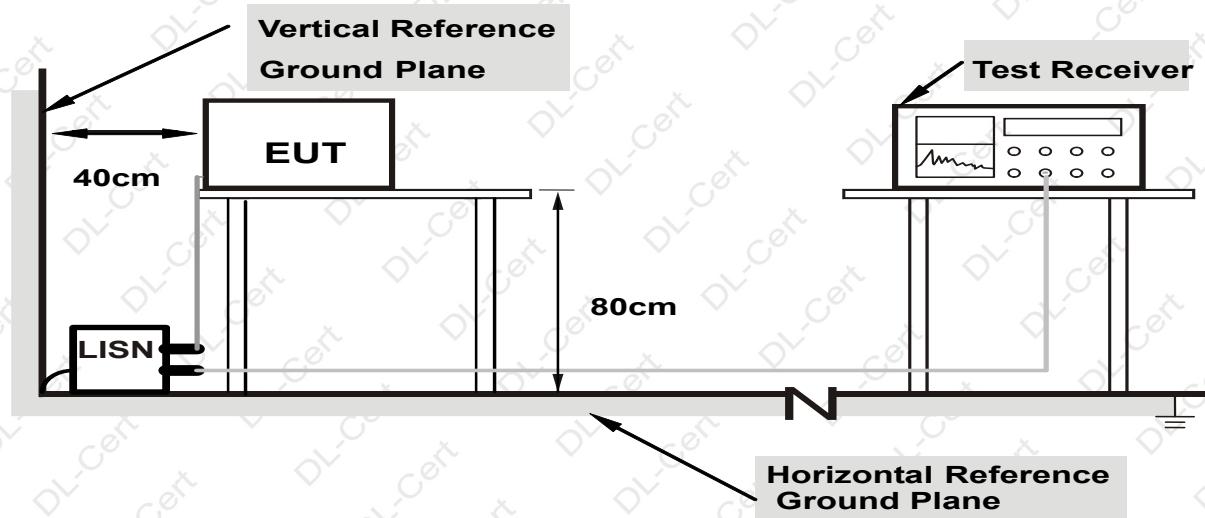

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.


### 3.1.6 TEST RESULTS

PASS

Please refer to the following page.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

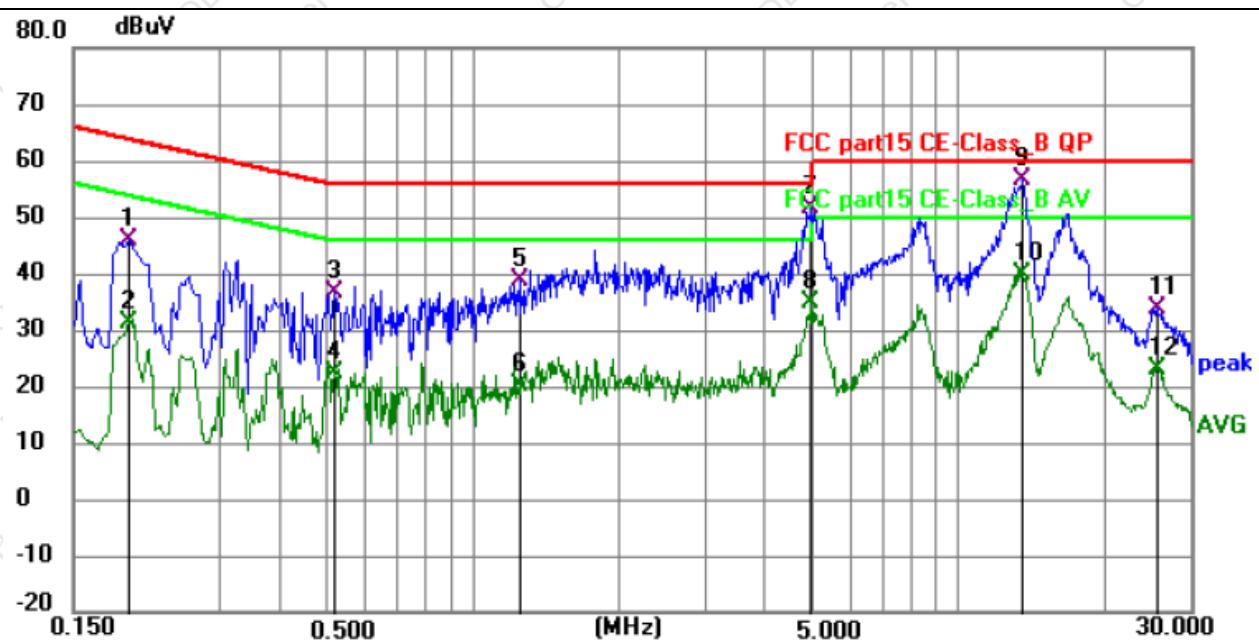


## Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	35.74	10.08	45.82	63.83	-18.01	QP	P	
2	0.1949	21.08	10.08	31.16	53.83	-22.67	AVG	P	
3	0.5190	26.43	10.16	36.59	56.00	-19.41	QP	P	
4	0.5190	12.06	10.16	22.22	46.00	-23.78	AVG	P	
5	1.2480	28.64	10.05	38.69	56.00	-17.31	QP	P	
6	1.2480	10.01	10.05	20.06	46.00	-25.94	AVG	P	
7	4.9560	41.38	10.38	51.76	56.00	-4.24	QP	P	
8	4.9560	24.31	10.38	34.69	46.00	-11.31	AVG	P	
9 *	13.5825	44.98	11.56	56.54	60.00	-3.46	QP	P	
10	13.5825	28.38	11.56	39.94	50.00	-10.06	AVG	P	
11	25.6514	21.03	12.80	33.83	60.00	-26.17	QP	P	
12	25.6514	10.34	12.80	23.14	50.00	-26.86	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

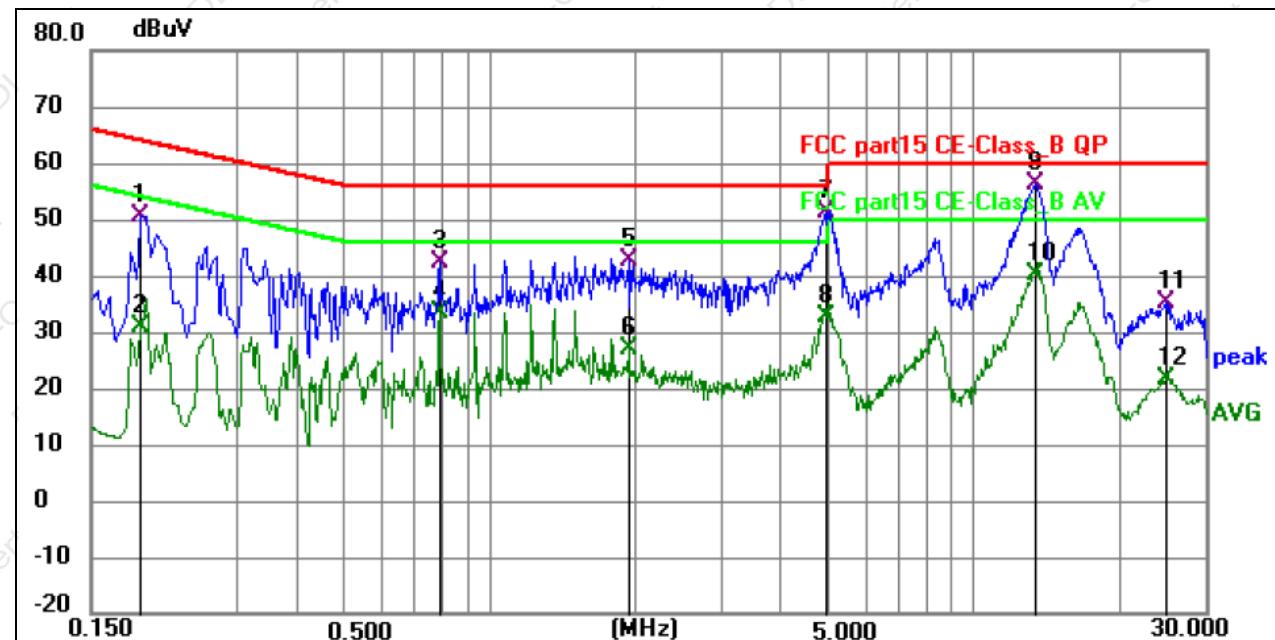

## Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1905	40.25	10.16	50.41	64.01	-13.60	QP	P	
2	0.1905	20.80	10.16	30.96	54.01	-23.05	AVG	P	
3	0.7890	32.34	10.06	42.40	56.00	-13.60	QP	P	
4	0.7890	23.28	10.06	33.34	46.00	-12.66	AVG	P	
5	1.9320	32.65	10.05	42.70	56.00	-13.30	QP	P	
6	1.9320	16.85	10.05	26.90	46.00	-19.10	AVG	P	
7	4.9380	40.95	10.31	51.26	56.00	-4.74	QP	P	
8	4.9380	22.42	10.31	32.73	46.00	-13.27	AVG	P	
9 *	13.4655	44.88	11.46	56.34	60.00	-3.66	QP	P	
10	13.4655	28.88	11.46	40.34	50.00	-9.66	AVG	P	
11	24.9135	22.55	12.54	35.09	60.00	-24.91	QP	P	
12	24.9135	8.93	12.54	21.47	50.00	-28.53	AVG	P	



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

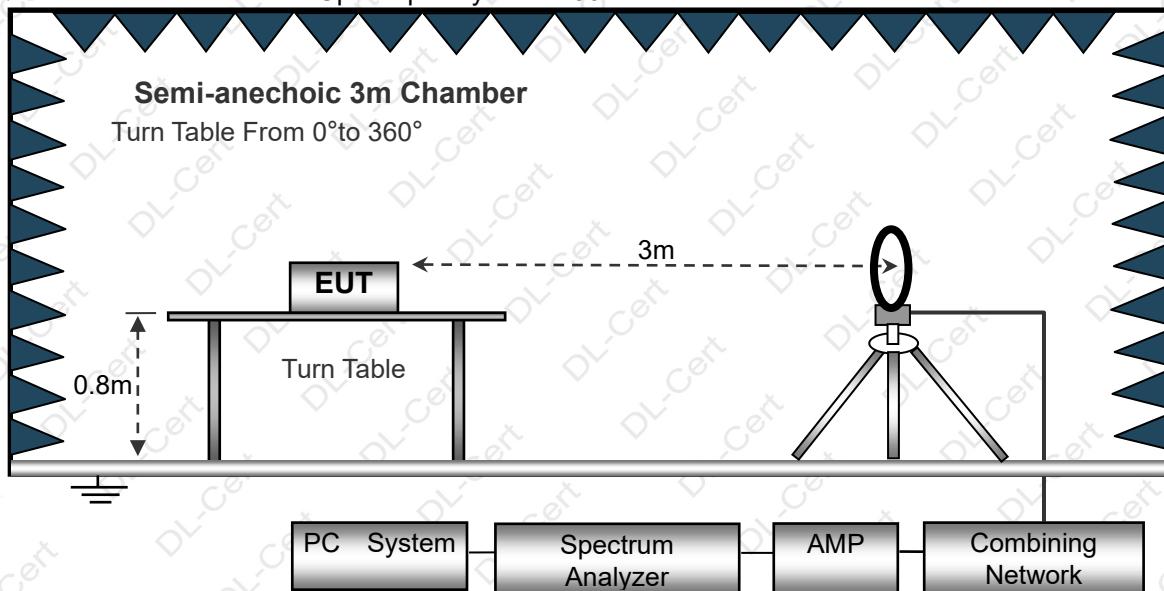

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

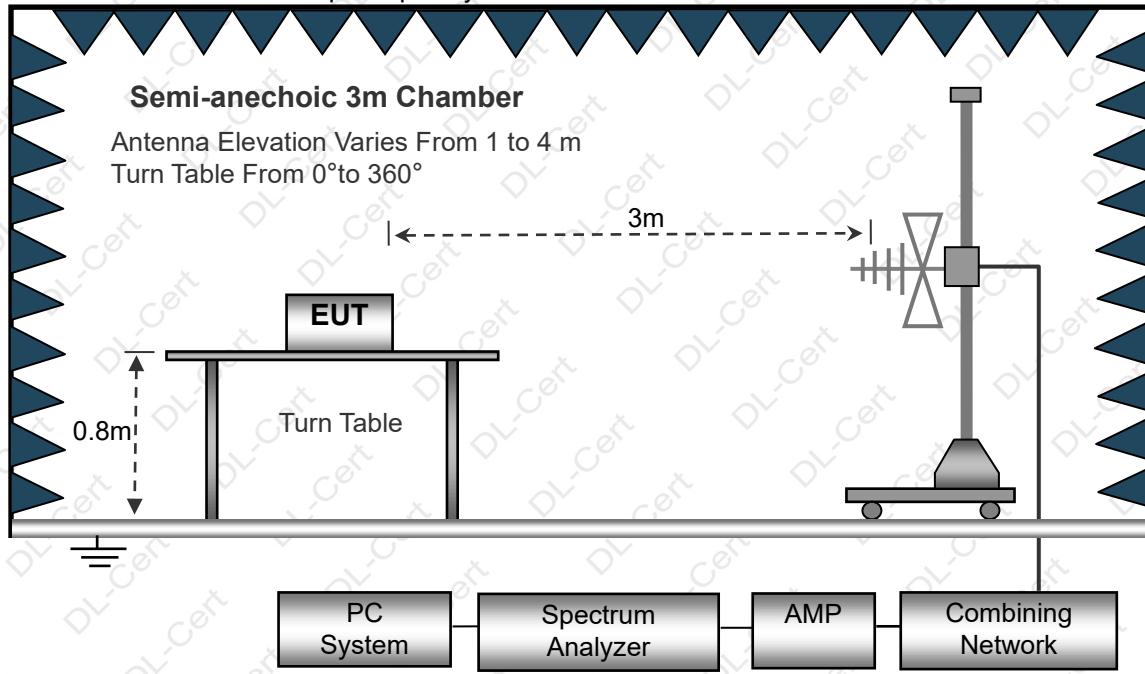

(C) Radiated Emission Test-Up Frequency Above 1GHz

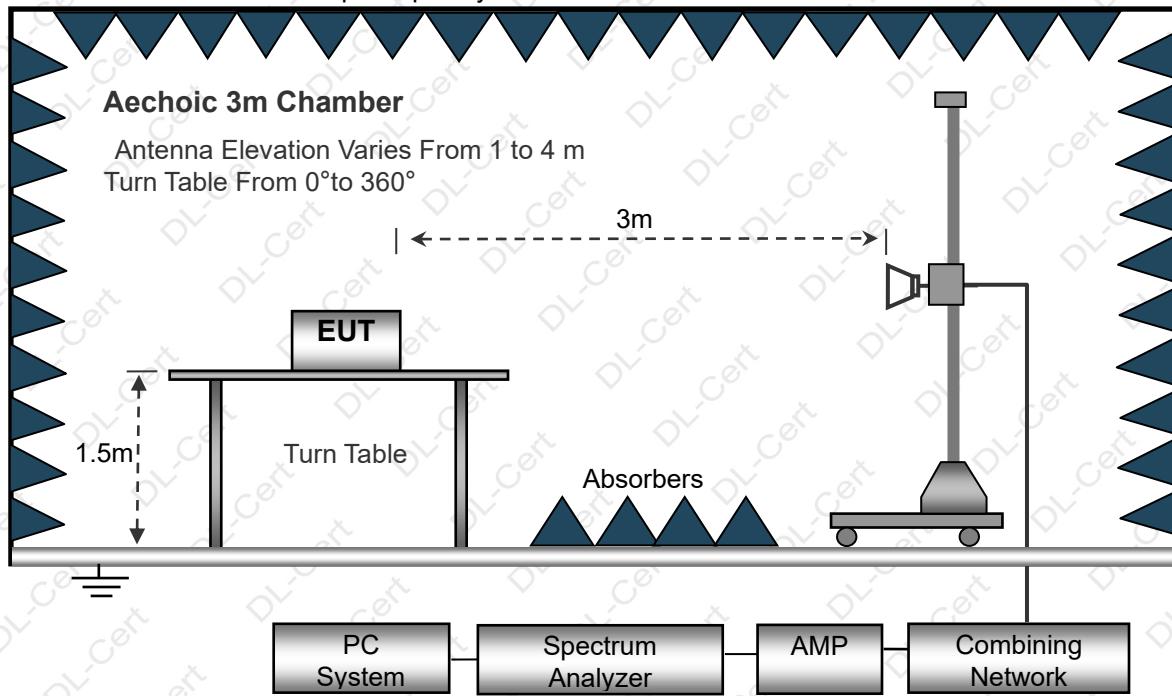

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.



### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		

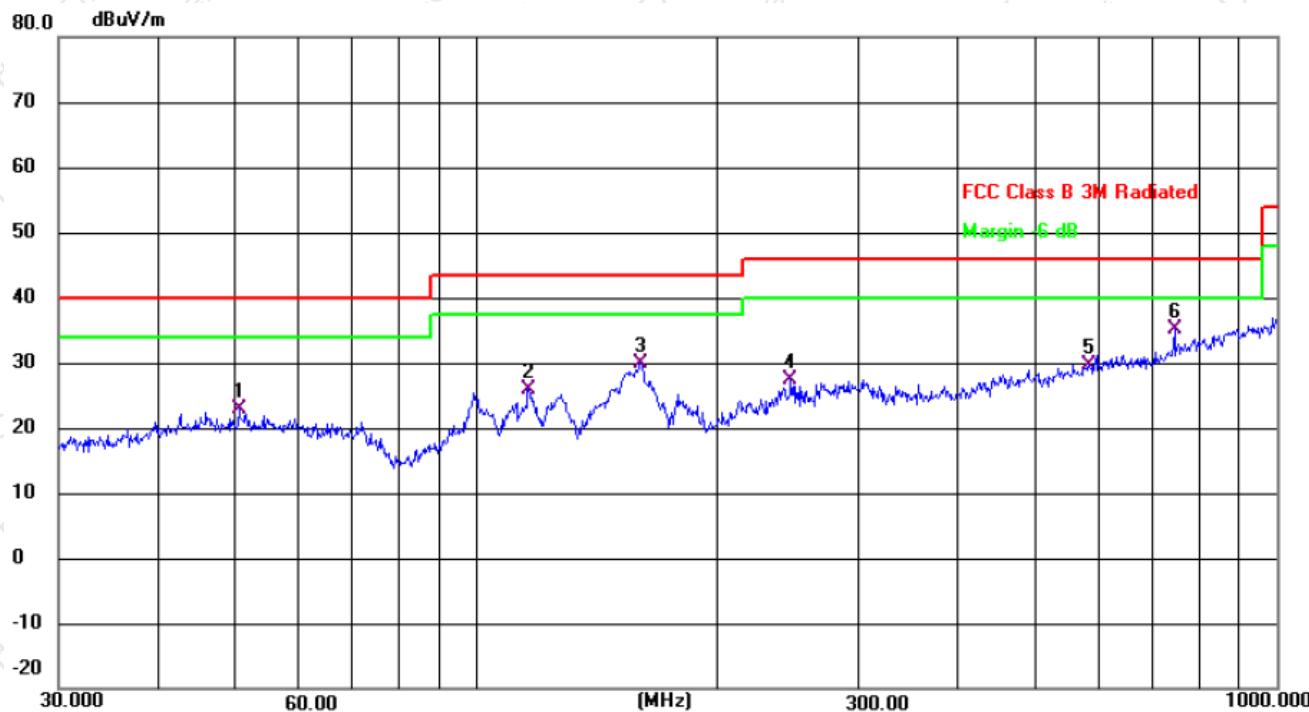

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin
			Level	Factor	ment		
1		50.4089	29.56	-6.79	22.77	40.00	-17.23
2		116.1321	35.63	-9.70	25.93	43.50	-17.57
3		160.3456	41.85	-11.87	29.98	43.50	-13.52
4		246.8149	34.77	-7.32	27.45	46.00	-18.55
5		582.7425	29.52	0.21	29.73	46.00	-16.27
6	*	744.8661	32.41	2.75	35.16	46.00	-10.84


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		

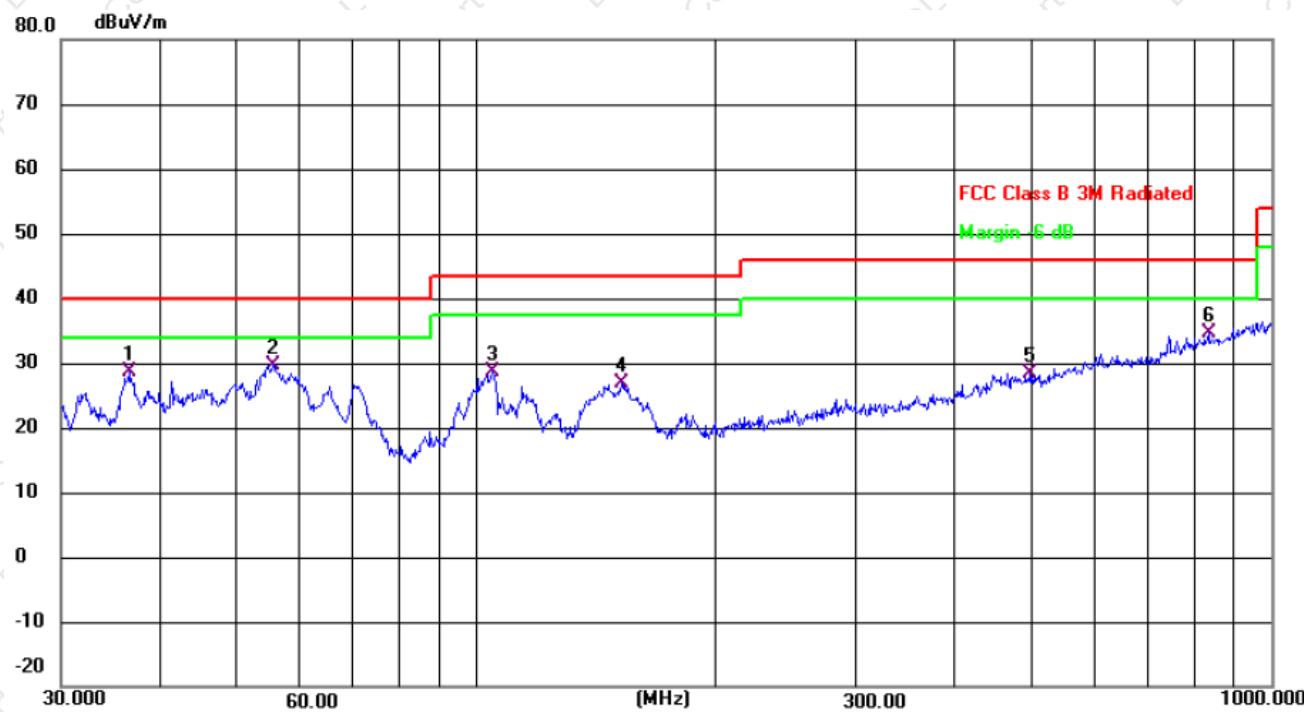

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin
			Level	Factor	ment		
1		36.5092	37.85	-9.21	28.64	40.00	-11.36
2 *		55.4147	36.87	-7.32	29.55	40.00	-10.45
3		104.9033	36.83	-8.31	28.52	43.50	-14.98
4		152.1297	39.15	-12.38	26.77	43.50	-16.73
5		497.6765	29.88	-1.48	28.40	46.00	-17.60
6		833.3171	30.55	4.09	34.64	46.00	-11.36

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



### 3.2.8 TEST RESULTS (1GHZ~25GHZ)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	4804.00	67.43	50.65	6.88	31.29	54.95	74	-19.05	PK
V	4804.00	55.32	50.65	6.88	31.29	42.84	54	-11.16	AV
V	7236.00	66.17	49.98	7.16	36.63	59.98	74	-14.02	PK
V	7236.00	46.25	49.98	7.16	36.63	40.06	54	-13.94	AV
V	16087.00	48.02	51.53	11.34	41.52	49.35	74	-24.65	PK
H	4804.00	66.69	50.65	6.88	31.29	54.21	74	-19.79	PK
H	4804.00	55.02	50.65	6.88	31.29	42.54	54	-11.46	AV
H	7236.00	68.97	49.98	7.16	36.63	62.78	74	-11.22	PK
H	7236.00	45.14	49.98	7.16	36.63	38.95	54	-15.05	AV
H	16087.00	48.32	51.53	11.34	41.52	49.65	74	-24.35	PK
<b>operation frequency:2440</b>									
V	4880.00	67.43	50.67	6.89	31.38	55.03	74	-18.97	PK
V	4880.00	55.03	50.67	6.89	31.38	42.63	54	-11.37	AV
V	7311.00	69.02	50.02	7.24	36.63	62.87	74	-11.13	PK
V	7311.00	46.7	50.02	7.24	36.63	40.55	54	-13.45	AV
V	16087.00	48.43	51.53	11.34	41.52	49.76	74	-24.24	PK
H	4880.00	66.06	50.67	6.89	31.38	53.66	74	-20.34	PK
H	4880.00	55.43	50.67	6.89	31.38	43.03	54	-10.97	AV
H	7311.00	69.02	50.02	7.24	36.63	62.87	74	-11.13	PK
H	7311.00	47.8	50.02	7.24	36.63	41.65	54	-12.35	AV
H	16087.00	48.02	51.53	11.34	41.52	49.35	74	-24.65	PK
<b>operation frequency:2480</b>									
V	4960.00	68.76	50.79	6.83	31.36	56.16	74	-17.84	PK
V	4960.00	55.12	50.79	6.83	31.36	42.52	54	-11.48	AV
V	7386.00	69.03	50.11	7.25	36.58	62.75	74	-11.25	PK
V	7386.00	46.13	50.11	7.25	36.58	39.85	54	-14.15	AV
V	16087.00	49.22	51.53	11.34	41.52	50.55	74	-23.45	PK
H	4960.00	67.06	50.79	6.83	31.36	54.46	74	-19.54	PK
H	4960.00	55.5	50.79	6.83	31.36	42.9	54	-11.1	AV
H	7386.00	67.02	50.11	7.25	36.58	60.74	74	-13.26	PK
H	7386.00	48.39	50.11	7.25	36.58	42.11	54	-11.89	AV
H	16087.00	49.13	51.53	11.34	41.52	50.46	74	-23.54	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation



### 3.3.4 TEST SETUP

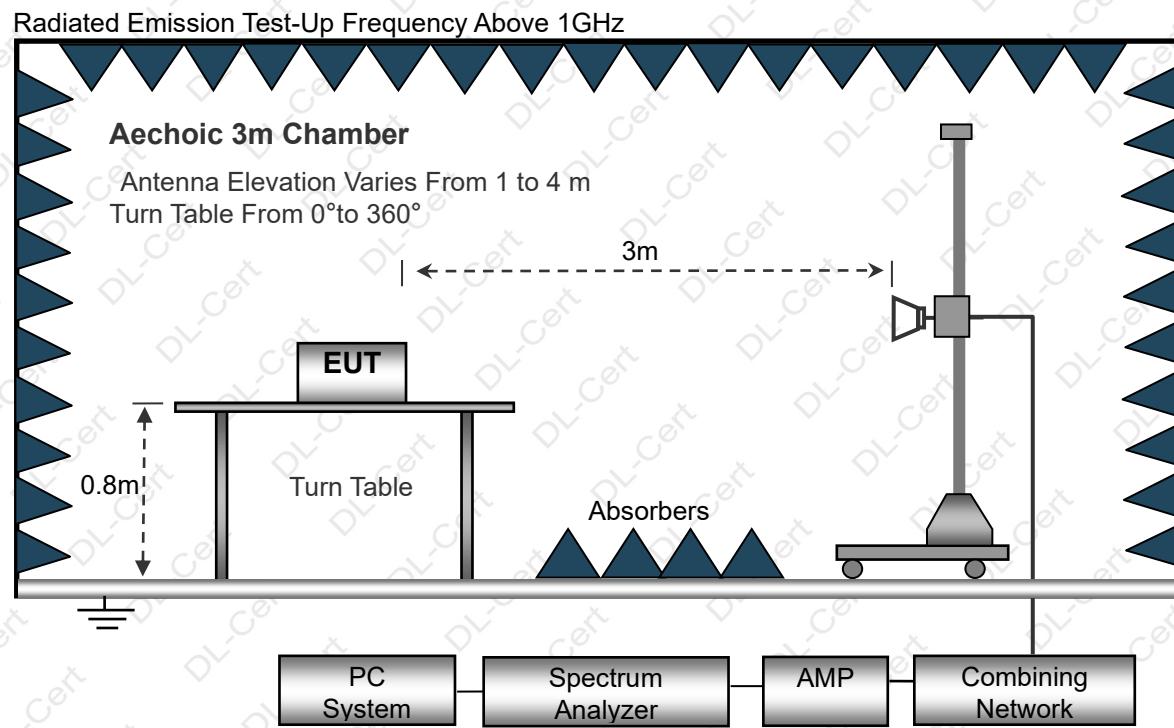

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.3.6 TEST RESULT

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	2390.00	76.99	52.12	2.73	27.38	54.98	74	-19.02	PK
V	2390.00	65.95	52.12	2.73	27.38	43.94	54	-10.06	AV
V	2400.00	77.93	52.16	2.78	27.41	55.96	74	-18.04	PK
V	2400.00	65.7	52.16	2.78	27.41	43.73	54	-10.27	AV
H	2390.00	77.51	52.12	2.73	27.38	55.5	74	-18.5	PK
H	2390.00	65.87	52.12	2.73	27.38	43.86	54	-10.14	AV
H	2400.00	76.43	52.16	2.78	27.41	54.46	74	-19.54	PK
H	2400.00	65.84	52.16	2.78	27.41	43.87	54	-10.13	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2480</b>									
V	2483.50	75.87	52.23	2.86	27.44	53.94	74	-20.06	PK
V	2483.50	66.91	52.23	2.86	27.44	44.98	54	-9.02	AV
V	2500.00	75.43	52.26	2.88	27.49	53.54	74	-20.46	PK
V	2500.00	65.76	52.26	2.88	27.49	43.87	54	-10.13	AV
H	2483.50	75.5	52.23	2.86	27.44	53.57	74	-20.43	PK
H	2483.50	65.2	52.23	2.86	27.44	43.27	54	-10.73	AV
H	2500.00	75.55	52.26	2.88	27.49	53.66	74	-20.34	PK
H	2500.00	66.69	52.26	2.88	27.49	44.8	54	-9.2	AV

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



### 3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB558074 D0115.247 Meas Guidance v05r02

#### 3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 3.4.2 TEST PROCEDURE

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq$  1.5 times the DTS bandwidth.
- c) Set the RBW=100 kHz.
- d) Set the VBW  $\geq$  [3 x RBW].
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.

i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW=100 kHz.
- c) Set the VBW  $\geq$  [3 x RBW].
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.


h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### 3.4.3 DEVIATION FROM STANDARD

No deviation.

#### 3.4.4 TEST SETUP

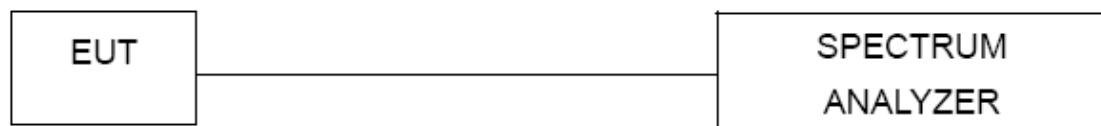


#### 3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





### 3.4.6 TEST RESULTS

For Conducted

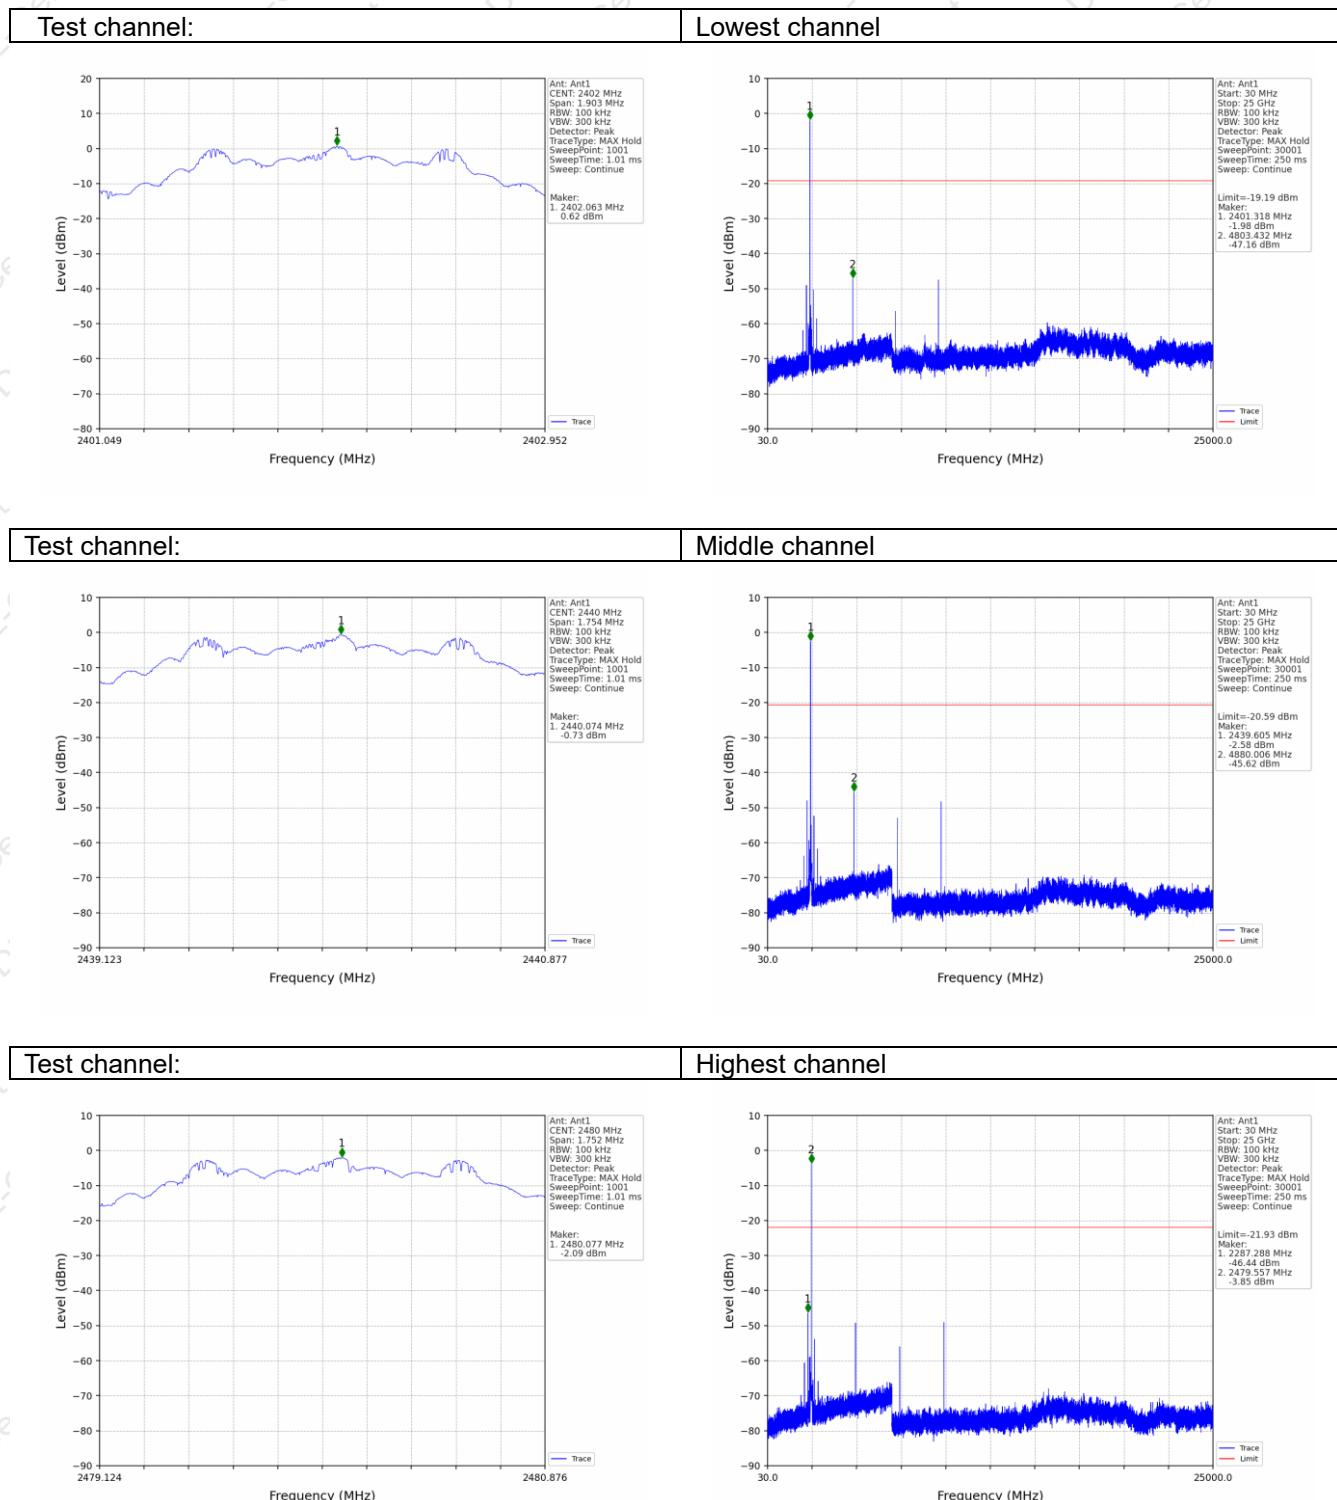



For Conducted

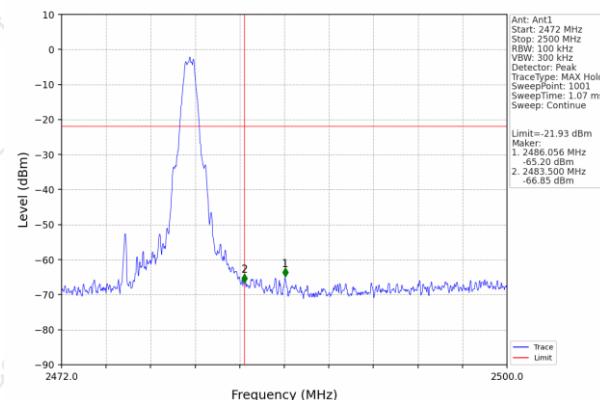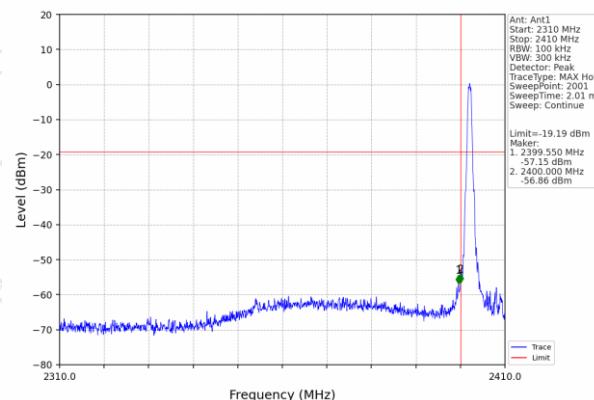



## 4. PEAK OUTPUT POWER

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 4.1.1 TEST PROCEDURE

The testing follows Subclause 11.9.1.1 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW  $\geq$ DTS bandwidth.

Set VBW=3\*RBW.

Set the span  $\geq$ 3\*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.1.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Test Channel	Peak Output Power (dBm)	LIMIT (dBm)
Low	-1.665	30.00
Middle	-0.328	30.00
High	-0.674	30.00

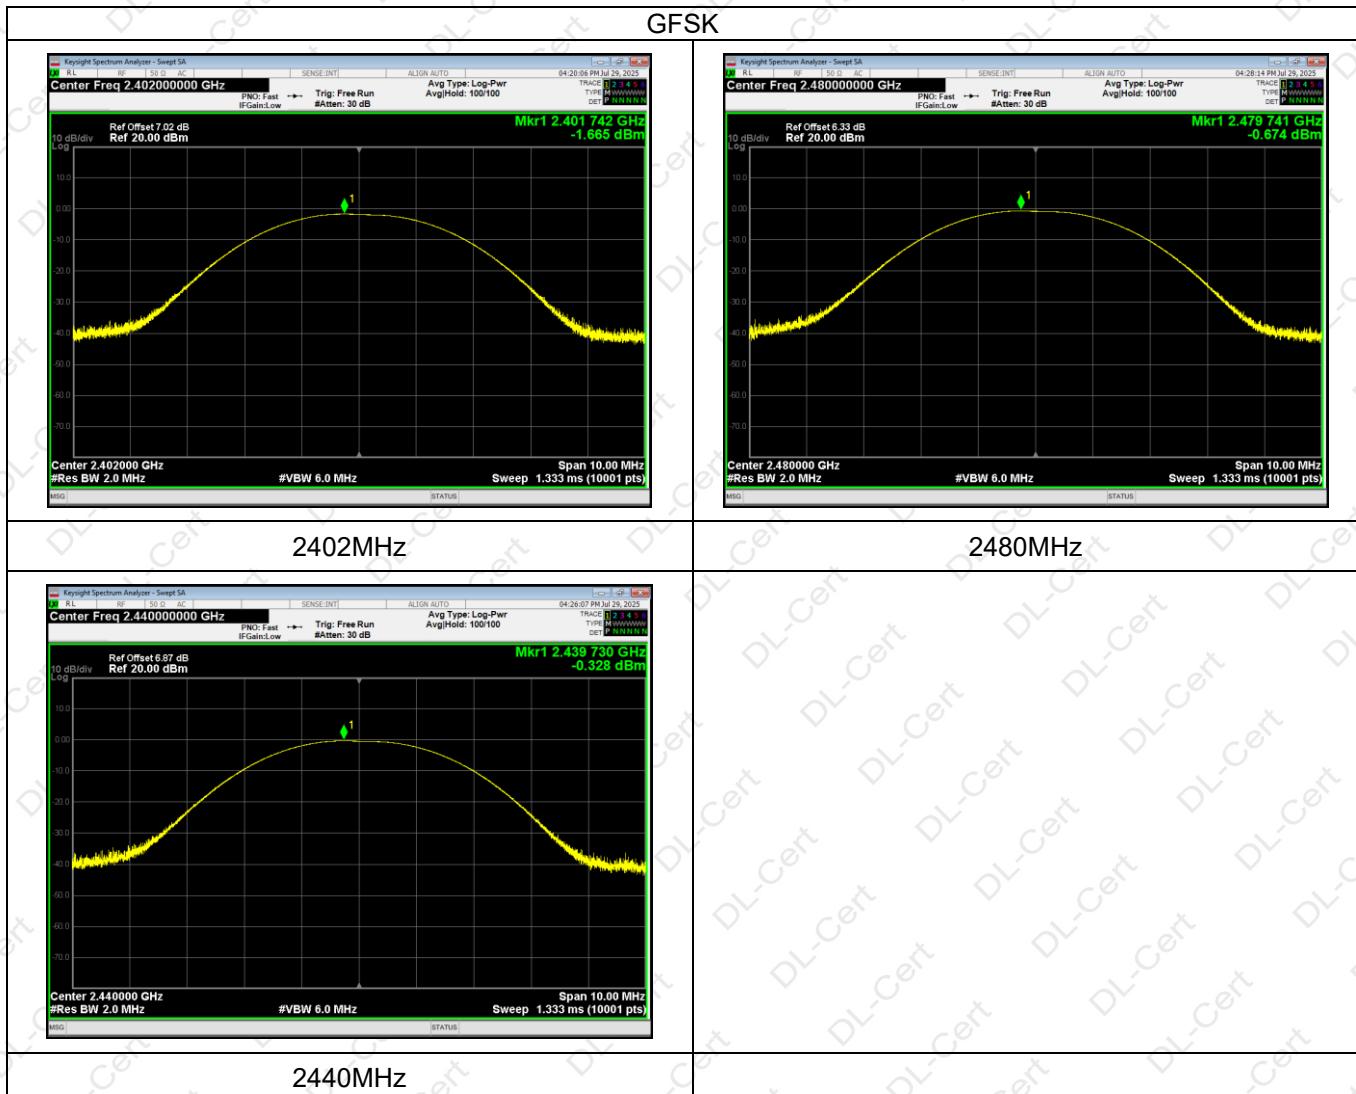



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3\text{kHz}$
VB	$VBW \geq 3RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP

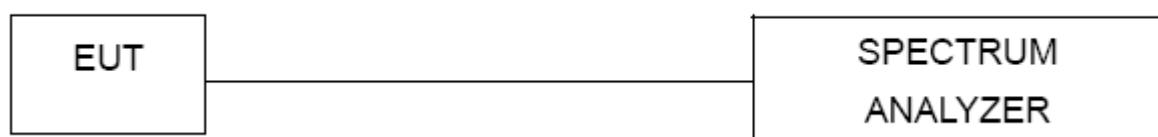

#### 5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 TEST RESULTS

Test Channel	Result(dBm) 3kHz	Limit(dBm)	Result
Low	-17.786	8	PASS
Middle	-16.458	8	PASS
High	-16.769	8	PASS




## GFSK

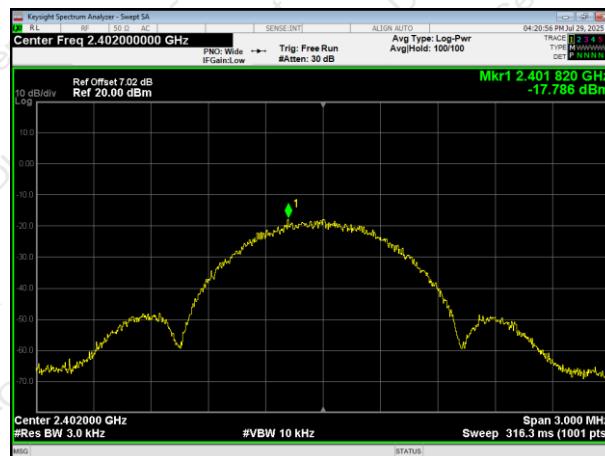

2402MHz

2480MHz

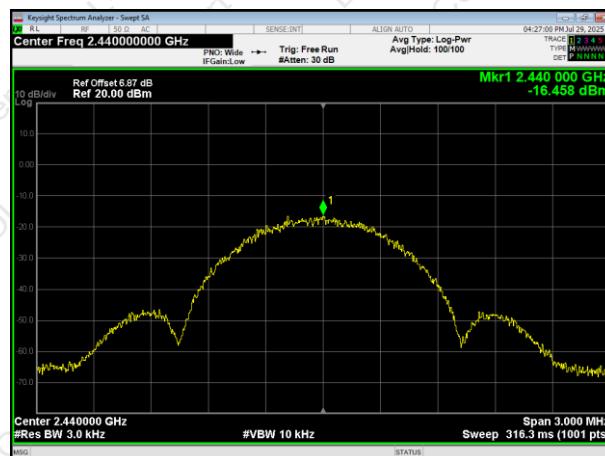

2440MHz



## 6. 6DB BANDWIDTH TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 6.1.5 TEST RESULTS

Test Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
Low	0.651	0.5	Pass
Middle	0.664	0.5	Pass
High	0.652	0.5	Pass



## GFSK



## 2402MHz



## 2440MHz

## 2480MHz



## 7. ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

## 8. TEST SEUUP PHOTO

Reference to the appendix I for details.

## 9. EUT PHOTO

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*