



FCC Part 15C Test Report

FCC ID: 2BFGM-C6

Applicant: Shenzhen Xin An Zhuo Technology Co.,Ltd.

Address: 5f, 7th Factory Bldg, zhengzhong Ind Zone Qiaotou Community, fuyong St, bao'an Dist Shenzhen, China

Manufacturer: Shenzhen Xin An Zhuo Technology Co.,Ltd.

Address: 5f, 7th Factory Bldg, zhengzhong Ind Zone Qiaotou Community, fuyong St, bao'an Dist Shenzhen, China

EUT: Car Video Player

Trade Mark: Cinandrow

Model Number: C6, C1, C2, C3, C5, C7, C8, C9, C10, C11, C12, C13, C15, C16, C17, C18, C19, C20

Date of Receipt: Apr. 20, 2025

Test Date: Apr. 20, 2025 - May 13, 2025

Date of Report: May 13, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250429007R

Prepared by(Engineer): Ken Tan

Reviewer(Supervisor): Jack Bu

Approved(Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION Limits	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	14
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ~25GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	23
3.3.1 TEST REQUIREMENT:	23
3.3.2 TEST PROCEDURE	23
3.3.3 DEVIATION FROM TEST STANDARD	23
3.3.4 TEST SETUP	24
3.3.5 EUT OPERATING CONDITIONS	24
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	27
3.4.1 APPLICABLE STANDARD	27
3.4.2 TEST PROCEDURE	27
3.4.3 DEVIATION FROM STANDARD	27



Table of Contents	Page
3.4.4 TEST SETUP	27
3.4.5 EUT OPERATION CONDITIONS	27
3.4.6 TEST RESULTS	27
4. PEAK OUTPUT POWER	28
4.1 APPLIED PROCEDURES / LIMIT	28
4.1.1 TEST PROCEDURE	28
4.1.2 DEVIATION FROM STANDARD	28
4.1.3 TEST SETUP	28
4.1.4 EUT OPERATION CONDITIONS	28
4.1.5 TEST RESULTS	28
5. POWER SPECTRAL DENSITY TEST	29
5.1 APPLIED PROCEDURES / LIMIT	29
5.1.1 TEST PROCEDURE	29
5.1.2 DEVIATION FROM STANDARD	29
5.1.3 TEST SETUP	29
5.1.4 EUT OPERATION CONDITIONS	29
5.1.5 TEST RESULTS	29
6. 6DB BANDWIDTH TEST	30
6.1 APPLIED PROCEDURES / LIMIT	30
6.1.1 TEST PROCEDURE	30
6.1.2 DEVIATION FROM STANDARD	30
6.1.3 TEST SETUP	30
6.1.4 EUT OPERATION CONDITIONS	30
6.1.5 TEST RESULTS	30
7. ANTENNA REQUIREMENT	31
7.1 STANDARD REQUIREMENT	31
7.2 EUT ANTENNA	31
8. TEST SEUUP PHOTO	32
9. EUT PHOTO	32



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.205, 15.247(d)	Band Edge Emission& Conducted Spurious Emissions	PASS	
15.247(b)	Peak Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1

Address: Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\text{MHz}$
9	Power Spectral Density	$\pm 2.45\text{dBm}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Car Video Player
Trademark	Cinandrow
Model No.:	C6, C1, C2, C3, C5, C7, C8, C9, C10, C11, C12, C13, C15, C16, C17, C18, C19, C20
Model Difference	The difference lies in the model name and the color of the appearance.
Sample ID:	DLE-250429007-001#
Operation Frequency:	BLE:2402~2480MHz 2.4G WIFI: 2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40
Channel numbers:	BLE:40 Channels 2.4G WIFI: 11 Channels for 802.11b/g/n(HT20) 7 Channels for 802.11nHT40
Channel separation:	BLE:1M 2.4G WIFI:5MHz
Modulation technology:	BLE:GFSK 2.4G WIFI: 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20/40): OFDM(QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter:	BLE:1Mbps 2.4G WIFI: 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Antenna Type:	FPC Antenna
Antenna gain:	2.55dBi
Power Supply:	DC 5V/3A from Car Charger

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



WIFI 2.4G Channel List (802.11b/g/nHT20)			
Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		
Channel List(802.11nHT40)			
Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		

BLE Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	CH00
Mode 6	CH19
Mode 7	CH39


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	CH00
Mode 6	CH19
Mode 7	CH39

Note: 1. The measurements are performed at the highest, middle, lowest available channels.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Car Video Player	C6	N/A	EUT
E-2	Car Charger	N/A	N/A	Input: DC 12-24V Output: DC 5V/3A

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting							
Test software Version	Test program: WiFi/BLE Test V1.0.1						
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40	CH00	CH19	CH39
Data Rate	1Mbps	6Mbps	MSC0	MSC0	1Mbps	1Mbps	1Mbps



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Power Meter	Ceyear	2438PA/PB	/	Nov. 01, 2024	Oct. 31, 2025
18	Peak/continuous wave power probe	Ceyear	81702F	/	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Peak Output Power Test Equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Power Meter	Agilent	E4419B	230480	Nov. 01, 2024	Oct. 31, 2025
2	RF Cable	Rosenberger	MWX322	MY50510202	Nov. 01, 2024	Oct. 31, 2025
3	10dB Attenuator	Rosenberger	2AS102-K10S3	N/A	Nov. 01, 2024	Oct. 31, 2025



Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation



3.1.4 TEST SETUP

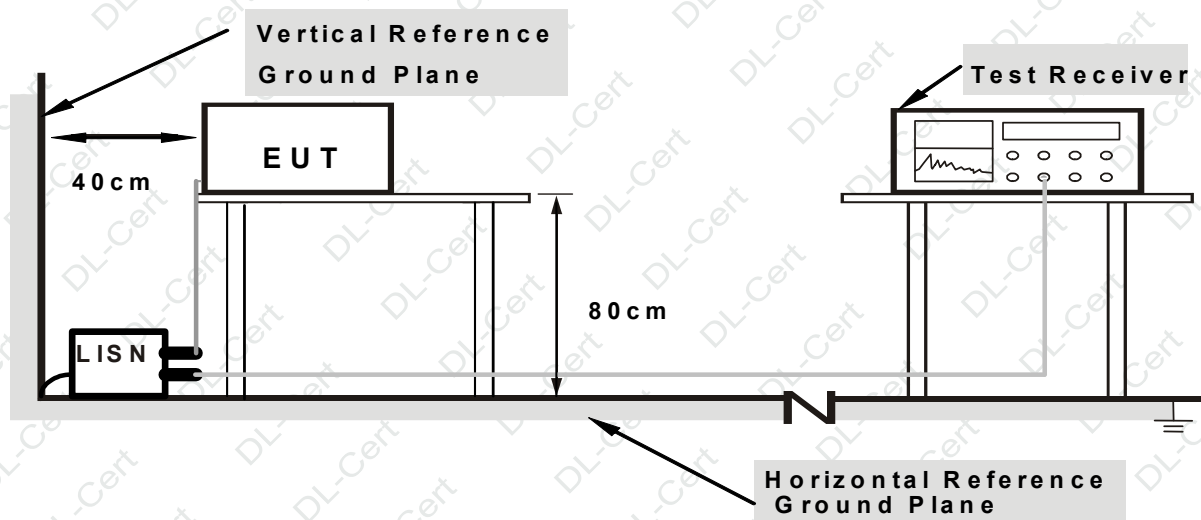

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

EUT is powered by direct current and is not applicable to this project.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

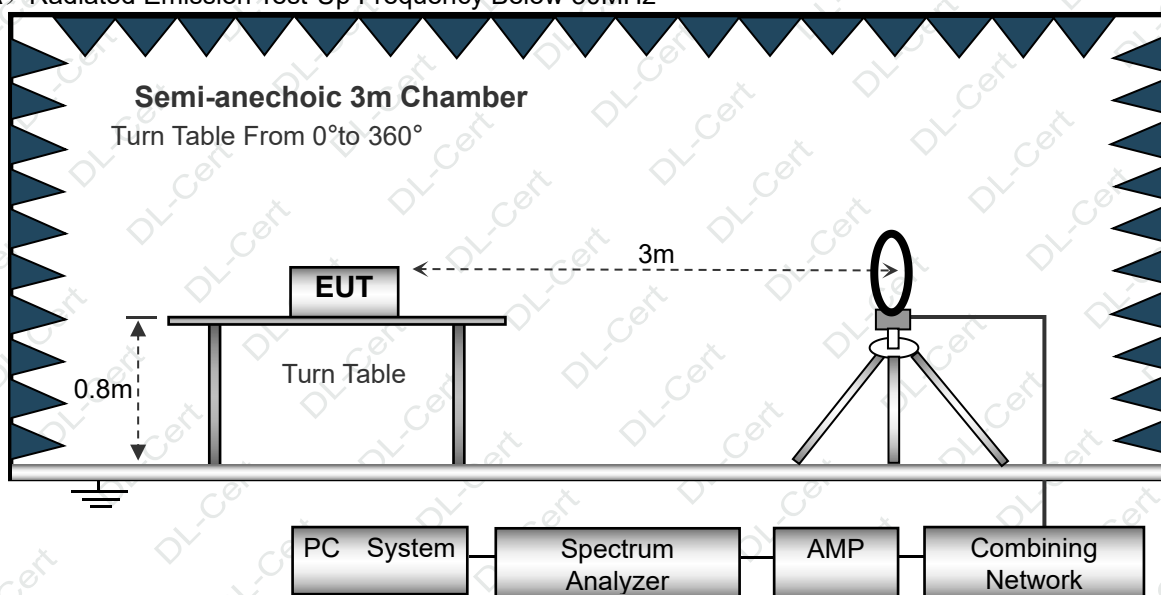

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

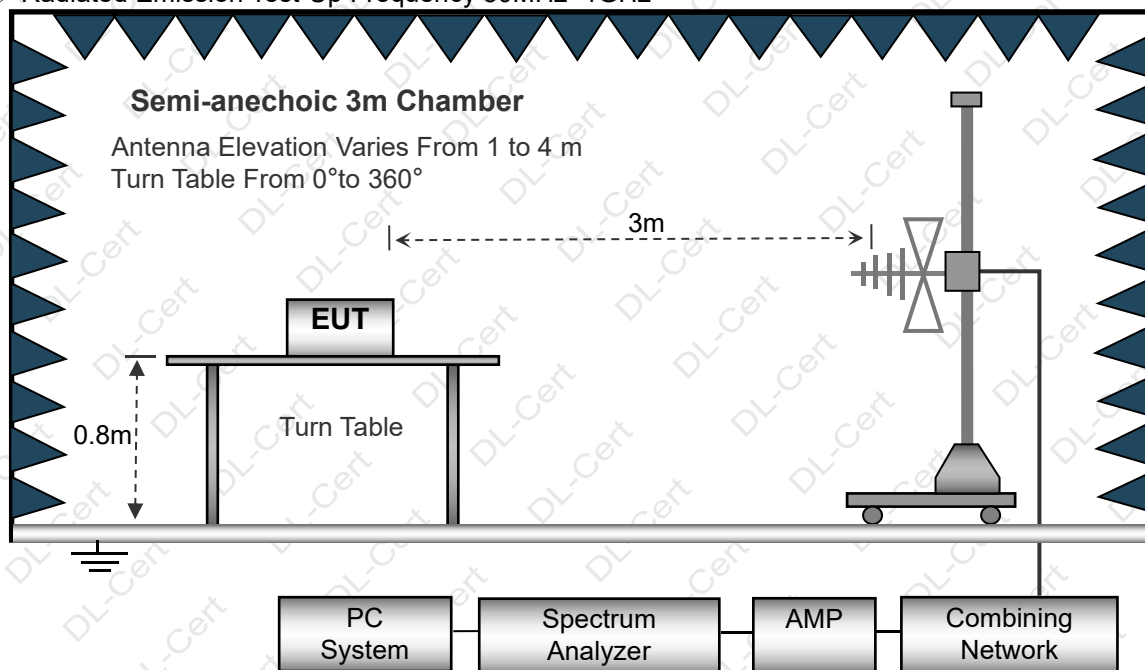

(C) Radiated Emission Test-Up Frequency Above 1GHz

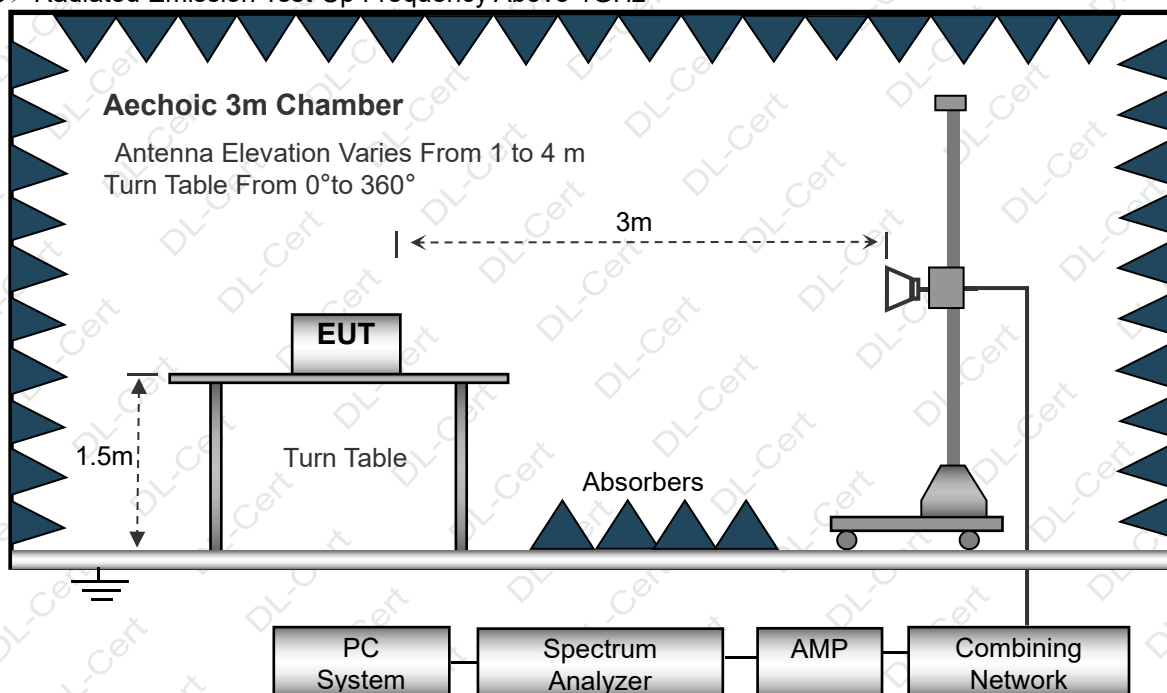

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V/3A from Car Charger
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

All the modulation modes were tested the data of the worst mode (802.11b TX 2412MHz and GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V/3A from Car Charger		
Test Mode :	Mode 1		

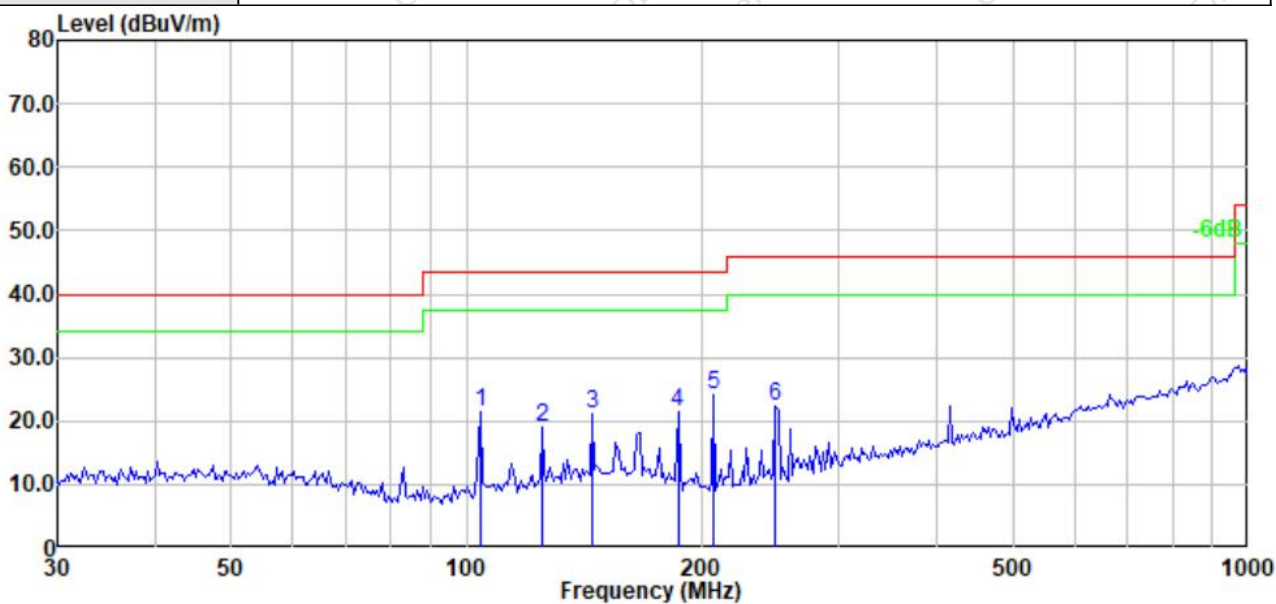

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	104.064	38.79	21.55	-17.24	43.50	-21.95	Horizontal	QP
2	124.925	34.63	19.16	-15.47	43.50	-24.34	Horizontal	QP
3	144.790	35.30	21.12	-14.18	43.50	-22.38	Horizontal	QP
4	186.468	37.31	21.51	-15.80	43.50	-21.99	Horizontal	QP
5	207.197	40.63	24.06	-16.57	43.50	-19.44	Horizontal	QP
6	248.732	37.19	22.29	-14.90	46.00	-23.71	Horizontal	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V/3A from Car Charger		
Test Mode :	Mode 1		

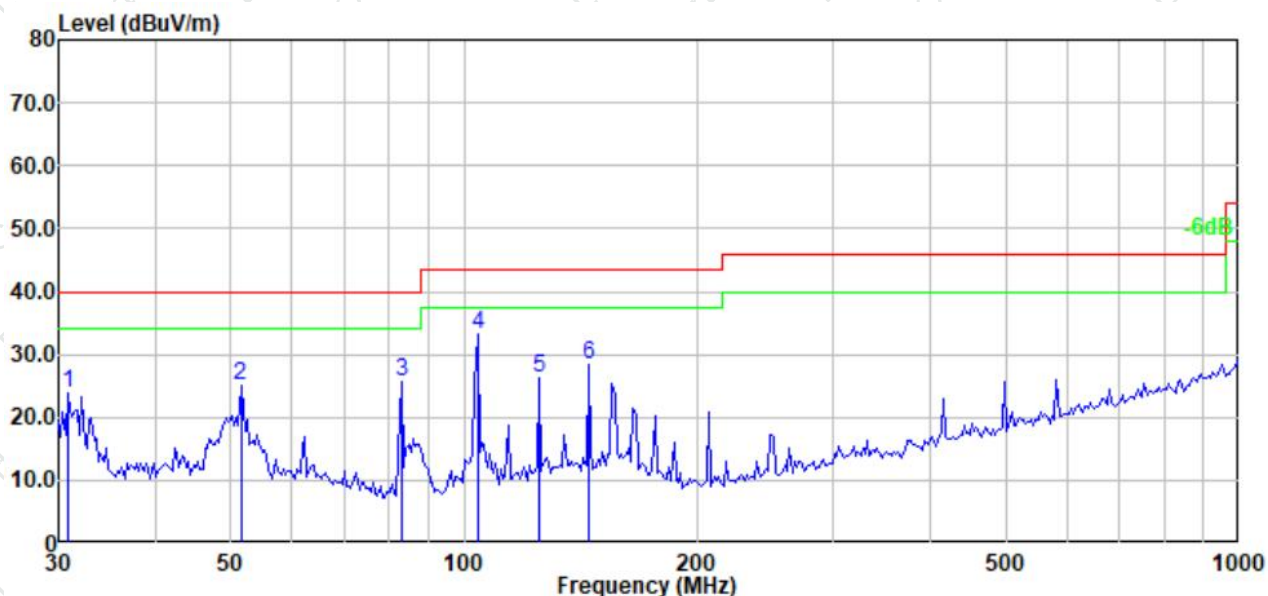

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	30.855	39.02	23.92	-15.10	40.00	-16.08	Vertical	QP
2	51.536	39.22	24.92	-14.30	40.00	-15.08	Vertical	QP
3	83.108	43.94	25.56	-18.38	40.00	-14.44	Vertical	QP
4	104.064	50.44	33.20	-17.24	43.50	-10.30	Vertical	QP
5	124.925	41.88	26.41	-15.47	43.50	-17.09	Vertical	QP
6	144.790	42.52	28.34	-14.18	43.50	-15.16	Vertical	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V/3A from Car Charger		
Test Mode :	Mode 5		

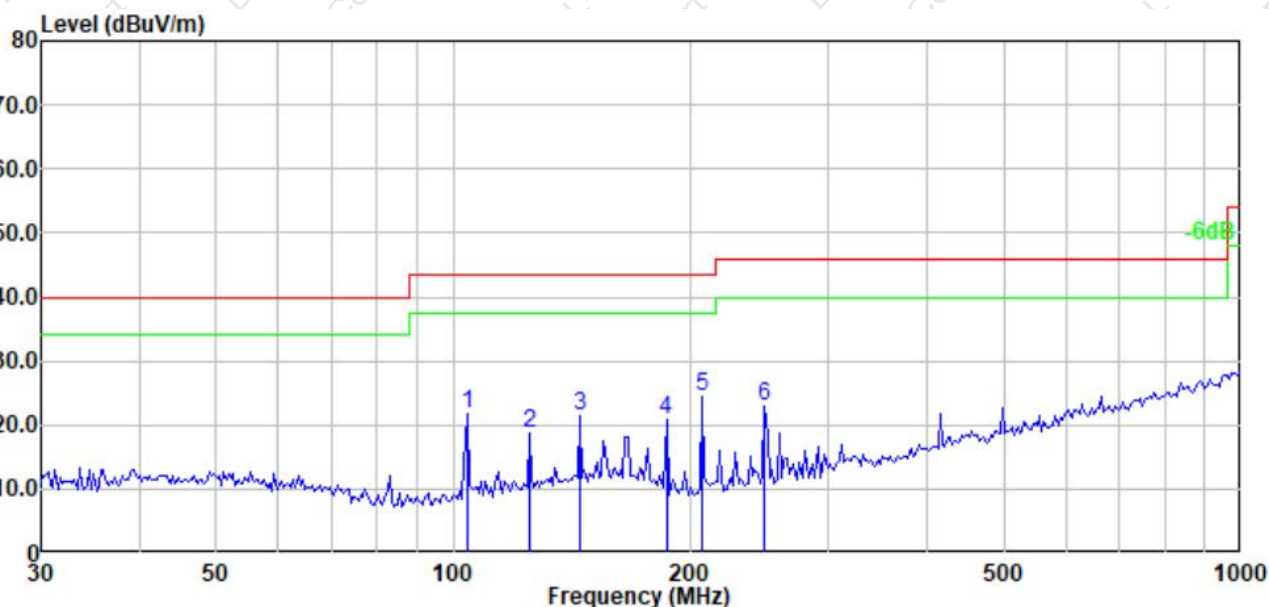

	Read Freq	Level	Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	104.064	39.03	21.79	-17.24	43.50	-21.71	Horizontal	QP
2	124.925	34.33	18.86	-15.47	43.50	-24.64	Horizontal	QP
3	144.790	35.47	21.29	-14.18	43.50	-22.21	Horizontal	QP
4	186.468	36.56	20.76	-15.80	43.50	-22.74	Horizontal	QP
5	207.197	41.09	24.52	-16.57	43.50	-18.98	Horizontal	QP
6	248.732	37.82	22.92	-14.90	46.00	-23.08	Horizontal	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V/3A from Car Charger		
Test Mode :	Mode 5		

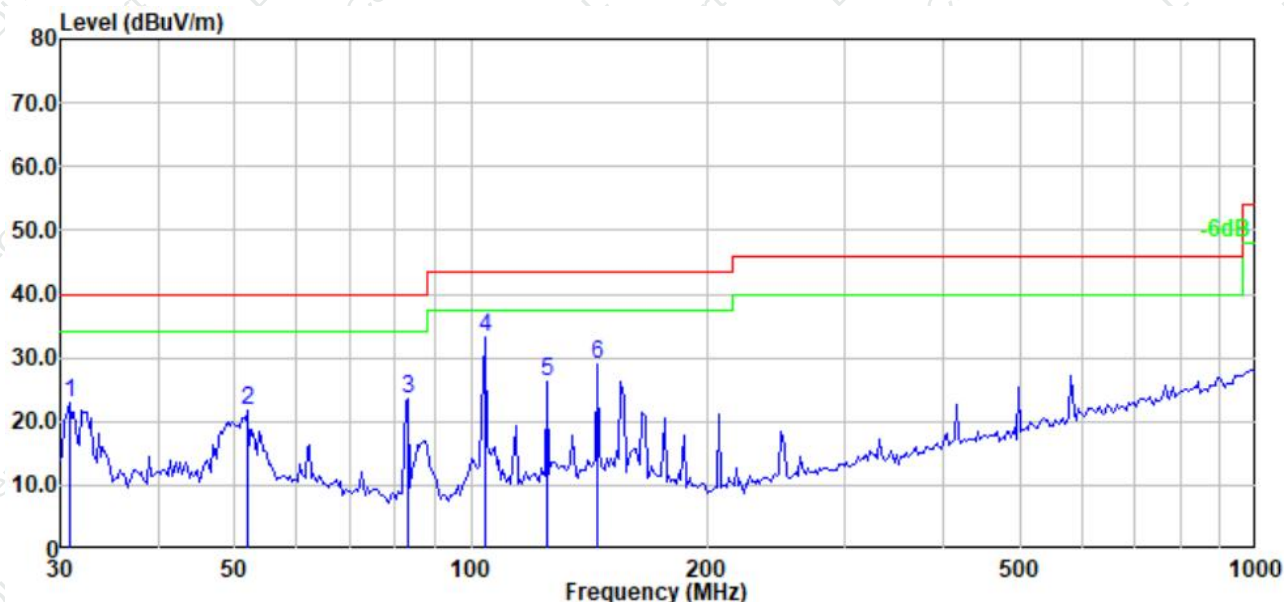

	Read	Limit	Over				
Freq	Level	Level	Factor	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	30.855	37.91	22.81	-15.10	40.00	-17.19	Vertical QP
2	51.900	36.04	21.71	-14.33	40.00	-18.29	Vertical QP
3	83.108	42.06	23.68	-18.38	40.00	-16.32	Vertical QP
4	104.064	50.44	33.20	-17.24	43.50	-10.30	Vertical QP
5	124.925	41.70	26.23	-15.47	43.50	-17.27	Vertical QP
6	144.790	43.11	28.93	-14.18	43.50	-14.57	Vertical QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



3.2.8 TEST RESULTS (1GHZ~25GHZ)

During the test, pre-scan 802.11b, g, n (HT20), n (HT40) mode, and find that 802.11n (HT40) mode was worse. The report only records this mode.

WIFI 2.4GHz: 802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422									
V	4844	65.63	50.65	6.88	31.29	53.15	74.00	-20.85	PK
V	4844	54.58	50.65	6.88	31.29	42.10	54.00	-11.90	AV
V	7266	66.89	49.98	7.16	36.63	60.70	74.00	-13.30	PK
V	7266	47.32	49.98	7.16	36.63	41.13	54.00	-12.87	AV
V	16087	46.47	51.53	11.34	41.52	47.80	74.00	-26.20	PK
H	4844	66.53	50.65	6.88	31.29	54.05	74.00	-19.95	PK
H	4844	55.57	50.65	6.88	31.29	43.09	54.00	-10.91	AV
H	7266	64.67	49.98	7.16	36.63	58.48	74.00	-15.52	PK
H	7266	47.88	49.98	7.16	36.63	41.69	54.00	-12.31	AV
H	16087	47.51	51.53	11.34	41.52	48.84	74.00	-25.16	PK
operation frequency:2437									
V	4874	66.87	50.67	6.89	31.38	54.47	74.00	-19.53	PK
V	4874	54.63	50.67	6.89	31.38	42.23	54.00	-11.77	AV
V	7311	65.77	50.02	7.24	36.63	59.62	74.00	-14.38	PK
V	7311	47.21	50.02	7.24	36.63	41.06	54.00	-12.94	AV
V	16087	48.01	51.53	11.34	41.52	49.34	74.00	-24.66	PK
H	4874	65.95	50.67	6.89	31.38	53.55	74.00	-20.45	PK
H	4874	53.71	50.67	6.89	31.38	41.31	54.00	-12.69	AV
H	7311	65.84	50.02	7.24	36.63	59.69	74.00	-14.31	PK
H	7311	47.32	50.02	7.24	36.63	41.17	54.00	-12.83	AV
H	16087	46.84	51.53	11.34	41.52	48.17	74.00	-25.83	PK
operation frequency:2452									
V	4904	68.11	50.79	6.83	31.36	55.51	74.00	-18.49	PK
V	4904	56.88	50.79	6.83	31.36	44.28	54.00	-9.72	AV
V	7356	64.81	50.11	7.25	36.58	58.53	74.00	-15.47	PK
V	7356	47.41	50.11	7.25	36.58	41.13	54.00	-12.87	AV
V	16087	48.57	51.53	11.34	41.52	49.90	74.00	-24.10	PK
H	4904	66.63	50.79	6.83	31.36	54.03	74.00	-19.97	PK
H	4904	55.55	50.79	6.83	31.36	42.95	54.00	-11.05	AV
H	7356	65.87	50.11	7.25	36.58	59.59	74.00	-14.41	PK
H	7356	46.93	50.11	7.25	36.58	40.65	54.00	-13.35	AV
H	16087	45.44	51.53	11.34	41.52	46.77	74.00	-27.23	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



BLE: GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	4804	76.54	52.12	5.73	27.38	57.53	74.00	-16.47	Pk
V	4804	61.32	52.12	5.73	27.38	42.31	54.00	-11.69	AV
V	7206	76.34	52.16	5.78	27.41	57.37	74.00	-16.63	Pk
V	7206	62.19	52.16	5.78	27.41	43.22	54.00	-10.78	AV
V	16132	74.11	52.12	5.73	27.38	55.10	74.00	-18.90	PK
H	4804	60.23	52.12	5.73	27.38	41.22	74.00	-12.78	Pk
H	4804	62.30	52.16	5.78	27.41	43.33	54.00	-10.67	AV
H	7206	63.22	52.16	5.78	27.41	44.25	74.00	-9.75	Pk
H	7206	61.99	52.12	5.73	27.38	42.98	54.00	-11.02	AV
H	16132	47.47	51.53	11.34	41.52	48.80	74.00	-25.20	PK
operation frequency:2441									
V	4882	71.45	52.23	5.11	27.44	51.77	74.00	-22.23	Pk
V	4882	63.33	52.23	5.73	27.44	44.27	54.00	-9.73	AV
V	7323	72.33	52.26	5.51	27.49	53.07	74.00	-20.93	Pk
V	7323	63.36	52.26	5.51	27.49	44.10	54.00	-9.90	AV
V	16132	72.36	52.23	5.73	27.44	53.30	74.00	-20.70	PK
H	4882	63.21	52.23	5.73	27.44	44.15	74.00	-9.85	Pk
H	4882	63.15	52.26	5.78	27.49	44.16	54.00	-9.84	AV
H	7323	63.22	52.26	5.78	27.49	44.23	74.00	-9.77	Pk
H	7323	64.02	52.23	5.13	27.44	44.36	54.00	-9.64	AV
H	16132	47.57	51.53	11.34	41.52	48.90	74.00	-25.10	PK
operation frequency:2480									
V	4960	63.33	51.74	4.83	31.25	47.67	74.00	-26.33	Pk
V	4960	48.88	51.74	5.11	31.25	33.50	54.00	-20.50	AV
V	7440	65.48	49.98	4.83	36.63	56.96	74.00	-17.04	Pk
V	7440	49.23	49.98	4.91	36.63	40.79	54.00	-13.21	AV
V	16132	65.29	51.53	5.13	41.52	60.41	74.00	-13.59	PK
H	4960	64.12	51.74	5.13	31.25	48.76	74.00	-25.24	Pk
H	4960	47.79	51.74	4.99	31.25	32.29	54.00	-21.71	AV
H	7440	65.54	49.98	5.23	36.63	57.42	74.00	-16.58	Pk
H	7440	50.19	49.98	5.11	36.63	41.95	54.00	-12.05	AV
H	16132	47.74	51.53	11.34	41.52	49.07	74.00	-24.93	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.3.3 DEVIATION FROM TEST STANDARD

No deviation



3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

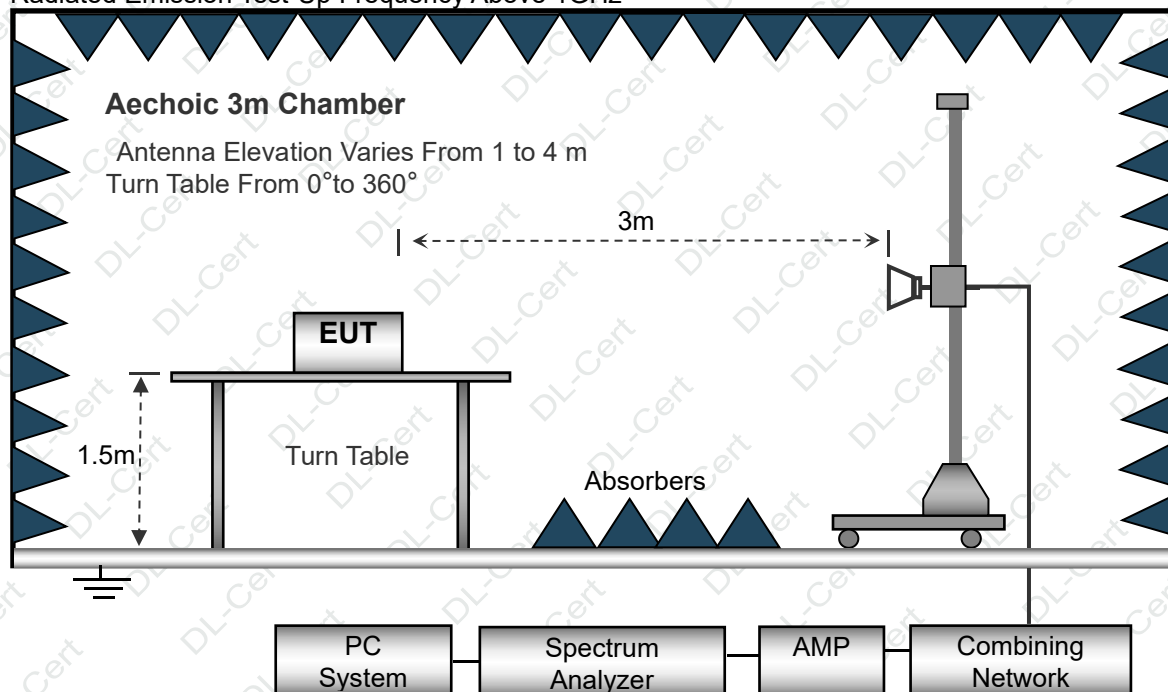

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

During the test, pre-scan 802.11b, g, n (HT20), n (HT40) mode, and find that 802.11n (HT40) mode was worse. The report only records this mode.

WIFI 2.4GHz: 802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2422									
V	2390	75.22	52.12	2.73	27.38	53.21	74.00	-20.79	PK
V	2390	65.56	52.12	2.73	27.38	43.55	54.00	-10.45	AV
V	2400	77.81	52.16	2.78	27.41	55.84	74.00	-18.16	PK
V	2400	65.27	52.16	2.78	27.41	43.30	54.00	-10.70	AV
H	2390	76.67	52.12	2.73	27.38	54.66	74.00	-19.34	PK
H	2390	65.13	52.12	2.73	27.38	43.12	54.00	-10.88	AV
H	2400	75.55	52.16	2.78	27.41	53.58	74.00	-20.42	PK
H	2400	64.66	52.16	2.78	27.41	42.69	54.00	-11.31	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2452									
V	2483.5	75.21	52.23	2.86	27.44	53.28	74.00	-20.72	PK
V	2483.5	63.36	52.23	2.86	27.44	41.43	54.00	-12.57	AV
V	2500	77.46	52.26	2.88	27.49	55.57	74.00	-18.43	PK
V	2500	64.22	52.26	2.88	27.49	42.33	54.00	-11.67	AV
H	2483.5	76.25	52.23	2.86	27.44	54.32	74.00	-19.68	PK
H	2483.5	64.19	52.23	2.86	27.44	42.26	54.00	-11.74	AV
H	2500	77.45	52.26	2.88	27.49	55.56	74.00	-18.44	PK
H	2500	66.48	52.26	2.88	27.49	44.59	54.00	-9.41	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



BLE: GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	71.32	51.77	3.03	27.38	49.96	74.00	-24.04	PK
V	2390.00	50.32	51.77	3.03	27.38	28.96	54.00	-25.04	AV
V	2400.00	73.21	50.02	7.24	27.41	57.84	74.00	-16.16	PK
V	2400.00	53.22	50.02	7.24	27.41	37.85	54.00	-16.15	AV
H	2390.00	65.14	51.53	11.34	27.38	52.33	74.00	-21.67	PK
H	2390.00	61.89	51.77	3.03	27.38	40.53	54.00	-13.47	AV
H	2400.00	68.36	51.77	3.03	27.41	47.03	74.00	-26.97	PK
H	2400.00	58.12	50.02	7.24	27.41	42.75	54.00	-11.25	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	73.54	51.77	3.03	27.44	52.24	74.00	-21.76	PK
V	2483.50	50.32	51.77	3.03	27.44	29.02	54.00	-24.98	AV
V	2500.00	73.46	50.02	7.24	27.49	58.17	74.00	-15.83	PK
V	2500.00	51.23	50.02	7.24	27.49	35.94	54.00	-18.06	AV
H	2483.50	64.19	51.53	11.34	27.44	51.44	74.00	-22.56	PK
H	2483.50	62.44	51.77	3.03	27.44	41.14	54.00	-12.86	AV
H	2500.00	65.36	51.77	3.03	27.49	44.11	74.00	-29.89	PK
H	2500.00	57.19	50.02	7.24	27.49	41.90	54.00	-12.10	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP**3.4.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.6 TEST RESULTS

Pass

Please refer to Appendix I BLE Test Data and Appendix II WIFI 2.4G Test Data.



4. PEAK OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously. Measure the conducted output power and record the results in the test report.
3. Set to the maximum power setting and enable the EUT transmit continuously.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

Pass

Please refer to Appendix I BLE Test Data and Appendix II WIFI 2.4G Test Data.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW $\geq$ 3kHz
VB	VBW $\geq$ 3RBW
Detector	power averaging (rms) or sample detector (when rms not available).
Trace	rms/average
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Pass

Please refer to Appendix I BLE Test Data and Appendix II WIFI 2.4G Test Data.

**6. 6DB BANDWIDTH TEST****6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP**6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Pass

Please refer to Appendix I BLE Test Data and Appendix II WIFI 2.4G Test Data.



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is FPC Antenna, It comply with the standard requirement.



8. TEST SEUUP PHOTO

Reference to the appendix for details.

9. EUT PHOTO

Reference to the appendix for details.

***** END OF REPORT *****