

Product Brief



LCW Series 2.4 GHz Antenna

The LCW dipole antenna is a very cost-effective solution for 2.4 GHz applications including single-band WiFi, Bluetooth®, ZigBee®, and other 802.15.4 solutions. The LCW delivers high efficiency and excellent peak gain in a ground plane independent dipole antenna.

The hinged, rotating, design of the LCW antenna allows for the antenna to be positioned for optimum performance and reduces the potential for damage from impact compared to a fixed whip design.

The LCW antenna is available with an SMA plug (male pin), or RP-SMA plug (female socket) connector for FCC Part 15 compliant applications.



Features

- Performance at 2.4 GHz
 - VSWR: ≤ 1.4
 - Peak Gain: 2.8 dBi
 - Efficiency: 86%
- Ground plane independent
- Hinged, rotating, design with detents for straight, 45 degree and 90 degree positioning
- SMA plug (male pin) or RP-SMA plug (female socket)

Applications

- Single-band WiFi/WLAN
 - 802.11b/g
- 2.4 GHz ISM Applications
 - Bluetooth®
 - ZigBee®
 - IEEE 802.15.4
- Internet of Things (IoT) devices
- Smart Home networking
- Sensing and remote monitoring
- Gateways

Ordering Information

Part Number	Description
ANT-2.4-LCW-SMA	Antenna with SMA plug (male pin)
ANT-2.4-LCW-RPS	Antenna with RP-SMA plug (female socket)

Available from Linx Technologies and select distributors and representatives.

Electrical Specifications

ANT-2.4-LCW-ccc	WiFi / ISM		
Frequency Range	2.4 GHz to 2.485 GHz		
VSWR (max.)	1.4		
Peak Gain (dBi)	2.8		
Average Gain (dBi)	-0.8		
Efficiency (%)	86		
Polarization	Linear	Impedance	50 Ω
Radiation	Omnidirectional	Max Power	10 W
Wavelength	1/2-wave	Electrical Type	Dipole
Weight	7.4 g (0.26 oz)	Operating Temp. Range	-40 °C to +80 °C
Dimensions	Height: 83.1 mm (3.27 in) Diameter: 9.4 mm (0.37 in)		
Connection	SMA plug (male pin) or RP-SMA plug (female socket)		

Electrical specifications and plots measured with antenna, mounted on the edge, bent 90 degrees.

VSWR

Figure 1 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

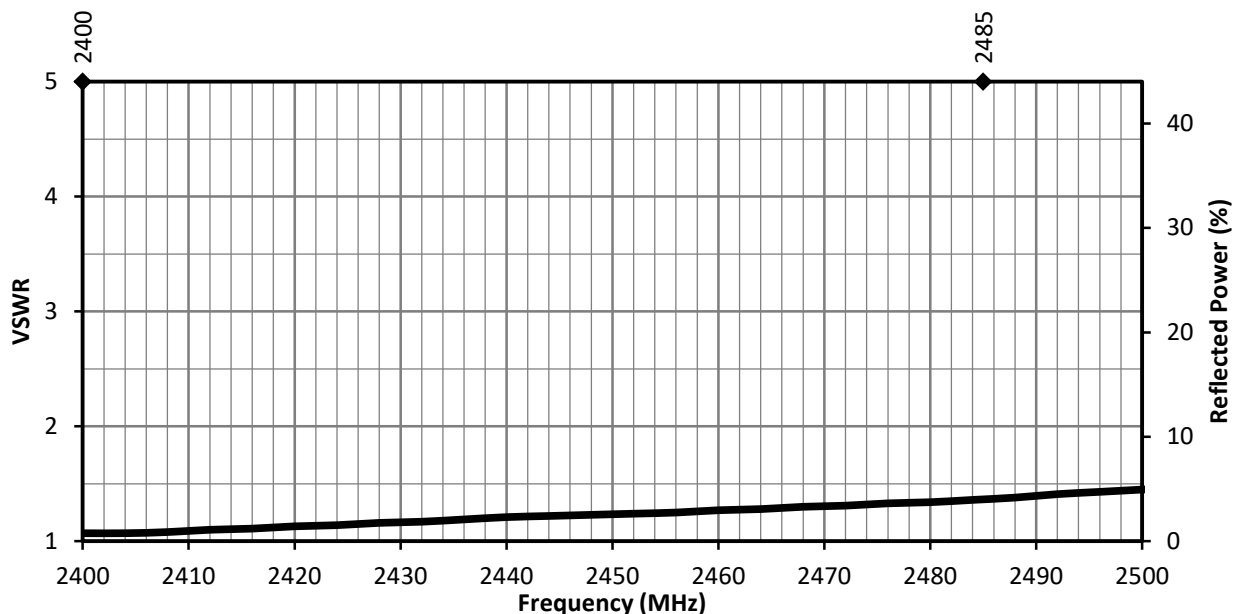


Figure 1. VSWR for the LCW Series Antenna

Website: <http://linxtechnologies.com> • Phone: +1 (541) 471-6256 • E-MAIL: info@linxtechnologies.com • Linx Offices: 159 Ort Lane, Merlin, OR, US 97532

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Bluetooth is a registered trademark of Bluetooth SIG, Inc. ZigBee is a registered trademark of ZigBee Alliance, Inc. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies. All Rights Reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Linx Technologies:](#)

[ANT-2.4-LCW-RPS](#) [ANT-2.4-LCW-SMA](#)