


## Channel 39 (2480MHz)


## 100kHz PSD Reference Level



## High Band Edge

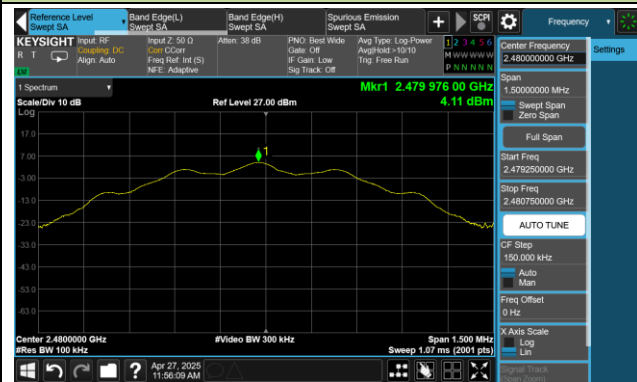


## Spurious Emission 30MHz ~ 25GHz

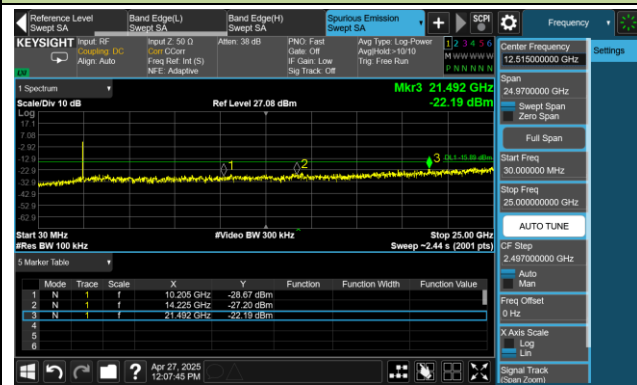

# BLE-500kbps Out-of-Band Emissions

## Channel 00 (2402MHz)


### 100kHz PSD Reference Level

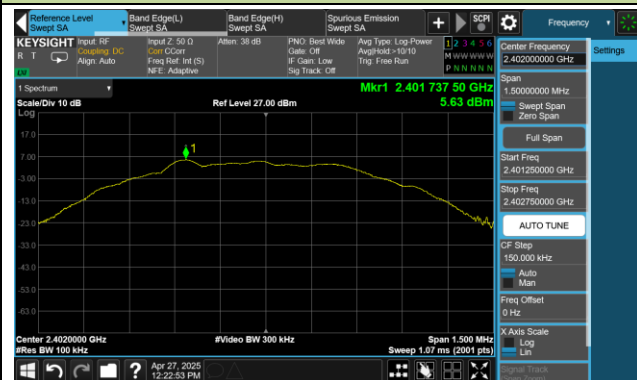

### Low Band Edge




### Spurious Emission 30MHz ~ 25GHz

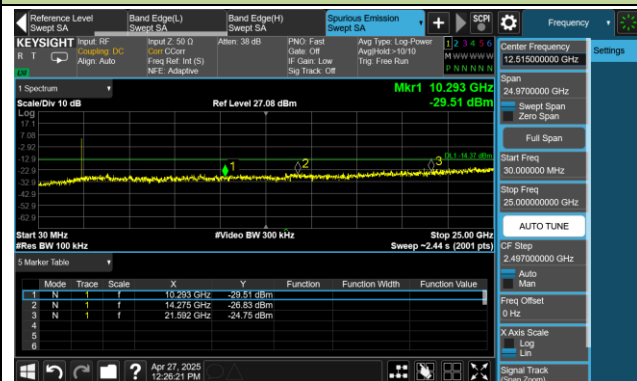


## Channel 19 (2440MHz)

### 100kHz PSD Reference Level

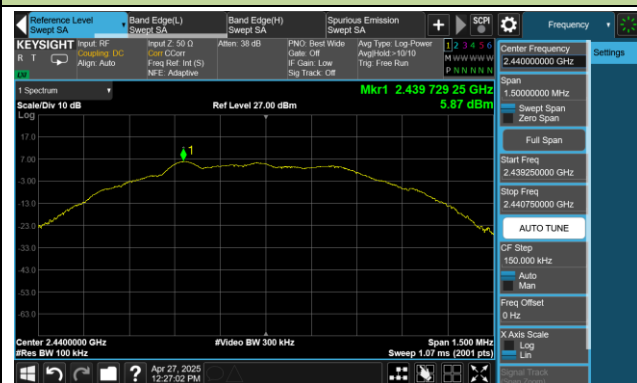


### Spurious Emission 30MHz ~ 25GHz

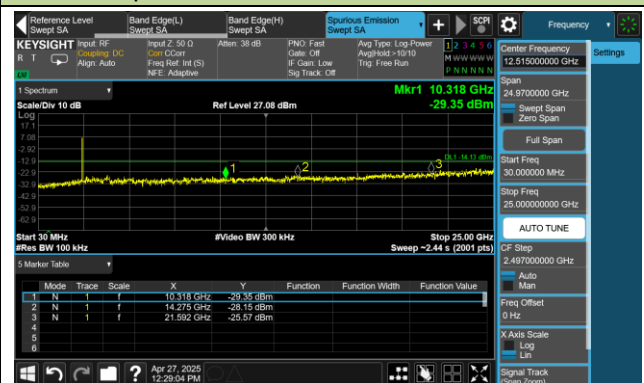

### Channel 39 (2480MHz)


#### 100kHz PSD Reference Level

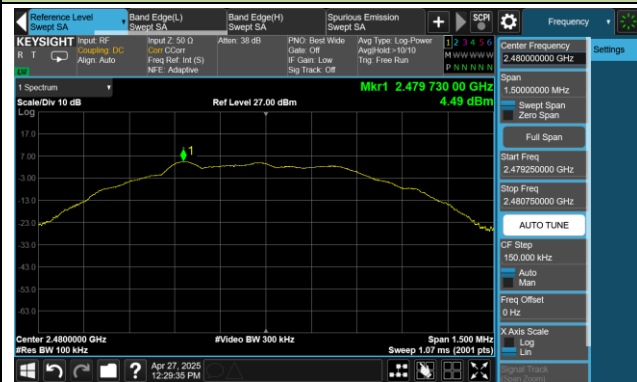

#### High Band Edge




#### Spurious Emission 30MHz ~ 25GHz

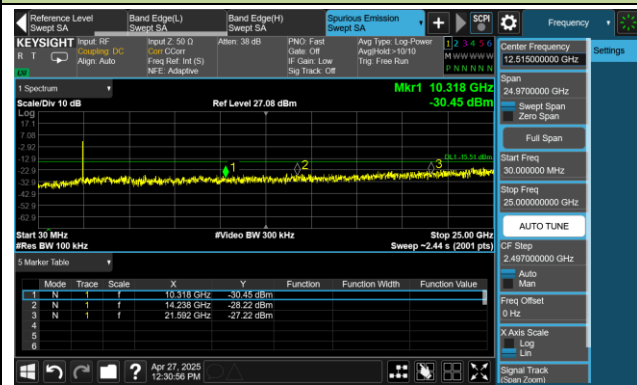


# BLE-1Mbps Out-of-Band Emissions

## Channel 00 (2402MHz)


### 100kHz PSD Reference Level

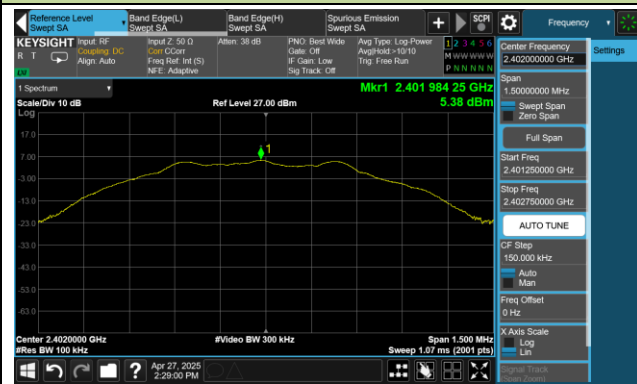

### Low Band Edge

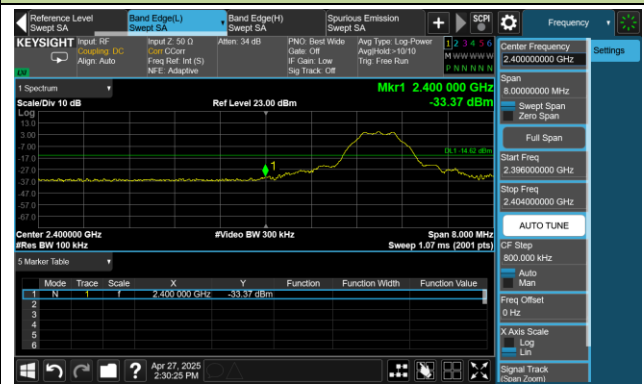


### Spurious Emission 30MHz ~ 25GHz

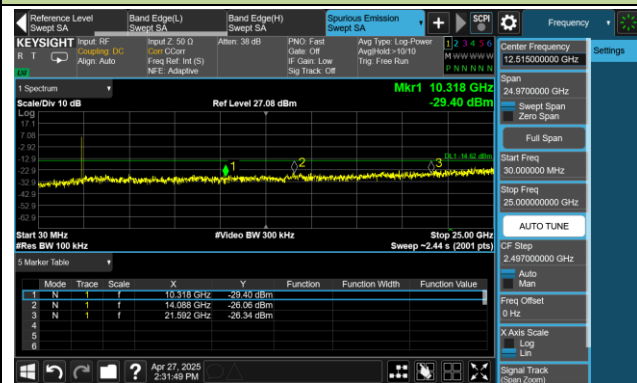


## Channel 19 (2440MHz)

### 100kHz PSD Reference Level

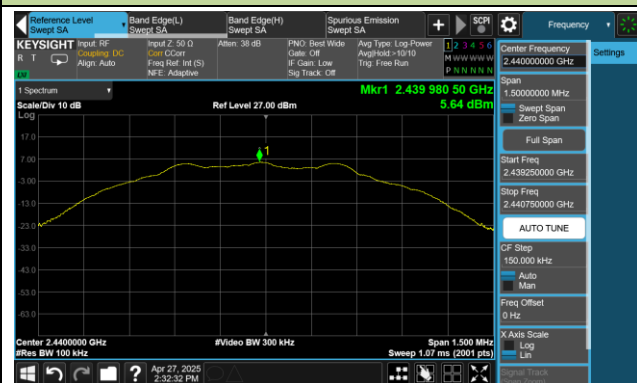


### Spurious Emission 30MHz ~ 25GHz

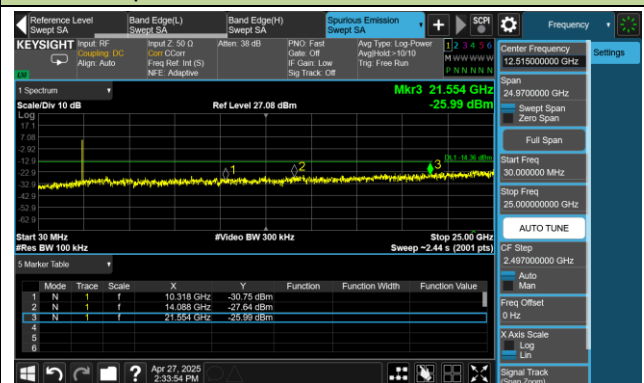


## Channel 39 (2480MHz)


## 100kHz PSD Reference Level

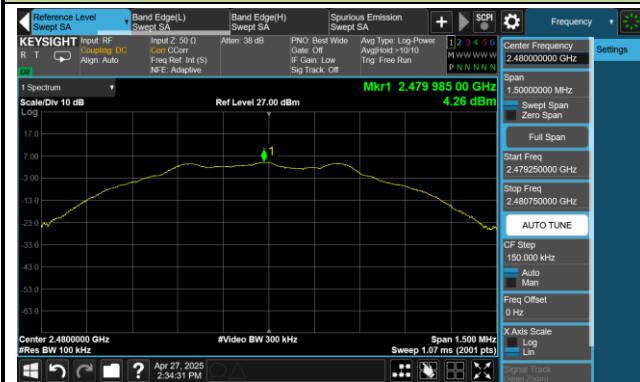

## High Band Edge

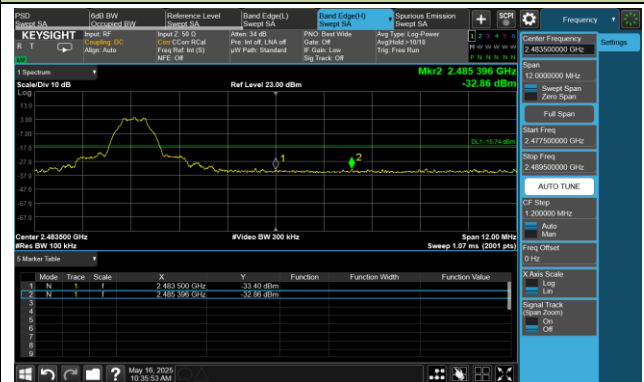


## Spurious Emission 30MHz ~ 25GHz

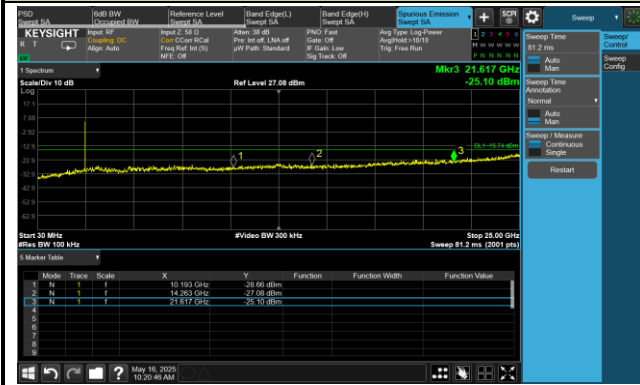

## BLE-2Mbps Out-of-Band Emissions

### Channel 00 (2402MHz)


#### 100kHz PSD Reference Level

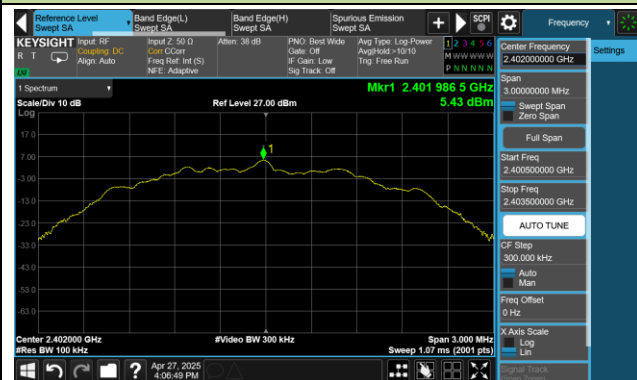

#### Low Band Edge



#### Spurious Emission 30MHz ~ 25GHz

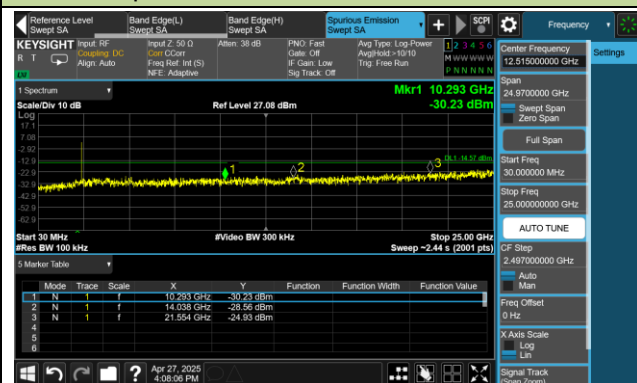

### Channel 19 (2440MHz)

#### 100kHz PSD Reference Level




#### Spurious Emission 30MHz ~ 25GHz



## Channel 39 (2480MHz)


## 100kHz PSD Reference Level

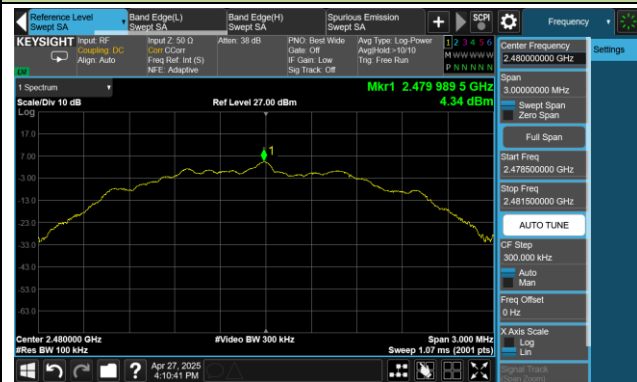

## High Band Edge



## Spurious Emission 30MHz ~ 25GHz

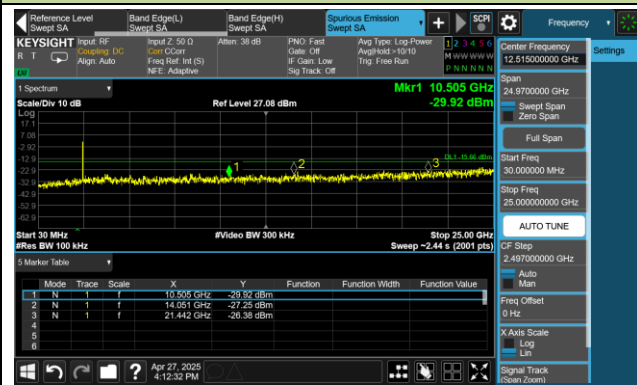

### A.6 Radiated Spurious Emission Test Result

|           |                                                                                                                                                                                   |               |             |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang   |
| Test Date | 2025-05-01                                                                                                                                                                        | Test Mode:    | BLE-125kbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |             |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 00           | 4804.60         | 43.17                | 0.11          | 43.28                  | 74.00          | -30.72      | Peak     | Horizontal   |
|              | 7614.70         | 39.83                | 5.44          | 45.27                  | 74.00          | -28.73      | Peak     | Horizontal   |
|              | 12430.80        | 43.37                | 4.88          | 48.25                  | 74.00          | -25.75      | Peak     | Horizontal   |
|              | 4804.60         | 46.25                | 0.11          | 46.36                  | 74.00          | -27.64      | Peak     | Vertical     |
|              | 8284.50         | 38.99                | 6.27          | 45.26                  | 74.00          | -28.74      | Peak     | Vertical     |
|              | 12009.20        | 41.13                | 5.20          | 46.33                  | 74.00          | -27.67      | Average  | Vertical     |
|              | 12009.20        | 47.00                | 5.20          | 52.20                  | 74.00          | -21.80      | Peak     | Vertical     |
| 19           | 5006.90         | 43.23                | 0.36          | 43.59                  | 74.00          | -30.41      | Peak     | Horizontal   |
|              | 7318.90         | 40.26                | 5.24          | 45.50                  | 54.00          | -8.50       | Average  | Horizontal   |
|              | 7318.90         | 46.71                | 5.24          | 51.95                  | 74.00          | -22.05      | Peak     | Horizontal   |
|              | 11329.20        | 42.49                | 5.68          | 48.17                  | 74.00          | -25.83      | Peak     | Horizontal   |
|              | 4881.10         | 46.34                | 0.12          | 46.46                  | 74.00          | -27.54      | Peak     | Vertical     |
|              | 7320.60         | 40.24                | 5.26          | 45.50                  | 54.00          | -8.50       | Average  | Vertical     |
|              | 7320.60         | 45.98                | 5.26          | 51.24                  | 74.00          | -22.76      | Peak     | Vertical     |
|              | 12197.90        | 43.20                | 4.84          | 48.04                  | 54.00          | -5.96       | Average  | Vertical     |
|              | 12197.90        | 48.78                | 4.84          | 53.62                  | 74.00          | -20.38      | Peak     | Vertical     |
| 39           | 4961.00         | 44.08                | 0.32          | 44.40                  | 74.00          | -29.60      | Peak     | Horizontal   |
|              | 7441.30         | 44.13                | 5.26          | 49.39                  | 74.00          | -24.61      | Peak     | Horizontal   |
|              | 12401.90        | 45.14                | 4.90          | 50.04                  | 74.00          | -23.96      | Peak     | Horizontal   |
|              | 4959.30         | 46.40                | 0.30          | 46.70                  | 74.00          | -27.30      | Peak     | Vertical     |
|              | 7441.30         | 44.30                | 5.26          | 49.56                  | 74.00          | -24.44      | Peak     | Vertical     |
|              | 12398.50        | 43.42                | 4.87          | 48.29                  | 54.00          | -5.71       | Average  | Vertical     |
|              | 12398.50        | 49.83                | 4.87          | 54.70                  | 74.00          | -19.30      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|           |                                                                                                                                                                                   |               |             |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang   |
| Test Date | 2025-05-01                                                                                                                                                                        | Test Mode:    | BLE-500kbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |             |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 00           | 4804.60         | 43.80                | 0.11          | 43.91                  | 74.00          | -30.09      | Peak     | Horizontal   |
|              | 7463.40         | 41.00                | 5.31          | 46.31                  | 74.00          | -27.69      | Peak     | Horizontal   |
|              | 11927.60        | 43.10                | 5.11          | 48.21                  | 74.00          | -25.79      | Peak     | Horizontal   |
|              | 4804.60         | 45.47                | 0.11          | 45.58                  | 74.00          | -28.42      | Peak     | Vertical     |
|              | 8218.20         | 40.06                | 6.24          | 46.30                  | 74.00          | -27.70      | Peak     | Vertical     |
|              | 12009.20        | 39.13                | 5.20          | 44.33                  | 54.00          | -9.67       | Average  | Vertical     |
|              | 12009.20        | 46.38                | 5.20          | 51.58                  | 74.00          | -22.42      | Peak     | Vertical     |
| 19           | 4881.10         | 43.55                | 0.12          | 43.67                  | 74.00          | -30.33      | Peak     | Horizontal   |
|              | 7318.90         | 45.69                | 5.24          | 50.93                  | 74.00          | -23.07      | Peak     | Horizontal   |
|              | 12201.30        | 45.52                | 4.84          | 50.36                  | 74.00          | -23.64      | Peak     | Horizontal   |
|              | 4879.40         | 45.81                | 0.14          | 45.95                  | 74.00          | -28.05      | Peak     | Vertical     |
|              | 7320.60         | 44.90                | 5.26          | 50.16                  | 74.00          | -23.84      | Peak     | Vertical     |
|              | 12201.30        | 45.87                | 4.84          | 50.71                  | 74.00          | -23.29      | Peak     | Vertical     |
| 39           | 4961.00         | 43.67                | 0.32          | 43.99                  | 74.00          | -30.01      | Peak     | Horizontal   |
|              | 7441.30         | 36.80                | 5.26          | 42.06                  | 54.00          | -11.94      | Average  | Horizontal   |
|              | 7441.30         | 45.82                | 5.26          | 51.08                  | 74.00          | -22.92      | Peak     | Horizontal   |
|              | 12400.20        | 44.75                | 4.88          | 49.63                  | 74.00          | -24.37      | Peak     | Horizontal   |
|              | 4959.30         | 46.15                | 0.30          | 46.45                  | 74.00          | -27.55      | Peak     | Vertical     |
|              | 7439.60         | 44.60                | 5.26          | 49.86                  | 74.00          | -24.14      | Peak     | Vertical     |
|              | 12400.20        | 42.14                | 4.88          | 47.02                  | 54.00          | -6.98       | Average  | Vertical     |
|              | 12400.20        | 48.62                | 4.88          | 53.50                  | 74.00          | -20.50      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang |
| Test Date | 2025-05-01                                                                                                                                                                        | Test Mode:    | BLE-1Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 00                                                                                                                                                       | 4163.70         | 42.41                | -1.68         | 40.73                  | 74.00          | -33.27      | Peak     | Horizontal   |
|                                                                                                                                                          | 4993.30         | 42.57                | 0.14          | 42.71                  | 74.00          | -31.29      | Peak     | Horizontal   |
|                                                                                                                                                          | 12007.50        | 44.78                | 5.21          | 49.99                  | 74.00          | -24.01      | Peak     | Horizontal   |
|                                                                                                                                                          | 4804.60         | 46.24                | 0.11          | 46.35                  | 74.00          | -27.65      | Peak     | Vertical     |
|                                                                                                                                                          | 8174.00         | 38.86                | 5.92          | 44.78                  | 74.00          | -29.22      | Peak     | Vertical     |
|                                                                                                                                                          | 12010.90        | 42.26                | 5.20          | 47.46                  | 54.00          | -6.54       | Average  | Vertical     |
|                                                                                                                                                          | 12010.90        | 47.39                | 5.20          | 52.59                  | 74.00          | -21.41      | Peak     | Vertical     |
| 19                                                                                                                                                       | 4879.40         | 43.61                | 0.14          | 43.75                  | 74.00          | -30.25      | Peak     | Horizontal   |
|                                                                                                                                                          | 7320.60         | 41.03                | 5.26          | 46.29                  | 54.00          | -7.71       | Average  | Horizontal   |
|                                                                                                                                                          | 7320.60         | 46.66                | 5.26          | 51.92                  | 74.00          | -22.08      | Peak     | Horizontal   |
|                                                                                                                                                          | 12092.50        | 43.95                | 5.14          | 49.09                  | 74.00          | -24.91      | Peak     | Horizontal   |
|                                                                                                                                                          | 4879.40         | 45.94                | 0.14          | 46.08                  | 74.00          | -27.92      | Peak     | Vertical     |
|                                                                                                                                                          | 7320.60         | 44.75                | 5.26          | 50.01                  | 74.00          | -23.99      | Peak     | Vertical     |
|                                                                                                                                                          | 12201.30        | 42.06                | 4.84          | 46.90                  | 54.00          | -7.10       | Average  | Vertical     |
|                                                                                                                                                          | 12201.30        | 47.65                | 4.84          | 52.49                  | 74.00          | -21.51      | Peak     | Vertical     |
| 39                                                                                                                                                       | 4959.30         | 43.39                | 0.30          | 43.69                  | 74.00          | -30.31      | Peak     | Horizontal   |
|                                                                                                                                                          | 7439.60         | 44.58                | 5.26          | 49.84                  | 74.00          | -24.16      | Peak     | Horizontal   |
|                                                                                                                                                          | 12401.90        | 45.67                | 4.90          | 50.57                  | 74.00          | -23.43      | Peak     | Horizontal   |
|                                                                                                                                                          | 4961.00         | 44.63                | 0.32          | 44.95                  | 74.00          | -29.05      | Peak     | Vertical     |
|                                                                                                                                                          | 7439.60         | 44.21                | 5.26          | 49.47                  | 74.00          | -24.53      | Peak     | Vertical     |
|                                                                                                                                                          | 12398.50        | 45.10                | 4.87          | 49.97                  | 54.00          | -4.03       | Average  | Vertical     |
|                                                                                                                                                          | 12398.50        | 49.48                | 4.87          | 54.35                  | 74.00          | -19.65      | Peak     | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Bob Zhang |
| Test Date | 2025-05-01                                                                                                                                                                        | Test Mode:    | BLE-2Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |


| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 00           | 4029.40         | 41.88                | -1.32         | 40.56                  | 74.00          | -33.44      | Peak     | Horizontal   |
|              | 4932.10         | 41.87                | 0.32          | 42.19                  | 74.00          | -31.81      | Peak     | Horizontal   |
|              | 12201.30        | 44.31                | 4.84          | 49.15                  | 74.00          | -24.85      | Peak     | Horizontal   |
|              | 4802.90         | 45.26                | 0.11          | 45.37                  | 74.00          | -28.63      | Peak     | Vertical     |
|              | 12007.50        | 38.91                | 5.21          | 44.12                  | 54.00          | -9.88       | Average  | Vertical     |
|              | 12007.50        | 47.64                | 5.21          | 52.85                  | 74.00          | -21.15      | Peak     | Vertical     |
|              | 16029.70        | 34.67                | 6.56          | 41.23                  | 54.00          | -12.77      | Average  | Vertical     |
|              | 16029.70        | 46.74                | 6.56          | 53.30                  | 74.00          | -20.70      | Peak     | Vertical     |
| 19           | 4685.60         | 43.34                | 0.04          | 43.38                  | 74.00          | -30.62      | Peak     | Horizontal   |
|              | 7318.90         | 38.26                | 5.24          | 43.50                  | 54.00          | -10.50      | Average  | Horizontal   |
|              | 7318.90         | 46.43                | 5.24          | 51.67                  | 74.00          | -22.33      | Peak     | Horizontal   |
|              | 12141.80        | 44.39                | 5.05          | 49.44                  | 74.00          | -24.56      | Peak     | Horizontal   |
|              | 4881.10         | 45.27                | 0.12          | 45.39                  | 74.00          | -28.61      | Peak     | Vertical     |
|              | 7318.90         | 43.94                | 5.24          | 49.18                  | 74.00          | -24.82      | Peak     | Vertical     |
|              | 12203.00        | 37.02                | 4.84          | 41.86                  | 54.00          | -12.14      | Average  | Vertical     |
|              | 12203.00        | 46.68                | 4.84          | 51.52                  | 74.00          | -22.48      | Peak     | Vertical     |
| 39           | 4959.30         | 44.20                | 0.30          | 44.50                  | 74.00          | -29.50      | Peak     | Horizontal   |
|              | 7437.90         | 45.29                | 5.25          | 50.54                  | 74.00          | -23.46      | Peak     | Horizontal   |
|              | 11873.20        | 43.11                | 5.03          | 48.14                  | 74.00          | -25.86      | Peak     | Horizontal   |
|              | 4959.30         | 44.55                | 0.30          | 44.85                  | 74.00          | -29.15      | Peak     | Vertical     |
|              | 7441.30         | 45.35                | 5.26          | 50.61                  | 74.00          | -23.39      | Peak     | Vertical     |
|              | 12396.80        | 43.23                | 4.85          | 48.08                  | 54.00          | -5.92       | Average  | Vertical     |
|              | 12396.80        | 47.56                | 4.85          | 52.41                  | 74.00          | -21.59      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1GHz:

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15.209_RSE (3m)      | Test Engineer | Bob Zhang  |
| Factor      | VULB 9163_07097               | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2480MHz |               |            |

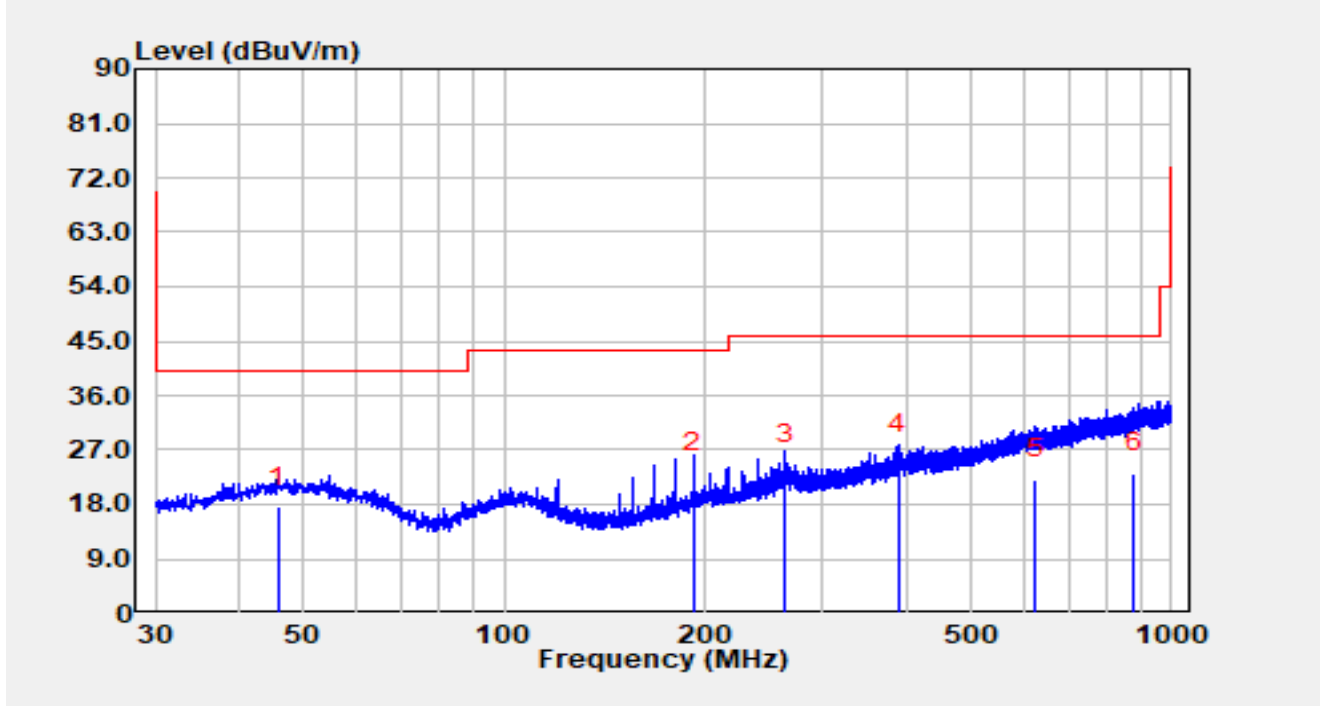


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 45.908          | -1.80          | 19.43      | 17.63                | -22.37      | 40.00          | QP       |
| 2  |      | 191.990         | 6.30           | 16.85      | 23.15                | -20.35      | 43.50          | QP       |
| 3  |      | 264.061         | 5.40           | 19.23      | 24.63                | -21.37      | 46.00          | QP       |
| 4  | *    | 388.803         | 4.20           | 22.13      | 26.33                | -19.67      | 46.00          | QP       |
| 5  |      | 625.580         | -4.30          | 26.44      | 22.14                | -23.86      | 46.00          | QP       |
| 6  |      | 878.944         | -6.30          | 29.43      | 23.13                | -22.87      | 46.00          | QP       |

#### Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15.209_RSE (3m)      | Test Engineer | Bob Zhang  |
| Factor      | VULB 9163_07097               | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2480MHz |               |            |

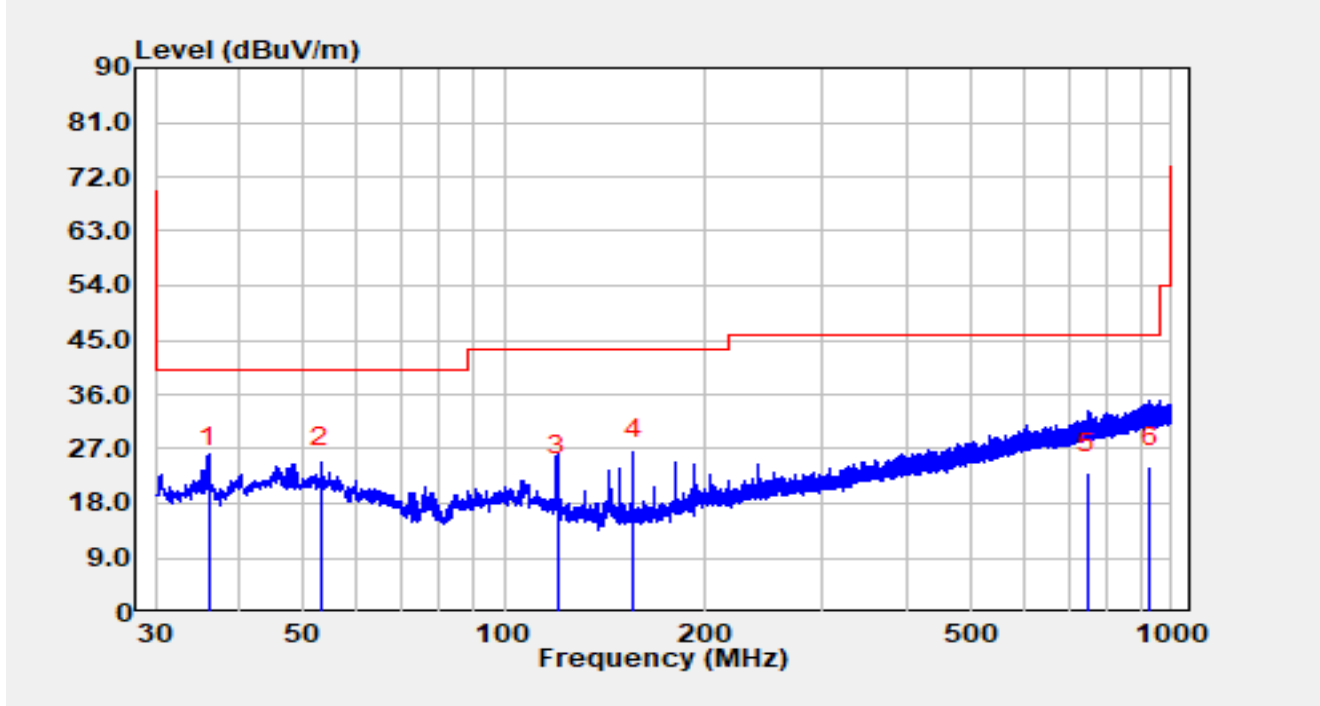


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 36.014          | 6.80           | 17.28      | 24.08                | -15.92      | 40.00          | QP       |
| 2  |      | 53.183          | 4.60           | 19.26      | 23.86                | -16.14      | 40.00          | QP       |
| 3  |      | 120.016         | 6.90           | 15.62      | 22.52                | -20.98      | 43.50          | QP       |
| 4  |      | 156.003         | 11.02          | 14.22      | 25.24                | -18.26      | 43.50          | QP       |
| 5  |      | 746.733         | -5.10          | 28.04      | 22.94                | -23.06      | 46.00          | QP       |
| 6  |      | 929.093         | -5.80          | 29.77      | 23.97                | -22.03      | 46.00          | QP       |

#### Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

### A.7 Radiated Restricted Band Edge Test Result

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2402MHz |               |            |

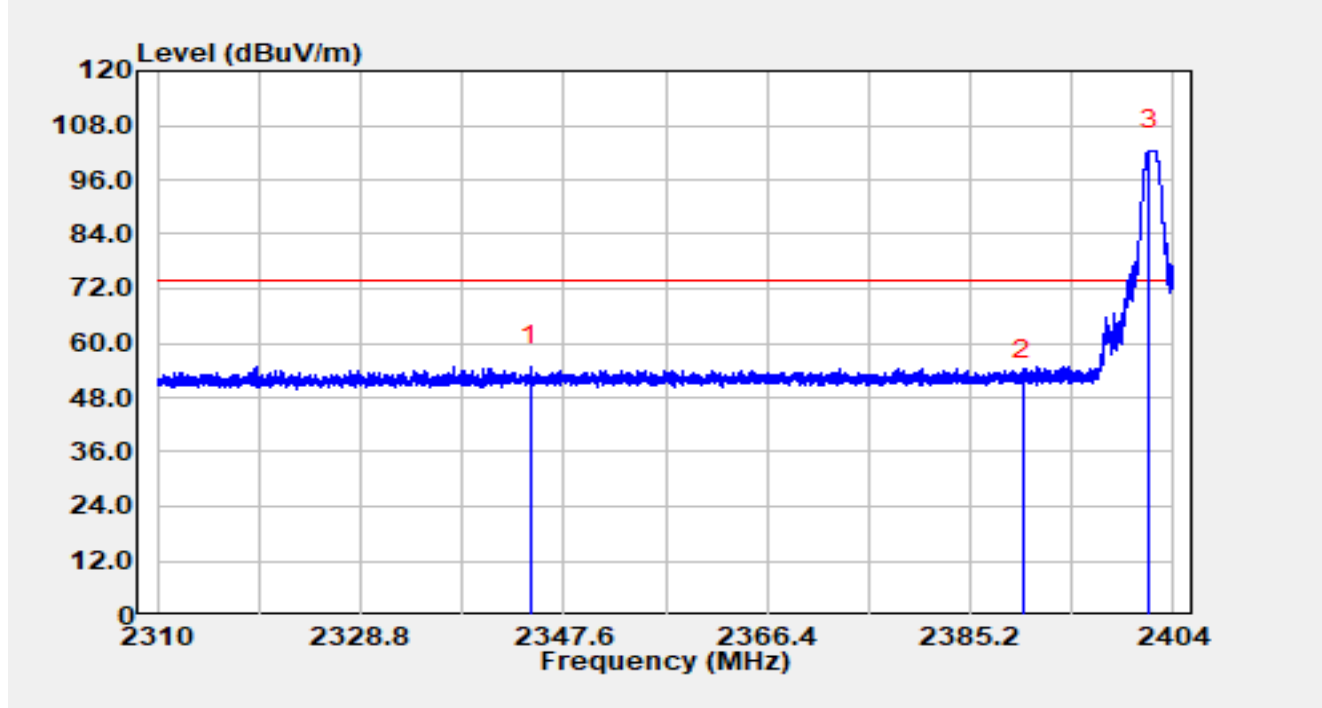


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2344.554        | 25.35          | 29.50      | 54.85                | -19.15      | 74.00          | Peak     |
| 2  |      | 2390.000        | 22.30          | 29.59      | 51.90                | -22.10      | 74.00          | Peak     |
| 3  |      | 2401.725        | 72.91          | 29.64      | 102.54               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2402MHz |               |            |

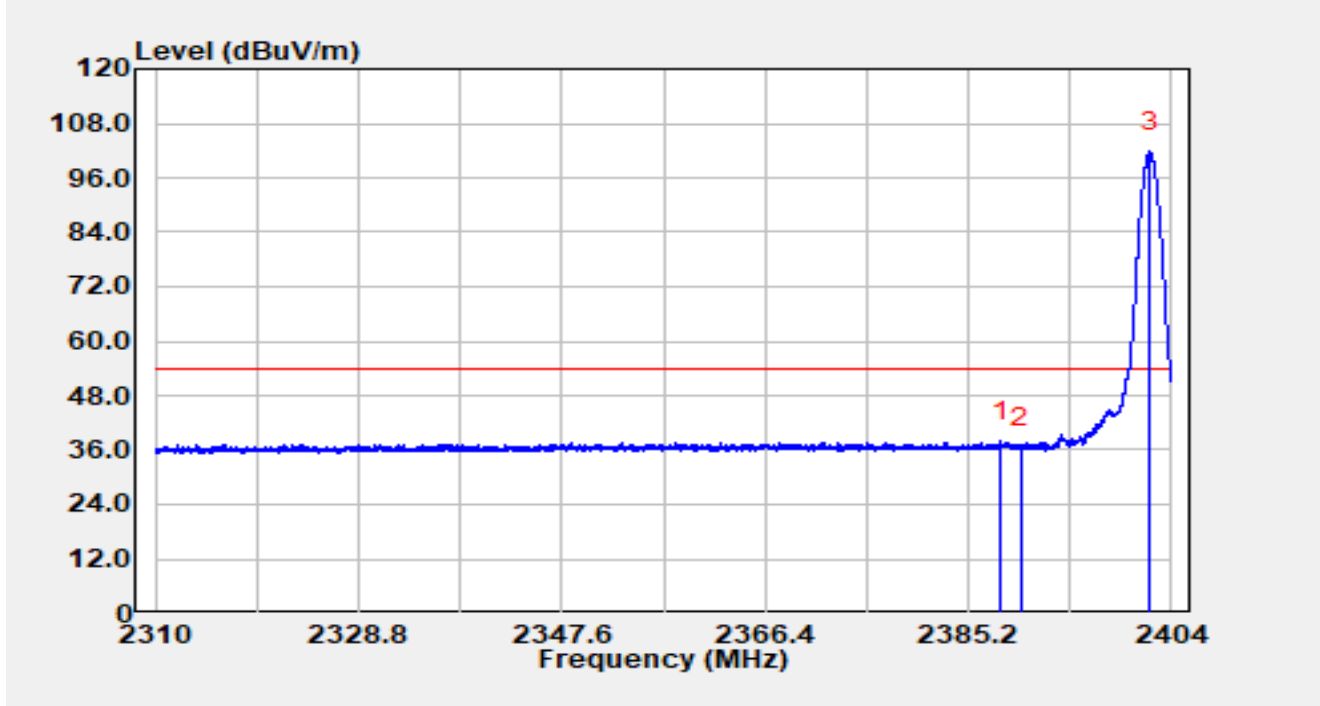


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.152        | 8.31           | 29.58      | 37.89                | -16.11      | 54.00          | Average  |
| 2  |      | 2390.000        | 6.89           | 29.59      | 36.48                | -17.52      | 54.00          | Average  |
| 3  |      | 2401.960        | 72.08          | 29.64      | 101.72               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2402MHz |               |            |

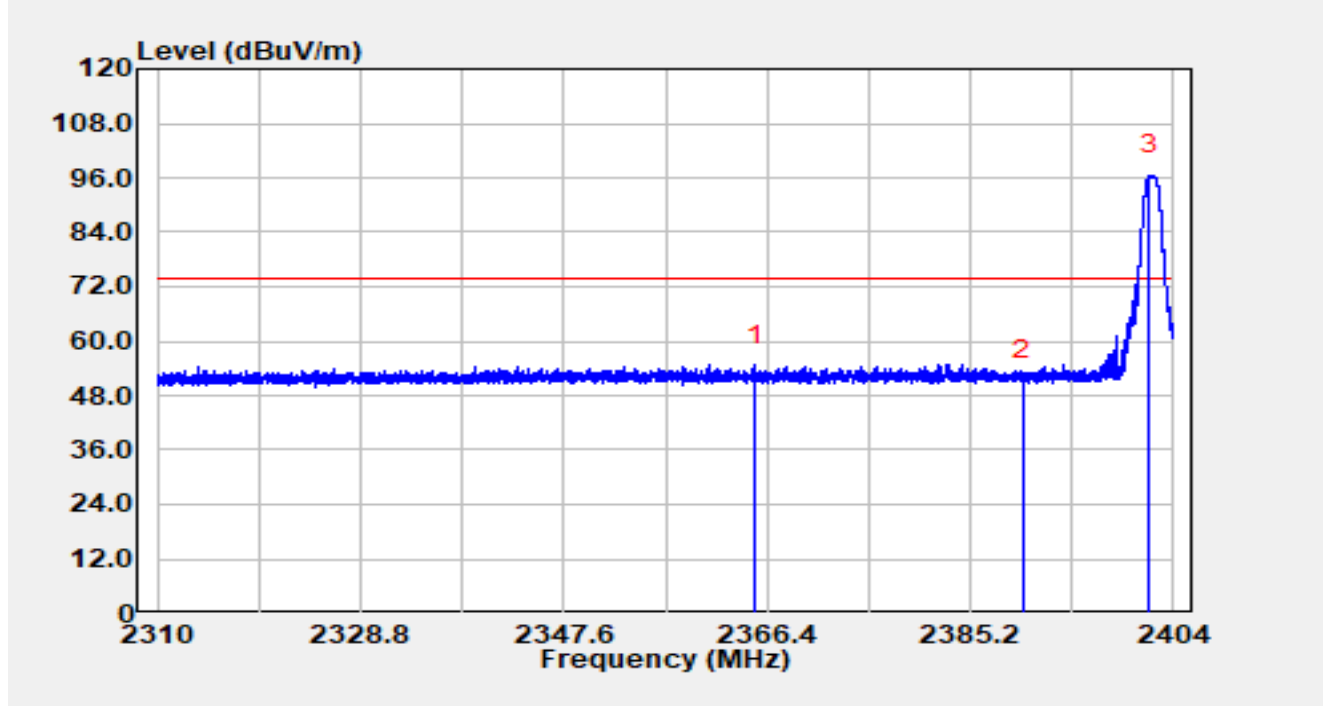


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2365.310        | 25.20          | 29.56      | 54.76                | -19.24      | 74.00          | Peak     |
| 2  |      | 2390.000        | 21.85          | 29.59      | 51.44                | -22.56      | 74.00          | Peak     |
| 3  |      | 2401.781        | 66.91          | 29.64      | 96.54                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2402MHz |               |            |

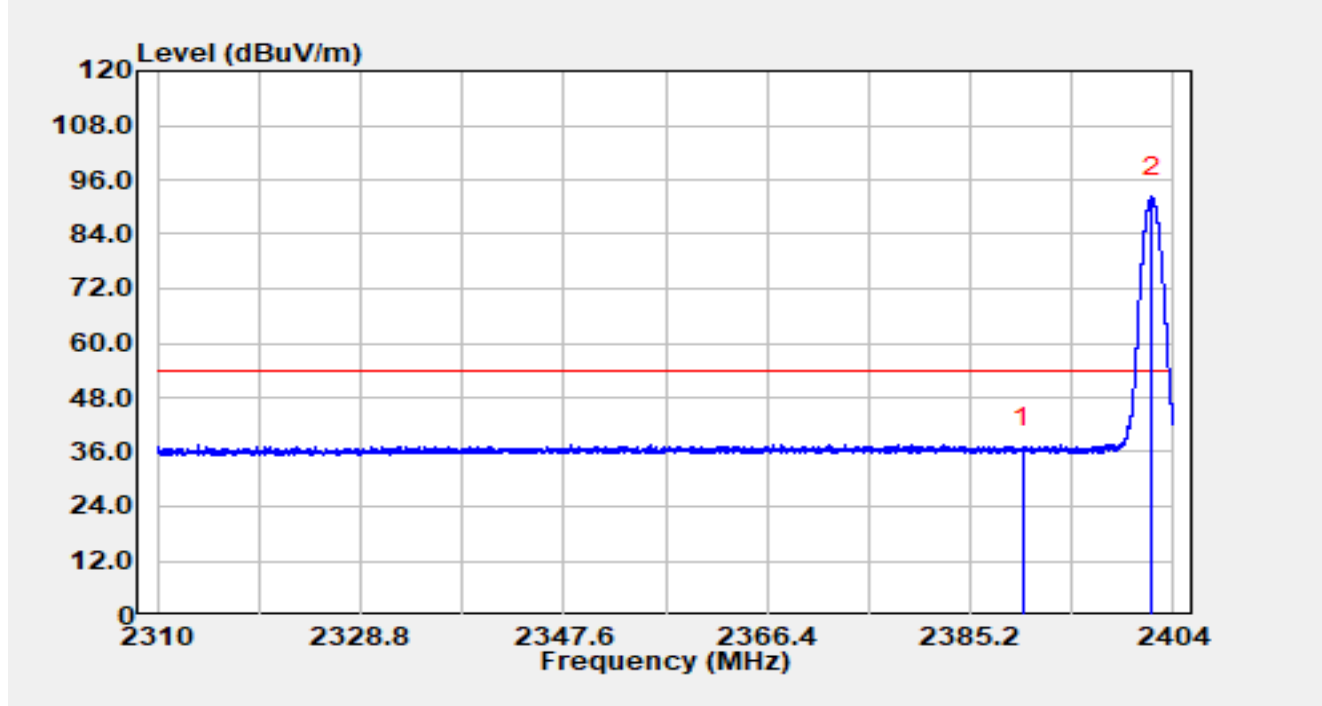


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2390.003        | 7.20           | 29.59      | 36.80                | -17.20      | 54.00          | Average  |
| 2  |      | 2401.998        | 62.59          | 29.64      | 92.22                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2480MHz |               |            |

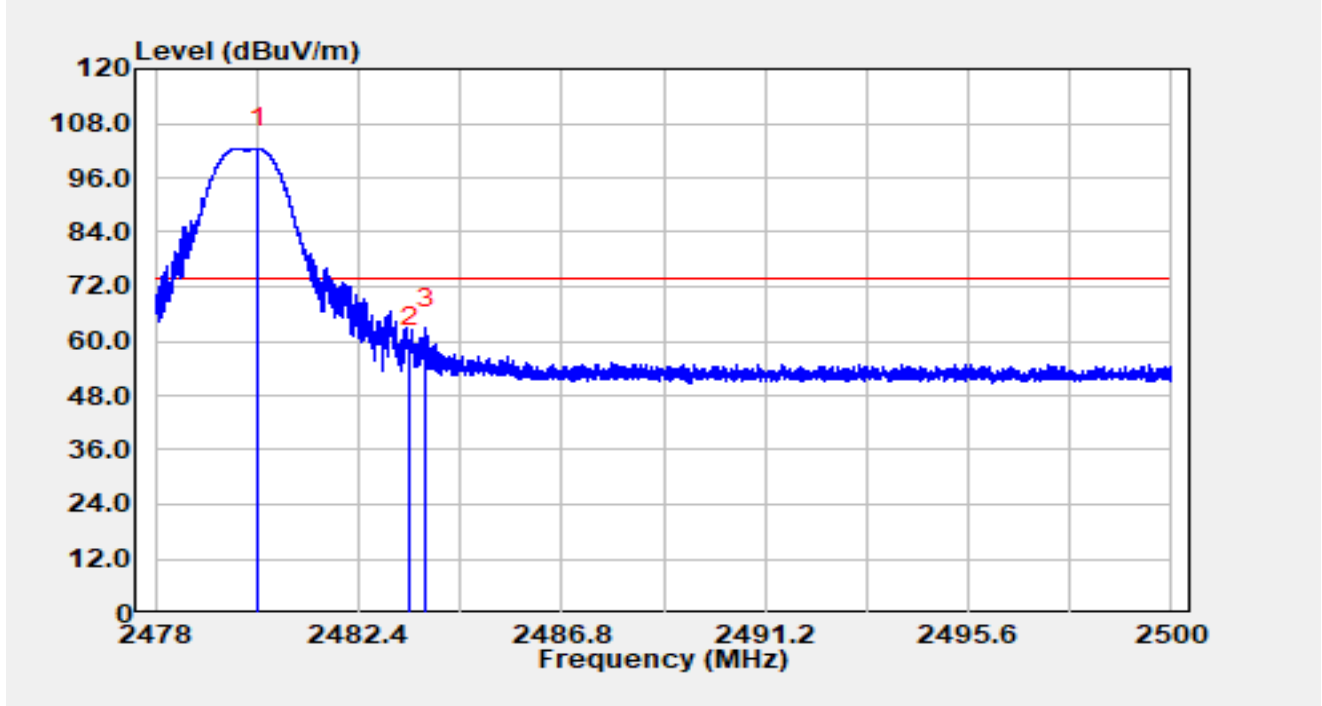


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.237        | 72.65          | 29.75      | 102.41               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 28.91          | 29.76      | 58.67                | -15.33      | 74.00          | Peak     |
| 3  | *    | 2483.865        | 33.04          | 29.77      | 62.81                | -11.19      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2480MHz |               |            |

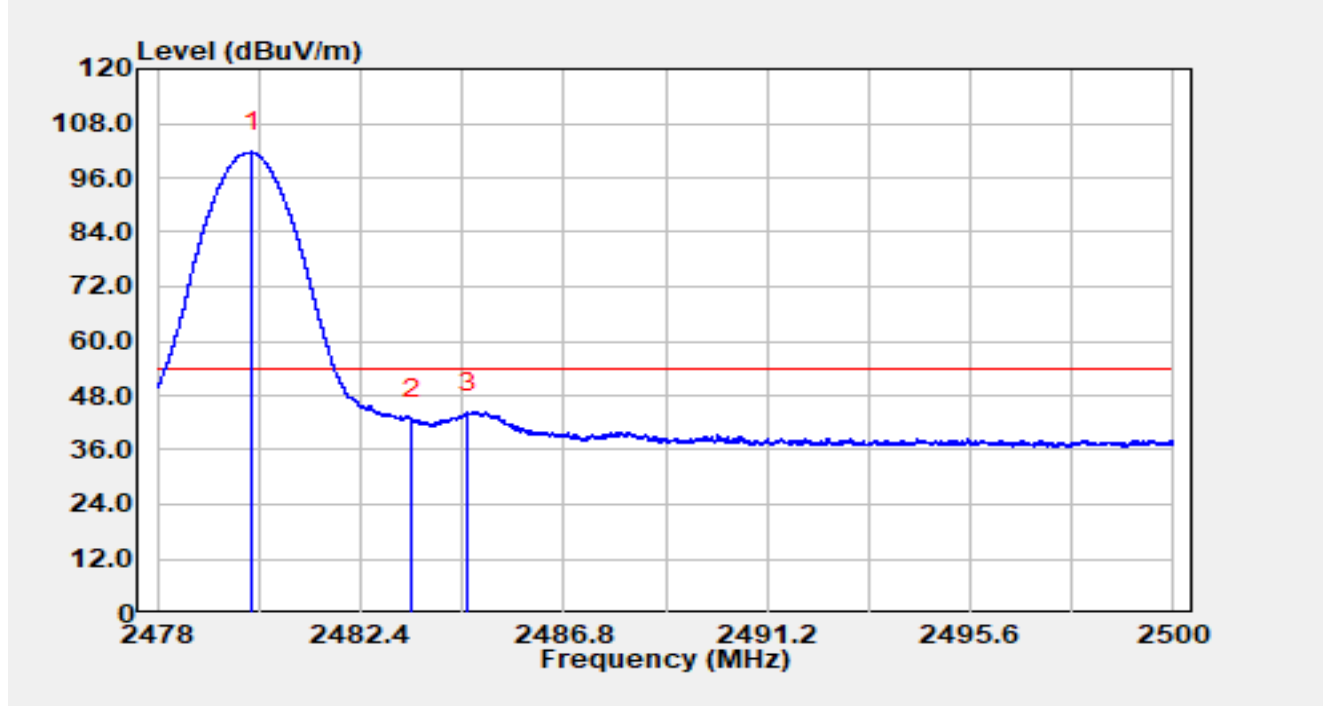


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.057        | 71.93          | 29.75      | 101.68               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 13.04          | 29.76      | 42.80                | -11.20      | 54.00          | Average  |
| 3  | *    | 2484.712        | 14.58          | 29.77      | 44.34                | -9.66       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2480MHz |               |            |

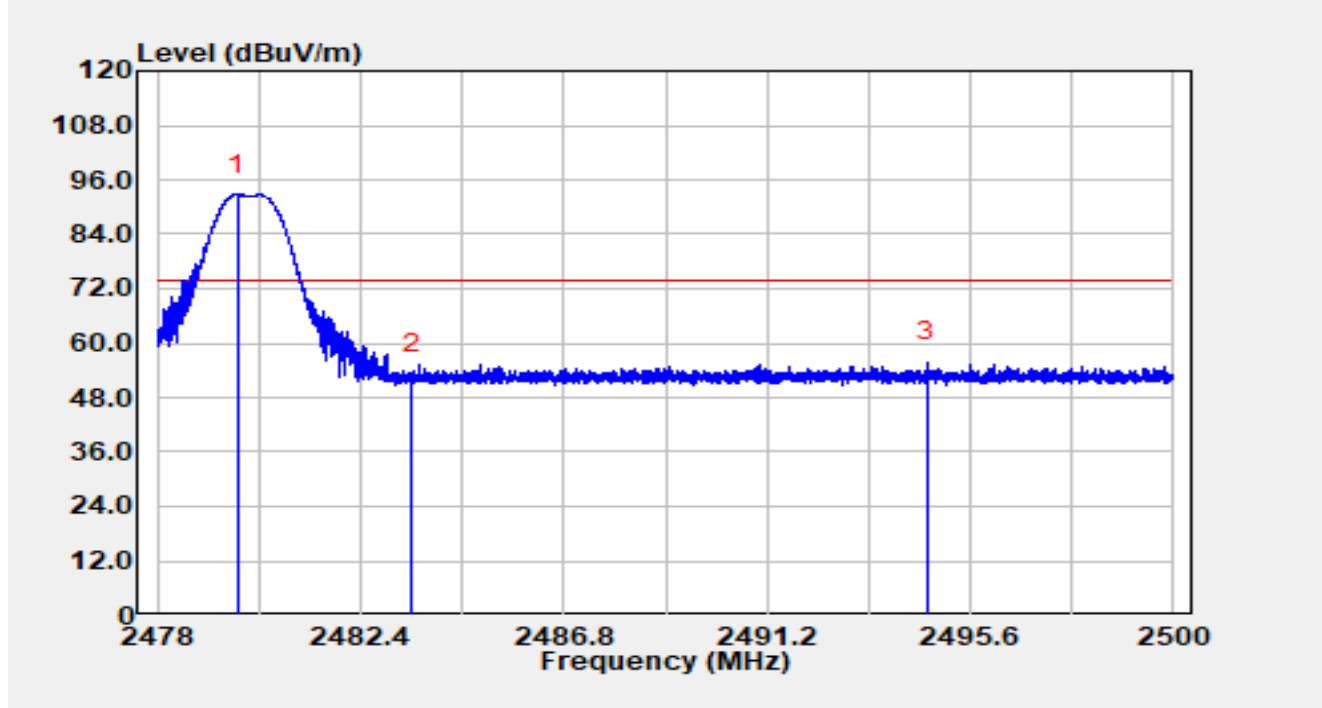


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.729        | 63.04          | 29.75      | 92.79                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 23.53          | 29.76      | 53.29                | -20.71      | 74.00          | Peak     |
| 3  | *    | 2494.661        | 25.96          | 29.79      | 55.75                | -18.25      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 125k at 2480MHz |               |            |

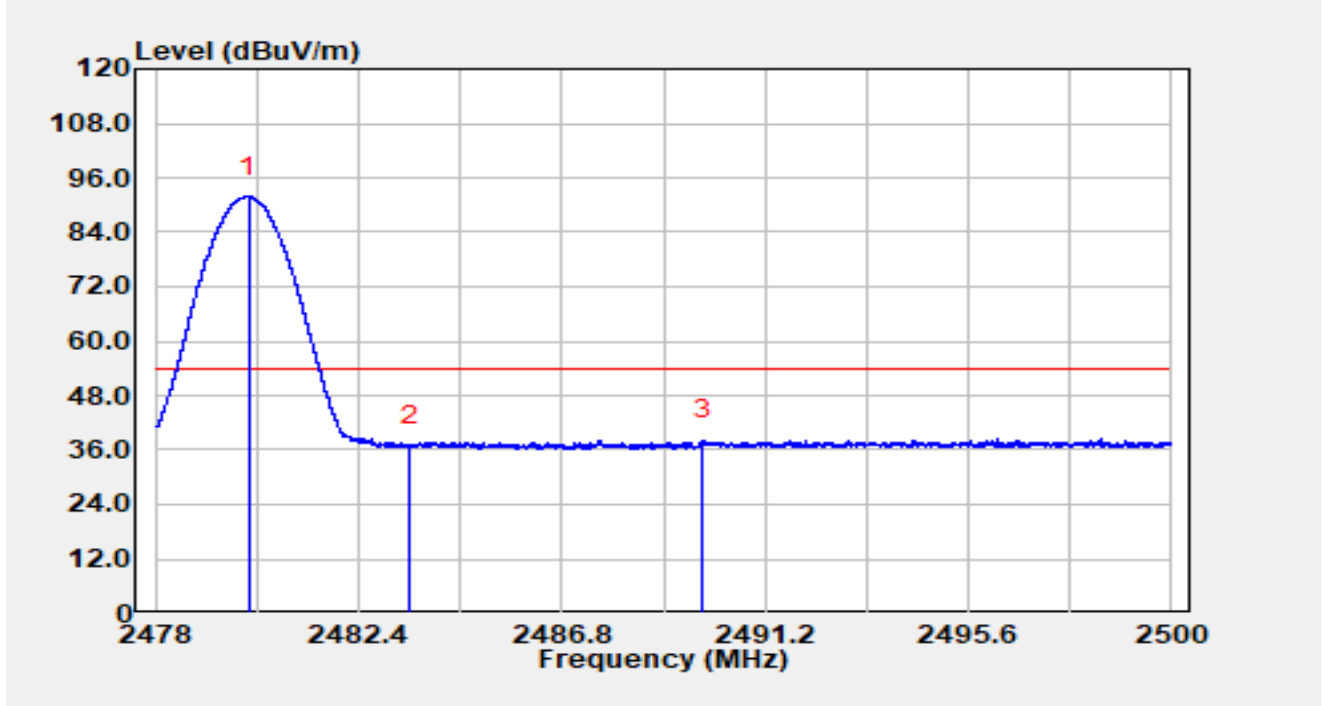


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.013        | 62.14          | 29.75      | 91.89                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 7.02           | 29.76      | 36.78                | -17.22      | 54.00          | Average  |
| 3  | *    | 2489.854        | 8.41           | 29.79      | 38.20                | -15.80      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2402MHz |               |            |

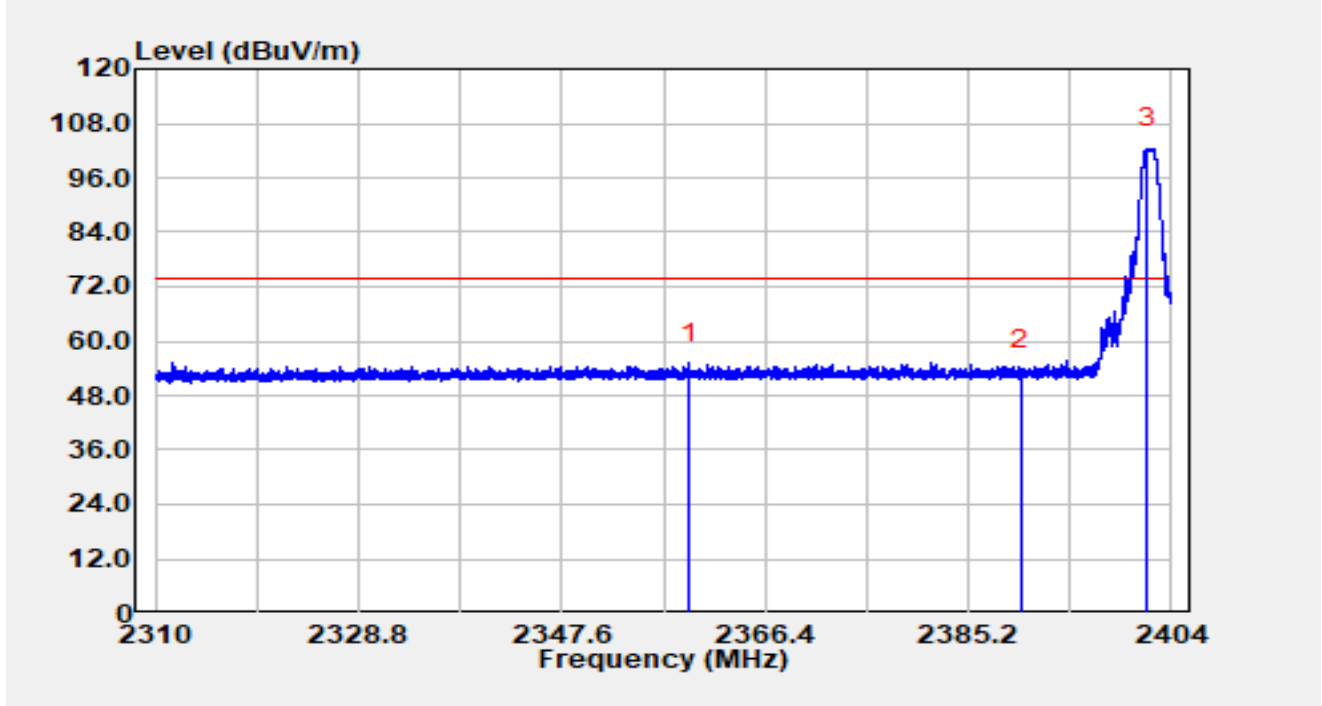


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2359.388        | 25.60          | 29.54      | 55.14                | -18.86      | 74.00          | Peak     |
| 2  |      | 2390.000        | 24.23          | 29.59      | 53.82                | -20.18      | 74.00          | Peak     |
| 3  |      | 2401.744        | 72.80          | 29.64      | 102.44               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2402MHz |               |            |

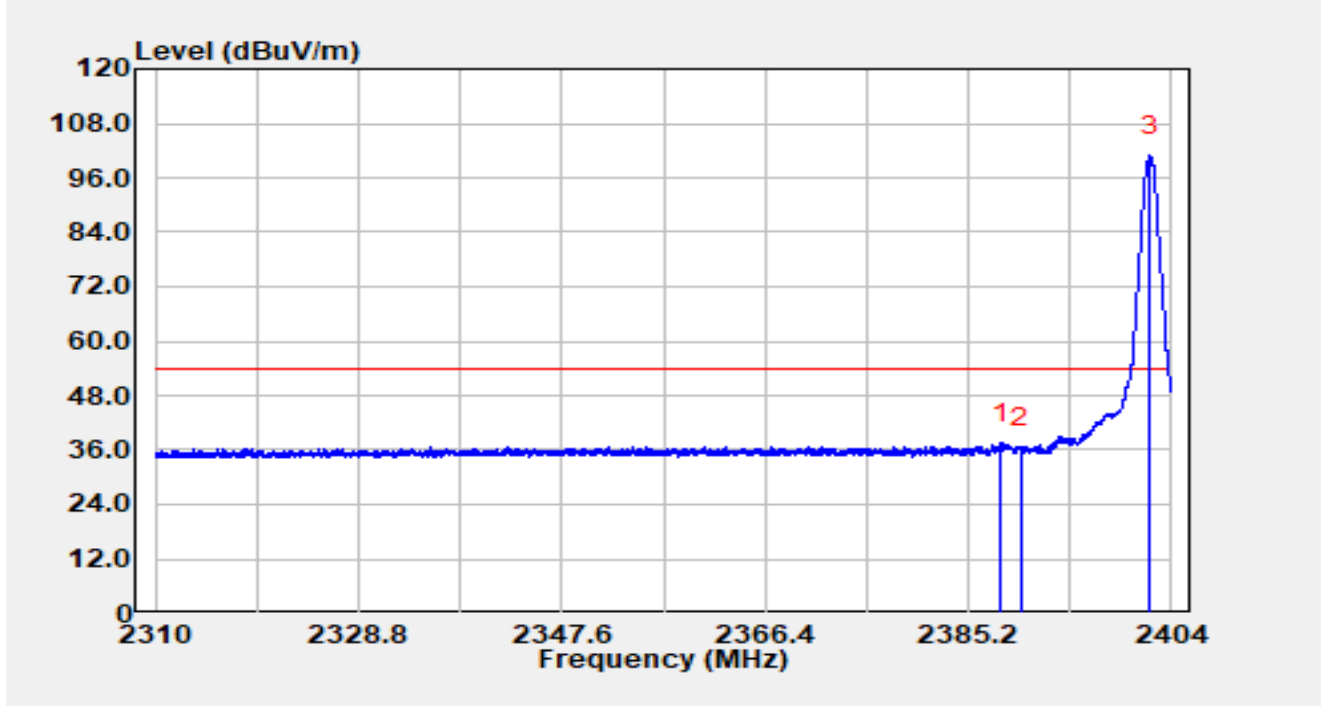


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.236        | 7.93           | 29.58      | 37.52                | -16.48      | 54.00          | Average  |
| 2  |      | 2390.003        | 6.64           | 29.59      | 36.23                | -17.77      | 54.00          | Average  |
| 3  |      | 2402.017        | 71.27          | 29.64      | 100.91               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2402MHz |               |            |

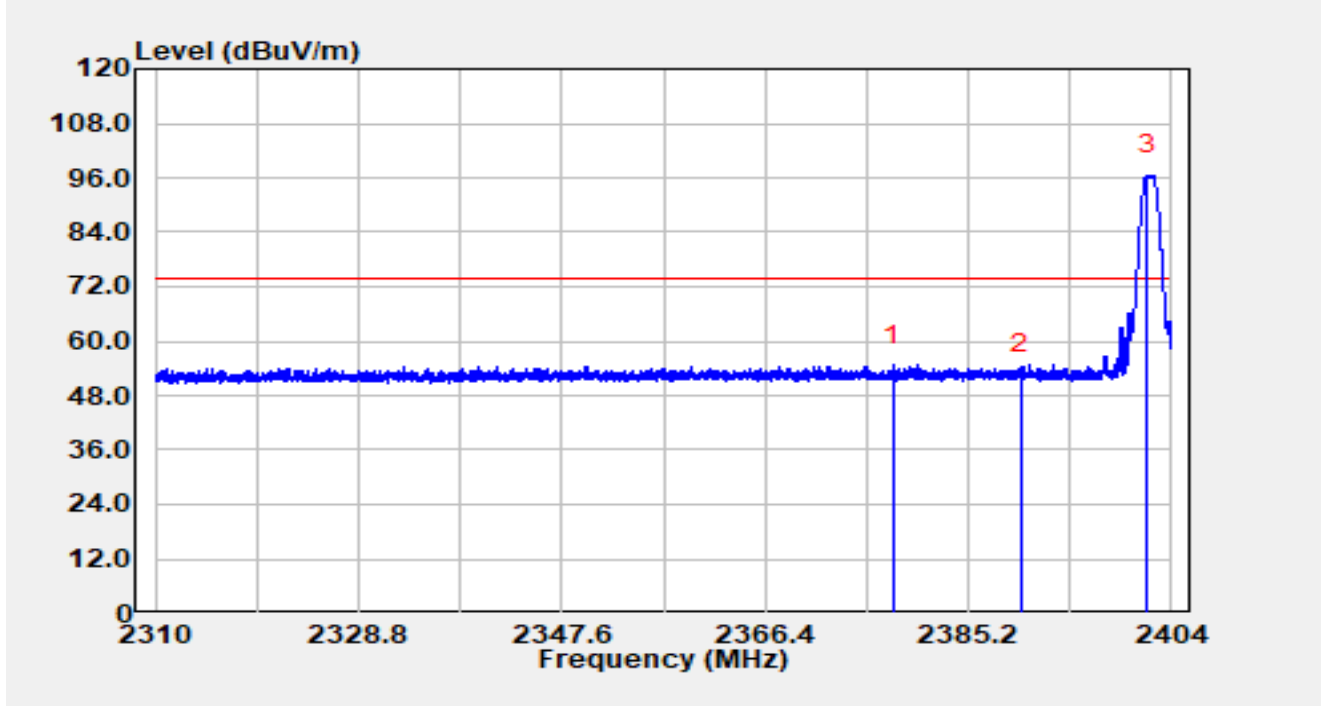


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2378.216        | 25.08          | 29.56      | 54.64                | -19.36      | 74.00          | Peak     |
| 2  |      | 2390.000        | 23.24          | 29.59      | 52.83                | -21.17      | 74.00          | Peak     |
| 3  |      | 2401.763        | 66.91          | 29.64      | 96.54                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2402MHz |               |            |

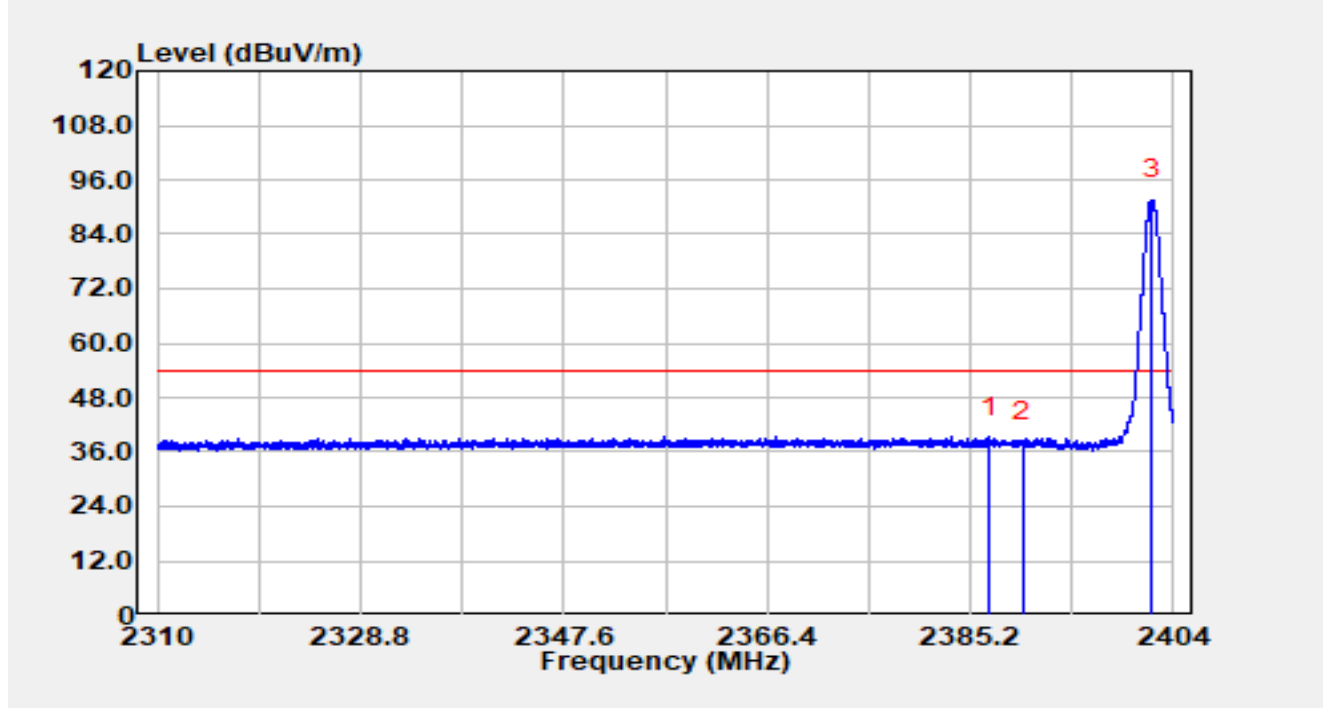


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2386.930        | 9.77           | 29.58      | 39.35                | -14.65      | 54.00          | Average  |
| 2  |      | 2390.000        | 8.46           | 29.59      | 38.05                | -15.95      | 54.00          | Average  |
| 3  |      | 2401.988        | 62.05          | 29.64      | 91.69                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2480MHz |               |            |

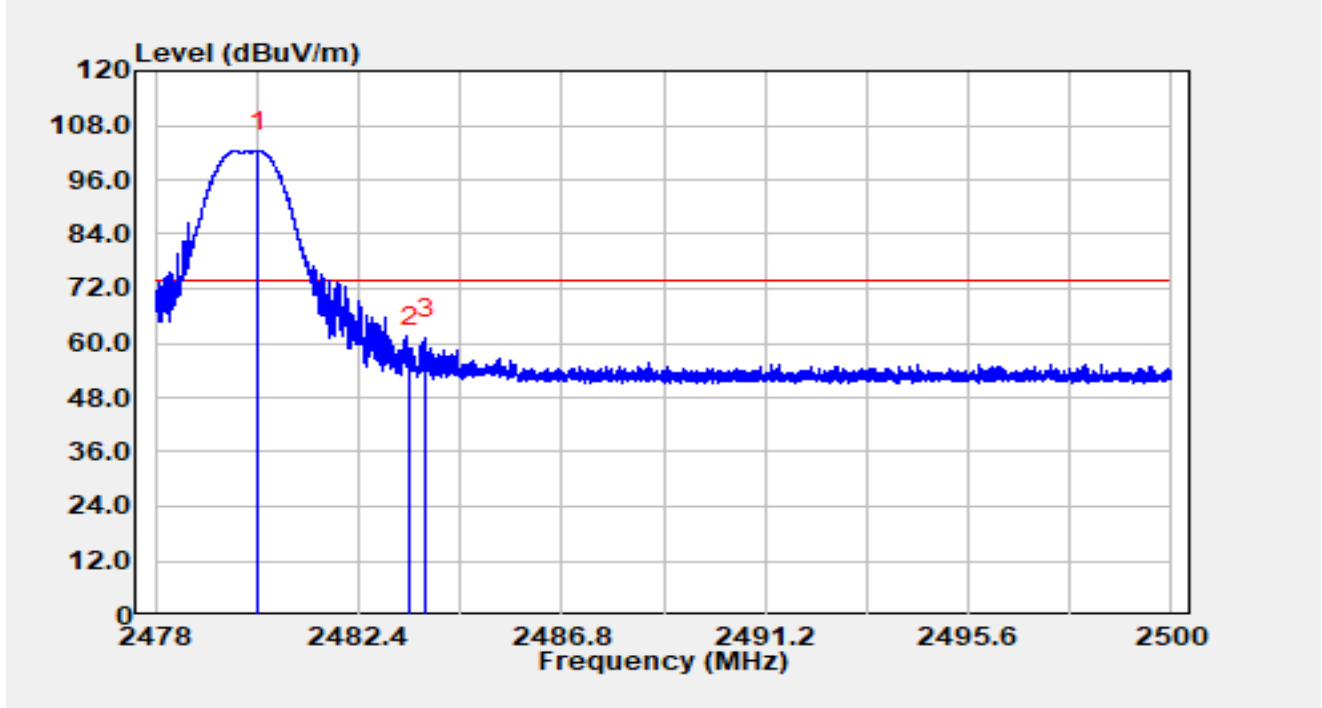


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.229        | 72.55          | 29.75      | 102.31               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 29.28          | 29.76      | 59.04                | -14.96      | 74.00          | Peak     |
| 3  | *    | 2483.848        | 31.19          | 29.77      | 60.96                | -13.04      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Horizontal |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2480MHz |               |            |

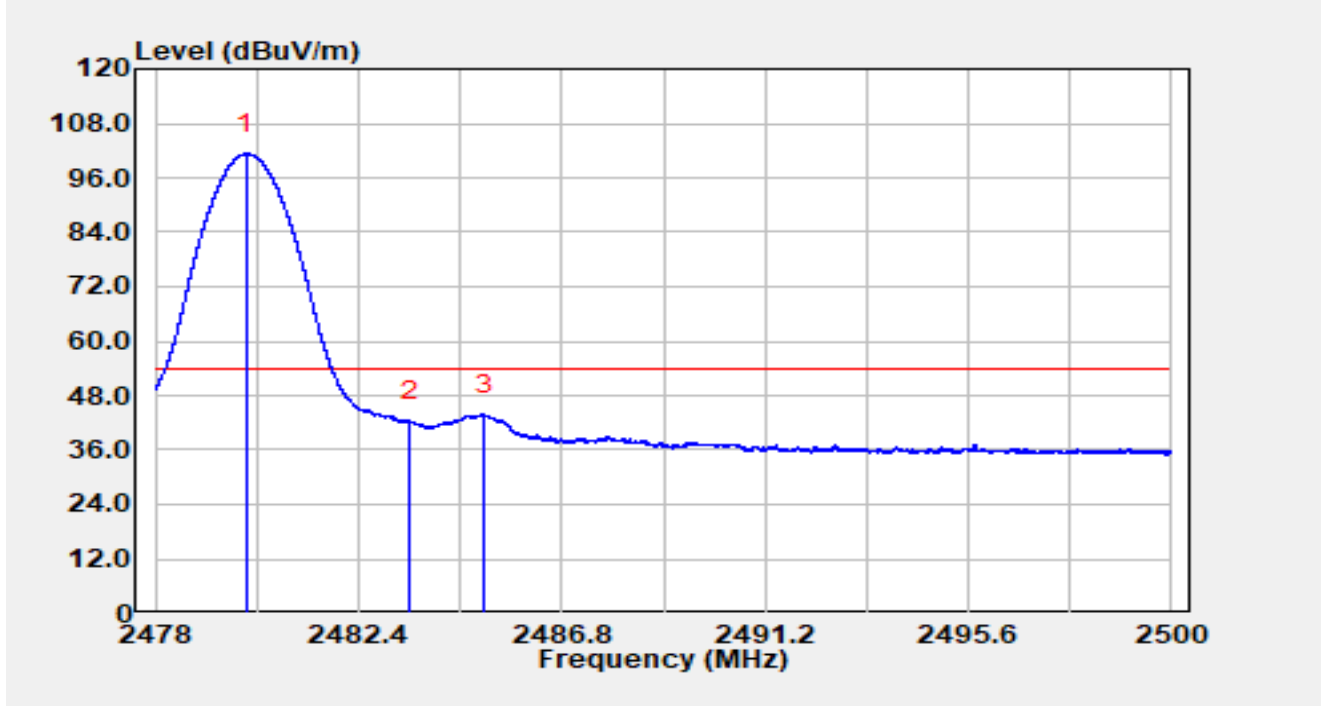


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.980        | 71.57          | 29.75      | 101.32               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 12.58          | 29.76      | 42.34                | -11.66      | 54.00          | Average  |
| 3  | *    | 2485.126        | 14.05          | 29.77      | 43.82                | -10.18      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2480MHz |               |            |

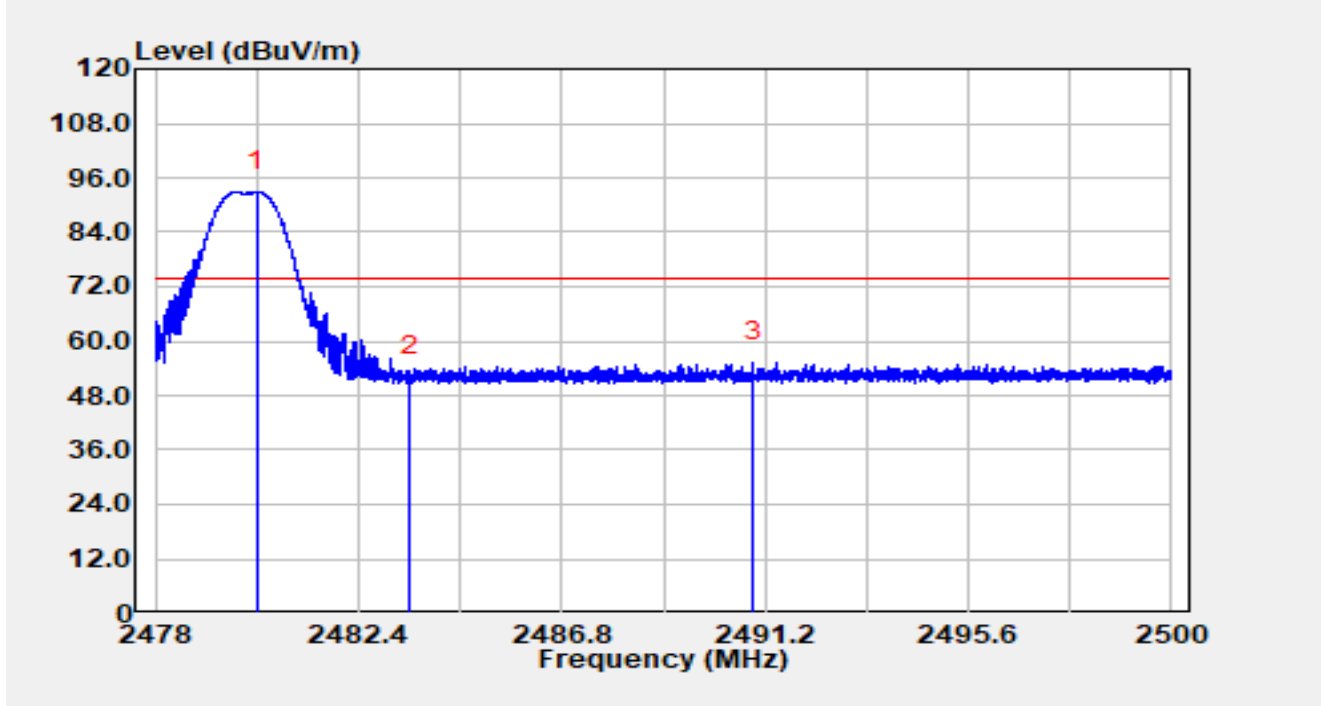


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.200        | 63.21          | 29.75      | 92.96                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 22.51          | 29.76      | 52.28                | -21.72      | 74.00          | Peak     |
| 3  | *    | 2490.945        | 25.66          | 29.79      | 55.45                | -18.55      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|             |                                 |               |            |
|-------------|---------------------------------|---------------|------------|
| Site        | WJ-AC2                          | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                         | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)      | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                   | Polarity      | Vertical   |
| EUT         | Asset5                          | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 500K at 2480MHz |               |            |

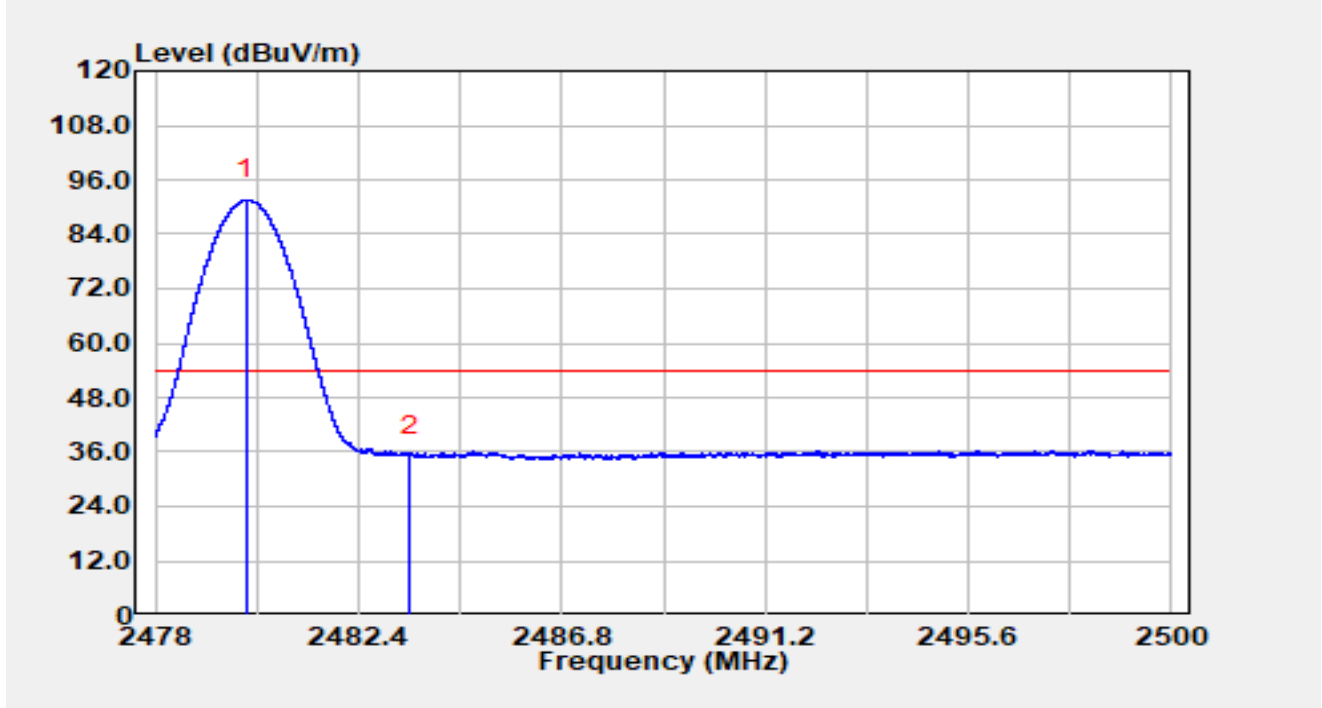


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.971        | 61.86          | 29.75      | 91.61                | N/A         | N/A            | Average  |
| 2  | *    | 2483.500        | 5.48           | 29.76      | 35.25                | -18.75      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2402MHz |               |            |

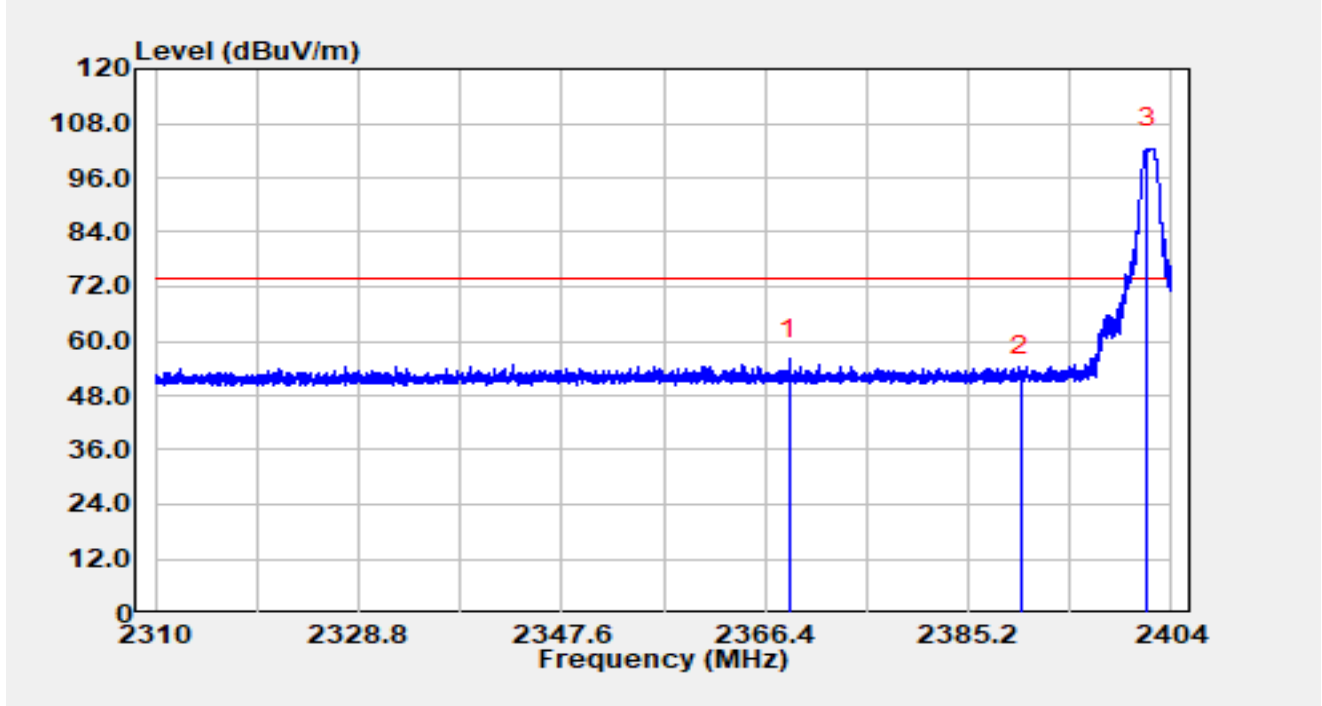


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2368.618        | 26.57          | 29.56      | 56.13                | -17.87      | 74.00          | Peak     |
| 2  |      | 2390.000        | 22.89          | 29.59      | 52.48                | -21.52      | 74.00          | Peak     |
| 3  |      | 2401.753        | 72.84          | 29.64      | 102.48               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2402MHz |               |            |

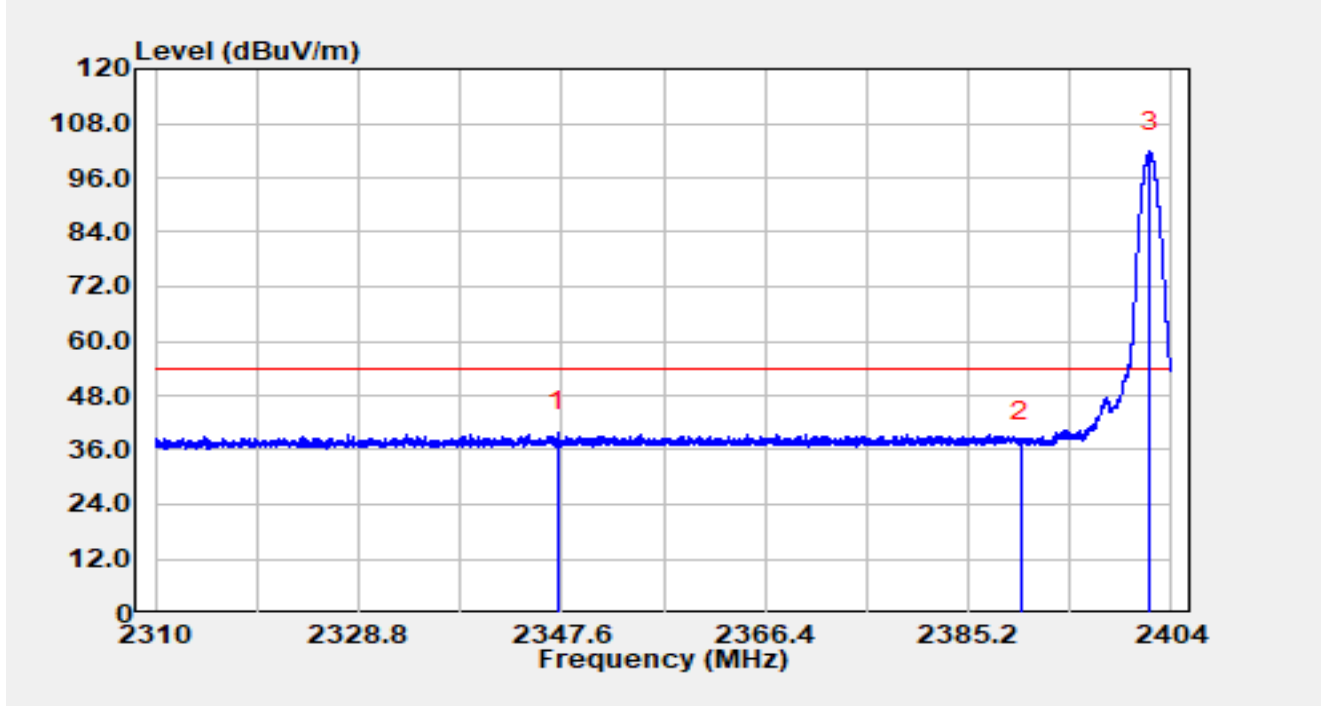


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2347.262        | 10.36          | 29.51      | 39.87                | -14.13      | 54.00          | Average  |
| 2  |      | 2390.000        | 8.18           | 29.59      | 37.77                | -16.23      | 54.00          | Average  |
| 3  |      | 2402.045        | 72.04          | 29.64      | 101.68               | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2402MHz |               |            |

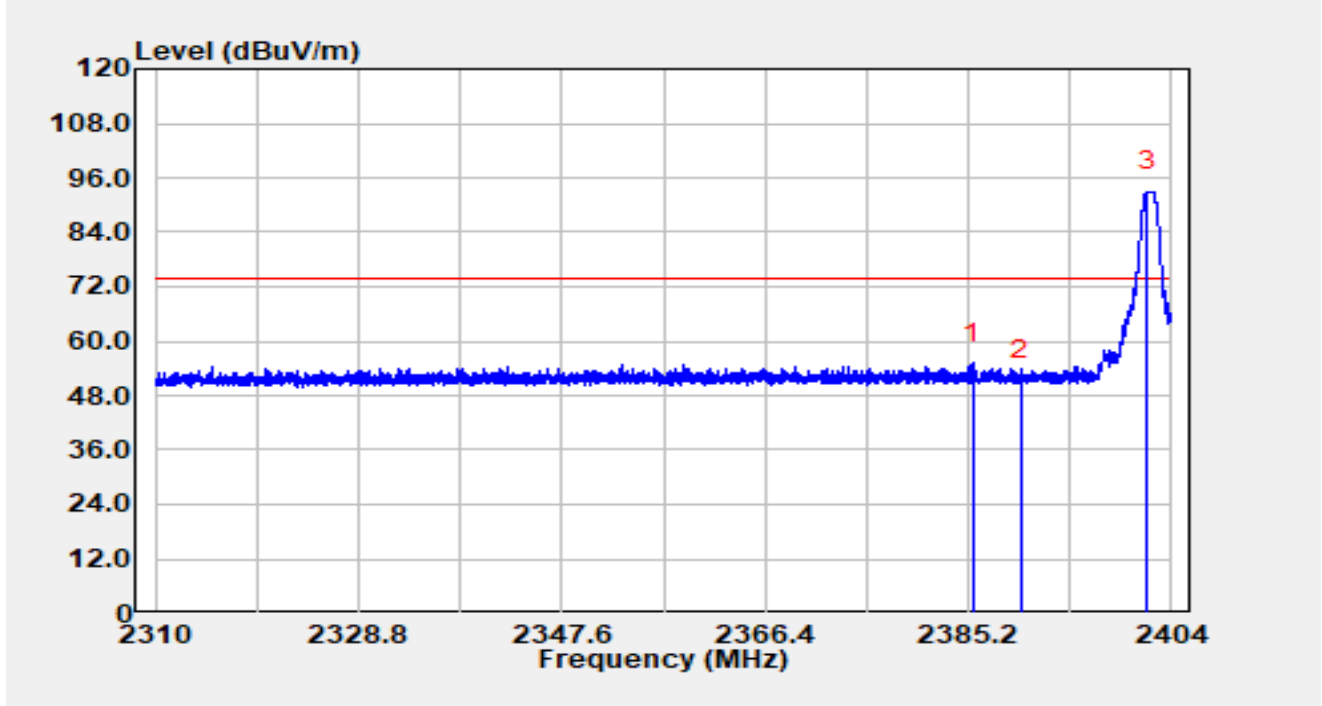


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2385.567        | 25.65          | 29.57      | 55.23                | -18.77      | 74.00          | Peak     |
| 2  |      | 2390.000        | 21.73          | 29.59      | 51.33                | -22.67      | 74.00          | Peak     |
| 3  |      | 2401.753        | 63.38          | 29.64      | 93.02                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2402MHz |               |            |

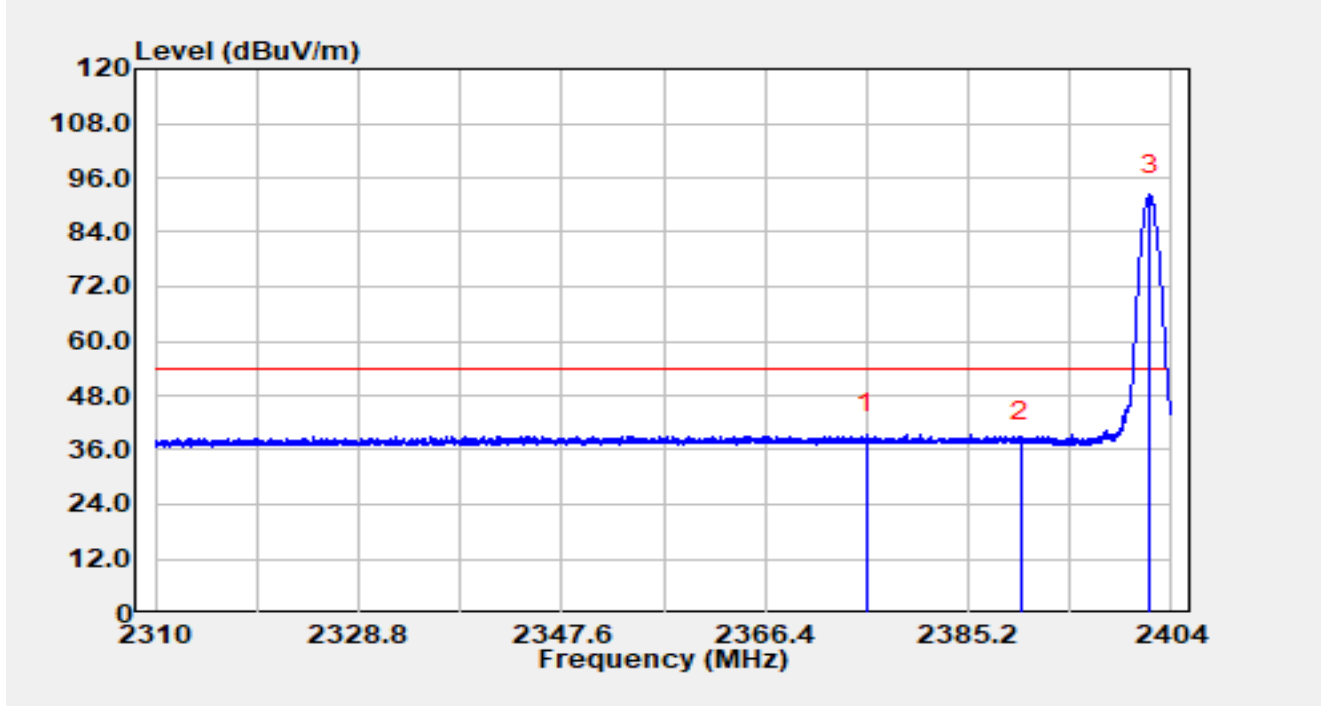


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2375.791        | 9.91           | 29.56      | 39.47                | -14.53      | 54.00          | Average  |
| 2  |      | 2390.000        | 8.00           | 29.59      | 37.59                | -16.41      | 54.00          | Average  |
| 3  |      | 2401.951        | 62.51          | 29.64      | 92.15                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2480MHz |               |            |

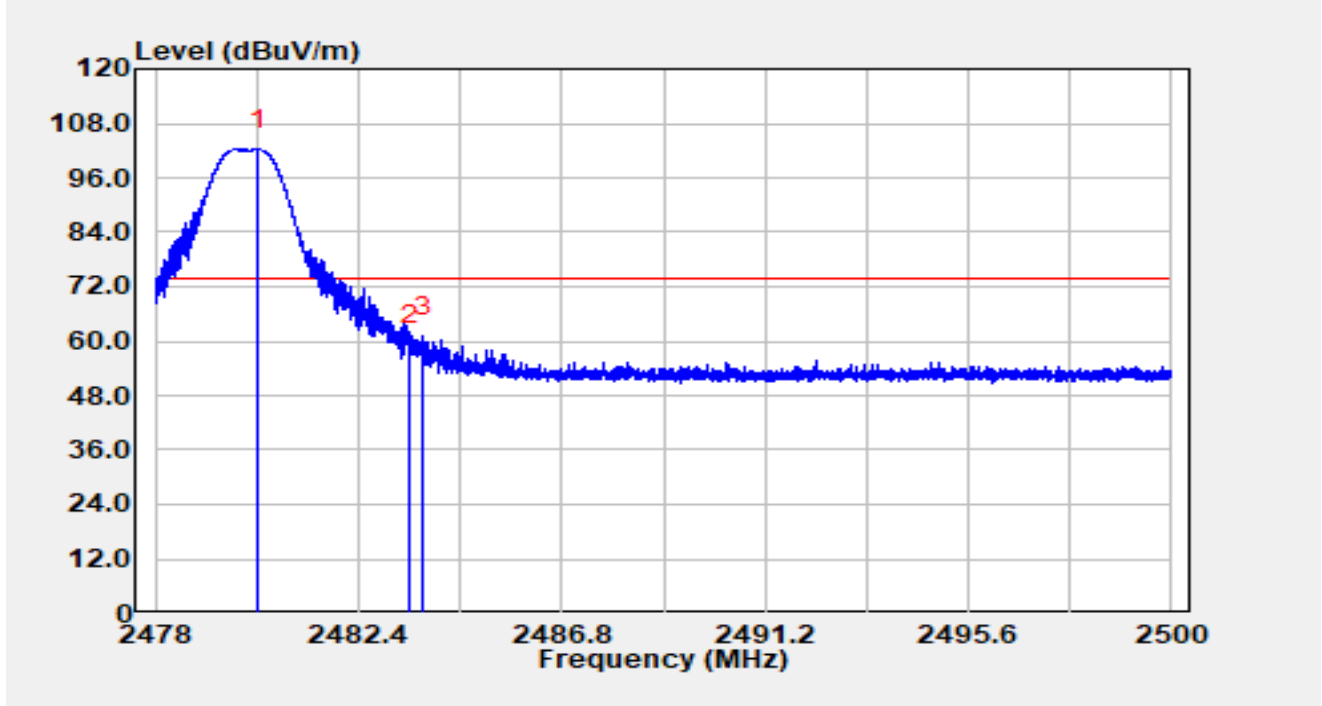


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.220        | 72.53          | 29.75      | 102.28               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 29.13          | 29.76      | 58.89                | -15.11      | 74.00          | Peak     |
| 3  | *    | 2483.795        | 31.16          | 29.77      | 60.93                | -13.07      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2480MHz |               |            |

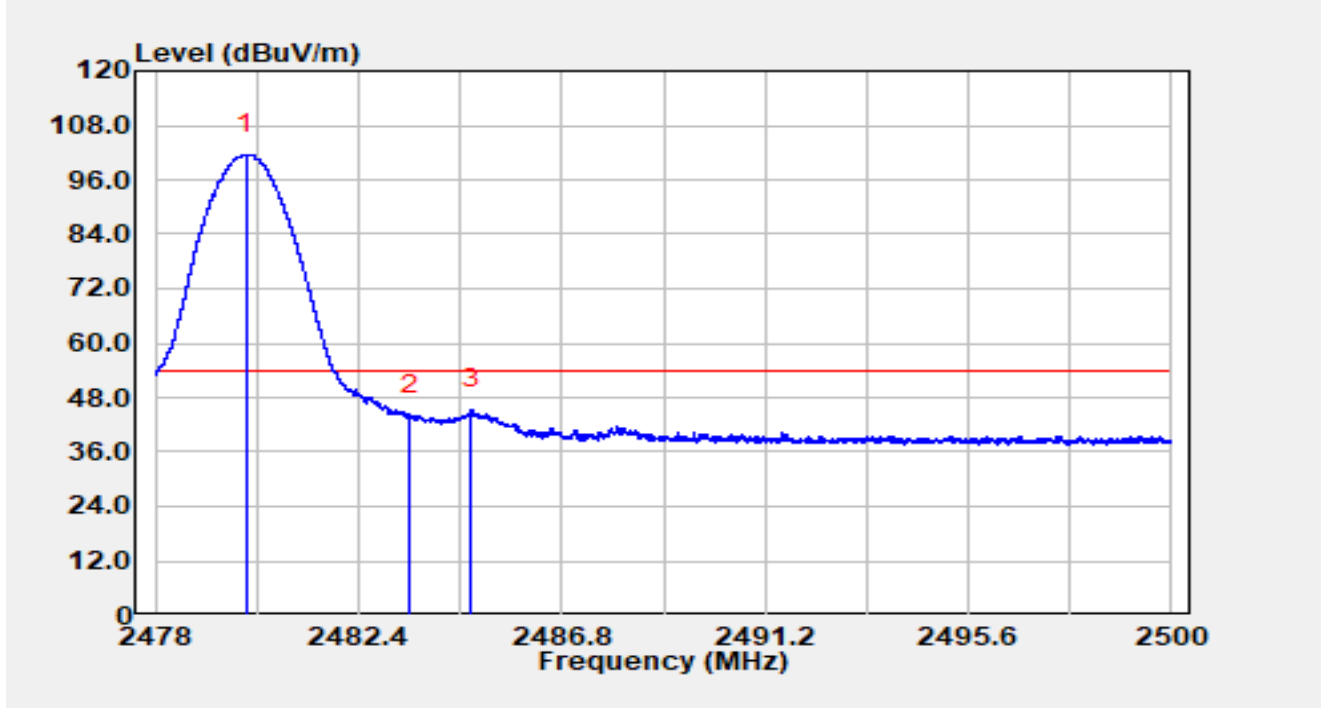


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.980        | 71.79          | 29.75      | 101.54               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 14.21          | 29.76      | 43.97                | -10.03      | 54.00          | Average  |
| 3  | *    | 2484.846        | 15.62          | 29.77      | 45.39                | -8.61       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2480MHz |               |            |

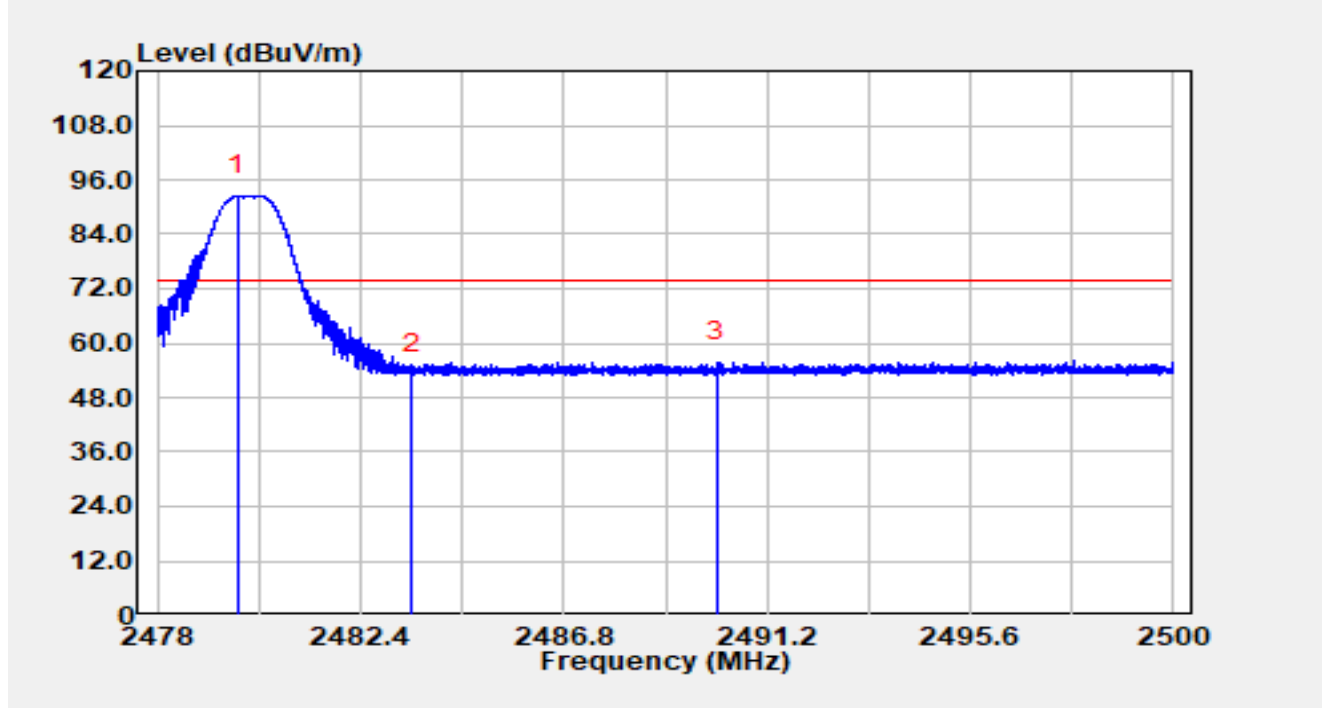


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.747        | 62.70          | 29.75      | 92.45                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 23.49          | 29.76      | 53.25                | -20.75      | 74.00          | Peak     |
| 3  | *    | 2490.102        | 26.08          | 29.79      | 55.87                | -18.13      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 1M at 2480MHz |               |            |

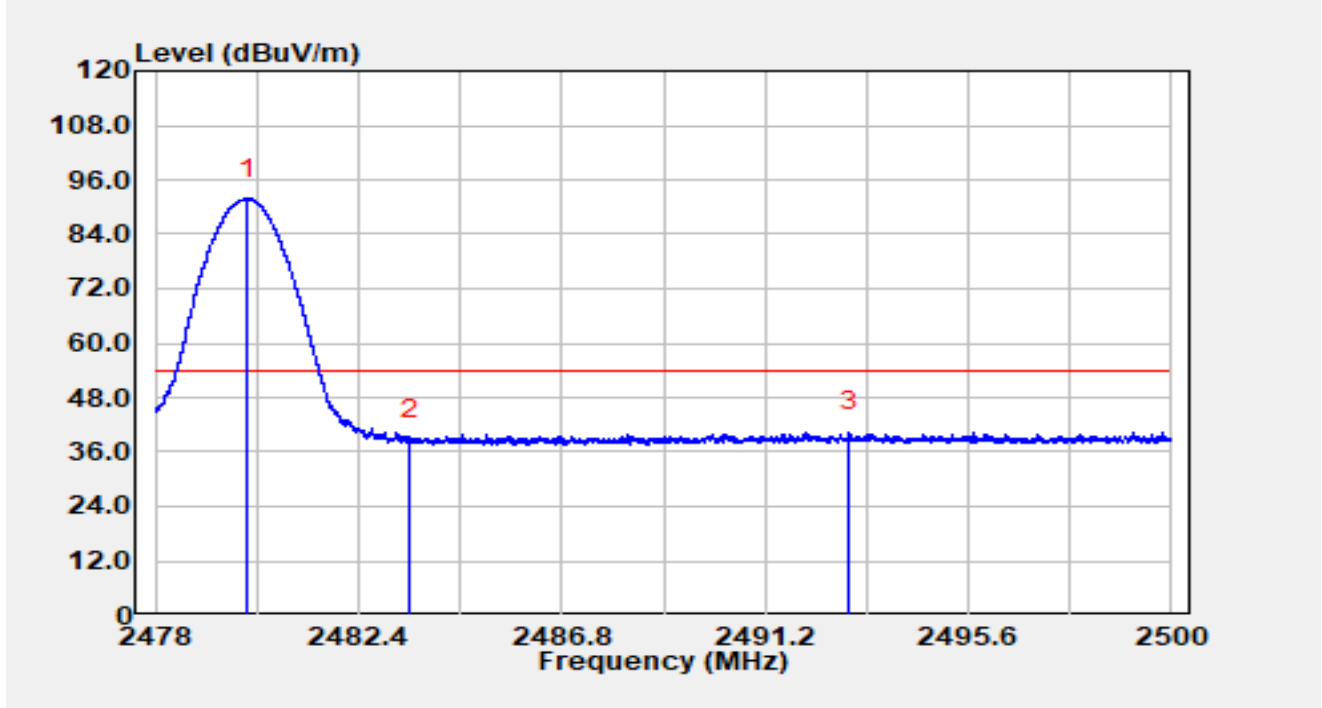


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.000        | 62.17          | 29.75      | 91.92                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 9.08           | 29.76      | 38.84                | -15.16      | 54.00          | Average  |
| 3  | *    | 2493.008        | 10.59          | 29.79      | 40.38                | -13.62      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2402MHz |               |            |

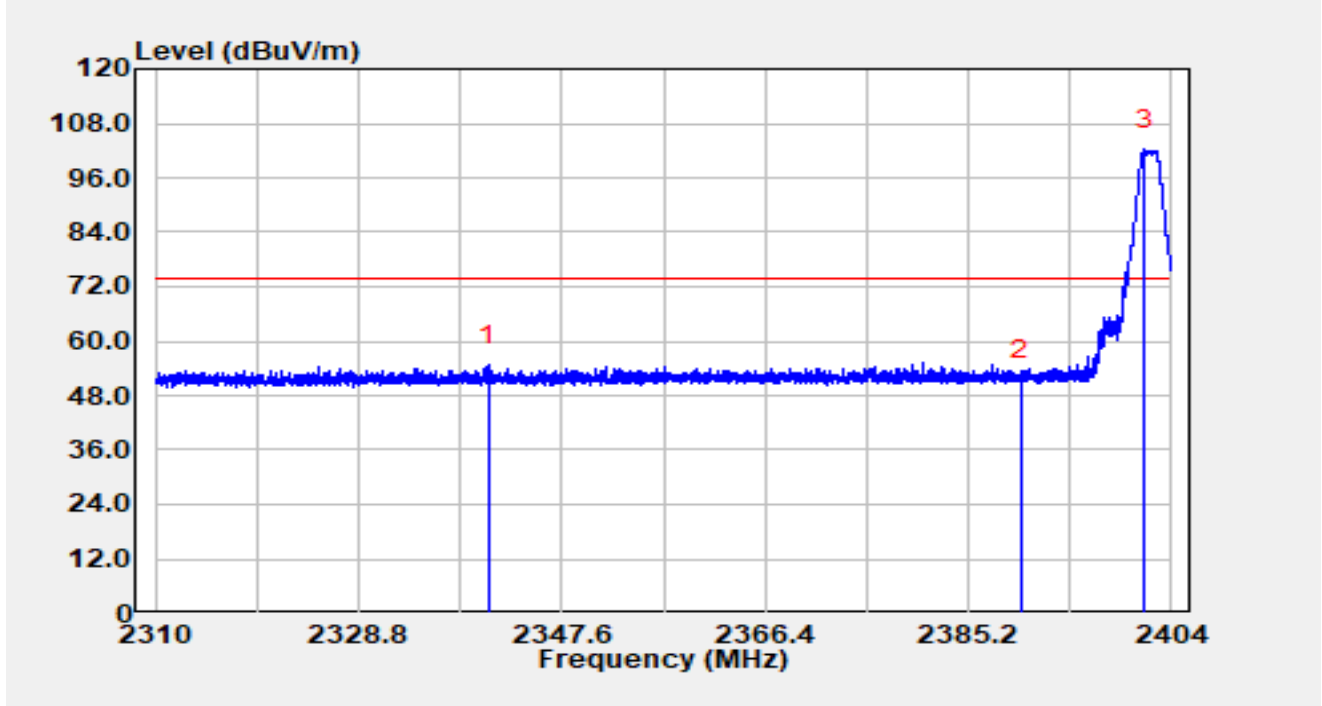


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2340.757        | 25.10          | 29.49      | 54.59                | -19.41      | 74.00          | Peak     |
| 2  |      | 2390.000        | 21.69          | 29.59      | 51.28                | -22.72      | 74.00          | Peak     |
| 3  |      | 2401.500        | 72.52          | 29.64      | 102.16               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2402MHz |               |            |

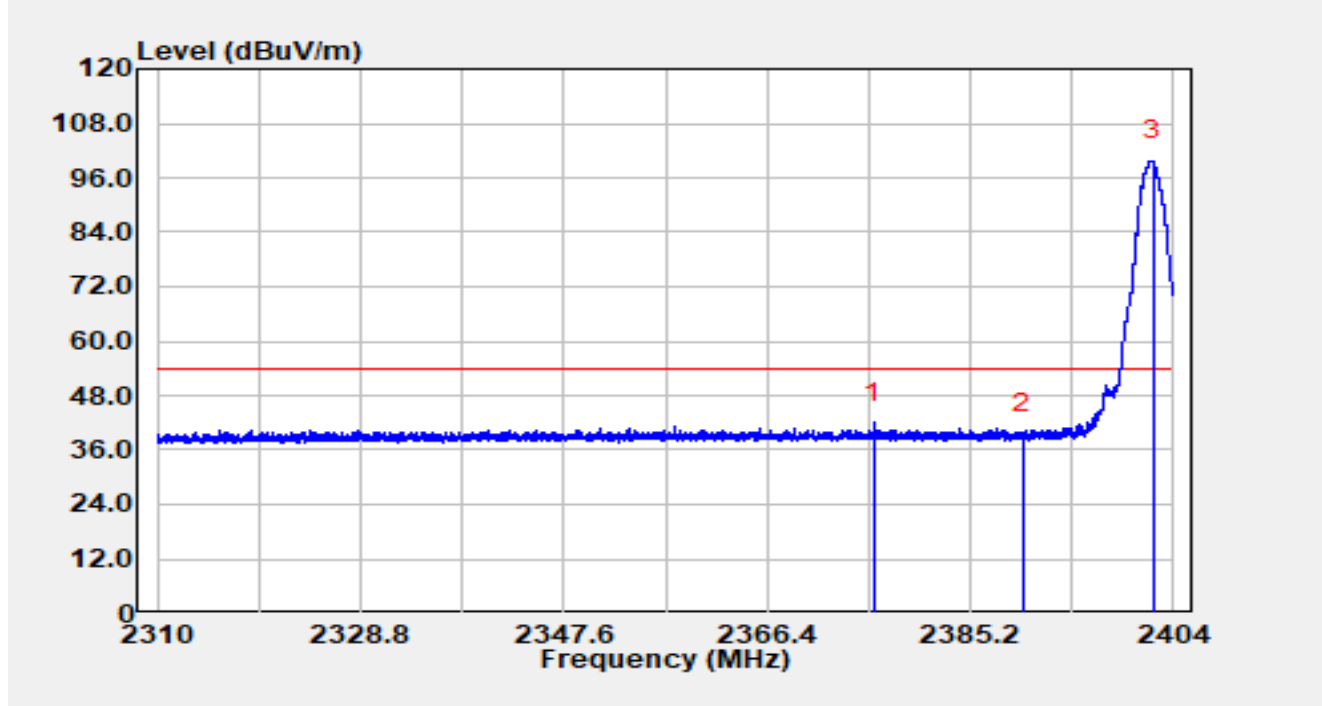


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2376.326        | 12.40          | 29.56      | 41.97                | -12.03      | 54.00          | Average  |
| 2  |      | 2390.003        | 10.09          | 29.59      | 39.69                | -14.31      | 54.00          | Average  |
| 3  |      | 2402.073        | 70.15          | 29.64      | 99.79                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2402MHz |               |            |

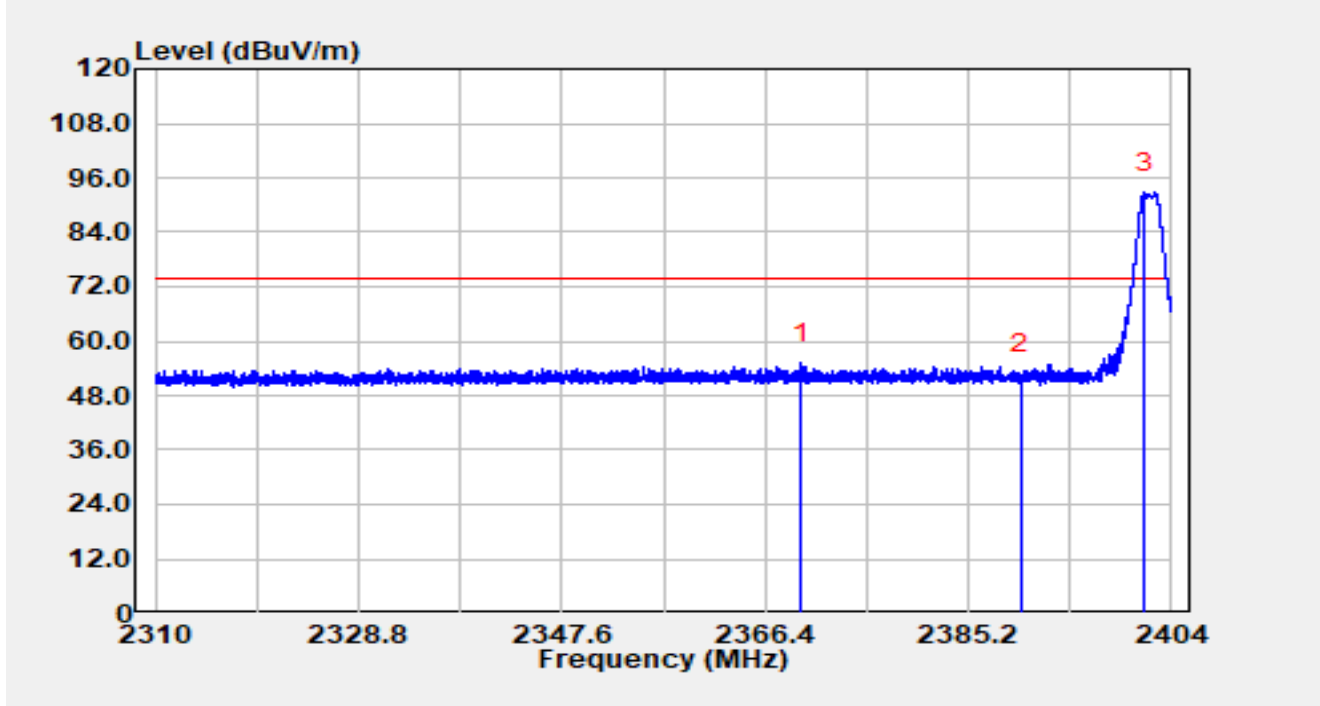


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2369.718        | 25.67          | 29.56      | 55.23                | -18.77      | 74.00          | Peak     |
| 2  |      | 2390.003        | 22.94          | 29.59      | 52.53                | -21.47      | 74.00          | Peak     |
| 3  |      | 2401.509        | 63.16          | 29.64      | 92.80                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2402MHz |               |            |

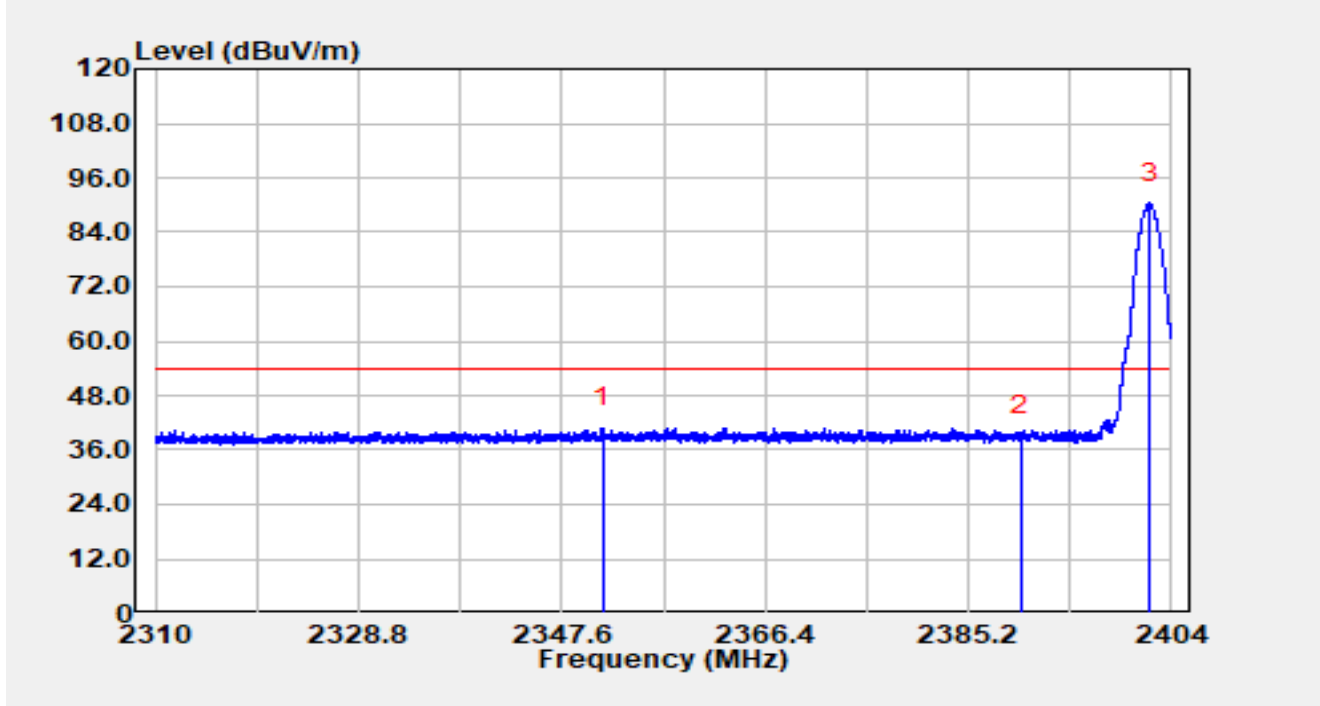


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2351.341        | 11.44          | 29.52      | 40.96                | -13.04      | 54.00          | Average  |
| 2  |      | 2390.000        | 9.61           | 29.59      | 39.20                | -14.80      | 54.00          | Average  |
| 3  |      | 2402.017        | 60.80          | 29.64      | 90.44                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2480MHz |               |            |

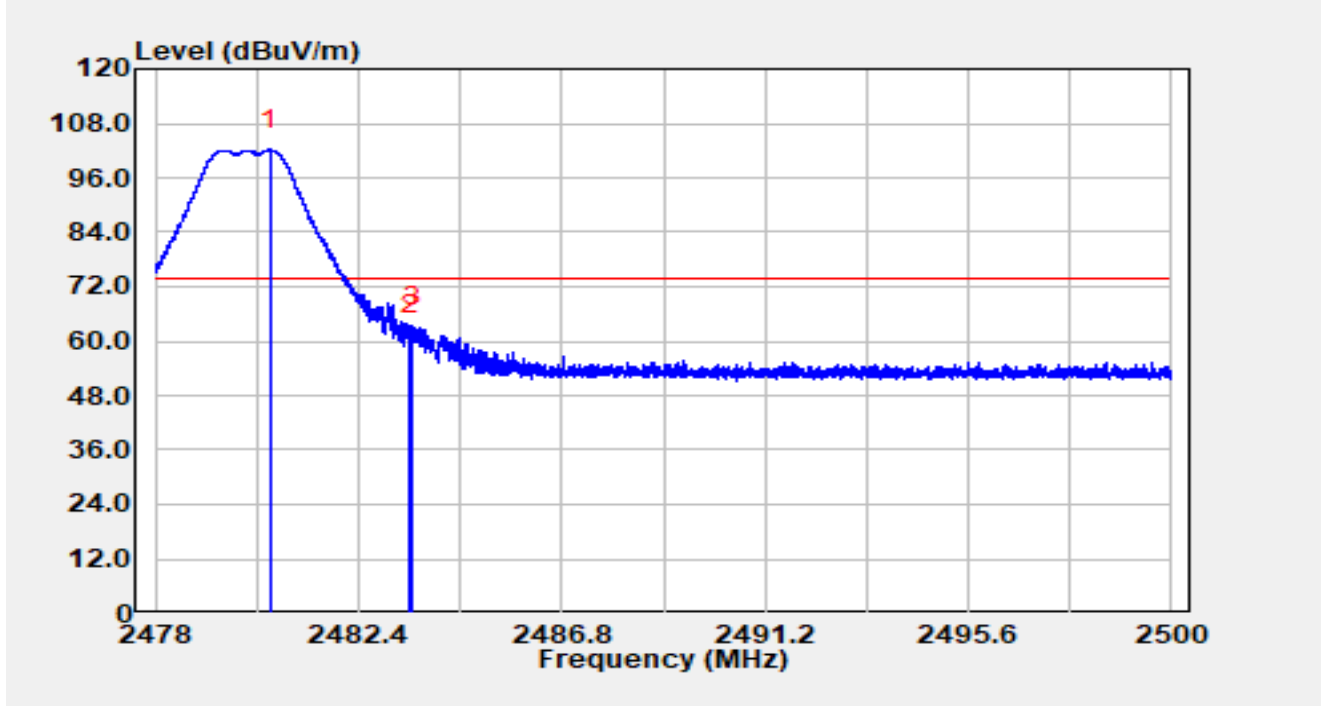


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.482        | 72.41          | 29.75      | 102.17               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 31.81          | 29.76      | 61.57                | -12.43      | 74.00          | Peak     |
| 3  | *    | 2483.568        | 33.63          | 29.76      | 63.39                | -10.61      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Horizontal |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2480MHz |               |            |

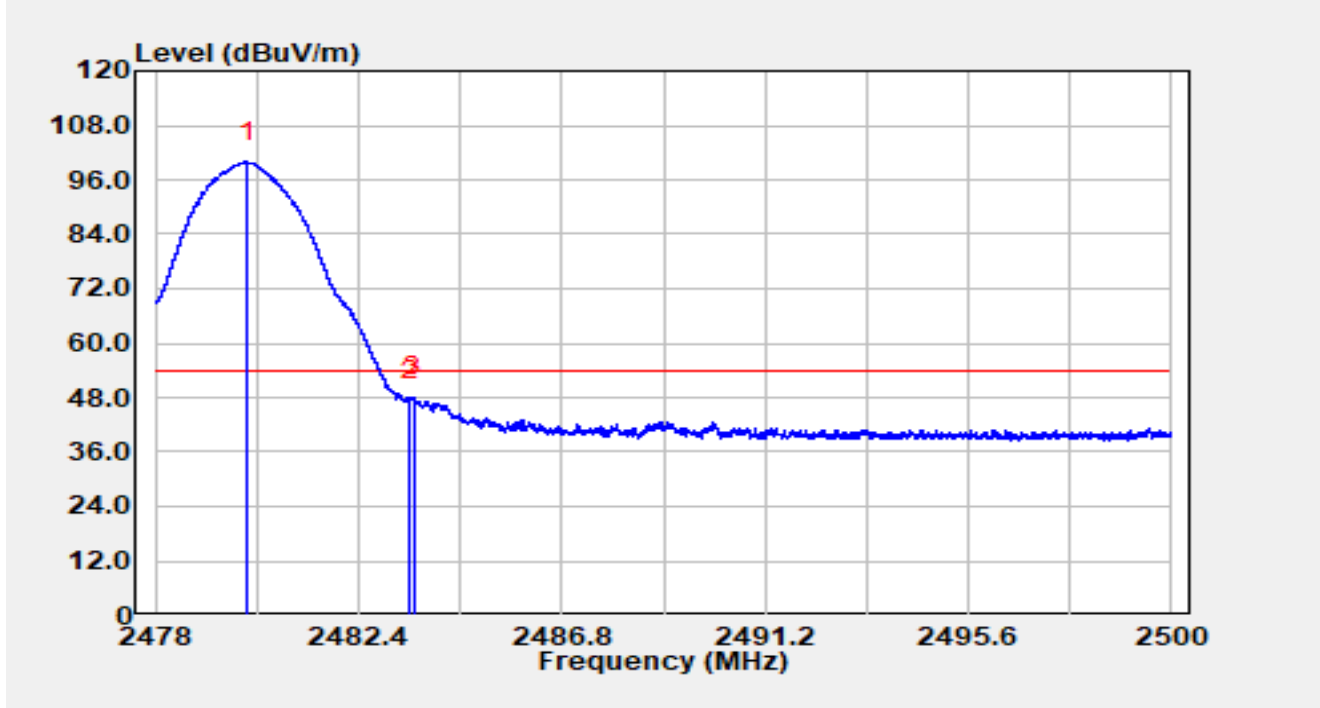


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.987        | 70.19          | 29.75      | 99.94                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 17.47          | 29.76      | 47.23                | -6.77       | 54.00          | Average  |
| 3  | *    | 2483.588        | 18.36          | 29.76      | 48.12                | -5.88       | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2480MHz |               |            |

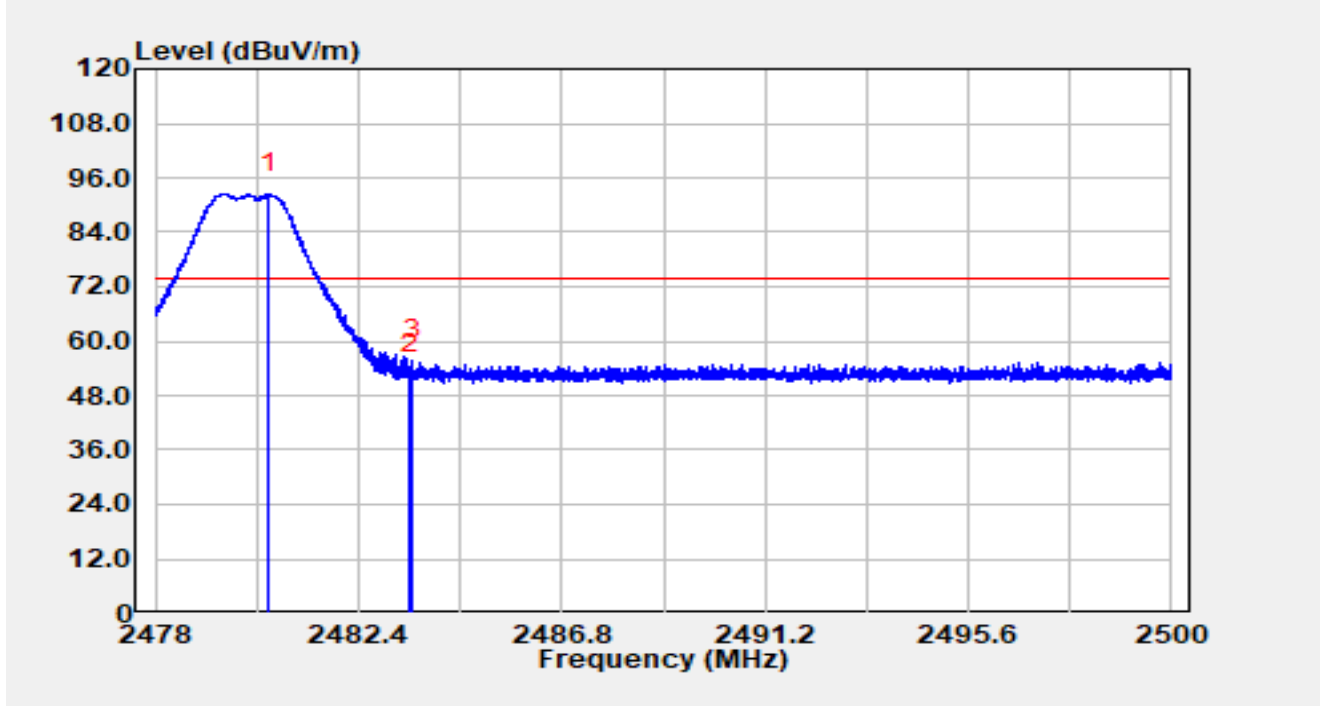


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.458        | 62.77          | 29.75      | 92.52                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 23.13          | 29.76      | 52.90                | -21.10      | 74.00          | Peak     |
| 3  | *    | 2483.555        | 25.94          | 29.76      | 55.70                | -18.30      | 74.00          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                               |               |            |
|-------------|-------------------------------|---------------|------------|
| Site        | WJ-AC2                        | Test Date     | 2025-05-01 |
| Temperature | 25.8 °C                       | Humidity      | 41.9 %     |
| Limit       | FCC_Part 15_Band Edge (3m)    | Test Engineer | Bob Zhang  |
| Factor      | DRH18-E_07105                 | Polarity      | Vertical   |
| EUT         | Asset5                        | Test Voltage  | By Battery |
| Test Mode   | Transmit by BLE 2M at 2480MHz |               |            |

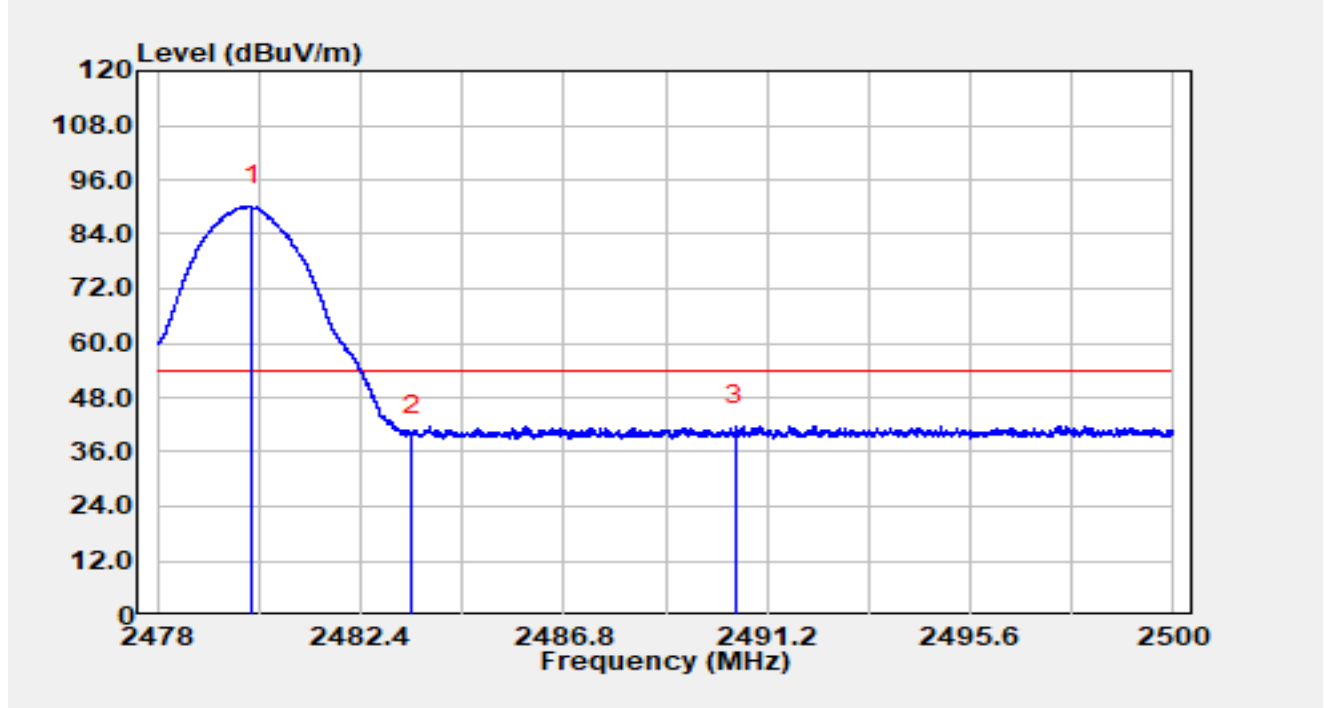

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.042        | 60.44          | 29.75      | 90.19                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 10.03          | 29.76      | 39.79                | -14.21      | 54.00          | Average  |
| 3  | *    | 2490.507        | 11.90          | 29.79      | 41.69                | -12.31      | 54.00          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

## **Appendix B - Test Setup Photograph**

Refer to "R25S1044041-UT" file.

## **Appendix C - EUT Photograph**

Refer to "R25S1044041-UE" file.

---

The End

---