


Site	WJ-AC1	Test Date	2025-08-06
Temperature	24.5 °C	Humidity	53.6 %
Limit	FCC_Part 15_Band Edge (3 m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Pro5S	Test Voltage	By PC
Test Mode	Transmit by BLE 2M at 2480 MHz		

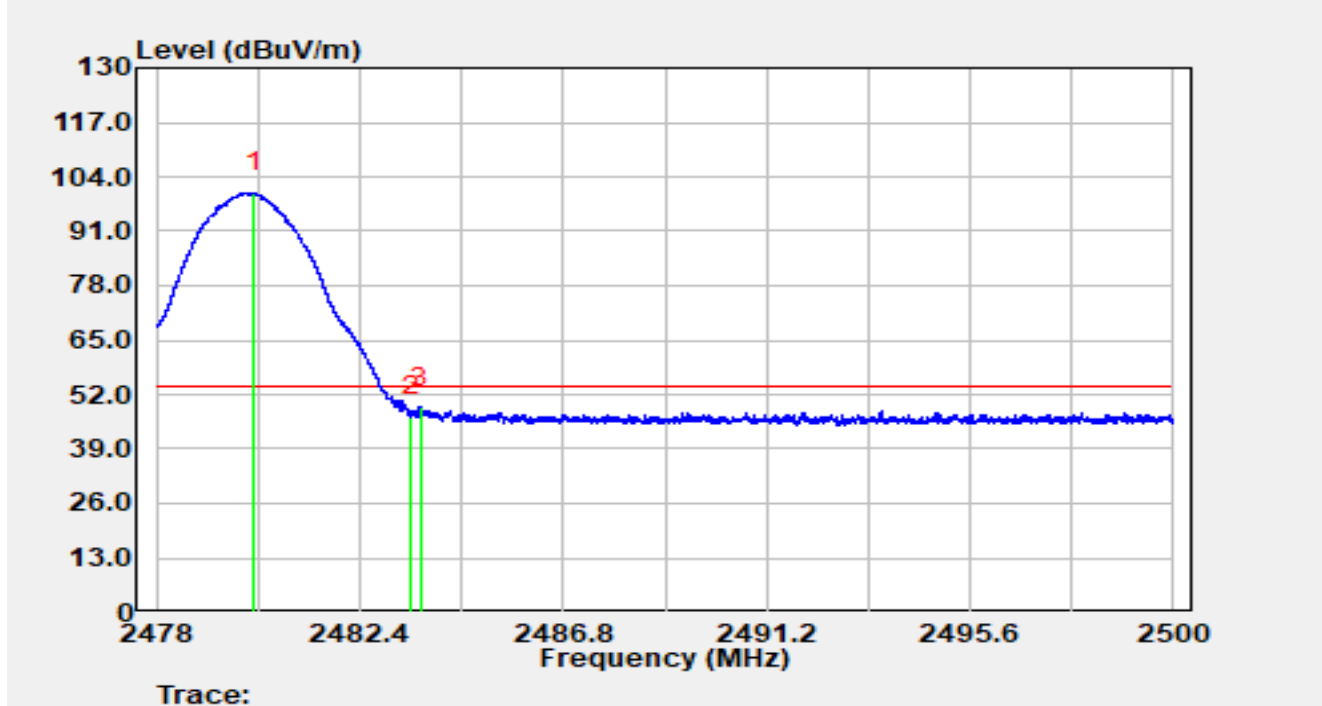


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.11	63.14	37.04	100.18	N/A	N/A	Average
2		2483.50	9.58	37.05	46.63	-7.37	54.00	Average
3	*	2483.70	11.87	37.05	48.93	-5.07	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-08-06
Temperature	24.5 °C	Humidity	53.6 %
Limit	FCC_Part 15_Band Edge (3 m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Pro5S	Test Voltage	By PC
Test Mode	Transmit by BLE 2M at 2480 MHz		

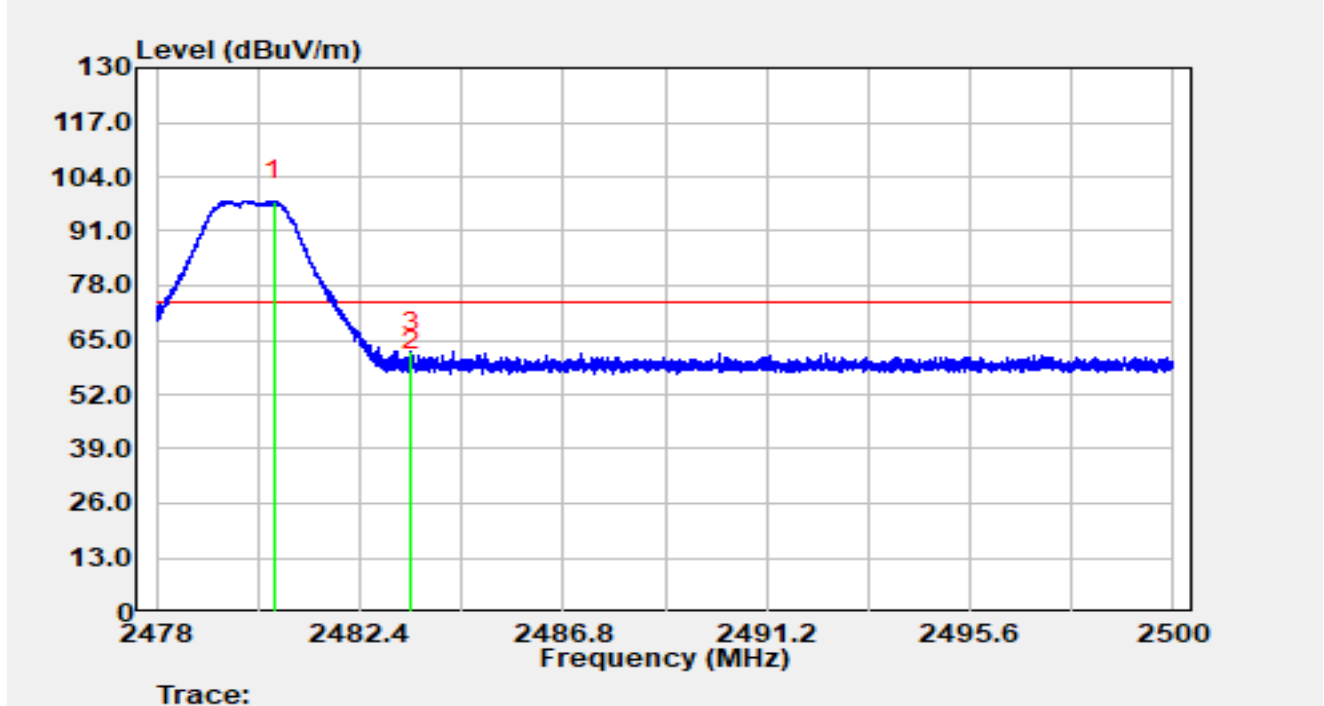


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.54	61.27	37.04	98.31	N/A	N/A	Peak
2		2483.50	20.61	37.05	57.66	-16.34	74.00	Peak
3	*	2483.52	25.14	37.05	62.19	-11.81	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-08-06
Temperature	24.5 °C	Humidity	53.6 %
Limit	FCC_Part 15_Band Edge (3 m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Pro5S	Test Voltage	By PC
Test Mode	Transmit by BLE 2M at 2480 MHz		

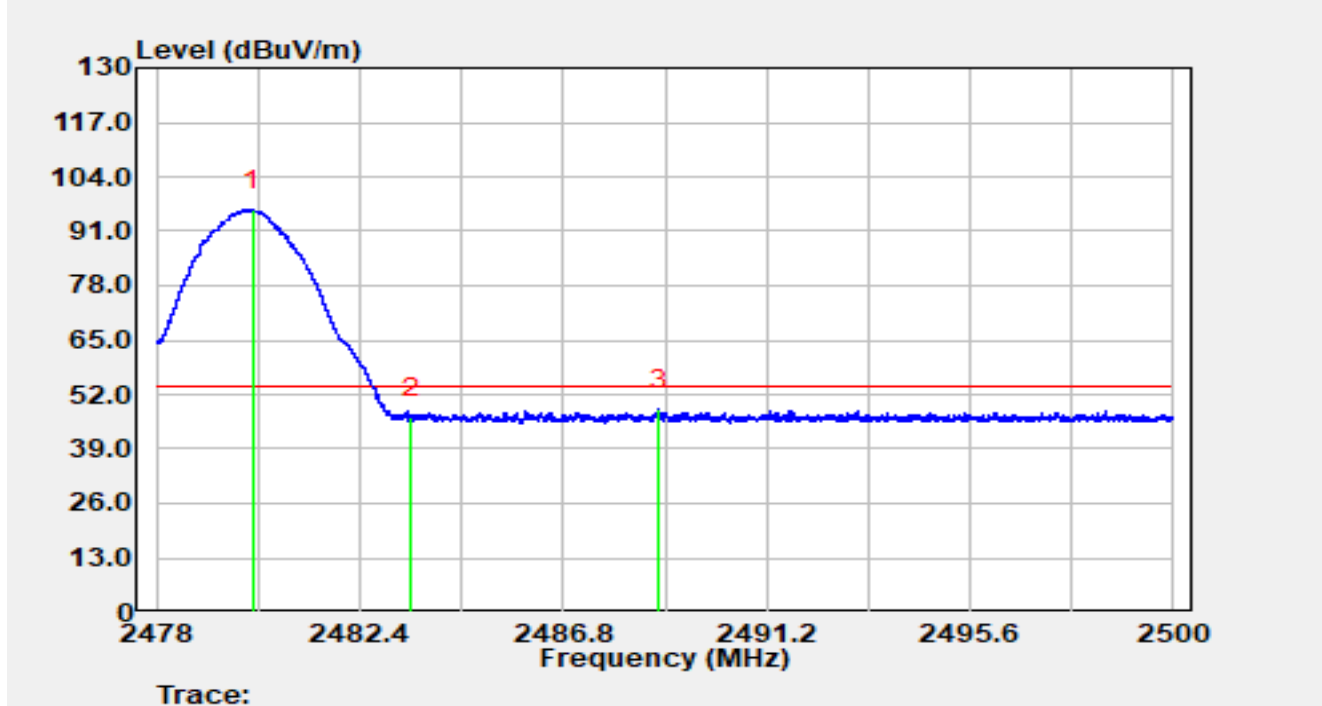

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.08	59.05	37.04	96.09	N/A	N/A	Average
2		2483.50	9.52	37.05	46.58	-7.42	54.00	Average
3	*	2488.87	11.33	37.07	48.40	-5.60	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Appendix B - Test Setup Photograph

Refer to “R25S1041069-UT” file.

Appendix C - EUT Photograph

Refer to "R25S1041069-UE" file.

_____ The End _____