

FCC ID:2BFI2-TC14001

Maximum Permissible Exposure (MPE)

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in §1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 * P * G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Average RF output power (W)

G = EUT Antenna numeric gain (numeric)


d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 * P * G}{377 * D^2}$$

From the EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

Schematic drawing

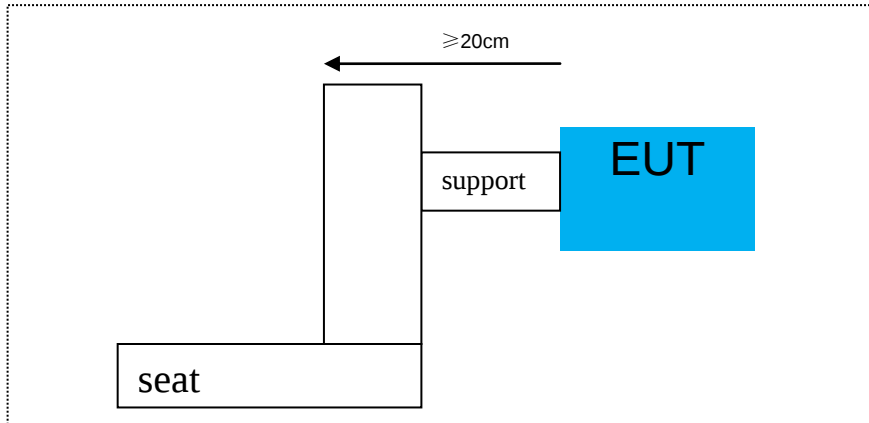

The sum of the thickness of the support and the seat back is greater than 20cm.

BLE:

Measurement Result

Operation Frequency: 2402MHz~2480MHz

Power density limited: $1\text{mW}/\text{cm}^2$

Antenna Type: FPCB antenna

Antenna gain: 0.69dBi;

R=20cm

$\text{mW}=10^{(\text{dBm}/10)}$

antenna gain Numeric= $10^{(\text{dBi}/10)}$

Channel Freq. (MHz)	modulation	conducted power	Tune-up power (dBm)	Max		Antenna		Evaluation result	Power density
		(dBm)		tune-up power		Gain		(mW/cm2)	(mW/cm2)
				(dBm)	(mW)	(dBi)	Numeric		
2402	GFSK	3.7	4±1	5	3.162	0.69	1.17	0.0007	1
2440		3.79	4±1	5	3.162	0.69	1.17	0.0007	1
2480		3.98	4±1	5	3.162	0.69	1.17	0.0007	1

2.4G WIFI:

Operation Frequency: WIFI 802.11b/g/n HT20: 2412-2462MHz,
WIFI 802.11n HT40:2422-2452MHz
Power density limited: 1mW/ cm²

Antenna Type: FPCB antenna

Antenna gain: 0.69dBi;

R=20cm

$mW=10^{(dBm/10)}$

$antenna\ gain\ Numeric=10^{(dBi/10)}$

Channel Freq. (MHz)	modulation	conducted power	Tune-up power (dBm)	Max		Antenna		Evaluation result	Power density
		(dBm)		tune-up power		Gain			
				(dBm)	(mW)	(dBi)	Numeric	(mW/cm2)	(mW/cm2)
2412	802.11b	15.98	15.5±1	16.5	44.668	0.69	1.17	0.0104	1
2437		14.94	15.5±1	16.5	44.668	0.69	1.17	0.0104	1
2462		15.53	15.5±1	16.5	44.668	0.69	1.17	0.0104	1
2412	802.11g	15.41	15±1	16	39.811	0.69	1.17	0.0093	1
2437		14.45	15±1	16	39.811	0.69	1.17	0.0093	1
2462		15.07	15±1	16	39.811	0.69	1.17	0.0093	1
2412	802.11n H20	15.31	14.5±1	15.5	35.481	0.69	1.17	0.0083	1
2437		14.17	14.5±1	15.5	35.481	0.69	1.17	0.0083	1
2462		15.05	14.5±1	15.5	35.481	0.69	1.17	0.0083	1
2422	802.11n(H T40)	15.14	14.5±1	15.5	35.481	0.69	1.17	0.0083	1
2437		14.59	14.5±1	15.5	35.481	0.69	1.17	0.0083	1
2452		14.71	14.5±1	15.5	35.481	0.69	1.17	0.0083	1

Note:

1. NO simultaneous transmissions are possible for this device of Wi-Fi 2.4G + BT.

Signature:

Date: 2024-05-11



NAME AND TITLE (Please print or type): alex li/Manager

COMPANY (Please print or type): Shenzhen NTEK Testing Technology Co., Ltd./ 1/F, Building E,
Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen P.R. China.