



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 1 of 58

SAR TEST REPORT

Application No.: KSCR2404000572AT
FCC ID: 2BFI4FC162
Applicant: Shanghai MediWorks Precision Instruments Co., Ltd.
Address of Applicant: No.7, MingPu Phase II, No.3279 SanLu Road, MinHang District, 201100, Shanghai, China
Manufacturer: Shanghai MediWorks Precision Instruments Co., Ltd.
Address of Manufacturer: No.7, MingPu Phase II, No.3279 SanLu Road, MinHang District, 201100, Shanghai, China
Product Name: Automatic Fundus Camera
Model No.(EUT): FC162
Trade Mark: 
Standard(s) : FCC 47CFR §2.1093
Date of Receipt: 2024-04-11
Date of Test: 2024-04-15 to 2024-04-18
Date of Issue: 2024-04-22

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 2 of 58

Version	Description	Date	Remark
00	Original	2024-04-22	/

Authorized for issue by:				
Tested By		<i>Richard. Kong</i>		
		Richard.Kong / Project Engineer		
Approved By		<i>Terry Hou</i>		
		Terry Hou / Reviewer		



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 3 of 58

TEST SUMMARY

Frequency Band	Maximum Reported SAR (W/kg)	
	Head	Extremity
WI-FI (2.4GHz)	0.13	0.98
WI-FI (5GHz)	0.11	0.68
Sum SAR	0.24	1.03
SAR Limited	1.6	4.0

CONTENTS

1	General Information	5
1.1	General Description of EUT	5
1.2	Test Specification	7
1.3	RF exposure limits.....	8
1.4	Test Location.....	9
1.5	Test Facility	9
2	Laboratory Environment.....	10
3	SAR Measurements System Configuration	11
3.1	The SAR Measurement System.....	11
3.2	Isotropic E-field Probe EX3DV4	12
3.3	Data Acquisition Electronics (DAE)	13
3.4	SAM Twin Phantom	13
3.5	ELI Phantom.....	14
3.6	Device Holder for Transmitters.....	15
3.7	Measurement procedure.....	16
4	SAR measurement variability and uncertainty	20
4.1	SAR measurement variability	20
4.2	SAR measurement uncertainty	21
5	Description of Test Position	22
5.1	Extremity exposure conditions	22
6	SAR System Verification Procedure	23
6.1	Tissue Simulate Liquid.....	23
6.2	SAR System Check	26
7	Test Configuration	29
8	Test Result	33
8.1	Measurement of RF Conducted Power	33
8.2	Measurement of SAR Data	41
8.3	Multiple Transmitter Evaluation.....	45
9	Equipment list.....	46
10	Calibration certificate	47
11	Photographs.....	47
Appendix A: Detailed System Check Results		48
Appendix B: Detailed Test Results.....		53
Appendix C: Calibration certificate		58
Appendix D: Photographs		58



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 5 of 58

1 General Information
1.1 General Description of EUT

Device Type:	Portable device		
Exposure Category:	Uncontrolled environment / general population		
SN:	FC162-J202403200-01-00005		
Hardware Version:	R3.0.002.000		
Software Version:	N/A		
Antenna Gain:	3.29dBi for 2.4GHz Band 4.03dBi for 5GHz Band (Provided by Manufacturer)		
Antenna Type:	PIFA Antenna		
Device Operating Configurations:			
Modulation Mode:	WIFI: CCK, DSSS, OFDM		
	WIFI2.4G	2412-2462	2412-2462
	WIFI(U-NII-1)	5150~5250	5150~5250
	WIFI(U-NII-2A)	5250~5350	5250~5350
	WIFI(U-NII-2C)	5470~5725	5470~5725
	WIFI(U-NII-3)	5725~5850	5725~5850
Battery Information:	Model:	GS2034A	
	Normal Voltage:	DC 14.4V	
	Rated capacity:	3300mAh 47.52Wh	
	Battery Type:	Rechargeable Li-ion Battery	
	Manufacturer:	Shenzhen Grace Technology Development Co.,Ltd	



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 6 of 58

1.1.1 DUT Antenna Locations

Please see the Appendix D



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 7 of 58

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
IEEE Std C95.1 – 1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D04	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
KDB 865664 D01 v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 v01r02	RF Exposure Compliance Reporting and Documentation Considerations
KDB 248227 D01 v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 8 of 58

1.3 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 9 of 58

1.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).

3. Sample source: sent by customer.

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

• ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E; CAB identifier: CN0072

• VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 10 of 58

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY8 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

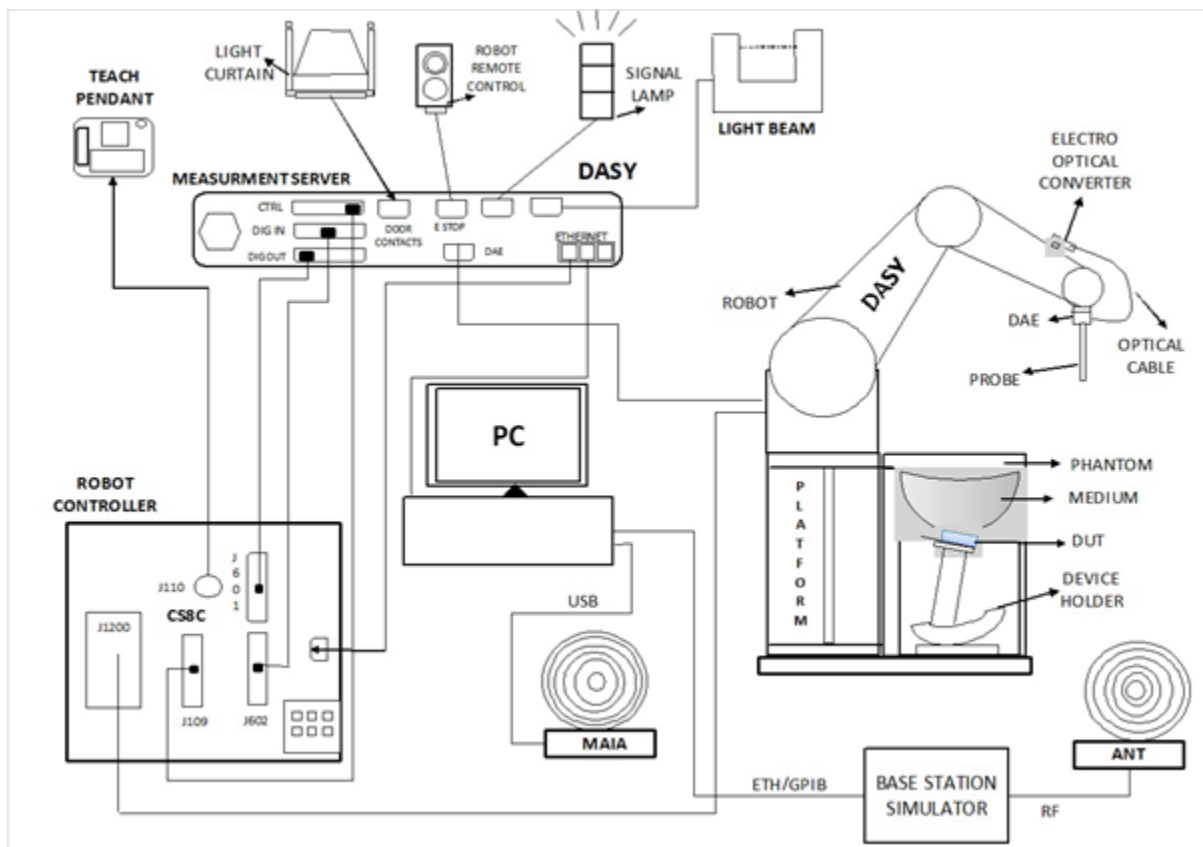

F-1. SAR Measurement System Configuration

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201


Page: 12 of 58

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

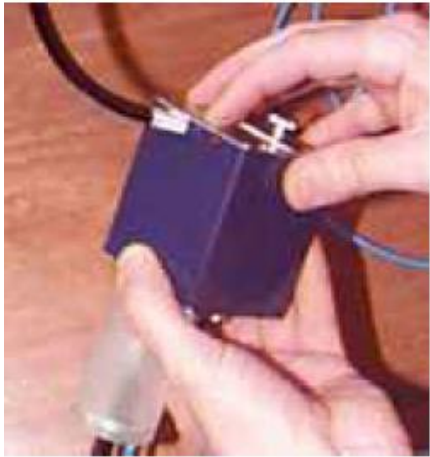Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	


3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

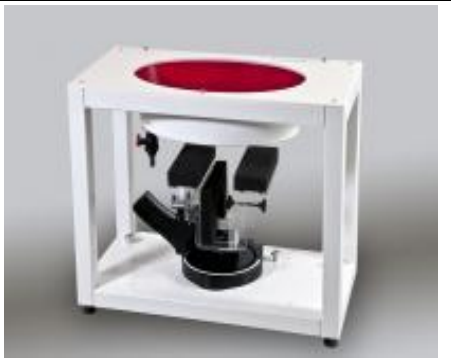Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 30mm*30mm*30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points ($\leq 2\text{GHz}$) and 7x7x7 points ($\geq 2\text{GHz}$). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 17 of 58

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE3”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 19 of 58

$$E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 21 of 58

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is $< 1.5 \text{ W/kg}$ ($< 3.75 \text{ W/kg}$ for 10g), the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 22 of 58

5 Description of Test Position

5.1 Extremity exposure conditions

SAR can test the sides near the antenna, the surface of the device should be tested for SAR compliance with device touching the phantom. The SAR Exclusion Threshold in KDB 447498 D04 for FCC can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device surface is used to determine if SAR testing is required for the adjacent surfaces, with the adjacent surface positioned against the phantom and the surface containing the antenna positioned perpendicular to the phantom.

This product is a hand-held thermal imager. Therefore, we use 0mm to evaluate the Extremity SAR.

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

HSL5GHz is composed of the following ingredients:

Water: 50-65%

Mineral oil: 10-30%

Emulsifiers: 8-25%

Sodium salt: 0-1.5%

MSL5GHz is composed of the following ingredients:

Water: 64-78%

Mineral oil: 11-18%

Emulsifiers: 9-15%

Sodium salt: 2-3%

6.1.2 Test Liquids Confirmation

Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended tissue dielectric parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201
Page: 25 of 58


6.1.3 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the SPEAG DAK3.5 dielectric probe kit in conjunction with Agilent Network Analyzer. The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Liquid Temp. ($^{\circ}\text{C}$)	Date
2450 Head	2450	1.87	39.1	1.80	39.20	3.89	-0.26	± 5	22.1	2024/4/15
5200 Head	5200	4.73	36.5	4.66	36.01	1.50	1.36	± 5	22.2	2024/4/16
5600 Head	5600	5.21	35.4	5.07	35.50	2.76	-0.28	± 5	22.2	2024/4/17
5800 Head	5800	5.43	34.8	5.28	35.24	2.84	-1.25	± 5	22.2	2024/4/18

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

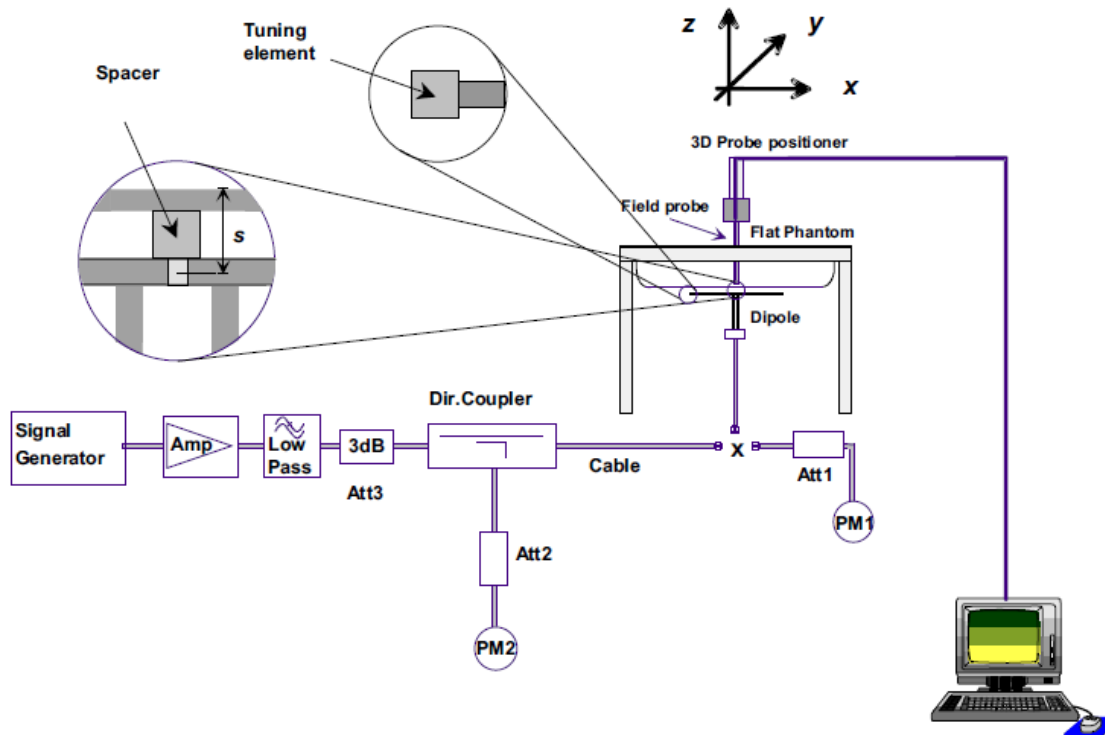

F-3. the microwave circuit arrangement used for SAR system verification



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 27 of 58

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 28 of 58

6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D2450V2	Head	13.9	6.46	55.6	25.84	53 (47.70~58.30)	24.7 (22.23~27.17)	22.1	2024/4/15
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head(5.20GHz)	7.46	2.17	74.6	21.7	77.6 (69.84~85.36)	22.1 (19.35~23.65)	22.2	2024/4/16
	Head(5.6GHz)	8.34	2.33	83.4	23.3	80.8 (72.72~88.88)	22.9 (20.61~25.19)	22.2	2024/4/17
	Head(5.8GHz)	7.45	2.19	74.5	21.9	76.7 (69.03~84.37)	21.5 (19.35~23.65)	22.2	2024/4/18

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration


7.1.1 Wi-Fi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.1.1 Duty cycle


1) 2.4GHz Wi-Fi:

802.11b: Duty cycle= 100%

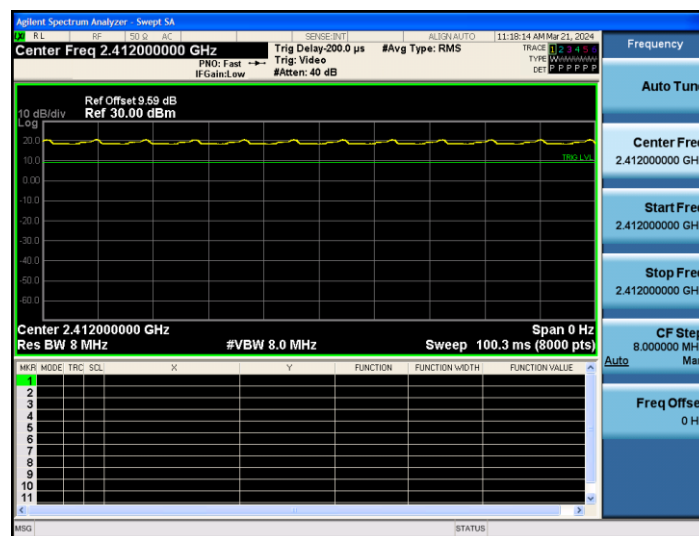

2) 5GHz Wi-Fi:

802.11a: Duty cycle= 100%

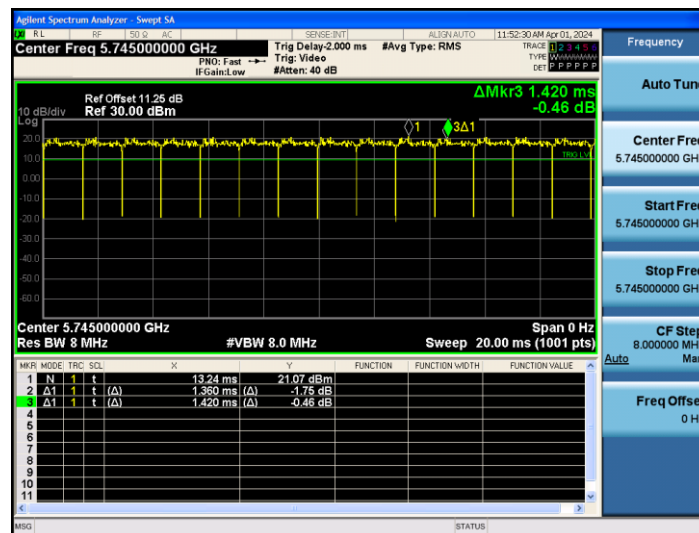

7.1.1.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.1.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.1.1.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 31 of 58

- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"

7.1.1.5 5 GHz Wi-Fi SAR Procedures

• U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

• U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 32 of 58

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

• OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

• SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power of Wi-Fi 2.4GHz

Ant1

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11b	1	2412	1	14.94	16.00
	6	2437		14.72	16.00
	11	2462		13.97	15.00
802.11g	1	2412	6	11.45	13.00
	6	2437		12.92	13.00
	11	2462		10.99	13.00
802.11n HT20	1	2412	6.5	10.37	11.00
	6	2437		10.13	11.00
	11	2462		9.03	10.00
802.11n HT40	3	2422	13.5	9.94	11.00
	6	2437		9.97	11.00
	9	2452		10.88	12.00

Ant2

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11b	1	2412	1	15.17	16.00
	6	2437		15.14	16.00
	11	2462		14.70	16.00
802.11g	1	2412	6	10.30	12.00
	6	2437		10.65	12.00
	11	2462		9.88	11.00
802.11n HT20	1	2412	6.5	9.37	11.00
	6	2437		9.66	11.00
	11	2462		9.46	10.00
802.11n HT40	3	2422	13.5	9.94	11.00
	6	2437		9.83	11.00
	9	2452		10.30	11.00

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 34 of 58

MIMO

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11b	1	2412	1	NA	NA
	6	2437			
	11	2462			
802.11g	1	2412	6		
	6	2437			
	11	2462			
802.11n HT20	1	2412	6.5	12.91	14.00
	6	2437		12.91	14.00
	11	2462		12.26	14.00
802.11n HT40	3	2422	13.5	12.95	14.00
	6	2437		12.91	14.00
	9	2452		13.61	14.00

Note:

- Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 35 of 58

8.1.2 Conducted Power of Wi-Fi 5G

Ant1

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11a	U-NII-1	36	5180	6	13.62	15.00
		40	5200		13.35	15.00
		44	5220		13.25	15.00
		48	5240		13.20	15.00
	U-NII-2A	52	5260		13.64	15.00
		56	5280		13.33	15.00
		60	5300		13.21	15.00
		64	5320		11.04	12.00
	U-NII-2C	100	5500		13.42	15.00
		116	5580		14.94	16.00
		140	5700		13.09	14.00
		149	5745		11.26	12.00
	U-NII-3	157	5785		11.18	12.00
		165	5825		11.00	12.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11n-HT20	U-NII-1	36	5180	MCS0	11.45	12.00
		40	5200		11.32	12.00
		44	5220		10.43	11.00
		48	5240		10.30	11.00
	U-NII-2A	52	5260		10.11	11.00
		56	5280		9.83	11.00
		60	5300		9.53	11.00
		64	5320		8.02	9.00
	U-NII-2C	100	5500		10.34	11.00
		116	5580		12.00	13.00
		140	5700		10.07	11.00
		149	5745		8.95	10.00
	U-NII-3	157	5785		8.21	10.00
		165	5825		7.67	9.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11n-HT40	U-NII-1	38	5190	MCS0	10.89	11.00
		46	5230		10.69	11.00
	U-NII-2A	54	5270		9.93	11.00
		62	5310		9.40	11.00
	U-NII-2C	102	5510		11.10	12.00
		110	5550		12.36	13.00
		134	5670		11.23	12.00



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 36 of 58

	U-NII-3	151	5755		9.44	10.00
		159	5795		8.63	9.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 20M	U-NII-1	36	5180	MCS0	10.16	11.00
		40	5200		10.07	11.00
		44	5220		9.87	11.00
		48	5240		10.08	11.00
	U-NII-2A	52	5260		9.68	11.00
		56	5280		9.12	11.00
		60	5300		8.58	10.00
		64	5320		7.94	9.00
	U-NII-2C	100	5500		10.40	11.00
		116	5580		11.94	13.00
		140	5700		11.21	12.00
	U-NII-3	149	5745		9.97	10.00
		157	5785		9.14	10.00
		165	5825		7.92	9.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 40M	U-NII-1	38	5190	MCS0	10.61	11.00
		46	5230		10.34	11.00
	U-NII-2A	54	5270		9.97	11.00
		62	5310		9.41	11.00
	U-NII-2C	102	5510		11.27	12.00
		110	5550		12.60	13.00
		134	5670		11.45	12.00
	U-NII-3	151	5755		9.89	10.00
		159	5795		9.06	10.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 80M	U-NII-1	42	5210	MCS0	9.85	11.00
	U-NII-2A	58	5290		9.91	11.00
	U-NII-2C	106	5530		11.38	12.00
		122	5610		11.83	12.00
	U-NII-3	155	5775		9.41	10.00



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 37 of 58

Ant2

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11a	U-NII-1	36	5180	6	12.86	14.00
		40	5200		12.41	14.00
		44	5220		12.32	14.00
		48	5240		12.74	14.00
	U-NII-2A	52	5260		12.58	14.00
		56	5280		12.41	14.00
		60	5300		12.30	14.00
		64	5320		11.26	12.00
	U-NII-2C	100	5500		12.57	14.00
		116	5580		13.32	14.50
		140	5700		11.98	13.00
	U-NII-3	149	5745		11.03	12.00
		157	5785		10.59	11.00
		165	5825		10.48	11.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11n-HT20	U-NII-1	36	5180	MCS0	11.04	12.00
		40	5200		10.85	12.00
		44	5220		10.14	12.00
		48	5240		10.22	12.00
	U-NII-2A	52	5260		10.05	12.00
		56	5280		10.01	12.00
		60	5300		9.95	11.00
		64	5320		9.24	10.00
	U-NII-2C	100	5500		10.14	12.00
		116	5580		10.87	12.00
		140	5700		9.65	11.00
	U-NII-3	149	5745		8.87	10.00
		157	5785		8.11	9.00
		165	5825		7.93	9.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11n-HT40	U-NII-1	38	5190	MCS0	10.59	11.00
		46	5230		10.28	11.00
	U-NII-2A	54	5270		9.97	11.00
		62	5310		10.09	11.00
	U-NII-2C	102	5510		10.70	11.00
		110	5550		11.11	12.00
		134	5670		10.54	11.00
	U-NII-3	151	5755		9.05	10.00
		159	5795		8.69	10.00



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 38 of 58

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 20M	U-NII-1	36	5180	MCS0	9.82	11.00
		40	5200		9.54	11.00
		44	5220		9.47	11.00
		48	5240		9.55	11.00
	U-NII-2A	52	5260		9.12	11.00
		56	5280		8.98	10.00
		60	5300		8.63	10.00
		64	5320		8.42	9.00
	U-NII-2C	100	5500		9.48	10.00
		116	5580		11.00	12.00
		140	5700		9.87	11.00
		149	5745		8.97	10.00
	U-NII-3	157	5785		8.23	10.00
		165	5825		7.08	8.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 40M	U-NII-1	38	5190	MCS0	9.93	11.00
		46	5230		9.40	11.00
	U-NII-2A	54	5270		9.47	11.00
		62	5310		9.65	11.00
	U-NII-2C	102	5510		10.10	11.00
		110	5550		10.62	12.00
		134	5670		9.96	11.00
	U-NII-3	151	5755		8.63	10.00
		159	5795		8.31	10.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 80M	U-NII-1	42	5210	MCS0	9.11	10.00
	U-NII-2A	58	5290		9.54	10.00
	U-NII-2C	106	5530		9.66	10.00
		122	5610		9.66	10.00
	U-NII-3	155	5775		7.50	8.00



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 39 of 58

MIMO

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11a	U-NII-1	36	5180	6	NA	NA
		40	5200			
		44	5220			
		48	5240			
	U-NII-2A	52	5260			
		56	5280			
		60	5300			
		64	5320			
	U-NII-2C	100	5500			
		116	5580			
		140	5700			
	U-NII-3	149	5745			
		157	5785			
		165	5825			
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11n-HT20	U-NII-1	36	5180	MCS0	14.26	15.00
		40	5200		14.01	15.00
		44	5220		13.30	14.00
		48	5240		13.27	14.00
	U-NII-2A	52	5260		13.09	14.00
		56	5280		12.93	14.00
		60	5300		12.76	14.00
		64	5320		11.68	13.00
	U-NII-2C	100	5500		13.25	14.00
		116	5580		14.48	15.00
		140	5700		12.88	14.00
	U-NII-3	149	5745		11.92	13.00
		157	5785		11.17	12.00
		165	5825		10.81	12.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11n-HT40	U-NII-1	38	5190	MCS0	13.75	14.00
		46	5230		13.50	14.00
	U-NII-2A	54	5270		12.96	14.00
		62	5310		12.77	14.00
	U-NII-2C	102	5510		13.91	14.00
		110	5550		14.79	15.00
		134	5670		13.91	14.00
	U-NII-3	151	5755		12.26	13.00
		159	5795		11.67	13.00



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 40 of 58

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 20M	U-NII-1	36	5180	MCS0	13.00	14.00
		40	5200		12.82	14.00
		44	5220		12.68	14.00
		48	5240		12.83	14.00
	U-NII-2A	52	5260		12.42	14.00
		56	5280		12.06	13.00
		60	5300		11.62	13.00
		64	5320		11.20	12.00
	U-NII-2C	100	5500		12.97	13.00
		116	5580		14.51	15.00
		140	5700		13.60	14.00
	U-NII-3	149	5745		12.51	13.00
		157	5785		11.72	13.00
		165	5825		10.53	11.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 40M	U-NII-1	38	5190	MCS0	13.29	14.00
		46	5230		12.91	14.00
	U-NII-2A	54	5270		12.74	14.00
		62	5310		12.54	14.00
	U-NII-2C	102	5510		13.73	14.00
		110	5550		14.73	15.00
		134	5670		13.78	14.00
	U-NII-3	151	5755		12.32	13.00
		159	5795		11.71	13.00
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up
802.11ac 80M	U-NII-1	42	5210	MCS0	12.51	13.00
	U-NII-2A	58	5290		12.74	13.00
	U-NII-2C	106	5530		13.61	14.00
		122	5610		13.89	14.00
	U-NII-3	155	5775		11.57	12.00

8.2 Measurement of SAR Data

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D04, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0W/kg for 10g) then testing at the other channels is not required for such test configuration(s).
- 3) The scaled SAR = Measured SAR(W/kg) * Duty Cycle Scaled factor * Scaled factor
- 4) Duty Cycle Scaled factor = 100% / Measured Duty Cycle

WiFi 5G:

- 1) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Per Kdb248227 D01, When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel.
- 2) Each channel was tested at the lowest data rate.
- 3) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration.
- 4) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not require



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 42 of 58

8.2.1 SAR Result Of 2.4GHz Wi-Fi

Wi-Fi 2.4G Ant1 SAR Test Record														
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg)
Head Test data (Separate 0mm)														
Side 6	802.11b	1/2412	100	1.000	0.072	0.037	-0.13	14.94	16.00	1.276	0.092	0.047	22.0	1.6
Extremity Test data (Separate 0mm)														
Side 1	802.11b	1/2412	100	1.000	0.044	0.025	0.07	14.94	16.00	1.276	0.056	0.032	22.0	4.0
Side 2	802.11b	1/2412	100	1.000	0.059	0.102	0.01	14.94	16.00	1.276	0.075	0.130	22.0	4.0
Side 3	802.11b	1/2412	100	1.000	0.022	0.012	0.06	14.94	16.00	1.276	0.028	0.015	22.0	4.0
Side 4	802.11b	1/2412	100	1.000	0.206	0.150	0.14	14.94	16.00	1.276	0.263	0.191	22.0	4.0
Side 5	802.11b	1/2412	100	1.000	1.63	0.675	-0.02	14.94	16.00	1.276	2.081	0.862	22.0	4.0
Wi-Fi 2.4G Ant2 SAR Test Record														
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg)
Head Test data (Separate 0mm)														
Side 6	802.11b	1/2412	100	1.000	0.107	0.044	-0.06	15.17	16.00	1.211	0.130	0.053	22.0	1.6
Extremity Test data (Separate 0mm)														
Side 1	802.11b	1/2412	100	1.000	0.077	0.061	0.18	15.17	16.00	1.211	0.093	0.074	22.0	4.0
Side 2	802.11b	1/2412	100	1.000	0.086	0.065	0.08	15.17	16.00	1.211	0.104	0.079	22.0	4.0
Side 3	802.11b	1/2412	100	1.000	1.96	0.811	-0.11	15.17	16.00	1.211	2.373	0.982	22.0	4.0
Side 4	802.11b	1/2412	100	1.000	0.221	0.165	0.10	15.17	16.00	1.211	0.268	0.200	22.0	4.0
Side 5	802.11b	1/2412	100	1.000	0.025	0.013	0.07	15.17	16.00	1.211	0.030	0.016	22.0	4.0



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 43 of 58

8.2.2 SAR Result Of 5GHz Wi-Fi

Wi-Fi 5G SAR Ant1 Test Record

Test position	Test mode	Test Ch./Freq.	Duty Cycle %	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg)
Head Test data U-NII-2A (Separate 0mm)														
Side 6	802.11a	52/5260	95.77	1.044	0.022	0.006	-0.06	13.64	15.00	1.368	0.031	0.009	22.2	1.6
Head Test data U-NII-2C (Separate 0mm)														
Side 6	802.11a	116/5580	95.77	1.044	0.073	0.021	0.01	14.94	16.00	1.276	0.097	0.028	22.2	1.6
Head Test data U-NII-3 (Separate 0mm)														
Side 6	802.11a	149/5745	95.77	1.044	0.091	0.035	0.06	11.26	12.00	1.186	0.113	0.043	22.2	1.6
Extremity Test data U-NII-2A (Separate 0mm)														
Side 1	802.11a	52/5260	95.77	1.044	0.002	0.001	0.01	13.64	15.00	1.368	0.003	0.001	22.2	4.0
Side 2	802.11a	52/5260	95.77	1.044	0.012	0.005	-0.02	13.64	15.00	1.368	0.017	0.007	22.2	4.0
Side 3	802.11a	52/5260	95.77	1.044	0.005	0.002	0.17	13.64	15.00	1.368	0.007	0.003	22.2	4.0
Side 4	802.11a	52/5260	95.77	1.044	0.040	0.017	0.19	13.64	15.00	1.368	0.057	0.024	22.2	4.0
Side 5	802.11a	52/5260	95.77	1.044	0.389	0.101	-0.06	13.64	15.00	1.368	0.555	0.144	22.2	4.0
Extremity Test data U-NII-2C (Separate 0mm)														
Side 1	802.11a	116/5580	95.77	1.044	0.018	0.008	-0.11	14.94	16.00	1.276	0.024	0.011	22.2	4.0
Side 2	802.11a	116/5580	95.77	1.044	0.069	0.024	-0.03	14.94	16.00	1.276	0.092	0.032	22.2	4.0
Side 3	802.11a	116/5580	95.77	1.044	0.038	0.012	0.07	14.94	16.00	1.276	0.051	0.016	22.2	4.0
Side 4	802.11a	116/5580	95.77	1.044	0.169	0.061	0.13	14.94	16.00	1.276	0.225	0.081	22.2	4.0
Side 5	802.11a	116/5580	95.77	1.044	1.48	0.385	-0.05	14.94	16.00	1.276	1.972	0.513	22.2	4.0
Extremity Test data U-NII-3 (Separate 0mm)														
Side 1	802.11a	149/5745	95.77	1.044	0.041	0.018	0.06	11.26	12.00	1.186	0.051	0.022	22.2	4.0
Side 2	802.11a	149/5745	95.77	1.044	0.082	0.033	-0.09	11.26	12.00	1.186	0.102	0.041	22.2	4.0
Side 3	802.11a	149/5745	95.77	1.044	0.045	0.035	-0.08	11.26	12.00	1.186	0.056	0.043	22.2	4.0
Side 4	802.11a	149/5745	95.77	1.044	0.250	0.076	-0.07	11.26	12.00	1.186	0.309	0.094	22.2	4.0
Side 5	802.11a	149/5745	95.77	1.044	2.07	0.549	-0.12	11.26	12.00	1.186	2.563	0.680	22.2	4.0



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201
Page: 44 of 58

Wi-Fi 5G SAR Ant2 Test Record														
Test position	Test mode	Test Ch./Freq.	Duty Cycle %	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg)
Head Test data U-NII-2A (Separate 0mm)														
Side 6	802.11a	52/5260	95.77	1.044	0.022	0.006	-0.06	12.58	14.00	1.387	0.032	0.009	22.2	1.6
Head Test data U-NII-2C														
Side 6	802.11a	116/5580	95.77	1.044	0.032	0.011	-0.05	13.32	14.50	1.312	0.044	0.015	22.2	1.6
Head Test data U-NII-3 (Separate 0mm)														
Side 6	802.11a	149/5745	95.77	1.044	0.027	0.009	-0.02	11.03	12.00	1.250	0.035	0.012	22.2	1.6
Extremity Test data U-NII-2A (Separate 0mm)														
Side 1	802.11a	52/5260	95.77	1.044	0.003	0.001	0.16	12.58	14.00	1.387	0.004	0.001	22.2	4.0
Side 2	802.11a	52/5260	95.77	1.044	0.005	0.002	0.13	12.58	14.00	1.387	0.007	0.003	22.2	4.0
Side 3	802.11a	52/5260	95.77	1.044	0.210	0.061	-0.01	12.58	14.00	1.387	0.304	0.088	22.2	4.0
Side 4	802.11a	52/5260	95.77	1.044	0.012	0.003	-0.08	12.58	14.00	1.387	0.017	0.004	22.2	4.0
Side 5	802.11a	52/5260	95.77	1.044	0.002	0.001	-0.11	12.58	14.00	1.387	0.003	0.001	22.2	4.0
Extremity Test data U-NII-2C (Separate 0mm)														
Side 1	802.11a	116/5580	95.77	1.044	0.006	0.002	0.02	13.32	14.50	1.312	0.008	0.003	22.2	4.0
Side 2	802.11a	116/5580	95.77	1.044	0.007	0.002	-0.07	13.32	14.50	1.312	0.010	0.003	22.2	4.0
Side 3	802.11a	116/5580	95.77	1.044	0.753	0.189	-0.04	13.32	14.50	1.312	1.032	0.259	22.2	4.0
Side 4	802.11a	116/5580	95.77	1.044	0.022	0.007	0.12	13.32	14.50	1.312	0.030	0.010	22.2	4.0
Side 5	802.11a	116/5580	95.77	1.044	0.003	0.001	0.12	13.32	14.50	1.312	0.004	0.001	22.2	4.0
Extremity Test data U-NII-3 (Separate 0mm)														
Side 1	802.11a	149/5745	95.77	1.044	0.007	0.003	-0.13	11.03	12.00	1.250	0.009	0.004	22.2	4.0
Side 2	802.11a	149/5745	95.77	1.044	0.009	0.003	-0.06	11.03	12.00	1.250	0.012	0.004	22.2	4.0
Side 3	802.11a	149/5745	95.77	1.044	0.736	0.226	-0.15	11.03	12.00	1.250	0.961	0.295	22.2	4.0
Side 4	802.11a	149/5745	95.77	1.044	0.018	0.006	-0.13	11.03	12.00	1.250	0.023	0.008	22.2	4.0
Side 5	802.11a	149/5745	95.77	1.044	0.003	0.001	0.16	11.03	12.00	1.250	0.004	0.001	22.2	4.0



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 45 of 58

8.3 Multiple Transmitter Evaluation

Simultaneous Transmission

NO.	Simultaneous Transmission Configuration	Head	Limbs
1	WIFI 2.4GHz Ant1+WIFI 2.4GHz Ant2	Yes	Yes
2	WIFI 5GHz Ant1+WIFI 5GHz Ant2	Yes	Yes
3	WIFI 2.4GHz Ant1+WIFI 5GHz Ant2	Yes	Yes
4	WIFI 5GHz Ant1+WIFI 2.4GHz Ant2	Yes	Yes

Simultaneous Transmission SAR Summation Scenario for head

Exposure position	①MAX. WLAN2.4G Ant1 SAR (W/kg)	②MAX. WLAN2.4G Ant2 SAR (W/kg)	③MAX. WLAN5G Ant1 SAR (W/kg)	④MAX. WLAN5G Ant2 SAR (W/kg)	Summed SAR ①+②	Summed SAR ③+④	Summed SAR ①+④	Summed SAR ②+③	Volume scan
Side 6	0.092	0.130	0.113	0.044	0.222	0.157	0.136	0.243	NO

Simultaneous Transmission SAR Summation Scenario for Extremity

Exposure position	①MAX. WLAN2.4G Ant1 SAR (W/kg)	②MAX. WLAN2.4G Ant2 SAR (W/kg)	③MAX. WLAN5G Ant1 SAR (W/kg)	④MAX. WLAN5G Ant2 SAR (W/kg)	Summed SAR ①+②	Summed SAR ③+④	Summed SAR ①+④	Summed SAR ②+③	Volume scan
Side 1	0.032	0.074	0.022	0.004	0.106	0.026	0.036	0.096	NO
Side 2	0.130	0.079	0.041	0.004	0.209	0.045	0.134	0.120	NO
Side 3	0.015	0.982	0.043	0.295	0.997	0.338	0.310	1.025	NO
Side 4	0.191	0.200	0.094	0.010	0.391	0.104	0.201	0.294	NO
Side 5	0.862	0.016	0.680	0.001	0.878	0.681	0.863	0.696	NO

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 46 of 58

9 Equipment list

Test Platform		SPEAG DASY8 Professional				
Description		SAR Test System (Frequency range 600MHz-6GHz)				
Software Reference		DASY8; SEMCAD				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	DAE	SPEAG	DAE4ip	1826	2023/12/27	2024/12/26
☒	E-field PROBE	SPEAG	EX3DV4	7833	2023/08/24	2024/08/23
☒	Dipole	SPEAG	D2450V2	817	2022/04/01	2025/03/31
☒	Dipole	SPEAG	D5GHzV2	1095	2022/06/01	2025/05/31
☒	Signal Generator	R&S	SMBV100B	103571	2024/03/16	2025/03/15
☒	S-Parameter Network Analyzer	Agilent	E5071C	MY46417539	2024/03/19	2025/03/18
☒	Communication System	Anritsu	CMW500	159275	2023/08/22	2024/08/23
☒	Power meter	Anritsu	ML2495A	1445010	2024/03/19	2025/03/18
☒	Power sensor	Anritsu	MA2411B	1339220	2024/03/19	2025/03/18
☒	Signal Analyzer	KEYSIGHT	N9030B	MY61330164	2024/01/15	2025/01/13
☒	Electro Thermometer	DF	TH608	N/A	2024/02/26	2025/02/25
☒	SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA004AA	2217	N/A	N/A
☒	Twin SAM Phantom	SPEAG	QD000P41AA	2155	N/A	N/A
☒	DAK-3.5 probe	SPEAG	DAK-3.5	1333	N/A	N/A

Note: All the equipments are within the valid period when the tests are performed.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 47 of 58

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 48 of 58

Appendix A: Detailed System Check Results

The plots are showing as followings.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 49 of 58

Date: 2024/04/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1

D2450, CW

Measurement Report for Dipole 2450 MHz; Type: 817

Communication System: D2450; Frequency: 2450.000

Medium: HSL. Medium parameters used: $f = 2450.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 14.2 W/kg; SAR (10g) = 6.66 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 13.9 W/kg; SAR (10g) = 6.46 W/kg;

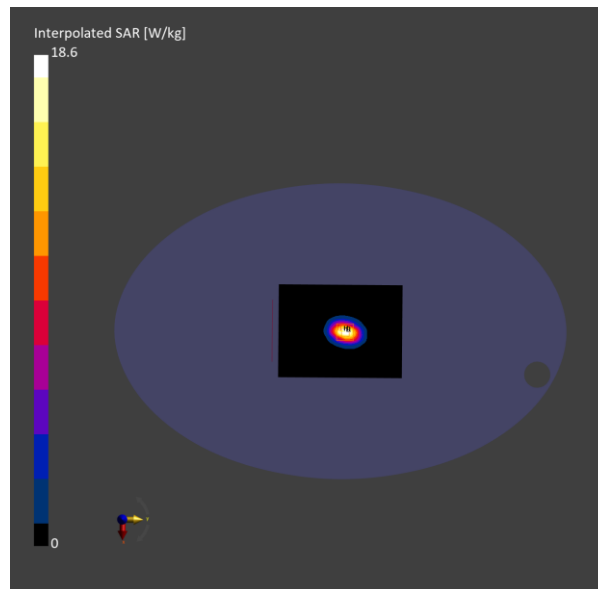



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 50 of 58

Date: 2024/04/16

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
D5GHz, CW

Measurement Report for Dipole 5.2 GHz; Type: 1095

Communication System: D5GHz; Frequency: 5200.000

Medium: HSL. Medium parameters used: $f = 5200.000$ MHz; $\sigma = 4.73$ S/m; $\epsilon_r = 36.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(5.16, 5.87, 5.61); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.55 W/kg; SAR (10g) = 2.07 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 7.46 W/kg; SAR (10g) = 2.17 W/kg;

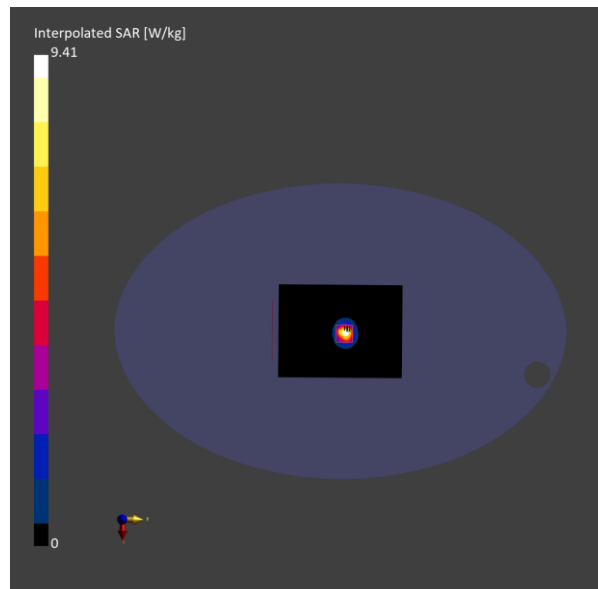



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 51 of 58

Date: 2024/04/17

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
D5GHz, CW

Measurement Report for Dipole 5.6 GHz; Type: 1095

Communication System: D5GHz; Frequency: 5600.000

Medium: HSL. Medium parameters used: $f = 5600.000$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 35.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(4.33, 4.92, 4.66); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.87 W/kg; SAR (10g) = 2.44 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 8.34 W/kg; SAR (10g) = 2.33 W/kg;

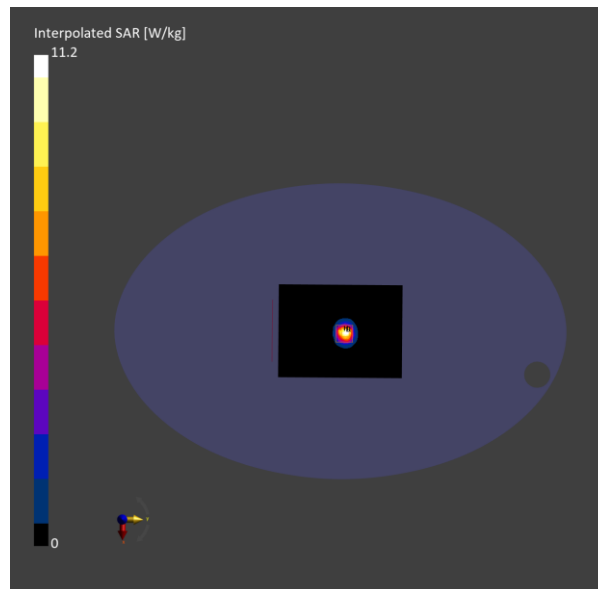



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400057201
Page: 52 of 58

Date: 2024/04/18

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
D5GHz, CW
Measurement Report for Dipole 5.8 GHz; Type: 1095
Communication System: D5GHz; Frequency: 5800.000
Medium: HSL. Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.43$ S/m; $\epsilon_r = 34.8$

DASY8 Configuration:
- Probe: EX3DV4 - SN7833; ConvF(4.5, 5.13, 4.87); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 6.53 W/kg; SAR (10g) = 2.03 W/kg;
Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 7.45 W/kg; SAR (10g) = 2.19 W/kg;

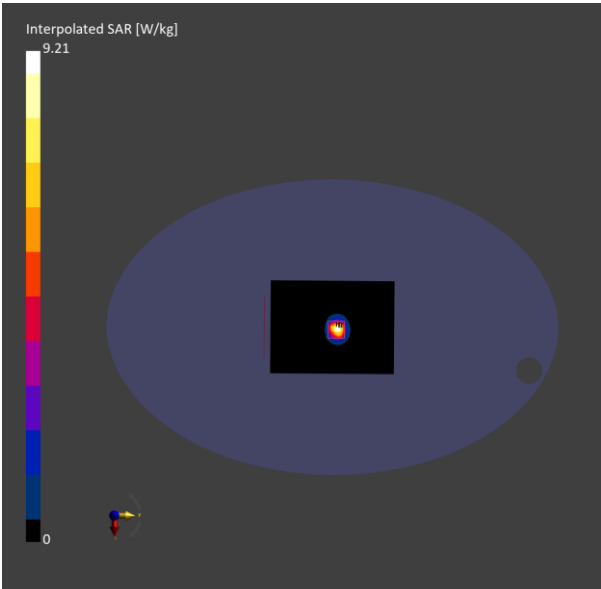



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 53 of 58

Appendix B: Detailed Test Results

The plots of worse case are showing as followings.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 54 of 58

Date: 2024/04/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 1
Measurement Report for FC162

Communication System: WLAN 2.4GHz; Frequency: 2412.000, Side6

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (160.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.100 W/kg; SAR (10g) = 0.054 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.107 W/kg; SAR (10g) = 0.044 W/kg;

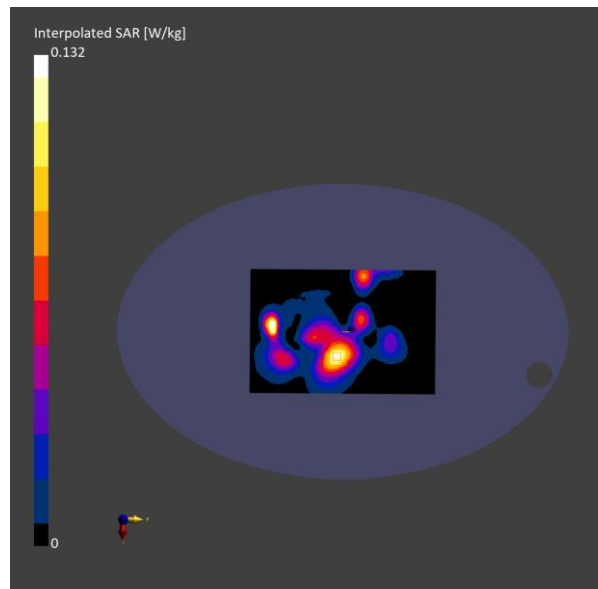



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 55 of 58

Date: 2024/04/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 1
Measurement Report for FC162

Communication System: WLAN 2.4GHz; Frequency: 2412.000, Side3

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (160.0 mm x 300.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.04 W/kg; SAR (10g) = 0.835 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 1.96 W/kg; SAR (10g) = 0.811 W/kg;

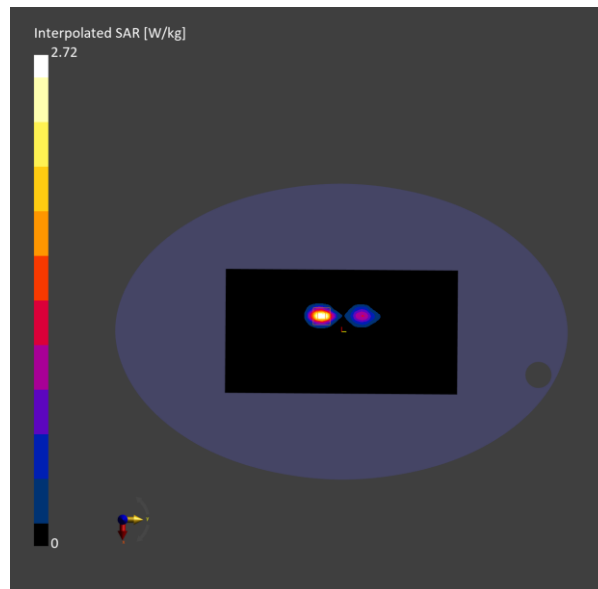



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 56 of 58

Date: 2024/04/18

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
WLAN 5GHz, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps), Channel 149
Measurement Report for FC162

Communication System: WLAN 5GHz; Frequency: 5745.000, Side6

Medium: HSL. Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 35.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(4.5, 5.13, 4.87); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (160.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.084 W/kg; SAR (10g) = 0.034 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.091 W/kg; SAR (10g) = 0.035 W/kg;

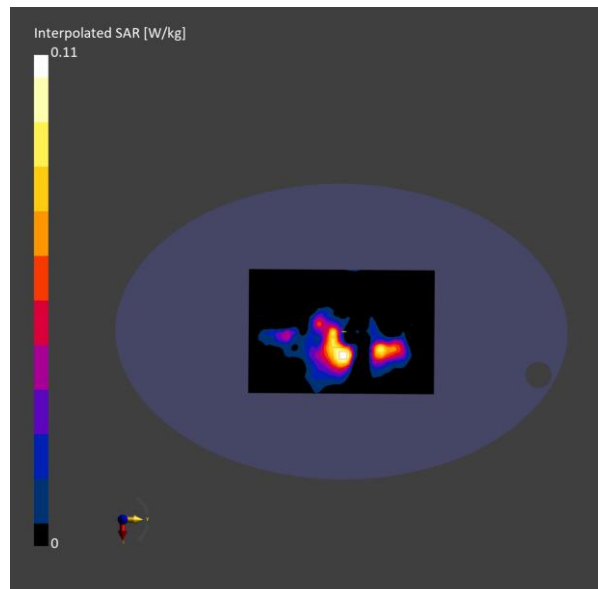



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 57 of 58

Date: 2024/04/18

Test Laboratory: Compliance Certification Services (Kunshan) Inc. SAR Lab 1
WLAN 5GHz, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps), Channel 149
Measurement Report for FC162

Communication System: WLAN 5GHz; Frequency: 5745.000, Side5

Medium: HSL. Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 35.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(4.5, 5.13, 4.87); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (160.0 mm x 300.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.73 W/kg; SAR (10g) = 0.537 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 2.07 W/kg; SAR (10g) = 0.549 W/kg;

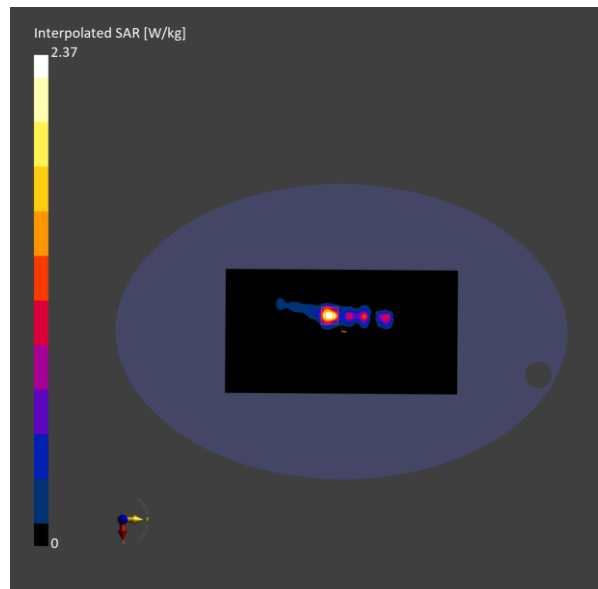



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400057201

Page: 58 of 58

Appendix C: Calibration certificate

Appendix D: Photographs

- End of the Report -