

## FCC PART 15.407

## TEST REPORT

For

**Vagaro, Inc.**

4430 Rosewood Drive, Suite 500, Pleasanton, CA 94588

**FCC ID: 2BFJHD052**

|                                        |                                                                                                                                                                                                                             |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Name:</b><br>PayPro                                                                                                                                                                                              |
| <b>Report Number:</b>                  | <u>RKSA240328001-00C</u>                                                                                                                                                                                                    |
| <b>Report Date:</b>                    | <u>2024-06-17</u>                                                                                                                                                                                                           |
| <b>Reviewed By:</b>                    | <u>Jenny Yang</u><br>Jenny Yang                                                                                                                                                                                             |
| <b>Approves By:</b>                    | <u>Kyle Xu</u><br>Kyle Xu                                                                                                                                                                                                   |
| <b>Test Laboratory:</b>                | Bay Area Compliance Laboratories Corp. (Kunshan)<br>No.248 Chenghu Road, Kunshan, Jiangsu Province, China<br>Tel: +86-512-86175000<br>Fax: +86-512-88934268<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

## **TABLE OF CONTENTS**

|                                                                                                   |           |
|---------------------------------------------------------------------------------------------------|-----------|
| <b>REPORT REVISION HISTORY.....</b>                                                               | <b>4</b>  |
| <b>GENERAL INFORMATION.....</b>                                                                   | <b>5</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                          | 5         |
| OBJECTIVE .....                                                                                   | 6         |
| TEST METHODOLOGY .....                                                                            | 6         |
| MEASUREMENT UNCERTAINTY .....                                                                     | 6         |
| TEST FACILITY .....                                                                               | 6         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                             | <b>7</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                           | 7         |
| EUT EXERCISE SOFTWARE .....                                                                       | 8         |
| EQUIPMENT MODIFICATIONS .....                                                                     | 24        |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                          | 24        |
| EXTERNAL I/O CABLE.....                                                                           | 24        |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                 | 25        |
| <b>TEST EQUIPMENT LIST .....</b>                                                                  | <b>28</b> |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                              | <b>29</b> |
| <b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>                                                    | <b>30</b> |
| APPLICABLE STANDARD .....                                                                         | 30        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                                              | 30        |
| <b>FCC §15.407 (b) (9) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS.....</b>                   | <b>31</b> |
| APPLICABLE STANDARD .....                                                                         | 31        |
| TEST SYSTEM SETUP.....                                                                            | 31        |
| EMI TEST RECEIVER SETUP.....                                                                      | 31        |
| TEST PROCEDURE .....                                                                              | 32        |
| TEST RESULTS SUMMARY .....                                                                        | 32        |
| <b>§15.205 &amp; §15.209 &amp; §15.407(B) – UNDESIRABLE EMISSION &amp; RESTRICTED BANDS .....</b> | <b>33</b> |
| APPLICABLE STANDARD .....                                                                         | 33        |
| TEST SYSTEM SETUP.....                                                                            | 33        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                                 | 36        |
| TEST PROCEDURE .....                                                                              | 36        |
| <b>FCC §15.407(a) &amp; §15.407(e)–EMISSION BANDWIDTH .....</b>                                   | <b>37</b> |
| APPLICABLE STANDARD .....                                                                         | 37        |
| TEST PROCEDURE .....                                                                              | 37        |
| <b>FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER.....</b>                                   | <b>38</b> |
| APPLICABLE STANDARD .....                                                                         | 38        |
| TEST PROCEDURE .....                                                                              | 38        |
| <b>FCC §15.407(a) - POWER SPECTRAL DENSITY .....</b>                                              | <b>39</b> |
| APPLICABLE STANDARD .....                                                                         | 39        |
| TEST PROCEDURE .....                                                                              | 39        |
| <b>EUT PHOTOGRAPHS .....</b>                                                                      | <b>40</b> |
| <b>TEST SETUP PHOTOGRAPHS .....</b>                                                               | <b>41</b> |
| <b>Appendix - TEST DATA.....</b>                                                                  | <b>42</b> |
| ENVIRONMENTAL CONDITIONS & TEST INFORMATION.....                                                  | 42        |

|                                                                   |     |
|-------------------------------------------------------------------|-----|
| AC POWER-LINE CONDUCTED EMISSIONS LIMITS .....                    | 43  |
| TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS ..... | 45  |
| EMISSION BANDWIDTH.....                                           | 92  |
| CONDUCTED TRANSMITTER OUTPUT POWER.....                           | 130 |
| POWER SPECTRAL DENSITY .....                                      | 131 |

REPORT REVISION HISTORY

| Number of Revisions | Report No.        | Version | Issue Date | Description     |
|---------------------|-------------------|---------|------------|-----------------|
| 0                   | RKSA240328001-00C | R1V1    | 2024-06-17 | Initial Release |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                        |                                                                    |              |
|------------------------|--------------------------------------------------------------------|--------------|
| Applicant:             | Vagaro, Inc.                                                       |              |
| Tested Model:          | D052                                                               |              |
| Product Name:          | PayPro                                                             |              |
| Power Supply:          | DC 24V                                                             |              |
| Maximum Output Power   | 5G Wi-Fi B1:                                                       | 5G Wi-Fi B4: |
|                        | 802.11a:12.95 dBm                                                  | 12.42 dBm    |
|                        | 802.11ac20:12.64 dBm                                               | 12.29 dBm    |
|                        | 802.11n-HT20:12.77 dBm                                             | 12.09 Bm     |
|                        | 802.11ac40:10.51 dBm                                               | 12.29 dBm    |
|                        | 802.11n-HT40:8.49 dBm                                              | 12.21 dBm    |
|                        | 802.11ac80:7.54 dBm                                                | 11.89 dBm    |
| Operating Frequency    | 5G Wi-Fi B1: 5180-5240 MHz, B4: 5745-5825 MHz                      |              |
| Channel Number         | 5G Wi-Fi B1: 7, B4: 8                                              |              |
| Channel Separation     | 5G Wi-Fi: 802.11a/ac20/n20: 20 MHz, ac40/n40: 40 MHz, ac80: 80 MHz |              |
| Modulation Type        | OFDM                                                               |              |
| Antenna Type           | FPC Antenna                                                        |              |
| ★Maximum Antenna Gain: | Band 1: 1.10 dBi; Band 4: 1.45 dBi                                 |              |

#### Adapter Information:

Model: ASSA52-240250

Input: 100-240V, 50/60Hz, 1.5A

Output: 24.0V, 2.5A, 60.0W

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA240328001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-03-28.)

## Objective

This type approval report is prepared for *Vagaro, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

## Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

## Measurement Uncertainty

| Item                               |                | Uncertainty |
|------------------------------------|----------------|-------------|
| AC Power Lines Conducted Emissions |                | 3.19 dB     |
| RF conducted test with spectrum    |                | 0.9dB       |
| RF Output Power with Power meter   |                | 0.5dB       |
| Radiated emission                  | 9 kHz~150 kHz  | 3.8dB       |
|                                    | 150 kHz~30 MHz | 3.4dB       |
|                                    | 30MHz~1GHz     | 6.11dB      |
|                                    | 1GHz~6GHz      | 4.45dB      |
|                                    | 6GHz~18GHz     | 5.23dB      |
|                                    | 18GHz~40GHz    | 5.65dB      |
| Occupied Bandwidth                 |                | 0.5kHz      |
| Temperature                        |                | 1.0℃        |
| Humidity                           |                | 6%          |

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/ac20/n20 mode Channel 36, 40, 48 were tested.

802.11n40/ac40 mode Channel 38, 46 were tested.

802.11ac80 mode Channel 42 was tested.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 36      | 5180            | 44      | 5220            |
| 38      | 5190            | 46      | 5230            |
| 40      | 5200            | 48      | 5240            |
| 42      | 5210            | /       | /               |

For **5725~5850 MHz** band,

802.11a/ac20/n20 mode Channel 149, 157, 165 were tested.

802.11n40/ac40 mode Channel 151, 159 were tested.

802.11ac80 mode Channel 155 was tested.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 149     | 5745            | 159     | 5795            |
| 151     | 5755            | 161     | 5805            |
| 153     | 5765            | 165     | 5825            |
| 155     | 5775            | /       | /               |
| 157     | 5785            | /       | /               |

**EUT Exercise Software**

RF test tool: Engineering Mode


The worst case was performed under:

| U-NII        | Mode           | Data rate | ★Power Level |                |              |
|--------------|----------------|-----------|--------------|----------------|--------------|
|              |                |           | Low Channel  | Middle Channel | High Channel |
| 5150~5250MHz | 802.11a        | 6Mbps     | 18           | 17             | 17           |
|              | 802.11n-HT20   | MCS0      | 17           | 17             | 17           |
|              | 802.11n-HT40   | MCS0      | 13           | 17             | 17           |
|              | 802.11ac-VHT20 | MCS0      | 17           | 17             | 17           |
|              | 802.11ac-VHT40 | MCS0      | 15           | /              | 17           |
|              | 802.11ac-VHT80 | MCS0      | /            | 17             | /            |


| U-NII        | Mode           | Data rate | ★Power Level |                |              |
|--------------|----------------|-----------|--------------|----------------|--------------|
|              |                |           | Low Channel  | Middle Channel | High Channel |
| 5725~5850MHz | 802.11a        | 6Mbps     | 17           | 17             | 17           |
|              | 802.11n-HT20   | MCS0      | 17           | 17             | 17           |
|              | 802.11n-HT40   | MCS0      | 17           | 17             | 17           |
|              | 802.11ac-VHT20 | MCS0      | 17           | 17             | 17           |
|              | 802.11ac-VHT40 | MCS0      | 17           | /              | 17           |
|              | 802.11ac-VHT80 | MCS0      | /            | 17             | /            |

Note: The power level was declared by the applicant.

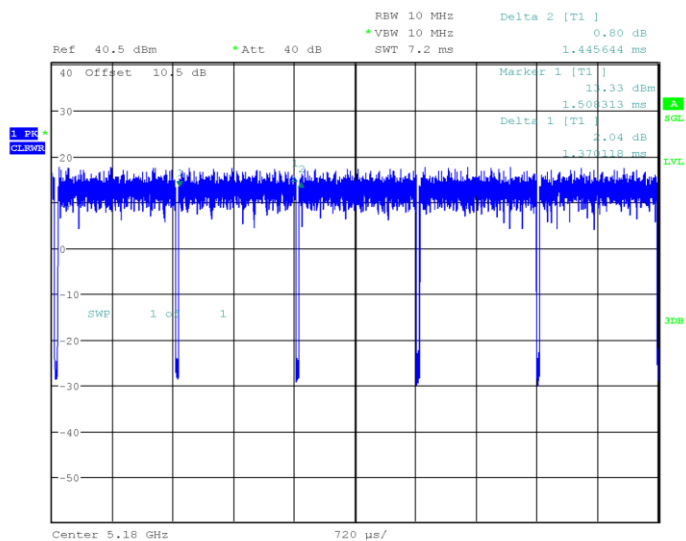


**Duty Cycle****5150MHz-5250MHz Band:****802.11a mode low channel**

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 14:56:13

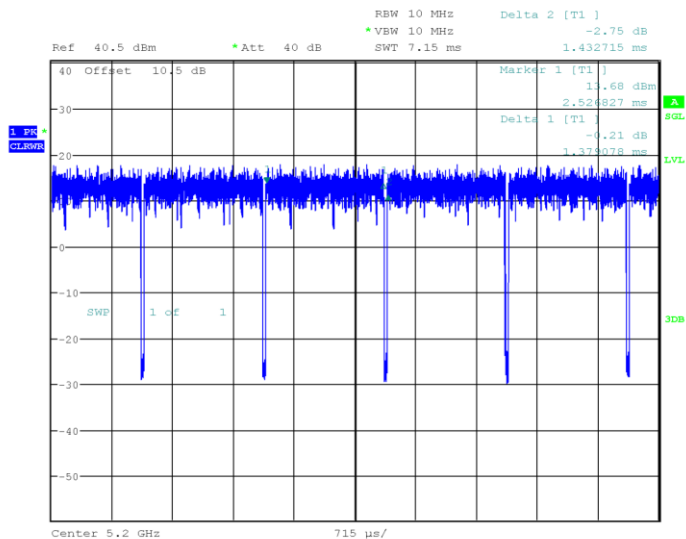**802.11a mode middle channel**


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:01:47

802.11a mode high channel

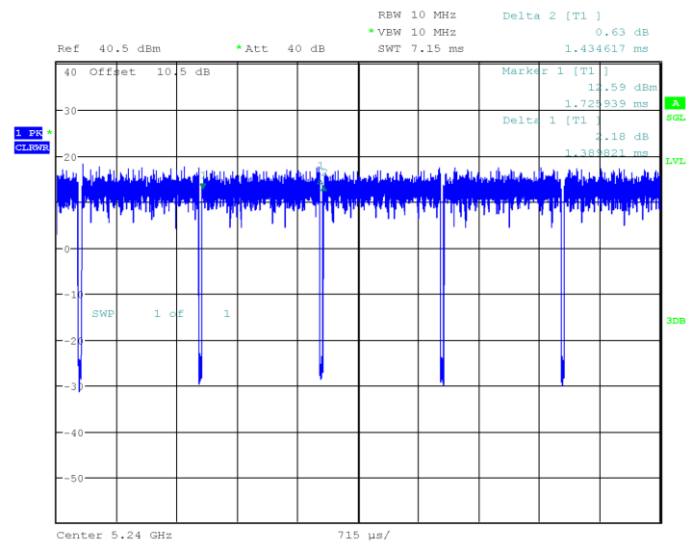


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:06:57

802.11n20 mode low channel

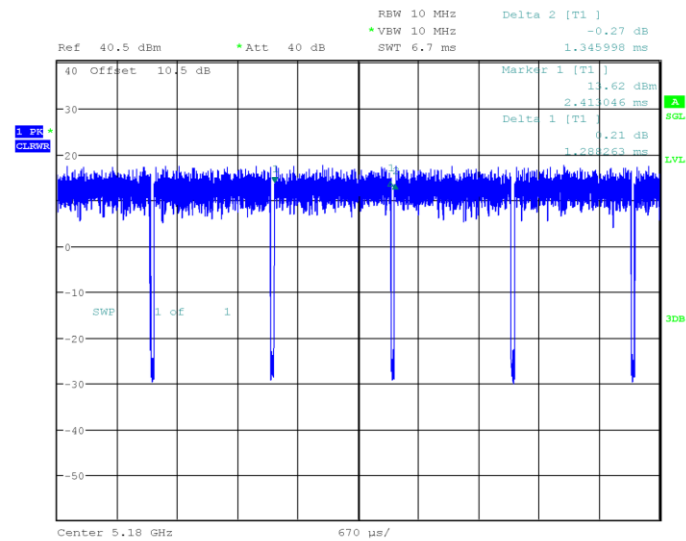


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:17:20

802.11n20 mode middle channel

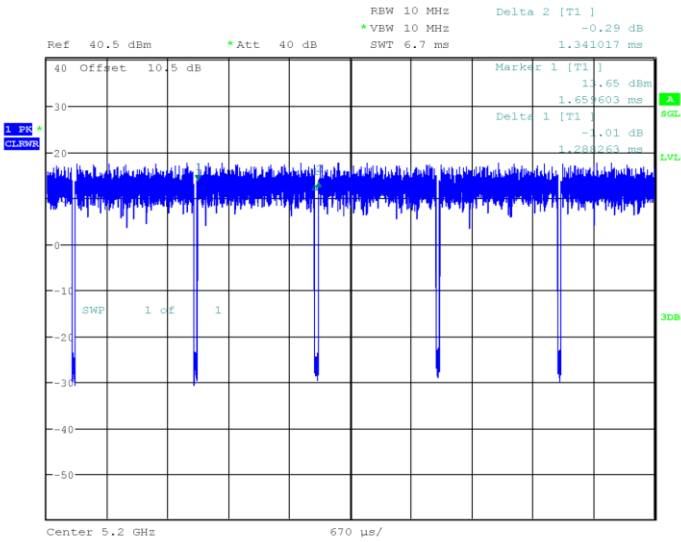


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:22:46

802.11n20 mode high channel

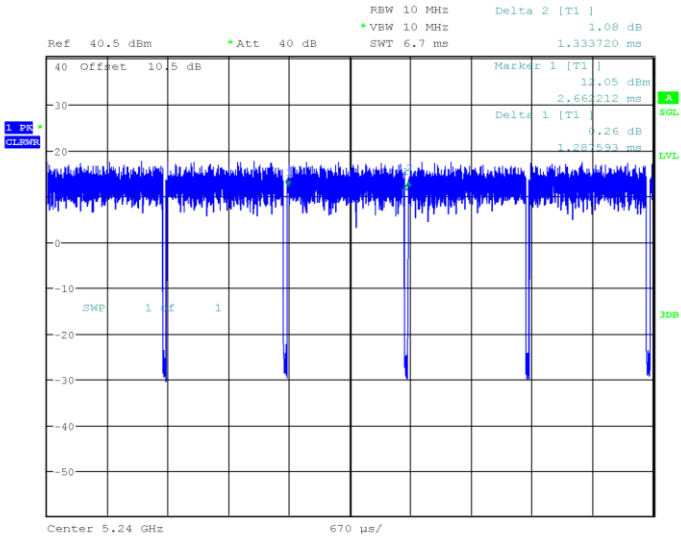


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:28:55

## 802.11n40 mode high channel

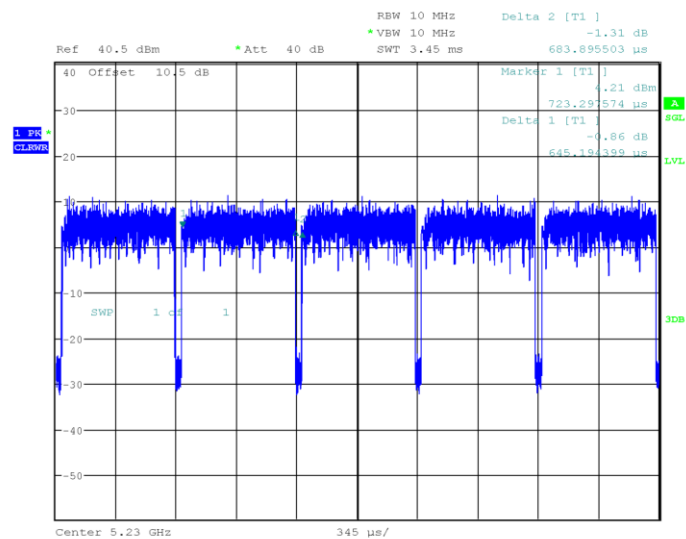


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:43:04

### 802.11ac20 mode low channel

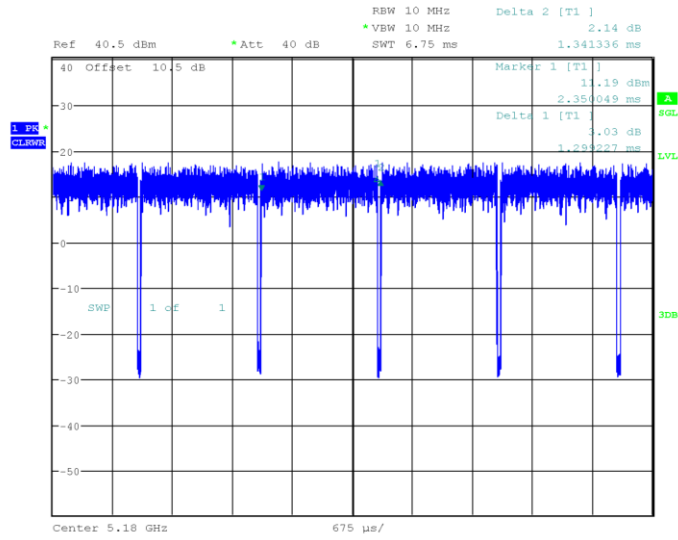


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:48:31

### 802.11ac20 mode middle channel

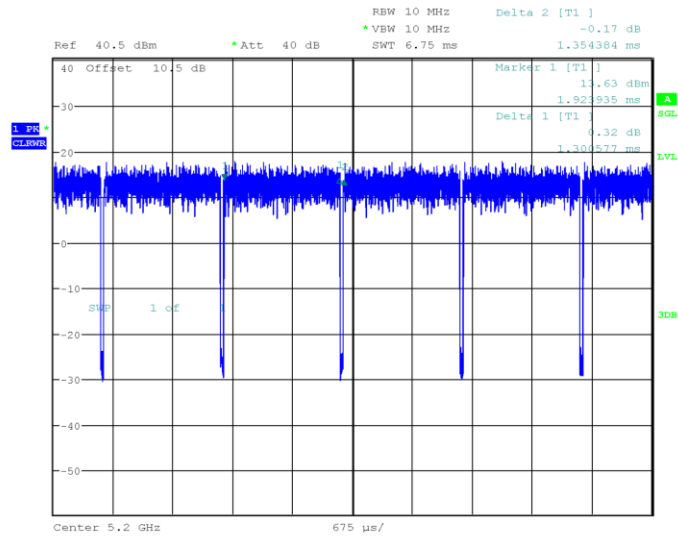


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 15:54:12

802.11ac20 mode high channel

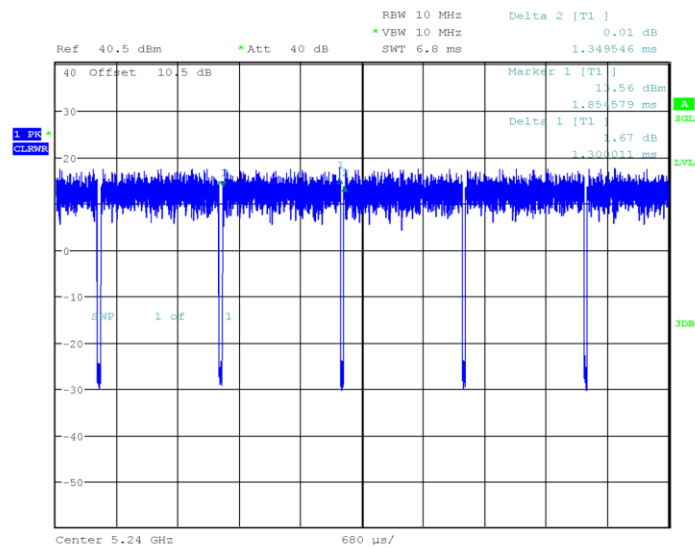


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 16:01:15

802.11ac40 mode low channel

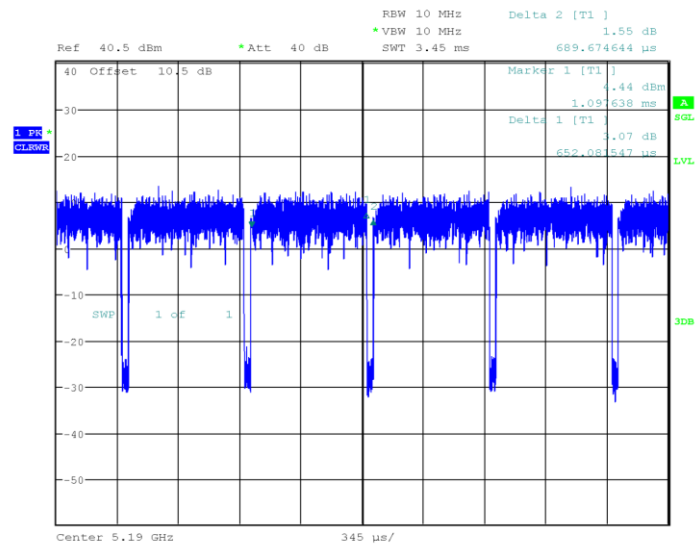


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 16:08:26

802.11ac40 mode high channel

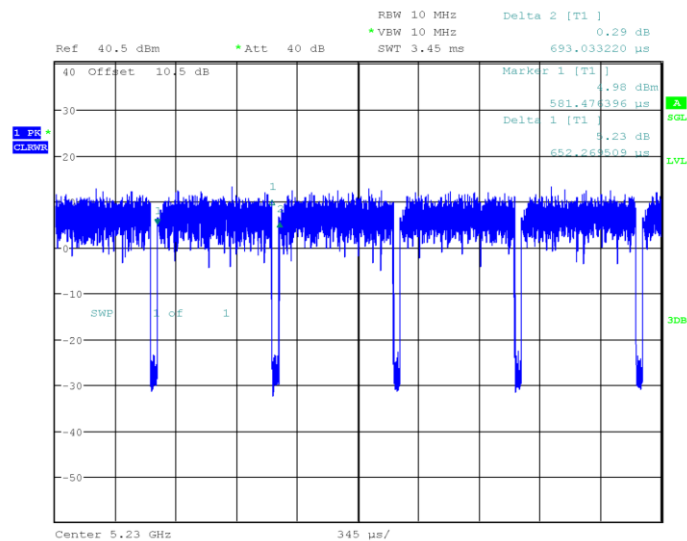

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 16:15:19


802.11ac80 mode middle channel

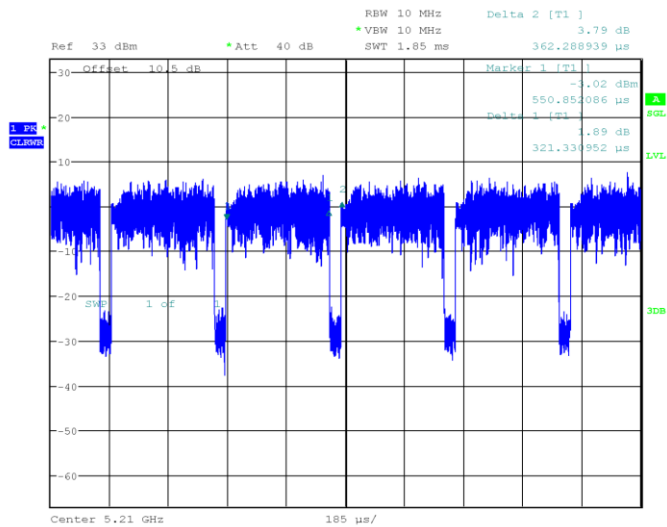

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 16:22:06


**5725MHz-5850MHz Band:**

**802.11a mode low channel**

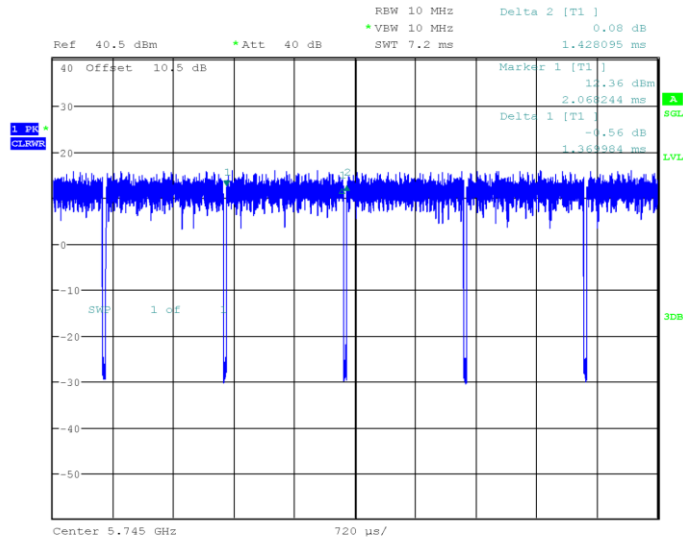

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
 Date: 21.MAY.2024 16:33:46


**802.11a mode middle channel**

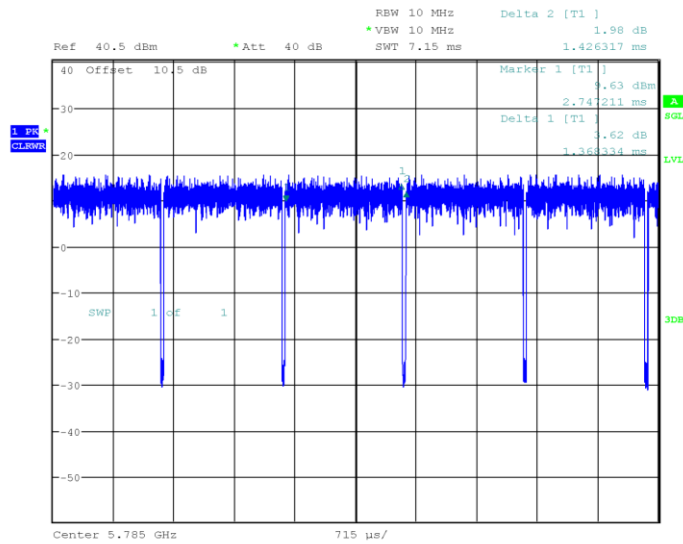

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
 Date: 21.MAY.2024 16:37:34




### 802.11a mode high channel

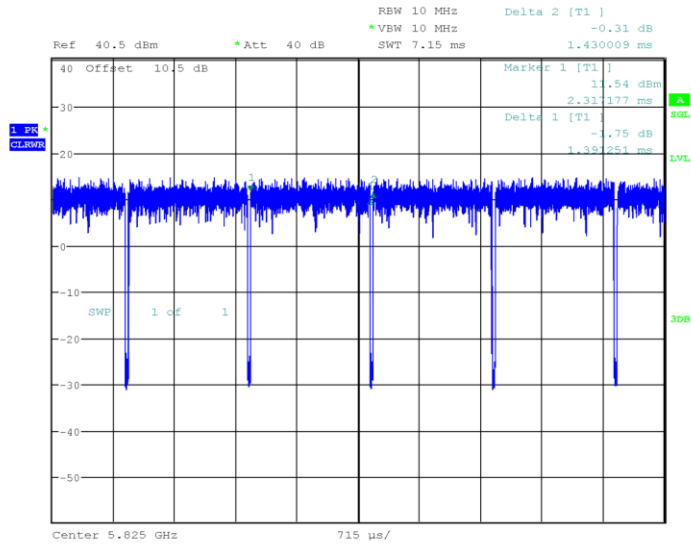


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
 Date: 21.MAY.2024 16:41:47

### 802.11n20 mode low channel

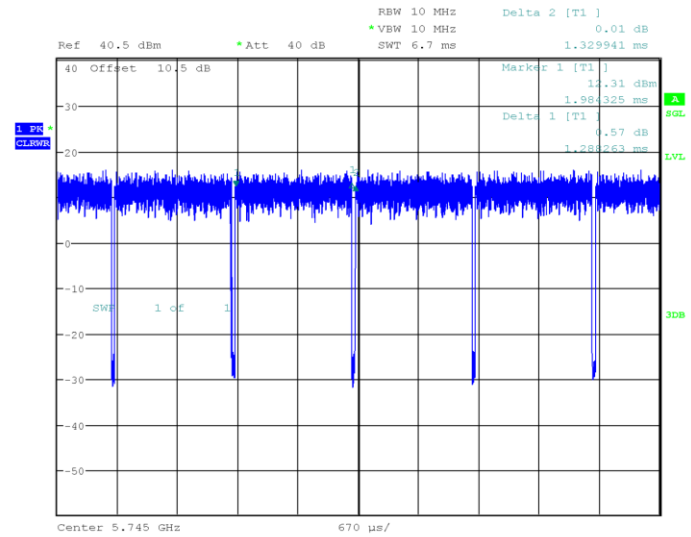


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
 Date: 21.MAY.2024 16:46:41

### 802.11n20 mode middle channel

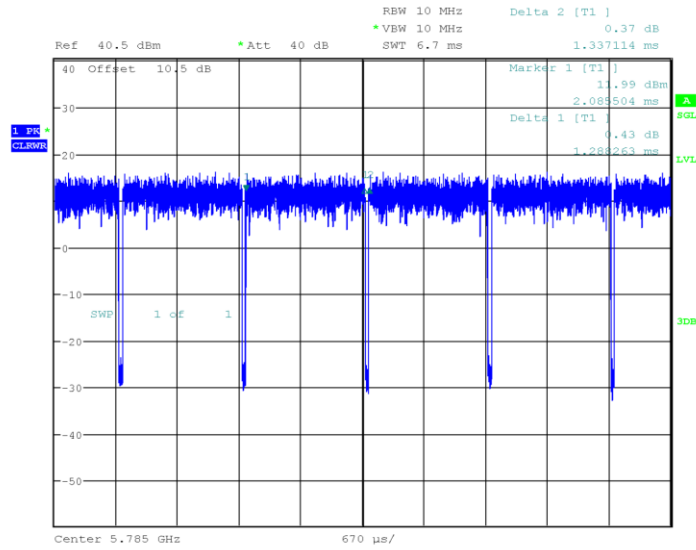


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 16:51:21

### 802.11n20 mode high channel

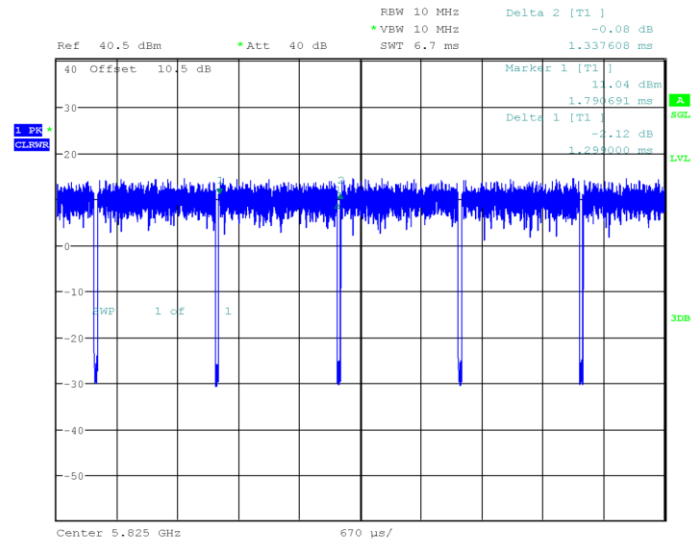


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 16:56:42

802.11n40 mode low channel

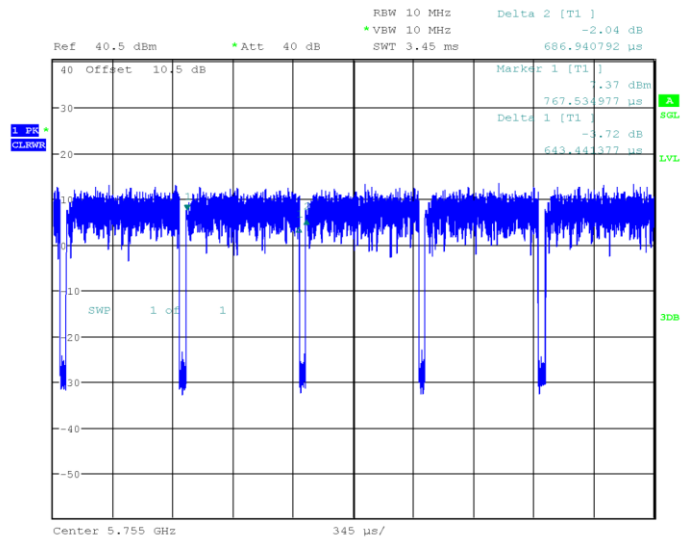


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:03:33

802.11n40 mode high channel

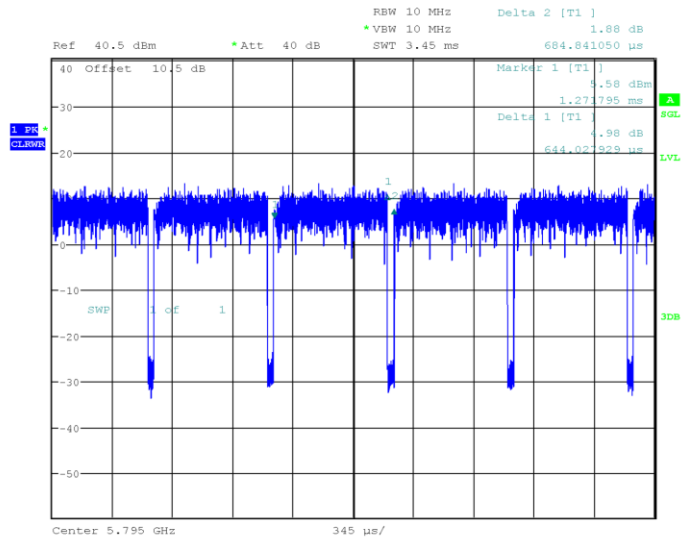


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:10:03

802.11ac20 mode low channel

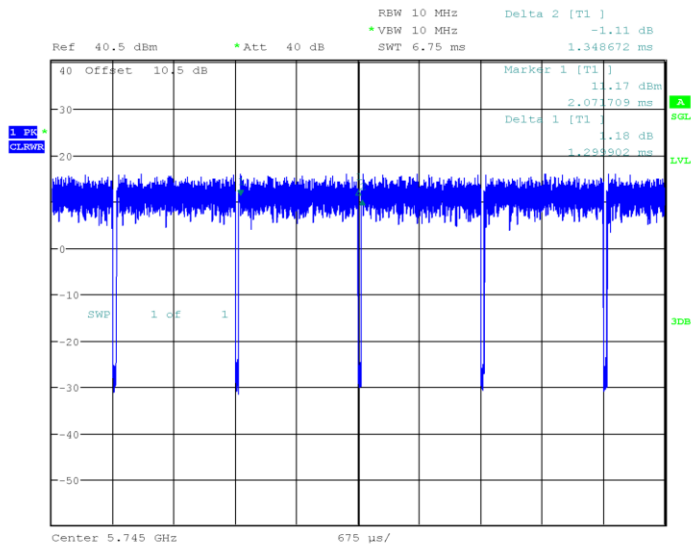

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:15:31

802.11ac20 mode middle channel

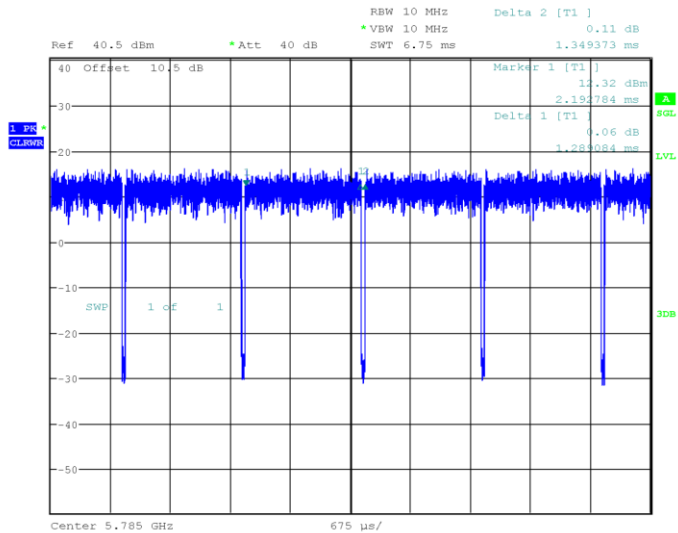

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:21:59

RBW 10 MHz Delta 2 [T1]  
 Att 40 dB VSW 10 MHz SWT 6.75 ms  
 Ref 40.5 dBm Delta 1 [T1]  
 Delta 2 [T1]

Offset 10.5 dB

Marker 1 [T1]  
 Delta 1 [T1]  
 Delta 2 [T1]

1 PR  
 CL0000

SWT 1 of 1

Center 5.825 GHz 675 μs/

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:25:55

RBW 10 MHz Delta 2 [T1] -1.75 dB  
 \*VSW 10 MHz SWT 3.45 ms 685.699529 us

Ref 40.5 dBm \*Att 40 dB Offset 10.5 dB

Marker 1 [T1] 7.55 dBm  
 959.220548 us  
 Delta 1 [T1] -0.85 dB  
 648.983019 us


1 PR  
 CLEAR

Center 5.755 GHz 345 us/

3dB


ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:33:17

802.11ac40 mode high channel

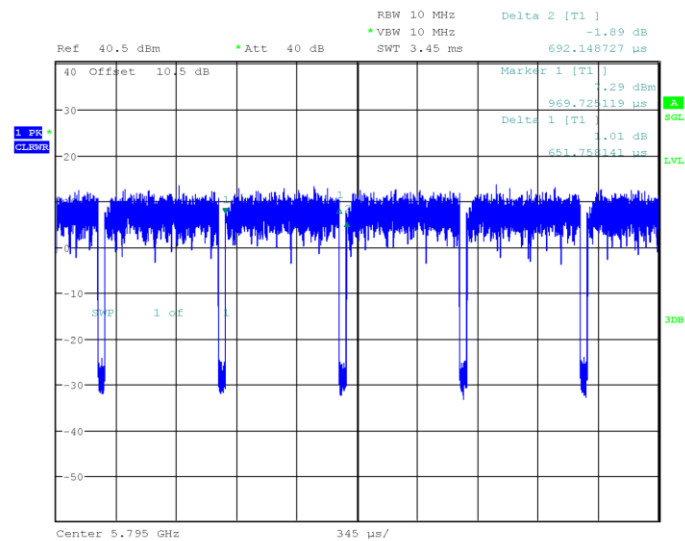

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:39:07

802.11ac80 mode middle channel

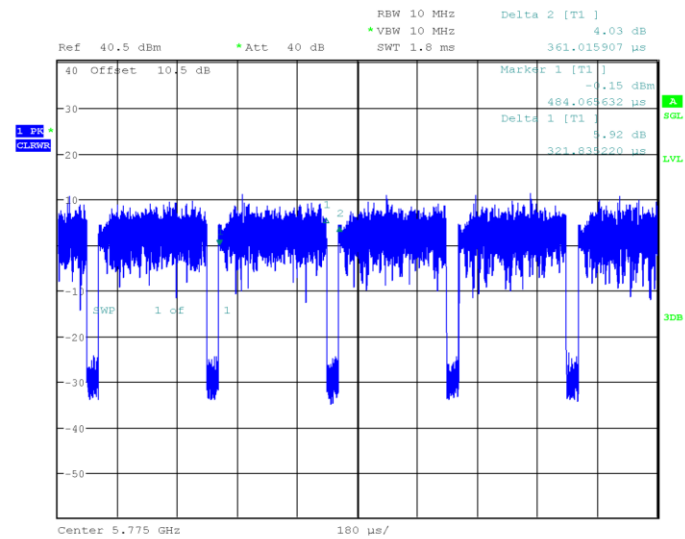

ProjectNo.:RKSA240328001 Tester:Hardy Huang  
Date: 21.MAY.2024 17:44:56

| Mode         | Ton<br>(ms) | Ton+Toff<br>(ms) | Duty Cycle<br>(%) | Duty Cycle<br>Factor<br>(dB) |
|--------------|-------------|------------------|-------------------|------------------------------|
| a_5180MHz    | 1.370       | 1.446            | 94.74             | 0.23                         |
| a_5200MHz    | 1.379       | 1.433            | 96.23             | 0.17                         |
| a_5240MHz    | 1.390       | 1.435            | 96.86             | 0.14                         |
| n20_5180MHz  | 1.288       | 1.346            | 95.69             | 0.19                         |
| n20_5200MHz  | 1.288       | 1.341            | 96.05             | 0.18                         |
| n20_5240MHz  | 1.288       | 1.334            | 96.55             | 0.15                         |
| n40_5190MHz  | 0.648       | 0.688            | 94.19             | 0.26                         |
| n40_5230MHz  | 0.645       | 0.684            | 94.30             | 0.25                         |
| ac20_5180MHz | 1.299       | 1.341            | 96.87             | 0.14                         |
| ac20_5200MHz | 1.301       | 1.354            | 96.09             | 0.17                         |
| ac20_5240MHz | 1.300       | 1.350            | 96.30             | 0.16                         |
| ac40_5190MHz | 0.652       | 0.690            | 94.49             | 0.25                         |
| ac40_5230MHz | 0.652       | 0.693            | 94.08             | 0.26                         |
| ac80_5210MHz | 0.321       | 0.362            | 88.67             | 0.52                         |

| Mode         | Ton<br>(ms) | Ton+Toff<br>(ms) | Duty Cycle<br>(%) | Duty Cycle<br>Factor<br>(dB) |
|--------------|-------------|------------------|-------------------|------------------------------|
| a_5745MHz    | 1.370       | 1.428            | 95.94             | 0.18                         |
| a_5785MHz    | 1.368       | 1.426            | 95.93             | 0.18                         |
| a_5825MHz    | 1.391       | 1.430            | 97.27             | 0.12                         |
| n20_5745MHz  | 1.288       | 1.330            | 96.84             | 0.14                         |
| n20_5785MHz  | 1.288       | 1.337            | 96.34             | 0.16                         |
| n20_5825MHz  | 1.299       | 1.338            | 97.09             | 0.13                         |
| n40_5755MHz  | 0.643       | 0.687            | 93.60             | 0.29                         |
| n40_5795MHz  | 0.644       | 0.685            | 94.01             | 0.27                         |
| ac20_5745MHz | 1.300       | 1.349            | 96.37             | 0.16                         |
| ac20_5785MHz | 1.289       | 1.349            | 95.55             | 0.20                         |
| ac20_5825MHz | 1.301       | 1.348            | 96.51             | 0.15                         |
| ac40_5755MHz | 0.649       | 0.686            | 94.61             | 0.24                         |
| ac40_5795MHz | 0.652       | 0.692            | 94.22             | 0.26                         |
| ac80_5775MHz | 0.322       | 0.361            | 89.20             | 0.50                         |

**Duty Cycle = Ton/(Ton+Toff)\*100%**

## Equipment Modifications

No modification was made to the EUT.

## Support Equipment List and Details

| Manufacturer | Description | Model      | Serial Number |
|--------------|-------------|------------|---------------|
| Lenovo       | Mouse       | M12Pro     | /             |
| /            | load*3      | /          | /             |
| TPLINK       | Router      | TL XDR3010 | 12373X0002080 |
| /            | cashbox     | /          | /             |
| /            | Keyboard    | /          | /             |


## External I/O Cable

| Cable Description | Length (m) | From Port      | To         |
|-------------------|------------|----------------|------------|
| Power cable 1     | 1.0        | AC Source/LISN | Adapter    |
| Power cable 2     | 1.0        | EUT            | Extend Hub |
| RJ45 Cable 1      | 5.0        | Extend Hub     | Router     |
| RJ45 Cable 2      | 1.0        | Extend Hub     | Cash box   |
| USB Cable 1       | 1.0        | Extend Hub     | Mouse      |
| USB Cable 2       | 1.0        | Extend Hub     | Keyboard   |
| USB Cable 3       | 0.5        | Extend Hub     | Load 1     |
| USB Cable 4       | 0.5        | Extend Hub     | Load 2     |
| USB Cable 5       | 0.5        | EUT            | Load 3     |
| USB Cable 6       | 1.5        | Adapter        | EUT        |




## Block Diagram of Test Setup


For Conducted Emissions:

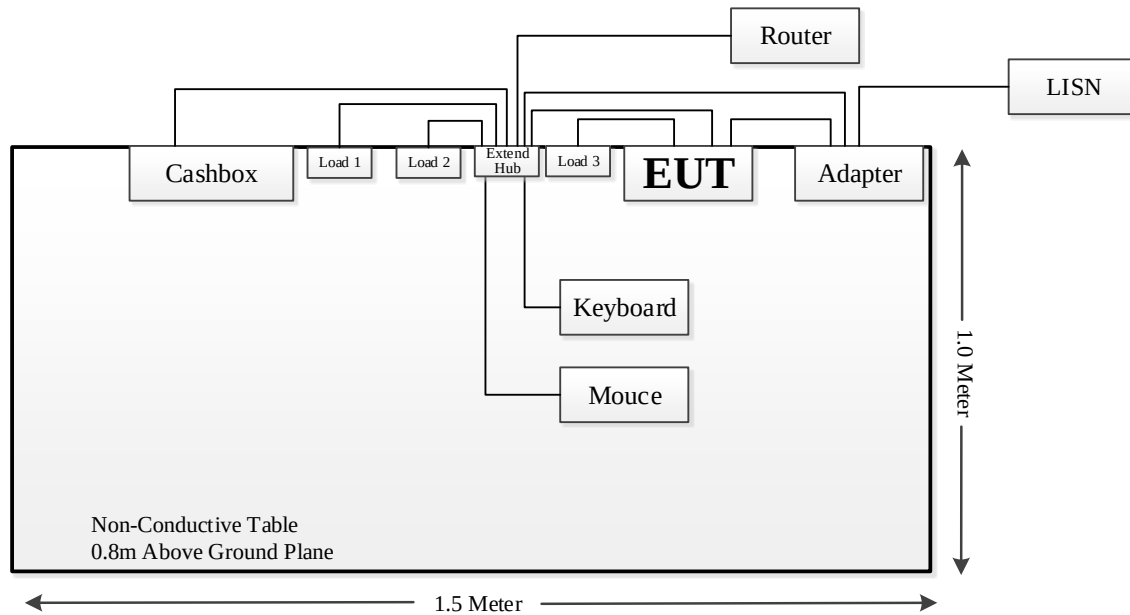

For Radiated Emissions (Below 1GHz):

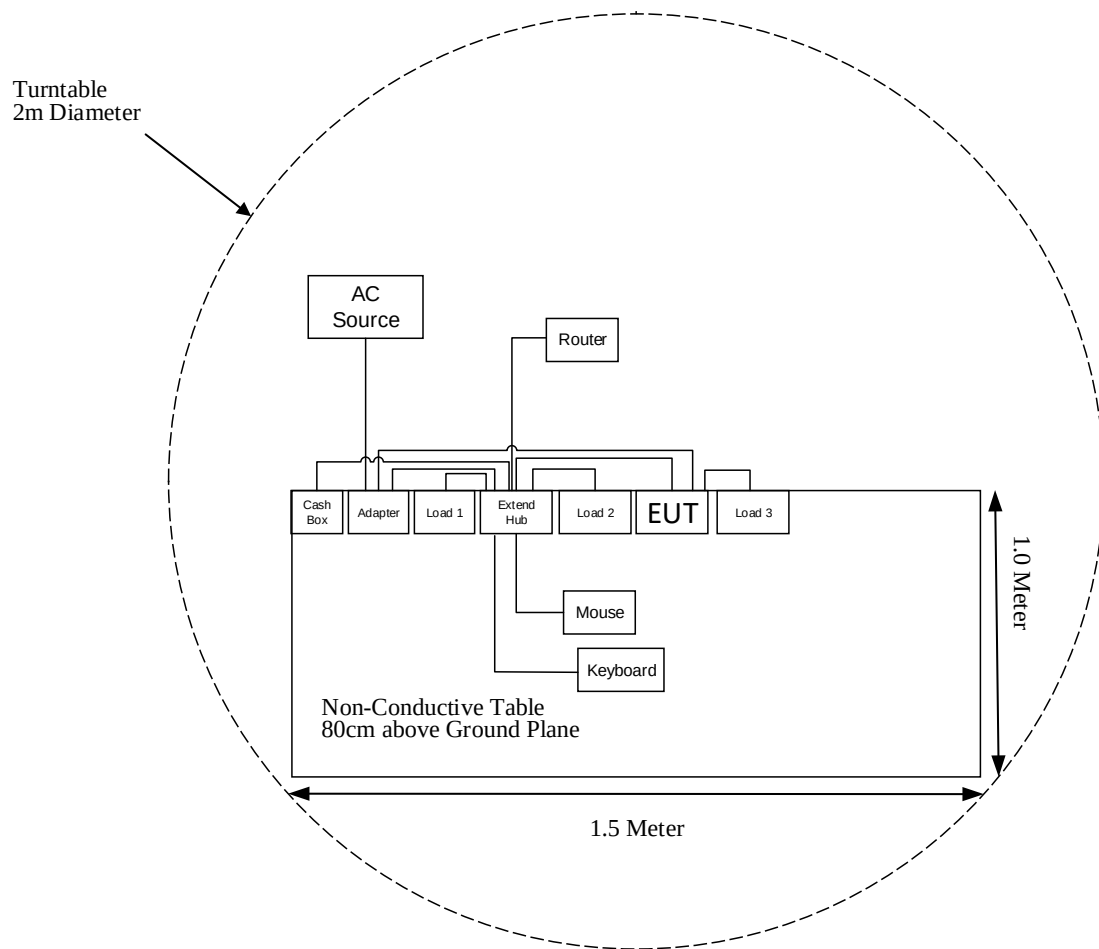

For Radiated Emissions (Above 1 GHz):

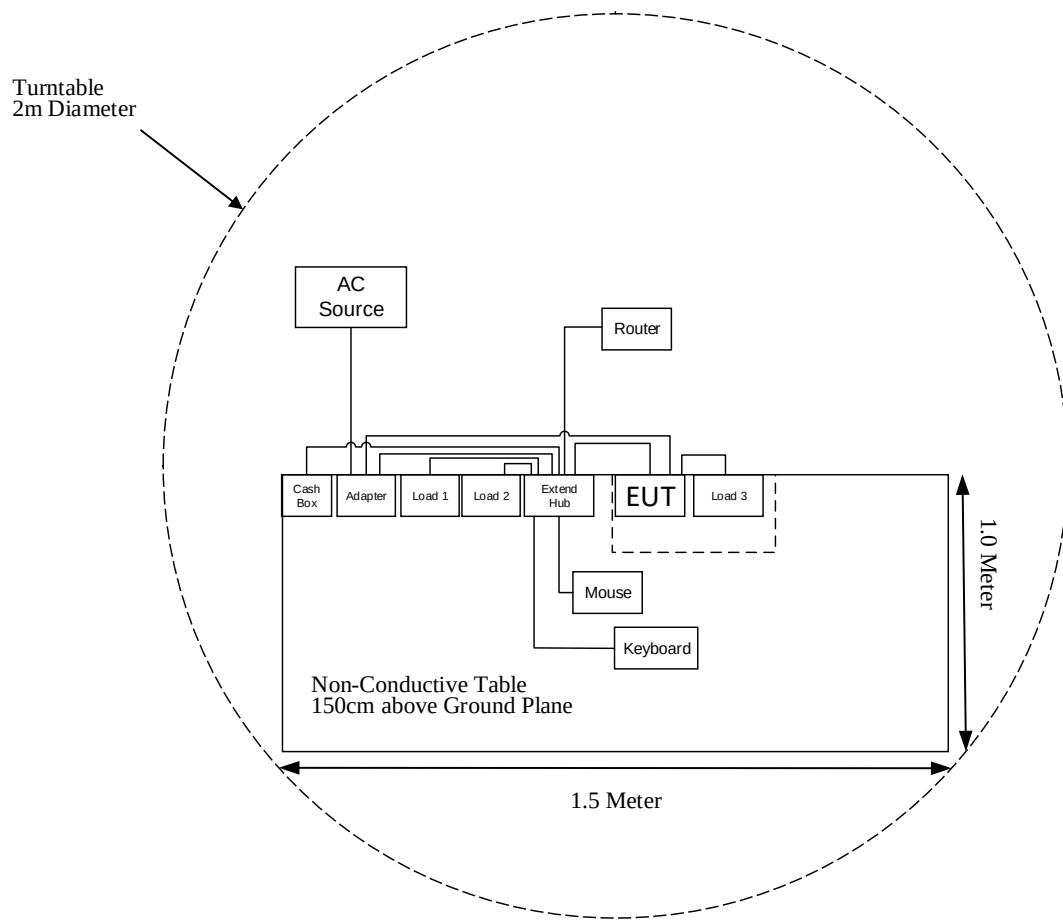

## TEST EQUIPMENT LIST

| Manufacturer                               | Description         | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------------------|---------------------|-----------|---------------|------------------|----------------------|
| <b>Radiated Emission Test (Chamber #1)</b> |                     |           |               |                  |                      |
| Rohde & Schwarz                            | EMI Test Receiver   | ESCI      | 100195        | 2023-05-23       | 2024-05-22           |
| Sunol Sciences                             | Hybrid Antenna      | JB3       | A090314-1     | 2023-11-11       | 2024-11-10           |
| ETS-LINDGREN                               | Loop Antenna        | 6512      | 108100        | 2023-11-09       | 2024-11-08           |
| Sonoma Instrument                          | Amplifier           | 310N      | 171205        | 2023-05-23       | 2024-05-22           |
| Rohde & Schwarz                            | Auto test Software  | EMC32     | 100361        | N/A              | N/A                  |
| MICRO-COAX                                 | Coaxial Cable       | Cable-8   | 008           | 2023-05-23       | 2024-05-22           |
| MICRO-COAX                                 | Coaxial Cable       | Cable-9   | 009           | 2023-05-23       | 2024-05-22           |
| MICRO-COAX                                 | Coaxial Cable       | Cable-10  | 010           | 2023-05-23       | 2024-05-22           |
| Narda                                      | 6dB Attenuator      | 773-6     | 10690812-2-1  | 2023-11-11       | 2024-11-10           |
| <b>Radiated Emission Test (Chamber #2)</b> |                     |           |               |                  |                      |
| Rohde & Schwarz                            | EMI Test Receiver   | ESU40     | 100207/040    | 2024-04-25       | 2025-04-24           |
| ETS-LINDGREN                               | Horn Antenna        | 3115      | 9311-4159     | 2023-12-02       | 2024-12-01           |
| ETS-LINDGREN                               | Horn Antenna        | 3116      | 84159         | 2023-12-07       | 2024-12-06           |
| A.H.Systems,inc                            | Amplifier           | PAM-0118P | 512           | 2024-04-25       | 2025-04-24           |
| EM Electronics Corporation                 | Amplifier           | EM18G40G  | 060726        | 2024-04-25       | 2025-04-24           |
| MICRO-TRONICS                              | Band Reject Filter  | BRC50703  | G094          | 2024-04-25       | 2025-04-24           |
| MICRO-TRONICS                              | Band Reject Filter  | BRC50705  | G085          | 2024-04-25       | 2025-04-24           |
| Narda                                      | Attenuator          | 10dB      | 010           | 2024-04-25       | 2025-04-24           |
| Rohde & Schwarz                            | Auto test Software  | EMC32     | 100361        | N/A              | N/A                  |
| MICRO-COAX                                 | Coaxial Cable       | Cable-6   | 006           | 2024-04-25       | 2025-04-24           |
| MICRO-COAX                                 | Coaxial Cable       | Cable-11  | 011           | 2024-04-25       | 2025-04-24           |
| MICRO-COAX                                 | Coaxial Cable       | Cable-12  | 012           | 2024-04-25       | 2025-04-24           |
| <b>RF Conducted Test</b>                   |                     |           |               |                  |                      |
| Rohde & Schwarz                            | Spectrum Analyzer   | FSU26     | 200103        | 2024-04-24       | 2025-04-23           |
| Anritsu                                    | Power Sensor        | MA24418A  | 12621         | 2024-04-23       | 2025-04-22           |
| Narda                                      | Attenuator          | 10dB      | 010           | 2024-04-25       | 2025-04-24           |
| XHFDZ                                      | RG316 Coaxial Cable | SMA-316   | XHF-1175      | Each time        | N/A                  |
| <b>Conducted Emission Test</b>             |                     |           |               |                  |                      |
| Rohde & Schwarz                            | EMI Test Receiver   | ESR       | 101746        | 2023-05-23       | 2024-05-22           |
| Rohde & Schwarz                            | LISN                | ENV216    | 101115        | 2023-05-23       | 2024-05-22           |
| Audix                                      | Test Software       | e3        | V9            | N/A              | N/A                  |
| Rohde & Schwarz                            | Pulse Limiter       | ESH3-Z2   | 0357.8810.54  | 2023-05-23       | 2024-05-22           |
| MICRO-COAX                                 | Coaxial Cable       | Cable-15  | 015           | 2023-05-23       | 2024-05-22           |

**Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**SUMMARY OF TEST RESULTS**

| <b>FCC Rules</b>                | <b>Description of Test</b>              | <b>Result</b> |
|---------------------------------|-----------------------------------------|---------------|
| §15.203                         | Antenna Requirement                     | Compliant     |
| §15.207 & §15.407(b) (9)        | AC Power Line Conducted Emissions       | Compliant     |
| § 15.205 & §15.209 & §15.407(b) | Undesirable Emission & Restricted Bands | Compliant     |
| §§15.407(a) & §15.407(e)        | Emission Bandwidth                      | Compliant     |
| §15.407(a)                      | Conducted Transmitter Output Power      | Compliant     |
| §15.407(a)                      | Power Spectral Density                  | Compliant     |

## FCC §15.203 – ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

Antenna permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.

| Antenna Type | Frequency Range | Max. Antenna Gain | Input impedance |
|--------------|-----------------|-------------------|-----------------|
| FPC          | 5150~5250 MHz   | 1.10 dBi          | 50Ω             |
|              | 5725~5850 MHz   | 1.45 dBi          | 50Ω             |


**Result:** Compliant.

## FCC §15.407 (b) (9) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a), §15.407(b) (9)

### Test System Setup

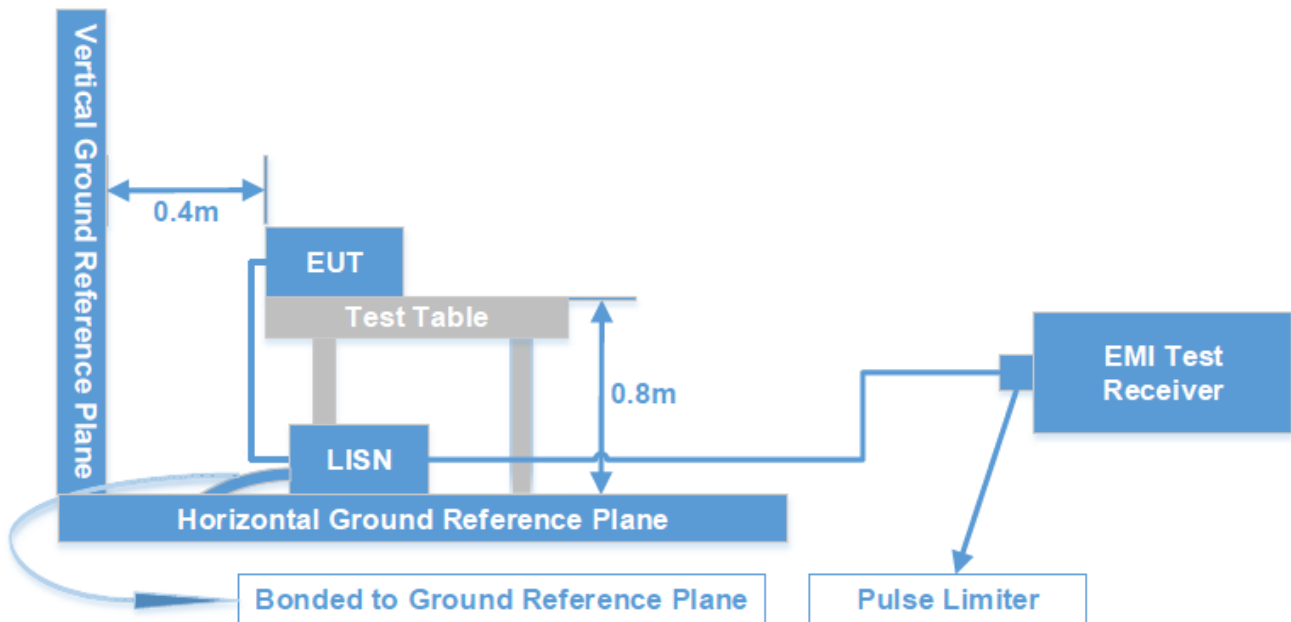

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | RBW   | VBW    |
|------------------|-------|--------|
| 150 kHz - 30 MHz | 9 kHz | 30 kHz |

## Test Procedure

During the conducted emission test, the EUT or adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

## Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Level (dB}\mu\text{V)} &= \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

**Test Data: See Appendix**



## §15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS

### Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$ , for  $d = 3$  meters.

### Test System Setup


9kHz–30 MHz:

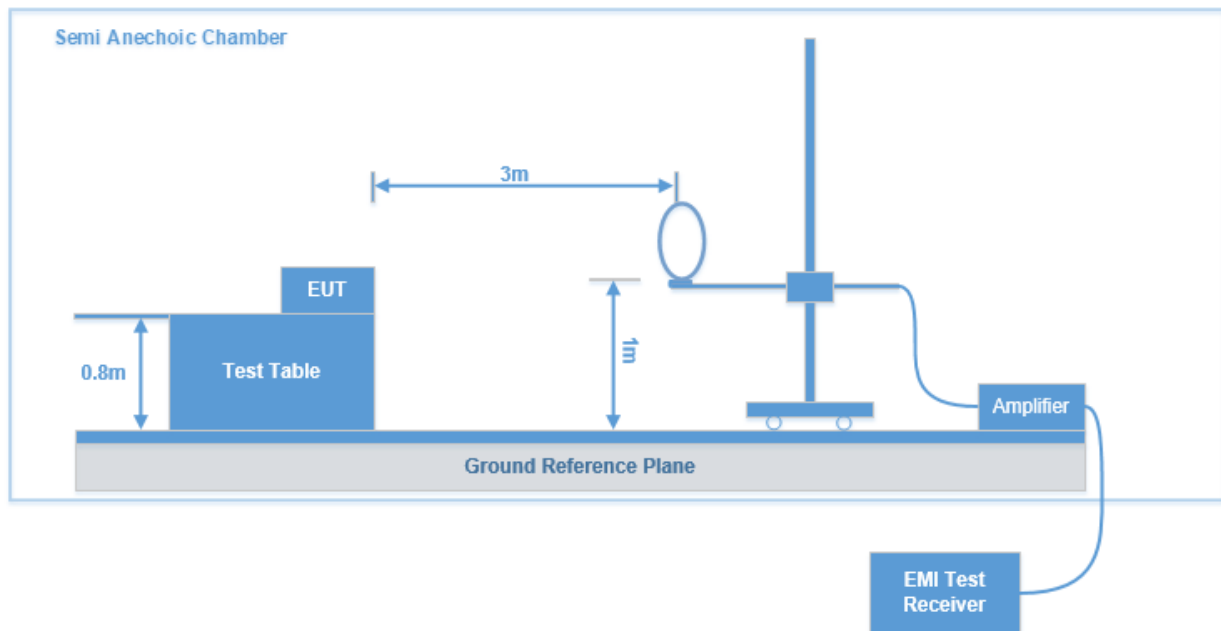


30MHz-1GHz:

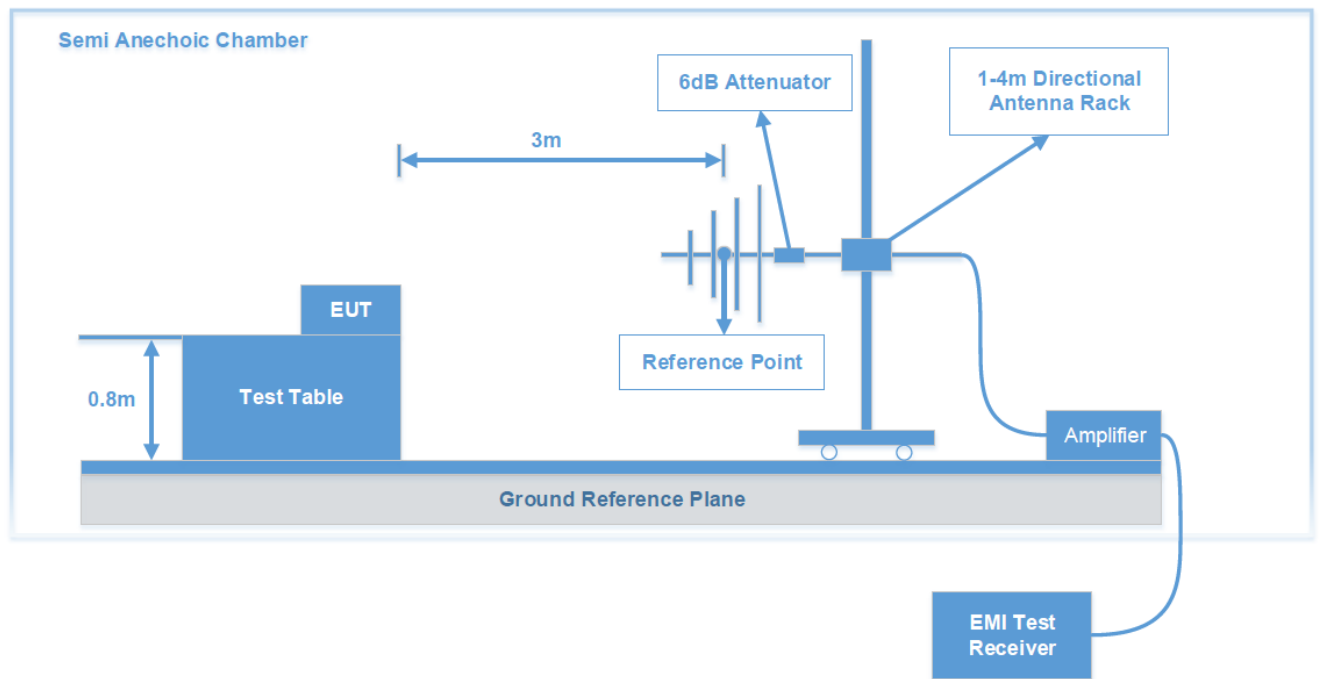

1 GHz-18GHz:

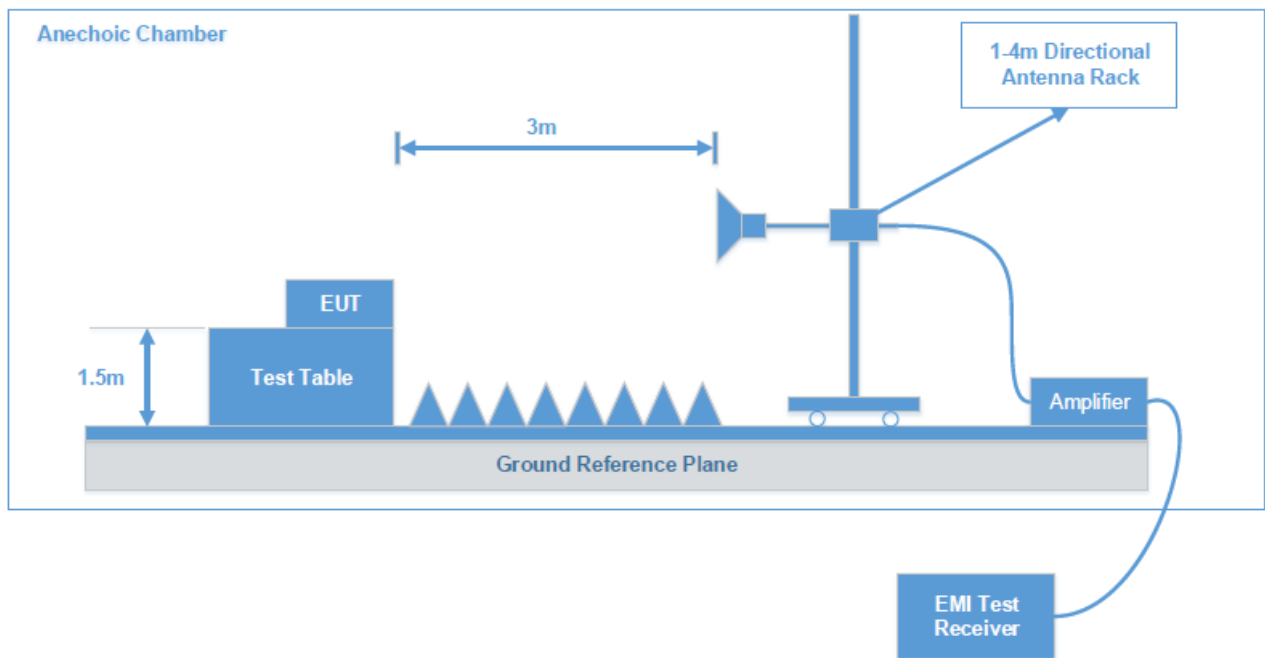

18-40GHz:

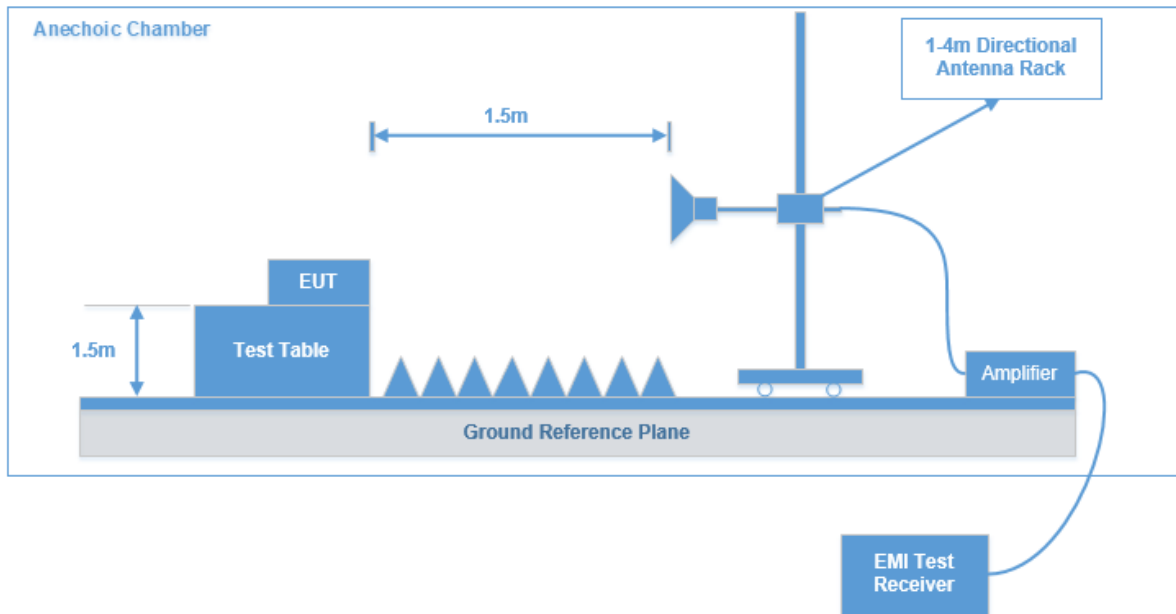

The radiated emission tests were performed in the 3 meters test site for below 18GHz and 1.5m for 18-40 GHz, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.407 limits. The limit at 1.5m for 18-40 GHz is 80dB $\mu$ V/m (Peak) and 60dB $\mu$ V/m (Average)

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

| Frequency Range   | RBW     | VBW     | IF B/W  | Detector    |
|-------------------|---------|---------|---------|-------------|
| 9 kHz - 150 kHz   | 200 Hz  | 1 kHz   | 200 Hz  | QP/Average  |
| 150 kHz - 30 MHz  | 9 kHz   | 30 kHz  | 9 kHz   | QP/ Average |
| 30 MHz - 1000 MHz | 100 kHz | 300 kHz | /       | Peak        |
|                   | /       | /       | 120 kHz | QP          |
| Above 1GHz        | 1MHz    | 3 MHz   | /       | Peak        |
|                   | 1MHz    | 3 MHz   | /       | Average     |

## Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet. Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Corrected factor (dB/m)

Corrected factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

**Test Data: See Appendix**

## FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH

### Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Procedure


#### 1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
  - Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - Detector = Peak.
  - Trace mode = max hold.
  - Sweep = auto couple.
  - Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



## FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

### Applicable Standard


For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



---

**FCC §15.407(a) - POWER SPECTRAL DENSITY**

---

**Applicable Standard**

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Test Procedure**

The measurements are base on FCC KDB 789033 D02 General UNII Test Proceidyres New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density (PPSD) and method SA-2

## **EUT PHOTOGRAPHS**

---

Please refer to the attachment EXHIBIT A-EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B-EUT INTERNAL PHOTOGRAPHS.



## **TEST SETUP PHOTOGRAPHS**

---


Please refer to the attachment EXHIBIT D-TEST SETUP PHOTOGRAPHS.

# Appendix - TEST DATA

## Environmental Conditions & Test Information

| Test Item:         | AC power-line conducted emissions limits | UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS |                |                 |
|--------------------|------------------------------------------|-------------------------------------------------|----------------|-----------------|
|                    |                                          | 9kHz - 1GHz                                     | 1 GHz - 18 GHz | 18 GHz - 40 GHz |
| Test Date:         | 2024-04-11                               | 2024-04-13                                      | 2024-04-29     | 2024-06-14      |
| Temperature:       | 19.6 °C                                  | 19.8 °C                                         | 20.3 °C        | 22.5 °C         |
| Relative Humidity: | 62 %                                     | 61 %                                            | 52 %           | 56 %            |
| ATM Pressure:      | 101.8 kPa                                | 101.5 kPa                                       | 101.5kPa       | 100.6 kPa       |
| Test Result:       | Pass                                     | Pass                                            | Pass           | Pass            |
| Test Engineer:     | Frank Liu                                | Leah Li                                         | Hugh Wu        | Hugh Wu         |


| Test Item:         | Duty Cycle  | Emission Bandwidth | Conducted Transmitter Output Power | Power Spectral Density |
|--------------------|-------------|--------------------|------------------------------------|------------------------|
| Test Date:         | 2024-05-21  | 2024-05-21         | 2024-05-21                         | 2024-05-21             |
| Temperature:       | 21.5 °C     | 21.5 °C            | 21.5 °C                            | 21.5 °C                |
| Relative Humidity: | 52 %        | 52 %               | 52 %                               | 52 %                   |
| ATM Pressure:      | 101.4kPa    | 101.4kPa           | 101.4kPa                           | 101.4kPa               |
| Test Result:       | /           | Pass               | Pass                               | Pass                   |
| Test Engineer:     | Hardy Huang | Hardy Huang        | Hardy Huang                        | Hardy Huang            |

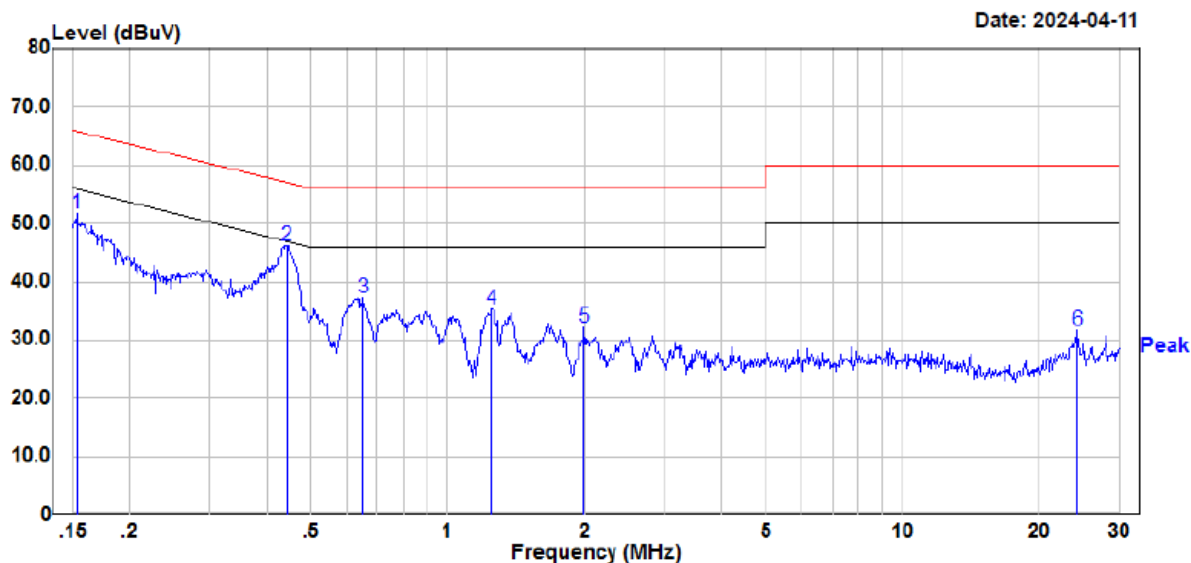**AC power-line conducted emissions limits***EUT operation mode: Transmitting in 802.11n20 mode low channel of 5150~5250MHz (maximum output power)***AC 120V/60 Hz, Line**

Site : CE  
Condition : FCC PART 15.207  
Project : DET:Peak  
Model : RKSA240328001  
Phase : D052  
Voltage : L  
Voltage : 120V/60Hz  
Mode : 5G WIFI  
Test Equipment : ENV216,ESR  
Temperature : 19.6℃  
Humidity : 62%  
Atmospheric pressure: 101.8kPa  
Test Engineer : Frank Liu

|   | Read   |       |        | Limit | Over  |              |
|---|--------|-------|--------|-------|-------|--------------|
|   | Freq   | Level | Factor | Level | Line  | Limit Remark |
|   | MHz    | dBuV  | dB     | dBuV  | dBuV  | dB           |
| 1 | 0.153  | 31.64 | 19.99  | 51.63 | 65.83 | -14.20 Peak  |
| 2 | 0.442  | 26.23 | 20.00  | 46.23 | 57.02 | -10.79 Peak  |
| 3 | 0.653  | 17.27 | 19.94  | 37.21 | 56.00 | -18.79 Peak  |
| 4 | 1.248  | 15.46 | 19.73  | 35.19 | 56.00 | -20.81 Peak  |
| 5 | 1.993  | 12.24 | 20.03  | 32.27 | 56.00 | -23.73 Peak  |
| 6 | 24.213 | 11.71 | 19.90  | 31.61 | 60.00 | -28.39 Peak  |

## AC 120V/60 Hz, Neutral

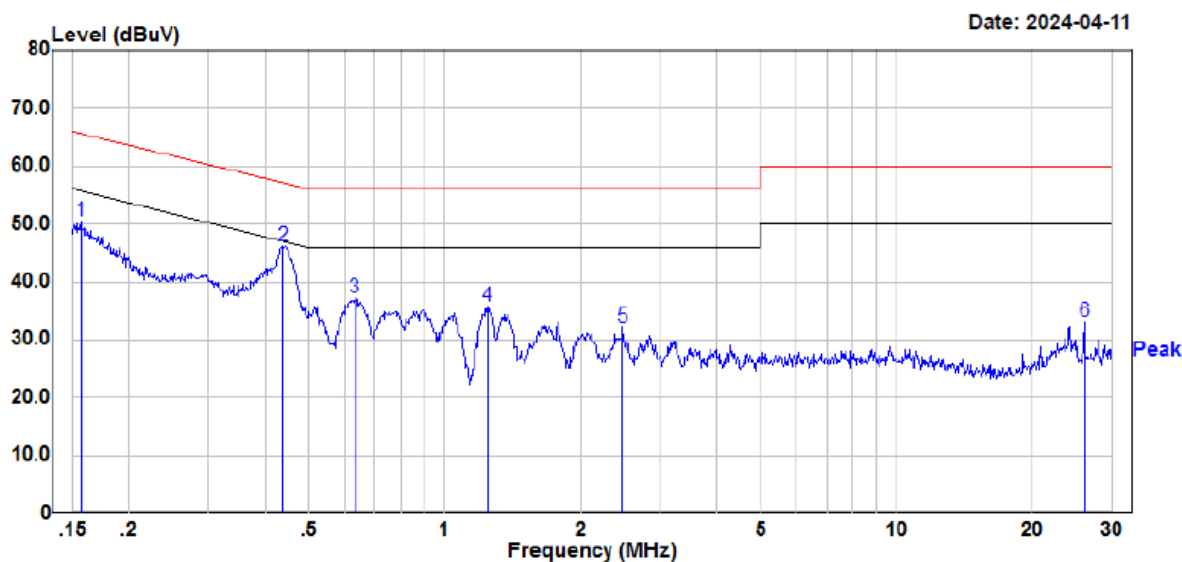

Site : CE  
Condition : FCC PART 15.207  
: DET:Peak  
Project : RKSA240328001  
Model : D052  
Phase : N  
Voltage : 120V/60Hz  
Mode : 5G WIFI  
Test Equipment : ENV216,ESR  
Temperature : 19.6°C  
Humidity : 62%  
Atmospheric pressure: 101.8kPa  
Test Engineer : Frank Liu

|   |        | Read  |        | Limit | Over  |              |
|---|--------|-------|--------|-------|-------|--------------|
|   | Freq   | Level | Factor | Level | Line  | Limit Remark |
|   | MHz    | dBuV  | dB     | dBuV  | dBuV  | dB           |
| 1 | 0.156  | 30.54 | 20.00  | 50.54 | 65.67 | -15.13 Peak  |
| 2 | 0.438  | 26.13 | 20.00  | 46.13 | 57.10 | -10.97 Peak  |
| 3 | 0.630  | 17.22 | 19.95  | 37.17 | 56.00 | -18.83 Peak  |
| 4 | 1.241  | 15.95 | 19.73  | 35.68 | 56.00 | -20.32 Peak  |
| 5 | 2.470  | 11.99 | 20.06  | 32.05 | 56.00 | -23.95 Peak  |
| 6 | 26.092 | 13.11 | 19.94  | 33.05 | 60.00 | -26.95 Peak  |

**Transmitter Unwanted Emissions & Restricted frequency bands**

After pre-scan in the X, Y and Z axes of orientation, the worst case in the Y axes of orientation is below:

**9 kHz-30 MHz:** (maximum output power 802.11n20 mode low channel of 5150~5250MHz)


The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.

**30MHz-1GHz(5150-5250MHz Band): 802.11n20 (worst case)**

**Low Channel: 5180 MHz**

**Common Information**

|                |                                                     |
|----------------|-----------------------------------------------------|
| Project No:    | RKSA240328001                                       |
| Test Mode:     | 5G WIFI Transmitting in 802.11n20 mode low channel  |
| Standard:      | FCC Part 15.205 & FCC Part 15.209 & FCC part 15.407 |
| Test Engineer: | Leah Li                                             |

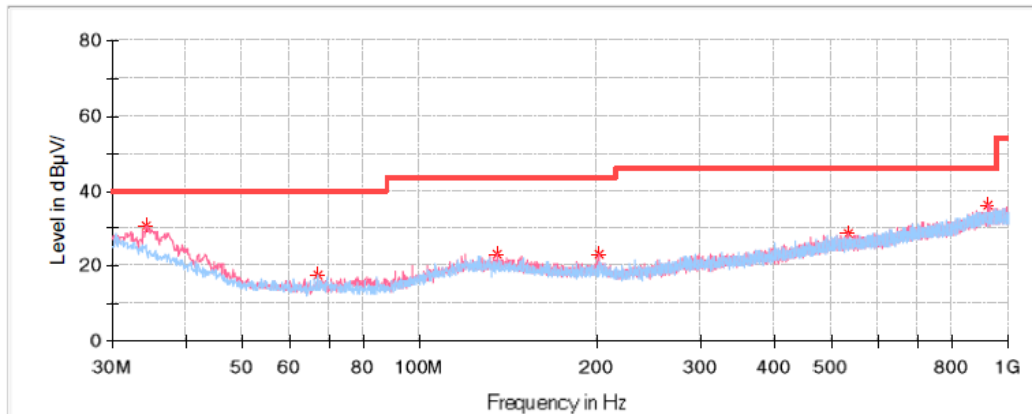
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-----------------|-------------|-----|--------------|
| 34.243750       | 30.72             | 40.00           | 9.28        | V   | -7.3         |
| 66.860000       | 17.74             | 40.00           | 22.26       | H   | -17.0        |
| 135.123750      | 23.23             | 43.50           | 20.27       | V   | -11.5        |
| 200.841250      | 23.13             | 43.50           | 20.37       | V   | -12.6        |
| 533.430000      | 28.44             | 46.00           | 17.56       | V   | -5.4         |
| 921.430000      | 36.03             | 46.00           | 9.97        | V   | 1.4          |

**Middle Channel: 5200 MHz**

## Common Information

Project No: RKSA240328001  
Test Mode: 5G WIFI Transmitting in 802.11n20 mode middle channel  
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC part 15.407  
Test Engineer: Leah Li

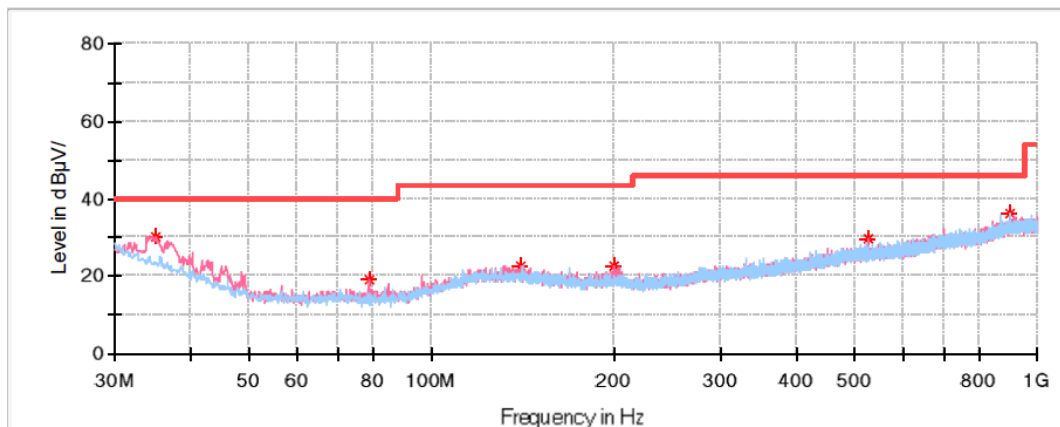


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-----------------|-------------|-----|--------------|
| 35.092500       | 30.38             | 40.00           | 9.62        | V   | -7.9         |
| 78.621250       | 18.89             | 40.00           | 21.11       | V   | -17.5        |
| 140.580000      | 22.69             | 43.50           | 20.81       | V   | -11.6        |
| 199.507500      | 22.58             | 43.50           | 20.92       | V   | -12.5        |
| 525.548750      | 29.52             | 46.00           | 16.48       | V   | -5.5         |
| 901.787500      | 36.22             | 46.00           | 9.78        | H   | 1.3          |

**High Channel: 5240 MHz****Common Information**

Project No: RKSA240328001  
Test Mode: 5G WIFI Transmitting in 802.11n20 mode high channel  
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC part 15.407  
Test Engineer: Leah Li

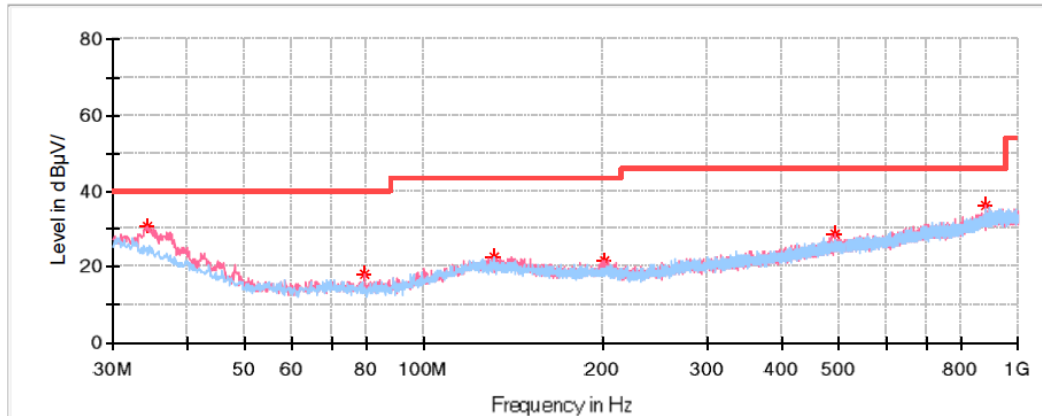**Critical Freqs**


| Frequency (MHz) | MaxPeak (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-----------------|-------------|-----|--------------|
| 34.243750       | 30.84             | 40.00           | 9.16        | V   | -7.3         |
| 79.591250       | 18.36             | 40.00           | 21.64       | V   | -17.5        |
| 130.880000      | 22.84             | 43.50           | 20.66       | H   | -11.4        |
| 201.568750      | 21.75             | 43.50           | 21.75       | V   | -12.6        |
| 492.811250      | 28.65             | 46.00           | 17.35       | V   | -6.0         |
| 881.538750      | 36.22             | 46.00           | 9.78        | V   | 0.8          |

30MHz-1GHz(5725-5850MHz Band): 802.11ac80 (worst case)

Middle Channel: 5775 MHz

## Common Information

Project No: RKSA240328001  
Test Mode: 5G WIFI Transmitting in 802.11ac80  
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC part 15.407  
Test Engineer: Leah Li

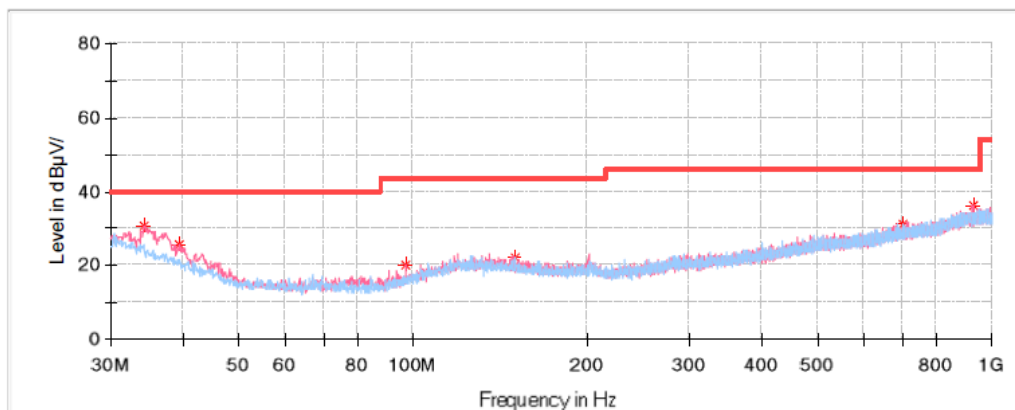

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-----------------|-------------|-----|--------------|
| 34.243750       | 30.72             | 40.00           | 9.28        | V   | -7.3         |
| 39.457500       | 25.60             | 40.00           | 14.40       | V   | -10.9        |
| 96.808750       | 20.36             | 43.50           | 23.14       | V   | -15.5        |
| 150.037500      | 22.22             | 43.50           | 21.28       | H   | -12.1        |
| 703.058750      | 31.01             | 46.00           | 14.99       | H   | -2.4         |
| 928.098750      | 36.01             | 46.00           | 9.99        | V   | 1.4          |



**1GHz-18GHz(5150-5250MHz Band):****802.11a Mode:****Low Channel: 5180MHz**

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

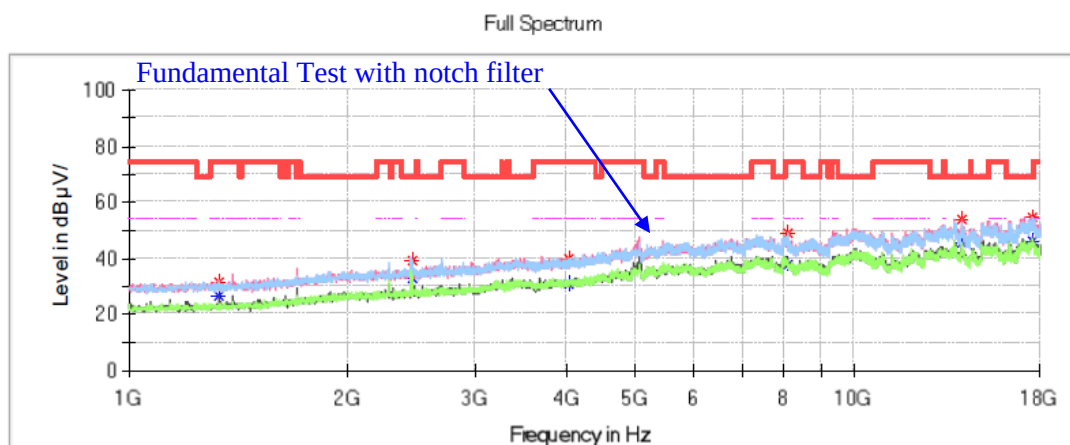


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1328.100000     | ---                | 26.36              | 54.00            | 27.64       | V   | -14.5        |
| 1328.100000     | 31.44              | ---                | 74.00            | 42.56       | V   | -14.5        |
| 2456.900000     | 39.29              | ---                | 68.20            | 28.91       | V   | -9.8         |
| 4029.400000     | ---                | 30.66              | 54.00            | 23.34       | H   | -5.0         |
| 4029.400000     | 39.64              | ---                | 74.00            | 34.36       | H   | -5.0         |
| 8089.000000     | ---                | 37.71              | 54.00            | 16.29       | H   | 3.8          |
| 8089.000000     | 48.99              | ---                | 74.00            | 25.01       | H   | 3.8          |
| 14005.000000    | 53.72              | ---                | 68.20            | 14.48       | H   | 10.5         |
| 17558.000000    | 54.79              | ---                | 68.20            | 13.41       | H   | 13.4         |

**Middle Channel: 5200MHz****Common Information**

|                |                                                     |
|----------------|-----------------------------------------------------|
| Project No.:   | RKSA240328001                                       |
| Test Mode:     | 5G Wi-Fi 802.11a mode of middle channel             |
| Standard:      | FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209 |
| Test Engineer: | Hugh Wu                                             |

Full Spectrum

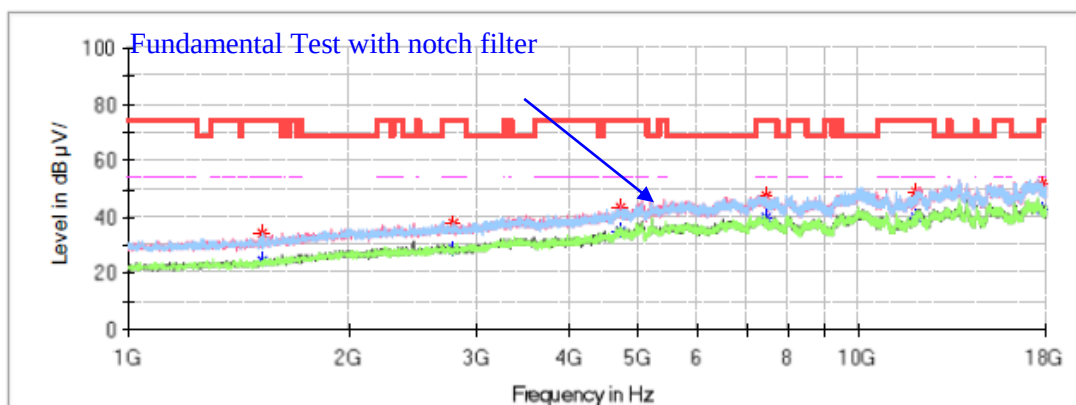
**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1528.700000     | 33.94                  | ---                    | 74.00                | 40.06       | H   | -13.7        |
| 1528.700000     | ---                    | 24.22                  | 54.00                | 29.78       | H   | -13.7        |
| 2785.000000     | 37.53                  | ---                    | 74.00                | 36.47       | H   | -8.8         |
| 2785.000000     | ---                    | 28.78                  | 54.00                | 25.22       | H   | -8.8         |
| 4704.300000     | 43.62                  | ---                    | 74.00                | 30.38       | V   | -2.7         |
| 4704.300000     | ---                    | 35.25                  | 54.00                | 18.75       | V   | -2.7         |
| 7444.700000     | 47.35                  | ---                    | 74.00                | 26.65       | V   | 4.1          |
| 7444.700000     | ---                    | 39.91                  | 54.00                | 14.09       | V   | 4.1          |
| 11946.300000    | 48.90                  | ---                    | 74.00                | 25.10       | V   | 6.9          |
| 11946.300000    | ---                    | 39.69                  | 54.00                | 14.31       | V   | 6.9          |
| 17794.300000    | ---                    | 42.89                  | 54.00                | 11.11       | V   | 12.4         |
| 17794.300000    | 51.85                  | ---                    | 74.00                | 22.15       | V   | 12.4         |

**High Channel: 5240MHz****Common Information**

Project No.: RKSA240328001  
 Test Mode: 5G Wi-Fi 802.11a mode of high channel  
 Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
 Test Engineer: Hugh Wu

Full Spectrum

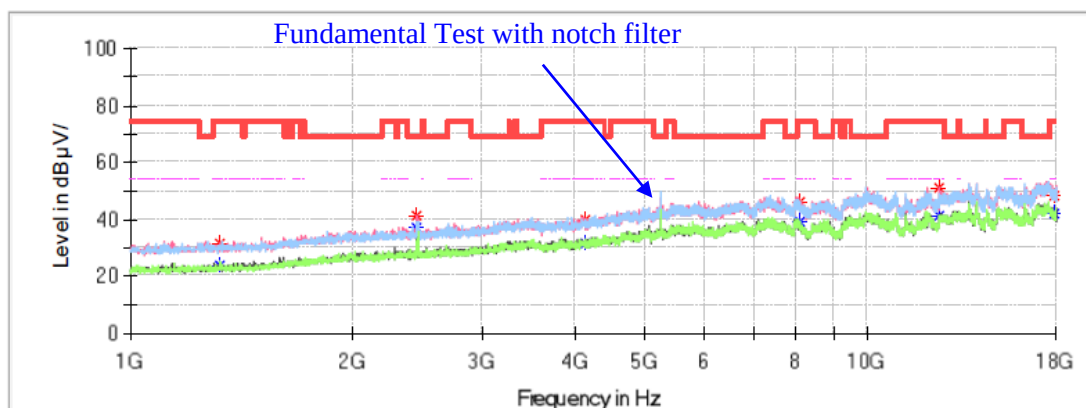
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1319.600000     | 31.28              | ---                | 74.00            | 42.72       | V   | -14.5        |
| 1319.600000     | ---                | 23.66              | 54.00            | 30.34       | V   | -14.5        |
| 2450.100000     | 40.94              | ---                | 68.20            | 27.26       | V   | -9.8         |
| 4128.000000     | 40.06              | ---                | 74.00            | 33.94       | H   | -4.7         |
| 4128.000000     | ---                | 31.27              | 54.00            | 22.73       | H   | -4.7         |
| 8068.600000     | 46.12              | ---                | 74.00            | 27.88       | V   | 3.8          |
| 8068.600000     | ---                | 39.12              | 54.00            | 14.88       | V   | 3.8          |
| 12512.400000    | 50.73              | ---                | 74.00            | 23.27       | V   | 8.5          |
| 12512.400000    | ---                | 41.09              | 54.00            | 12.91       | V   | 8.5          |
| 17855.500000    | 48.39              | ---                | 74.00            | 25.61       | H   | 12.1         |
| 17855.500000    | ---                | 42.26              | 54.00            | 11.74       | H   | 12.1         |

**802.11ac20 Mode:****Low Channel: 5180MHz****Common Information**

|                |                                                     |
|----------------|-----------------------------------------------------|
| Project No.:   | RKSA240328001                                       |
| Test Mode:     | 5G Wi-Fi 802.11ac20 mode of low channel             |
| Standard:      | FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209 |
| Test Engineer: | Hugh Wu                                             |

Fundamental Test with notch filter

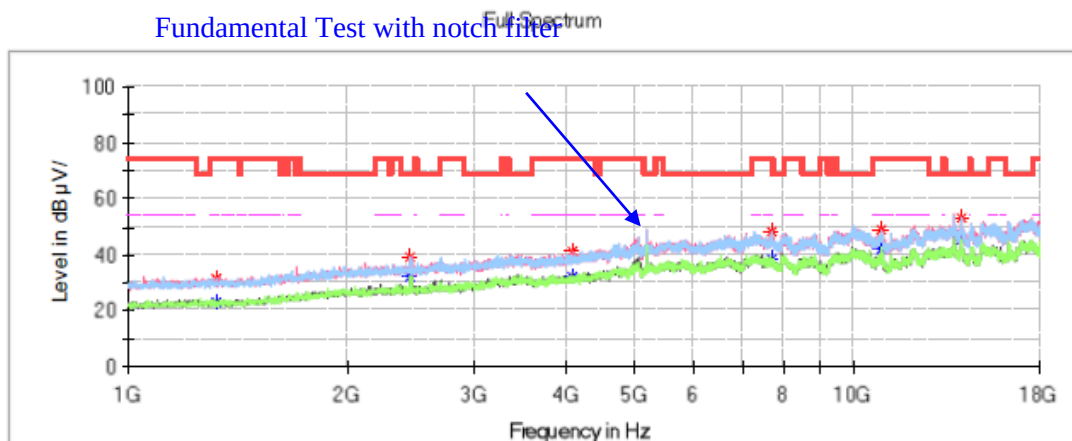
**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1319.600000     | ---                    | 23.23                  | 54.00                | 30.77       | V   | -14.5        |
| 1319.600000     | 31.64                  | ---                    | 74.00                | 42.36       | V   | -14.5        |
| 2450.100000     | 39.21                  | ---                    | 68.20                | 28.99       | V   | -9.8         |
| 4082.100000     | ---                    | 31.98                  | 54.00                | 22.02       | V   | -4.8         |
| 4082.100000     | 41.34                  | ---                    | 74.00                | 32.66       | V   | -4.8         |
| 7687.800000     | ---                    | 38.66                  | 54.00                | 15.34       | H   | 4.1          |
| 7687.800000     | 48.43                  | ---                    | 74.00                | 25.57       | H   | 4.1          |
| 10865.100000    | ---                    | 42.23                  | 54.00                | 11.77       | V   | 6.6          |
| 10865.100000    | 49.19                  | ---                    | 74.00                | 24.81       | V   | 6.6          |
| 14001.600000    | 53.49                  | ---                    | 68.20                | 14.71       | V   | 10.5         |

**Middle Channel: 5200MHz****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac20 mode of middle channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu


Full Spectrum

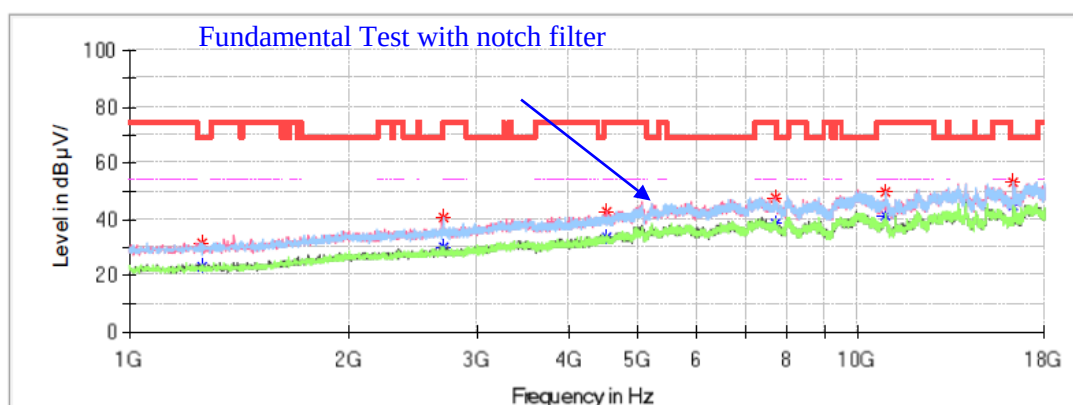**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1256.700000     | 31.66                  | ---                    | 68.20                | 36.54       | H   | -14.7        |
| 2698.300000     | 40.59                  | ---                    | 74.00                | 33.41       | H   | -9.1         |
| 2698.300000     | ---                    | 29.78                  | 54.00                | 24.22       | H   | -9.1         |
| 4510.500000     | 42.86                  | ---                    | 74.00                | 31.14       | V   | -3.7         |
| 4510.500000     | ---                    | 33.80                  | 54.00                | 20.20       | V   | -3.7         |
| 7699.700000     | ---                    | 38.30                  | 54.00                | 15.70       | V   | 4.0          |
| 7699.700000     | 47.53                  | ---                    | 74.00                | 26.47       | V   | 4.0          |
| 10866.800000    | ---                    | 40.96                  | 54.00                | 13.04       | V   | 6.6          |
| 10866.800000    | 49.47                  | ---                    | 74.00                | 24.53       | V   | 6.6          |
| 16305.100000    | 53.29                  | ---                    | 68.20                | 14.91       | H   | 9.7          |

**High Channel: 5240MHz****Common Information**


Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac20 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

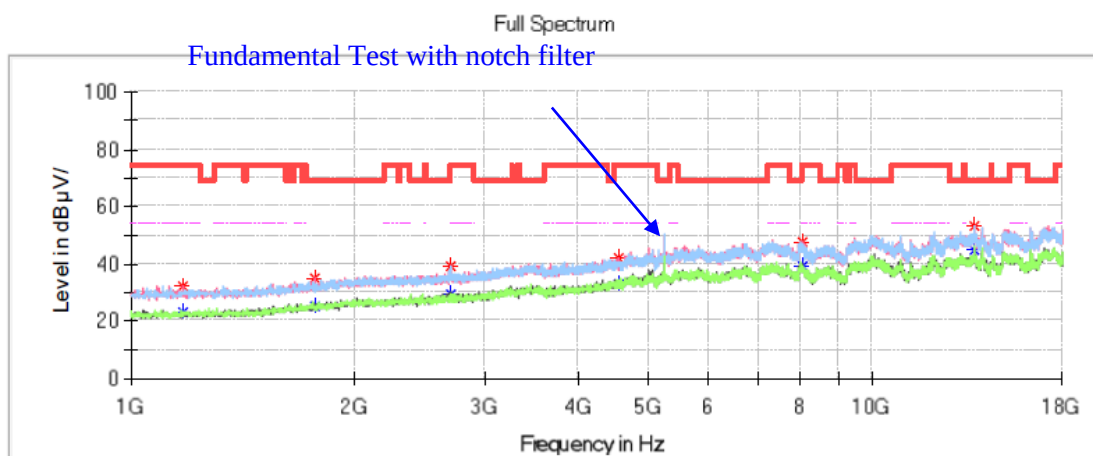**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1176.800000     | ---                | 23.32              | 54.00            | 30.68       | V   | -15.0        |
| 1176.800000     | 31.97              | ---                | 74.00            | 42.03       | V   | -15.0        |
| 1766.700000     | 35.15              | ---                | 68.20            | 33.05       | V   | -12.1        |
| 2694.900000     | ---                | 29.51              | 54.00            | 24.49       | H   | -9.1         |
| 2694.900000     | 39.04              | ---                | 74.00            | 34.96       | H   | -9.1         |
| 4534.300000     | ---                | 32.68              | 54.00            | 21.32       | V   | -3.6         |
| 4534.300000     | 41.67              | ---                | 74.00            | 32.33       | V   | -3.6         |
| 8022.700000     | 47.70              | ---                | 68.20            | 20.50       | H   | 3.8          |
| 13683.700000    | 53.31              | ---                | 68.20            | 14.89       | H   | 10.8         |

**802.11n-HT20 Mode:****Low Channel: 5180MHz****Common Information**


Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n20 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

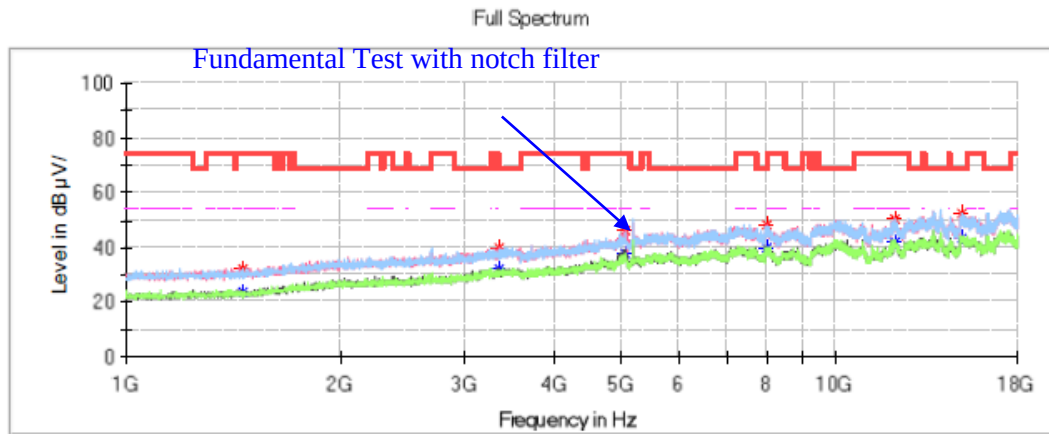**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1462.400000     | 31.88                  | ---                    | 74.00                | 42.12       | H   | -14.0        |
| 1462.400000     | ---                    | 24.03                  | 54.00                | 29.97       | H   | -14.0        |
| 3354.500000     | ---                    | 31.94                  | 54.00                | 22.06       | V   | -6.7         |
| 3354.500000     | 39.57                  | ---                    | 74.00                | 34.43       | V   | -6.7         |
| 5061.300000     | 46.21                  | ---                    | 74.00                | 27.79       | V   | -1.0         |
| 5061.300000     | ---                    | 37.75                  | 54.00                | 16.25       | V   | -1.0         |
| 8009.100000     | 48.05                  | ---                    | 68.20                | 20.15       | V   | 3.8          |
| 12090.800000    | ---                    | 41.97                  | 54.00                | 12.03       | H   | 7.1          |
| 12090.800000    | 50.20                  | ---                    | 74.00                | 23.80       | H   | 7.1          |
| 15050.500000    | 52.71                  | ---                    | 68.20                | 15.49       | H   | 10.3         |

**Middle Channel: 5200MHz****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n20 mode of middle channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

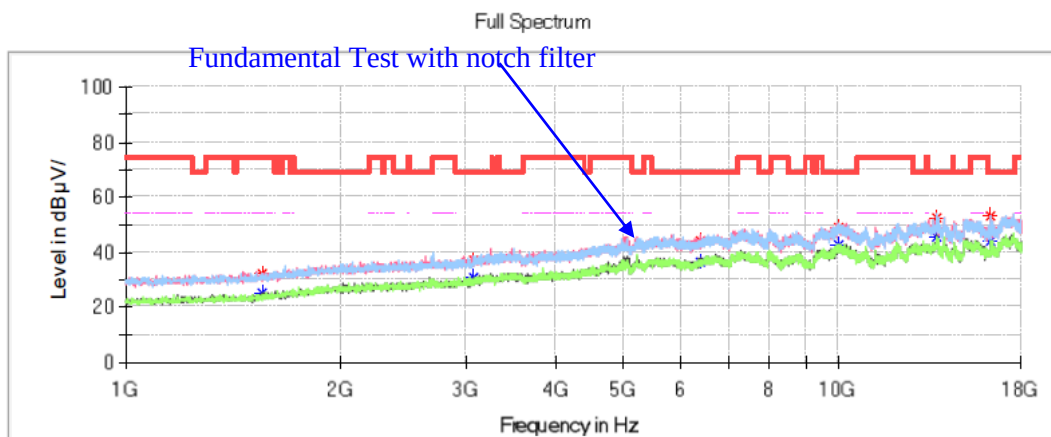
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1557.600000     | ---                | 24.94              | 54.00            | 29.06       | V   | -13.5        |
| 1557.600000     | 32.24              | ---                | 74.00            | 41.76       | V   | -13.5        |
| 3067.200000     | 37.41              | ---                | 68.20            | 30.79       | V   | -7.8         |
| 6389.000000     | 44.01              | ---                | 68.20            | 24.19       | V   | 0.7          |
| 9993.000000     | 49.06              | ---                | 68.20            | 19.14       | V   | 7.8          |
| 13676.900000    | 52.32              | ---                | 68.20            | 15.88       | H   | 10.8         |
| 16315.300000    | 53.31              | ---                | 68.20            | 14.89       | H   | 9.7          |



**High Channel: 5240MHz****Common Information**

Project No.: RKSA240328001  
 Test Mode: 5G Wi-Fi 802.11n20 mode of high channel  
 Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
 Test Engineer: Hugh Wu

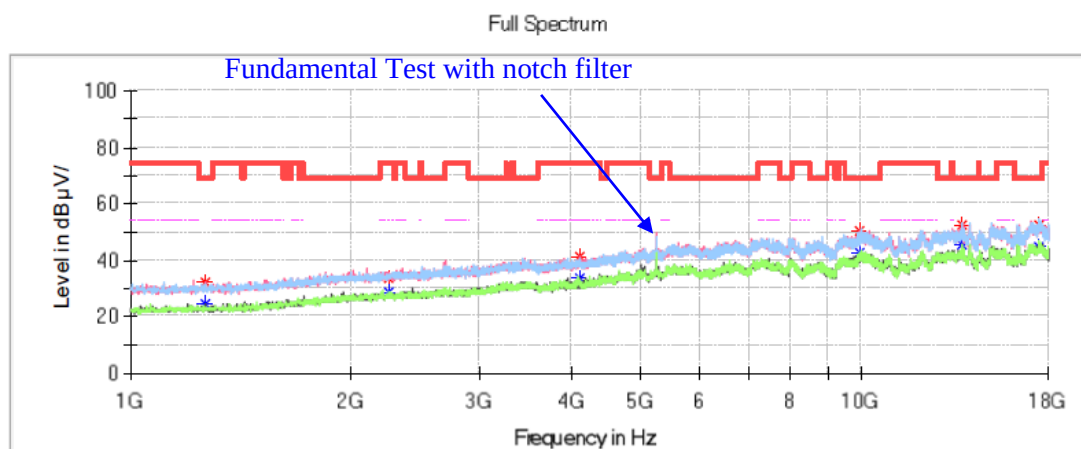**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1266.900000     | 32.36              | ---                | 68.20            | 35.84       | V   | -14.7        |
| 2251.200000     | 33.85              | ---                | 74.00            | 40.15       | V   | -10.2        |
| 2251.200000     | ---                | 28.50              | 54.00            | 25.50       | V   | -10.2        |
| 4107.600000     | ---                | 33.47              | 54.00            | 20.53       | V   | -4.8         |
| 4107.600000     | 41.55              | ---                | 74.00            | 32.45       | V   | -4.8         |
| 9942.000000     | 50.54              | ---                | 68.20            | 17.66       | H   | 7.6          |
| 13676.900000    | 52.62              | ---                | 68.20            | 15.58       | H   | 10.8         |
| 17466.200000    | 52.38              | ---                | 68.20            | 15.82       | V   | 13.5         |

**802.11ac40 Mode:**

| Frequency (MHz)       | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------------|------------------|------------------|----------------|-------------|-----|--------------|
| Low Channel: 5190MHz  |                  |                  |                |             |     |              |
| 1153.000000           | ---              | 23.11            | 54.00          | 30.89       | H   | -15.0        |
| 1153.000000           | 32.29            | ---              | 74.00          | 41.71       | H   | -15.0        |
| 2598.000000           | 37.13            | ---              | 68.20          | 31.07       | V   | -9.4         |
| 5037.500000           | ---              | 36.80            | 54.00          | 17.20       | H   | -1.1         |
| 5037.500000           | 46.51            | ---              | 74.00          | 27.49       | H   | -1.1         |
| 10071.200000          | 49.03            | ---              | 68.20          | 19.17       | V   | 7.7          |
| 13676.900000          | 52.97            | ---              | 68.20          | 15.23       | V   | 10.8         |
| 17559.700000          | 54.28            | ---              | 68.20          | 13.92       | V   | 13.4         |
| High Channel: 5230MHz |                  |                  |                |             |     |              |
| 1175.100000           | ---              | 24.13            | 54.00          | 29.87       | H   | -15.0        |
| 1175.100000           | 30.61            | ---              | 74.00          | 43.39       | H   | -15.0        |
| 2501.100000           | 38.00            | ---              | 68.20          | 30.20       | V   | -9.8         |
| 4483.300000           | 43.35            | ---              | 68.20          | 24.85       | V   | -3.8         |
| 7951.300000           | 45.48            | ---              | 68.20          | 22.72       | V   | 3.9          |
| 9931.800000           | 49.34            | ---              | 68.20          | 18.86       | V   | 7.6          |
| 17314.900000          | 53.04            | ---              | 68.20          | 15.16       | H   | 13.1         |

**802.11n-HT40 Mode:**

| Frequency (MHz)       | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------------|------------------|------------------|----------------|-------------|-----|--------------|
| Low Channel: 5190MHz  |                  |                  |                |             |     |              |
| 1198.900000           | 31.09            | ---              | 74.00          | 42.91       | V   | -14.9        |
| 1198.900000           | ---              | 24.13            | 54.00          | 29.87       | V   | -14.9        |
| 2099.900000           | 35.97            | ---              | 68.20          | 32.23       | V   | -10.4        |
| 4683.900000           | ---              | 34.52            | 54.00          | 19.48       | V   | -2.8         |
| 4683.900000           | 43.07            | ---              | 74.00          | 30.93       | V   | -2.8         |
| 6917.700000           | 45.47            | ---              | 68.20          | 22.73       | V   | 3.3          |
| 9976.000000           | 49.51            | ---              | 68.20          | 18.69       | V   | 7.7          |
| 17493.400000          | 53.24            | ---              | 68.20          | 14.96       | H   | 13.6         |
| High Channel: 5230MHz |                  |                  |                |             |     |              |
| 1394.400000           | ---              | 23.08            | 54.00          | 30.92       | V   | -14.3        |
| 1394.400000           | 33.98            | ---              | 74.00          | 40.02       | V   | -14.3        |
| 2693.200000           | ---              | 28.52            | 54.00          | 25.48       | H   | -9.1         |
| 2693.200000           | 39.08            | ---              | 74.00          | 34.92       | H   | -9.1         |
| 5049.400000           | ---              | 37.45            | 54.00          | 16.55       | V   | -1.0         |
| 5049.400000           | 46.22            | ---              | 74.00          | 27.78       | V   | -1.0         |
| 9454.100000           | ---              | 42.10            | 54.00          | 11.90       | H   | 6.0          |
| 9454.100000           | 47.26            | ---              | 74.00          | 26.74       | H   | 6.0          |
| 13678.600000          | 51.67            | ---              | 68.20          | 16.53       | V   | 10.8         |
| 17530.800000          | 53.73            | ---              | 68.20          | 14.47       | V   | 13.5         |


**802.11ac80 Mode:**

| Frequency<br>(MHz) | MaxPeak<br>(dB $\mu$ V/m) | Average<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) | Pol | Corr.<br>(dB/m) |
|--------------------|---------------------------|---------------------------|-------------------------|----------------|-----|-----------------|
| Channel: 5210MHz   |                           |                           |                         |                |     |                 |
| 1249.900000        | 31.21                     | ---                       | 68.20                   | 36.99          | V   | -14.7           |
| 2247.800000        | ---                       | 27.17                     | 54.00                   | 26.83          | V   | -10.2           |
| 2247.800000        | 36.33                     | ---                       | 74.00                   | 37.67          | V   | -10.2           |
| 5047.700000        | ---                       | 39.22                     | 54.00                   | 14.78          | V   | -1.0            |
| 5047.700000        | 46.08                     | ---                       | 74.00                   | 27.92          | V   | -1.0            |
| 7951.300000        | 46.43                     | ---                       | 68.20                   | 21.77          | V   | 3.9             |
| 13306.300000       | ---                       | 42.44                     | 54.00                   | 11.56          | V   | 10.2            |
| 13306.300000       | 51.85                     | ---                       | 74.00                   | 22.15          | V   | 10.2            |
| 17561.400000       | 53.55                     | ---                       | 68.20                   | 14.65          | V   | 13.4            |

**1GHz-18GHz(5725-5850MHz Band):****802.11a Mode:****Low Channel: 5745MHz**

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

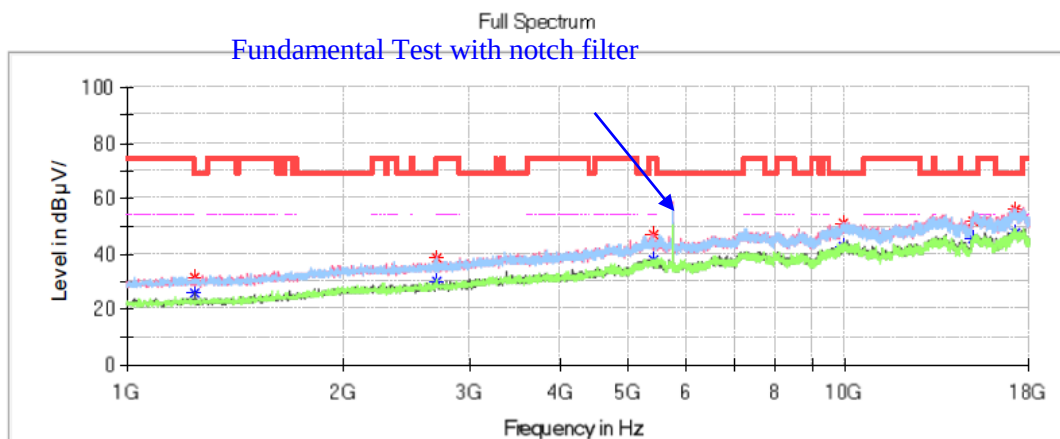


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB µV/m) | Average (dB µV/m) | Limit (dB µV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-------------------|-----------------|-------------|-----|--------------|
| 1243.100000     | 31.44             | ---               | 68.20           | 36.76       | V   | -14.7        |
| 2691.500000     | ---               | 29.87             | 54.00           | 24.13       | V   | -9.1         |
| 2691.500000     | 38.78             | ---               | 74.00           | 35.22       | V   | -9.1         |
| 5397.900000     | ---               | 38.04             | 54.00           | 15.96       | V   | 0.4          |
| 5397.900000     | 47.05             | ---               | 74.00           | 26.95       | V   | 0.4          |
| 9894.400000     | 51.27             | ---               | 68.20           | 16.93       | V   | 7.5          |
| 15081.100000    | 52.07             | ---               | 68.20           | 16.13       | H   | 10.4         |
| 17194.200000    | 56.12             | ---               | 68.20           | 12.08       | H   | 12.8         |

**Middle Channel: 5785MHz****Common Information**

Project No.: RKSA240328001  
 Test Mode: 5G Wi-Fi 802.11a mode of middle channel  
 Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
 Test Engineer: Hugh Wu

Full Spectrum

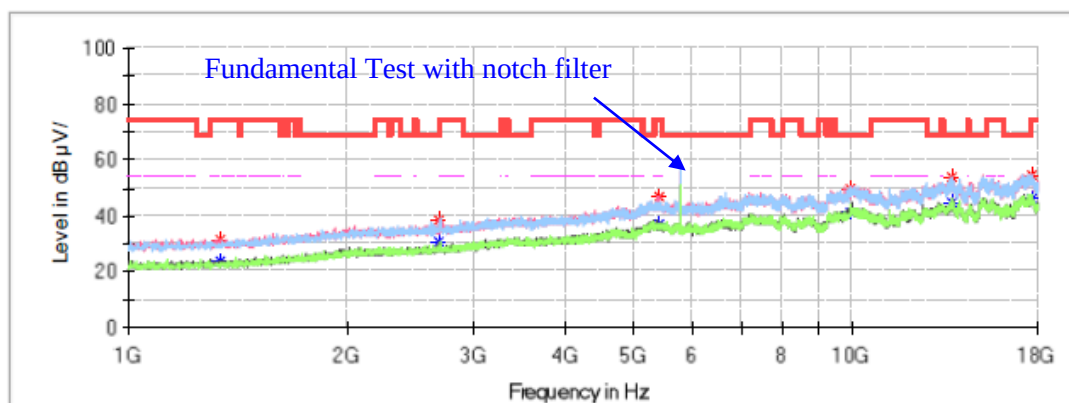
**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1341.700000     | ---                    | 24.12                  | 54.00                | 29.88       | V   | -14.4        |
| 1341.700000     | 31.72                  | ---                    | 74.00                | 42.28       | V   | -14.4        |
| 2686.400000     | 38.49                  | ---                    | 68.20                | 29.71       | V   | -9.1         |
| 5399.600000     | ---                    | 36.82                  | 54.00                | 17.18       | V   | 0.4          |
| 5399.600000     | 46.69                  | ---                    | 74.00                | 27.31       | V   | 0.4          |
| 9919.900000     | 49.89                  | ---                    | 68.20                | 18.31       | V   | 7.6          |
| 13738.100000    | 54.02                  | ---                    | 68.20                | 14.18       | H   | 10.8         |
| 17660.000000    | 54.82                  | ---                    | 68.20                | 13.38       | H   | 13.0         |

**High Channel: 5825MHz****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

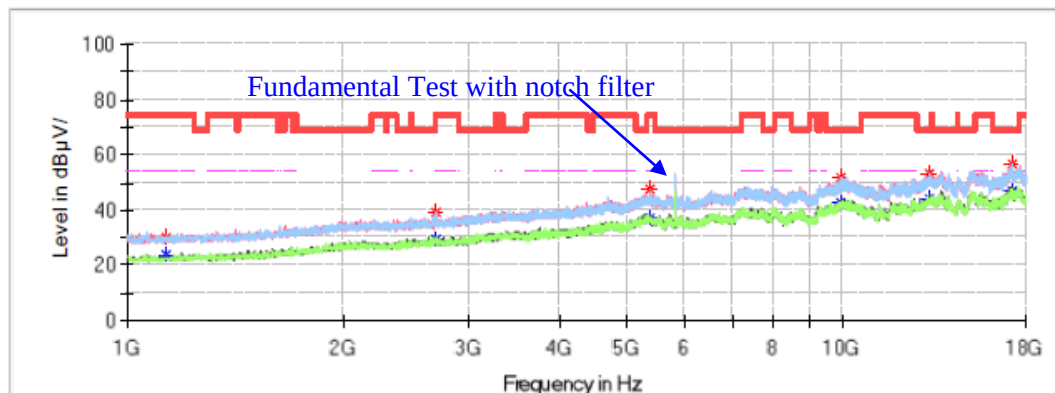**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1132.600000     | ---                    | 24.09                  | 54.00                | 29.91       | V   | -15.1        |
| 1132.600000     | 30.35                  | ---                    | 74.00                | 43.65       | V   | -15.1        |
| 2693.200000     | ---                    | 29.18                  | 54.00                | 24.82       | V   | -9.1         |
| 2693.200000     | 39.11                  | ---                    | 74.00                | 34.89       | V   | -9.1         |
| 5379.200000     | ---                    | 37.40                  | 54.00                | 16.60       | V   | 0.3          |
| 5379.200000     | 47.44                  | ---                    | 74.00                | 26.56       | V   | 0.3          |
| 9930.100000     | 51.87                  | ---                    | 68.20                | 16.33       | H   | 7.6          |
| 13238.300000    | 53.45                  | ---                    | 68.20                | 14.75       | H   | 10.0         |
| 17243.500000    | 56.75                  | ---                    | 68.20                | 11.45       | H   | 13.0         |

**802.11ac20 Mode:**

| Frequency (MHz)         | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-------------------------|------------------|------------------|----------------|-------------|-----|--------------|
| Low Channel: 5745MHz    |                  |                  |                |             |     |              |
| 1146.200000             | ---              | 20.81            | 54.00          | 33.19       | V   | -15.1        |
| 1146.200000             | 30.46            | ---              | 74.00          | 43.54       | V   | -15.1        |
| 2694.900000             | ---              | 28.43            | 54.00          | 25.57       | H   | -9.1         |
| 2694.900000             | 39.14            | ---              | 74.00          | 34.86       | H   | -9.1         |
| 5374.100000             | ---              | 37.20            | 54.00          | 16.80       | V   | 0.3          |
| 5374.100000             | 46.80            | ---              | 74.00          | 27.20       | V   | 0.3          |
| 9948.800000             | 50.62            | ---              | 68.20          | 17.58       | V   | 7.6          |
| 13676.900000            | 52.92            | ---              | 68.20          | 15.28       | H   | 10.8         |
| 17597.100000            | 55.11            | ---              | 68.20          | 13.09       | V   | 13.2         |
| Middle Channel: 5785MHz |                  |                  |                |             |     |              |
| 1178.500000             | ---              | 21.63            | 54.00          | 32.37       | V   | -15.0        |
| 1178.500000             | 29.82            | ---              | 74.00          | 44.18       | V   | -15.0        |
| 2686.400000             | 36.41            | ---              | 68.20          | 31.79       | V   | -9.1         |
| 4558.100000             | ---              | 31.93            | 54.00          | 22.07       | H   | -3.5         |
| 4558.100000             | 43.63            | ---              | 74.00          | 30.37       | H   | -3.5         |
| 9996.400000             | 50.90            | ---              | 68.20          | 17.30       | V   | 7.8          |
| 13682.000000            | 53.73            | ---              | 68.20          | 14.47       | H   | 10.8         |
| 17614.100000            | 54.03            | ---              | 68.20          | 14.17       | V   | 13.1         |
| High Channel: 5825MHz   |                  |                  |                |             |     |              |
| 1224.400000             | ---              | 22.51            | 54.00          | 31.49       | V   | -14.8        |
| 1224.400000             | 31.84            | ---              | 74.00          | 42.16       | V   | -14.8        |
| 2504.500000             | 36.21            | ---              | 68.20          | 31.99       | V   | -9.7         |
| 5389.400000             | ---              | 36.13            | 54.00          | 17.87       | H   | 0.4          |
| 5389.400000             | 47.42            | ---              | 74.00          | 26.58       | H   | 0.4          |
| 9981.100000             | 49.36            | ---              | 68.20          | 18.84       | H   | 7.8          |
| 13676.900000            | 52.73            | ---              | 68.20          | 15.47       | V   | 10.8         |
| 17420.300000            | 53.33            | ---              | 68.20          | 14.87       | V   | 13.4         |



**802.11n-HT20 Mode:**

| Frequency (MHz)         | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-------------------------|------------------|------------------|----------------|-------------|-----|--------------|
| Low Channel: 5745MHz    |                  |                  |                |             |     |              |
| 1122.400000             | ---              | 22.51            | 54.00          | 31.49       | V   | -15.1        |
| 1122.400000             | 28.11            | ---              | 74.00          | 45.89       | V   | -15.1        |
| 2589.500000             | 36.07            | ---              | 68.20          | 32.13       | V   | -9.4         |
| 5396.200000             | ---              | 37.25            | 54.00          | 16.75       | H   | 0.4          |
| 5396.200000             | 46.36            | ---              | 74.00          | 27.64       | H   | 0.4          |
| 10028.700000            | 51.23            | ---              | 68.20          | 16.97       | V   | 7.8          |
| 13678.600000            | 53.29            | ---              | 68.20          | 14.91       | V   | 10.8         |
| 17581.800000            | 53.26            | ---              | 68.20          | 14.94       | V   | 13.3         |
| Middle Channel: 5785MHz |                  |                  |                |             |     |              |
| 1217.600000             | ---              | 21.95            | 54.00          | 32.05       | V   | -14.8        |
| 1217.600000             | 30.80            | ---              | 74.00          | 43.20       | V   | -14.8        |
| 2698.300000             | ---              | 30.27            | 54.00          | 23.73       | H   | -9.1         |
| 2698.300000             | 35.64            | ---              | 74.00          | 38.36       | H   | -9.1         |
| 5377.500000             | ---              | 38.42            | 54.00          | 15.58       | V   | 0.3          |
| 5377.500000             | 47.55            | ---              | 74.00          | 26.45       | V   | 0.3          |
| 9991.300000             | 50.07            | ---              | 68.20          | 18.13       | V   | 7.8          |
| 13685.400000            | 53.25            | ---              | 68.20          | 14.95       | H   | 10.8         |
| 17620.900000            | 52.96            | ---              | 68.20          | 15.24       | V   | 13.1         |
| High Channel: 5825MHz   |                  |                  |                |             |     |              |
| 1438.600000             | ---              | 23.43            | 54.00          | 30.57       | V   | -14.1        |
| 1438.600000             | 32.54            | ---              | 74.00          | 41.46       | V   | -14.1        |
| 2688.100000             | 38.34            | ---              | 68.20          | 29.86       | H   | -9.1         |
| 4648.200000             | 42.03            | ---              | 74.00          | 31.97       | H   | -3.0         |
| 4648.200000             | ---              | 34.07            | 54.00          | 19.93       | H   | -3.0         |
| 9952.200000             | 50.24            | ---              | 68.20          | 17.96       | V   | 7.7          |
| 13680.300000            | 52.00            | ---              | 68.20          | 16.20       | V   | 10.8         |
| 17600.500000            | 54.11            | ---              | 68.20          | 14.09       | V   | 13.2         |

**802.11ac40 Mode:**

| Frequency (MHz)       | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------------|------------------|------------------|----------------|-------------|-----|--------------|
| Low Channel: 5755MHz  |                  |                  |                |             |     |              |
| 1129.200000           | ---              | 23.23            | 54.00          | 30.77       | V   | -15.1        |
| 1129.200000           | 30.91            | ---              | 74.00          | 43.09       | V   | -15.1        |
| 2688.100000           | 36.93            | ---              | 68.20          | 31.27       | V   | -9.1         |
| 5374.100000           | ---              | 36.96            | 54.00          | 17.04       | H   | 0.3          |
| 5374.100000           | 45.79            | ---              | 74.00          | 28.21       | H   | 0.3          |
| 8400.100000           | ---              | 37.18            | 54.00          | 16.82       | V   | 3.9          |
| 8400.100000           | 47.46            | ---              | 74.00          | 26.54       | V   | 3.9          |
| 13676.900000          | 51.89            | ---              | 68.20          | 16.31       | H   | 10.8         |
| 17546.100000          | 54.53            | ---              | 68.20          | 13.67       | V   | 13.4         |
| High Channel: 5795MHz |                  |                  |                |             |     |              |
| 1217.600000           | ---              | 22.72            | 54.00          | 31.28       | H   | -14.8        |
| 1217.600000           | 31.29            | ---              | 74.00          | 42.71       | H   | -14.8        |
| 2443.300000           | 36.41            | ---              | 68.20          | 31.79       | V   | -9.9         |
| 4049.800000           | ---              | 32.65            | 54.00          | 21.35       | H   | -4.9         |
| 4049.800000           | 40.96            | ---              | 74.00          | 33.04       | H   | -4.9         |
| 7344.400000           | ---              | 37.59            | 54.00          | 16.41       | V   | 4.1          |
| 7344.400000           | 48.28            | ---              | 74.00          | 25.72       | V   | 4.1          |
| 10173.200000          | 51.12            | ---              | 68.20          | 17.08       | V   | 7.6          |
| 17187.400000          | 53.70            | ---              | 68.20          | 14.50       | V   | 12.8         |

**802.11n-HT40 Mode:**


| Frequency (MHz)       | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------------|------------------|------------------|----------------|-------------|-----|--------------|
| Low Channel: 5755MHz  |                  |                  |                |             |     |              |
| 1153.000000           | ---              | 22.31            | 54.00          | 31.69       | V   | -15.0        |
| 1153.000000           | 32.12            | ---              | 74.00          | 41.88       | V   | -15.0        |
| 2489.200000           | ---              | 29.54            | 54.00          | 24.46       | V   | -9.8         |
| 2489.200000           | 36.11            | ---              | 74.00          | 37.89       | V   | -9.8         |
| 5394.500000           | ---              | 37.09            | 54.00          | 16.91       | H   | 0.4          |
| 5394.500000           | 46.04            | ---              | 74.00          | 27.96       | H   | 0.4          |
| 9489.800000           | ---              | 39.24            | 54.00          | 14.76       | V   | 6.2          |
| 9489.800000           | 49.41            | ---              | 74.00          | 24.59       | V   | 6.2          |
| 13678.600000          | 53.05            | ---              | 68.20          | 15.15       | V   | 10.8         |
| 17534.200000          | 53.15            | ---              | 68.20          | 15.05       | H   | 13.5         |
| High Channel: 5795MHz |                  |                  |                |             |     |              |
| 1173.400000           | ---              | 22.32            | 54.00          | 31.68       | V   | -15.0        |
| 1173.400000           | 32.16            | ---              | 74.00          | 41.84       | V   | -15.0        |
| 2438.200000           | 37.54            | ---              | 68.20          | 30.66       | H   | -9.9         |
| 5377.500000           | ---              | 38.52            | 54.00          | 15.48       | V   | 0.3          |
| 5377.500000           | 46.61            | ---              | 74.00          | 27.39       | V   | 0.3          |
| 9447.300000           | ---              | 39.27            | 54.00          | 14.73       | H   | 6.0          |
| 9447.300000           | 48.70            | ---              | 74.00          | 25.30       | H   | 6.0          |
| 13676.900000          | 51.67            | ---              | 68.20          | 16.53       | V   | 10.8         |

**802.11ac80 Mode:**


| Frequency<br>(MHz)      | MaxPeak<br>(dB $\mu$ V/m) | Average<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) | Pol | Corr.<br>(dB/m) |
|-------------------------|---------------------------|---------------------------|-------------------------|----------------|-----|-----------------|
| Middle Channel: 5775MHz |                           |                           |                         |                |     |                 |
| 1139.400000             | ---                       | 21.67                     | 54.00                   | 32.33          | V   | -15.1           |
| 1139.400000             | 31.01                     | ---                       | 74.00                   | 42.99          | V   | -15.1           |
| 2276.700000             | ---                       | 31.58                     | 54.00                   | 22.42          | H   | -10.1           |
| 2276.700000             | 36.21                     | ---                       | 74.00                   | 37.79          | H   | -10.1           |
| 5244.900000             | 45.75                     | ---                       | 68.20                   | 22.45          | V   | -0.2            |
| 9705.700000             | 49.70                     | ---                       | 68.20                   | 18.50          | V   | 6.9             |
| 13678.600000            | 52.33                     | ---                       | 68.20                   | 15.87          | H   | 10.8            |
| 17168.700000            | 54.75                     | ---                       | 68.20                   | 13.45          | V   | 12.8            |

**18GHz-40GHz:**

Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40, 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11n20 mode (5180MHz)** was recorded

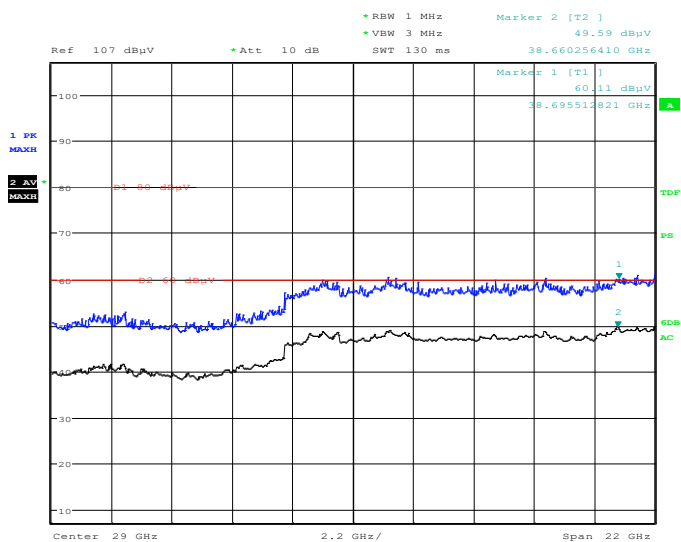**Horizontal**

Project No : RKSA240328001      Tester :Hugh Wu  
Date: 14.JUN.2024 12:08:34

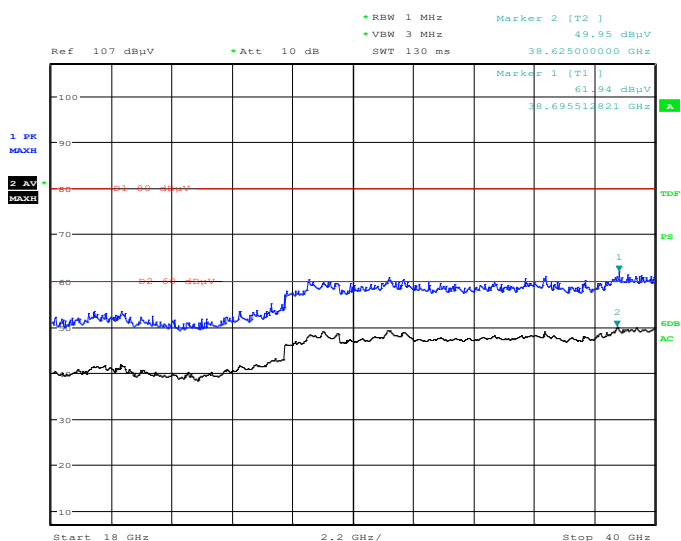
**Vertical**

Project No : RKSA240328001      Tester :Hugh Wu  
Date: 14.JUN.2024 12:25:44

Note: The test distance is 1.5m. The limit is 80dBμV/m(Peak) and 60dBμV/m(Average).

**Restricted Bands Emissions Test (5150-5250MHz Band):****802.11a Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

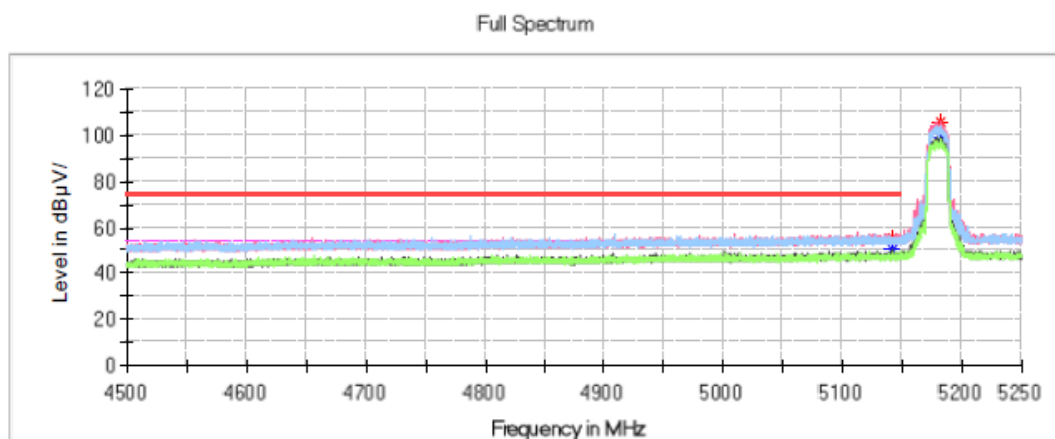
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5141.250000     | 55.68              | ---                | 74.00            | 18.32       | V   | 9.4          |
| 5141.250000     | ---                | 50.01              | 54.00            | 3.99        | V   | 9.4          |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

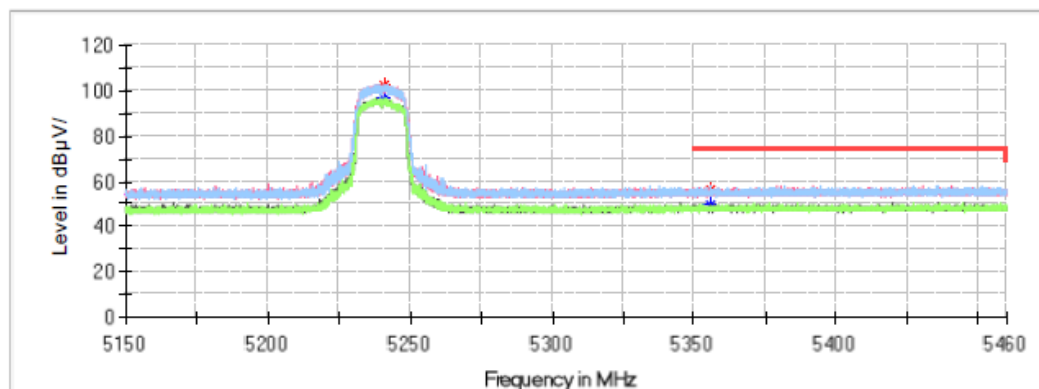


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5355.654000     | ---                | 49.73              | 54.00            | 4.27        | V   | 10.2         |
| 5355.654000     | 56.26              | ---                | 74.00            | 17.74       | V   | 10.2         |

**802.11ac20 Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac20 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

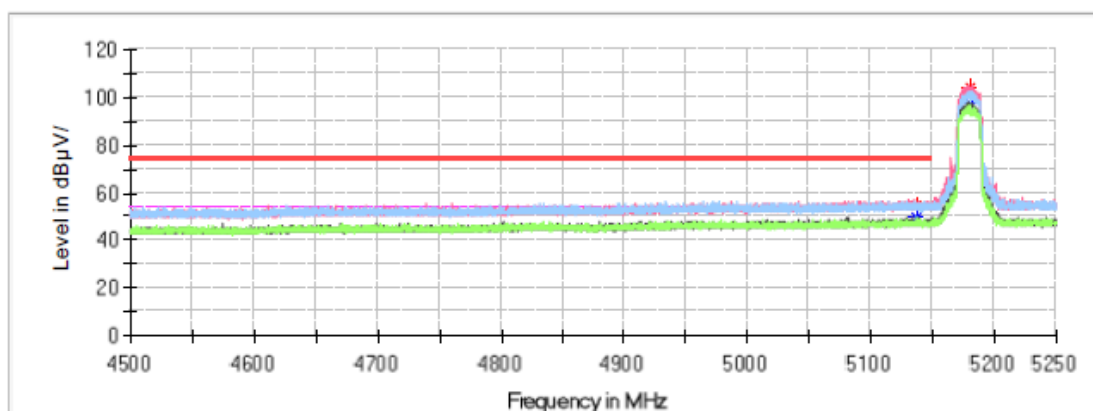**Critical\_Freqs**


| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5136.975000     | 54.81              | ---                | 74.00            | 19.19       | H   | 9.4          |
| 5136.975000     | ---                | 49.68              | 54.00            | 4.32        | H   | 9.4          |



## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac20 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

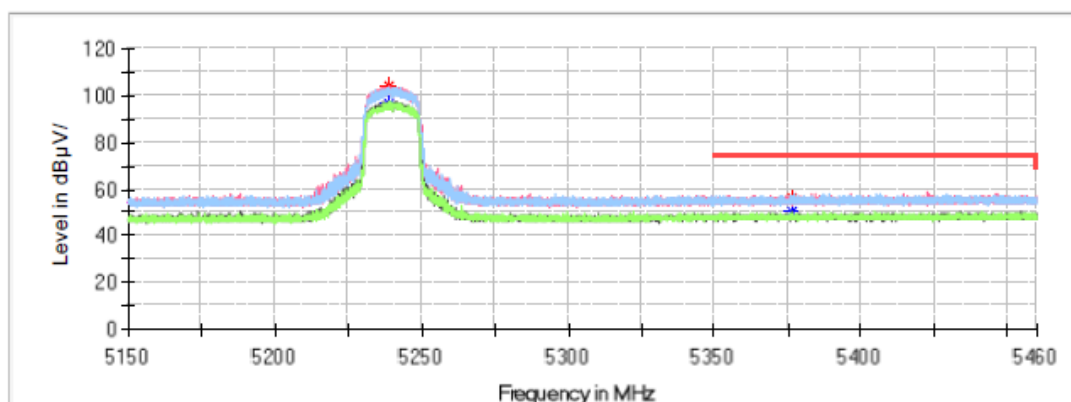


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5376.269000     | ---                | 50.66              | 54.00            | 3.34        | V   | 10.3         |
| 5376.269000     | 56.60              | ---                | 74.00            | 17.40       | V   | 10.3         |

**802.11n-HT20 Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n20 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

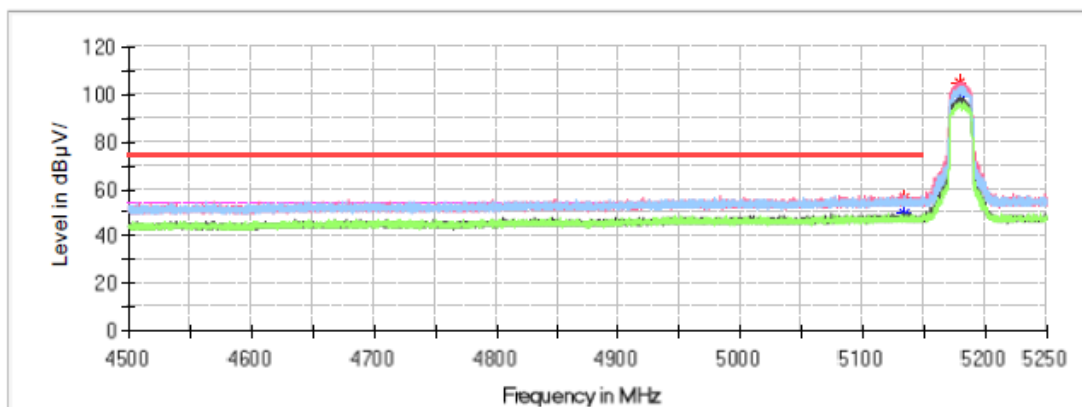
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5133.450000     | 56.64              | ---                | 74.00            | 17.36       | V   | 9.3          |
| 5133.450000     | ---                | 49.80              | 54.00            | 4.20        | V   | 9.3          |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n20 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

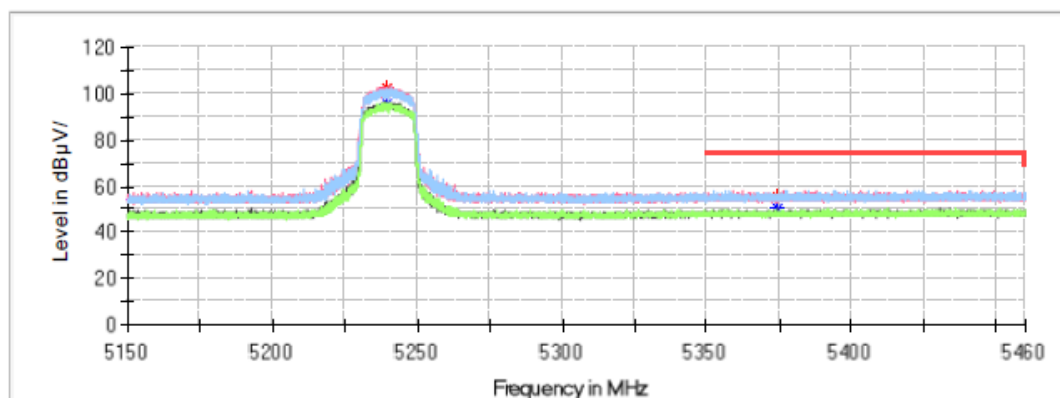

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5374.781000     | ---                | 50.48              | 54.00            | 3.52        | H   | 10.3         |
| 5374.781000     | 55.46              | ---                | 74.00            | 18.54       | H   | 10.3         |

**802.11ac40 Mode:****Common Information**

Project No.:

RKSA240328001

Test Mode:

5G Wi-Fi 802.11ac40 mode of low channel


Standard:

FCC Part 15.407 &amp; FCC Part 15.205 &amp; FCC Part 15.209

Test Engineer:

Hugh Wu

Full Spectrum

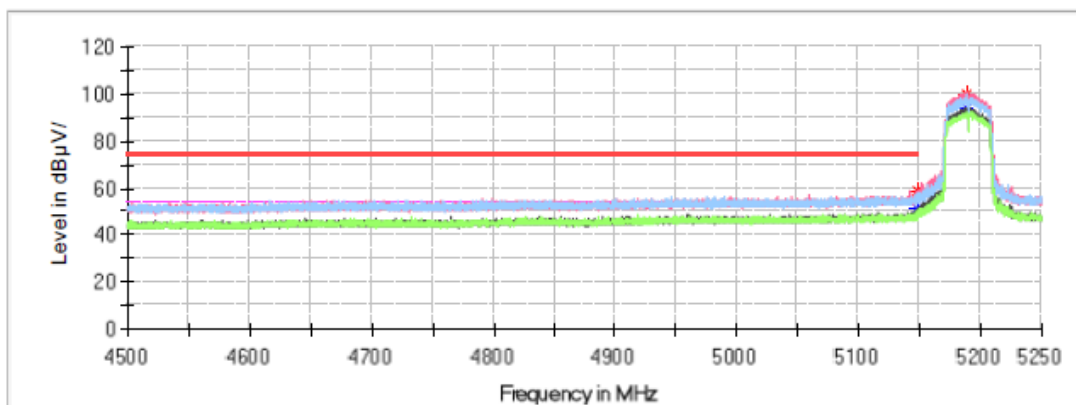
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5148.450000     | ---                | 51.31              | 54.00            | 2.69        | V   | 9.4          |
| 5148.450000     | 59.11              | ---                | 74.00            | 14.89       | V   | 9.4          |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac40 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

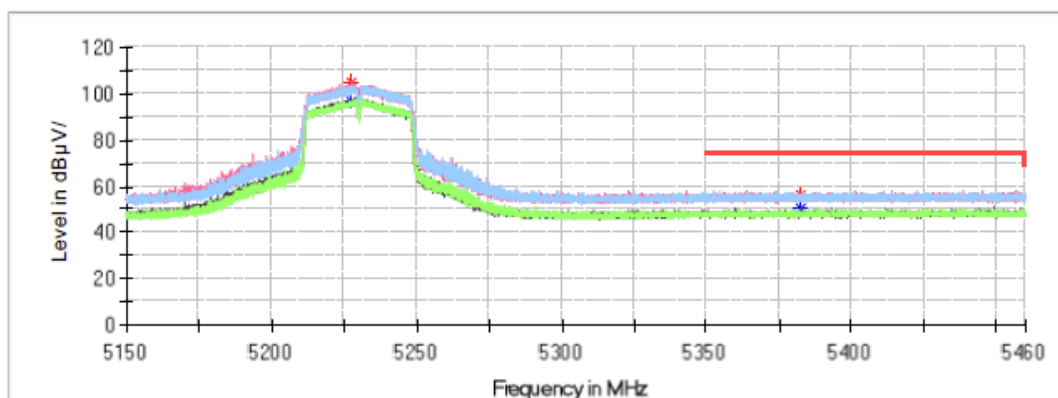


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5382.190000     | ---                | 50.15              | 54.00            | 3.85        | V   | 10.4         |
| 5382.190000     | 56.54              | ---                | 74.00            | 17.46       | V   | 10.4         |

**802.11n-HT40 Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n40 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

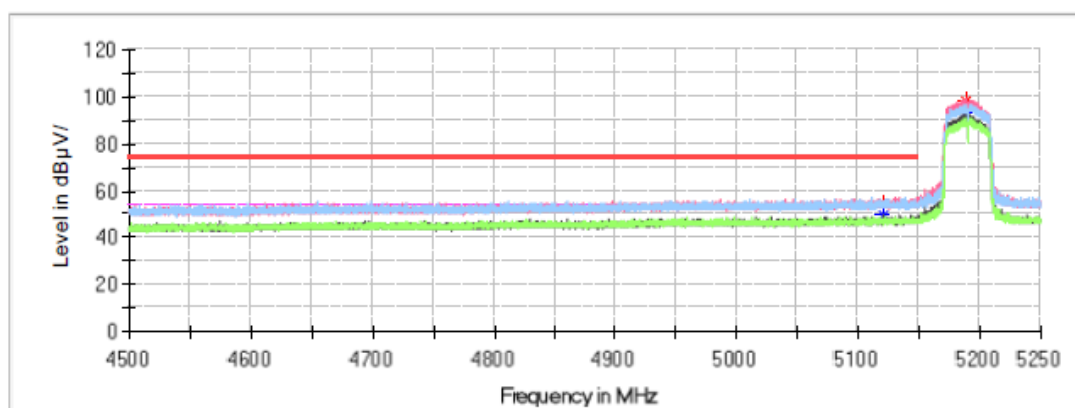**Critical\_Freqs**


| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5120.775000     | 54.77              | ---                | 74.00            | 19.23       | V   | 9.3          |
| 5120.775000     | ---                | 49.92              | 54.00            | 4.08        | V   | 9.3          |

## Common Information

Project No.:  
Test Mode:  
Standard:  
Test Engineer:

RKSA240328001  
5G Wi-Fi 802.11n40 mode of high channel  
FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Hugh Wu

Full Spectrum

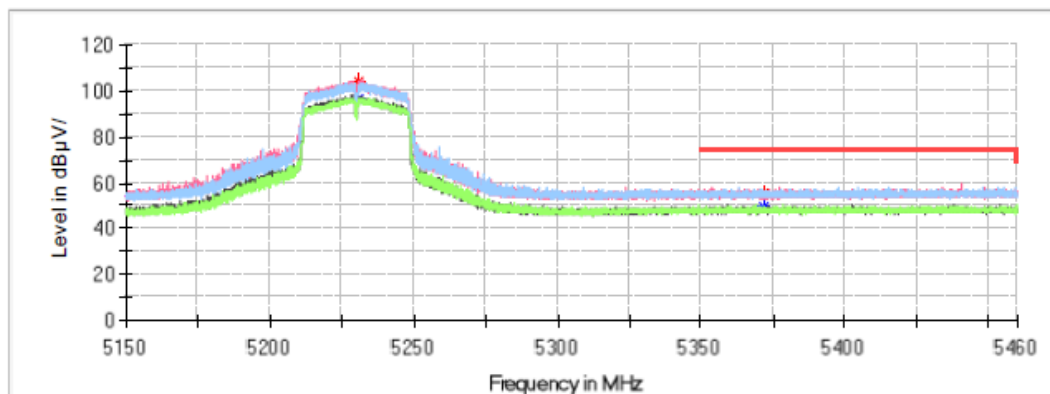


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5372.115000     | 54.98              | ---                | 74.00            | 19.02       | H   | 10.3         |
| 5372.115000     | ---                | 49.78              | 54.00            | 4.22        | H   | 10.3         |

**802.11ac80 Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac80 mode of middle channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

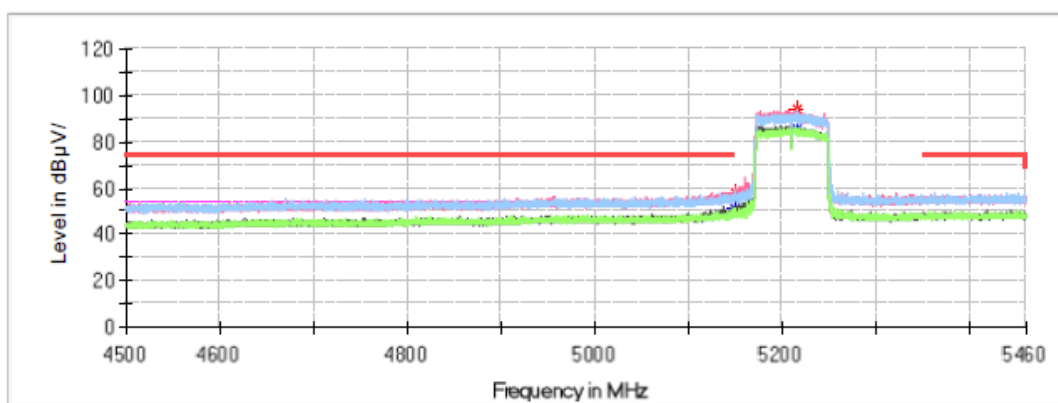
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5149.536000     | 57.67              | ---                | 74.00            | 16.33       | H   | 9.4          |
| 5149.536000     | ---                | 51.01              | 54.00            | 2.99        | H   | 9.4          |



**Bandedge Emissions Test (5725-5850MHz Band):****802.11a Mode:****Common Information**


Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

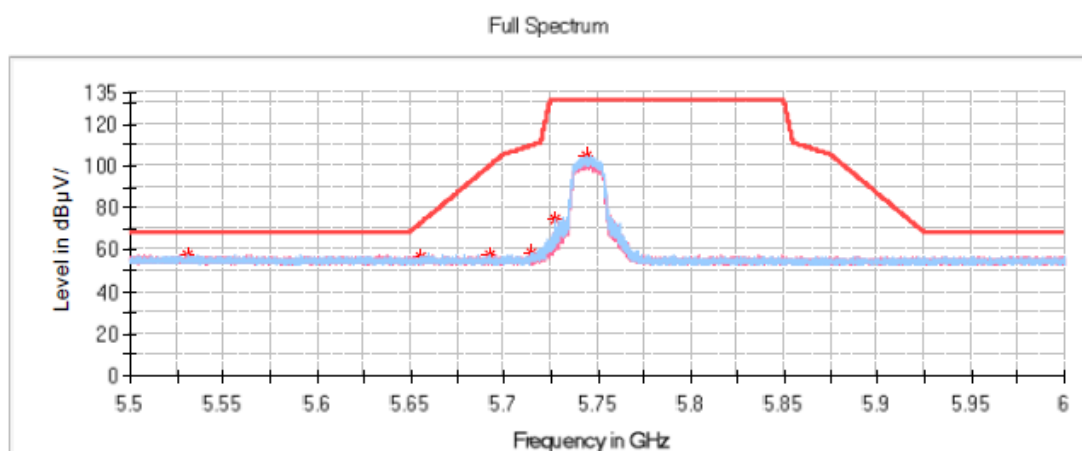**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5530.300000     | 57.64              | ---                | 68.20            | 10.56       | H   | 10.8         |
| 5655.200000     | 56.81              | ---                | 72.05            | 15.24       | H   | 10.6         |
| 5692.650000     | 57.18              | ---                | 99.76            | 42.58       | H   | 10.6         |
| 5715.100000     | 58.13              | ---                | 109.43           | 51.30       | H   | 10.6         |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11a mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

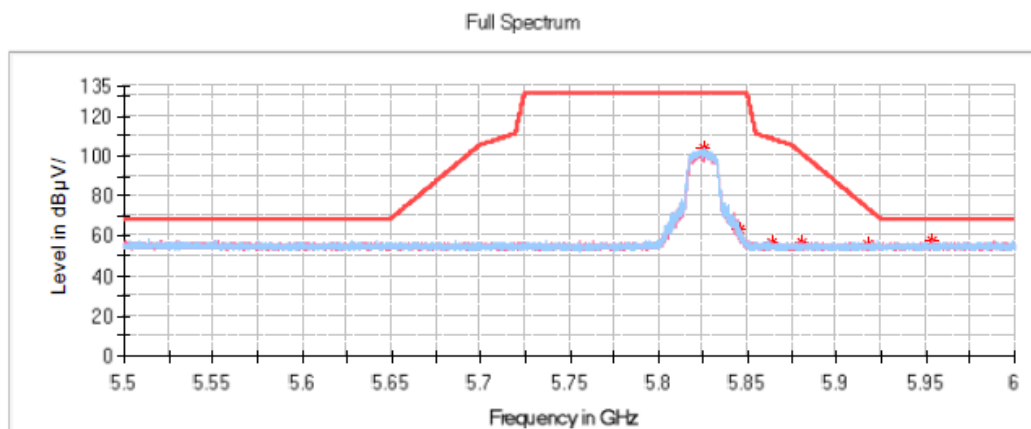


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5863.950000     | 56.69              | ---                | 108.29           | 51.60       | V   | 10.4         |
| 5880.400000     | 57.06              | ---                | 101.20           | 44.14       | V   | 10.3         |
| 5917.800000     | 56.15              | ---                | 73.53            | 17.38       | V   | 10.3         |
| 5953.200000     | 57.26              | ---                | 68.20            | 10.94       | V   | 10.3         |

**802.11ac20 Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac20 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu


Full Spectrum

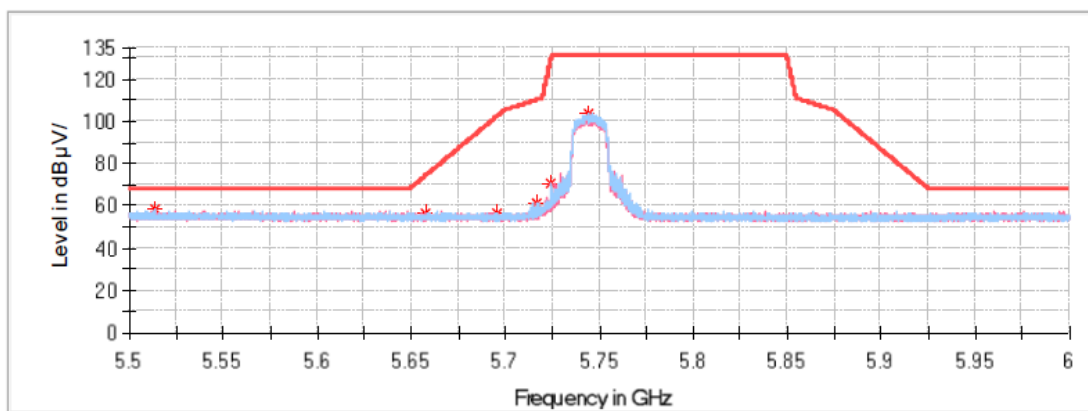**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5513.900000     | 58.07              | ---                | 68.20            | 10.13       | H   | 10.8         |
| 5657.600000     | 56.75              | ---                | 73.82            | 17.07       | V   | 10.6         |
| 5695.350000     | 56.85              | ---                | 101.76           | 44.91       | V   | 10.6         |
| 5716.750000     | 61.32              | ---                | 109.89           | 48.57       | H   | 10.6         |
| 5724.600000     | 71.09              | ---                | 129.57           | 58.48       | H   | 10.5         |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac20 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

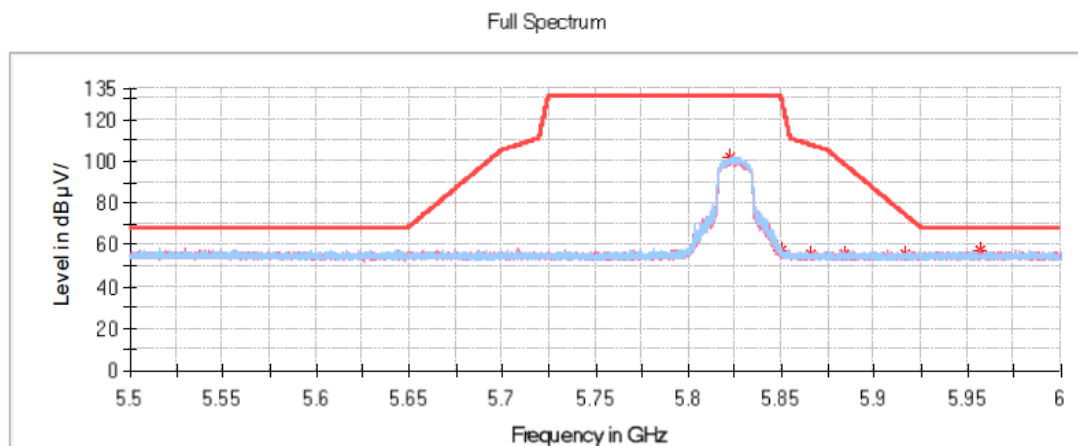


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5850.400000     | 57.32              | ---                | 129.57           | 72.25       | H   | 10.4         |
| 5865.400000     | 55.55              | ---                | 107.89           | 52.34       | H   | 10.4         |
| 5884.100000     | 55.66              | ---                | 98.47            | 42.81       | V   | 10.3         |
| 5916.200000     | 56.01              | ---                | 74.71            | 18.70       | V   | 10.3         |
| 5956.600000     | 57.69              | ---                | 68.20            | 10.51       | V   | 10.2         |

**802.11n-HT20 Mode:****Common Information**

|                |                                                     |
|----------------|-----------------------------------------------------|
| Project No.:   | RKSA240328001                                       |
| Test Mode:     | 5G Wi-Fi 802.11n20 mode of low channel              |
| Standard:      | FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209 |
| Test Engineer: | Hugh Wu                                             |

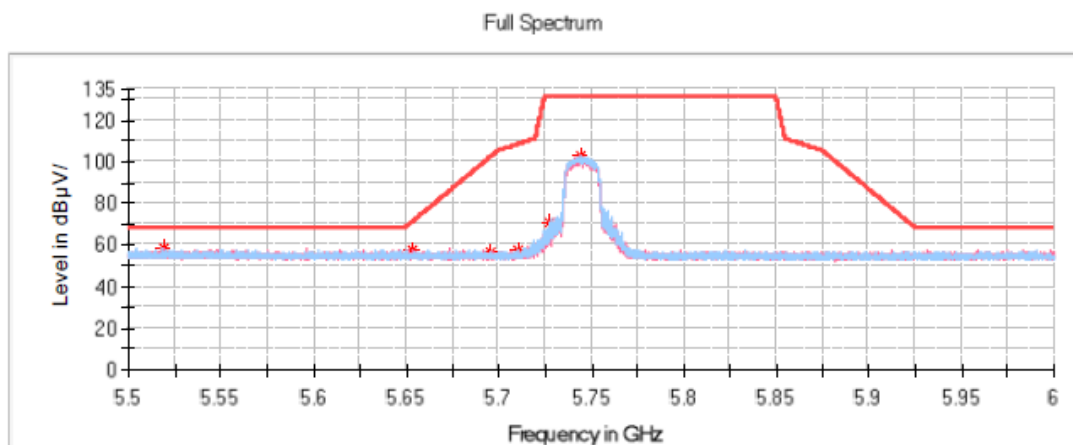
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5518.900000     | 58.28              | ---                | 68.20            | 9.92        | V   | 10.8         |
| 5653.800000     | 57.28              | ---                | 71.01            | 13.73       | V   | 10.6         |
| 5695.050000     | 56.20              | ---                | 101.54           | 45.34       | H   | 10.6         |
| 5710.200000     | 58.02              | ---                | 108.06           | 50.04       | H   | 10.6         |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n20 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

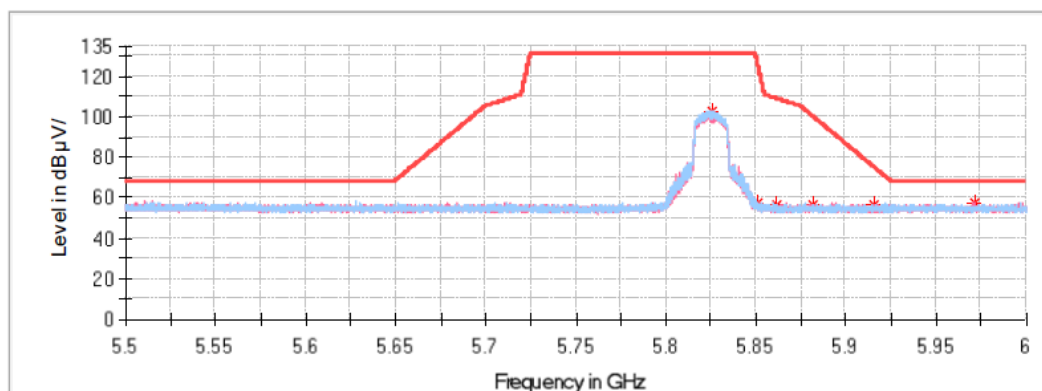


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5850.500000     | 57.72              | ---                | 129.16           | 71.44       | H   | 10.4         |
| 5861.250000     | 56.27              | ---                | 109.05           | 52.78       | H   | 10.4         |
| 5881.250000     | 56.79              | ---                | 100.58           | 43.78       | V   | 10.3         |
| 5915.600000     | 56.41              | ---                | 75.16            | 18.75       | V   | 10.3         |
| 5971.400000     | 57.19              | ---                | 68.20            | 11.01       | V   | 10.2         |

**802.11ac40 Mode:****Common Information**

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac40 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

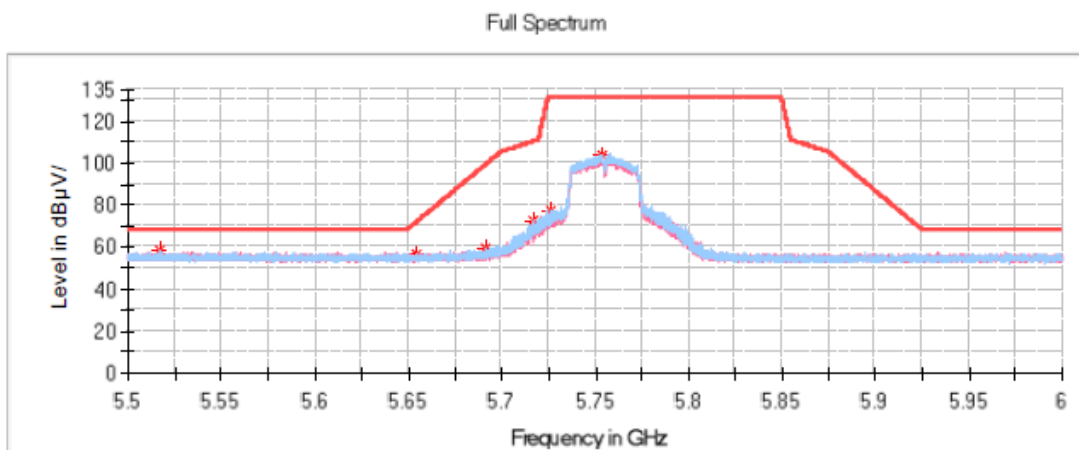
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5517.000000     | 58.11              | ---                | 68.20            | 10.09       | H   | 10.8         |
| 5654.600000     | 56.38              | ---                | 71.60            | 15.22       | H   | 10.6         |
| 5691.000000     | 59.66              | ---                | 98.54            | 38.88       | H   | 10.6         |
| 5717.100000     | 72.61              | ---                | 109.99           | 37.38       | H   | 10.6         |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11ac40 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

Full Spectrum

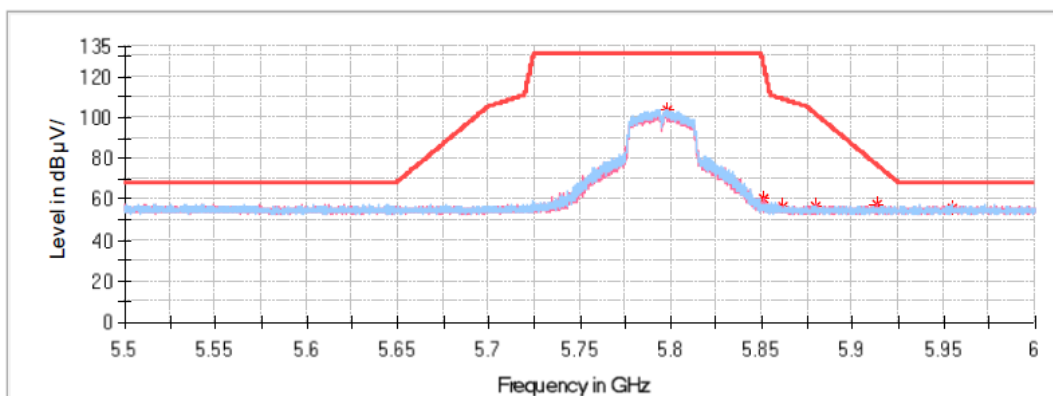


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5850.700000     | 60.28              | ---                | 128.34           | 68.07       | V   | 10.4         |
| 5861.600000     | 56.31              | ---                | 108.95           | 52.64       | V   | 10.4         |
| 5879.800000     | 56.35              | ---                | 101.65           | 45.29       | V   | 10.3         |
| 5913.750000     | 57.71              | ---                | 76.53            | 18.81       | V   | 10.3         |
| 5954.150000     | 55.50              | ---                | 68.20            | 12.70       | H   | 10.2         |



**802.11n-HT40 Mode:****Common Information**


Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n40 mode of low channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

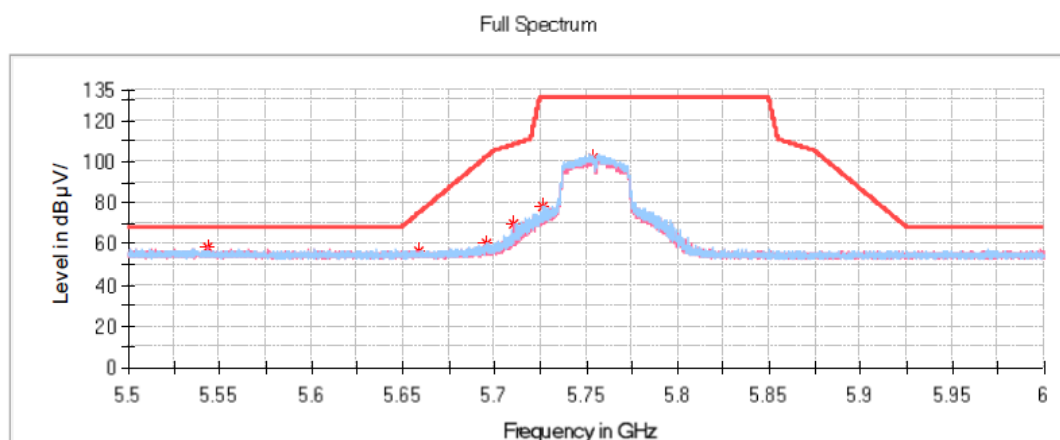**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 5543.500000     | 58.28                  | ---                    | 68.20                | 9.92        | V   | 10.8         |
| 5658.850000     | 56.93                  | ---                    | 74.75                | 17.82       | V   | 10.6         |
| 5695.600000     | 59.98                  | ---                    | 101.94               | 41.96       | H   | 10.6         |
| 5710.850000     | 69.78                  | ---                    | 108.24               | 38.46       | H   | 10.6         |

## Common Information

Project No.: RKSA240328001  
Test Mode: 5G Wi-Fi 802.11n40 mode of high channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Engineer: Hugh Wu

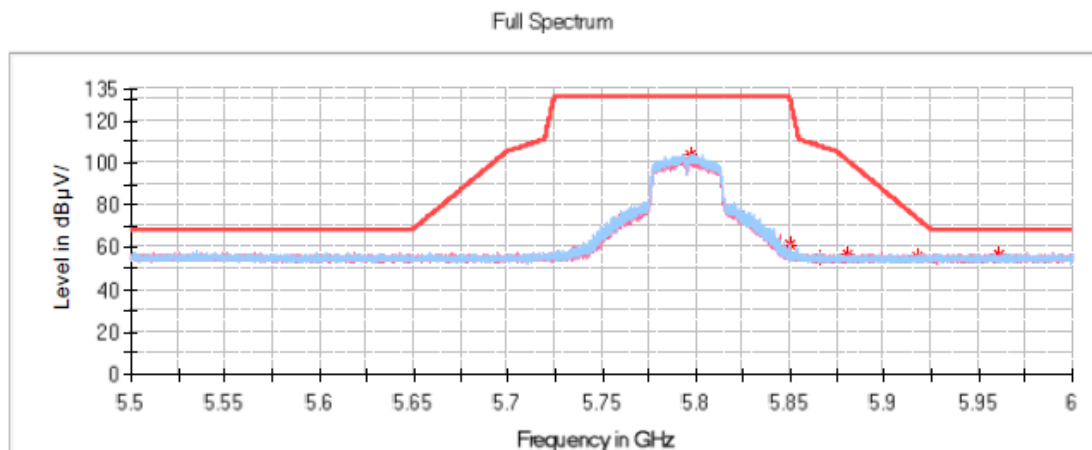

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 5865.450000     | 55.09              | ---                | 107.87           | 52.78       | V   | 10.4         |
| 5880.250000     | 57.04              | ---                | 101.32           | 44.27       | V   | 10.3         |
| 5917.150000     | 56.05              | ---                | 74.01            | 17.96       | V   | 10.3         |
| 5960.550000     | 56.84              | ---                | 68.20            | 11.36       | V   | 10.2         |

**802.11ac80 Mode:****Common Information**

Project No.:

RKSA240328001

Test Mode:

5G Wi-Fi 802.11ac80 mode of middle channel


Standard:

FCC Part 15.407 &amp; FCC Part 15.205 &amp; FCC Part 15.209

Test Engineer:

Hugh Wu

Full Spectrum

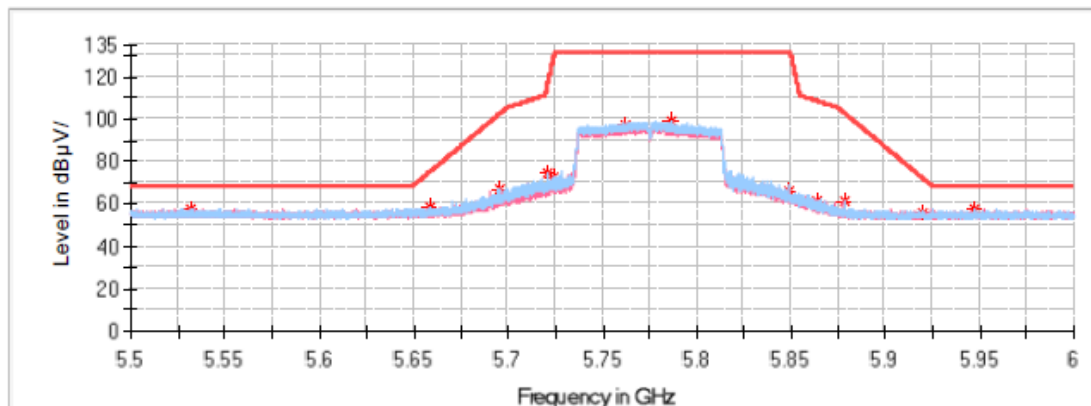**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 5531.550000     | 58.03                  | ---                    | 68.20                | 10.17       | H   | 10.8         |
| 5658.100000     | 58.10                  | ---                    | 74.19                | 16.09       | H   | 10.6         |
| 5695.450000     | 67.15                  | ---                    | 101.83               | 34.68       | H   | 10.6         |
| 5720.800000     | 74.80                  | ---                    | 114.06               | 39.26       | H   | 10.6         |
| 5723.750000     | 72.92                  | ---                    | 126.10               | 53.18       | H   | 10.5         |
| 5863.950000     | 61.55                  | ---                    | 108.29               | 46.74       | H   | 10.4         |
| 5878.650000     | 61.75                  | ---                    | 102.50               | 40.75       | H   | 10.3         |
| 5919.400000     | 56.01                  | ---                    | 72.34                | 16.33       | H   | 10.3         |
| 5947.100000     | 57.56                  | ---                    | 68.20                | 10.64       | H   | 10.3         |

**EMISSION BANDWIDTH****Test Result:** Compliant

5150-5250 MHz:

| Mode               | 26dB Bandwidth (MHz) |
|--------------------|----------------------|
| 802.11a_5180MHz    | 20.513               |
| 802.11a_5200MHz    | 20.513               |
| 802.11a_5240MHz    | 21.021               |
| 802.11n20_5180MHz  | 20.816               |
| 802.11n20_5200MHz  | 20.665               |
| 802.11n20_5240MHz  | 21.274               |
| 802.11n40_5190MHz  | 41.059               |
| 802.11n40_5230MHz  | 40.859               |
| 802.11ac20_5180MHz | 20.665               |
| 802.11ac20_5200MHz | 20.462               |
| 802.11ac20_5240MHz | 20.869               |
| 802.11ac40_5190MHz | 41.159               |
| 802.11ac40_5230MHz | 41.059               |
| 802.11ac80_5210MHz | 82.917               |

| Mode               | 99% OBW (MHz) |
|--------------------|---------------|
| 802.11a_5180MHz    | 16.550        |
| 802.11a_5200MHz    | 16.600        |
| 802.11a_5240MHz    | 16.650        |
| 802.11n20_5180MHz  | 17.550        |
| 802.11n20_5200MHz  | 17.600        |
| 802.11n20_5240MHz  | 17.650        |
| 802.11n40_5190MHz  | 36.200        |
| 802.11n40_5230MHz  | 36.200        |
| 802.11ac20_5180MHz | 17.550        |
| 802.11ac20_5200MHz | 17.550        |
| 802.11ac20_5240MHz | 17.600        |
| 802.11ac40_5190MHz | 36.200        |
| 802.11ac40_5230MHz | 36.200        |
| 802.11ac80_5210MHz | 76.000        |

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5725-5850MHz:

| Mode               | 6dB Bandwidth (MHz) | Limit (MHz) | Result |
|--------------------|---------------------|-------------|--------|
| 802.11a_5745MHz    | 15.285              | 0.500       | Pass   |
| 802.11a_5785MHz    | 15.285              | 0.500       | Pass   |
| 802.11a_5825MHz    | 15.285              | 0.500       | Pass   |
| 802.11n20_5745MHz  | 15.285              | 0.500       | Pass   |
| 802.11n20_5785MHz  | 15.285              | 0.500       | Pass   |
| 802.11n20_5825MHz  | 15.285              | 0.500       | Pass   |
| 802.11n40_5755MHz  | 35.365              | 0.500       | Pass   |
| 802.11n40_5795MHz  | 35.365              | 0.500       | Pass   |
| 802.11ac20_5745MHz | 15.285              | 0.500       | Pass   |
| 802.11ac20_5785MHz | 15.285              | 0.500       | Pass   |
| 802.11ac20_5825MHz | 15.285              | 0.500       | Pass   |
| 802.11ac40_5755MHz | 35.365              | 0.500       | Pass   |
| 802.11ac40_5795MHz | 35.365              | 0.500       | Pass   |
| 802.11ac80_5775MHz | 75.724              | 0.500       | Pass   |

| Mode               | 99% OBW (MHz) |
|--------------------|---------------|
| 802.11a_5745MHz    | 16.550        |
| 802.11a_5785MHz    | 16.550        |
| 802.11a_5825MHz    | 16.600        |
| 802.11n20_5745MHz  | 17.650        |
| 802.11n20_5785MHz  | 17.600        |
| 802.11n20_5825MHz  | 17.600        |
| 802.11n40_5755MHz  | 36.400        |
| 802.11n40_5795MHz  | 36.300        |
| 802.11ac20_5745MHz | 17.550        |
| 802.11ac20_5785MHz | 17.550        |
| 802.11ac20_5825MHz | 17.600        |
| 802.11ac40_5755MHz | 36.300        |
| 802.11ac40_5795MHz | 36.300        |
| 802.11ac80_5775MHz | 76.200        |

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

| Mode               | 26dB Bandwidth<br>(MHz) |
|--------------------|-------------------------|
| 802.11a_5745MHz    | 20.833                  |
| 802.11a_5785MHz    | 20.800                  |
| 802.11a_5825MHz    | 21.394                  |
| 802.11n20_5745MHz  | 21.062                  |
| 802.11n20_5785MHz  | 21.057                  |
| 802.11n20_5825MHz  | 24.388                  |
| 802.11n40_5755MHz  | 41.303                  |
| 802.11n40_5795MHz  | 41.467                  |
| 802.11ac20_5745MHz | 20.872                  |
| 802.11ac20_5785MHz | 20.833                  |
| 802.11ac20_5825MHz | 22.973                  |
| 802.11ac40_5755MHz | 41.263                  |
| 802.11ac40_5795MHz | 41.046                  |
| 802.11ac80_5775MHz | 93.351                  |