



FCC TEST REPORT

FCC ID:2BFKC-M41

Applicant: **ShenZhen HIPPO Digital CO., Ltd**
Address: 7th Floor, Building A, Shanghe Industrial Park, Nanchang Road, Sanwei Community, Hangcheng Street, Bao'an District, ShenZhen, China 518126
Manufacturer: **ShenZhen HIPPO Digital CO., Ltd**
Address: 7th Floor, Building A, Shanghe Industrial Park, Nanchang Road, Sanwei Community, Hangcheng Street, Bao'an District, ShenZhen, China 518126
EUT: **Wireless Microphone**
Trade Mark: Coolbox, HIPPO
Model Number: M41
M41DC, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26, M27, M28, M29, M30, M31, M32, M33, M34, M35, M36, M37, M38, M39, M40, M42, M43, M45, M46, M47, M48, M49, M50, M51, M52, M53, M54, M55, M56, M57, M58, M59, M60
Date of Receipt: Aug. 15, 2025
Test Date: Aug. 15, 2025 - Sep. 01, 2025
Date of Report: Sep. 01, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Result: Pass
Report Number: DLE-250814007R

Prepared by(Engineer): Ken Tan
Reviewer(Supervisor): Jack Bu
Approved(Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

	Page
1. VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 Test Setup Configuration	9
3.3 Support Equipment	9
3.4 Test Mode	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 Conducted emissions	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 Test Result	14
4.2 Radiated emissions	16
4.2.1 Radiated Emission Limits	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	19
5. RADIATED BAND EMISSION MEASUREMENT	35
5.1 Test Requirement:	35
5.2 TEST PROCEDURE	35
5.3 DEVIATION FROM TEST STANDARD	36
5.4 TEST SETUP	36
5.5 EUT OPERATING CONDITIONS	36
5.6 TEST RESULT	37
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	41
6.1 Limit	41
6.2 Test Setup	41
6.3 Test procedure	41
6.4 DEVIATION FROM STANDARD	41
7. 20DB&99% BANDWIDTH	54
7.1 Test Setup	54
7.2 Limit	54



7.3 Test procedure	54
7.4 DEVIATION FROM STANDARD	54
7.5 Test Result	55
8. MAXIMUM PEAK OUTPUT POWER	59
8.1 Block Diagram Of Test Setup	59
8.2 Limit	59
8.3 Test procedure	59
8.4 DEVIATION FROM STANDARD	59
8.5 Test Result	60
9. HOPPING CHANNEL SEPARATION	64
9.1 Test Setup	64
9.2 Test procedure	64
9.3 DEVIATION FROM STANDARD	64
9.4 Test Result	65
10.NUMBER OF HOPPING FREQUENCY	69
10.1 Test Setup	69
10.2 Test procedure	69
10.3 DEVIATION FROM STANDARD	69
10.4 Test Result	70
11. DWELL TIME	71
11.1 Test Setup	71
11.2 Test procedure	71
11.3 DEVIATION FROM STANDARD	71
11.4 Test Result	72
13. TEST SETUP PHOTO	77
14. EUT CONSTRUCTIONAL DETAILS	77

**1. VERSION**

Report No.	Version	Description	Approved
DLE-250814007R	Rev.01	Initial issue of report	Sep. 01, 2025



2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless Microphone
Model No.:	M41 M41DC, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26, M27, M28, M29, M30, M31, M32, M33, M34, M35, M36, M37, M38, M39, M40, M42, M43, M45, M46, M47, M48, M49, M50, M51, M52, M53, M54, M55, M56, M57, M58, M59, M60
Model Different.:	We (ShenZhen HIPPO Digital CO., Ltd) hereby state that all the models are electrical identical including the same software parameter and hardware design (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) and antenna location, components on PCB, etc.), same mechanical structure and design (including product enclosure, materials, etc.), the only difference is the model name
Sample ID	DLE-250814007R
Sample(s) Status:	Engineer sample
Channel numbers:	79
Operation Frequency:	2402MHz~2480MHz
Modulation technology:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Chip antenna
Antenna gain:	1.75 dBi
Power Supply:	Input: 5 V $\pm$ 1A Battery: 3.7V, 100mAh



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



3.2 Test Setup Configuration

Conducted Emission



Radiated Emission



Conducted Spurious



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Microphone	N/A	M41	N/A	EUT
A1	AC/DC adapter	N/A	H6157-W1	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 「Length」 column.



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	BT Test Tool
Power level setup	7dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	MWRF Power Meter Test system	MW	MW100-RFCB	10371	Sep. 29, 2024	Sep. 28, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

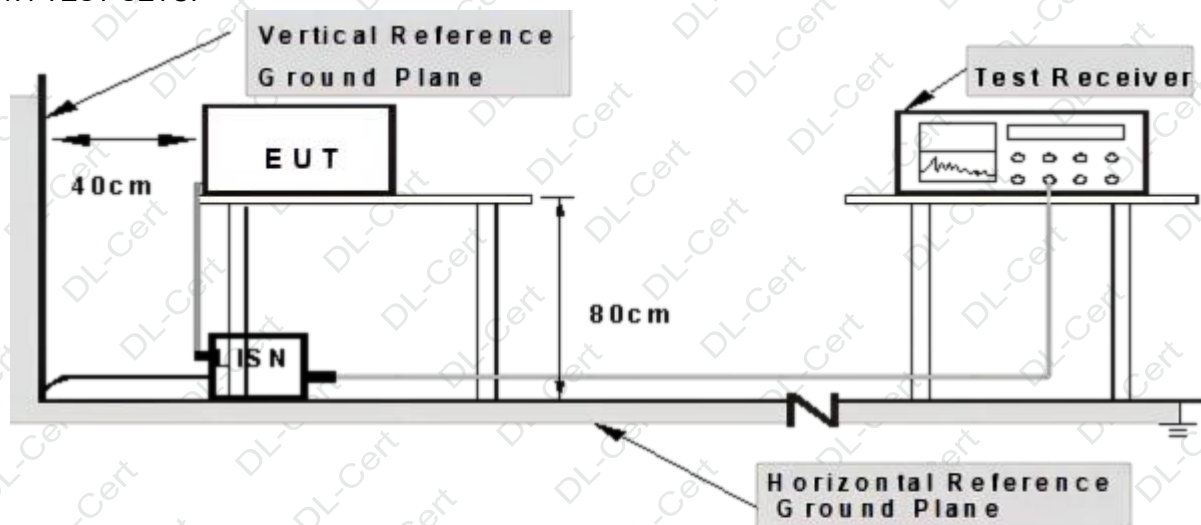

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model:	GFSK 2402MHz

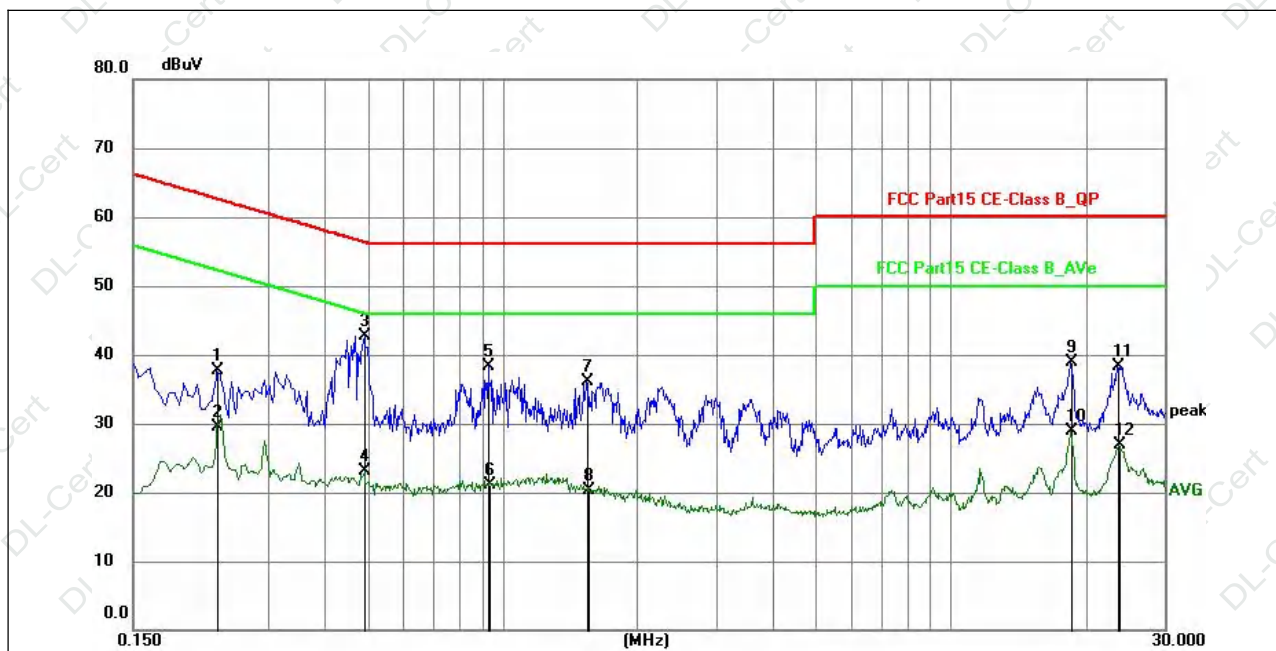


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2310	16.71	21.02	37.73	62.41	-24.68	QP	P
2	0.2310	8.55	21.02	29.57	52.41	-22.84	AVG	P
3	0.4920	21.95	20.84	42.79	56.13	-13.34	QP	P
4	0.4920	2.20	20.84	23.04	46.13	-23.09	AVG	P
5	0.9329	17.43	20.92	38.35	56.00	-17.65	QP	P
6	0.9374	0.10	20.93	21.03	46.00	-24.97	AVG	P
7	1.5404	15.04	21.00	36.04	56.00	-19.96	QP	P
8	1.5539	-0.63	21.00	20.37	46.00	-25.63	AVG	P
9	18.6000	15.51	23.47	38.98	60.00	-21.02	QP	P
10	18.6000	5.47	23.47	28.94	50.00	-21.06	AVG	P
11	23.5950	14.00	24.29	38.29	60.00	-21.71	QP	P
12	23.7300	2.69	24.31	27.00	50.00	-23.00	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model:	GFSK 2402MHZ

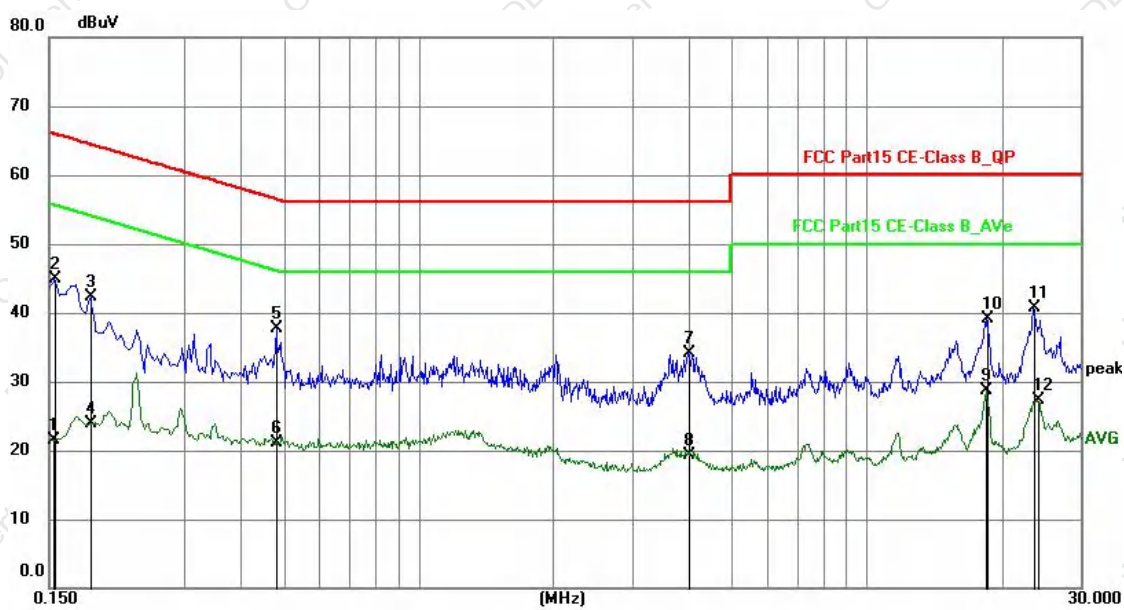

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1532	0.65	20.85	21.50	55.82	-34.32	AVG	P
2	0.1544	24.01	20.86	44.87	65.76	-20.89	QP	P
3	0.1860	21.44	20.96	42.40	64.21	-21.81	QP	P
4	0.1863	2.89	20.96	23.85	54.20	-30.35	AVG	P
5	0.4830	16.78	20.86	37.64	56.29	-18.65	QP	P
6	0.4837	0.34	20.86	21.20	46.28	-25.08	AVG	P
7	3.9975	13.00	21.11	34.11	56.00	-21.89	QP	P
8	4.0065	-1.81	21.11	19.30	46.00	-26.70	AVG	P
9	18.5190	5.26	23.52	28.78	50.00	-21.22	AVG	P
10	18.5280	15.66	23.52	39.18	60.00	-20.82	QP	P
11	23.5634	16.38	24.34	40.72	60.00	-19.28	QP	P
12	24.1395	2.91	24.42	27.33	50.00	-22.67	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	MX5Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

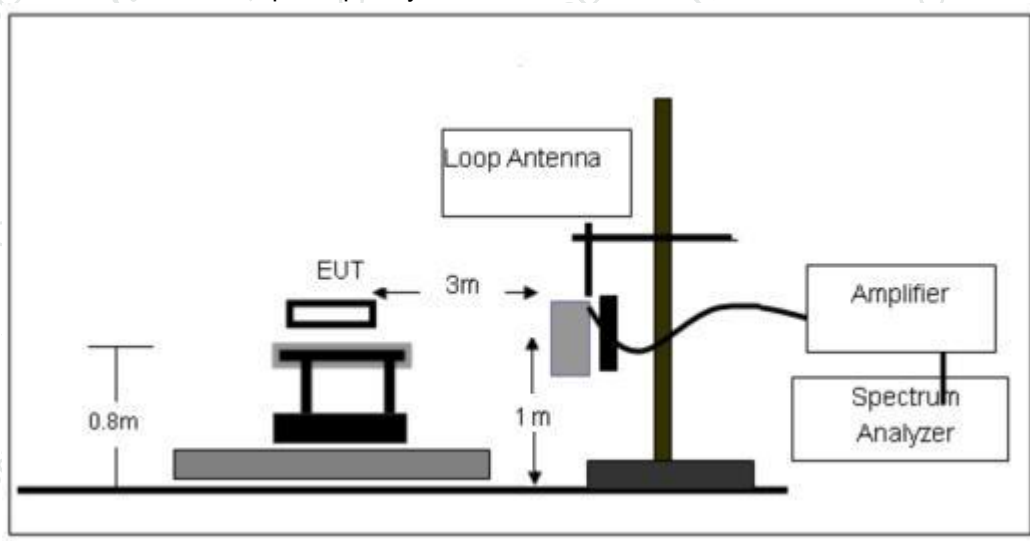




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

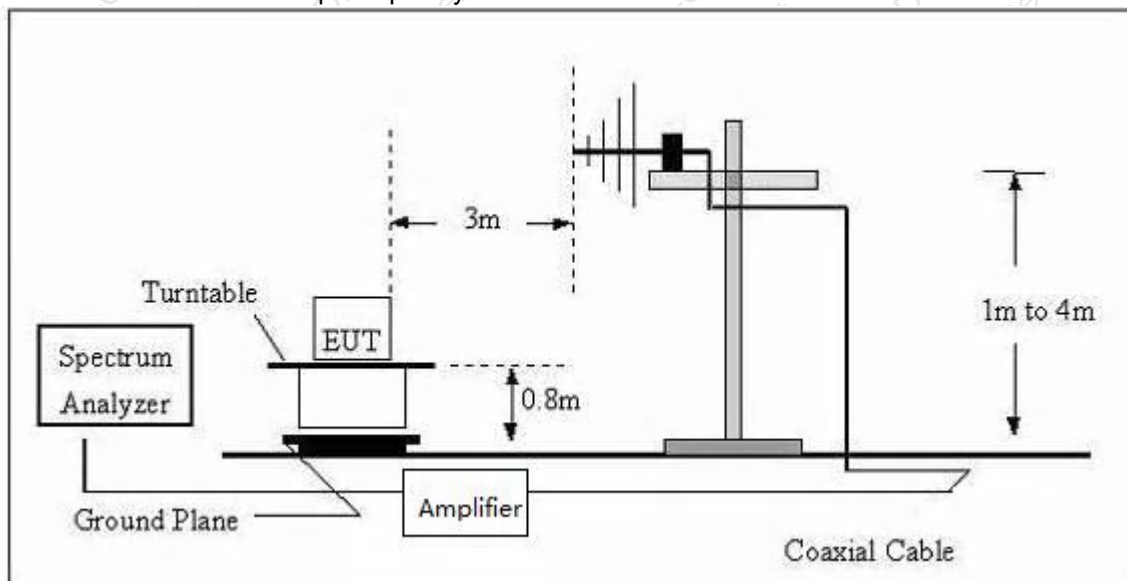

(C) Radiated Emission Test-Up Frequency Above 1GHz

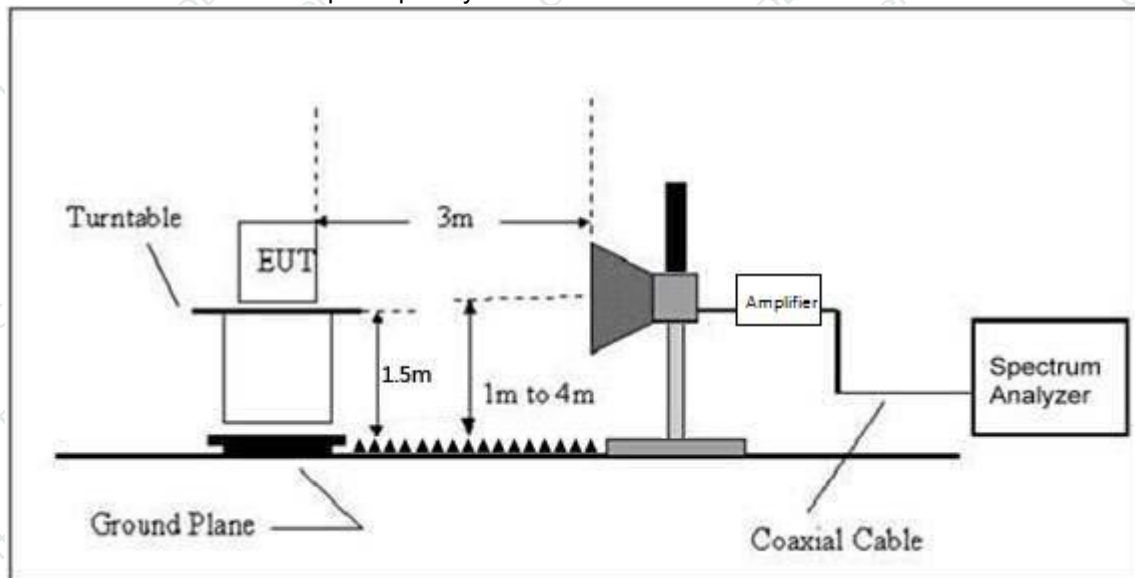

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz(Left ear headphones)


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode:	BT TX

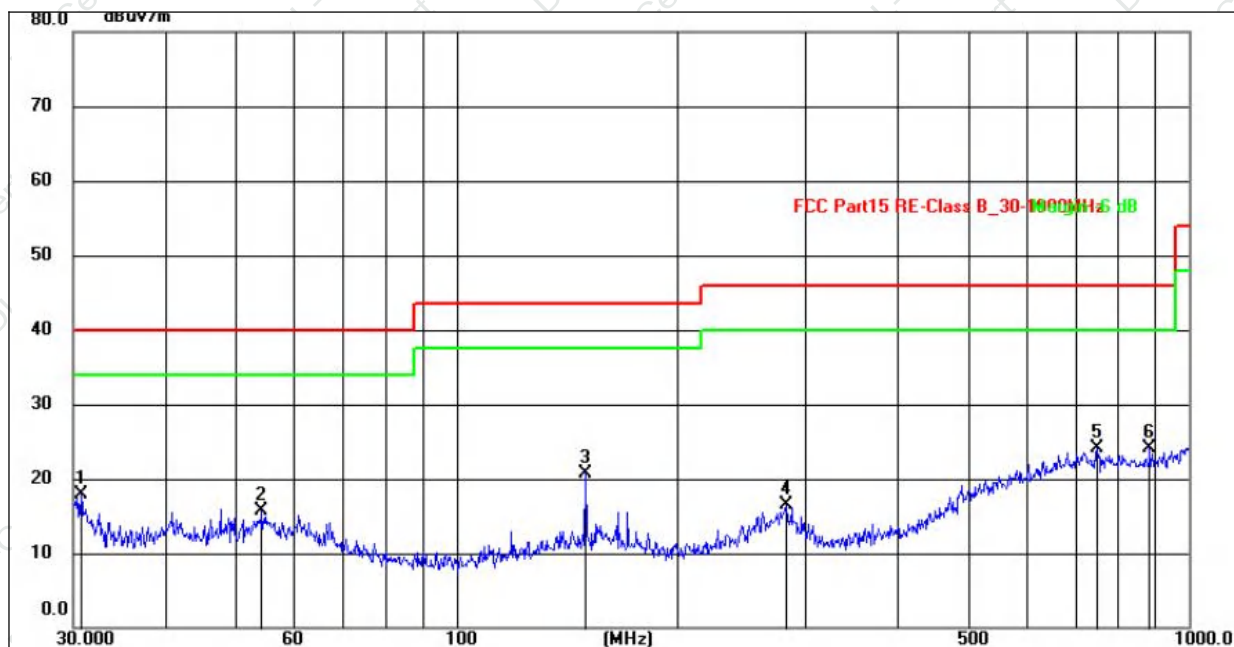

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.7454	32.18	-14.23	17.95	40.00	-22.05	QP
2	54.2608	29.68	-14.02	15.66	40.00	-24.34	QP
3	150.0107	37.08	-16.35	20.73	43.50	-22.77	QP
4	281.9945	30.62	-14.20	16.42	46.00	-29.58	QP
5	750.1082	30.58	-6.54	24.04	46.00	-21.96	QP
6	884.5027	30.80	-6.69	24.11	46.00	-21.89	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode:	BT TX

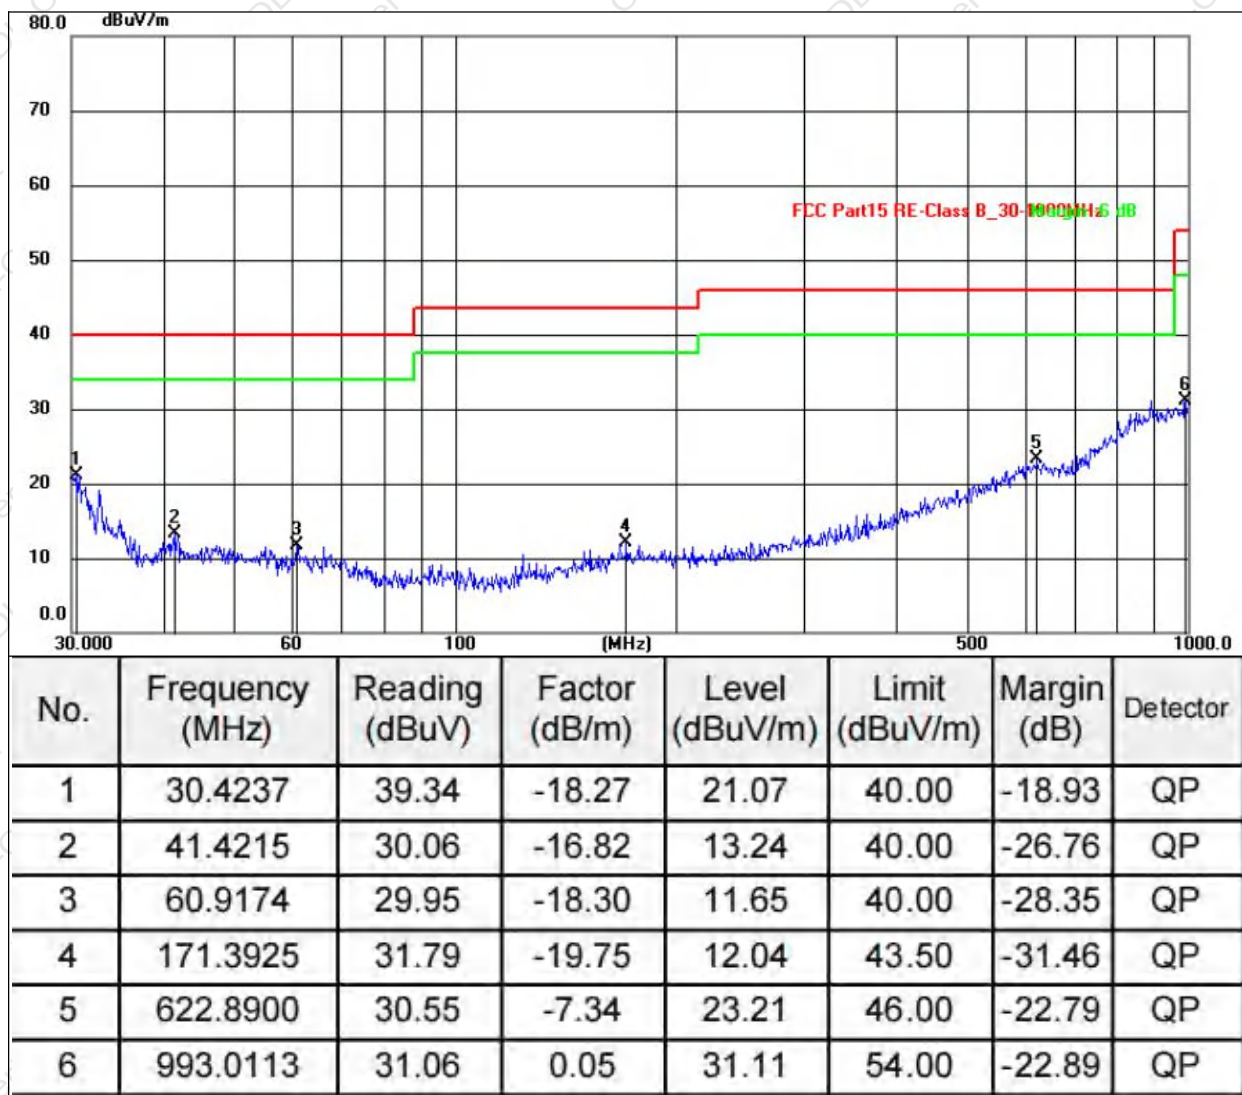


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor
- 5.Correct Factor= Antenna factor+ Cable loss factor - Amplifier factor
- 6.Margin= Measurement Level-Limit
- 7.The test data shows only the worst case $\pi/4$ -DQPSK and DC 3.7Vmode



Between 30MHz – 1GHz(Right ear headphones)


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode:	BT TX

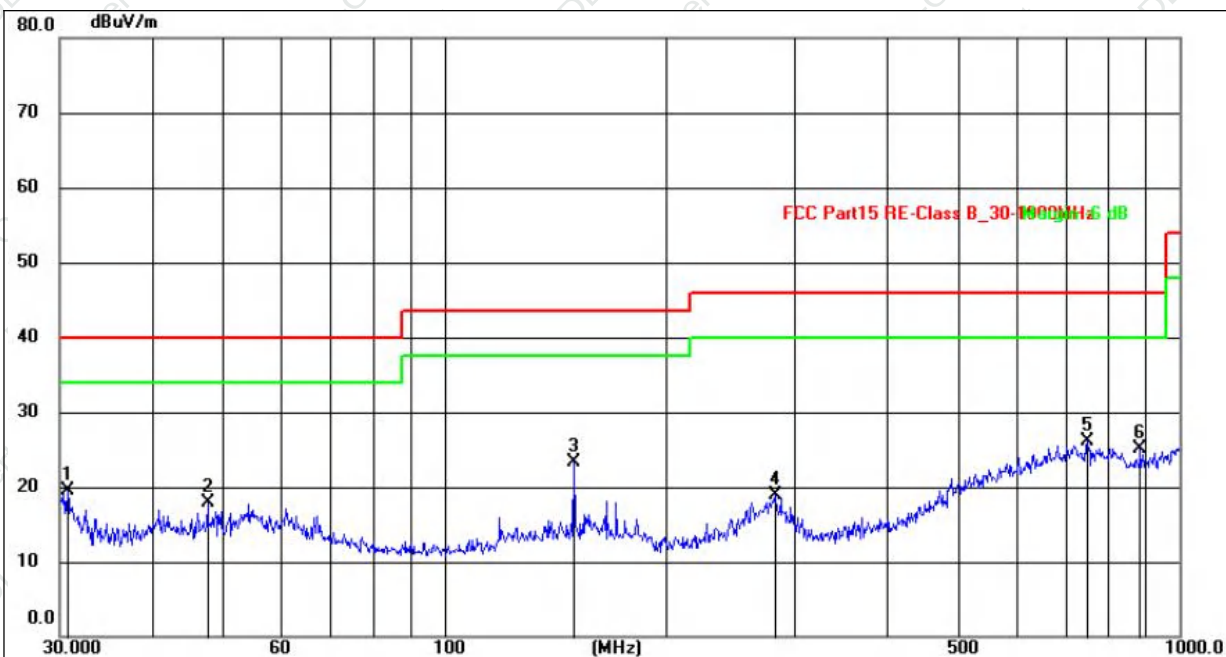

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.7454	33.68	-14.23	19.45	40.00	-20.55	QP
2	47.6584	31.89	-13.95	17.94	40.00	-22.06	QP
3	150.0107	39.58	-16.35	23.23	43.50	-20.27	QP
4	281.9945	33.12	-14.20	18.92	46.00	-27.08	QP
5	750.1082	32.58	-6.54	26.04	46.00	-19.96	QP
6	884.5027	31.80	-6.69	25.11	46.00	-20.89	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode:	BT TX

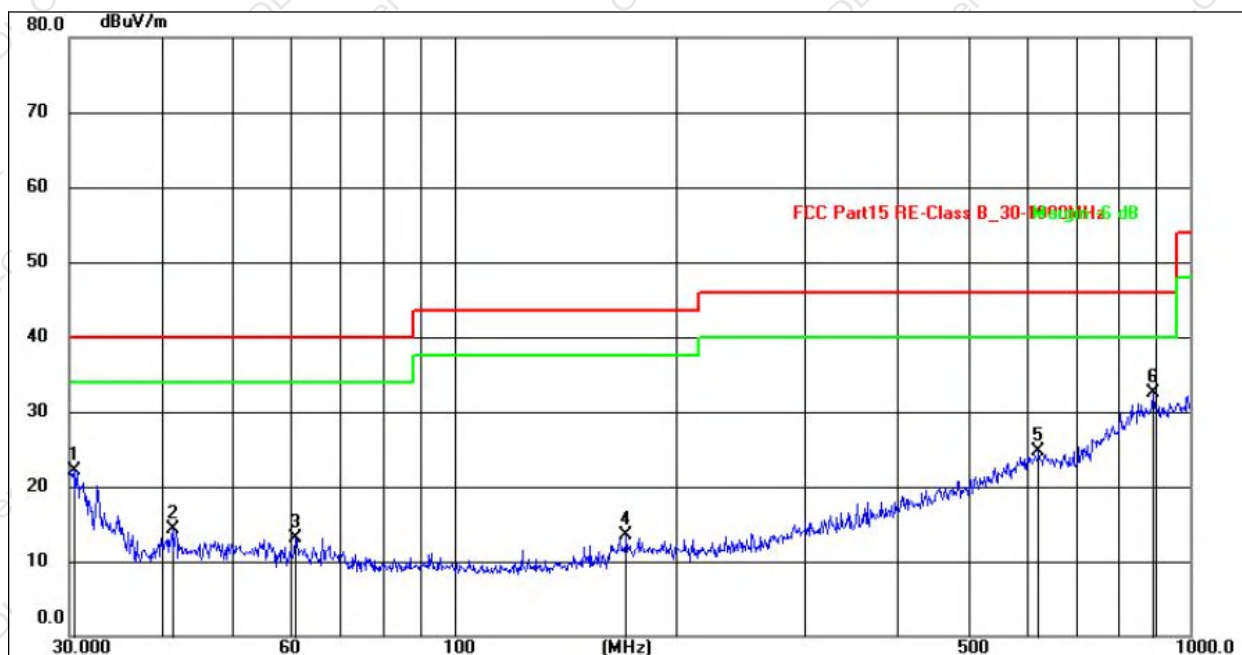

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.4237	40.34	-18.27	22.07	40.00	-17.93	QP
2	41.4215	31.06	-16.82	14.24	40.00	-25.76	QP
3	60.9174	31.45	-18.30	13.15	40.00	-26.85	QP
4	171.3925	33.29	-19.75	13.54	43.50	-29.96	QP
5	622.8900	32.05	-7.34	24.71	46.00	-21.29	QP
6	890.7277	33.24	-0.70	32.54	46.00	-13.46	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor
5. Correct Factor = Antenna factor + Cable loss factor - Amplifier factor
6. Margin = Measurement Level - Limit
7. The test data shows only the worst case $\pi/4$ -DQPSK and DC 3.7V mode



1GHz~25GHz(Left ear headphones)

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.29	30.55	5.77	24.66	52.17	74.00	-21.83	Pk
V	4804.00	43.32	30.55	5.77	24.66	43.20	54.00	-10.80	AV
V	7206.00	51.41	30.33	6.32	24.55	51.95	74.00	-22.05	Pk
V	7206.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
V	9608.00	52.62	30.85	7.45	24.69	53.91	74.00	-20.09	Pk
V	9608.00	43.31	30.85	7.45	24.69	44.60	54.00	-9.40	AV
V	12010.00	51.60	31.02	8.99	25.57	55.14	74.00	-18.86	Pk
V	12010.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV
H	4804.00	53.54	30.55	5.77	24.66	53.42	74.00	-20.58	Pk
H	4804.00	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
H	7206.00	54.23	30.33	6.32	24.55	54.77	74.00	-19.23	Pk
H	7206.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
H	9608.00	50.26	30.85	7.45	24.69	51.55	74.00	-22.45	Pk
H	9608.00	43.86	30.85	7.45	24.69	45.15	54.00	-8.85	AV
H	12010.00	53.01	31.02	8.99	25.57	56.55	74.00	-17.45	Pk
H	12010.00	43.97	31.02	8.99	25.57	47.51	54.00	-6.49	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	53.50	30.55	5.77	24.66	53.38	74.00	-20.62	Pk
V	4882.00	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
V	7323.00	53.02	30.33	6.32	24.55	53.56	74.00	-20.44	Pk
V	7323.00	43.89	30.33	6.32	24.55	44.43	54.00	-9.57	AV
V	9764.00	54.83	30.85	7.45	24.69	56.12	74.00	-17.88	Pk
V	9764.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
V	12205.00	51.25	31.02	8.99	25.57	54.79	74.00	-19.21	Pk
V	12205.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV
H	4882.00	51.38	30.55	5.77	24.66	51.26	74.00	-22.74	Pk
H	4882.00	43.87	30.55	5.77	24.66	43.75	54.00	-10.25	AV
H	7323.00	51.97	30.33	6.32	24.55	52.51	74.00	-21.49	Pk
H	7323.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
H	9764.00	52.35	30.85	7.45	24.69	53.64	74.00	-20.36	Pk
H	9764.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
H	12205.00	51.08	31.02	8.99	25.57	54.62	74.00	-19.38	Pk
H	12205.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	50.47	30.55	5.77	24.66	50.35	74.00	-23.65	Pk
V	4960.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
V	7440.00	54.37	30.33	6.32	24.55	54.91	74.00	-19.09	Pk
V	7440.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
V	9920.00	53.13	30.85	7.45	24.69	54.42	74.00	-19.58	Pk
V	9920.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
V	12400.00	53.75	31.02	8.99	25.57	57.29	74.00	-16.71	Pk
V	12400.00	43.26	31.02	8.99	25.57	46.80	54.00	-7.20	AV
H	4960.00	54.33	30.55	5.77	24.66	54.21	74.00	-19.79	Pk
H	4960.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
H	7440.00	50.38	30.33	6.32	24.55	50.92	74.00	-23.08	Pk
H	7440.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
H	9920.00	54.54	30.85	7.45	24.69	55.83	74.00	-18.17	Pk
H	9920.00	43.98	30.85	7.45	24.69	45.27	54.00	-8.73	AV
H	12400.00	52.04	31.02	8.99	25.57	55.58	74.00	-18.42	Pk
H	12400.00	43.11	31.02	8.99	25.57	46.65	54.00	-7.35	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	51.66	30.55	5.77	24.66	51.54	74.00	-22.46	Pk
V	4804.00	43.03	30.55	5.77	24.66	42.91	54.00	-11.09	AV
V	7206.00	54.74	30.33	6.32	24.55	55.28	74.00	-18.72	Pk
V	7206.00	43.86	30.33	6.32	24.55	44.40	54.00	-9.60	AV
V	9608.00	51.08	30.85	7.45	24.69	52.37	74.00	-21.63	Pk
V	9608.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
V	12010.00	54.87	31.02	8.99	25.57	58.41	74.00	-15.59	Pk
V	12010.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV
H	4804.00	51.80	30.55	5.77	24.66	51.68	74.00	-22.32	Pk
H	4804.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
H	7206.00	54.28	30.33	6.32	24.55	54.82	74.00	-19.18	Pk
H	7206.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
H	9608.00	51.30	30.85	7.45	24.69	52.59	74.00	-21.41	Pk
H	9608.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
H	12010.00	51.76	31.02	8.99	25.57	55.30	74.00	-18.70	Pk
H	12010.00	43.34	31.02	8.99	25.57	46.88	54.00	-7.12	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.75	30.55	5.77	24.66	50.63	74.00	-23.37	Pk
V	4882.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
V	7323.00	53.85	30.33	6.32	24.55	54.39	74.00	-19.61	Pk
V	7323.00	43.76	30.33	6.32	24.55	44.30	54.00	-9.70	AV
V	9764.00	50.68	30.85	7.45	24.69	51.97	74.00	-22.03	Pk
V	9764.00	43.44	30.85	7.45	24.69	44.73	54.00	-9.27	AV
V	12205.00	53.51	31.02	8.99	25.57	57.05	74.00	-16.95	Pk
V	12205.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV
H	4882.00	51.27	30.55	5.77	24.66	51.15	74.00	-22.85	Pk
H	4882.00	43.68	30.55	5.77	24.66	43.56	54.00	-10.44	AV
H	7323.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	Pk
H	7323.00	43.52	30.33	6.32	24.55	44.06	54.00	-9.94	AV
H	9764.00	53.59	30.85	7.45	24.69	54.88	74.00	-19.12	Pk
H	9764.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
H	12205.00	52.39	31.02	8.99	25.57	55.93	74.00	-18.07	Pk
H	12205.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.13	30.55	5.77	24.66	54.01	74.00	-19.99	Pk
V	4960.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
V	7440.00	50.46	30.33	6.32	24.55	51.00	74.00	-23.00	Pk
V	7440.00	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
V	9920.00	54.87	30.85	7.45	24.69	56.16	74.00	-17.84	Pk
V	9920.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
V	12400.00	50.58	31.02	8.99	25.57	54.12	74.00	-19.88	Pk
V	12400.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV
H	4960.00	53.84	30.55	5.77	24.66	53.72	74.00	-20.28	Pk
H	4960.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
H	7440.00	52.69	30.33	6.32	24.55	53.23	74.00	-20.77	Pk
H	7440.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
H	9920.00	51.62	30.85	7.45	24.69	52.91	74.00	-21.09	Pk
H	9920.00	43.71	30.85	7.45	24.69	45.00	54.00	-9.00	AV
H	12400.00	52.54	31.02	8.99	25.57	56.08	74.00	-17.92	Pk
H	12400.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.40	30.55	5.77	24.66	52.28	74.00	-21.72	Pk
V	4804.00	43.07	30.55	5.77	24.66	42.95	54.00	-11.05	AV
V	7206.00	52.97	30.33	6.32	24.55	53.51	74.00	-20.49	Pk
V	7206.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
V	9608.00	52.97	30.85	7.45	24.69	54.26	74.00	-19.74	Pk
V	9608.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
V	12010.00	50.53	31.02	8.99	25.57	54.07	74.00	-19.93	Pk
V	12010.00	43.02	31.02	8.99	25.57	46.56	54.00	-7.44	AV
H	4804.00	51.08	30.55	5.77	24.66	50.96	74.00	-23.04	Pk
H	4804.00	43.73	30.55	5.77	24.66	43.61	54.00	-10.39	AV
H	7206.00	51.08	30.33	6.32	24.55	51.62	74.00	-22.38	Pk
H	7206.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
H	9608.00	50.94	30.85	7.45	24.69	52.23	74.00	-21.77	Pk
H	9608.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
H	12010.00	54.19	31.02	8.99	25.57	57.73	74.00	-16.27	Pk
H	12010.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	51.17	30.55	5.77	24.66	51.05	74.00	-22.95	Pk
V	4882.00	43.51	30.55	5.77	24.66	43.39	54.00	-10.61	AV
V	7323.00	51.05	30.33	6.32	24.55	51.59	74.00	-22.41	Pk
V	7323.00	43.53	30.33	6.32	24.55	44.07	54.00	-9.93	AV
V	9764.00	54.09	30.85	7.45	24.69	55.38	74.00	-18.62	Pk
V	9764.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
V	12205.00	51.48	31.02	8.99	25.57	55.02	74.00	-18.98	Pk
V	12205.00	43.96	31.02	8.99	25.57	47.50	54.00	-6.50	AV
H	4882.00	50.38	30.55	5.77	24.66	50.26	74.00	-23.74	Pk
H	4882.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
H	7323.00	51.70	30.33	6.32	24.55	52.24	74.00	-21.76	Pk
H	7323.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
H	9764.00	54.06	30.85	7.45	24.69	55.35	74.00	-18.65	Pk
H	9764.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
H	12205.00	54.87	31.02	8.99	25.57	58.41	74.00	-15.59	Pk
H	12205.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.86	30.55	5.77	24.66	54.74	74.00	-19.26	Pk
V	4960.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
V	7440.00	54.07	30.33	6.32	24.55	54.61	74.00	-19.39	Pk
V	7440.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
V	9920.00	54.37	30.85	7.45	24.69	55.66	74.00	-18.34	Pk
V	9920.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
V	12400.00	50.13	31.02	8.99	25.57	53.67	74.00	-20.33	Pk
V	12400.00	43.58	31.02	8.99	25.57	47.12	54.00	-6.88	AV
H	4960.00	50.18	30.55	5.77	24.66	50.06	74.00	-23.94	Pk
H	4960.00	43.07	30.55	5.77	24.66	42.95	54.00	-11.05	AV
H	7440.00	50.36	30.33	6.32	24.55	50.90	74.00	-23.10	Pk
H	7440.00	43.29	30.33	6.32	24.55	43.83	54.00	-10.17	AV
H	9920.00	52.43	30.85	7.45	24.69	53.72	74.00	-20.28	Pk
H	9920.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
H	12400.00	50.22	31.02	8.99	25.57	53.76	74.00	-20.24	Pk
H	12400.00	43.49	31.02	8.99	25.57	47.03	54.00	-6.97	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



1GHz~25GHz(Right ear headphones)

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	53.97	30.55	5.77	24.66	53.85	74.00	-20.15	Pk
V	4804.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
V	7206.00	51.37	30.33	6.32	24.55	51.91	74.00	-22.09	Pk
V	7206.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
V	9608.00	52.86	30.85	7.45	24.69	54.15	74.00	-19.85	Pk
V	9608.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
V	12010.00	54.47	31.02	8.99	25.57	58.01	74.00	-15.99	Pk
V	12010.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	4804.00	53.54	30.55	5.77	24.66	53.42	74.00	-20.58	Pk
H	4804.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
H	7206.00	53.93	30.33	6.32	24.55	54.47	74.00	-19.53	Pk
H	7206.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
H	9608.00	50.22	30.85	7.45	24.69	51.51	74.00	-22.49	Pk
H	9608.00	43.07	30.85	7.45	24.69	44.36	54.00	-9.64	AV
H	12010.00	51.15	31.02	8.99	25.57	54.69	74.00	-19.31	Pk
H	12010.00	43.60	31.02	8.99	25.57	47.14	54.00	-6.86	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.21	30.55	5.77	24.66	50.09	74.00	-23.91	Pk
V	4882.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
V	7323.00	50.79	30.33	6.32	24.55	51.33	74.00	-22.67	Pk
V	7323.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	9764.00	51.33	30.85	7.45	24.69	52.62	74.00	-21.38	Pk
V	9764.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
V	12205.00	53.97	31.02	8.99	25.57	57.51	74.00	-16.49	Pk
V	12205.00	43.26	31.02	8.99	25.57	46.80	54.00	-7.20	AV
H	4882.00	53.20	30.55	5.77	24.66	53.08	74.00	-20.92	Pk
H	4882.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
H	7323.00	50.93	30.33	6.32	24.55	51.47	74.00	-22.53	Pk
H	7323.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
H	9764.00	51.84	30.85	7.45	24.69	53.13	74.00	-20.87	Pk
H	9764.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
H	12205.00	51.54	31.02	8.99	25.57	55.08	74.00	-18.92	Pk
H	12205.00	43.77	31.02	8.99	25.57	47.31	54.00	-6.69	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	50.54	30.55	5.77	24.66	50.42	74.00	-23.58	Pk
V	4960.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
V	7440.00	52.45	30.33	6.32	24.55	52.99	74.00	-21.01	Pk
V	7440.00	43.24	30.33	6.32	24.55	43.78	54.00	-10.22	AV
V	9920.00	53.94	30.85	7.45	24.69	55.23	74.00	-18.77	Pk
V	9920.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
V	12400.00	53.38	31.02	8.99	25.57	56.92	74.00	-17.08	Pk
V	12400.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV
H	4960.00	51.07	30.55	5.77	24.66	50.95	74.00	-23.05	Pk
H	4960.00	43.03	30.55	5.77	24.66	42.91	54.00	-11.09	AV
H	7440.00	53.57	30.33	6.32	24.55	54.11	74.00	-19.89	Pk
H	7440.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
H	9920.00	53.47	30.85	7.45	24.69	54.76	74.00	-19.24	Pk
H	9920.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
H	12400.00	50.59	31.02	8.99	25.57	54.13	74.00	-19.87	Pk
H	12400.00	43.32	31.02	8.99	25.57	46.86	54.00	-7.14	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.12	30.55	5.77	24.66	52.00	74.00	-22.00	Pk
V	4804.00	43.80	30.55	5.77	24.66	43.68	54.00	-10.32	AV
V	7206.00	54.46	30.33	6.32	24.55	55.00	74.00	-19.00	Pk
V	7206.00	43.82	30.33	6.32	24.55	44.36	54.00	-9.64	AV
V	9608.00	54.05	30.85	7.45	24.69	55.34	74.00	-18.66	Pk
V	9608.00	43.98	30.85	7.45	24.69	45.27	54.00	-8.73	AV
V	12010.00	52.65	31.02	8.99	25.57	56.19	74.00	-17.81	Pk
V	12010.00	43.02	31.02	8.99	25.57	46.56	54.00	-7.44	AV
H	4804.00	51.87	30.55	5.77	24.66	51.75	74.00	-22.25	Pk
H	4804.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
H	7206.00	50.33	30.33	6.32	24.55	50.87	74.00	-23.13	Pk
H	7206.00	43.40	30.33	6.32	24.55	43.94	54.00	-10.06	AV
H	9608.00	51.24	30.85	7.45	24.69	52.53	74.00	-21.47	Pk
H	9608.00	43.38	30.85	7.45	24.69	44.67	54.00	-9.33	AV
H	12010.00	51.63	31.02	8.99	25.57	55.17	74.00	-18.83	Pk
H	12010.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	53.86	30.55	5.77	24.66	53.74	74.00	-20.26	Pk
V	4882.00	43.71	30.55	5.77	24.66	43.59	54.00	-10.41	AV
V	7323.00	53.79	30.33	6.32	24.55	54.33	74.00	-19.67	Pk
V	7323.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
V	9764.00	53.07	30.85	7.45	24.69	54.36	74.00	-19.64	Pk
V	9764.00	43.79	30.85	7.45	24.69	45.08	54.00	-8.92	AV
V	12205.00	53.29	31.02	8.99	25.57	56.83	74.00	-17.17	Pk
V	12205.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV
H	4882.00	52.42	30.55	5.77	24.66	52.30	74.00	-21.70	Pk
H	4882.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
H	7323.00	52.36	30.33	6.32	24.55	52.90	74.00	-21.10	Pk
H	7323.00	43.79	30.33	6.32	24.55	44.33	54.00	-9.67	AV
H	9764.00	54.75	30.85	7.45	24.69	56.04	74.00	-17.96	Pk
H	9764.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
H	12205.00	52.70	31.02	8.99	25.57	56.24	74.00	-17.76	Pk
H	12205.00	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.32	30.55	5.77	24.66	53.20	74.00	-20.80	Pk
V	4960.00	43.93	30.55	5.77	24.66	43.81	54.00	-10.19	AV
V	7440.00	53.86	30.33	6.32	24.55	54.40	74.00	-19.60	Pk
V	7440.00	43.43	30.33	6.32	24.55	43.97	54.00	-10.03	AV
V	9920.00	51.88	30.85	7.45	24.69	53.17	74.00	-20.83	Pk
V	9920.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
V	12400.00	53.05	31.02	8.99	25.57	56.59	74.00	-17.41	Pk
V	12400.00	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV
H	4960.00	51.49	30.55	5.77	24.66	51.37	74.00	-22.63	Pk
H	4960.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
H	7440.00	54.36	30.33	6.32	24.55	54.90	74.00	-19.10	Pk
H	7440.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
H	9920.00	51.67	30.85	7.45	24.69	52.96	74.00	-21.04	Pk
H	9920.00	44.00	30.85	7.45	24.69	45.29	54.00	-8.71	AV
H	12400.00	53.86	31.02	8.99	25.57	57.40	74.00	-16.60	Pk
H	12400.00	43.54	31.02	8.99	25.57	47.08	54.00	-6.92	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.07	30.55	5.77	24.66	49.95	74.00	-24.05	Pk
V	4804.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
V	7206.00	50.85	30.33	6.32	24.55	51.39	74.00	-22.61	Pk
V	7206.00	43.43	30.33	6.32	24.55	43.97	54.00	-10.03	AV
V	9608.00	53.78	30.85	7.45	24.69	55.07	74.00	-18.93	Pk
V	9608.00	43.35	30.85	7.45	24.69	44.64	54.00	-9.36	AV
V	12010.00	50.35	31.02	8.99	25.57	53.89	74.00	-20.11	Pk
V	12010.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV
H	4804.00	50.23	30.55	5.77	24.66	50.11	74.00	-23.89	Pk
H	4804.00	43.47	30.55	5.77	24.66	43.35	54.00	-10.65	AV
H	7206.00	52.38	30.33	6.32	24.55	52.92	74.00	-21.08	Pk
H	7206.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
H	9608.00	53.12	30.85	7.45	24.69	54.41	74.00	-19.59	Pk
H	9608.00	43.31	30.85	7.45	24.69	44.60	54.00	-9.40	AV
H	12010.00	53.68	31.02	8.99	25.57	57.22	74.00	-16.78	Pk
H	12010.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	52.66	30.55	5.77	24.66	52.54	74.00	-21.46	Pk
V	4882.00	43.45	30.55	5.77	24.66	43.33	54.00	-10.67	AV
V	7323.00	50.56	30.33	6.32	24.55	51.10	74.00	-22.90	Pk
V	7323.00	43.08	30.33	6.32	24.55	43.62	54.00	-10.38	AV
V	9764.00	51.60	30.85	7.45	24.69	52.89	74.00	-21.11	Pk
V	9764.00	43.14	30.85	7.45	24.69	44.43	54.00	-9.57	AV
V	12205.00	54.08	31.02	8.99	25.57	57.62	74.00	-16.38	Pk
V	12205.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV
H	4882.00	52.65	30.55	5.77	24.66	52.53	74.00	-21.47	Pk
H	4882.00	43.43	30.55	5.77	24.66	43.31	54.00	-10.69	AV
H	7323.00	51.44	30.33	6.32	24.55	51.98	74.00	-22.02	Pk
H	7323.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
H	9764.00	51.70	30.85	7.45	24.69	52.99	74.00	-21.01	Pk
H	9764.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
H	12205.00	50.94	31.02	8.99	25.57	54.48	74.00	-19.52	Pk
H	12205.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.67	30.55	5.77	24.66	53.55	74.00	-20.45	Pk
V	4960.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	7440.00	51.56	30.33	6.32	24.55	52.10	74.00	-21.90	Pk
V	7440.00	43.43	30.33	6.32	24.55	43.97	54.00	-10.03	AV
V	9920.00	53.28	30.85	7.45	24.69	54.57	74.00	-19.43	Pk
V	9920.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
V	12400.00	50.33	31.02	8.99	25.57	53.87	74.00	-20.13	Pk
V	12400.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV
H	4960.00	52.20	30.55	5.77	24.66	52.08	74.00	-21.92	Pk
H	4960.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
H	7440.00	50.09	30.33	6.32	24.55	50.63	74.00	-23.37	Pk
H	7440.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	9920.00	51.20	30.85	7.45	24.69	52.49	74.00	-21.51	Pk
H	9920.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
H	12400.00	50.73	31.02	8.99	25.57	54.27	74.00	-19.73	Pk
H	12400.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel,the Highest channel

**Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

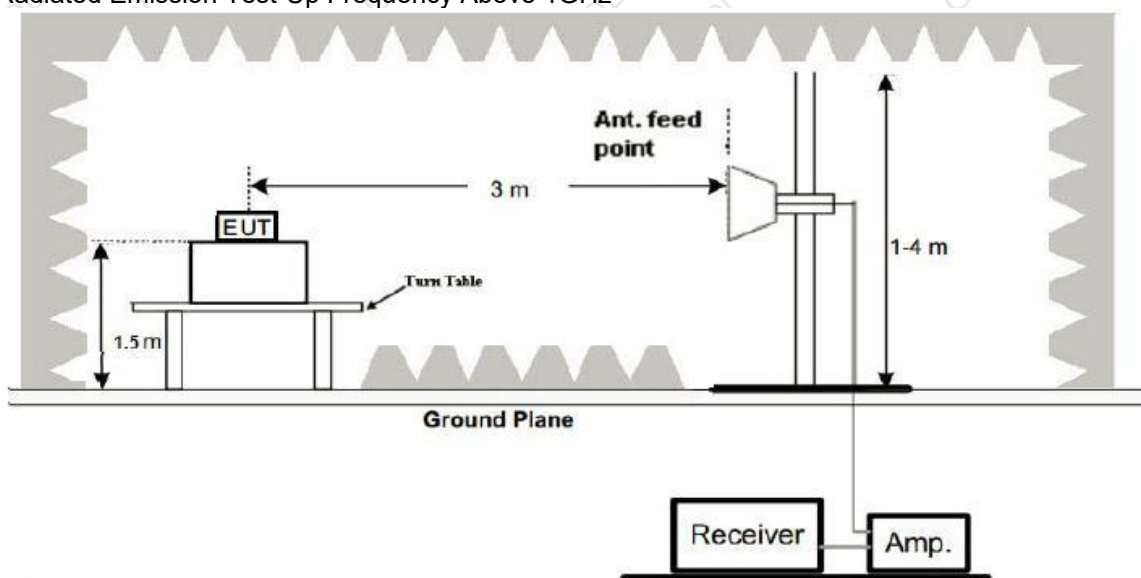**5.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

(Left ear headphones)

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	54.05	30.22	4.85	23.98	52.66	74.00	PK	PASS
	H	2390.00	44.01	30.22	4.85	23.98	42.62	54.00	AV	PASS
	H	2400.00	54.51	30.22	4.85	23.98	53.12	74.00	PK	PASS
	H	2400.00	44.90	30.22	4.85	23.98	43.51	54.00	AV	PASS
	V	2390.00	54.41	30.22	4.85	23.98	53.02	74.00	PK	PASS
	V	2390.00	44.66	30.22	4.85	23.98	43.27	54.00	AV	PASS
	V	2400.00	53.40	30.22	4.85	23.98	52.01	74.00	PK	PASS
	V	2400.00	44.53	30.22	4.85	23.98	43.14	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.19	30.22	4.85	23.98	52.80	74.00	Pk	PASS
	H	2483.50	44.55	30.22	4.85	23.98	43.16	54.00	AV	PASS
	H	2500.00	54.70	30.22	4.85	23.98	53.31	74.00	Pk	PASS
	H	2500.00	44.94	30.22	4.85	23.98	43.55	54.00	AV	PASS
	V	2483.50	54.84	30.22	4.85	23.98	53.45	74.00	Pk	PASS
	V	2483.50	44.94	30.22	4.85	23.98	43.55	54.00	AV	PASS
	V	2500.00	53.66	30.22	4.85	23.98	52.27	74.00	Pk	PASS
	V	2500.00	44.64	30.22	4.85	23.98	43.25	54.00	AV	PASS
$\pi/4$ -DQPSK	Low Channel: 2402MHz									
	H	2390.00	53.27	30.22	4.85	23.98	51.88	74.00	PK	PASS
	H	2390.00	44.00	30.22	4.85	23.98	42.61	54.00	AV	PASS
	H	2400.00	53.63	30.22	4.85	23.98	52.24	74.00	PK	PASS
	H	2400.00	44.63	30.22	4.85	23.98	43.24	54.00	AV	PASS
	V	2390.00	54.14	30.22	4.85	23.98	52.75	74.00	PK	PASS
	V	2390.00	44.95	30.22	4.85	23.98	43.56	54.00	AV	PASS
	V	2400.00	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	V	2400.00	44.90	30.22	4.85	23.98	43.51	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.95	30.22	4.85	23.98	52.56	74.00	PK	PASS
	H	2483.50	44.52	30.22	4.85	23.98	43.13	54.00	AV	PASS
	H	2500.00	53.35	30.22	4.85	23.98	51.96	74.00	PK	PASS
	H	2500.00	44.47	30.22	4.85	23.98	43.08	54.00	AV	PASS
	V	2483.50	53.59	30.22	4.85	23.98	52.20	74.00	PK	PASS
	V	2483.50	44.24	30.22	4.85	23.98	42.85	54.00	AV	PASS
	V	2500.00	53.73	30.22	4.85	23.98	52.34	74.00	PK	PASS
	V	2500.00	44.43	30.22	4.85	23.98	43.04	54.00	AV	PASS



8-DPSK	Low Channel: 2402MHz									
	H	2390.00	53.58	30.22	4.85	23.98	52.19	74.00	PK	PASS
	H	2390.00	44.55	30.22	4.85	23.98	43.16	54.00	AV	PASS
	H	2400.00	53.20	30.22	4.85	23.98	51.81	74.00	PK	PASS
	H	2400.00	44.06	30.22	4.85	23.98	42.67	54.00	AV	PASS
	V	2390.00	53.69	30.22	4.85	23.98	52.30	74.00	PK	PASS
	V	2390.00	44.78	30.22	4.85	23.98	43.39	54.00	AV	PASS
	V	2400.00	53.59	30.22	4.85	23.98	52.20	74.00	PK	PASS
	V	2400.00	44.15	30.22	4.85	23.98	42.76	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.69	30.22	4.85	23.98	53.30	74.00	PK	PASS
	H	2483.50	44.97	30.22	4.85	23.98	43.58	54.00	AV	PASS
	H	2500.00	53.41	30.22	4.85	23.98	52.02	74.00	PK	PASS
	H	2500.00	44.20	30.22	4.85	23.98	42.81	54.00	AV	PASS
	V	2483.50	53.60	30.22	4.85	23.98	52.21	74.00	PK	PASS
	V	2483.50	44.27	30.22	4.85	23.98	42.88	54.00	AV	PASS
	V	2500.00	53.62	30.22	4.85	23.98	52.23	74.00	PK	PASS
	V	2500.00	44.67	30.22	4.85	23.98	43.28	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



(Right ear headphones)

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	53.37	30.22	4.85	23.98	51.98	74.00	PK	PASS
	H	2390.00	44.97	30.22	4.85	23.98	43.58	54.00	AV	PASS
	H	2400.00	53.33	30.22	4.85	23.98	51.94	74.00	PK	PASS
	H	2400.00	44.28	30.22	4.85	23.98	42.89	54.00	AV	PASS
	V	2390.00	54.54	30.22	4.85	23.98	53.15	74.00	PK	PASS
	V	2390.00	44.45	30.22	4.85	23.98	43.06	54.00	AV	PASS
	V	2400.00	53.75	30.22	4.85	23.98	52.36	74.00	PK	PASS
	V	2400.00	44.21	30.22	4.85	23.98	42.82	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.02	30.22	4.85	23.98	52.63	74.00	Pk	PASS
	H	2483.50	44.47	30.22	4.85	23.98	43.08	54.00	AV	PASS
	H	2500.00	53.96	30.22	4.85	23.98	52.57	74.00	Pk	PASS
	H	2500.00	44.11	30.22	4.85	23.98	42.72	54.00	AV	PASS
	V	2483.50	54.15	30.22	4.85	23.98	52.76	74.00	Pk	PASS
	V	2483.50	44.03	30.22	4.85	23.98	42.64	54.00	AV	PASS
	V	2500.00	54.28	30.22	4.85	23.98	52.89	74.00	Pk	PASS
	V	2500.00	44.58	30.22	4.85	23.98	43.19	54.00	AV	PASS
$\pi/4$ -DQPSK	Low Channel: 2402MHz									
	H	2390.00	53.04	30.22	4.85	23.98	51.65	74.00	PK	PASS
	H	2390.00	44.22	30.22	4.85	23.98	42.83	54.00	AV	PASS
	H	2400.00	53.96	30.22	4.85	23.98	52.57	74.00	PK	PASS
	H	2400.00	44.89	30.22	4.85	23.98	43.50	54.00	AV	PASS
	V	2390.00	53.50	30.22	4.85	23.98	52.11	74.00	PK	PASS
	V	2390.00	44.88	30.22	4.85	23.98	43.49	54.00	AV	PASS
	V	2400.00	54.02	30.22	4.85	23.98	52.63	74.00	PK	PASS
	V	2400.00	44.14	30.22	4.85	23.98	42.75	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.04	30.22	4.85	23.98	51.65	74.00	PK	PASS
	H	2483.50	44.22	30.22	4.85	23.98	42.83	54.00	AV	PASS
	H	2500.00	53.96	30.22	4.85	23.98	52.57	74.00	PK	PASS
	H	2500.00	44.89	30.22	4.85	23.98	43.50	54.00	AV	PASS
	V	2483.50	53.50	30.22	4.85	23.98	52.11	74.00	PK	PASS
	V	2483.50	44.88	30.22	4.85	23.98	43.49	54.00	AV	PASS
	V	2500.00	54.02	30.22	4.85	23.98	52.63	74.00	PK	PASS
	V	2500.00	44.14	30.22	4.85	23.98	42.75	54.00	AV	PASS



8-DPSK	Low Channel: 2402MHz									
	H	2390.00	53.89	30.22	4.85	23.98	52.50	74.00	PK	PASS
	H	2390.00	44.37	30.22	4.85	23.98	42.98	54.00	AV	PASS
	H	2400.00	54.38	30.22	4.85	23.98	52.99	74.00	PK	PASS
	H	2400.00	44.86	30.22	4.85	23.98	43.47	54.00	AV	PASS
	V	2390.00	54.84	30.22	4.85	23.98	53.45	74.00	PK	PASS
	V	2390.00	44.66	30.22	4.85	23.98	43.27	54.00	AV	PASS
	V	2400.00	53.45	30.22	4.85	23.98	52.06	74.00	PK	PASS
	V	2400.00	44.30	30.22	4.85	23.98	42.91	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.58	30.22	4.85	23.98	52.19	74.00	PK	PASS
	H	2483.50	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	H	2500.00	53.08	30.22	4.85	23.98	51.69	74.00	PK	PASS
	H	2500.00	44.72	30.22	4.85	23.98	43.33	54.00	AV	PASS
	V	2483.50	53.51	30.22	4.85	23.98	52.12	74.00	PK	PASS
	V	2483.50	44.86	30.22	4.85	23.98	43.47	54.00	AV	PASS
	V	2500.00	53.83	30.22	4.85	23.98	52.44	74.00	PK	PASS
	V	2500.00	44.22	30.22	4.85	23.98	42.83	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup



30

6.3 Test procedure

Using the following spectrum analyzer setting:


- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD

No deviation.




6.5 Test Result

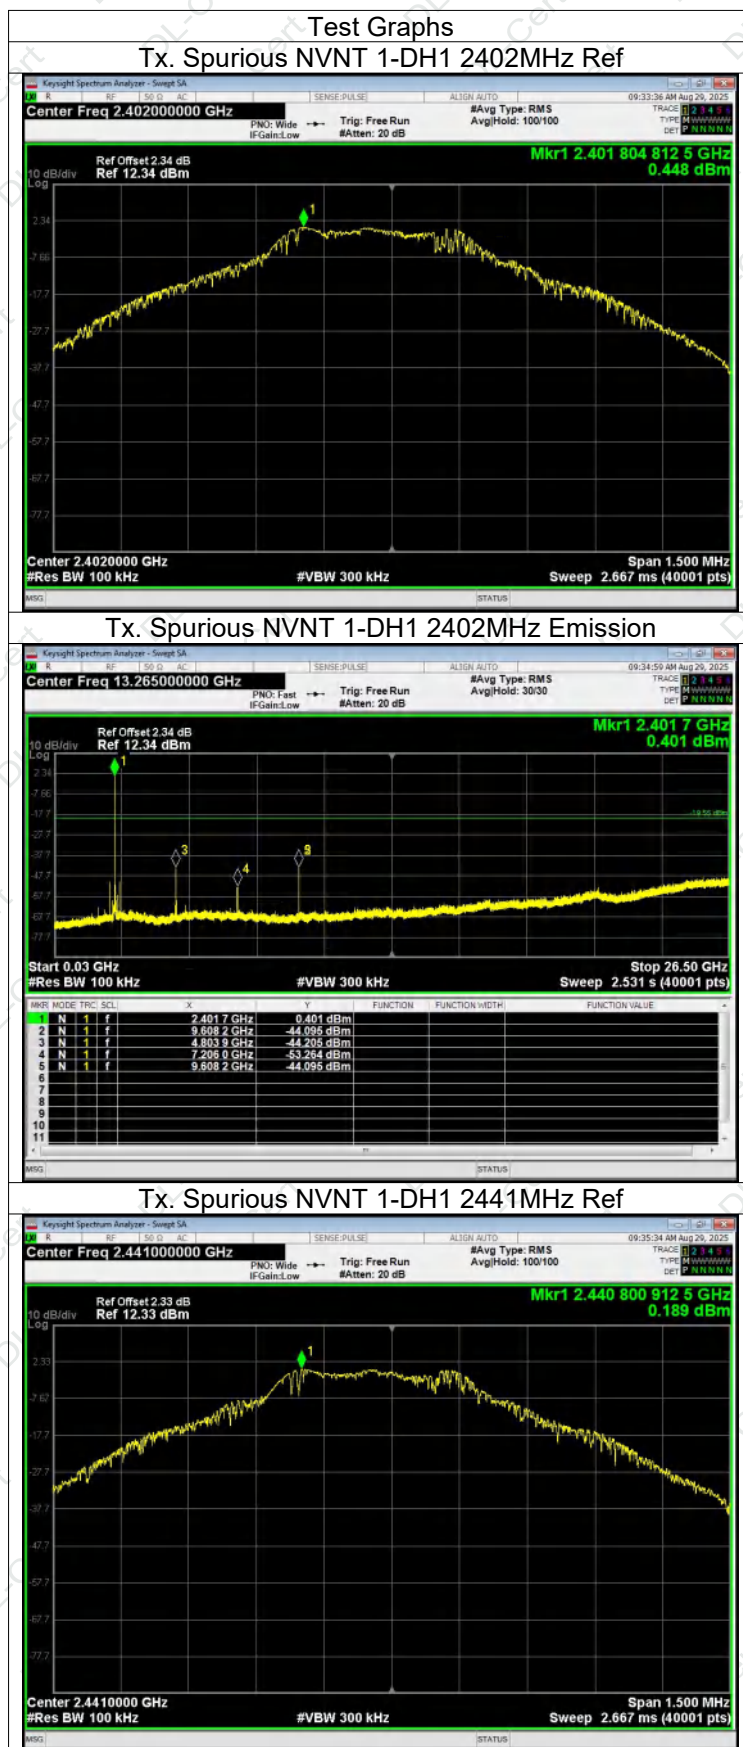




Tx. Spurious NVNT 1-DH1 2441MHz Emission

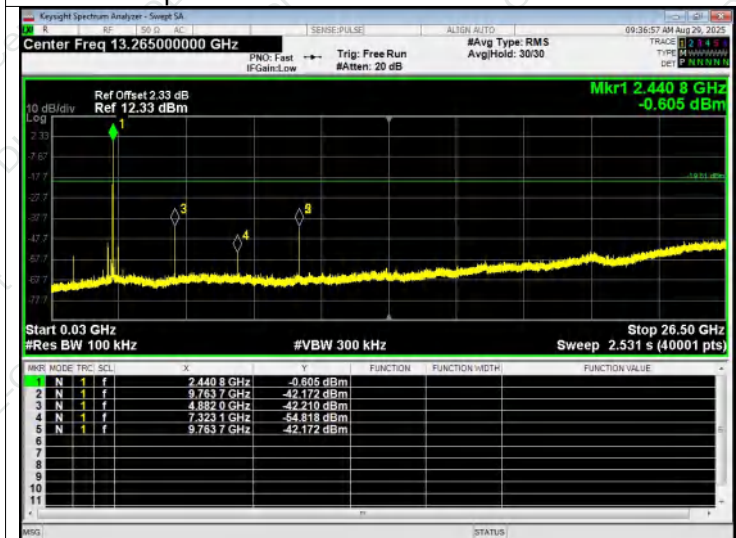

Tx. Spurious NVNT 1-DH1 2480MHz Ref



Tx. Spurious NVNT 1-DH1 2480MHz Emission

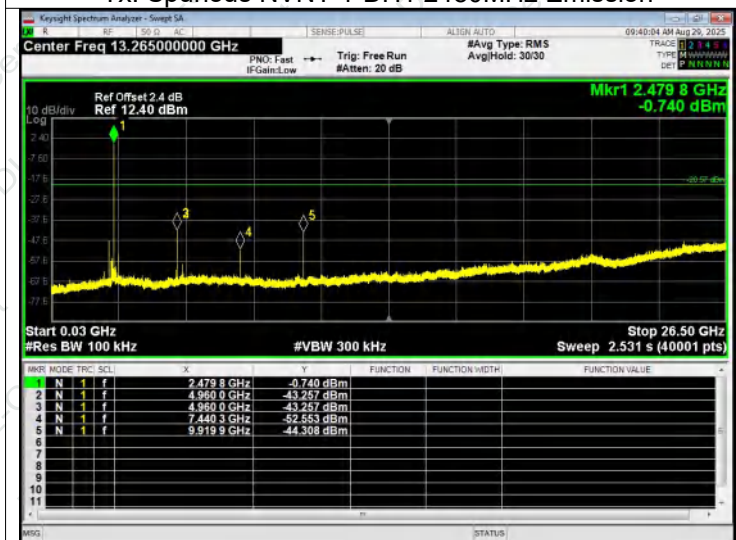




Tx. Spurious NVNT 2-DH1 2402MHz Ref



Tx. Spurious NVNT 2-DH1 2402MHz Emission

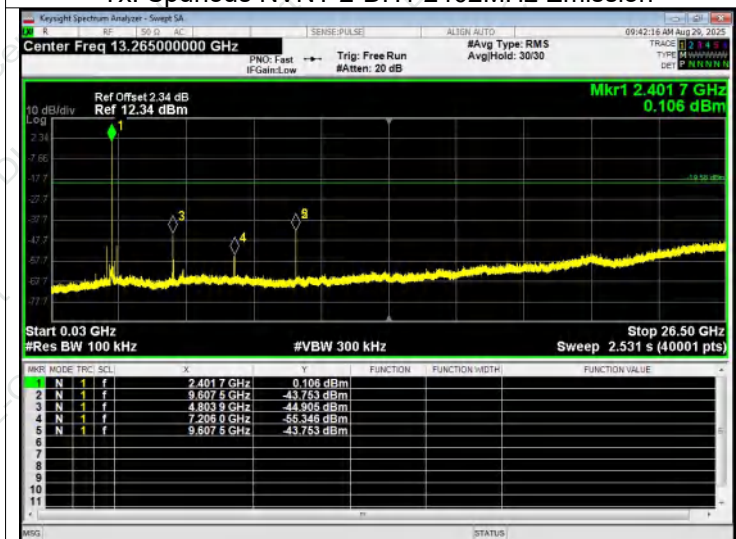


Tx. Spurious NVNT 2-DH1 2441MHz Ref






Tx. Spurious NVNT 2-DH1 2441MHz Emission

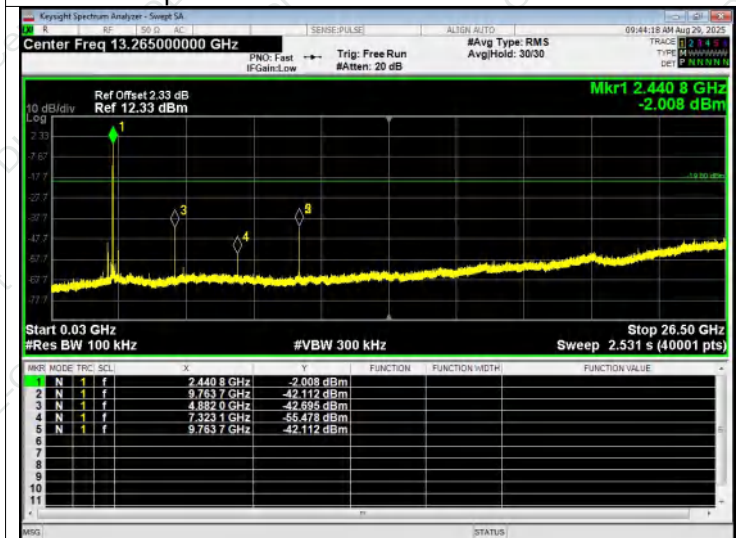

Tx. Spurious NVNT 2-DH1 2480MHz Ref



Tx. Spurious NVNT 2-DH1 2480MHz Emission

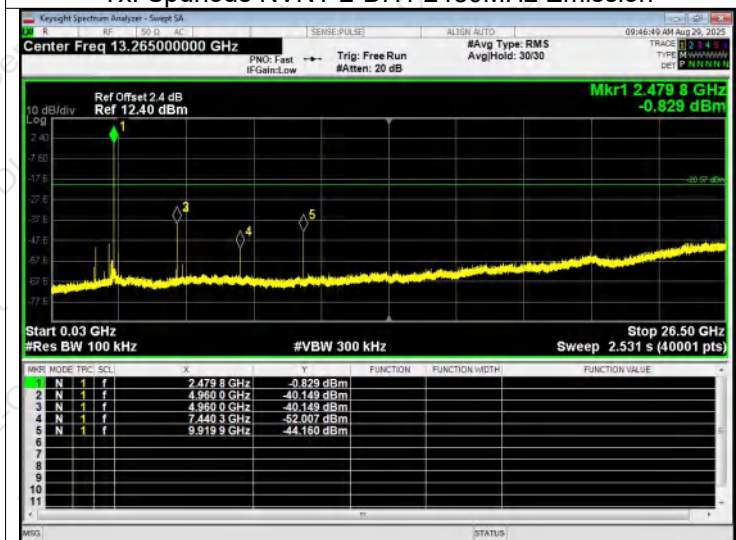





Tx. Spurious NVNT 3-DH1 2402MHz Ref



Tx. Spurious NVNT 3-DH1 2402MHz Emission

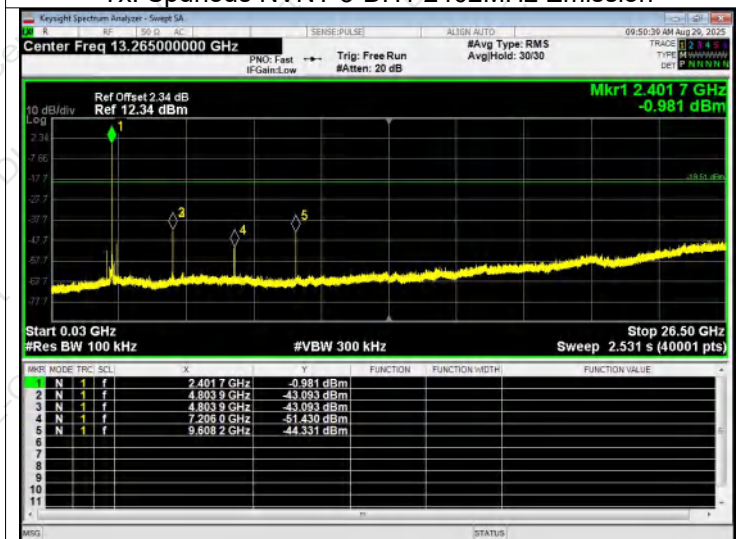


Tx. Spurious NVNT 3-DH1 2441MHz Ref

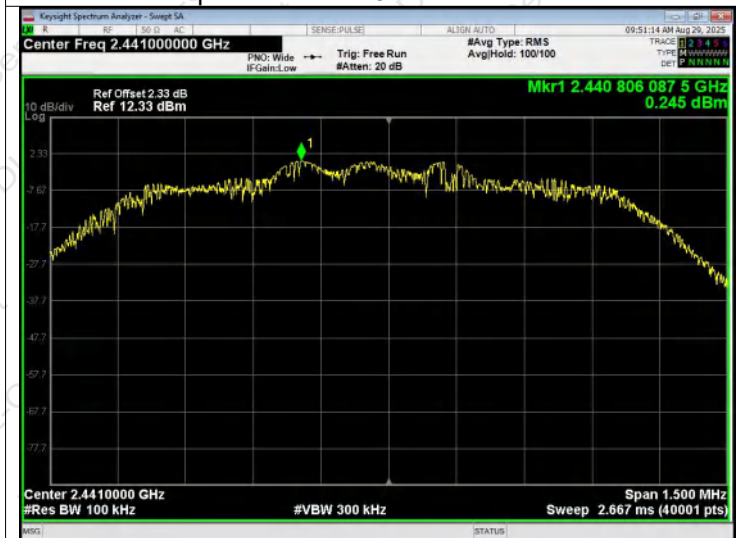




Tx. Spurious NVNT 3-DH1 2441MHz Emission

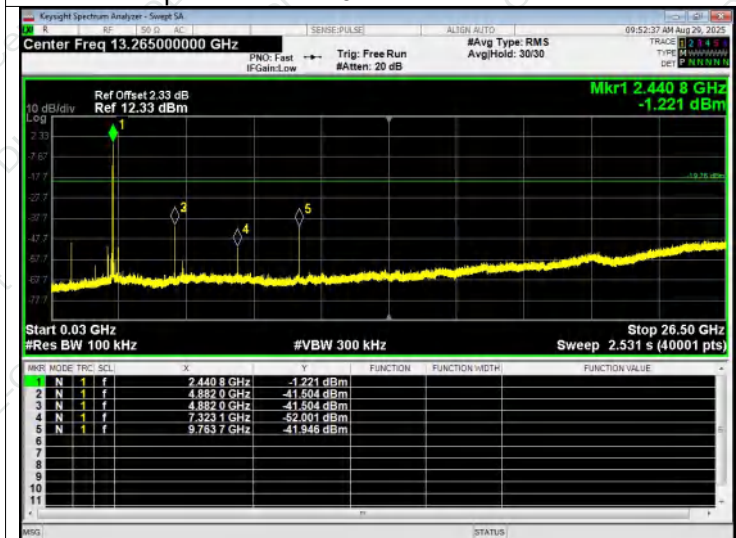

Tx. Spurious NVNT 3-DH1 2480MHz Ref




Tx. Spurious NVNT 3-DH1 2480MHz Emission

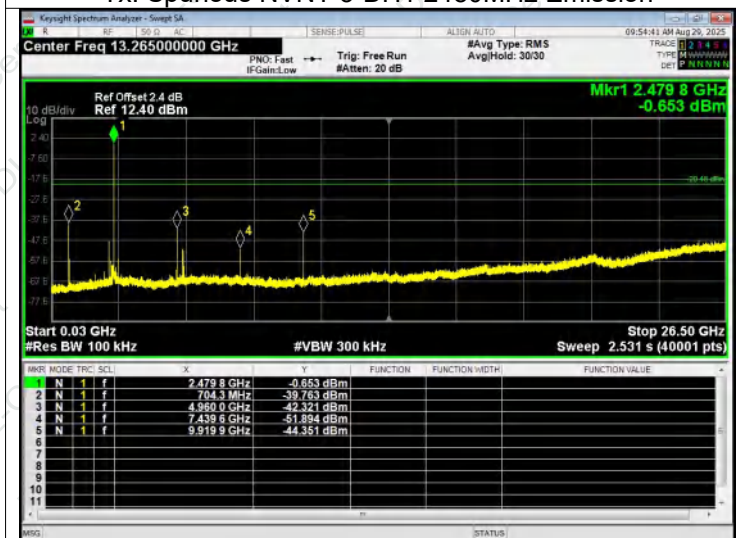




GFSK No-hopping Band edge-left side

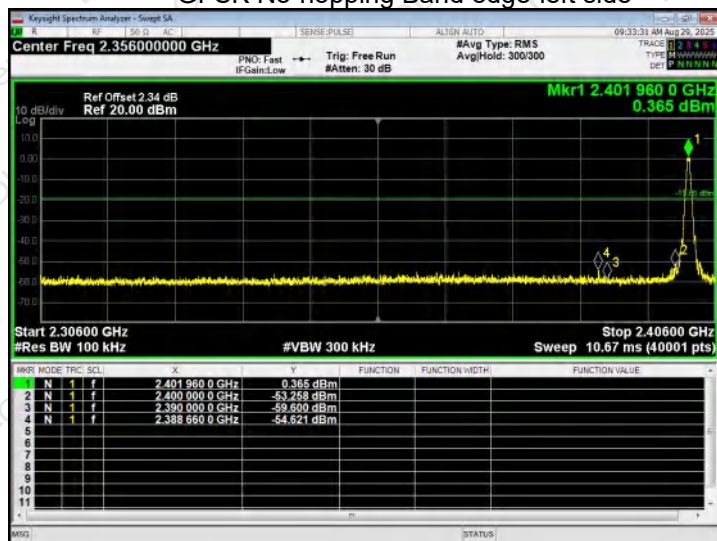


GFSK Hopping Band edge-left side

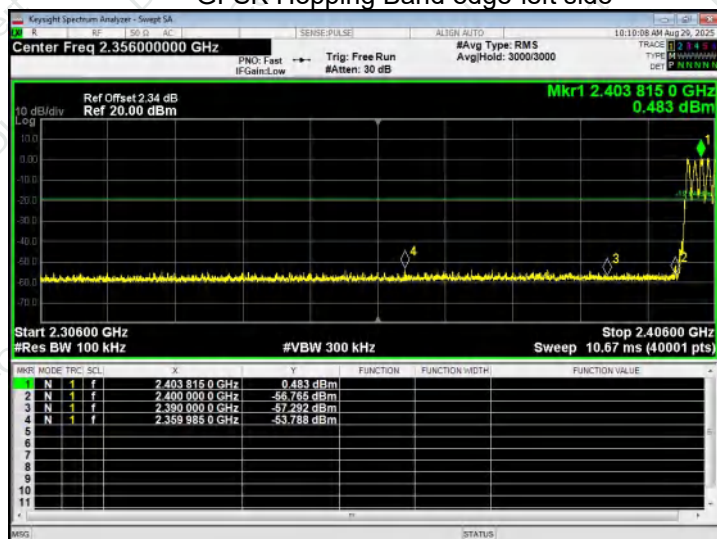








GFSK No-hopping Band edge-right side

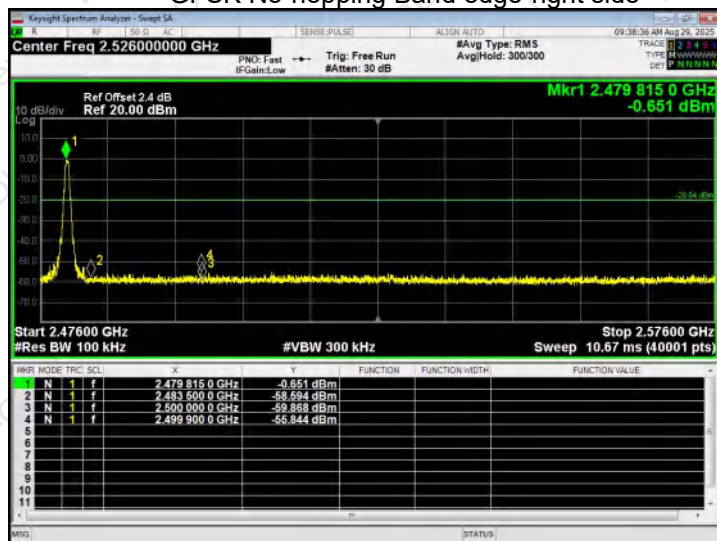

GFSK Hopping Band edge-right side

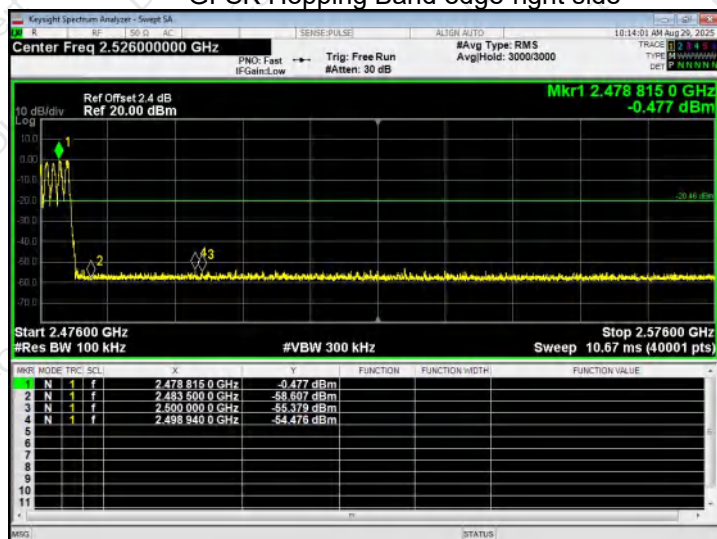


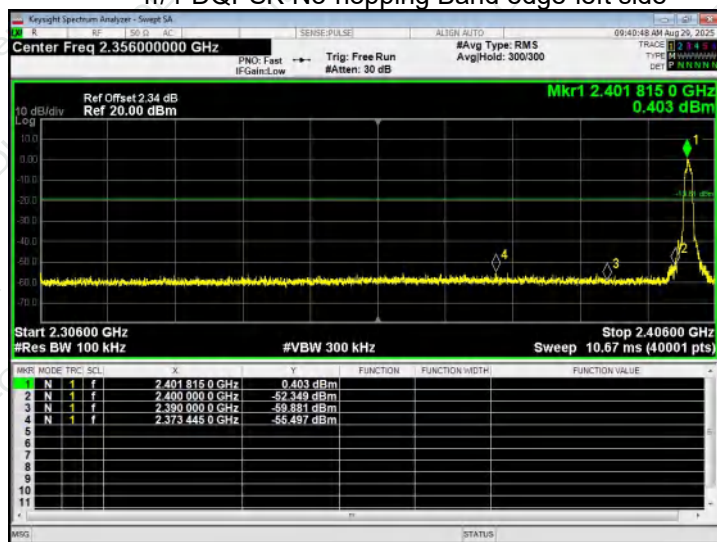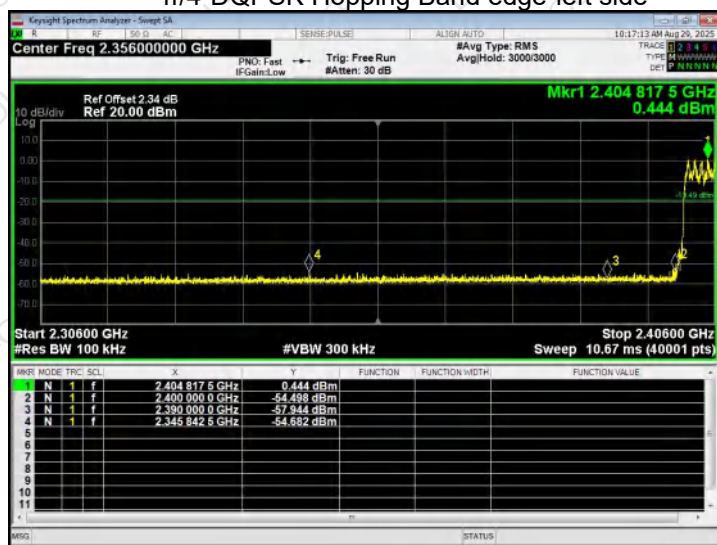 $\pi/4$ -DQPSK No-hopping Band edge-left side $\pi/4$ -DQPSK Hopping Band edge-left side

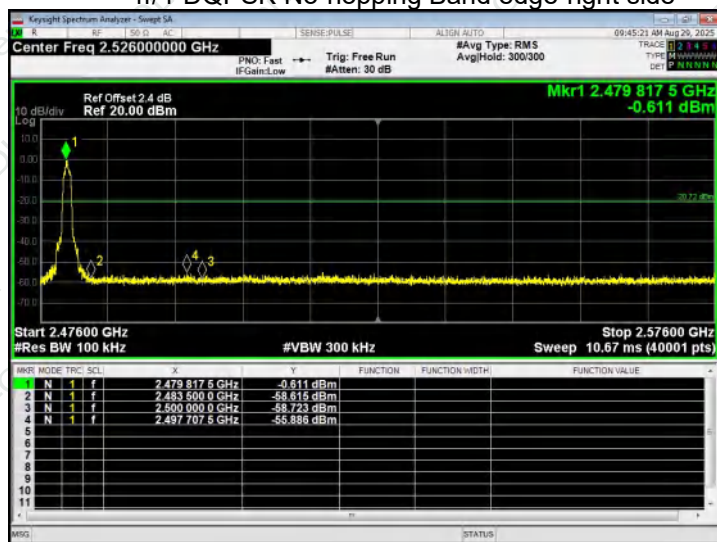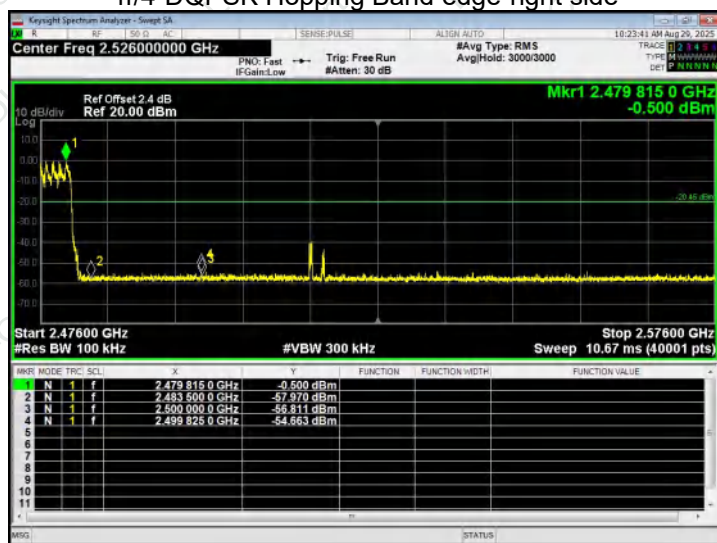
 $\pi/4$ -DQPSK No-hopping Band edge-right side $\pi/4$ -DQPSK Hopping Band edge-right side



8-DPSK No-hopping Band edge-left side

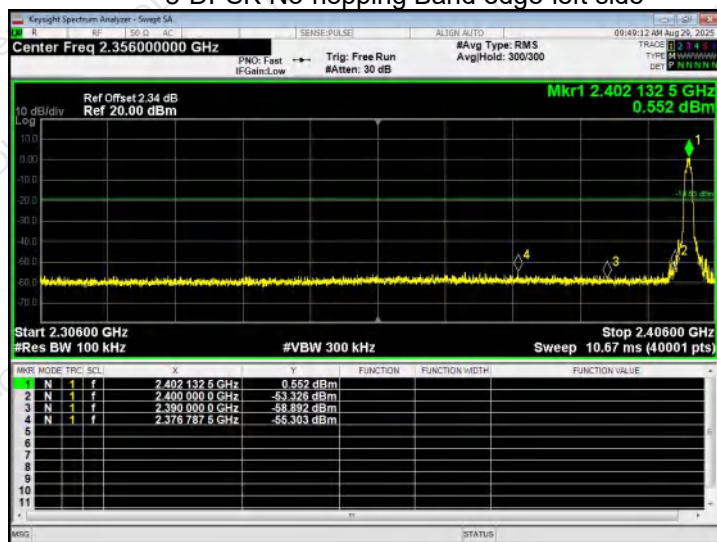


8-DPSK Hopping Band edge-left side

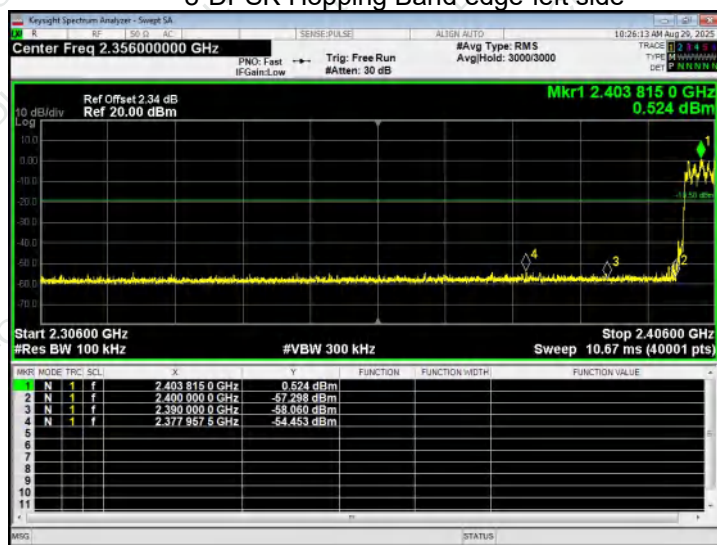




8-DPSK No-hopping Band edge-right side

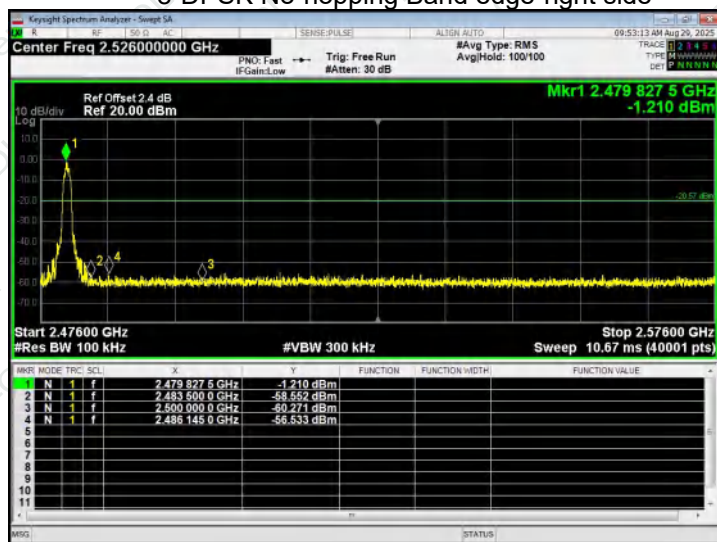

8-DPSK Hopping Band edge-right side

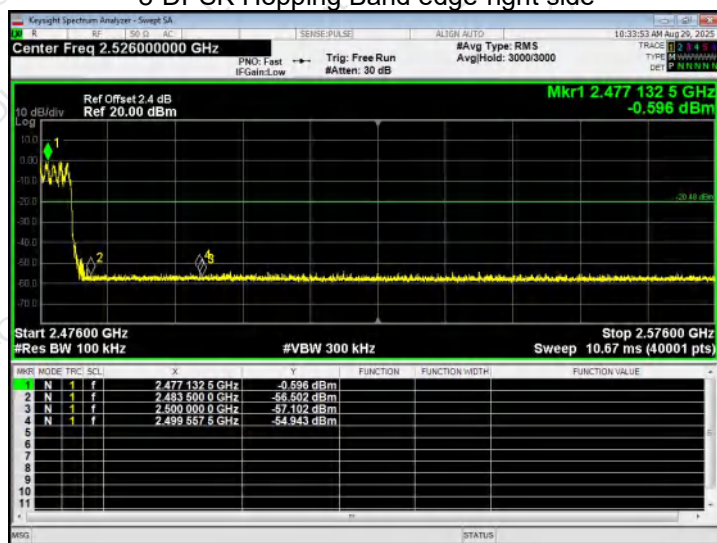

**7. 20DB&99% BANDWIDTH**

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup**7.2 Limit**

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.




7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.876	Pass
	Middle	0.876	
	Highest	0.974	
$\pi/4$ -DQPSK	Lowest	1.252	Pass
	Middle	1.261	
	Highest	1.279	
8-DPSK	Lowest	1.227	Pass
	Middle	1.222	
	Highest	1.218	




Test Graphs

-20dB Bandwidth NVNT 1-DH1 2402MHz



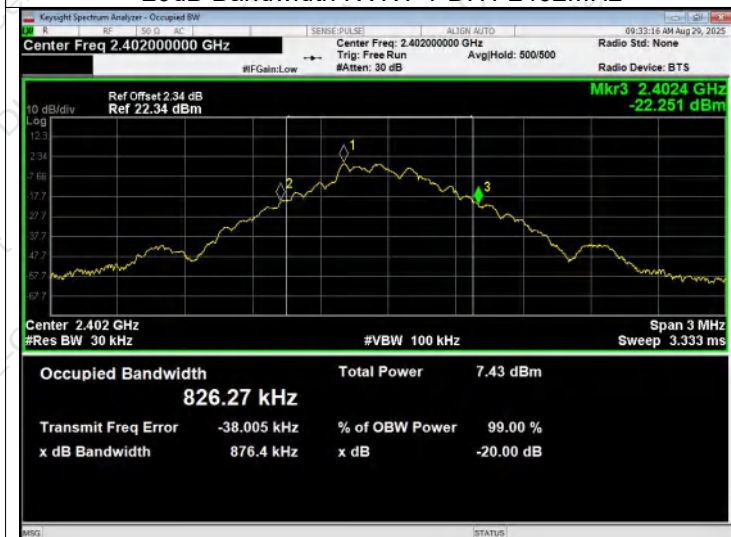





-20dB Bandwidth NVNT 1-DH1 2441MHz

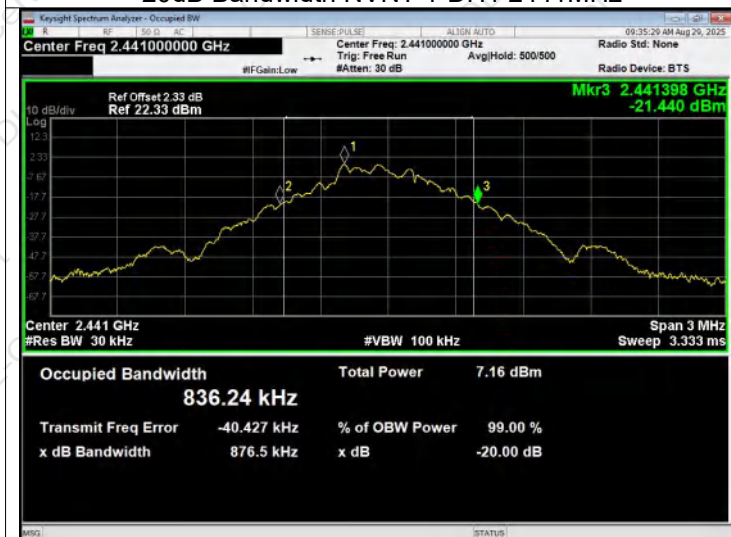

-20dB Bandwidth NVNT 1-DH1 2480MHz

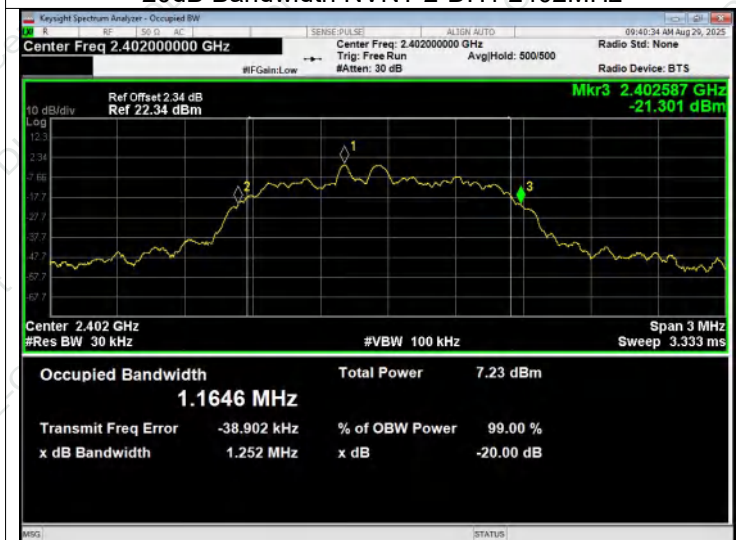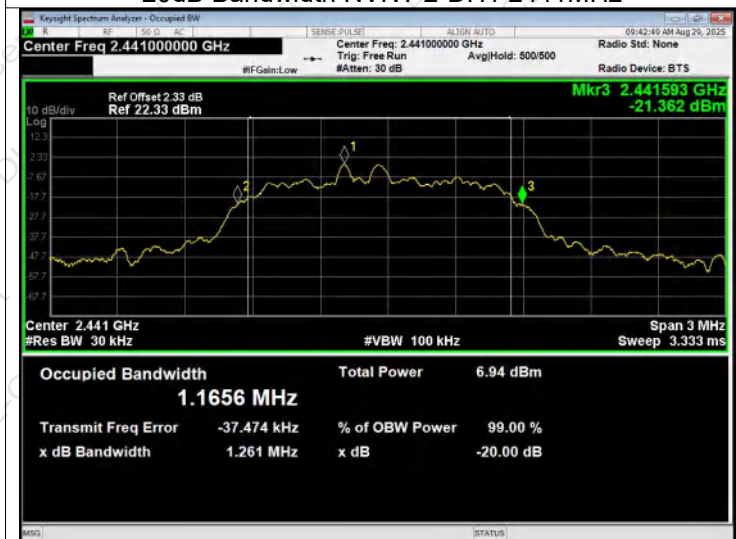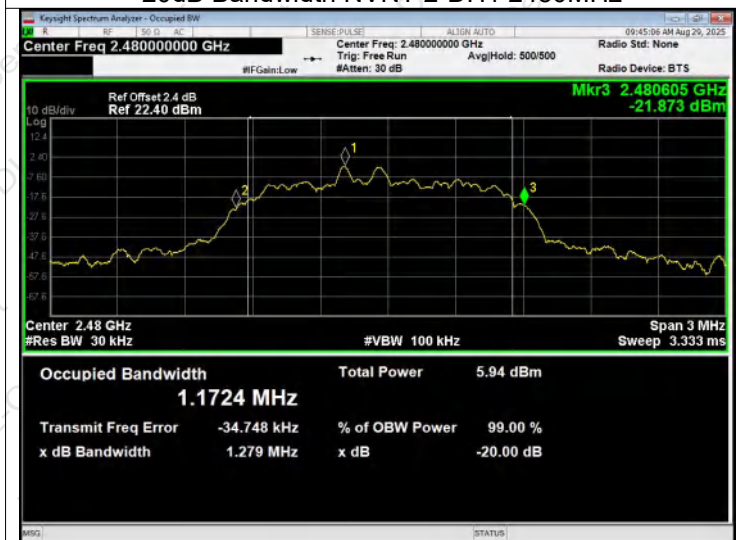

**-20dB Bandwidth NVNT 2-DH1 2402MHz****-20dB Bandwidth NVNT 2-DH1 2441MHz****-20dB Bandwidth NVNT 2-DH1 2480MHz**

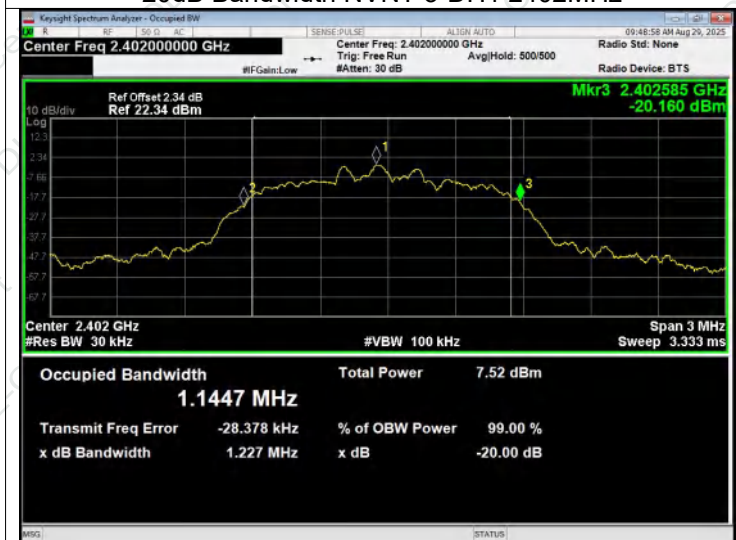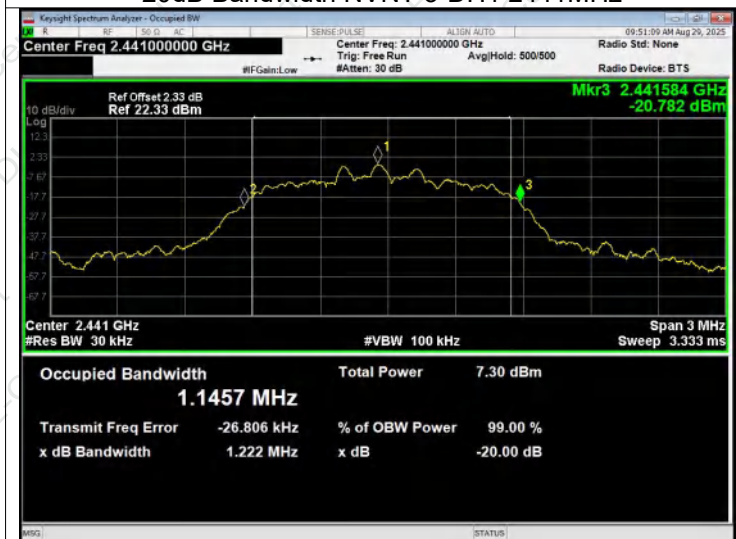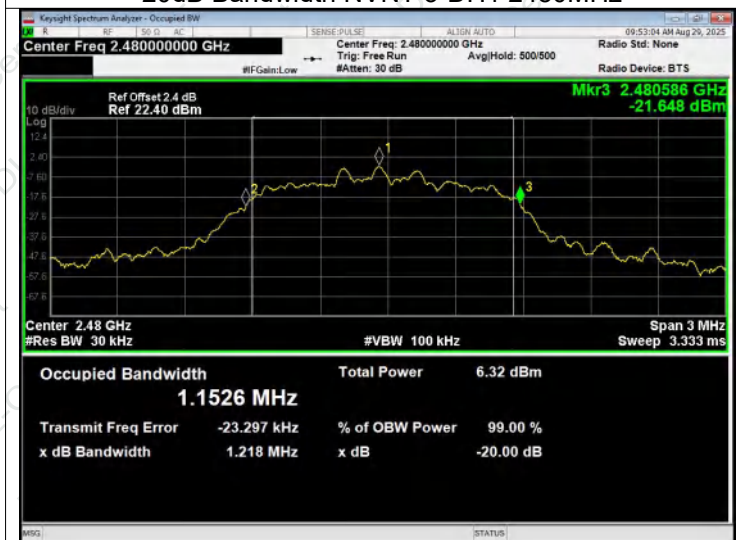**-20dB Bandwidth NVNT 3-DH1 2402MHz****-20dB Bandwidth NVNT 3-DH1 2441MHz****-20dB Bandwidth NVNT 3-DH1 2480MHz**



8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	GFSK:30 dBm $\pi/4$ -DQPSK & 8-DPSK:20.97 dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


8.4 DEVIATION FROM STANDARD

No deviation.




8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	0.612	30.00	Pass
	Middle	0.443		
	Highest	-0.356		
$\pi/4$ -DQPSK	Lowest	1.310	21.00	Pass
	Middle	1.117		
	Highest	0.265		
8-DPSK	Lowest	1.884	21.00	Pass
	Middle	1.654		
	Highest	0.865		

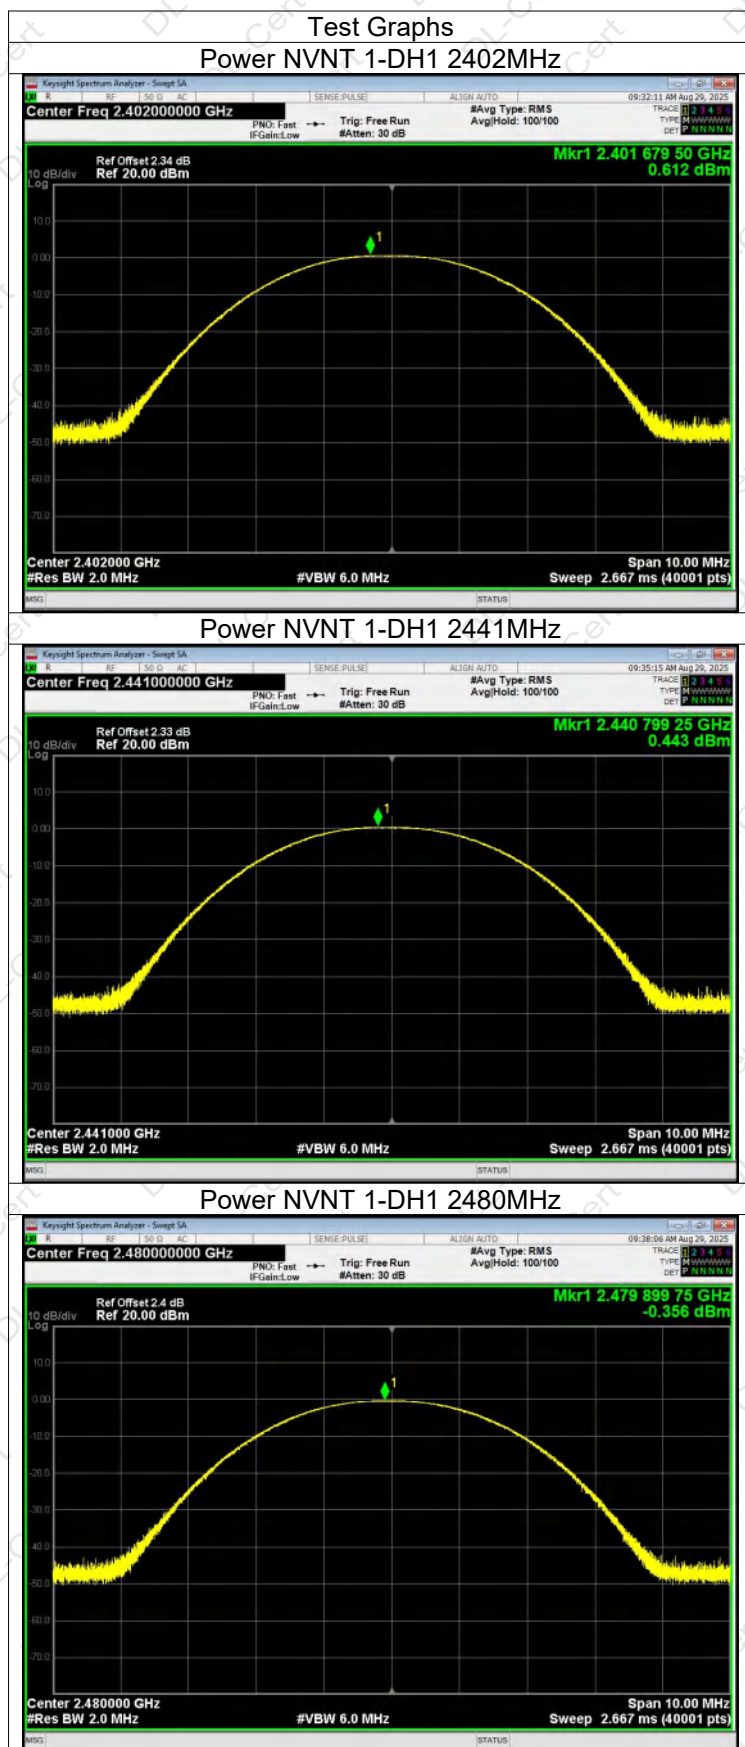





Power NVNT 2-DH1 2402MHz

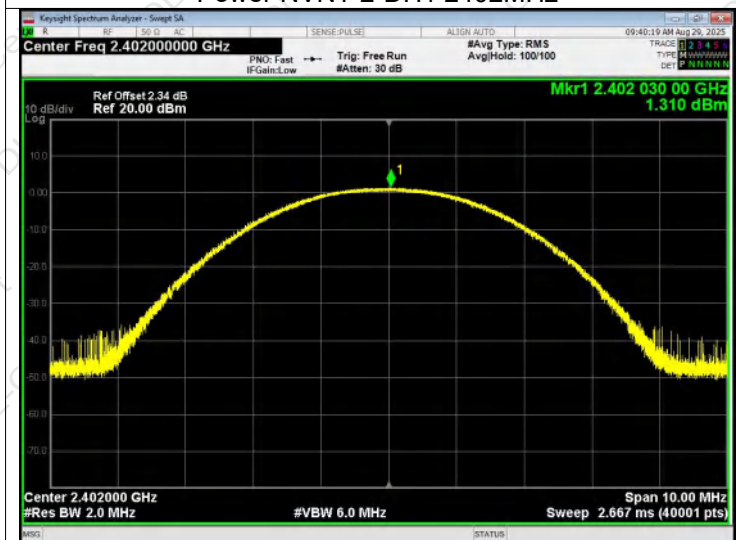

Power NVNT 2-DH1 2441MHz

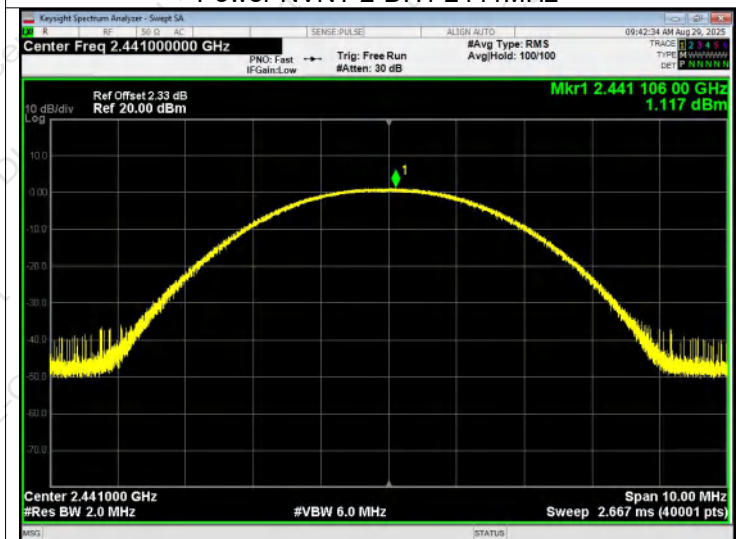


Power NVNT 2-DH1 2480MHz

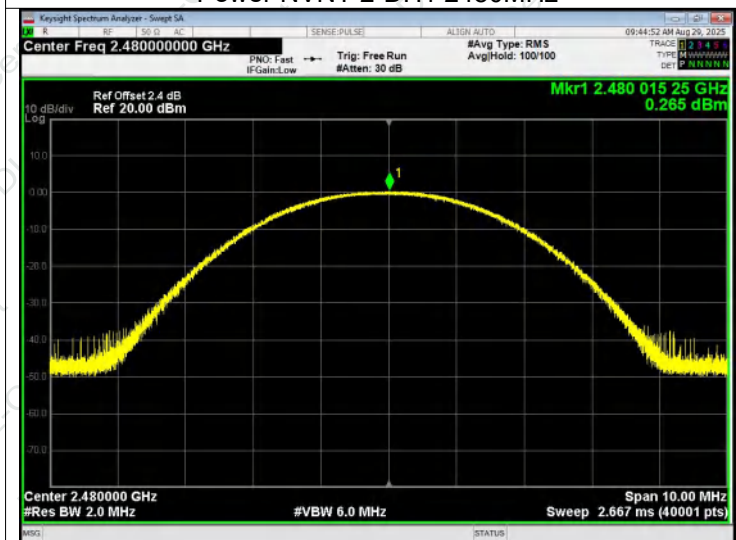





Power NVNT 3-DH1 2402MHz

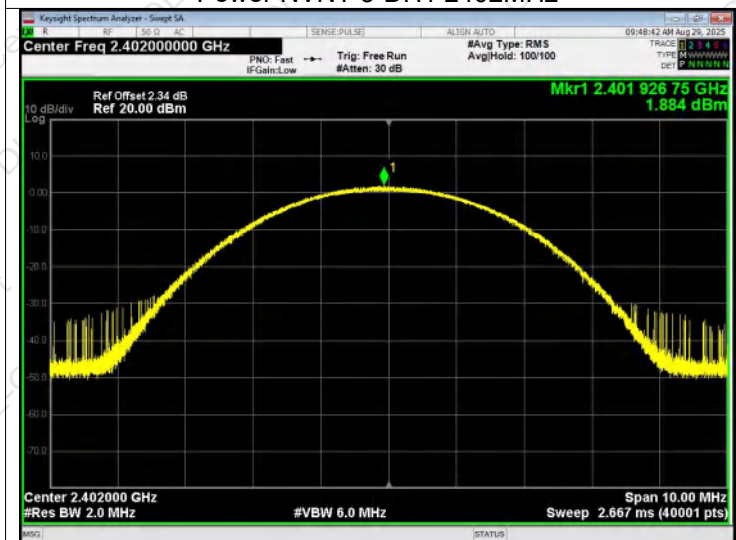

Power NVNT 3-DH1 2441MHz

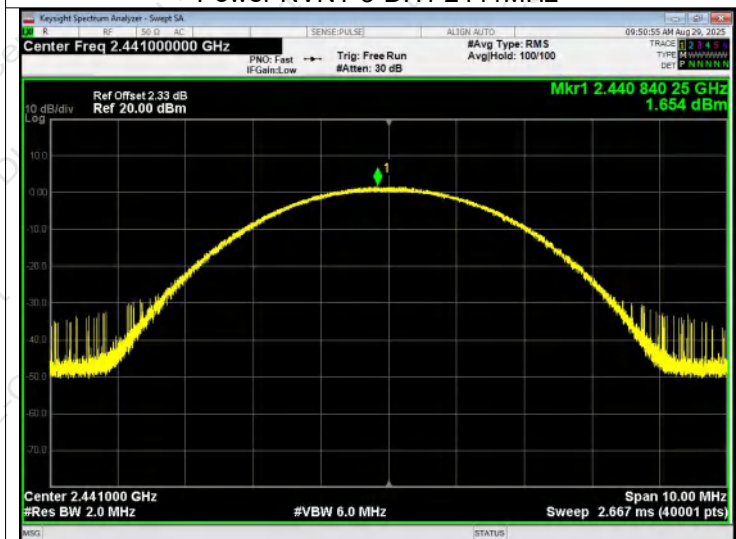

Power NVNT 3-DH1 2480MHz

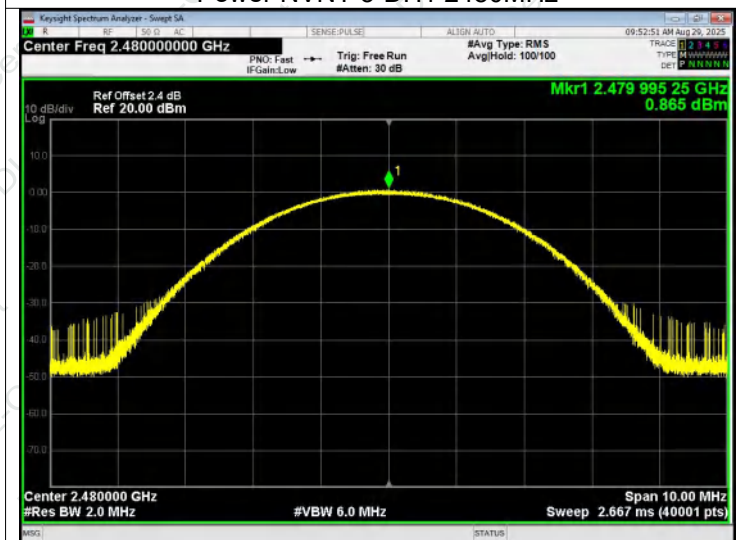



9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	0.996	0.876	PASS
GFSK	Middle	1.005	0.876	PASS
GFSK	High	1.002	0.974	PASS
$\pi/4$ -DQPSK	Low	1.008	0.835	PASS
$\pi/4$ -DQPSK	Middle	1.002	0.841	PASS
$\pi/4$ -DQPSK	High	0.981	0.853	PASS
8-DPSK	Low	1.152	0.818	PASS
8-DPSK	Middle	1.005	0.815	PASS
8-DPSK	High	0.987	0.812	PASS



Test Graphs

CFS NVNT 1-DH1 2402MHz



CFS NVNT 1-DH1 2441MHz




CFS NVNT 1-DH1 2480MHz







CFS NVNT 2-DH1 2402MHz

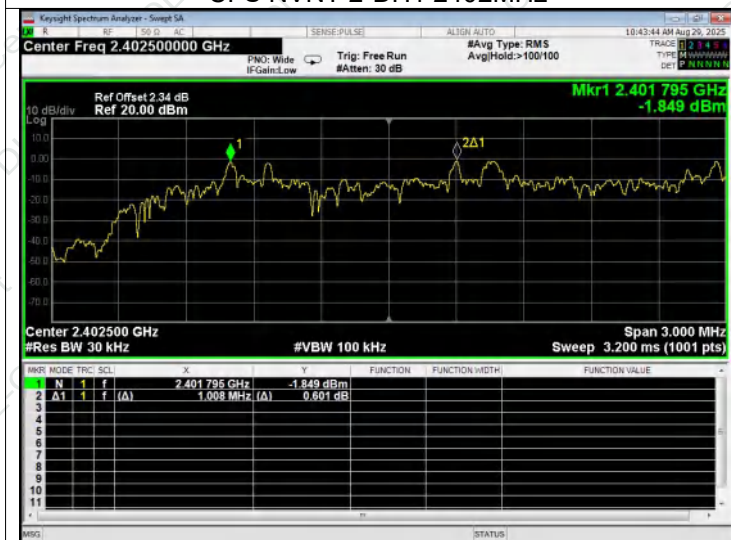

CFS NVNT 2-DH1 2441MHz

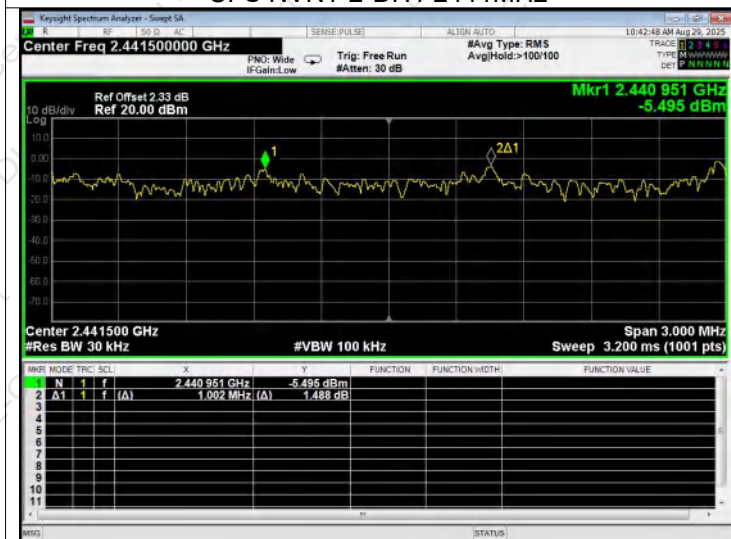


CFS NVNT 2-DH1 2480MHz

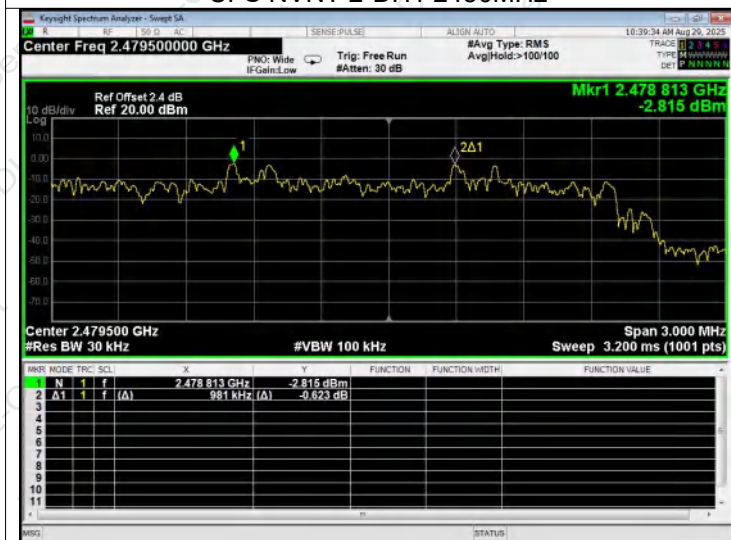





CFS NVNT 3-DH1 2402MHz

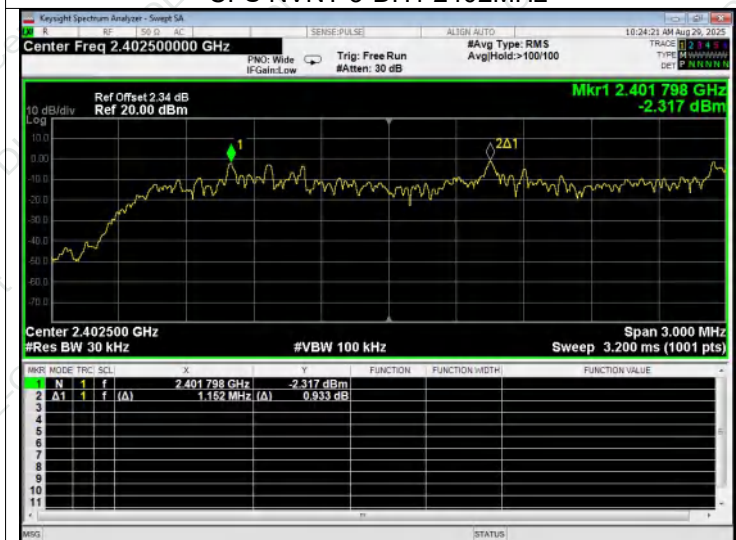

CFS NVNT 3-DH1 2441MHz

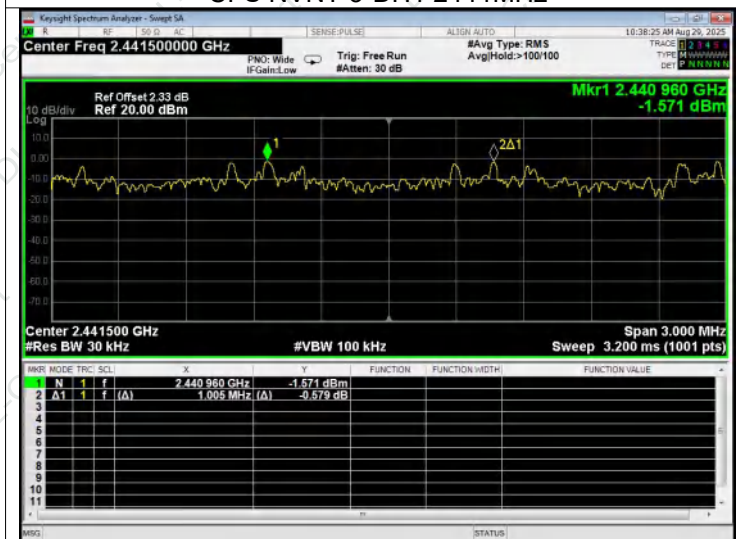

CFS NVNT 3-DH1 2480MHz

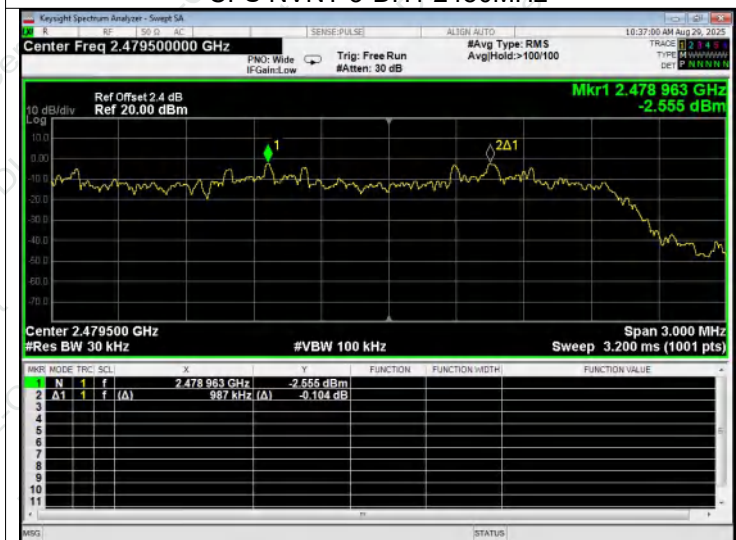



10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	GFSK: 75 channels $\pi/4$ -DQPSK, 8-DPSK: 15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



10.3 DEVIATION FROM STANDARD

No deviation.


Modulation	Packet	Hopping Number	Limit	Result
GFSK	1-DH1	79	15	Pass
$\pi/4$ -DQPSK	2-DH1	79	15	Pass
8-DPSK	3-DH1	79	15	Pass



10.4 Test Result

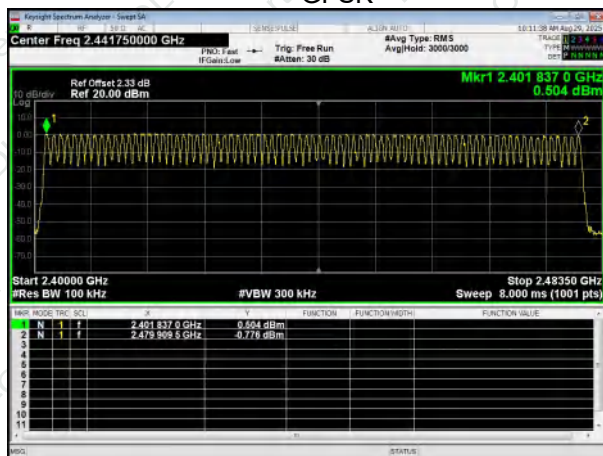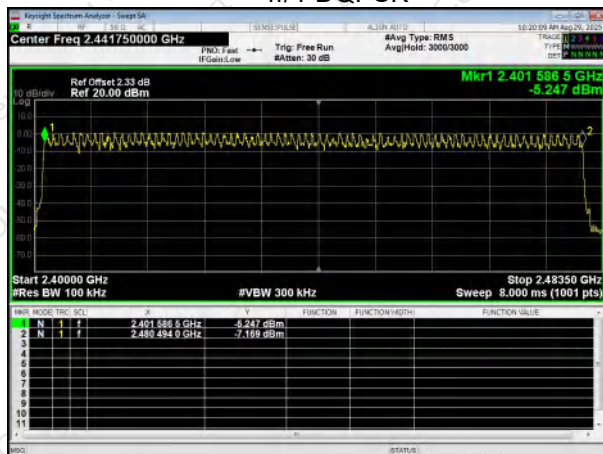Test Plots:79 Channels in total
GFSK $\pi/4$ -DQPSK

8-DPSK

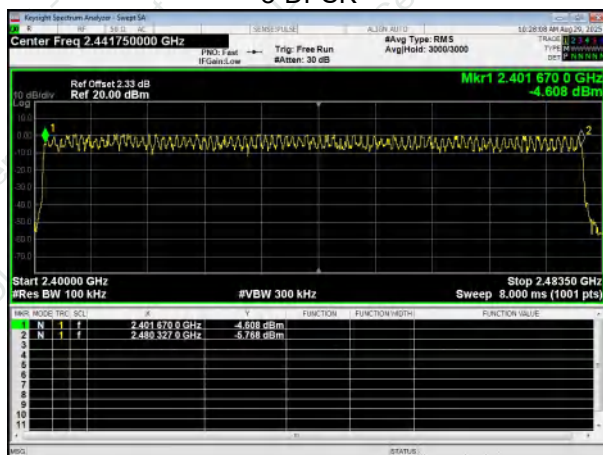

**11. DWELL TIME**

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup**11.2 Test procedure**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	0.383	122.56	31600	400	Pass
1-DH3	2441	1.639	262.24	31600	400	Pass
1-DH5	2441	2.887	307.947	31600	400	Pass
2-DH1	2441	0.392	125.44	31600	400	Pass
2-DH3	2441	1.644	263.04	31600	400	Pass
2-DH5	2441	2.892	308.48	31600	400	Pass
3-DH1	2441	0.392	125.44	31600	400	Pass
3-DH3	2441	1.642	262.72	31600	400	Pass
3-DH5	2441	2.894	308.693	31600	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31600\text{ms}$

Test channel: as blow

CH:2441MHz time slot=test data(ms)*(1600/ (2*79))*31600ms


CH:2441MHz time slot=test data(ms)*(1600/ (4*79))*31600ms

CH:2441MHz time slot=test data(ms)*(1600/ (6*79))*31600ms



Test Graphs

Dwell NVNT 1-DH1 2441MHz

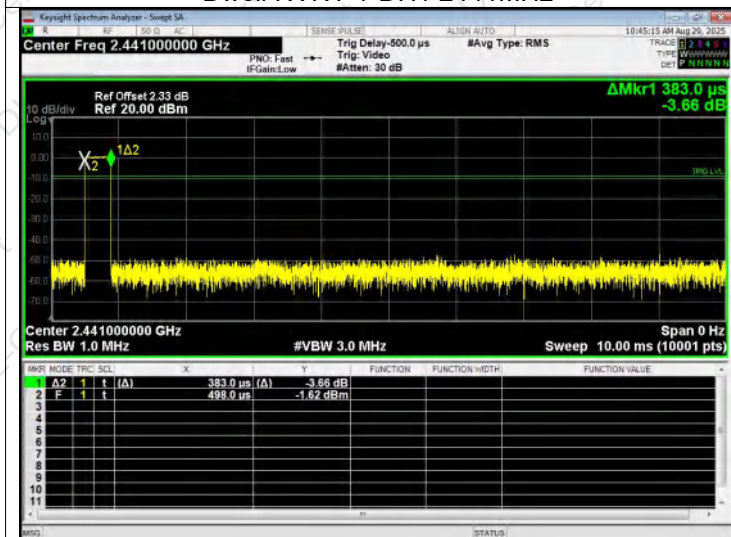

Dwell NVNT 1-DH3 2441MHz




Dwell NVNT 1-DH5 2441MHz





Dwell NVNT 2-DH1 2441MHz

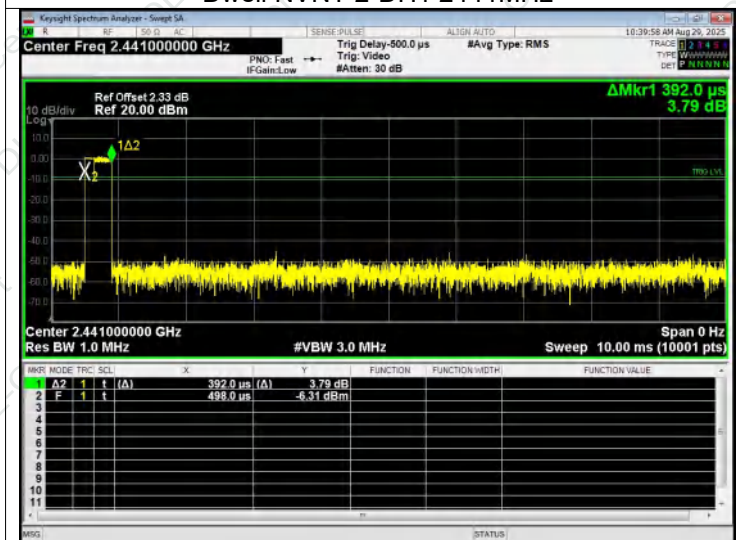

Dwell NVNT 2-DH3 2441MHz




Dwell NVNT 2-DH5 2441MHz





Dwell NVNT 3-DH1 2441MHz

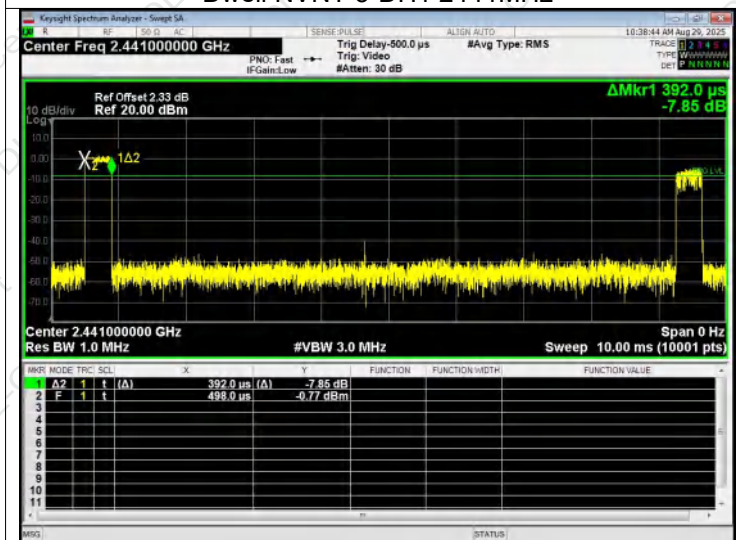

Dwell NVNT 3-DH3 2441MHz



Dwell NVNT 3-DH5 2441MHz





12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Chip antenna, the best case gain of the antennas is 1.75 dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****