



RF MEASUREMENT REPORT

FCC ID: 2BFMH-KN-3911

Applicant: Keenetic Ltd.

Product: Keenetic Challenger SE

Model No.: KN-3911

Trademark: KEENETIC

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2023-03-20

Test Date: 2024-06-21 ~ 2024-06-24

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033 and KDB 291074. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2403RSU044-U6	V01	Initial Report	2024-09-09	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Antenna Details	9
2. Test Configuration	10
2.1. Test Mode	10
2.2. Test System Connection Diagram	11
2.3. Test Software	12
2.4. Applied Standards	12
2.5. Test Environment Condition	12
3. Antenna Requirements	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty	14
5.1. Decision Rules	14
5.2. Measurement Uncertainty	14
6. Test Result	15
6.1. Summary	15
6.2. 26dB & 99% Bandwidth Measurement	16
6.2.1. Test Limit	16
6.2.2. Test Procedure	16
6.2.3. Test Setting	16
6.2.4. Test Setup	16
6.2.5. Test Result	17
6.3. 6dB Bandwidth Measurement	18
6.3.1. Test Limit	18
6.3.2. Test Procedure	18
6.3.3. Test Setting	18
6.3.4. Test Setup	18
6.3.5. Test Result	18
6.4. Output Power Measurement	19
6.4.1. Test Limit	19

6.4.2.	Test Procedure	19
6.4.3.	Test Setting	19
6.4.4.	Test Setup	19
6.4.5.	Test Result	19
6.5.	Power Spectral Density Measurement	20
6.5.1.	Test Limit	20
6.5.2.	Test Procedure	20
6.5.3.	Test Setting	20
6.5.4.	Test Setup	20
6.5.5.	Test Result	20
6.6.	Frequency Stability Measurement	21
6.6.1.	Test Limit	21
6.6.2.	Test Procedure	21
6.6.3.	Test Setup	21
6.6.4.	Test Result	22
6.7.	Radiated Spurious Emission Measurement.....	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure	23
6.7.3.	Test Setting	24
6.7.4.	Test Setup	26
6.7.5.	Test Result	27
6.8.	Radiated Restricted Band Edge Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Procedure	30
6.8.3.	Test Setting	30
6.8.4.	Test Setup	31
6.8.5.	Test Result	31
6.9.	AC Conducted Emissions Measurement	32
6.9.1.	Test Limit	32
6.9.2.	Test Setup	32
6.9.3.	Test Result	32
Appendix A – Test Result.....		33
A.1	Duty Cycle Test Result.....	33
A.2	26dB & 99% Bandwidth Test Result	35
A.3	6dB Bandwidth Test Result	41
A.4	Output Power Test Result	47
A.5	Power Spectral Density Test Result.....	48
A.6	Frequency Stability Test Result.....	64
A.7	Radiated Spurious Emission Test Result.....	65

A.8	Radiated Restricted Band Edge Test Result.....	84
A.9	AC Conducted Emissions Test Result	114
Appendix B – Test Setup Photograph		116
Appendix C – EUT Photograph		117

1. General Information

1.1. Applicant

Keenetic Ltd.

Office 2703A, 27/F., 148 Electric Road, North Point, Hong Kong.

1.2. Manufacturer

Keenetic Ltd.

Office 2703A, 27/F., 148 Electric Road, North Point, Hong Kong.

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Keenetic Challenger SE
Model No.	KN-3911
EUT Identification No.	20240322Sample#02(Radiated Testing) 20240322Sample#03(Conducted Testing)
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Operating Temp.	0 ~ 40 °C
Operating Environment	Indoor Use
Power Supply	By AC/DC Adapter
Accessory	
AC Adapter	Model: DSA-18PFCA-09 120150 Input: 100-240V ~ 50/60Hz, 0.6A Output: 12.0V, 1.5A, 18.0W
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5845MHz, 5865MHz, 5885MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5835MHz, 5875MHz For 802.11ac-VHT80/ax-HE80: 5855MHz For 802.11ac-VHT160/ax-HE160: 5815MHz	
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA	
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1732Mbps 802.11ax: up to 2402Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
169	5845 MHz	173	5865 MHz	177	5885 MHz

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
167	5835 MHz	175	5875 MHz	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
171	5855 MHz	--	--	--	--

802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
163	5815 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency (MHz)	TX Paths	Number of spatial streams	Antenna Gain (dBi)			Directional Gain (dBi)
				Ant 0	Ant 1	Ant 2	
PIFA	2400 ~ 2483.5	2	1	2.55	1.19	--	4.91
	5150 ~ 5250	3	1	2.49	3.13	2.50	7.48
	5250 ~ 5350	3	1	1.69	3.20	2.55	7.27
	5470 ~ 5725	3	1	2.58	3.10	2.78	7.59
	5725 ~ 5850	3	1	3.57	3.32	2.71	7.98
	5850 ~ 5895	3	1	3.05	3.32	2.54	7.84

Remark:

- The antenna gain refers to manufacturer's antenna specification.
- The device supports CDD Mode and Beamforming mode, details refer to the table as below.
- CDD signals are correlated, the directional gain as follows,
For power measurements: Array Gain = 0 dB for $N_{ANT} \leq 4$, the directional gain = max antenna gain + array gain
For power spectral density (PSD) measurements: the max directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. BF Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$.

Test Mode	T _x Paths	CDD Mode	Beamforming Mode
Wi-Fi 2.4G			
802.11b/g	2	√	X
802.11n/ax	2	√	√
Wi-Fi 5G			
802.11a	3	√	X
802.11n/ac/ax	3	√	√

Remark: "√" means "Support", "X" means "Not support".


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11a_Nss=1 (6Mbps) (CDD Mode)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0) (CDD Mode)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0) (CDD Mode)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0) (CDD Mode)
Mode 5: Transmit by 802.11ac-VHT160_Nss=1 (MCS0) (CDD Mode)
Mode 6: Transmit by 802.11ax-HE20_Nss=1 (MCS0) (CDD Mode)
Mode 7: Transmit by 802.11ax-HE40_Nss=1 (MCS0) (CDD Mode)
Mode 8: Transmit by 802.11ax-HE80_Nss=1 (MCS0) (CDD Mode)
Mode 9: Transmit by 802.11 ax-HE160_Nss=1 (MCS0) (CDD Mode)
Note: 1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. For CDD mode, this device supports 2 NSS and power level is the same of spatial multiplexing. The worst case is NSS=1. 3. The conducted power under Beam-Forming mode will be automatically back down based on CDD mode. 4. 802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report. 5. As Designated by manufacturer, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

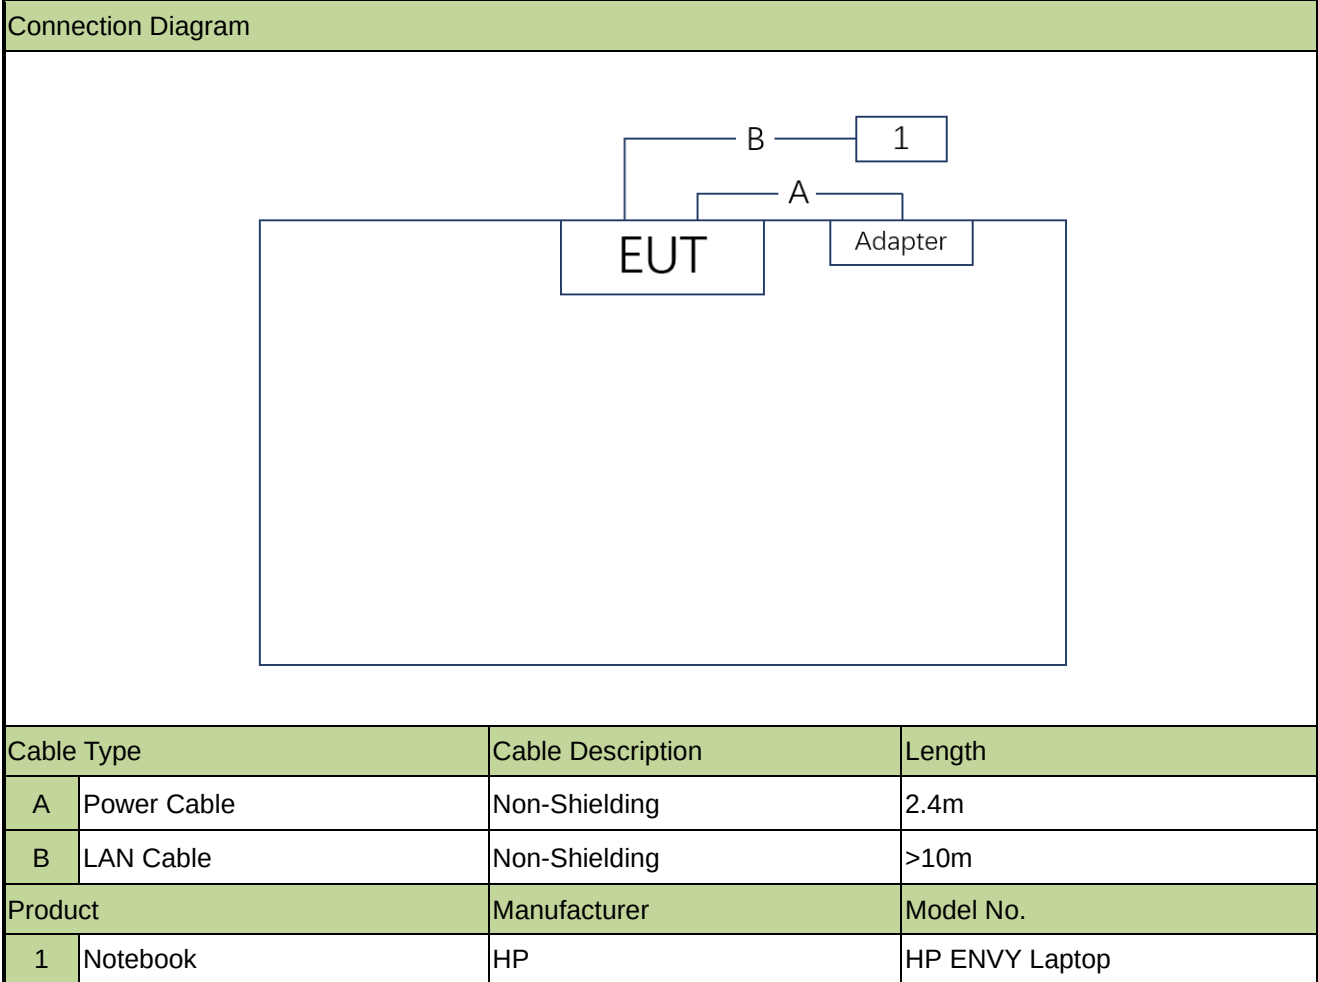

2.3. Test Software

The test utility software used during testing was "QATool_Dbg.exe", and the version was v2.78.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 291074 D02v01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

KDB 291074 DR01: An Indoor Access point in the U-NII-4 band (5.850-5.895 GHz) and U-NII -3 & -4 span channels must use an integrated antenna

- The antenna of the device is built in and locked inside the enclosure.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2024-12-17	SIP-AC1
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2024-12-21	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2025-05-08	SIP-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2024-09-24	SIP-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2024-10-09	SIP-AC1
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2025-06-12	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2024-10-28	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-13	SIP-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2025-01-27	SIP-AC1
Preamplifier	MRT	AMP-AC1	MRTSUE11265	1 year	2024-11-03	SIP-AC1
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2024-07-31	SIP-TR1
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2025-02-03	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2025-02-03	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2024-10-28	SIP-TR1

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
e3	19910a	RE & CE
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power
Controller_MF 7802BS	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(3)(ii)	Maximum Conducted Output Power		Pass
15.407(a)(3)(ii)(12)	Peak Power Spectral Density		Pass
15.407(b)(5)	Undesirable Emissions	Radiated	Pass
15.205, 15.209 15.407(b)(5)(i), (8), (9)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section C.1 (26dB Bandwidth)

KDB 789033 D02v02r01- Section D (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Detector = Peak.
6. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

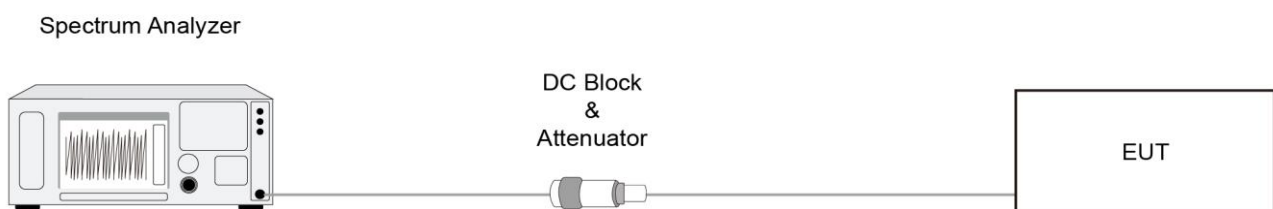

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section C.2

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

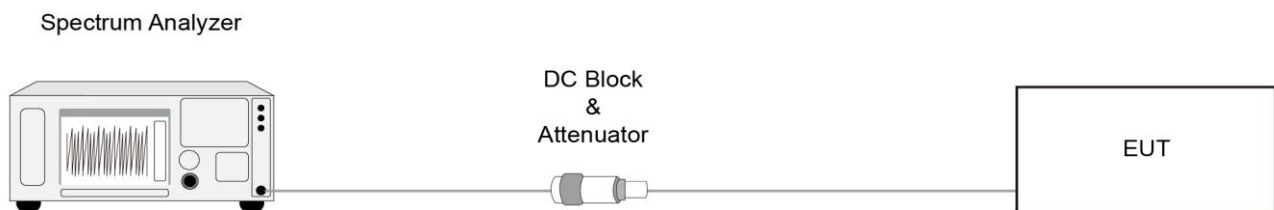

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.850-5.895 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

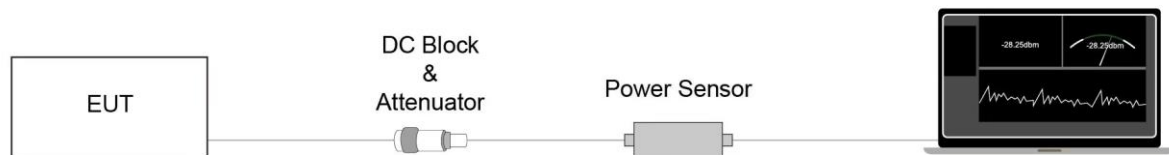

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Power Spectral Density Measurement

6.5.1. Test Limit

For an indoor access point operating in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 20 dBm e.i.r.p. in any 1-megahertz band.


6.5.2. Test Procedure

KDB 789033 D02v02r01-SectionF

6.5.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = $3 \times \text{RBW}$
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.

6.5.4. Test Setup

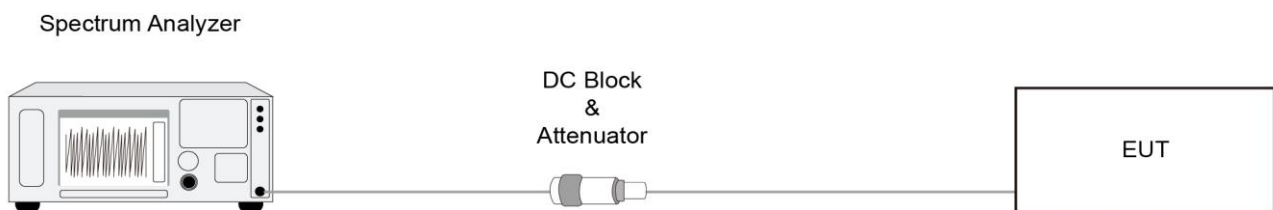

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

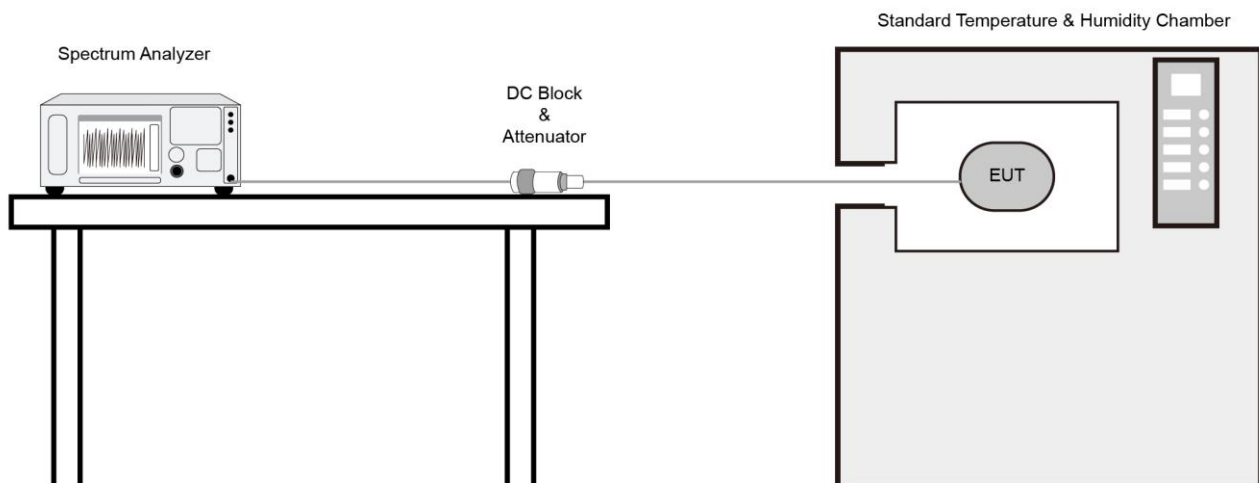

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Radiated Spurious Emission Measurement

6.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency	Field Strength	Measured Distance
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

KDB 789033 D02v02r01- Section G.

6.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.7.4. Test Setup


Below 30MHz Test Setup:

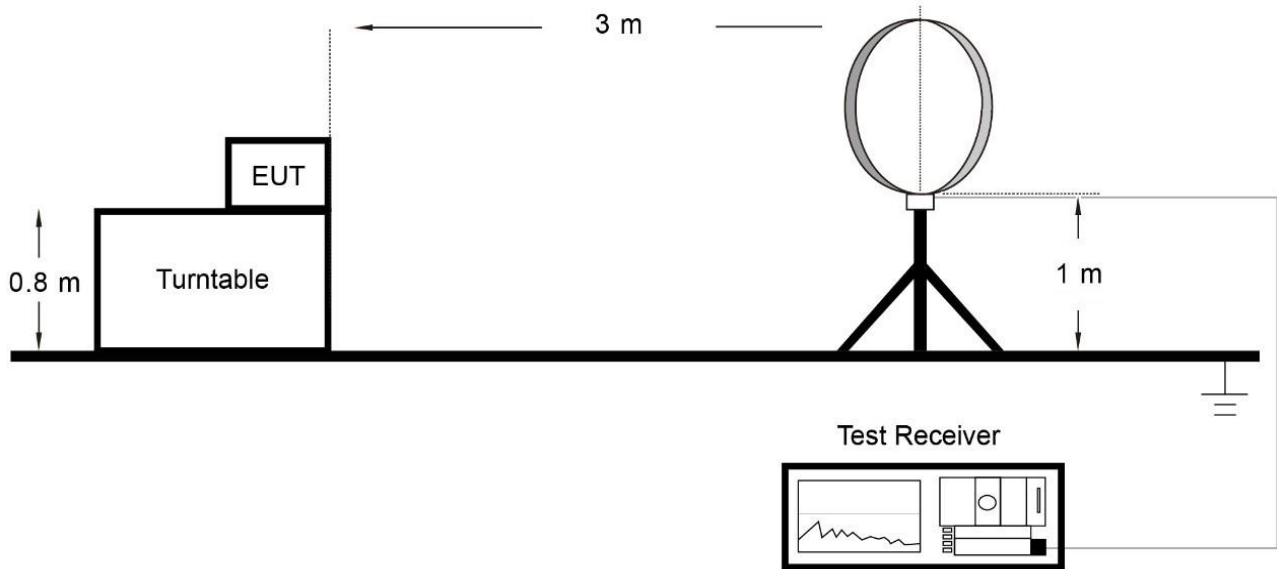

Below 1GHz Test Setup:

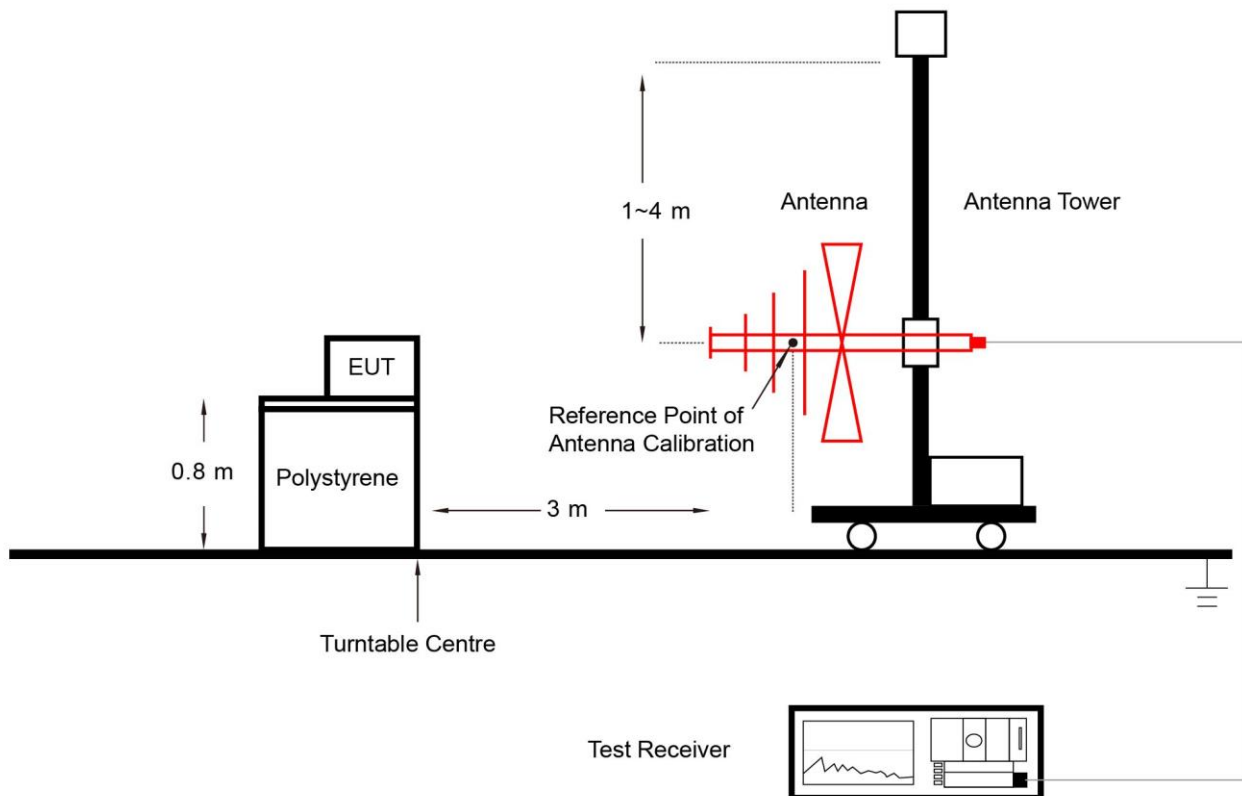

Above 1GHz Test Setup:

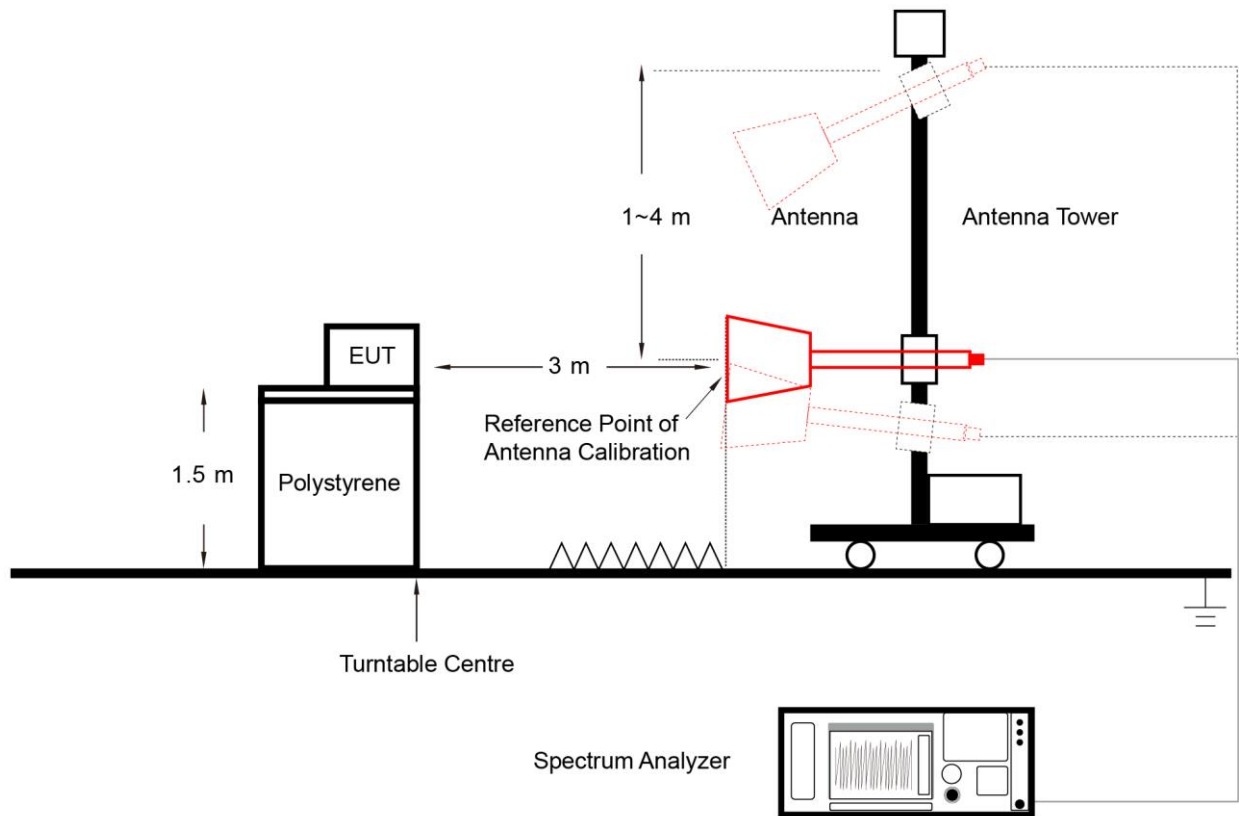

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Restricted Band Edge Measurement

6.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For an indoor access point, all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925GHz.

For indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for example, -27 dBm/MHz = 68.2 dB μ V/m

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section G

6.8.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.8.4. Test Setup

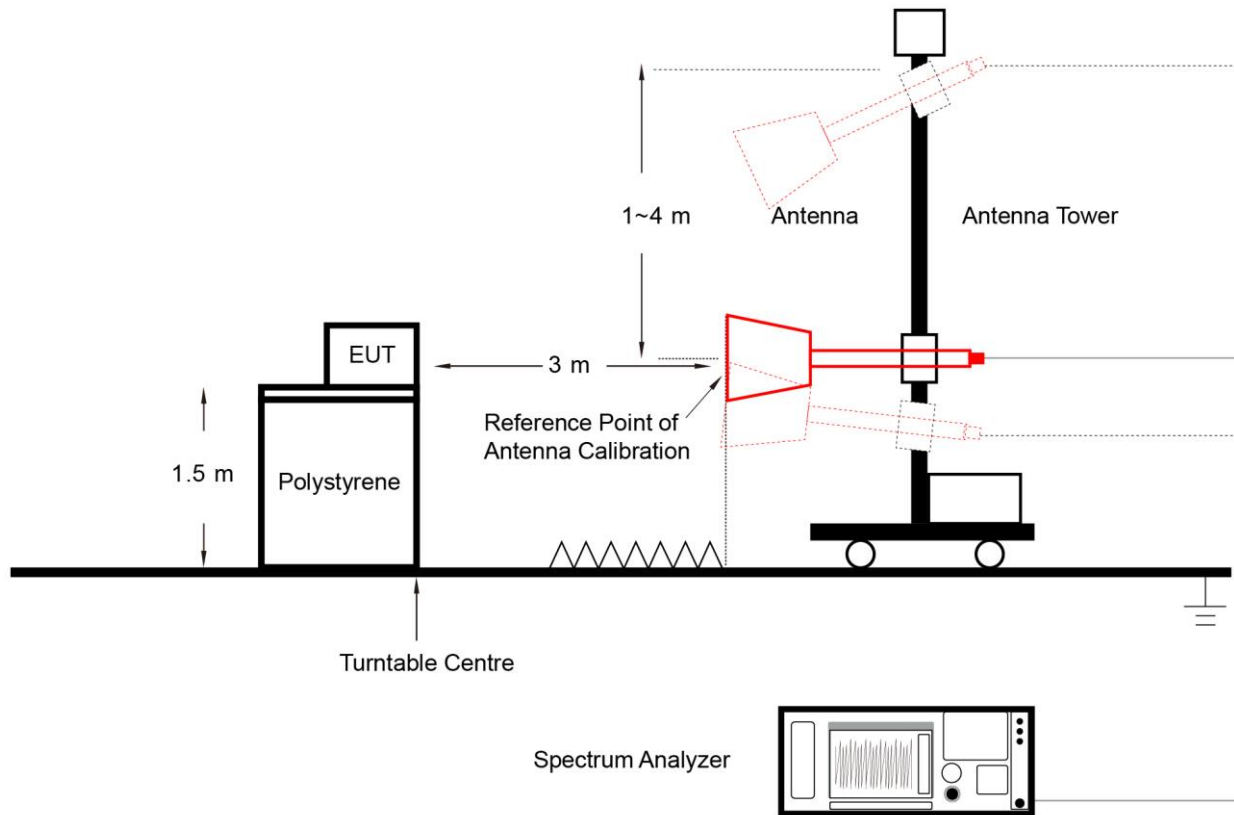

6.8.5. Test Result

Refer to Appendix A.8.

6.9. AC Conducted Emissions Measurement


6.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.9.2. Test Setup

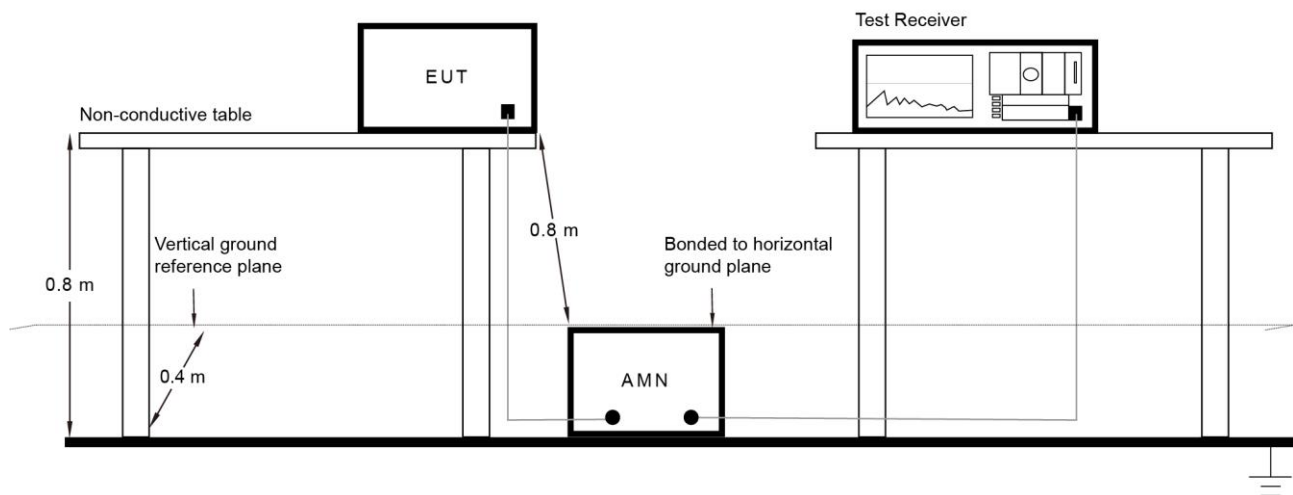

6.9.3. Test Result

Refer to Appendix A.9.





Appendix A – Test Result

A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-06-21		


Test Mode	Duty Cycle
802.11a	95.60%
802.11ac-VHT20	95.26%
802.11ac-VHT40	91.40%
802.11ac-VHT80	84.74%
802.11ac-VHT160	76.30%
802.11ax-HE20	94.55%
802.11ax-HE40	90.10%
802.11ax-HE80	83.71%
802.11ax-HE160	83.48%

Duty Cycle (T = Transmission Duration)

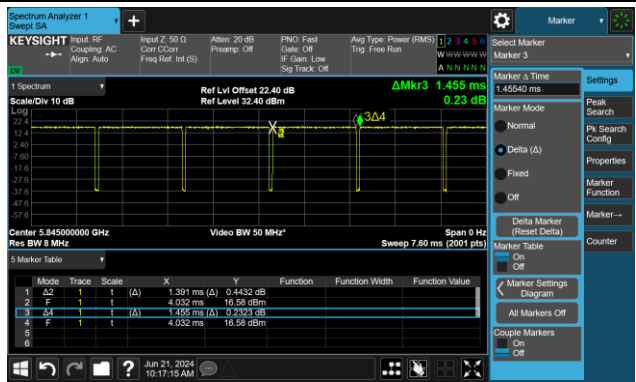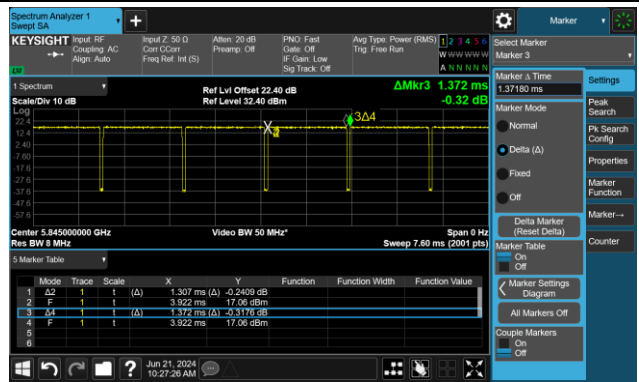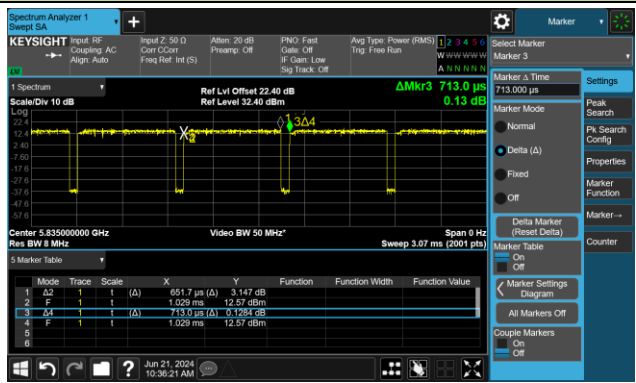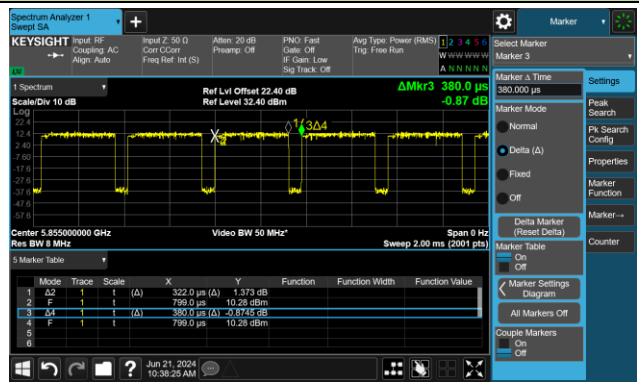
802.11a (T = 1.391ms) 	802.11ac-VHT20 (T = 1.307ms) 
802.11ac-VHT40 (T = 651.7μs) 	802.11ac-VHT80 (T = 322.0μs) 

Duty Cycle (T = Transmission Duration)


802.11ac-VHT160 (T = 183.5µs)

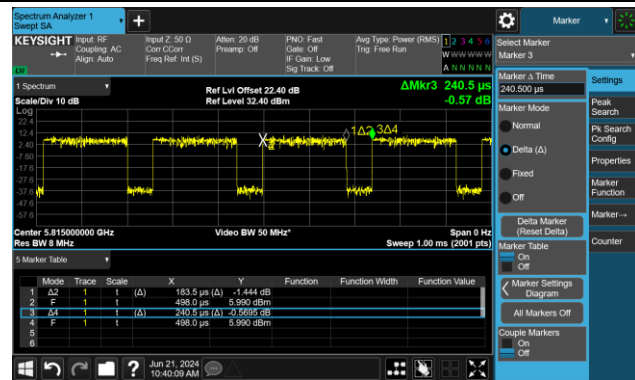


802.11ax-HE20 (T = 1.023ms)

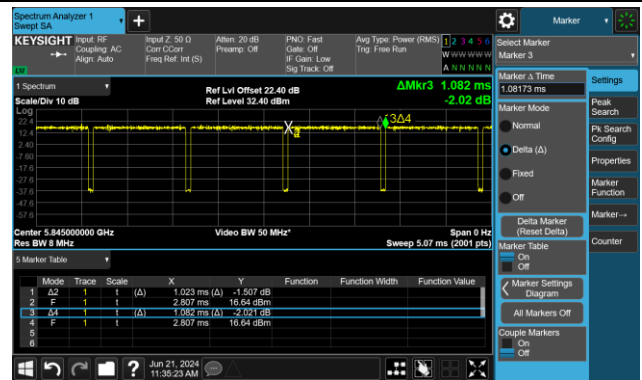


802.11ax-HE40 (T = 544.3µs)

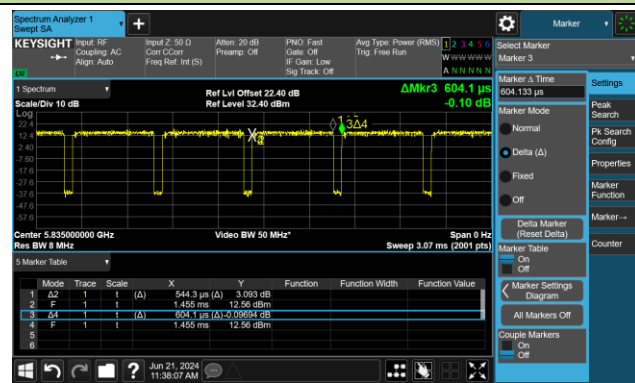

802.11ax-HE80 (T = 296.0µs)

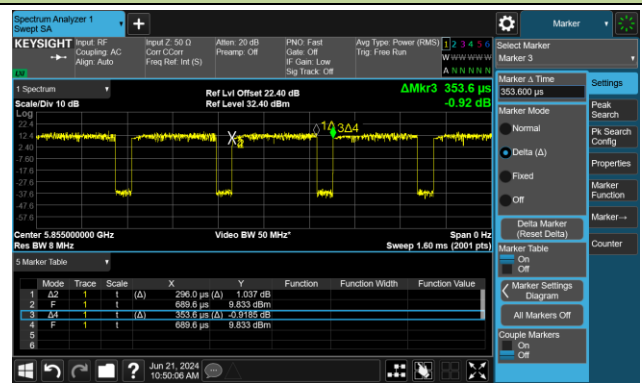

802.11ax-HE160 (T = 295.2µs)

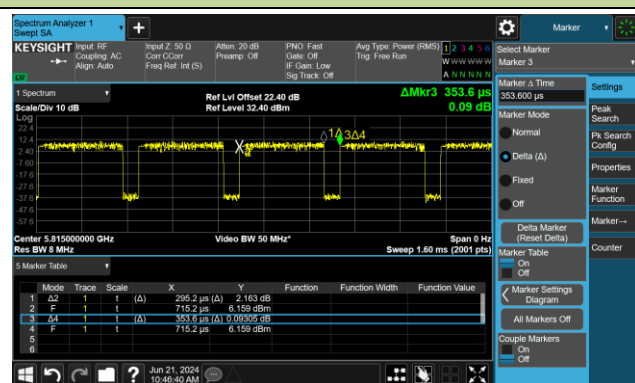


A.2 26dB & 99% Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-06-21		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	99% Bandwidth (MHz)	26dB Bandwidth (MHz)
11a	6Mbps	169	5845	16.534	21.10
11a	6Mbps	173	5865	16.539	20.65
11a	6Mbps	177	5885	16.536	20.61
11ac-VHT20	MCS0	169	5845	17.736	21.35
11ac-VHT20	MCS0	173	5865	17.748	21.52
11ac-VHT20	MCS0	177	5885	17.738	21.15
11ac-VHT40	MCS0	167	5835	36.213	42.69
11ac-VHT40	MCS0	175	5875	36.268	42.93
11ac-VHT80	MCS0	171	5855	76.549	149.10
11ac-VHT160	MCS0	163	5815	158.99	312.70
11ax-HE20	MCS0	169	5845	18.969	21.33
11ax-HE20	MCS0	173	5865	18.938	21.88
11ax-HE20	MCS0	177	5885	18.994	21.50
11ax-HE40	MCS0	167	5835	37.726	44.96
11ax-HE40	MCS0	175	5875	37.659	45.15
11ax-HE80	MCS0	171	5855	78.258	142.90
11ac-HE160	MCS0	163	5815	157.32	280.10

802.11a 26dB Bandwidth


Channel 169 (5845MHz)

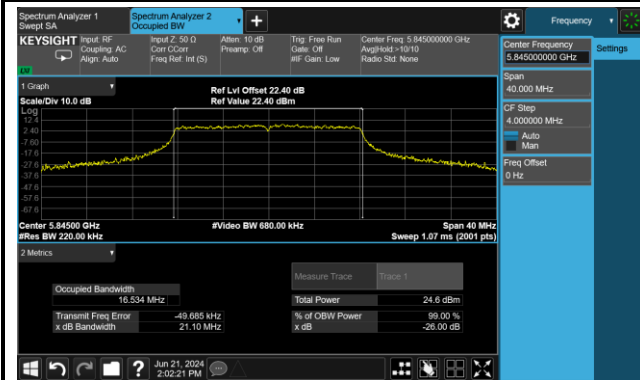

Channel 173 (5865MHz)

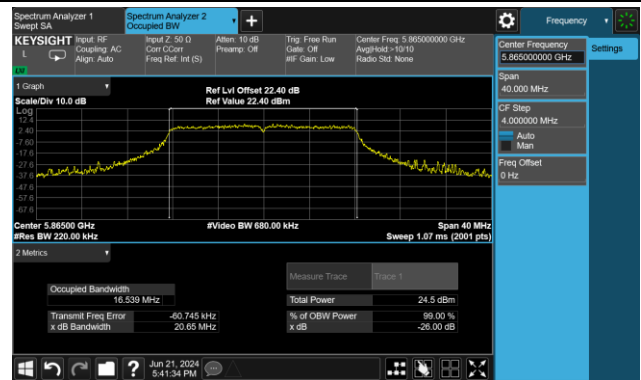


Channel 177 (5885MHz)

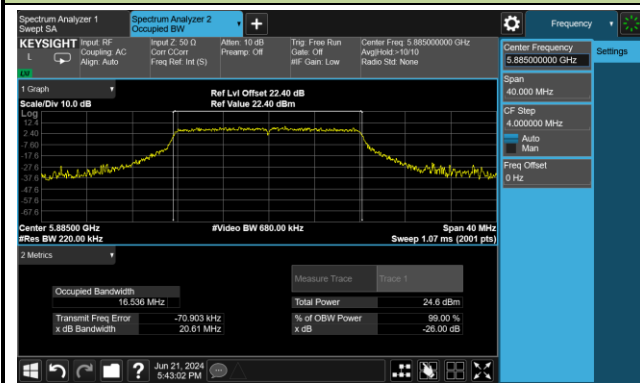


802.11ac-VHT20 26dB Bandwidth


Channel 169 (5845MHz)

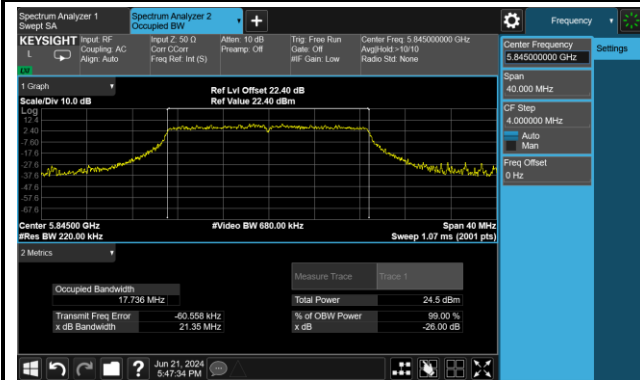

Channel 173 (5865MHz)

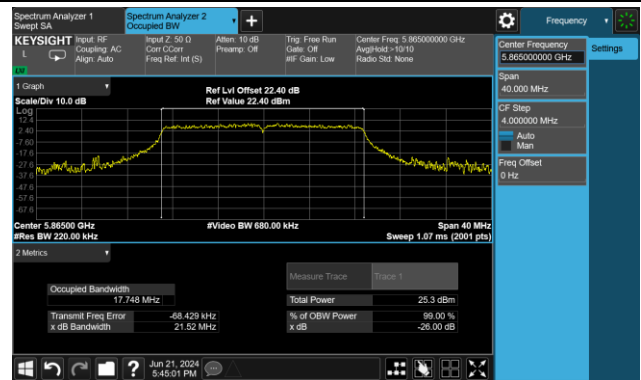


Channel 177 (5885MHz)

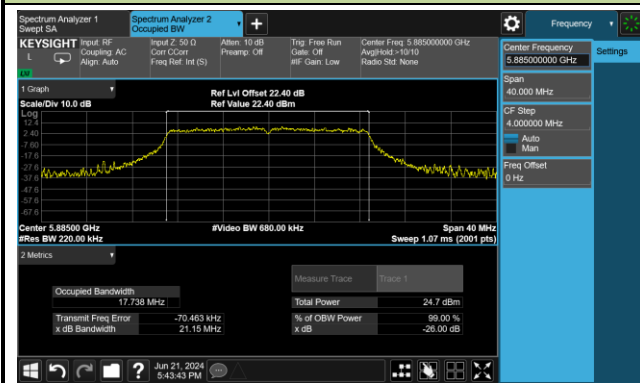


802.11ac-VHT40 26dB Bandwidth

Channel 167 (5835MHz)

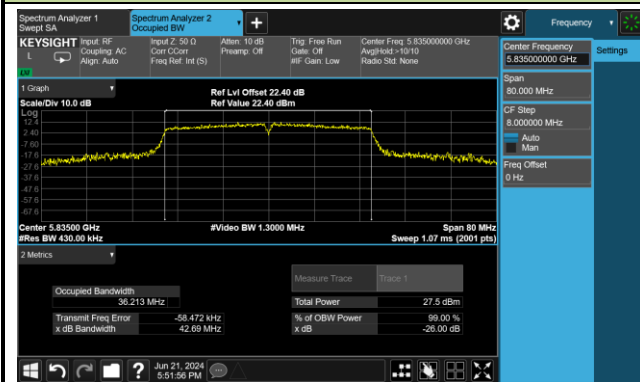


Channel 175(5875MHz)

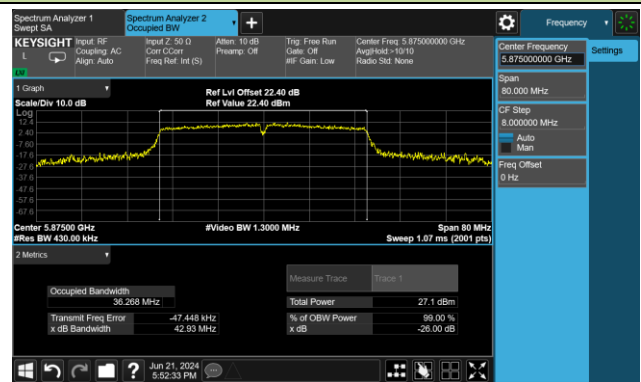


802.11ac-VHT80 26dB Bandwidth

Channel 171 (5855MHz)

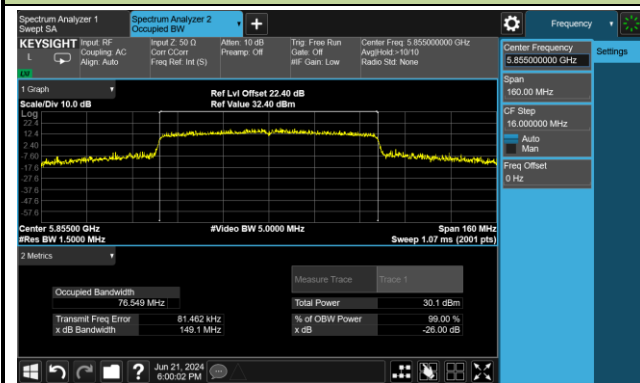


802.11ac-VHT160 26dB Bandwidth

Channel 163 (5815MHz)

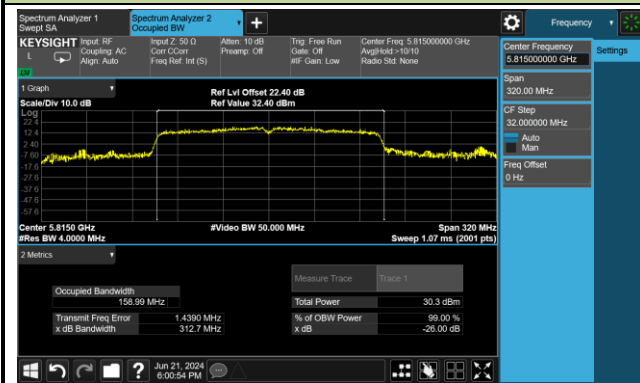


802.11ax-HE20 26dB Bandwidth


Channel 169 (5845MHz)

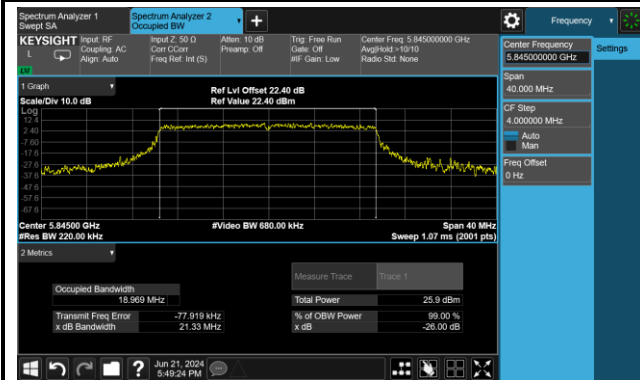

Channel 173 (5865MHz)

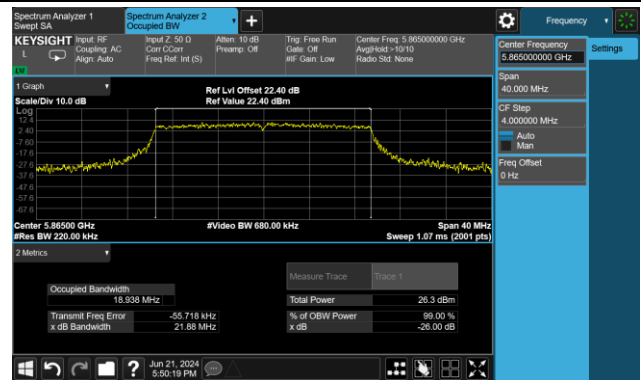


Channel 177 (5885MHz)

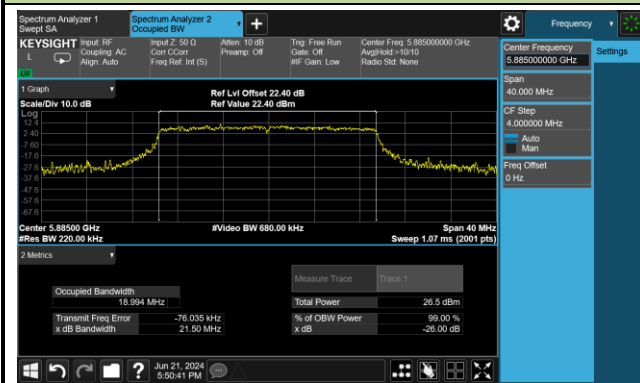


802.11ax-HE40 26dB Bandwidth

Channel 167 (5835MHz)

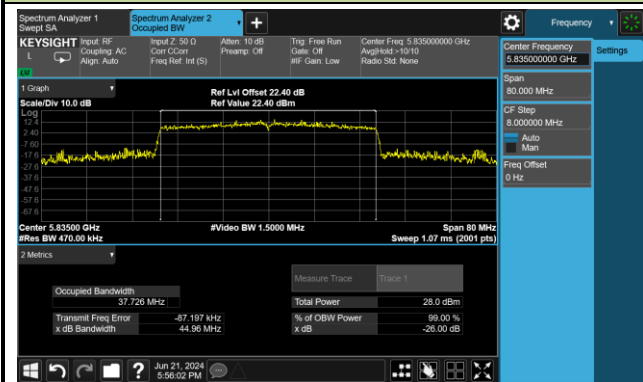


Channel 175(5875MHz)

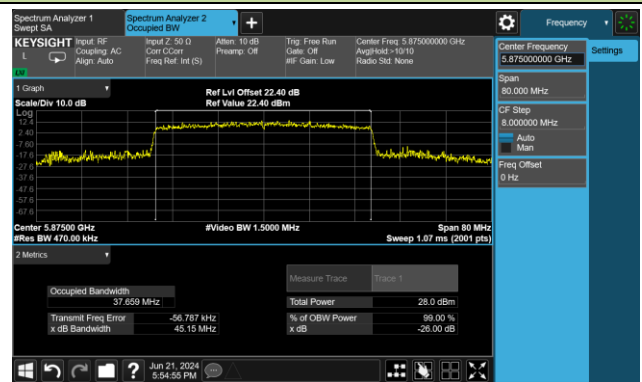


802.11ax-HE80 26dB Bandwidth

Channel 171 (5855MHz)

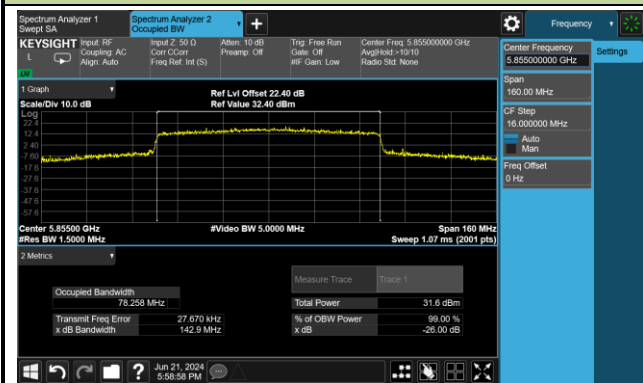

802.11ac-HE160 26dB Bandwidth

Channel 163 (5815MHz)

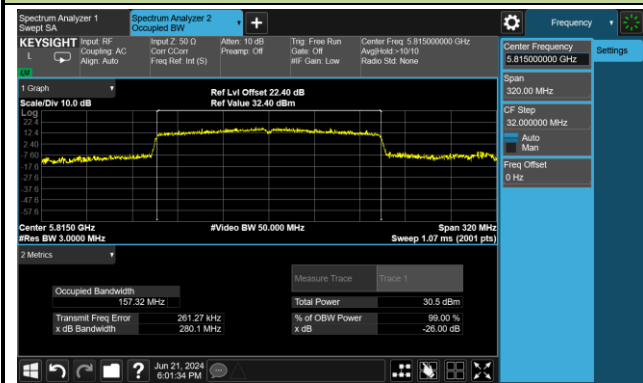


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-06-23		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	169	5845	16.35	≥ 0.5
11a	6Mbps	173	5865	16.34	≥ 0.5
11a	6Mbps	177	5885	16.32	≥ 0.5
11ac-VHT20	MCS0	169	5845	17.58	≥ 0.5
11ac-VHT20	MCS0	173	5865	17.59	≥ 0.5
11ac-VHT20	MCS0	177	5885	17.59	≥ 0.5
11ac-VHT40	MCS0	167	5835	32.63	≥ 0.5
11ac-VHT40	MCS0	175	5875	31.77	≥ 0.5
11ac-VHT80	MCS0	171	5855	73.83	≥ 0.5
11ac-VHT160	MCS0	163	5815	145.20	≥ 0.5
11ax-HE20	MCS0	169	5845	18.74	≥ 0.5
11ax-HE20	MCS0	173	5865	18.87	≥ 0.5
11ax-HE20	MCS0	177	5885	18.93	≥ 0.5
11ax-HE40	MCS0	167	5835	36.29	≥ 0.5
11ax-HE40	MCS0	175	5875	33.83	≥ 0.5
11ax-HE80	MCS0	171	5855	75.15	≥ 0.5
11ax-HE160	MCS0	163	5815	155.10	≥ 0.5

802.11a 6dB Bandwidth


Channel 169 (5845MHz)

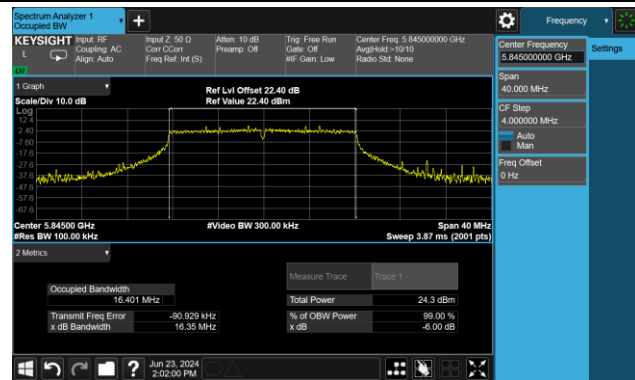

Channel 173 (5865MHz)

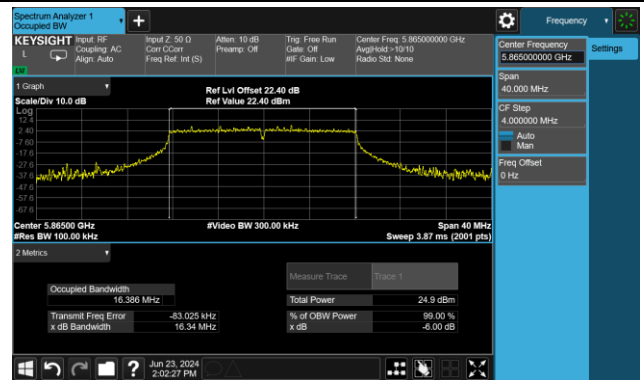


Channel 177 (5885MHz)

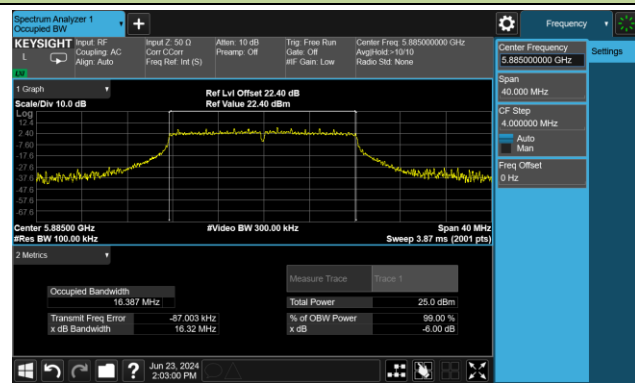


802.11ac-VHT20 6dB Bandwidth


Channel 169 (5845MHz)

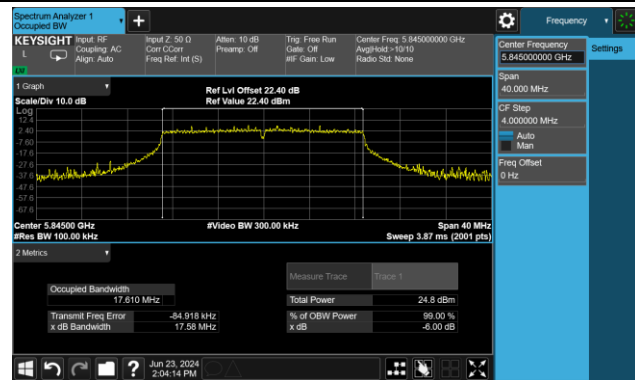

Channel 173 (5865MHz)

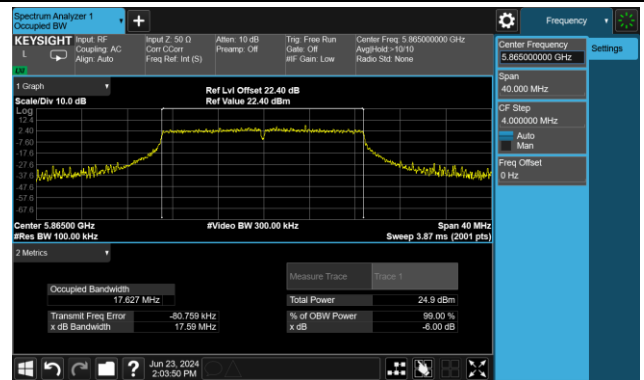


Channel 177 (5885MHz)

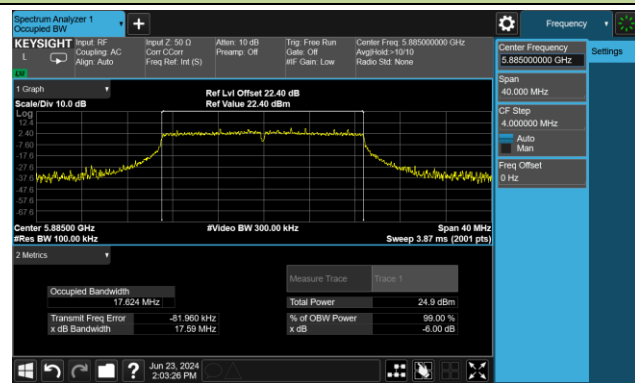


802.11ac-VHT40 6dB Bandwidth

Channel 167 (5835MHz)

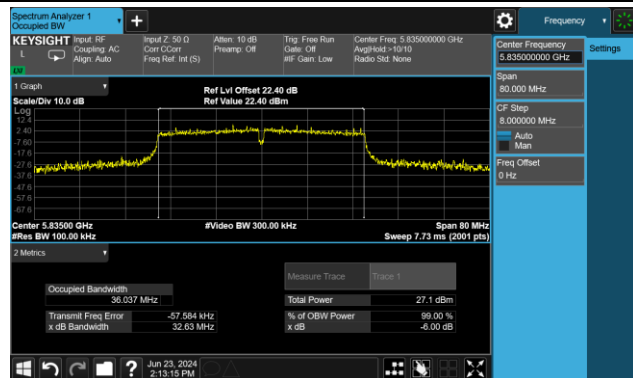


Channel 175(5875MHz)

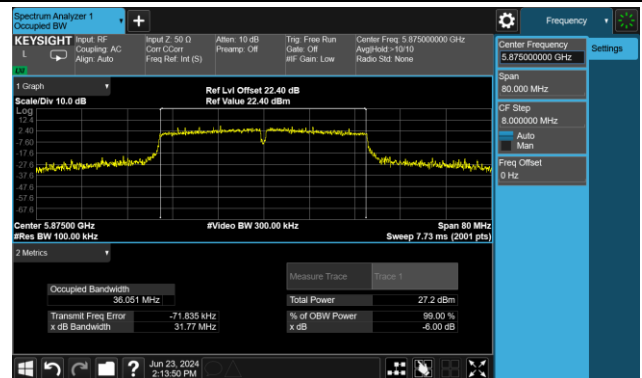


802.11ac-VHT80 6dB Bandwidth

Channel 171 (5855MHz)

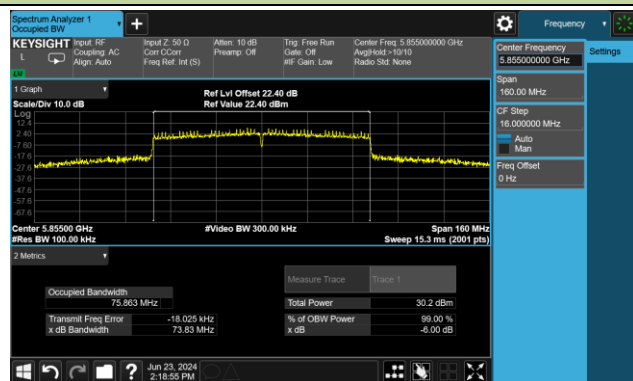


802.11ac-VHT160 6dB Bandwidth

Channel 163 (5815MHz)

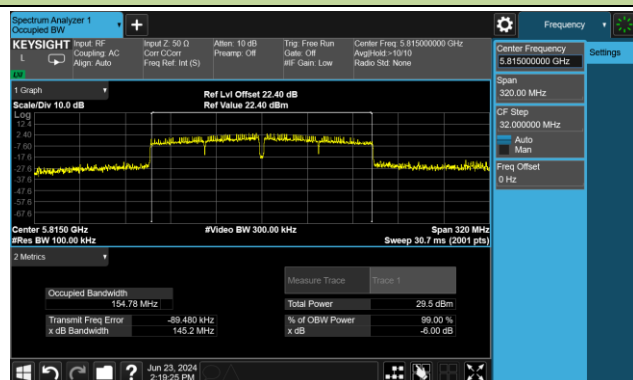


802.11ax-HE20 6dB Bandwidth


Channel 169 (5845MHz)

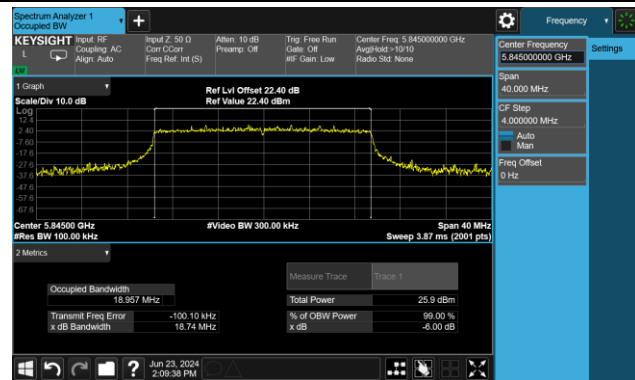

Channel 173 (5865MHz)

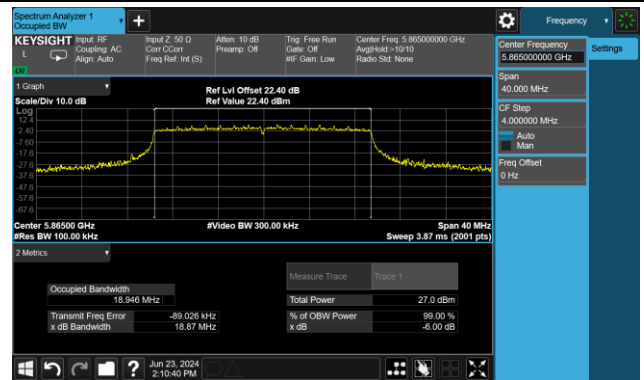


Channel 177 (5885MHz)

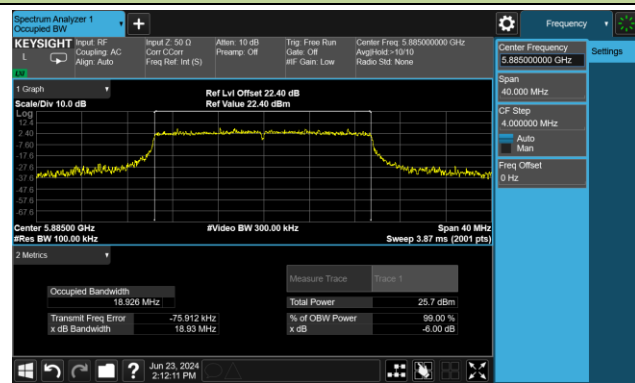


802.11ax-HE40 6dB Bandwidth

Channel 167 (5835MHz)

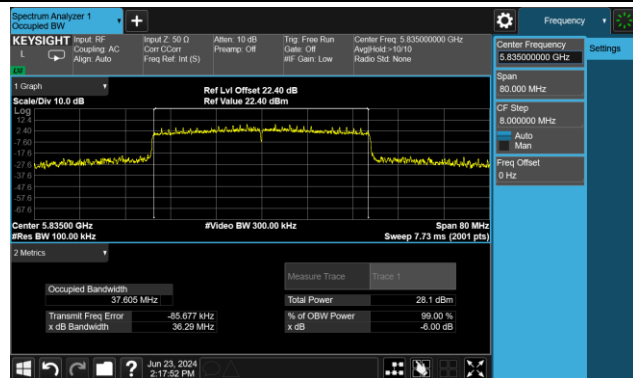


Channel 175(5875MHz)

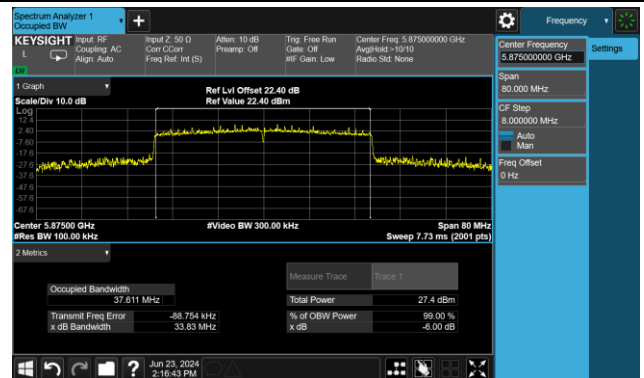


802.11ax-HE80 6dB Bandwidth

Channel 171 (5855MHz)

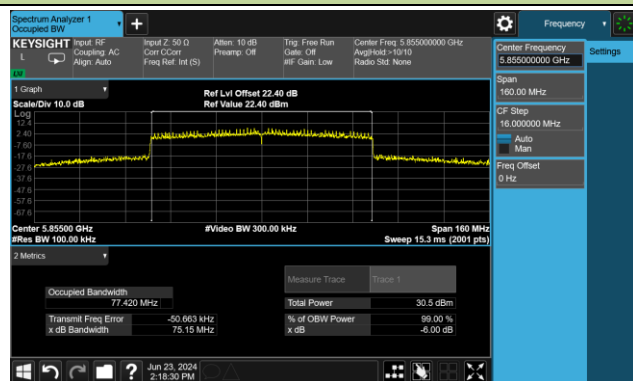

802.11ax-HE160 6dB Bandwidth

Channel 163 (5815MHz)

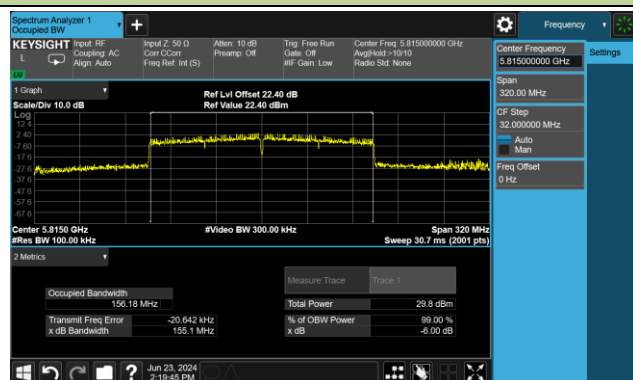

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-06-21 ~ 2024-06-24		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Antenna Gain (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)
				Ant 0	Ant 1	Ant 2				
11a	6Mbps	169	5845	18.32	17.75	18.22	22.87	3.32	26.19	≤ 36.00
11a	6Mbps	173	5865	18.16	17.92	18.31	22.90	3.32	26.22	≤ 36.00
11a	6Mbps	177	5885	18.36	17.83	18.44	22.99	3.32	26.31	≤ 36.00
11ac-VHT20	MCS0	169	5845	18.46	17.98	18.54	23.10	3.32	26.42	≤ 36.00
11ac-VHT20	MCS0	173	5865	18.30	18.24	18.48	23.11	3.32	26.43	≤ 36.00
11ac-VHT20	MCS0	177	5885	18.61	18.02	18.58	23.18	3.32	26.50	≤ 36.00
11ac-VHT40	MCS0	167	5835	20.75	20.13	20.82	25.35	3.32	28.67	≤ 36.00
11ac-VHT40	MCS0	175	5875	20.70	20.38	20.76	25.39	3.32	28.71	≤ 36.00
11ac-VHT80	MCS0	171	5855	22.78	22.17	22.52	27.27	3.32	30.59	≤ 36.00
11ac-VHT160	MCS0	163	5815	14.62	14.38	14.82	19.38	3.32	22.70	≤ 36.00
11ax-HE20	MCS0	169	5845	18.94	18.64	19.19	23.70	3.32	27.02	≤ 36.00
11ax-HE20	MCS0	173	5865	18.45	18.52	18.73	23.34	3.32	26.66	≤ 36.00
11ax-HE20	MCS0	177	5885	18.54	18.26	18.86	23.33	3.32	26.65	≤ 36.00
11ax-HE40	MCS0	167	5835	20.97	20.44	21.08	25.61	3.32	28.93	≤ 36.00
11ax-HE40	MCS0	175	5875	20.44	20.15	20.65	25.19	3.32	28.51	≤ 36.00
11ax-HE80	MCS0	171	5855	23.28	22.84	23.21	27.89	3.32	31.21	≤ 36.00
11ax-HE160	MCS0	163	5815	14.92	15.06	15.43	19.91	3.32	23.23	≤ 36.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)}\}$ (dBm).

Note 2: EIRP Power (dBm) = Total Average Power (dBm) + Max. Antenna Gain (dBi).

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-06-21 ~ 2024-06-24		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/MHz)			Duty Cycle (%)	Total PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2				
11a	6Mbps	169	5845	6.734	6.554	7.384	95.60	11.87	19.71	≤ 20.00
11a	6Mbps	173	5865	6.962	6.537	7.382	95.60	11.94	19.78	≤ 20.00
11a	6Mbps	177	5885	7.207	6.653	7.309	95.60	12.03	19.87	≤ 20.00
11ac-VHT20	MCS0	169	5845	7.116	6.634	6.978	95.26	11.90	19.74	≤ 20.00
11ac-VHT20	MCS0	173	5865	6.953	6.487	7.003	95.26	11.80	19.64	≤ 20.00
11ac-VHT20	MCS0	177	5885	7.350	6.565	6.792	95.26	11.90	19.74	≤ 20.00
11ac-VHT40	MCS0	167	5835	6.723	6.412	6.811	91.40	11.81	19.65	≤ 20.00
11ac-VHT40	MCS0	175	5875	6.765	6.323	6.913	91.40	11.84	19.67	≤ 20.00
11ac-VHT80	MCS0	171	5855	6.178	5.394	5.662	84.74	11.25	19.09	≤ 20.00
11ac-VHT160	MCS0	163	5815	-5.064	-5.366	-4.673	76.30	0.92	8.76	≤ 20.00
11ax-HE20	MCS0	169	5845	7.069	6.550	7.211	94.55	11.97	19.81	≤ 20.00
11ax-HE20	MCS0	173	5865	6.816	6.251	6.837	94.55	11.66	19.50	≤ 20.00
11ax-HE20	MCS0	177	5885	6.743	6.427	7.156	94.55	11.80	19.64	≤ 20.00
11ax-HE40	MCS0	167	5835	6.995	6.283	6.680	90.10	11.89	19.73	≤ 20.00
11ax-HE40	MCS0	175	5875	6.543	6.053	6.384	90.10	11.56	19.39	≤ 20.00
11ax-HE80	MCS0	171	5855	6.084	5.414	5.388	83.71	11.18	19.02	≤ 20.00
11ax-HE160	MCS0	163	5815	-4.433	-4.555	-3.672	83.48	1.35	9.19	≤ 20.00


Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)}\}$ (dBm/MHz) + $10 \cdot \log (1/\text{Duty cycle})$.

Note 2: EIRP PSD (dBm/MHz) = Total PSD (dBm/MHz) + Directional Antenna Gain for PSD (dBi).


Note 3: For Channels span the 5.725-5.850 GHz and 5.850-5.895 GHz bands, we record the maximum level of 5.725-5.850 GHz and 5.850-5.895 GHz with RBW=1MHz, and the level complied with the 5.850-5.895 GHz EIRP PSD Limit.

802.11a Power Spectral Density - Ant 0


Channel 169 (5845MHz)

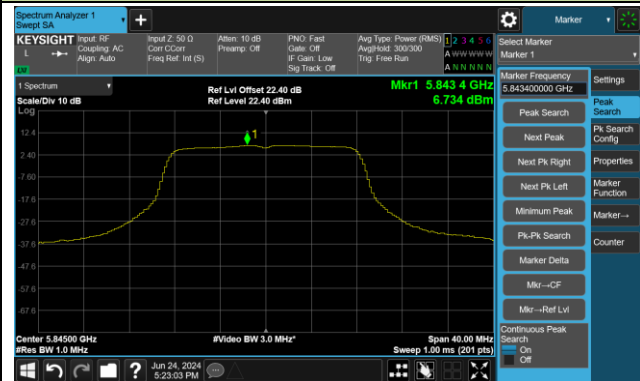

Channel 173 (5865MHz)

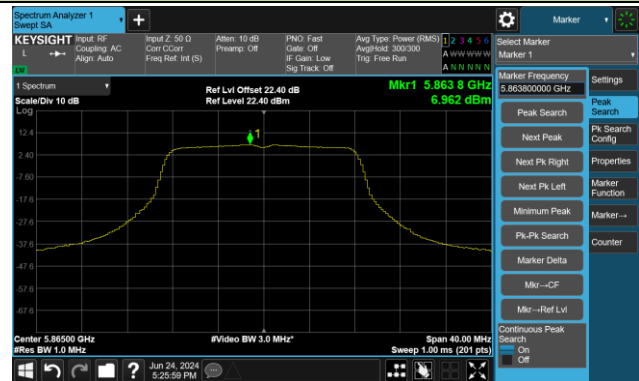

Channel 177 (5885MHz)

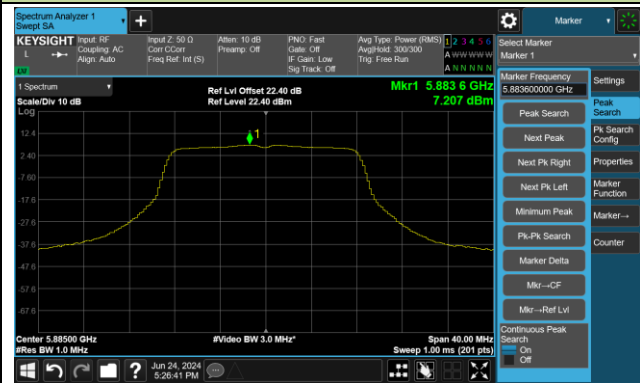


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 169 (5845MHz)



Channel 173 (5865MHz)

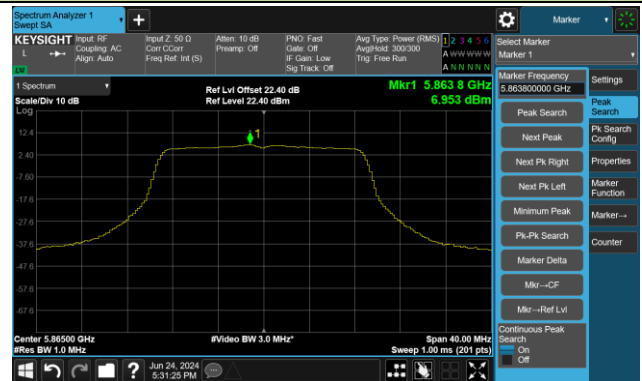


Channel 177 (5885MHz)

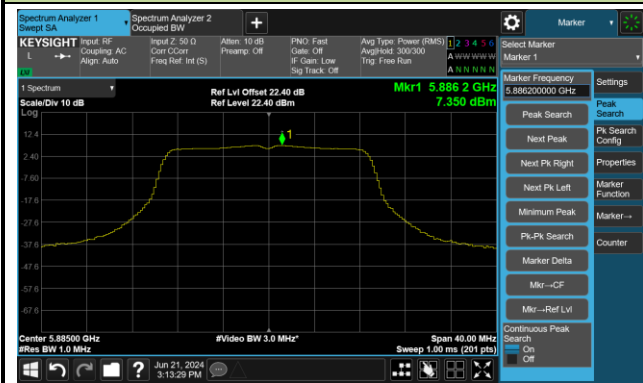


802.11ac-VHT40 Power Spectral Density - Ant 0

Channel 167 (5835MHz)

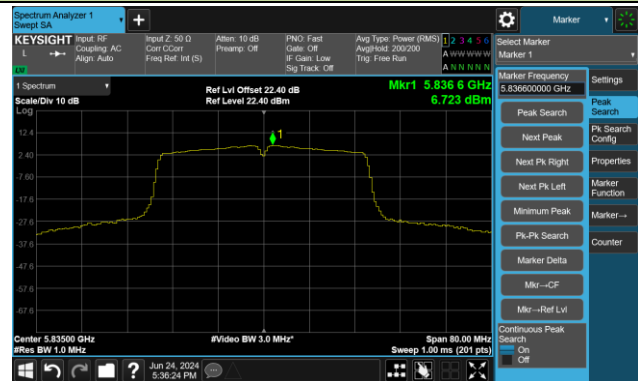


Channel 175 (5875MHz)

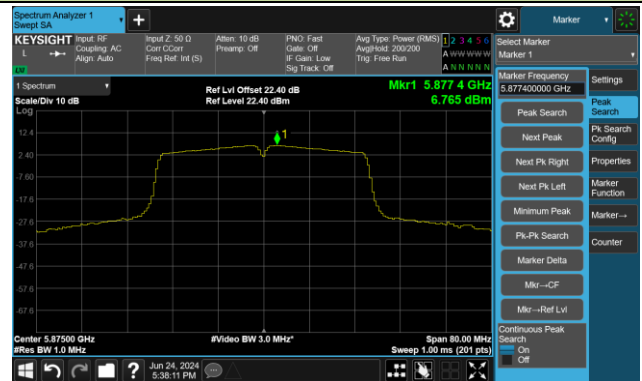


802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 171 (5855MHz)

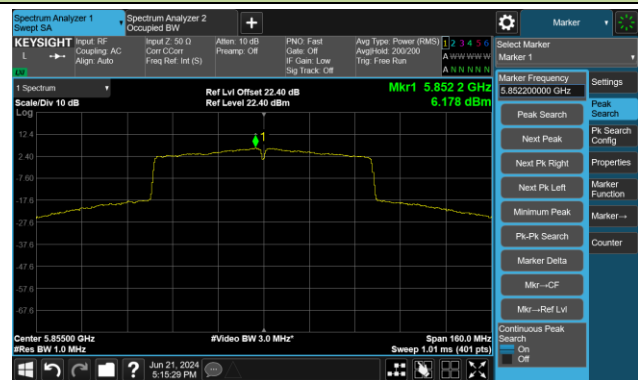

802.11ac-VHT160 Power Spectral Density - Ant 0

Channel 163 (5815MHz)

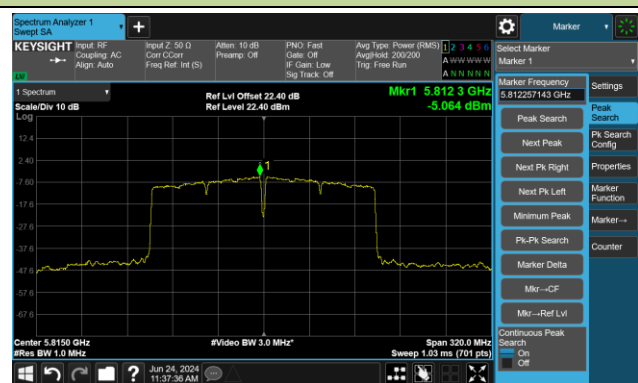

802.11ax-HE20 Power Spectral Density - Ant 0

Channel 169 (5845MHz)



Channel 173 (5865MHz)




Channel 177 (5885MHz)



802.11 ax-HE40 Power Spectral Density - Ant 0

Channel 167 (5835MHz)

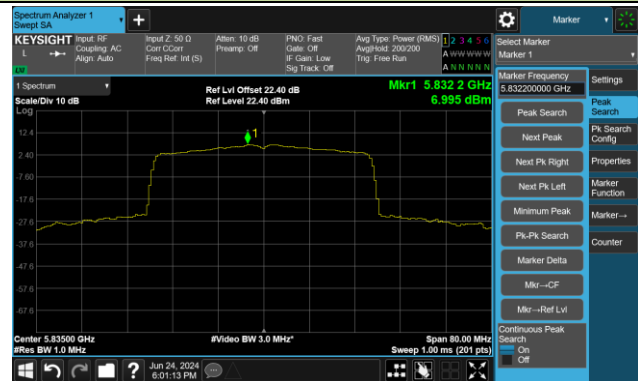


Channel 175 (5875MHz)



802.11 ax-HE80 Power Spectral Density - Ant 0

Channel 171 (5855MHz)

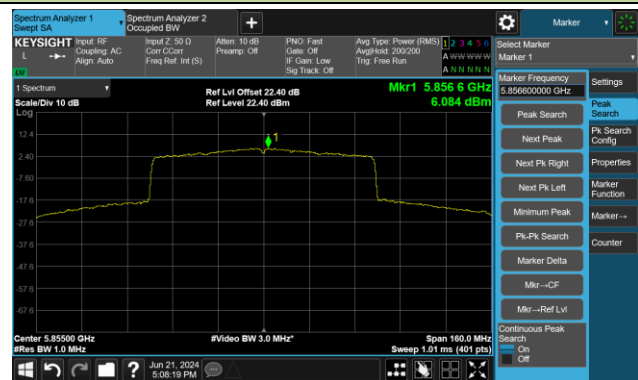


802.11 ax-HE160 Power Spectral Density - Ant 0

Channel 163 (5815MHz)




802.11a Power Spectral Density - Ant 1


Channel 169 (5845MHz)

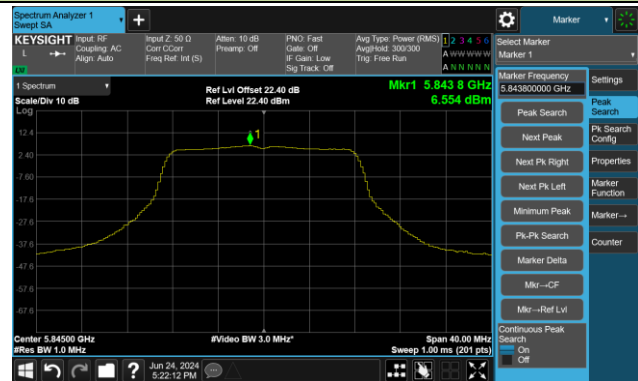

Channel 173 (5865MHz)

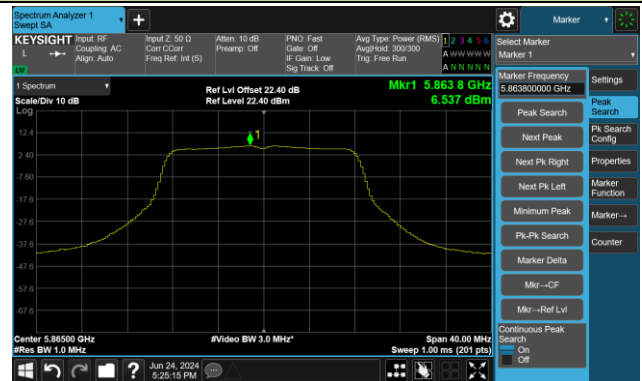


Channel 177 (5885MHz)

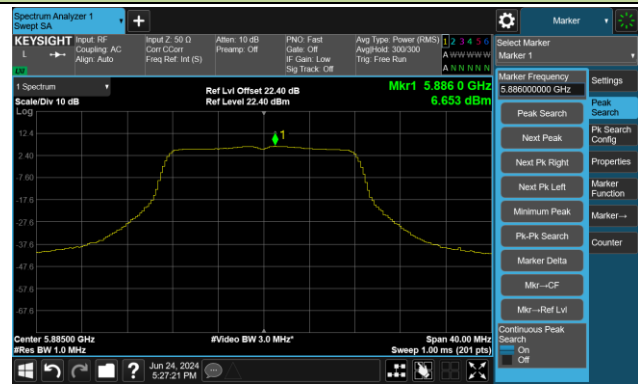


802.11ac-VHT20 Power Spectral Density - Ant 1


Channel 169 (5845MHz)

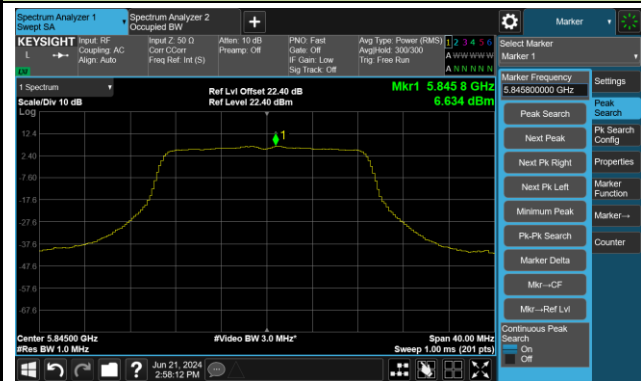

Channel 173 (5865MHz)

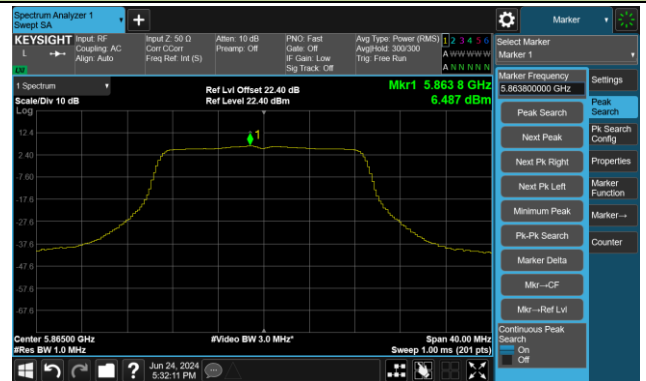


Channel 177 (5885MHz)

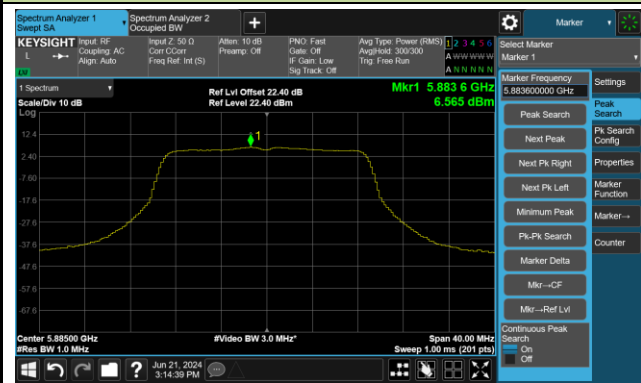


802.11ac-VHT40 Power Spectral Density - Ant 1

Channel 167 (5835MHz)

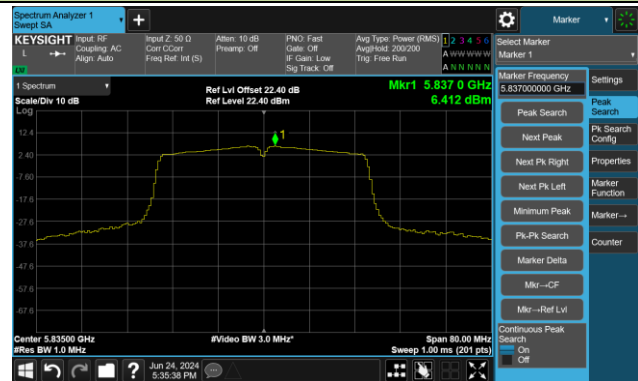


Channel 175 (5875MHz)

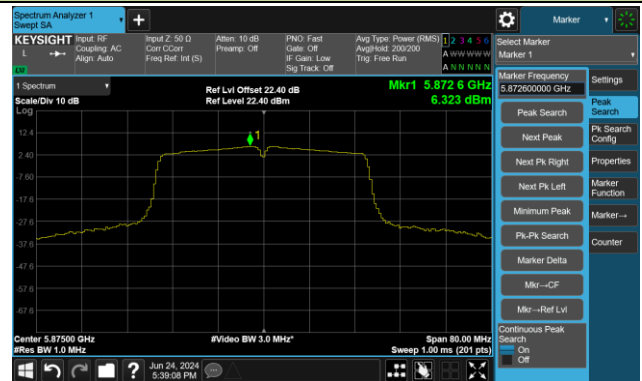

802.11ac-VHT80 Power Spectral Density - Ant 1

Channel 171 (5855MHz)

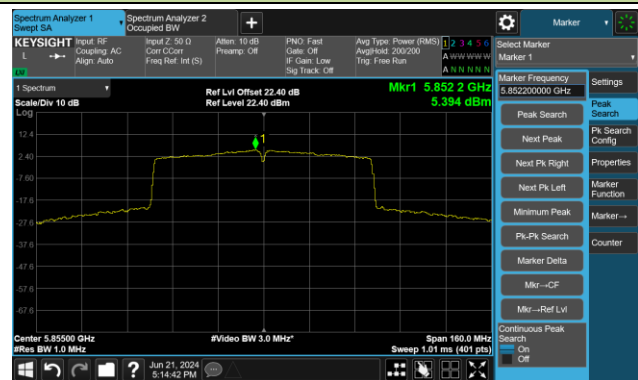

802.11ac-VHT160 Power Spectral Density - Ant 1

Channel 163 (5815MHz)

