

TEST REPORT

Product	:	K628 4G LTE Module
Trade mark	:	KIAYO
Model/Type reference	:	K628-G, K628-CN, K628-WIFI
Serial Number	:	N/A
Report Number	:	EED32Q80383704
FCC ID	:	2BFPB-K628
Date of Issue	:	May 30, 2024
Test Standards	:	47 CFR Part 15 Subpart E
Test result	:	PASS

Prepared for:

SHENZHEN KIAYO TECHNOLOGY CO.,LTD.**4th Floor, Building 25, Chentian Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong Province, China**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China****TEL: +86-755-3368 3668****FAX: +86-755-3368 3385**

Compiled by:

Frazer Li

Reviewed by:

Tom Chen

Approved by:

Frazer Li
Aaron Ma

Date:

May 30, 2024



Check No.: 7001270324

1 Content

1 CONTENT	2
2 VERSION	3
3 TEST SUMMARY	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST CONFIGURATION	7
4.4 TEST ENVIRONMENT	7
4.5 DESCRIPTION OF SUPPORT UNITS	8
4.6 TEST LOCATION	9
4.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
5 EQUIPMENT LIST	10
6 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
6.1 ANTENNA REQUIREMENT	13
6.2 MAXIMUM CONDUCTED OUTPUT POWER	14
6.3 6dB EMISSION BANDWIDTH	15
6.4 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	16
6.5 MAXIMUM POWER SPECTRAL DENSITY	17
6.6 FREQUENCY STABILITY	18
6.7 RADIATED EMISSION	19
6.8 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BANDS	26
7 APPENDIX 5G WI-FI	59
PHOTOGRAPHS OF TEST SETUP	60
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	62

2 Version

Version No.	Date	Description
00	May 30, 2024	Original

3 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	N/A
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
26dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
99% Occupied bandwidth	\	PASS
6dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407 (e)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS

Remark:
 N/A: The product is powered by DC and is not suitable.
 Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.
 Model No.: K628-G, K628-CN, K628-WIFI
 Only the model K628-G was tested. Their electrical circuit design, layout, components used and internal wiring are identical. Only the different sales regions is different.

4 General Information

4.1 Client Information

Applicant:	SHENZHEN KIAYO TECHNOLOGY CO.,LTD.
Address of Applicant:	4th Floor, Building 25, Chentian Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong Province, China
Manufacturer:	SHENZHEN KIAYO TECHNOLOGY CO.,LTD.
Address of Manufacturer:	4th Floor, Building 25, Chentian Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong Province, China
Factory:	SHENZHEN KIAYO TECHNOLOGY CO.,LTD.
Address of Factory:	4th Floor, Building 25, Chentian Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong Province, China

4.2 General Description of EUT

Product Name:	K628 4G LTE Module
Model No.(EUT):	K628-G, K628-CN, K628-WIFI
Test Model No.:	K628-G
Trade mark:	KIAYO
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fixed Location
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(VHT20/VHT40/VHT80): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Operating Frequency	U-NII-1 & U-NII-2A: 5180-5320MHz U-NII-2C:5500-5700MHz(except 5600-5675MHz) U-NII-3:5745-5825MHz
Sample Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fixed Location
Antenna Type:	External Antenna
Antenna Gain:	6.6dBi
Function	<input checked="" type="checkbox"/> SISO <input type="checkbox"/> 2x2 MIMO <input type="checkbox"/> 3x3 MIMO <input type="checkbox"/> 4x4MIMO
Power Supply:	INPUT:100-240V~50/60Hz, 1.2A OUTPUT:12V/4A, 48W
Test voltage:	DC 12V
Sample Received Date:	Mar. 27, 2024
Sample tested Date:	Apr. 10, 2024 to May 23, 2024

Operation Frequency each of channel

802.11a/802.11n/802.11ac(20MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
-	-	-	-	116	5580	165	5825
-	-	-	-	132	5660	-	-
-	-	-	-	136	5680	-	-
-	-	-	-	140	5700	-	-

802.11n/802.11ac(40MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
-	-	-	-	134	5670	-	-
-	-	-	-	142	5710	-	-

802.11ac(80MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	58	5290	106	5530	155	5775
-	-	-	-	138	5690	-	-

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

4.3 Test Configuration

EUT Test Software Settings:	
Software:	RF test
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(VHT20)	MCS0
802.11ac(VHT40)	MCS0
802.11ac(VHT80)	MCS0

4.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Temperature:	NT (Normal Temperature)
	LT (Low Temperature)
	HT (High Temperature)
Working Voltage of the EUT:	NV (Normal Voltage)
	LV (Low Voltage)
	HV (High Voltage)
	DC 12V
	DC 10.8 V
	DC 13.2 V

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
3# display	DELL	U3011	FCC&CE	CTI
Adapter	Shenzhen Huntkey Electric Co., Ltd.	HKA04812048120 40-0A7	FCC&CE	Client

4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Communication test set	R&S	CMW500	107929	06-28-2023	06-27-2024
Signal Generator	R&S	SMBV100A	1407.6004K02-262149-CV	09-05-2023	09-04-2024
Spectrum Analyzer	R&S	FSV40	101200	07-25-2023	07-24-2024
RF control unit(power unit)	MWRF-test	MW100-RFCB	MW220620CTI-42	06-28-2023	06-27-2024
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-12-2023	12-10-2024
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-01-2023	05-31-2024
BT&WI-FI Automatic test software	MWRF-test	MTS 8310	V2.0.0.0	---	---
Spectrum Analyzer	R&S	FSV3044	101509	01-17-2024	01-1-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/22/2022	05/21/2025
Receiver	R&S	ESCI7	100938-003	09/22/2023	09/21/2024
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/22/2022	05/21/2025
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/17/2021 04/16/2024	04/16/2024 04/15/2025
Multi device Controller	maturo	NCD/070/10711112	---	---	---
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/17/2021 04/16/2024	04/16/2024 04/15/2025
Microwave Preamplifier	Agilent	8449B	3008A02425	06/20/2023	06/19/2024
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	01-09-2024	01-08-2025
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-19-2024	01-18-2025
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-13-2024	01-12-2025
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-30-2021 04-28-2024	04-29-2024 04-27-2025
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-17-2021 04-16-2024	04-16-2024 04-15-2025
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	04-13-2023 04-12-2024	04-12-2024 04-11-2025
Preamplifier	EMCI	EMC001330	980563	03-08-2024	03-07-2025
Preamplifier	JS Tonscend	TAP-011858	AP21B806112	07-25-2023	07-24-2024
Communication test set	R&S	CMW500	102898	12-14-2023	12-13-2024
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-07-2024	04-06-2025
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Radio Technical Requirements Specification


6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	Please see Internal photos
The antenna is external antenna. The best case gain of the antenna is 6.6dBi.	


6.2 Maximum Conducted Output Power

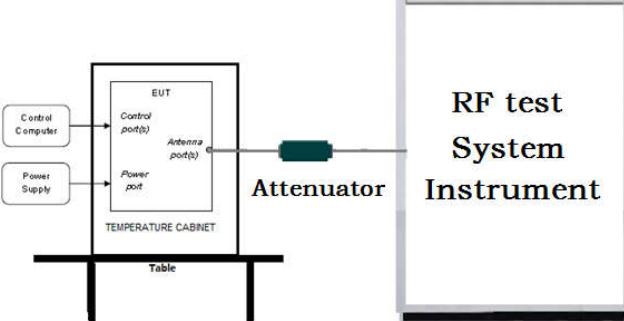Test Requirement:	47 CFR Part 15C Section 15.407 (a)												
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E												
Test Setup:													
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report. 												
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device </td> </tr> <tr> <td>5250-5350</td> <td>$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$</td> </tr> <tr> <td>5470-5725</td> <td>$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$</td> </tr> <tr> <td>5725-5850</td> <td>$\leq 1W(30dBm)$</td> </tr> <tr> <td>Remark:</td> <td>* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	$\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device	5250-5350	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$	5470-5725	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$	5725-5850	$\leq 1W(30dBm)$	Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
Frequency band (MHz)	Limit												
5150-5250	$\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device												
5250-5350	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$												
5470-5725	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$												
5725-5850	$\leq 1W(30dBm)$												
Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.												
Test Mode:	Transmitting mode with modulation												
Test Results:	Refer to Appendix 5G Wi-Fi												


6.3 6dB Emission Bandwidth

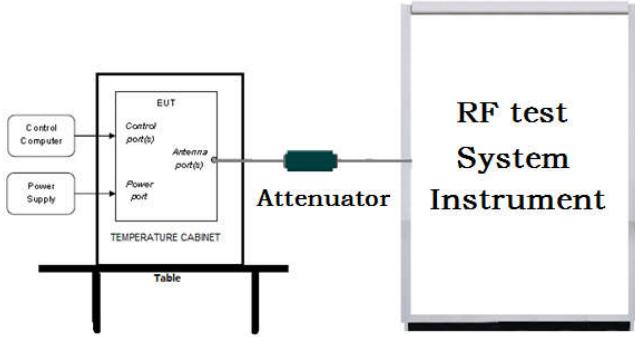Test Requirement:	47 CFR Part 15C Section 15.407 (e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Limit:	≥ 500 kHz
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix 5G Wi-Fi

6.4 26dB Emission Bandwidth and 99% Occupied Bandwidth

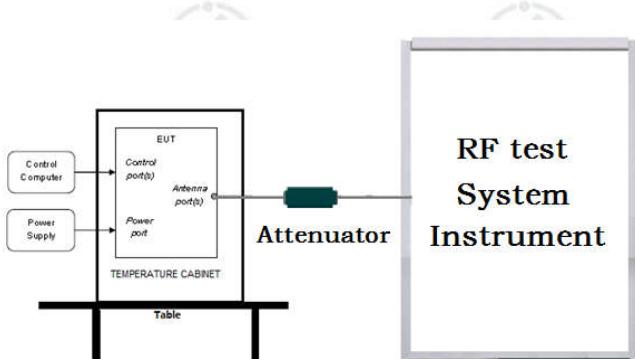Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Limit:	No restriction limits
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix 5G Wi-Fi

6.5 Maximum Power Spectral Density

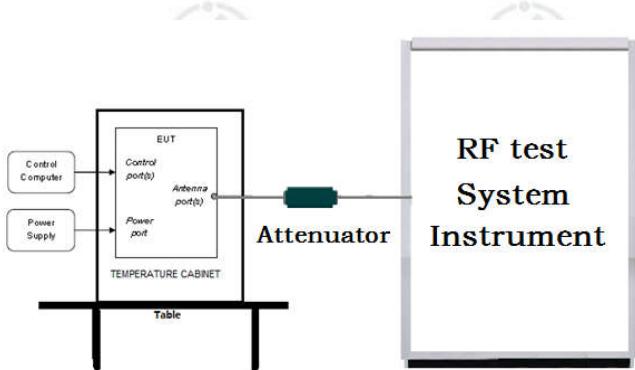Test Requirement:	47 CFR Part 15C Section 15.407 (a)												
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F												
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>												
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 												
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device </td> </tr> <tr> <td>5250-5350</td> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td> </tr> <tr> <td>5470-5725</td> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td> </tr> <tr> <td>5725-5850</td> <td>$\leq 30\text{dBm}$ in 500kHz</td> </tr> <tr> <td>Remark:</td> <td>The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device	5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device	5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device	5725-5850	$\leq 30\text{dBm}$ in 500kHz	Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.
Frequency band (MHz)	Limit												
5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device												
5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device												
5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device												
5725-5850	$\leq 30\text{dBm}$ in 500kHz												
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.												
Test Mode:	Transmitting mode with modulation												
Test Results:	Refer to Appendix 5G Wi-Fi												

6.6 Frequency Stability

Test Requirement:	47 CFR Part 15C Section 15.407 (g)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. 2. Turn the EUT on and couple its output to a spectrum analyzer. 3. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. 4. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. 5. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix 5G Wi-Fi

6.7 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed				

	<p>the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p> <p>Note:</p> <p>(i) $EIRP = ((E^*d)^2) / 30$</p> <p>where:</p> <ul style="list-style-type: none"> • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts. <p>(ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$</p> <p>(iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$</p>
Test Setup:	

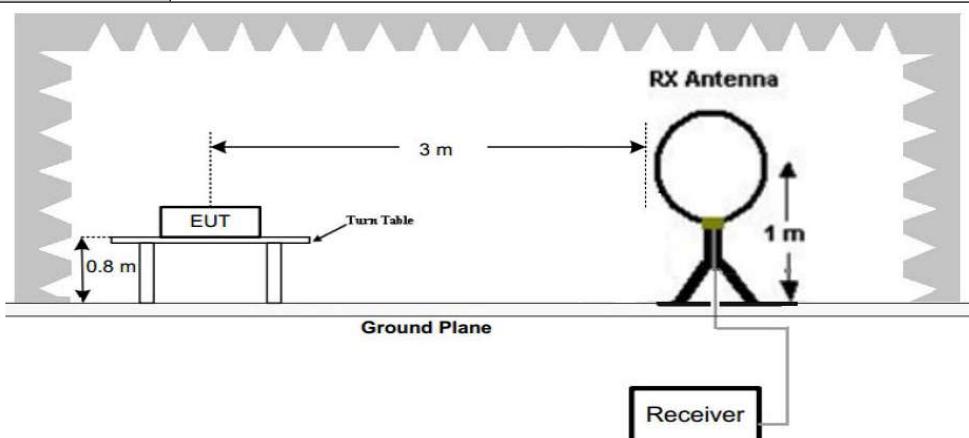


Figure 1. Below 30MHz

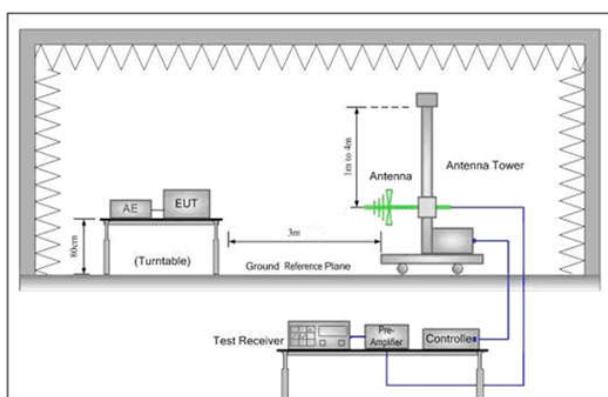


Figure 2. 30MHz to 1GHz

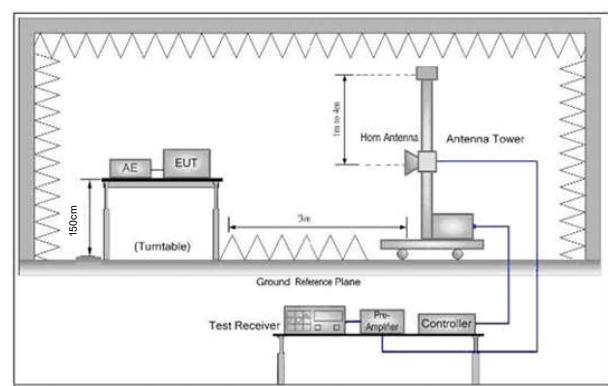


Figure 3. Above 1 GHz

Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p>
-----------------	--


	<p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel and the highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case middle channel of 6Mbps for 802.11a was recorded in the report.


Horizontal:

Test Graph

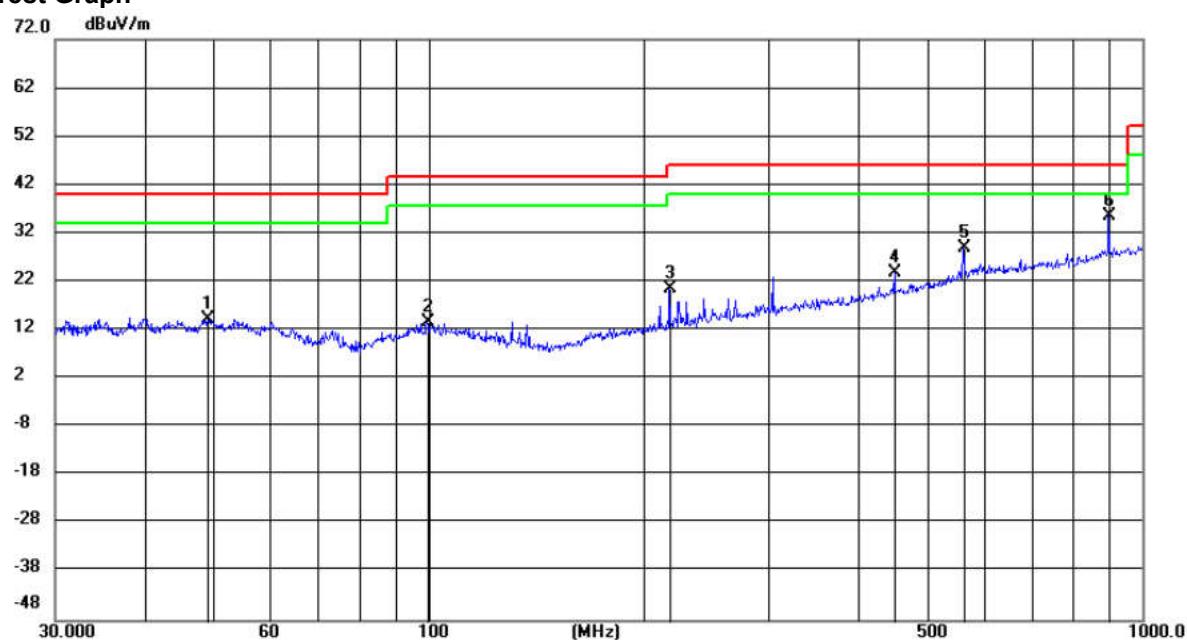

No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	Level							
1	49.1176	0.08	14.16	14.24	40.00	-25.76	QP	100	69	
2	99.7202	0.22	13.51	13.73	43.50	-29.77	QP	100	352	
3	217.7351	7.21	13.42	20.63	46.00	-25.37	QP	199	331	
4	449.9501	4.21	19.78	23.99	46.00	-22.01	QP	100	164	
5	562.5637	6.34	22.55	28.89	46.00	-17.11	QP	199	123	
6	*	900.1474	8.27	27.41	35.68	46.00	-10.32	QP	100	80

Vertical:

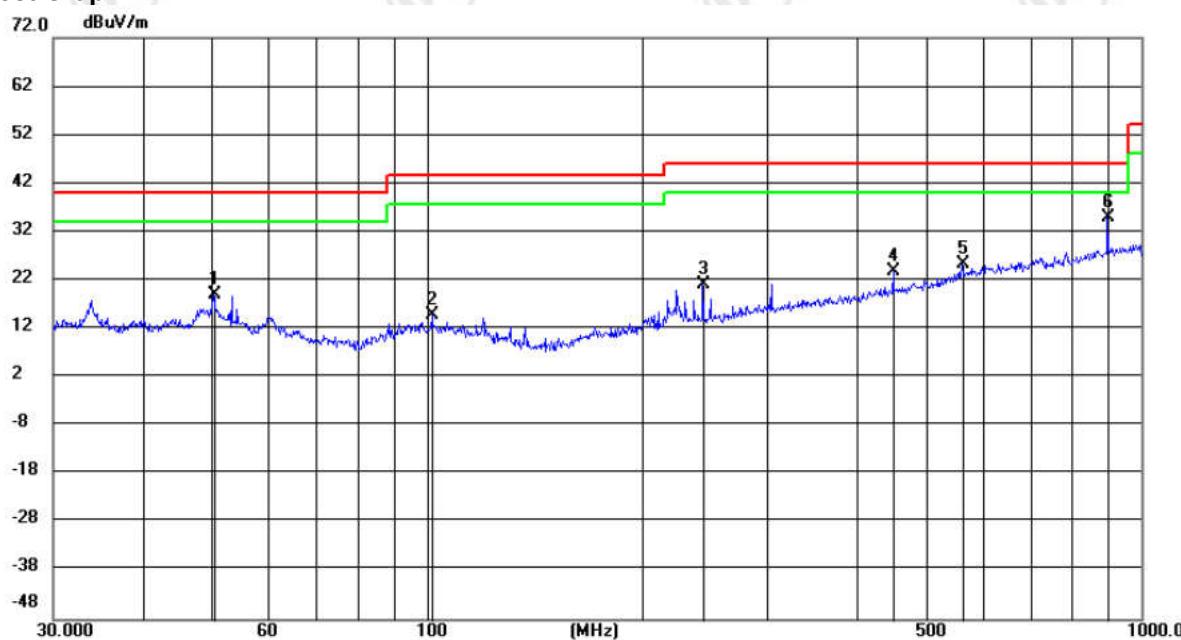Test Graph


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table			
			Level	Factor	ment					Height	Degree	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		50.3647	4.97	14.13	19.10	40.00	-20.90	QP	200	44		
2		101.8762	1.28	13.46	14.74	43.50	-28.76	QP	100	111		
3		243.7615	6.83	14.44	21.27	46.00	-24.73	QP	100	174		
4		450.0290	4.17	19.79	23.96	46.00	-22.04	QP	100	299		
5		562.5637	2.91	22.55	25.46	46.00	-20.54	QP	100	7		
6	*	900.1474	7.42	27.41	34.83	46.00	-11.17	QP	100	7		

Transmitter Emission above 1GHz

Remark: During the test, the Radiates Emission from 1GHz to 40GHz was performed in all modes,, for 20MHz Occupied Bandwidth, 802.11 a mode was the worst case; for 40MHz Occupied Bandwidth, 802.11 n(HT40) mode was the worst case; for 80MHz Occupied Bandwidth, 802.11 ac(VHT80) mode was the worst case; only the worst case was in the report.

Mode:			802.11 a Transmitting			Channel:		5180MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1262.9263	7.80	21.44	29.24	68.20	38.96	PASS	Horizontal	PK
2	1775.5776	8.69	22.40	31.09	68.20	37.11	PASS	Horizontal	PK
3	2277.7778	10.27	24.20	34.47	68.20	33.73	PASS	Horizontal	PK
4	3300.8801	13.56	24.86	38.42	68.20	29.78	PASS	Horizontal	PK
5	7801.8651	-3.85	47.64	43.79	68.20	24.41	PASS	Horizontal	PK
6	13650.4825	5.64	43.50	49.14	68.20	19.06	PASS	Horizontal	PK
7	1159.516	7.29	21.53	28.82	68.20	39.38	PASS	Vertical	PK
8	1772.8273	8.69	22.02	30.71	68.20	37.49	PASS	Vertical	PK
9	3073.7074	12.40	26.64	39.04	68.20	29.16	PASS	Vertical	PK
10	4013.7514	15.44	23.96	39.40	68.20	28.80	PASS	Vertical	PK
11	10360.168	-1.51	48.93	47.42	68.20	20.78	PASS	Vertical	PK
12	13610.2305	6.13	41.31	47.44	68.20	20.76	PASS	Vertical	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		5190MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1440.5941	8.21	21.63	29.84	68.20	38.36	PASS	Horizontal	PK
2	2190.319	9.88	22.90	32.78	68.20	35.42	PASS	Horizontal	PK
3	2804.7305	11.86	25.12	36.98	68.20	31.22	PASS	Horizontal	PK
4	4042.9043	15.53	23.70	39.23	68.20	28.97	PASS	Horizontal	PK
5	9594.8047	-1.67	46.35	44.68	68.20	23.52	PASS	Horizontal	PK
6	14291.6396	6.30	42.62	48.92	68.20	19.28	PASS	Horizontal	PK
7	1427.9428	8.25	20.20	28.45	68.20	39.75	PASS	Vertical	PK
8	2156.2156	9.99	23.68	33.67	68.20	34.53	PASS	Vertical	PK
9	2722.7723	11.76	26.30	38.06	68.20	30.14	PASS	Vertical	PK
10	3986.7987	15.29	24.19	39.48	68.20	28.72	PASS	Vertical	PK
11	8303.8652	-4.74	50.39	45.65	68.20	22.55	PASS	Vertical	PK
12	13648.7574	5.67	43.08	48.75	68.20	19.45	PASS	Vertical	PK

Mode:			802.11 ac(VHT80) Transmitting			Channel:		5210MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1262.3762	7.80	26.23	34.03	68.20	34.17	PASS	Horizontal	PK
2	1856.4356	8.78	26.35	35.13	68.20	33.07	PASS	Horizontal	PK
3	2227.7228	9.99	24.98	34.97	68.20	33.23	PASS	Horizontal	PK
4	3951.0451	14.95	24.97	39.92	68.20	28.28	PASS	Horizontal	PK
5	6684.0092	-7.84	63.34	55.50	68.20	12.70	PASS	Horizontal	PK
6	7425.2213	-6.46	56.17	49.71	68.20	18.49	PASS	Horizontal	PK
7	1485.1485	8.06	25.59	33.65	68.20	34.55	PASS	Vertical	PK
8	2315.7316	10.45	24.47	34.92	68.20	33.28	PASS	Vertical	PK
9	3169.967	12.82	25.76	38.58	68.20	29.62	PASS	Vertical	PK
10	3966.4466	15.10	24.13	39.23	68.20	28.97	PASS	Vertical	PK
11	6682.8591	-7.86	59.62	51.76	68.20	16.44	PASS	Vertical	PK
12	7425.2213	-6.46	58.40	51.94	68.20	16.26	PASS	Vertical	PK

For co-launch:

Mode:			5G Wi-Fi+LTE						
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1262.3762	7.80	26.23	34.03	68.20	34.17	PASS	Horizontal	PK
2	1856.4356	8.78	26.35	35.13	68.20	33.07	PASS	Horizontal	PK
3	2227.7228	9.99	24.98	34.97	68.20	33.23	PASS	Horizontal	PK
4	3951.0451	14.95	24.97	39.92	68.20	28.28	PASS	Horizontal	PK
5	6684.0092	-7.84	63.34	55.50	68.20	12.70	PASS	Horizontal	PK
6	7425.2213	-6.46	56.17	49.71	68.20	18.49	PASS	Horizontal	PK
7	1485.1485	8.06	25.59	33.65	68.20	34.55	PASS	Vertical	PK
8	2315.7316	10.45	24.47	34.92	68.20	33.28	PASS	Vertical	PK
9	3169.967	12.82	25.76	38.58	68.20	29.62	PASS	Vertical	PK
10	3966.4466	15.10	24.13	39.23	68.20	28.97	PASS	Vertical	PK
11	6682.8591	-7.86	59.62	51.76	68.20	16.44	PASS	Vertical	PK
12	7425.2213	-6.46	58.40	51.94	68.20	16.26	PASS	Vertical	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) Only the worst case data was recorded in the report.

6.8 Radiated Emission which fall in the restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed				

	<p>the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p> <p>Note:</p> <p>(i) $EIRP = ((E^*d)^2) / 30$ where: • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts.</p> <p>(ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$</p> <p>(iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$</p>
Test Setup:	

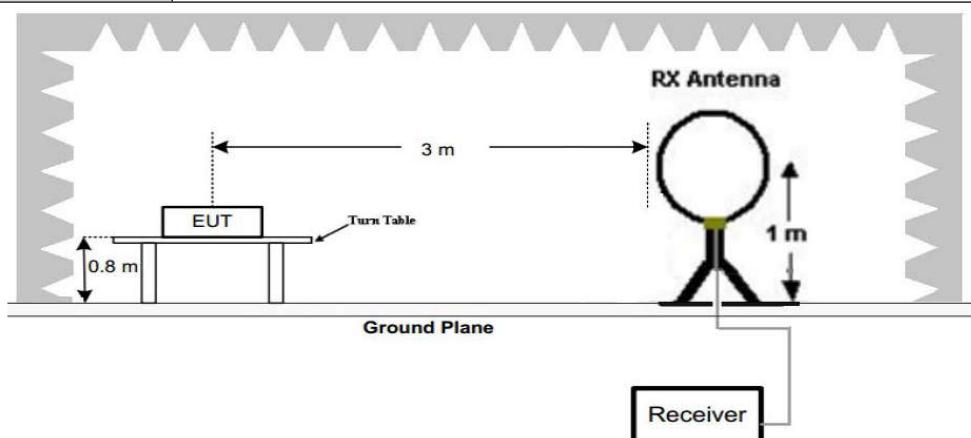


Figure 1. Below 30MHz

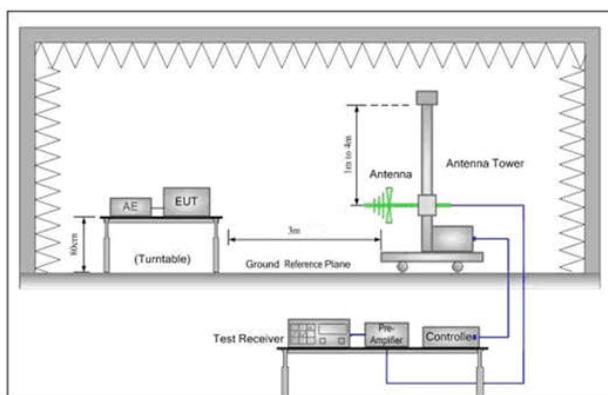


Figure 2. 30MHz to 1GHz

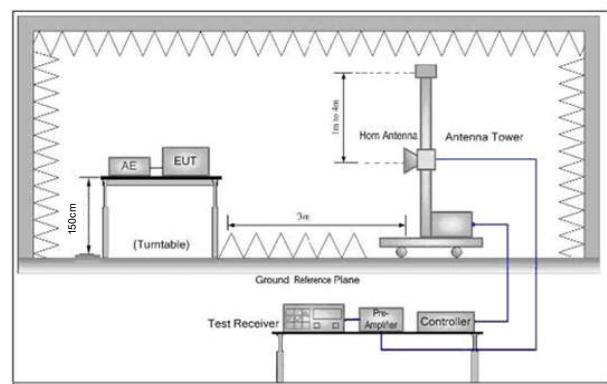


Figure 3. Above 1 GHz


Test Procedure:	<p>j. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p>
-----------------	--

	<p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>k. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>l. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>m. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>n. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>o. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>p. Test the EUT in the lowest channel, the Highest channel</p> <p>q. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>r. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Test Data:

Test_Mode	802.11 a Transmitting	Test_Frequency	5180
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

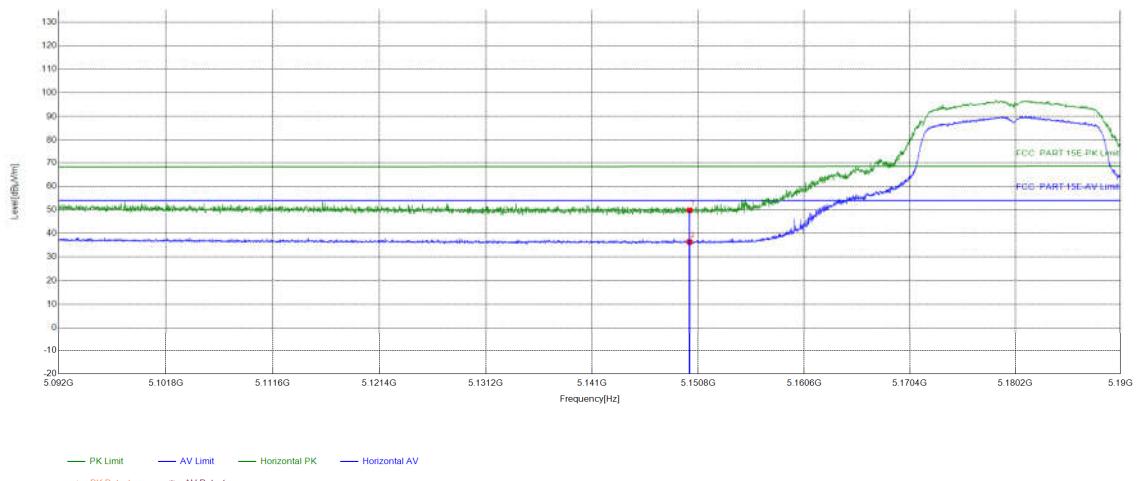


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	17.42	32.42	49.84	68.38	18.54	PASS	Horizontal	PK
2	5150	17.42	18.97	36.39	54.00	17.61	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5180
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

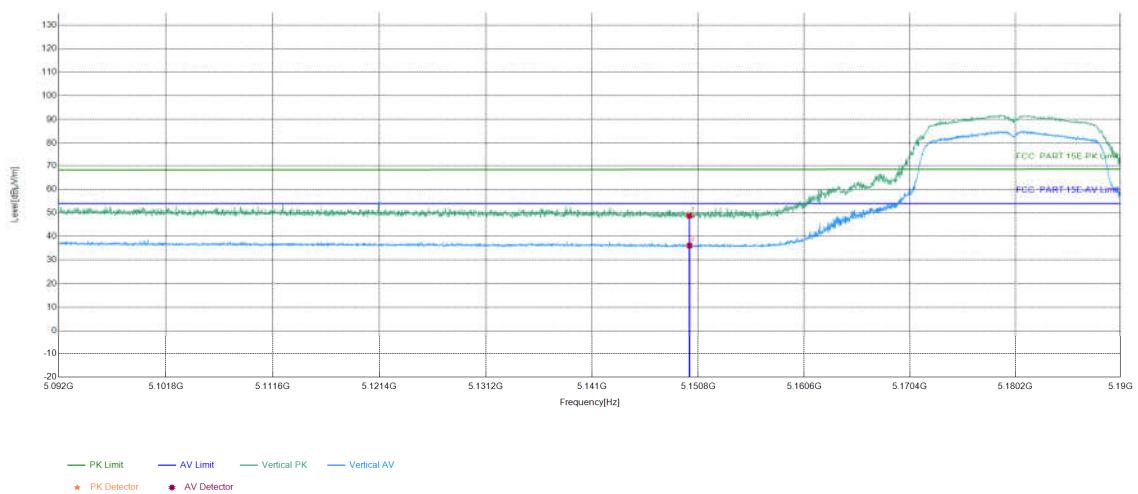


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	17.42	31.36	48.78	68.38	19.60	PASS	Vertical	PK
2	5150	17.42	18.73	36.15	54.00	17.85	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5180
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

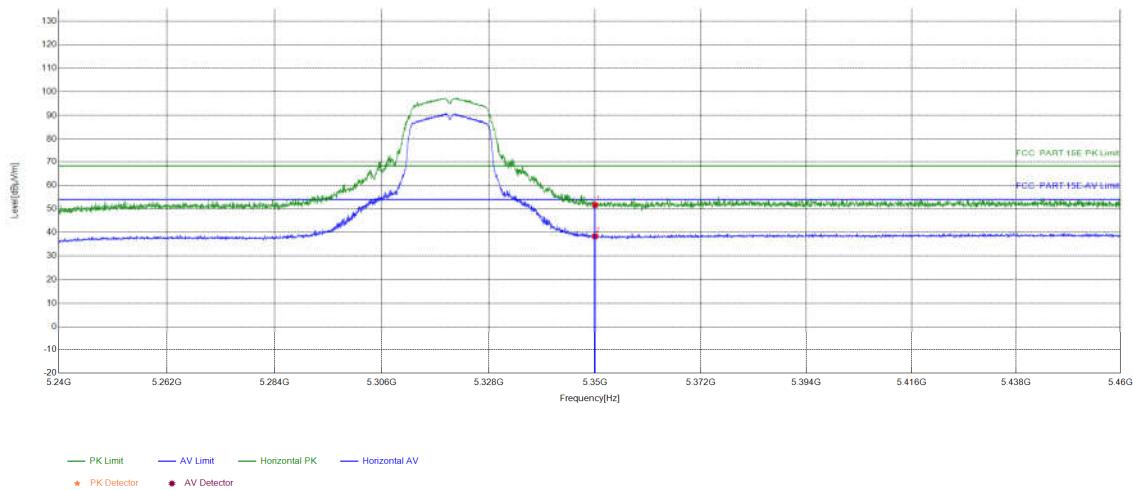


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5350	18.45	33.15	51.60	68.20	16.60	PASS	Horizontal	PK
2	5350	18.45	19.91	38.36	54.00	15.64	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5320
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

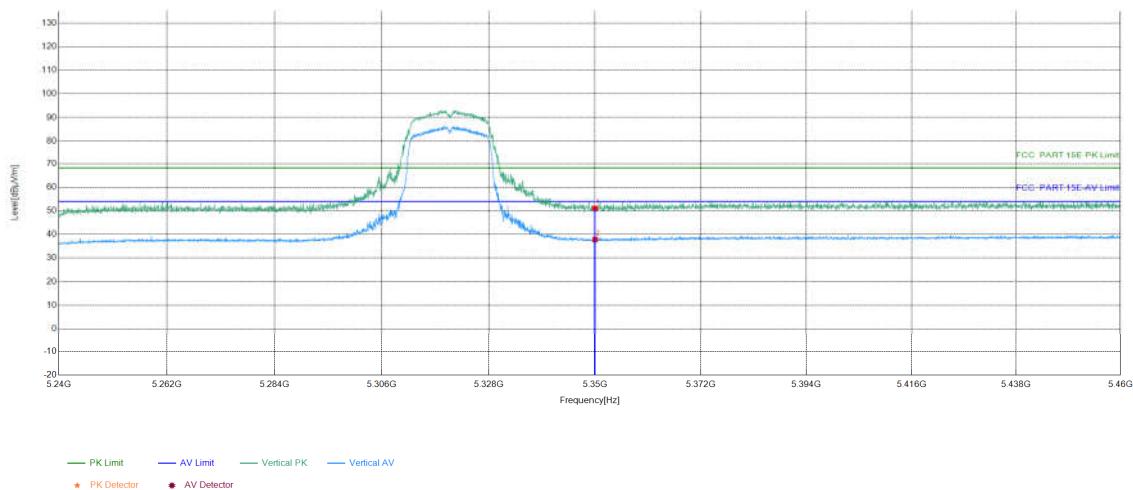


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5350	18.45	32.59	51.04	68.20	17.16	PASS	Vertical	PK
2	5350	18.45	19.42	37.87	54.00	16.13	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5500
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

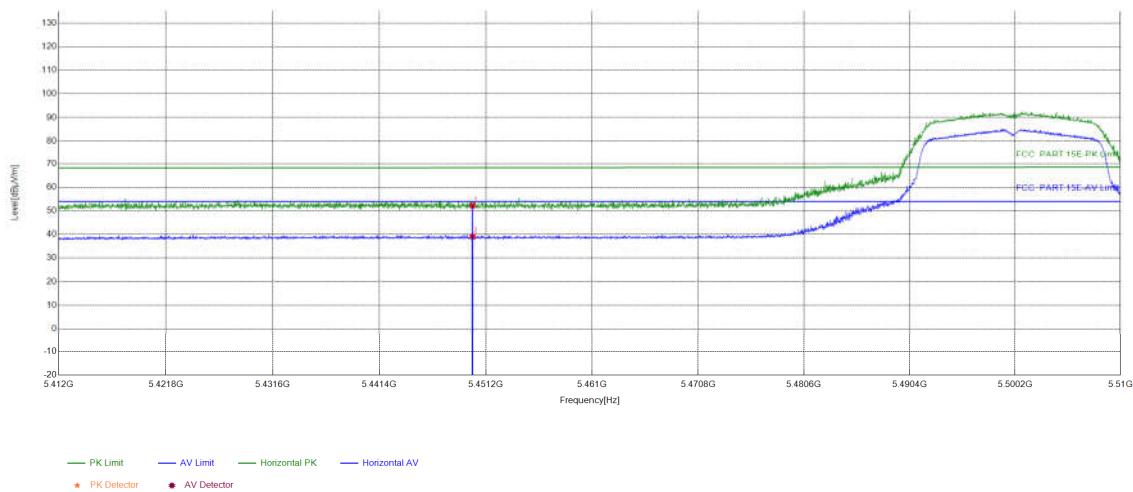


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.49	33.71	52.20	68.32	16.12	PASS	Horizontal	PK
2	5450	18.49	20.57	39.06	54.00	14.94	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5500
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

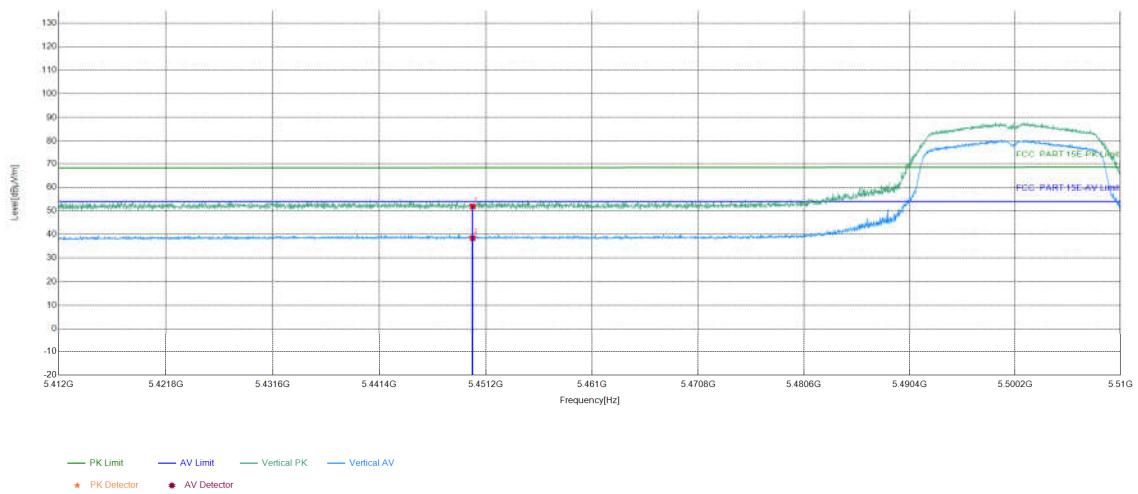


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.49	33.36	51.85	68.32	16.47	PASS	Vertical	PK
2	5450	18.49	19.96	38.45	54.00	15.55	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5745
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

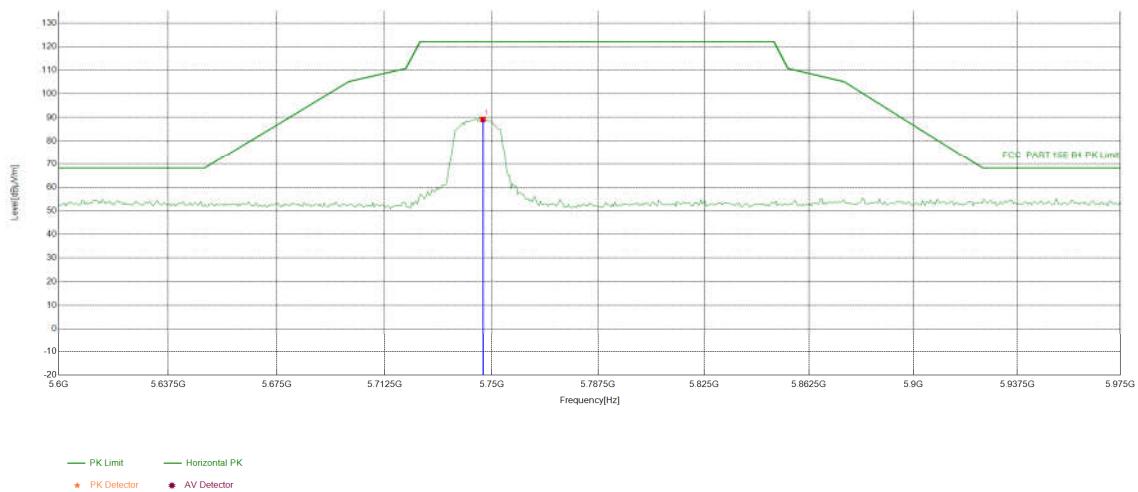


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5746.9	18.65	70.54	89.19	122.20	33.01	PASS	Horizontal	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5745
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

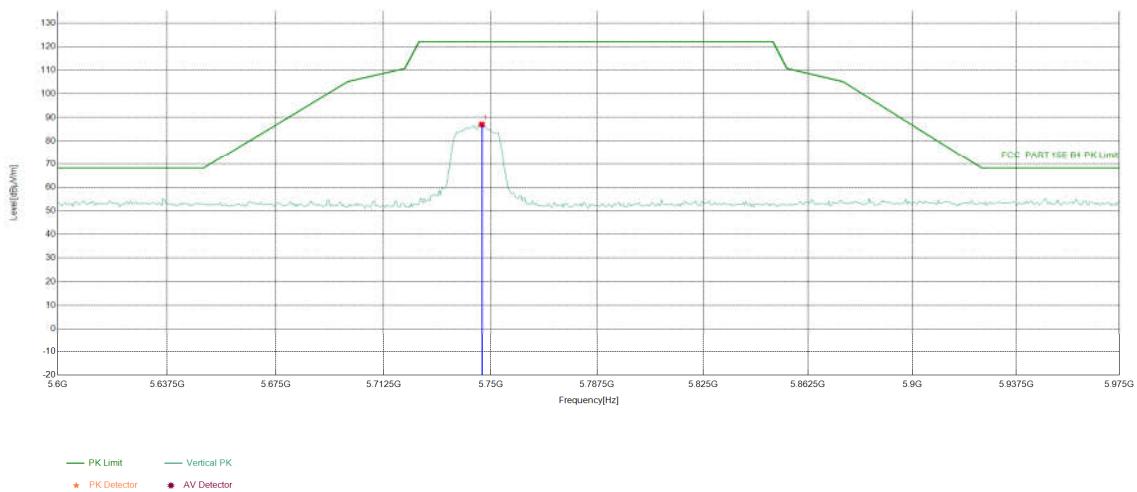


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5746.9	18.65	68.40	87.05	122.20	35.15	PASS	Vertical	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5825
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

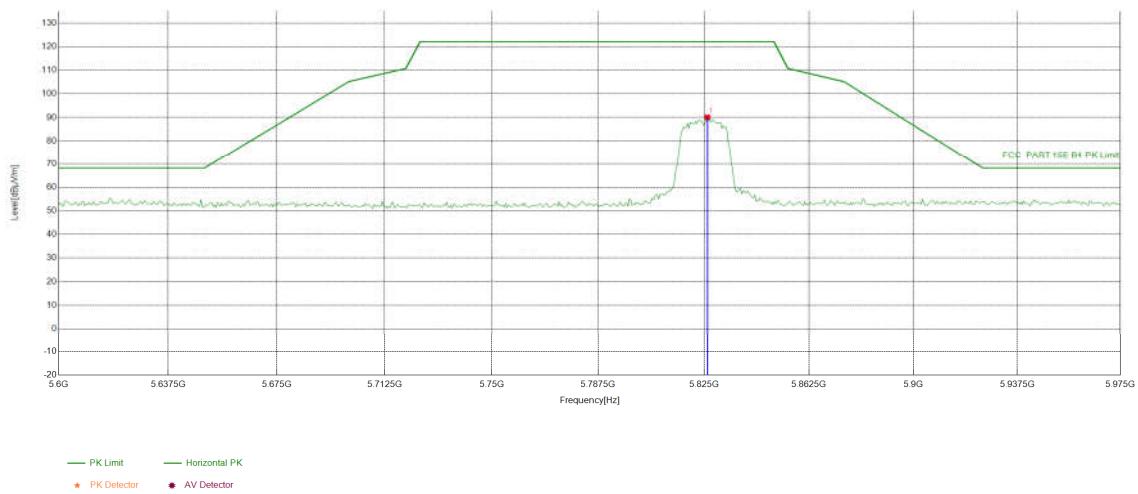


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5826.22	18.86	71.22	90.08	122.20	32.12	PASS	Horizontal	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5825
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

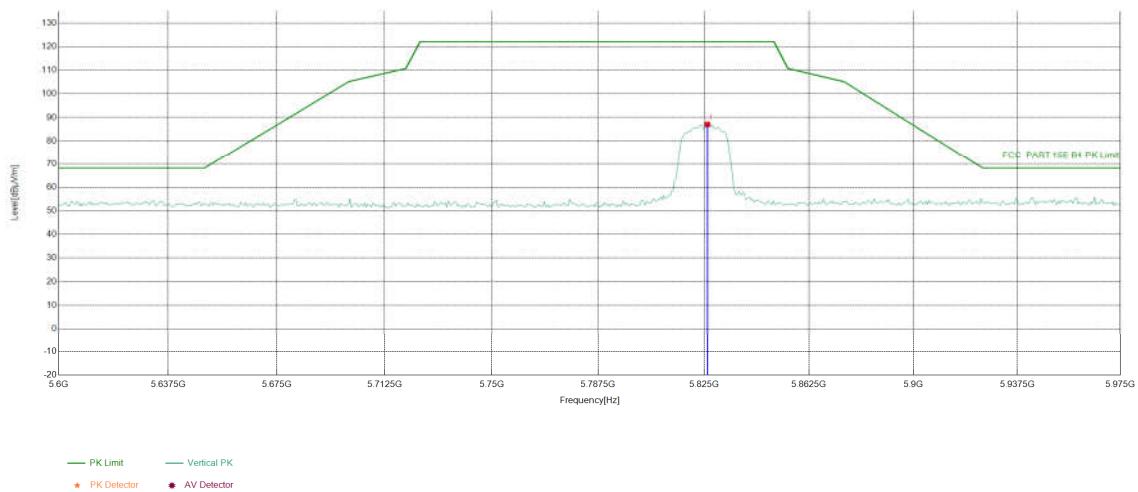


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5826.22	18.86	68.25	87.11	122.20	35.09	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

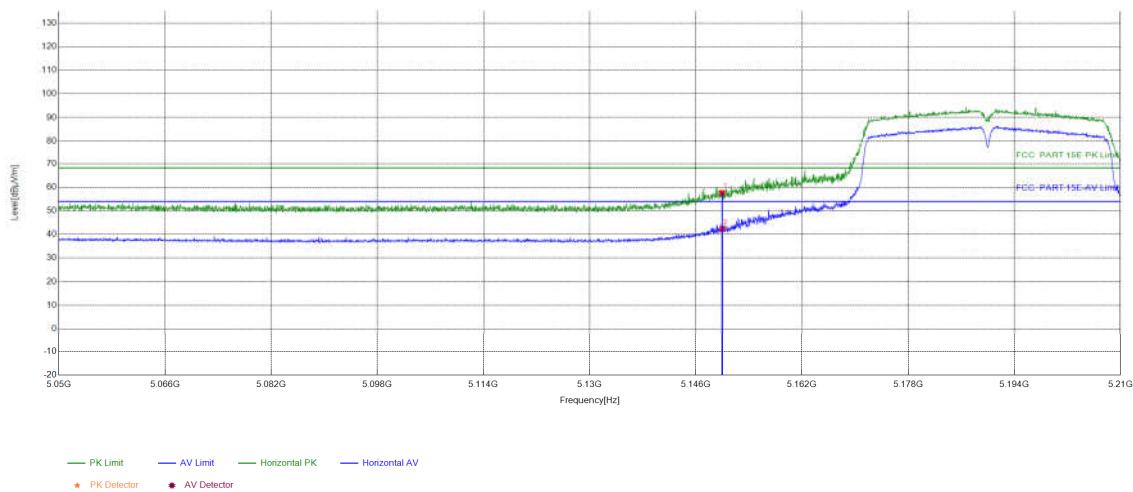


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	17.28	40.38	57.66	68.20	10.54	PASS	Horizontal	PK
2	5150	17.28	25.01	42.29	54.00	11.71	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

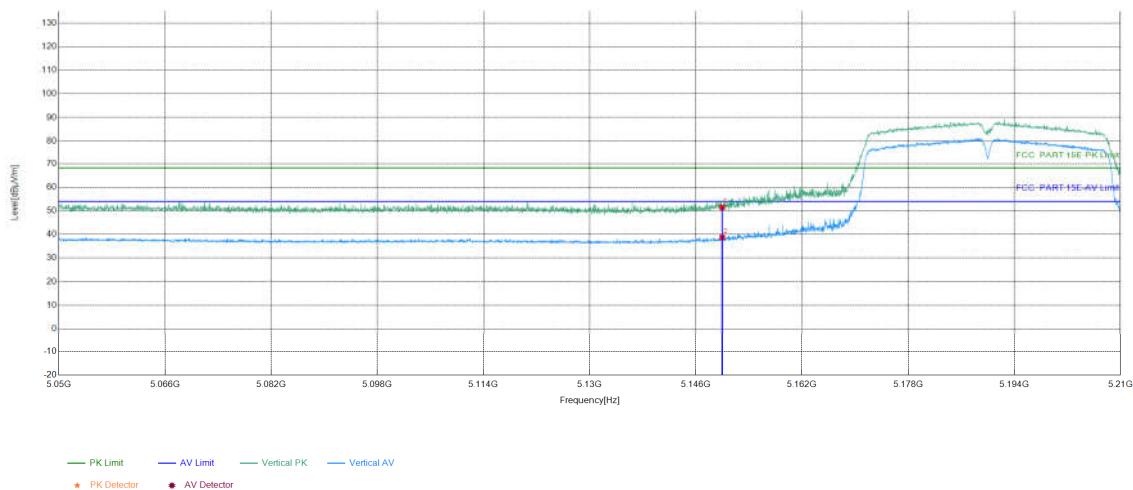


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	17.28	34.21	51.49	68.20	16.71	PASS	Vertical	PK
2	5150	17.28	21.47	38.75	54.00	15.25	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

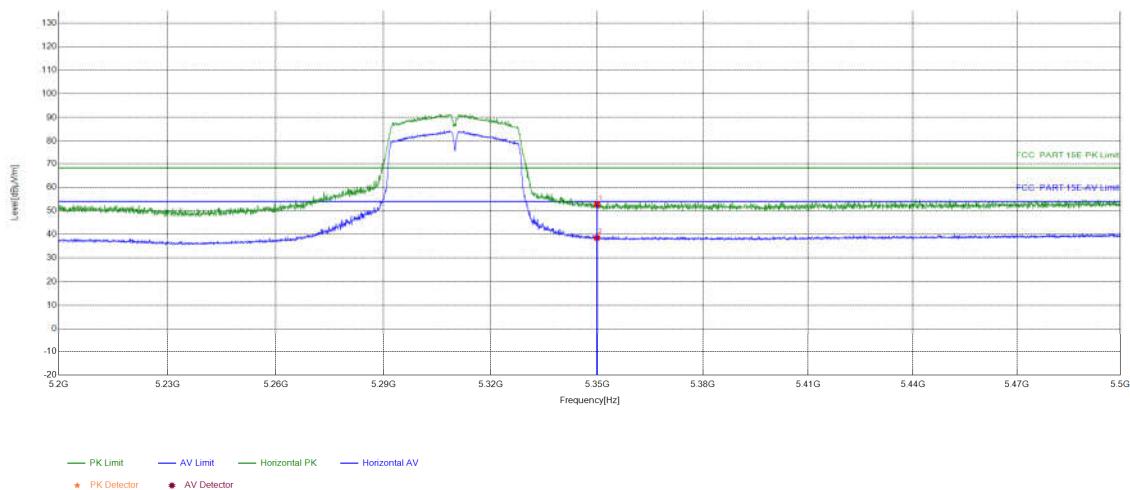


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5350	18.53	34.10	52.63	68.20	15.57	PASS	Horizontal	PK
2	5350	18.53	20.04	38.57	54.00	15.43	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

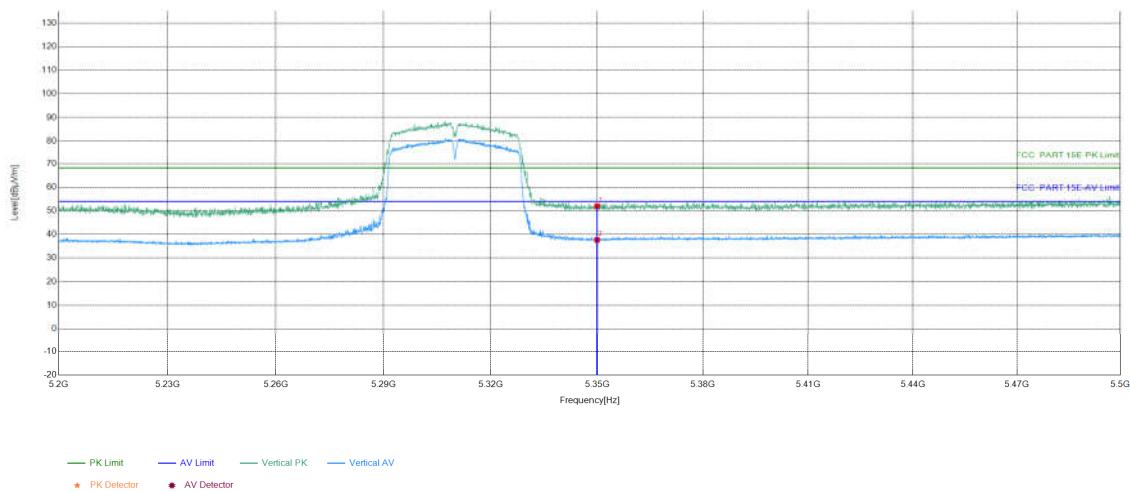


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5350	18.53	33.41	51.94	68.20	16.26	PASS	Vertical	PK
2	5350	18.53	19.16	37.69	54.00	16.31	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

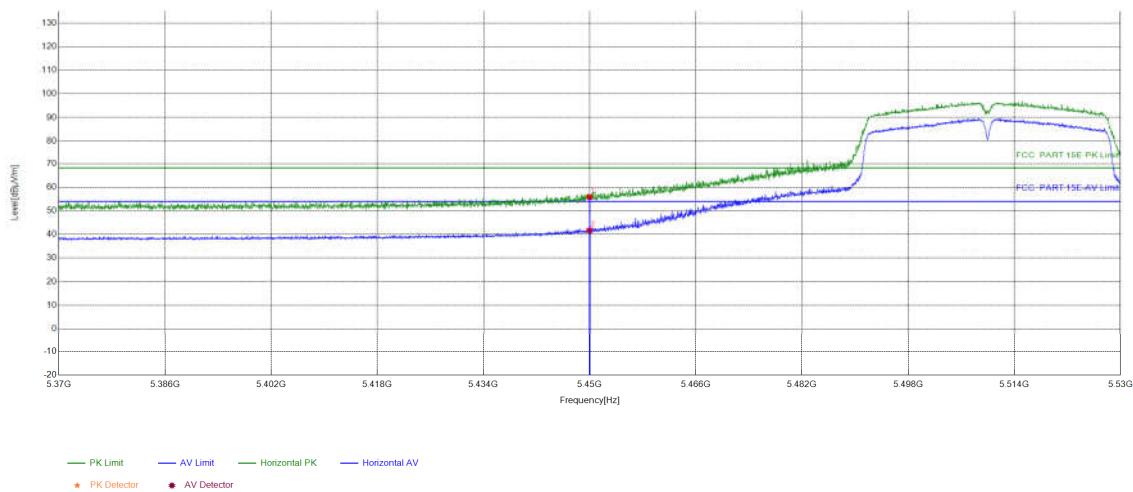


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.58	37.23	55.81	68.20	12.39	PASS	Horizontal	PK
2	5450	18.58	23.13	41.71	54.00	12.29	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

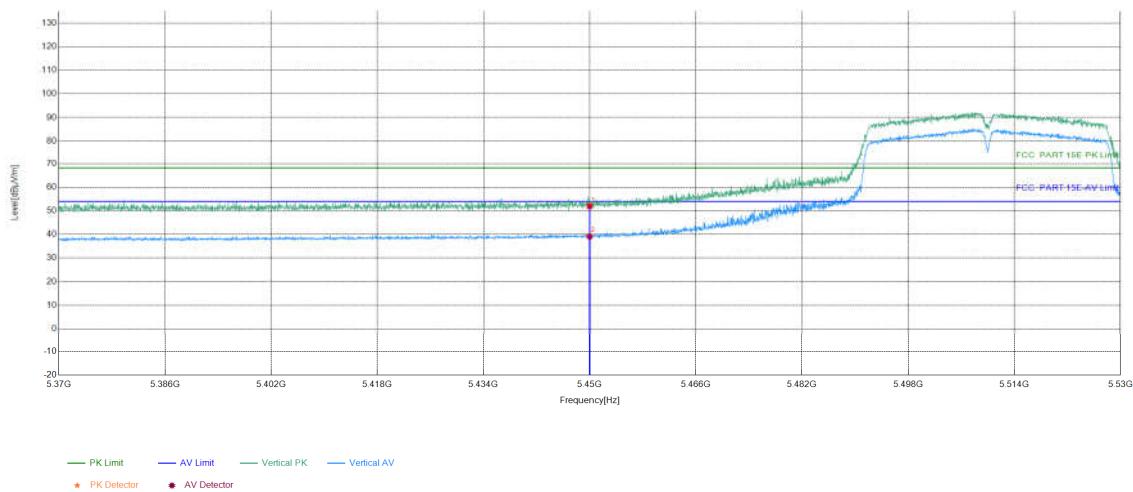


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.58	33.39	51.97	68.20	16.23	PASS	Vertical	PK
2	5450	18.58	20.56	39.14	54.00	14.86	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

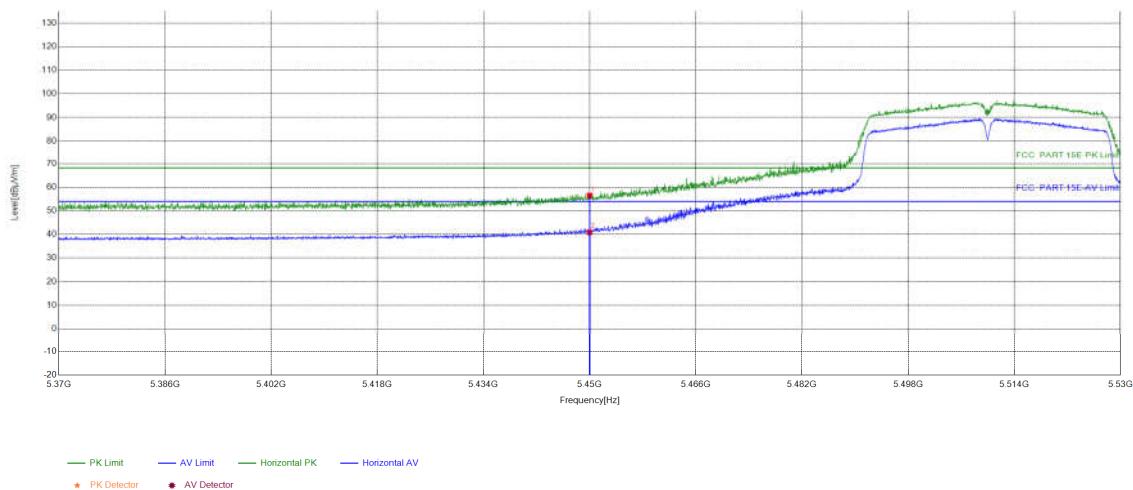


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.58	37.92	56.50	68.20	11.70	PASS	Horizontal	PK
2	5450	18.58	22.33	40.91	54.00	13.09	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

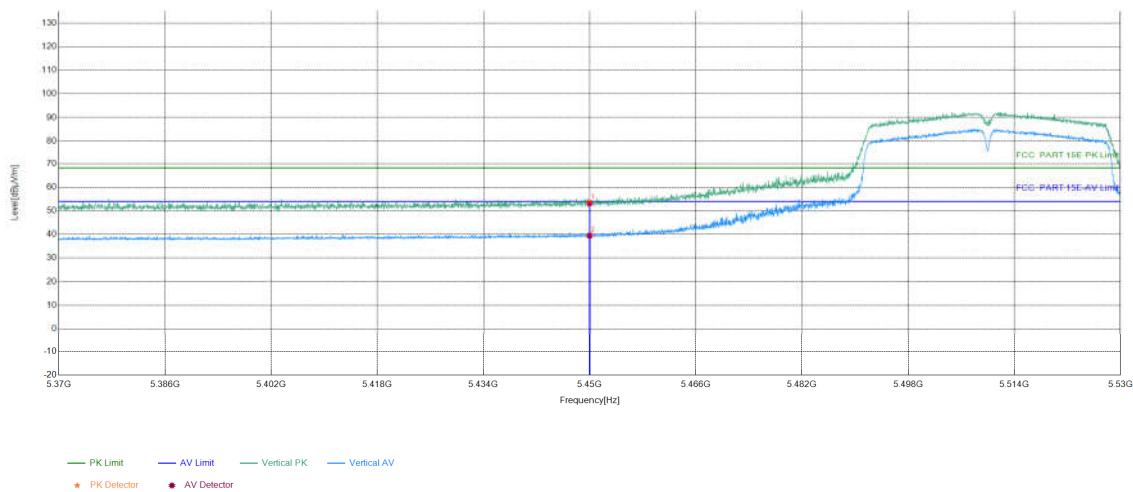


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.58	34.68	53.26	68.20	14.94	PASS	Vertical	PK
2	5450	18.58	20.92	39.50	54.00	14.50	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5755
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

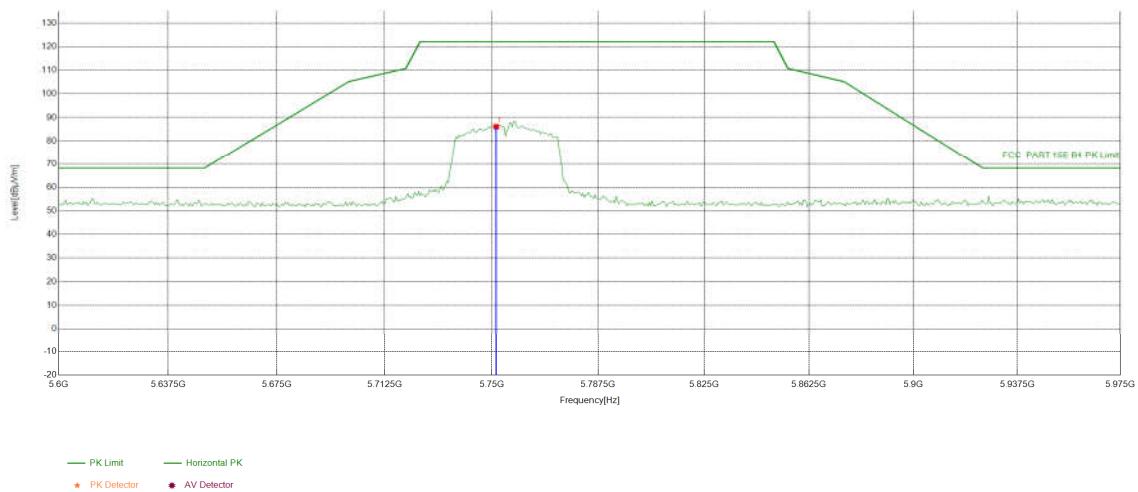


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5751.59	18.66	67.46	86.12	122.20	36.08	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5755
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

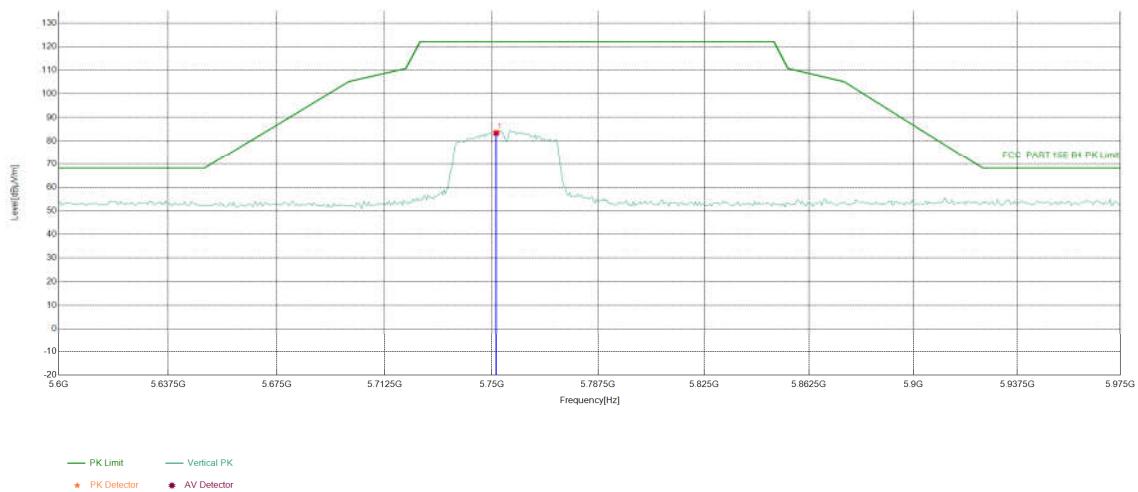


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5751.59	18.66	64.81	83.47	122.20	38.73	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5795
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

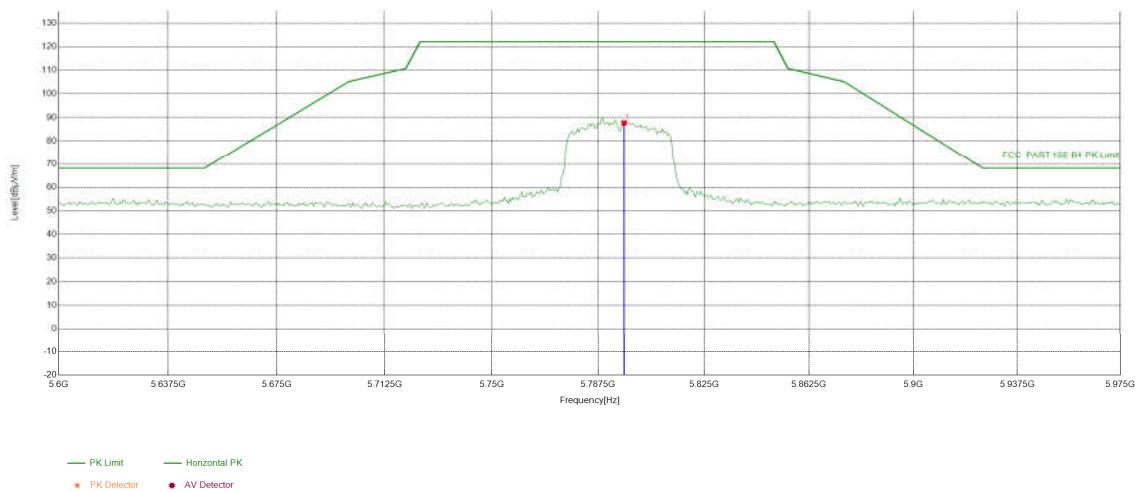


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5796.65	18.79	68.91	87.70	122.20	34.50	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5795
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

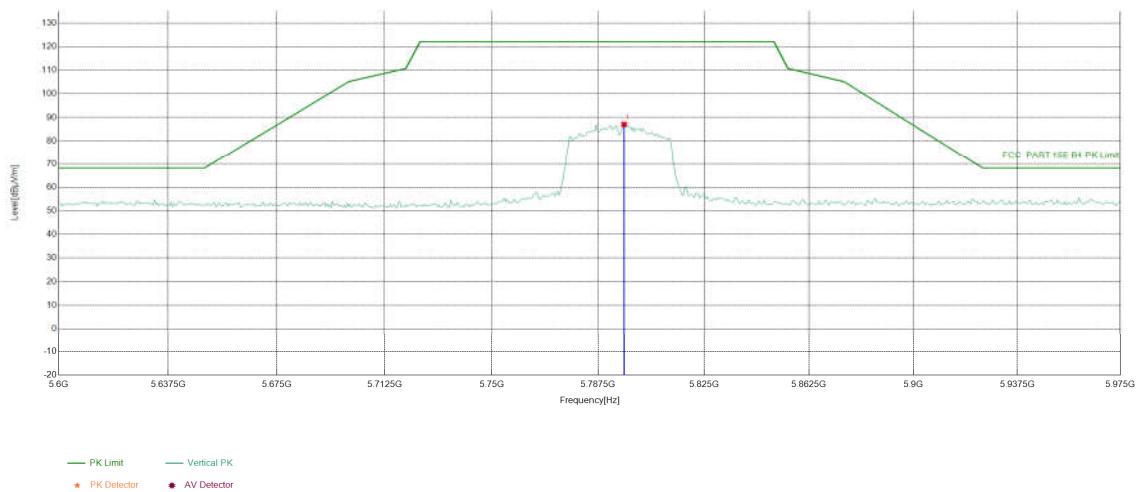


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5796.65	18.79	68.30	87.09	122.20	35.11	PASS	Vertical	PK

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

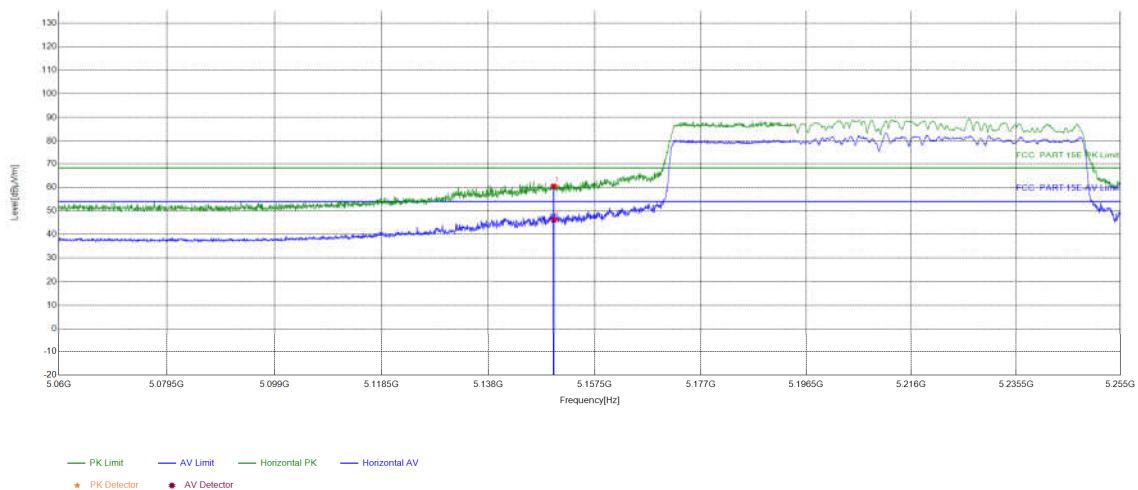


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	17.28	43.09	60.37	68.20	7.83	PASS	Horizontal	PK
2	5150	17.28	28.86	46.14	54.00	7.86	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

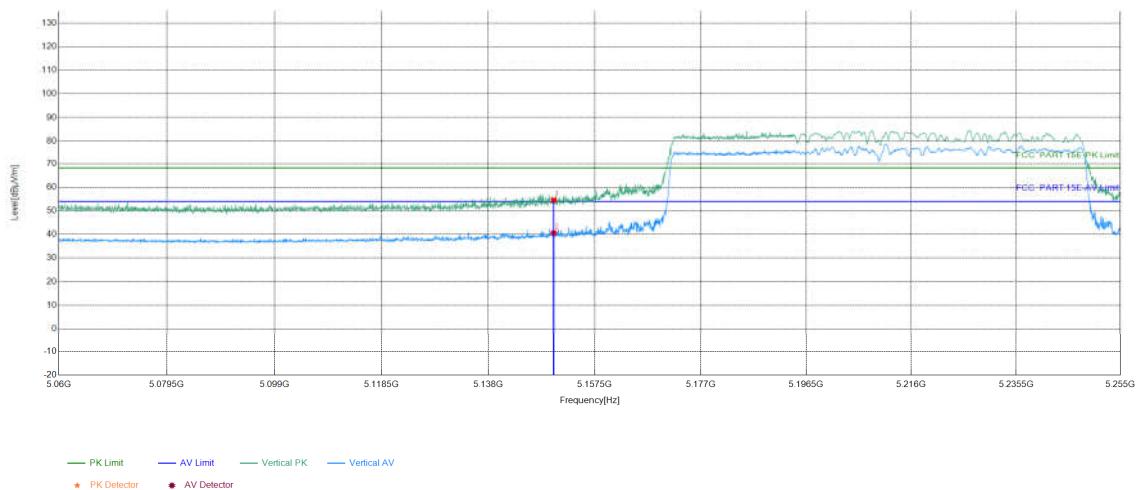


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	17.28	37.20	54.48	68.20	13.72	PASS	Vertical	PK
2	5150	17.28	23.28	40.56	54.00	13.44	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5290
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

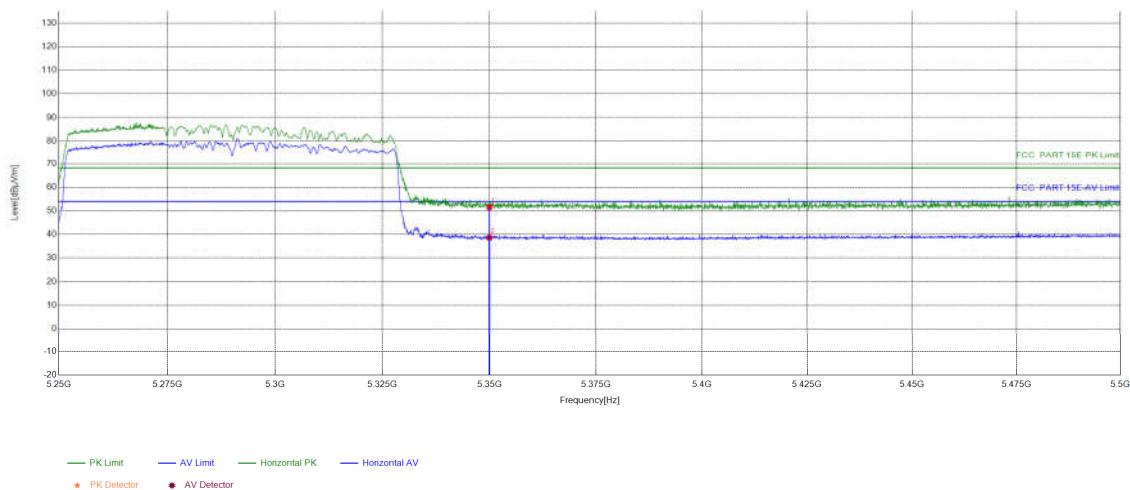


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5350	18.53	33.05	51.58	68.20	16.62	PASS	Horizontal	PK
2	5350	18.53	20.11	38.64	54.00	15.36	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5290
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

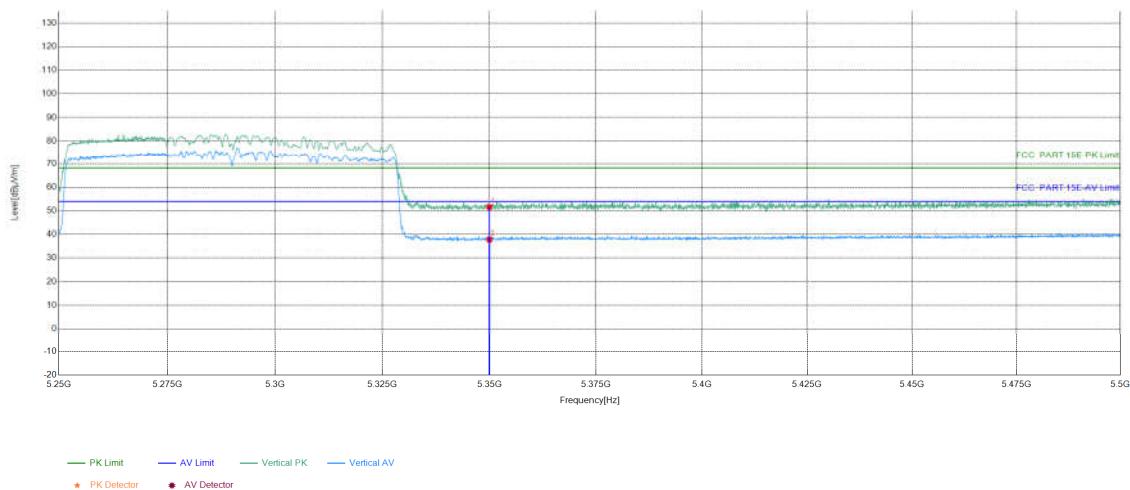


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5350	18.53	33.07	51.60	68.20	16.60	PASS	Vertical	PK
2	5350	18.53	19.30	37.83	54.00	16.17	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5530
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

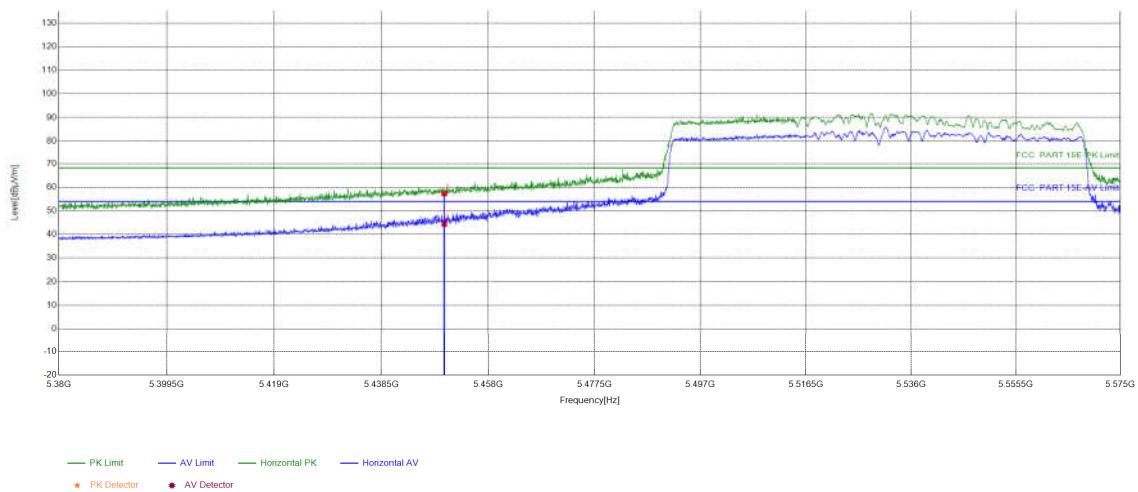


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.58	38.75	57.33	68.20	10.87	PASS	Horizontal	PK
2	5450	18.58	25.82	44.40	54.00	9.60	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5530
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

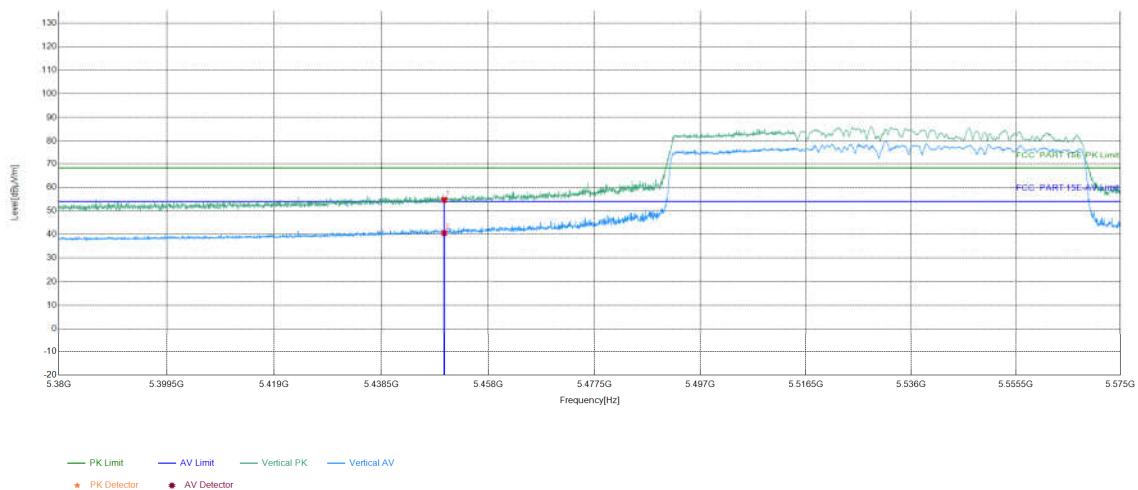


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5450	18.58	36.06	54.64	68.20	13.56	PASS	Vertical	PK
2	5450	18.58	21.96	40.54	54.00	13.46	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5775
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

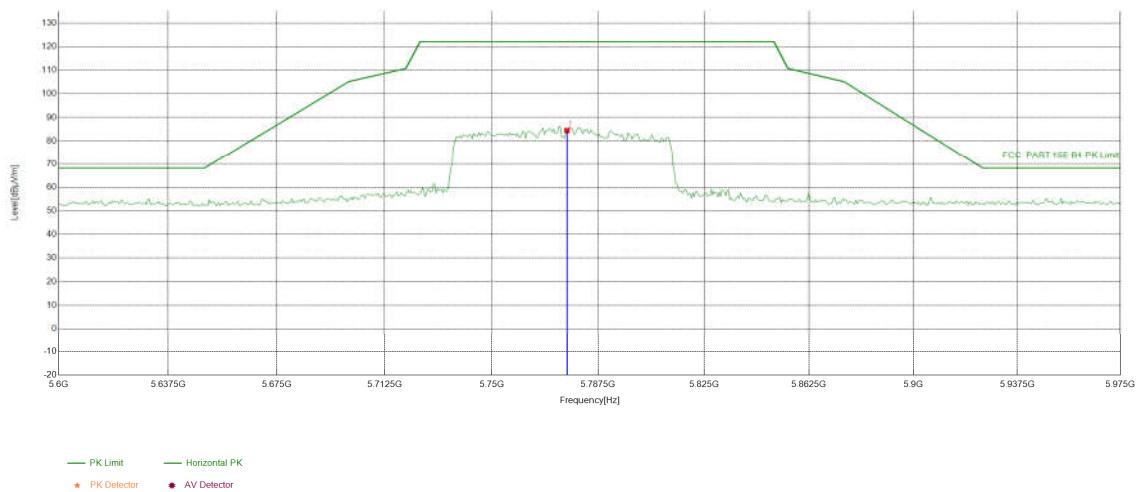


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5776.47	18.73	65.76	84.49	122.20	37.71	PASS	Horizontal	PK

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5775
Tset_Engineer	chenjun	Test_Date	2024/05/20
Remark	\		

Test Graph

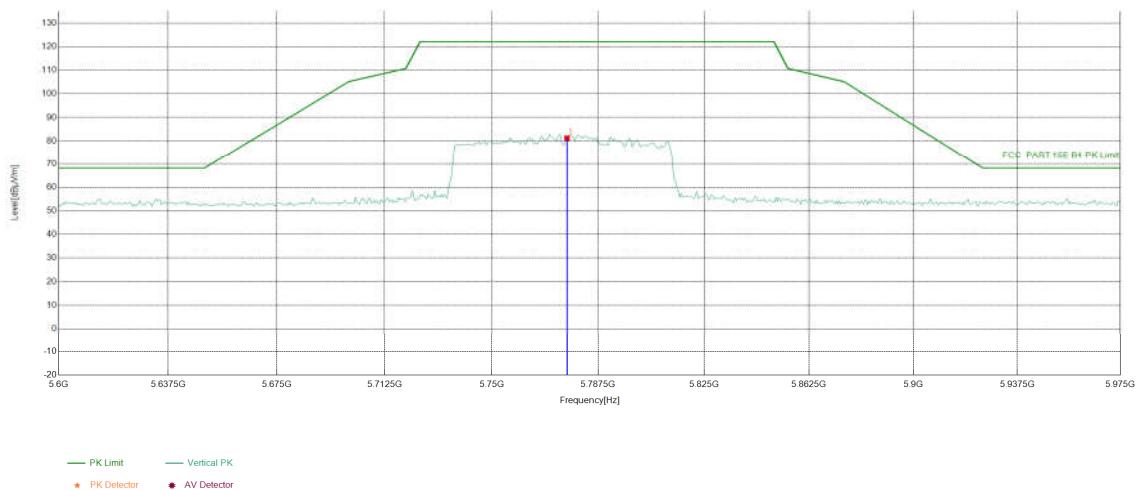

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5776.47	18.73	62.55	81.28	122.20	40.92	PASS	Vertical	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 1GHz to 25GHz, the disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

7 Appendix 5G Wi-Fi

Refer to Appendix: 5G Wi-Fi of EED32Q80383704