

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称: _____

CUSTOMER NAME: SunSun Electronic Technology Inc.

产 品 名 称:

PRODUCT NAME: Wireless fence

客 户 料 号: _____

CUSTOMER P /N: _____



电子料号

P/N:


REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:		
AUDITOR BY:		
APPROVED BY:		
DATE:	2023-8-3	


主要技术指标		Main technical specifications	
频率范围 (MHZ)	433-434	Frequency Range (MHZ)	433-434
特性阻抗(Ω)	10	Impedance(Ω)	10
增益(dBi)	2.51	Gain(dBi)	2.51
输出电压 驻波比	2	VSWR	2
最大功率	10W	Admitted Power	10W
极化方式	垂直极化	Polarization	Linear,Vertical
方向性	两重性	Radiation	duality
连接方式	SMA	Connector Type	SMA
物理性能		Physical Properties	
天线外套材料	TPEE	Antenna cover	TPEE
工作温度	-20℃~+70℃	Operating Temp	-20℃~+70℃
保存温度	-20℃~+70℃	Storage Temp	-20℃~+70℃

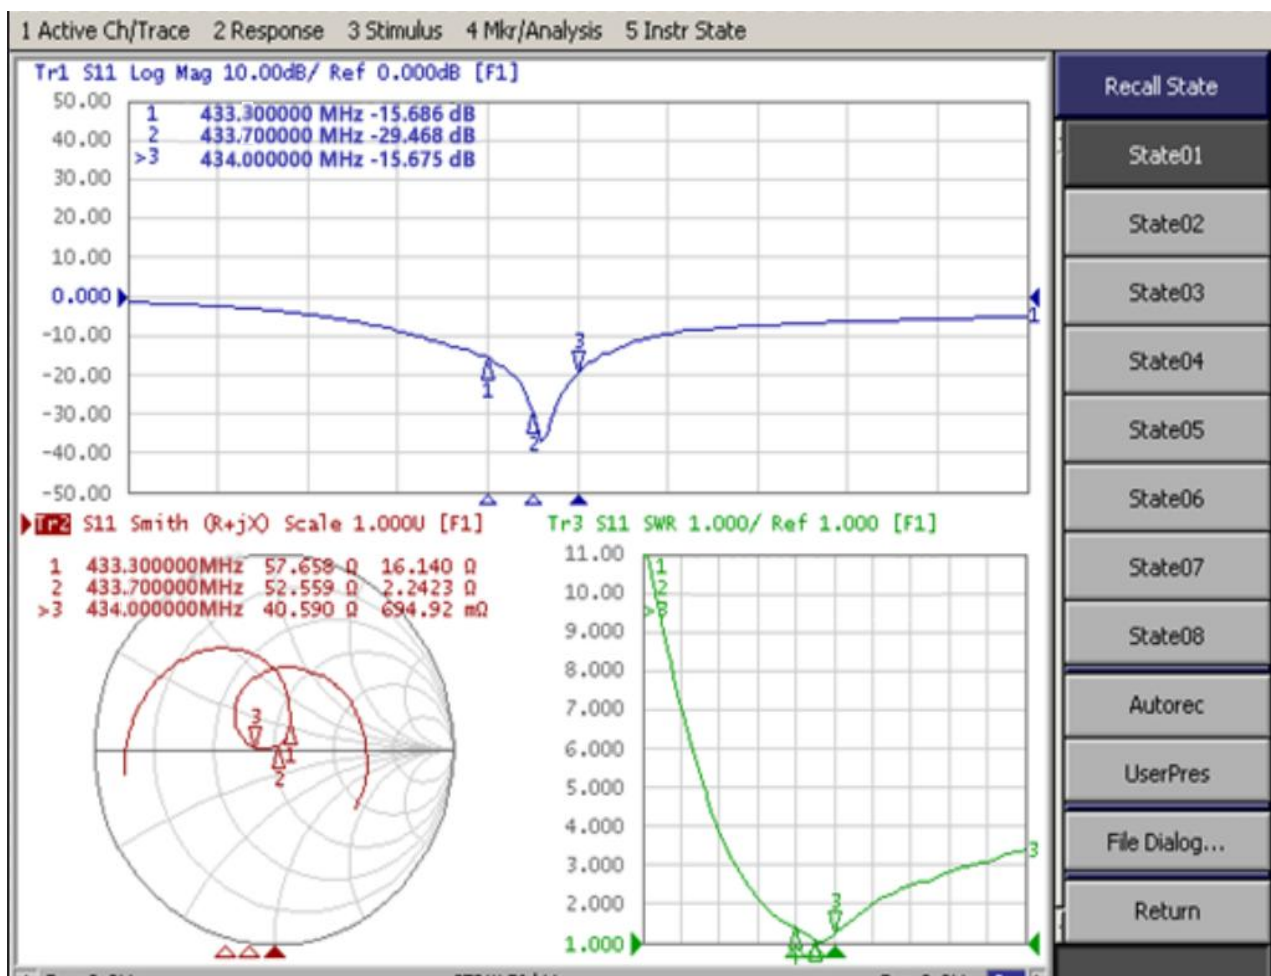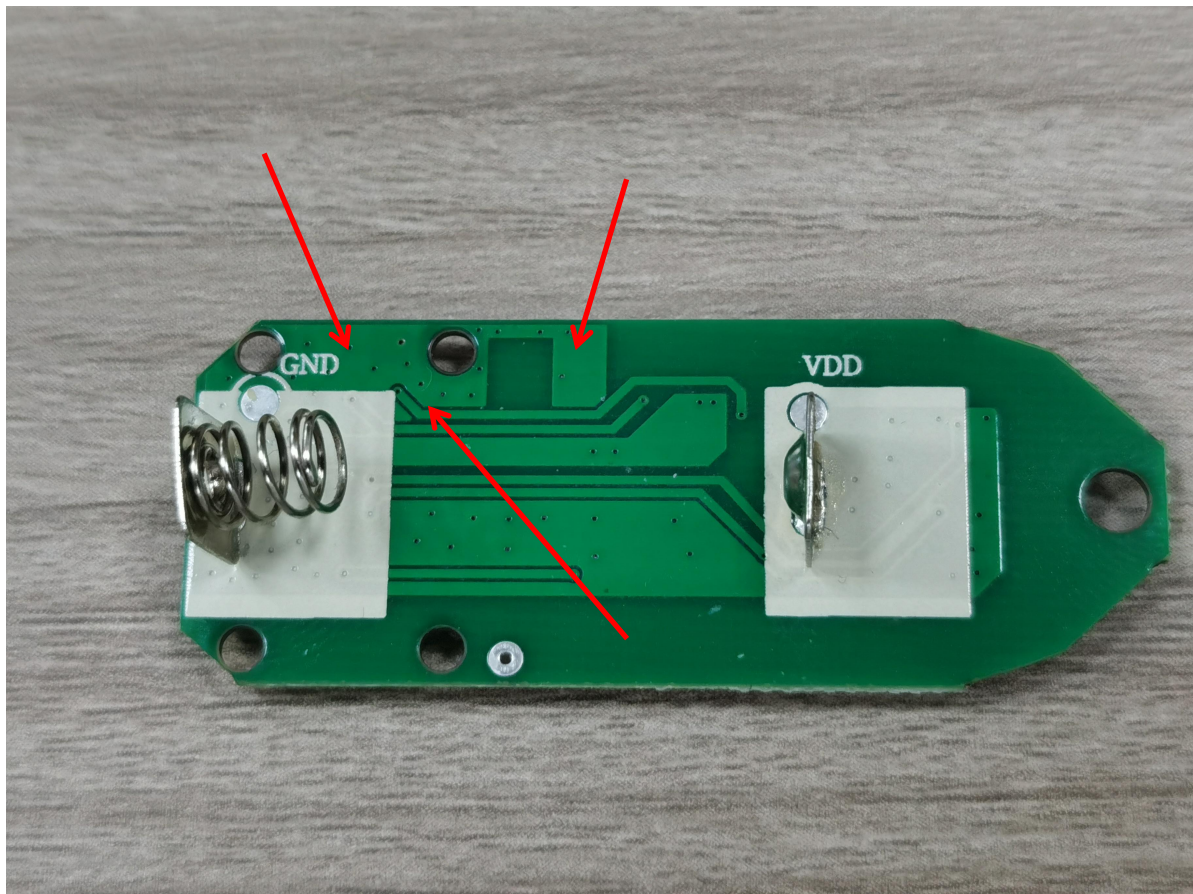


2D、3DRaditation Pattern




433.3mHz




Gain2.42 dBi




Efficiency:75.6 1%




433.7mHz




Gain: 2.51dBi




Efficiency: 78.45%



434.0mHz



Gain: 2.47dBi



Efficiency: 79.32%