

TEST REPORT

Report No.	CISRR25090404702
Project No.	CISR250904047
FCC ID	2BFQI-GS01
Applicant	Jiangxi Jichi Technology Co., Ltd.
Address	PlantNo.3,BlockB13-1-2,B14-1,JinggangshanEconomicandDevelopment Zone,Ji'anCity,Jiangxi Province,China
Manufacturer	Jiangxi Jichi Technology Co., Ltd.
Address	PlantNo.3,BlockB13-1-2,B14-1,JinggangshanEconomicandDevelopment Zone,Ji'anCity,Jiangxi Province,China
Product Name	Mouse
Trademark	N/A
Model/Type reference	GS01
Listed Model(s)	N/A
Standard	47 CFR Part 15.249
Test date	September 5, 2025 to September 9, 2025
Issue date	September 11, 2025
Test result	Complied



Prepared by: Lucas Huang



Approved by: Hans Hu

The test results relate only to the tested samples.
The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

Contents

1. REPORT VERSION	3
2. SUMMARY OF TEST RESULT	4
3. SUMMARY	5
3.1. Product Description	5
3.2. Radio Specification Description	5
3.3. Modification of EUT	6
3.4. Testing Site	6
3.5. Field Strength Calculation	6
4. DISTURBANCE CALCULATION	6
4.1. Test frequency list	7
4.2. Test mode	7
4.3. Support unit used in test configuration and system	7
4.4. Test sample information	7
4.5. Testing environmental condition	7
4.6. Statement of the measurement uncertainty	7
4.7. Equipment Used during the Test	8
5. TEST CONDITIONS AND RESULTS	10
5.1. Antenna Requirement	10
5.2. AC Conducted Emission	11
5.3. 20 dB Bandwidth	14
5.4. Radiated Band edge Emission	16
5.5. Radiated Spurious Emission	22
6. TEST SETUP PHOTOS	32
7. EXTERNAL AND INTERNAL PHOTOS	32
6.1 External photos	32
6.2 Internal photos	32

1. REPORT VERSION

Version No.	Issue date	Description
00	September 11, 2025	Original

2. SUMMARY OF TEST RESULT

Report clause	Test Item	Standard Requirement	Result
5.1	Antenna Requirement	15.203	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	20 dB Bandwidth	15.215 (c)	PASS
5.4	Radiated Band Edge Emission	15.205/15.209/15.249(d)	PASS
5.5	Radiated Spurious Emission	15.249(a)(c)(e)/15.205/15.209	Pass

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Product Description

Main unit information:	
Product Name:	Mouse
Trade Mark:	N/A
Model No.:	GS01
Listed Model(s):	N/A
Model difference:	N/A
Power supply:	Input: DC 4V
Hardware version:	ID2645-V103
Software version:	V2.1.94-10TV197
Accessory unit (AU) information:	
Battery information:	DC 3.7V

3.2. Radio Specification Description

Technology:	2.4G
Modulation:	GFSK
Operation frequency:	2402MHz~2478MHz
Channel number:	39
Antenna type:	PCB antenna
Antenna gain:	5.09dBi

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2402	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474

7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	/	/

3.3. Modification of EUT

No modifications are made to the EUT during all test items.

3.4. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
FCC registration number	736346

3.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

4. DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

TEST CONFIGURATION

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

4.1. Test frequency list

Channel	Frequency (MHz)
CH-L	2402
CH-M	2440
CH-H	2478

4.2. Test mode

No	Test mode	Description
TM1	TX mode	Keep the EUT in continuously transmitting mode with GFSK modulation at lowest, middle and highest channel.
TM2	Link mode	Keep the EUT in Bluetooth linking mode with AE.
TM3	Charging mode	Keep the EUT in charging status

4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Item	Equipment name	Trade Name	Model No.
1	Adapter	Guangdong Sangu Technology Co. Ltd	SG-0501000AU

4.4. Test sample information

Type	sample no.
Engineer sample	CISR250904047--S01
Normal sample	CISR250904047--S01

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	1.63dB
2	20dB Bandwidth	0.002%
3	Radiated Band Edge Emission	3.76dB for 30MHz-1GHz 3.80dB for above 1GHz

4	Radiated Spurious Emission	3.76dB for 30MHz-1GHz 3.80dB for above 1GHz
---	----------------------------	--

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

AC Conducted Emission						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2025-01-08	2026-01-07
2	Artificial power network	Schwarzbeck	NSLK8127	8127-01096	2025-01-08	2026-01-07
3	8-wire Impedance Stabilization Network	Schwarzbeck	NTFM 8158	8158-00337	2025-01-08	2026-01-07
4	Artificial power network	Schwarzbeck	ENV216	/	2025-01-08	2026-01-07

20 dB Bandwidth						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	MXG RF Signal Generator	Agilent	N5181A	MY50145362	2025-01-08	2026-01-07
2	Spectrum analyzer	R&S	FSV-40N	102130	2025-01-08	2026-01-07
3	Vector Signal Generator	Agilent	N5182A	MY50142364	2025-01-08	2026-01-07

Radiated Band Edge Emission Radiated Spurious Emission						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2025-01-08	2026-01-07
2	Amplifier	Tonscend	TAP9K3G40	AP23A8060270	2025-01-08	2026-01-07
3	Prime amplifier	Tonscend	TAP01018050	AP23A8060280	2025-01-08	2026-01-07
4	9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2024-09-02	2027-09-01
5	Spectrum analyzer	Agilent	N9020A	MY50530263	2025-01-08	2026-01-07
6	Spectrum analyzer	R&S	FSV-40N	102130	2025-01-08	2026-01-07
7	Bilog Antenna	Schwarzbeck	VULB 9163	1463	2023-01-09	2026-01-08
8	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2023-01-09	2026-01-08
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2023-01-09	2026-01-08
10	RF Cable	Tonscend	Cable 1	/	2025-01-08	2026-01-07
11	RF Cable	Tonscend	Cable 2	/	2025-01-08	2026-01-07

12	RF Cable	SKET	Cable 3	/	2025-01-08	2026-01-07
13	L.I.S.N.#1	Schwarzbeck	NSLK812 7	/	2025-01-08	2026-01-07
14	L.I.S.N.#2	ROHDE&SCHWA RZ	ENV216	/	2025-01-08	2026-01-07
15	Horn Antenna	SCHWARZBECK	BBHA917 0	1130	2023-01-09	2026-01-08
16	Preamplifier	Tonscend	TAP1804 0048	AP21C806126	2025-01-08	2026-01-07
17	Variable-frequency power source	Pinhong	PH1110	/	2025-01-08	2026-01-07
18	6dB Attenuator	SKET	DC-6G	/	2025-01-08	2026-01-07
19	Antenna tower	SKT	Bk-4AT- BS	AT202104010 1-V1	2025-01-08	2026-01-07

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Description


The EUT antenna is PCB antenna(5.09dBi), the directional gain of the antenna less than 6dBi. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen Bangce Testing Technology Co., Ltd. does not assume any responsibility.

5.2. AC Conducted Emission

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).				
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)			
		Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
*Decreases with the logarithm of the frequency.					
Test Method:	ANSI C63.10-2020 section 6.2				
Procedure:	1. The EUT was setup according to ANSI C63.10 requirements. 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. 4. The peripheral devices are also connected to the main power through a LISN. (Refer to the block diagram of the test setup and photographs) 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz. 8. During the above scans, the emissions were maximized by cable manipulation.				
Operating Environment:					
Temperature :	22.5 °C	Humidity:	56.7 %	Atmospheric Pressure:	103 kPa
Pre test mode:		TM3			
Pre test mode:		TM3			


Test Setup Diagram

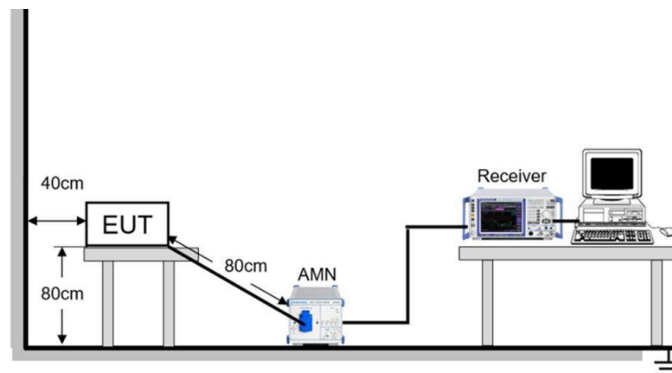

Test Result
Pass


Test Data

TM3 / Line: Line

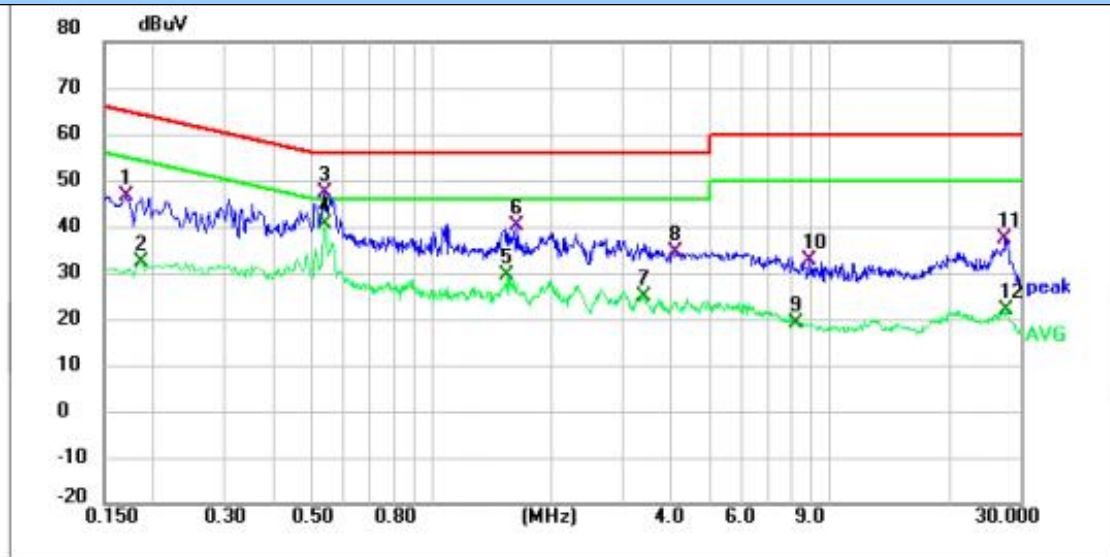

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	36.43	10.19	46.62	64.96	18.34	QP
2	0.1860	22.16	10.18	32.34	54.21	21.87	AVG
3	0.5380	37.15	10.16	47.31	56.00	8.69	QP
4 *	0.5380	30.23	10.16	40.39	46.00	5.61	AVG
5	1.5500	19.10	10.22	29.32	46.00	16.68	AVG
6	1.6340	29.83	10.23	40.06	56.00	15.94	QP
7	3.4020	14.44	10.33	24.77	46.00	21.23	AVG
8	4.1020	24.20	10.35	34.55	56.00	21.45	QP
9	8.2700	8.82	10.35	19.17	50.00	30.83	AVG
10	8.8900	22.24	10.36	32.60	60.00	27.40	QP
11	27.5420	26.54	10.91	37.45	60.00	22.55	QP
12	27.7620	10.91	10.91	21.82	50.00	28.18	AVG

TM3 / Line: Neutral

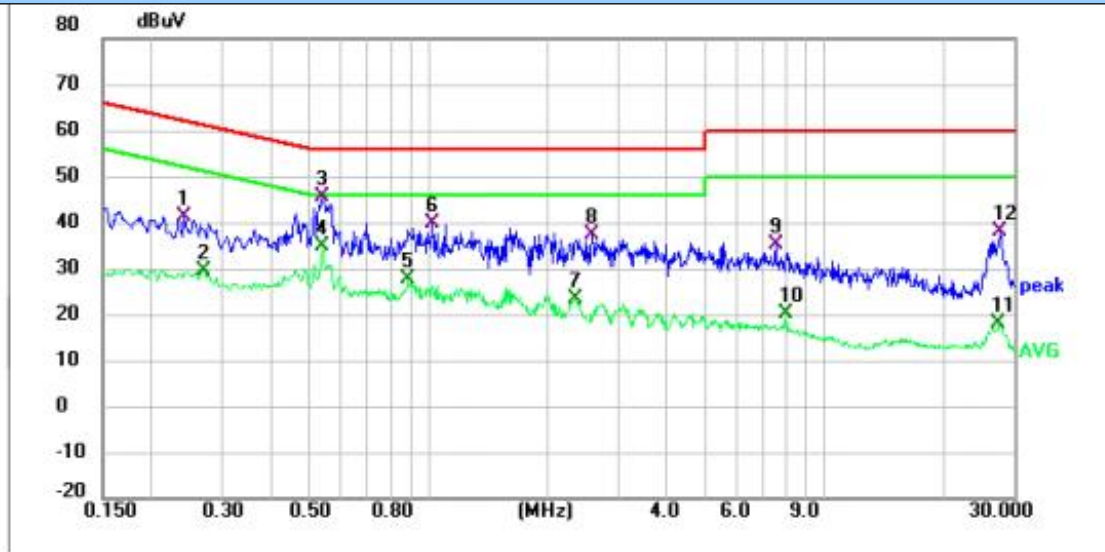

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2416	31.16	10.14	41.30	62.04	20.74	QP
2	0.2700	19.45	10.15	29.60	51.12	21.52	AVG
3 *	0.5380	35.54	10.12	45.66	56.00	10.34	QP
4	0.5380	24.87	10.12	34.99	46.00	11.01	AVG
5	0.8860	17.50	10.16	27.66	46.00	18.34	AVG
6	1.0260	29.67	10.16	39.83	56.00	16.17	QP
7	2.3500	13.02	10.25	23.27	46.00	22.73	AVG
8	2.5900	27.08	10.26	37.34	56.00	18.66	QP
9	7.5300	24.74	10.36	35.10	60.00	24.90	QP
10	8.0020	9.89	10.36	20.25	50.00	29.75	AVG
11	27.5340	7.20	10.89	18.09	50.00	31.91	AVG
12	27.7900	27.30	10.88	38.18	60.00	21.82	QP


Note:

- 1). Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)
- 2). Margin = Result - Limit

5.3. 20 dB Bandwidth

Limit:

Test configuration:

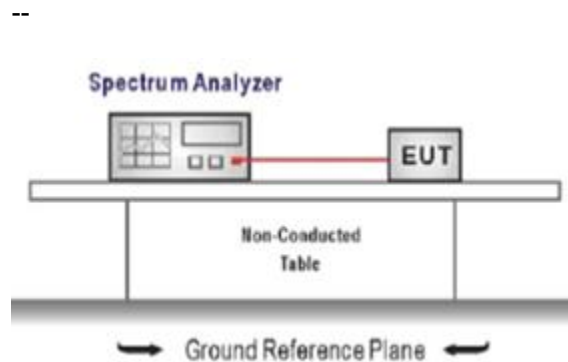

Test procedure:

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Operating Environment:

Temperature:	22.2 °C	Humidity:	56.3 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

Test Setup Diagram



Test Result

Pass

Test Data

Test Result of 20dB Bandwidth Measurement		
Test Frequency(MHz)	20dB Bandwidth(MHz)	Limit(MHz)
2402	2.312	Non-Specified
2440	2.318	Non-Specified
2478	2.272	Non-Specified




5.4. Radiated Band edge Emission

Limit:

FFCC CFR Title 47 Part 15 Subpart C Section 15.249 (d):

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Test configuration:

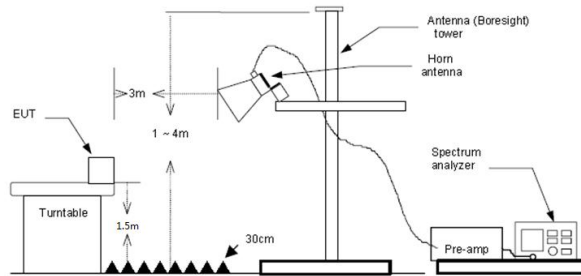


Test procedure:

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - d) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=Average, Trace=RMS for Average measurement

Operating Environment:

Temperature:	22.2 °C	Humidity:	56.5 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (TM1) is recorded in the report				

Test Setup Diagram

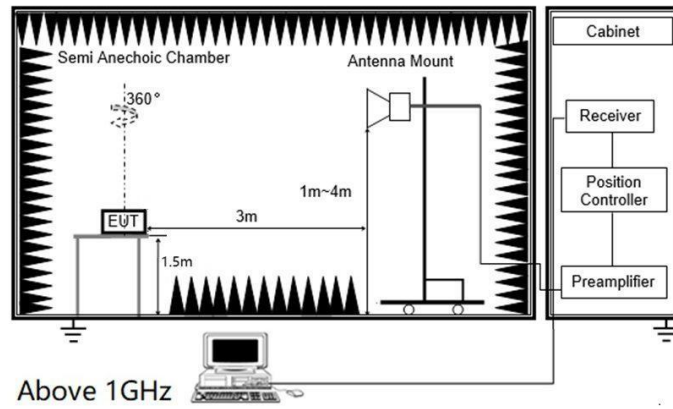


Test Result

Pass


Test Data

TM1 / Polarization: Horizontal / CH: L

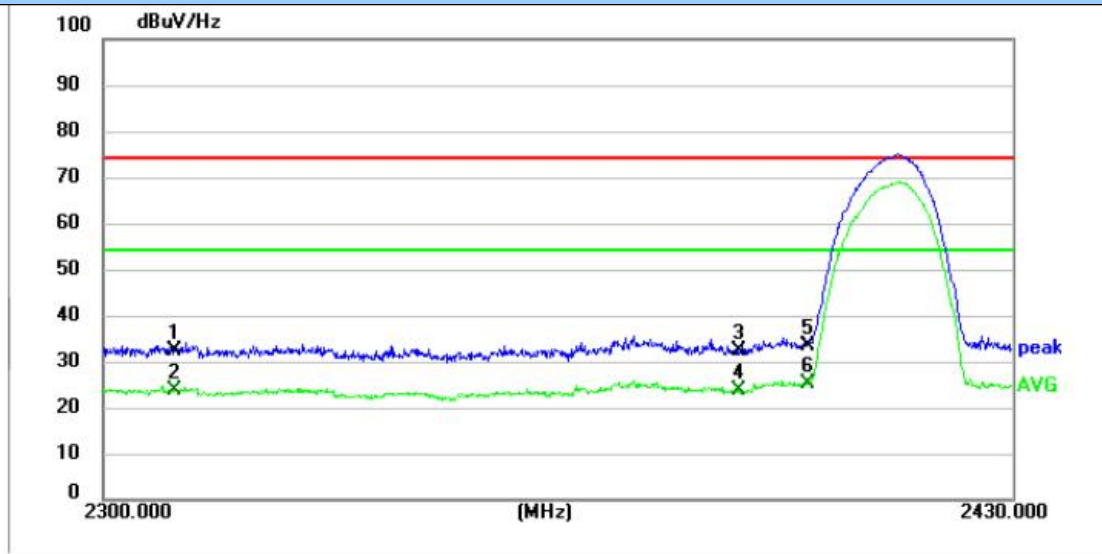


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2310.0000	49.85	-17.52	32.33	74.00	41.67	peak
2	2310.0000	41.19	-17.52	23.67	54.00	30.33	AVG
3	2390.0000	49.58	-17.32	32.26	74.00	41.74	peak
4	2390.0000	40.97	-17.32	23.65	54.00	30.35	AVG
5	2400.0000	50.80	-17.28	33.52	74.00	40.48	peak
6 *	2400.0000	42.55	-17.28	25.27	54.00	28.73	AVG

TM1 / Polarization: Vertical / CH: L

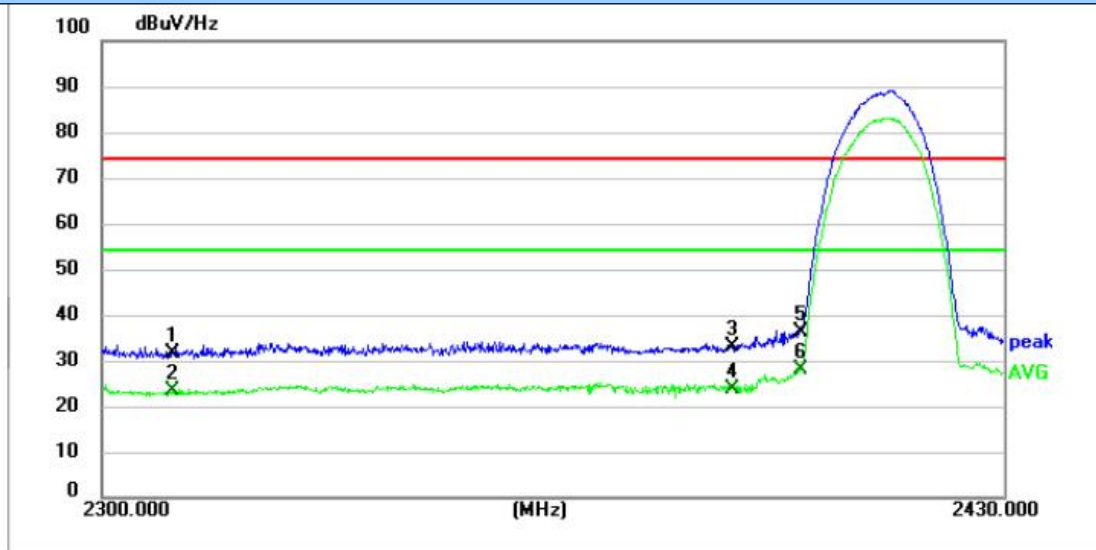


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2310.0000	48.98	-17.52	31.46	74.00	42.54	peak
2	2310.0000	40.79	-17.52	23.27	54.00	30.73	AVG
3	2390.0000	50.50	-17.32	33.18	74.00	40.82	peak
4	2390.0000	41.17	-17.32	23.85	54.00	30.15	AVG
5	2400.0000	53.45	-17.28	36.17	74.00	37.83	peak
6 *	2400.0000	45.26	-17.28	27.98	54.00	26.02	AVG

TM1 / Polarization: Horizontal / CH: H

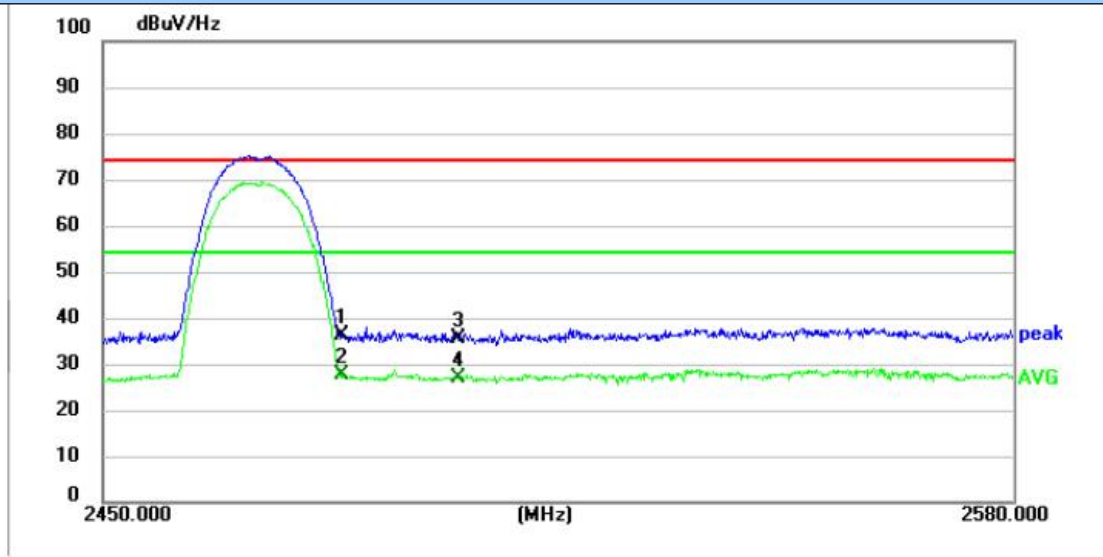

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2483.5000	53.23	-17.03	36.20	74.00	37.80	peak
2 *	2483.5000	44.72	-17.03	27.69	54.00	26.31	AVG
3	2500.0000	52.30	-16.94	35.36	74.00	38.64	peak
4	2500.0000	43.92	-16.94	26.98	54.00	27.02	AVG

TM1 / Polarization: Vertical / CH: H

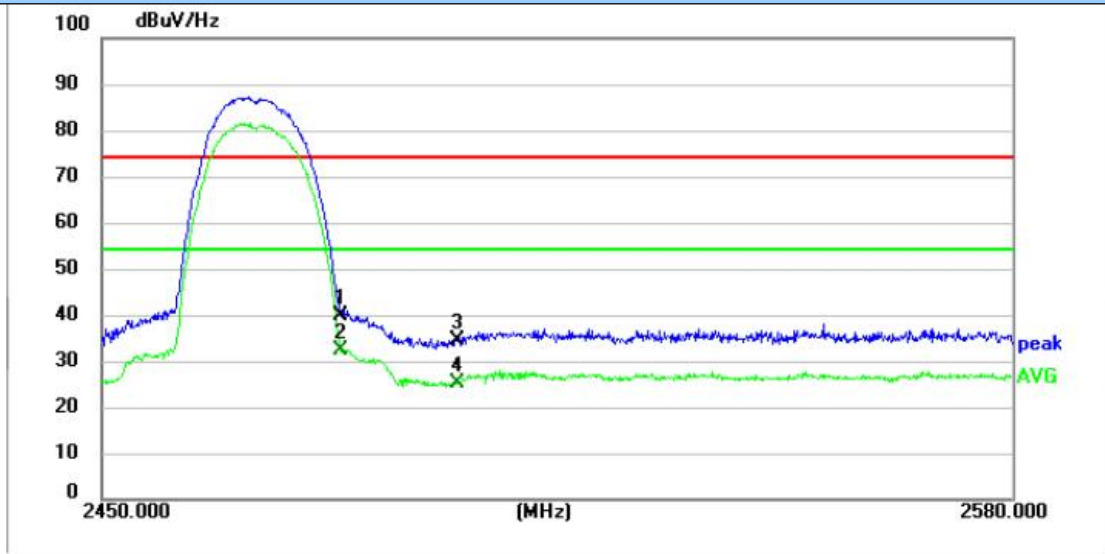

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2483.5000	56.90	-17.03	39.87	74.00	34.13	peak
2 *	2483.5000	49.31	-17.03	32.28	54.00	21.72	AVG
3	2500.0000	51.52	-16.94	34.58	74.00	39.42	peak
4	2500.0000	42.25	-16.94	25.31	54.00	28.69	AVG

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level

5.5. Radiated Spurious Emission

Limit:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak

Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)

FCC CFR Title 47 Part 15 Subpart C Section 15.249


As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the Antenna azimuth.

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz(Field strength of fundamental)	94.00	Average
	114.00	Peak
Above 1GHz(Field strength of harmonics)	54.00	Average
	74.00	Peak

Test configuration:


9kHz~30MHz

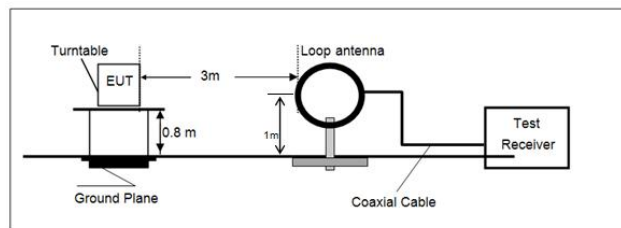

30 MHz ~ 1 GHz

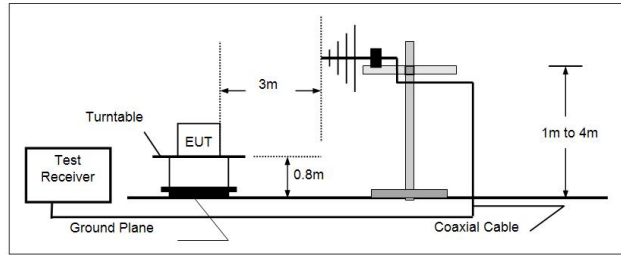

Above 1 GHz

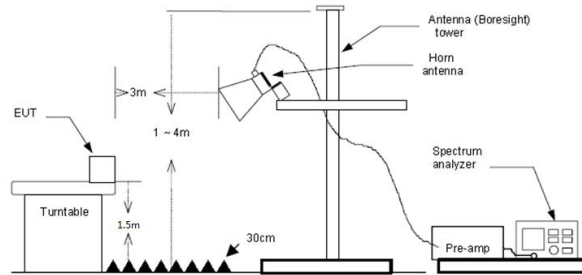

Test procedure:

1. The EUT was setup and tested according to ANSI C63.10.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - d) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=Average, Trace=RMS for Average measurement

Operating Environment:

Temperature:	22.2 °C	Humidity:	56.5 %	Atmospheric Pressure:	103 kPa
--------------	---------	-----------	--------	-----------------------	---------

Pre test mode:	TM1, TM2, TM3
----------------	---------------

Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (TM1) is recorded in the report
------------------	--

Test Result

Pass

Test Data

For 30 MHz ~ 1000 MHz

TM1 / Polarization: Horizontal / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.6931	60.92	-29.97	30.95	40.00	9.05	QP
2	80.0805	60.46	-34.98	25.48	40.00	14.52	QP
3	141.3296	68.00	-34.10	33.90	43.50	9.60	QP
4	271.3245	61.80	-28.23	33.57	46.00	12.43	QP
5 *	374.6225	62.64	-25.51	37.13	46.00	8.87	QP
6	869.1300	51.97	-15.25	36.72	46.00	9.28	QP

TM1 / Polarization: Vertical / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	58.8185	61.11	-30.63	30.48	40.00	9.52	QP
2	106.7587	61.66	-30.69	30.97	43.50	12.53	QP
3	200.6880	63.40	-29.83	33.57	43.50	9.93	QP
4	312.1792	58.09	-26.84	31.25	46.00	14.75	QP
5 *	422.0577	60.87	-24.23	36.64	46.00	9.36	QP
6	574.6258	52.47	-20.03	32.44	46.00	13.56	QP

Note:

1) For 9 kHz ~ 30 MHz Measurement


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

2) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor

3) Margin = Limit – Level


For 1 GHz ~ 25 GHz

TM1 / Polarization: Horizontal / CH: L

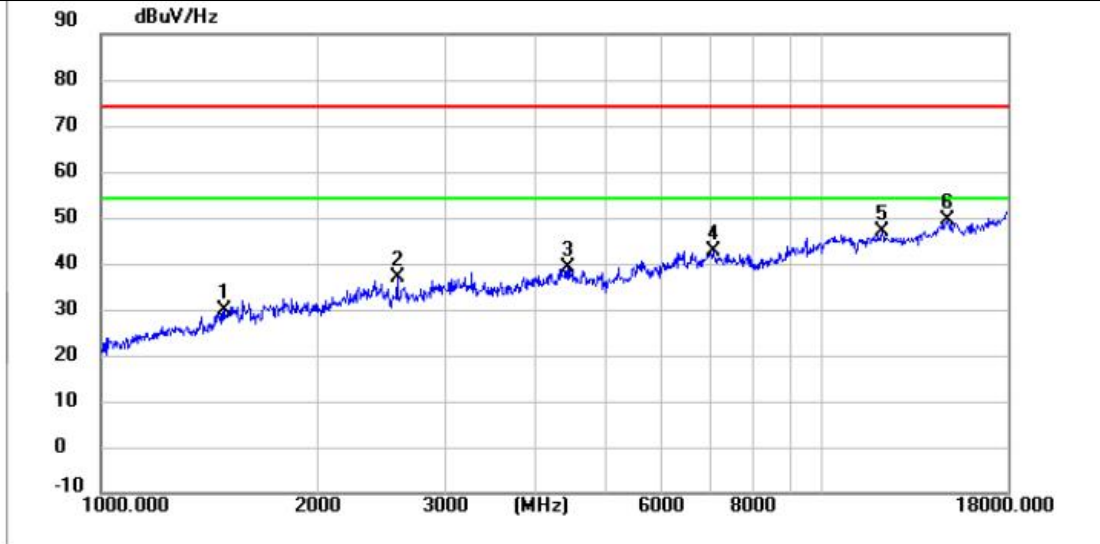

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1489.6000	50.61	-20.75	29.86	74.00	44.14	peak
2	2577.6000	53.21	-16.35	36.86	74.00	37.14	peak
3	4442.5000	50.06	-11.07	38.99	74.00	35.01	peak
4	7075.8000	38.78	3.94	42.72	74.00	31.28	peak
5	12092.5000	32.55	14.51	47.06	74.00	26.94	peak
6 *	14945.1000	31.55	17.78	49.33	74.00	24.67	peak

TM1 / Polarization: Vertical / CH: L

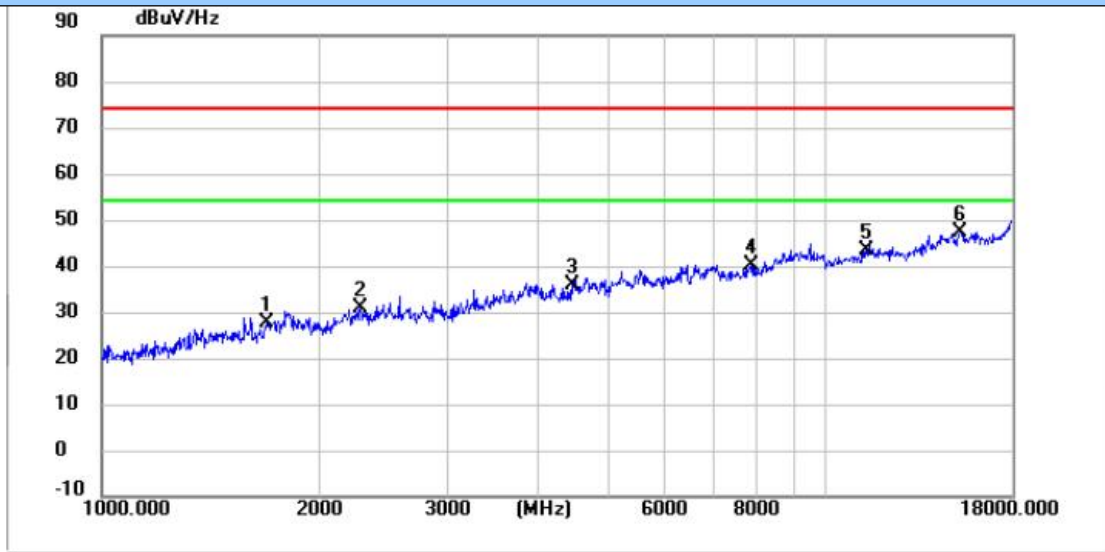


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1693.6000	47.67	-20.13	27.54	74.00	46.46	peak
2	2281.8000	48.32	-17.59	30.73	74.00	43.27	peak
3	4457.8000	46.80	-11.02	35.78	74.00	38.22	peak
4	7873.1000	34.26	6.06	40.32	74.00	33.68	peak
5	11341.1000	29.56	13.83	43.39	74.00	30.61	peak
6 *	15322.5000	29.78	17.58	47.36	74.00	26.64	peak

Test channel:2402MHz


Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBuV/m)	Margin (dB)	Remark	Polarity
2402.00	90.38	29.23	4.02	38.2	-4.95	85.43	114	28.57	Peak	Horizontal
2402.00	81.32	29.23	4.02	38.2	-4.95	76.37	94	17.63	Average	Horizontal
2402.00	82.28	29.23	4.02	38.2	-4.95	77.33	114	36.67	Peak	Vertical
2402.00	67.32	29.23	4.02	38.2	-4.95	62.37	94	31.63	Average	Vertical

TM1 / Polarization: Horizontal / CH: M

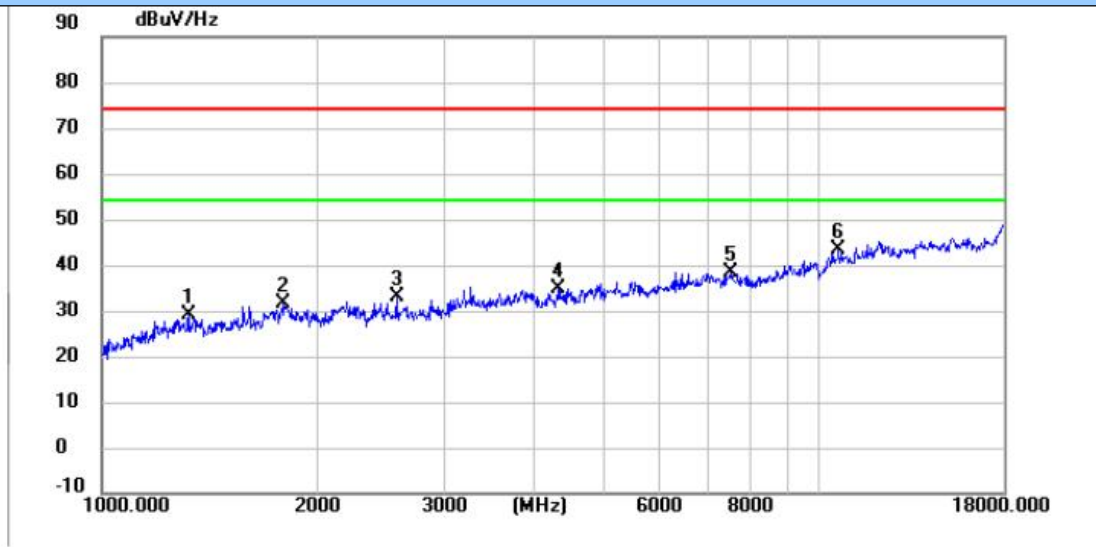

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1321.3000	50.40	-21.24	29.16	74.00	44.84	peak
2	1797.3000	51.21	-19.53	31.68	74.00	42.32	peak
3	2577.6000	49.21	-16.35	32.86	74.00	41.14	peak
4	4320.1000	46.46	-11.63	34.83	74.00	39.17	peak
5	7534.8000	32.92	5.40	38.32	74.00	35.68	peak
6 *	10608.4000	31.07	12.16	43.23	74.00	30.77	peak

TM1 / Polarization: Vertical / CH: M

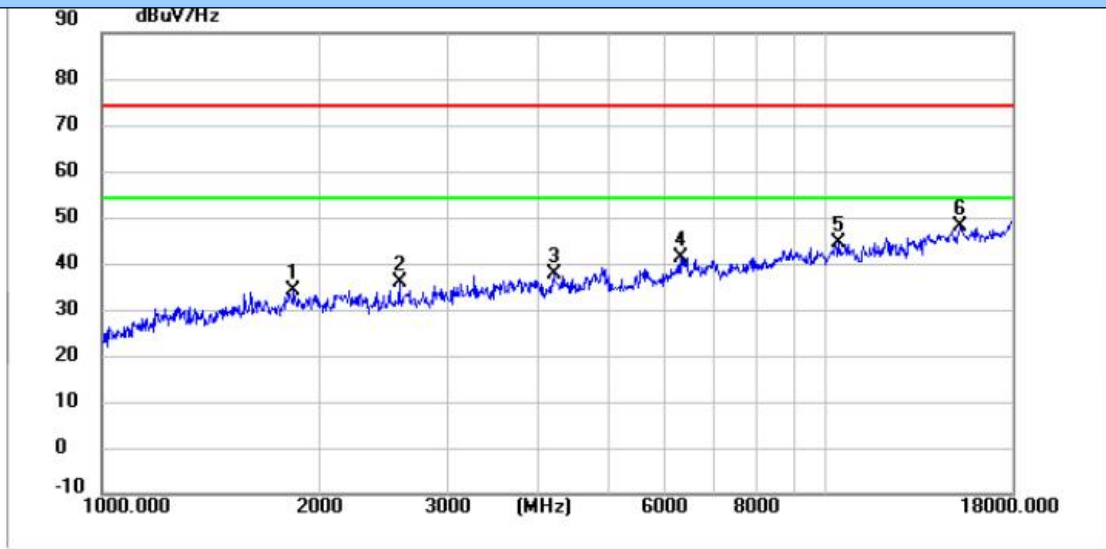


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1843.2000	53.64	-19.43	34.21	74.00	39.79	peak
2	2577.6000	52.21	-16.35	35.86	74.00	38.14	peak
3	4216.4000	49.33	-11.78	37.55	74.00	36.45	peak
4	6287.0000	44.26	-2.99	41.27	74.00	32.73	peak
5	10423.1000	32.58	11.81	44.39	74.00	29.61	peak
6 *	15322.5000	30.28	17.58	47.86	74.00	26.14	peak

Test channel:2440MHz


Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBuV/m)	Margin (dB)	Remark	Polarity
2440.00	91.12	29.18	4.02	38.35	-5.15	85.97	114	28.03	Peak	Horizontal
2440.00	81.06	29.18	4.02	38.35	-5.15	75.91	94	18.09	Average	Horizontal
2440.00	82.34	29.18	4.02	38.35	-5.15	77.19	114	36.81	Peak	Vertical
2440.00	67.56	29.18	4.02	38.35	-5.15	62.41	94	31.59	Average	Vertical

TM1 / Polarization: Horizontal / CH: H

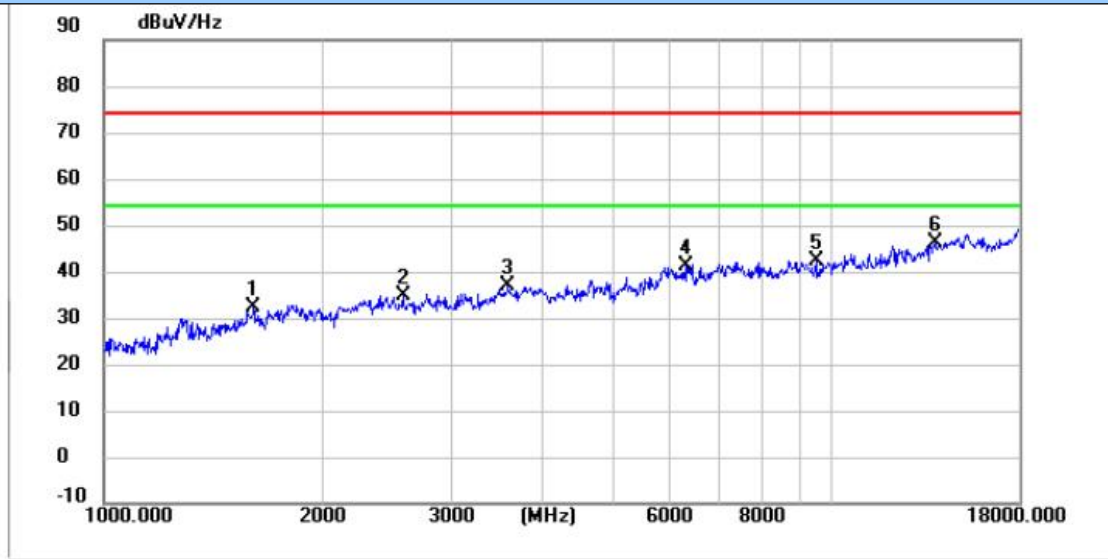

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1608.6000	52.83	-20.45	32.38	74.00	41.62	peak
2	2577.6000	51.21	-16.35	34.86	74.00	39.14	peak
3	3594.2000	50.31	-13.48	36.83	74.00	37.17	peak
4	6287.0000	44.26	-2.99	41.27	74.00	32.73	peak
5	9501.7000	32.61	9.75	42.36	74.00	31.64	peak
6 *	13824.8000	28.16	17.94	46.10	74.00	27.90	peak

TM1 / Polarization: Vertical / CH: H

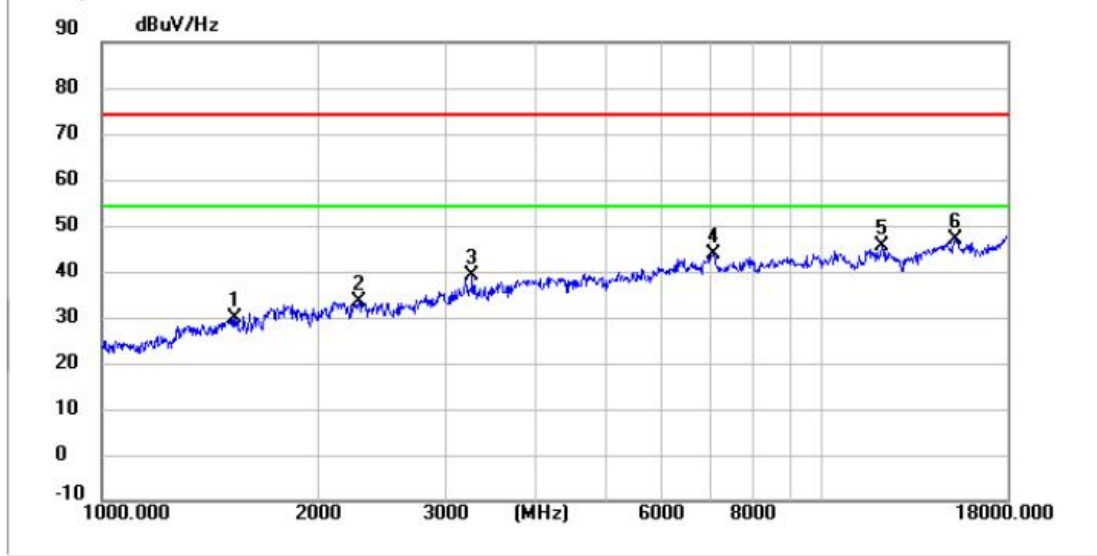

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1537.2000	50.63	-20.67	29.96	74.00	44.04	peak
2	2281.8000	50.82	-17.59	33.23	74.00	40.77	peak
3	3264.4000	53.10	-13.94	39.16	74.00	34.84	peak
4	7075.8000	39.78	3.94	43.72	74.00	30.28	peak
5	12092.5000	31.05	14.51	45.56	74.00	28.44	peak
6 *	15322.5000	29.28	17.58	46.86	74.00	27.14	peak

Test channel:2478MHz

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
2478.00	92.31	29.2	4.02	38.3	-5.08	87.23	114	92.31	Peak	Horizont al
2478.00	81.53	29.2	4.02	38.3	-5.08	76.45	94	81.53	Average	Horizont al
2478.00	82.33	29.2	4.02	38.3	-5.08	77.25	114	82.33	Peak	Vertical
2478.00	68.12	29.2	4.02	38.3	-5.08	63.04	94	68.12	Average	Vertical

Note:

1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor

2) Margin = Limit – Level

3) Average measurement was not performed if peak level is lower than average limit (54dBuV/m) for above 1GHz.

6. TEST SETUP PHOTOS

Please refer to RF report: CISRR25090404701

7. EXTERNAL AND INTERNAL PHOTOS

7.1 External photos

Please refer to RF report: CISRR25090404701

7.2 Internal photos

Please refer to RF report: CISRR25090404701

-----End of the report-----