




Power Spectral Density spectrum plot of Chain A value:

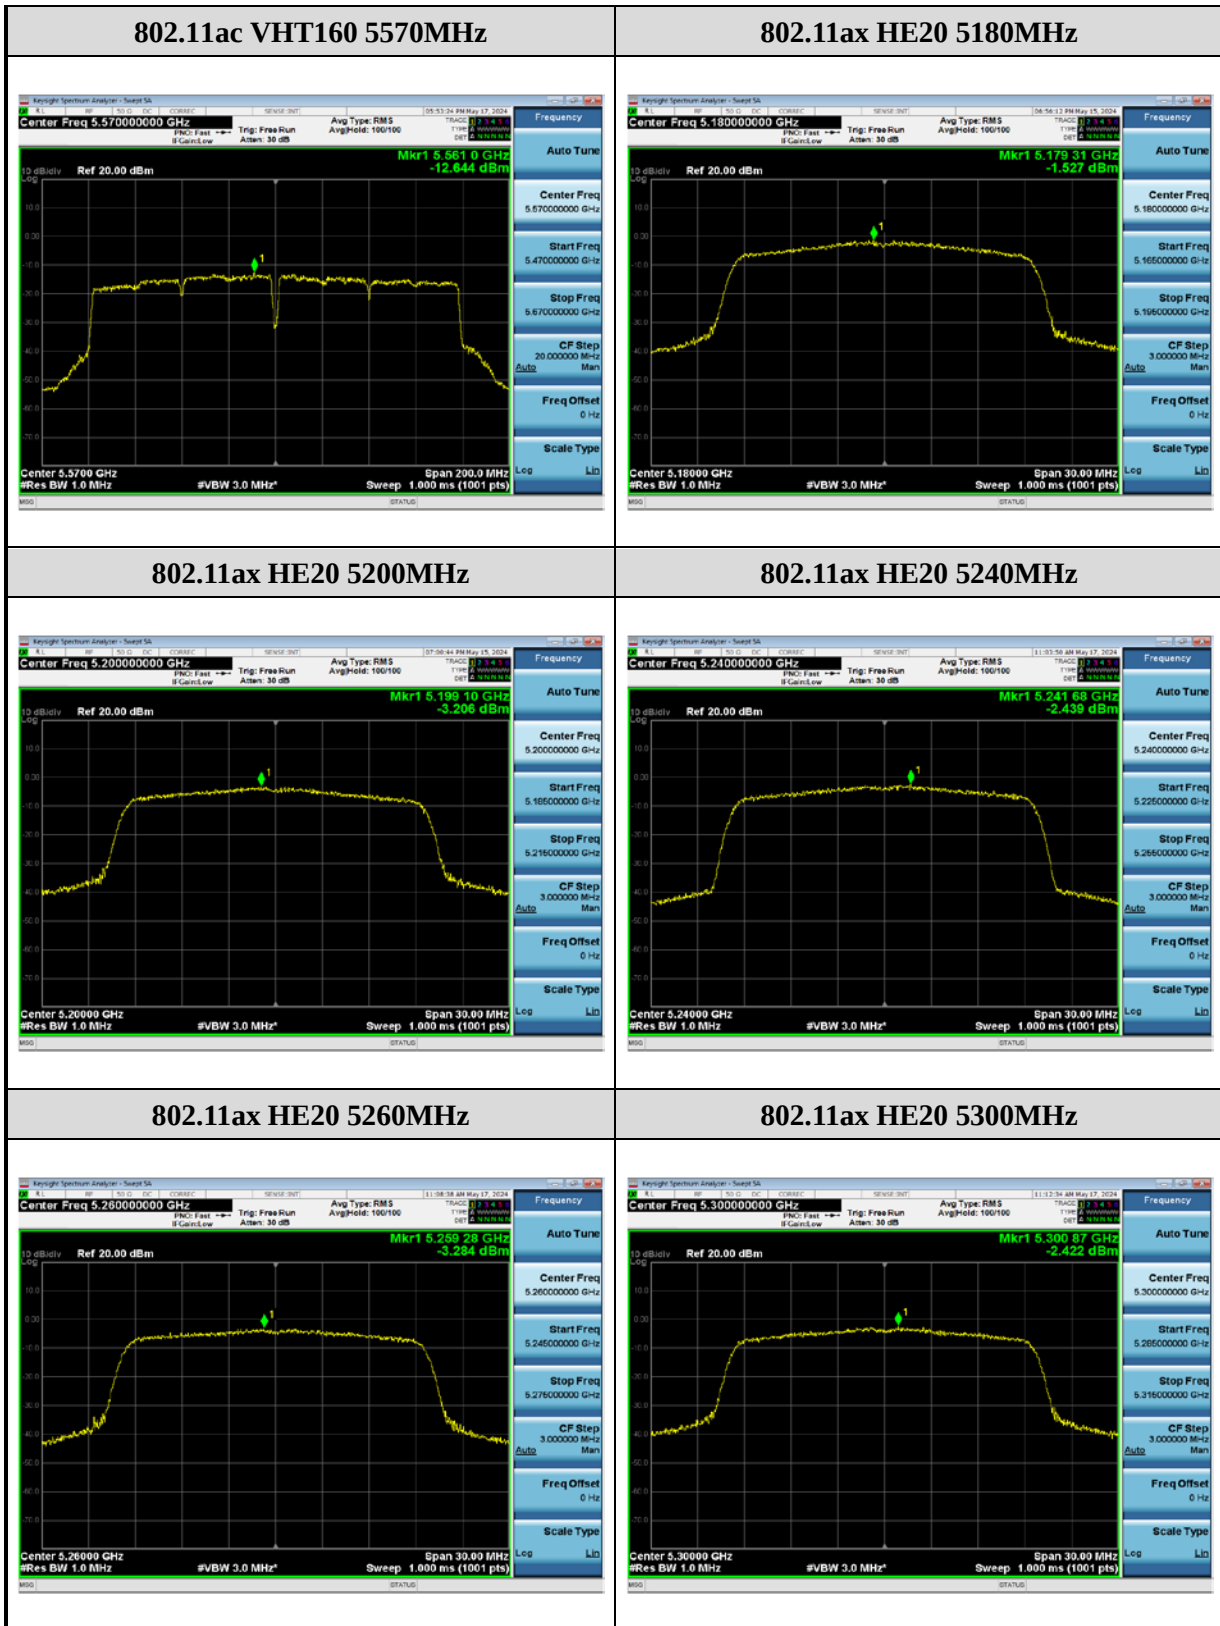


Power Spectral Density spectrum plot of Chain A value:

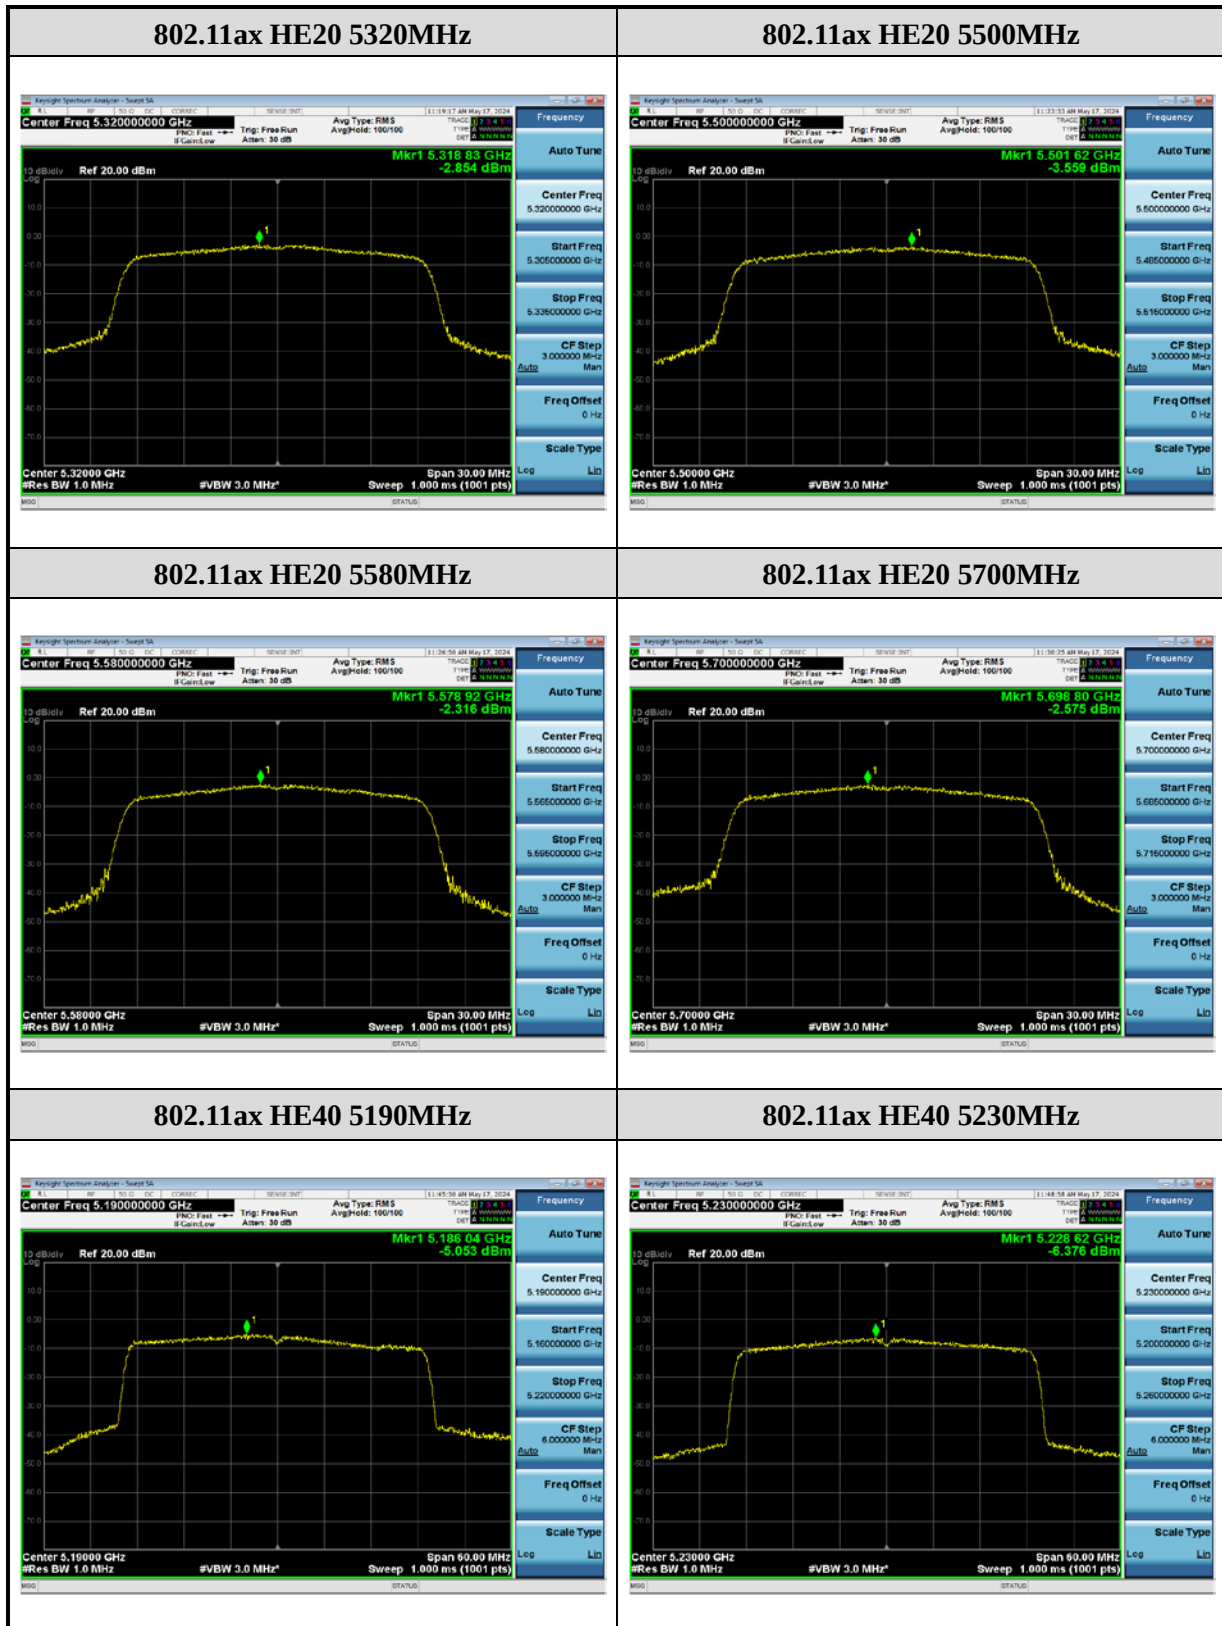

Power Spectral Density spectrum plot of Chain A value:

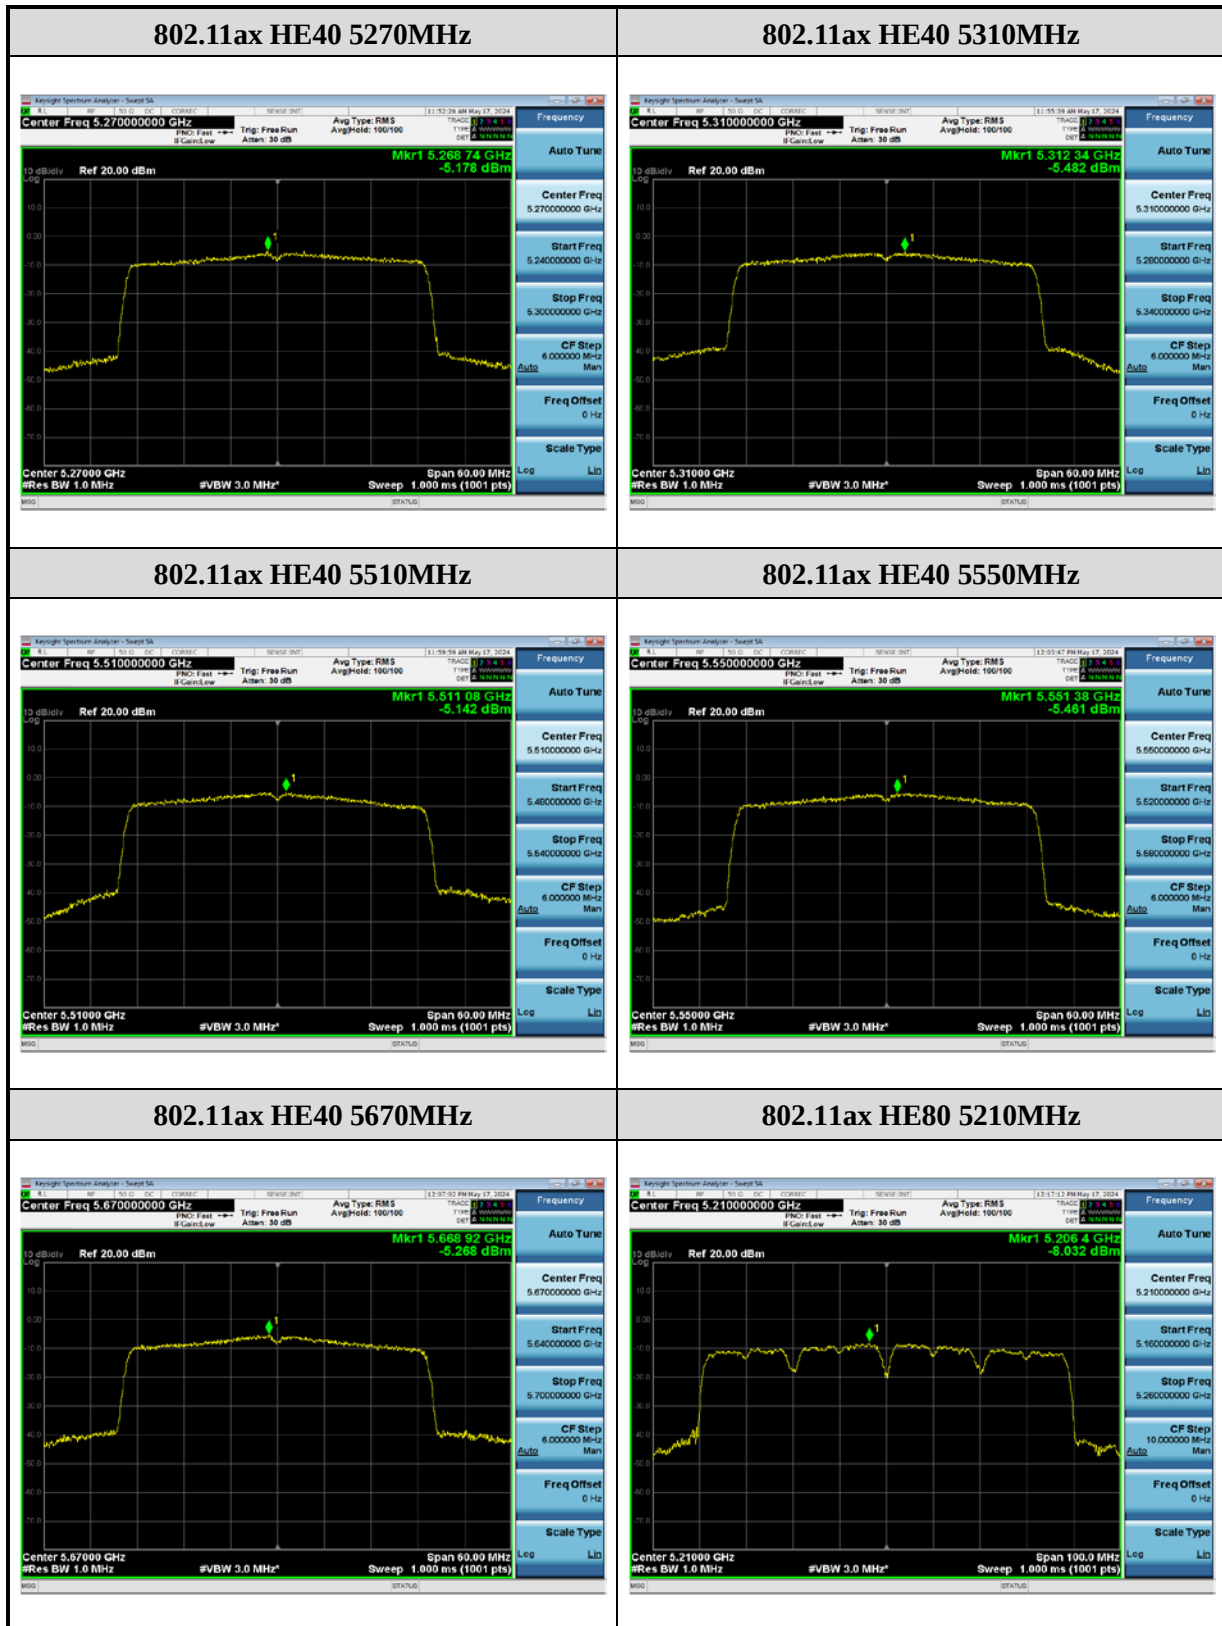

Power Spectral Density spectrum plot of Chain A value:

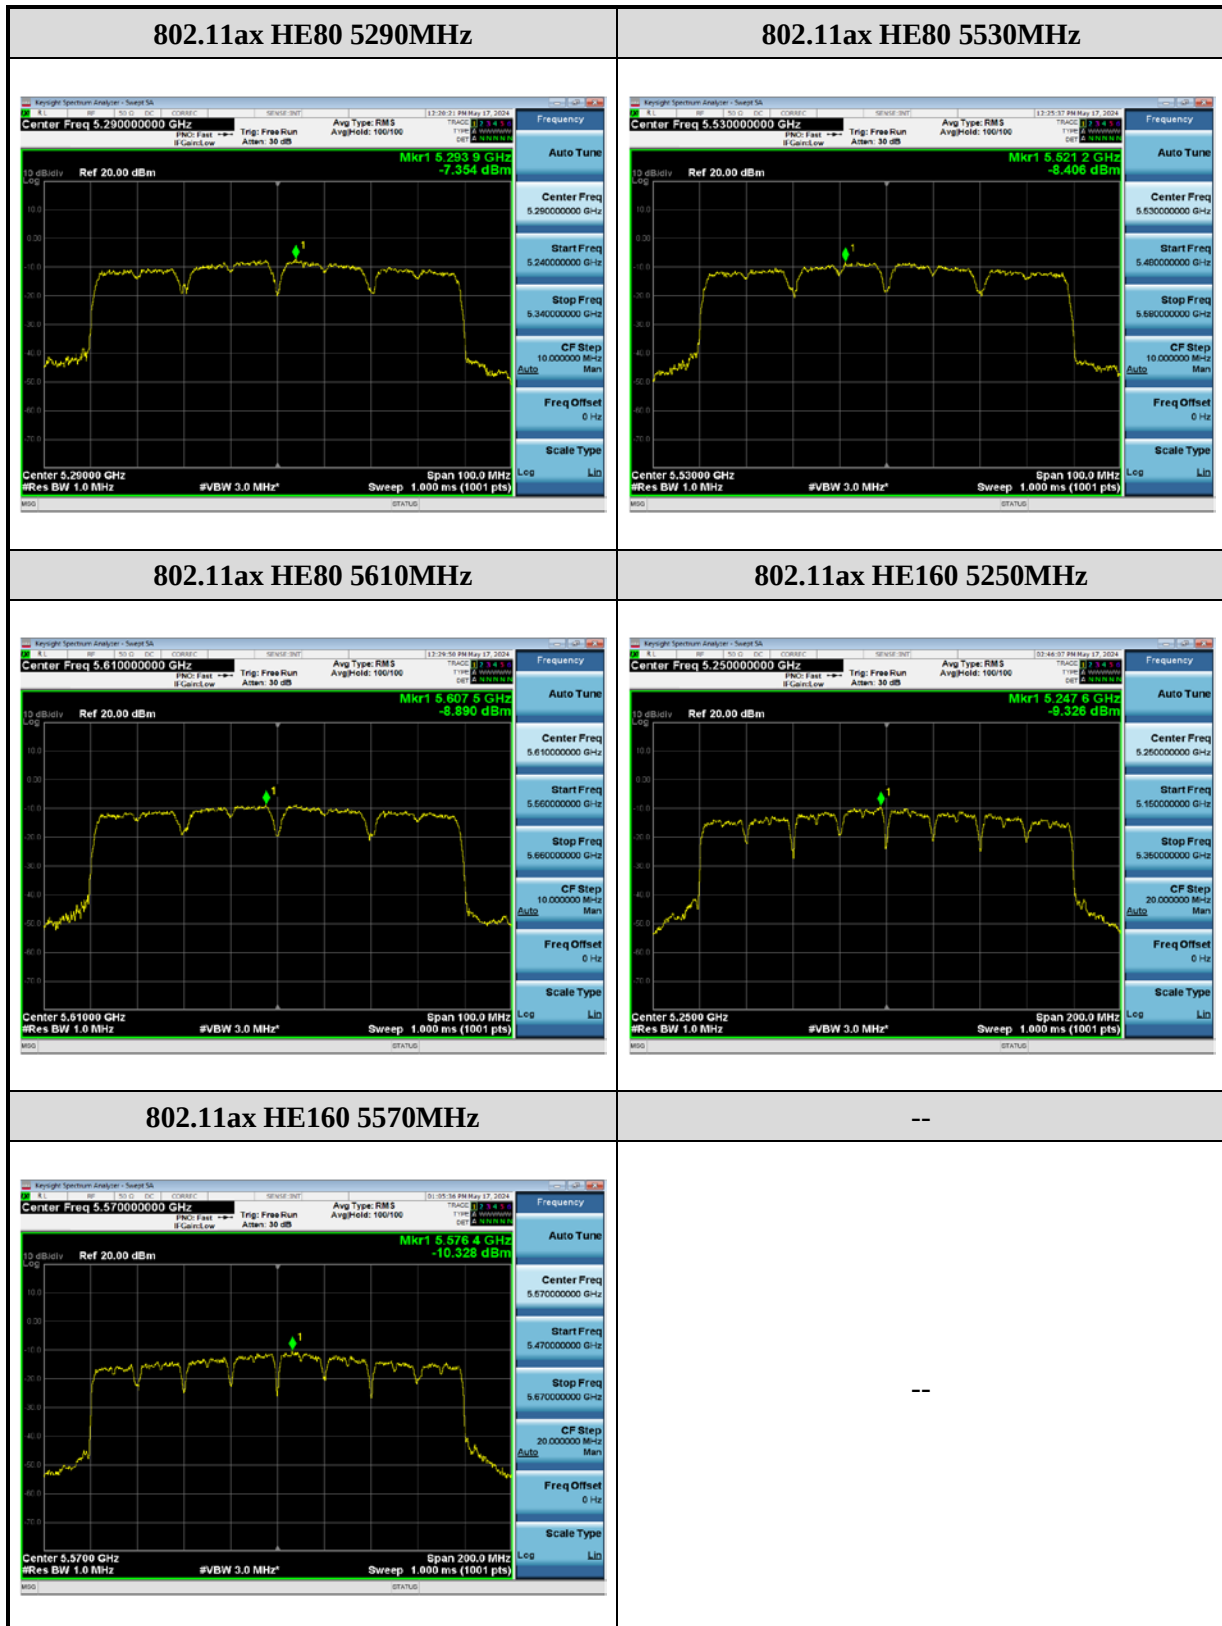

For 5725 MHz ~ 5850 MHz

802.11a

Frequency (MHz)	PSD (dBm/500kHz)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5745	-2.75	--	--	< 30	Pass
5785	-1.96	--	--	< 30	Pass
5825	-2.17	--	--	< 30	Pass

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$

802.11n HT20

Frequency (MHz)	PSD (dBm/500kHz)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5745	-3.42	--	--	< 30	Pass
5785	-2.66	--	--	< 30	Pass
5825	-2.44	--	--	< 30	Pass

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

802.11ac VHT40

Frequency (MHz)	PSD (dBm)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5755	-4.77	--	--	< 30	Pass
5795	-4.06	--	--	< 30	Pass

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

802.11ac VHT80

Frequency (MHz)	PSD (dBm)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5775	-6.42	--	--	< 30	Pass

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

802.11ax HE20

Frequency (MHz)	PSD (dBm)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5745	-4.17	--	--	< 30	Pass
5785	-3.69	--	--	< 30	Pass
5825	-3.54	--	--	< 30	Pass

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

802.11ax HE40

Frequency (MHz)	PSD (dBm)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5755	-4.38	--	--	< 30	Pass
5795	-5.33	--	--	< 30	Pass

備 Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.


802.11ax HE80

Frequency (MHz)	PSD (dBm)		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
	Chain A	Chain B			
5775	-7.13	--	--	< 30	Pass


Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2. $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.


Power Spectral Density spectrum plot of Chain A value:

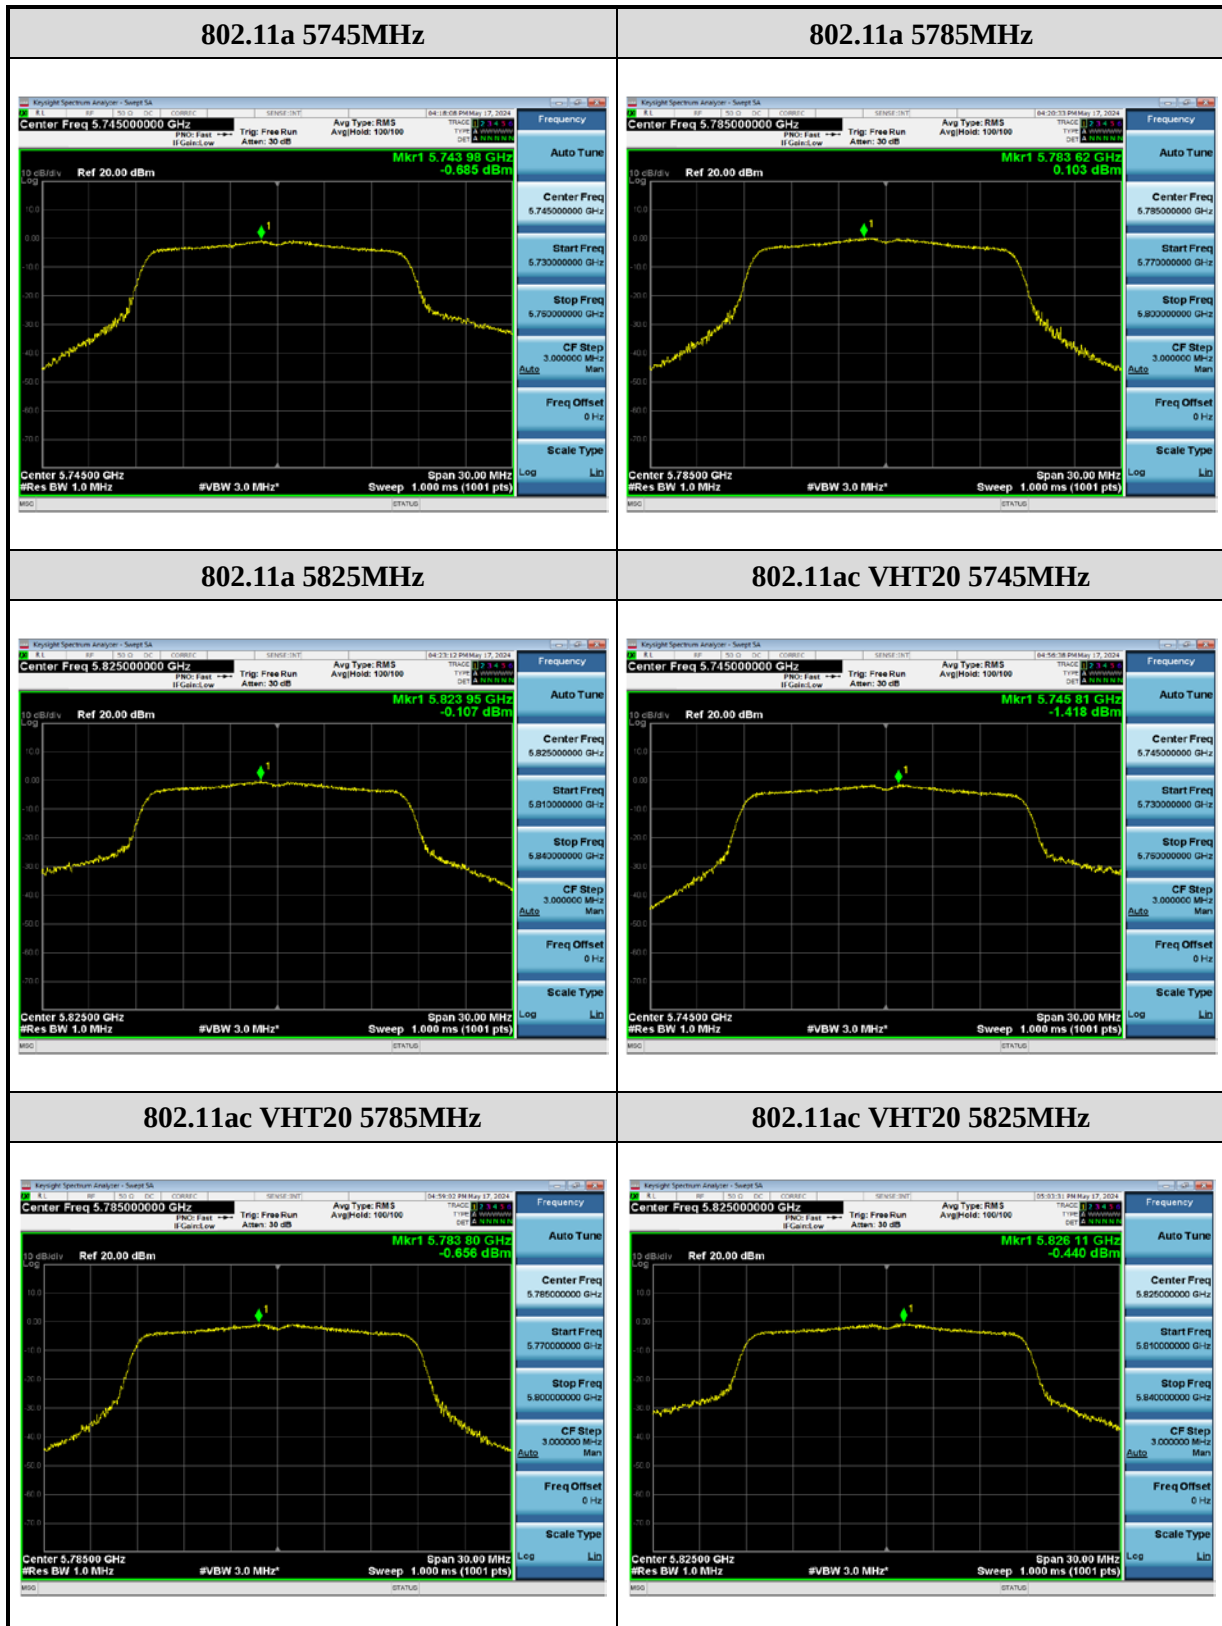

Power Spectral Density spectrum plot of Chain A value:

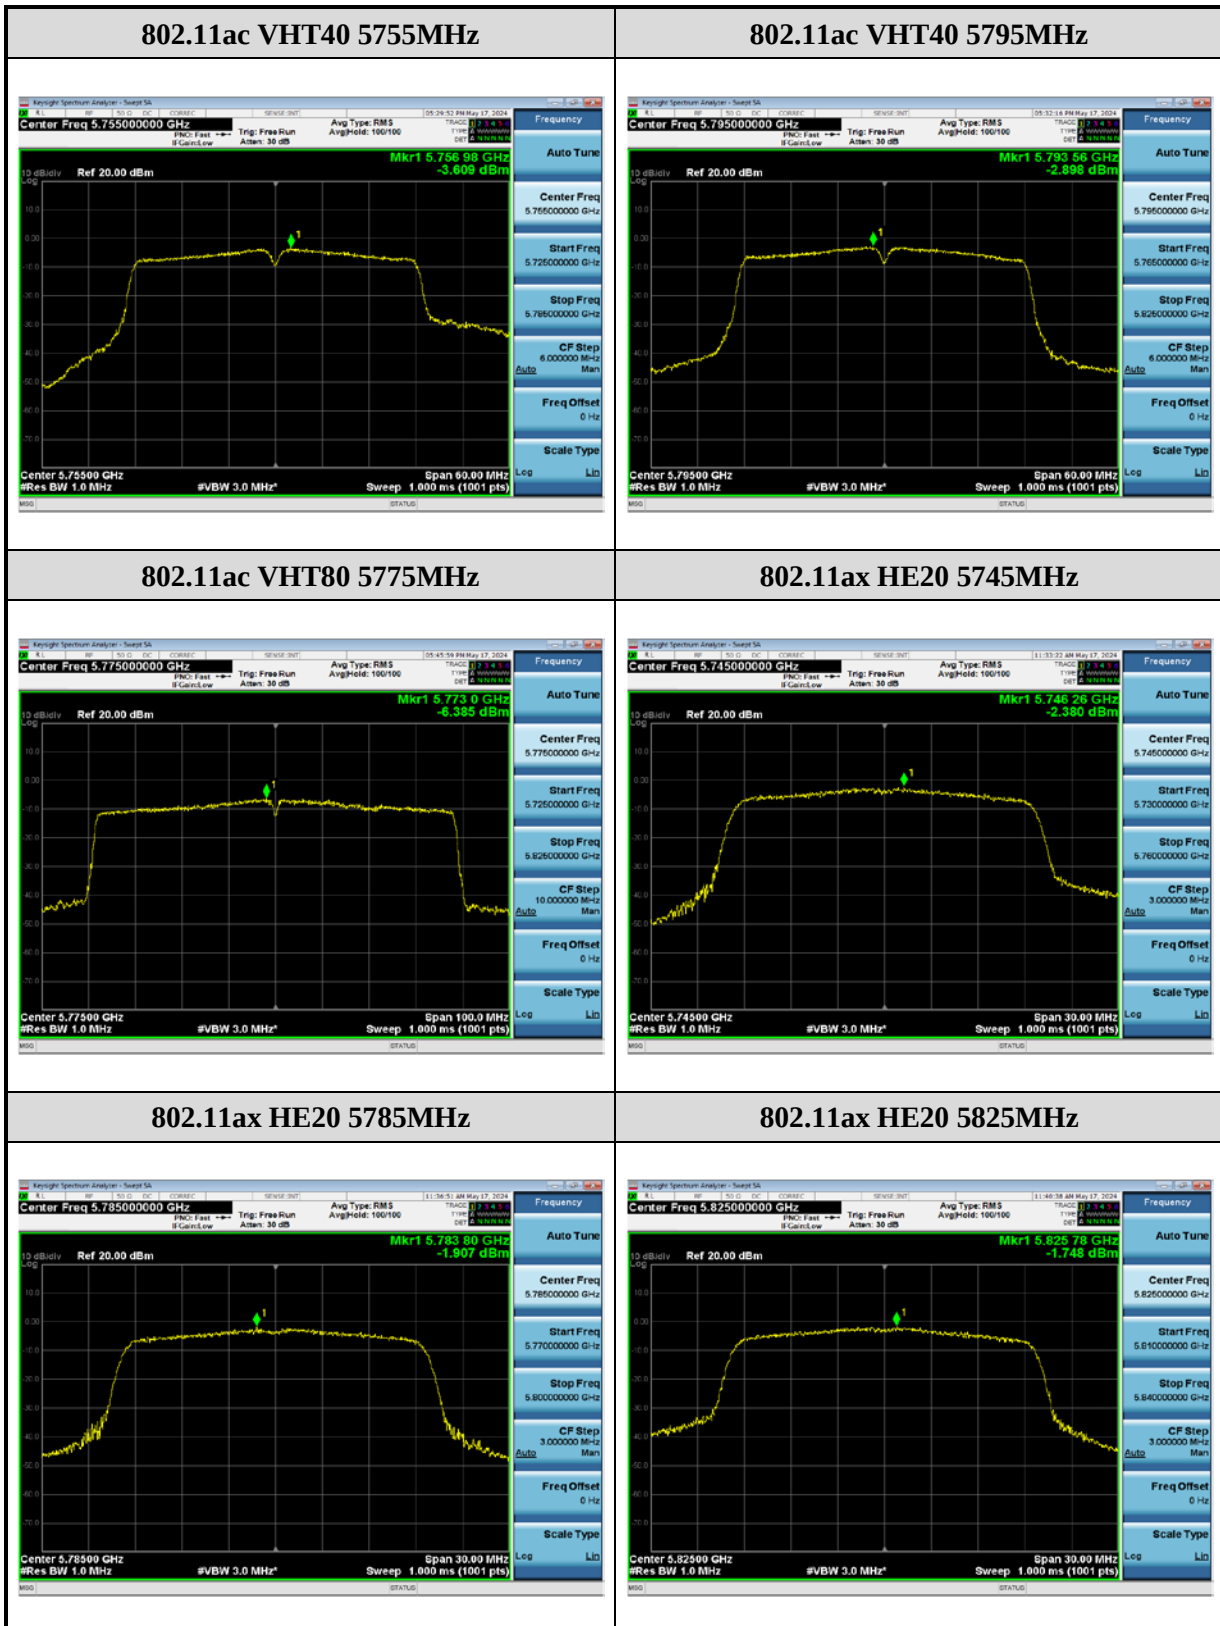

Power Spectral Density spectrum plot of Chain A value:

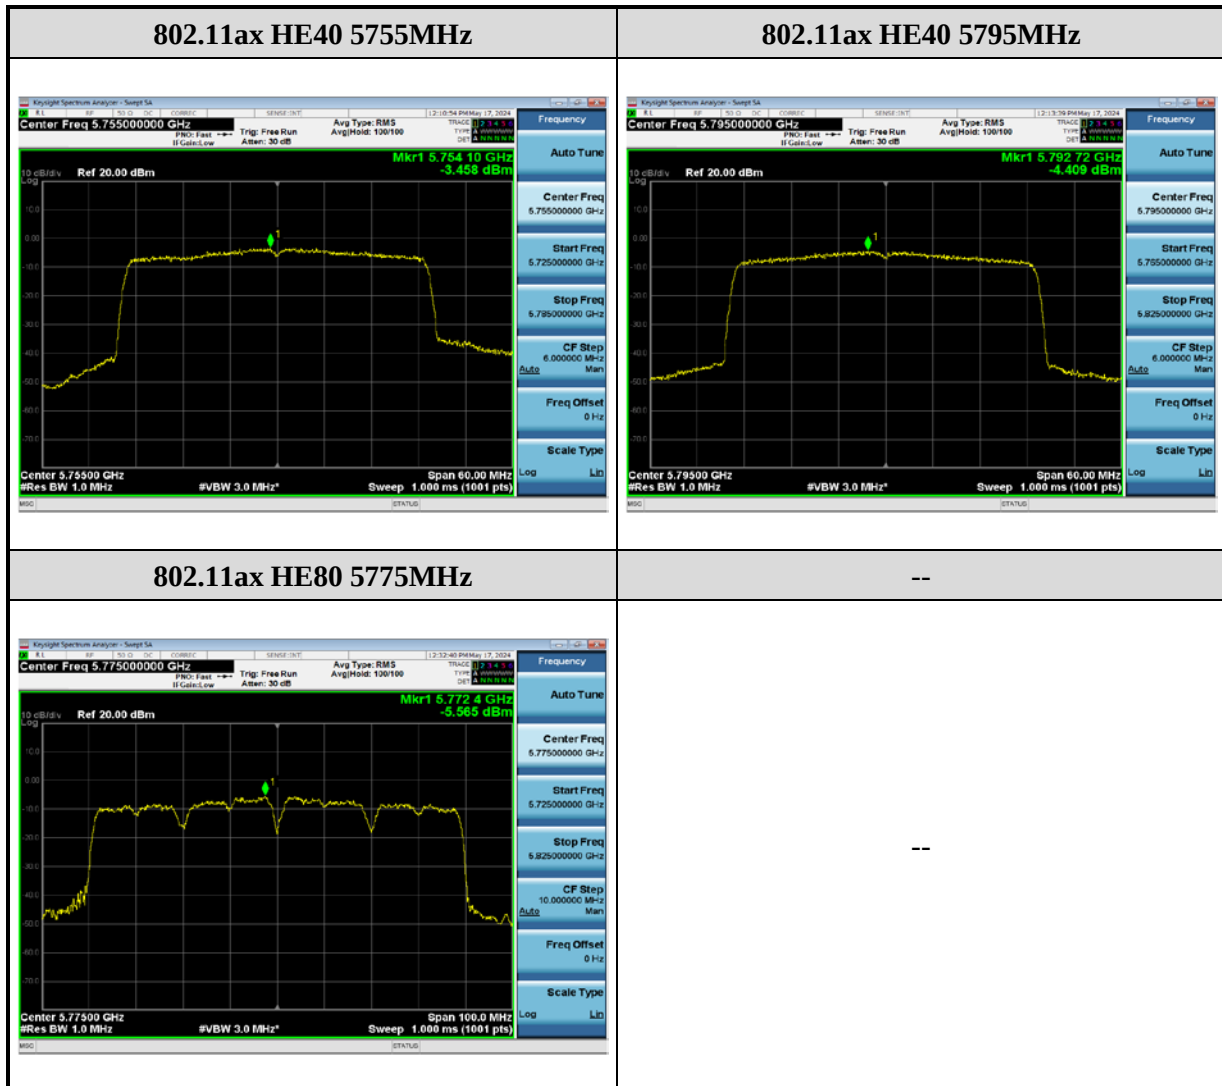

2.5 Unwanted Emission Measurement

2.5.1 Limit

1. Un- restricted bands unwanted emission limit :

Operating Band (MHz)	Limit of all emissions outside of the operating band
5150 ~ 5250	-27dBm/MHz, EIRP
5250 ~ 5350	-27dBm/MHz, EIRP
5470 ~ 5725	-27dBm/MHz, EIRP
5725 ~ 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

2. Restricted bands unwanted emission limit :


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) = 20 log RF Voltage(uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

2.5.2 Test Setup


Below 30MHz

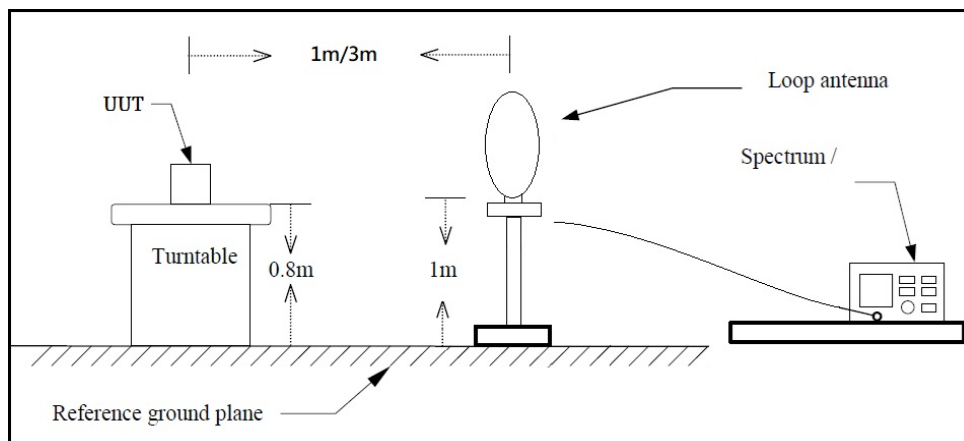

30MHz~1GHz

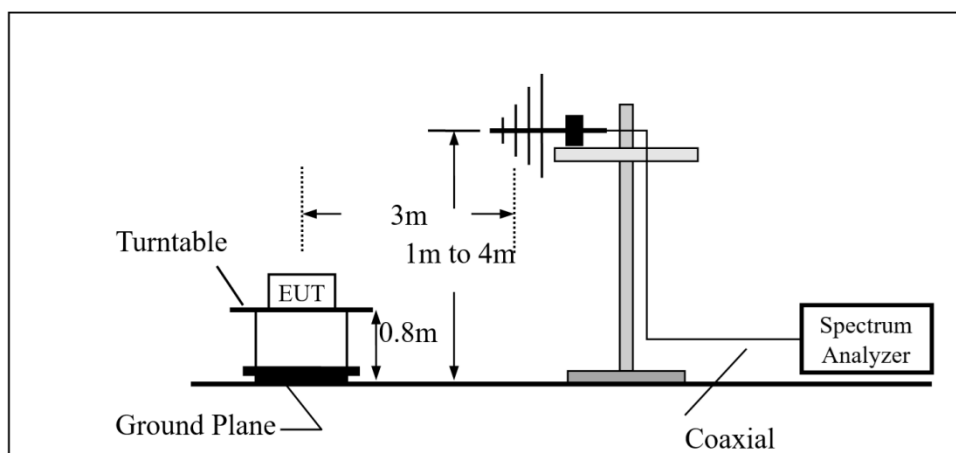

Above 1GHz

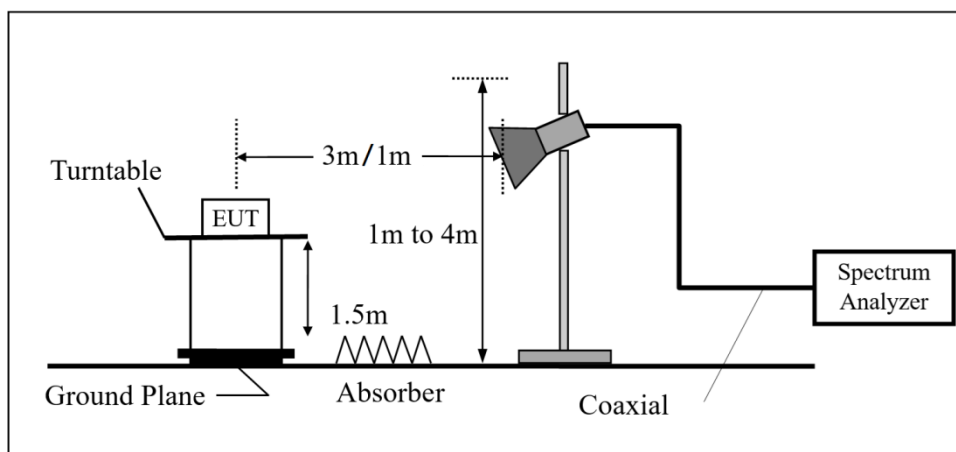

2.5.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

The following bandwidths were used during emissions testing.

Frequency	RBW	VBW
9 kHz to 150 kHz	200 Hz to 300 Hz	3 × RBW
0.15 MHz to 30 MHz	9 kHz to 10 kHz	3 × RBW
30 MHz to 1000 MHz	100 kHz to 120 kHz	3 × RBW
>1000 MHz	1 MHz	3 × RBW

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For Radiated emission Above 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

2.5.4 Duty Cycle


Type of Modulation	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	5180	1.426	1.774	0.804	0.948	0.701
802.11ac VHT20	5180	1.334	1.682	0.793	1.007	0.750
802.11ac VHT40	5190	0.665	1.017	0.654	1.845	1.504
802.11ac VHT80	5210	0.344	0.682	0.504	2.974	2.909
802.11ac VHT160	5250	0.204	0.561	0.364	4.392	4.902
802.11ax HE20	5180	1.036	1.373	0.755	1.223	0.965
802.11ax HE40	5190	0.551	0.893	0.618	2.092	1.814
802.11ax HE80	5210	0.042	0.058	0.717	1.442	23.866
802.11ax HE160	5250	0.041	0.060	0.693	1.593	24.213

2.5.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

Test Frequency				
RF	802.11a /ac-VHT20 / ax-HE20	802.11ac-VHT40 / ax-HE40	802.11ac-VHT80 / ax-HE80	802.11ac-VHT160 / ax-HE160
Tx	CH36 (5180MHz)	CH38 (5190MHz)	CH42 (5210MHz)	CH50 (5250MHz)
	CH64 (5320MHz)	CH62 (5310MHz)	CH58 (5290MHz)	CH114 (5570MHz)
	CH100 (5500MHz)	CH102 (5510MHz)	CH106 (5530MHz)	
	CH149 (5745MHz)	CH151 (5755MHz)	CH155 (5775MHz)	
	CH165 (5825MHz)	CH159 (5795MHz)		

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

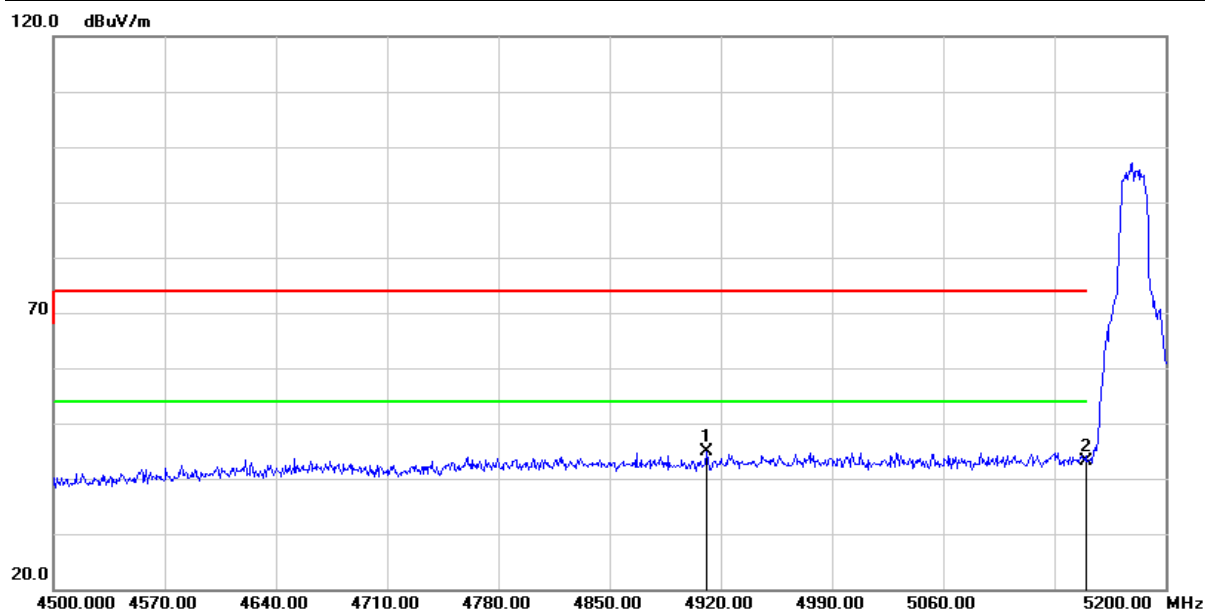


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4910.900	42.71	2.25	44.96	74.00	-29.04	peak
2	5150.000	40.02	3.14	43.16	74.00	-30.84	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

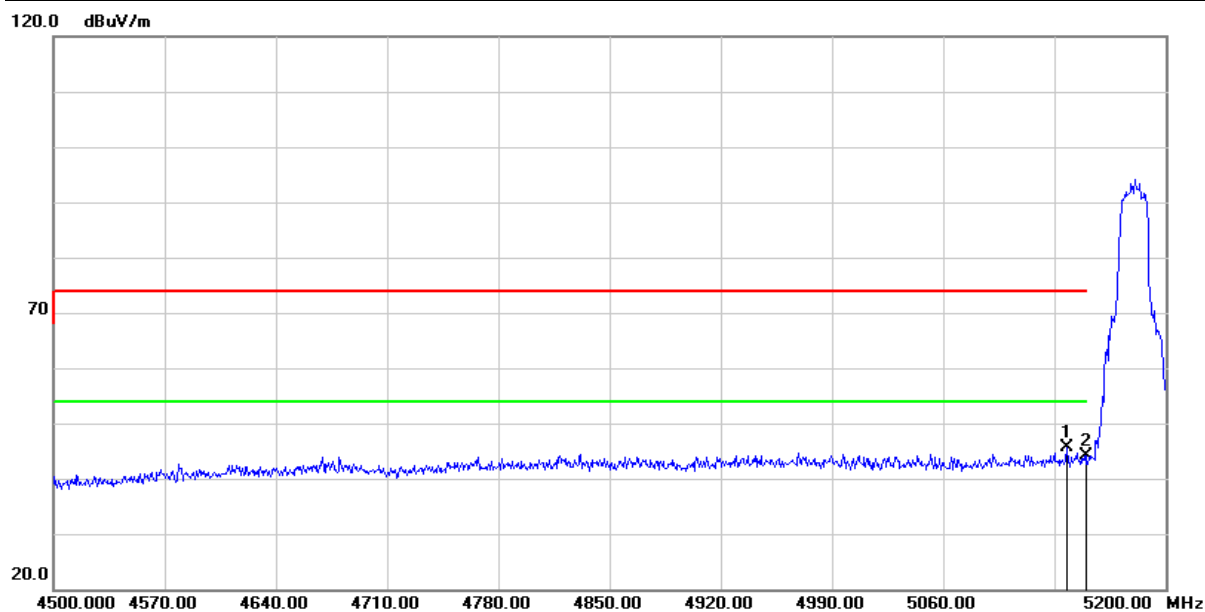


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.700	42.42	3.12	45.54	74.00	-28.46	peak
2	5150.000	40.98	3.14	44.12	74.00	-29.88	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

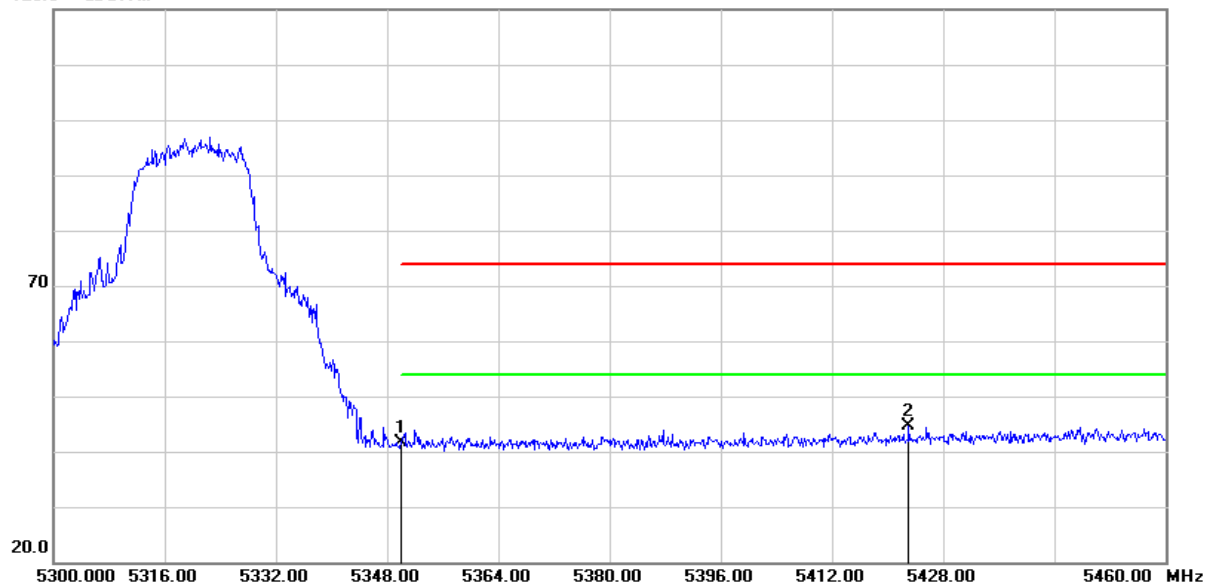


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.08	2.46	41.54	74.00	-32.46	peak
2	5423.040	41.88	2.69	44.57	74.00	-29.43	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

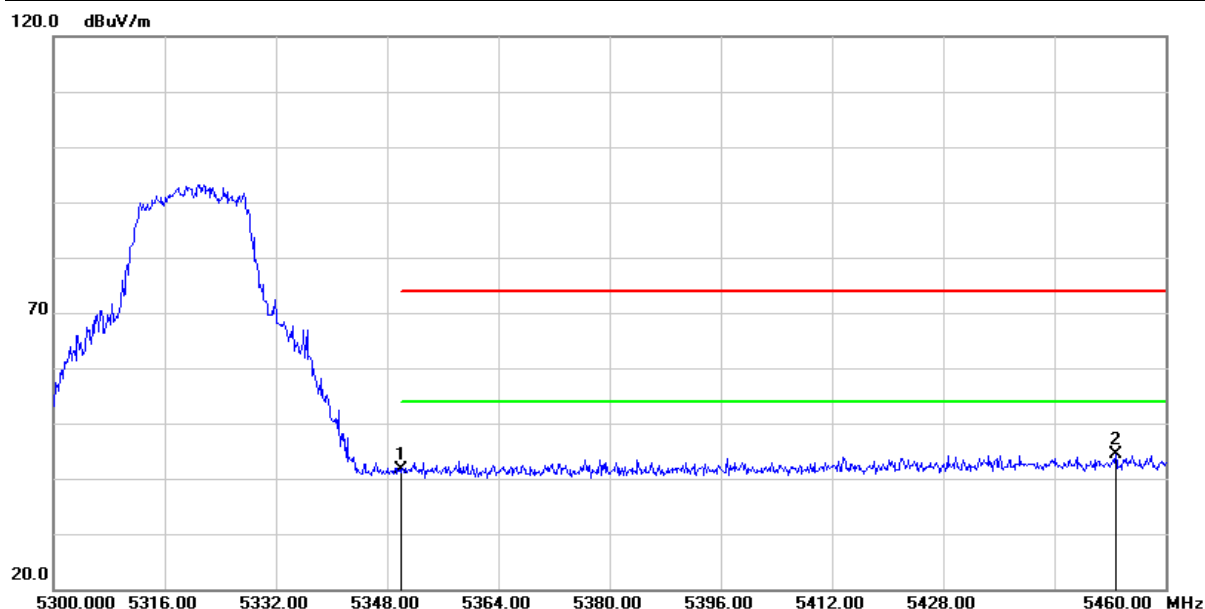


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.20	2.46	41.66	74.00	-32.34	peak
2	5452.800	41.40	2.87	44.27	74.00	-29.73	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

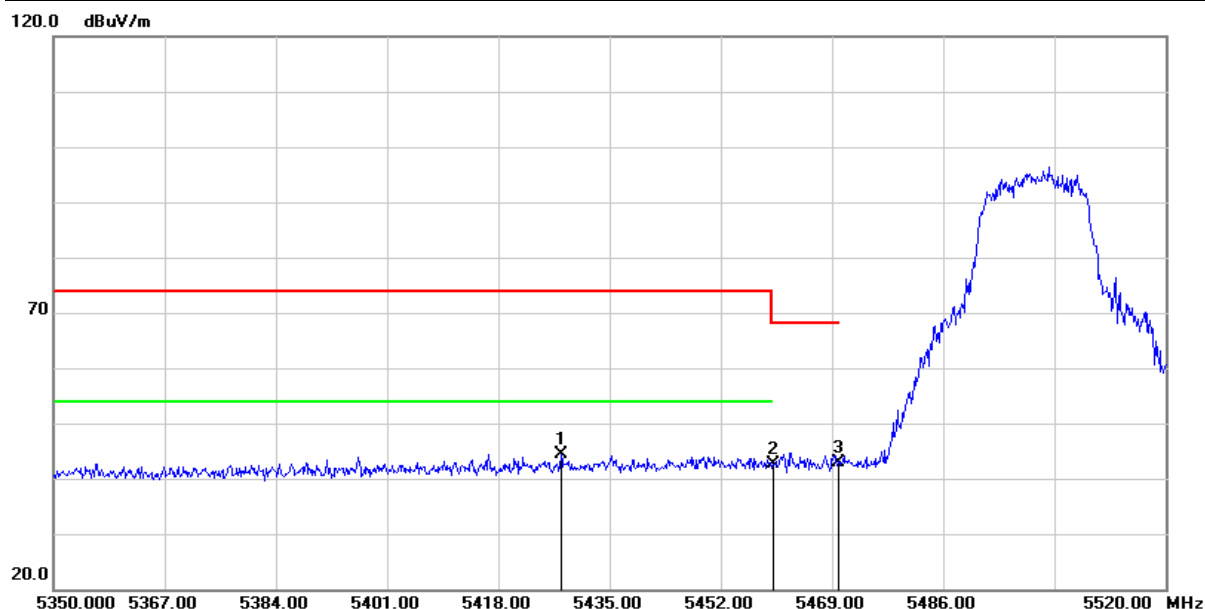


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.520	41.77	2.73	44.50	74.00	-29.50	peak
2	5460.000	39.69	2.87	42.56	74.00	-31.44	peak
3	5470.000	39.91	2.90	42.81	68.20	-25.39	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

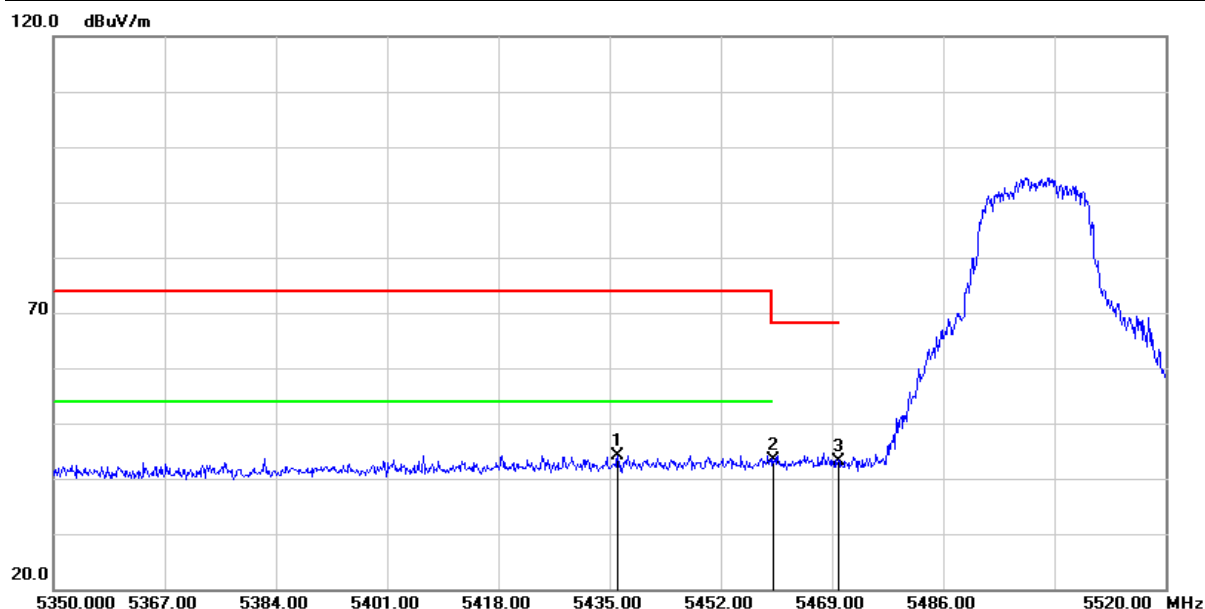


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5436.190	41.48	2.77	44.25	74.00	-29.75	peak
2	5460.000	40.61	2.87	43.48	74.00	-30.52	peak
3	5470.000	40.19	2.90	43.09	68.20	-25.11	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

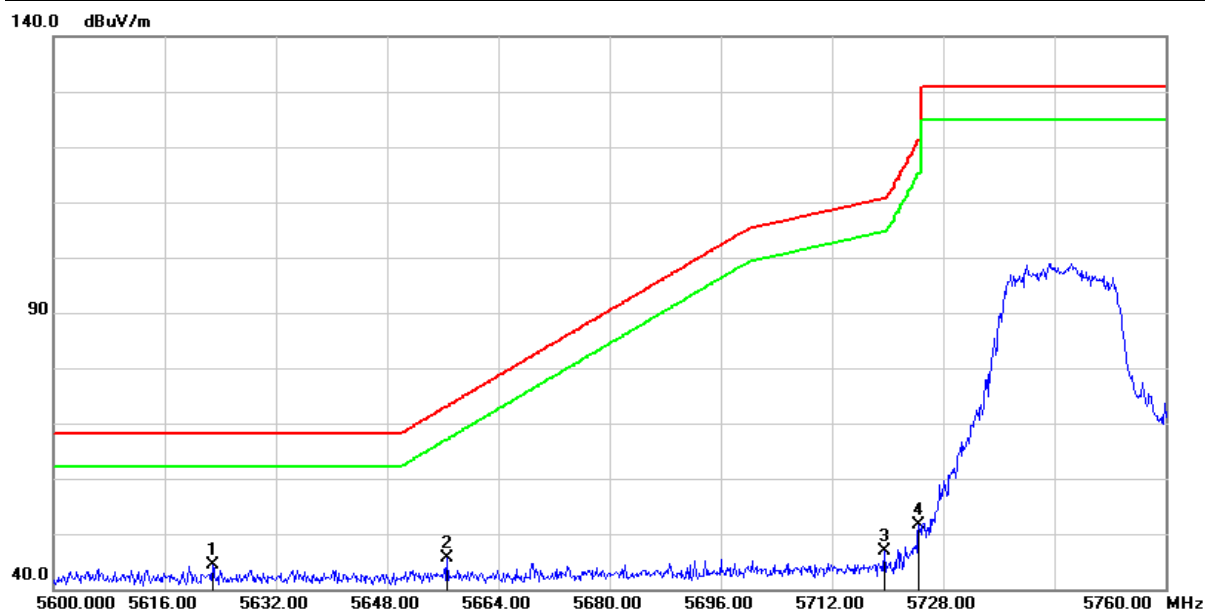


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5622.880	41.35	3.11	44.46	68.20	-23.74	peak
2	5656.640	42.54	3.18	45.72	73.11	-27.39	peak
3	5719.520	43.48	3.43	46.91	110.67	-63.76	peak
4	5724.480	48.18	3.43	51.61	121.01	-69.40	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

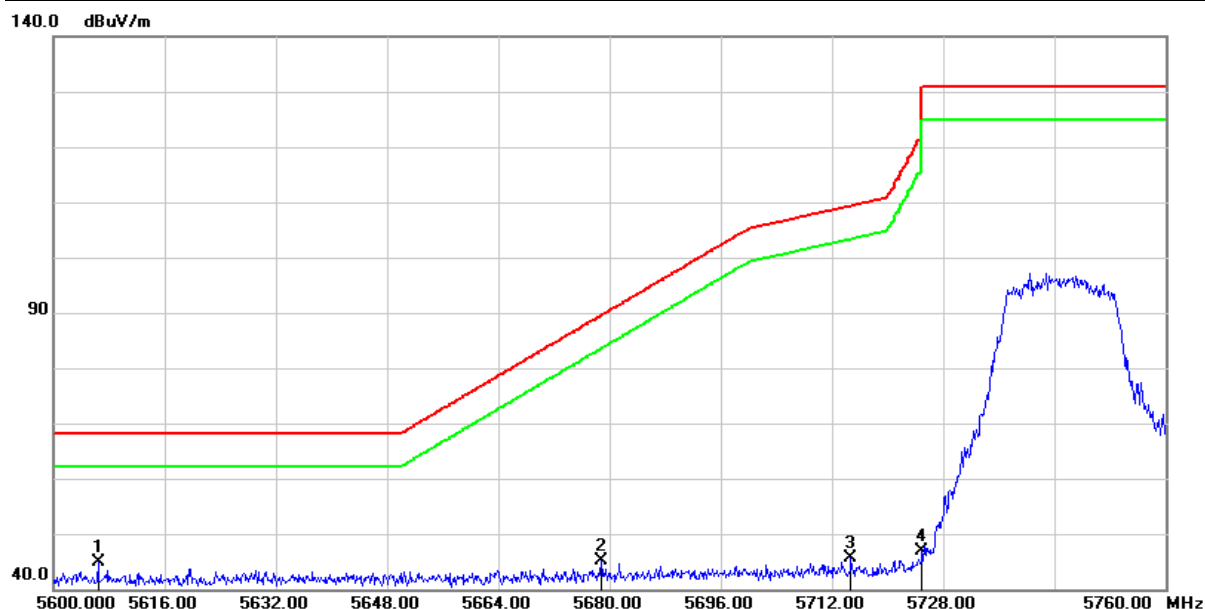


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5606.400	41.87	3.08	44.95	68.20	-23.25	peak
2	5678.720	41.80	3.29	45.09	89.45	-44.36	peak
3	5714.720	42.14	3.42	45.56	109.32	-63.76	peak
4	5724.960	43.54	3.43	46.97	122.11	-75.14	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

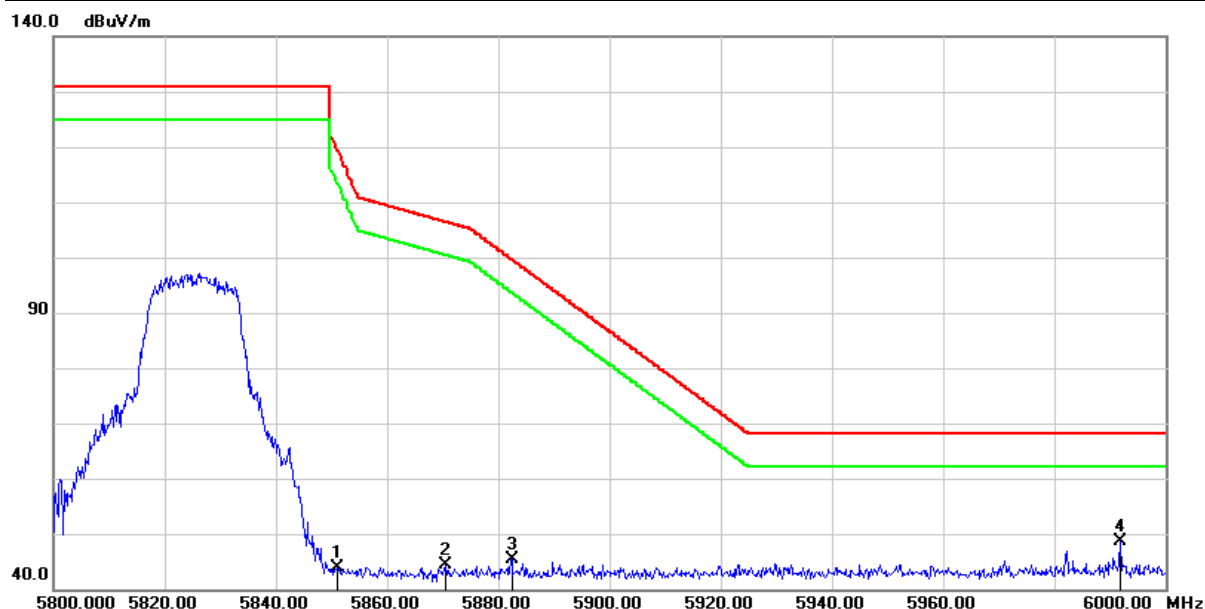


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5851.000	40.29	3.70	43.99	119.92	-75.93	peak
2	5870.600	40.43	3.83	44.26	106.43	-62.17	peak
3	5882.400	41.37	3.91	45.28	99.72	-54.44	peak
4	5991.800	44.36	4.24	48.60	68.20	-19.60	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/29
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

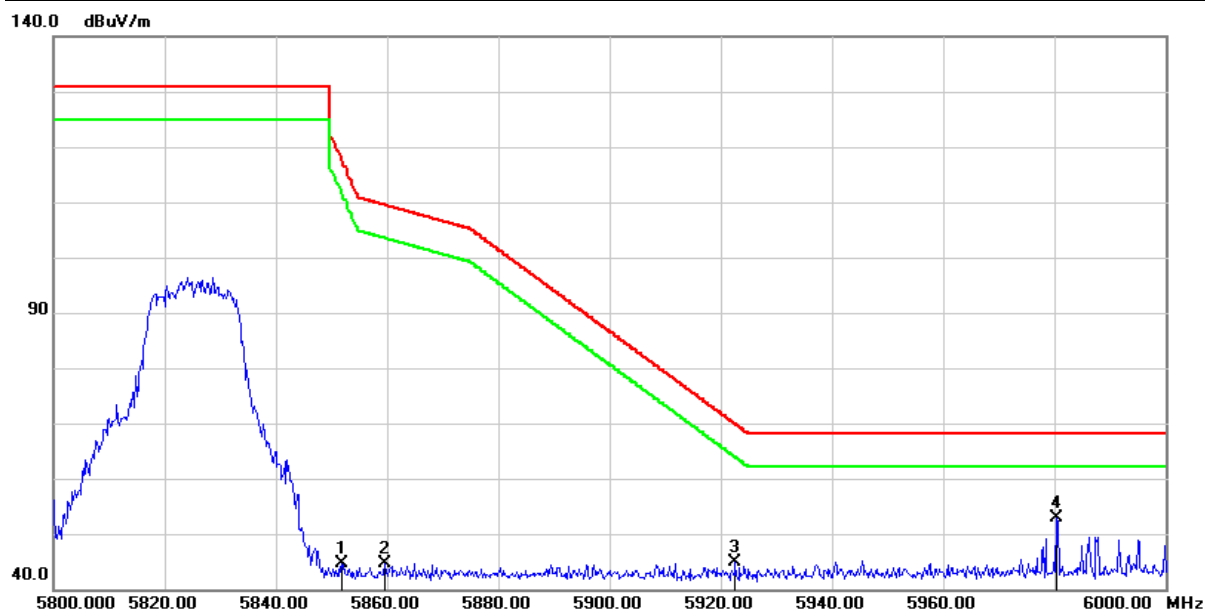


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5851.800	40.88	3.70	44.58	118.10	-73.52	peak
2	5859.600	40.83	3.76	44.59	109.51	-64.92	peak
3	5922.600	40.85	4.08	44.93	69.98	-25.05	peak
4	5980.400	48.75	4.21	52.96	68.20	-15.24	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

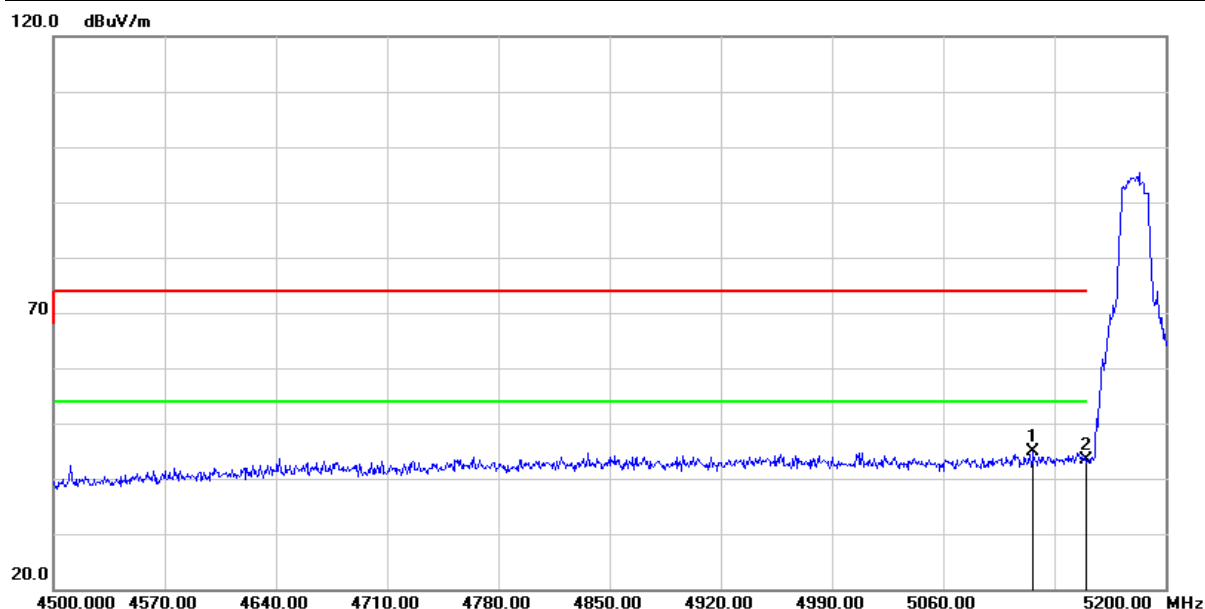


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5116.700	41.84	3.07	44.91	74.00	-29.09	peak
2	5150.000	40.14	3.14	43.28	74.00	-30.72	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

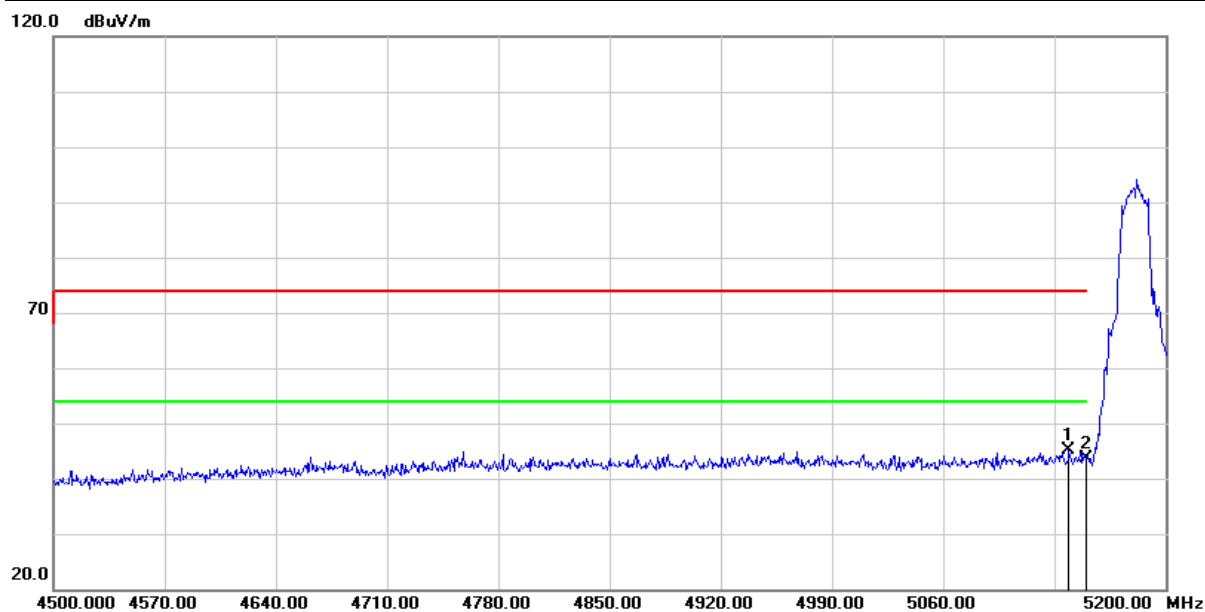


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.100	42.01	3.12	45.13	74.00	-28.87	peak
2	5150.000	40.59	3.14	43.73	74.00	-30.27	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

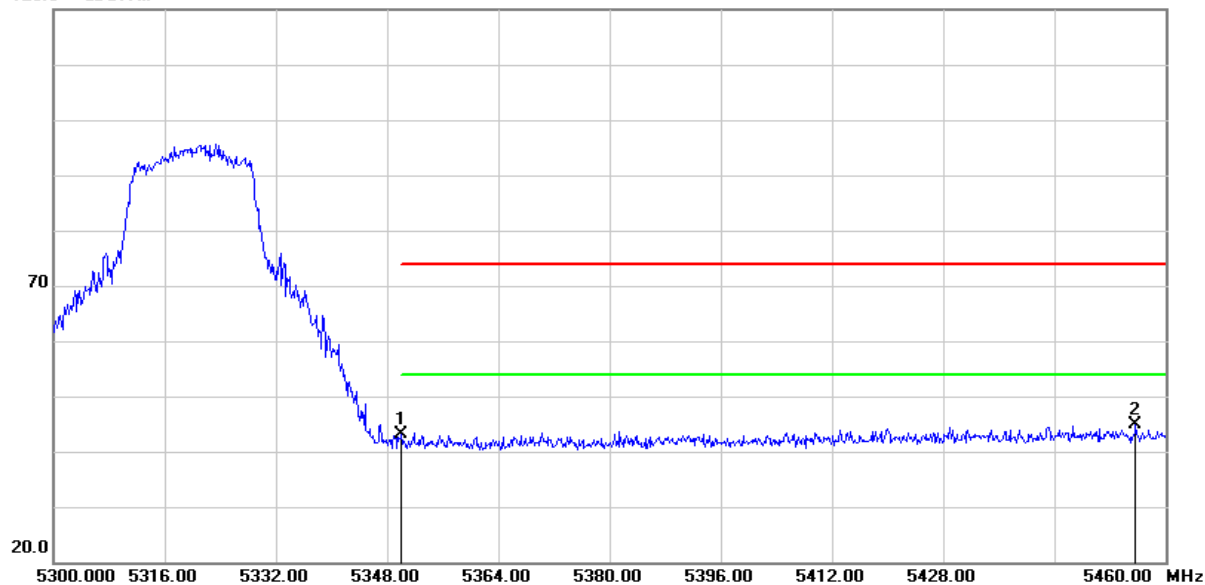


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.73	2.46	43.19	74.00	-30.81	peak
2	5455.680	42.00	2.87	44.87	74.00	-29.13	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

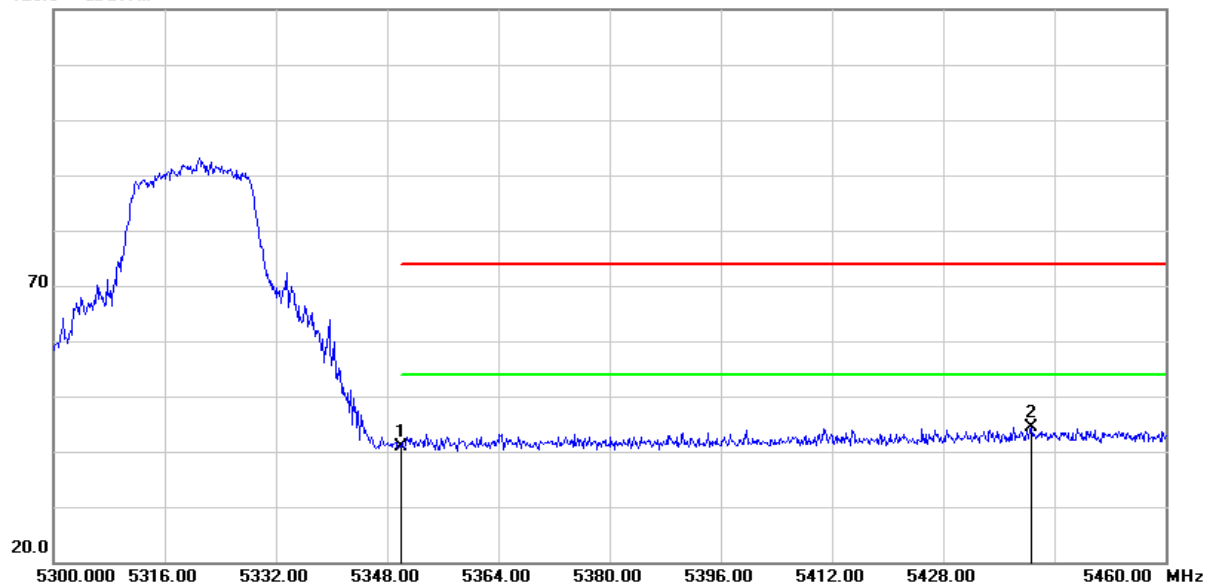


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	38.39	2.46	40.85	74.00	-33.15	peak
2	5440.640	41.54	2.80	44.34	74.00	-29.66	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

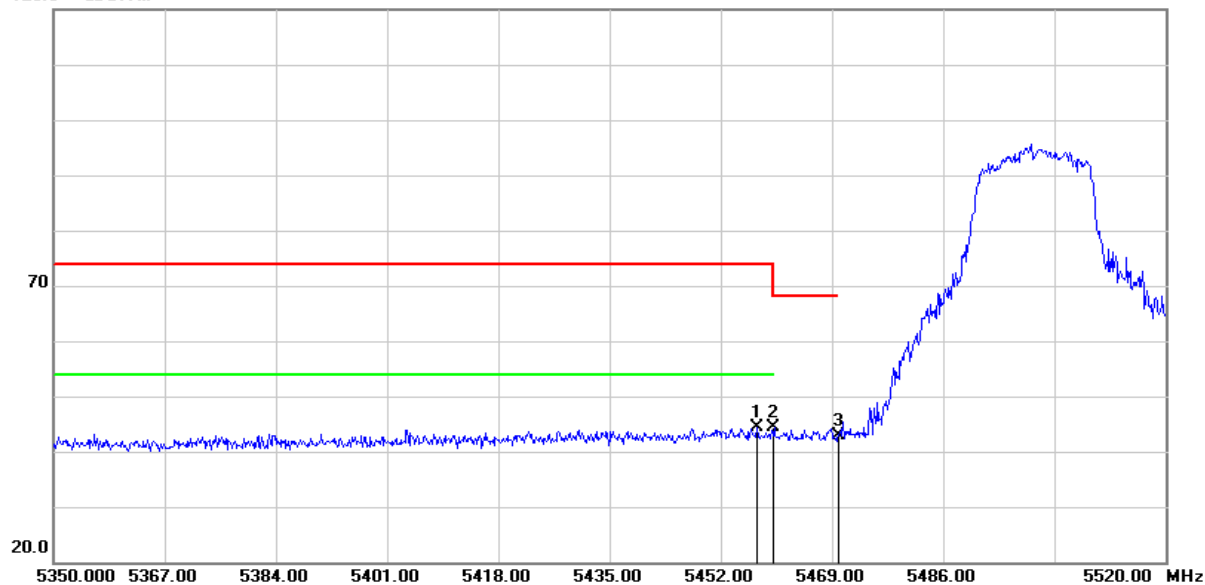


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.440	41.41	2.87	44.28	74.00	-29.72	peak
2	5460.000	41.62	2.87	44.49	74.00	-29.51	peak
3	5470.000	40.02	2.90	42.92	68.20	-25.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

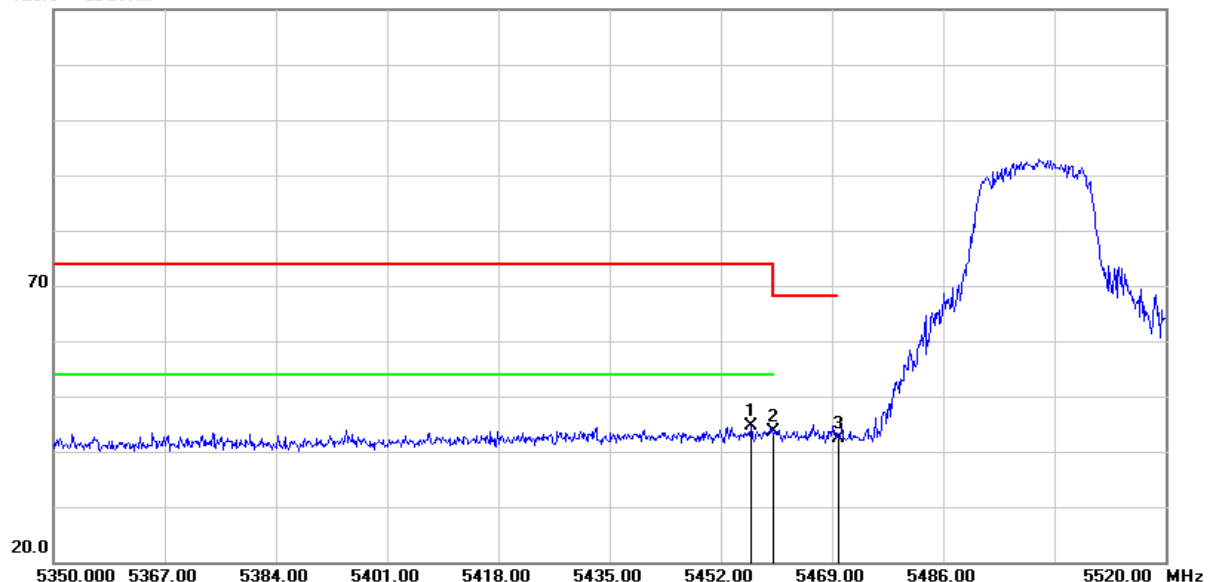


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.590	41.78	2.87	44.65	74.00	-29.35	peak
2	5460.000	40.80	2.87	43.67	74.00	-30.33	peak
3	5470.000	39.47	2.90	42.37	68.20	-25.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

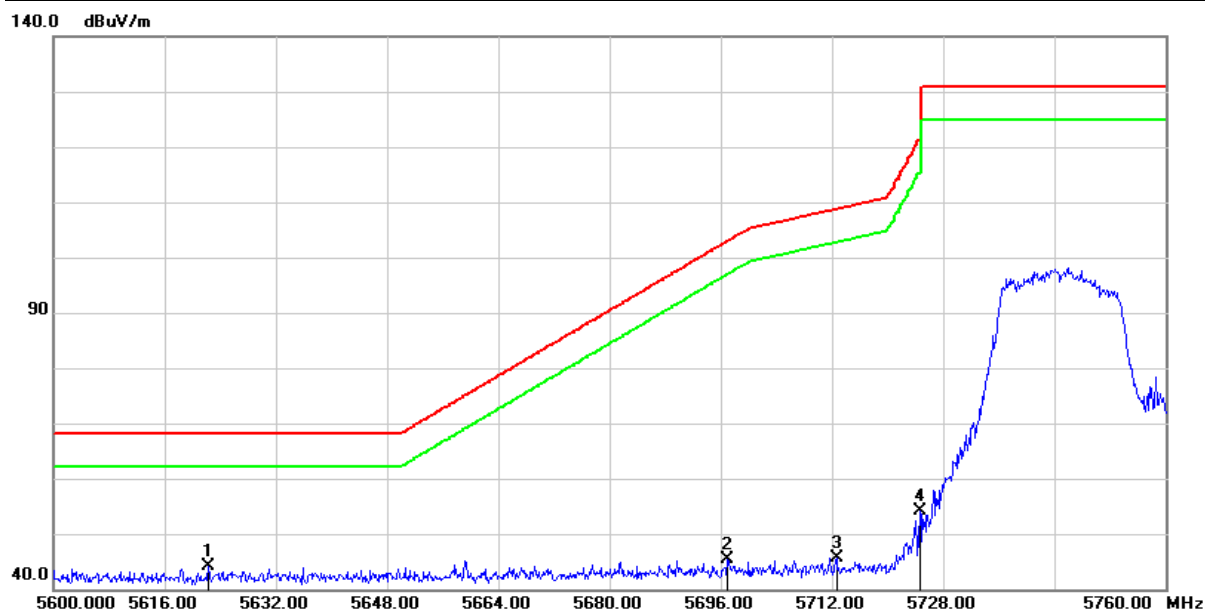


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5622.240	40.90	3.11	44.01	68.20	-24.19	peak
2	5696.960	41.95	3.39	45.34	102.95	-57.61	peak
3	5712.640	42.14	3.42	45.56	108.74	-63.18	peak
4	5724.640	50.78	3.43	54.21	121.38	-67.17	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

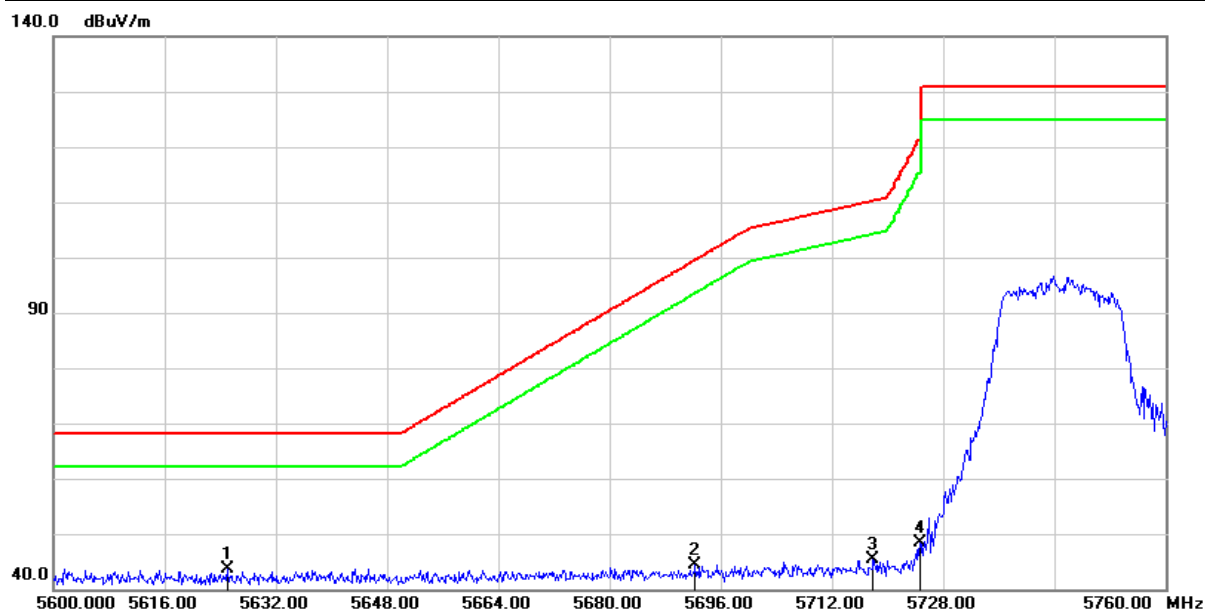


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.960	40.55	3.11	43.66	68.20	-24.54	peak
2	5692.320	41.00	3.37	44.37	99.52	-55.15	peak
3	5717.920	41.95	3.43	45.38	110.22	-64.84	peak
4	5724.640	44.95	3.43	48.38	121.38	-73.00	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

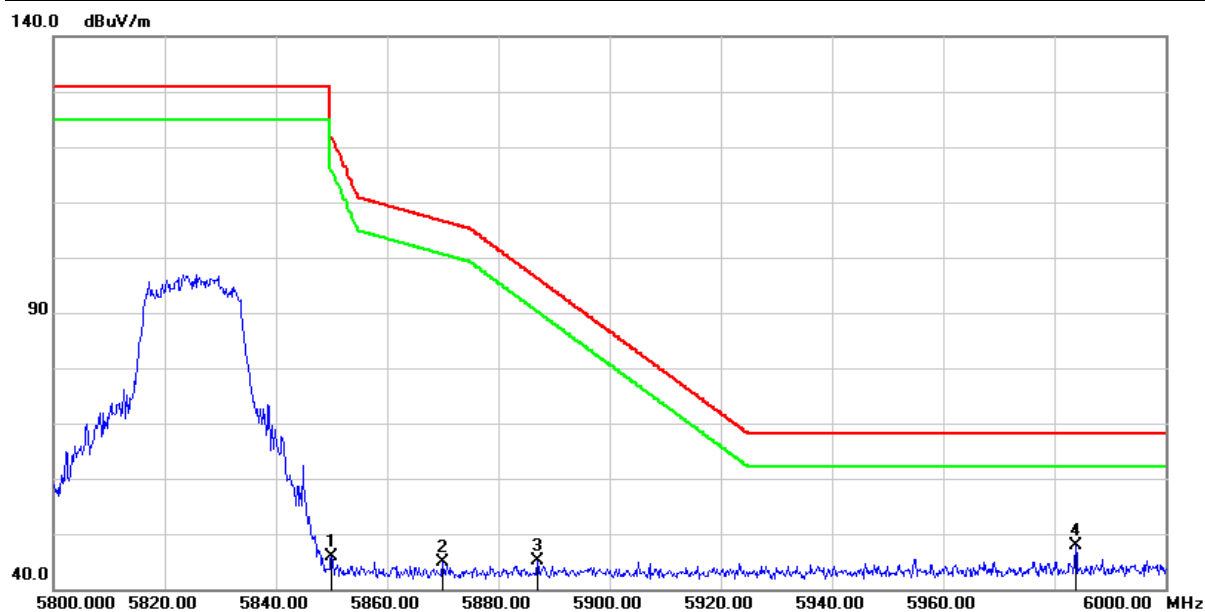


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	42.12	3.69	45.81	122.20	-76.39	peak
2	5870.000	40.98	3.83	44.81	106.60	-61.79	peak
3	5887.000	41.12	3.95	45.07	96.32	-51.25	peak
4	5983.800	43.67	4.22	47.89	68.20	-20.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/04/30
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

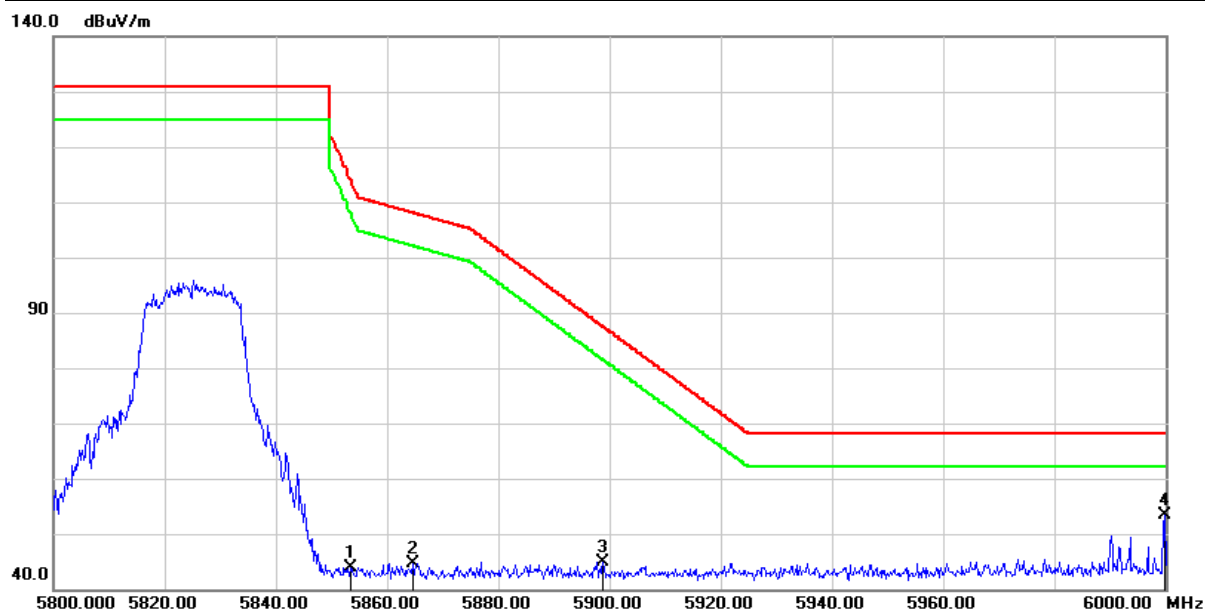


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5853.400	40.23	3.71	43.94	114.45	-70.51	peak
2	5864.600	40.82	3.79	44.61	108.11	-63.50	peak
3	5898.800	40.86	4.04	44.90	87.59	-42.69	peak
4	5999.800	48.99	4.27	53.26	68.20	-14.94	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH38(5190MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

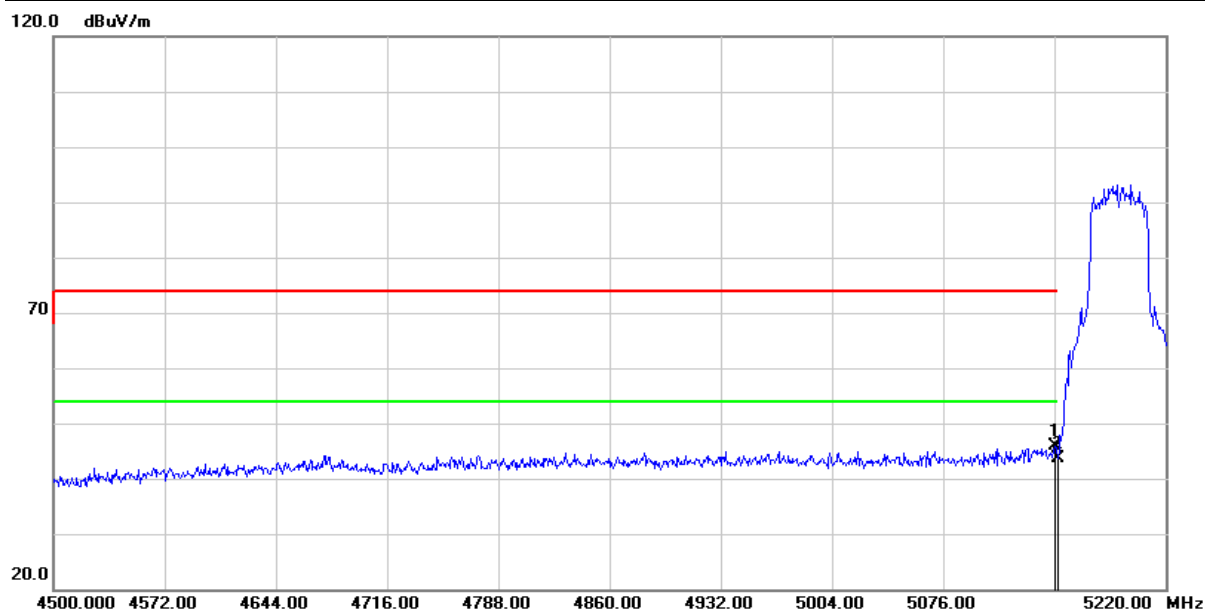


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.000	42.75	3.15	45.90	74.00	-28.10	peak
2	5150.000	40.56	3.14	43.70	74.00	-30.30	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH38(5190MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

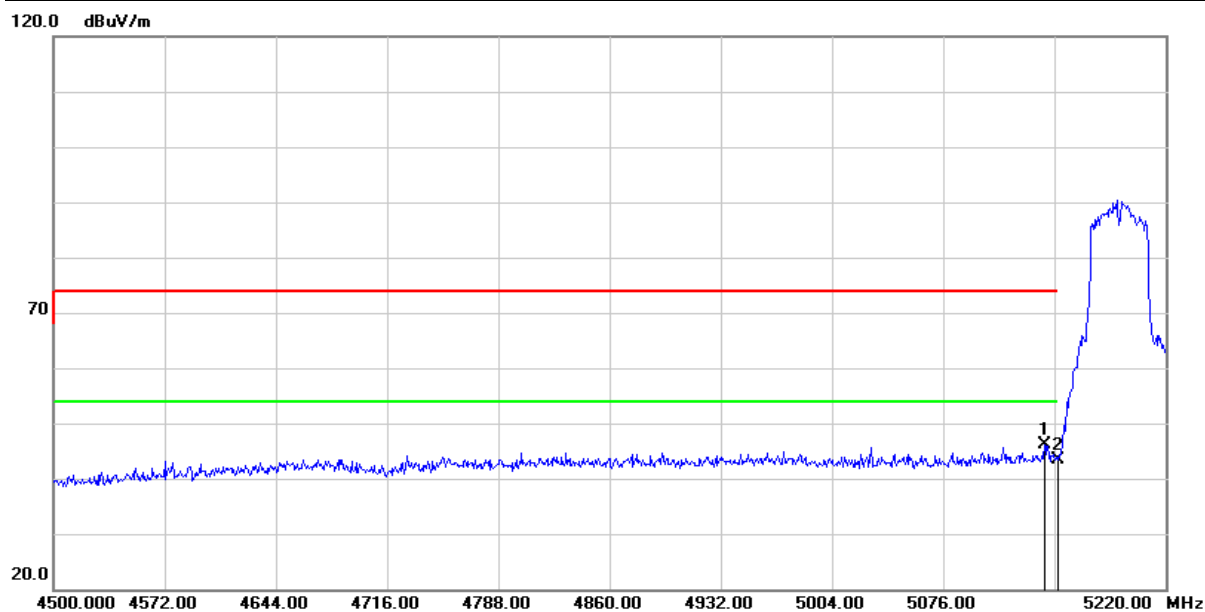


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.520	42.91	3.12	46.03	74.00	-27.97	peak
2	5150.000	40.35	3.14	43.49	74.00	-30.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH62(5310MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

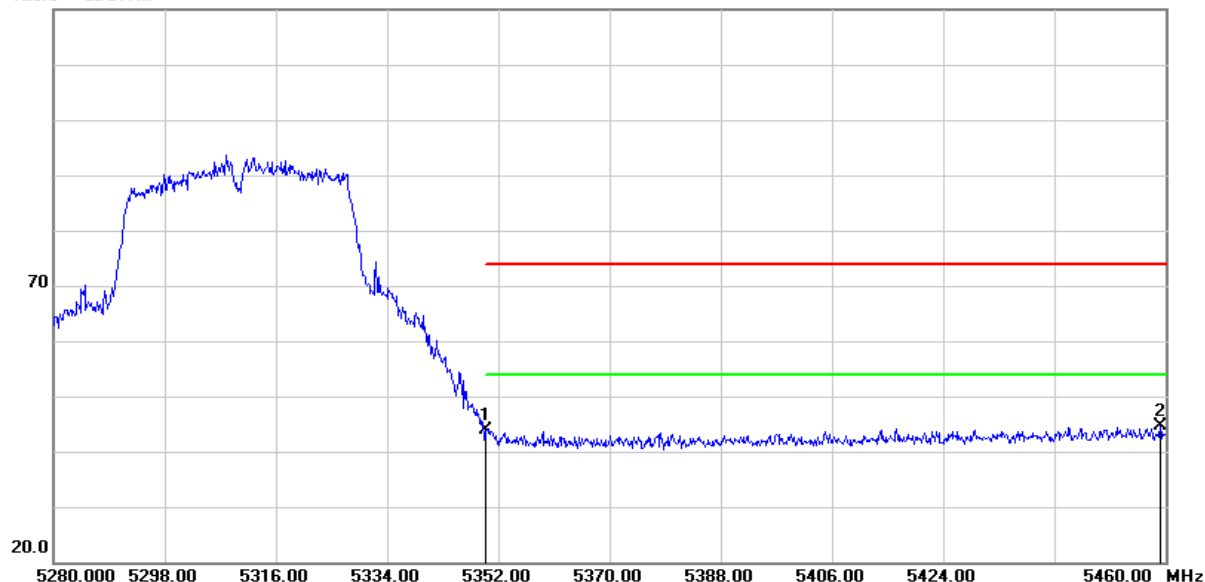


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.30	2.46	43.76	74.00	-30.24	peak
2	5459.100	41.80	2.87	44.67	74.00	-29.33	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH62(5310MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

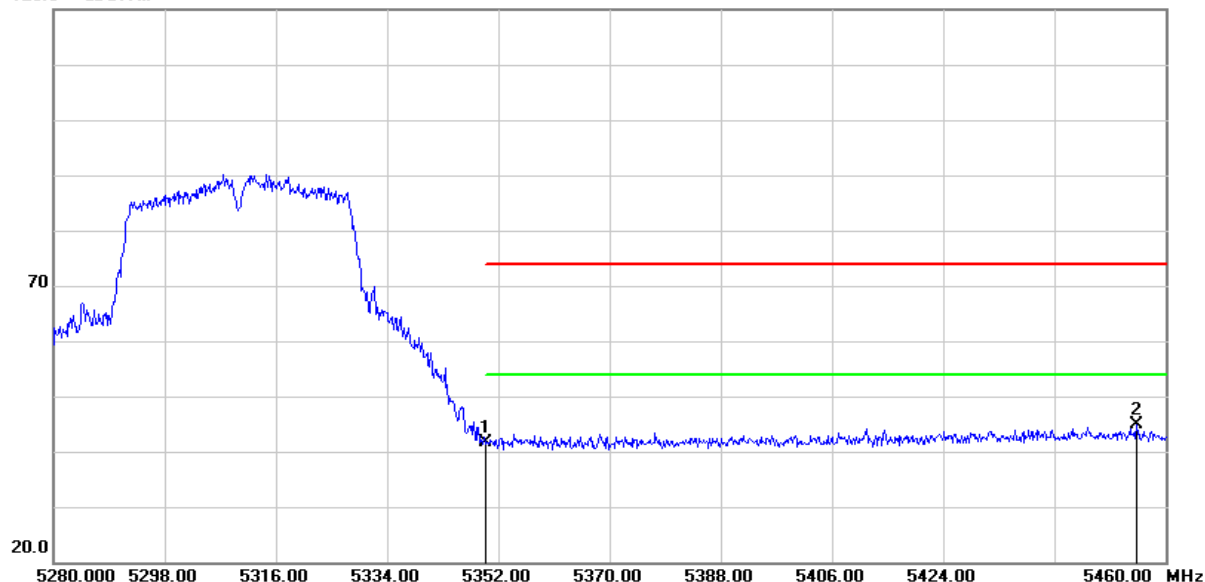


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.05	2.46	41.51	74.00	-32.49	peak
2	5455.320	41.90	2.87	44.77	74.00	-29.23	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH102(5510MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

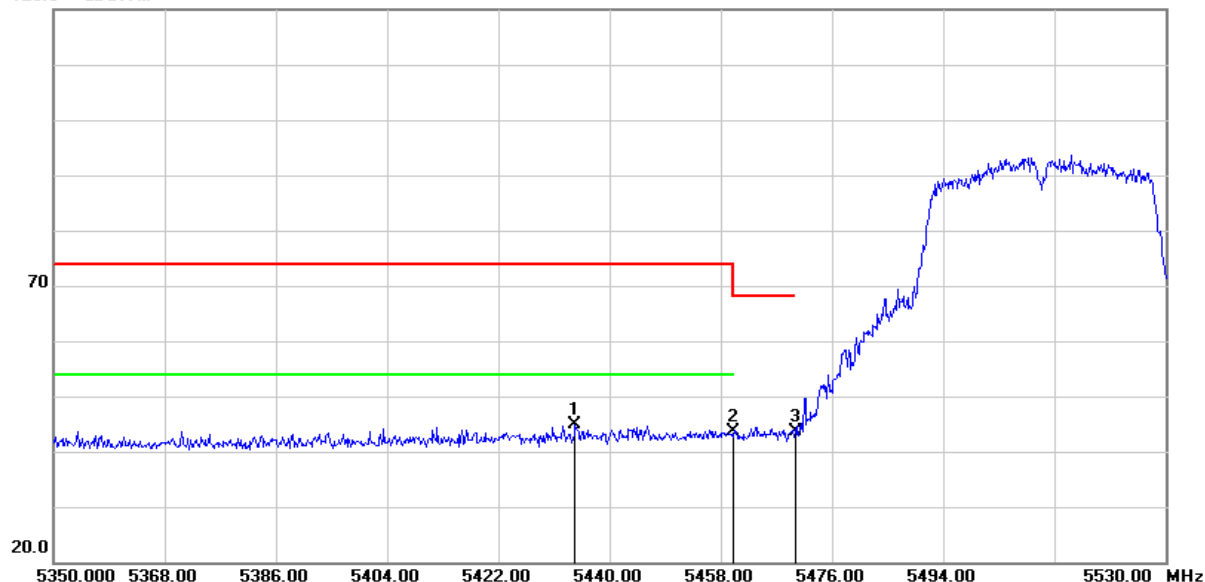


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5434.420	41.99	2.77	44.76	74.00	-29.24	peak
2	5460.000	40.74	2.87	43.61	74.00	-30.39	peak
3	5470.000	40.65	2.90	43.55	68.20	-24.65	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH102(5510MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

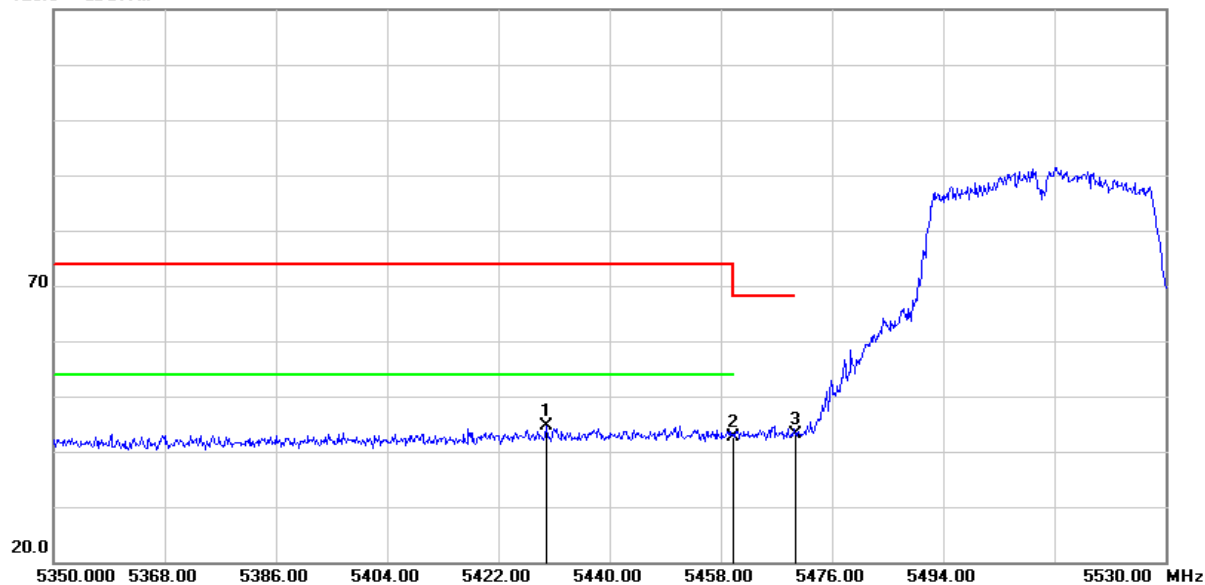


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.740	41.85	2.74	44.59	74.00	-29.41	peak
2	5460.000	39.66	2.87	42.53	74.00	-31.47	peak
3	5470.000	40.11	2.90	43.01	68.20	-25.19	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH151(5755MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

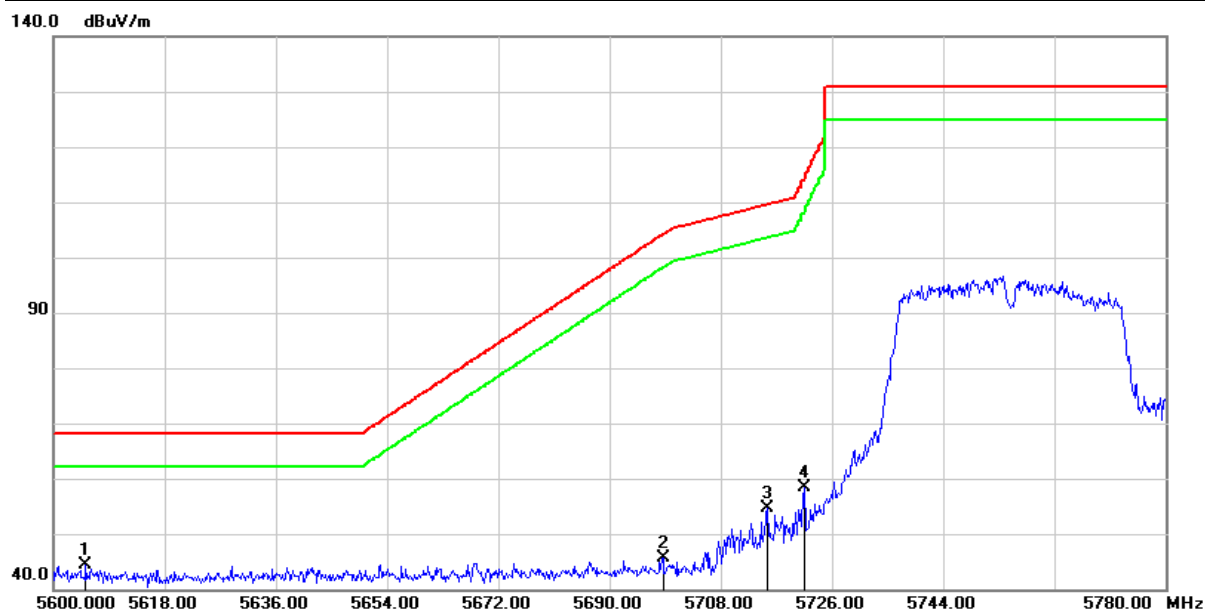


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5605.220	41.35	3.08	44.43	68.20	-23.77	peak
2	5698.640	42.20	3.39	45.59	104.19	-58.60	peak
3	5715.560	51.28	3.42	54.70	109.56	-54.86	peak
4	5721.500	55.03	3.43	58.46	114.22	-55.76	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH151(5755MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

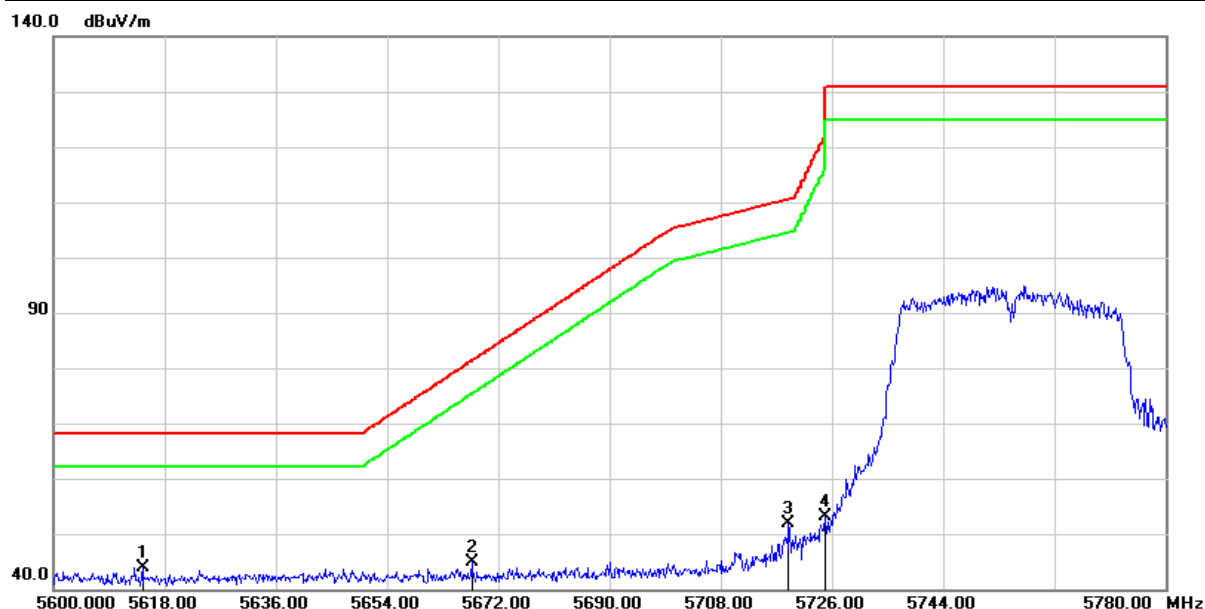


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5614.400	40.81	3.10	43.91	68.20	-24.29	peak
2	5667.680	41.58	3.23	44.81	81.28	-36.47	peak
3	5718.980	48.56	3.43	51.99	110.51	-58.52	peak
4	5724.920	49.59	3.43	53.02	122.02	-69.00	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH159(5795MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

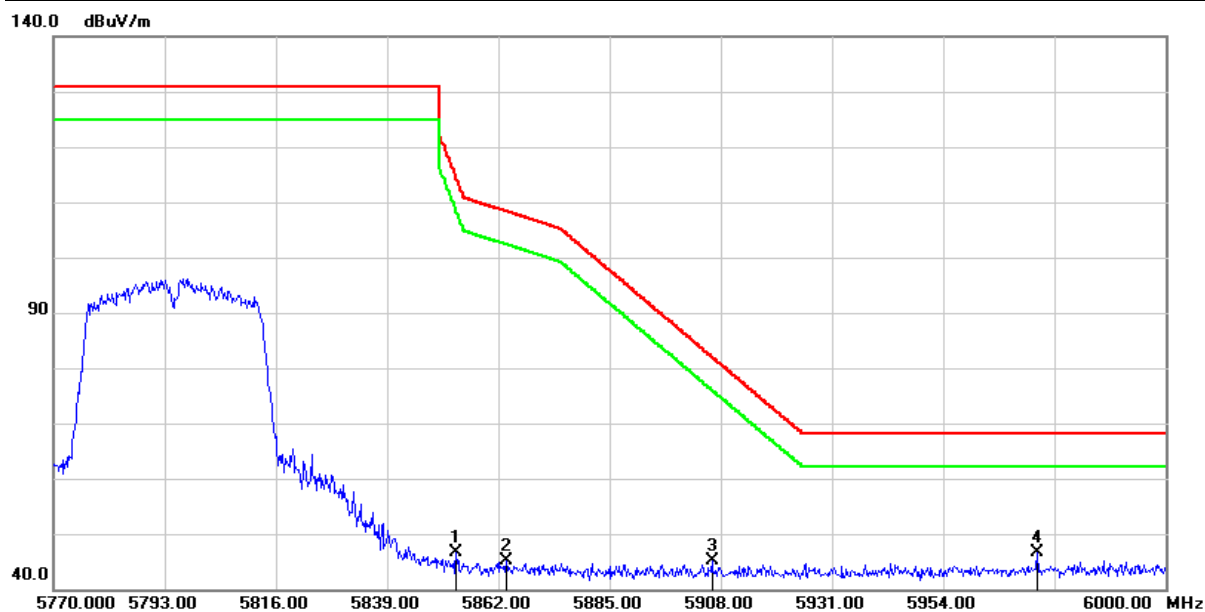

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5853.260	42.84	3.71	46.55	114.77	-68.22	peak
2	5863.610	41.26	3.78	45.04	108.39	-63.35	peak
3	5906.160	41.08	4.06	45.14	82.14	-37.00	peak
4	5973.550	42.52	4.19	46.71	68.20	-21.49	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/04/30
Test Channel :	CH159(5795MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.500	42.40	3.69	46.09	121.06	-74.97	peak
2	5860.620	42.81	3.76	46.57	109.23	-62.66	peak
3	5895.580	40.88	4.02	44.90	89.97	-45.07	peak
4	5980.450	47.92	4.21	52.13	68.20	-16.07	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH42(5210MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

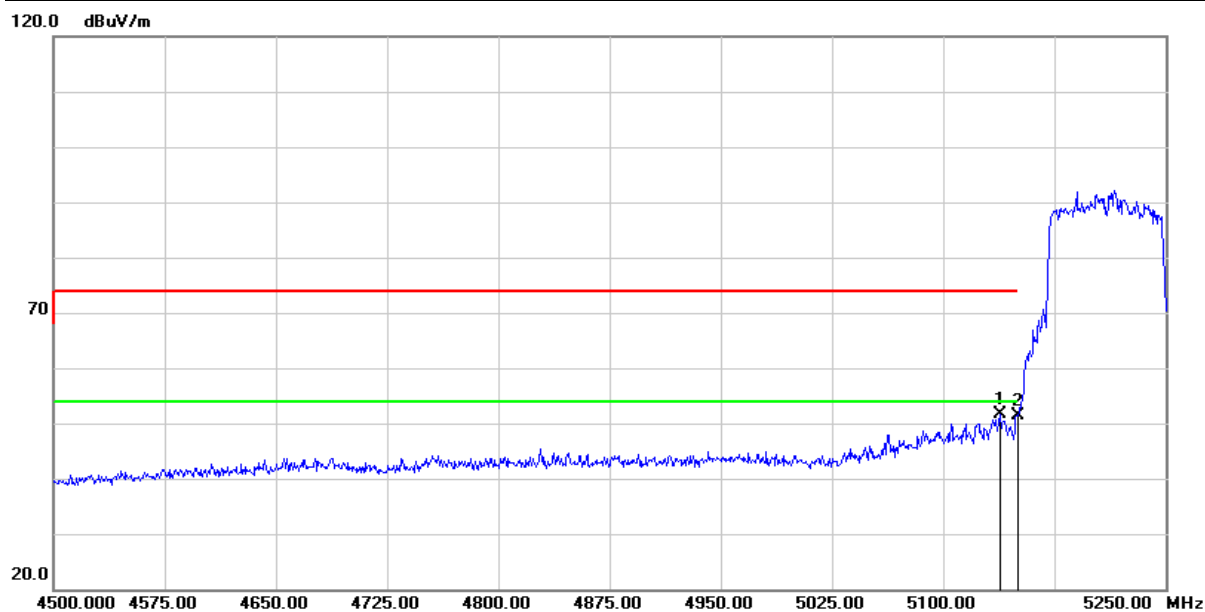


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.250	48.58	3.12	51.70	74.00	-22.30	peak
2	5150.000	48.18	3.14	51.32	74.00	-22.68	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH42(5210MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

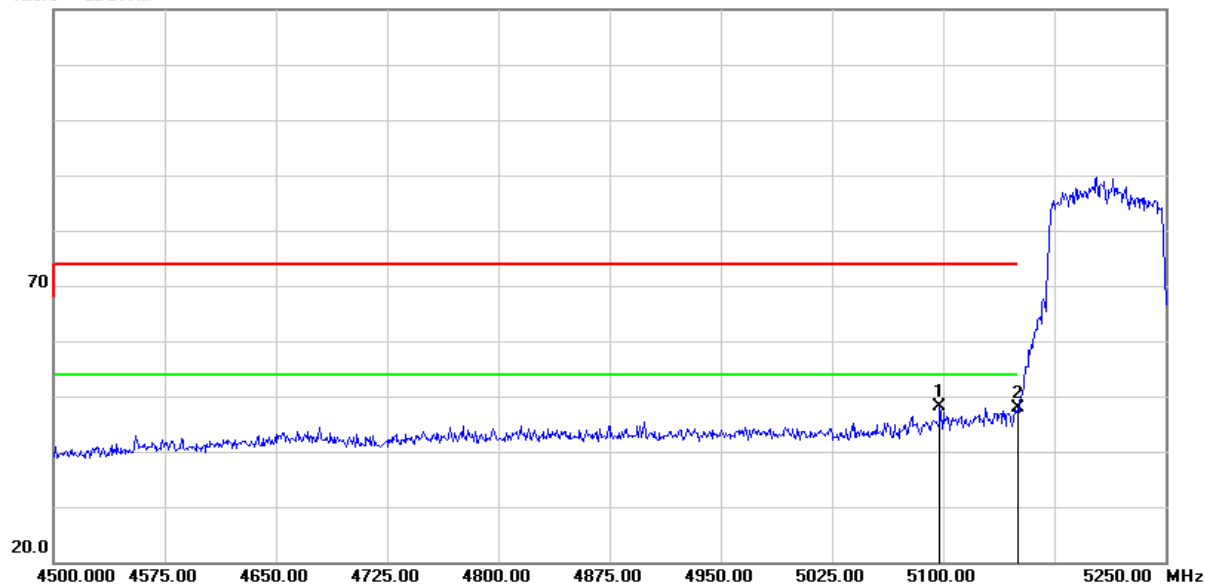


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5097.750	45.18	3.04	48.22	74.00	-25.78	peak
2	5150.000	44.72	3.14	47.86	74.00	-26.14	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH58(5290MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

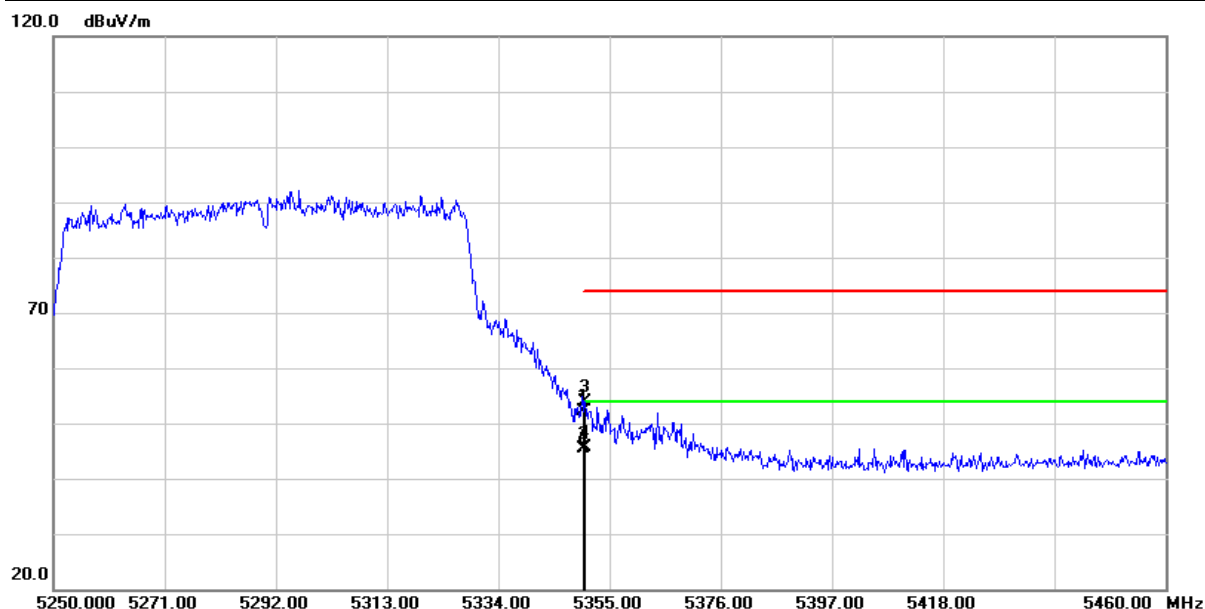


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.67	2.46	52.13	74.00	-21.87	peak
2	5350.000	42.98	2.46	45.44	54.00	-8.56	AVG
3	5350.380	51.52	2.46	53.98	74.00	-20.02	peak
4	5350.380	43.07	2.46	45.53	54.00	-8.47	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH58(5290MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

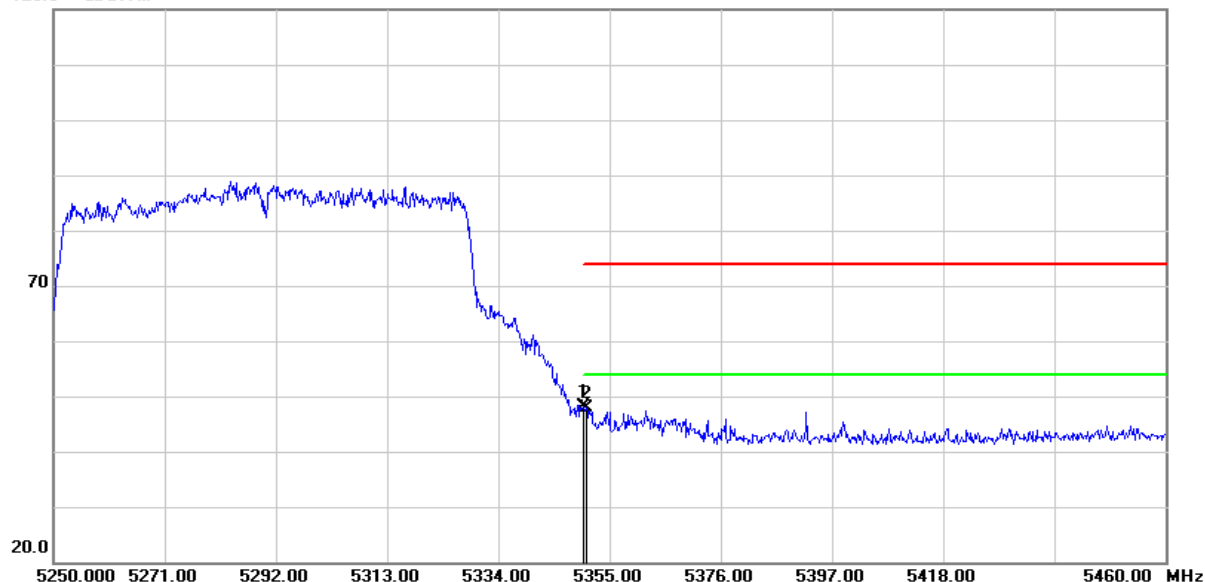


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.69	2.46	48.15	74.00	-25.85	peak
2	5350.590	45.51	2.46	47.97	74.00	-26.03	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH106(5530MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

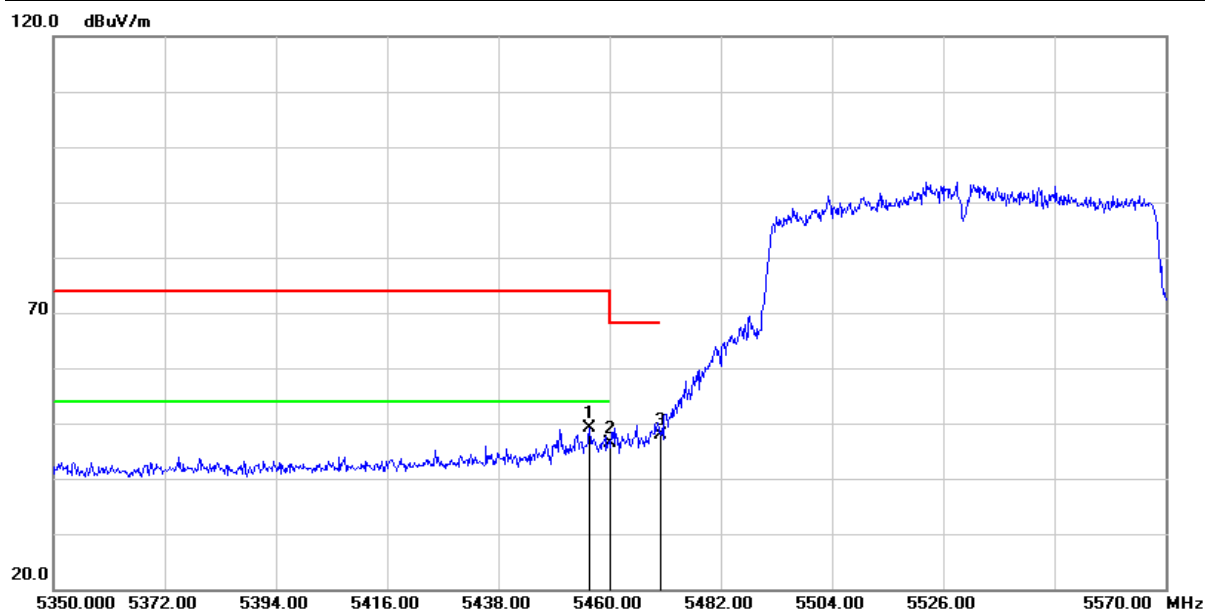


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.040	46.30	2.87	49.17	74.00	-24.83	peak
2	5460.000	43.40	2.87	46.27	74.00	-27.73	peak
3	5470.000	44.88	2.90	47.78	68.20	-20.42	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH106(5530MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

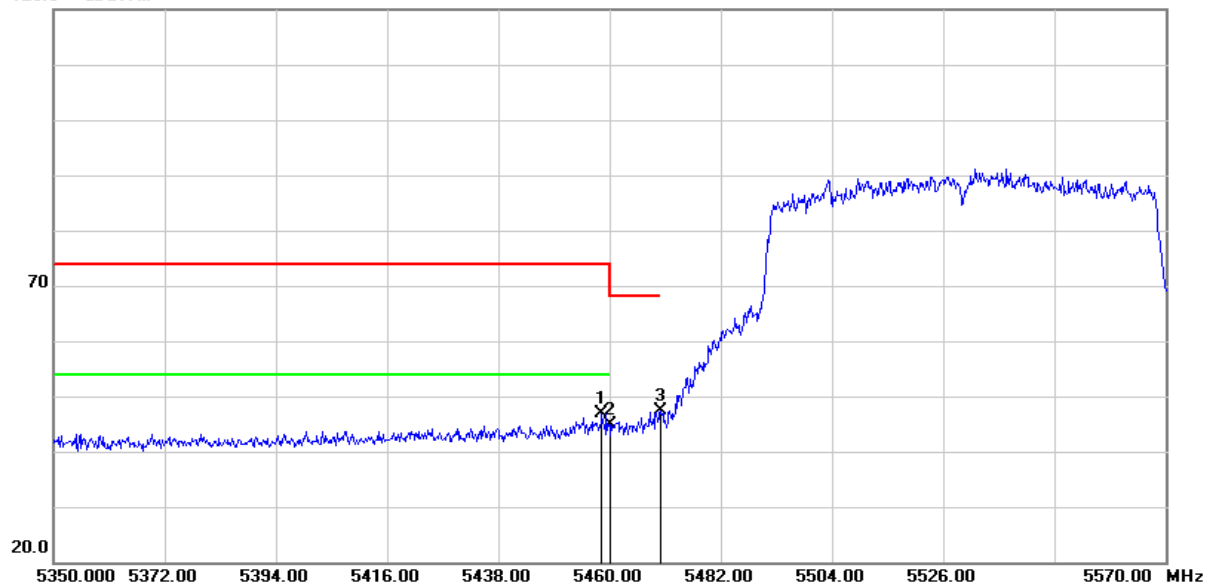


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.460	43.94	2.87	46.81	74.00	-27.19	peak
2	5460.000	41.96	2.87	44.83	74.00	-29.17	peak
3	5470.000	44.44	2.90	47.34	68.20	-20.86	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

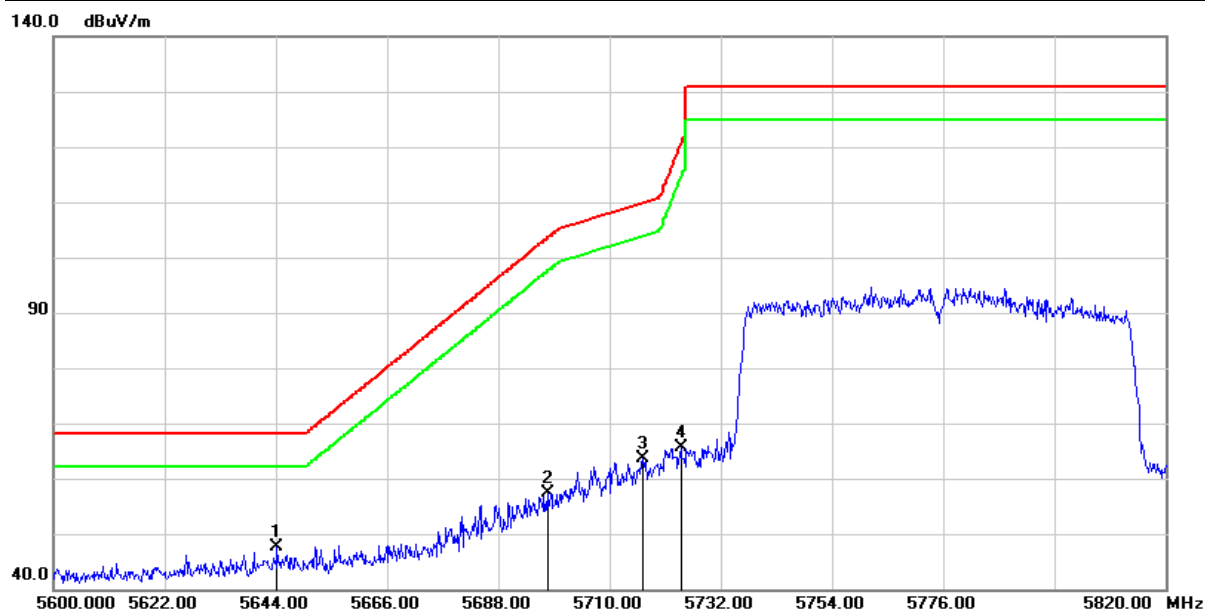


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.220	44.54	3.14	47.68	68.20	-20.52	peak
2	5697.680	54.02	3.39	57.41	103.48	-46.07	peak
3	5716.600	60.09	3.42	63.51	109.85	-46.34	peak
4	5724.080	62.08	3.43	65.51	120.10	-54.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

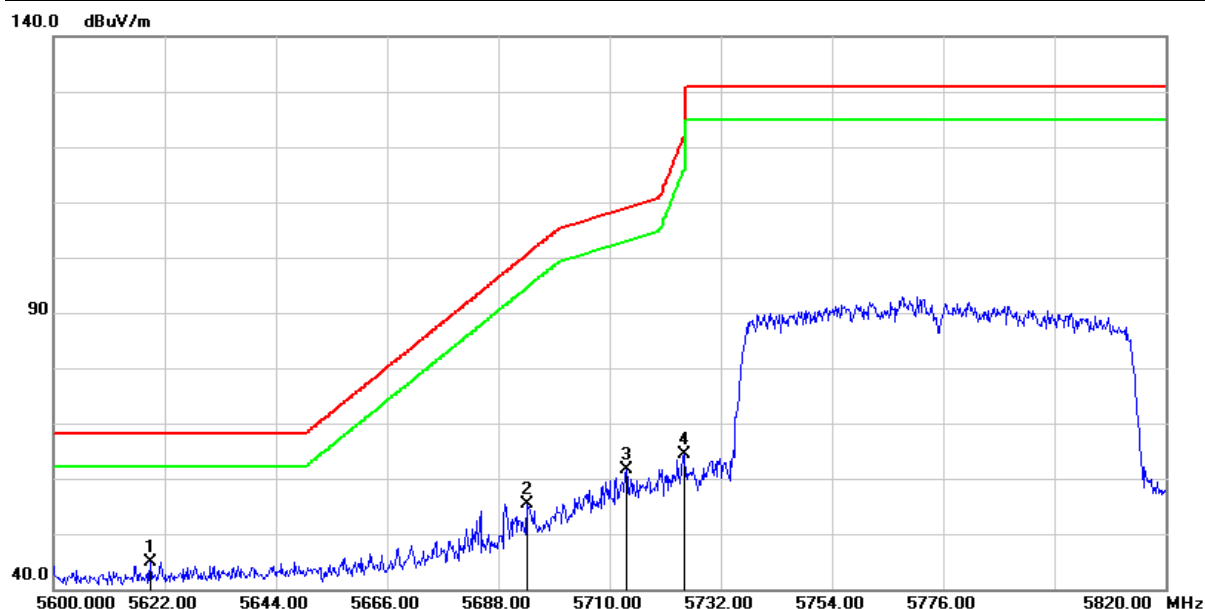


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5619.140	41.85	3.11	44.96	68.20	-23.24	peak
2	5693.720	51.99	3.37	55.36	100.55	-45.19	peak
3	5713.300	58.26	3.42	61.68	108.92	-47.24	peak
4	5724.740	60.90	3.43	64.33	121.61	-57.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

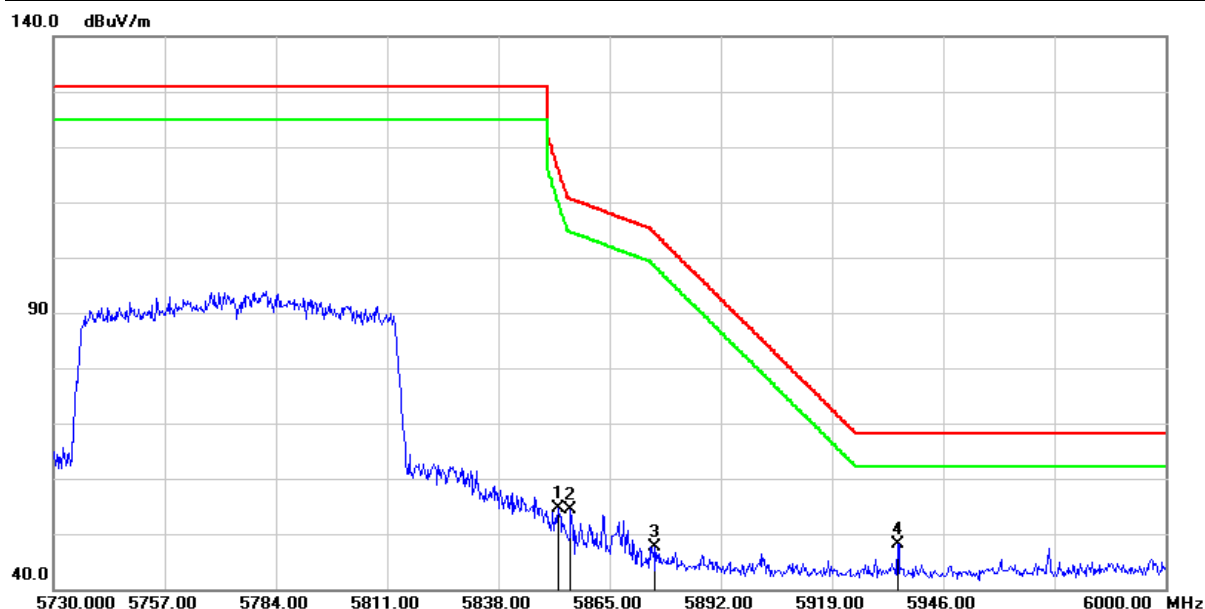


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5852.580	50.81	3.71	54.52	116.32	-61.80	peak
2	5855.550	50.56	3.72	54.28	110.65	-56.37	peak
3	5875.800	43.71	3.87	47.58	104.61	-57.03	peak
4	5934.930	44.04	4.09	48.13	68.20	-20.07	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/04/30
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

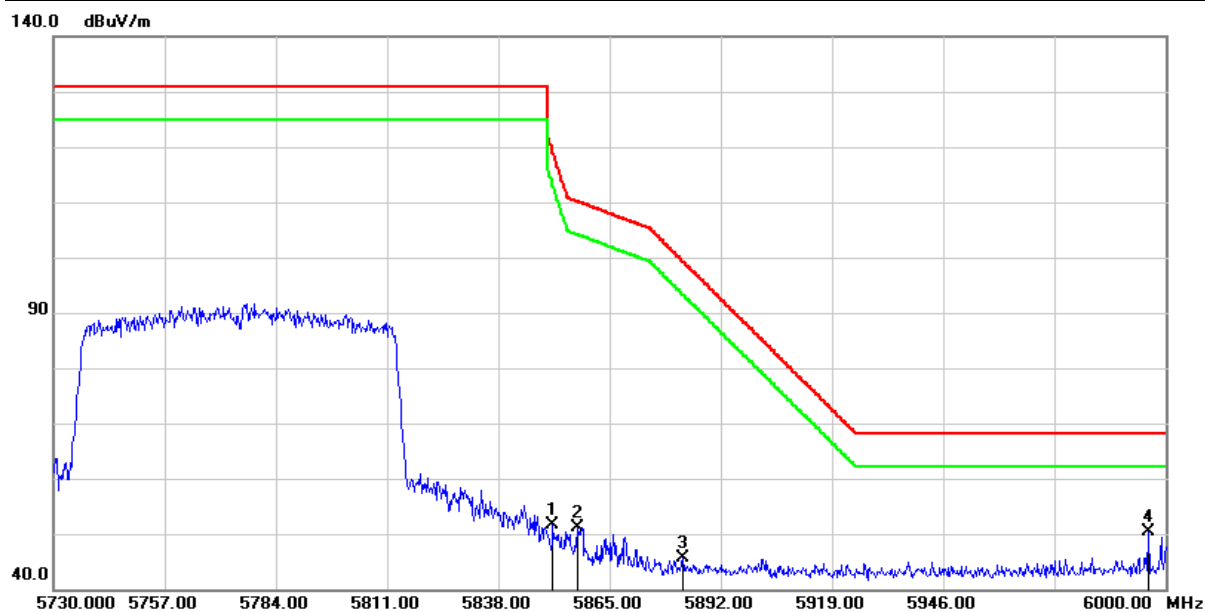


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5851.230	48.00	3.70	51.70	119.40	-67.70	peak
2	5857.170	47.37	3.74	51.11	110.19	-59.08	peak
3	5882.820	41.64	3.92	45.56	99.41	-53.85	peak
4	5995.950	46.18	4.26	50.44	68.20	-17.76	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

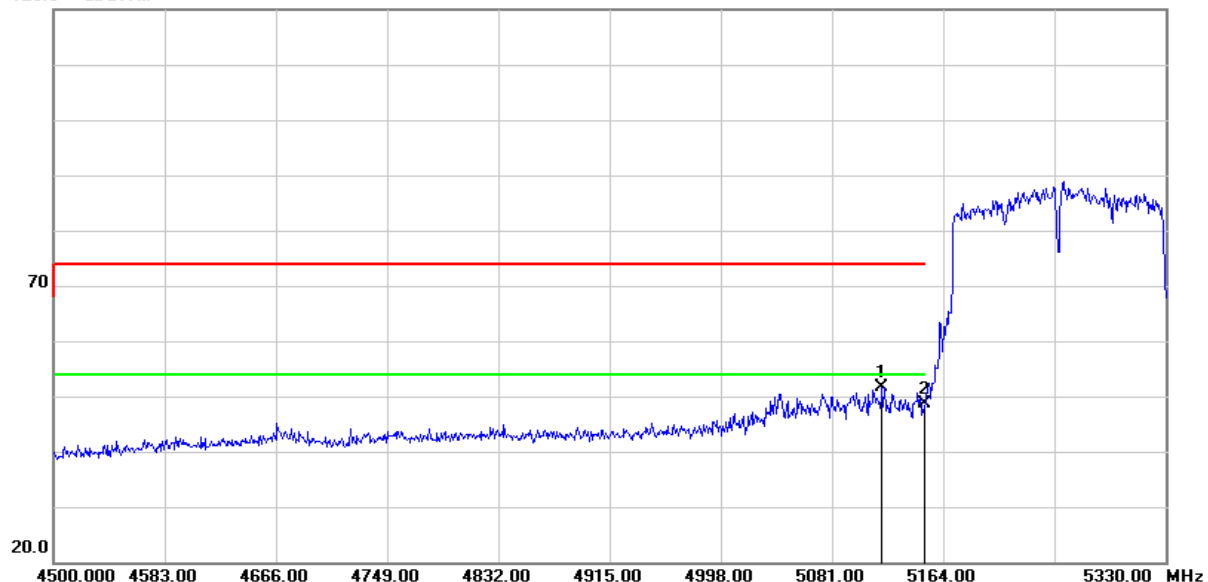


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.350	48.50	3.08	51.58	74.00	-22.42	peak
2	5150.000	45.38	3.14	48.52	74.00	-25.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

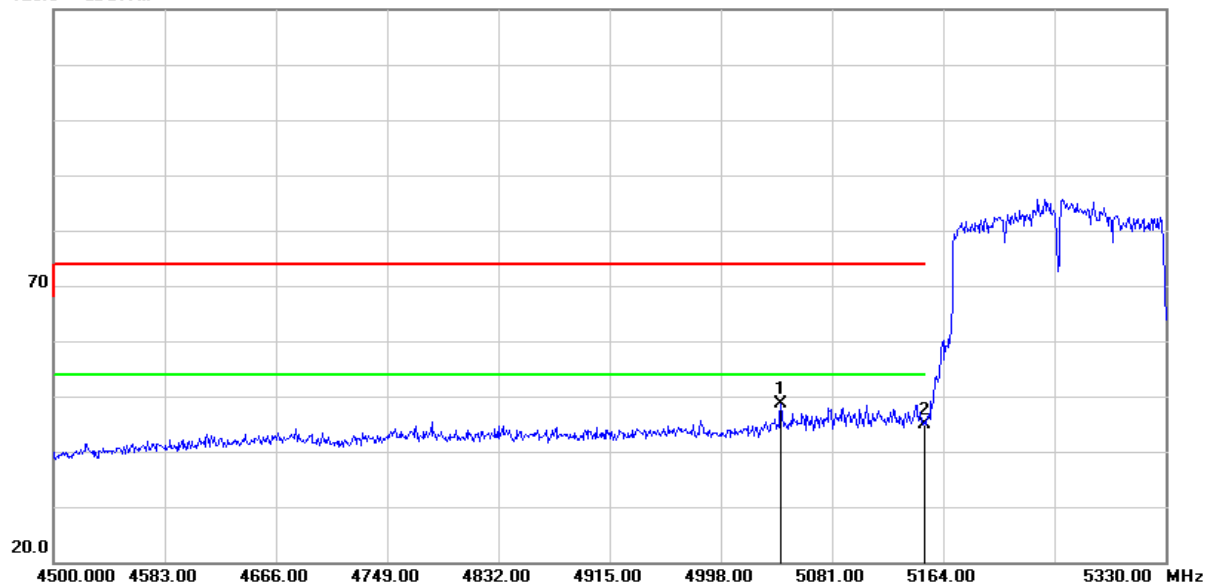


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5042.820	45.86	2.74	48.60	74.00	-25.40	peak
2	5150.000	41.69	3.14	44.83	74.00	-29.17	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

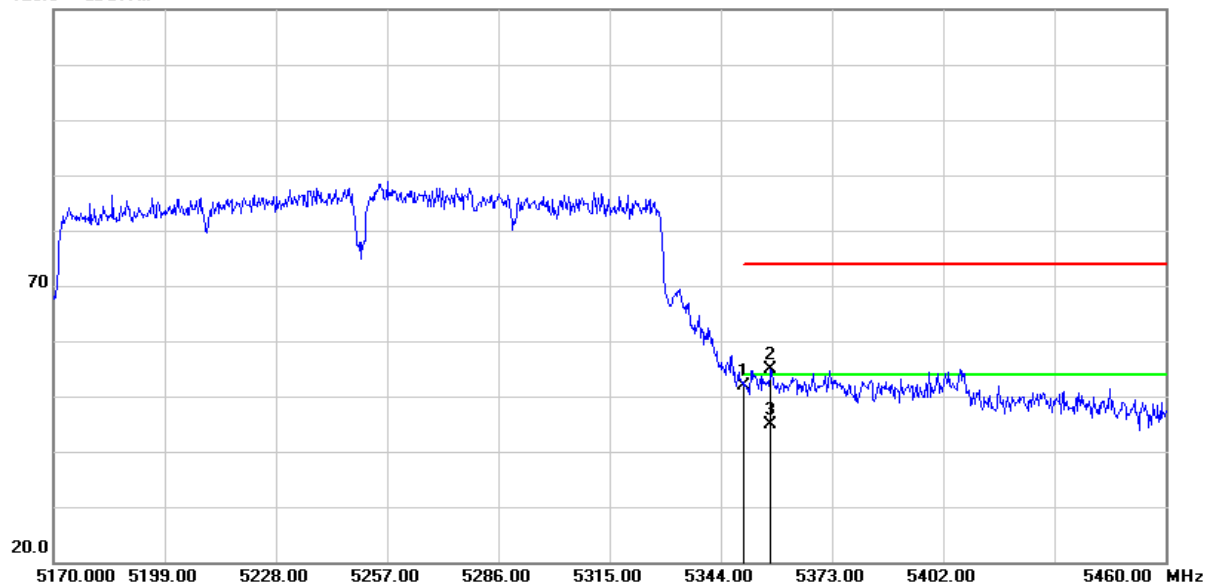


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.38	2.46	51.84	74.00	-22.16	peak
2	5357.050	52.48	2.46	54.94	74.00	-19.06	peak
3	5357.050	42.47	2.46	44.93	54.00	-9.07	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

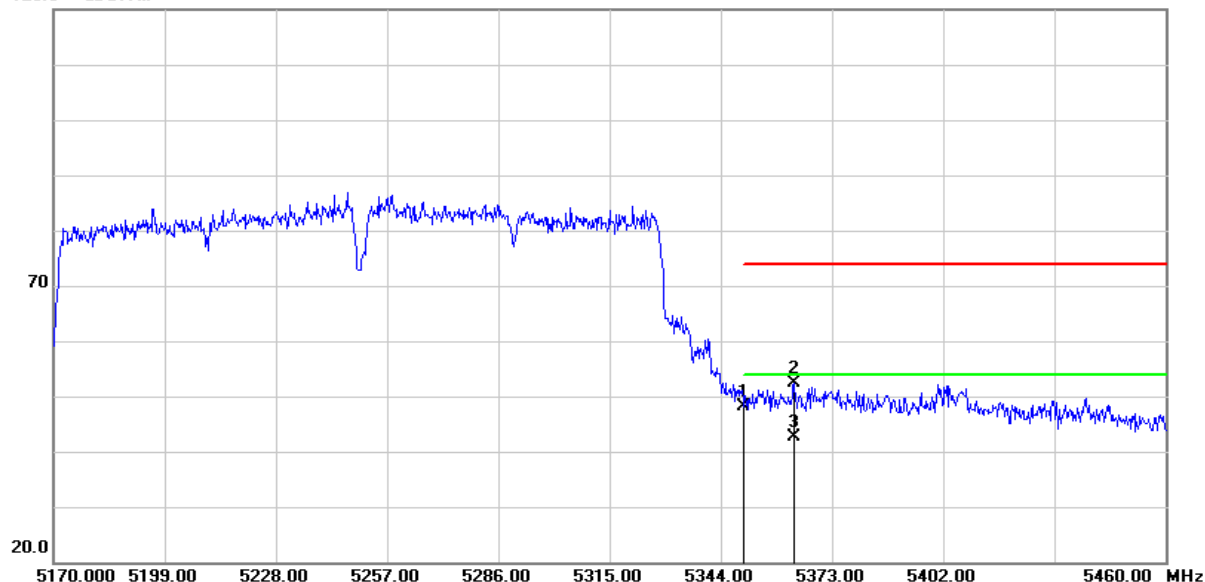


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.67	2.46	48.13	74.00	-25.87	peak
2	5363.140	49.78	2.48	52.26	74.00	-21.74	peak
3	5363.140	40.08	2.48	42.56	54.00	-11.44	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH114(5570MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

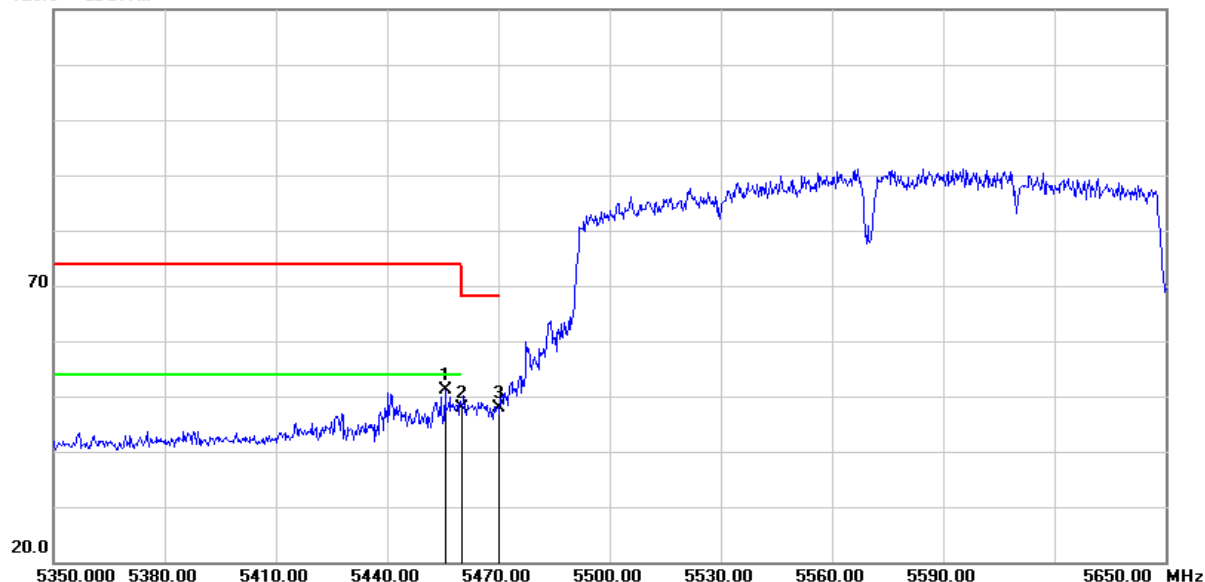


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.600	48.33	2.87	51.20	74.00	-22.80	peak
2	5460.000	44.93	2.87	47.80	74.00	-26.20	peak
3	5470.000	45.04	2.90	47.94	68.20	-20.26	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH114(5570MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

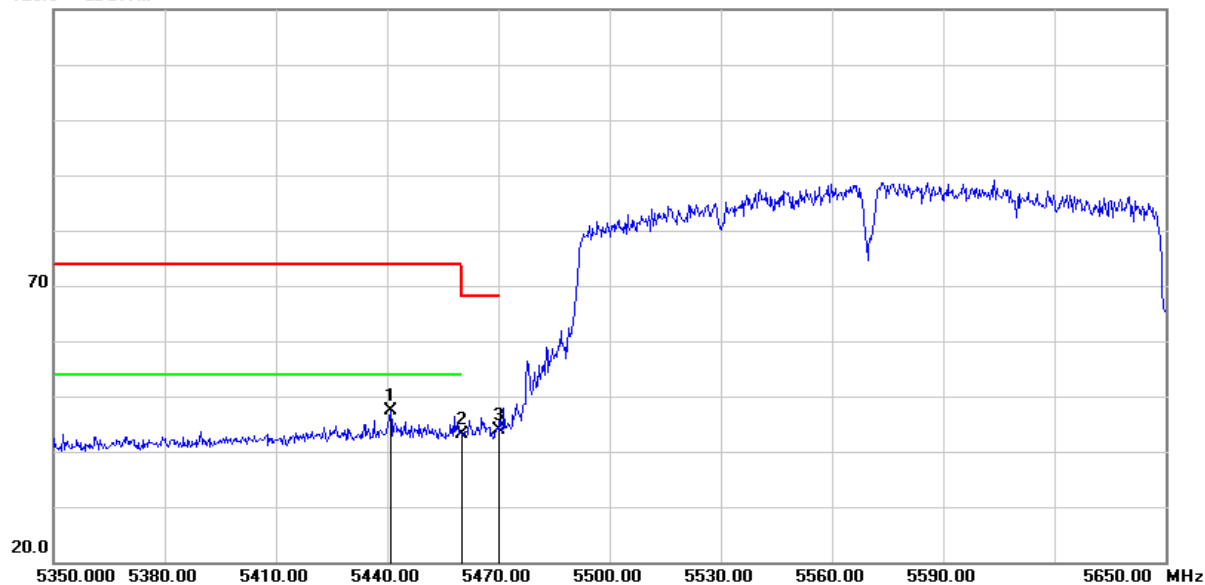


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.900	44.53	2.81	47.34	74.00	-26.66	peak
2	5460.000	40.15	2.87	43.02	74.00	-30.98	peak
3	5470.000	40.91	2.90	43.81	68.20	-24.39	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

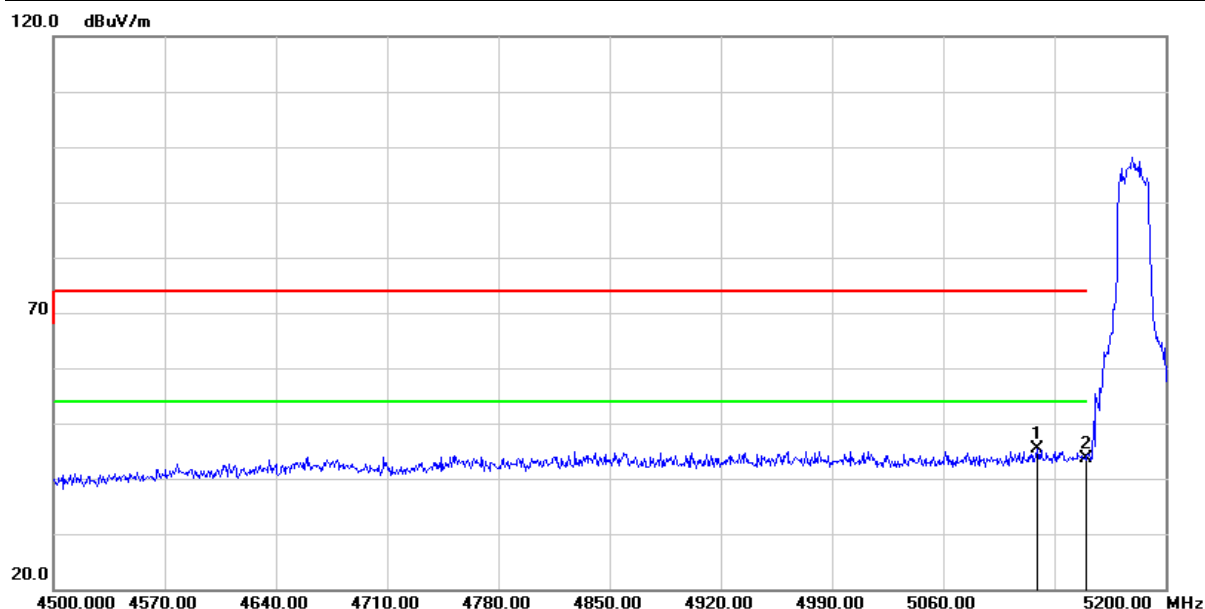


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.500	42.30	3.09	45.39	74.00	-28.61	peak
2	5150.000	40.61	3.14	43.75	74.00	-30.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

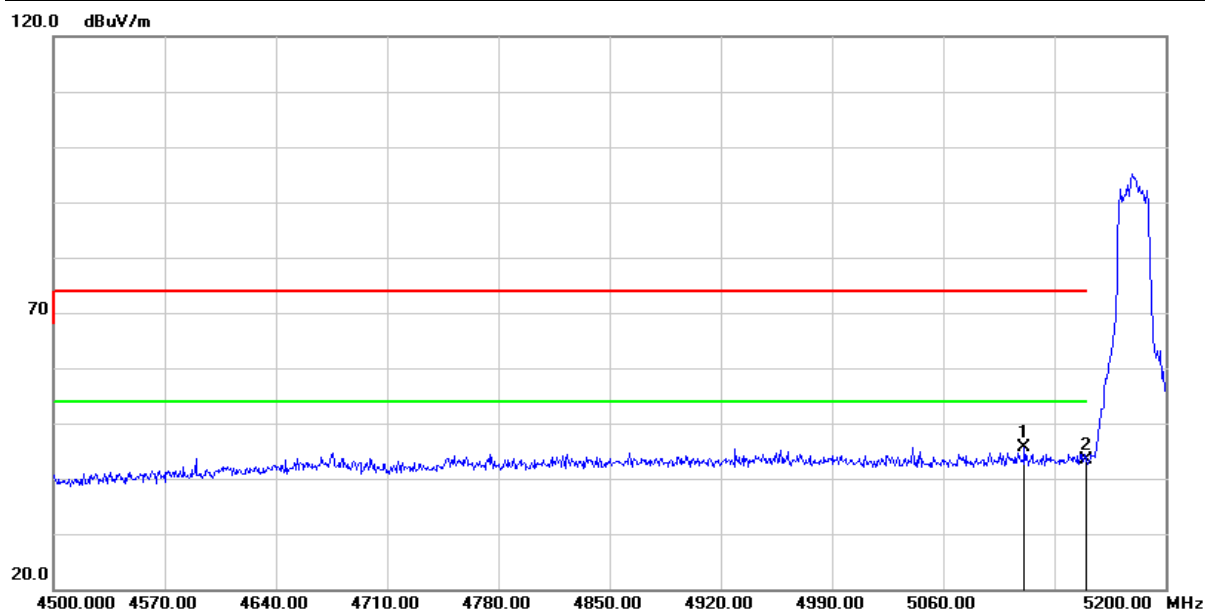


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5111.100	42.46	3.07	45.53	74.00	-28.47	peak
2	5150.000	40.16	3.14	43.30	74.00	-30.70	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

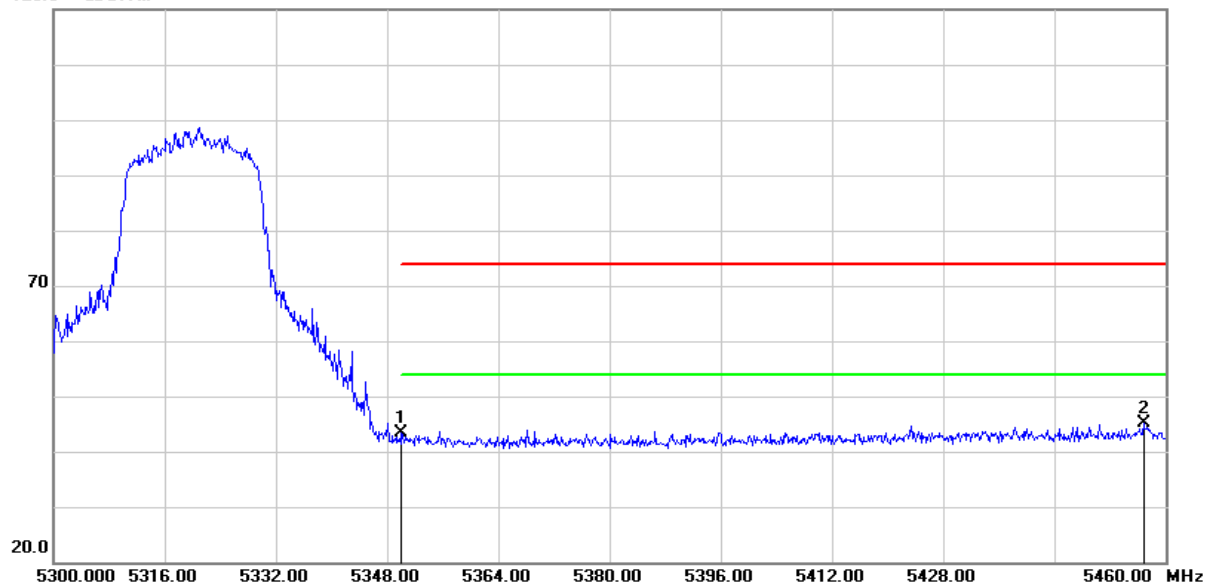


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.97	2.46	43.43	74.00	-30.57	peak
2	5456.800	42.36	2.87	45.23	74.00	-28.77	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

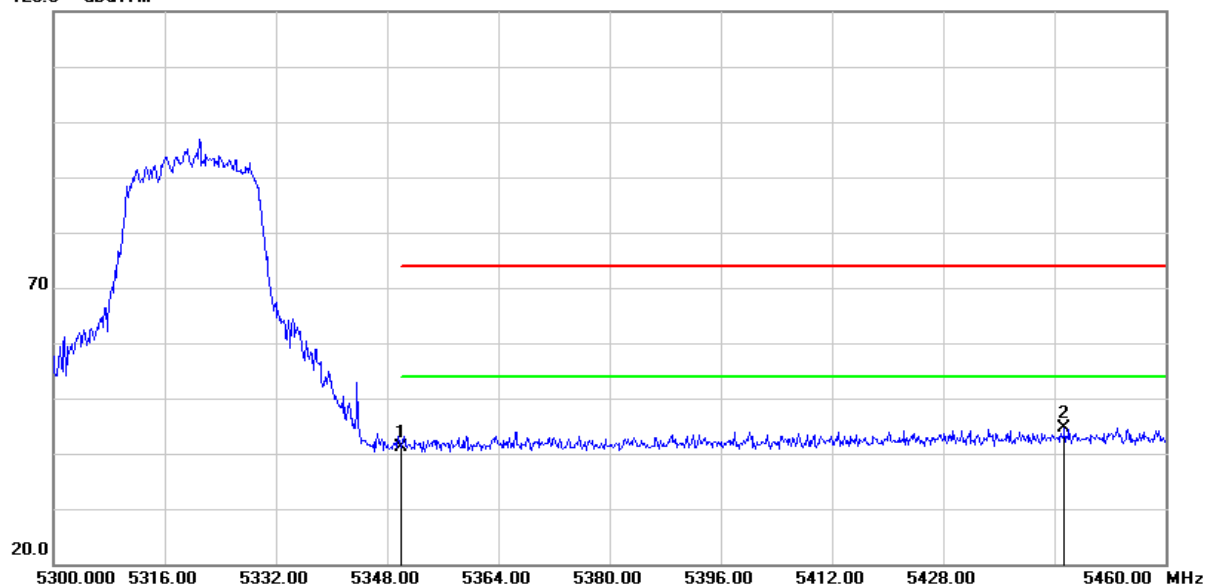


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	38.58	2.46	41.04	74.00	-32.96	peak
2	5445.440	41.90	2.83	44.73	74.00	-29.27	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

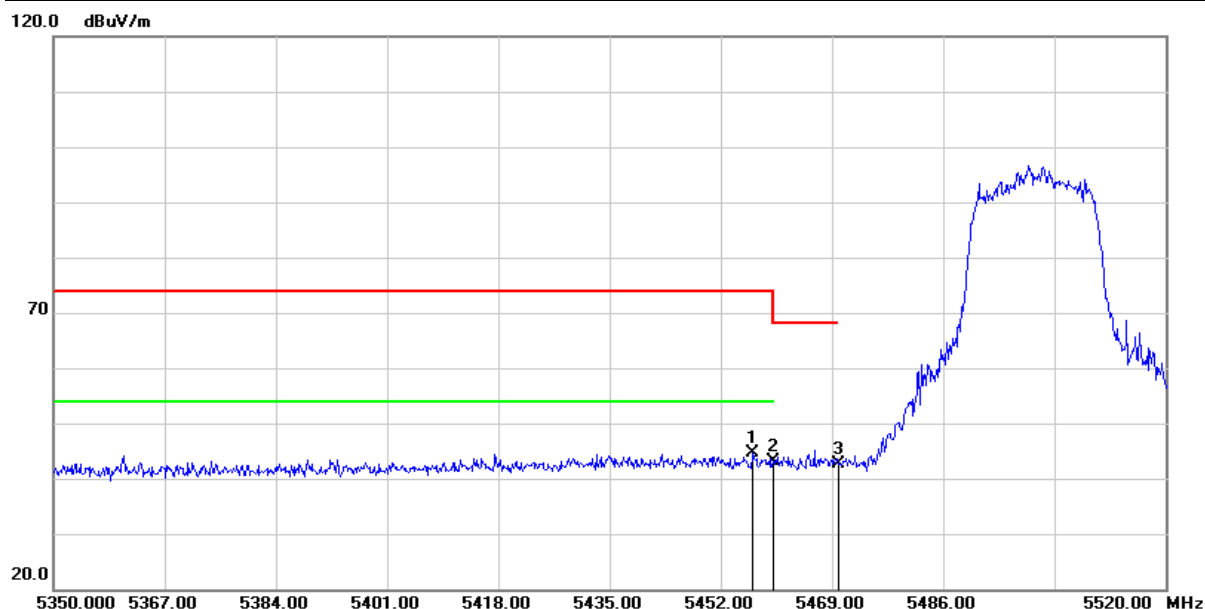


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.930	41.65	2.87	44.52	74.00	-29.48	peak
2	5460.000	40.28	2.87	43.15	74.00	-30.85	peak
3	5470.000	39.67	2.90	42.57	68.20	-25.63	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

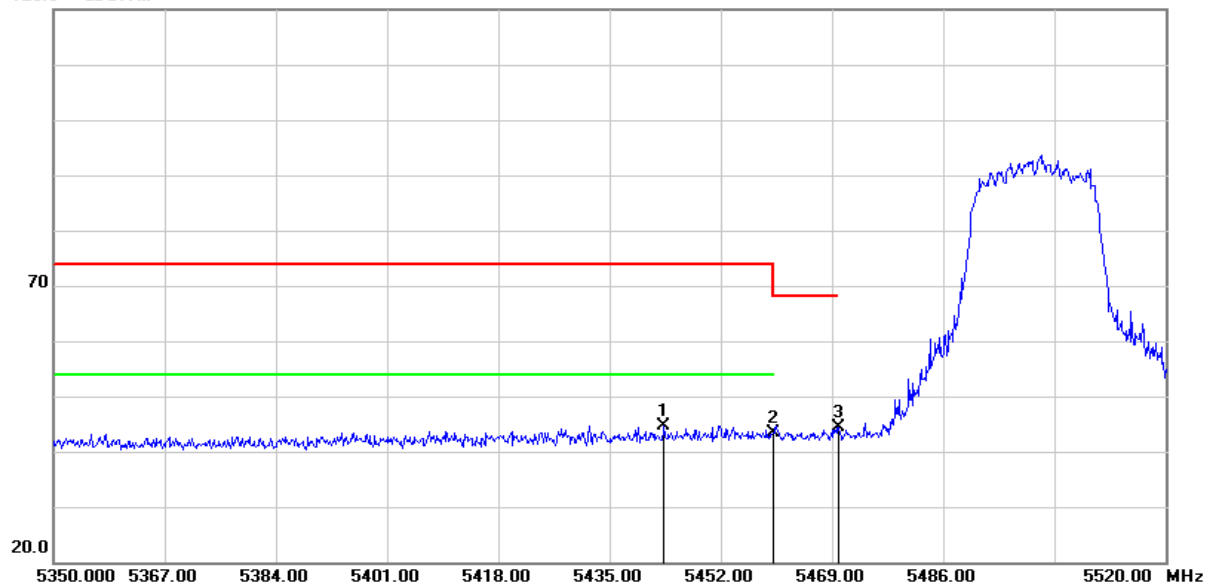


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.330	41.85	2.82	44.67	74.00	-29.33	peak
2	5460.000	40.48	2.87	43.35	74.00	-30.65	peak
3	5470.000	41.48	2.90	44.38	68.20	-23.82	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

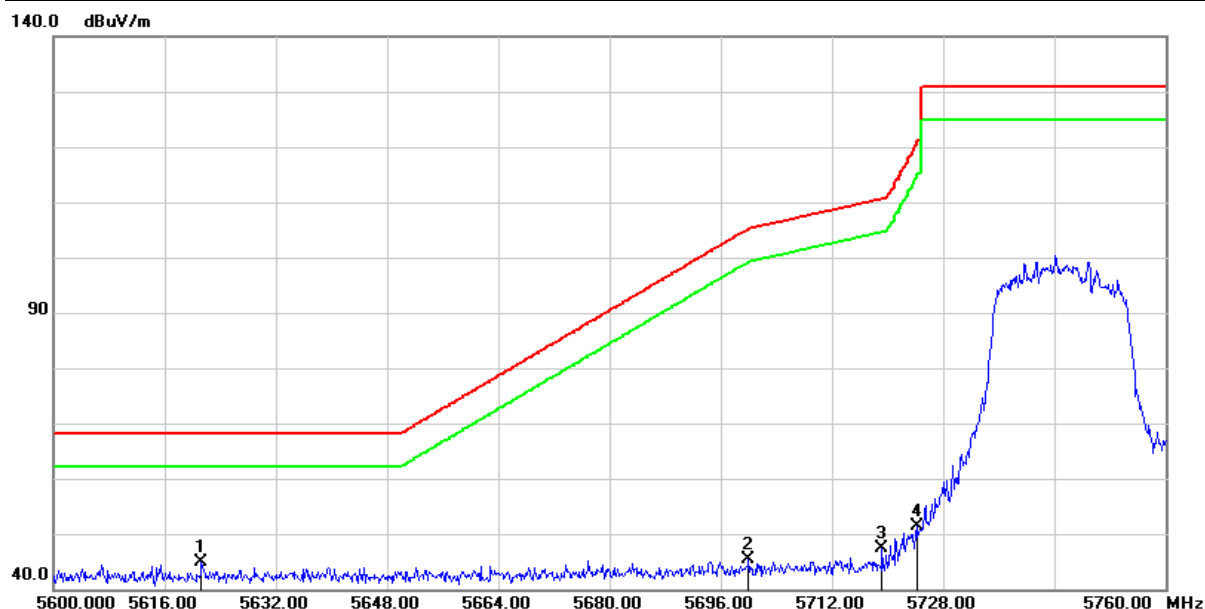

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5621.280	41.83	3.11	44.94	68.20	-23.26	peak
2	5700.000	42.01	3.41	45.42	105.20	-59.78	peak
3	5719.200	44.01	3.43	47.44	110.58	-63.14	peak
4	5724.160	47.89	3.43	51.32	120.28	-68.96	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5613.120	41.03	3.10	44.13	68.20	-24.07	peak
2	5687.680	41.75	3.34	45.09	96.08	-50.99	peak
3	5717.280	41.71	3.42	45.13	110.04	-64.91	peak
4	5724.640	45.77	3.43	49.20	121.38	-72.18	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5851.600	40.97	3.70	44.67	118.55	-73.88	peak
2	5863.200	42.09	3.78	45.87	108.50	-62.63	peak
3	5922.200	40.43	4.08	44.51	70.27	-25.76	peak
4	5981.400	42.16	4.21	46.37	68.20	-21.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/04/30
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

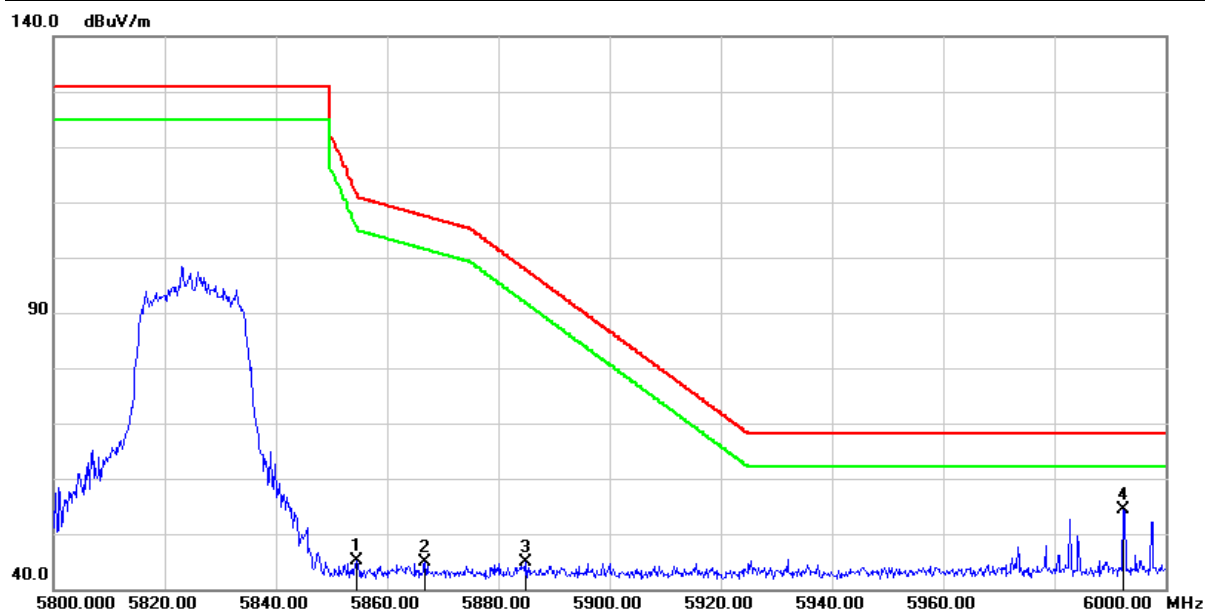


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5854.600	41.40	3.72	45.12	111.71	-66.59	peak
2	5866.800	40.95	3.81	44.76	107.50	-62.74	peak
3	5885.000	40.97	3.94	44.91	97.80	-52.89	peak
4	5992.400	50.06	4.24	54.30	68.20	-13.90	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

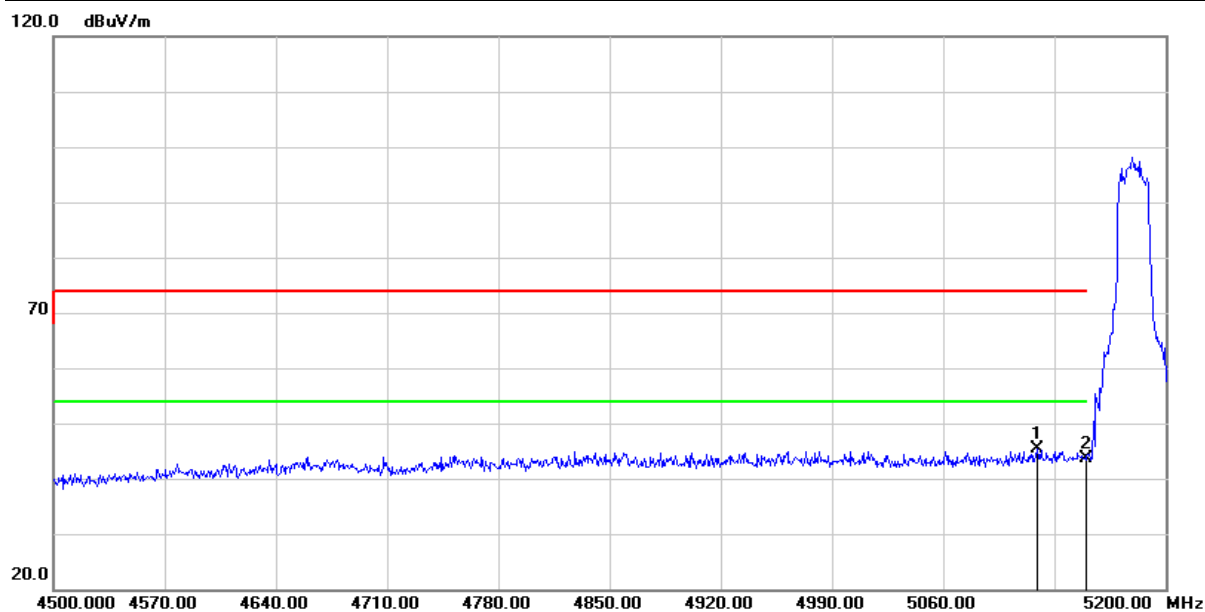


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.500	42.30	3.09	45.39	74.00	-28.61	peak
2	5150.000	40.61	3.14	43.75	74.00	-30.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH36(5180MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

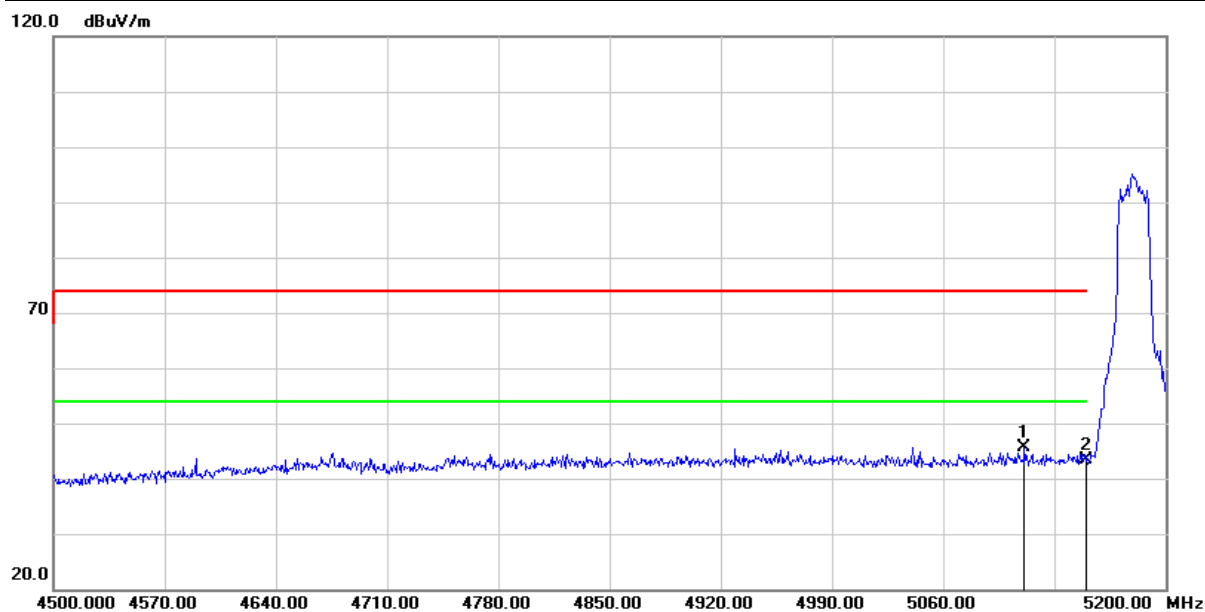


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5111.100	42.46	3.07	45.53	74.00	-28.47	peak
2	5150.000	40.16	3.14	43.30	74.00	-30.70	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

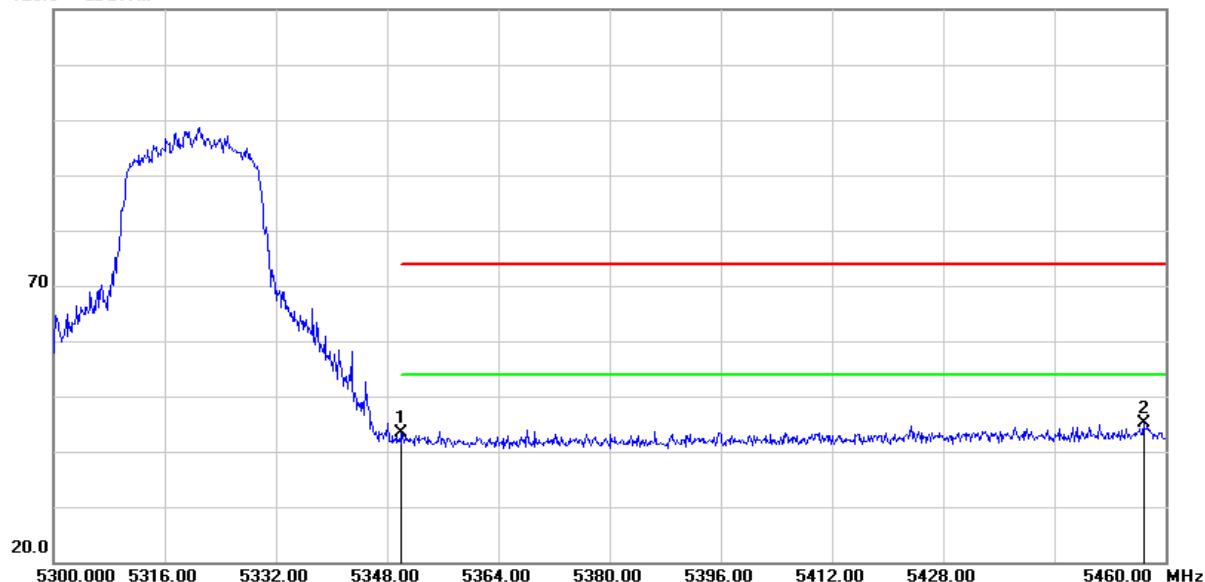


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.97	2.46	43.43	74.00	-30.57	peak
2	5456.800	42.36	2.87	45.23	74.00	-28.77	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH64(5320MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

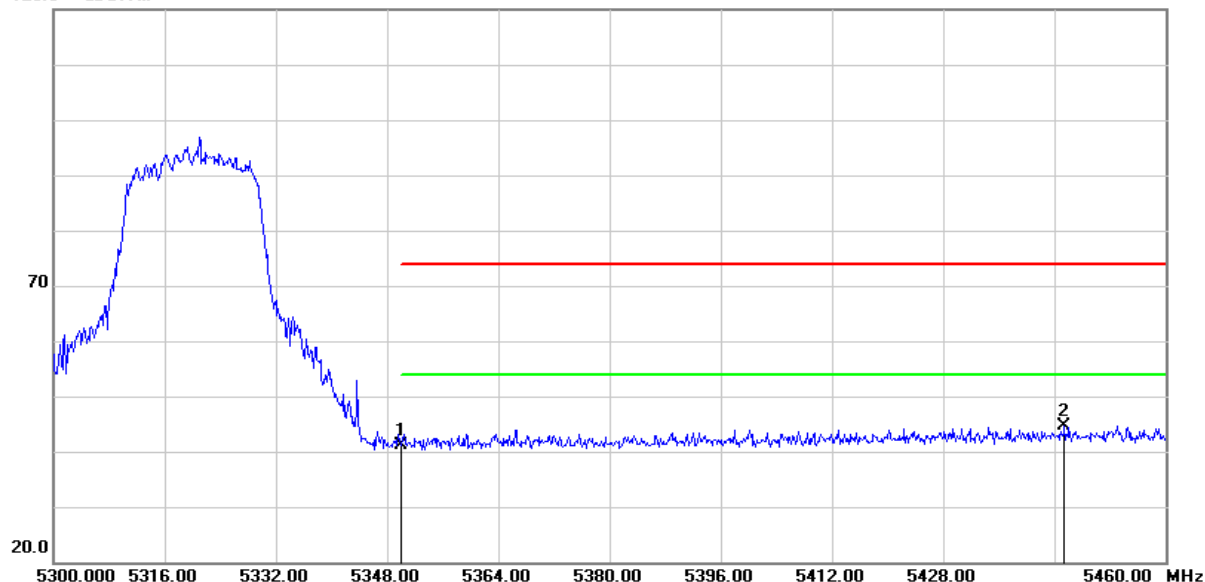


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	38.58	2.46	41.04	74.00	-32.96	peak
2	5445.440	41.90	2.83	44.73	74.00	-29.27	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

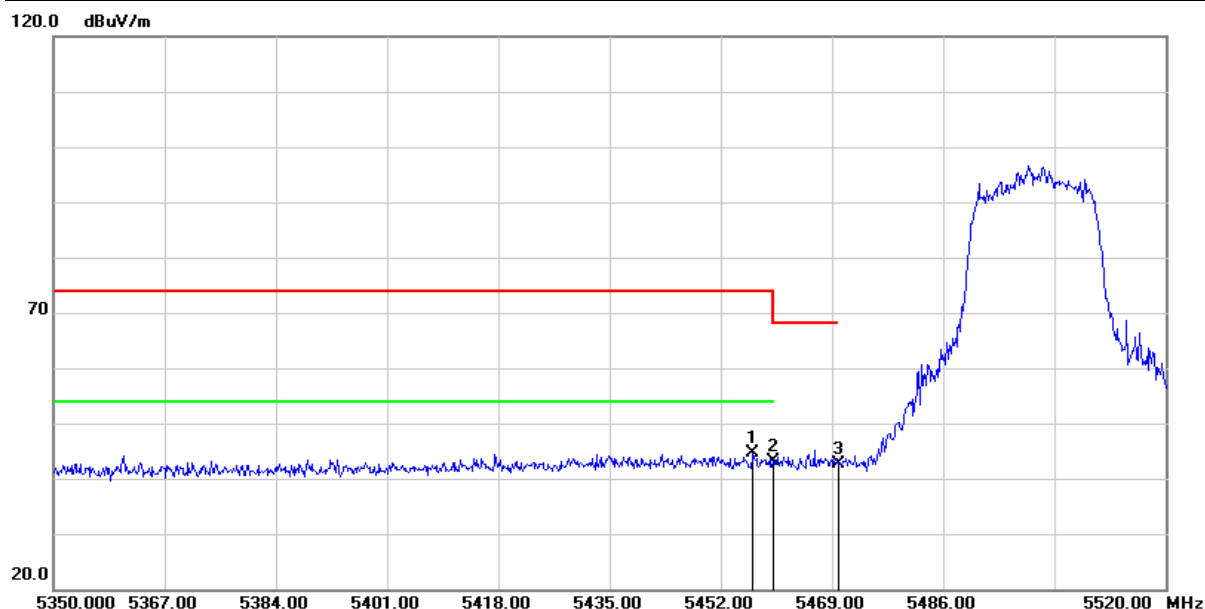


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.930	41.65	2.87	44.52	74.00	-29.48	peak
2	5460.000	40.28	2.87	43.15	74.00	-30.85	peak
3	5470.000	39.67	2.90	42.57	68.20	-25.63	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH100(5500MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

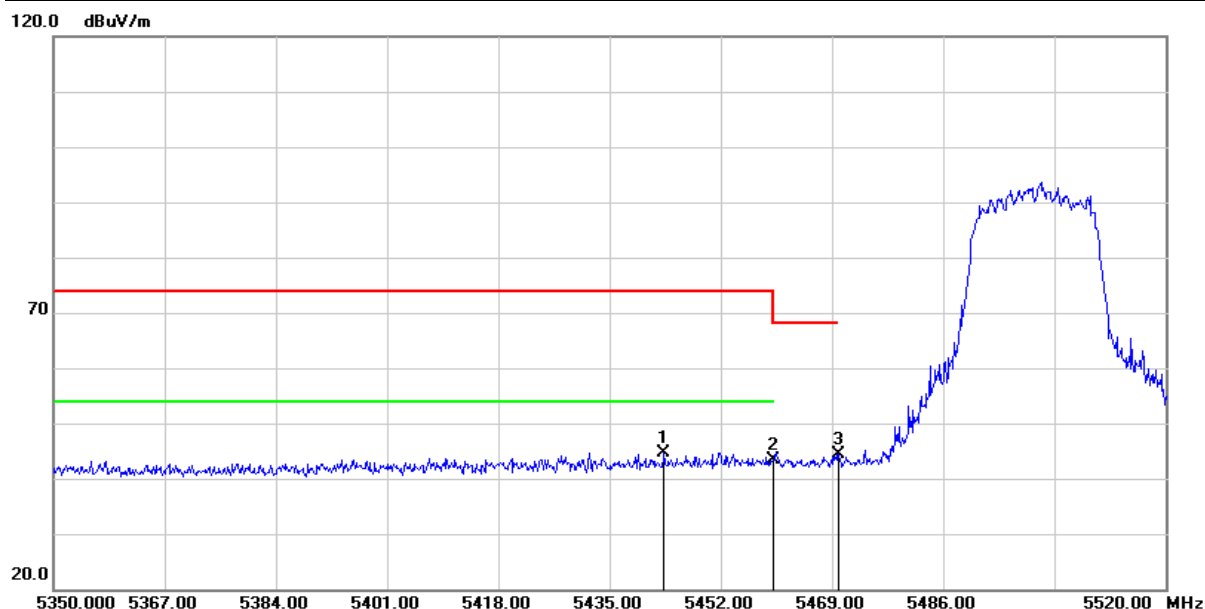


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.330	41.85	2.82	44.67	74.00	-29.33	peak
2	5460.000	40.48	2.87	43.35	74.00	-30.65	peak
3	5470.000	41.48	2.90	44.38	68.20	-23.82	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

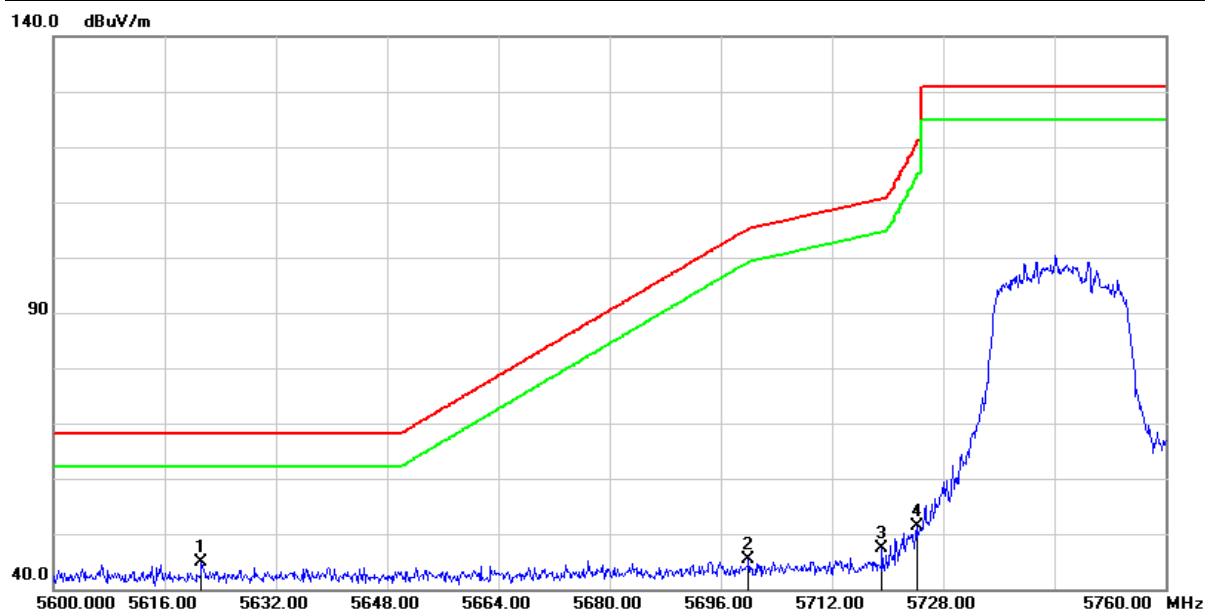

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5621.280	41.83	3.11	44.94	68.20	-23.26	peak
2	5700.000	42.01	3.41	45.42	105.20	-59.78	peak
3	5719.200	44.01	3.43	47.44	110.58	-63.14	peak
4	5724.160	47.89	3.43	51.32	120.28	-68.96	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH149(5745MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5613.120	41.03	3.10	44.13	68.20	-24.07	peak
2	5687.680	41.75	3.34	45.09	96.08	-50.99	peak
3	5717.280	41.71	3.42	45.13	110.04	-64.91	peak
4	5724.640	45.77	3.43	49.20	121.38	-72.18	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/04/30
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5851.600	40.97	3.70	44.67	118.55	-73.88	peak
2	5863.200	42.09	3.78	45.87	108.50	-62.63	peak
3	5922.200	40.43	4.08	44.51	70.27	-25.76	peak
4	5981.400	42.16	4.21	46.37	68.20	-21.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/01
Test Channel :	CH165(5825MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

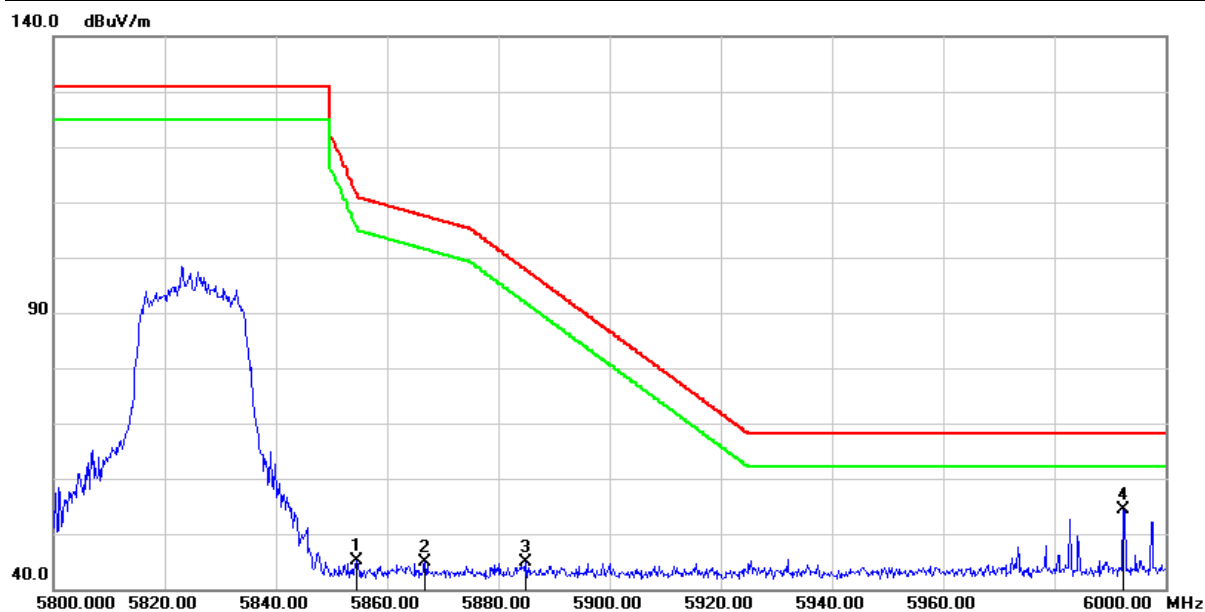


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5854.600	41.40	3.72	45.12	111.71	-66.59	peak
2	5866.800	40.95	3.81	44.76	107.50	-62.74	peak
3	5885.000	40.97	3.94	44.91	97.80	-52.89	peak
4	5992.400	50.06	4.24	54.30	68.20	-13.90	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH38(5190MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

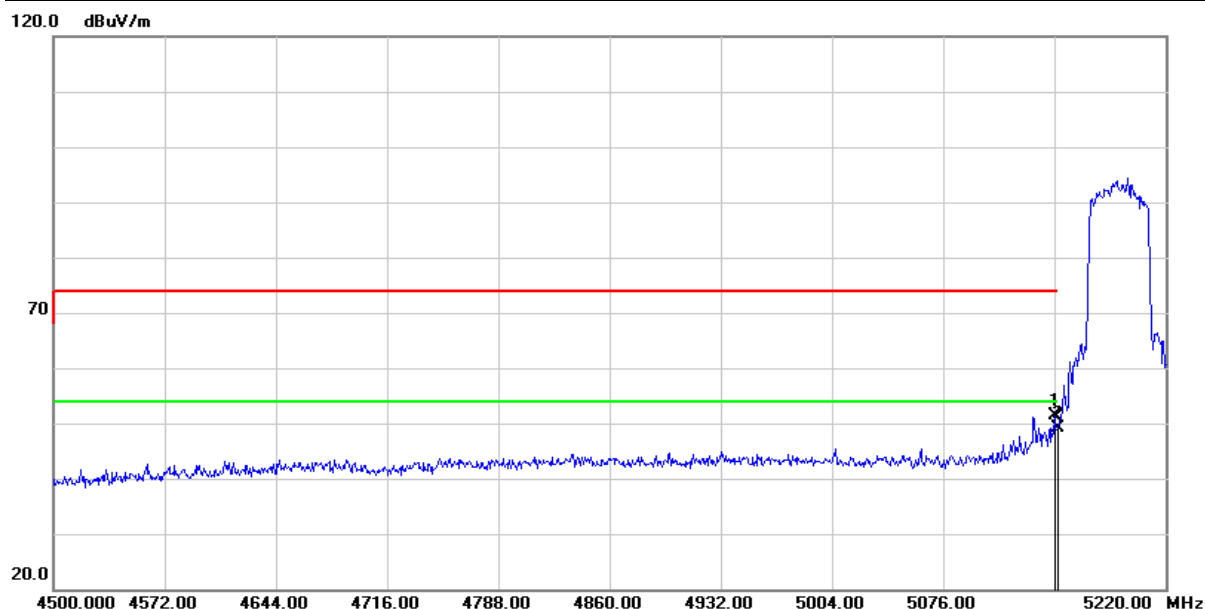


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.000	48.26	3.15	51.41	74.00	-22.59	peak
2	5150.000	46.02	3.14	49.16	74.00	-24.84	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH38(5190MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

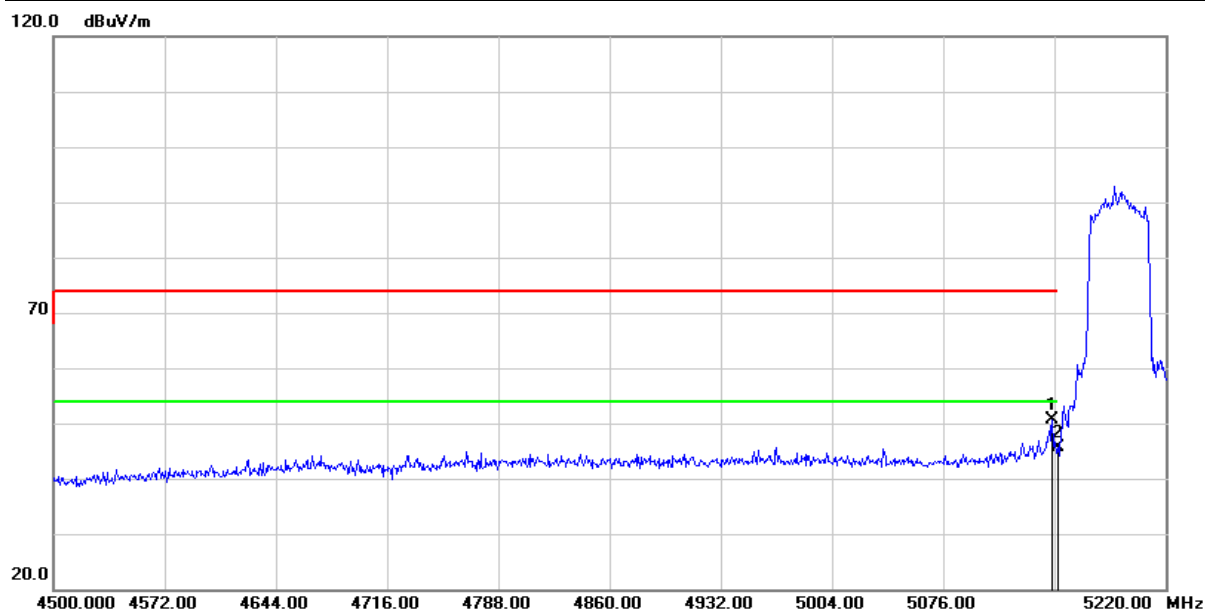


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.560	47.41	3.14	50.55	74.00	-23.45	peak
2	5150.000	42.43	3.14	45.57	74.00	-28.43	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH62(5310MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

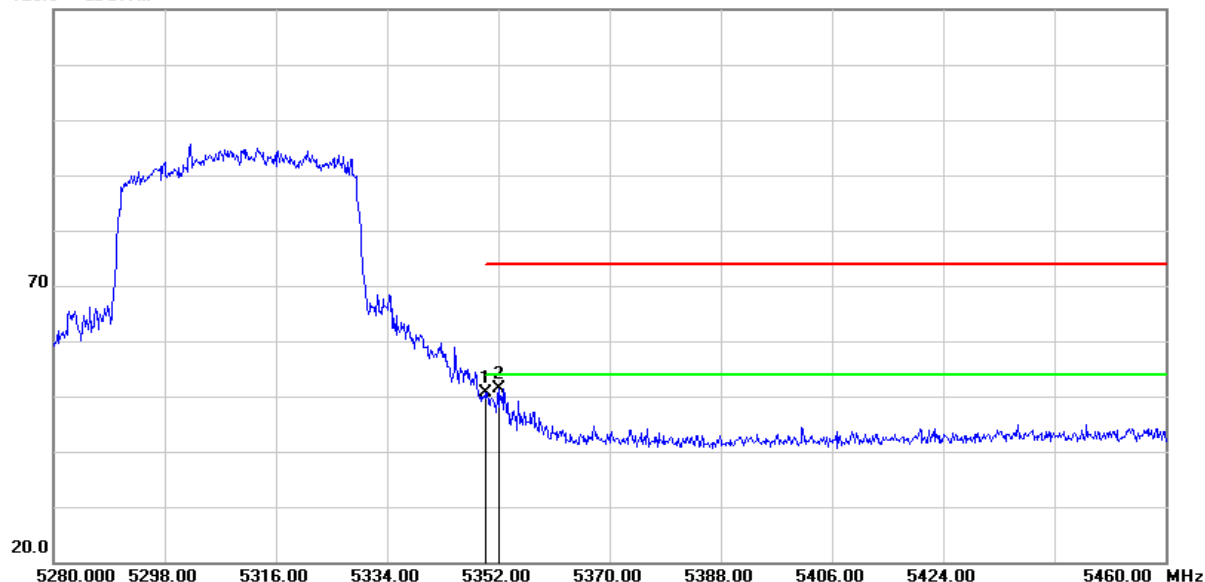


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.18	2.46	50.64	74.00	-23.36	peak
2	5352.000	49.02	2.45	51.47	74.00	-22.53	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH62(5310MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

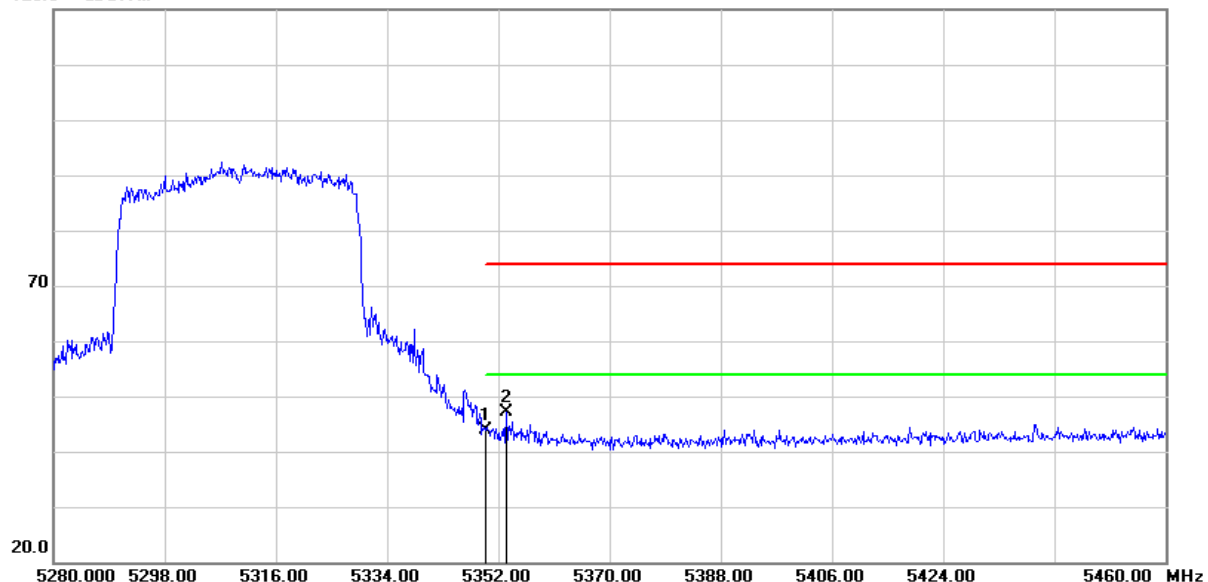


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.36	2.46	43.82	74.00	-30.18	peak
2	5353.260	44.66	2.46	47.12	74.00	-26.88	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH102(5510MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

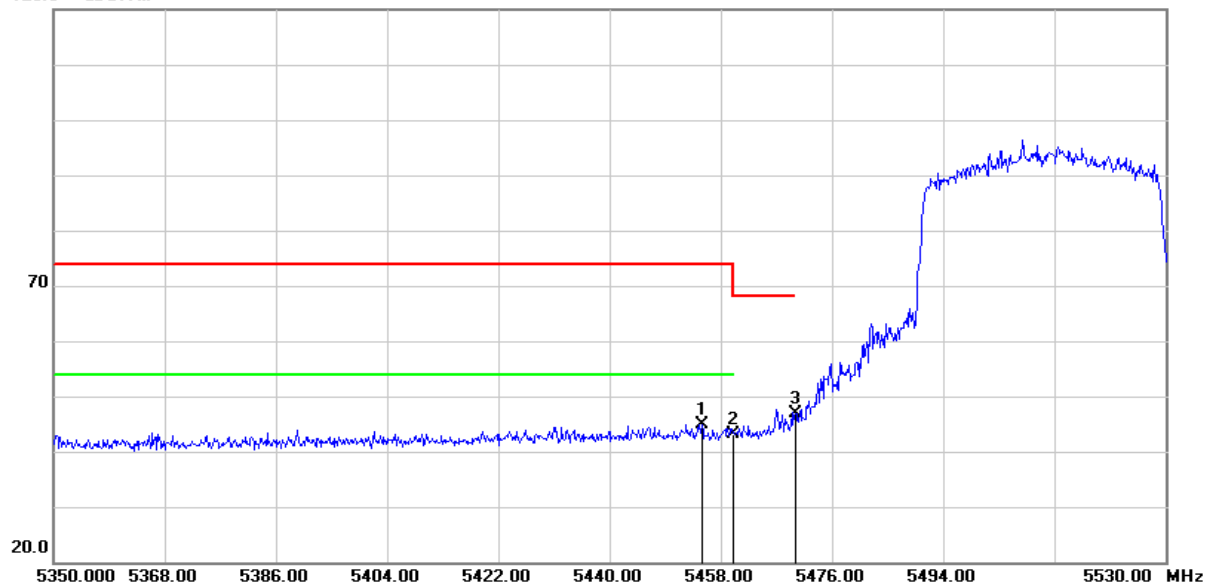


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.940	42.08	2.87	44.95	74.00	-29.05	peak
2	5460.000	40.19	2.87	43.06	74.00	-30.94	peak
3	5470.000	43.99	2.90	46.89	68.20	-21.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH102(5510MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

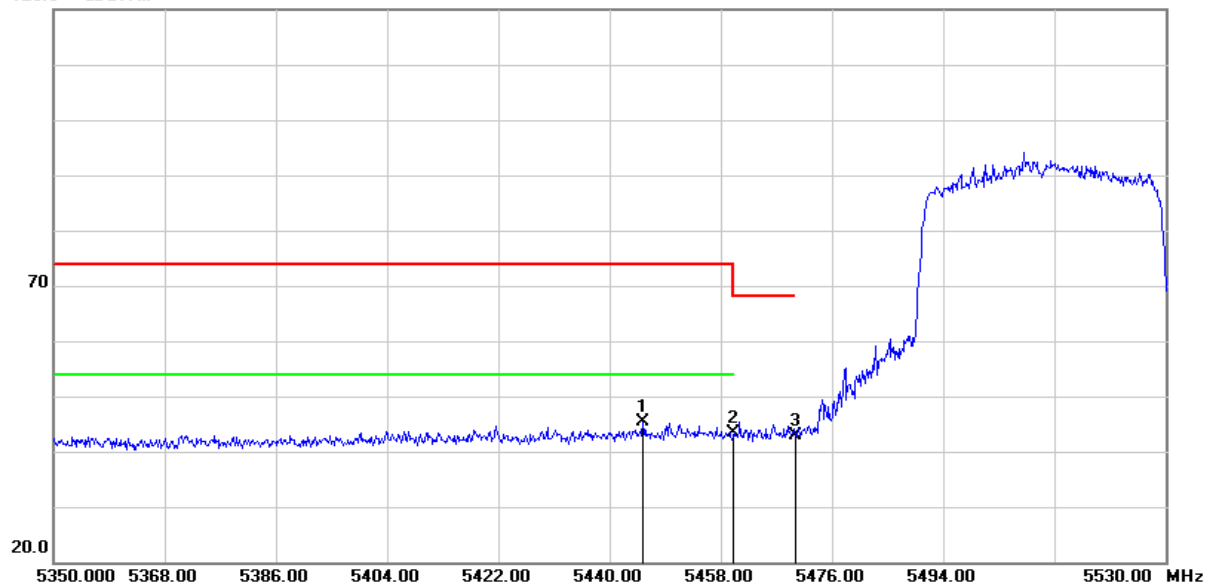


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.400	42.65	2.83	45.48	74.00	-28.52	peak
2	5460.000	40.41	2.87	43.28	74.00	-30.72	peak
3	5470.000	40.03	2.90	42.93	68.20	-25.27	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH151(5755MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

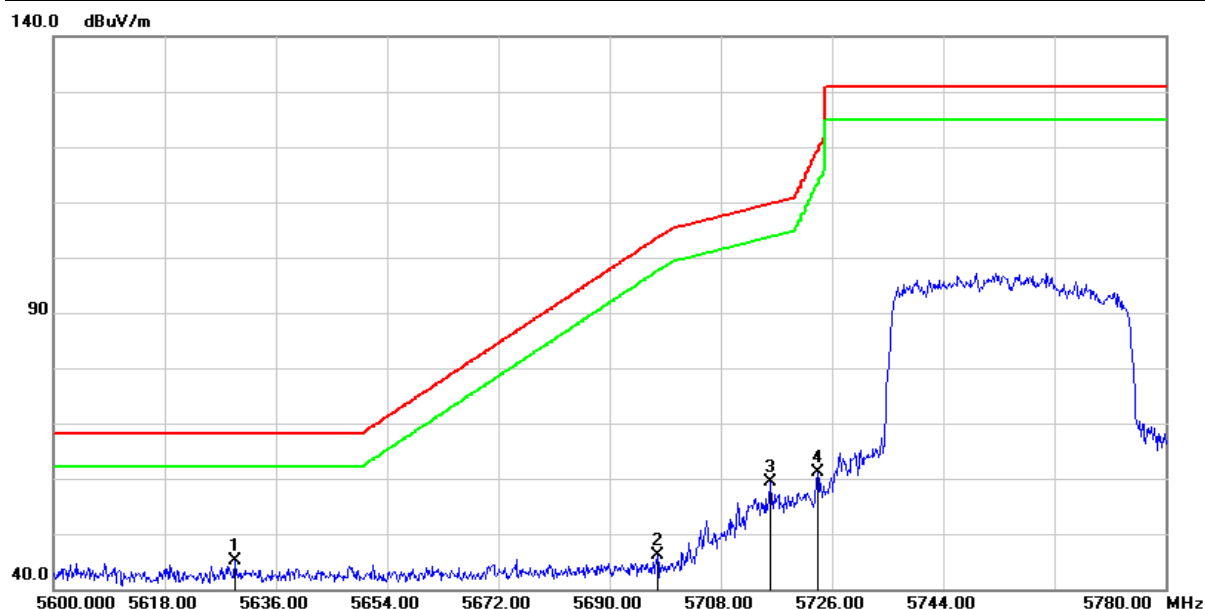


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5629.340	41.98	3.12	45.10	68.20	-23.10	peak
2	5697.740	42.72	3.39	46.11	103.53	-57.42	peak
3	5716.100	55.84	3.42	59.26	109.71	-50.45	peak
4	5723.660	57.63	3.43	61.06	119.14	-58.08	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/01
Test Channel :	CH151(5755MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

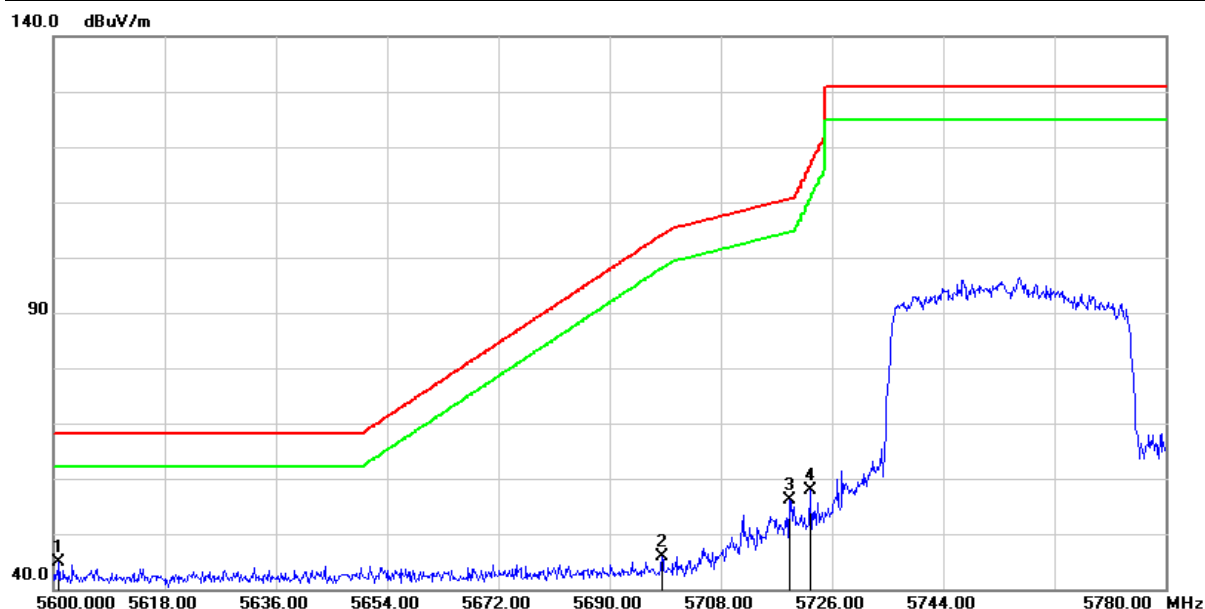


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.900	41.68	3.08	44.76	68.20	-23.44	peak
2	5698.460	42.46	3.39	45.85	104.06	-58.21	peak
3	5719.160	52.67	3.43	56.10	110.56	-54.46	peak
4	5722.400	54.33	3.43	57.76	116.27	-58.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/02
Test Channel :	CH159(5795MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

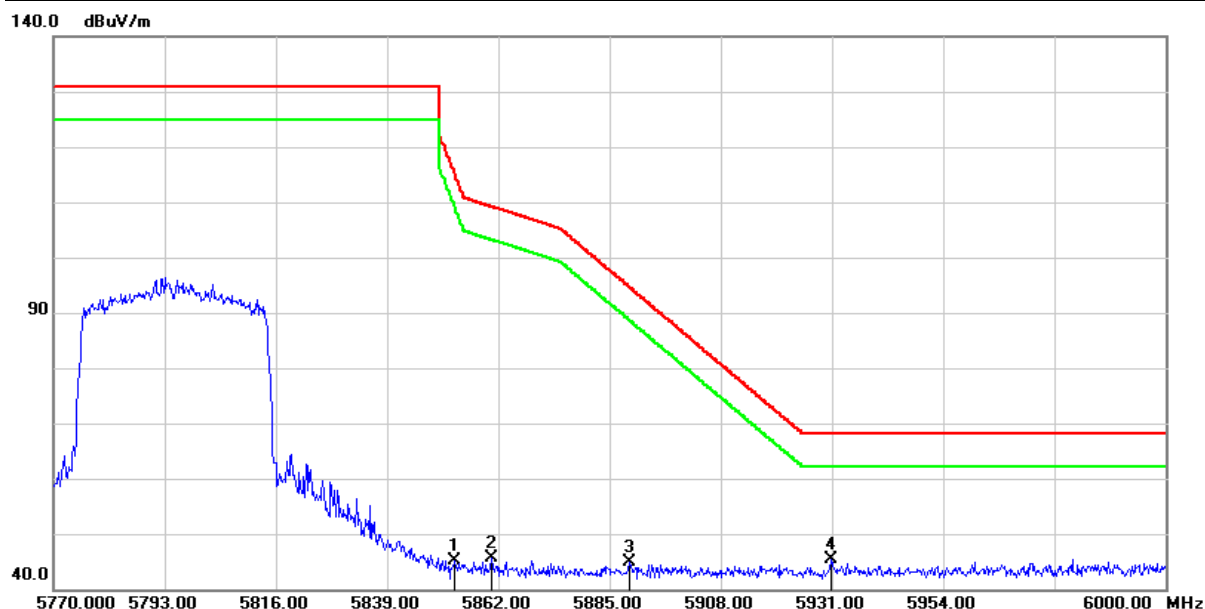

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5853.030	41.39	3.71	45.10	115.29	-70.19	peak
2	5860.620	41.87	3.76	45.63	109.23	-63.60	peak
3	5889.140	40.82	3.96	44.78	94.74	-49.96	peak
4	5930.770	41.22	4.09	45.31	68.20	-22.89	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/02
Test Channel :	CH159(5795MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5853.260	42.47	3.71	46.18	114.77	-68.59	peak
2	5858.550	40.71	3.75	44.46	109.81	-65.35	peak
3	5899.260	40.56	4.05	44.61	87.25	-42.64	peak
4	5992.410	45.82	4.24	50.06	68.20	-18.14	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH42(5210MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

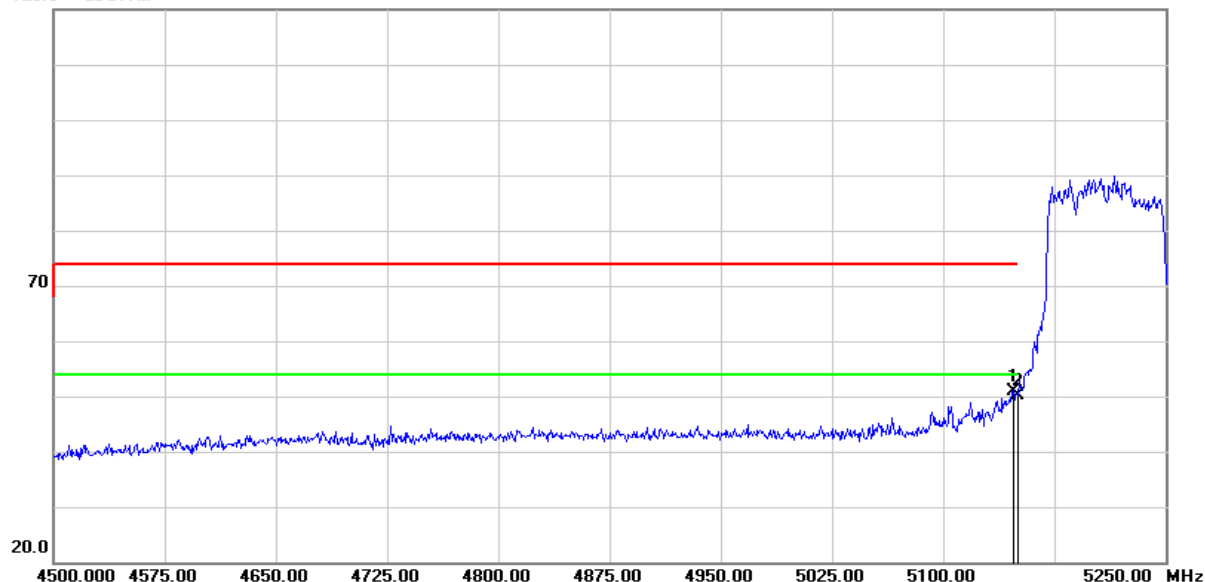


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.250	47.86	3.14	51.00	74.00	-23.00	peak
2	5150.000	47.02	3.14	50.16	74.00	-23.84	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH42(5210MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

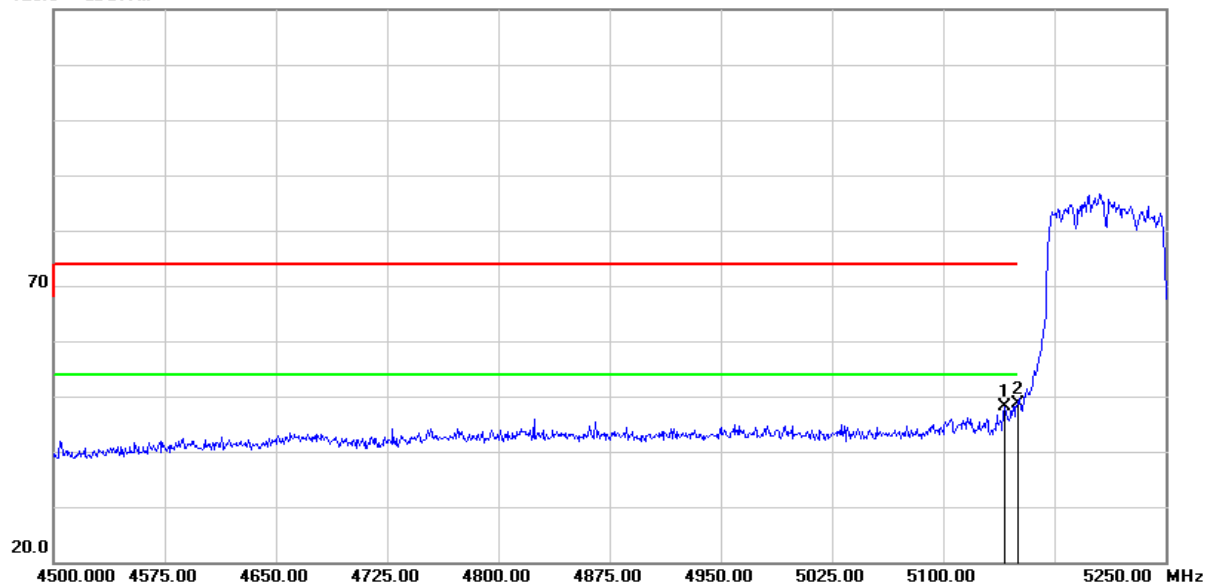


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.250	45.10	3.12	48.22	74.00	-25.78	peak
2	5150.000	45.39	3.14	48.53	74.00	-25.47	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH58(5290MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

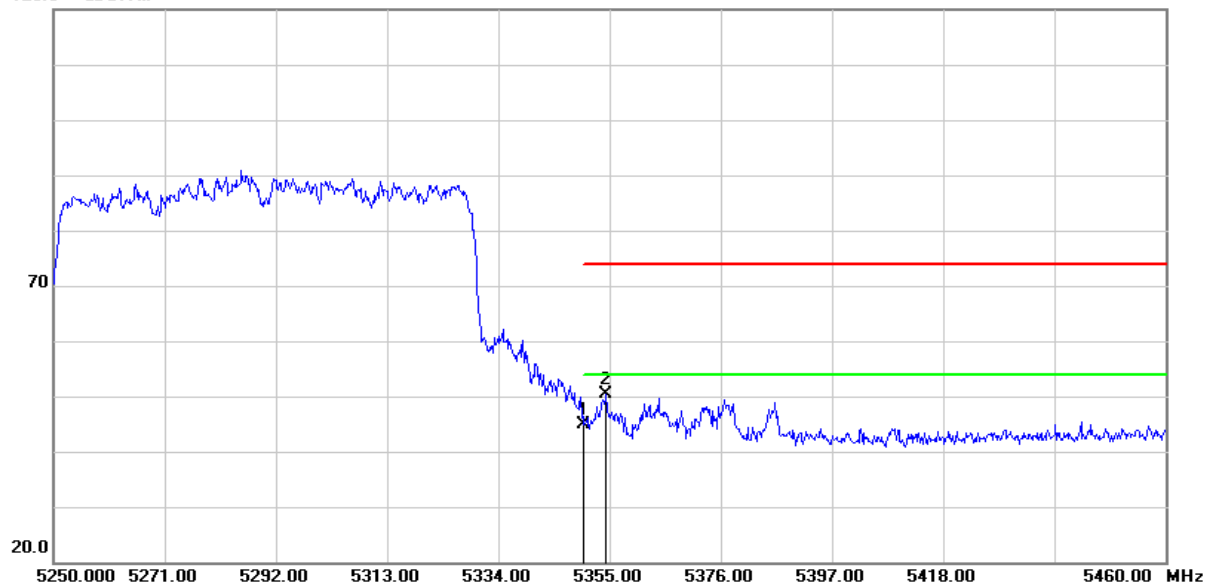


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	42.30	2.46	44.76	74.00	-29.24	peak
2	5354.370	47.80	2.46	50.26	74.00	-23.74	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH58(5290MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

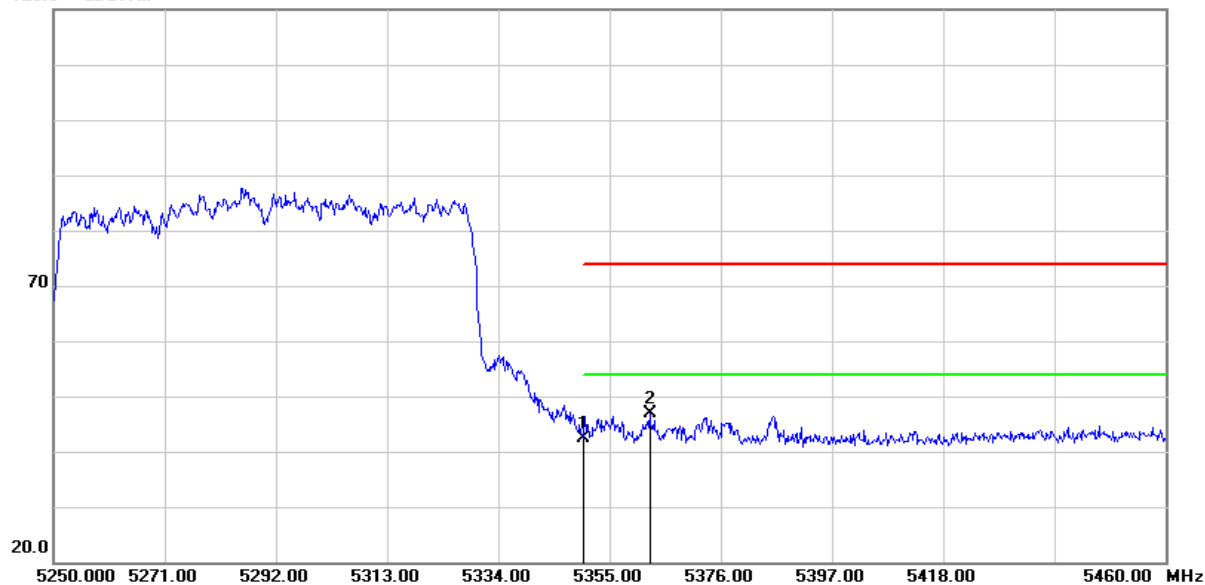


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.04	2.46	42.50	74.00	-31.50	peak
2	5362.560	44.35	2.49	46.84	74.00	-27.16	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH106(5530MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

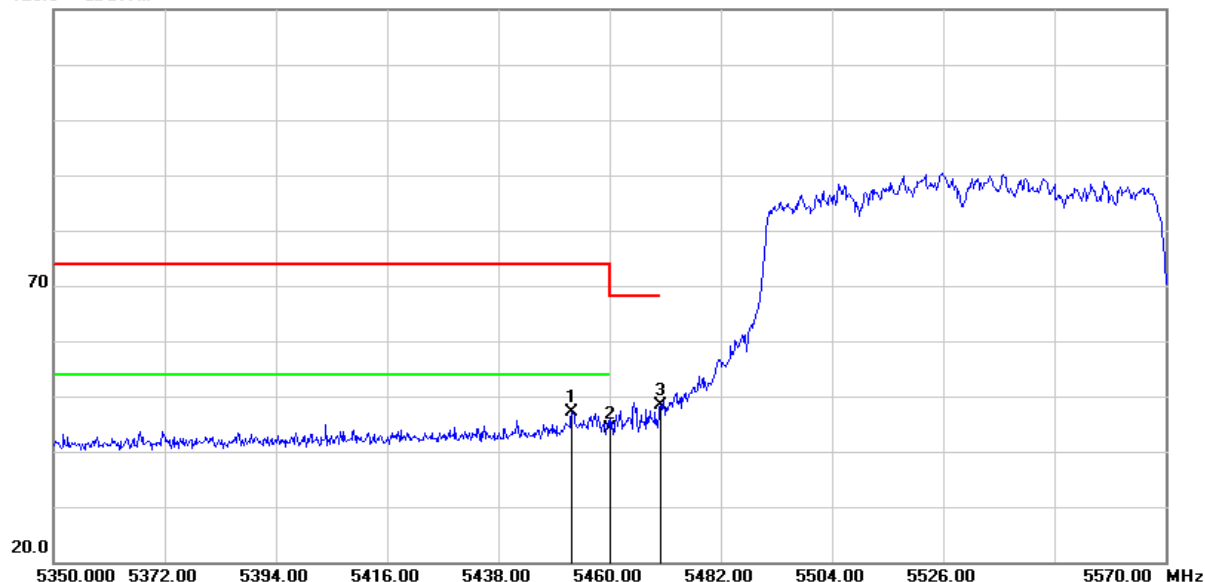


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.520	44.25	2.87	47.12	74.00	-26.88	peak
2	5460.000	41.33	2.87	44.20	74.00	-29.80	peak
3	5470.000	45.56	2.90	48.46	68.20	-19.74	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH106(5530MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

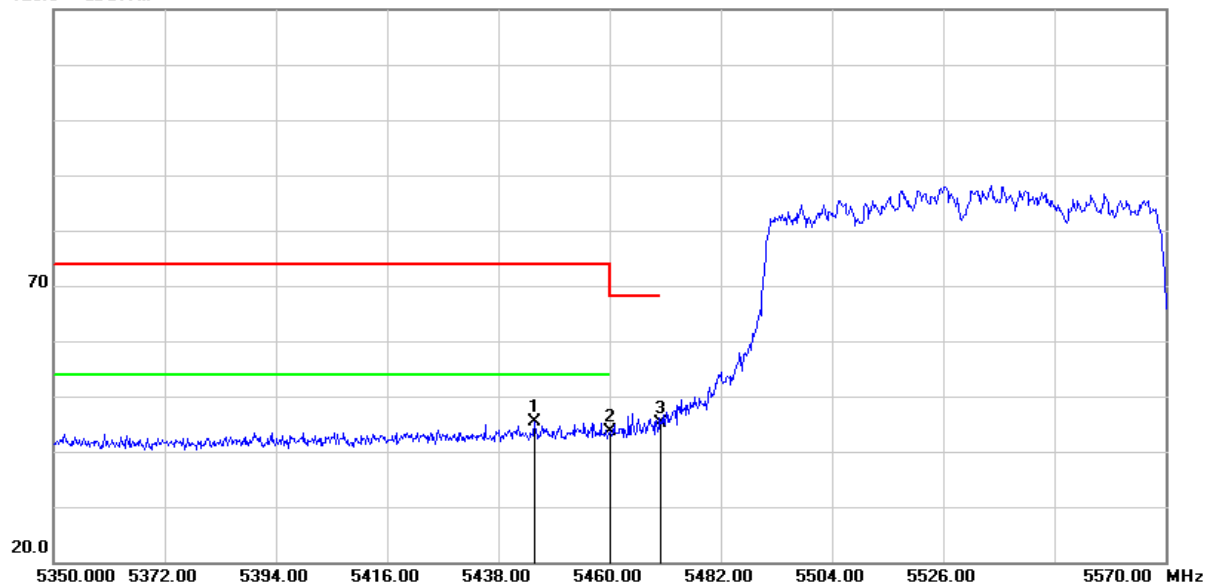


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.040	42.63	2.83	45.46	74.00	-28.54	peak
2	5460.000	40.87	2.87	43.74	74.00	-30.26	peak
3	5470.000	42.34	2.90	45.24	68.20	-22.96	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

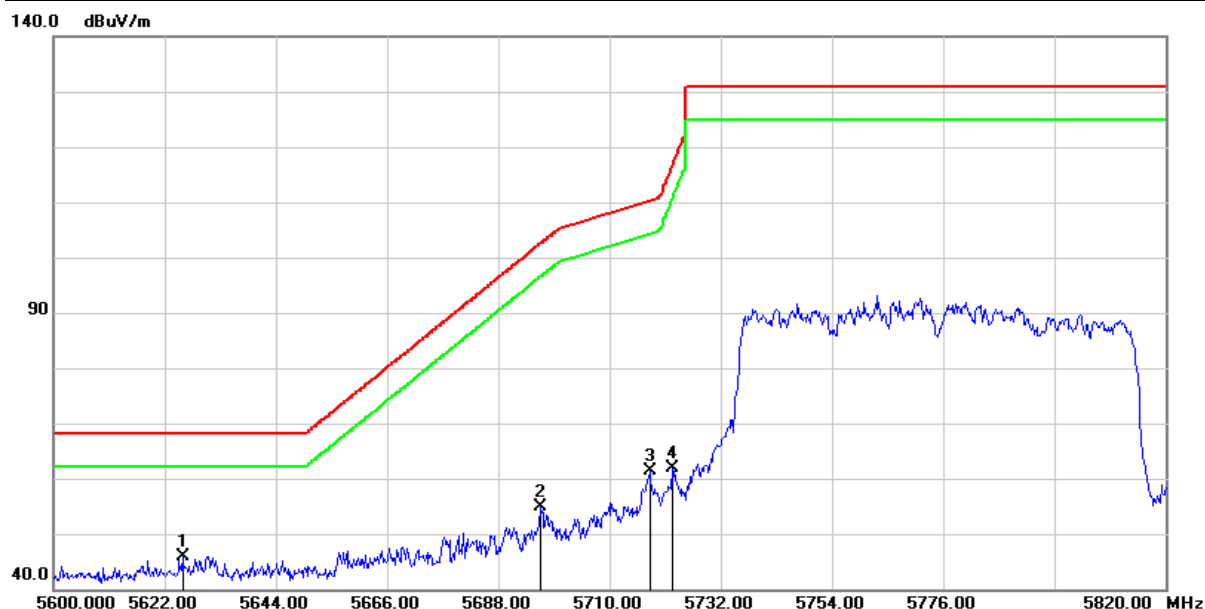


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.520	42.88	3.12	46.00	68.20	-22.20	peak
2	5696.360	51.58	3.39	54.97	102.51	-47.54	peak
3	5717.920	57.93	3.43	61.36	110.22	-48.86	peak
4	5722.320	58.33	3.43	61.76	116.09	-54.33	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

140.0 dBuV/m

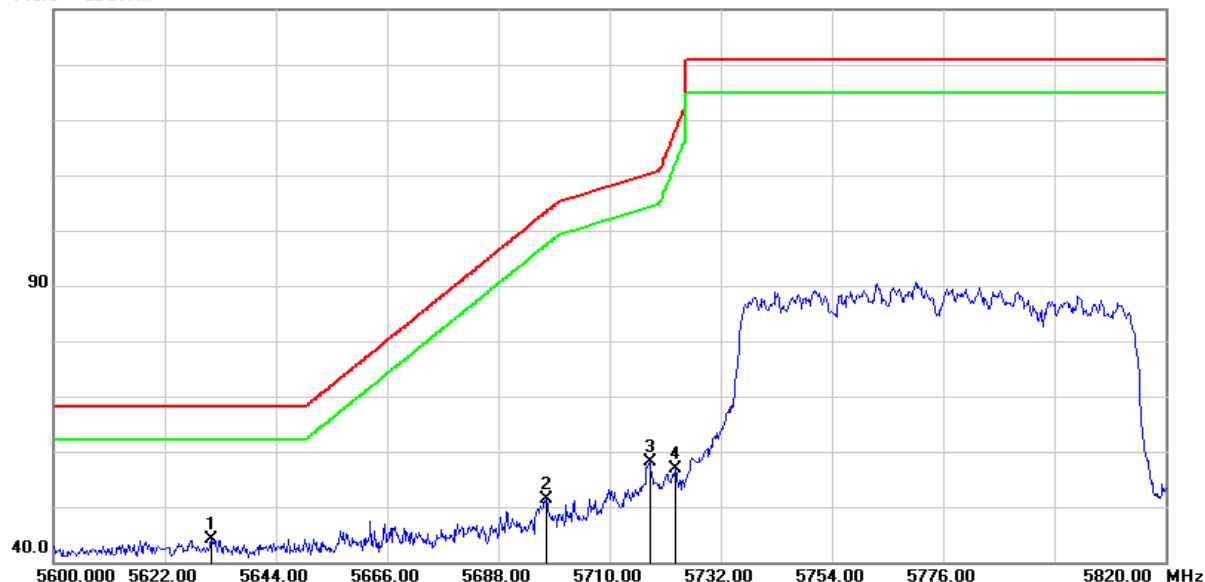


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5631.240	41.09	3.12	44.21	68.20	-23.99	peak
2	5697.460	47.87	3.39	51.26	103.32	-52.06	peak
3	5717.920	54.71	3.43	58.14	110.22	-52.08	peak
4	5722.980	53.45	3.43	56.88	117.59	-60.71	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

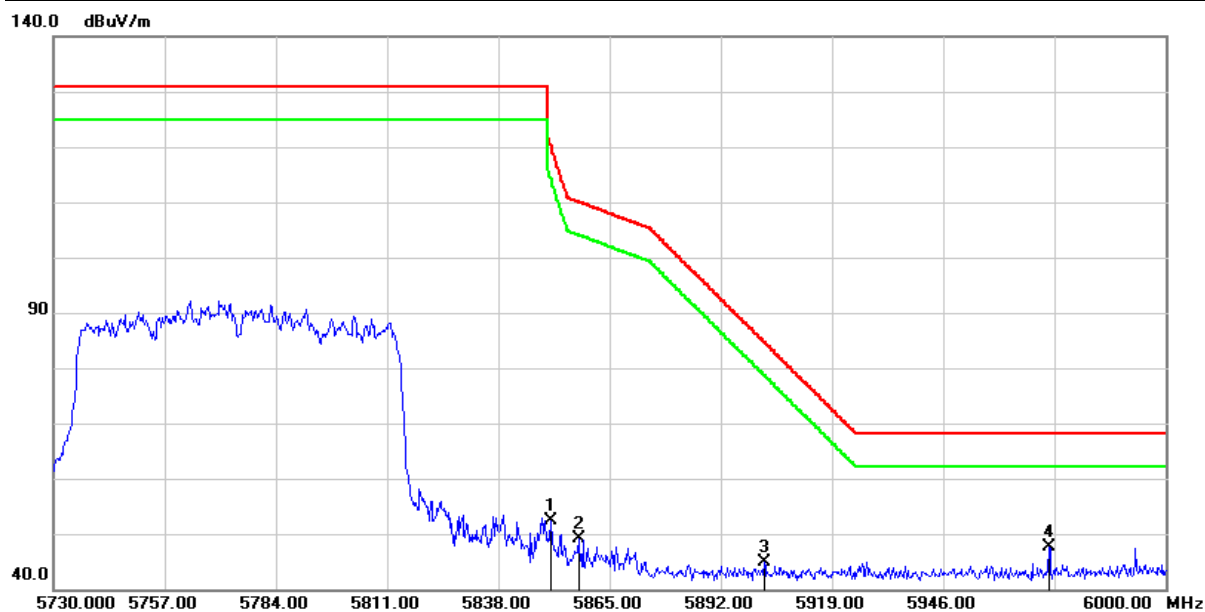


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.690	48.69	3.69	52.38	120.63	-68.25	peak
2	5857.440	45.31	3.74	49.05	110.12	-61.07	peak
3	5902.530	40.82	4.05	44.87	84.83	-39.96	peak
4	5971.650	43.43	4.18	47.61	68.20	-20.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/02
Test Channel :	CH155(5775MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

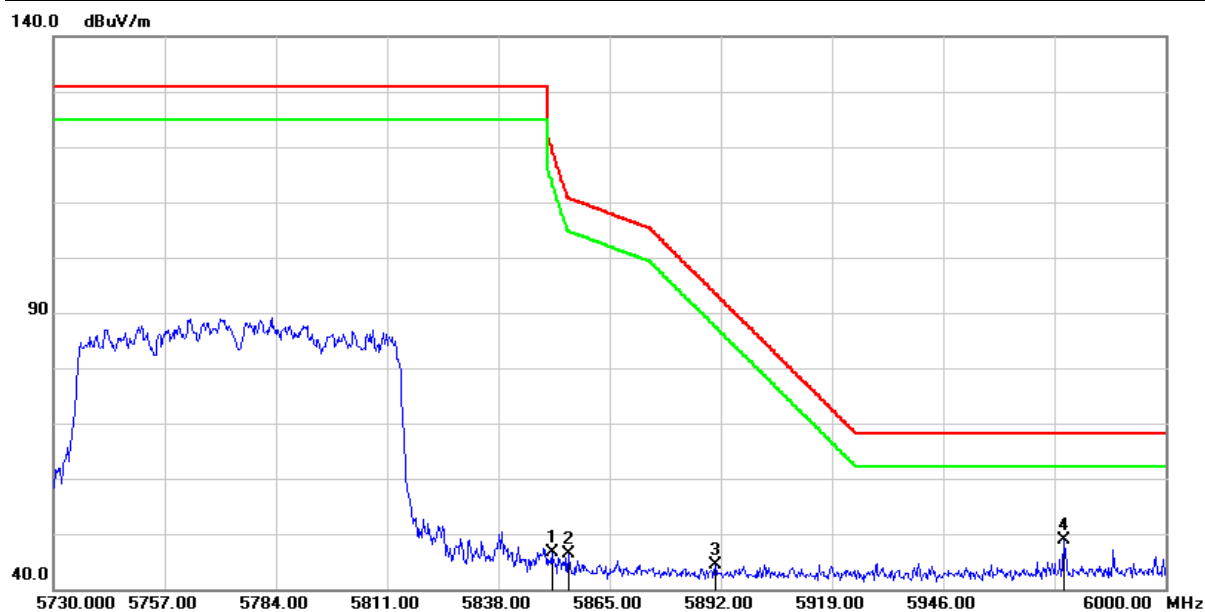

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.960	42.98	3.70	46.68	120.01	-73.33	peak
2	5855.010	42.67	3.72	46.39	110.80	-64.41	peak
3	5890.650	40.40	3.97	44.37	93.62	-49.25	peak
4	5975.160	44.65	4.19	48.84	68.20	-19.36	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/02
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5046.970	49.93	2.74	52.67	74.00	-21.33	peak
2	5046.970	39.89	2.74	42.63	54.00	-11.37	AVG
3	5150.000	43.42	3.14	46.56	74.00	-27.44	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/02
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

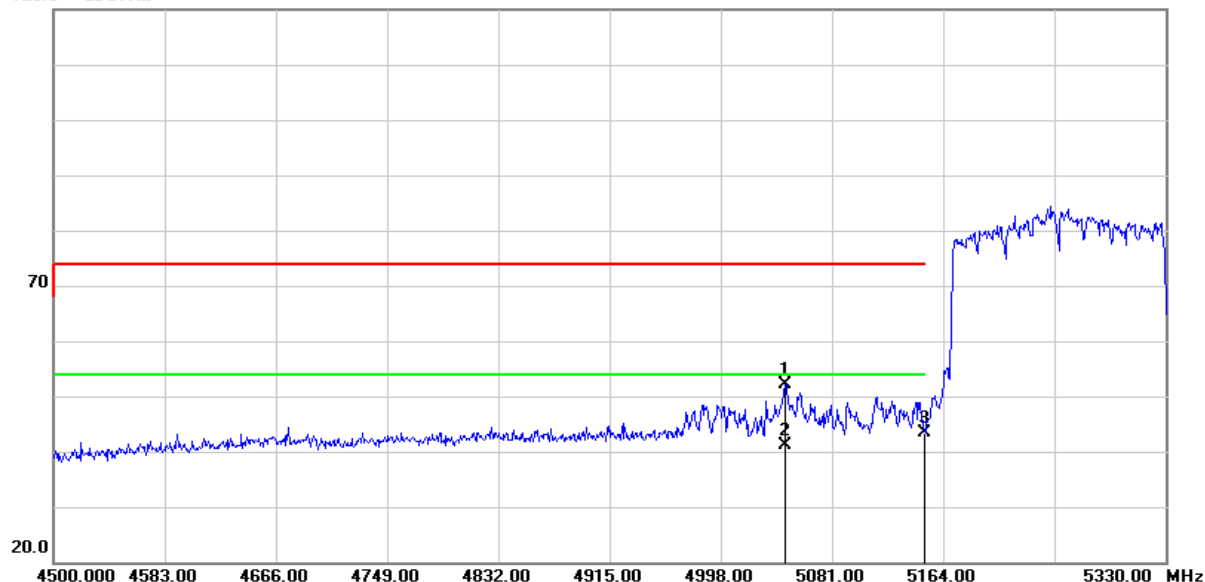


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5046.140	49.34	2.74	52.08	74.00	-21.92	peak
2	5046.140	38.50	2.74	41.24	54.00	-12.76	AVG
3	5150.000	40.21	3.14	43.35	74.00	-30.65	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/02
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

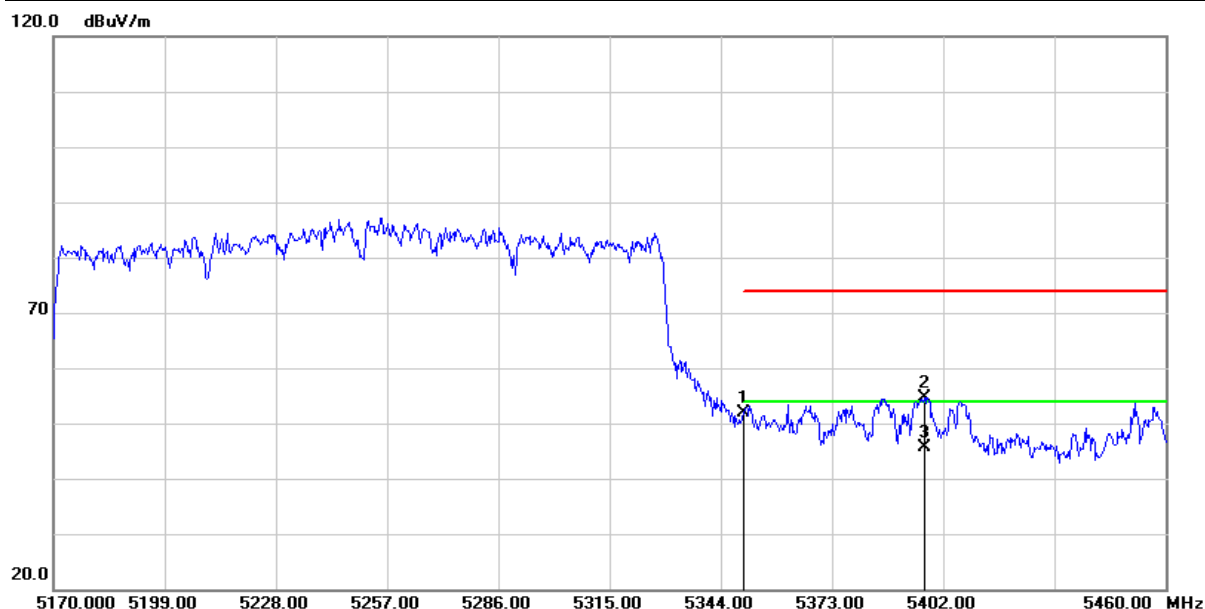


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.54	2.46	52.00	74.00	-22.00	peak
2	5397.070	52.19	2.55	54.74	74.00	-19.26	peak
3	5397.070	43.16	2.55	45.71	54.00	-8.29	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/02
Test Channel :	CH50(5250MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

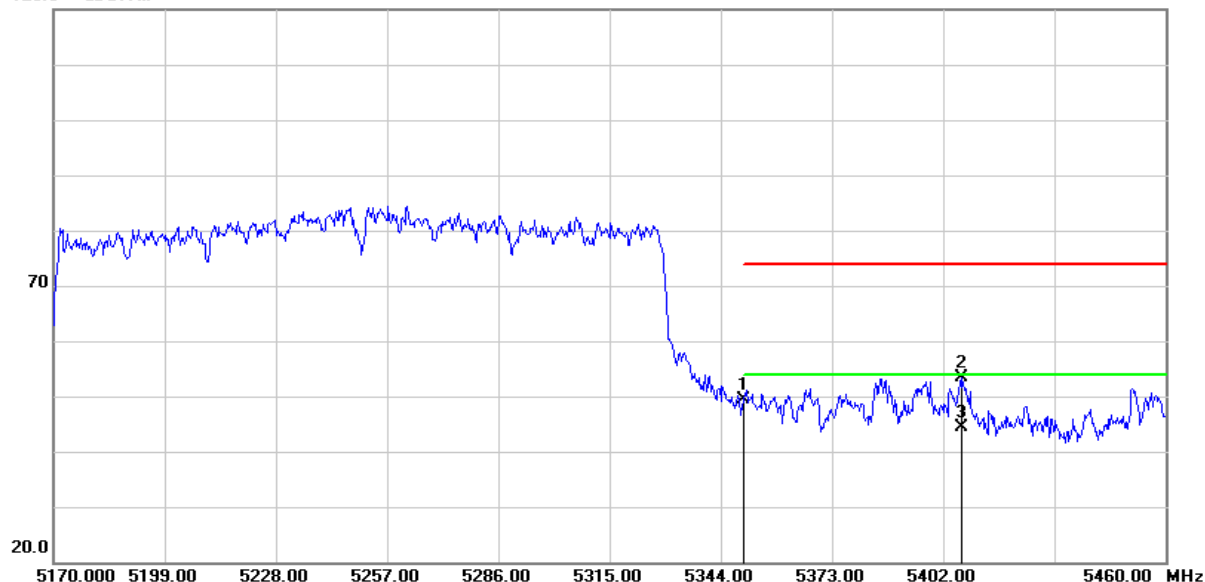


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.02	2.46	49.48	74.00	-24.52	peak
2	5406.640	50.72	2.60	53.32	74.00	-20.68	peak
3	5406.640	41.72	2.60	44.32	54.00	-9.68	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/02
Test Channel :	CH114(5570MHz)	Temperature :	21.5 °C
Polarization :	Horizontal	Relative Humidity :	49 %

120.0 dBuV/m

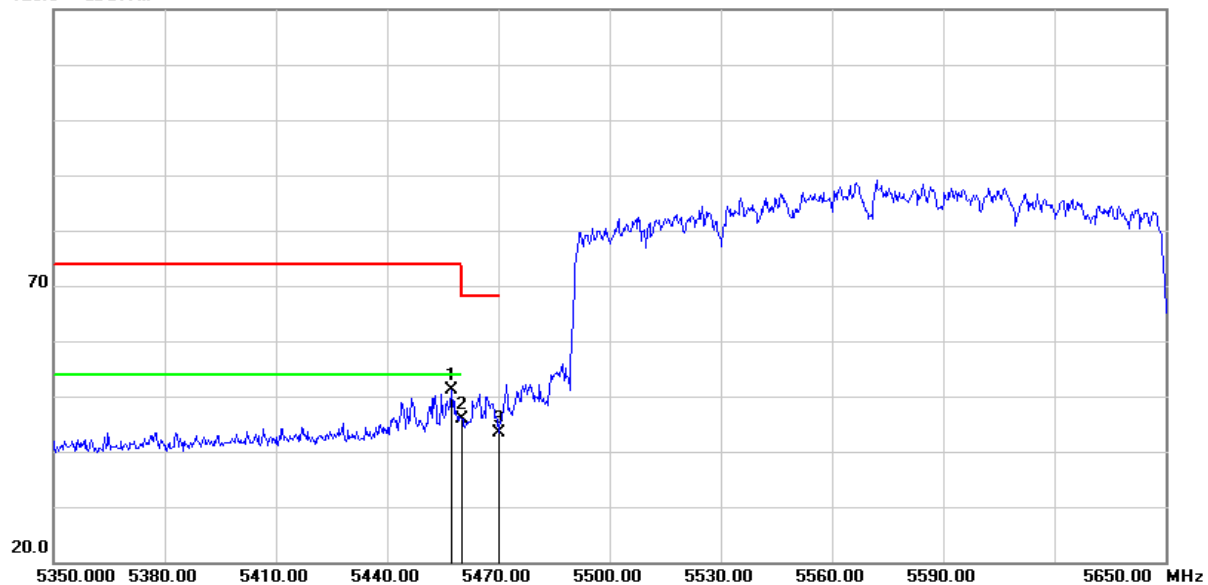


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.400	48.34	2.87	51.21	74.00	-22.79	peak
2	5460.000	43.08	2.87	45.95	74.00	-28.05	peak
3	5470.000	40.58	2.90	43.48	68.20	-24.72	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/02
Test Channel :	CH114(5570MHz)	Temperature :	21.5 °C
Polarization :	Vertical	Relative Humidity :	49 %

120.0 dBuV/m

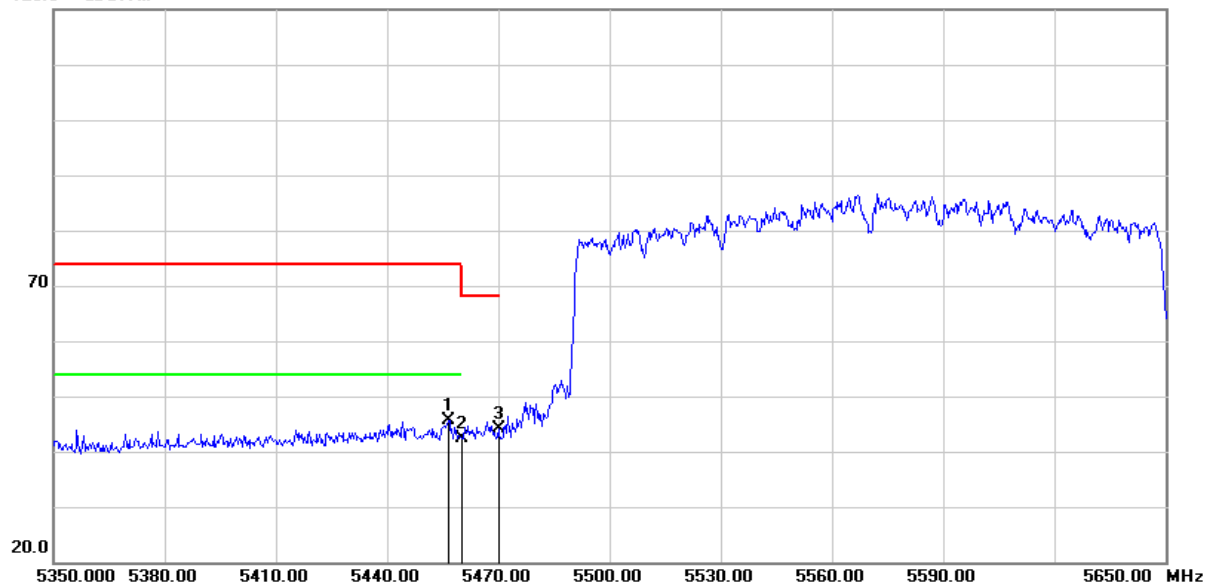

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.500	42.87	2.87	45.74	74.00	-28.26	peak
2	5460.000	39.57	2.87	42.44	74.00	-31.56	peak
3	5470.000	41.31	2.90	44.21	68.20	-23.99	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.


2.5.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 40GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency				
RF	802.11a /ac-VHT20 / ax-HE20	802.11ac-VHT40 / ax-HE40	802.11ac-VHT80 / ax-HE80	802.11ac-VHT160 / ax-HE160
Tx	CH36 (5180MHz)	CH38 (5190MHz)	CH42 (5210MHz)	CH50 (5250MHz)
	CH40 (5200MHz)	CH46 (5230MHz)	CH58 (5290MHz)	CH114 (5570MHz)
	CH48 (5240MHz)	CH54 (5270MHz)	CH106 (5530MHz)	
	CH52 (5260MHz)	CH62 (5310MHz)	CH122 (5610MHz)	
	CH60 (5300MHz)	CH102 (5510MHz)	CH155 (5775MHz)	
	CH64 (5320MHz)	CH110 (5550MHz)		
	CH100 (5500MHz)	CH134 (5670MHz)		
	CH116 (5580MHz)	CH151 (5755MHz)		
	CH140 (5700MHz)	CH159 (5795MHz)		
	CH149 (5745MHz)			
	CH157 (5785MHz)			
	CH165 (5825MHz)			

Above 1GHz Data

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH36(5180MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

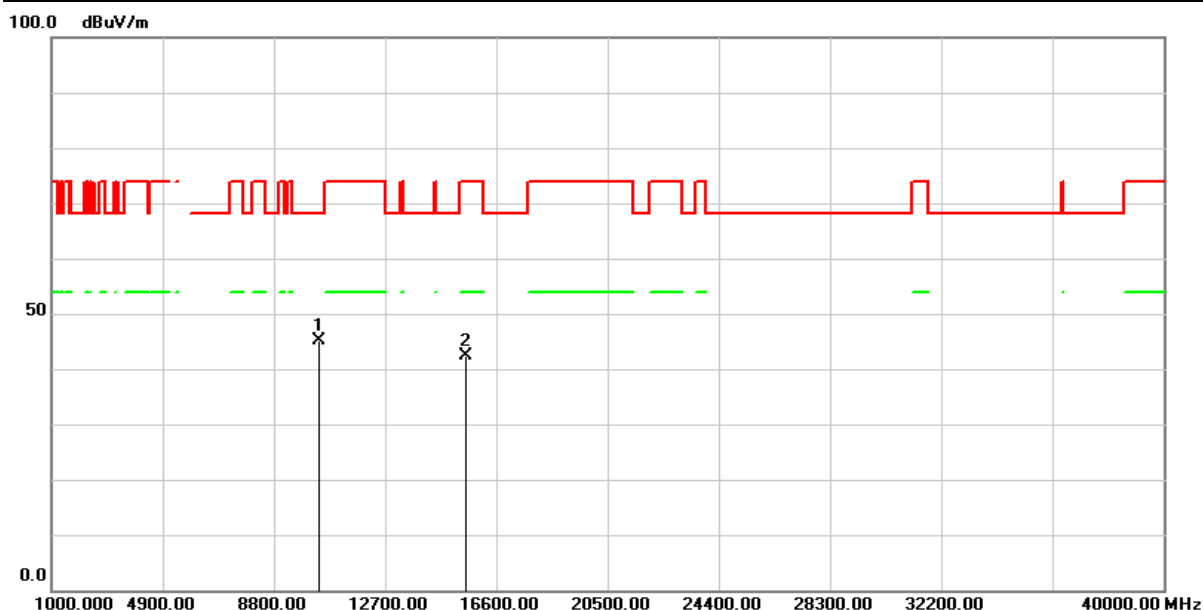


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	55.09	-10.05	45.04	68.20	-23.16	peak
2	15540.000	50.07	-7.80	42.27	74.00	-31.73	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH36(5180MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

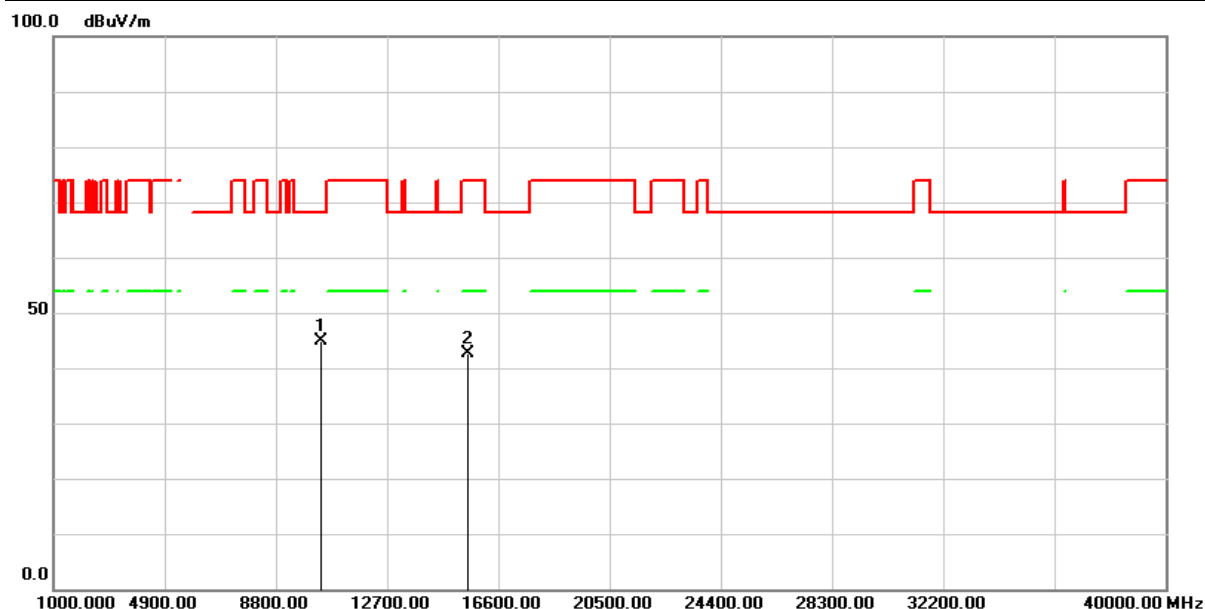


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	54.93	-10.05	44.88	68.20	-23.32	peak
2	15540.000	50.50	-7.80	42.70	74.00	-31.30	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH40(5200MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

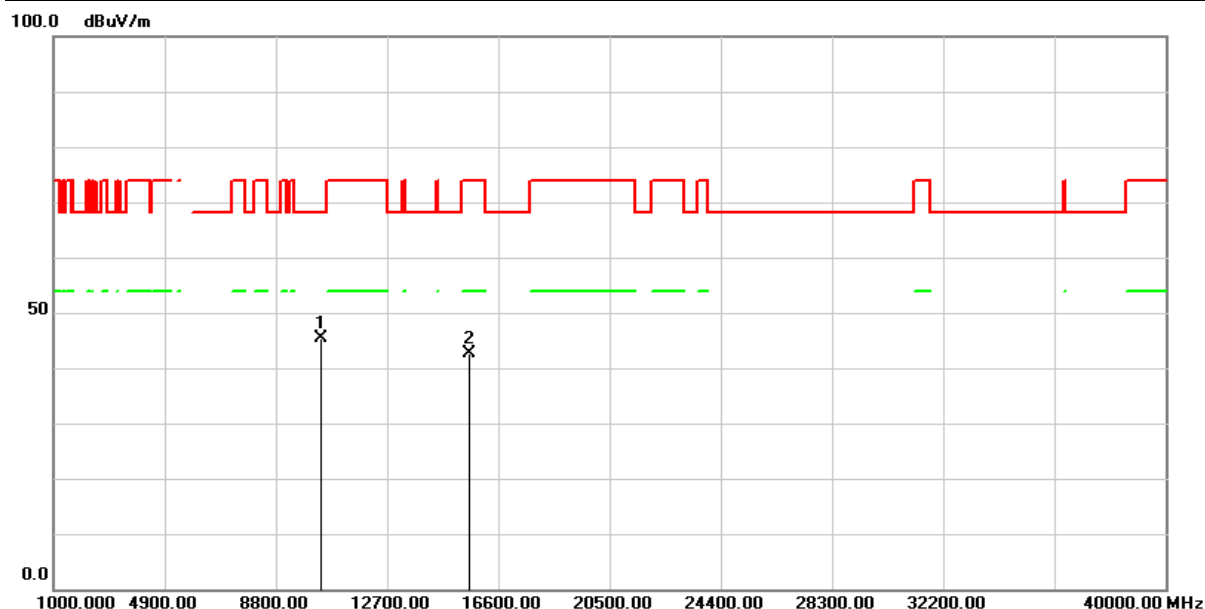


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	55.43	-9.95	45.48	68.20	-22.72	peak
2	15600.000	50.49	-7.79	42.70	74.00	-31.30	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH40(5200MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

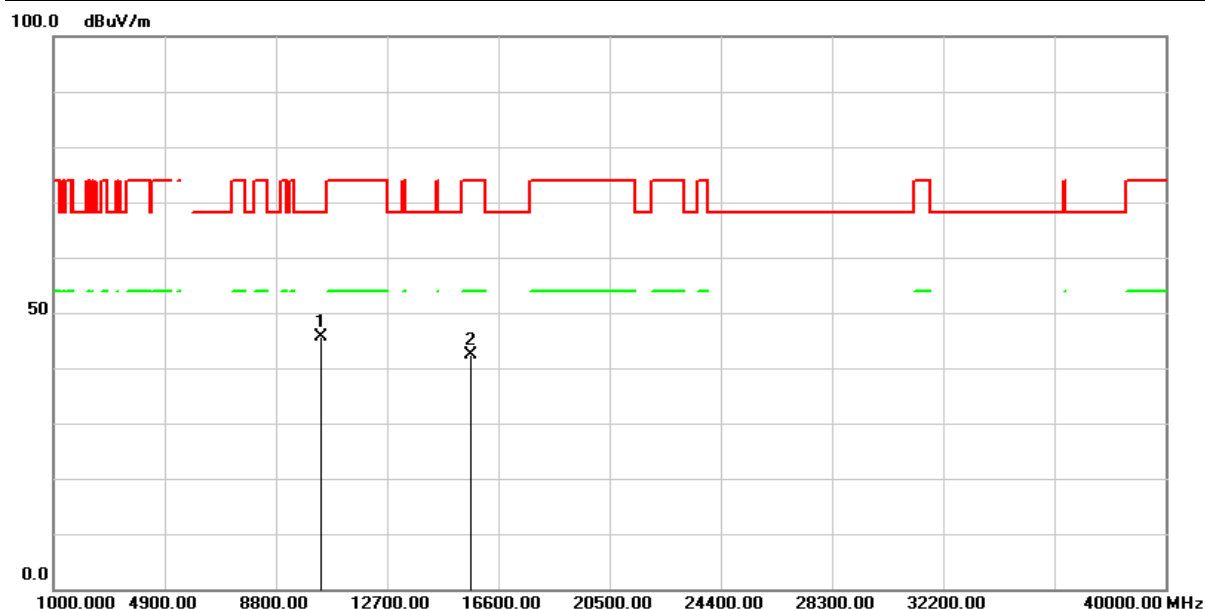


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	55.52	-9.95	45.57	68.20	-22.63	peak
2	15600.000	50.27	-7.79	42.48	74.00	-31.52	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH48(5240MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

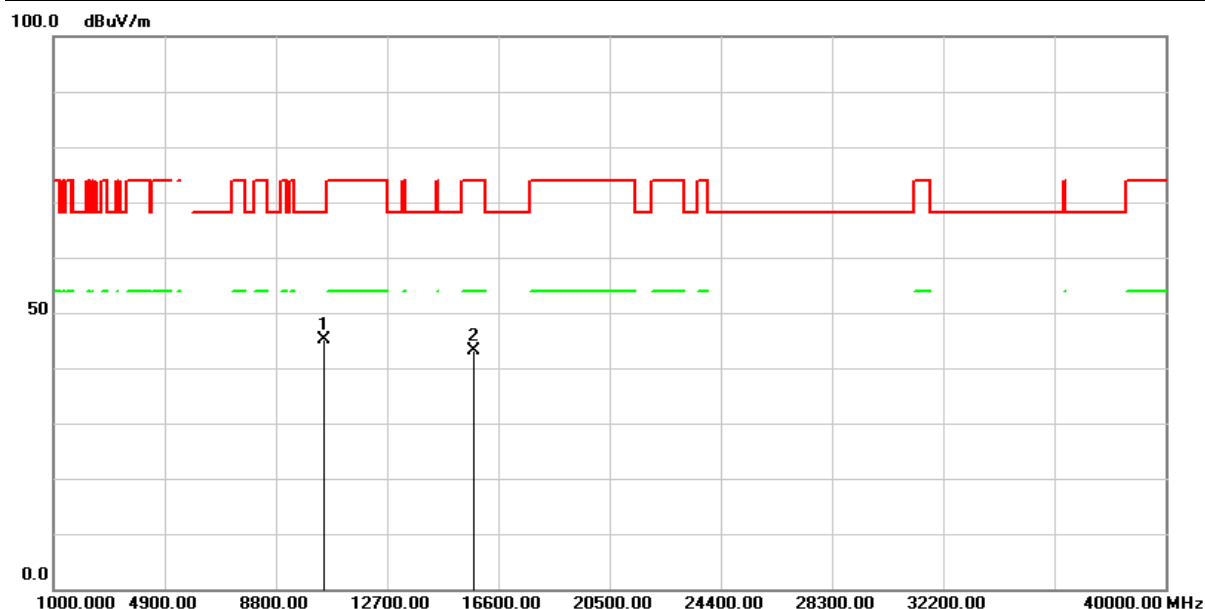


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	55.18	-9.97	45.21	68.20	-22.99	peak
2	15720.000	50.78	-7.62	43.16	74.00	-30.84	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH48(5240MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

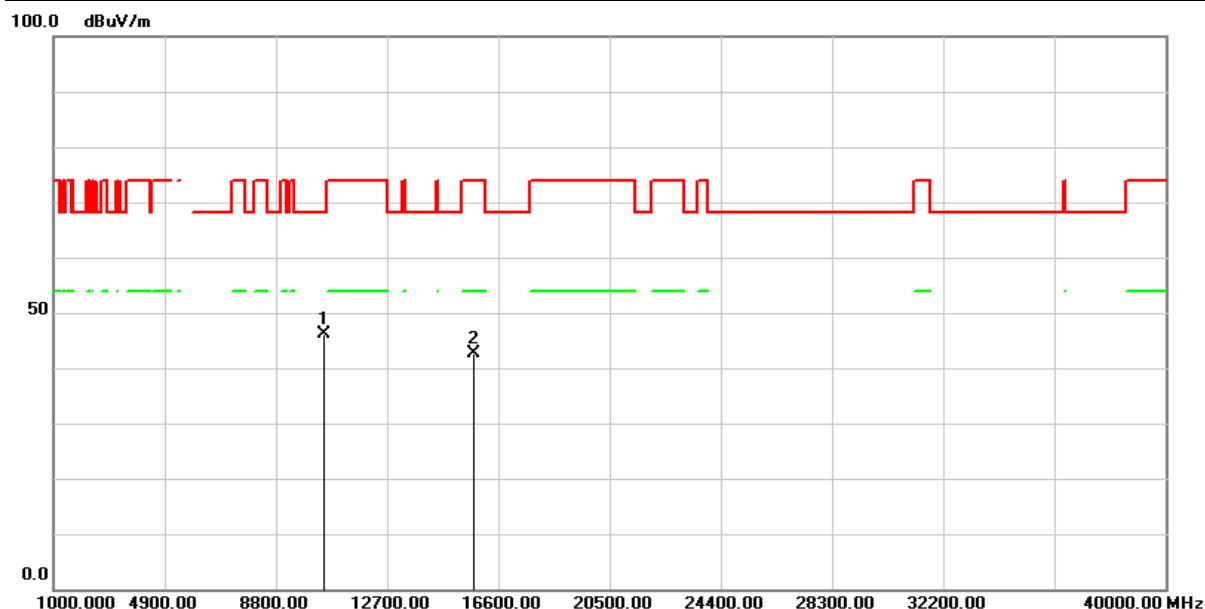


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	56.10	-9.97	46.13	68.20	-22.07	peak
2	15720.000	50.21	-7.62	42.59	74.00	-31.41	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH52(5260MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

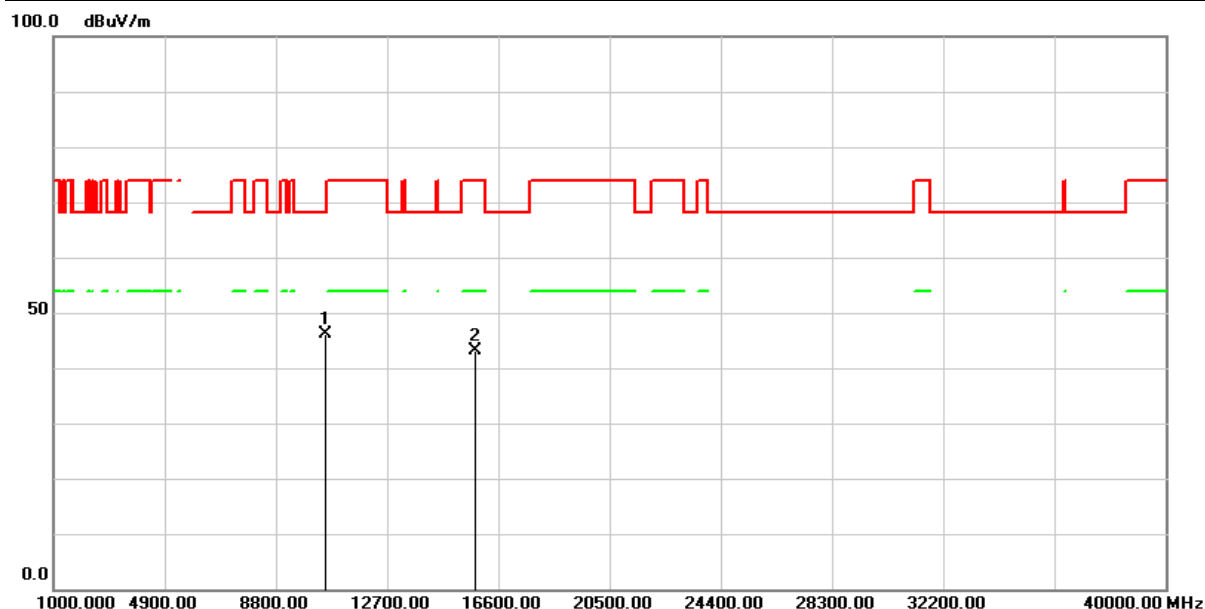


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	56.26	-10.01	46.25	68.20	-21.95	peak
2	15780.000	50.58	-7.51	43.07	74.00	-30.93	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH52(5260MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

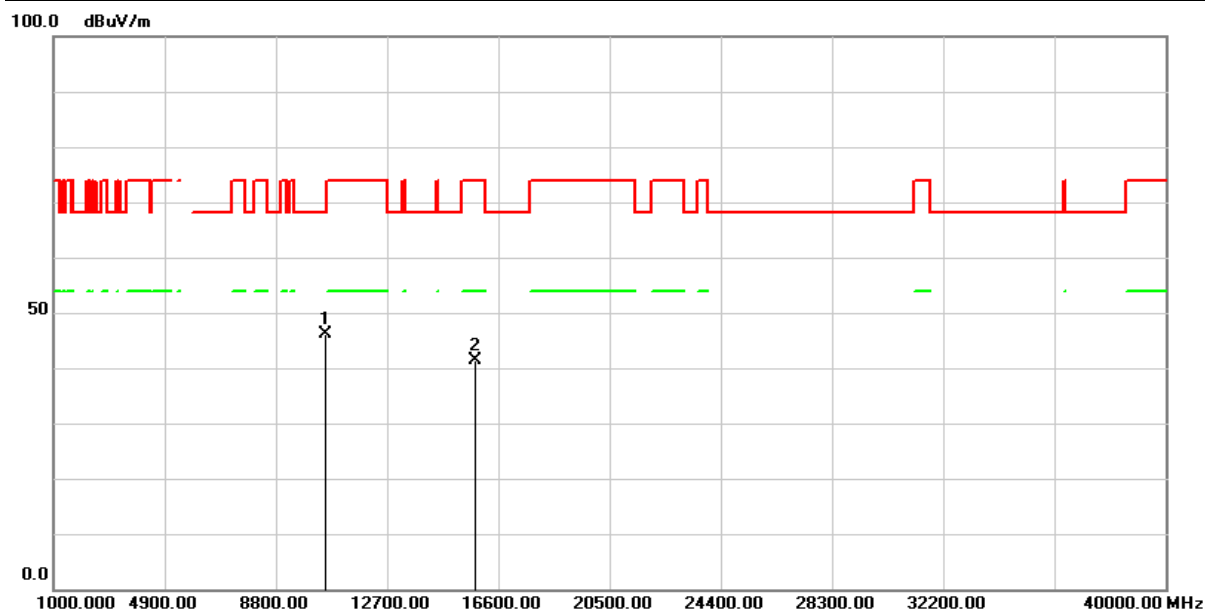


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	56.16	-10.01	46.15	68.20	-22.05	peak
2	15780.000	49.00	-7.51	41.49	74.00	-32.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH60(5300MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

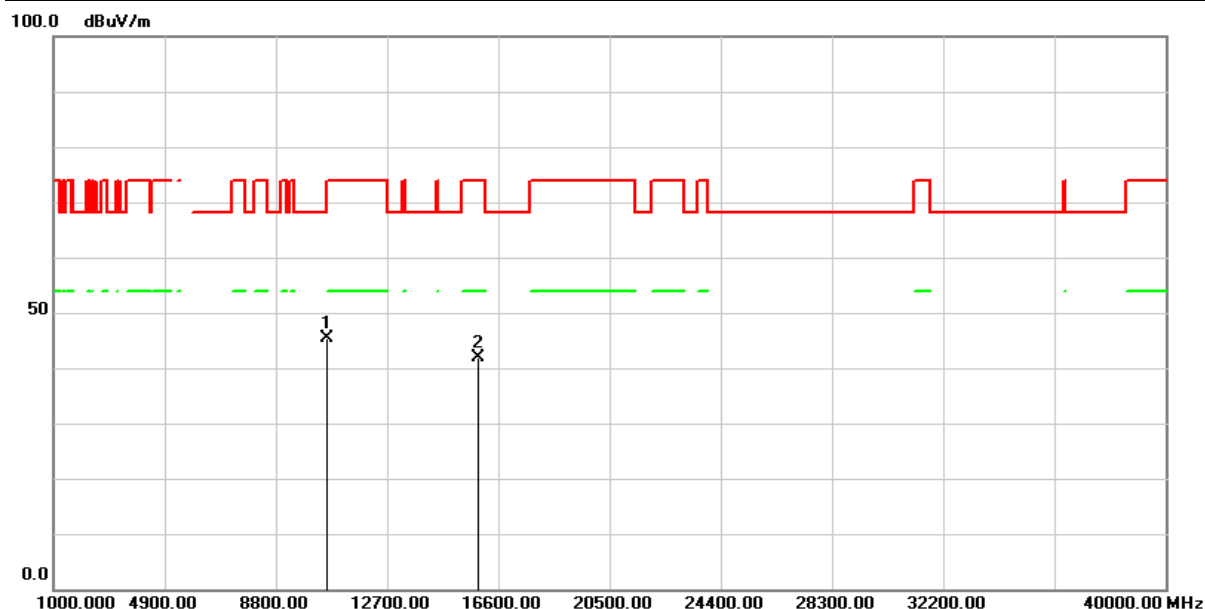


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	55.36	-9.94	45.42	68.20	-22.78	peak
2	15900.000	49.12	-7.20	41.92	74.00	-32.08	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH60(5300MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

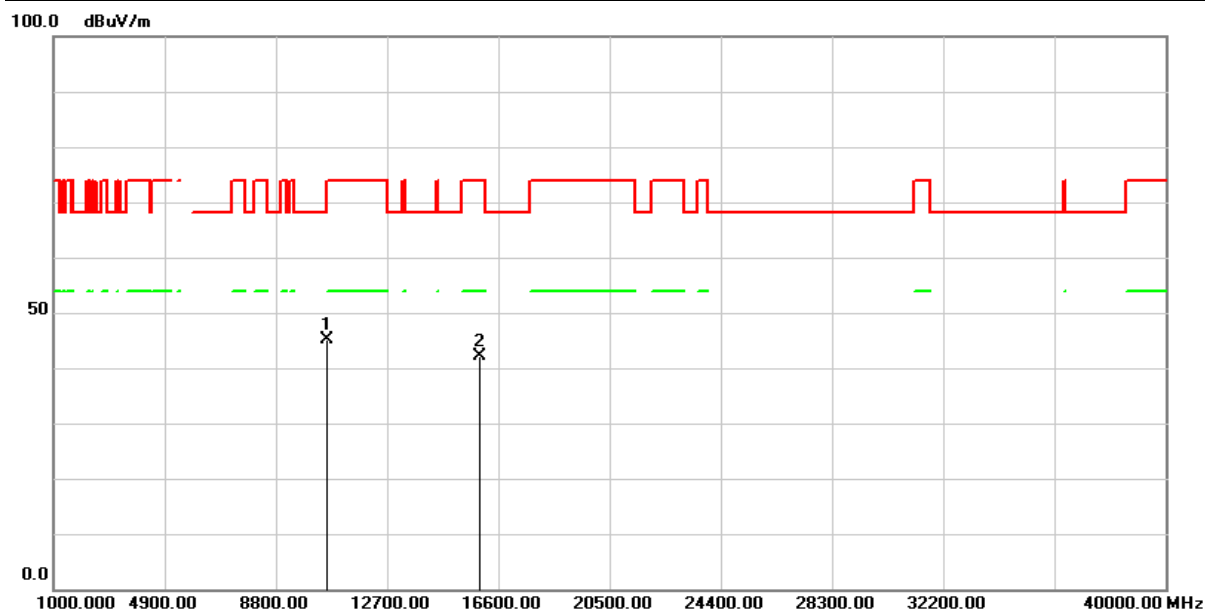


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	54.98	-9.94	45.04	68.20	-23.16	peak
2	15900.000	49.26	-7.20	42.06	74.00	-31.94	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH64(5320MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

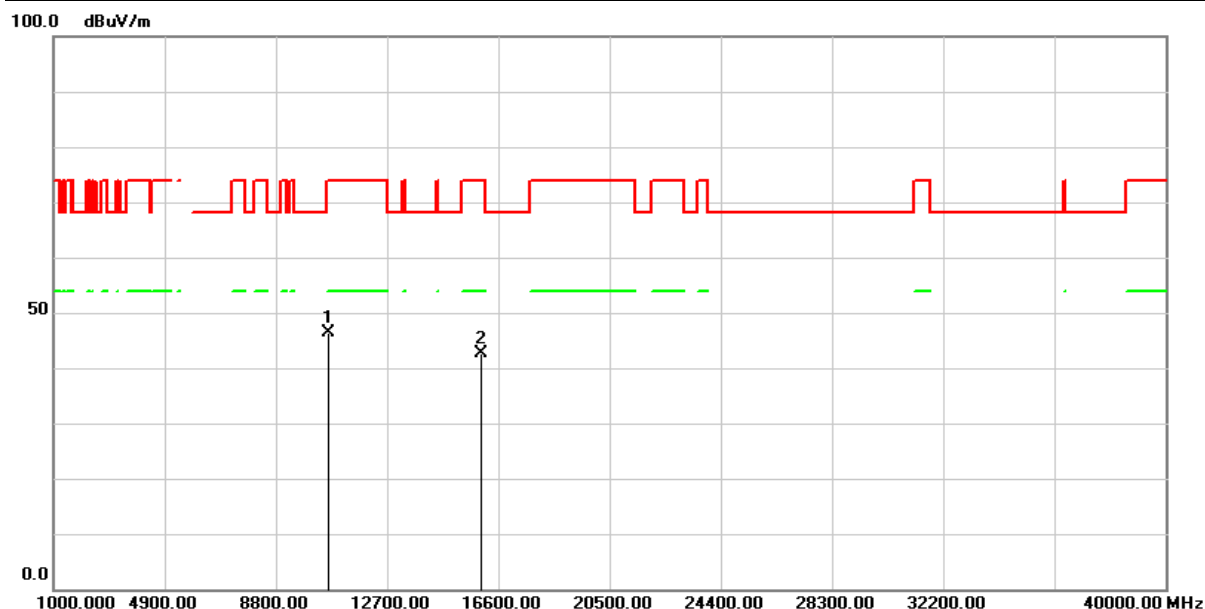


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	56.32	-9.87	46.45	74.00	-27.55	peak
2	15960.000	49.81	-7.29	42.52	74.00	-31.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH64(5320MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

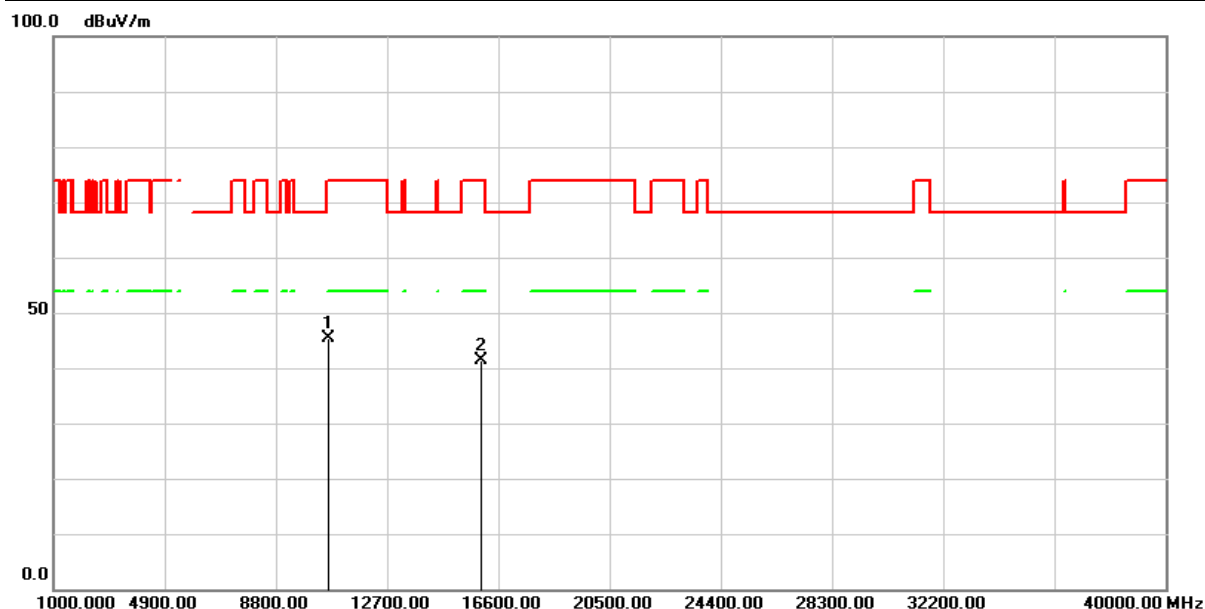


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	55.30	-9.87	45.43	74.00	-28.57	peak
2	15960.000	48.78	-7.29	41.49	74.00	-32.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH100(5500MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

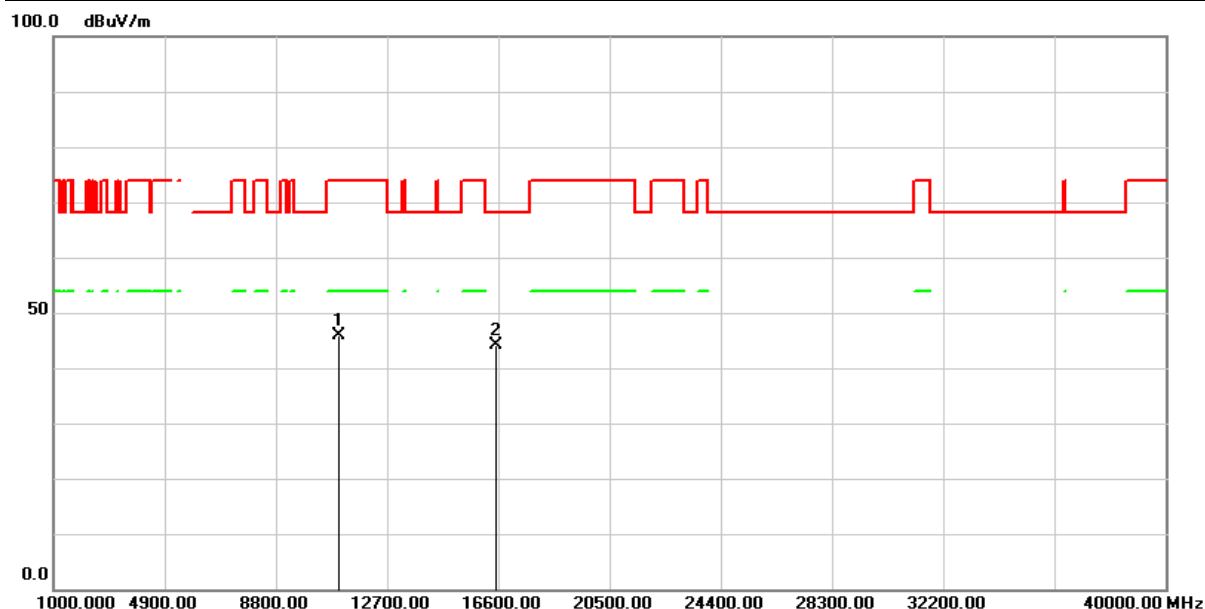


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	55.65	-9.68	45.97	74.00	-28.03	peak
2	16500.000	49.70	-5.66	44.04	68.20	-24.16	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH100(5500MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

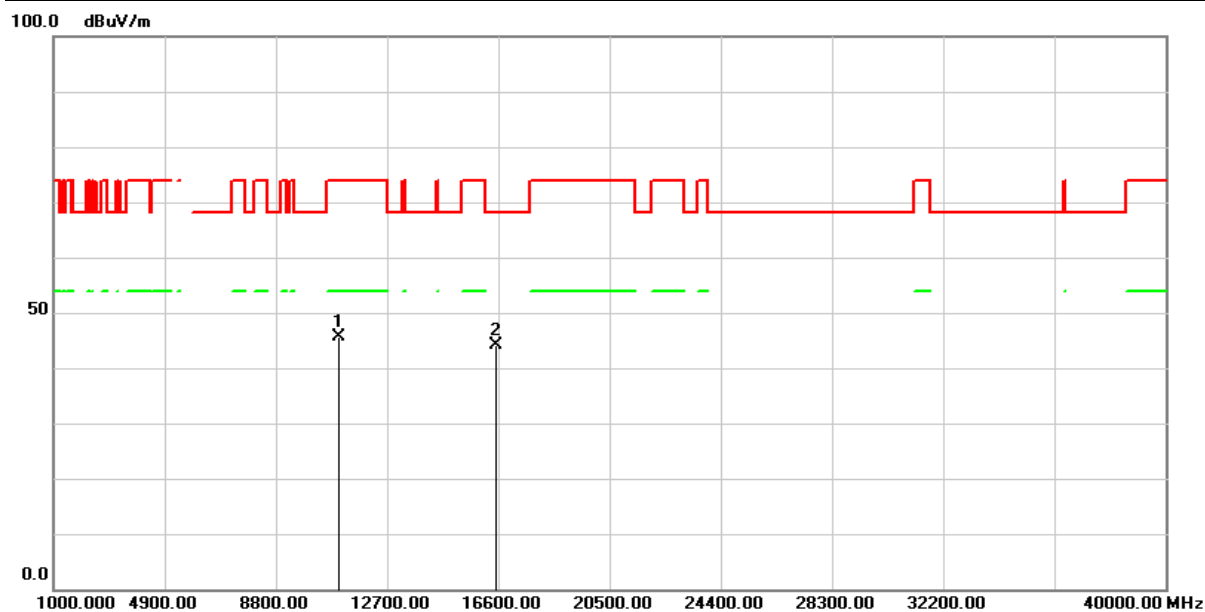


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	55.26	-9.68	45.58	74.00	-28.42	peak
2	16500.000	49.71	-5.66	44.05	68.20	-24.15	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH116(5580MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

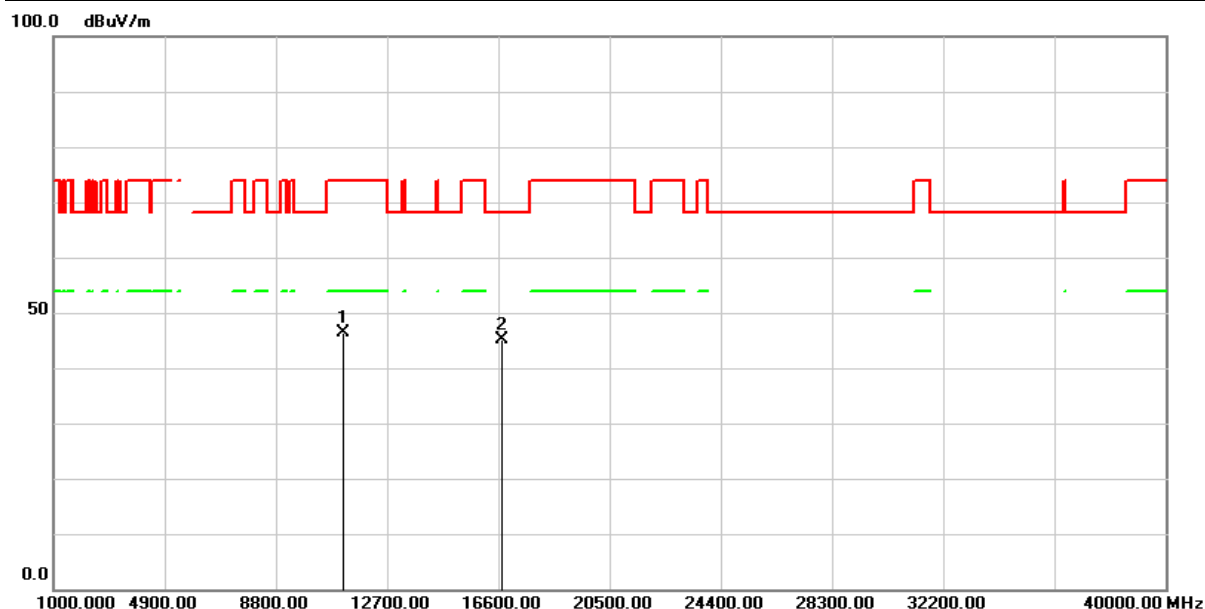


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	56.19	-9.89	46.30	74.00	-27.70	peak
2	16740.000	49.36	-4.31	45.05	68.20	-23.15	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH116(5580MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

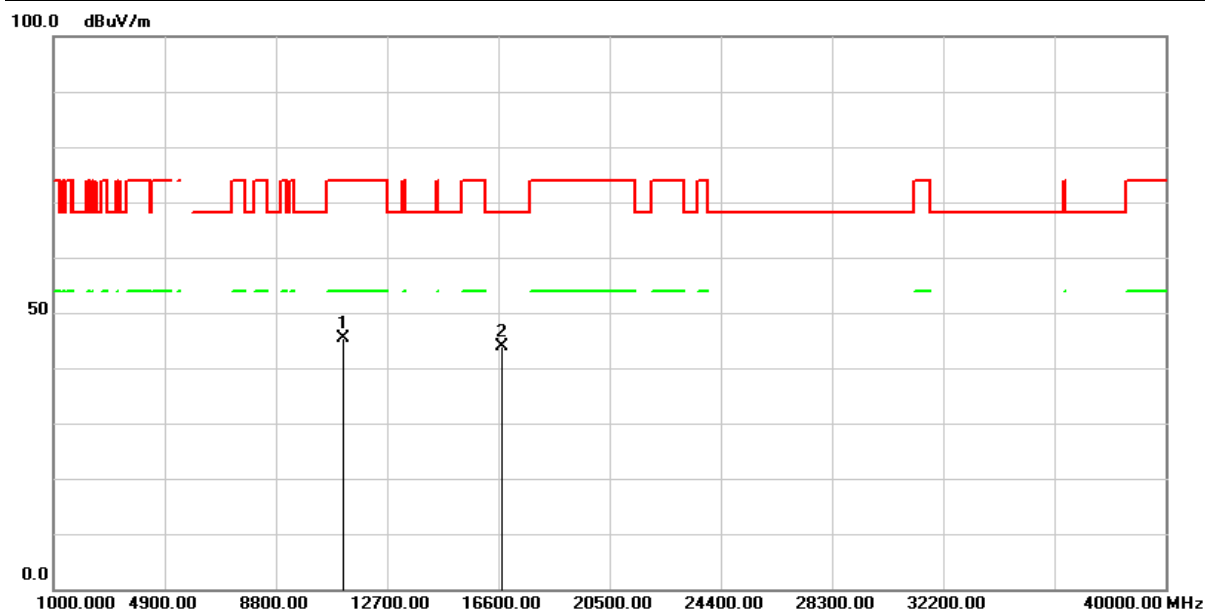


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	55.15	-9.89	45.26	74.00	-28.74	peak
2	16740.000	48.26	-4.31	43.95	68.20	-24.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH140(5700MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

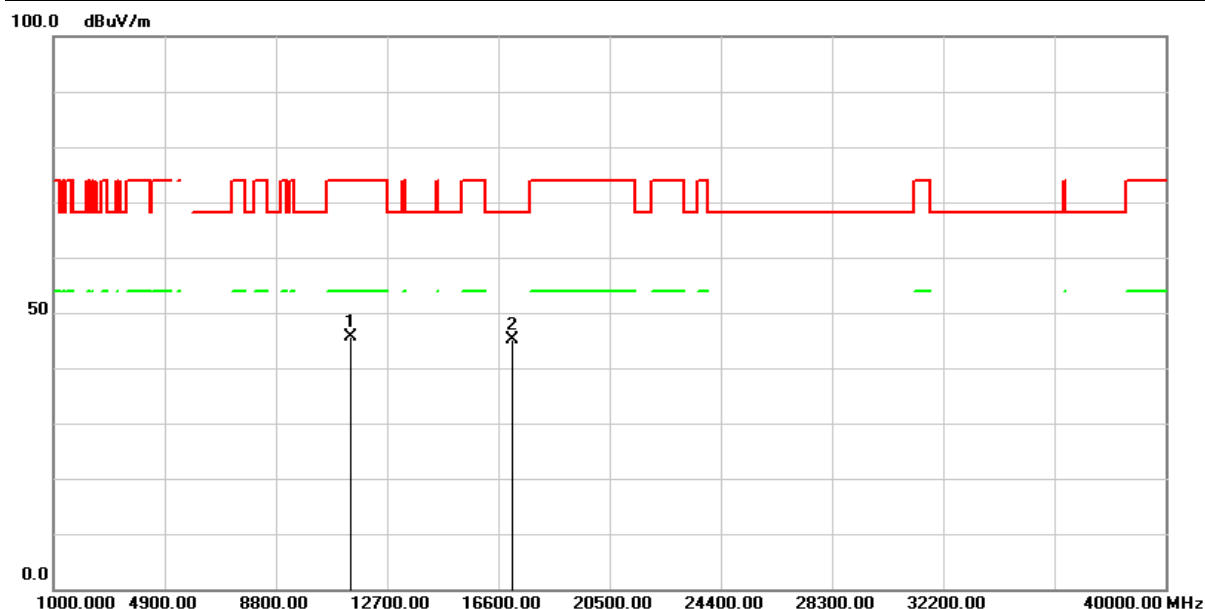


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	55.22	-9.59	45.63	74.00	-28.37	peak
2	17100.000	47.78	-2.67	45.11	68.20	-23.09	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH140(5700MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

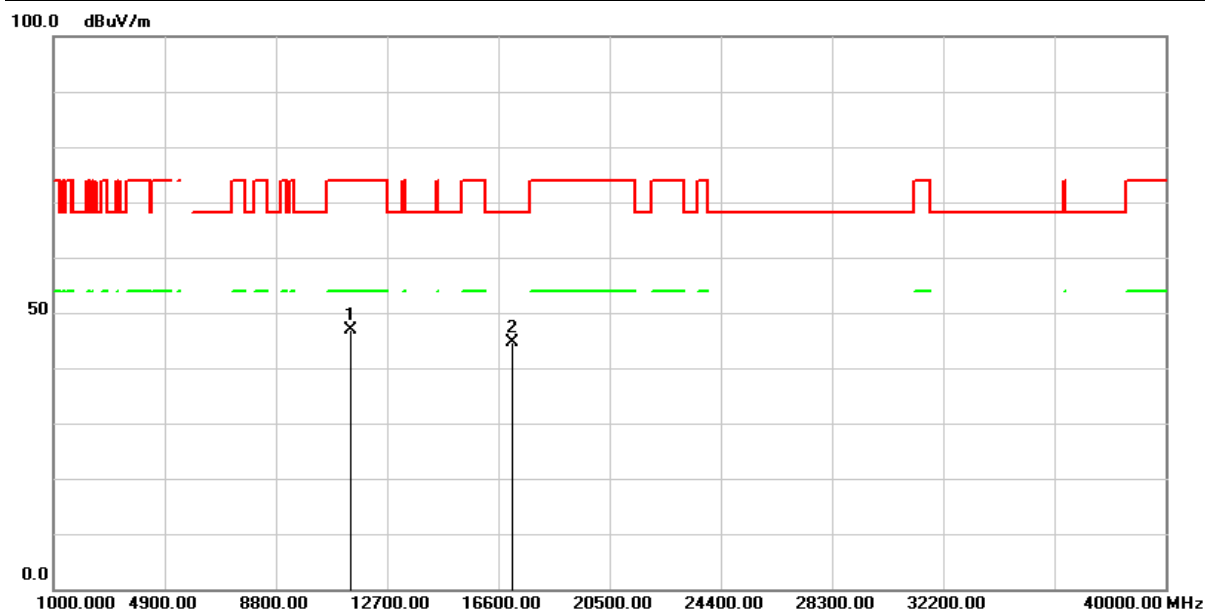


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	56.59	-9.59	47.00	74.00	-27.00	peak
2	17100.000	47.40	-2.67	44.73	68.20	-23.47	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH149(5745MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

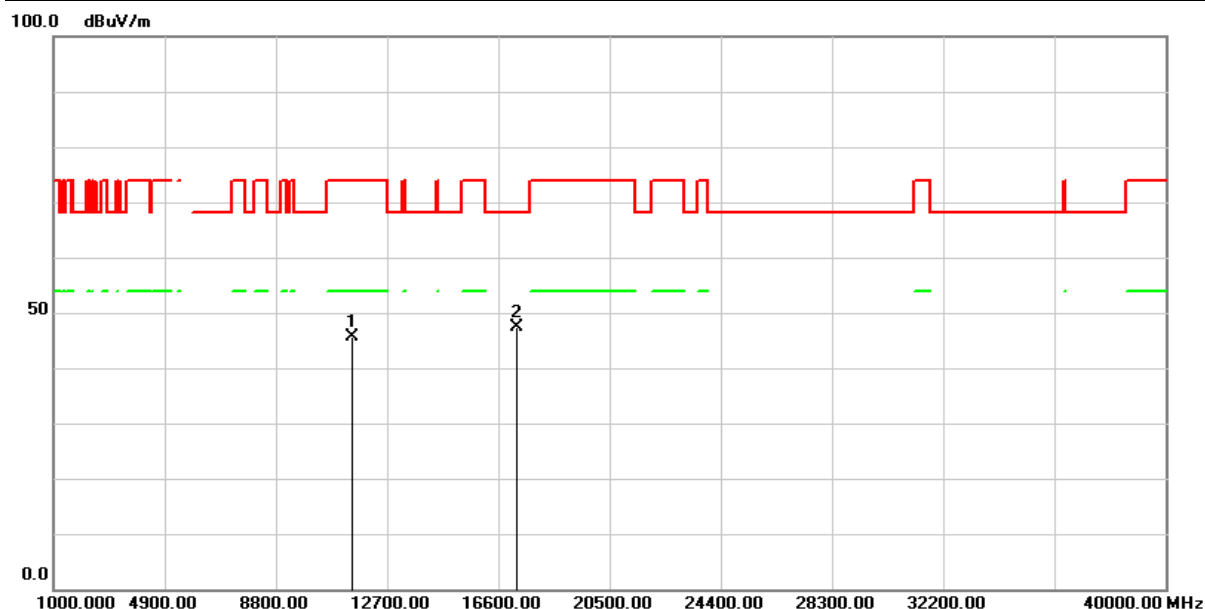


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	55.19	-9.45	45.74	74.00	-28.26	peak
2	17235.000	49.54	-2.24	47.30	68.20	-20.90	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH149(5745MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

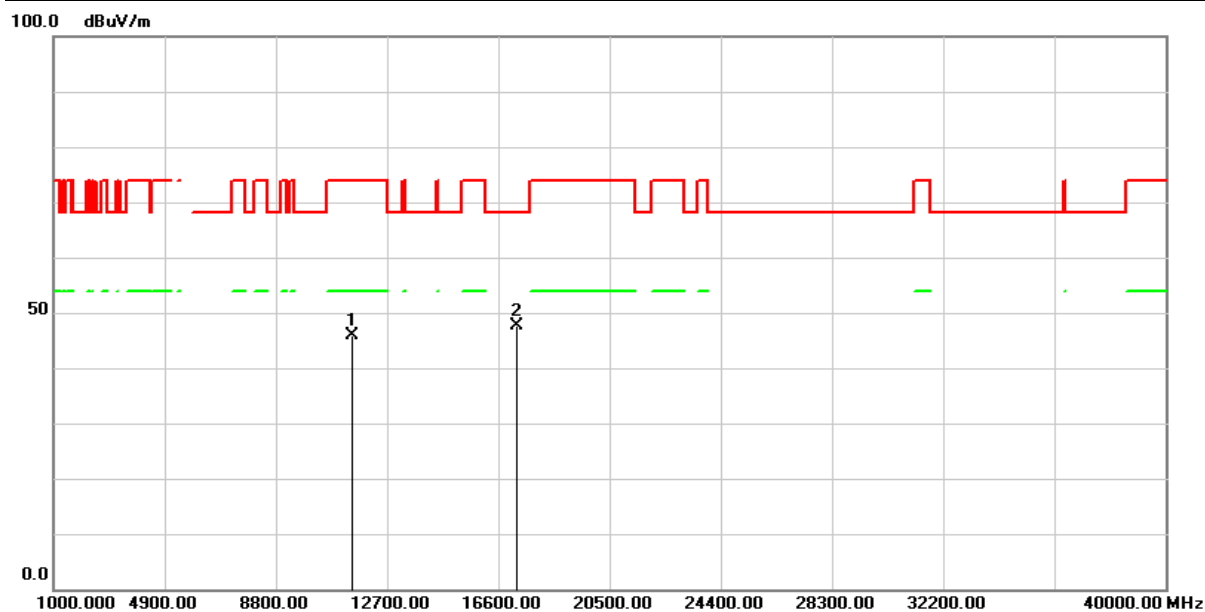


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	55.22	-9.45	45.77	74.00	-28.23	peak
2	17235.000	49.96	-2.24	47.72	68.20	-20.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH157(5785MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

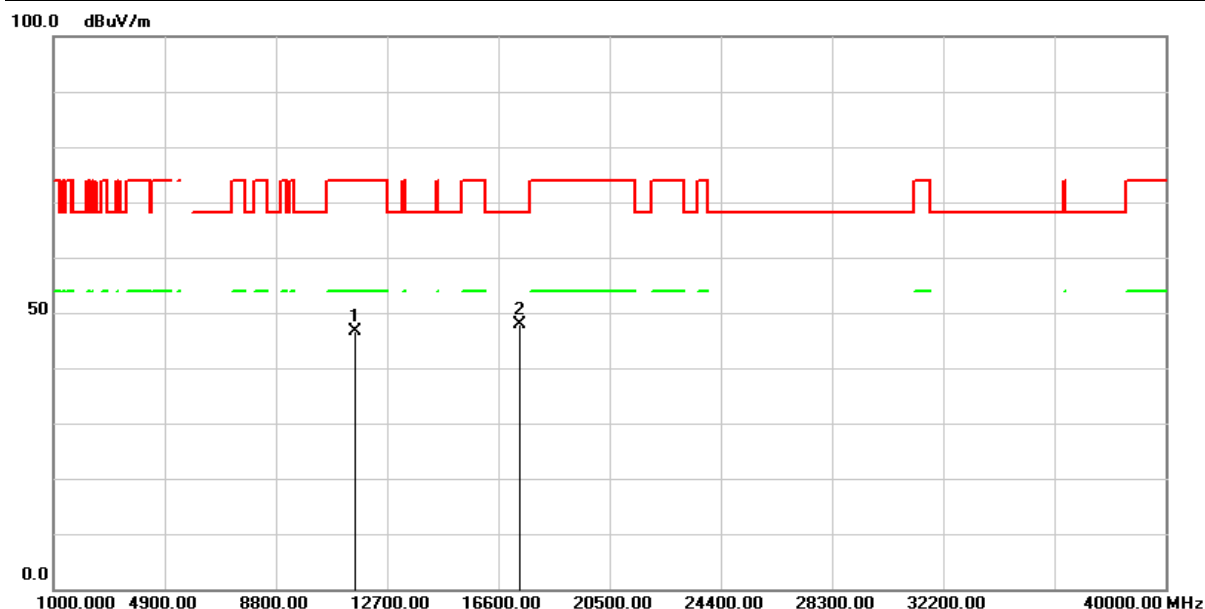


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	56.13	-9.40	46.73	74.00	-27.27	peak
2	17355.000	49.62	-1.65	47.97	68.20	-20.23	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH157(5785MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

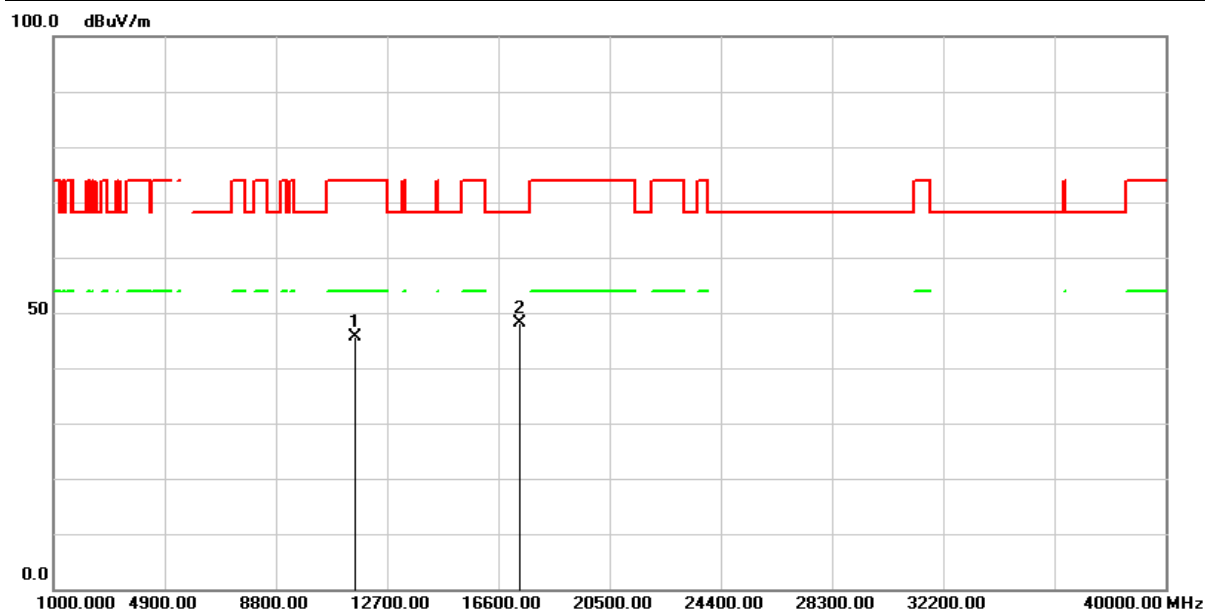


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	55.08	-9.40	45.68	74.00	-28.32	peak
2	17355.000	49.87	-1.65	48.22	68.20	-19.98	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH165(5825MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

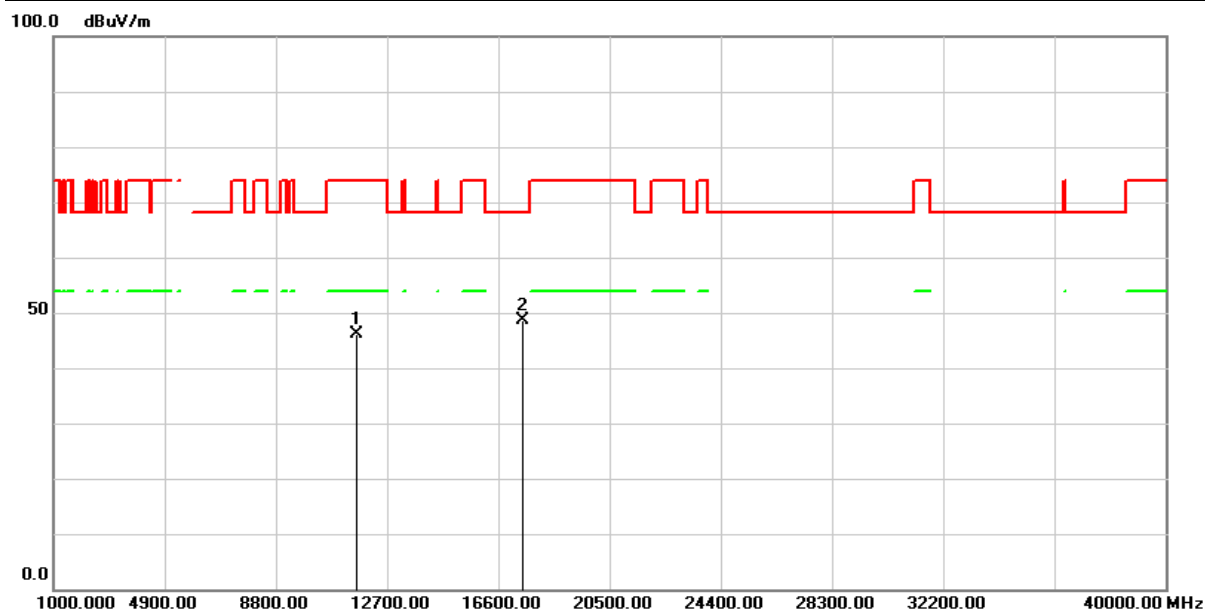


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	55.98	-9.82	46.16	74.00	-27.84	peak
2	17475.000	49.57	-0.85	48.72	68.20	-19.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/05/02
Test Channel :	CH165(5825MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

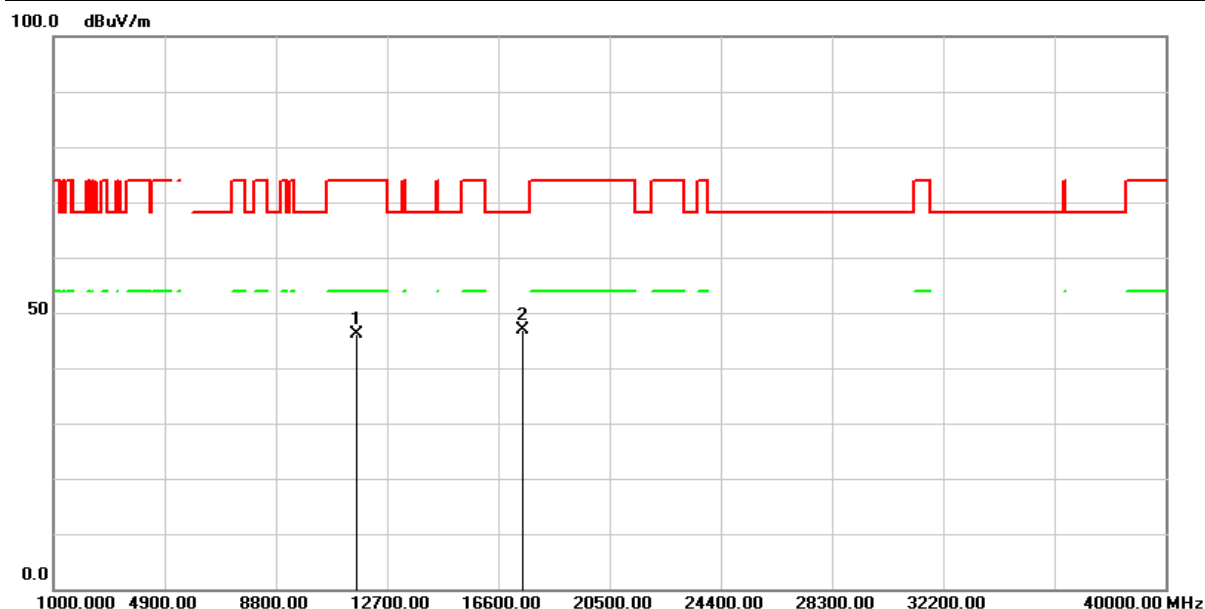


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	55.94	-9.82	46.12	74.00	-27.88	peak
2	17475.000	47.64	-0.85	46.79	68.20	-21.41	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH36(5180MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

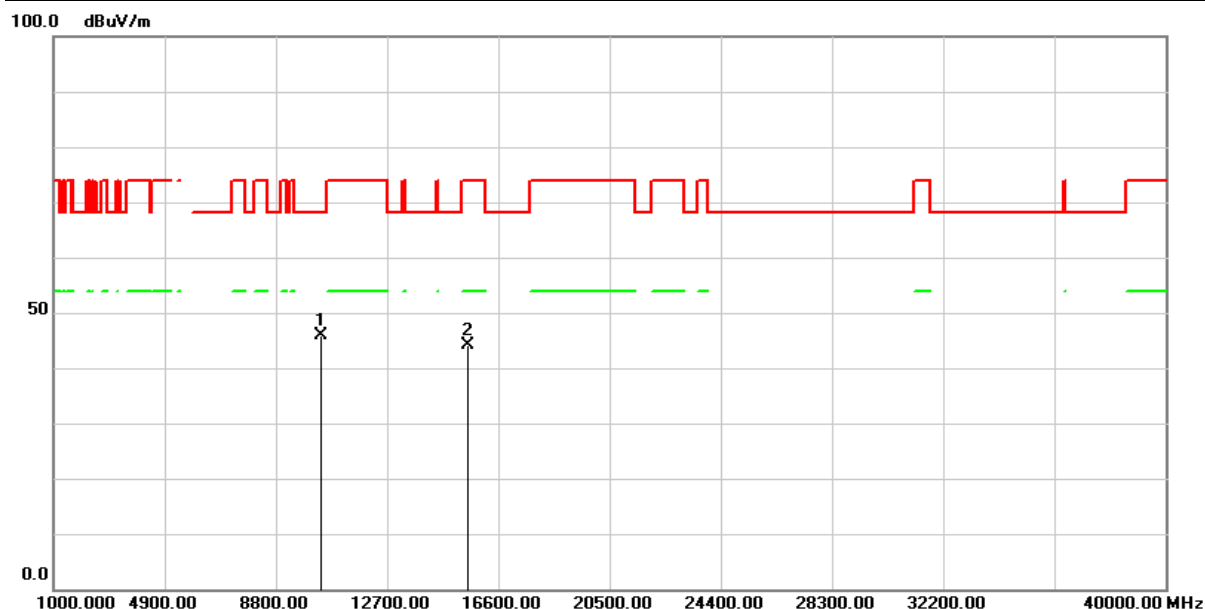


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	55.81	-10.05	45.76	68.20	-22.44	peak
2	15540.000	51.86	-7.80	44.06	74.00	-29.94	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH36(5180MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

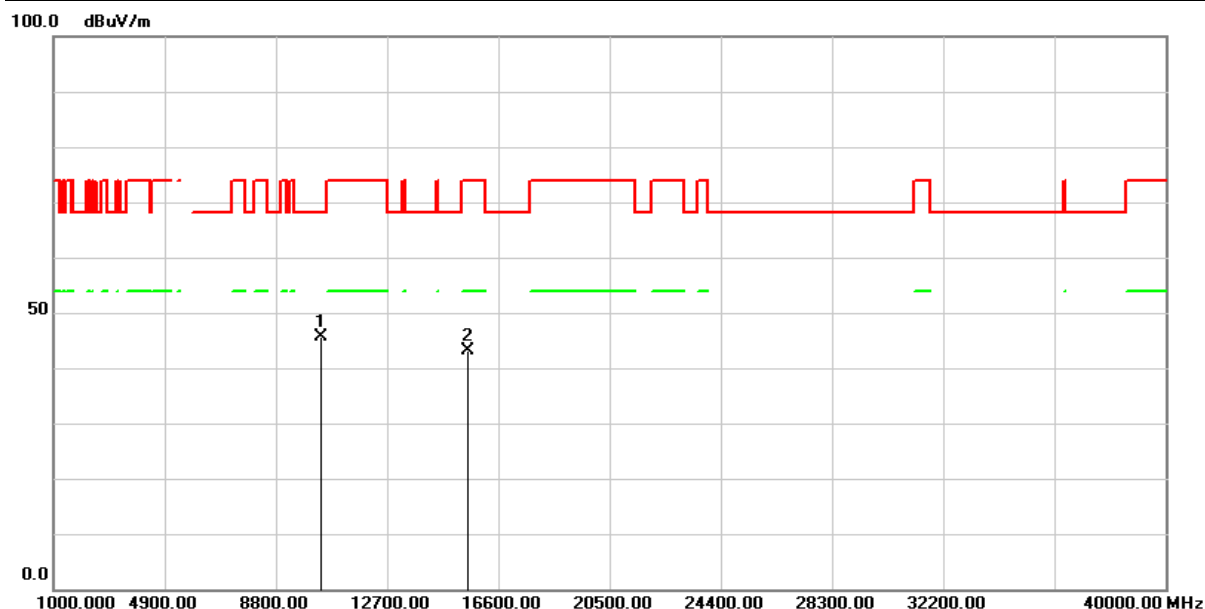


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	55.70	-10.05	45.65	68.20	-22.55	peak
2	15540.000	51.04	-7.80	43.24	74.00	-30.76	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH44(5200MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

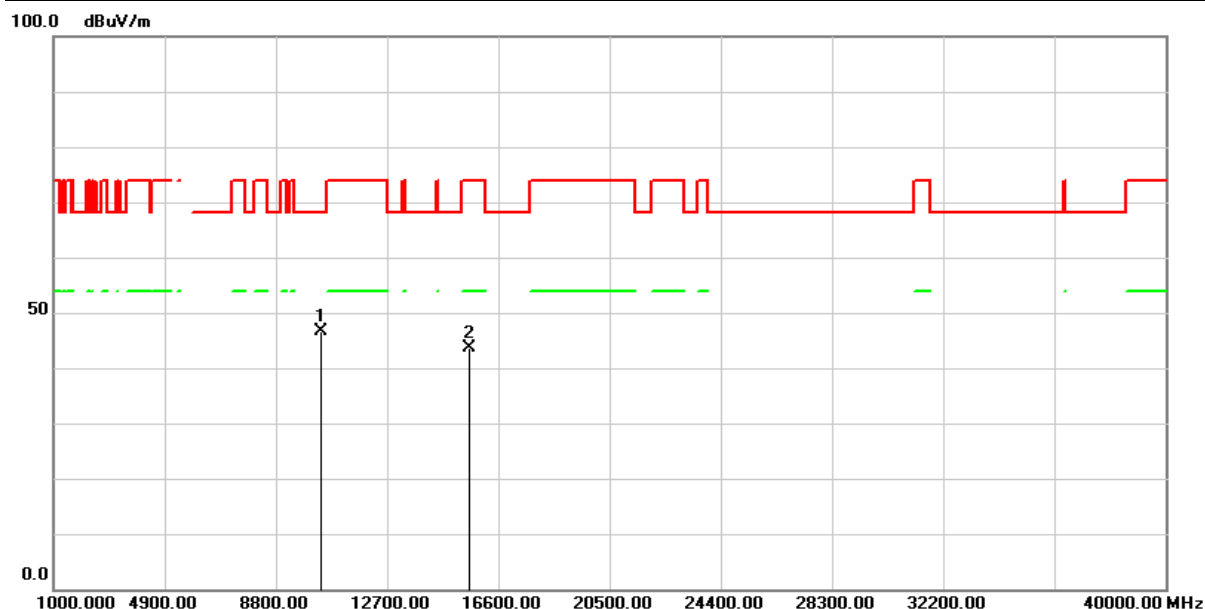


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	56.47	-9.95	46.52	68.20	-21.68	peak
2	15600.000	51.41	-7.79	43.62	74.00	-30.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH44(5200MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

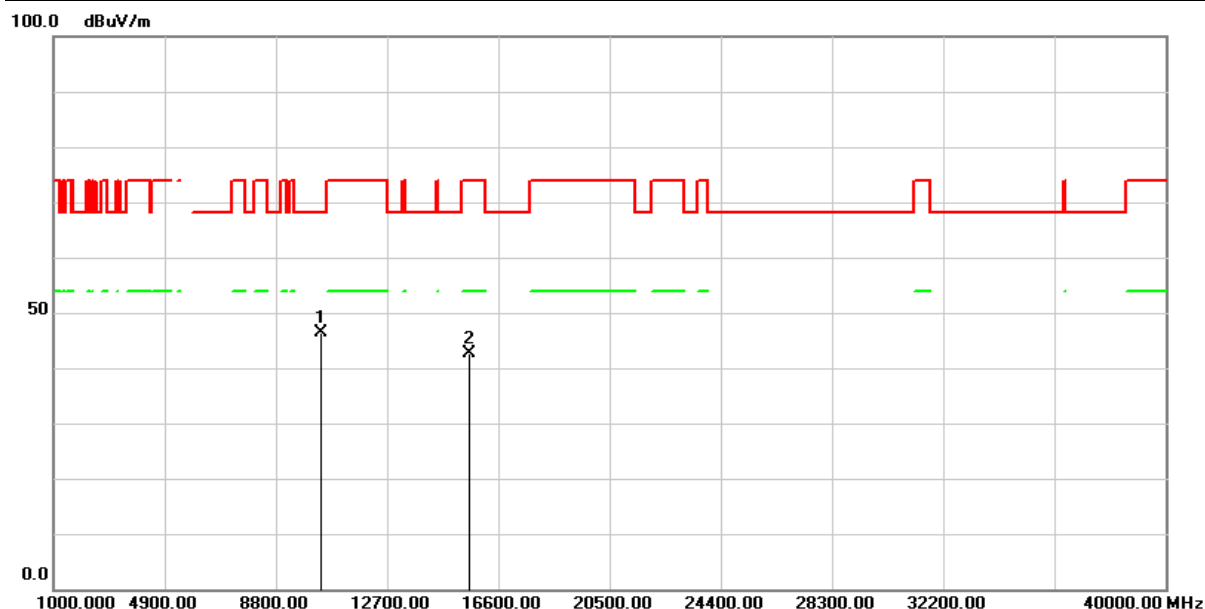


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	56.32	-9.95	46.37	68.20	-21.83	peak
2	15600.000	50.31	-7.79	42.52	74.00	-31.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH48(5240MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

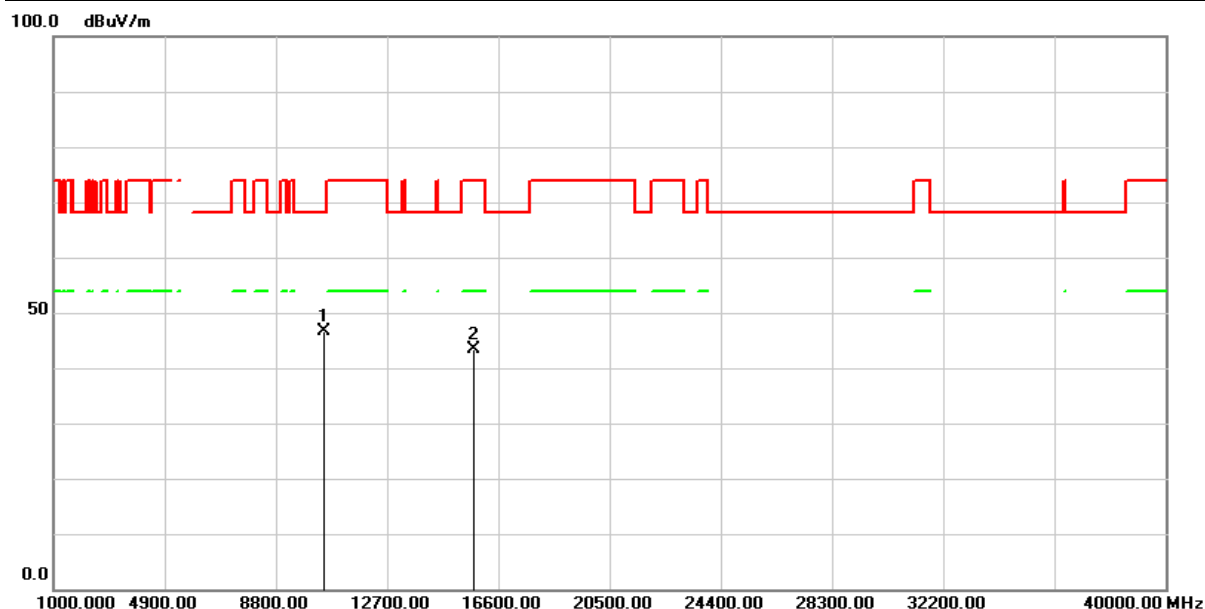


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	56.69	-9.97	46.72	68.20	-21.48	peak
2	15720.000	51.03	-7.62	43.41	74.00	-30.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH48(5240MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

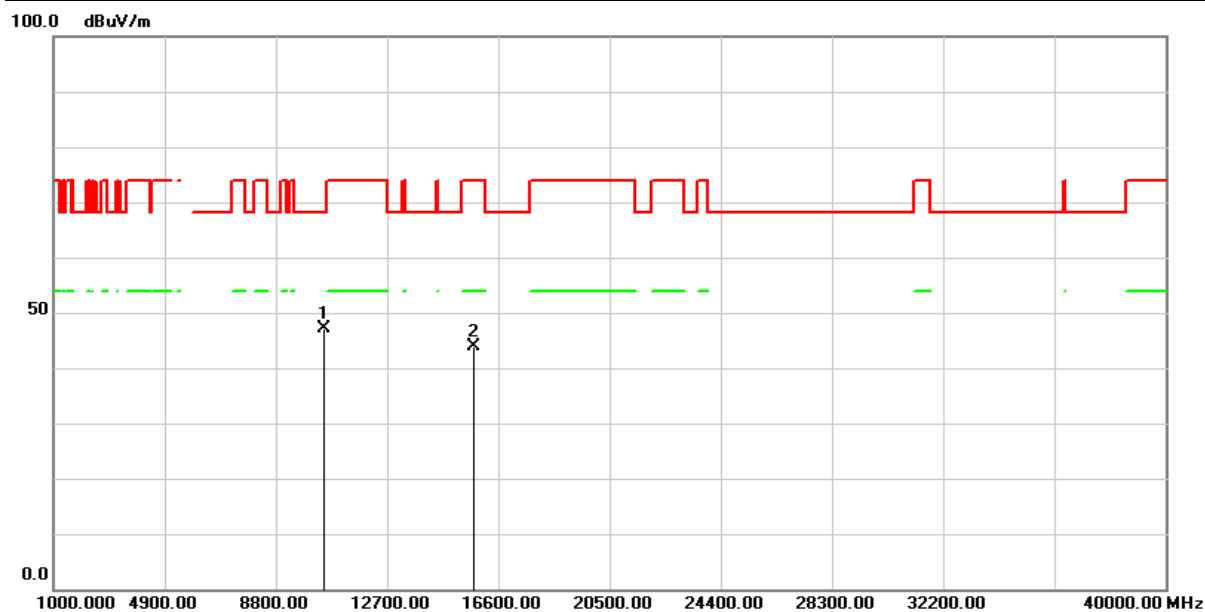


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	57.04	-9.97	47.07	68.20	-21.13	peak
2	15720.000	51.59	-7.62	43.97	74.00	-30.03	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH52(5260MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

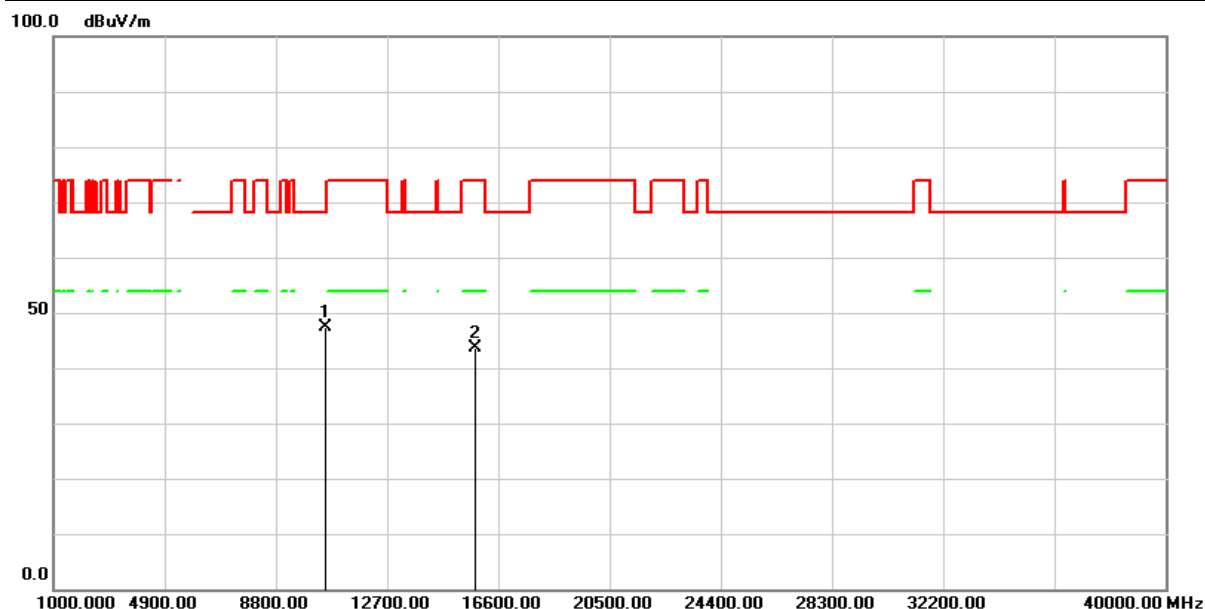


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	57.30	-10.01	47.29	68.20	-20.91	peak
2	15780.000	51.12	-7.51	43.61	74.00	-30.39	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH52(5260MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

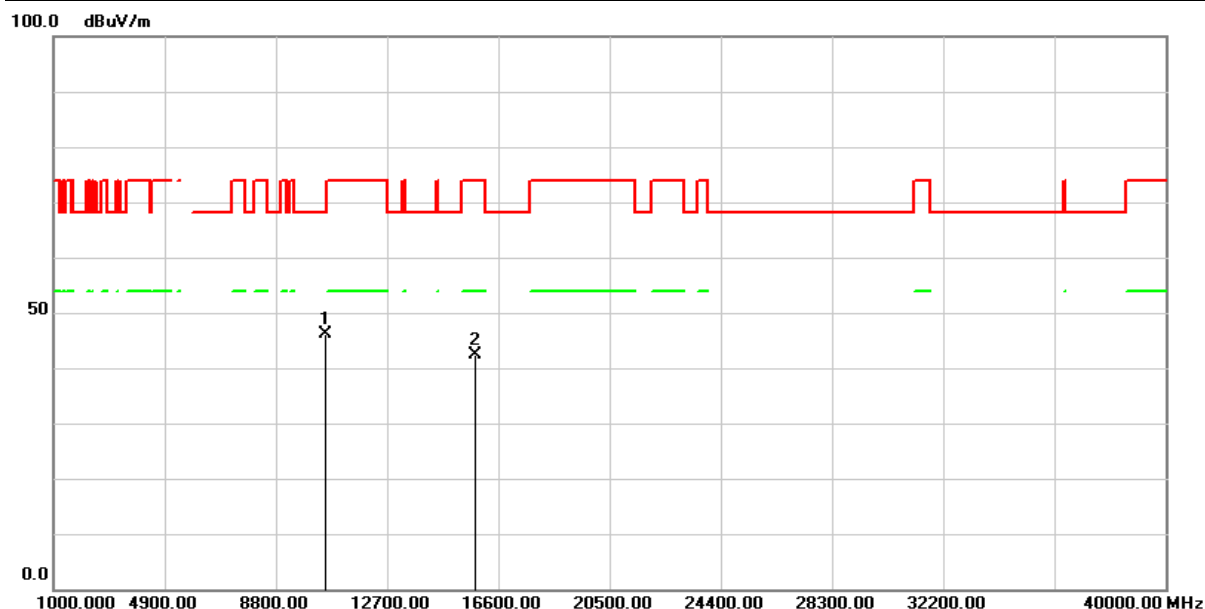


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	56.21	-10.01	46.20	68.20	-22.00	peak
2	15780.000	49.97	-7.51	42.46	74.00	-31.54	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH60(5300MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

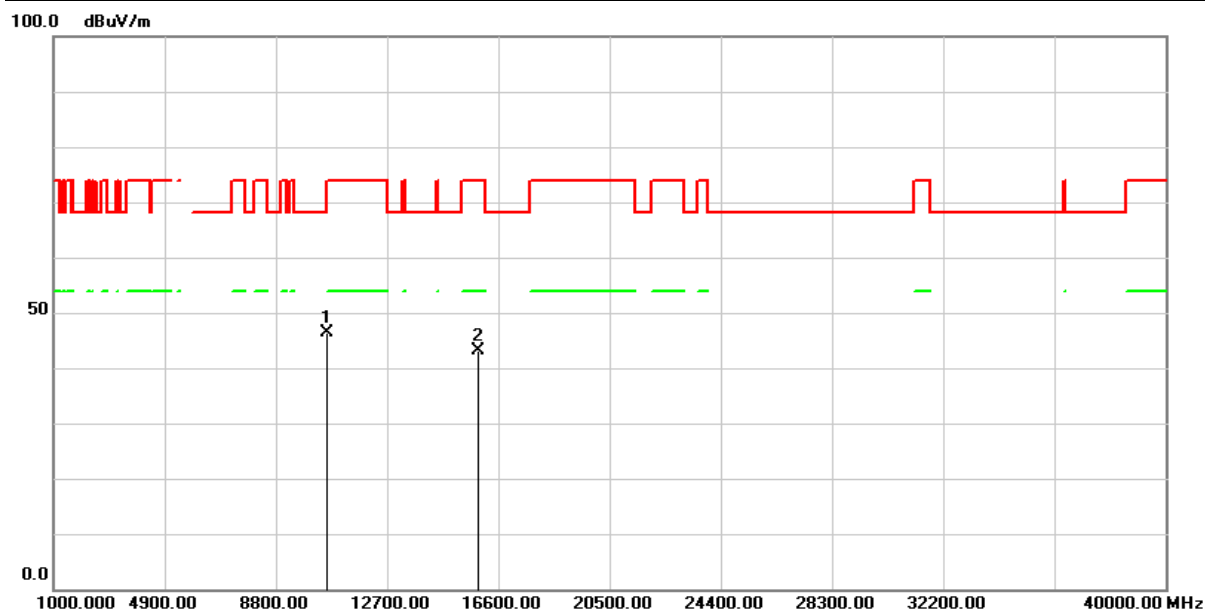


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	56.37	-9.94	46.43	68.20	-21.77	peak
2	15900.000	50.26	-7.20	43.06	74.00	-30.94	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH60(5300MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

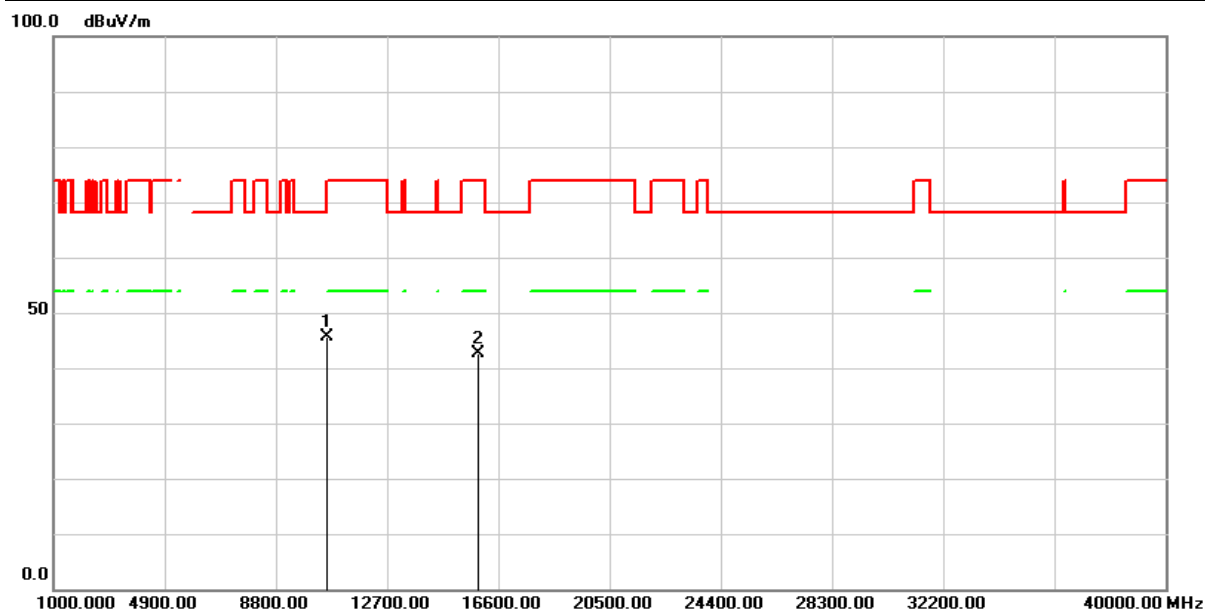


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	55.58	-9.94	45.64	68.20	-22.56	peak
2	15900.000	49.86	-7.20	42.66	74.00	-31.34	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH64(5320MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

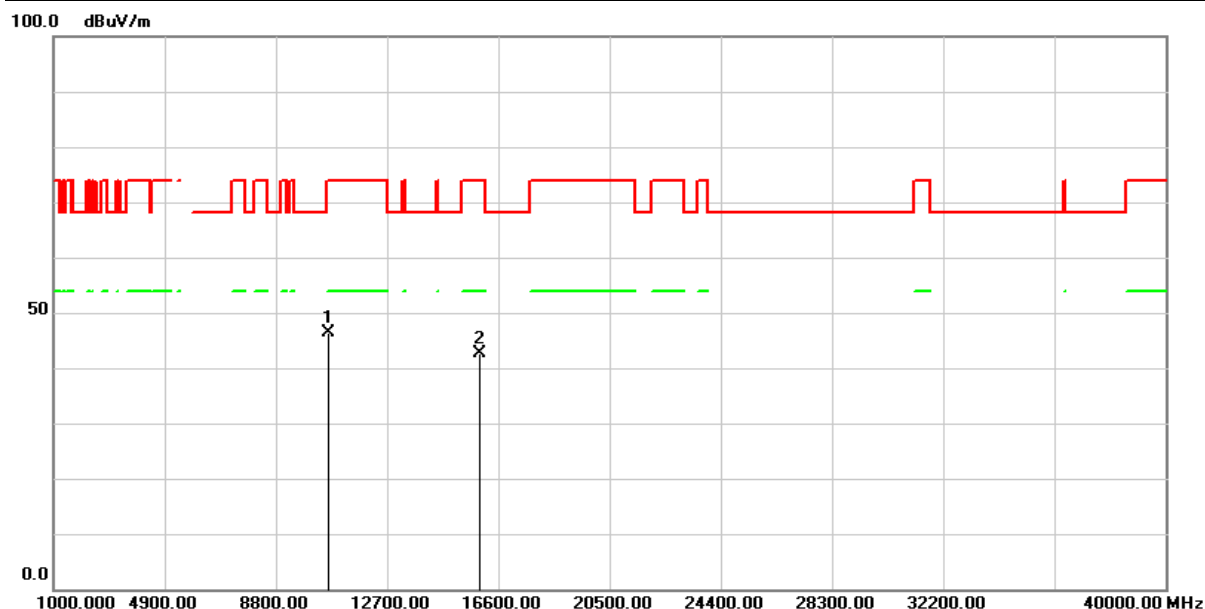


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	56.26	-9.87	46.39	74.00	-27.61	peak
2	15960.000	50.04	-7.29	42.75	74.00	-31.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH64(5320MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

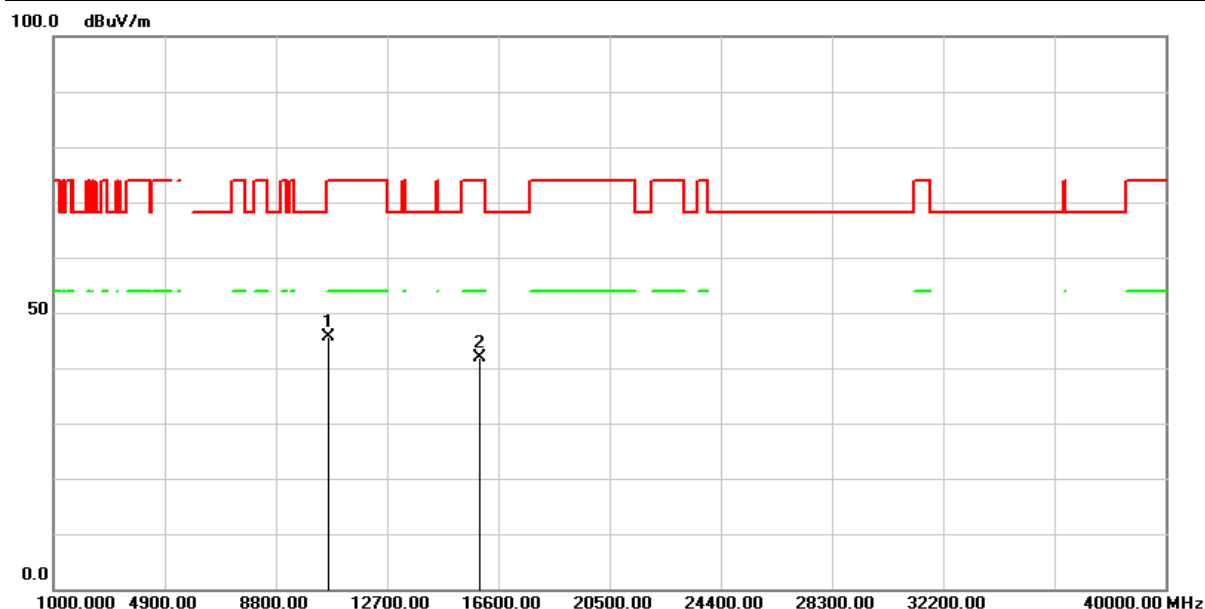


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	55.57	-9.87	45.70	74.00	-28.30	peak
2	15960.000	49.22	-7.29	41.93	74.00	-32.07	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH100(5500MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

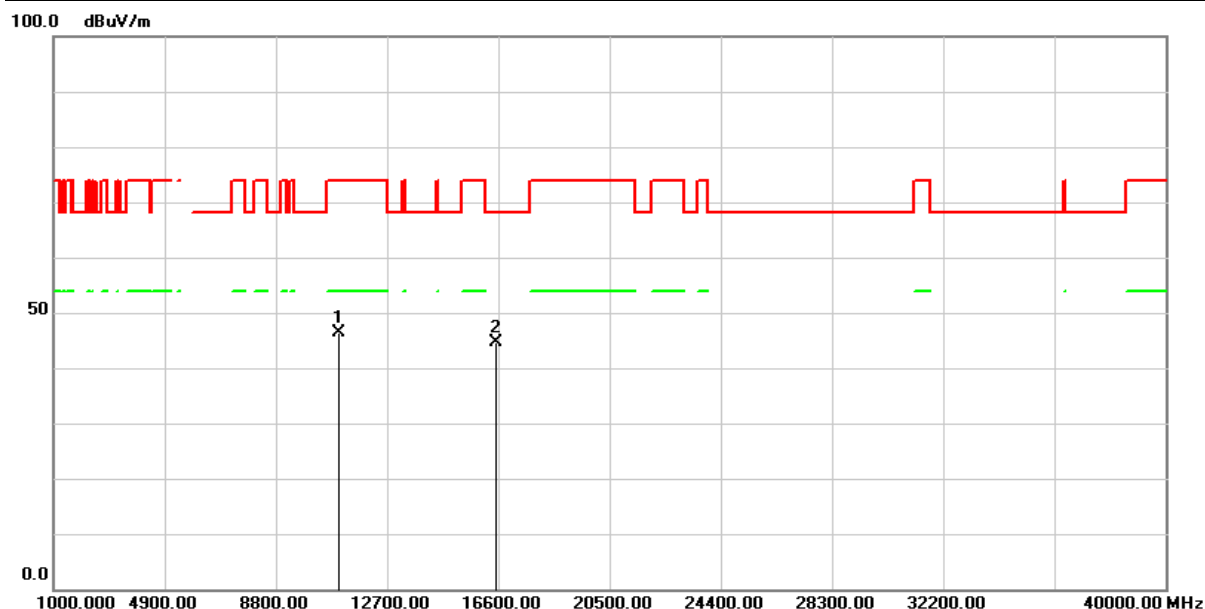


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	56.15	-9.68	46.47	74.00	-27.53	peak
2	16500.000	50.21	-5.66	44.55	68.20	-23.65	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/02
Test Channel :	CH100(5500MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

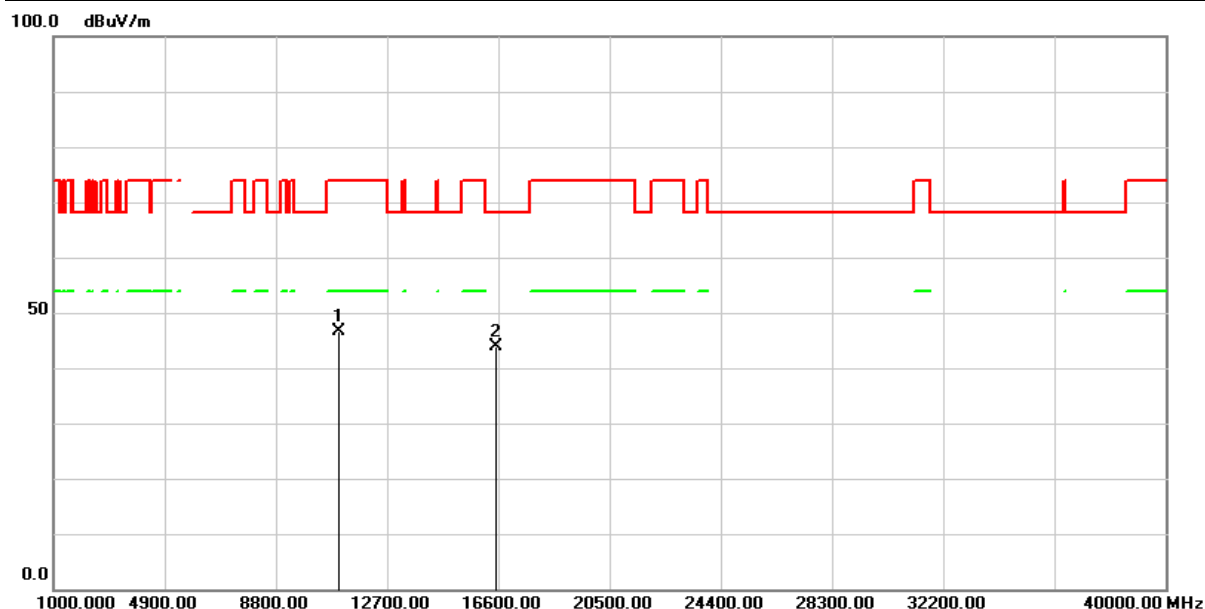


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	56.39	-9.68	46.71	74.00	-27.29	peak
2	16500.000	49.58	-5.66	43.92	68.20	-24.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/03
Test Channel :	CH116(5580MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

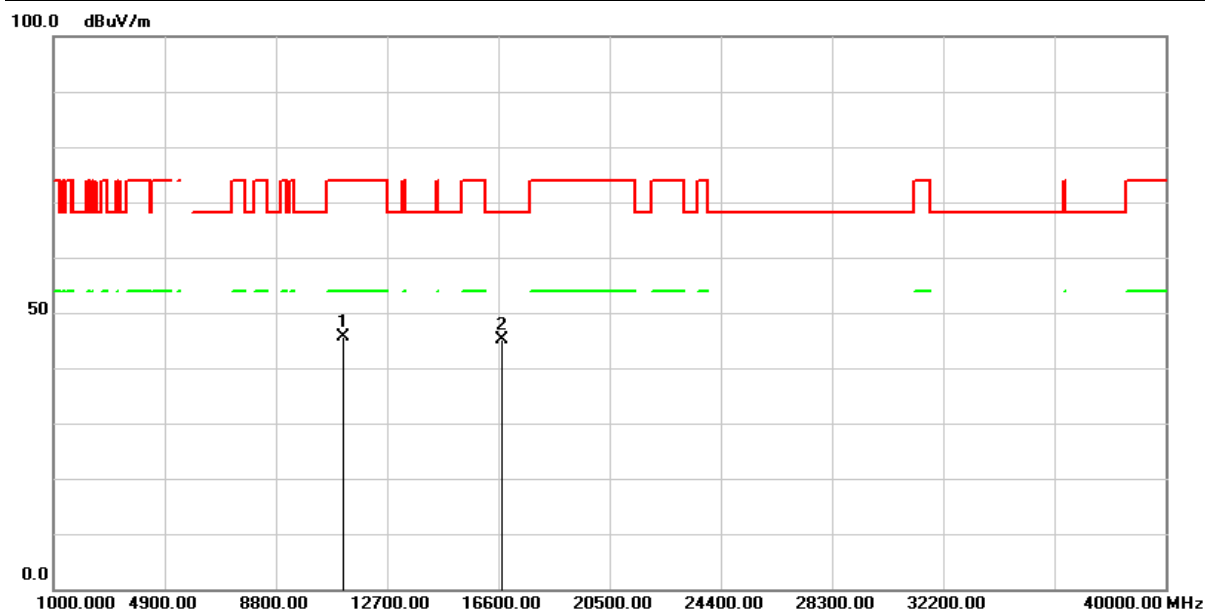


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	55.56	-9.89	45.67	74.00	-28.33	peak
2	16740.000	49.39	-4.31	45.08	68.20	-23.12	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/03
Test Channel :	CH116(5580MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

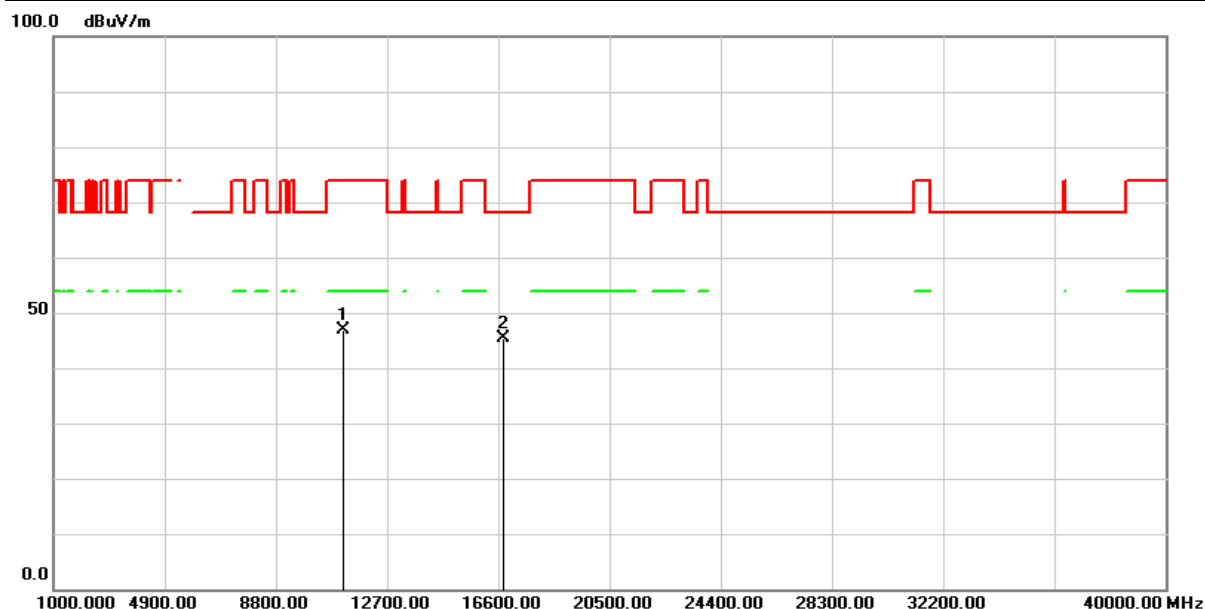


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	56.71	-9.89	46.82	74.00	-27.18	peak
2	16740.000	49.60	-4.31	45.29	68.20	-22.91	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/03
Test Channel :	CH140(5700MHz)	Temperature :	22.9 °C
Polarization :	Horizontal	Relative Humidity :	52 %

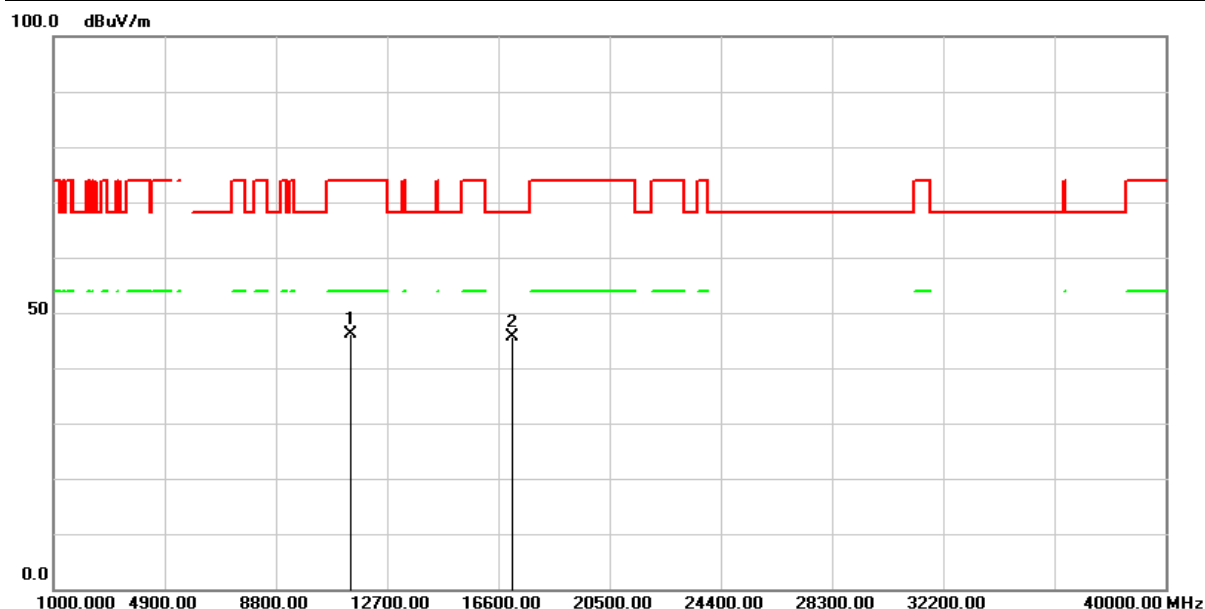


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	55.72	-9.59	46.13	74.00	-27.87	peak
2	17100.000	48.24	-2.67	45.57	68.20	-22.63	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/03
Test Channel :	CH140(5700MHz)	Temperature :	22.9 °C
Polarization :	Vertical	Relative Humidity :	52 %

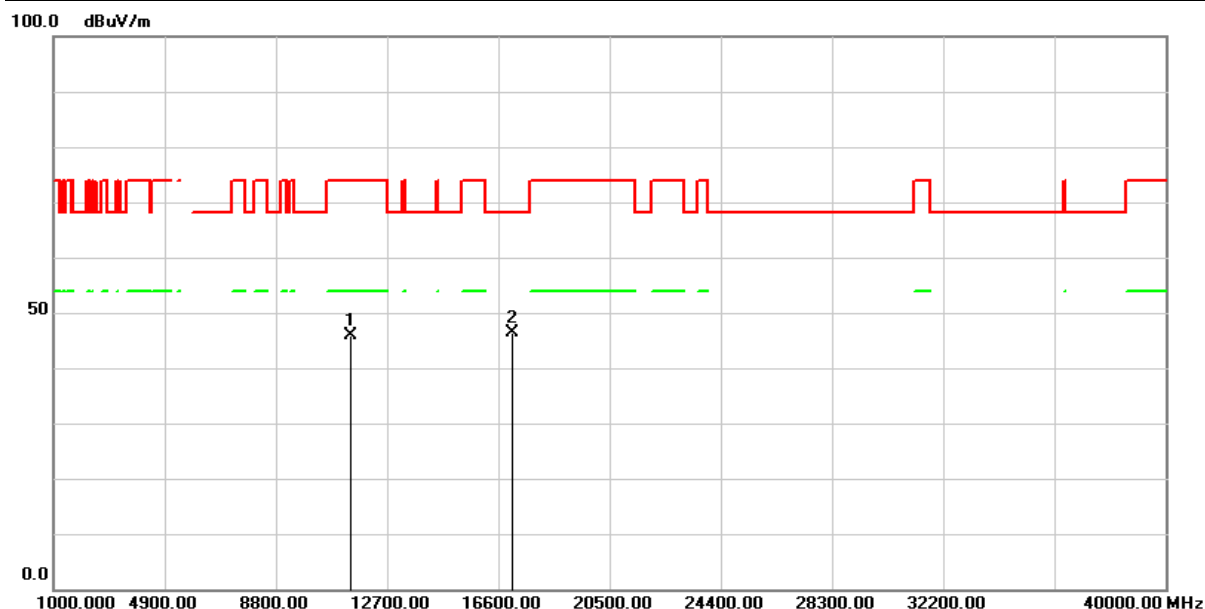


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	55.56	-9.59	45.97	74.00	-28.03	peak
2	17100.000	49.08	-2.67	46.41	68.20	-21.79	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/06
Test Channel :	CH149(5745MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

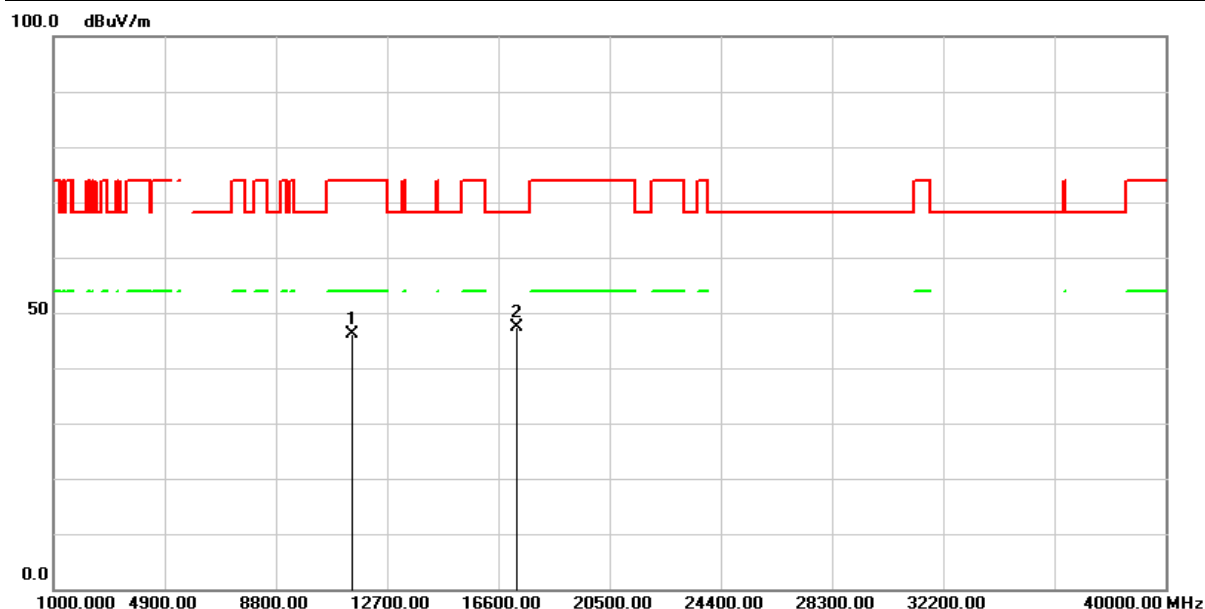


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	55.46	-9.45	46.01	74.00	-27.99	peak
2	17235.000	49.59	-2.24	47.35	68.20	-20.85	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/06
Test Channel :	CH149(5745MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

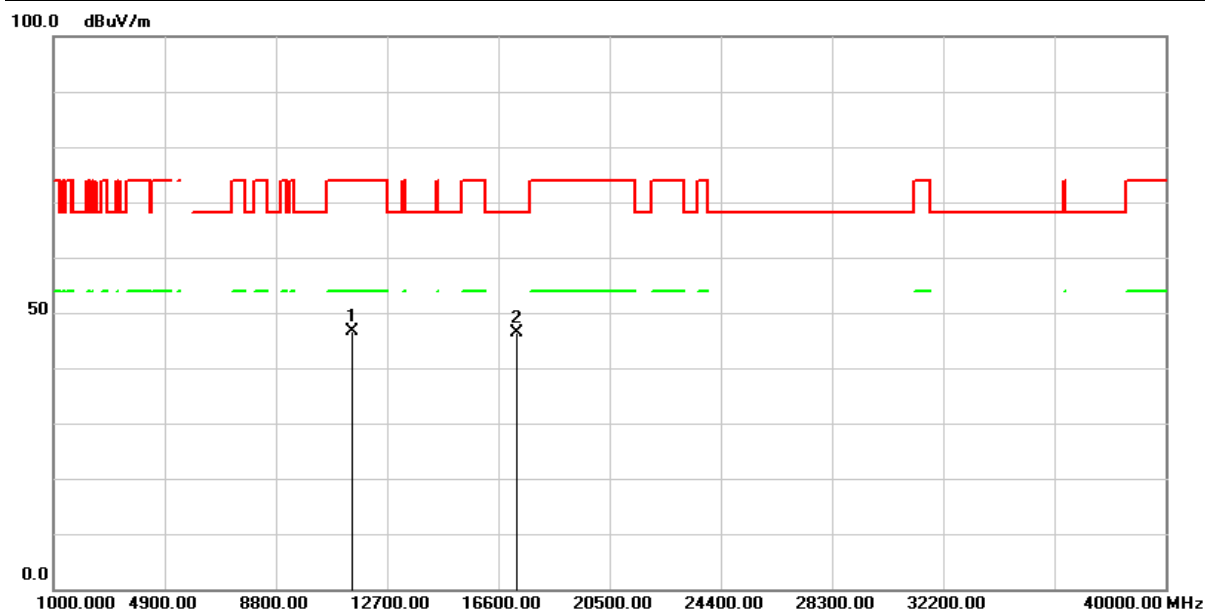


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	56.20	-9.45	46.75	74.00	-27.25	peak
2	17235.000	48.55	-2.24	46.31	68.20	-21.89	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/06
Test Channel :	CH157(5785MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

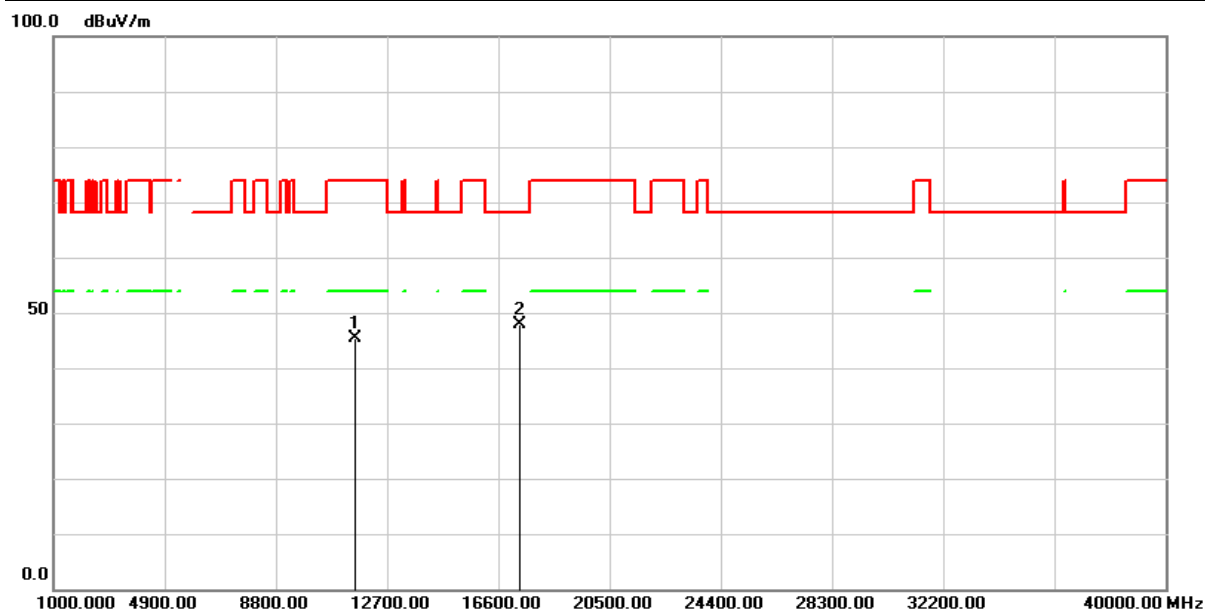


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	54.90	-9.40	45.50	74.00	-28.50	peak
2	17355.000	49.47	-1.65	47.82	68.20	-20.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/06
Test Channel :	CH157(5785MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

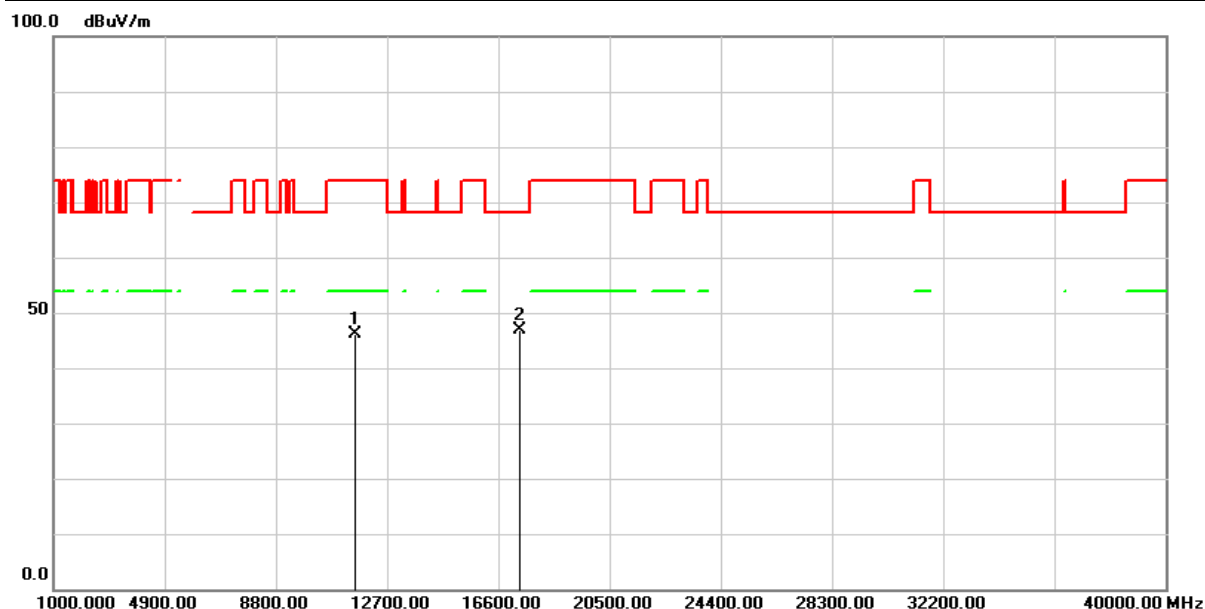


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	55.56	-9.40	46.16	74.00	-27.84	peak
2	17355.000	48.60	-1.65	46.95	68.20	-21.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/06
Test Channel :	CH165(5825MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

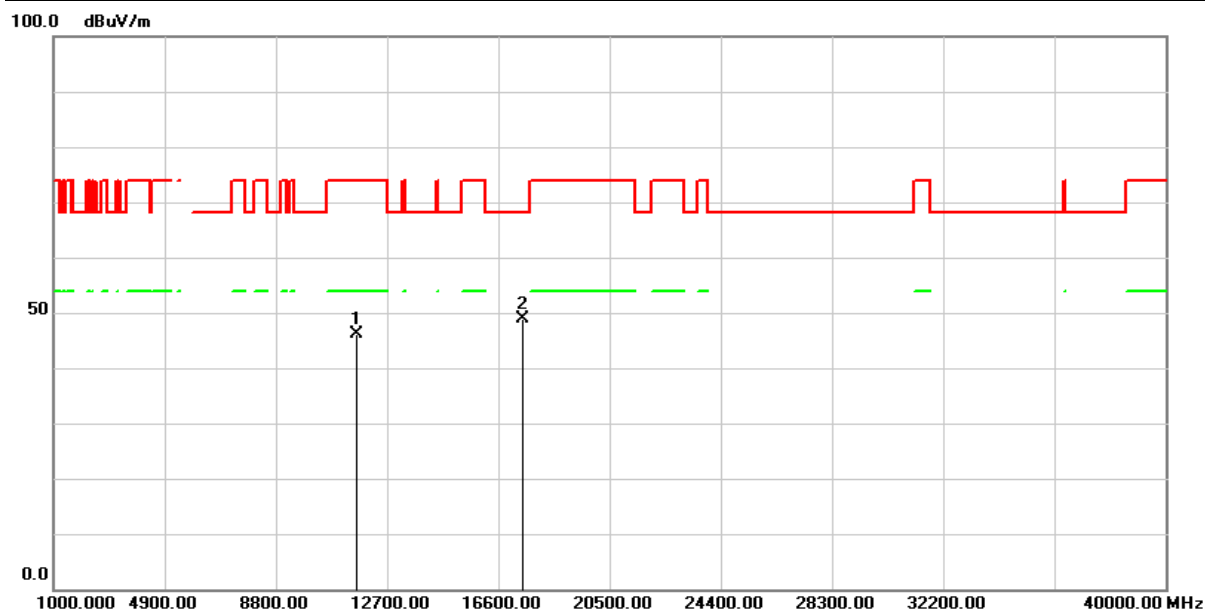


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	55.85	-9.82	46.03	74.00	-27.97	peak
2	17475.000	49.64	-0.85	48.79	68.20	-19.41	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 2 : Transmit (802.11ac VHT20 MCS0)	Test Date :	2024/05/06
Test Channel :	CH165(5825MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

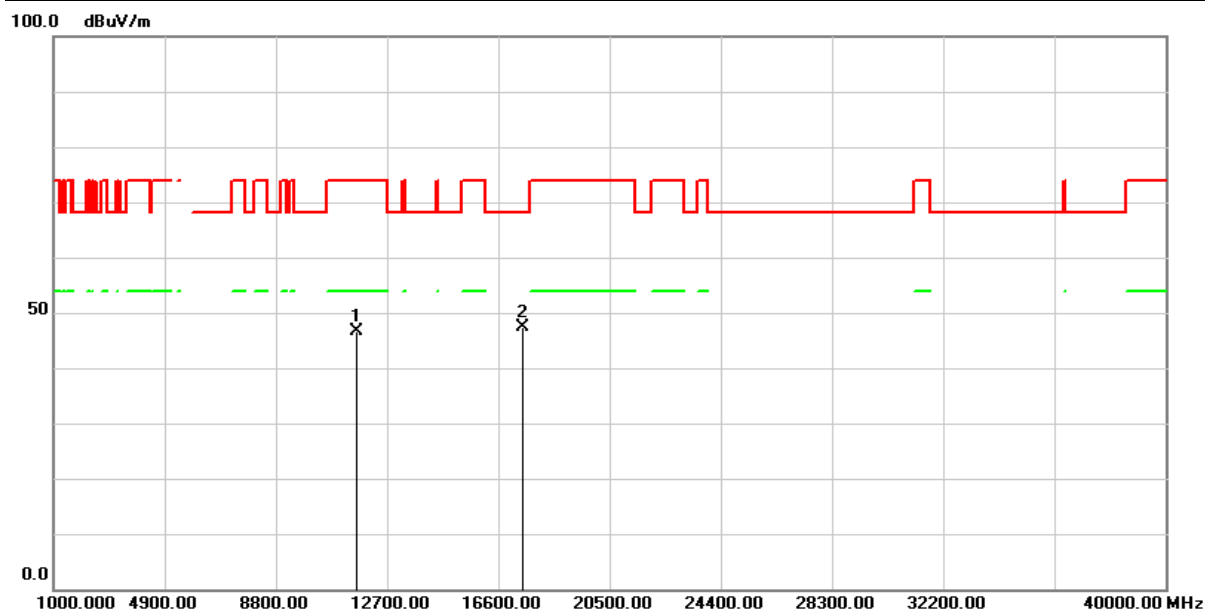


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	56.57	-9.82	46.75	74.00	-27.25	peak
2	17475.000	48.31	-0.85	47.46	68.20	-20.74	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH38(5190MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

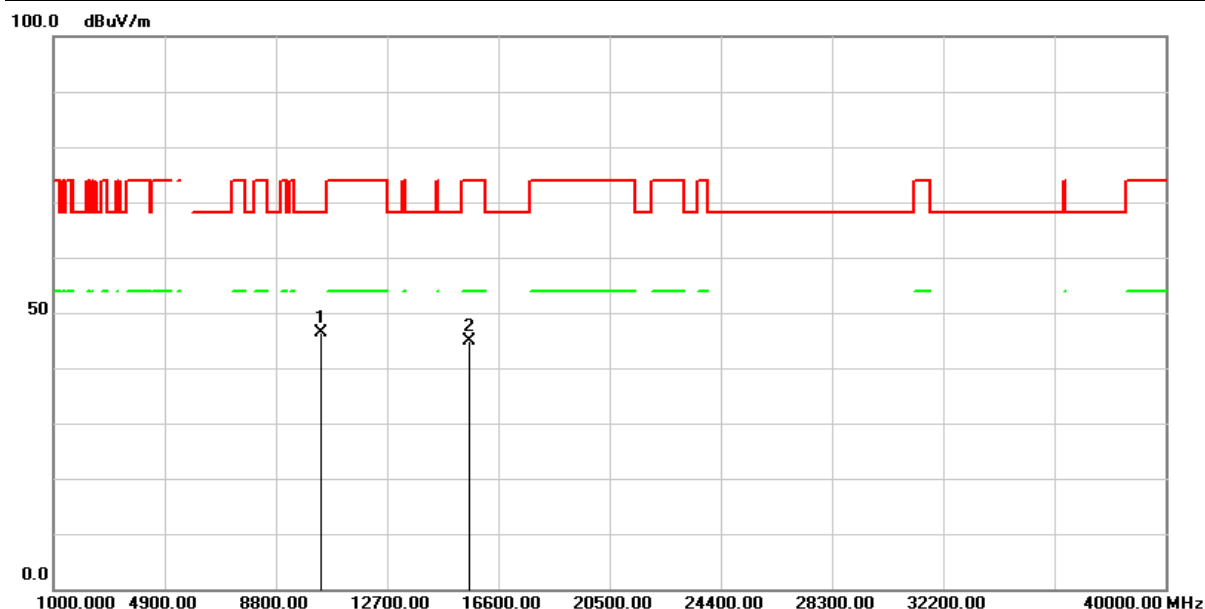


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	56.33	-10.00	46.33	68.20	-21.87	peak
2	15570.000	52.65	-7.79	44.86	74.00	-29.14	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH38(5190MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

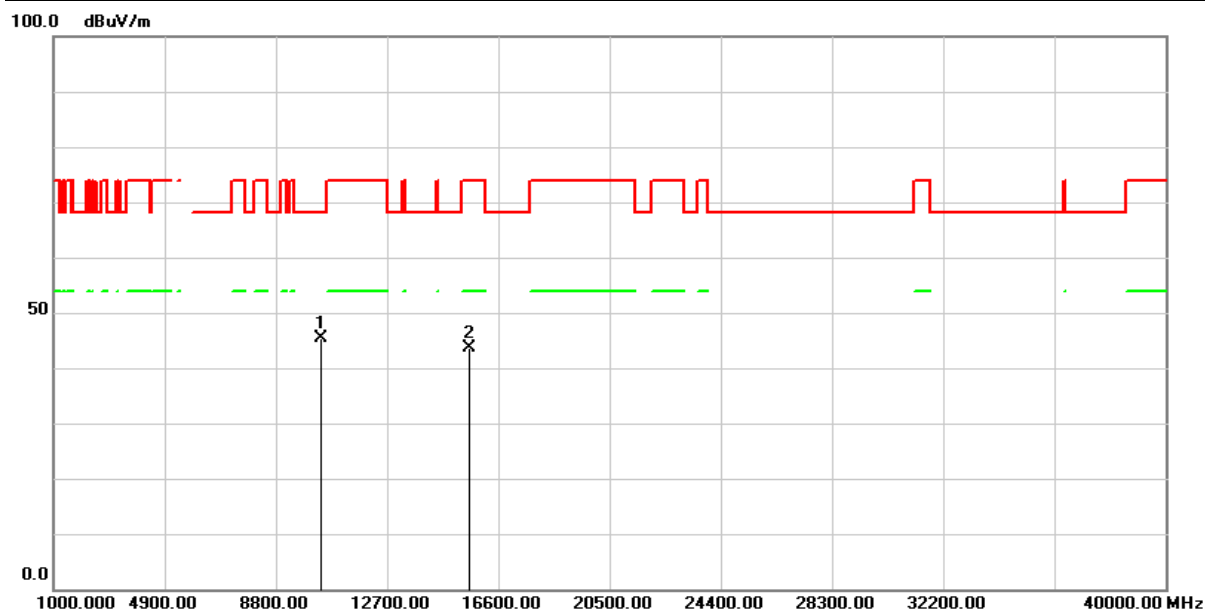


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	55.34	-10.00	45.34	68.20	-22.86	peak
2	15570.000	51.34	-7.79	43.55	74.00	-30.45	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH46(5230MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

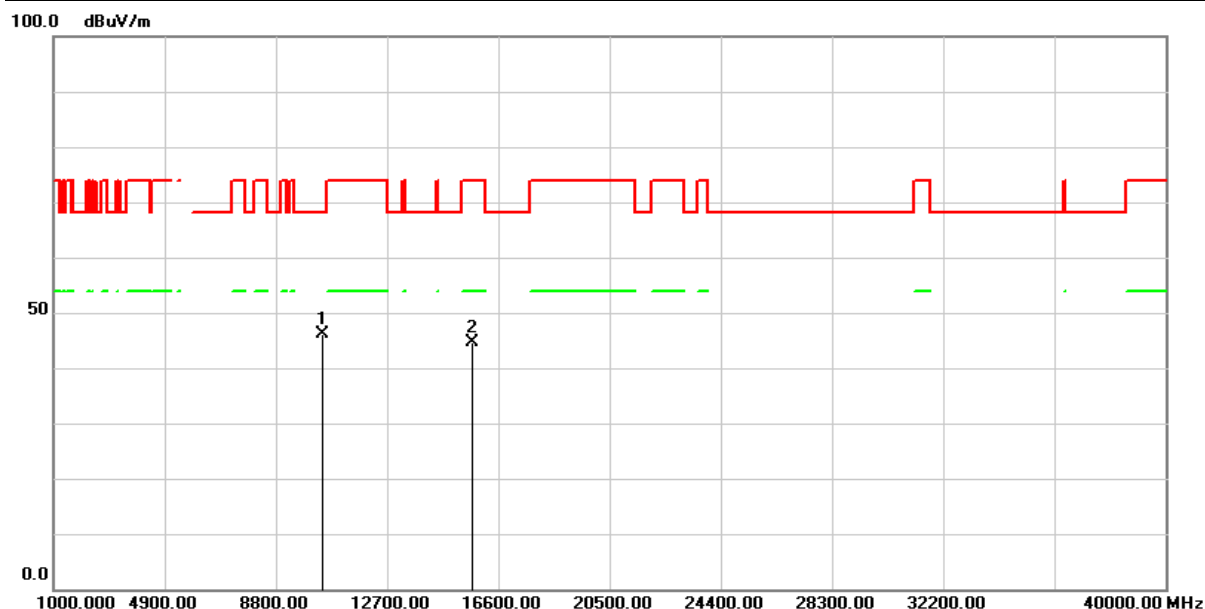


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	56.01	-9.94	46.07	68.20	-22.13	peak
2	15690.000	52.37	-7.81	44.56	74.00	-29.44	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH46(5230MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

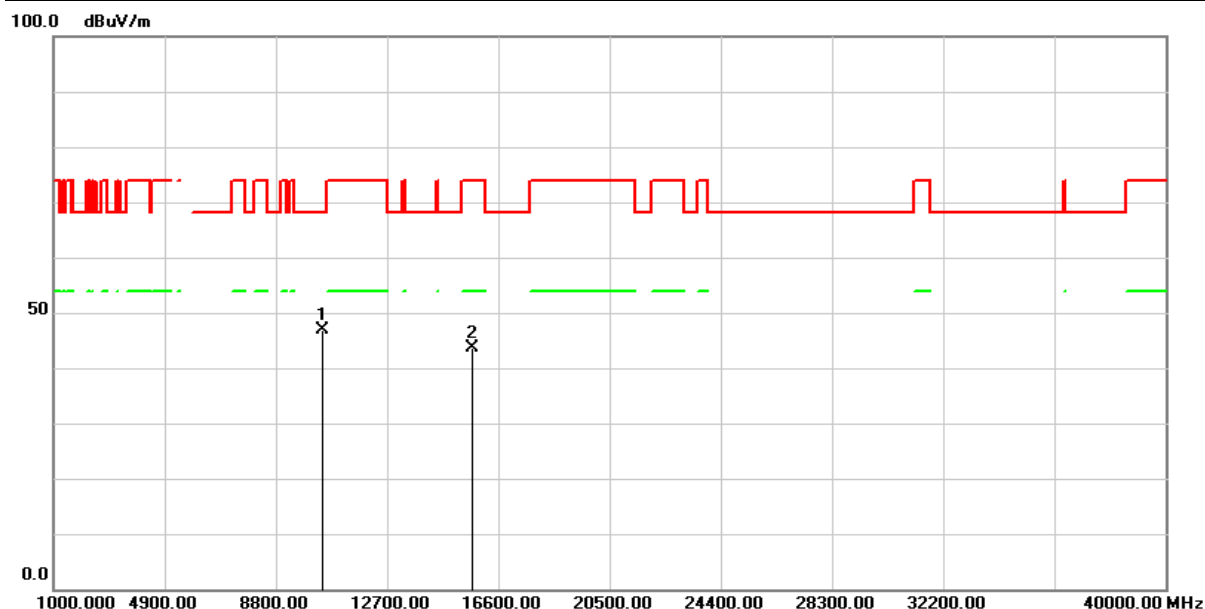


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	56.80	-9.94	46.86	68.20	-21.34	peak
2	15690.000	51.50	-7.81	43.69	74.00	-30.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH54(5270MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

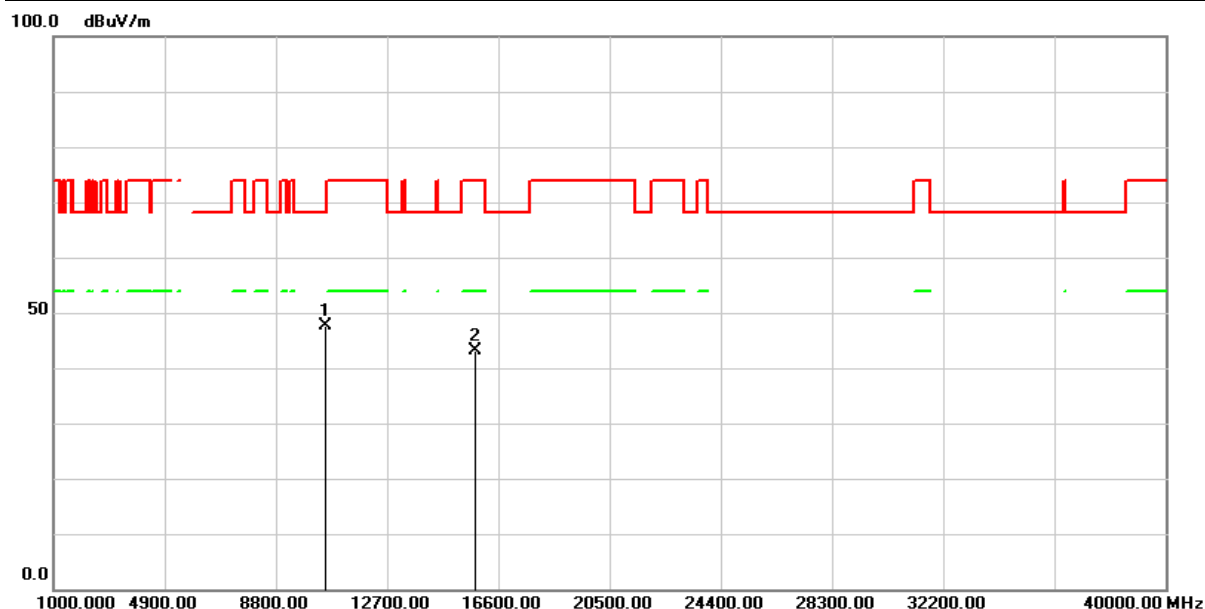


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	57.72	-10.01	47.71	68.20	-20.49	peak
2	15810.000	50.73	-7.54	43.19	74.00	-30.81	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH54(5270MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

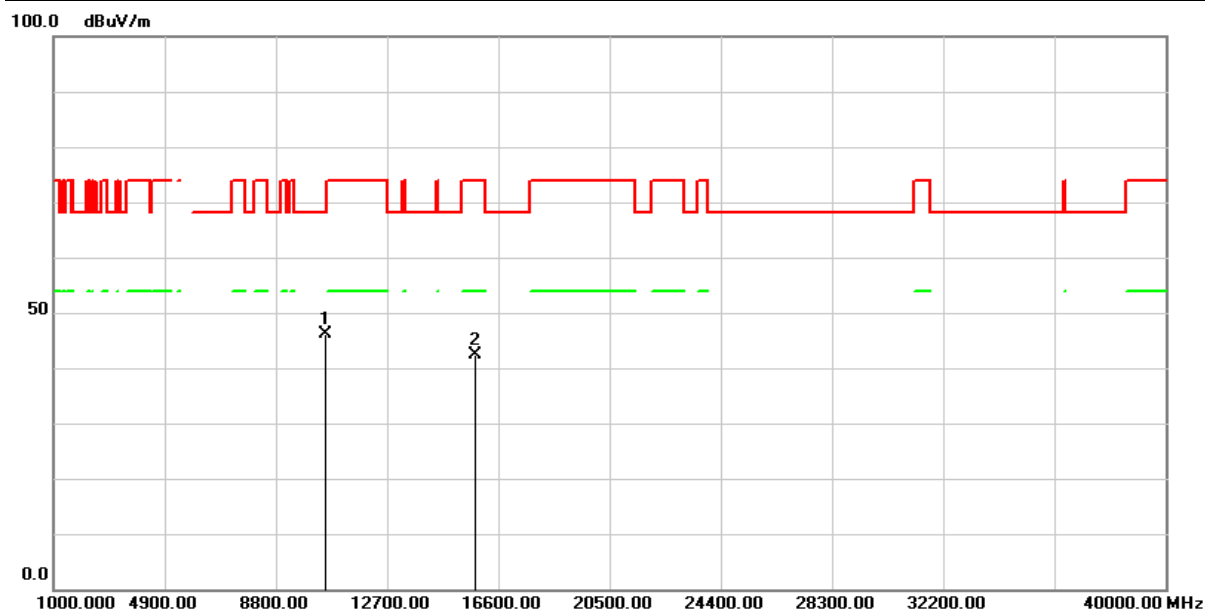


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	56.05	-10.01	46.04	68.20	-22.16	peak
2	15810.000	49.94	-7.54	42.40	74.00	-31.60	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH62(5310MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

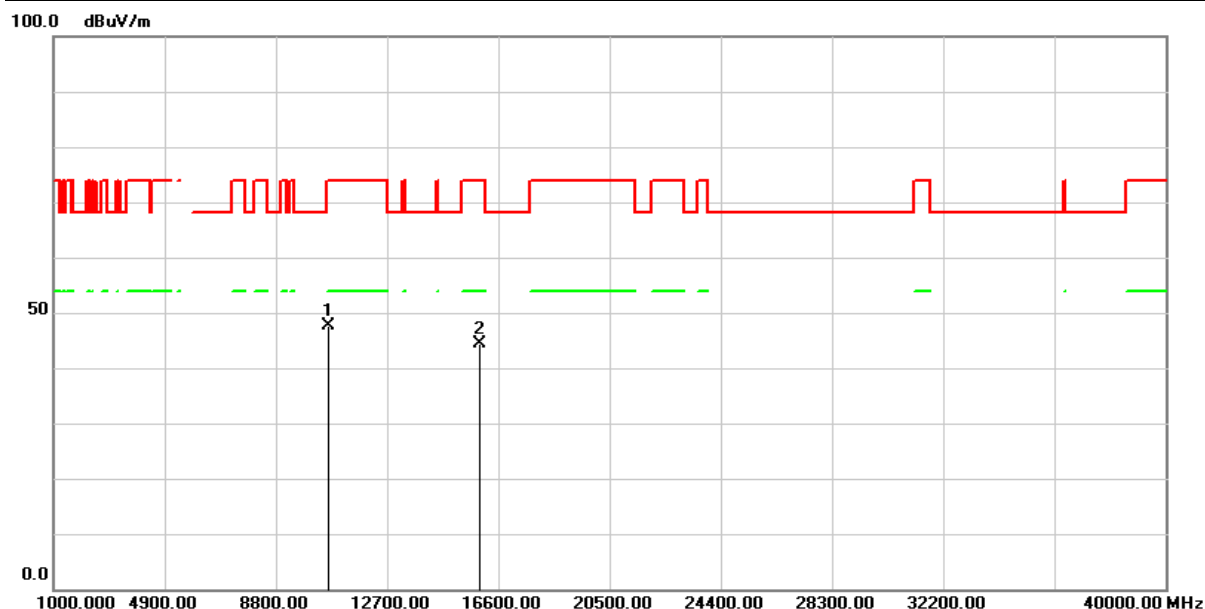


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	57.51	-9.90	47.61	74.00	-26.39	peak
2	15930.000	51.71	-7.26	44.45	74.00	-29.55	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH62(5310MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

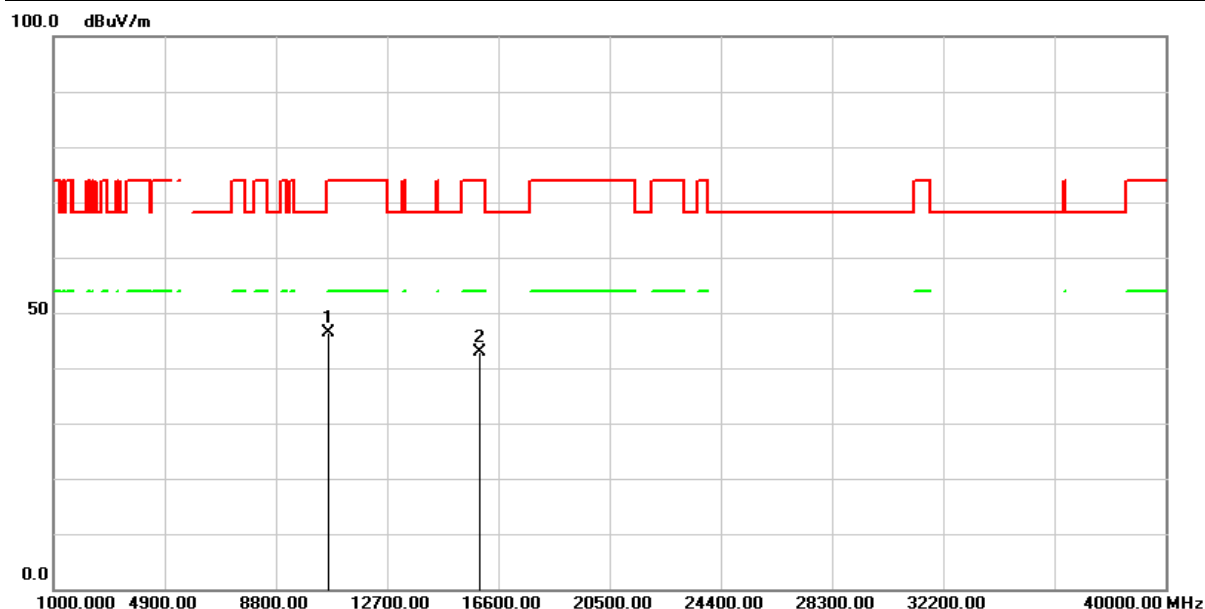


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	56.25	-9.90	46.35	74.00	-27.65	peak
2	15930.000	50.15	-7.26	42.89	74.00	-31.11	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH102(5510MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

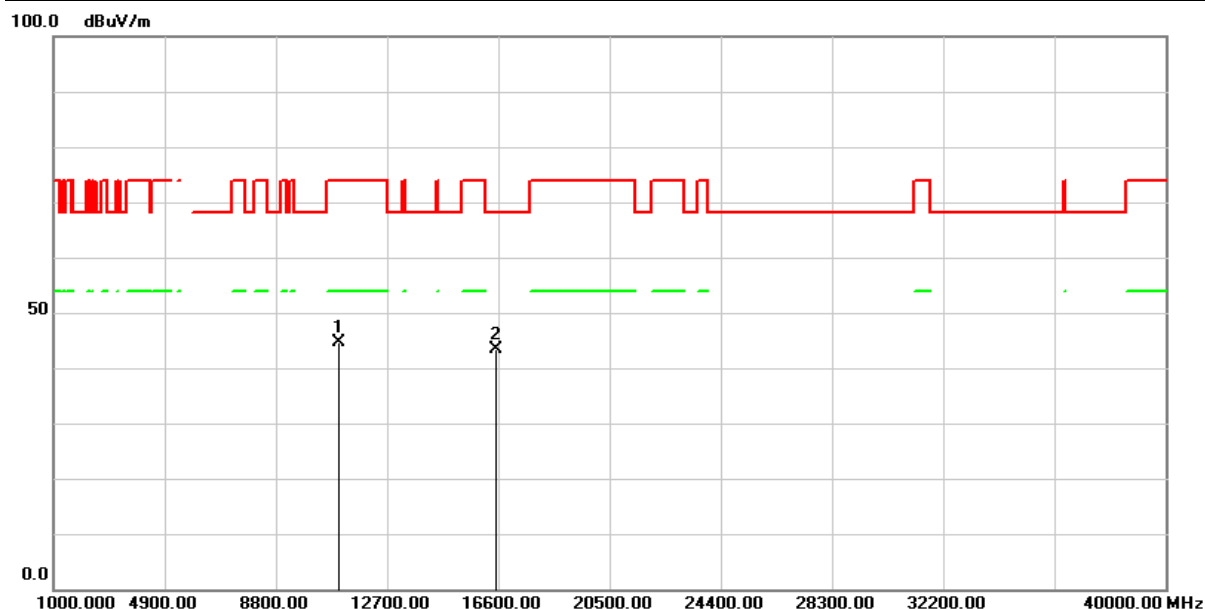


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	54.35	-9.71	44.64	74.00	-29.36	peak
2	16530.000	48.93	-5.60	43.33	68.20	-24.87	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH102(5510MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

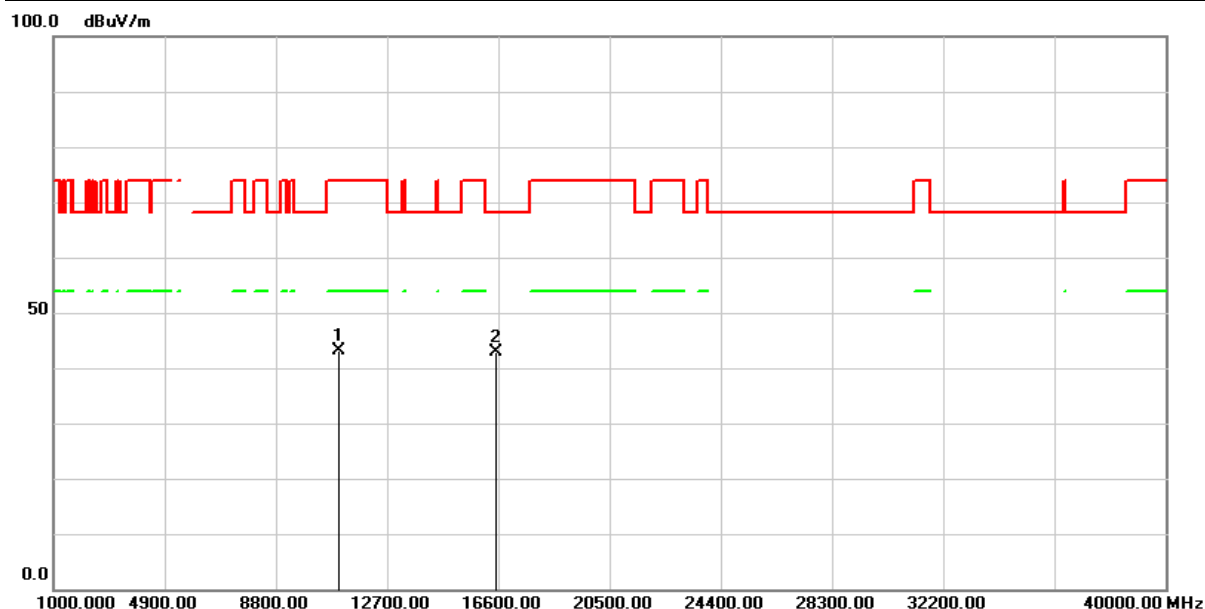


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	52.82	-9.71	43.11	74.00	-30.89	peak
2	16530.000	48.39	-5.60	42.79	68.20	-25.41	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH110(5550MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

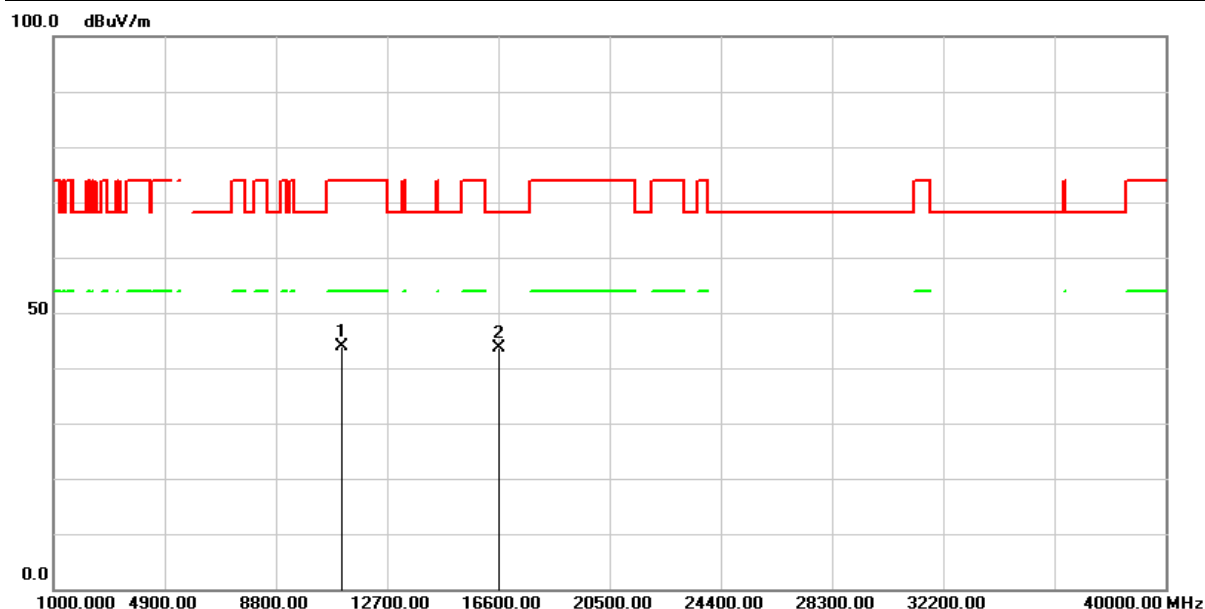


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	53.73	-9.91	43.82	74.00	-30.18	peak
2	16650.000	48.86	-5.13	43.73	68.20	-24.47	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH110(5550MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

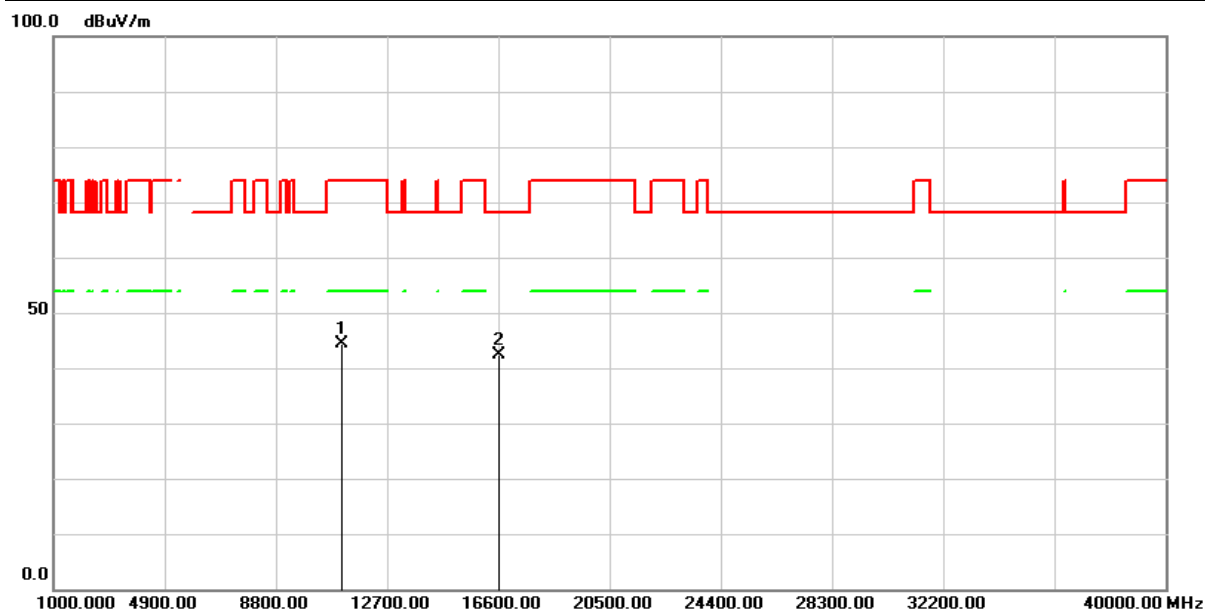


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	54.25	-9.91	44.34	74.00	-29.66	peak
2	16650.000	47.58	-5.13	42.45	68.20	-25.75	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH134(5670MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

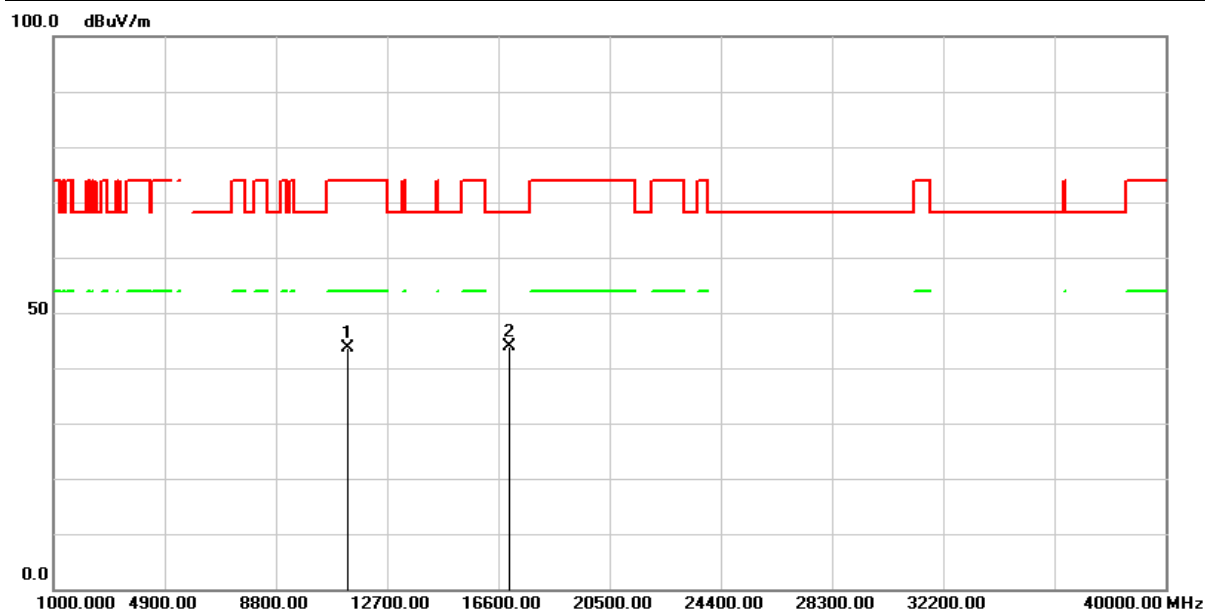


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	53.41	-9.75	43.66	74.00	-30.34	peak
2	17010.000	46.48	-2.70	43.78	68.20	-24.42	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH134(5670MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

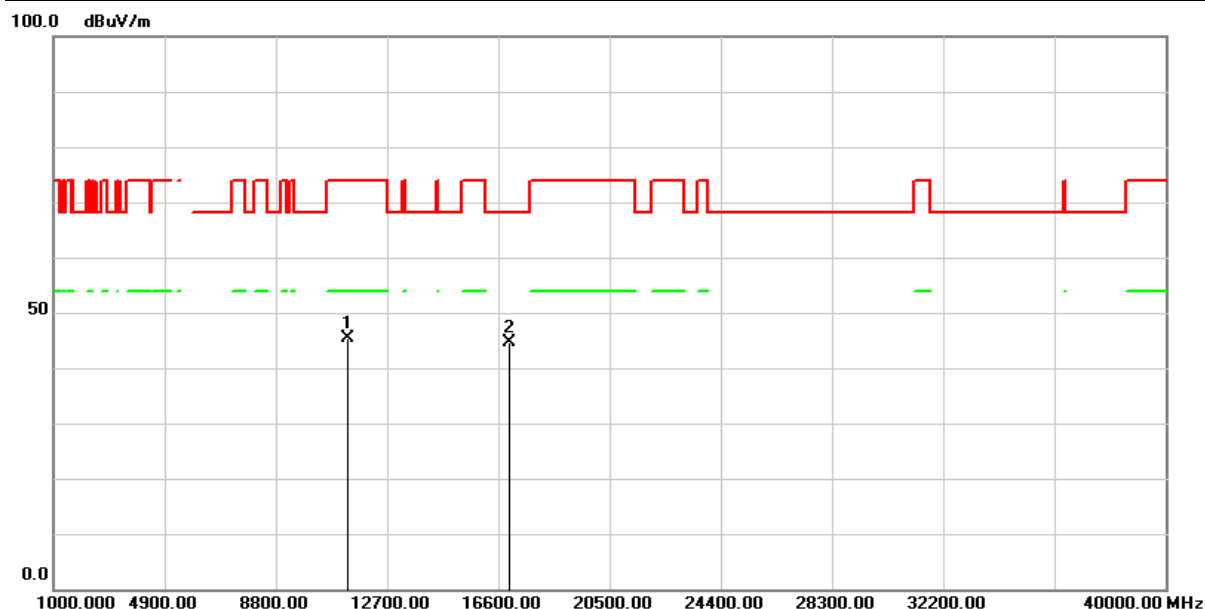


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	55.01	-9.75	45.26	74.00	-28.74	peak
2	17010.000	47.26	-2.70	44.56	68.20	-23.64	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH151(5755MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

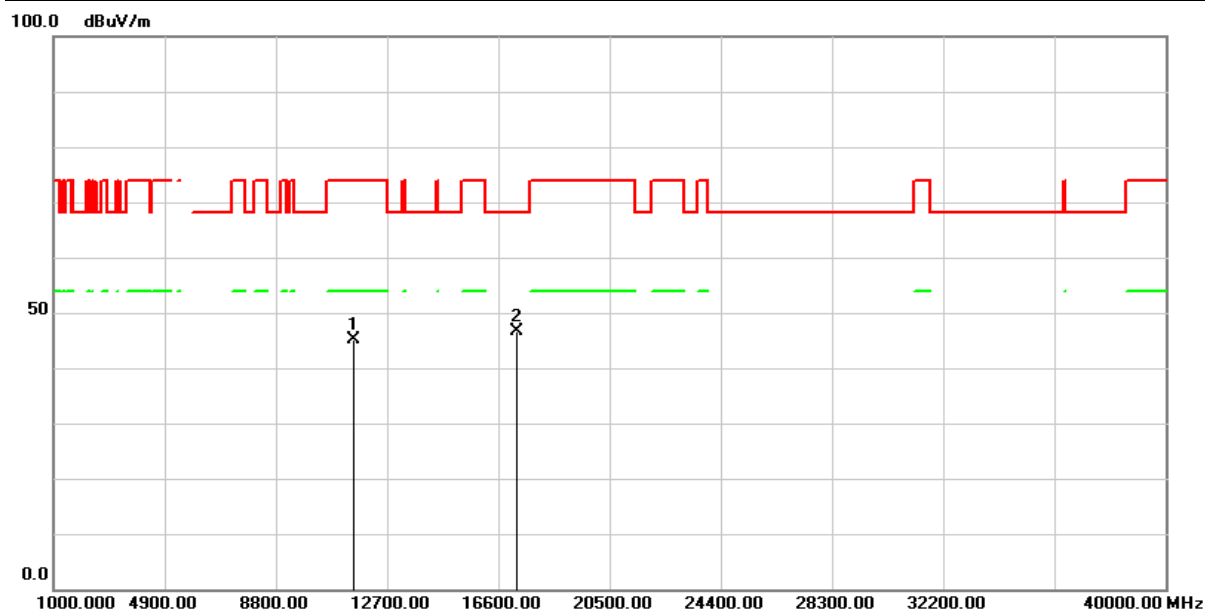


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	54.62	-9.40	45.22	74.00	-28.78	peak
2	17265.000	48.80	-2.19	46.61	68.20	-21.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH151(5755MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

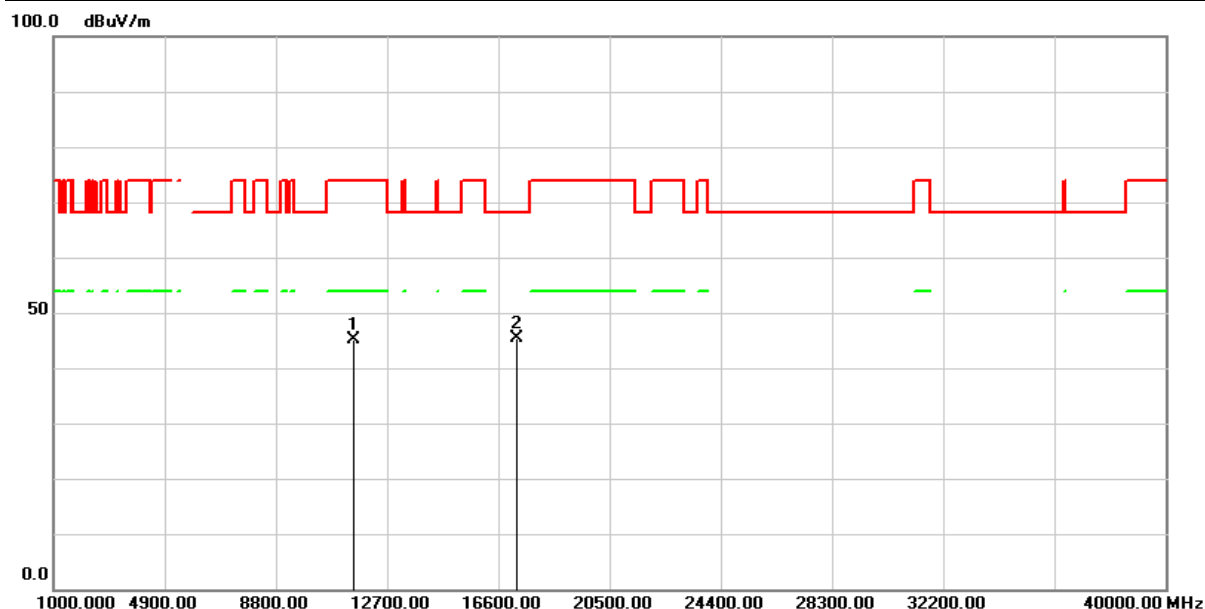


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	54.55	-9.40	45.15	74.00	-28.85	peak
2	17265.000	47.48	-2.19	45.29	68.20	-22.91	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH159(5795MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

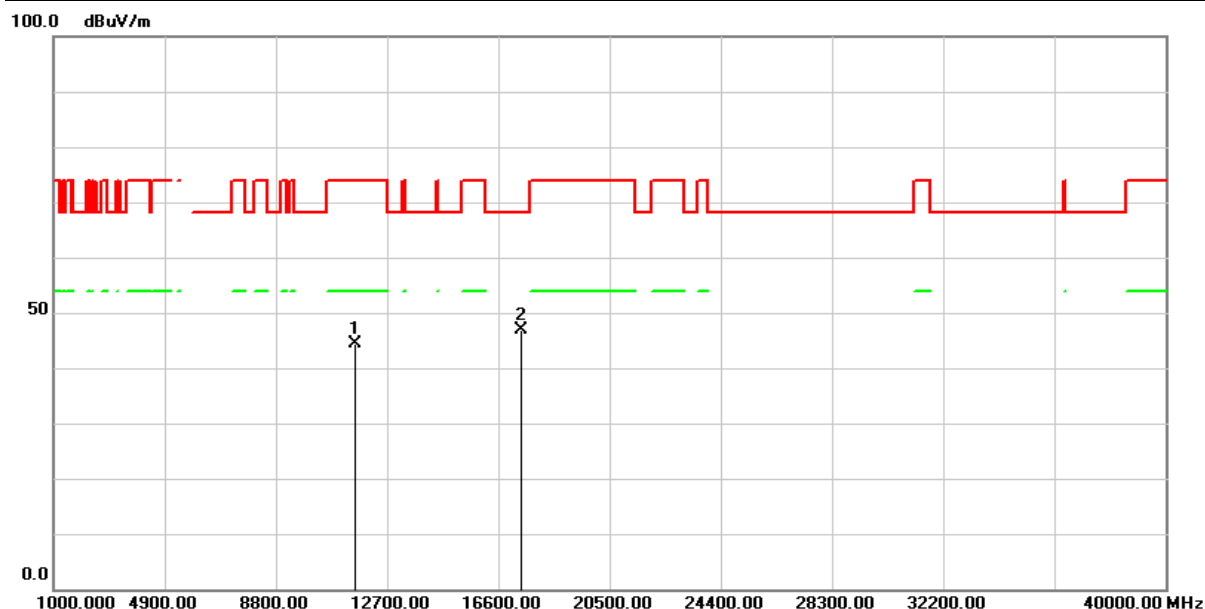


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	53.96	-9.48	44.48	74.00	-29.52	peak
2	17385.000	48.26	-1.42	46.84	68.20	-21.36	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 3 : Transmit (802.11ac VHT40 MCS0)	Test Date :	2024/05/06
Test Channel :	CH159(5795MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

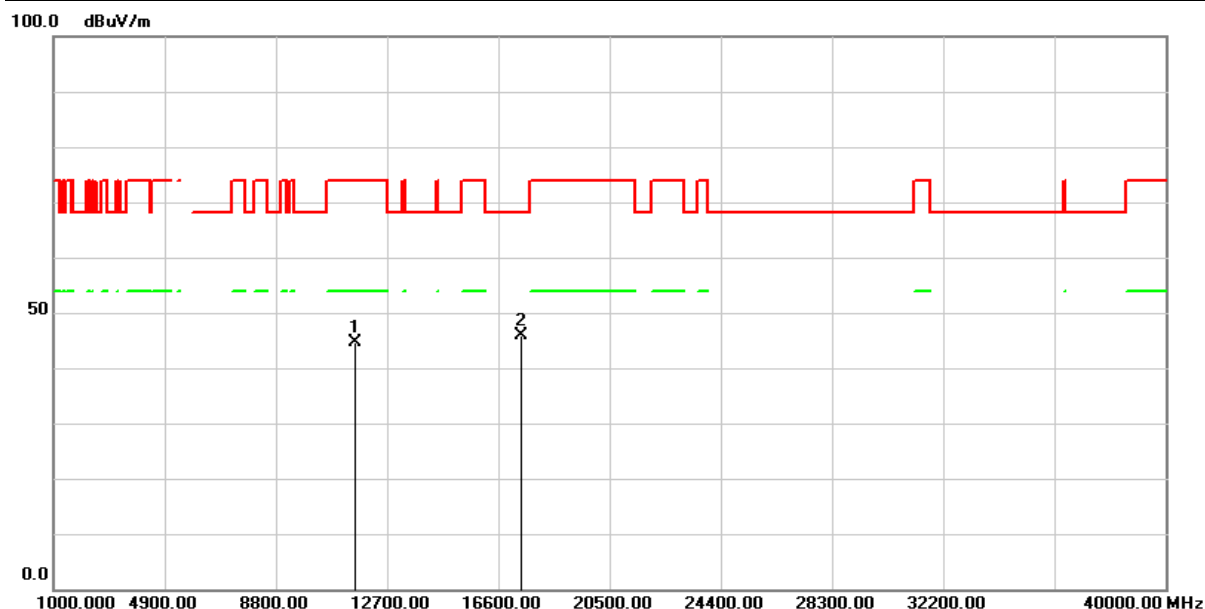


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	54.02	-9.48	44.54	74.00	-29.46	peak
2	17385.000	47.40	-1.42	45.98	68.20	-22.22	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH42(5210MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

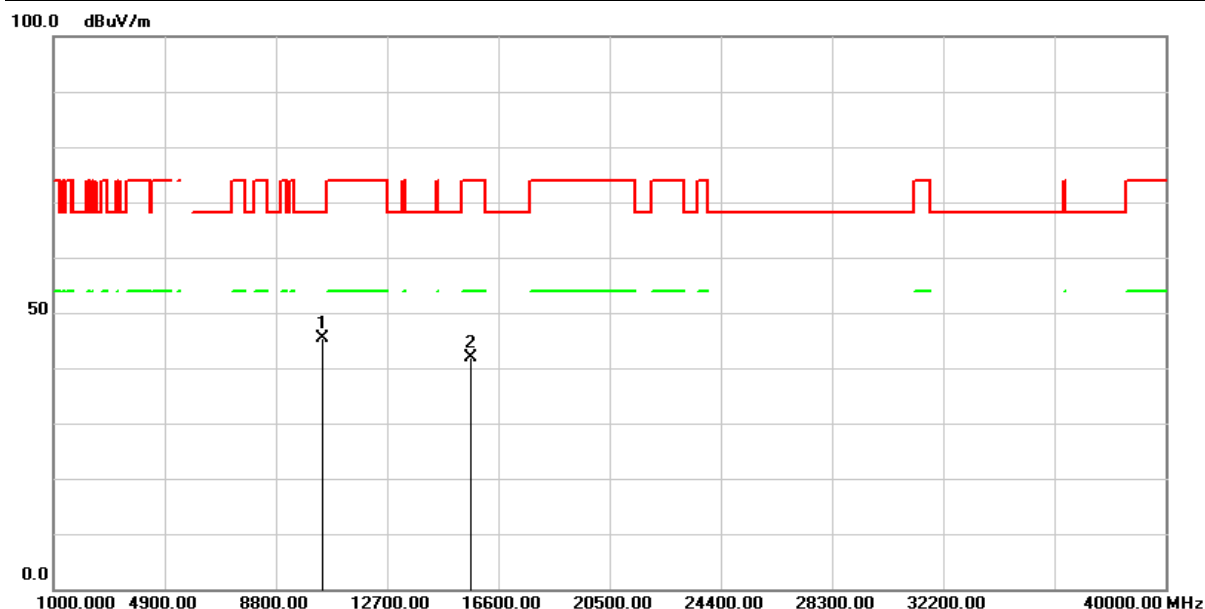


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	55.32	-9.94	45.38	68.20	-22.82	peak
2	15630.000	49.78	-7.98	41.80	74.00	-32.20	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH42(5210MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

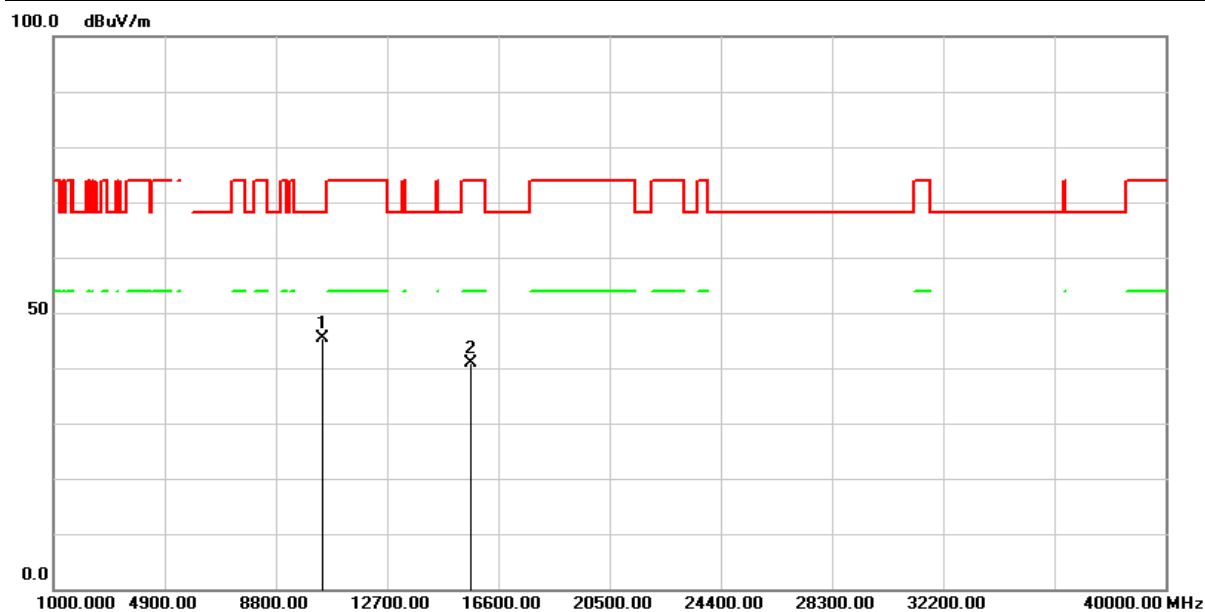


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	55.38	-9.94	45.44	68.20	-22.76	peak
2	15630.000	48.77	-7.98	40.79	74.00	-33.21	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH58(5290MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

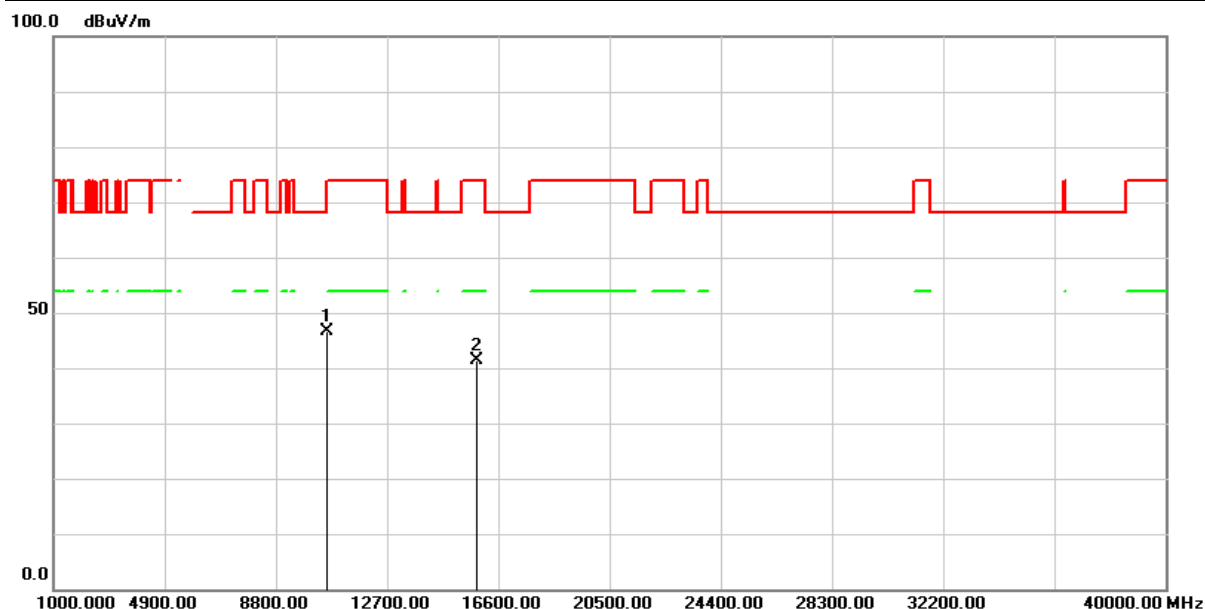


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	56.65	-9.97	46.68	68.20	-21.52	peak
2	15870.000	48.87	-7.37	41.50	74.00	-32.50	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH58(5290MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

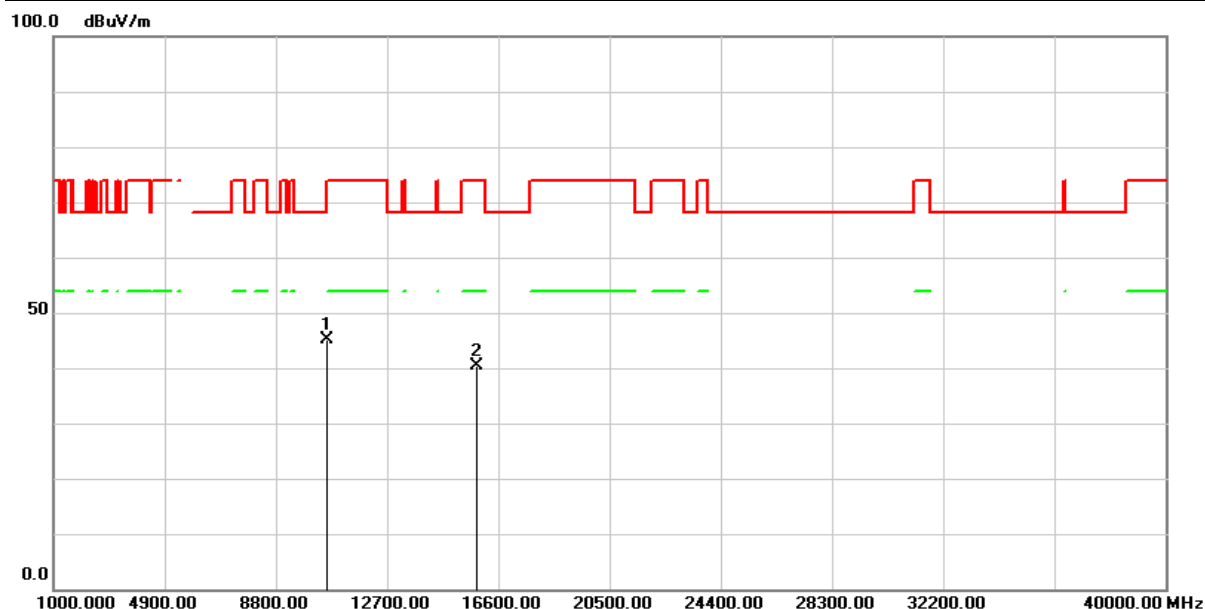


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	55.04	-9.97	45.07	68.20	-23.13	peak
2	15870.000	47.78	-7.37	40.41	74.00	-33.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH106(5530MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

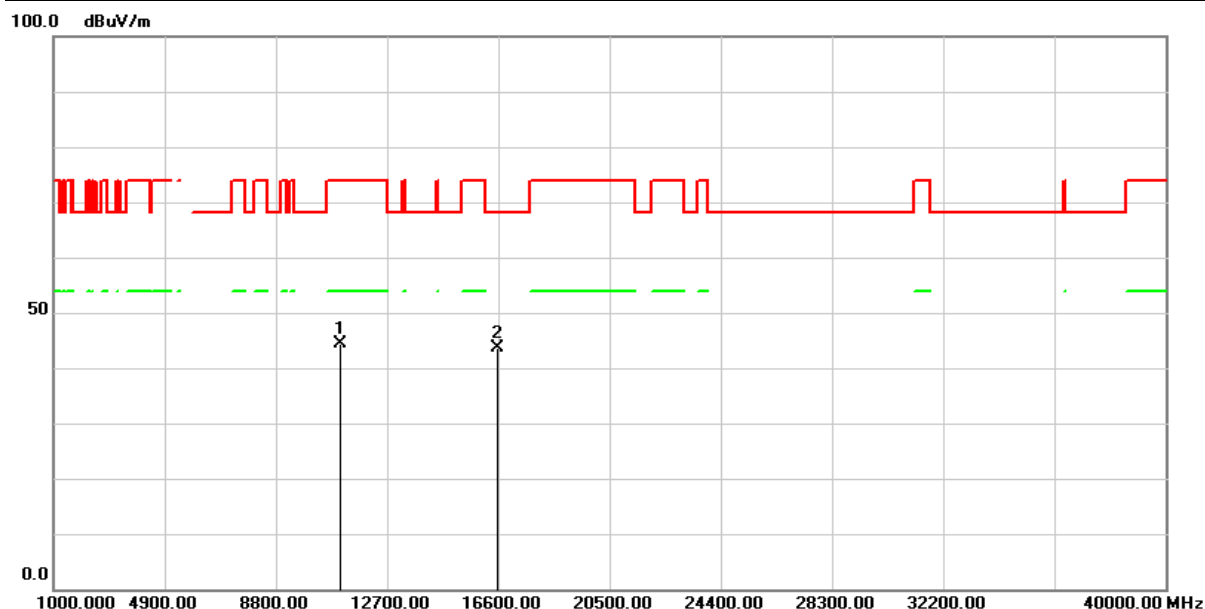


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	54.05	-9.78	44.27	74.00	-29.73	peak
2	16590.000	49.08	-5.54	43.54	68.20	-24.66	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH106(5530MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

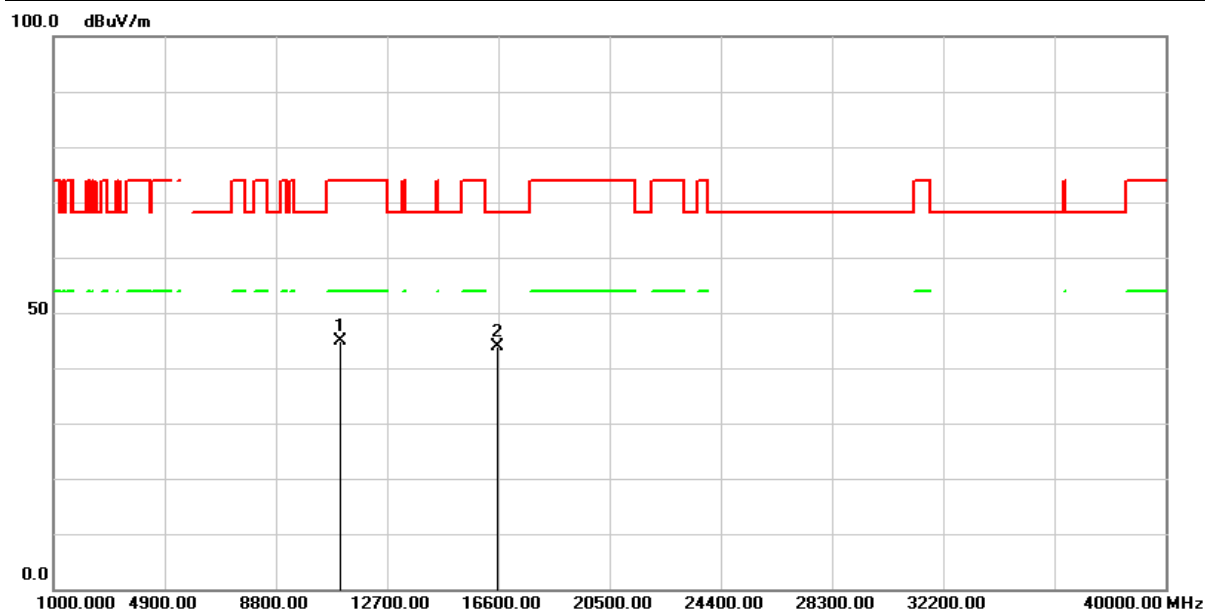


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	54.57	-9.78	44.79	74.00	-29.21	peak
2	16590.000	49.51	-5.54	43.97	68.20	-24.23	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH122(5610MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

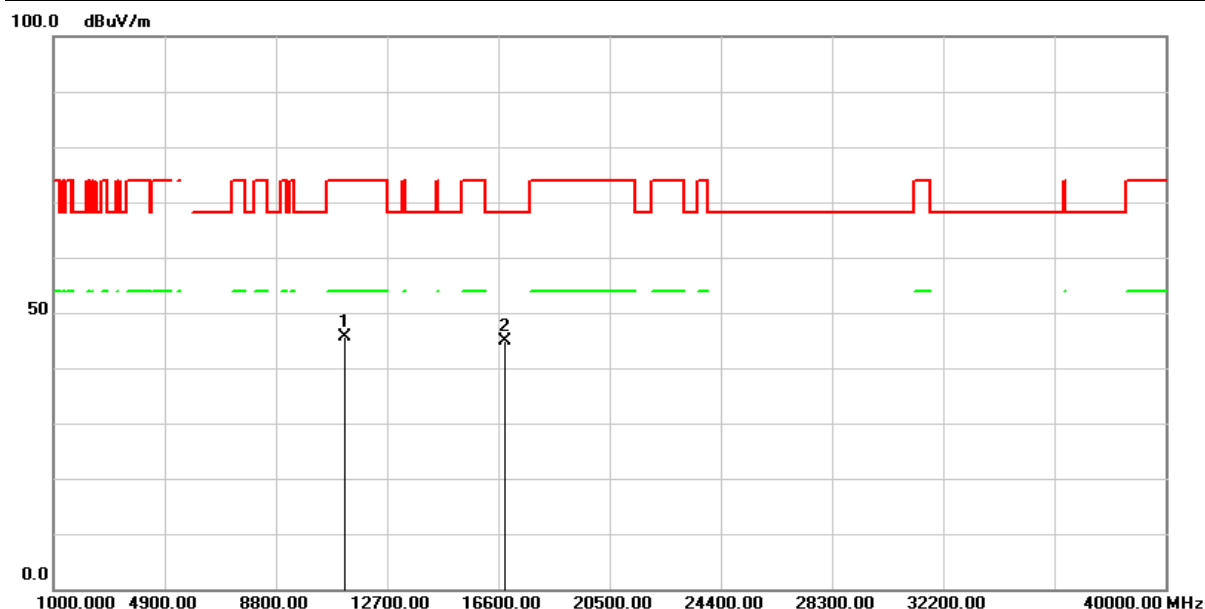


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	55.45	-9.93	45.52	74.00	-28.48	peak
2	16830.000	48.15	-3.20	44.95	68.20	-23.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH122(5610MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

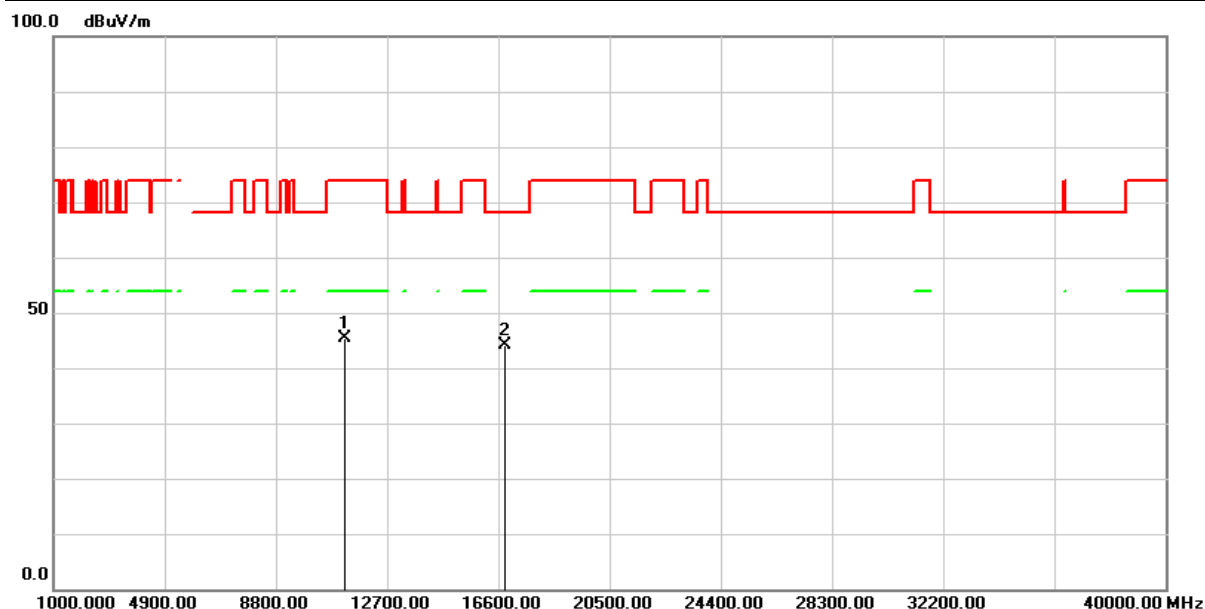


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	55.42	-9.93	45.49	74.00	-28.51	peak
2	16830.000	47.35	-3.20	44.15	68.20	-24.05	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH155(5775MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

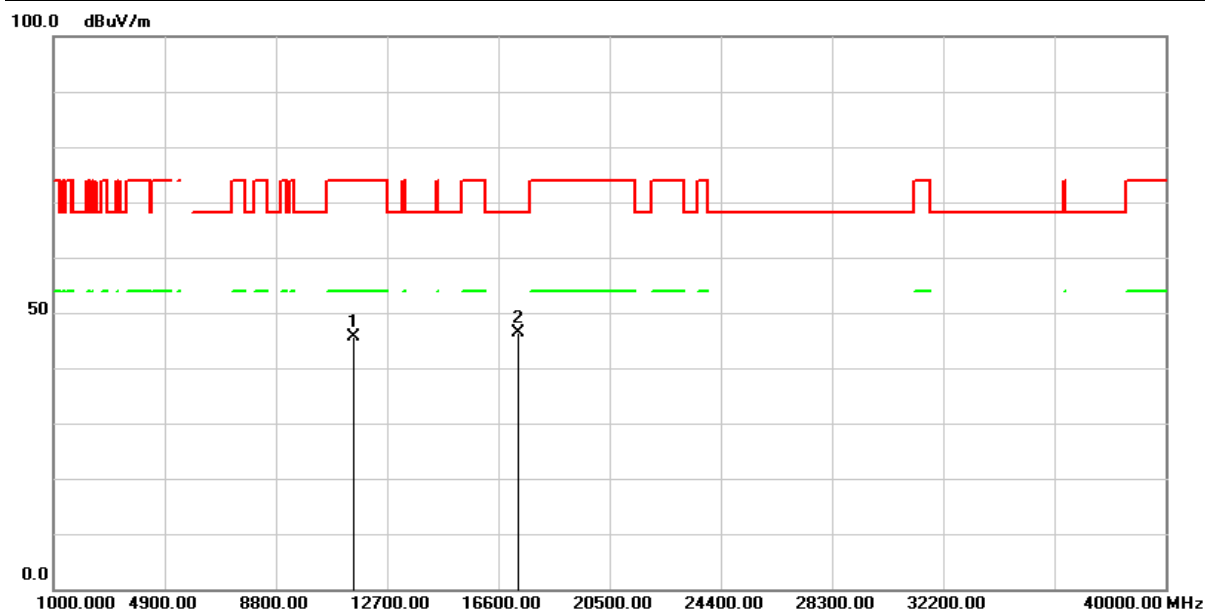


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	55.06	-9.32	45.74	74.00	-28.26	peak
2	17325.000	48.45	-1.95	46.50	68.20	-21.70	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 4 : Transmit (802.11ac VHT80 MCS0)	Test Date :	2024/05/06
Test Channel :	CH155(5775MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

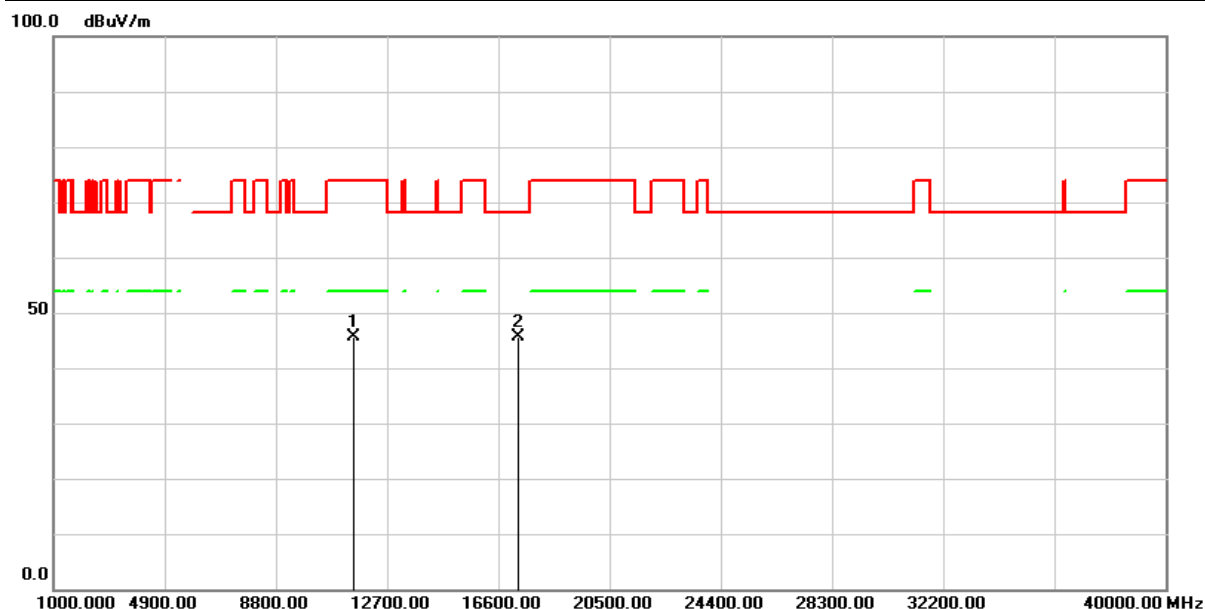


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	55.05	-9.32	45.73	74.00	-28.27	peak
2	17325.000	47.63	-1.95	45.68	68.20	-22.52	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/05/06
Test Channel :	CH50(5250MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

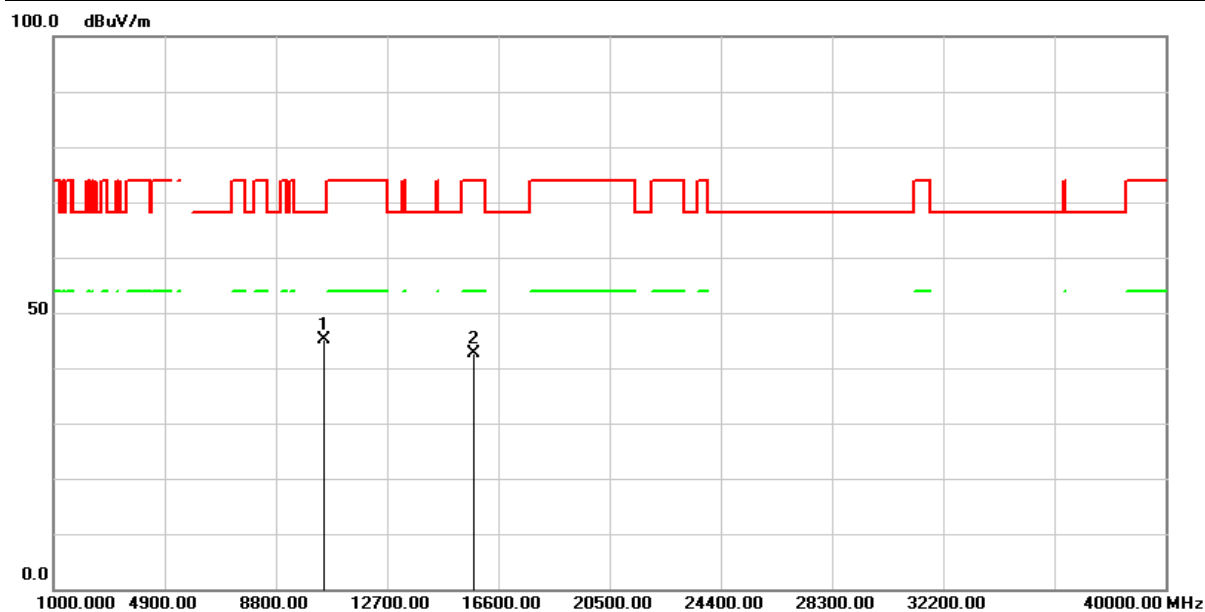


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	55.15	-10.00	45.15	68.20	-23.05	peak
2	15750.000	50.06	-7.44	42.62	74.00	-31.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/05/06
Test Channel :	CH50(5250MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

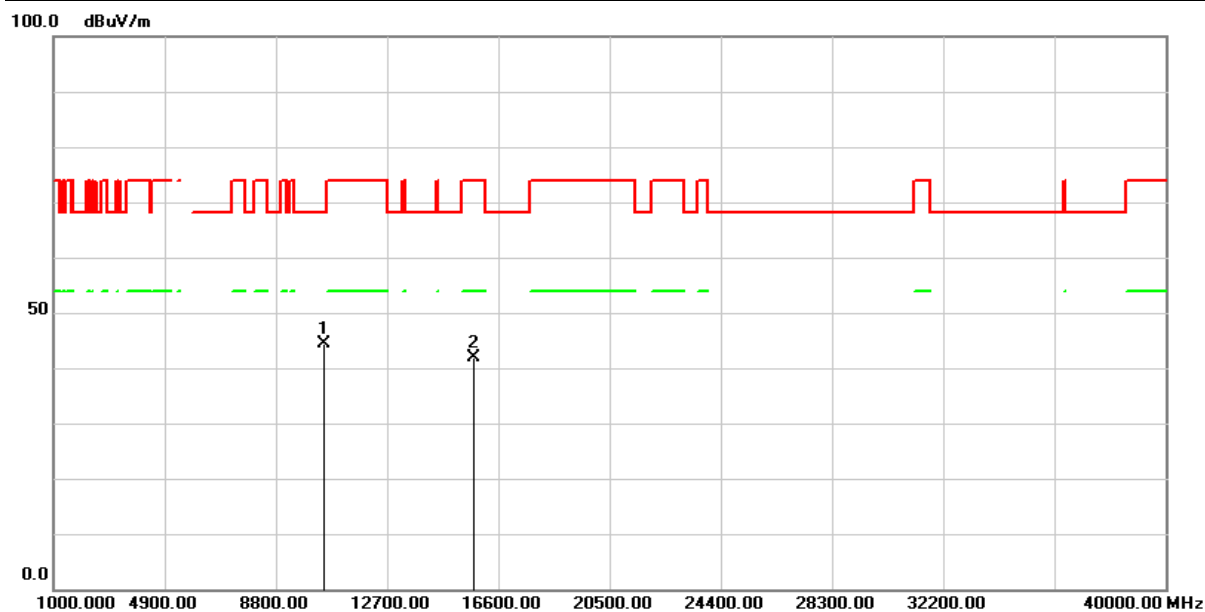


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	54.41	-10.00	44.41	68.20	-23.79	peak
2	15750.000	49.40	-7.44	41.96	74.00	-32.04	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/05/06
Test Channel :	CH114(5570MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

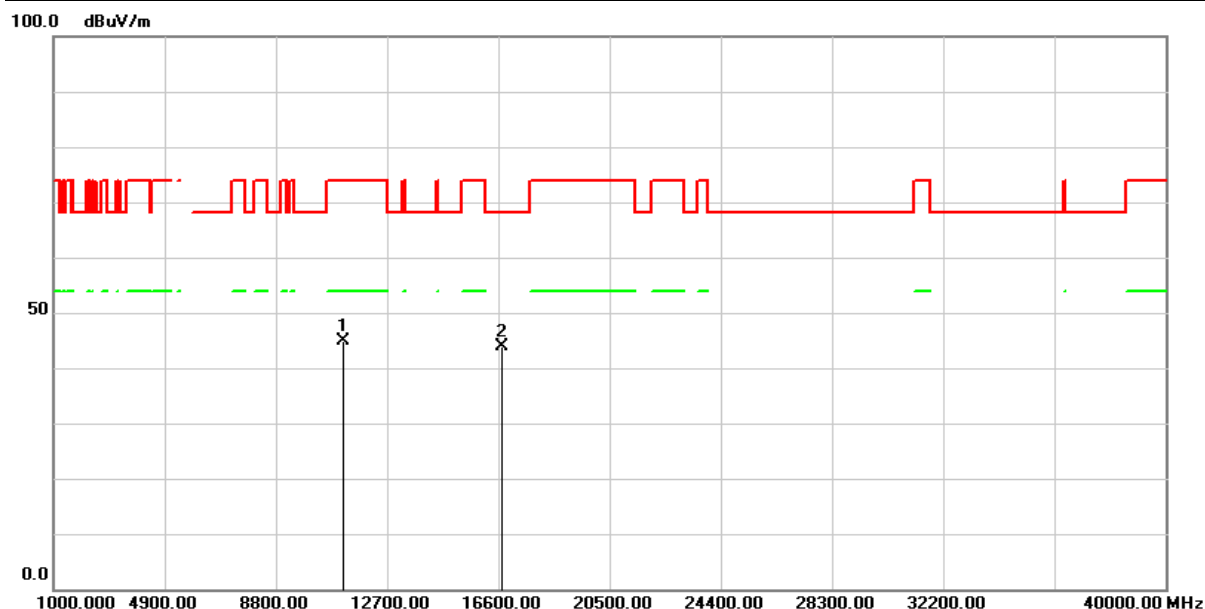


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	54.83	-9.88	44.95	74.00	-29.05	peak
2	16710.000	48.54	-4.62	43.92	68.20	-24.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 5 : Transmit (802.11ac VHT160 MCS0)	Test Date :	2024/05/06
Test Channel :	CH114(5570MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

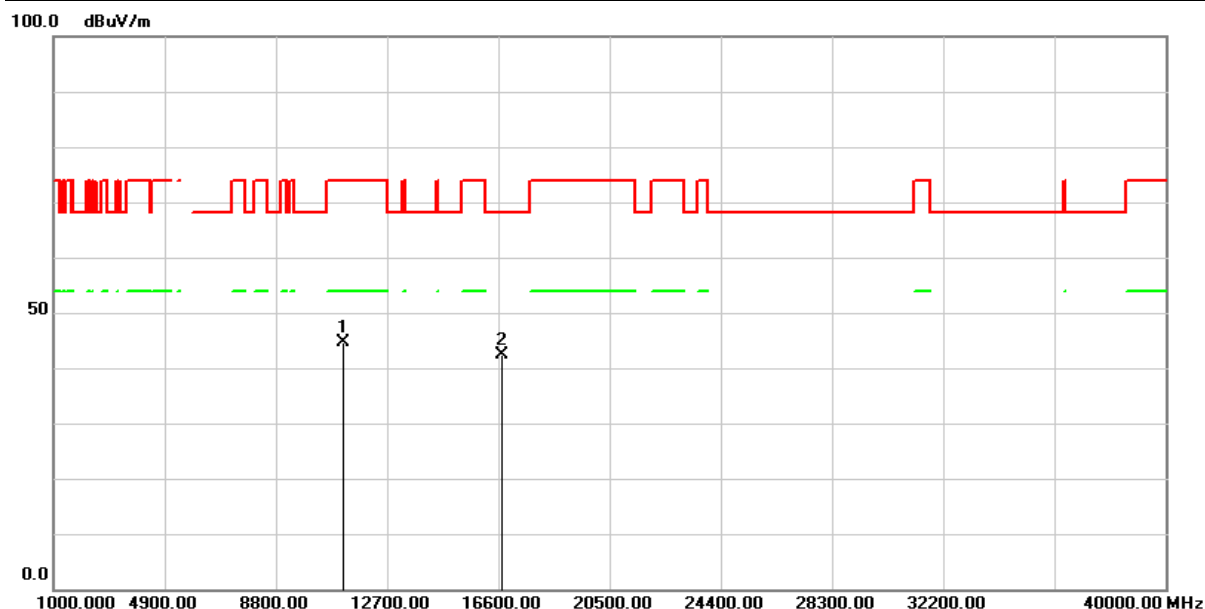


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	54.48	-9.88	44.60	74.00	-29.40	peak
2	16710.000	46.90	-4.62	42.28	68.20	-25.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH36(5180MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

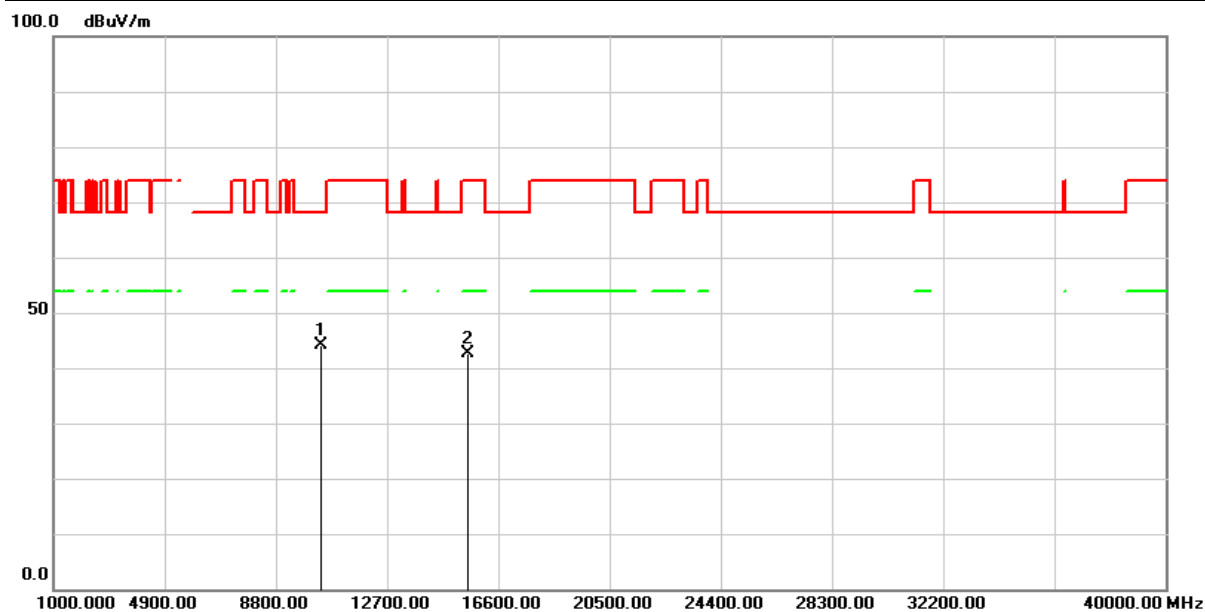


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	54.25	-10.05	44.20	68.20	-24.00	peak
2	15540.000	50.54	-7.80	42.74	74.00	-31.26	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH36(5180MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

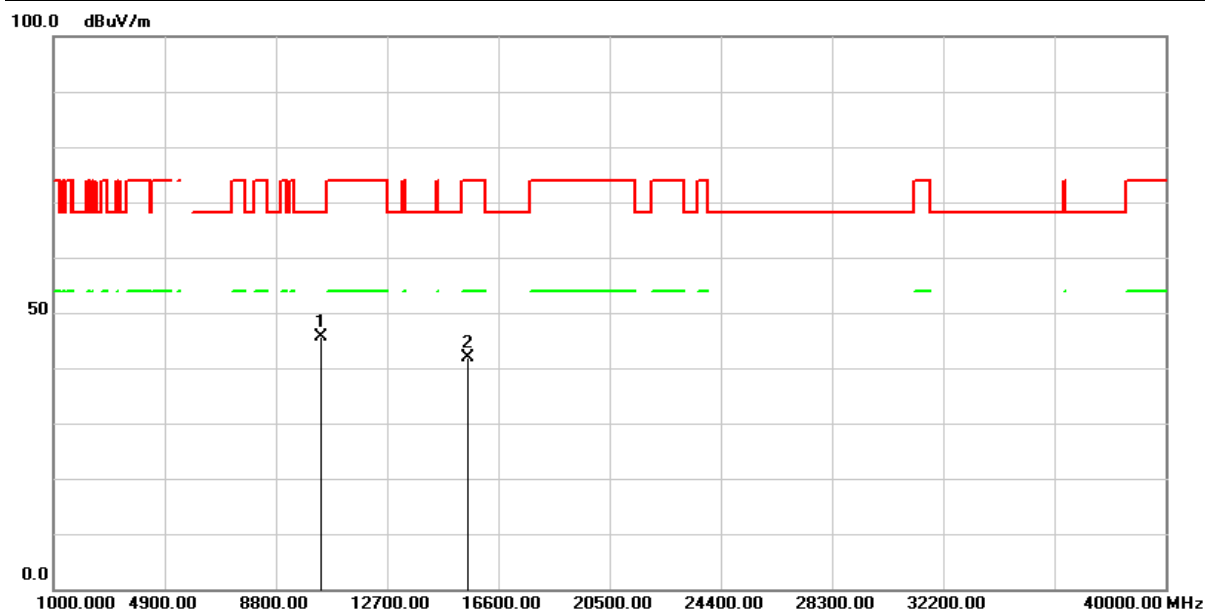


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	55.64	-10.05	45.59	68.20	-22.61	peak
2	15540.000	49.80	-7.80	42.00	74.00	-32.00	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH44(5200MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

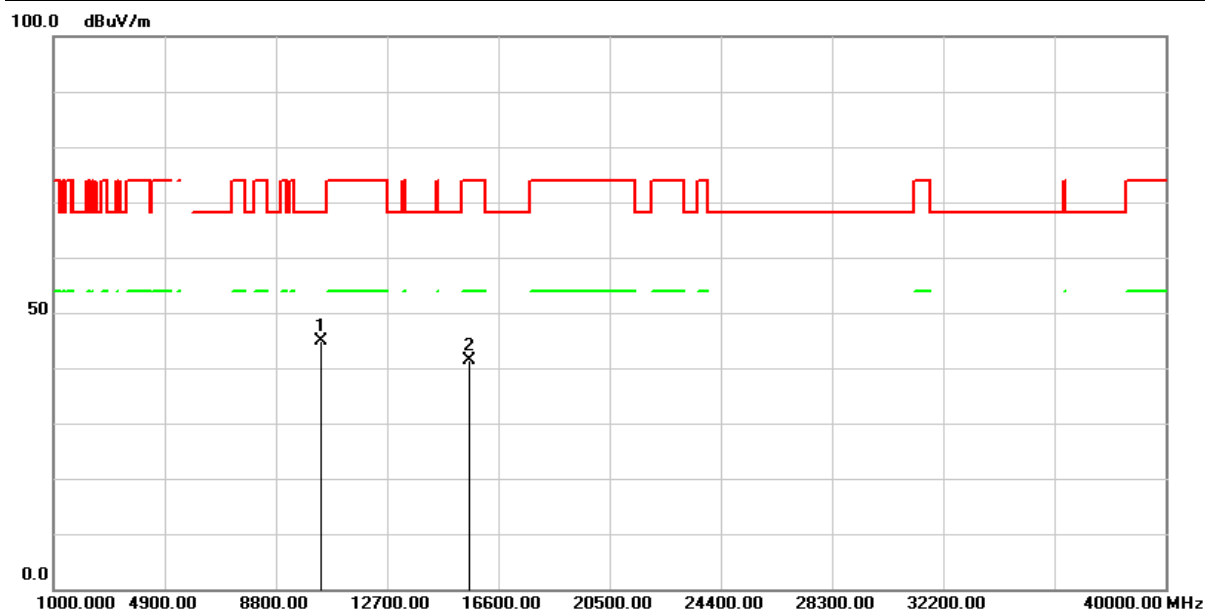


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	54.72	-9.95	44.77	68.20	-23.43	peak
2	15600.000	49.22	-7.79	41.43	74.00	-32.57	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH44(5200MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

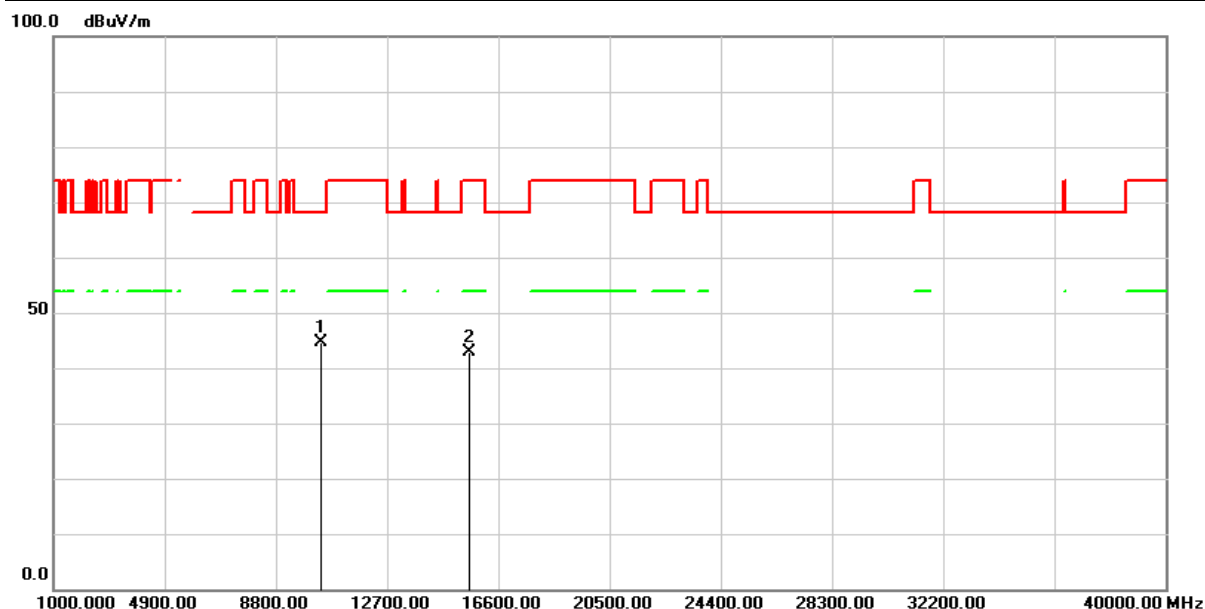


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	54.53	-9.95	44.58	68.20	-23.62	peak
2	15600.000	50.59	-7.79	42.80	74.00	-31.20	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH48(5240MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

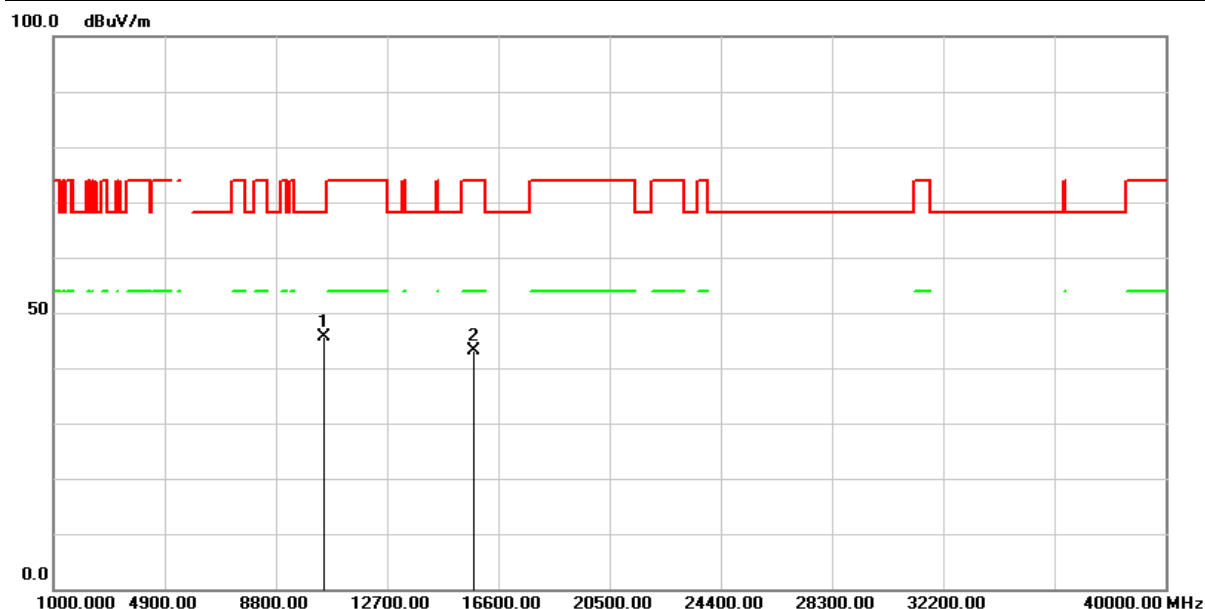


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	55.72	-9.97	45.75	68.20	-22.45	peak
2	15720.000	50.86	-7.62	43.24	74.00	-30.76	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH48(5240MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

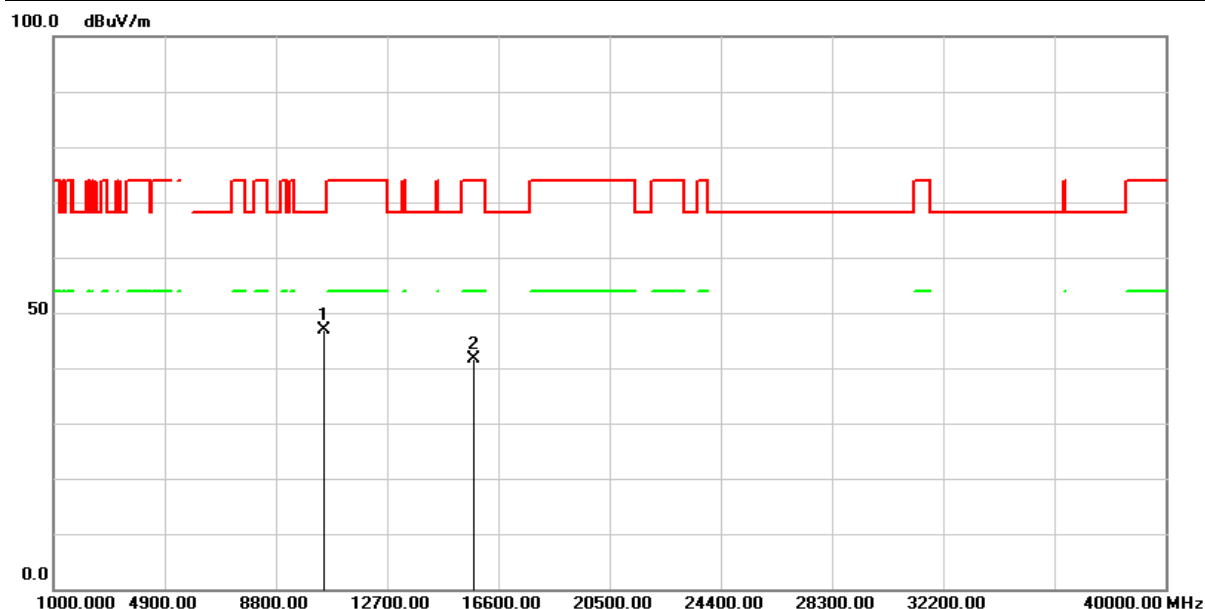


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	56.78	-9.97	46.81	68.20	-21.39	peak
2	15720.000	49.21	-7.62	41.59	74.00	-32.41	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH52(5260MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

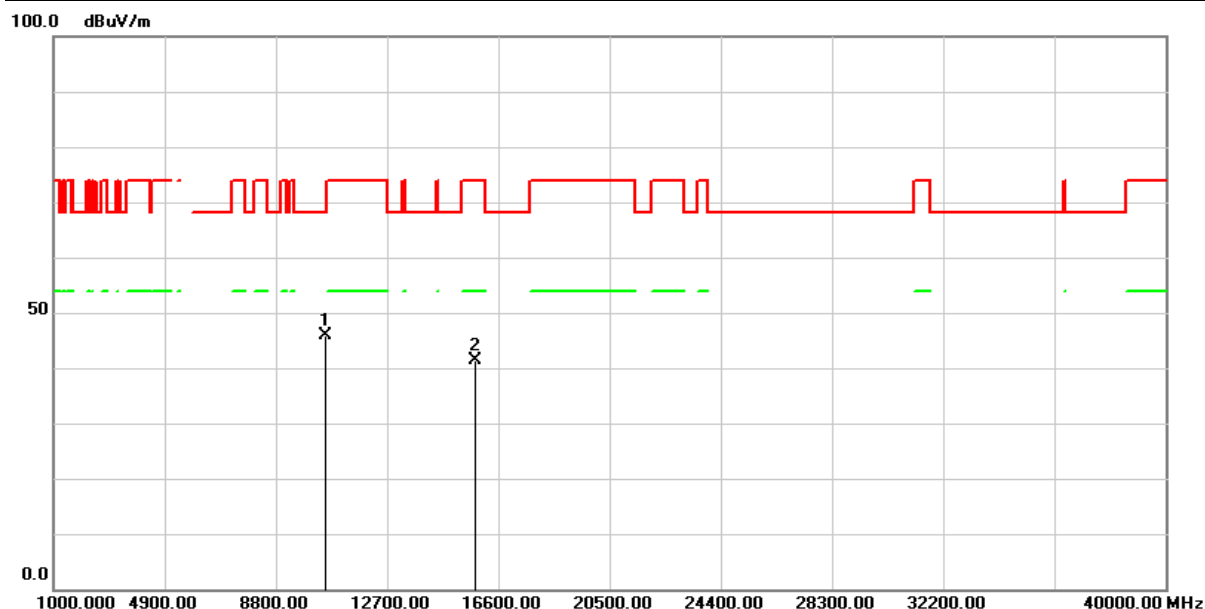


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	55.93	-10.01	45.92	68.20	-22.28	peak
2	15780.000	48.95	-7.51	41.44	74.00	-32.56	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH52(5260MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

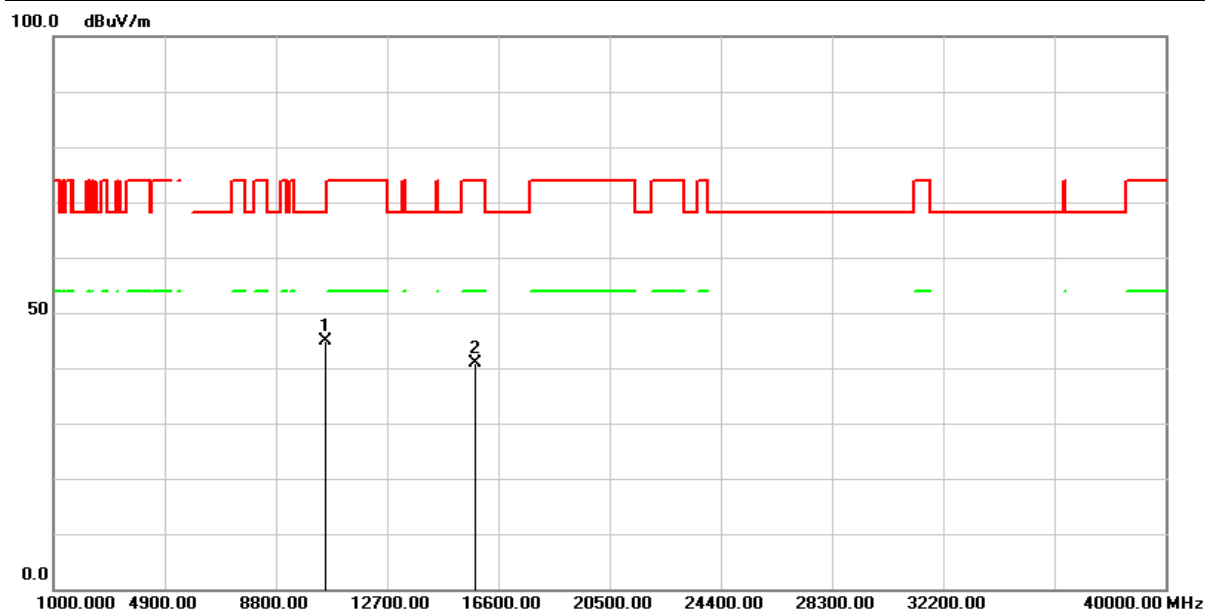


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	54.96	-10.01	44.95	68.20	-23.25	peak
2	15780.000	48.40	-7.51	40.89	74.00	-33.11	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH60(5300MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

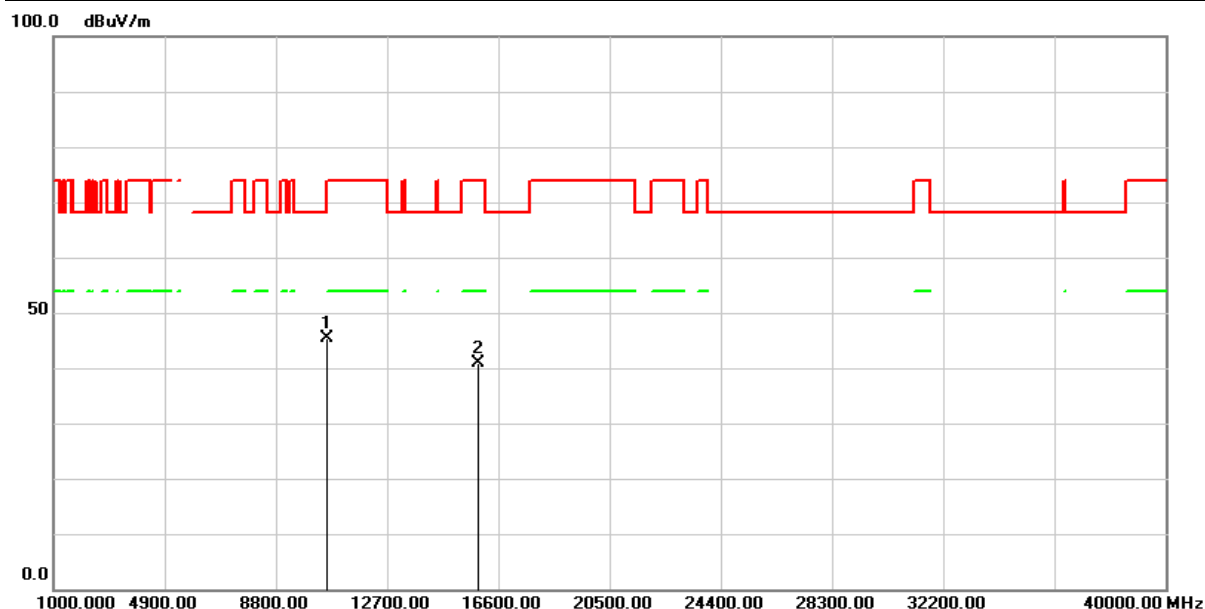


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	55.29	-9.94	45.35	68.20	-22.85	peak
2	15900.000	48.19	-7.20	40.99	74.00	-33.01	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH60(5300MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

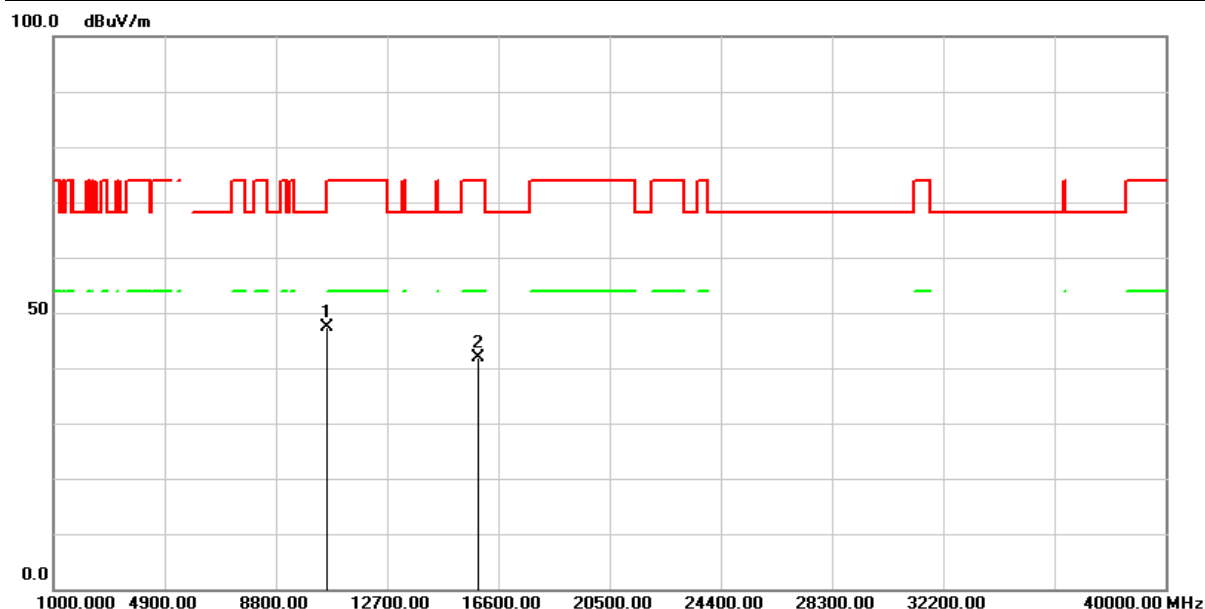


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	57.20	-9.94	47.26	68.20	-20.94	peak
2	15900.000	49.00	-7.20	41.80	74.00	-32.20	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH64(5320MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

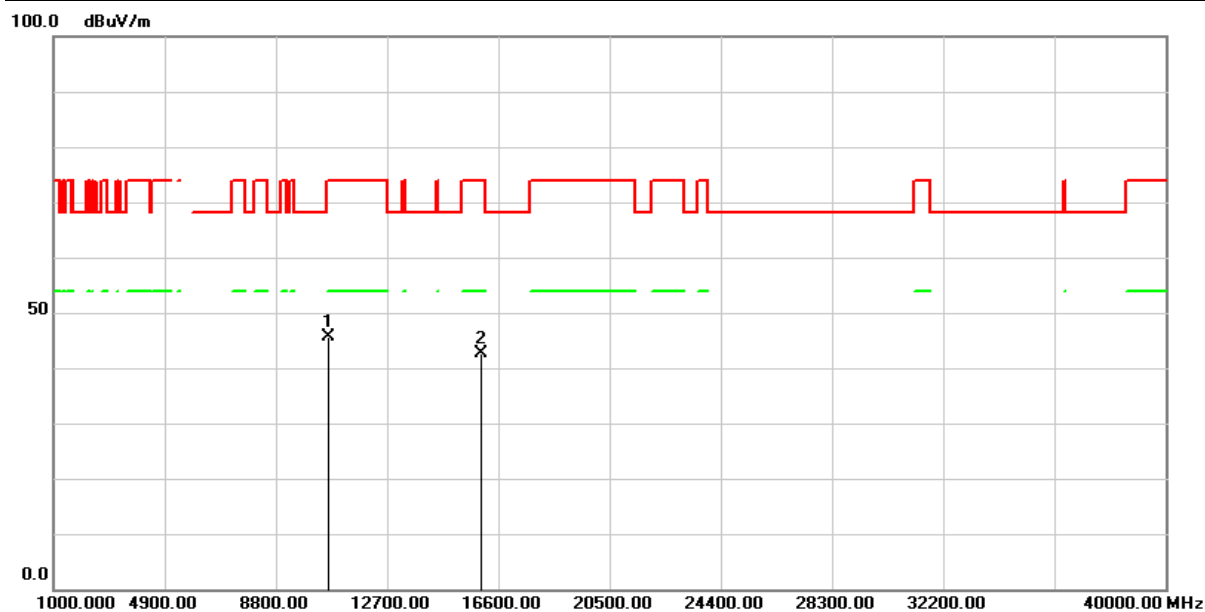


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	55.45	-9.87	45.58	74.00	-28.42	peak
2	15960.000	49.85	-7.29	42.56	74.00	-31.44	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH64(5320MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

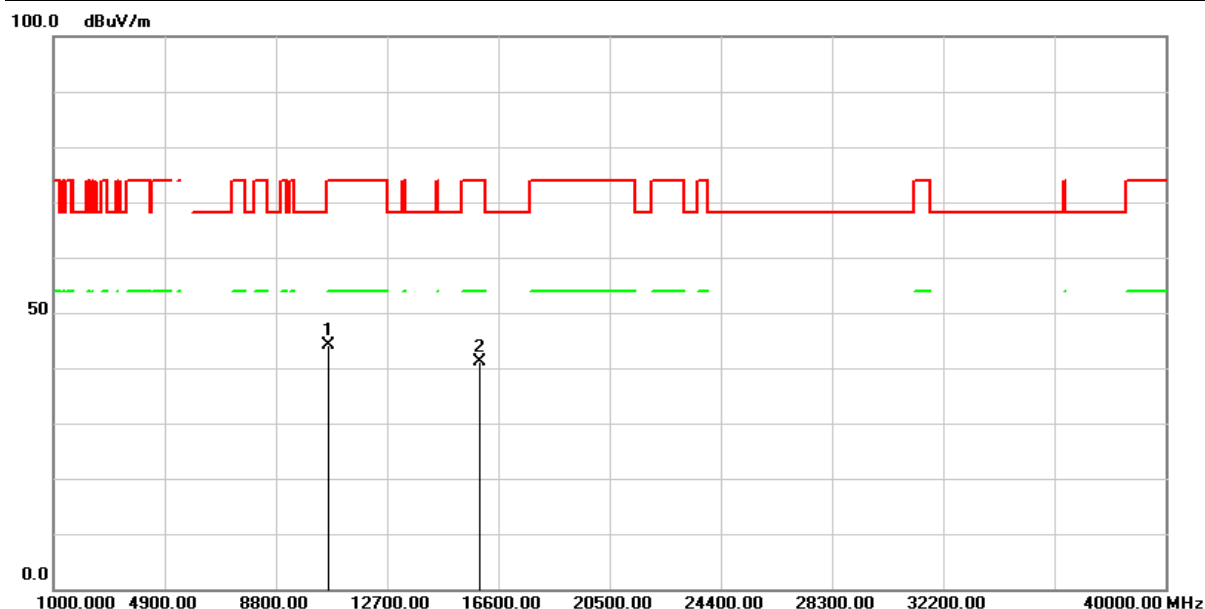


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	54.08	-9.87	44.21	74.00	-29.79	peak
2	15960.000	48.30	-7.29	41.01	74.00	-32.99	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH100(5500MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

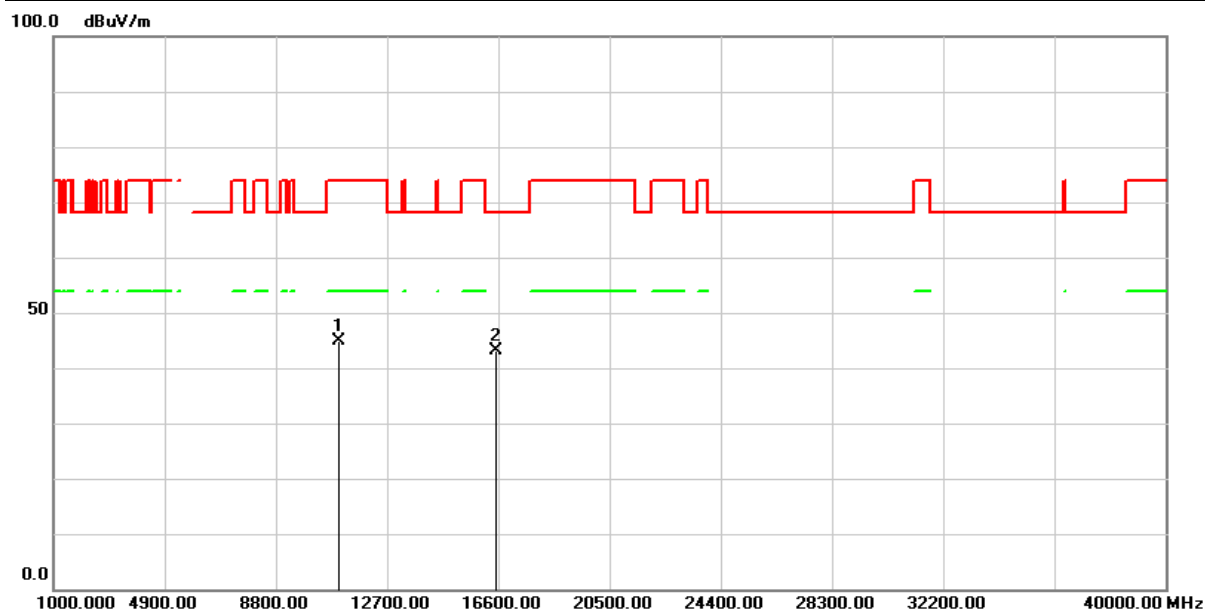


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	54.57	-9.68	44.89	74.00	-29.11	peak
2	16500.000	48.77	-5.66	43.11	68.20	-25.09	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH100(5500MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

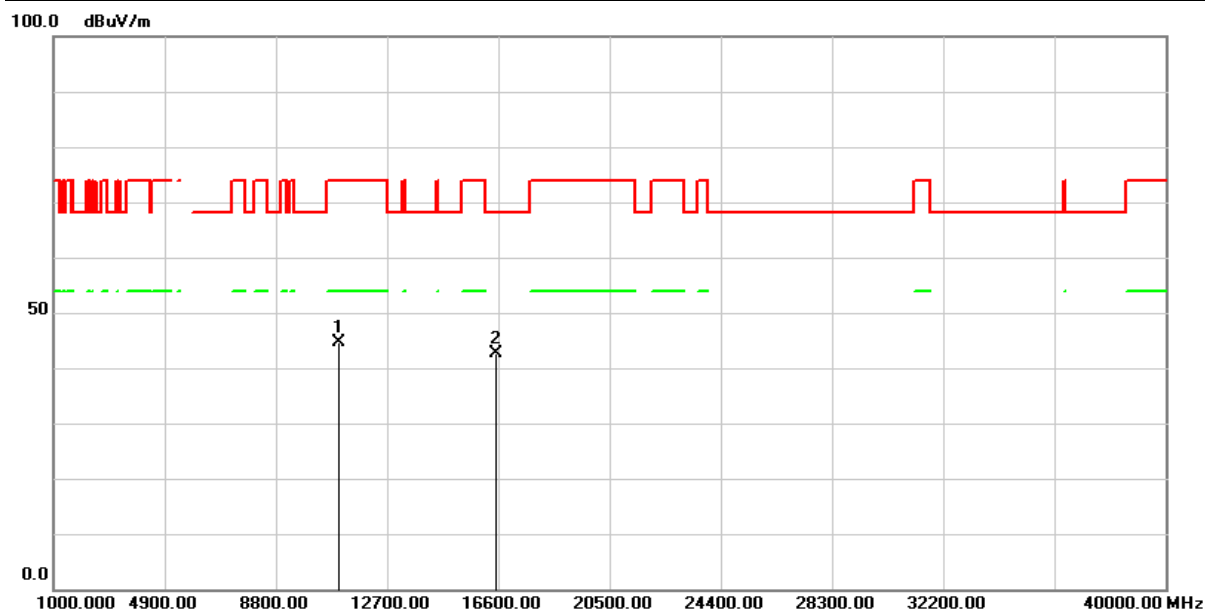


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	54.23	-9.68	44.55	74.00	-29.45	peak
2	16500.000	48.26	-5.66	42.60	68.20	-25.60	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH116(5580MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

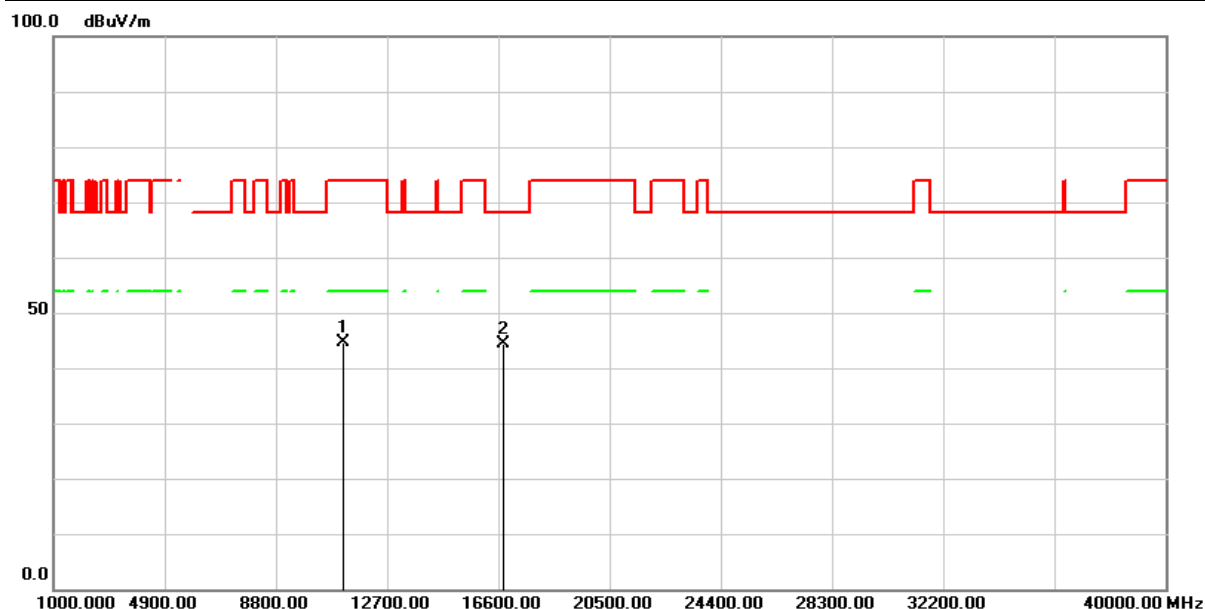


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	54.43	-9.89	44.54	74.00	-29.46	peak
2	16740.000	48.60	-4.31	44.29	68.20	-23.91	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH116(5580MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

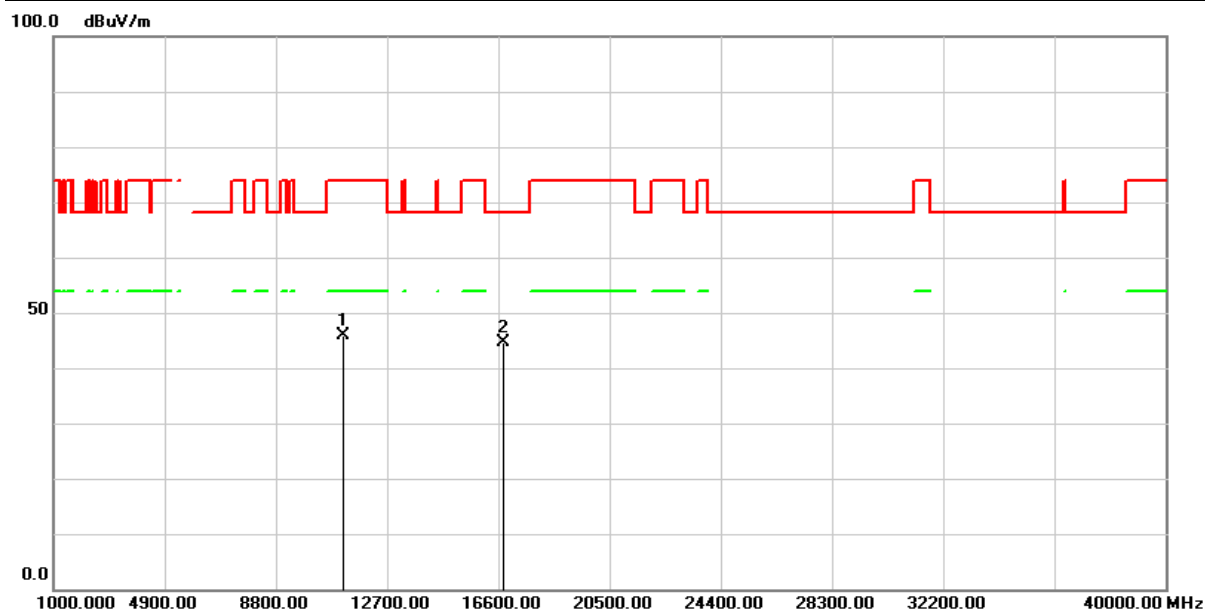


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	55.66	-9.89	45.77	74.00	-28.23	peak
2	16740.000	48.83	-4.31	44.52	68.20	-23.68	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/06
Test Channel :	CH140(5700MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

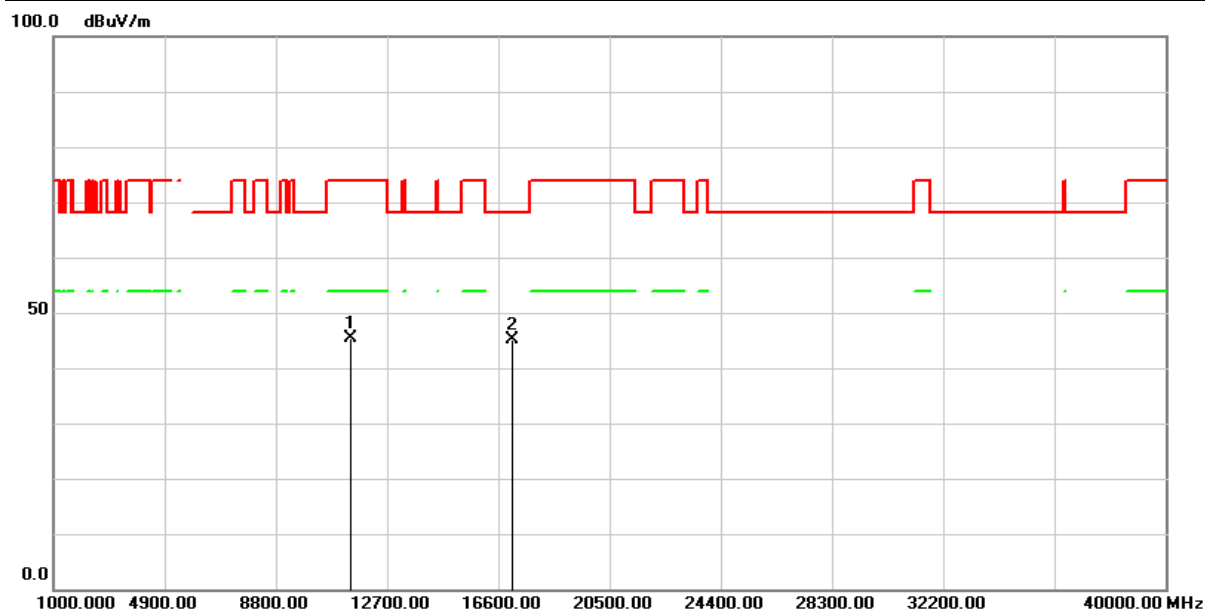


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	54.96	-9.59	45.37	74.00	-28.63	peak
2	17100.000	47.83	-2.67	45.16	68.20	-23.04	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH140(5700MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

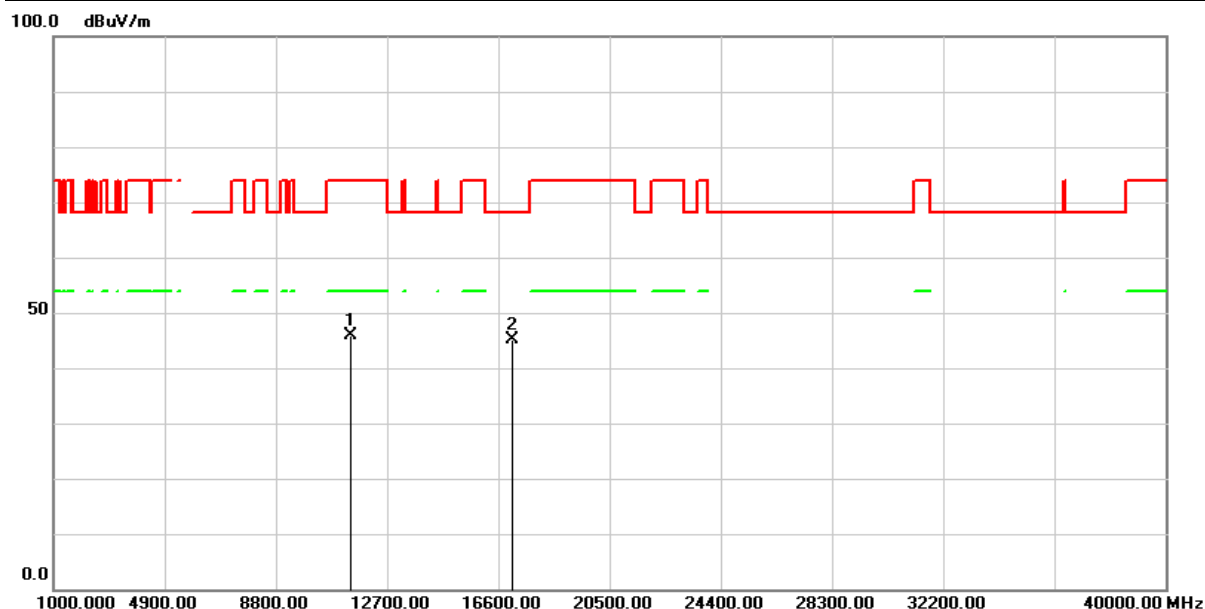


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	55.57	-9.59	45.98	74.00	-28.02	peak
2	17100.000	47.71	-2.67	45.04	68.20	-23.16	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH149(5745MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

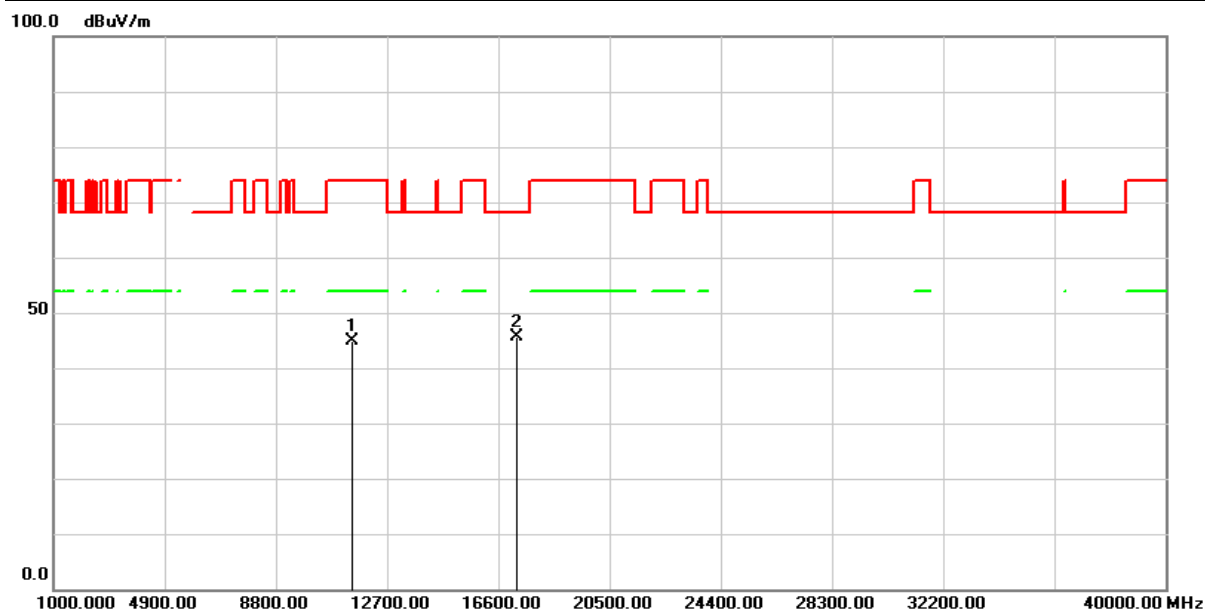


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	54.27	-9.45	44.82	74.00	-29.18	peak
2	17235.000	47.95	-2.24	45.71	68.20	-22.49	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH149(5745MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

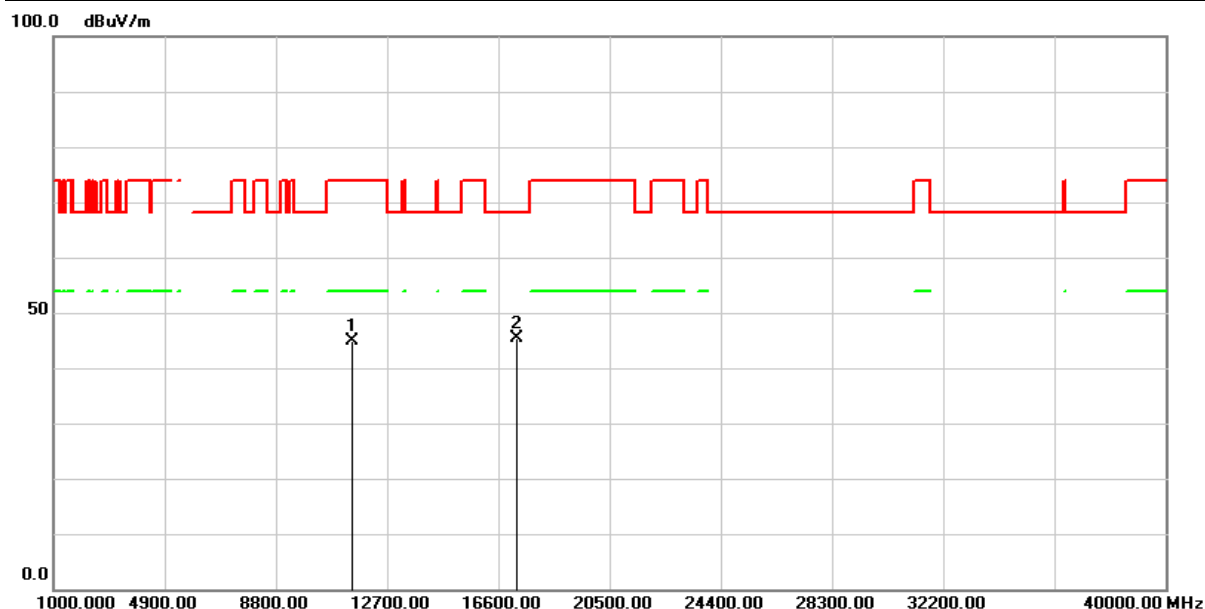


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	54.23	-9.45	44.78	74.00	-29.22	peak
2	17235.000	47.64	-2.24	45.40	68.20	-22.80	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH157(5785MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

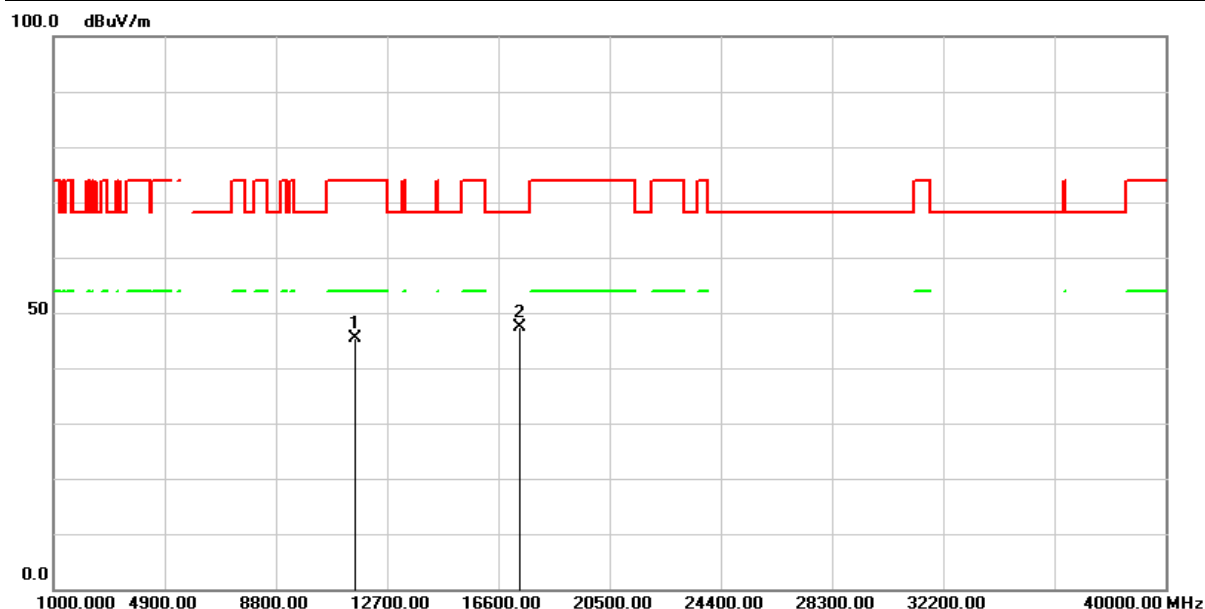


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	54.71	-9.40	45.31	74.00	-28.69	peak
2	17355.000	49.10	-1.65	47.45	68.20	-20.75	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH157(5785MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

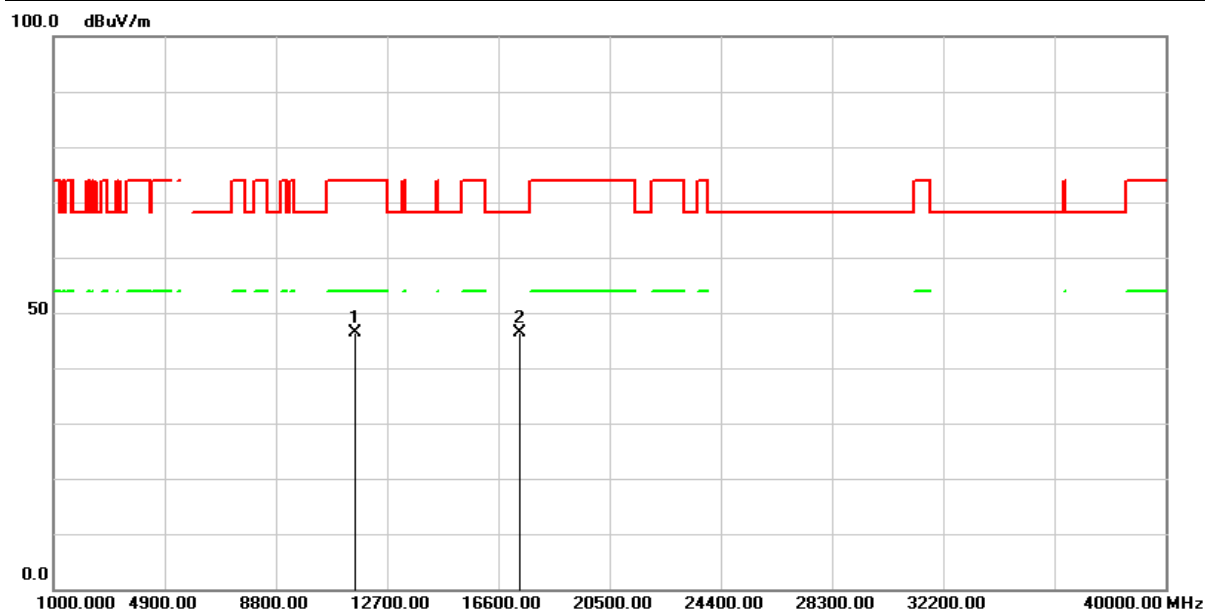


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	55.69	-9.40	46.29	74.00	-27.71	peak
2	17355.000	48.06	-1.65	46.41	68.20	-21.79	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH165(5825MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

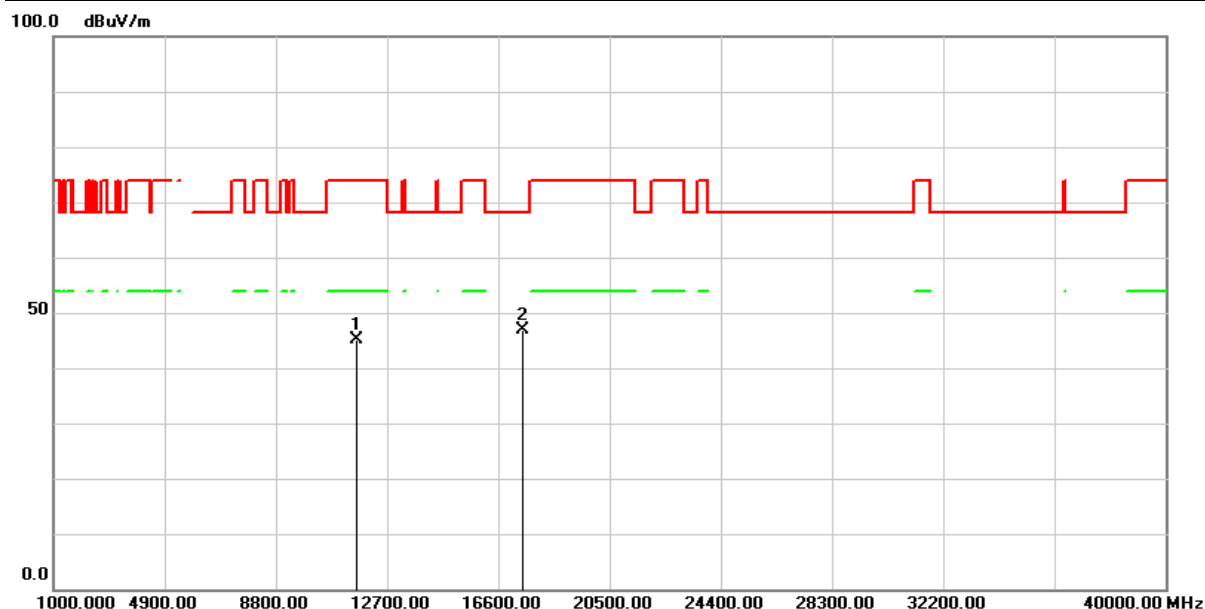


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	55.00	-9.82	45.18	74.00	-28.82	peak
2	17475.000	47.73	-0.85	46.88	68.20	-21.32	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 6 : Transmit (802.11ax HE20M MCS0)	Test Date :	2024/05/07
Test Channel :	CH165(5825MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

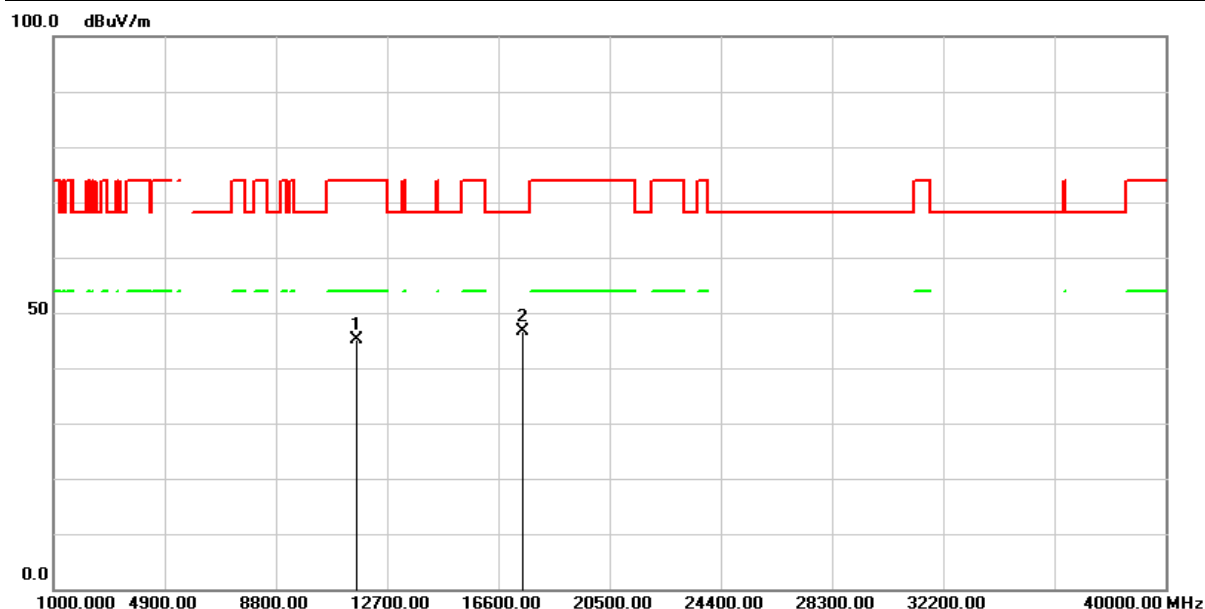


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	54.96	-9.82	45.14	74.00	-28.86	peak
2	17475.000	47.43	-0.85	46.58	68.20	-21.62	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH38(5190MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

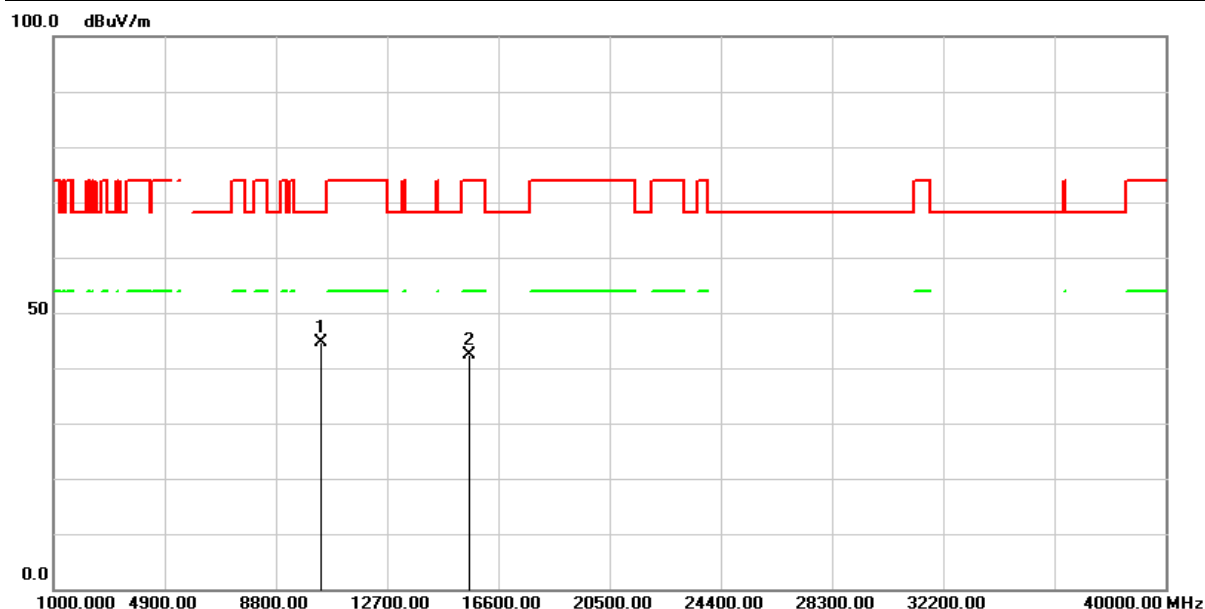


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	54.63	-10.00	44.63	68.20	-23.57	peak
2	15570.000	50.20	-7.79	42.41	74.00	-31.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH38(5190MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

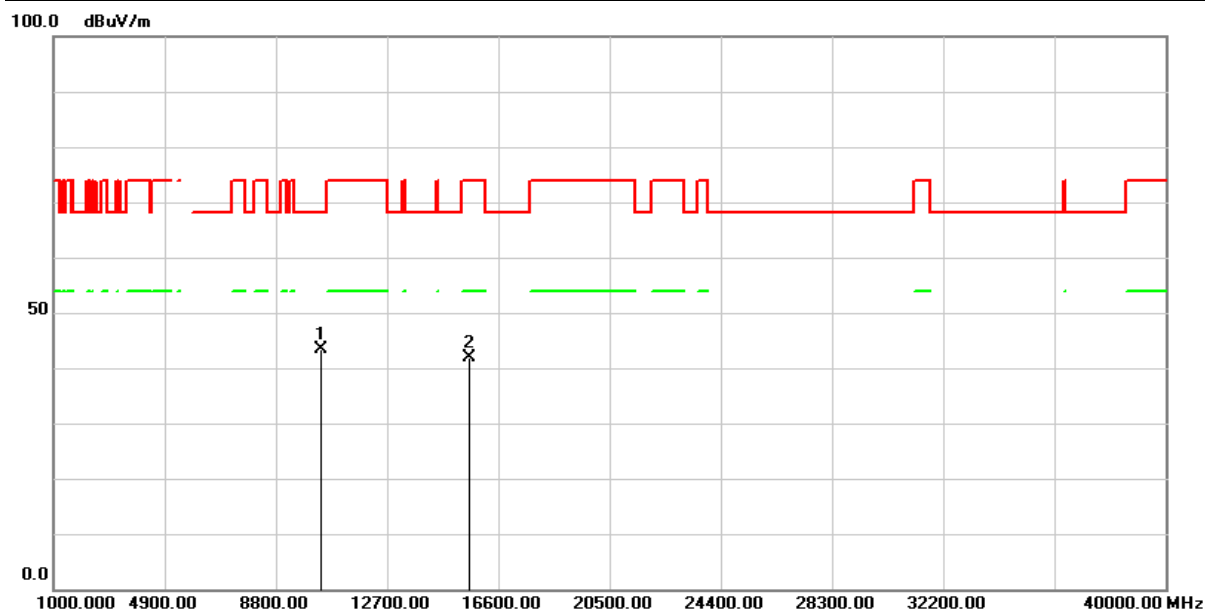


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	53.47	-10.00	43.47	68.20	-24.73	peak
2	15570.000	49.60	-7.79	41.81	74.00	-32.19	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH46(5230MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

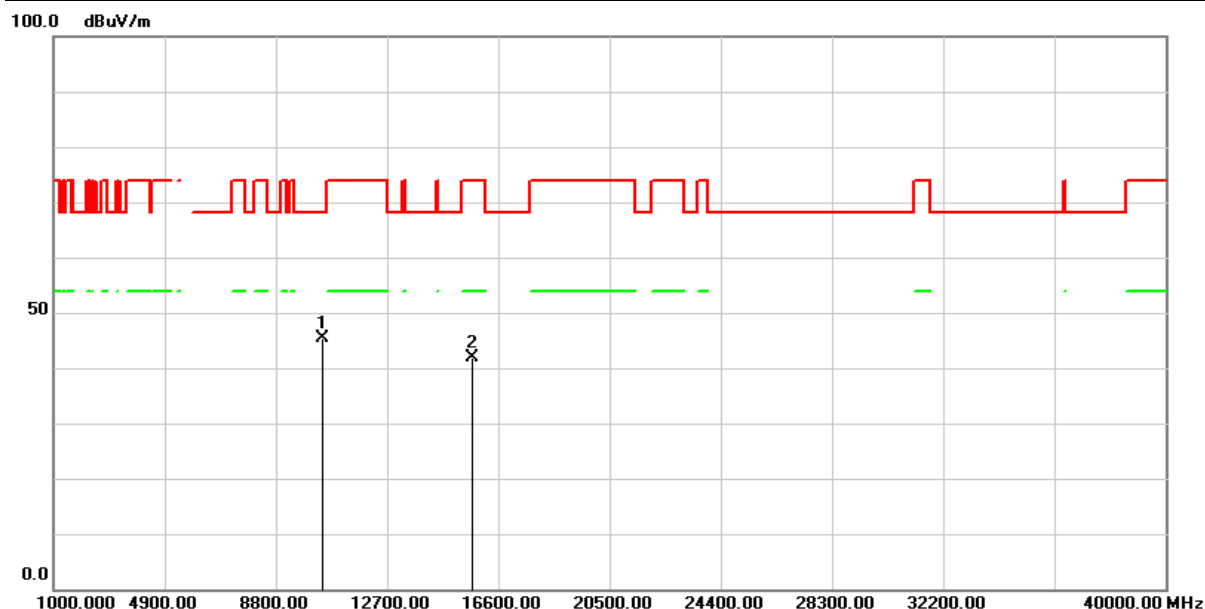


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	55.22	-9.94	45.28	68.20	-22.92	peak
2	15690.000	49.76	-7.81	41.95	74.00	-32.05	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH46(5230MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

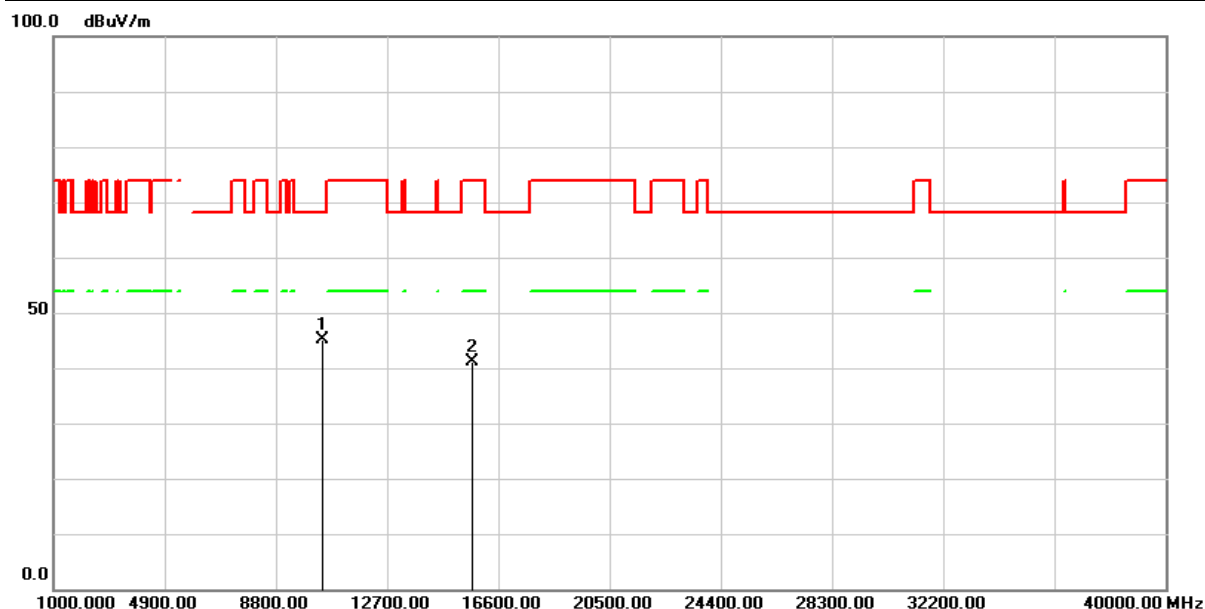


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	55.10	-9.94	45.16	68.20	-23.04	peak
2	15690.000	49.03	-7.81	41.22	74.00	-32.78	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH54(5270MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

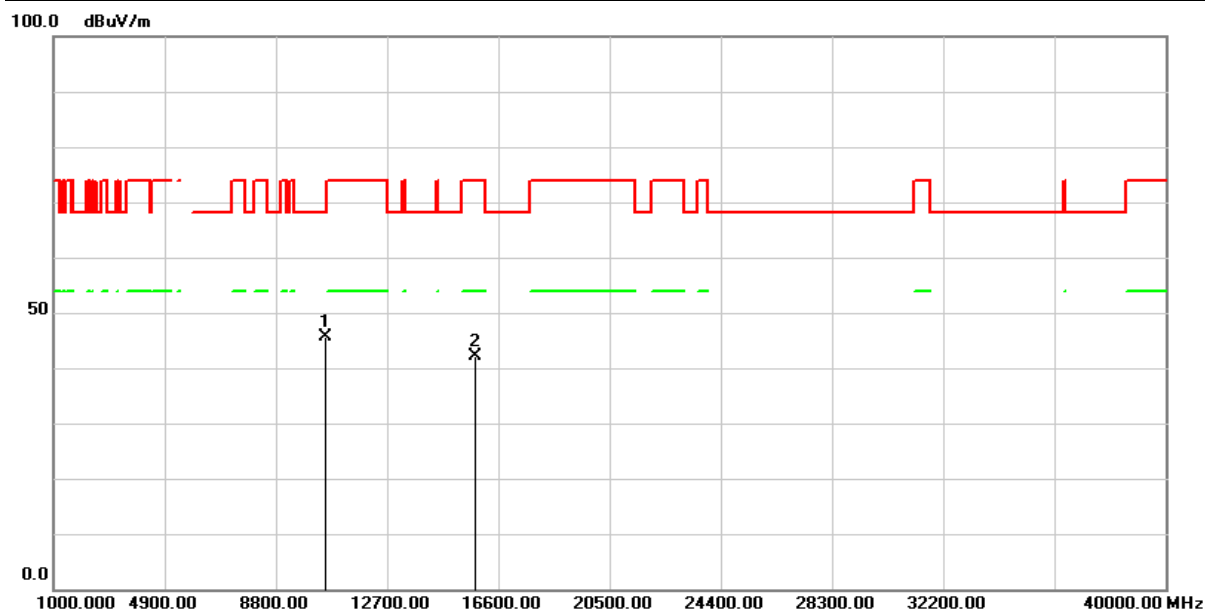


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	55.53	-10.01	45.52	68.20	-22.68	peak
2	15810.000	49.60	-7.54	42.06	74.00	-31.94	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH54(5270MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

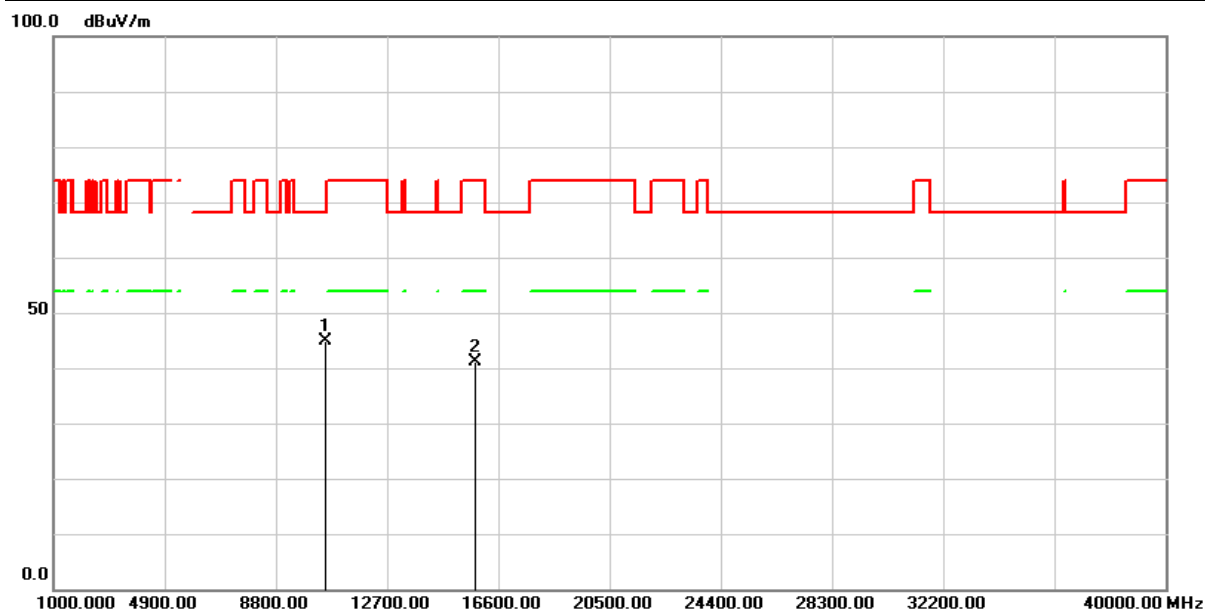


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	54.81	-10.01	44.80	68.20	-23.40	peak
2	15810.000	48.62	-7.54	41.08	74.00	-32.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH62(5310MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

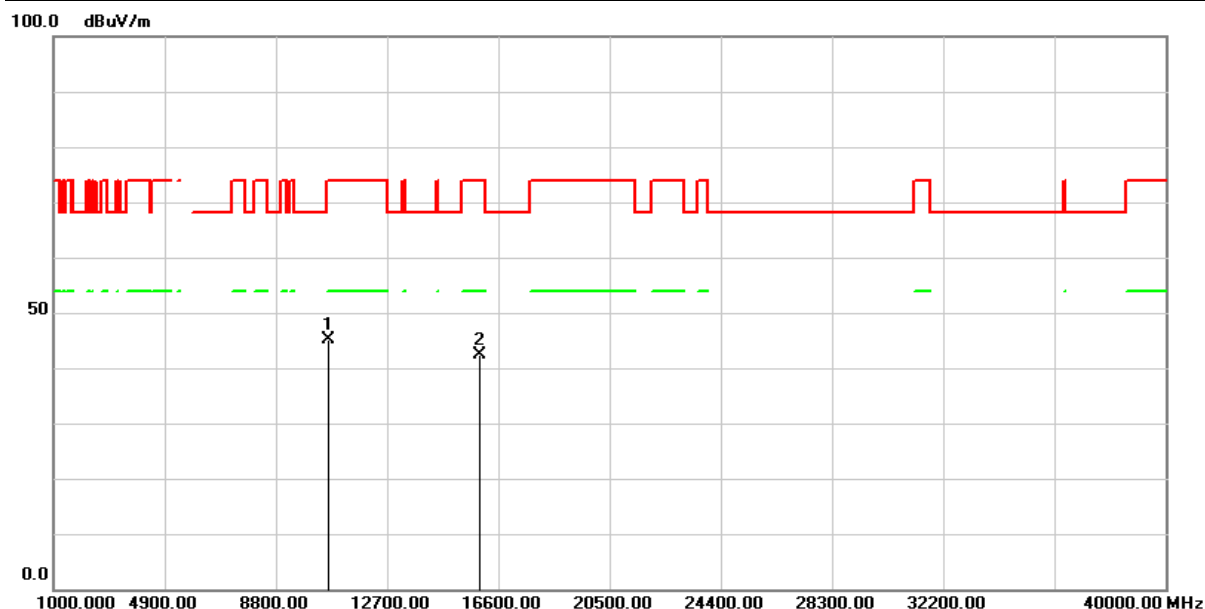


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	54.93	-9.90	45.03	74.00	-28.97	peak
2	15930.000	49.60	-7.26	42.34	74.00	-31.66	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH62(5310MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

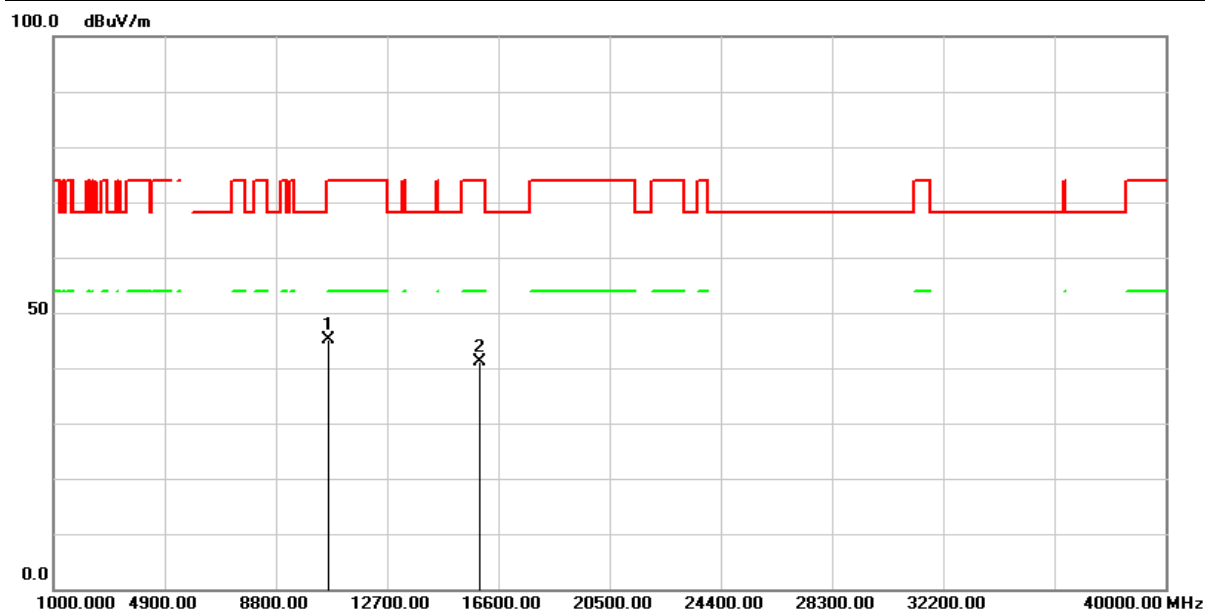


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	55.08	-9.90	45.18	74.00	-28.82	peak
2	15930.000	48.34	-7.26	41.08	74.00	-32.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH102(5510MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

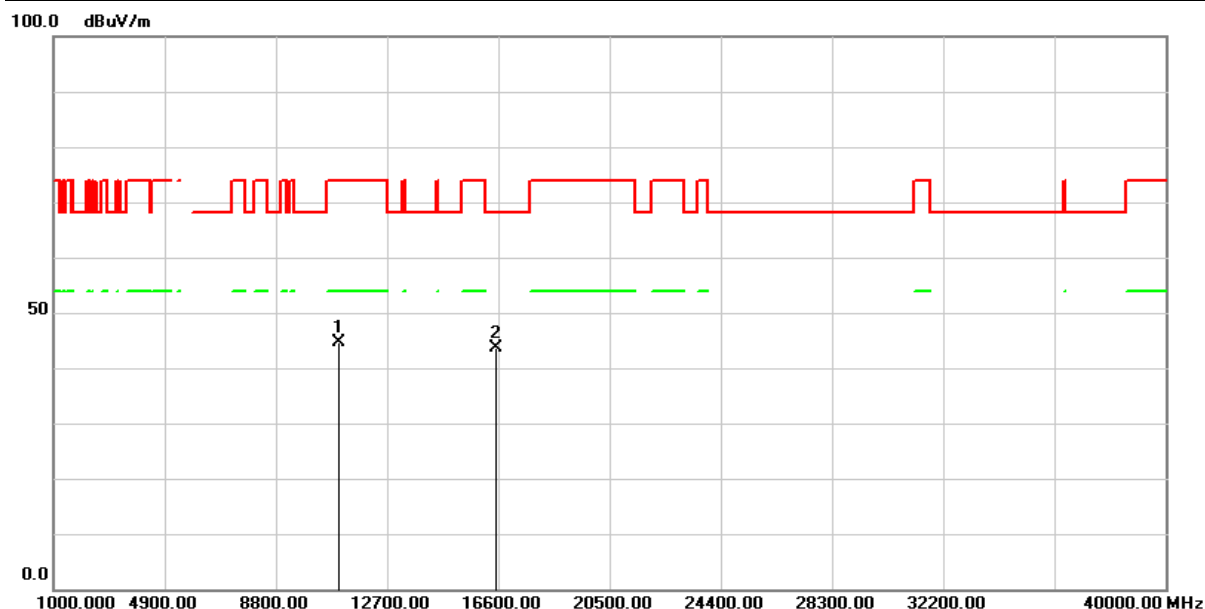


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	54.42	-9.71	44.71	74.00	-29.29	peak
2	16530.000	49.30	-5.60	43.70	68.20	-24.50	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH102(5510MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

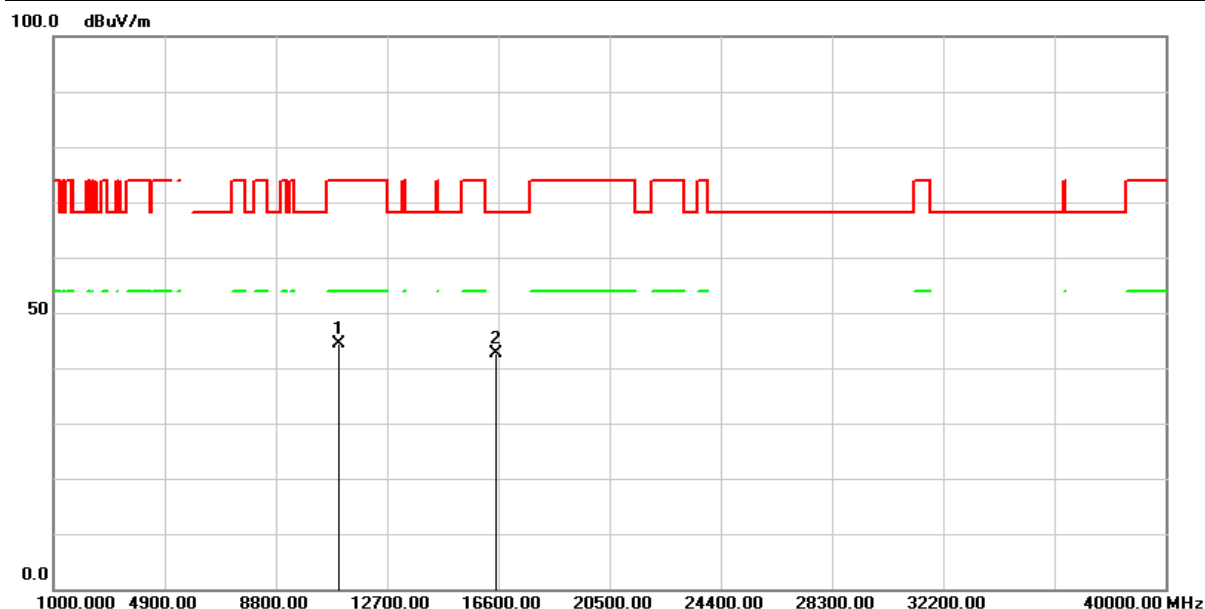


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	53.98	-9.71	44.27	74.00	-29.73	peak
2	16530.000	48.17	-5.60	42.57	68.20	-25.63	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH110(5550MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

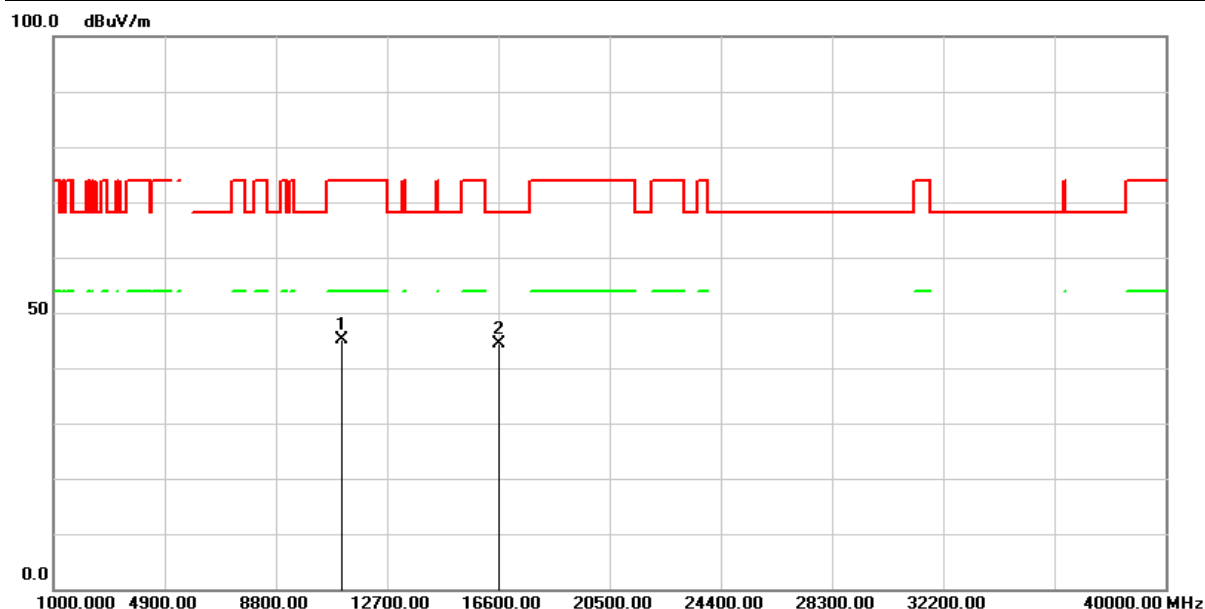


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	55.08	-9.91	45.17	74.00	-28.83	peak
2	16650.000	49.50	-5.13	44.37	68.20	-23.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH110(5550MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

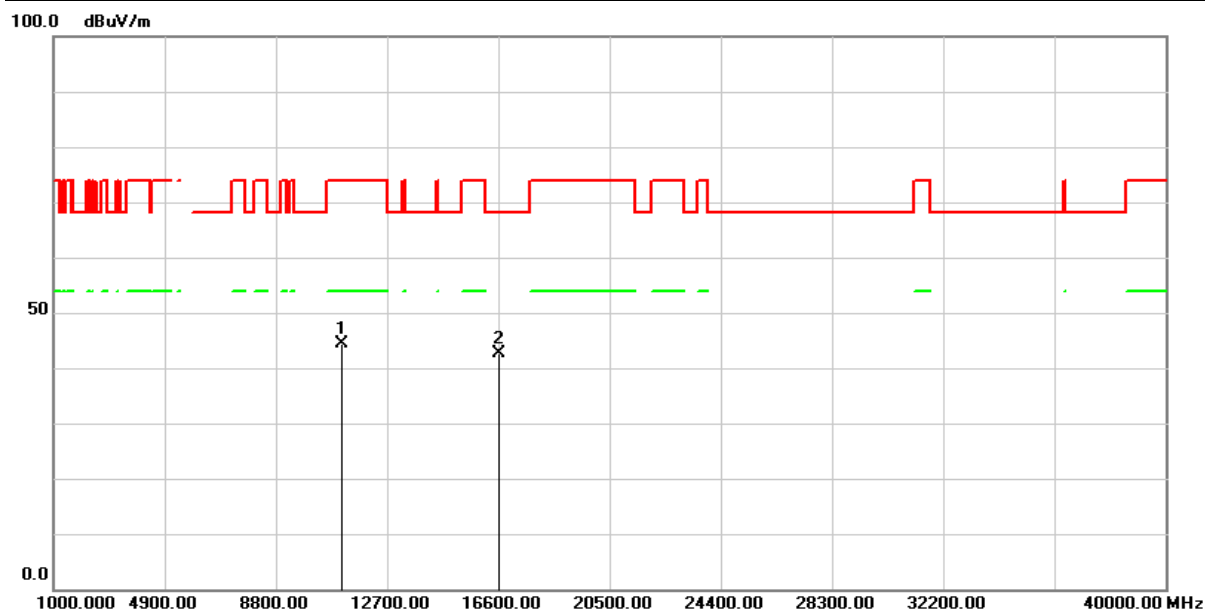


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	54.21	-9.91	44.30	74.00	-29.70	peak
2	16650.000	47.65	-5.13	42.52	68.20	-25.68	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH134(5670MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

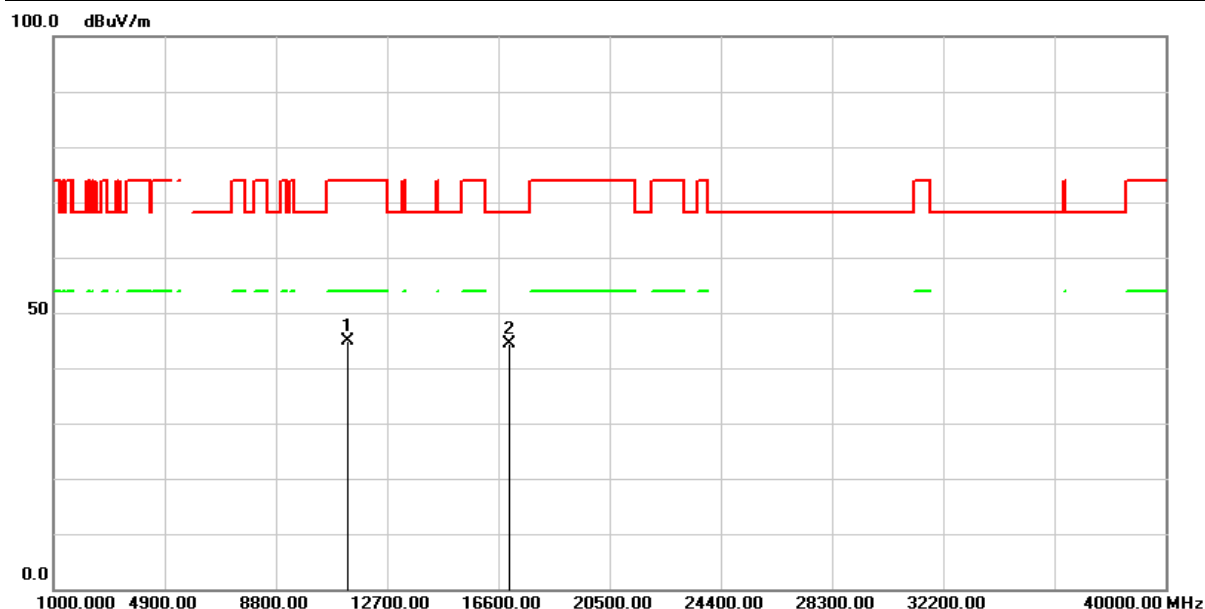


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	54.73	-9.75	44.98	74.00	-29.02	peak
2	17010.000	47.07	-2.70	44.37	68.20	-23.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH134(5670MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

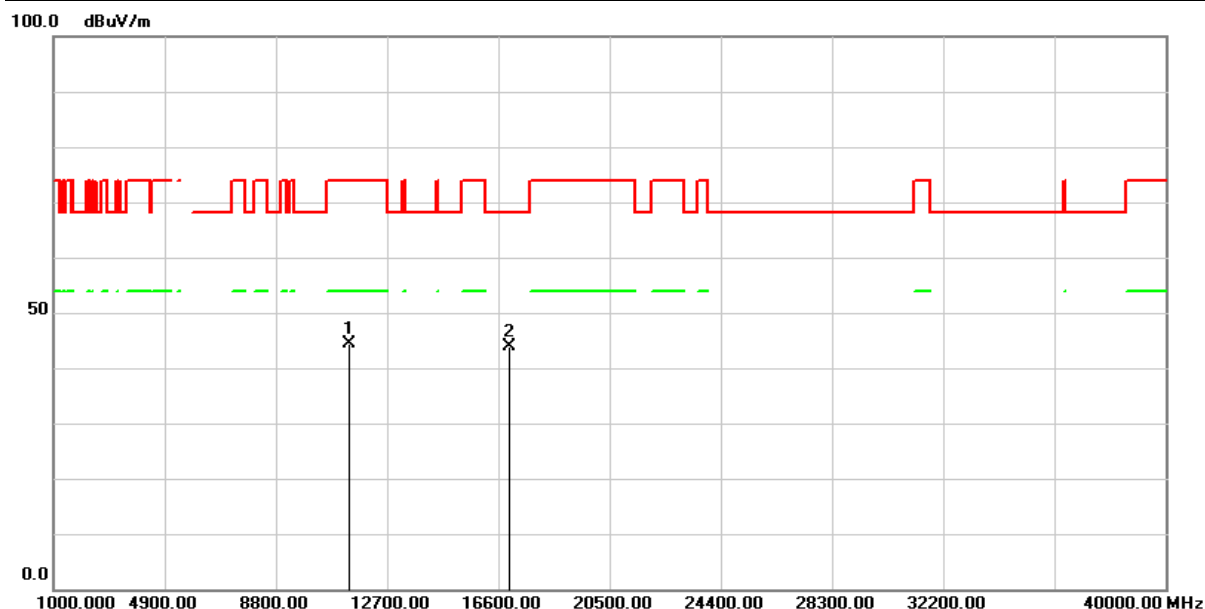


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	54.21	-9.75	44.46	74.00	-29.54	peak
2	17010.000	46.57	-2.70	43.87	68.20	-24.33	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH151(5755MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

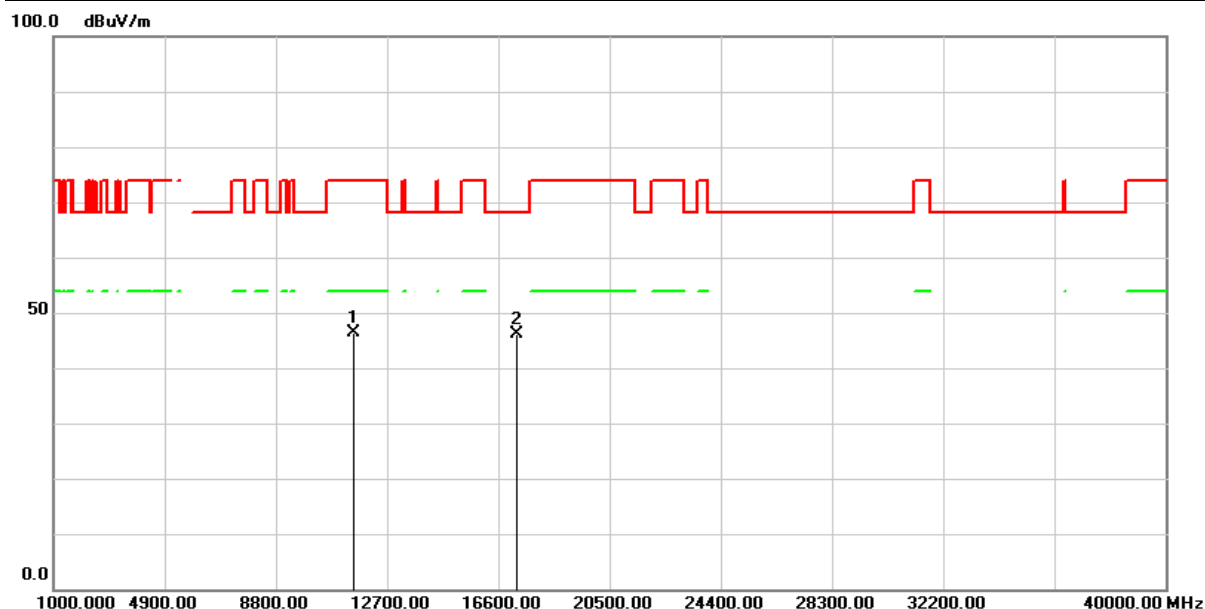


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	55.68	-9.40	46.28	74.00	-27.72	peak
2	17265.000	48.26	-2.19	46.07	68.20	-22.13	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH151(5755MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

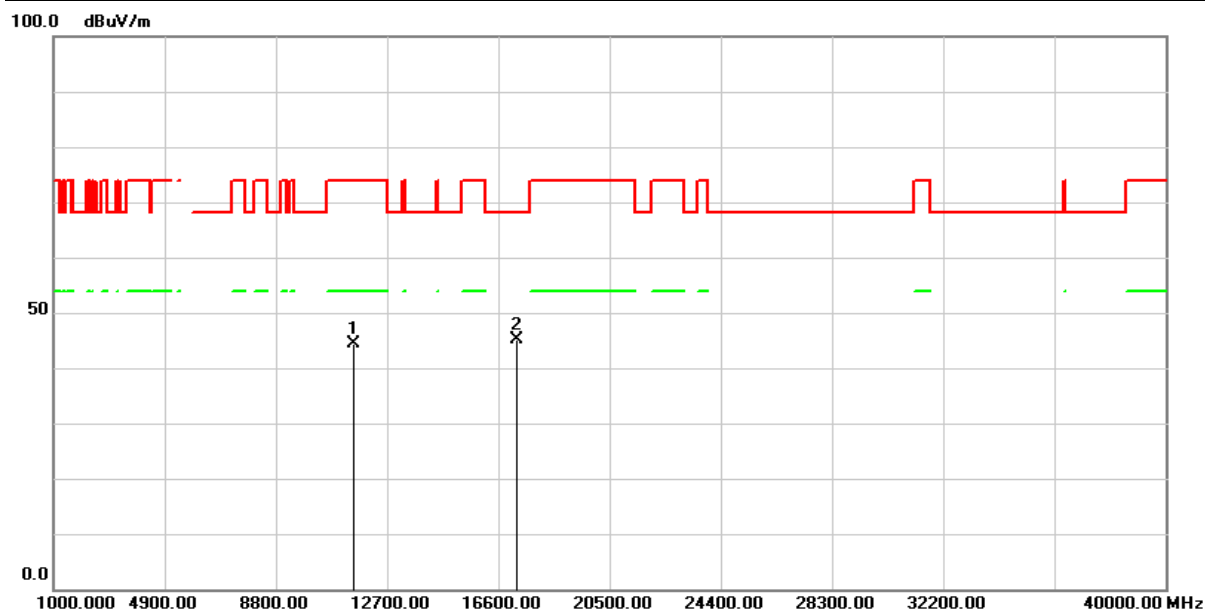


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	53.90	-9.40	44.50	74.00	-29.50	peak
2	17265.000	47.39	-2.19	45.20	68.20	-23.00	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH159(5795MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

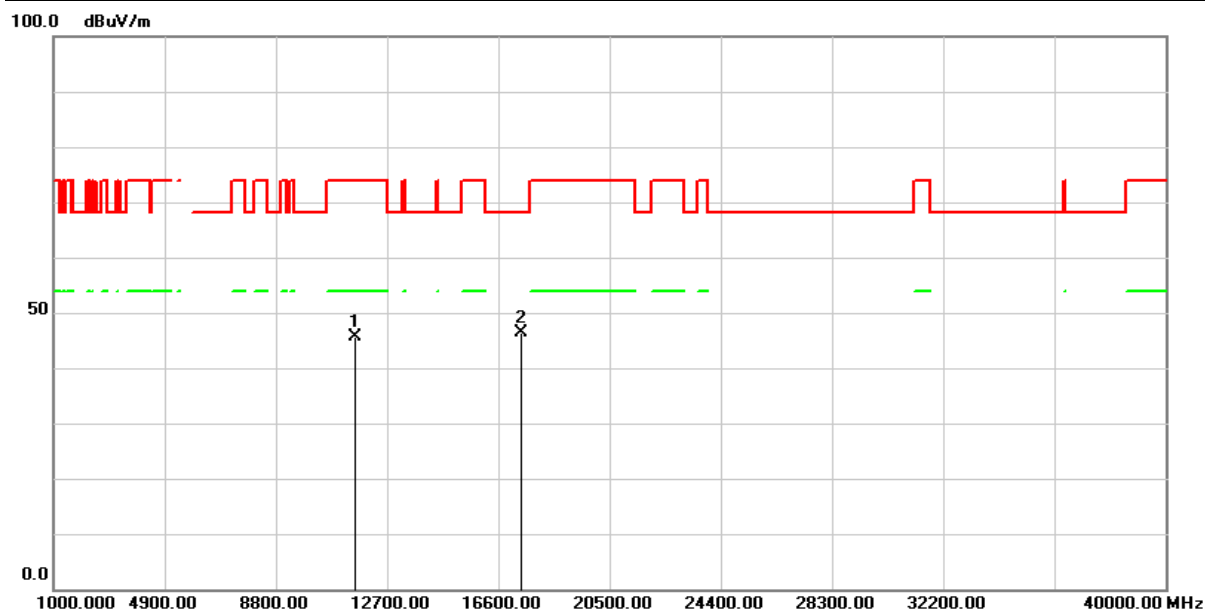


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	55.10	-9.48	45.62	74.00	-28.38	peak
2	17385.000	47.81	-1.42	46.39	68.20	-21.81	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 7 : Transmit (802.11ax HE40M MCS0)	Test Date :	2024/05/07
Test Channel :	CH159(5795MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

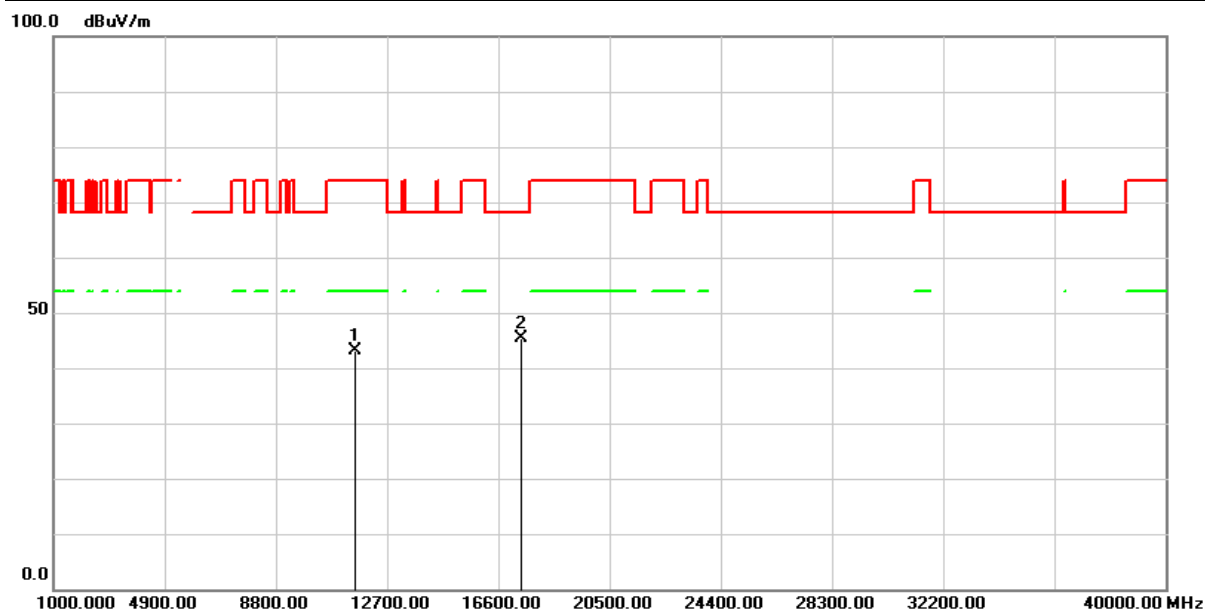


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	52.71	-9.48	43.23	74.00	-30.77	peak
2	17385.000	46.70	-1.42	45.28	68.20	-22.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH42(5210MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

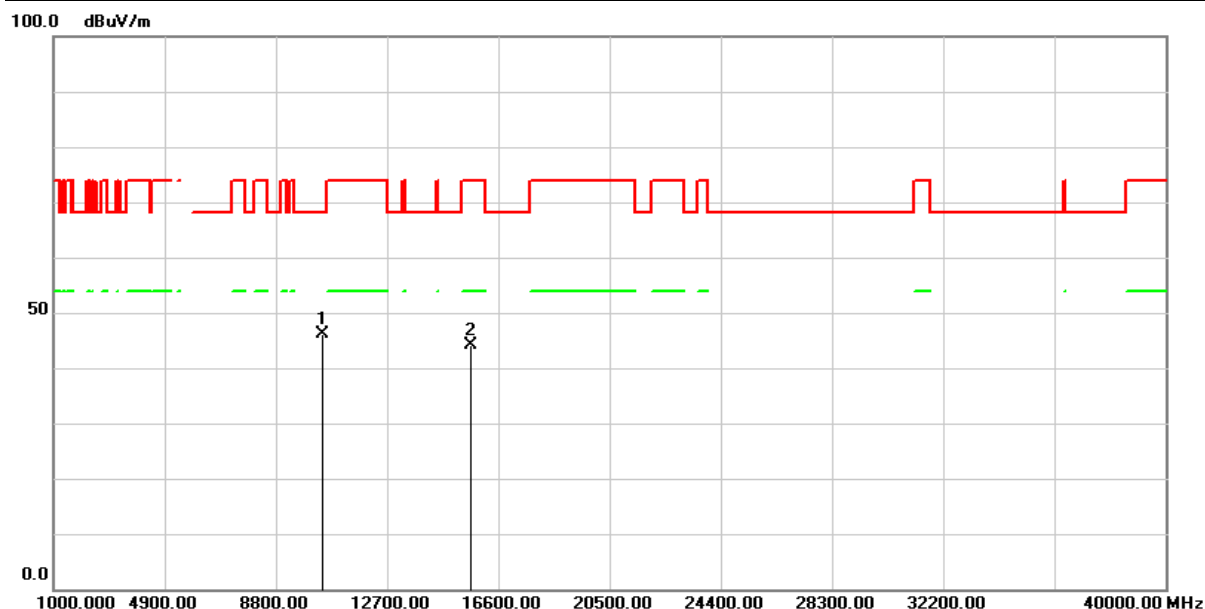


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	56.16	-9.94	46.22	68.20	-21.98	peak
2	15630.000	52.15	-7.98	44.17	74.00	-29.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH42(5210MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

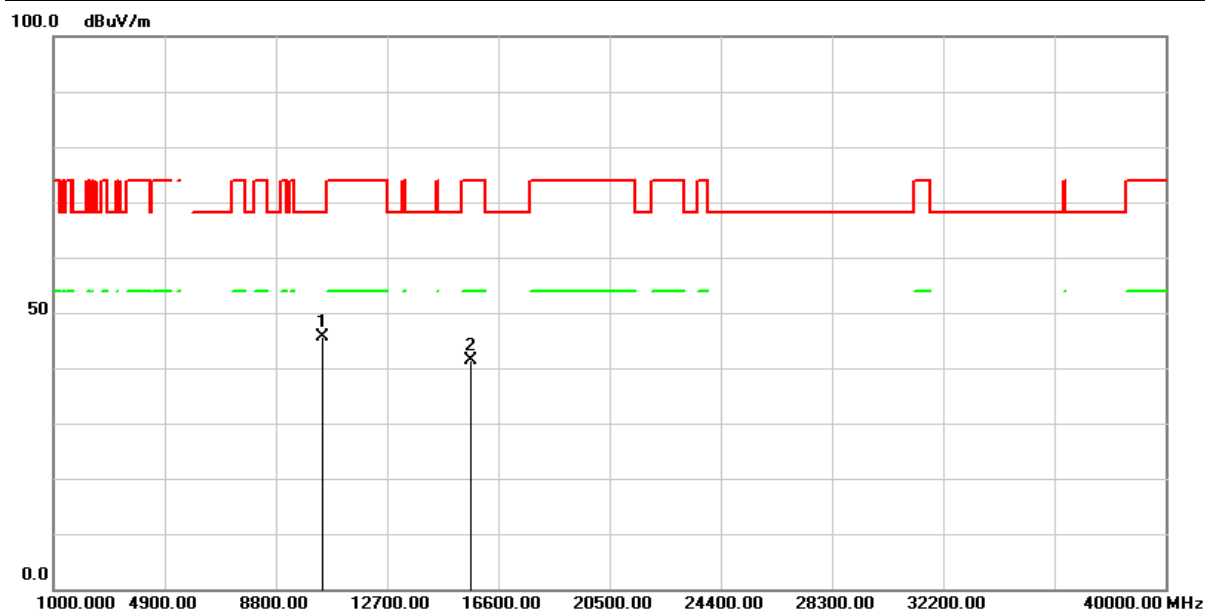


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	55.48	-9.94	45.54	68.20	-22.66	peak
2	15630.000	49.34	-7.98	41.36	74.00	-32.64	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH58(5290MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

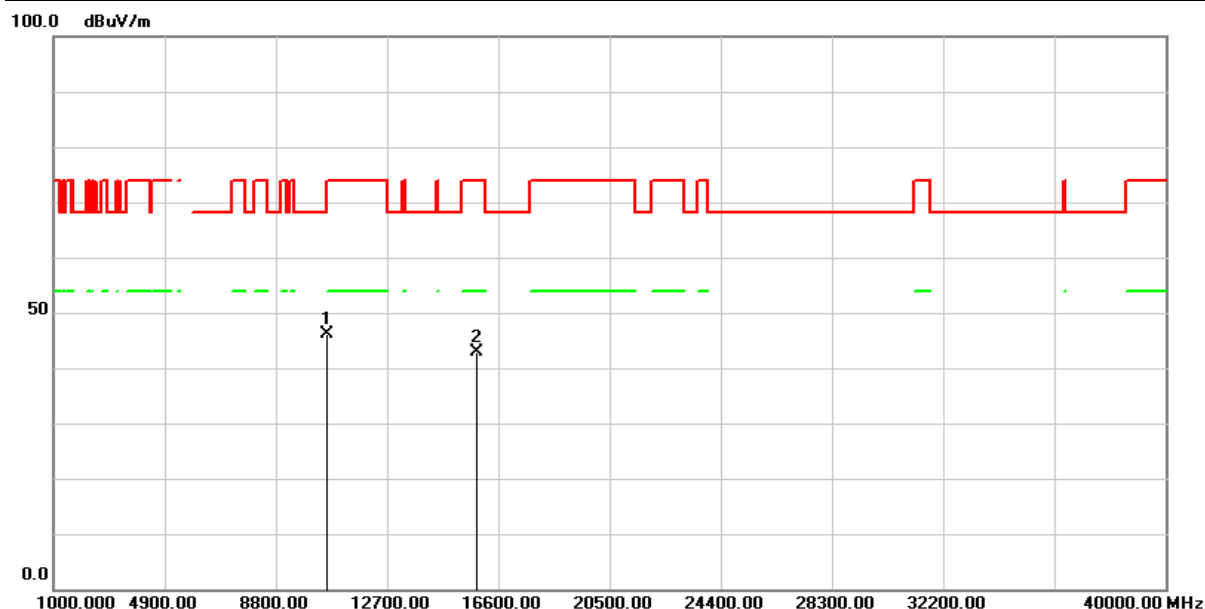


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	56.07	-9.97	46.10	68.20	-22.10	peak
2	15870.000	50.35	-7.37	42.98	74.00	-31.02	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH58(5290MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

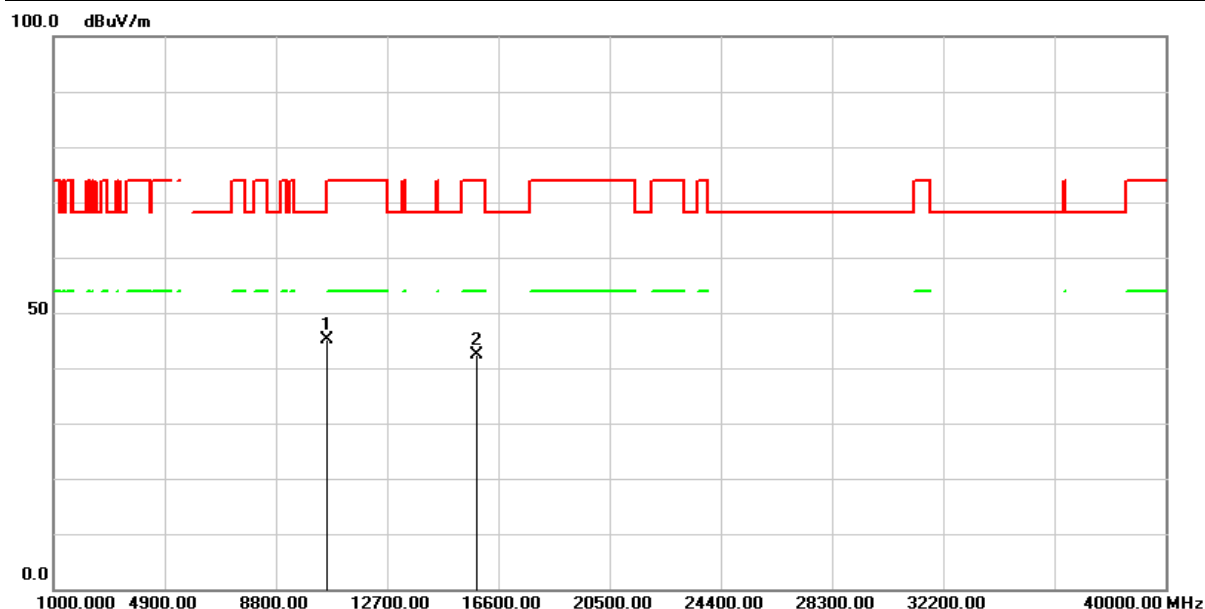


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	55.16	-9.97	45.19	68.20	-23.01	peak
2	15870.000	49.79	-7.37	42.42	74.00	-31.58	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH106(5530MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

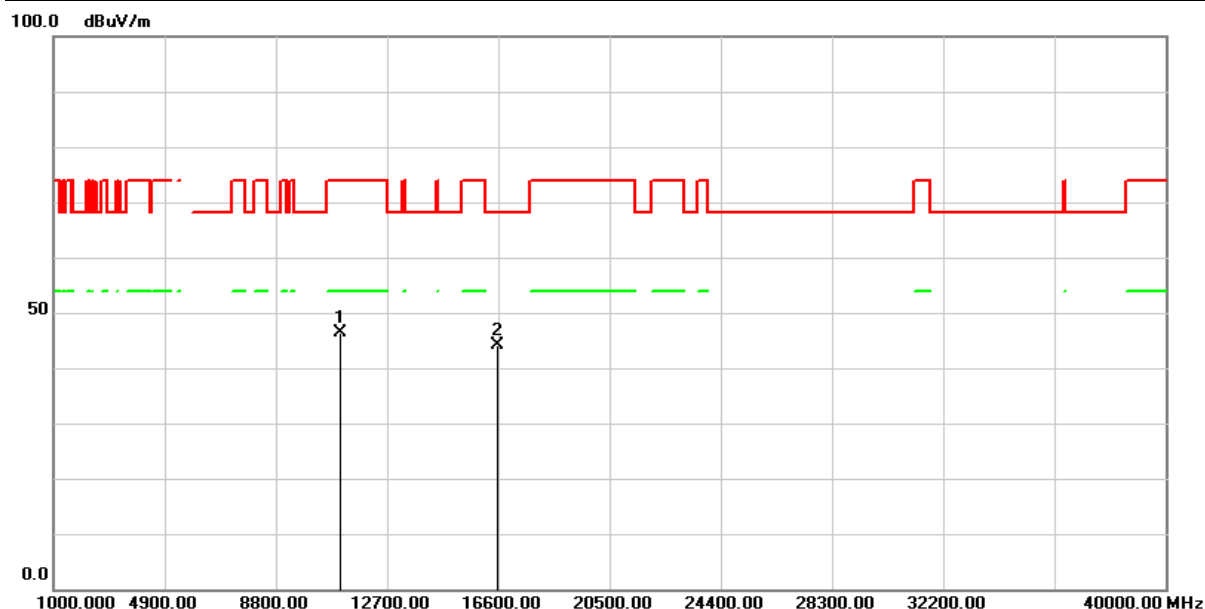


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	56.13	-9.78	46.35	74.00	-27.65	peak
2	16590.000	49.63	-5.54	44.09	68.20	-24.11	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH106(5530MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

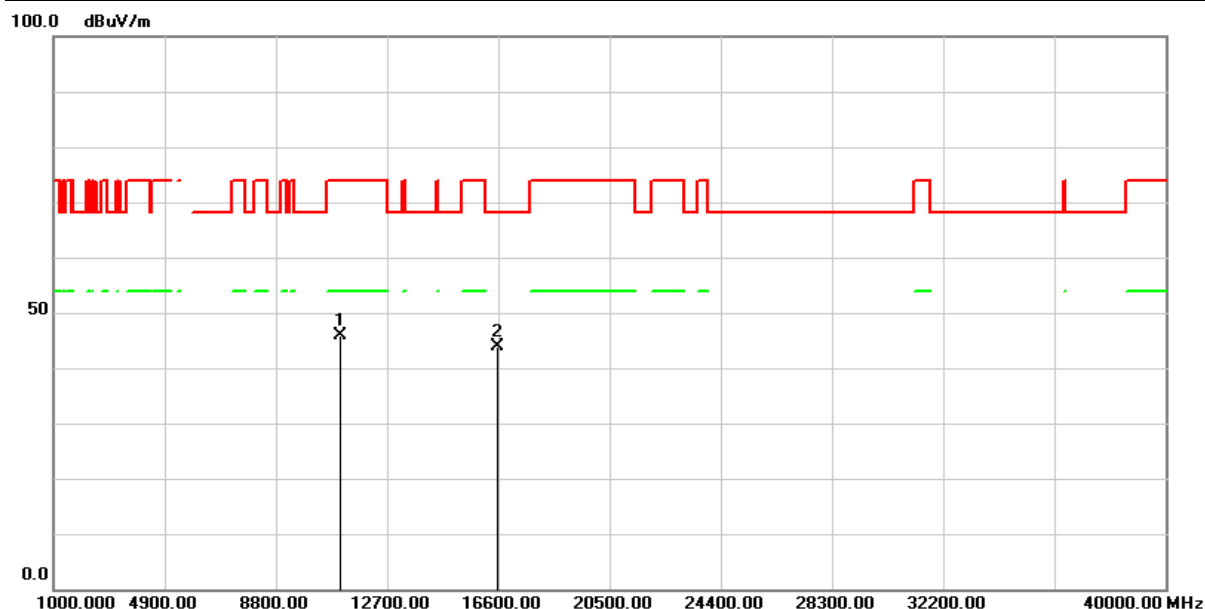


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	55.56	-9.78	45.78	74.00	-28.22	peak
2	16590.000	49.39	-5.54	43.85	68.20	-24.35	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH122(5610MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

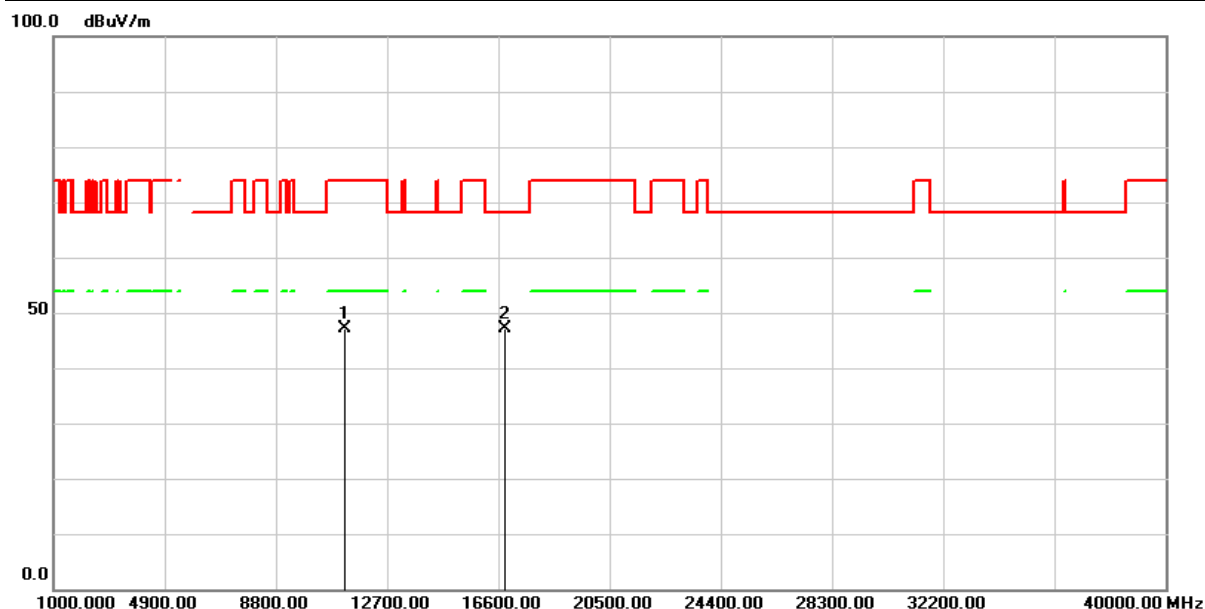


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	57.10	-9.93	47.17	74.00	-26.83	peak
2	16830.000	50.27	-3.20	47.07	68.20	-21.13	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH122(5610MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

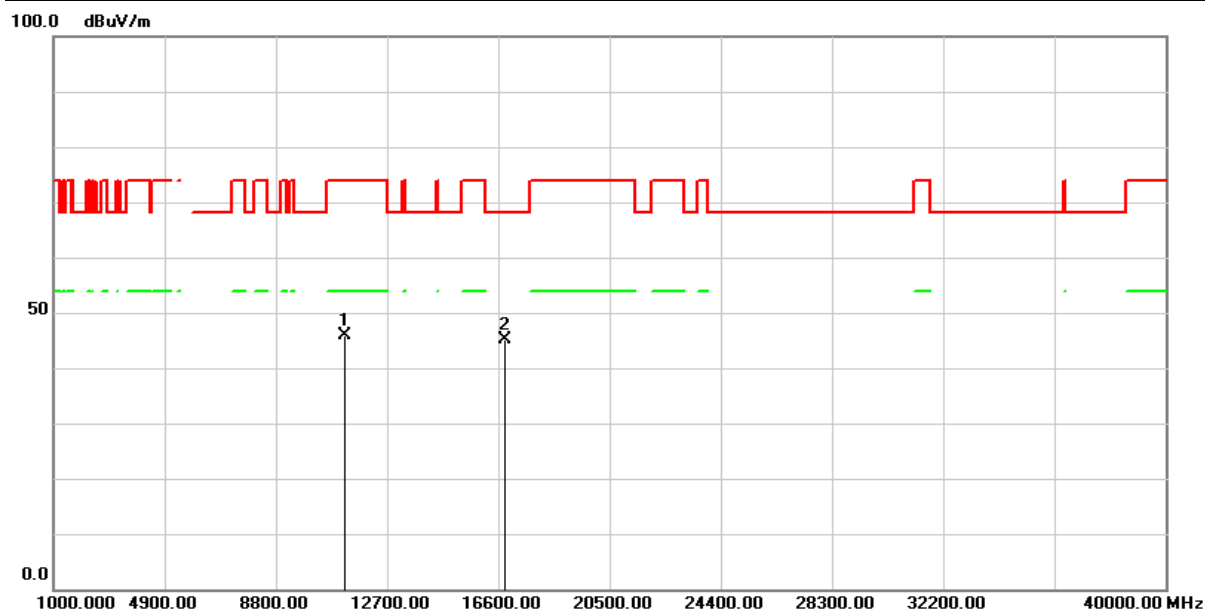


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	55.84	-9.93	45.91	74.00	-28.09	peak
2	16830.000	48.32	-3.20	45.12	68.20	-23.08	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH155(5775MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

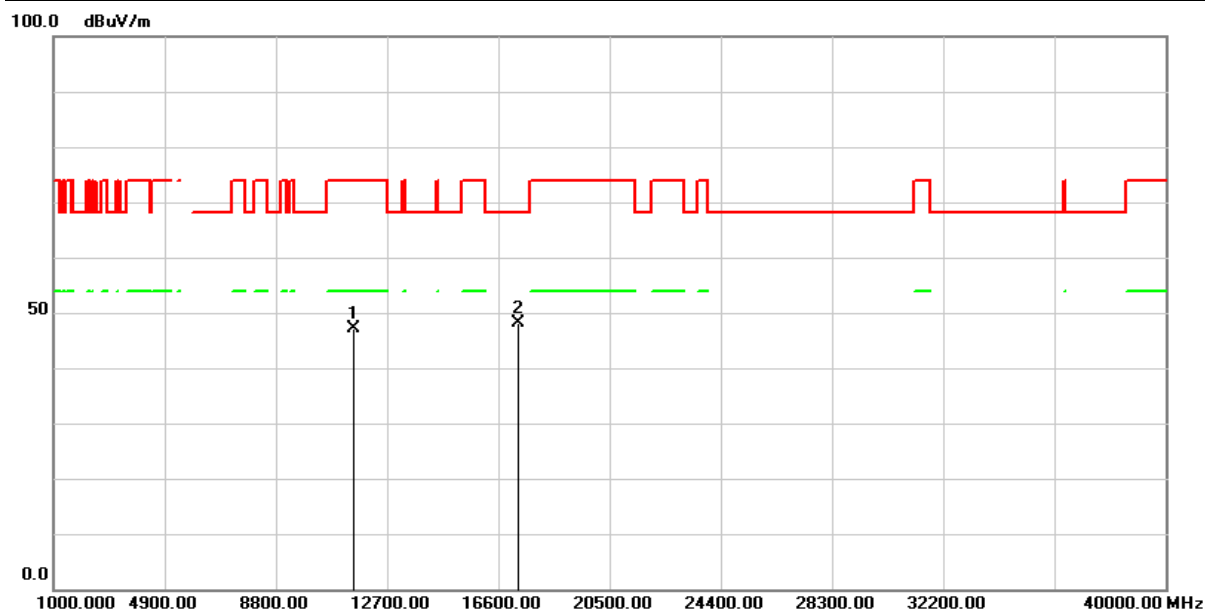


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	56.41	-9.32	47.09	74.00	-26.91	peak
2	17325.000	50.00	-1.95	48.05	68.20	-20.15	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 8 : Transmit (802.11ax HE80M MCS0)	Test Date :	2024/05/07
Test Channel :	CH155(5775MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

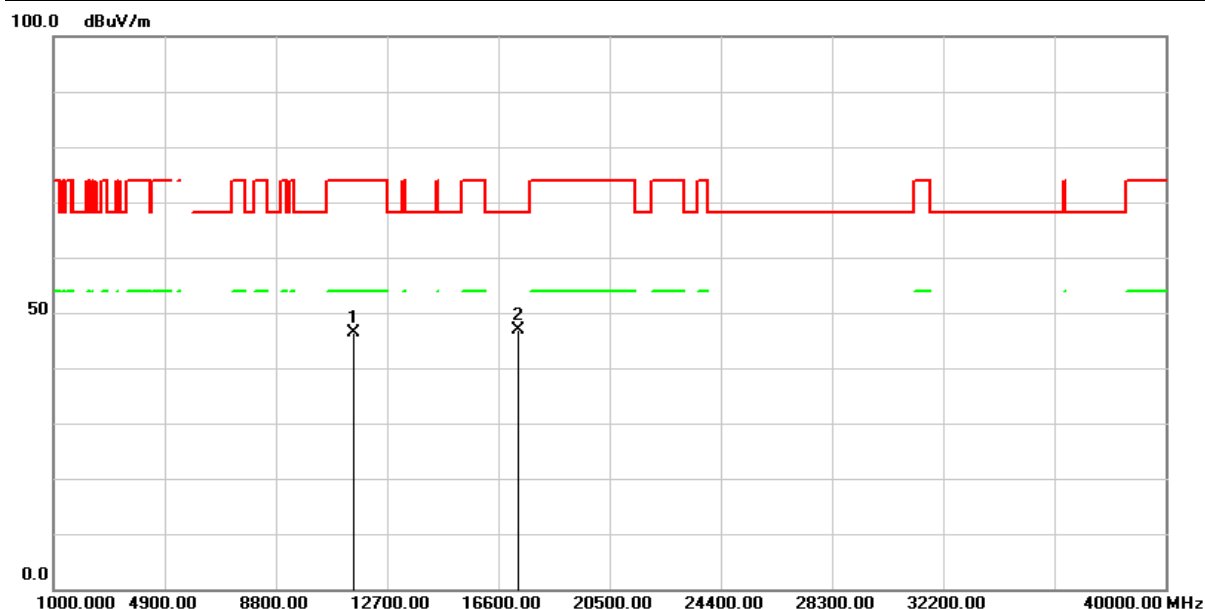


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	55.65	-9.32	46.33	74.00	-27.67	peak
2	17325.000	48.92	-1.95	46.97	68.20	-21.23	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/07
Test Channel :	CH50 (5250MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

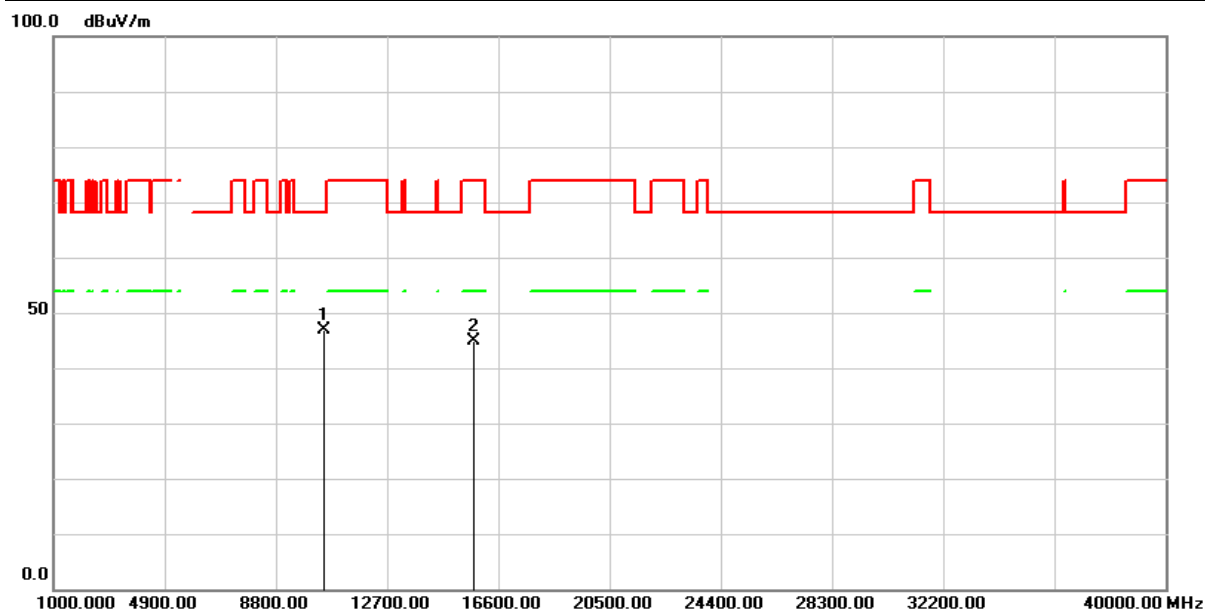


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	56.85	-10.00	46.85	68.20	-21.35	peak
2	15750.000	52.40	-7.44	44.96	74.00	-29.04	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/07
Test Channel :	CH50 (5250MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

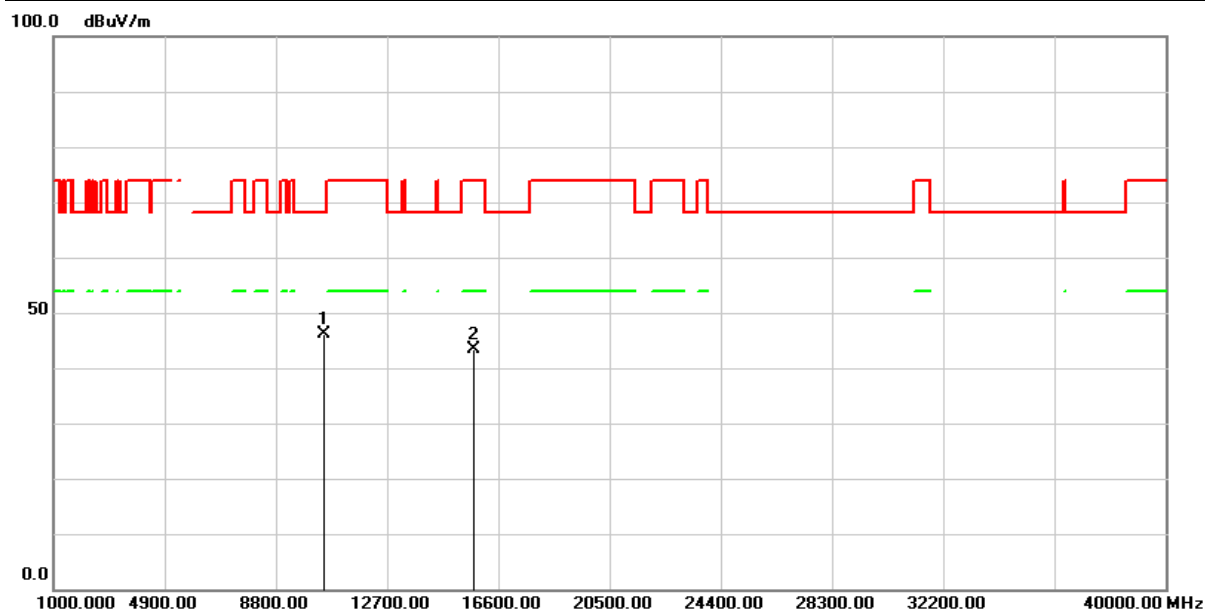


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	56.09	-10.00	46.09	68.20	-22.11	peak
2	15750.000	50.79	-7.44	43.35	74.00	-30.65	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/07
Test Channel :	CH114 (5570MHz)	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	51 %

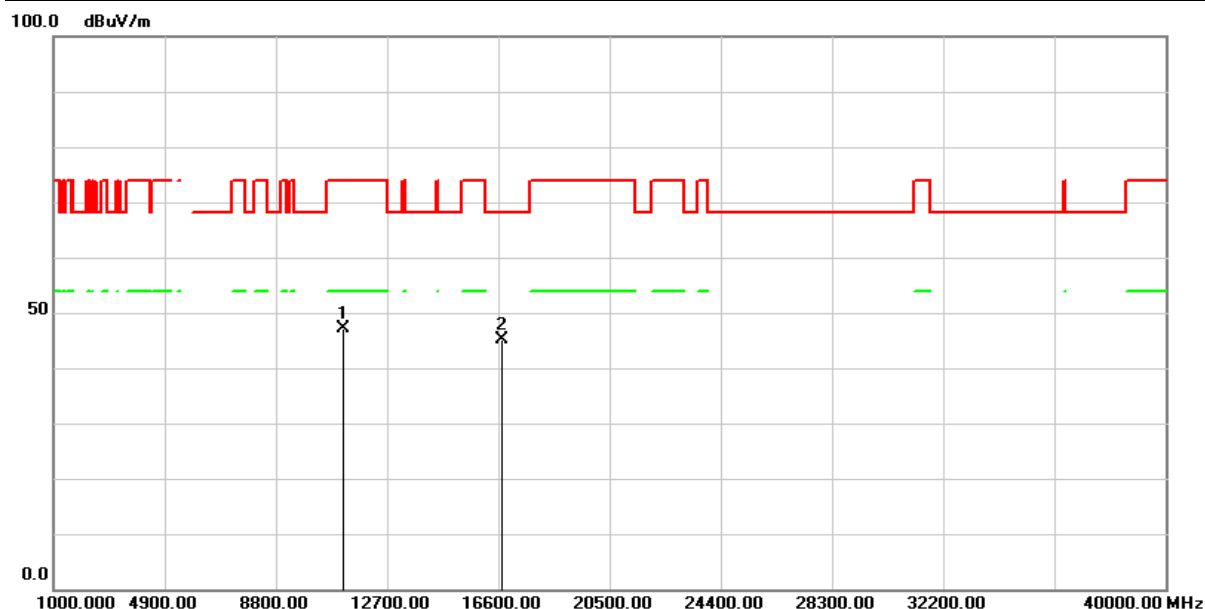


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	56.99	-9.88	47.11	74.00	-26.89	peak
2	16710.000	49.64	-4.62	45.02	68.20	-23.18	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 9 : Transmit (802.11ax HE160M MCS0)	Test Date :	2024/05/07
Test Channel :	CH114 (5570MHz)	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	51 %

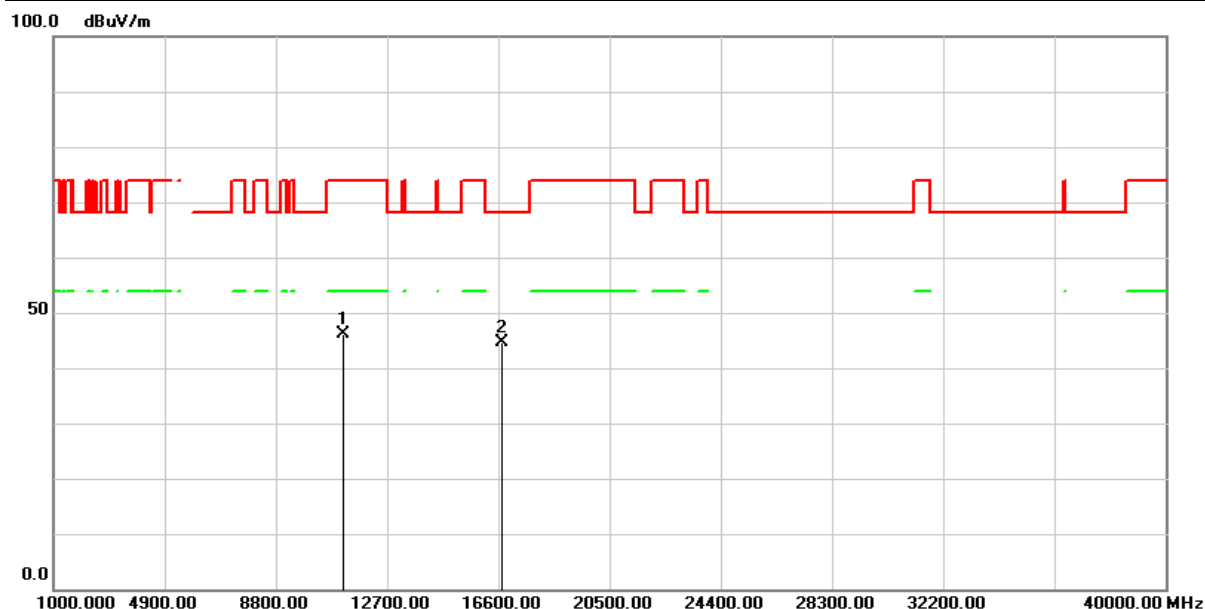


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	55.95	-9.88	46.07	74.00	-27.93	peak
2	16710.000	49.31	-4.62	44.69	68.20	-23.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Below 1GHz Data

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/24
Test Channel :	CH40 (5200MHz)	Temperature :	21.4 °C
Polarization :	Horizontal	Relative Humidity :	62 %

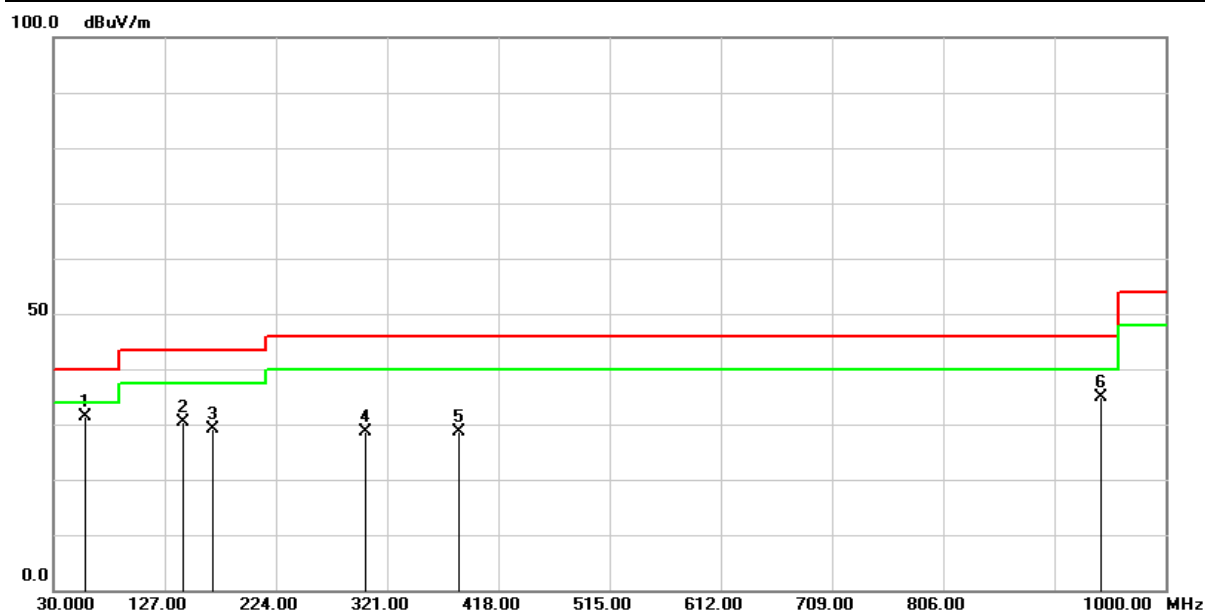


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	42.09	-10.79	31.30	40.00	-8.70	QP
2	143.4900	41.98	-11.48	30.50	43.50	-13.00	QP
3	168.7100	40.64	-11.42	29.22	43.50	-14.28	QP
4	301.6000	38.84	-10.20	28.64	46.00	-17.36	QP
5	384.0500	36.32	-7.65	28.67	46.00	-17.33	QP
6	943.7400	30.36	4.50	34.86	46.00	-11.14	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/24
Test Channel :	CH40 (5200MHz)	Temperature :	21.4 °C
Polarization :	Vertical	Relative Humidity :	62 %

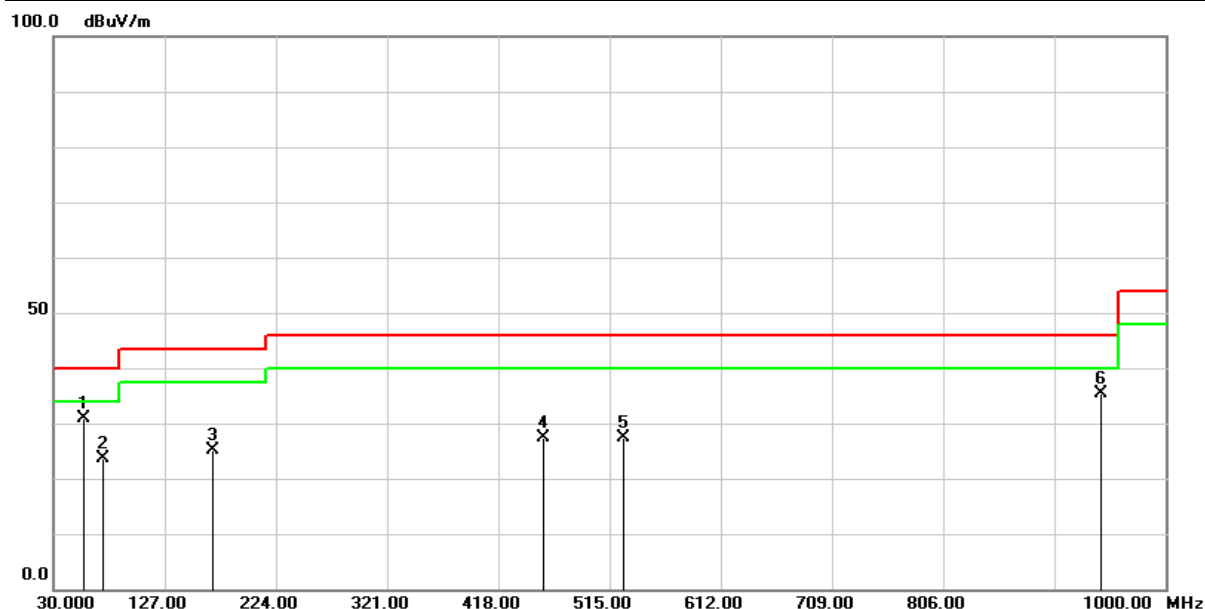


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	56.1900	41.46	-10.66	30.80	40.00	-9.20	QP
2	73.6500	37.54	-13.85	23.69	40.00	-16.31	QP
3	168.7100	36.61	-11.42	25.19	43.50	-18.31	QP
4	456.8000	32.81	-5.47	27.34	46.00	-18.66	QP
5	526.6400	31.42	-4.11	27.31	46.00	-18.69	QP
6	943.7400	30.92	4.50	35.42	46.00	-10.58	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/25
Test Channel :	CH52 (5260MHz)	Temperature :	21.4 °C
Polarization :	Horizontal	Relative Humidity :	62 %

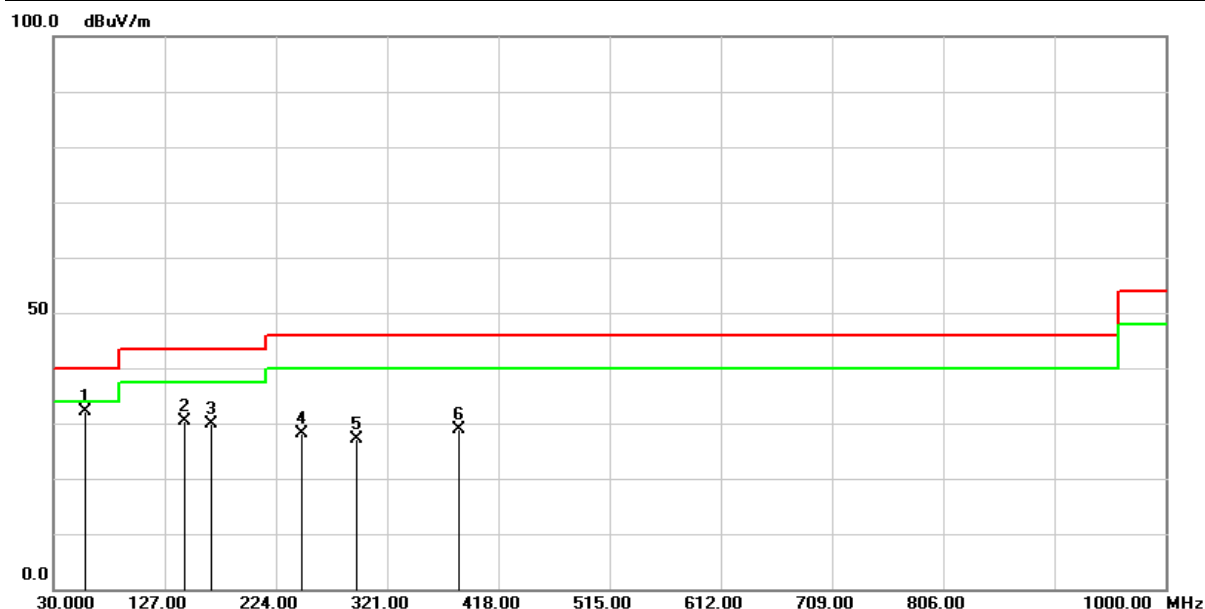


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	42.97	-10.79	32.18	40.00	-7.82	QP
2	144.4600	41.80	-11.46	30.34	43.50	-13.16	QP
3	167.7400	41.14	-11.28	29.86	43.50	-13.64	QP
4	246.3100	40.30	-12.14	28.16	46.00	-17.84	QP
5	293.8400	37.59	-10.38	27.21	46.00	-18.79	QP
6	384.0500	36.48	-7.65	28.83	46.00	-17.17	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/25
Test Channel :	CH52 (5260MHz)	Temperature :	21.4 °C
Polarization :	Vertical	Relative Humidity :	62 %

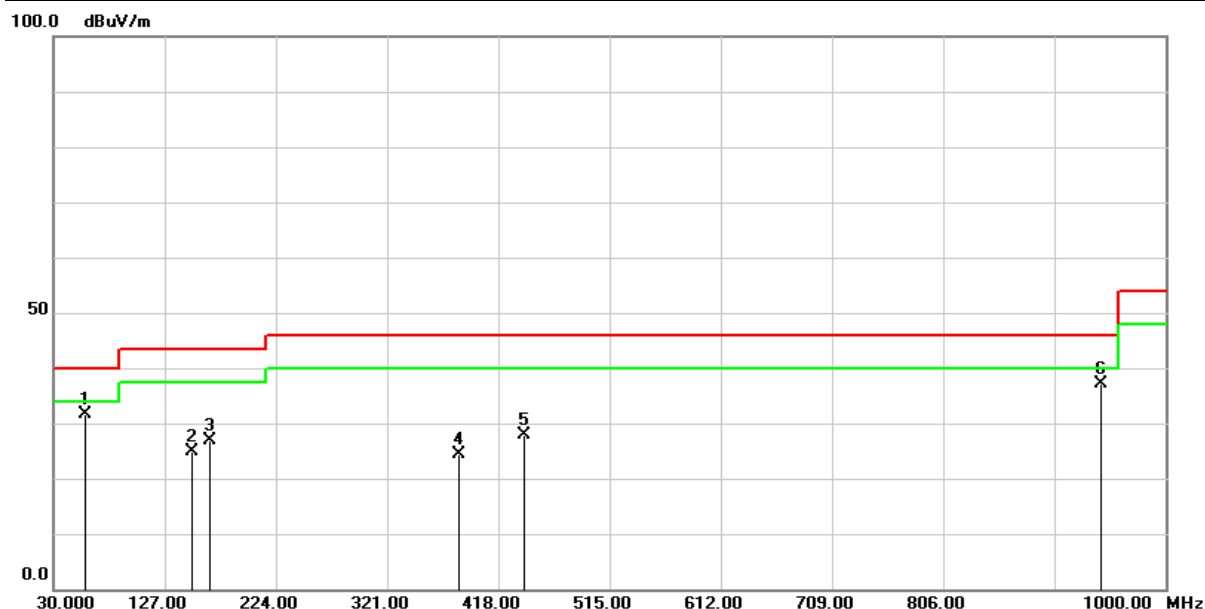

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	42.37	-10.79	31.58	40.00	-8.42	QP
2	150.2800	36.03	-11.08	24.95	43.50	-18.55	QP
3	166.7700	38.23	-11.27	26.96	43.50	-16.54	QP
4	384.0500	32.13	-7.65	24.48	46.00	-21.52	QP
5	440.3100	33.56	-5.80	27.76	46.00	-18.24	QP
6	943.7400	32.58	4.50	37.08	46.00	-8.92	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/25
Test Channel :	CH100 (5500MHz)	Temperature :	21.4 °C
Polarization :	Horizontal	Relative Humidity :	62 %

100.0 dBuV/m




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	41.61	-10.79	30.82	40.00	-9.18	QP
2	144.4600	43.58	-11.46	32.12	43.50	-11.38	QP
3	151.2500	41.62	-11.07	30.55	43.50	-12.95	QP
4	244.3700	40.48	-12.16	28.32	46.00	-17.68	QP
5	384.0500	36.24	-7.65	28.59	46.00	-17.41	QP
6	943.7400	31.42	4.50	35.92	46.00	-10.08	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/25
Test Channel :	CH100 (5500MHz)	Temperature :	21.4 °C
Polarization :	Vertical	Relative Humidity :	62 %

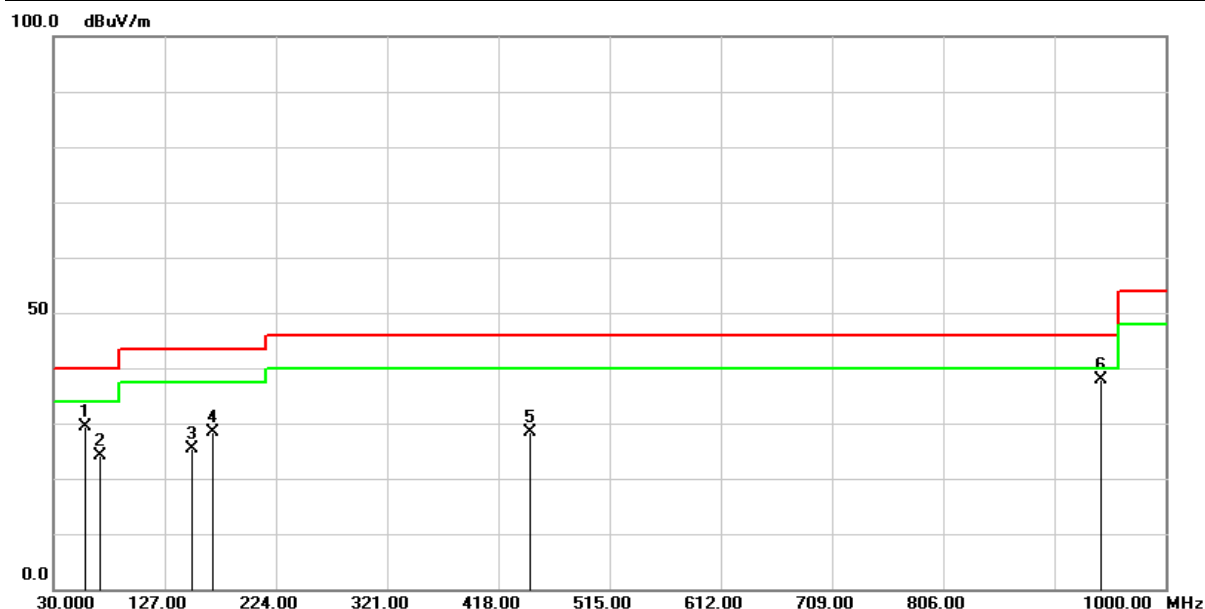


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	40.29	-10.79	29.50	40.00	-10.50	QP
2	70.7400	37.41	-13.17	24.24	40.00	-15.76	QP
3	150.2800	36.49	-11.08	25.41	43.50	-18.09	QP
4	168.7100	39.92	-11.42	28.50	43.50	-15.00	QP
5	445.1600	33.96	-5.67	28.29	46.00	-17.71	QP
6	943.7400	33.46	4.50	37.96	46.00	-8.04	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/25
Test Channel :	CH157 (5785MHz)	Temperature :	21.4 °C
Polarization :	Horizontal	Relative Humidity :	62 %

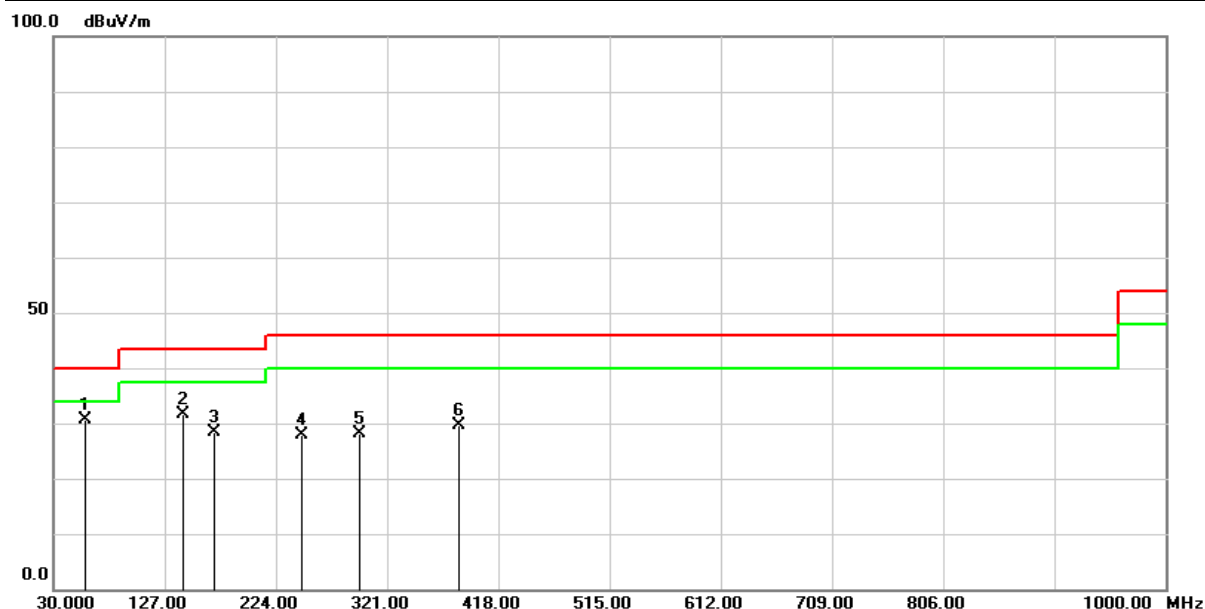


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	41.54	-10.79	30.75	40.00	-9.25	QP
2	143.4900	43.02	-11.48	31.54	43.50	-11.96	QP
3	169.6800	39.92	-11.53	28.39	43.50	-15.11	QP
4	246.3100	40.08	-12.14	27.94	46.00	-18.06	QP
5	296.7500	38.42	-10.32	28.10	46.00	-17.90	QP
6	384.0500	37.16	-7.65	29.51	46.00	-16.49	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

Test Mode :	Mode 1 : Transmit (802.11a 6Mbps)	Test Date :	2024/04/25
Test Channel :	CH157 (5785MHz)	Temperature :	21.4 °C
Polarization :	Vertical	Relative Humidity :	62 %

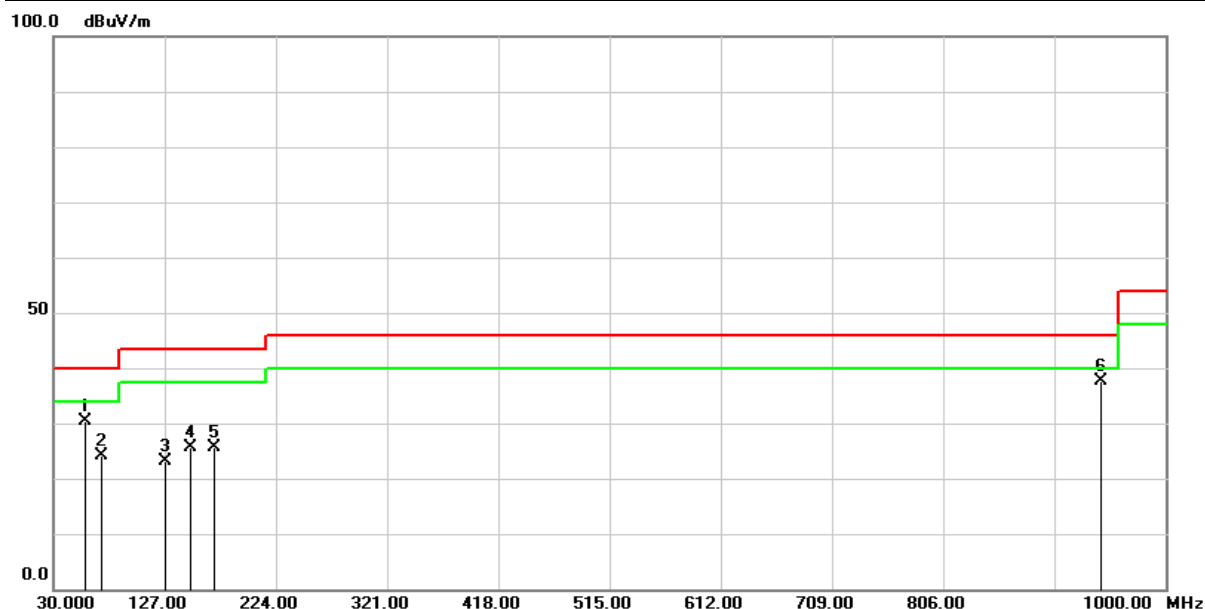

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	41.10	-10.79	30.31	40.00	-9.69	QP
2	71.7100	37.43	-13.23	24.20	40.00	-15.80	QP
3	127.0000	36.06	-12.95	23.11	43.50	-20.39	QP
4	149.3100	36.66	-11.15	25.51	43.50	-17.99	QP
5	170.6500	37.11	-11.56	25.55	43.50	-17.95	QP
6	943.7400	33.20	4.50	37.70	46.00	-8.30	QP

Remark :


1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

2.6 Frequency Stability

2.6.1 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2 Test Setup

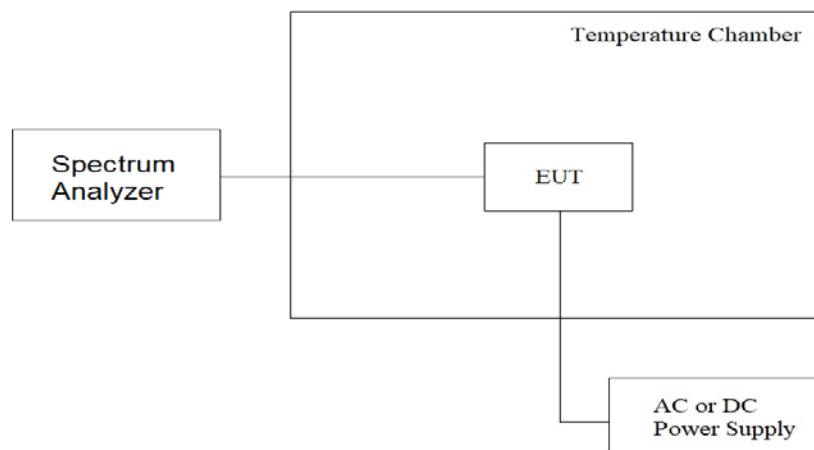

2.6.3 Test Procedure

1. The test shall be performed under 85% ~115% of the nominal voltage.
2. Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

2.6.4 Test Result

Band I selected frequency: 5180MHz

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
20	108	-7.529	-8.494	2.896	-14.479	20	Pass
	120	0.772	9.846	-8.108	8.494	20	Pass
	132	-4.440	7.722	-4.054	-3.668	20	Pass

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
0	120	-11.776	-12.548	-5.405	-2.896	20	Pass
10		-9.846	-6.757	14.672	-5.792	20	Pass
20		-10.811	-13.514	11.197	7.915	20	Pass
30		0.965	18.533	18.533	-18.919	20	Pass
40		0.965	-17.954	-11.390	-12.355	20	Pass

Band II-A selected frequency: 5300MHz

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
20	108	5.849	7.170	14.340	-3.962	20	Pass
	120	-14.151	15.094	-6.415	15.094	20	Pass
	132	-0.755	-1.509	13.208	12.264	20	Pass

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
0	120	1.321	0.377	-16.226	-18.302	20	Pass
10		-5.472	18.113	7.925	-0.377	20	Pass
20		7.170	-10.943	18.868	-6.792	20	Pass
30		11.321	-2.642	9.245	-13.585	20	Pass
40		1.321	4.340	-11.321	-7.170	20	Pass

Band II-C selected frequency: 5580MHz

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
20	108	-14.516	8.244	2.509	7.885	20	Pass
	120	4.301	-12.186	-5.914	7.168	20	Pass
	132	-11.470	-12.366	-7.706	-15.412	20	Pass

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
0	120	12.724	-6.989	-5.018	10.753	20	Pass
10		-12.186	5.914	12.007	-1.613	20	Pass
20		-7.348	10.036	13.262	-17.384	20	Pass
30		-1.254	14.695	1.254	8.244	20	Pass
40		13.082	-13.978	-16.308	4.659	20	Pass

Band III selected frequency: 5745MHz

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
20	108	14.447	-10.966	-9.922	5.744	20	Pass
	120	-15.666	0.348	-12.359	14.273	20	Pass
	132	3.481	7.311	14.099	14.621	20	Pass

Temperature (°C)	Voltage (V)	Tolerance (ppm)				Limit (ppm)	Result
		Start	2 min	5 min	10 min		
0	120	1.218	12.881	-1.915	-6.789	20	Pass
10		12.881	-16.884	-15.840	-9.922	20	Pass
20		-13.577	11.314	-1.741	12.707	20	Pass
30		-3.133	1.567	5.222	12.533	20	Pass
40		12.881	15.666	8.181	1.741	20	Pass

2.7 Antenna Requirement

2.7.1 Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

An intentional radiator shall be designed to ensure that no antenna other than as furnished by the responsible party shall be used with the device. If transmitting antennas of directional gain greater than 6dBi are using the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, for compliance to FCC 47CFR 15.407 (a) requirements.

2.7.2 Antenna Connected Construction

Non-standard antenna connector is used.

2.7.3 Antenna Gain

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	InnoComm Mobile Technology Corp.	Jagar	PIFA Antenna	1.98 dBi for 5.15~5.25GHz 1.98 dBi for 5.25~5.35GHz 1.98 dBi for 5.47~5.725GHz 1.98 dBi for 5.725~5.825GHz


2.8 AC Conducted Emissions Measurement

2.8.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.8.2 Test Setup

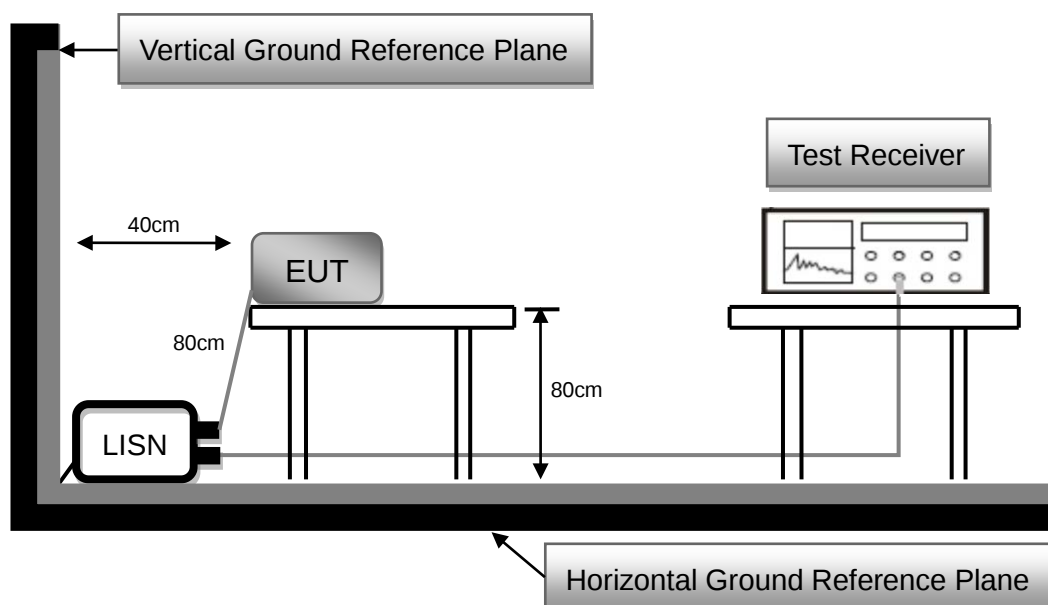


2.8.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The Test Data of the worst case was recorded.

2.8.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 10 : Normal mode	6dB Bandwidth :	9 kHz
Test Date :	2024/06/28	Phase :	L
Temperature :	26.1°C	Humidity :	45 %

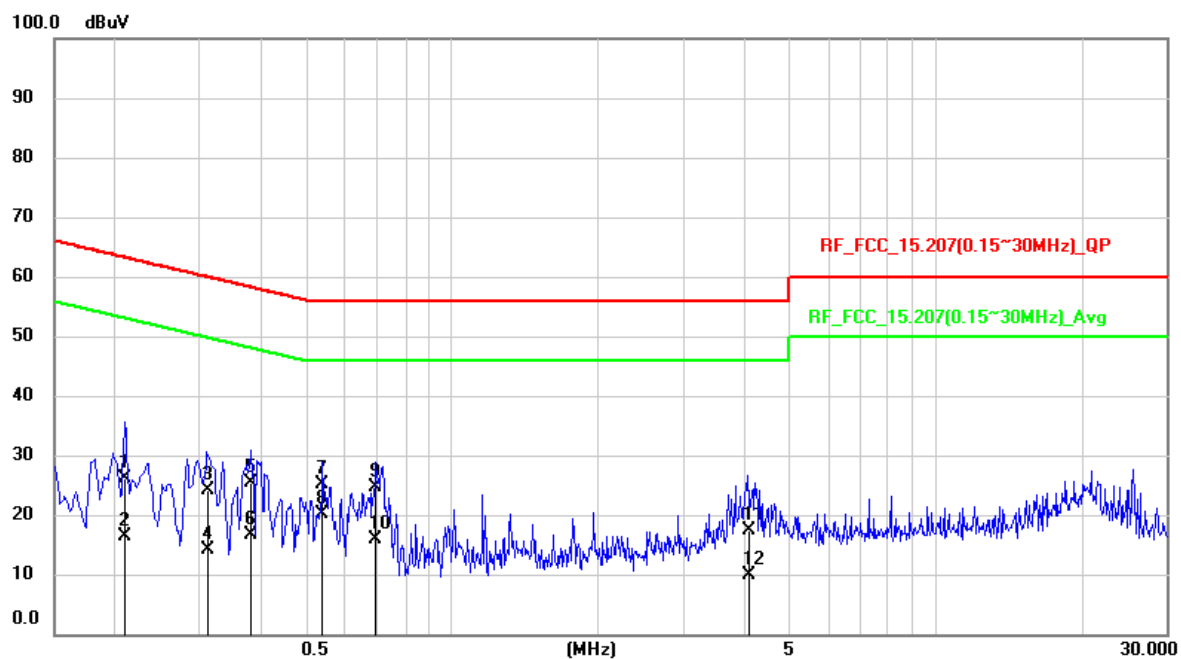


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.209	16.38	9.82	26.2	63.24	-37.04	QP
2	0.209	6.67	9.82	16.49	53.24	-36.75	AVG
3	0.3119	14.36	9.83	24.19	59.92	-35.73	QP
4	0.3119	4.29	9.83	14.12	49.92	-35.8	AVG
5	0.3824	15.65	9.84	25.49	58.23	-32.74	QP
6	0.3824	6.84	9.84	16.68	48.23	-31.55	AVG
7	0.5387	15.35	9.84	25.19	56	-30.81	QP
8	0.5387	10.34	9.84	20.18	46	-25.82	AVG
9	0.6963	14.89	9.85	24.74	56	-31.26	QP
10	0.6963	6.15	9.85	16	46	-30	AVG
11	4.1143	7.5	9.96	17.46	56	-38.54	QP
12	4.1143	-0.02	9.96	9.94	46	-36.06	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 10 : Normal mode	6dB Bandwidth :	9 kHz
Test Date :	2024/06/28	Phase :	N
Temperature :	26.1°C	Humidity :	45 %

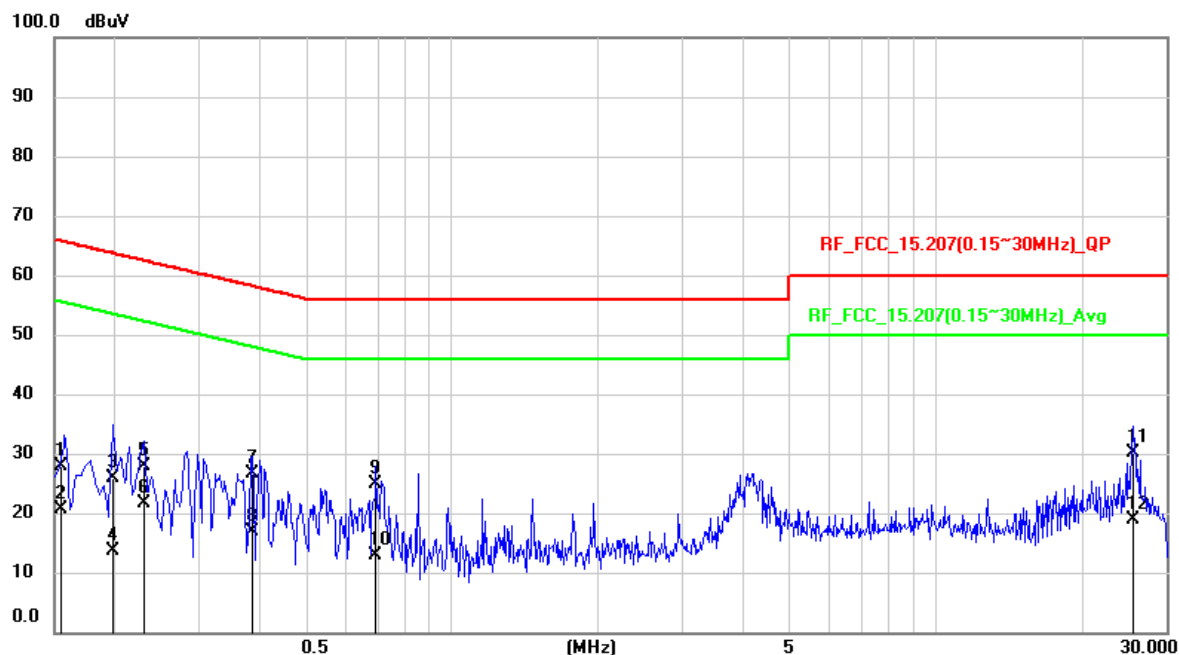

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1543	17.94	9.84	27.78	65.77	-37.99	QP
2	0.1543	10.88	9.84	20.72	55.77	-35.05	AVG
3	0.1989	16.12	9.82	25.94	63.66	-37.72	QP
4	0.1989	3.93	9.82	13.75	53.66	-39.91	AVG
5	0.2312	18.05	9.82	27.87	62.41	-34.54	QP
6	0.2312	11.93	9.82	21.75	52.41	-30.66	AVG
7	0.3861	16.7	9.84	26.54	58.15	-31.61	QP
8	0.3861	7.01	9.84	16.85	48.15	-31.3	AVG
9	0.6963	15.03	9.85	24.88	56	-31.12	QP
10	0.6963	3.07	9.85	12.92	46	-33.08	AVG
11	25.6659	19.76	10.44	30.2	60	-29.8	QP
12	25.6659	8.46	10.44	18.9	50	-31.1	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

--- END ---