



**MAXLAB Testing Co.,Ltd.**

Report No.: MAX250703110P01-R02

# **FCC TEST REPORT**

## **FCC ID:2BFZP-M27**

**Product : Carplay**  
**Model Name : M27, M4, M25, M26, M28, M29, M30**  
**Brand : /**  
**Report No. : MAX250703110P01-R02**

Prepared for

**Dongguan KWD Technology Co.,Ltd**  
**9F,Building B,Caiqiao Industrial Park,Puxinhu,Tangxia Town,Dongguan**  
**City,Guangdong Province,P.R.C**

Prepared by

**MAXLAB Testing Co.,Ltd.**  
**1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District,**  
**Shenzhen,Guangdong, 518052, People' s Republic of China**



**MAXLAB Testing Co.,Ltd.**

Report No.: MAX250703110P01-R02

## 1 TEST RESULT CERTIFICATION

Applicant : Dongguan KWD Technology Co.,Ltd  
Address : 9F,Building B,Caiqiao Industrial Park,Puxinhu,Tangxia Town,Dongguan  
City,Guangdong Province,P.R.C  
Manufacturer : Dongguan KWD Technology Co.,Ltd  
Address : 9F,Building B,Caiqiao Industrial Park,Puxinhu,Tangxia Town,Dongguan  
City,Guangdong Province,P.R.C  
Product name : Carplay  
Model name : M27, M4, M25, M26, M28, M29, M30  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2020  
Date of test : Jul. 03, 2025 to Jul. 14, 2025  
Date of Issue : Jul. 14, 2025

This device described above has been tested by MAXLAB, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of MAXLAB, this document may be altered or revised by MAXLAB, personal only, and shall be noted in the revision of the document.

Test Engineer:

Engineer/ Cindy Zheng

Technical Manager:

RF Manager/ Vivian Jiang



## Contents

|                                                                     | Page      |
|---------------------------------------------------------------------|-----------|
| <b>1 TEST RESULT CERTIFICATION .....</b>                            | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                                         | <b>5</b>  |
| <b>3 GENERAL INFORMATION .....</b>                                  | <b>6</b>  |
| 3.1 GENERAL DESCRIPTION OF E.U.T. ....                              | 6         |
| 3.2 CHANNEL LIST .....                                              | 7         |
| 3.3 TEST SITE .....                                                 | 8         |
| 3.4 TEST SETUP CONFIGURATION .....                                  | 9         |
| 3.5 TEST MODE .....                                                 | 9         |
| <b>4 EQUIPMENT DURING TEST .....</b>                                | <b>10</b> |
| 4.1 EQUIPMENTS LIST .....                                           | 10        |
| 4.2 MEASUREMENT UNCERTAINTY .....                                   | 12        |
| 4.3 DESCRIPTION OF SUPPORT UNITS .....                              | 12        |
| <b>5 CONDUCTED EMISSION .....</b>                                   | <b>13</b> |
| 5.1 E.U.T. OPERATION .....                                          | 13        |
| 5.2 EUT SETUP .....                                                 | 13        |
| 5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....              | 13        |
| 5.4 MEASUREMENT PROCEDURE .....                                     | 14        |
| 5.5 CONDUCTED EMISSION LIMIT .....                                  | 14        |
| 5.6 MEASUREMENT DESCRIPTION .....                                   | 14        |
| 5.7 CONDUCTED EMISSION TEST RESULT .....                            | 14        |
| <b>6 RADIATED SPURIOUS EMISSIONS .....</b>                          | <b>15</b> |
| 6.1 EUT OPERATION .....                                             | 15        |
| 6.2 TEST SETUP .....                                                | 15        |
| 6.3 SPECTRUM ANALYZER SETUP .....                                   | 17        |
| 6.4 TEST PROCEDURE .....                                            | 17        |
| 6.5 SUMMARY OF TEST RESULTS .....                                   | 18        |
| <b>7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT .....</b> | <b>27</b> |
| 7.1 TEST PROCEDURE .....                                            | 27        |
| 7.2 TEST SETUP BLOCKING .....                                       | 27        |



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

|                                                  |           |
|--------------------------------------------------|-----------|
| 7.3 TEST RESULT .....                            | 28        |
| <b>8 6DB&amp;99% BANDWIDTH MEASUREMENT .....</b> | <b>29</b> |
| 8.1 TEST PROCEDURE .....                         | 29        |
| 8.2 TEST SETUP BLOCKING .....                    | 29        |
| 8.3 TEST RESULT .....                            | 29        |
| <b>9 MAXIMUM PEAK OUTPUT POWER .....</b>         | <b>30</b> |
| 9.1 TEST PROCEDURE .....                         | 30        |
| 9.2 TEST SETUP BLOCKING .....                    | 30        |
| 9.3 TEST RESULT .....                            | 30        |
| <b>10 POWER SPECTRAL DENSITY .....</b>           | <b>31</b> |
| 10.1 TEST PROCEDURE .....                        | 31        |
| 10.2 TEST SETUP BLOCKING .....                   | 31        |
| 10.3 TEST RESULT .....                           | 31        |
| <b>11 ANTENNA APPLICATION .....</b>              | <b>32</b> |
| 11.1 ANTENNA REQUIREMENT .....                   | 32        |
| 11.2 RESULT .....                                | 32        |
| <b>12 TEST SETUP AND EUT PHOTOS .....</b>        | <b>33</b> |



**MAXLAB Testing Co.,Ltd.**

Report No.: MAX250703110P01-R02

## 2 Test Summary

| Test Items                  | Test Requirement           | Result |
|-----------------------------|----------------------------|--------|
| Conduct Emission            | FCC part 15.207            | N/A    |
| Radiated Spurious Emissions | FCC part 15.205/15.209     | PASS   |
| Conducted Spurious Emission | FCC part 15.205/15.209     | PASS   |
| Band edge                   | FCC part 15.247(d)         | PASS   |
| 6dB&99% Bandwidth           | FCC part 15.247 (a)(2)     | PASS   |
| Maximum Peak Output Power   | FCC part 15.247 (b)(3)     | PASS   |
| Power Spectral Density      | FCC part 15.247 (e)        | PASS   |
| Antenna Requirement         | FCC part 15.203/15.247 (c) | PASS   |

Remark:

“N/A” denotes test is not applicable in this Test Report.



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

### **3 General Information**

#### **3.1 General Description of E.U.T.**

|                                                                                                                                                                                                                |   |                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------------|
| Product Name                                                                                                                                                                                                   | : | Carplay                                                                                  |
| Model Name                                                                                                                                                                                                     | : | M27                                                                                      |
| Sample ID                                                                                                                                                                                                      | : | 20250703Z-001#                                                                           |
| Sample(s) Status:                                                                                                                                                                                              | : | Engineer sample                                                                          |
| Series Model                                                                                                                                                                                                   | : | M4, M25, M26, M28, M29, M30                                                              |
| Model Different.:                                                                                                                                                                                              | : | /                                                                                        |
| Specification                                                                                                                                                                                                  | : | 802.11b/g/n HT20/40                                                                      |
| Operation Frequency                                                                                                                                                                                            | : | 2412-2462MHz for 802.11b/g/n20;<br>2422-2452MHz for 802.11n40                            |
| Number of Channel                                                                                                                                                                                              | : | 11 channels for 802.11b/g/n20;<br>7 channels for 802.11n40                               |
| Type of Modulation                                                                                                                                                                                             | : | DSSS with DBPSK/DQPSK/CCK for 802.11b;<br>OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n; |
| Antenna installation                                                                                                                                                                                           | : | PBC Antenna                                                                              |
| Antenna Gain                                                                                                                                                                                                   | : | 2.02 dBi                                                                                 |
| Power supply                                                                                                                                                                                                   | : | DC 5V From PC                                                                            |
| Hardware Version                                                                                                                                                                                               | : | /                                                                                        |
| Software Version                                                                                                                                                                                               | : | /                                                                                        |
| Channel Puncturing Function                                                                                                                                                                                    | : | <input type="checkbox"/> Supported <input type="checkbox"/> Unspported                   |
| Support RU                                                                                                                                                                                                     | : | <input type="checkbox"/> Full RU <input type="checkbox"/> Partial RU                     |
| Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant. |   |                                                                                          |



### 3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20/40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20):

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 1       | 2412            | 5       | 2432            | 9       | 2452            |
| 2       | 2417            | 6       | 2437            | 10      | 2457            |
| 3       | 2422            | 7       | 2442            | 11      | 2462            |
| 4       | 2427            | 8       | 2447            |         |                 |

Test Frequency and Channel for 802.11 b/g/n (HT20/40):

| Lowest Frequency |                 | Middle Frequency |                 | Highest Frequency |                 |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel          | Frequency (MHz) | Channel          | Frequency (MHz) | Channel           | Frequency (MHz) |
| 1                | 2412            | 6                | 2437            | 11                | 2462            |
| 3                | 2422            | 6                | 2437            | 9                 | 2452            |



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

### **3.3 Test Site**

#### **Site Description**

EMC Lab.: FCC-Registration No:562200 Designation Number: CN1338

MAXLAB Testing Co., Ltd.has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert.No:4707.01

MAXLAB Testing Co, Ltd.has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

Industry Canada Registration Number.Is:11093A

CAB identifier: CN0019


The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

Name of Firm: MAXLAB Testing Co, Ltd.


Site Location: 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China




### 3.4 Test Setup Configuration




Radiated Emission (30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



### 3.5 Test Mode

|                                                                                                                                                                                                                                       |                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode. |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                 |

|                   |                    |
|-------------------|--------------------|
| Test Software     | FCC_assist_1.0.2.2 |
| Power level setup | 0 dBm              |

## 4 Equipment During Test

### 4.1 Equipments List

| Conducted Emission        |                         |                      |            |              |            |
|---------------------------|-------------------------|----------------------|------------|--------------|------------|
| Test Equipment            | Manufacturer            | Model                | Serial No. | Date of Cal. | Due Date   |
| Shielding Room            | ZhongYu Electron        | 7.3(L)x3.1(W)x2.9(H) | MAX252     | 2024-10-27   | 2025-10-26 |
| EMI Test Receiver         | R&S                     | ESCI 7               | MAX552     | 2024-10-27   | 2025-10-26 |
| Coaxial Switch            | ANRITSU CORP            | MP59B                | MAX225     | 2024-10-27   | 2025-10-26 |
| ENV216 2-L-V-NETZNACHB.DE | ROHDE&SCHWARZ           | ENV216               | MAX226     | 2024-10-27   | 2025-10-26 |
| Coaxial Cable             | MAX                     | N/A                  | MAX227     | N/A          | N/A        |
| Thermo meter              | KTJ                     | TA328                | MAX233     | 2024-10-27   | 2025-10-26 |
| Absorbing clamp           | Elektronik-Feinmechanik | MDS21                | MAX229     | 2024-10-27   | 2025-10-26 |
| LISN                      | R&S                     | ENV216               | 308        | 2024-10-27   | 2025-10-26 |
| LISN                      | R&S                     | ENV216               | 314        | 2024-10-27   | 2025-10-26 |

| Radiation Test equipment      |                             |                          |            |              |            |
|-------------------------------|-----------------------------|--------------------------|------------|--------------|------------|
| Test Equipment                | Manufacturer                | Model                    | Serial No. | Date of Cal. | Due Date   |
| 3m Semi- Anechoic Chamber     | ZhongYu Electron            | 9.2(L)*6.2(W)*6.4(H)     | MAX250     | 2024-10-27   | 2025-10-26 |
| Control Room                  | ZhongYu Electron            | 6.2(L)*2.5(W)*2.4(H)     | MAX251     | N/A          | N/A        |
| EMI Test Receiver             | Rohde & Schwarz             | ESU26                    | MAX203     | 2024-10-27   | 2025-10-26 |
| BiConiLog Antenna             | SCHWARZBECK MESS-ELEKTRONIK | VULB9163                 | MAX214     | 2024-10-27   | 2025-10-26 |
| Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120 D              | MAX208     | 2024-10-27   | 2025-10-26 |
| Horn Antenna                  | ETS-LINDGREN                | 3160                     | MAX217     | 2024-10-27   | 2025-10-26 |
| Coaxial Cable                 | MAX                         | N/A                      | MAX213     | 2024-10-27   | 2025-10-26 |
| Coaxial Cable                 | MAX                         | N/A                      | MAX211     | 2024-10-27   | 2025-10-26 |
| Coaxial cable                 | MAX                         | N/A                      | MAX210     | 2024-10-27   | 2025-10-26 |
| Coaxial Cable                 | MAX                         | N/A                      | MAX212     | 2024-10-27   | 2025-10-26 |
| Amplifier(100kHz-3GHz)        | HP                          | 8347A                    | MAX204     | 2024-10-27   | 2025-10-26 |
| Amplifier(2GHz-20GHz)         | HP                          | 84722A                   | MAX206     | 2024-10-27   | 2025-10-26 |
| Amplifier (18-26GHz)          | Rohde & Schwarz             | AFS33-18002 650-30-8P-44 | MAX218     | 2024-10-27   | 2025-10-26 |
| Band filter                   | Amindeon                    | 82346                    | MAX219     | 2024-10-27   | 2025-10-26 |
| Power Meter                   | Anritsu                     | ML2495A                  | MAX540     | 2024-10-27   | 2025-10-26 |
| Power Sensor                  | Anritsu                     | MA2411B                  | MAX541     | 2024-10-27   | 2025-10-26 |



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

|                                     |                 |           |        |            |            |
|-------------------------------------|-----------------|-----------|--------|------------|------------|
| Wideband Radio Communication Tester | Rohde & Schwarz | CMW500    | MAX575 | 2024-10-27 | 2025-10-26 |
| Splitter                            | Agilent         | 11636B    | MAX237 | 2024-10-27 | 2025-10-26 |
| Loop Antenna                        | ZHINAN          | ZN30900A  | MAX534 | 2024-10-27 | 2025-10-26 |
| Breitband hornantenne               | SCHWARZBECK     | BBHA 9170 | MAX579 | 2024-10-27 | 2025-10-26 |
| Amplifier                           | TDK             | PA-02-02  | MAX574 | 2024-10-27 | 2025-10-26 |
| Amplifier                           | TDK             | PA-02-03  | MAX576 | 2024-10-27 | 2025-10-26 |
| PSA Series Spectrum Analyzer        | Rohde & Schwarz | FSP       | MAX578 | 2024-10-27 | 2025-10-26 |

| RF Conducted Test:                             |              |                  |            |              |            |
|------------------------------------------------|--------------|------------------|------------|--------------|------------|
| Test Equipment                                 | Manufacturer | Model            | Serial No. | Date of Cal. | Due Date   |
| MXA Signal Analyzer                            | Agilent      | N9020A           | MAX566     | 2024-10-27   | 2025-10-26 |
| EMI Test Receiver                              | R&S          | ESCI 7           | MAX552     | 2024-10-27   | 2025-10-26 |
| Spectrum Analyzer                              | Agilent      | E4440A           | MAX533     | 2024-10-27   | 2025-10-26 |
| MXG vector Signal Generator                    | Agilent      | N5182A           | MAX567     | 2024-10-27   | 2025-10-26 |
| ESG Analog Signal Generator                    | Agilent      | E4428C           | MAX568     | 2024-10-27   | 2025-10-26 |
| USB RF Power Sensor                            | DARE         | RPR3006W         | MAX569     | 2024-10-27   | 2025-10-26 |
| RF Switch Box                                  | Shongyi      | RFSW3003328      | MAX571     | 2024-10-27   | 2025-10-26 |
| Programmable Constant Temp & Humi Test Chamber | WEWON        | WHTH-150L-40-880 | MAX572     | 2024-10-27   | 2025-10-26 |

Other

| Item | Name                         | Manufacturer | Model   | Software version |
|------|------------------------------|--------------|---------|------------------|
| 1    | EMC Conduction Test System   | EZ           | EZ-EMC  | EMC-CON 3A1.1+   |
| 2    | EMC radiation test system    | EZ           | EZ-EMC  | FA-03A2 RE+      |
| 3    | RF test system               | TACHOY       | RFTtest | V1.0.0           |
| 4    | RF communication test system | TACHOY       | RFTtest | V1.0.0           |

## 4.2 Measurement Uncertainty

| Parameter                                                                                       | Uncertainty              |
|-------------------------------------------------------------------------------------------------|--------------------------|
| RF output power, conducted                                                                      | ±1.0dB                   |
| Power Spectral Density, conducted                                                               | ±2.2dB                   |
| Radio Frequency                                                                                 | ± 1 x 10 <sup>-6</sup>   |
| Bandwidth                                                                                       | ± 1.5 x 10 <sup>-6</sup> |
| Time                                                                                            | ±2%                      |
| Duty Cycle                                                                                      | ±2%                      |
| Temperature                                                                                     | ±1°C                     |
| Humidity                                                                                        | ±5%                      |
| DC and low frequency voltages                                                                   | ±3%                      |
| Conducted Emissions (150kHz~30MHz)                                                              | ±3.64dB                  |
| Radiated Emission(9KHz~30MHz)                                                                   | ±4.51dB                  |
| Radiated Emission(30MHz~1GHz)                                                                   | ±5.03dB                  |
| Radiated Emission(1GHz~25GHz)                                                                   | ±4.74dB                  |
| Radiated Emission(25GHz~40GHz)                                                                  | ±3.38dB                  |
| Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95% |                          |

## 4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note      |
|------|-----------|-----------|----------------|------------|-----------|
| E-1  | Carplay   | N/A       | M27            | N/A        | EUT       |
| E-2  | Adapter   | N/A       | QL010-0502000V | N/A        | Auxiliary |
| E-3  | notebook  | N/A       | 500R4K         | N/A        | Auxiliary |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 5 Conducted Emission

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| Test Requirement: | : FCC CFR 47 Part 15 Section 15.207, RSS-Gen§8.8, RSS-247§ 3.1 |
| Test Method       | : ANSI C63.10: 2020                                            |
| Test Result       | : PASS                                                         |
| Frequency Range   | : 150kHz to 30MHz                                              |
| Class/Severity    | : Class B                                                      |


### 5.1 E.U.T. Operation

Operating Environment :


|                      |           |
|----------------------|-----------|
| Temperature          | : 26 °C   |
| Humidity             | : 54 % RH |
| Atmospheric Pressure | : 101kPa  |

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2020.

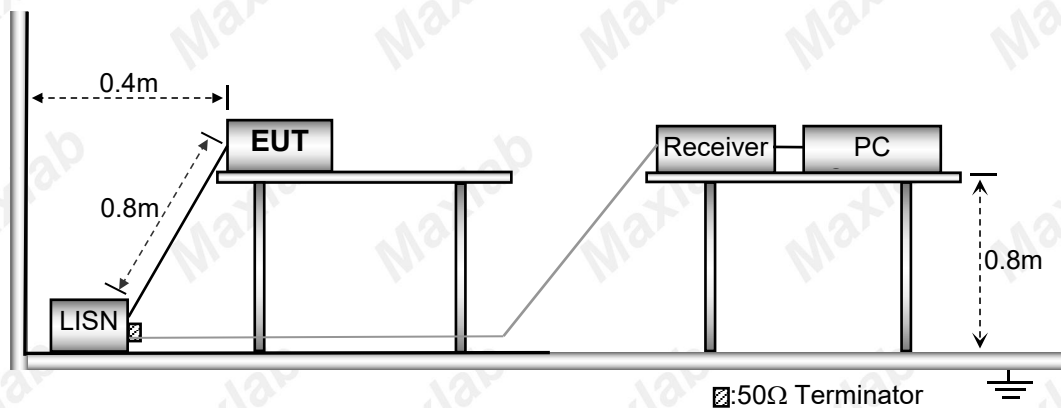

### 5.3 Test SET-UP (Block Diagram of Configuration)

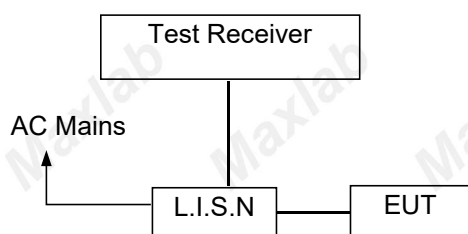





## **5.4 Measurement Procedure**

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

## **5.5 Conducted Emission Limit**

### **Conducted Emission**

| <b>Frequency(MHz)</b> | <b>Quasi-peak</b> | <b>Average</b> |
|-----------------------|-------------------|----------------|
| 0.15-0.5              | 66-56             | 56-46          |
| 0.5-5.0               | 56                | 46             |
| 5.0-30.0              | 60                | 50             |

### **Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## **5.6 Measurement Description**

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## **5.7 Conducted Emission Test Result**

The EUT is powered by PC, so this test item is not applicable for the EUT

## 6 Radiated Spurious Emissions

|                      |   |                                                                          |
|----------------------|---|--------------------------------------------------------------------------|
| Test Requirement     | : | FCC CFR47 Part 15 Section 15.209 & 15.247<br>RSS-Gen §8.9, RSS-Gen §8.10 |
| Test Method          | : | ANSI C63.10:2020                                                         |
| Test Result          | : | PASS                                                                     |
| Measurement Distance | : | 3m                                                                       |
| Limit                | : | See the follow table                                                     |

| Frequency (MHz) | Field Strength        |              | Field Strength Limit at 3m Measurement Dist |                                       |
|-----------------|-----------------------|--------------|---------------------------------------------|---------------------------------------|
|                 | uV/m                  | Distance (m) | uV/m                                        | dBuV/m                                |
| 0.009 ~ 0.490   | $2400/F(\text{kHz})$  | 300          | $10000 * 2400/F(\text{kHz})$                | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705   | $24000/F(\text{kHz})$ | 30           | $100 * 24000/F(\text{kHz})$                 | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30      | 30                    | 30           | $100 * 30$                                  | $20\log^{(30)} + 40$                  |
| 30 ~ 88         | 100                   | 3            | 100                                         | $20\log^{(100)}$                      |
| 88 ~ 216        | 150                   | 3            | 150                                         | $20\log^{(150)}$                      |
| 216 ~ 960       | 200                   | 3            | 200                                         | $20\log^{(200)}$                      |
| Above 960       | 500                   | 3            | 500                                         | $20\log^{(500)}$                      |

### 6.1 EUT Operation

Operating Environment :

Temperature: : 26°C


Humidity: : 54 % RH

Atmospheric Pressure: : 101kPa


### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

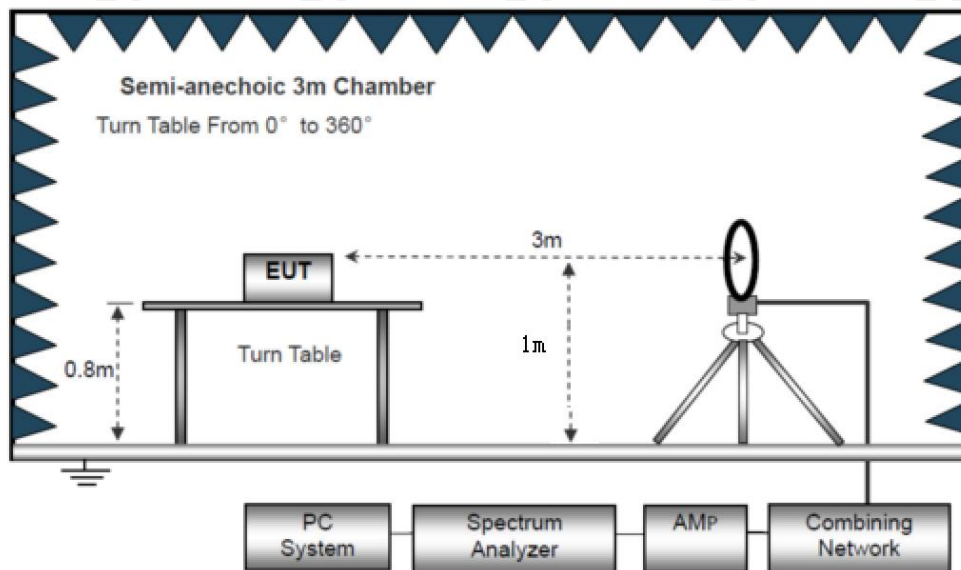

The test setup for emission measurement from 30 MHz to 1 GHz.

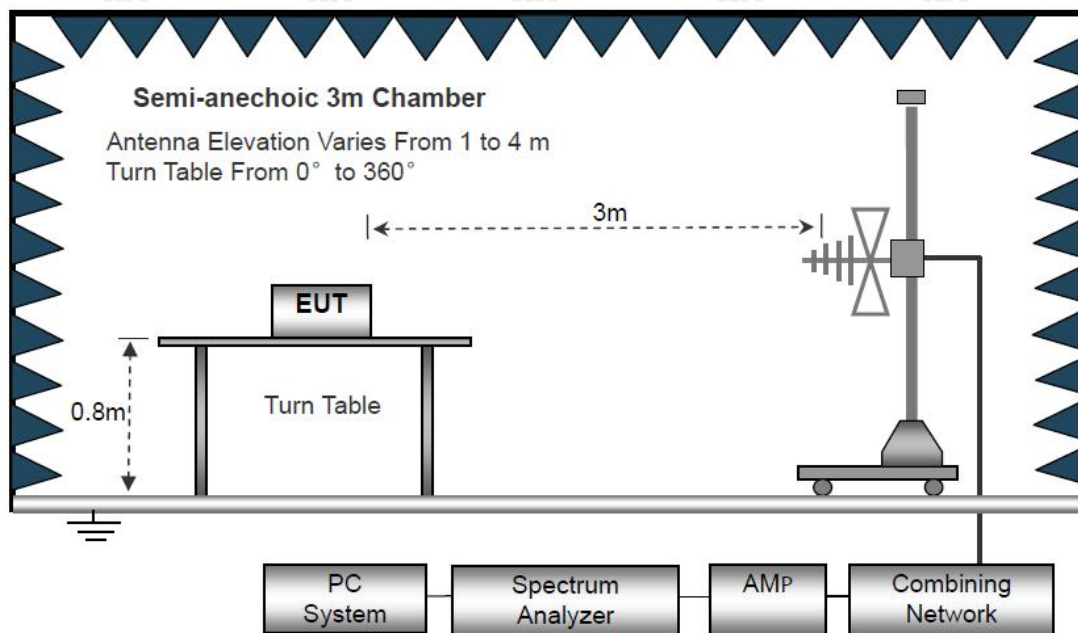

The test setup for emission measurement above 1 GHz

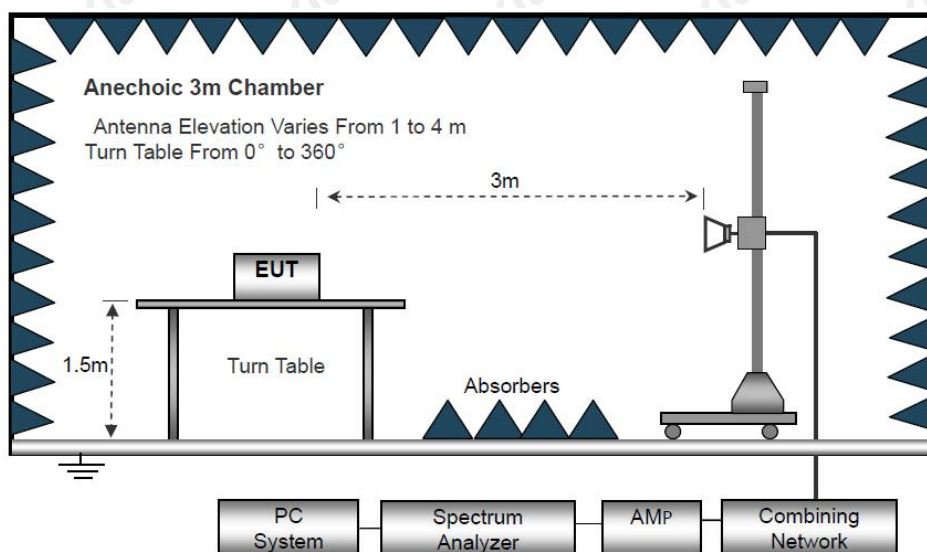

### 6.3 Spectrum Analyzer Setup

|                      |   |        |        |
|----------------------|---|--------|--------|
| Below 30MHz          |   |        |        |
| IF Bandwidth         | : | 10kHz  |        |
| Resolution Bandwidth | : | 10kHz  |        |
| Video Bandwidth      | : | 10kHz  |        |
| 30MHz ~ 1GHz         |   |        |        |
| Detector             | : | PK     | QP     |
| Resolution Bandwidth | : | 100kHz | 120kHz |
| Video Bandwidth      | : | 300kHz | 300kHz |
| Above 1GHz           |   |        |        |
| Detector             | : | PK     | AV     |
| Resolution Bandwidth | : | 1MHz   | 1MHz   |
| Video Bandwidth      | : | 3MHz   | 10Hz   |

### 6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

## 6.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Over<br>(dB) |
|----------------|-----------------|----------------------------|----------------------|--------------|
| --             | --              | --                         | --                   | >20          |

#### Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor.


### Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

**Please refer to the following test plots:**




|               |         |                    |            |
|---------------|---------|--------------------|------------|
| Temperature:  | 26°C    | Relative Humidity: | 54%        |
| Pressure:     | 101 kPa | Polarization:      | Horizontal |
| Test Voltage: | DC 5V   |                    |            |

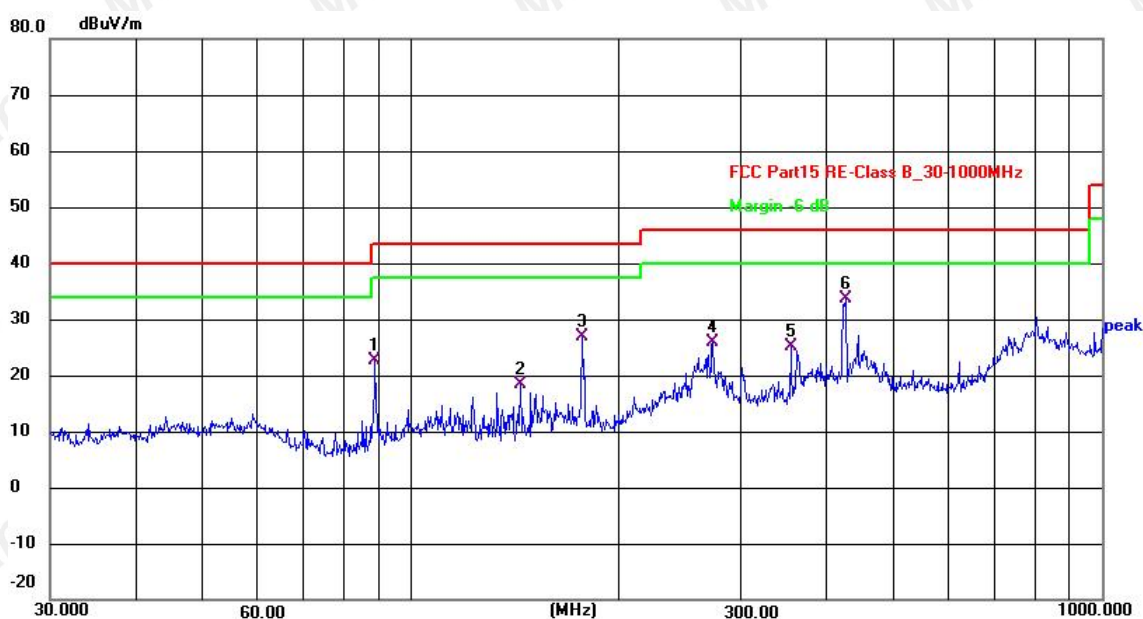

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 88.6524         | 41.14          | -18.51        | 22.63          | 43.50          | -20.87      | QP       |
| 2   | 143.8294        | 37.80          | -19.38        | 18.42          | 43.50          | -25.08      | QP       |
| 3   | 176.8878        | 44.72          | -17.85        | 26.87          | 43.50          | -16.63      | QP       |
| 4   | 273.2340        | 40.15          | -14.24        | 25.91          | 46.00          | -20.09      | QP       |
| 5   | 354.1831        | 37.60          | -12.52        | 25.08          | 46.00          | -20.92      | QP       |
| 6   | 425.0280        | 45.08          | -11.41        | 33.67          | 46.00          | -12.33      | QP       |

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

|               |         |                    |          |
|---------------|---------|--------------------|----------|
| Temperature:  | 26°C    | Relative Humidity: | 54%      |
| Pressure:     | 101 kPa | Polarization:      | Vertical |
| Test Voltage: | DC 5V   |                    |          |

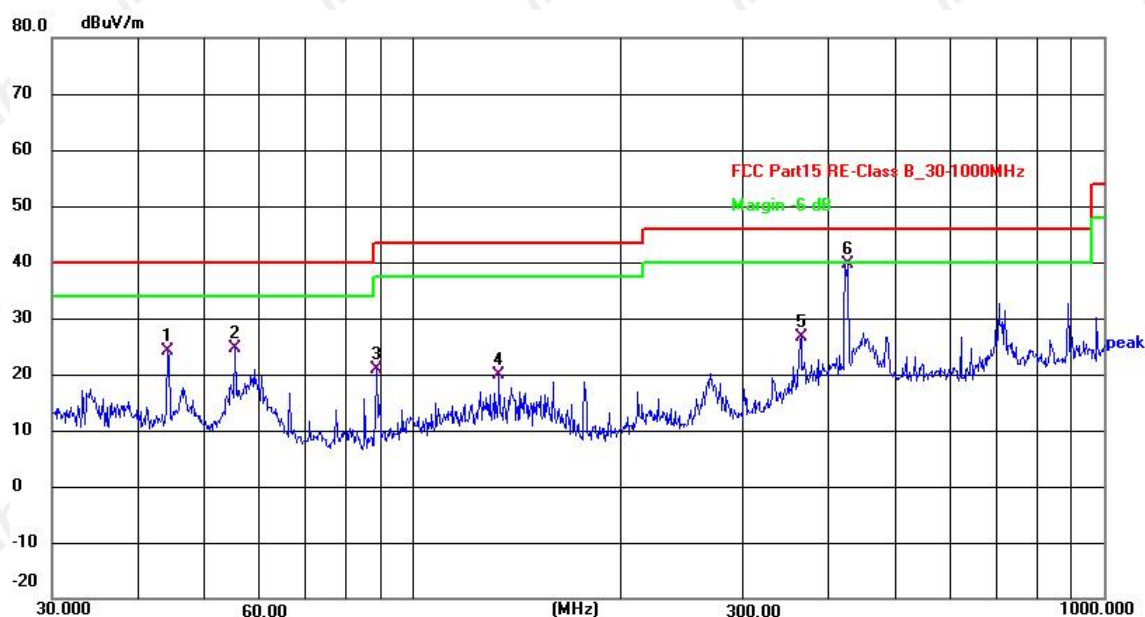

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 44.1202         | 38.56          | -14.45        | 24.11          | 40.00          | -15.89      | QP       |
| 2   | 55.2207         | 39.27          | -14.64        | 24.63          | 40.00          | -15.37      | QP       |
| 3   | 88.6524         | 39.41          | -18.51        | 20.90          | 43.50          | -22.60      | QP       |
| 4   | 133.1510        | 39.03          | -19.10        | 19.93          | 43.50          | -23.57      | QP       |
| 5   | 364.2595        | 38.81          | -12.27        | 26.54          | 46.00          | -19.46      | QP       |
| 6   | 425.0280        | 51.14          | -11.41        | 39.73          | 46.00          | -6.27       | QP       |

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

### Test Frequency 1GHz-25GHz

| Polar (H/V)         | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|---------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel:2412MHz |                 |                      |                    |                 |                     |                         |                 |             |               |
| V                   | 4824.00         | 42.7                 | 34.11              | 5.04            | 32.44               | 46.07                   | 74.00           | -27.93      | Pk            |
| V                   | 4824.00         | 38.89                | 34.11              | 5.04            | 32.44               | 42.26                   | 54.00           | -11.74      | AV            |
| V                   | 7236.00         | 43                   | 32.57              | 6.30            | 35.89               | 52.62                   | 74.00           | -21.38      | Pk            |
| V                   | 7236.00         | 30.6                 | 32.57              | 6.30            | 35.89               | 40.22                   | 54.00           | -13.78      | AV            |
| V                   | 9648.00         | 38.26                | 32.96              | 7.56            | 38.40               | 51.26                   | 74.00           | -22.74      | Pk            |
| V                   | 9648.00         | 22.84                | 32.96              | 7.56            | 38.40               | 35.84                   | 54.00           | -18.16      | AV            |
| V                   | 12060.00        | 31.75                | 32.06              | 8.92            | 39.01               | 47.62                   | 74.00           | -26.38      | Pk            |
| V                   | 12060.00        | 24.98                | 32.06              | 8.92            | 39.01               | 40.85                   | 54.00           | -13.15      | AV            |
| H                   | 4824.00         | 45.51                | 34.11              | 5.04            | 32.44               | 48.88                   | 74.00           | -25.12      | Pk            |
| H                   | 4824.00         | 35.04                | 34.11              | 5.04            | 32.44               | 38.41                   | 54.00           | -15.59      | AV            |
| H                   | 7236.00         | 39.33                | 32.57              | 6.30            | 35.89               | 48.95                   | 74.00           | -25.05      | Pk            |
| H                   | 7236.00         | 27.42                | 32.57              | 6.30            | 35.89               | 37.04                   | 54.00           | -16.96      | AV            |
| H                   | 9648.00         | 37.18                | 32.96              | 7.56            | 38.40               | 50.18                   | 74.00           | -23.82      | Pk            |
| H                   | 9648.00         | 26.88                | 32.96              | 7.56            | 38.40               | 39.88                   | 54.00           | -14.12      | AV            |
| H                   | 12060.00        | 36.32                | 32.06              | 8.92            | 39.01               | 52.19                   | 74.00           | -21.81      | Pk            |
| H                   | 12060.00        | 24.06                | 32.06              | 8.92            | 39.01               | 39.93                   | 54.00           | -14.07      | AV            |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|-------------|-----------|---------------|---------------|------------|----------------|----------------|--------|--------|---------------|
|-------------|-----------|---------------|---------------|------------|----------------|----------------|--------|--------|---------------|

|                        | (MHz)    | (dBuV) | (dB)  | (dB) | (dB)  | (dBuV/m) | (dBuV/m) | (dB)   |    |
|------------------------|----------|--------|-------|------|-------|----------|----------|--------|----|
| Middle Channel:2437MHz |          |        |       |      |       |          |          |        |    |
| V                      | 4874.00  | 47.28  | 34.08 | 5.08 | 32.57 | 50.85    | 74.00    | -23.15 | Pk |
| V                      | 4874.00  | 36.85  | 34.08 | 5.08 | 32.57 | 40.42    | 54.00    | -13.58 | AV |
| V                      | 7311.00  | 41.94  | 32.62 | 6.34 | 35.95 | 51.61    | 74.00    | -22.39 | Pk |
| V                      | 7311.00  | 31.23  | 32.62 | 6.34 | 35.95 | 40.90    | 54.00    | -13.10 | AV |
| V                      | 9748.00  | 43.37  | 32.93 | 7.58 | 38.40 | 56.42    | 74.00    | -17.58 | Pk |
| V                      | 9748.00  | 32.10  | 32.93 | 7.58 | 38.40 | 45.15    | 54.00    | -8.85  | AV |
| V                      | 12185.00 | 43.20  | 31.97 | 8.89 | 39.04 | 59.16    | 74.00    | -14.84 | Pk |
| V                      | 12185.00 | 27.14  | 31.97 | 8.89 | 39.04 | 43.10    | 54.00    | -10.90 | AV |
| H                      | 4874.00  | 44.81  | 34.08 | 5.08 | 32.57 | 48.38    | 74.00    | -25.62 | Pk |
| H                      | 4874.00  | 31.11  | 34.08 | 5.08 | 32.57 | 34.68    | 54.00    | -19.32 | AV |
| H                      | 7311.00  | 42.95  | 32.62 | 6.34 | 35.95 | 52.62    | 74.00    | -21.38 | Pk |
| H                      | 7311.00  | 32.15  | 32.62 | 6.34 | 35.95 | 41.82    | 54.00    | -12.18 | AV |
| H                      | 9748.00  | 45.26  | 32.93 | 7.58 | 38.40 | 58.31    | 74.00    | -15.69 | Pk |
| H                      | 9748.00  | 28.73  | 32.93 | 7.58 | 38.40 | 41.78    | 54.00    | -12.22 | AV |
| H                      | 12185.00 | 37.40  | 31.97 | 8.89 | 39.04 | 53.36    | 74.00    | -20.64 | Pk |
| H                      | 12185.00 | 24.04  | 31.97 | 8.89 | 39.04 | 40.00    | 54.00    | -14.00 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|-------------|-----------|---------------|---------------|------------|----------------|----------------|--------|--------|---------------|
|-------------|-----------|---------------|---------------|------------|----------------|----------------|--------|--------|---------------|



|                      | (MHz)    | (dBuV) | (dB)  | (dB) | (dB)  | (dBuV/m) | (dBuV/m) | (dB)   |    |
|----------------------|----------|--------|-------|------|-------|----------|----------|--------|----|
| High Channel:2462MHz |          |        |       |      |       |          |          |        |    |
| V                    | 4924.00  | 46.50  | 34.05 | 5.14 | 32.79 | 50.38    | 74.00    | -23.62 | Pk |
| V                    | 4924.00  | 30.83  | 34.05 | 5.14 | 32.79 | 34.71    | 54.00    | -19.29 | AV |
| V                    | 7386.00  | 41.14  | 32.67 | 6.36 | 35.99 | 50.82    | 74.00    | -23.18 | Pk |
| V                    | 7386.00  | 31.86  | 32.67 | 6.36 | 35.99 | 41.54    | 54.00    | -12.46 | AV |
| V                    | 9848.00  | 39.77  | 32.89 | 7.59 | 38.37 | 52.84    | 74.00    | -21.16 | Pk |
| V                    | 9848.00  | 27.98  | 32.89 | 7.59 | 38.37 | 41.05    | 54.00    | -12.95 | AV |
| V                    | 12310.00 | 37.42  | 31.88 | 8.82 | 39.06 | 53.42    | 74.00    | -20.58 | Pk |
| V                    | 12310.00 | 23.12  | 31.88 | 8.82 | 39.06 | 39.12    | 54.00    | -14.88 | AV |
| H                    | 4924.00  | 43.78  | 34.05 | 5.14 | 32.79 | 47.66    | 74.00    | -26.34 | Pk |
| H                    | 4924.00  | 33.78  | 34.05 | 5.14 | 32.79 | 37.66    | 54.00    | -16.34 | AV |
| H                    | 7386.00  | 42.85  | 32.67 | 6.36 | 35.99 | 52.53    | 74.00    | -21.47 | Pk |
| H                    | 7386.00  | 27.30  | 32.67 | 6.36 | 35.99 | 36.98    | 54.00    | -17.02 | AV |
| H                    | 9848.00  | 40.27  | 32.89 | 7.59 | 38.37 | 53.34    | 74.00    | -20.66 | Pk |
| H                    | 9848.00  | 26.76  | 32.89 | 7.59 | 38.37 | 39.83    | 54.00    | -14.17 | AV |
| H                    | 12310.00 | 35.43  | 31.88 | 8.82 | 39.06 | 51.43    | 74.00    | -22.57 | Pk |
| H                    | 12310.00 | 27.48  | 31.88 | 8.82 | 39.06 | 43.48    | 54.00    | -10.52 | AV |

Note: 1. The testing has been conformed to 10\*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(802.11b) in the report

|  | Polar<br>(H/V) | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV<br>/m) | Margin<br>(dB) | Detec<br>tor<br>Type |
|--|----------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-----------------------|----------------|----------------------|
|--|----------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-----------------------|----------------|----------------------|



|         |                      |         |       |       |      |       |       |    |        |    |
|---------|----------------------|---------|-------|-------|------|-------|-------|----|--------|----|
| 802.11b | Low Channel 2412MHz  |         |       |       |      |       |       |    |        |    |
|         | H                    | 2390.00 | 57.61 | 35.17 | 3.48 | 27.49 | 53.41 | 74 | -20.59 | PK |
|         | H                    | 2390.00 | 50.01 | 35.17 | 3.48 | 27.49 | 45.81 | 54 | -8.19  | AV |
|         | H                    | 2400.00 | 59.71 | 35.16 | 3.49 | 27.52 | 55.56 | 74 | -18.44 | PK |
|         | H                    | 2400.00 | 49.79 | 35.16 | 3.49 | 27.52 | 45.64 | 54 | -8.36  | AV |
|         | V                    | 2390.00 | 58.11 | 35.17 | 3.48 | 27.49 | 53.91 | 74 | -20.09 | PK |
|         | V                    | 2390.00 | 49.87 | 35.17 | 3.48 | 27.49 | 45.67 | 54 | -8.33  | AV |
|         | V                    | 2400.00 | 60.06 | 35.16 | 3.49 | 27.52 | 55.91 | 74 | -18.09 | PK |
|         | V                    | 2400.00 | 50.12 | 35.16 | 3.49 | 27.52 | 45.97 | 54 | -8.03  | AV |
|         | High Channel 2462MHz |         |       |       |      |       |       |    |        |    |
|         | H                    | 2483.50 | 57.45 | 35.11 | 3.56 | 27.75 | 53.65 | 74 | -20.35 | PK |
|         | H                    | 2483.50 | 49.08 | 35.11 | 3.56 | 27.75 | 45.28 | 54 | -8.72  | AV |
|         | H                    | 2500.00 | 59.65 | 35.10 | 3.57 | 27.80 | 55.92 | 74 | -18.08 | PK |
|         | H                    | 2500.00 | 49.61 | 35.10 | 3.57 | 27.80 | 45.88 | 54 | -8.12  | AV |
|         | V                    | 2483.50 | 58.69 | 35.11 | 3.56 | 27.75 | 54.89 | 74 | -19.11 | PK |
|         | V                    | 2483.50 | 50.20 | 35.11 | 3.56 | 27.75 | 46.40 | 54 | -7.6   | AV |
|         | V                    | 2500.00 | 59.05 | 35.10 | 3.57 | 27.80 | 55.32 | 74 | -18.68 | PK |
|         | V                    | 2500.00 | 49.35 | 35.10 | 3.57 | 27.80 | 45.62 | 54 | -8.38  | AV |
| 802.11g | Low Channel 2412MHz  |         |       |       |      |       |       |    |        |    |
|         | H                    | 2390.00 | 57.61 | 35.17 | 3.48 | 27.49 | 53.41 | 74 | -20.59 | PK |
|         | H                    | 2390.00 | 49.71 | 35.17 | 3.48 | 27.49 | 45.51 | 54 | -8.49  | AV |
|         | H                    | 2400.00 | 58.60 | 35.16 | 3.49 | 27.52 | 54.45 | 74 | -19.55 | PK |
|         | H                    | 2400.00 | 49.89 | 35.16 | 3.49 | 27.52 | 45.74 | 54 | -8.26  | AV |
|         | V                    | 2390.00 | 57.06 | 35.17 | 3.48 | 27.49 | 52.86 | 74 | -21.14 | PK |
|         | V                    | 2390.00 | 48.98 | 35.17 | 3.48 | 27.49 | 44.78 | 54 | -9.22  | AV |

|               |                      |         |       |       |      |       |       |    |        |    |
|---------------|----------------------|---------|-------|-------|------|-------|-------|----|--------|----|
|               | V                    | 2400.00 | 58.79 | 35.16 | 3.49 | 27.52 | 54.64 | 74 | -19.36 | PK |
|               | V                    | 2400.00 | 49.10 | 35.16 | 3.49 | 27.52 | 44.95 | 54 | -9.05  | AV |
|               | High Channel 2462MHz |         |       |       |      |       |       |    |        |    |
|               | H                    | 2483.50 | 57.01 | 35.11 | 3.56 | 27.75 | 53.21 | 74 | -20.79 | PK |
|               | H                    | 2483.50 | 48.75 | 35.11 | 3.56 | 27.75 | 44.95 | 54 | -9.05  | AV |
|               | H                    | 2500.00 | 58.83 | 35.10 | 3.57 | 27.80 | 55.10 | 74 | -18.9  | PK |
|               | H                    | 2500.00 | 49.00 | 35.10 | 3.57 | 27.80 | 45.27 | 54 | -8.73  | AV |
|               | V                    | 2483.50 | 57.68 | 35.11 | 3.56 | 27.75 | 53.88 | 74 | -20.12 | PK |
|               | V                    | 2483.50 | 50.17 | 35.11 | 3.56 | 27.75 | 46.37 | 54 | -7.63  | AV |
|               | V                    | 2500.00 | 57.94 | 35.10 | 3.57 | 27.80 | 54.21 | 74 | -19.79 | PK |
|               | V                    | 2500.00 | 48.99 | 35.10 | 3.57 | 27.80 | 45.26 | 54 | -8.74  | AV |
| 802.11<br>n20 | Low Channel 2412MHz  |         |       |       |      |       |       |    |        |    |
|               | H                    | 2390.00 | 57.95 | 35.17 | 3.48 | 27.49 | 53.75 | 74 | -20.25 | PK |
|               | H                    | 2390.00 | 49.94 | 35.17 | 3.48 | 27.49 | 45.74 | 54 | -8.26  | AV |
|               | H                    | 2400.00 | 60.65 | 35.16 | 3.49 | 27.52 | 56.50 | 74 | -17.5  | PK |
|               | H                    | 2400.00 | 49.71 | 35.16 | 3.49 | 27.52 | 45.56 | 54 | -8.44  | AV |
|               | V                    | 2390.00 | 57.82 | 35.17 | 3.48 | 27.49 | 53.62 | 74 | -20.38 | PK |
|               | V                    | 2390.00 | 50.39 | 35.17 | 3.48 | 27.49 | 46.19 | 54 | -7.81  | AV |
|               | V                    | 2400.00 | 59.31 | 35.16 | 3.49 | 27.52 | 55.16 | 74 | -18.84 | PK |
|               | V                    | 2400.00 | 49.83 | 35.16 | 3.49 | 27.52 | 45.68 | 54 | -8.32  | AV |
|               | High Channel 2462MHz |         |       |       |      |       |       |    |        |    |
|               | H                    | 2483.50 | 58.15 | 35.11 | 3.56 | 27.75 | 54.35 | 74 | -19.65 | PK |
|               | H                    | 2483.50 | 48.85 | 35.11 | 3.56 | 27.75 | 45.05 | 54 | -8.95  | AV |
|               | H                    | 2500.00 | 59.26 | 35.10 | 3.57 | 27.80 | 55.53 | 74 | -18.47 | PK |
|               | H                    | 2500.00 | 49.83 | 35.10 | 3.57 | 27.80 | 46.10 | 54 | -7.9   | AV |

|               |                      |         |       |       |      |       |       |    |        |    |
|---------------|----------------------|---------|-------|-------|------|-------|-------|----|--------|----|
|               | V                    | 2483.50 | 58.24 | 35.11 | 3.56 | 27.75 | 54.44 | 74 | -19.56 | PK |
|               | V                    | 2483.50 | 49.81 | 35.11 | 3.56 | 27.75 | 46.01 | 54 | -7.99  | AV |
|               | V                    | 2500.00 | 58.29 | 35.10 | 3.57 | 27.80 | 54.56 | 74 | -19.44 | PK |
|               | V                    | 2500.00 | 49.98 | 35.10 | 3.57 | 27.80 | 46.25 | 54 | -7.75  | AV |
| 802.11<br>n40 | Low Channel 2422MHz  |         |       |       |      |       |       |    |        |    |
|               | H                    | 2390.00 | 56.81 | 35.17 | 3.48 | 27.49 | 52.61 | 74 | -21.39 | PK |
|               | H                    | 2390.00 | 48.61 | 35.17 | 3.48 | 27.49 | 44.41 | 54 | -9.59  | AV |
|               | H                    | 2400.00 | 58.51 | 35.16 | 3.49 | 27.52 | 54.36 | 74 | -19.64 | PK |
|               | H                    | 2400.00 | 49.36 | 35.16 | 3.49 | 27.52 | 45.21 | 54 | -8.79  | AV |
|               | V                    | 2390.00 | 57.15 | 35.17 | 3.48 | 27.49 | 52.95 | 74 | -21.05 | PK |
|               | V                    | 2390.00 | 49.35 | 35.17 | 3.48 | 27.49 | 45.15 | 54 | -8.85  | AV |
|               | V                    | 2400.00 | 58.70 | 35.16 | 3.49 | 27.52 | 54.55 | 74 | -19.45 | PK |
|               | V                    | 2400.00 | 48.63 | 35.16 | 3.49 | 27.52 | 44.48 | 54 | -9.52  | AV |
|               | High Channel 2452MHz |         |       |       |      |       |       |    |        |    |
|               | H                    | 2483.50 | 57.25 | 35.11 | 3.56 | 27.75 | 53.45 | 74 | -20.55 | PK |
|               | H                    | 2483.50 | 48.01 | 35.11 | 3.56 | 27.75 | 44.21 | 54 | -9.79  | AV |
|               | H                    | 2500.00 | 58.46 | 35.10 | 3.57 | 27.80 | 54.73 | 74 | -19.27 | PK |
|               | H                    | 2500.00 | 49.07 | 35.10 | 3.57 | 27.80 | 45.34 | 54 | -8.66  | AV |
|               | V                    | 2483.50 | 57.58 | 35.11 | 3.56 | 27.75 | 53.78 | 74 | -20.22 | PK |
|               | V                    | 2483.50 | 49.62 | 35.11 | 3.56 | 27.75 | 45.82 | 54 | -8.18  | AV |
|               | V                    | 2500.00 | 57.73 | 35.10 | 3.57 | 27.80 | 54.00 | 74 | -20    | PK |
|               | V                    | 2500.00 | 49.19 | 35.10 | 3.57 | 27.80 | 45.46 | 54 | -8.54  | AV |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit


## 7 Conduct Band Edge And Spurious Emissions Measurement

|                  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | : | FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Method      | : | ANSI C63.10:2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Limit       | : | Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).<br>RSS-247 § 5.5:<br>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required. |

### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 7.2 Test Setup Blocking





**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

### **7.3 Test Result**

Please see the attachment for the data.





**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

## **8 6dB&99% Bandwidth Measurement**

Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-GEN §6.7& RSS-247 §5.2

Test Method : ANSI C63.10:2020


Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### **8.1 Test Procedure**

For 6dB&99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW  $\geq 3 \times$  RBW

### **8.2 Test Setup Blocking**



### **8.3 Test Result**

Please see the attachment for the data.

## 9 Maximum Peak Output Power

|                  |   |                                                                                                                                                                                                                                                                                             |
|------------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | : | FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.4                                                                                                                                                                                                                                             |
| Test Method      | : | ANSI C63.10:2020                                                                                                                                                                                                                                                                            |
| Test Limit       | : | Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. |

### RSS-247 § 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

### 9.1 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 9.2 Test Setup Blocking



### 9.3 Test Result

Please see the attachment for the data.



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**


## 10 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-247 §5.2
- Test Method : ANSI C63.10:2020
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 10.2 Test Setup Blocking



### 10.3 Test Result

Please see the attachment for the data.



## **11 Antenna Application**

### **11.1 Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

### **11.2 Result**

The antenna is PBC Antenna, the Max gain of the antennas is 2.02 dBi, reference to the attachment for details.



**MAXLAB Testing Co.,Ltd.**

**Report No.: MAX250703110P01-R02**

## **12 Test Setup and EUT Photos**

Reference to the attachment for details.

**\*\*\*\*\*THE END REPORT\*\*\*\*\***