



# Radio Test Report

Report No.:STS2410091W01

## Issued for

Hiconics Eco-energy Drive Technology Co., Ltd  
No.3 Boxing 2nd Road, Economic and Technological  
Development Zone 100176, Beijing P.R. China

Product Name: Internet Dongle

Brand Name: N/A

Model Name: MH-W01-U3-G

Series Model(s): N/A

FCC ID: 2BG23MDC-HKA94E6

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.



## TEST REPORT

**Applicant's Name** .....: Hiconics Eco-energy Drive Technology Co., Ltd  
**Address** .....: No.3 Boxing 2nd Road, Economic and Technological Development Zone 100176, Beijing P.R. China  
**Manufacturer's Name** .....: Hiconics Eco-energy Drive Technology Co., Ltd  
**Address** .....: No.3 Boxing 2nd Road, Economic and Technological Development Zone 100176, Beijing P.R. China

### Product Description

**Product Name** .....: Internet Dongle  
**Brand Name** .....: N/A  
**Model Name** .....: MH-W01-U3-G  
**Series Model(s)** .....: N/A

**Test Standards** .....: FCC Part15.247

**Test Procedure** .....: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**Date of Test** .....:

**Date of receipt of test item** .....: 28 May 2024

**Date (s) of performance of tests** .....: 28 May 2024 ~ 14 Jan. 2025

**Date of Issue** .....: 14 Jan. 2025

**Test Result** .....: **Pass**

Testing Engineer : *Aaron Bu*

(Aaron Bu)

Technical Manager : *Tony Liu*

(Tony Liu)

Authorized Signatory : *Bovey Yang*

(Bovey Yang)





## Table of Contents

<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 TEST SOFTWARE AND POWER LEVEL	8
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.6 EQUIPMENTS LIST	11
<b>3. RADIATED EMISSION MEASUREMENT</b>	<b>12</b>
3.1 RADIATED EMISSION LIMITS	12
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	15
3.4 EUT OPERATING CONDITIONS	15
3.5 FIELD STRENGTH CALCULATION	16
3.6 TEST RESULTS	17
<b>4. ANTENNA REQUIREMENT</b>	<b>22</b>
4.1 STANDARD REQUIREMENT	22
4.2 EUT ANTENNA	22
<b>APPENDIX 1- EUT TEST PHOTO</b>	<b>23</b>

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	27 June 2024	STS2405119W01	ALL	Initial Issue
00	14 Jan. 2025	STS2410091W01	ALL	Update radiated emission and model.



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

<b>FCC Part 15.247,Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.209	Radiated Spurious Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



## 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
2	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
3	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
5	All emissions, radiated>6G	$\pm 5.24\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Internet Dongle															
Brand Name	N/A															
Model Name	MH-W01-U3-G															
Series Model(s)	N/A															
Model Difference	N/A															
Product Description	<p>The EUT is a Internet Dongle</p> <table border="1"><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Radio Technology:</td><td>BLE</td></tr><tr><td>Bluetooth Configuration:</td><td>LE(Support 1M PHY, 2M PHY)</td></tr><tr><td>Number Of Channel:</td><td>40</td></tr><tr><td>Antenna Type:</td><td>Out-board PCB Antenna</td></tr><tr><td>Antenna Gain (dBi)</td><td>3.34 dBi</td></tr></table>		Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Radio Technology:	BLE	Bluetooth Configuration:	LE(Support 1M PHY, 2M PHY)	Number Of Channel:	40	Antenna Type:	Out-board PCB Antenna	Antenna Gain (dBi)	3.34 dBi
Operation Frequency:	2402~2480 MHz															
Modulation Type:	GFSK															
Radio Technology:	BLE															
Bluetooth Configuration:	LE(Support 1M PHY, 2M PHY)															
Number Of Channel:	40															
Antenna Type:	Out-board PCB Antenna															
Antenna Gain (dBi)	3.34 dBi															
Channel List	Please refer to the Note 3.															
Rating	Input: DC 5V															
Hardware version number	N/A															
Software version number	N/A															
Connecting I/O Port(s)	Please refer to the Note 1.															

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

## 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1M PHY /GFSK
Mode 2	TX CH19(2440MHz)	1M PHY /GFSK
Mode 3	TX CH39(2480MHz)	1M PHY /GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2M PHY /GFSK
Mode 5	TX CH19(2440MHz)	2M PHY /GFSK
Mode 6	TX CH39(2480MHz)	2M PHY /GFSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have been tested for all available U.S. voltage and frequencies (For DC 5V) for which the device is capable of operation, and the worst case of DC 5V is shown in the report.


## 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
BLE(With 2M PHY)	BLE_1M PHY	GFSK	3.34	Default	DOGO_VP2.4.7
	BLE_2M PHY	GFSK	3.34	Default	

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

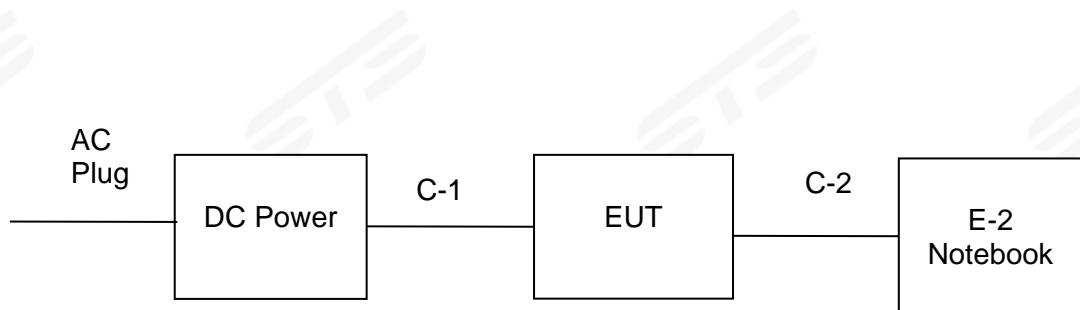



## 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
	N/A	N/A	N/A	N/A	N/A

### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
	Personal computer	DELL	Inspiron 14-3467	N/A	N/A
	USB Cable	N/A	N/A	150cm	NO
	DC Power	HONGSHENGFENG	DPS-305AF	N/A	N/A

#### Note:

- (1) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (2) "YES" is means "with core"; "NO" is means "without core".



## 2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2024.09.23	2025.09.22
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			



### 3. RADIATED EMISSION MEASUREMENT

#### 3.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part 15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



## For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

## For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2 TEST PROCEDURE


- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 3.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

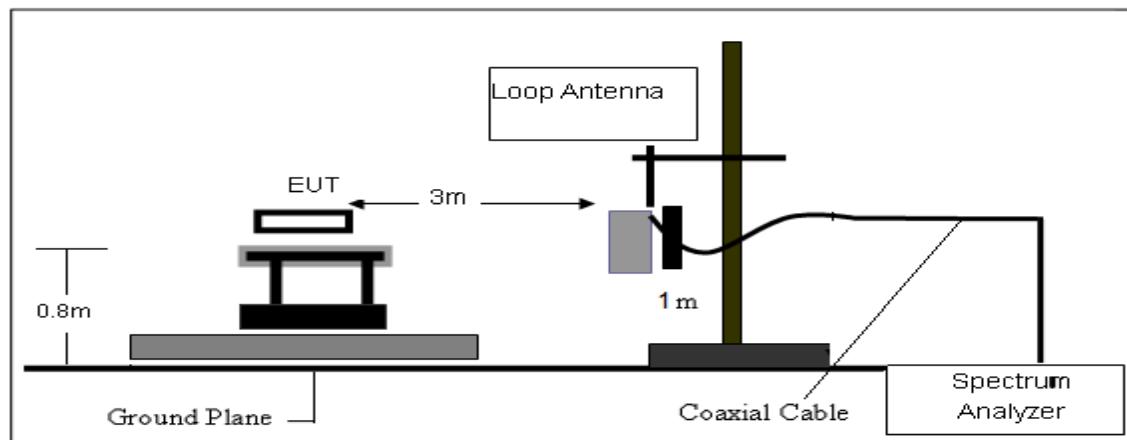

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

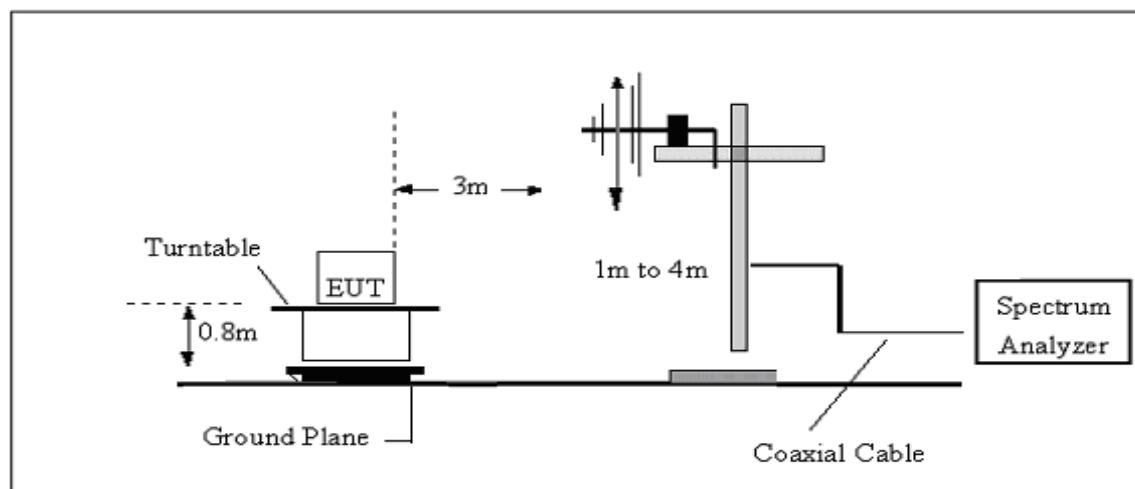

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

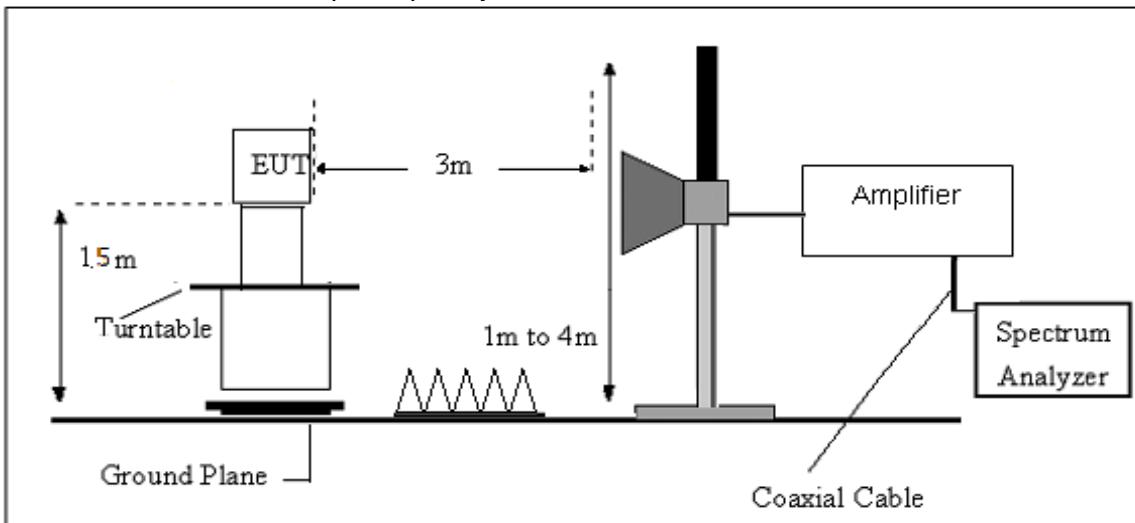

### 3.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



### 3.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$



### 3.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 5V	Polarization:	--
Test Mode:	TX Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);  
Limit line = specific limits(dBuV) + distance extrapolation factor.



(30MHz -1000MHz)


## 1M PHY

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
			Factor(dB/ m)				
1	38.7300	48.53	-17.36	31.17	40.00	-8.83	peak
2	77.5300	57.17	-23.49	33.68	40.00	-6.32	peak
3	199.7500	58.25	-21.11	37.14	43.50	-6.36	peak
4	374.3500	51.31	-12.39	38.92	46.00	-7.08	peak
5	531.4900	44.96	-7.37	37.59	46.00	-8.41	peak
6	761.3800	42.48	-2.19	40.29	46.00	-5.71	peak

## Remark:

1. Margin = Result (Result =Reading + Factor )-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

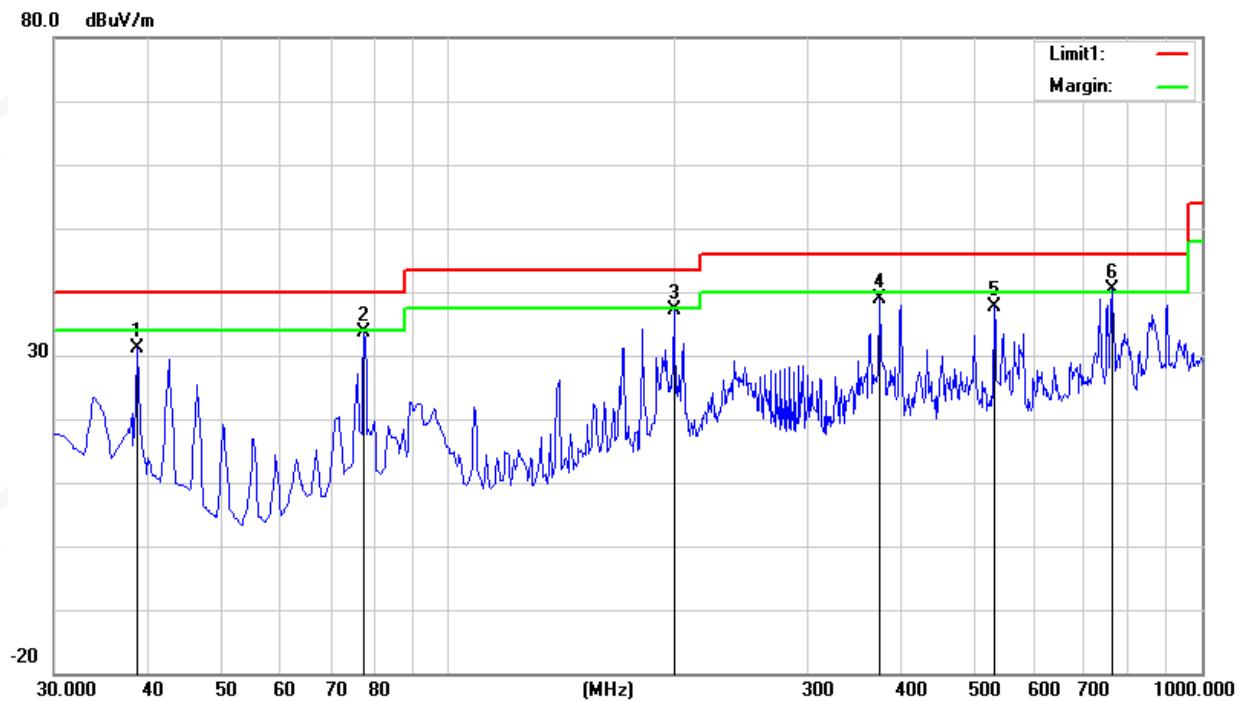


Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	50.55	-17.36	33.19	40.00	-6.81	peak
2	77.5300	55.00	-23.49	31.51	40.00	-8.49	peak
3	199.7500	57.93	-21.11	36.82	43.50	-6.68	peak
4	284.1400	54.01	-15.46	38.55	46.00	-7.45	peak
5	374.3500	50.84	-12.39	38.45	46.00	-7.55	peak
6	756.5300	41.68	-2.17	39.51	46.00	-6.49	peak

Remark:

- Margin = Result (Result =Reading + Factor )-Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- All modes have been tested,only show the worst case.

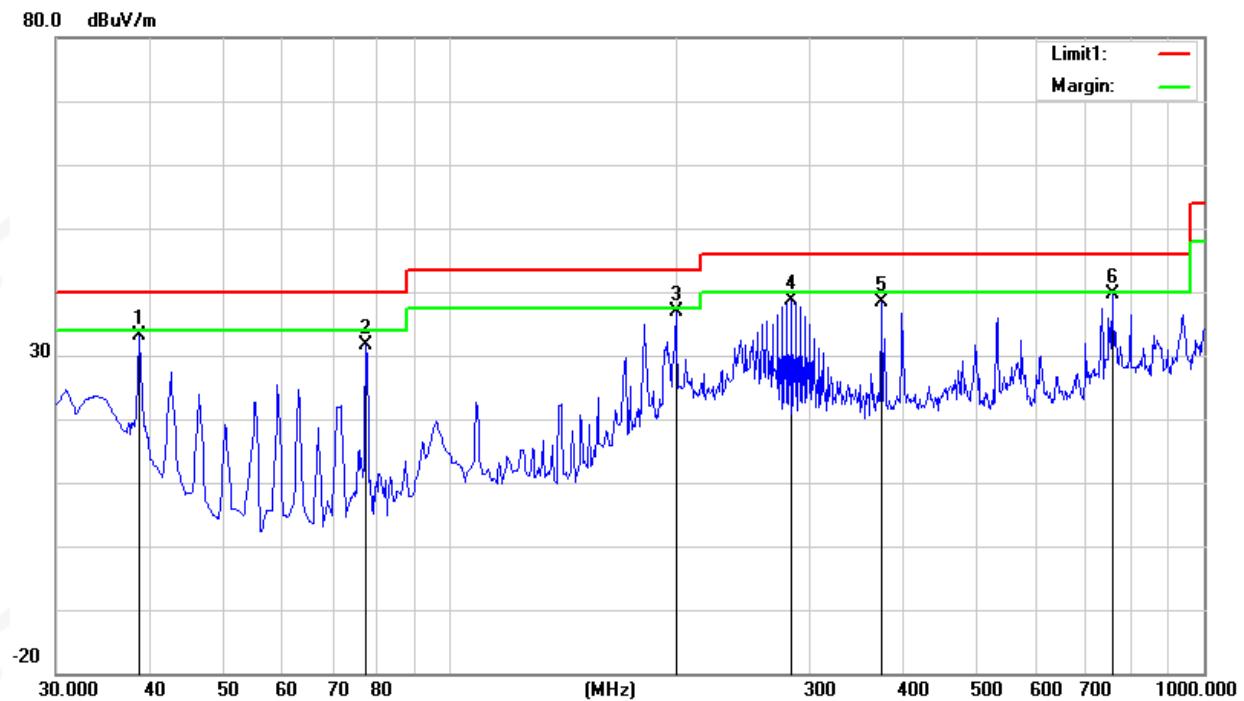




## 2M PHY

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	Mode 4/5/6 (Mode 4 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	48.79	-17.36	31.43	40.00	-8.57	peak
2	77.5300	56.35	-23.49	32.86	40.00	-7.14	peak
3	198.7800	58.70	-21.12	37.58	43.50	-5.92	peak
4	326.8200	50.95	-13.80	37.15	46.00	-8.85	peak
5	398.6000	49.08	-11.20	37.88	46.00	-8.12	peak
6	762.3500	41.88	-2.21	39.67	46.00	-6.33	peak

## Remark:

- Margin = Result (Result =Reading + Factor )-Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- All modes have been tested,only show the worst case.

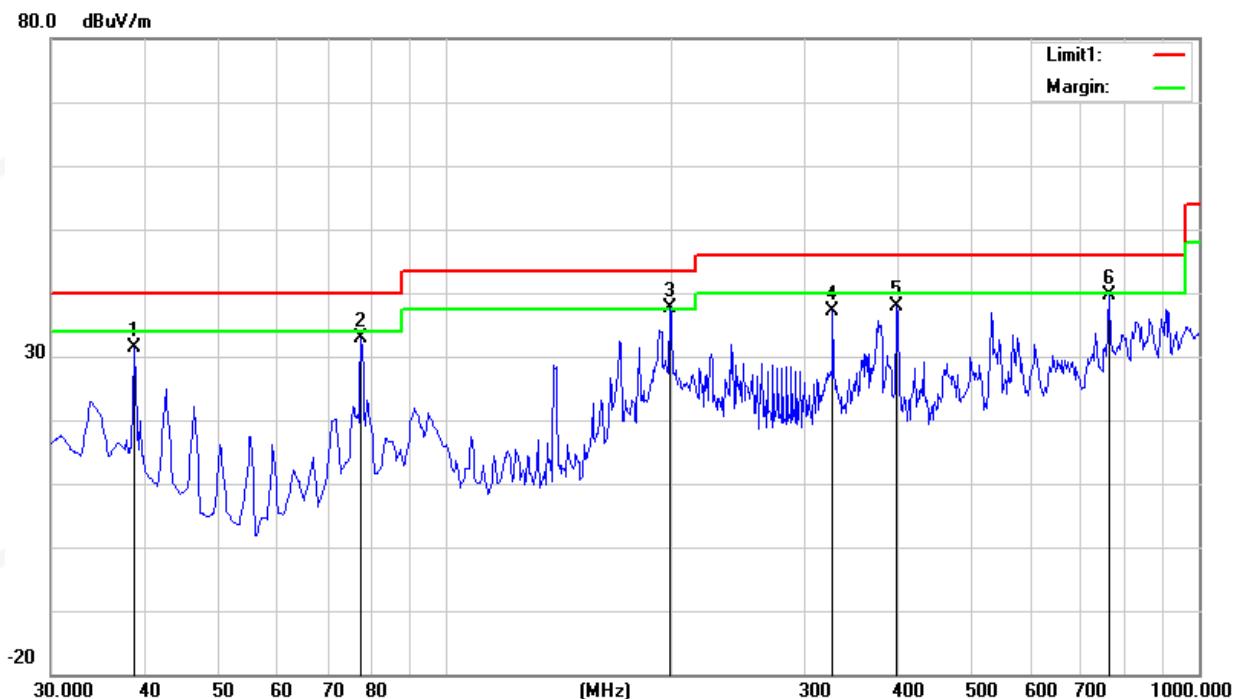




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	Mode 4/5/6 (Mode 4 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	51.33	-17.36	33.97	40.00	-6.03	peak
2	77.5300	54.69	-23.49	31.20	40.00	-8.80	peak
3	199.7500	57.49	-21.11	36.38	43.50	-7.12	peak
4	280.2600	52.12	-15.60	36.52	46.00	-9.48	peak
5	377.2600	50.44	-12.33	38.11	46.00	-7.89	peak
6	763.3200	41.55	-2.22	39.33	46.00	-6.67	peak

**Remark:**

1. Margin = Result (Result =Reading + Factor )-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

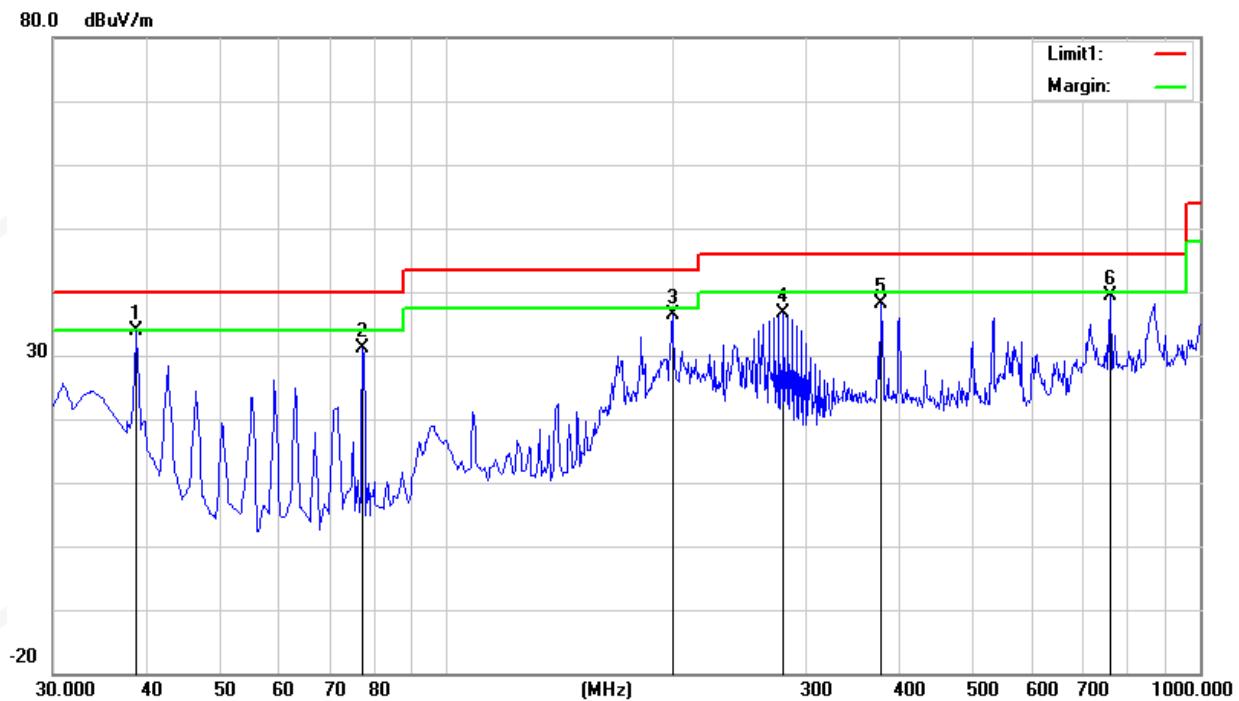



## 4. ANTENNA REQUIREMENT

### 4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 4.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.



## APPENDIX 1- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\* END OF THE REPORT \*\*\*