

Applicant: PC-COOLERS SRL

Product: Mechanical Keyboard with multimedia buttons

Model No.: MIRA, MIRABK, MIRAWH, ST-MK77

Trademark: AQIRYS

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry lang

**Terry Tang** 

Manager

Dated: August 30, 2024

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2408074-02E Page 2 of 34

Date: 2024-08-30



#### **Special Statement:**

#### FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

#### Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

#### **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2024-08-30



# **Test Report Conclusion**

#### Content 1.0 General Details 1.1 Test Lab Details.... 4 1.2 Applicant Details. 4 1.3 Description of EUT .... 1.4 Submitted Sample.... 4 Test Duration. 1.5 5 1.6 Test Uncertainty. 1.7 Test By..... 5 List of Measurement Equipment..... 2.0 3.0 7 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 EUT Modification.... 7 Power Line Conducted Emission Test.... 5.0 8 Schematics of the Test..... 5.1 8 5.2 Test Method and Test Procedure. Configuration of the EUT..... 5.3 8 5.4 EUT Operating Condition. Conducted Emission Limit. 9 5.5 5.6 Test Result. 6.0 Radiated Emission test.... 12 Test Method and Test Procedure. 6.1 12 6.2 Configuration of the EUT.... 13 6.3 EUT Operation Condition. 13 Radiated Emission Limit. 14 6.4 Test Result.... 6.5 15 7.0 Band Edge 23 7.1 Test Method and Test Procedure. 23 7.2 Radiated Test Setup. 23 7.3 Configuration of the EUT..... 23 7.4 EUT Operating Condition. 23 7.5 Band Edge Limit..... 23 7.6 Band Edge Test Result. 24 8.0 Antenna Requirement..... 28 20dB bandwidth measurement.... 9.0 29 FCC ID Label..... 10.0 38 Photo of Test Setup and EUT View....

The report refers only to the sample tested and does not apply to the bulk.

11.0

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2024-08-30



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: PC-COOLERS SRL

Address: MATEI BASARAB STR, NO.98, 3RD DISTRICT, BUCHAREST Romania

#### 1.3 Description of EUT

Product: Mechanical Keyboard with multimedia buttons

Manufacturer: PC-COOLERS SRL

Address: MATEI BASARAB STR, NO.98, 3RD DISTRICT, BUCHAREST Romania

Trademark: AQIRYS
Additional Trademark: N/A
Model Number: MIRA

Additional Model Name MIRABK, MIRAWH, ST-MK77

Hardware Version: V1 Software Version: V0

Serial No.: 90007104

Rating: Input: DC5V, 500mA or DC3.7V, 500mA

Battery: DC3.7V, 1300mAh Li-ion battery

Modulation Type: GFSK

Operation Frequency: 2402-2480MHz

Channel Separate: 1MHz Channel Number: 79

Antenna Designation PCB antenna with gain 2.34dBi Max (Get from the antenna specification)

#### 1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2408074-02E Page 5 of 34

Date: 2024-08-30



#### 1.5 Test Duration

2024-08-08 to 2024-08-30

#### 1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 34

Report No.: TW2408074-02E

Date: 2024-08-30



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2024-07-12	2025-07-11
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11

#### 2.2 Automation Test Software

#### For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

#### For Radiated Emissions

Name	Version		
EMI Test Software BL410-EV18.91	V18.905		
EMI Test Software BL410-EV18.806 High Frequency	V18.06		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 34

Report No.: TW2408074-02E

Date: 2024-08-30



#### 3.0 Technical Details

#### 3.1 Summary of test results

The EUT has	been teste	d according	to the	following	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2024-08-30



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

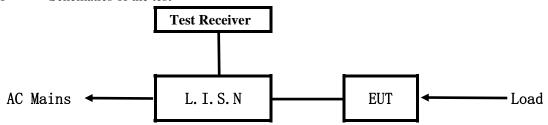


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

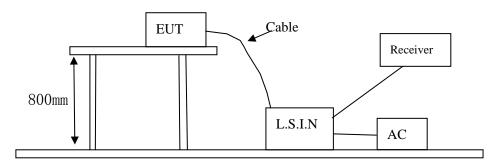

#### 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID	
Mechanical Keyboard with	PC-COOLERS SRL	MIRA, MIRABK, MIRAWH,	2BG42-MIRA	
multimedia buttons	FC-COOLERS SKL	ST-MK77		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2408074-02E Page 9 of 34

Date: 2024-08-30



#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

#### C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB $\mu$ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results:

Pass

Date: 2024-08-30



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)


#### **EUT Operating Environment**

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Charging and Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

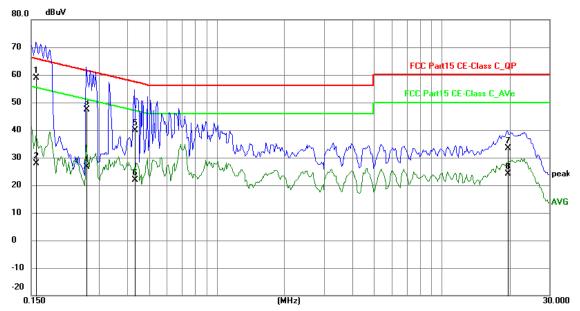

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1578	49.03	9.78	58.81	65.58	-6.77	QP	Ч
2	0.1578	17.99	9.78	27.77	55.58	-27.81	AVG	Р
3	0.2631	37.56	9.75	47.31	61.33	-14.02	QP	Р
4	0.2631	16.85	9.75	26.60	51.33	-24.73	AVG	Р
5	0.4308	30.04	9.77	39.81	57.24	-17.43	QP	Р
6	0.4308	12.23	9.77	22.00	47.24	-25.24	AVG	П
7	19.5360	22.84	10.65	33.49	60.00	-26.51	QP	Р
8	19.5360	13.57	10.65	24.22	50.00	-25.78	AVG	Р

Date: 2024-08-30



#### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


#### **EUT Operating Environment**

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Charging and Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

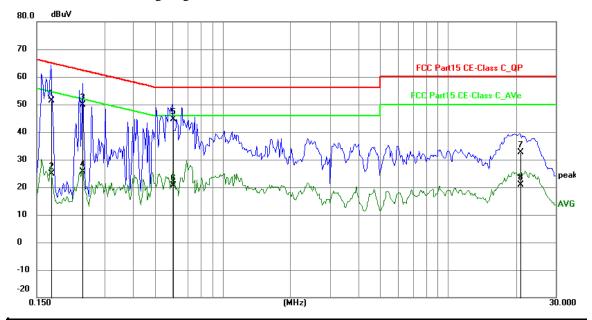

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1734	41.57	9.77	51.34	64.80	-13.46	QP	Р
2	0.1734	15.08	9.77	24.85	54.80	-29.95	AVG	Р
3	0.2397	40.24	9.75	49.99	62.11	-12.12	QP	Р
4	0.2397	15.85	9.75	25.60	52.11	-26.51	AVG	Р
5	0.6023	34.97	9.77	44.74	56.00	-11.26	QP	Р
6	0.6023	10.79	9.77	20.56	46.00	-25.44	AVG	Р
7	20.8503	21.79	10.73	32.52	60.00	-27.48	QP	Р
8	20.8503	10.27	10.73	21.00	50.00	-29.00	AVG	Р

Report No.: TW2408074-02E Page 12 of 34

Date: 2024-08-30




#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

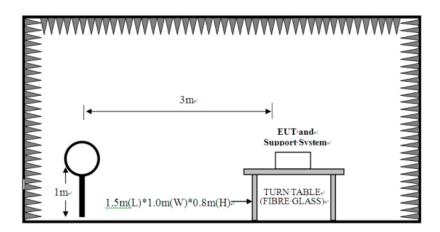


Page 13 of 34

Report No.: TW2408074-02E


Date: 2024-08-30



For radiated emissions from 30MHz to1GHz

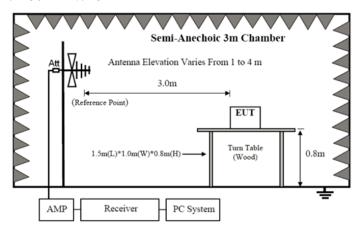

For radiated emissions above 1GHz

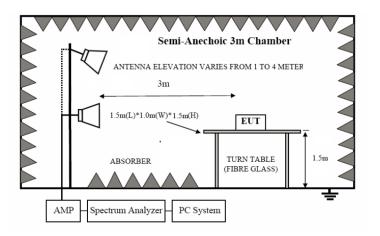

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.

Report No.: TW2408074-02E Page 14 of 34

Date: 2024-08-30



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)			
(MHz)	mV/m	dBuV/m		uV/m	dBuV/m			
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)		

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

#### B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Battery full charged during tests.

Report No.: TW2408074-02E Page 15 of 34

Date: 2024-08-30




#### 6.5 Test result

## A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

#### Horizontal

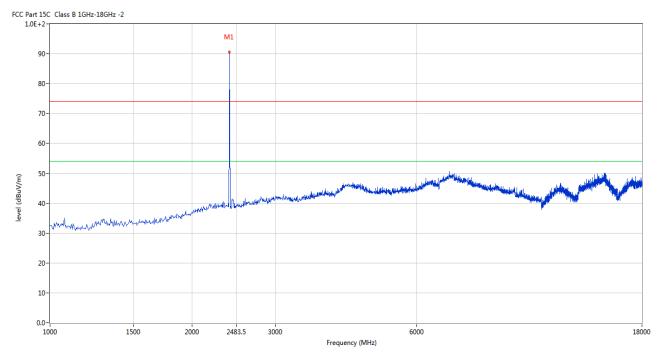


N	0.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1		2402	90.62	-3.57	114.0	-23.38	Peak	86.00	100	Horizontal	Pass

Report No.: TW2408074-02E Page 16 of 34

Date: 2024-08-30



#### Vertical

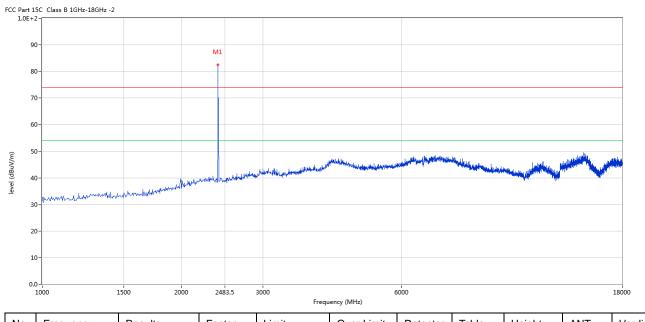

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	82.39	-3.57	114.0	-31.61	Peak	259.00	100	Vertical	Pass


Report No.: TW2408074-02E Page 17 of 34

Date: 2024-08-30



Please refer to the following test plots for details: Middle Channel-2440MHz

#### **Horizontal**

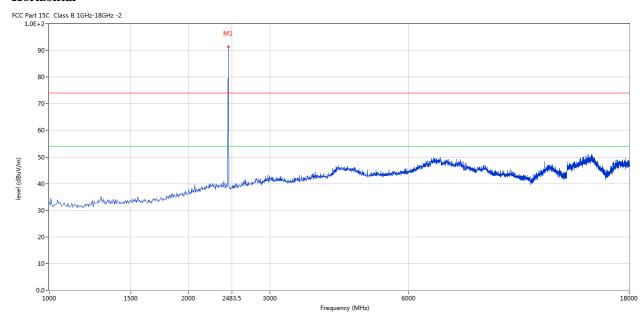


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	91.39	-3.57	114.0	-22.61	Peak	104.00	100	Horizontal	Pass

Report No.: TW2408074-02E Page 18 of 34

Date: 2024-08-30



#### Vertical

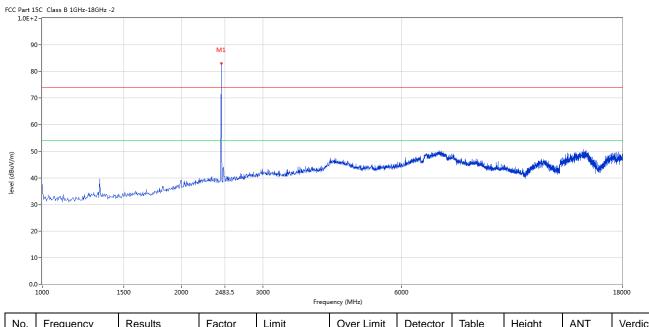

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	83.09	-3.57	114.0	-30.91	Peak	251.00	100	Vertical	Pass


Report No.: TW2408074-02E Page 19 of 34

Date: 2024-08-30



Please refer to the following test plots for details: High Channel-2480MHz

#### Horizontal

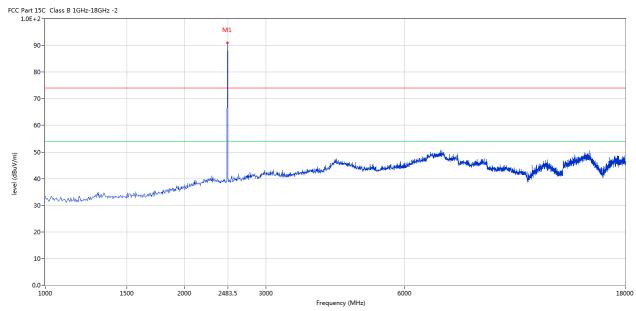


Ī	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
	1	2480	90.90	-3.57	114.0	-23.10	Peak	95.00	100	Horizontal	Pass

Report No.: TW2408074-02E Page 20 of 34

Date: 2024-08-30



#### Vertical

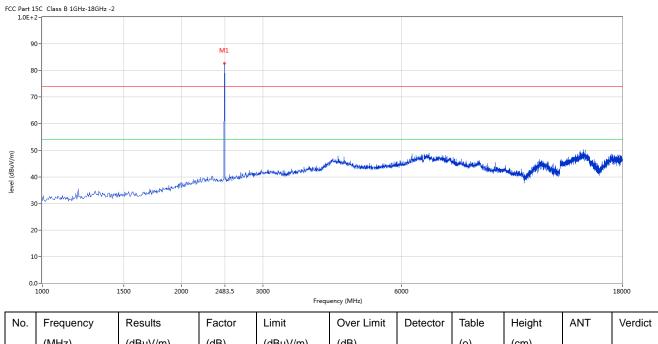

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	82.65	-3.57	114.0	-31.35	Peak	254.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2408074-02E Page 21 of 34

Date: 2024-08-30




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

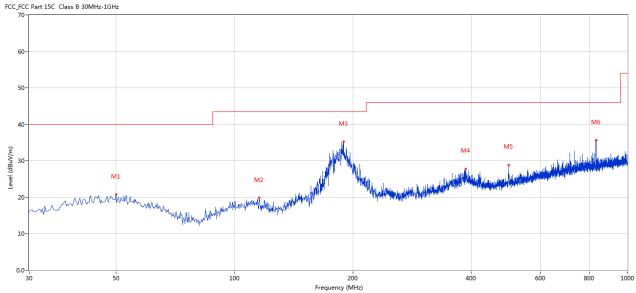

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	49.880	20.76	-11.36	40.0	19.24	Peak	197.00	100	Horizontal	Pass
2	115.581	19.78	-14.52	43.5	23.72	Peak	242.00	100	Horizontal	Pass
3	189.283	35.23	-14.33	43.5	8.27	Peak	267.00	100	Horizontal	Pass
4	387.356	27.80	-8.99	46.0	18.20	Peak	270.00	100	Horizontal	Pass
5	498.635	28.88	-7.08	46.0	17.12	Peak	54.00	100	Horizontal	Pass
6	831.990	35.63	-2.91	46.0	10.37	Peak	284.00	100	Horizontal	Pass

Report No.: TW2408074-02E Page 22 of 34

Date: 2024-08-30




#### Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

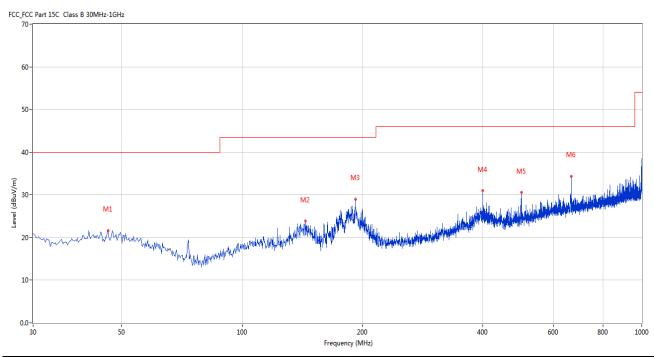

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	46.243	21.65	-11.41	40.0	18.35	Peak	219.00	100	Vertical	Pass
2	144.189	23.86	-17.09	43.5	19.64	Peak	239.00	100	Vertical	Pass
3	192.192	29.02	-14.04	43.5	14.48	Peak	246.00	100	Vertical	Pass
4	399.963	31.00	-8.57	46.0	15.00	Peak	3.00	100	Vertical	Pass
5	499.605	30.58	-6.94	46.0	15.42	Peak	0.00	100	Vertical	Pass
6	666.161	34.38	-4.50	46.0	11.62	Peak	98.00	100	Vertical	Pass

Date: 2024-08-30




#### 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

#### 7. 2 Radiated Test Setup

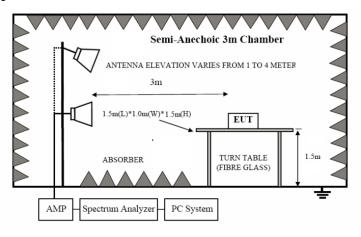

For the actual test configuration, please refer to the related items – Photos of Testing

#### 7.3 Configuration of the EUT

Same as section 5.3 of this report

#### 7.4 EUT Operating Condition

Same as section 5.4 of this report.


#### 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2408074-02E Page 24 of 34




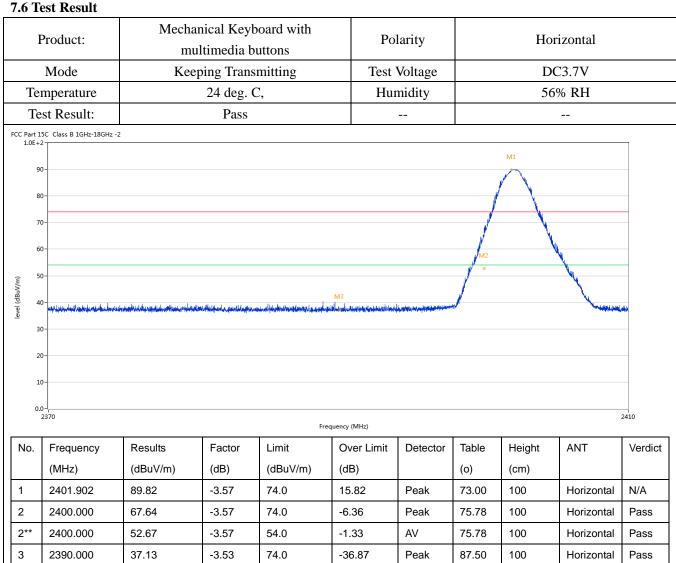

Report No.: TW2408074-02E Page 25 of 34



Product:	Mechanical Keyboard with multimedia buttons	Detector	Vertical
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

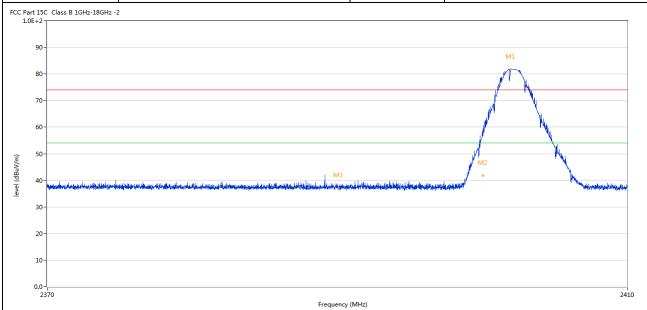


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.922	81.78	-3.57	74.0	7.78	Peak	271.00	100	Vertical	N/A
2	2400.000	57.30	-3.57	74.0	-16.70	Peak	271.00	100	Vertical	Pass
2**	2400.000	41.89	-3.57	54.0	-12.11	AV	271.00	100	Vertical	Pass
3	2390.000	36.97	-3.53	74.0	-37.03	Peak	163.00	100	Vertical	Pass

Report No.: TW2408074-02E Page 26 of 34



Product:	Mechanical Keyboard with multimedia buttons	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

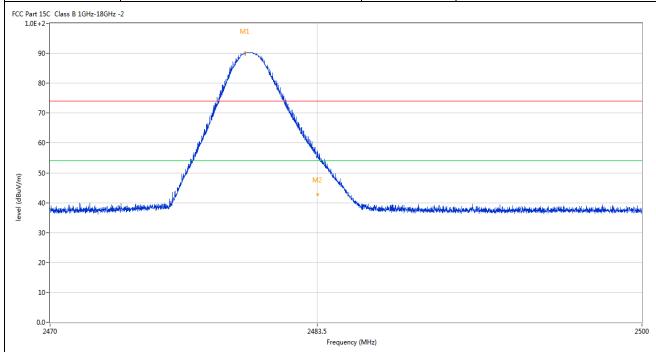

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.853	90.26	-3.57	74.0	16.26	Peak	76.00	100	Horizontal	N/A
2	2483.520	57.22	-3.57	74.0	-16.78	Peak	81.00	100	Horizontal	Pass
2**	2483.520	42.71	-3.57	54.0	-11.29	AV	81.00	100	Horizontal	Pass

Page 27 of 34

Report No.: TW2408074-02E



	Product:	Mechanica	l Keyboard buttor	l with multimedians	a De					ertical		
	Mode	Ke	eeping Tran	nsmitting	Test	Voltage	tage DC3.7V					
Те	emperature	С,	Hu	ımidity		56% RH						
T	est Result:		i.									
FCC Part	15C Class B 1GHz-18GHz	-2										
	90 -		M1									
	80-											
	70-											
	50 -		June									
			y	W								
(m//m)	50-	للملال		N. Committee of the com								
vel (dBuV/m)	40-	i canada in canada de la canada d		The same of the sa	marial i friend franchistico franchis	the distribution of the production of the second	a photo and a subject to the subject	wantang ang akata difilipakan di anan ang ka	<del>Modern as the long the L</del> earn should	hamala		
level (dBuV/m	40-	المرافق			mated all the major deposition between	الاسلام والمساورة والمساور	hy hisrachus, shronglishir shqullandyr afail	re-and-ant-prints of this beauthour And	doorgenserich and belonderede	has a state of		
level (dBuV/π	40-	Landing the State of the State			notedalpina, o <mark>grada</mark> og skipsk <del>a</del> r	<del>k ling also Milliands on</del>	n, hite who with weight handered complexity of	ne waken dispersion of the same Andrews	<del>diriya</del> ssayah <b>asak</b> ihiyondiyad	de control de		
level (dBuV/m	40 - wheel the was as those as the desire th	s annach in description of the state of the			motel dipeta popularita dest	te libergadess Philipsopher "A Strinder eng	hydrochocoldendeletanteet enfordel	erah-capaishikilanteen Adh	nterioris survivanos (terresidades de la considera de la consi	has minde		
level (dBuV/m	40	i andahin unturka propinsi di manara di m			and distance in the second second	kida, pian <mark>Ala</mark> k, filindana	a player to a submitted to the player to the submitted to the subm	wedneste display display de an a did	<del>all</del> erente allerente de la constante de la co	hasanda h		
level (dBuV/m	40-uhadinah en in dia ny lodonaple 30-	i andahkunturungan kalandara kandara k		2483.5 Frequency		kida, priese P <mark>al</mark> letta, plister <b>it</b> rec	a phagaine, and a supplemental temporal and a supplemental and a suppl	wada a pada diigida dan a da	itinasysta <b>al</b> thyradiya	2500		
level (dBuV/m	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	Results	Factor	2483.5 Frequency		Detector	Table	Height	ANT	2500 Verdict		
level (dBuV/m	10		Factor (dB)	2483.5 Frequency	y (MHz)							
level (dBuV/m	10	Results		2483.5 Frequency	<sub>y (MHz)</sub> ver Limit IB)		Table	Height				
No.	10- 20- 10- 2470 Frequency (MHz)	Results (dBuV/m)	(dB)	2483.5 Frequency Limit Or (dBuV/m) (d 74.0 7.5	<sub>oy (MHz)</sub> ver Limit IB)	Detector	Table (o)	Height (cm)	ANT	Verdict		

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Date: 2024-08-30



Page 28 of 34

#### 8.0 Antenna Requirement

#### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain 2.34dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Page 29 of 34

Report No.: TW2408074-02E



Product:	Mechanical Keyboard with multimedia buttons					Test Mod	de:	Keep transmitting		
Mode		Keep	oing Trans	mitting		Test Volt	age	DC3.7V 56% RH		
Temperature			24 deg. C	7,		Humidi	ty			
Test Result:	: Pass Detector PK						PK			
OdB Bandwidth			950kHz							
Ref Lvl 10 dBm		ndB	1 [T1 r 20. 20.899799	00 dB	RBW VBW SWT	30 k 100 k 8.5 m	Hz	F Att	20 dB	m
10						<b>V</b> 1	[T1]	2.40206		n
-10					1	ndE BW ▼ <sub>Tj</sub>	94 [T1]	9.89979	.69 dBr	m
-20			(		\	V <sub>T</sub>	? [T1]	2.40161 -26 2.40256	222 GHz .50 dBr 212 GHz	m Z
-30						Y	4			11
-40		$ \wedge $					hay.			
-50	,,,,	$\sqrt{}$					1	V~~		
-60								`	· · · · · · · · · · · · · · · · · · ·	7
······										
-70										
-80										
-90 Center 2.	402 GH	Ηz		300	kHz/			Spa	ın 3 MHz	<b>∐</b> z

Page 30 of 34

Report No.: TW2408074-02E



Product:	Mechanical Key	Test Mode:			Keep transmitting						
Mode	Keeping Transmitting 24 deg. C,					est Voltage		DC3.7V			
Temperature						Humidity		56% RH			
Test Result:		Pass				Detector		I	PK		
20dB Bandwidth		926kHz									
Ref Lvl	ndB	1 [T1 r 20. 5.851703	00 dB	V	BW BW WT	30 ki 100 ki 8.5 ms	Hz	F Att	20 dB	ı	
0				1		▼1 ndR BW	[T1]	-6 2.44006 20	.97 dBm 313 GHz .00 dB	А	
-10				<b>√</b> √√	7	$oldsymbol{ abla}_{\mathrm{Tl}}$	[T1]	-27 2.43961 -27	.07 dBm		
1MAX		T				T2	1	2.44053	808 GHz	1MA	
-40							7				
-50											
-70	h										
-80											
-90 Center 2		:40:59	300	kHz/				Spa	an 3 MHz		

Page 31 of 34

Report No.: TW2408074-02E



Product:	Mechanical Key	Test Mode:			Keep transmitting						
Mode	Keeping Transmitting 24 deg. C,					est Voltage		DC3.7V			
Temperature						Humidity		56% RH			
Test Result:		Pass				Detector		I	PK PK		
20dB Bandwidth	Ć	908kHz									
Ref Lvl 10 dBm	ndB	1 [T1 n 20.	00 dB	V	BW BW WT	30 kF 100 kF 8.5 ms	łz	F Att	20 dB	ı	
0						▼ <sub>1</sub>	[T1]	-6 2.48004 20	.71 dBm 509 GHz .00 dB	А	
-10				**************************************	<b>1</b>	BW ▼ <sub>Tl</sub>	90 [T1]	7.81563 -26	126 kHz .83 dBm 824 GHz		
-20						V <sub>T2</sub>	[T1]		.79 dBm		
-30		T1V				T2	١			1MA	
-40							<u>\</u>				
-50							<u></u>	ma			
-60											
-70											
-80											
	Center 2.48 GHz							Spa	ın 3 MHz		

Report No.: TW2408074-02E Page 32 of 34

Date: 2024-08-30




#### 10.0 FCC ID Label

#### FCC ID: 2BG42-MIRA

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

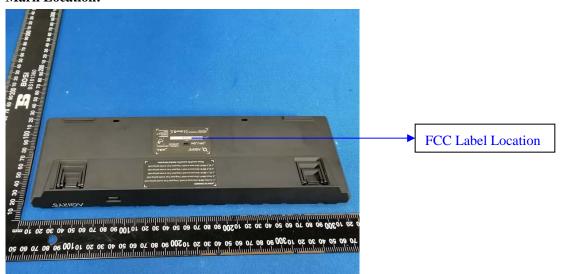

Page 33 of 34 Report No.: TW2408074-02E

Date: 2024-08-30



#### 11.0 Photo of testing


#### 11.1 Conducted test View--



Date: 2024-08-30



#### Radiated emission test view

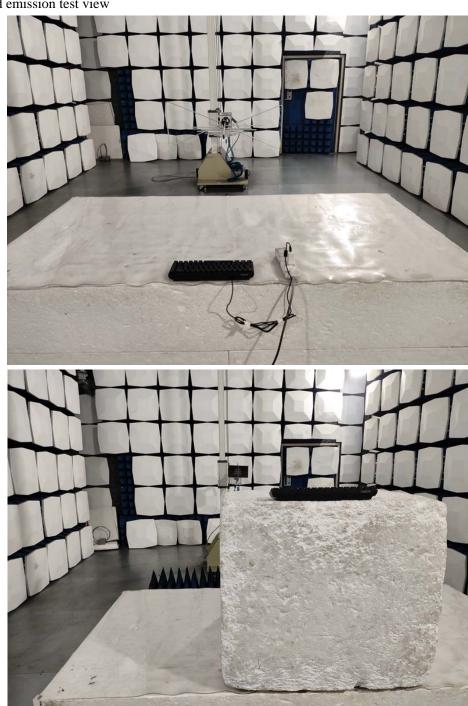

# Photographs – EUT

Please refer test report TW2408074-01E

#### -- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.