

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093) and
IEEE Std 1528-2013**

Product Name : QIDI Vida

Brand Name : QIDI

Model Name : MER-A2

Family Model : N/A

Report No. : S24042304907001

FCC ID : 2BG44-MERA2

Prepared for

Qidi Technology (Shanghai) Co., Ltd

Building C, No. 888, Huanhu West 2nd Road, Lingang New Area, Shanghai ,China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1&5/F, Building C, 1&2/F, Building E, Fenda Science Park, Sanwei

Community,Xixiang Street Bao'an District,

Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name Qidi Technology (Shanghai) Co., Ltd
Address..... Building C, No. 888, Huanhu West 2nd Road, Lingang New Area,
Shanghai ,China

Manufacturer's Name . Qidi Technology (Shanghai) Co., Ltd
Address..... Building C, No. 888, Huanhu West 2nd Road, Lingang New Area,
Shanghai ,China

Product description

Product name QIDI Vida
Brand Name QIDI
Model and/or type MER-A2
reference
Family Model N/A
FCC 47 CFR Part 2(2.1093)

Standards IEEE Std 1528-2013
Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093). The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S240423049006

Date of Test

Date (s) of performance of tests... Jul. 05, 2024 ~ Jul. 11, 2024

Date of Issue Jul. 25, 2024

Test Result..... **Pass**

Prepared By : Jack Li
Jack Li
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

※
 ※
 Revision History
 ※
 ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Jul. 25, 2024	Jack Li

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s).....	8
1.5. Ambient Condition.....	8
2. SAR Measurement System	9
2.1. SATIMO SAR Measurement Set-up Diagram	9
2.2. Robot	10
2.3. E-Field Probe.....	11
2.3.1. E-Field Probe Calibration	11
2.4. SAM phantoms	12
2.4.1. Technical Data	13
2.5. Device Holder	14
2.6. Test Equipment List	15
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results.....	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
7. RF Output Power	28
7.1. LTE Conducted Power	28
7.2. WLAN & Bluetooth Output Power	42
8. Stand-alone SAR test exclusion.....	44
9. SAR Results	45
9.1. SAR measurement Result.....	45
9.1.1. SAR measurement Result of LTE Band 2	45

9.1.2.	SAR measurement Result of LTE Band 4	45
9.1.3.	SAR measurement Result of LTE Band 5	45
9.1.4.	SAR measurement Result of LTE Band 7	46
9.1.5.	SAR measurement Result of LTE Band 41	46
9.1.6.	SAR measurement Result of LTE Band 66	46
9.1.7.	SAR measurement Result of WLAN2.4G	46
9.1.8.	SAR measurement Result of WLAN5.2G	47
9.1.9.	SAR measurement Result of WLAN5.8G	47
9.2.	Simultaneous Transmission Analysis.....	47
10.	Appendix A. Photo documentation	48
11.	Appendix B. System Check Plots.....	49
12.	Appendix C. Plots of High SAR Measurement.....	64
13.	Appendix D. Calibration Certificate	83

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for MER-A2 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)				Max. Reported SAR (W/kg)
		PCB	DTS	NII	DSS	
1-g Head		0.584	0.019	0.573	0.264	0.584
Max Simultaneous Tx	Head	1.157	0.603	1.157	0.848	1.157

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093), and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	QIDI Vida		
Brand Name	QIDI		
Model Name	MER-A2		
Family Model	N/A		
Model Difference	N/A		
FCC ID	2BG44-MERA2		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna Type	FPC Antenna		
Battery Information	DC 3.89V, 500mAh,2.03Wh		
HW Version	N/A		
SW Version	N/A		
Device Operating Configurations			
Supporting Mode(s)	LTEBand2/4/5/7/41/66, WLAN 2.4G/5G, Bluetooth		
Test Modulation	LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894

	LTE Band 7	2500-2570	2620-2690
	LTE Band 41	2535-2655	
	LTE Band 66	1710-1780	2110-2200
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
Power Class	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 41)		
	3, tested with power control all Max.(LTE Band 66)		

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D05 SAR for LTE Devices

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

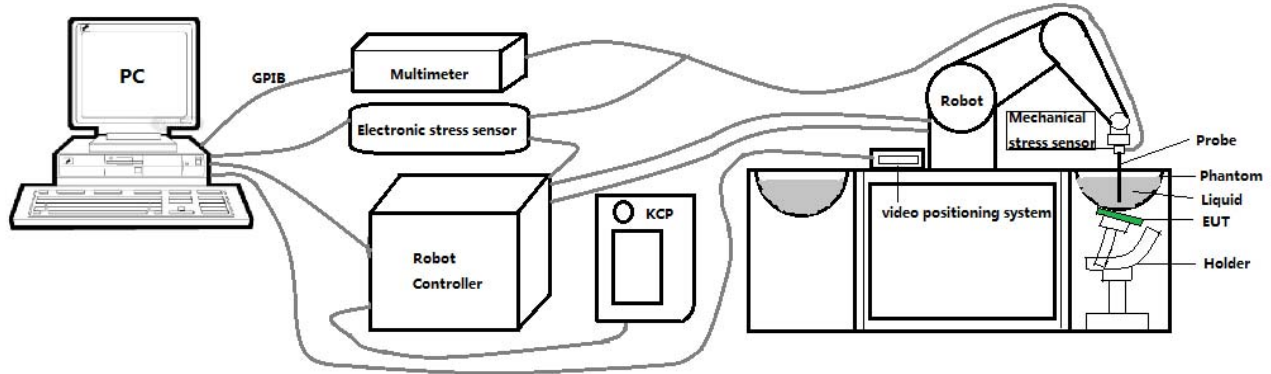

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe 3423-EPGO-426 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.06 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.


2.4. SAM phantoms

Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by Smart Phones.

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

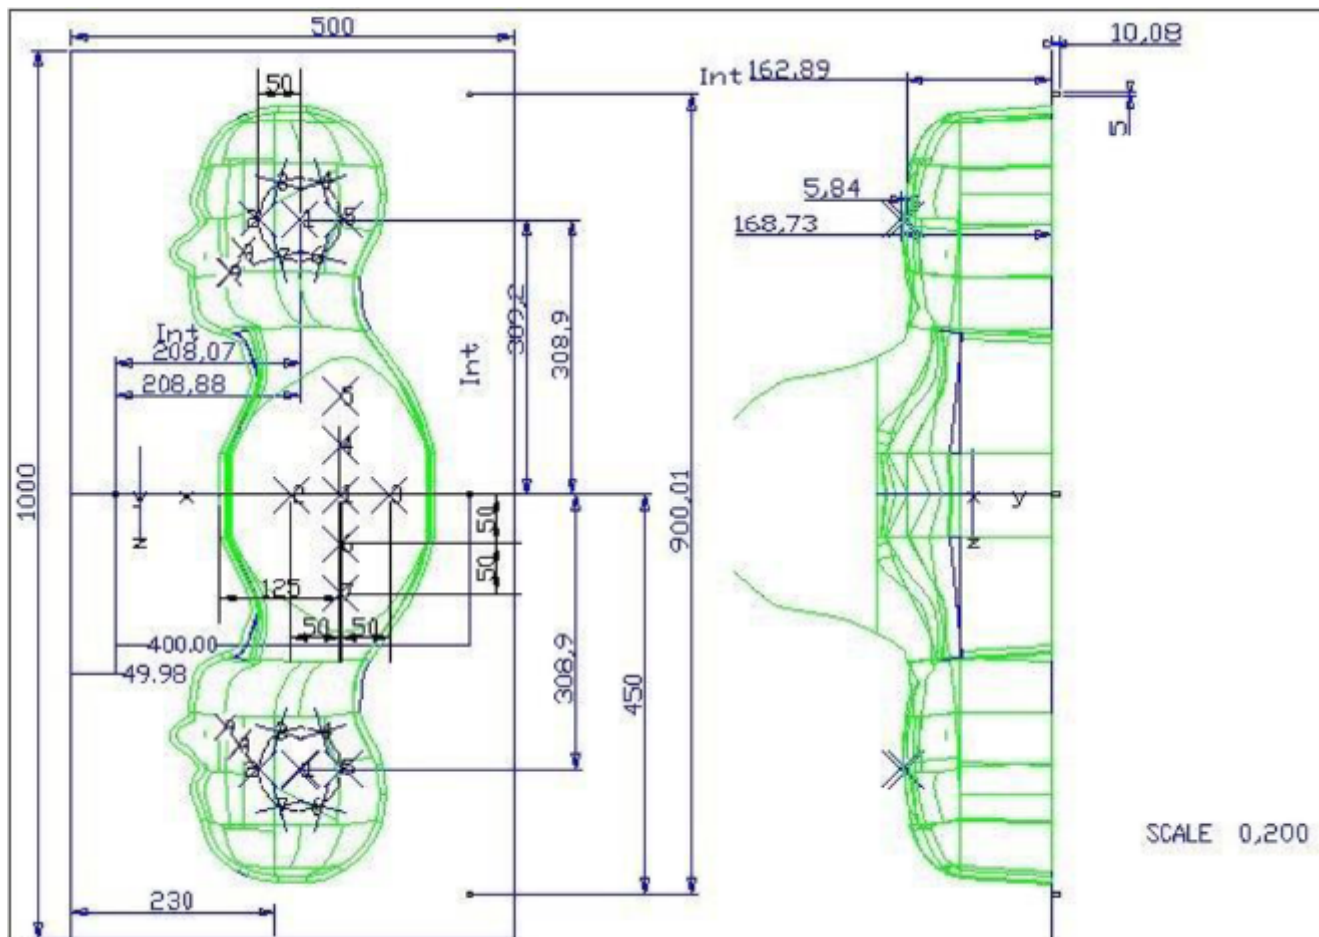


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

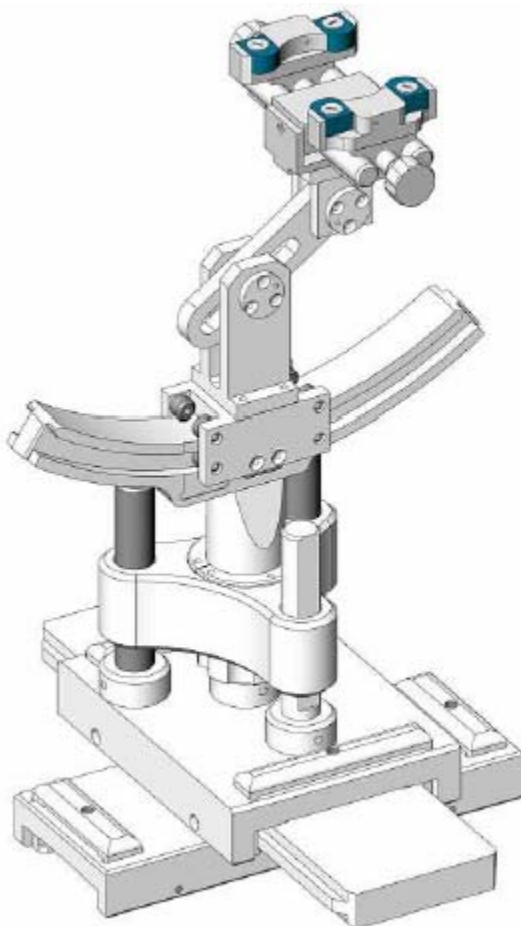

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	3423-EPGO-426	Sep. 18, 2023	Sep. 17, 2024
☐	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
☐	MVG	3700 MHz Dipole	SID3700	SN 09/12 DIP 3G/700-361	Oct. 15, 2022	Oct. 14, 2025
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☐	R&S	Universal radio communication tester	CMU200	117858	Apr. 26, 2024	Apr. 25, 2025

☒	R&S	Wideband radio communication tester	CMW500	103917	Apr. 26, 2024	Apr. 25, 2025
☒	HP	Network Analyzer	8753D	3410J01136	Apr. 26, 2024	Apr. 25, 2025
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Apr. 25, 2024	Apr. 24, 2025
☒	Agilent	Power meter	E4419B	MY45102538	Apr. 25, 2024	Apr. 24, 2025
☒	Agilent	Power sensor	E9301A	MY41495644	Apr. 25, 2024	Apr. 24, 2025
☒	Agilent	Power sensor	E9301A	US39212148	Apr. 25, 2024	Apr. 24, 2025
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Apr. 26, 2024	Apr. 25, 2027
☒	N/A	Thermometer	N/A	LES-085	Mar. 27, 2023	Mar. 26, 2026
☒	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 835	Head 835	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 1800	Head 1800	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 1900	Head 1900	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 2450	Head 2450	NCR	NCR
☒	Shenzhen	Human	Head 2600	Head 2600	NCR	NCR

	Tianxu Communication Technology Co., Ltd.	Simulating Liquid				
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5200	Head 5200	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5800	Head 5800	NCR	NCR

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.51	0.91	21.3 °C	Jul. 07, 2024
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.93	1.37	21.0 °C	Jul. 09, 2024
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.87	1.45	21.2 °C	Jul. 08, 2024
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	37.69	1.77	21.5 °C	Jul. 05, 2024
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.88	1.98	21.1 °C	Jul. 06, 2024
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	34.58	4.53	21.7 °C	Jul. 10, 2024
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.01	5.18	21.6 °C	Jul. 11, 2024

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

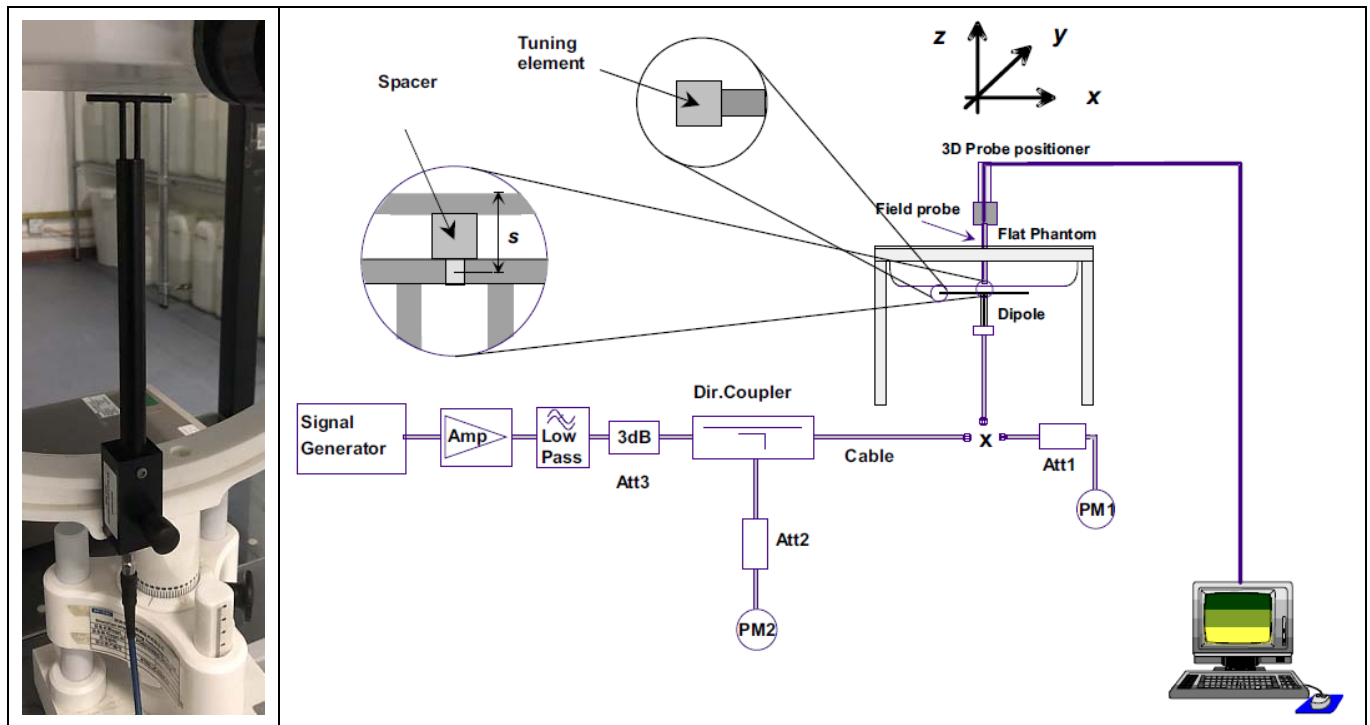

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W)		Measured SAR		Liquid Temp.	Test Date
	(±10%)		(Normalized to 1W)			
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz	9.40 (8.46~10.34)	6.28 (5.65~6.91)	10.02	6.64	21.3 °C	Jul. 07, 2024
1800MHz	37.06 (33.35~40.77)	20.01 (18.01~22.01)	38.99	21.23	21.0 °C	Jul. 09, 2024
1900MHz	39.69 (35.72~43.66)	20.92 (18.83~23.01)	40.30	20.76	21.2 °C	Jul. 08, 2024
2450MHz	50.05 (45.05~55.06)	23.80 (21.42~26.18)	48.48	24.49	21.5 °C	Jul. 05, 2024
2600MHz	54.16 (48.74~59.58)	24.85 (22.37~27.34)	57.00	22.61	21.1 °C	Jul. 06, 2024
5200MHz	162.59 (146.33~178.85)	56.21 (50.59~61.83)	146.67	59.05	21.7 °C	Jul. 10, 2024
5800MHz	182.20 (163.98~200.42)	61.32 (55.19~67.45)	182.55	64.13	21.6 °C	Jul. 11, 2024

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.

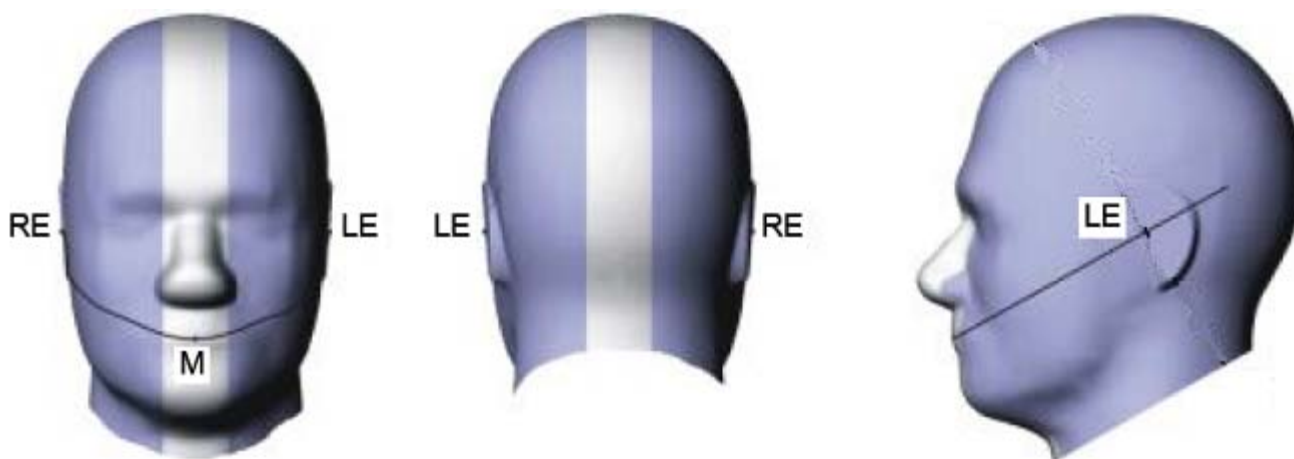


Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

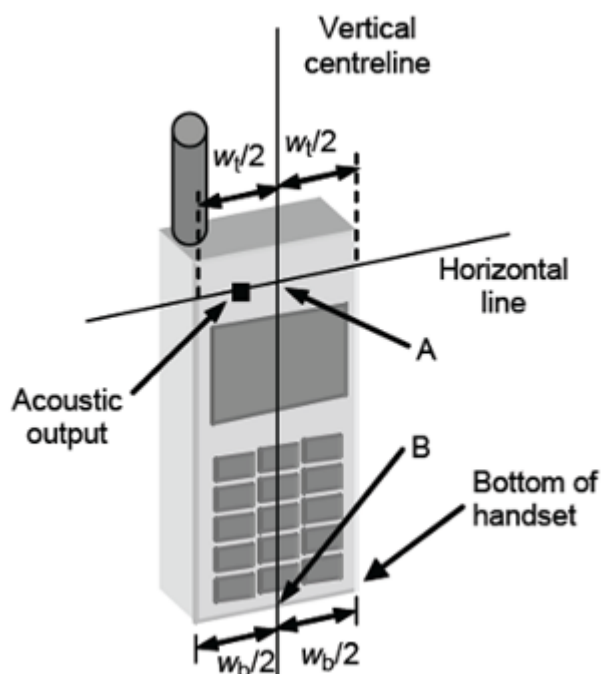


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

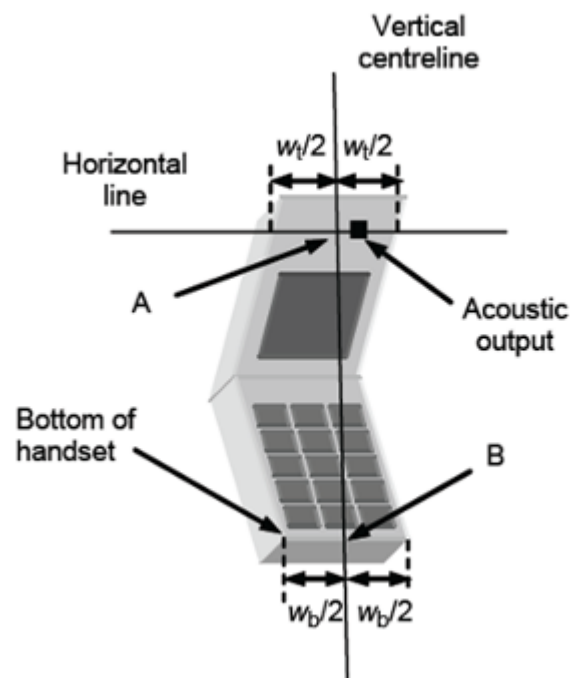


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

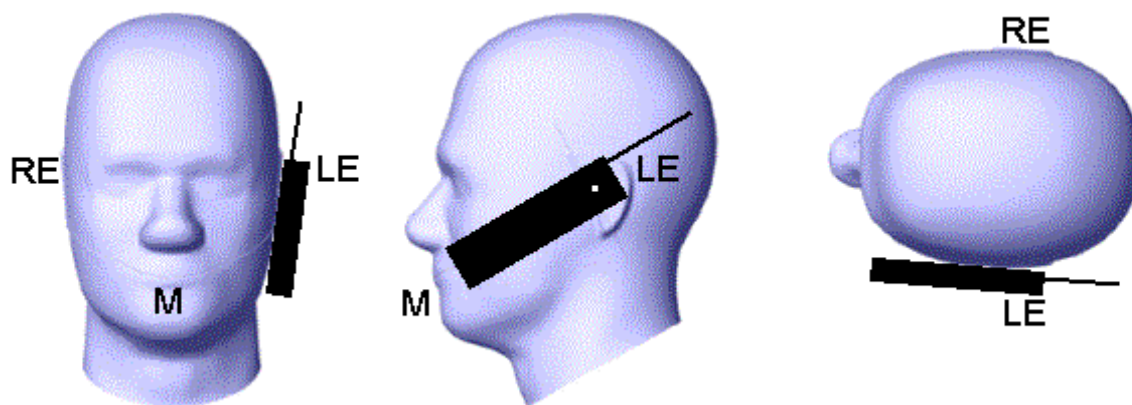


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

7. RF Output Power

7.1. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	23.50	21.92	22.95	23.46
			1	2	23.50	22.82	23.04	23.40
			1	5	23.50	22.55	23.15	23.36
			3	0	24.00	22.77	23.19	23.49
			3	1	24.00	22.68	23.09	23.56
			3	2	24.00	22.66	23.06	23.46
			6	0	22.50	21.90	22.16	22.47
		16QAM	1	0	23.00	21.83	22.14	22.72
			1	2	23.00	21.72	22.52	22.68
			1	5	23.00	21.68	22.25	22.42
			3	0	23.00	21.74	22.74	22.47
			3	1	23.00	21.77	22.66	22.55
			3	2	23.00	21.46	22.76	22.41
			6	0	22.00	20.88	21.70	21.54
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	24.00	23.30	23.17	23.62
			1	7	24.00	23.27	23.20	23.62
			1	14	24.00	23.03	23.11	23.47
			8	0	23.00	22.15	22.28	22.59
			8	4	23.00	22.11	22.31	22.54
			8	7	23.00	22.11	22.37	22.67
			15	0	23.00	22.11	22.44	22.67
		16QAM	1	0	23.00	22.62	22.20	22.64
			1	7	23.00	22.85	22.32	22.98
			1	14	23.00	22.66	22.05	22.61
			8	0	22.00	21.10	21.16	21.69
			8	4	22.00	21.09	21.45	21.84
			8	7	22.00	21.16	21.28	21.64
			15	0	22.00	21.36	21.33	21.89

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	24.00	22.91	22.91	23.51
			1	12	24.00	23.55	23.37	23.89
			1	24	24.00	22.97	23.07	23.28
			12	0	23.00	22.15	22.44	22.65
			12	6	23.00	22.22	22.51	22.68
			12	11	23.00	22.15	22.47	22.64
			25	0	23.00	22.18	22.43	22.76
		16QAM	1	0	23.00	22.35	22.04	22.81
			1	12	23.00	22.32	22.53	22.78
			1	24	23.00	21.83	21.97	22.34
			12	0	22.00	20.93	21.31	21.71
			12	6	22.00	20.88	21.31	21.75
			12	11	22.00	20.91	21.08	21.49
			25	0	22.00	21.34	21.39	21.67
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	24.00	23.10	23.33	23.38
			1	24	24.00	23.47	23.58	23.75
			1	49	24.00	23.24	23.21	22.95
			25	0	23.00	22.25	22.54	22.65
			25	12	23.00	22.32	22.52	22.66
			25	24	23.00	22.25	22.47	22.72
			50	0	23.00	22.26	22.48	22.62
		16QAM	1	0	23.50	22.71	22.33	22.67
			1	24	23.50	23.31	22.36	22.72
			1	49	23.50	22.78	21.69	22.10
			25	0	22.00	21.21	21.45	21.59
			25	12	22.00	21.31	21.52	21.71
			25	24	22.00	21.32	21.48	21.71
			50	0	22.00	21.25	21.61	21.66
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5

LTE Band 2	15MHz	QPSK	1	0	24.00	22.86	22.79	22.51
			1	37	24.00	23.49	23.67	23.56
			1	74	24.00	22.41	23.00	22.40
			36	0	23.00	22.22	22.51	22.62
			36	18	23.00	22.24	22.50	22.65
			36	37	23.00	22.28	22.33	22.59
			75	0	23.00	22.27	22.46	22.60
		16QAM	1	0	23.50	22.20	22.11	22.66
			1	37	23.50	23.49	22.57	23.04
			1	74	23.50	22.97	21.57	21.76
			36	0	22.00	21.25	21.60	21.53
			36	18	22.00	21.27	21.54	21.63
			36	37	22.00	21.23	21.41	21.60
			75	0	22.00	21.21	21.50	21.75
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	24.00	22.76	22.52	22.89
			1	49	24.00	23.22	23.60	23.41
			1	99	24.00	22.61	23.05	23.09
			50	0	23.00	22.25	22.51	22.34
			50	24	23.00	22.30	22.54	22.46
			50	49	23.00	22.33	22.49	22.42
			100	0	23.00	22.36	22.58	22.46
		16QAM	1	0	23.00	21.95	22.80	22.33
			1	49	23.00	22.33	22.46	22.21
			1	99	23.00	21.82	21.55	22.07
			50	0	22.00	21.52	21.41	21.47
			50	24	22.00	21.47	21.54	21.60
			50	49	22.00	21.24	21.40	21.58
			100	0	21.50	21.37	21.45	21.46

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	23.50	23.20	23.14	23.11
			1	2	23.50	23.31	23.41	23.17
			1	5	23.50	23.25	23.06	23.15

				3	0	23.50	23.21	23.30	23.10
				3	1	23.50	23.24	23.17	23.17
				3	2	23.50	23.27	23.16	23.18
				6	0	22.50	22.22	22.30	22.21
			16QAM	1	0	22.50	22.36	22.19	22.08
				1	2	22.50	22.38	22.13	22.34
				1	5	22.50	22.34	22.16	22.04
				3	0	23.00	22.43	22.05	22.36
				3	1	23.00	22.58	22.14	22.30
				3	2	23.00	22.45	22.16	22.25
				6	0	21.50	21.37	21.38	21.37
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5	
LTE Band 4	3MHz	QPSK	1	0	24.00	23.17	22.99	23.20	
			1	7	24.00	23.50	22.95	23.18	
			1	14	24.00	23.32	22.87	23.05	
			8	0	22.50	22.13	22.27	22.02	
			8	4	22.50	22.17	22.21	21.92	
			8	7	22.50	22.16	22.23	22.13	
			15	0	22.50	22.06	22.27	22.03	
		16QAM	1	0	23.00	22.69	21.98	22.01	
			1	7	23.00	22.79	22.08	22.05	
			1	14	23.00	22.63	22.00	22.01	
			8	0	21.50	21.11	21.23	21.08	
			8	4	21.50	21.13	21.28	21.11	
			8	7	21.50	21.16	21.20	20.99	
			15	0	21.50	20.99	21.21	20.96	
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5	
LTE Band 4	5MHz	QPSK	1	0	24.00	22.81	22.49	23.05	
			1	12	24.00	23.50	22.87	23.32	
			1	24	24.00	22.90	22.56	22.87	
			12	0	22.50	22.05	22.23	22.12	
			12	6	22.50	22.03	22.20	22.11	
			12	11	22.50	22.03	22.17	22.06	
			25	0	22.50	22.03	22.17	22.14	

		16QAM	1	0	22.50	22.05	21.95	22.11
			1	12	22.50	22.18	22.26	22.46
			1	24	22.50	21.60	21.96	21.90
			12	0	21.50	20.81	20.99	21.08
			12	6	21.50	21.03	21.06	21.18
			12	11	21.50	20.93	21.07	21.05
			25	0	21.50	21.12	21.09	21.16
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	23.50	23.03	22.93	22.79
			1	24	23.50	23.33	23.44	23.39
			1	49	23.50	22.94	22.87	23.19
			25	0	22.50	22.13	22.16	22.08
			25	12	22.50	22.03	22.21	22.12
			25	24	22.50	22.05	22.05	22.05
			50	0	22.50	22.11	22.15	22.07
		16QAM	1	0	23.50	22.55	21.95	21.96
			1	24	23.50	23.01	22.01	22.30
			1	49	23.50	22.55	22.23	21.83
			25	0	21.50	21.30	21.17	20.97
			25	12	21.50	21.35	21.32	21.04
			25	24	21.50	21.23	21.13	21.05
			50	0	21.50	21.12	21.37	21.00
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	23.50	22.93	22.71	23.14
			1	37	23.50	23.20	23.17	23.34
			1	74	23.50	22.88	22.79	22.81
			36	0	22.50	22.10	22.20	22.11
			36	18	22.50	22.01	22.19	22.02
			36	37	22.50	22.06	22.07	22.11
			75	0	22.50	22.07	22.01	22.18
		16QAM	1	0	23.50	22.58	22.07	22.59
			1	37	23.50	23.45	22.13	22.76
			1	74	23.50	22.56	22.41	22.13
			36	0	21.50	21.10	21.27	21.16

			36	18	21.50	21.16	21.27	21.01
			36	37	21.50	21.01	21.03	21.01
			75	0	21.50	20.98	20.98	21.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	23.50	22.76	22.71	22.80
			1	49	23.50	22.95	23.26	23.15
			1	99	23.50	22.89	23.07	22.89
			50	0	22.50	22.02	22.21	22.31
			50	24	22.50	22.05	22.15	22.11
			50	49	22.50	22.11	22.10	22.07
			100	0	22.50	22.15	22.07	22.09
		16QAM	1	0	22.50	22.04	22.25	22.00
			1	49	22.50	21.77	21.89	21.92
			1	99	22.50	21.65	21.26	21.64
			50	0	21.50	21.26	21.02	21.21
			50	24	21.50	21.21	21.15	21.20
			50	49	21.50	21.27	21.12	21.19
			100	0	21.50	21.17	20.98	21.06

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	23.50	22.77	22.84	22.86
			1	2	23.50	22.91	23.10	22.98
			1	5	23.50	22.76	22.98	22.79
			3	0	23.50	22.95	22.94	22.78
			3	1	23.50	22.93	23.19	22.95
			3	2	23.50	22.94	23.07	22.89
			6	0	22.00	21.80	21.97	21.86
		16QAM	1	0	22.50	22.05	21.72	22.07
			1	2	22.50	22.03	22.02	22.09
			1	5	22.50	21.98	21.85	22.16
			3	0	23.00	21.91	22.07	21.84
			3	1	23.00	22.02	22.53	21.96
			3	2	23.00	21.99	22.60	22.07
			6	0	21.50	20.95	21.41	20.88

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	23.50	23.04	22.54	22.86
			1	7	23.50	22.98	22.85	22.91
			1	14	23.50	22.70	22.96	22.97
			8	0	22.50	21.83	21.82	21.97
			8	4	22.50	21.75	22.04	22.02
			8	7	22.50	21.73	22.00	21.93
			15	0	22.00	21.88	21.88	21.97
		16QAM	1	0	22.50	22.37	21.62	22.01
			1	7	22.50	22.46	21.92	22.15
			1	14	22.50	22.28	21.80	21.87
			8	0	21.50	21.20	20.82	21.00
			8	4	21.50	21.13	20.93	20.89
			8	7	21.50	20.53	20.97	20.92
			15	0	21.00	20.89	20.79	20.90
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	23.00	22.68	22.07	22.63
			1	12	23.00	22.92	22.96	22.59
			1	24	23.00	22.54	22.61	22.45
			12	0	22.00	21.87	21.77	21.97
			12	6	22.00	21.85	21.91	21.98
			12	11	22.00	21.81	21.97	21.92
			25	0	22.00	21.88	21.91	22.00
		16QAM	1	0	22.50	22.18	21.54	22.17
			1	12	22.50	21.96	22.09	22.13
			1	24	22.50	21.40	21.71	21.78
			12	0	21.00	20.75	20.37	20.89
			12	6	21.00	20.76	20.72	20.97
			12	11	21.00	20.53	20.84	20.69
			25	0	21.00	20.90	20.75	20.87
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844

LTE Band 5	10MHz	QPSK	1	0	23.50	23.04	22.65	22.80
			1	24	23.50	22.93	22.99	22.87
			1	49	23.50	22.70	22.91	22.76
			25	0	22.50	21.84	21.79	21.98
			25	12	22.50	21.83	21.94	21.92
			25	24	22.50	21.80	22.03	21.93
			50	0	22.00	21.86	21.89	21.98
		16QAM	1	0	22.50	22.34	21.64	21.96
			1	24	22.50	22.08	21.81	22.05
			1	49	22.50	22.24	21.80	21.43
			25	0	21.50	20.89	20.80	21.07
			25	12	21.50	20.84	20.97	20.88
			25	24	21.50	20.73	21.17	20.85
			50	0	21.00	20.83	20.74	20.85

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	23.00	22.35	22.05	22.16
			1	12	23.00	22.81	22.56	22.51
			1	24	23.00	22.54	22.00	22.11
			12	0	22.00	21.61	21.67	21.52
			12	6	22.00	21.71	21.55	21.46
			12	11	22.00	21.73	21.58	21.43
			25	0	22.00	21.56	21.68	21.54
		16QAM	1	0	22.00	21.71	21.30	21.40
			1	12	22.00	21.78	21.76	21.70
			1	24	22.00	21.31	21.07	20.70
			12	0	21.00	20.38	20.41	20.42
			12	6	21.00	20.60	20.43	20.49
			12	11	21.00	20.43	20.25	20.27
			25	0	21.00	20.73	20.53	20.53
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	23.00	22.44	22.49	22.55
			1	24	23.00	22.82	22.68	22.58
			1	49	23.00	22.53	22.35	22.58

			25	0	22.00	21.62	21.68	21.45
			25	12	22.00	21.73	21.67	21.55
			25	24	22.00	21.61	21.57	21.49
			50	0	22.00	21.55	21.58	21.57
		16QAM	1	0	23.00	21.91	21.53	21.49
			1	24	23.00	22.65	21.44	21.59
			1	49	23.00	21.95	21.70	21.05
			25	0	21.00	20.72	20.59	20.54
			25	12	21.00	20.59	20.82	20.62
			25	24	21.00	20.44	20.71	20.49
			50	0	21.00	20.55	20.80	20.40
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	23.50	22.43	22.46	22.41
			1	37	23.50	22.80	22.58	23.33
			1	74	23.50	22.60	22.47	22.29
			36	0	22.00	21.54	21.63	21.49
			36	18	22.00	21.50	21.66	21.46
			36	37	22.00	21.56	21.61	21.56
			75	0	22.00	21.53	21.63	21.43
		16QAM	1	0	22.50	21.95	21.47	21.85
			1	37	22.50	22.42	21.73	22.03
			1	74	22.50	22.08	21.05	21.76
			36	0	21.00	20.48	20.74	20.44
			36	18	21.00	20.68	20.68	20.42
			36	37	21.00	20.63	20.52	20.36
			75	0	21.00	20.49	20.59	20.42
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	23.00	22.16	22.60	22.19
			1	49	23.00	22.46	22.81	22.69
			1	99	23.00	22.17	22.60	22.10
			50	0	22.00	21.55	21.55	21.49
			50	24	22.00	21.47	21.59	21.45
			50	49	22.00	21.47	21.58	21.47
			100	0	22.00	21.48	21.53	21.53

16QAM	1	0	22.00	21.40	21.78	21.50
	1	49	22.00	21.25	21.30	21.09
	1	99	22.00	20.61	21.15	20.98
	50	0	21.00	20.65	20.62	20.44
	50	24	21.00	20.57	20.72	20.45
	50	49	21.00	20.56	20.63	20.53
	100	0	21.00	20.47	20.44	20.50

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40065/2537.5	40640/2595	41215/2652.5
LTE Band 41	5MHz	QPSK	1	0	22.50	21.85	21.80	21.79
			1	12	22.50	22.22	22.21	22.19
			1	24	22.50	21.75	21.86	21.79
			12	0	21.50	21.13	21.19	21.13
			12	6	21.50	21.15	21.12	21.12
			12	11	21.50	21.02	21.09	21.11
			25	0	21.50	21.09	21.19	21.11
		16QAM	1	0	21.50	20.90	20.62	20.74
			1	12	21.50	21.08	20.73	20.95
			1	24	21.50	20.66	20.74	20.69
			12	0	20.50	19.89	20.24	20.18
			12	6	20.50	20.04	20.19	20.18
			12	11	20.50	19.82	20.14	20.16
			25	0	20.50	20.05	20.10	19.99

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40090/2540	40640/2595	41190/2650
LTE Band 41	10MHz	QPSK	1	0	23.00	22.39	21.96	22.23
			1	24	23.00	22.57	22.11	22.24
			1	49	23.00	22.45	21.99	22.22
			25	0	21.50	21.17	21.16	21.11
			25	12	21.50	21.02	21.11	21.20
			25	24	21.50	21.06	21.19	21.13
			50	0	21.50	21.12	21.18	21.17
		16QAM	1	0	22.00	21.63	20.24	21.53
			1	24	22.00	21.84	20.21	21.60
			1	49	22.00	21.56	20.18	21.45

			25	0	20.50	20.18	20.30	20.03
			25	12	20.50	20.10	20.25	20.09
			25	24	20.50	20.04	20.21	20.14
			50	0	20.50	20.12	20.24	20.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40115/2542.5	40640/2595	41165/2647.5
LTE Band 41	15MHz	QPSK	1	0	22.50	22.15	21.99	22.01
			1	37	22.50	22.26	22.04	22.17
			1	74	22.50	21.87	22.02	21.92
			36	0	21.50	21.09	21.17	21.06
			36	18	21.50	21.07	21.12	21.09
			36	37	21.50	21.09	21.22	21.15
			75	0	21.50	21.02	21.12	21.08
		16QAM	1	0	22.00	21.68	20.24	21.07
			1	37	22.00	21.80	20.46	20.93
			1	74	22.00	21.60	20.45	20.99
			36	0	20.50	20.06	20.35	19.94
			36	18	20.50	20.07	20.33	20.09
			36	37	20.50	20.11	20.31	20.16
			75	0	20.50	20.02	20.24	20.24
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40140/2545	40640/2595	41140/2645
LTE Band 41	20MHz	QPSK	1	0	22.50	21.74	22.14	22.23
			1	49	22.50	21.95	22.26	22.44
			1	99	22.50	21.54	22.15	22.13
			50	0	21.50	21.20	21.20	21.12
			50	24	21.50	21.24	21.21	21.14
			50	49	21.50	21.05	21.11	21.17
			100	0	21.50	21.08	21.23	21.17
		16QAM	1	0	21.50	20.96	20.23	21.38
			1	49	21.50	20.70	20.08	21.17
			1	99	21.50	20.33	19.95	21.14
			50	0	20.50	20.20	20.34	20.14
			50	24	20.50	20.25	20.24	20.20
			50	49	20.50	20.13	20.14	20.25
			100	0	20.50	20.18	20.07	20.20

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	24.00	23.51	23.26	23.44
			1	2	24.00	23.62	23.58	23.53
			1	5	24.00	23.53	23.30	23.48
			3	0	24.00	23.66	23.40	23.63
			3	1	24.00	23.75	23.32	23.73
			3	2	24.00	23.65	23.43	23.66
			6	0	23.00	22.55	22.44	22.53
		16QAM	1	0	23.00	22.70	22.33	22.37
			1	2	23.00	22.56	22.10	22.64
			1	5	23.00	22.44	22.00	22.40
			3	0	23.50	22.28	22.17	22.74
			3	1	23.50	22.43	22.17	22.95
			3	2	23.50	22.25	22.20	23.07
			6	0	22.00	21.22	21.18	21.94
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	24.00	22.40	23.11	23.65
			1	7	24.00	23.70	23.02	23.52
			1	14	24.00	23.68	23.15	23.36
			8	0	23.00	22.36	22.28	22.56
			8	4	23.00	22.38	22.22	22.66
			8	7	23.00	22.40	22.38	22.55
			15	0	23.00	22.55	22.36	22.48
		16QAM	1	0	23.00	22.76	22.18	22.57
			1	7	23.00	22.77	22.02	22.45
			1	14	23.00	22.73	22.17	22.48
			8	0	22.00	21.30	21.18	21.53
			8	4	22.00	21.35	21.23	21.39
			8	7	22.00	21.41	21.20	21.39
			15	0	21.50	21.34	21.22	21.44
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB	RB		131997/1712.5	132322/1745	132647/177

			Size	Offset				7.5
LTE Band 66	5MHz	QPSK	1	0	24.00	23.57	22.78	23.43
			1	12	24.00	23.74	23.34	23.54
			1	24	24.00	23.30	23.14	23.55
			12	0	23.00	22.59	22.39	22.65
			12	6	23.00	22.55	22.40	22.64
			12	11	23.00	22.43	22.40	22.49
			25	0	23.00	22.58	22.41	22.61
		16QAM	1	0	23.00	22.91	22.22	22.89
			1	12	23.00	22.81	22.48	22.78
			1	24	23.00	22.06	22.21	22.43
			12	0	21.50	21.22	21.18	21.44
			12	6	21.50	21.23	21.20	21.36
			12	11	21.50	21.14	21.23	21.32
			25	0	22.00	21.50	21.25	21.58
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	24.00	23.62	23.40	23.30
			1	24	24.00	23.71	23.52	23.50
			1	49	24.00	23.55	23.27	23.37
			25	0	23.00	22.59	22.40	22.51
			25	12	23.00	22.52	22.44	22.59
			25	24	23.00	22.53	22.39	22.58
			50	0	23.00	22.48	22.37	22.54
		16QAM	1	0	23.50	23.29	22.38	22.45
			1	24	23.50	23.38	22.44	22.70
			1	49	23.50	23.08	22.31	22.47
			25	0	22.00	21.69	21.49	21.53
			25	12	22.00	21.54	21.45	21.65
			25	24	22.00	21.47	21.49	21.59
			50	0	22.00	21.41	21.29	21.53
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	24.00	23.59	23.42	23.35
			1	37	24.00	23.36	23.78	23.50
			1	74	24.00	23.61	23.32	23.36

			36	0	23.00	22.52	22.50	22.54
			36	18	23.00	22.46	22.40	22.51
			36	37	23.00	22.39	22.48	22.60
			75	0	23.00	22.47	22.38	22.55
		16QAM	1	0	23.50	23.34	22.45	22.77
			1	37	23.50	23.37	22.88	22.86
			1	74	23.50	23.03	22.27	22.79
			36	0	22.00	21.58	21.52	21.28
			36	18	22.00	21.61	21.49	21.34
			36	37	22.00	21.45	21.58	21.41
			75	0	22.00	21.42	21.29	21.51
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	24.00	22.35	23.68	23.53
			1	49	24.00	23.11	23.69	23.59
			1	99	24.00	22.97	23.59	23.30
			50	0	23.00	22.41	22.57	22.42
			50	24	23.00	22.32	22.37	22.42
			50	49	23.00	22.41	22.44	22.44
			100	0	23.00	22.41	22.56	22.48
		16QAM	1	0	23.00	22.47	23.00	22.30
			1	49	23.00	22.13	22.30	22.26
			1	99	23.00	22.09	21.81	22.05
			50	0	22.00	21.25	21.46	21.33
			50	24	22.00	21.43	21.33	21.45
			50	49	22.00	21.60	21.43	21.46
			100	0	21.50	21.36	21.22	21.36

7.2. WLAN & Bluetooth Output Power

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11b	1	2412	16.50	16.07
	6	2437	16.50	16.03
	11	2462	16.50	15.99
802.11g	1	2412	14.00	13.63
	6	2437	14.00	13.35
	11	2462	14.00	13.18
802.11n HT20	1	2412	12.50	12.44
	6	2437	12.50	12.00
	11	2462	12.50	12.03
802.11n HT40	3	2422	12.50	12.42
	6	2437	12.50	11.18
	9	2452	12.50	11.04

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	36	5180	11.50	10.37
	40	5200	11.50	10.46
	48	5240	11.50	11.36
802.11n HT20	36	5180	12.00	10.32
	40	5200	12.00	10.30
	48	5240	12.00	11.54
802.11n HT40	38	5190	12.00	10.83
	46	5230	12.00	11.70
802.11ac VHT20	36	5180	11.50	10.35
	40	5200	11.50	10.49
	48	5240	11.50	11.41
802.11ac VHT40	38	5190	12.00	10.75
	46	5230	12.00	11.56
802.11ac VHT80	42	5210	9.50	9.43

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	149	5745	11.50	10.48
	157	5785	11.50	11.01
	165	5825	11.50	10.96
802.11n HT20	149	5745	11.00	10.11
	157	5785	11.00	10.70
	165	5825	11.00	10.59
802.11n HT40	151	5755	11.50	10.51
	159	5795	11.50	11.22
802.11ac VHT20	149	5745	11.00	10.08
	157	5785	11.00	10.68
	165	5825	11.00	10.63
802.11ac VHT40	151	5755	11.50	10.49
	159	5795	11.50	11.09
802.11ac VHT80	155	5775	11.00	10.80

NOTE: Power measurement results of WLAN 5.8G.

BR+EDR	Output Power (dBm)				
	Channel	Tune-up (dBm)	Data Rates		
			1M	2M	3M
	0CH	8.00	7.68	6.85	7.16
	39CH	8.00	7.03	6.18	6.62
	78CH	8.00	7.23	6.39	6.67

BLE Module 1

BLE	Channel	Tune-up (dBm)	Output Power (dBm)	
			1M	2M
	0CH	8.00	7.83	7.92
	19CH	8.00	7.24	7.36
	39CH	8.00	7.24	7.37

BLE Module 2

BLE	Channel	Tune-up (dBm)	Output Power (dBm)	
			1M	2M

	0CH	-1.00	-1.69	-1.67
	19CH	-1.00	-1.94	-1.90
	39CH	-1.00	-1.93	-1.90

NOTE: Power measurement results of Bluetooth.

8. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	8.00	6.31	5	2.480	2	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	8.00	6.31	5	2.48	7.5	0.264

NOTE: Estimated SAR calculation for Bluetooth

9. SAR Results

9.1. SAR measurement Result

9.1.1. SAR measurement Result of LTE Band 2

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Head	18900/1880	20M QPSK(1,49)	0.289	0.146	1.50	23.60	24.00	0.317	2024/7/08	4#
50%RB										
Head	18900/1880	20M QPSK(50,24)	0.173	0.077	1.59	22.54	23.00	0.192	2024/7/08	

NOTE: Head SAR test results of LTE Band 2

9.1.2. SAR measurement Result of LTE Band 4

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Head	20175/1732.5	20M QPSK(1,49)	0.320	0.178	-2.36	23.26	23.50	0.338	2024/7/09	5#
50%RB										
Head	20175/1732.5	20M QPSK(50,0)	0.160	0.102	0.74	22.21	22.50	0.171	2024/7/09	

NOTE: Head SAR test results of LTE Band 4

9.1.3. SAR measurement Result of LTE Band 5

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Head	20525/836.5	10M QPSK(1,0)	0.280	0.206	-3.15	22.65	23.50	0.341	2024/7/07	6#
50%RB										
Head	20525/836.5	10M QPSK(25,24)	0.167	0.117	-0.10	22.03	22.50	0.186	2024/7/07	

NOTE: Head SAR test results of LTE Band 5

9.1.4. SAR measurement Result of LTE Band 7

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Head	21100/2535	20M QPSK(1,49)	0.363	0.156	-0.28	22.81	23.00	0.379	2024/7/06	7#
50%RB										
Head	21100/2535	20M QPSK(50,24)	0.210	0.079	-2.20	21.59	22.00	0.231	2024/7/06	

NOTE: Head SAR test results of LTE Band 7

9.1.5. SAR measurement Result of LTE Band 41

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Head	40640/2595	20M QPSK(1,49)	0.553	0.246	1.36	22.26	22.50	0.584	2024/7/06	8#
50%RB										
Head	40640/2595	20M QPSK(50,24)	0.301	0.135	4.10	21.21	21.50	0.322	2024/7/06	

NOTE: Head SAR test results of LTE Band 41

9.1.6. SAR measurement Result of LTE Band 66

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Head	132322/1745	20M QPSK(1,49)	0.332	0.177	0.12	23.69	24.00	0.357	2024/7/09	9#
50%RB										
Head	132322/1745	20M QPSK(50,0)	0.183	0.090	1.62	22.57	23.00	0.202	2024/7/09	

NOTE: Head SAR test results of LTE Band 66

9.1.7. SAR measurement Result of WLAN2.4G

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Head	1/2412	802.11b	0.017	0.010	2.38	16.07	16.50	0.019	2024/7/05	3#

NOTE: Head SAR test results of WLAN2.4G

9.1.8. SAR measurement Result of WLAN5.2G

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Head	46/5230	802.11n HT40	0.535	0.160	-4.56	11.70	12.00	0.573	2024/7/10	1#

NOTE: Head SAR test results of WLAN5.2G

9.1.9. SAR measurement Result of WLAN5.8G

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Head	159/5795	802.11n HT40	0.251	0.082	3.05	11.22	11.50	0.268	2024/7/11	2#

NOTE: Head SAR test results of WLAN5.8G

9.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6\text{W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
	PCB	DTS			
Head	0.584	0.019	0.603	N/A	N/A

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
	PCB	NII			

Head	0.584	0.573	1.157	N/A	N/A
------	-------	-------	-------	-----	-----

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
	PCB	DSS			
Head	0.584	0.264	0.848	N/A	N/A

10. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

11. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 835MHz
MEASUREMENT 2 System Performance Check - 1800MHz
MEASUREMENT 3 System Performance Check - 1900MHz
MEASUREMENT 4 System Performance Check - 2450MHz
MEASUREMENT 5 System Performance Check - 2600MHz
MEASUREMENT 6 System Performance Check - 5200MHz
MEASUREMENT 7 System Performance Check - 5800MHz

MEASUREMENT 1

Date of measurement: 7/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.513135
Relative permittivity (imaginary part)	19.549945
Conductivity (S/m)	0.906900
Variation (%)	-0.930000

SURFACE SAR

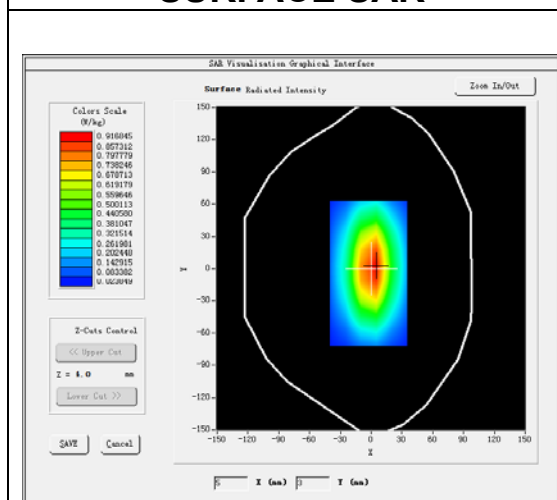



VOLUME SAR

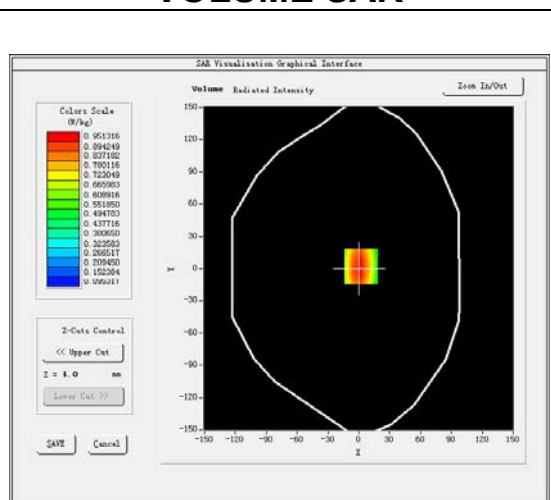

Maximum location: X=2.00, Y=2.00

SAR Peak: 1.29 W/kg

SAR 10g (W/Kg)	0.664322
SAR 1g (W/Kg)	1.002099

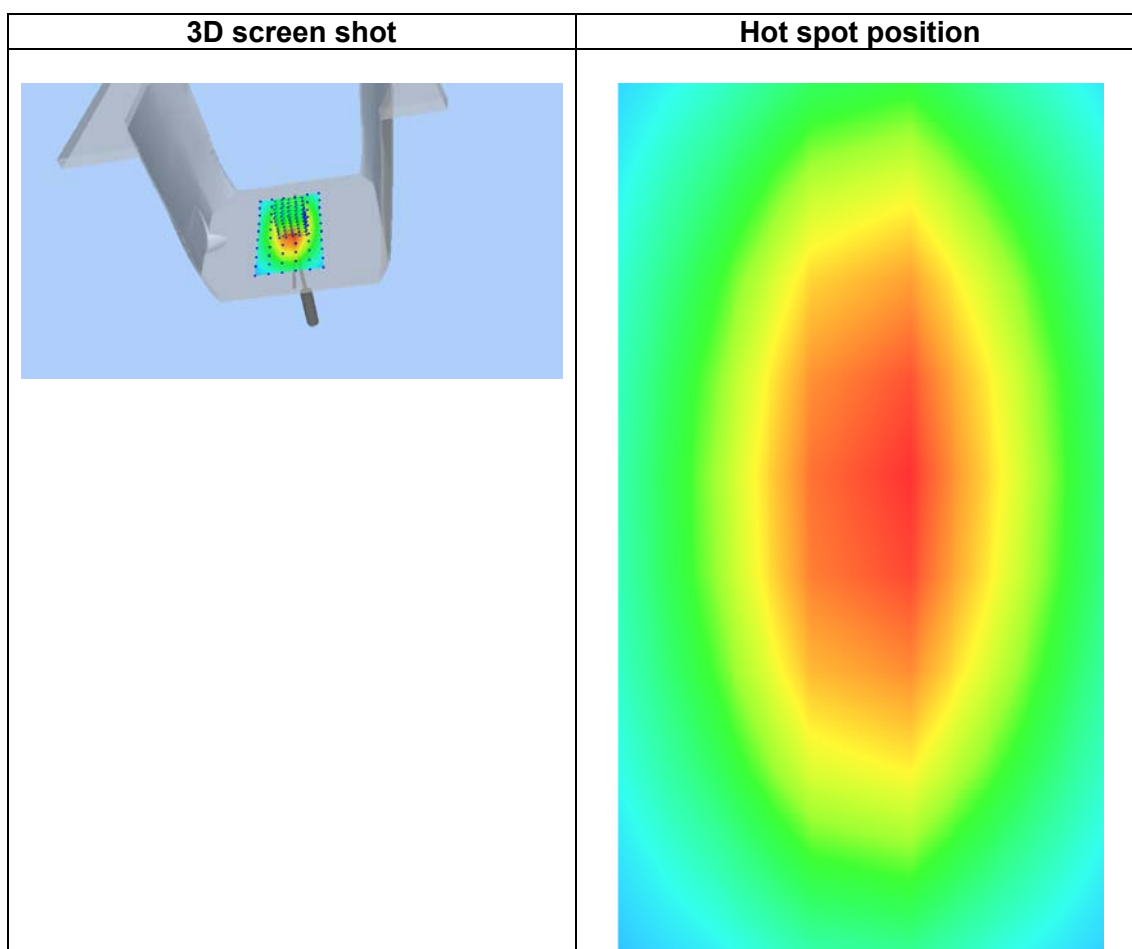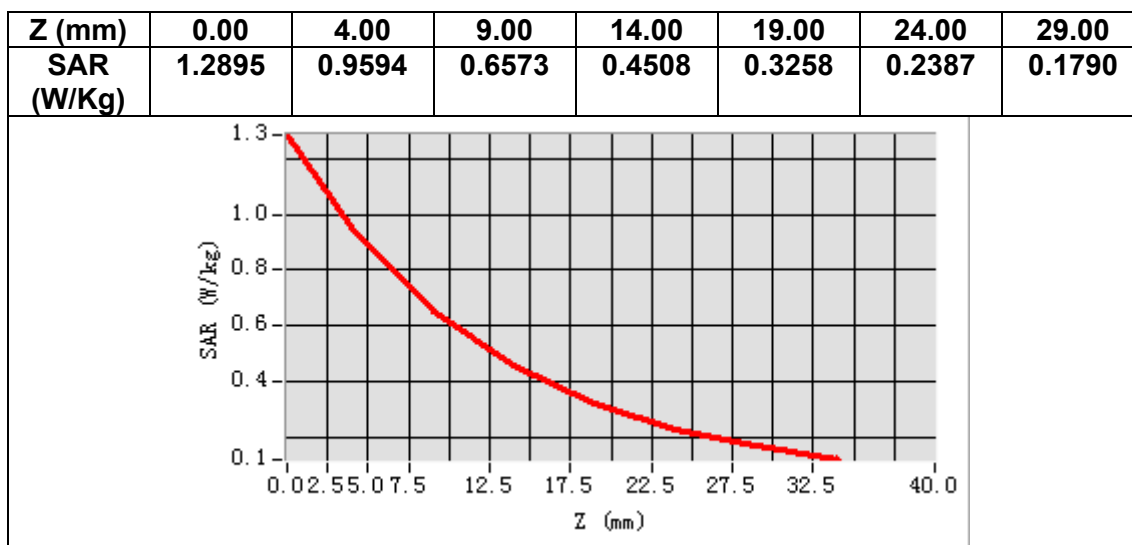

MEASUREMENT 2

Date of measurement: 9/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.930183
Relative permittivity (imaginary part)	13.747547
Conductivity (S/m)	1.374755
Variation (%)	-1.900000

SURFACE SAR

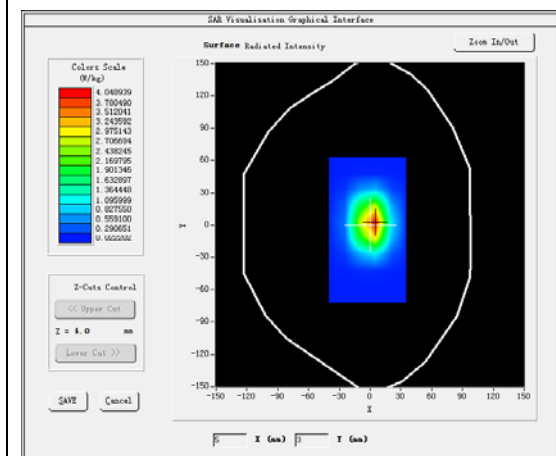



VOLUME SAR

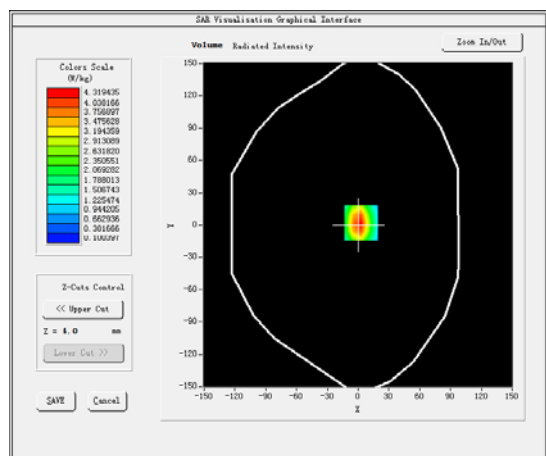

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.123193
SAR 1g (W/Kg)	3.899386

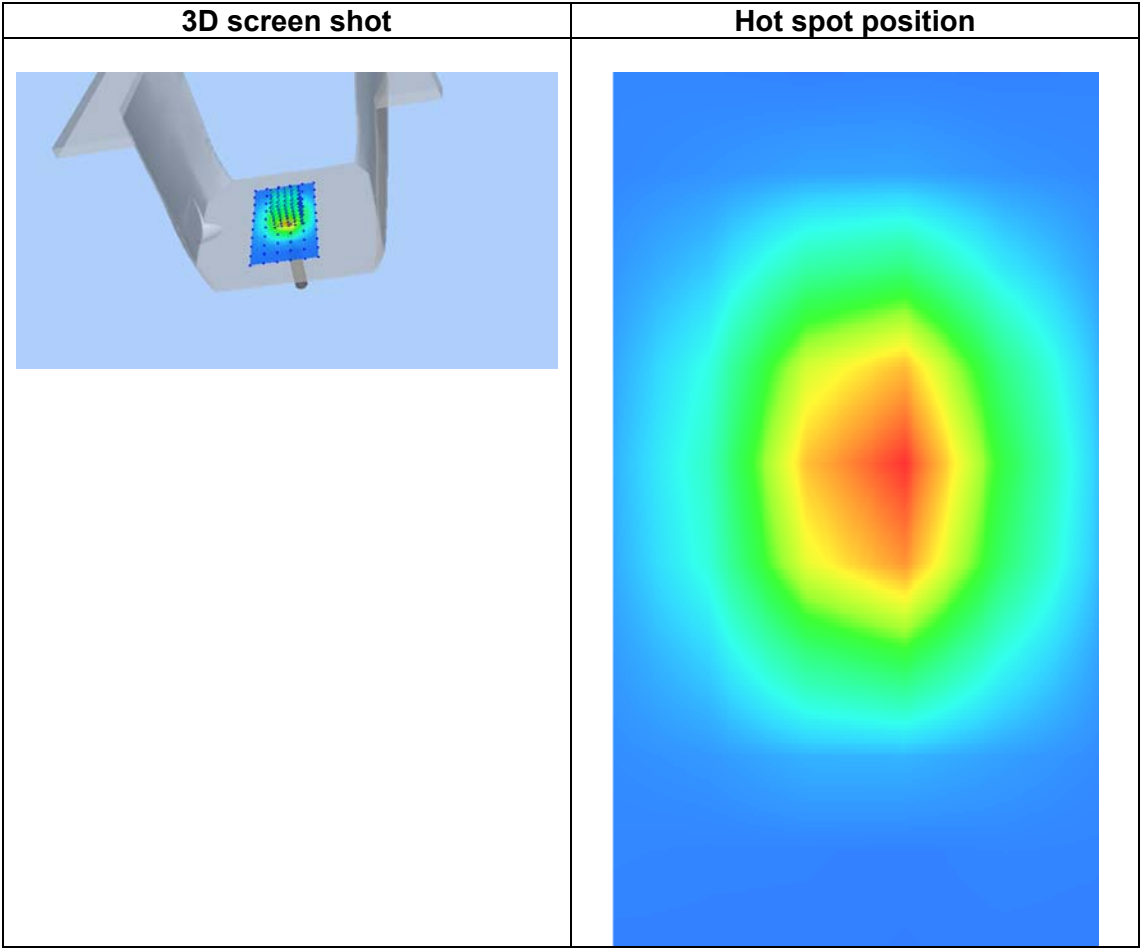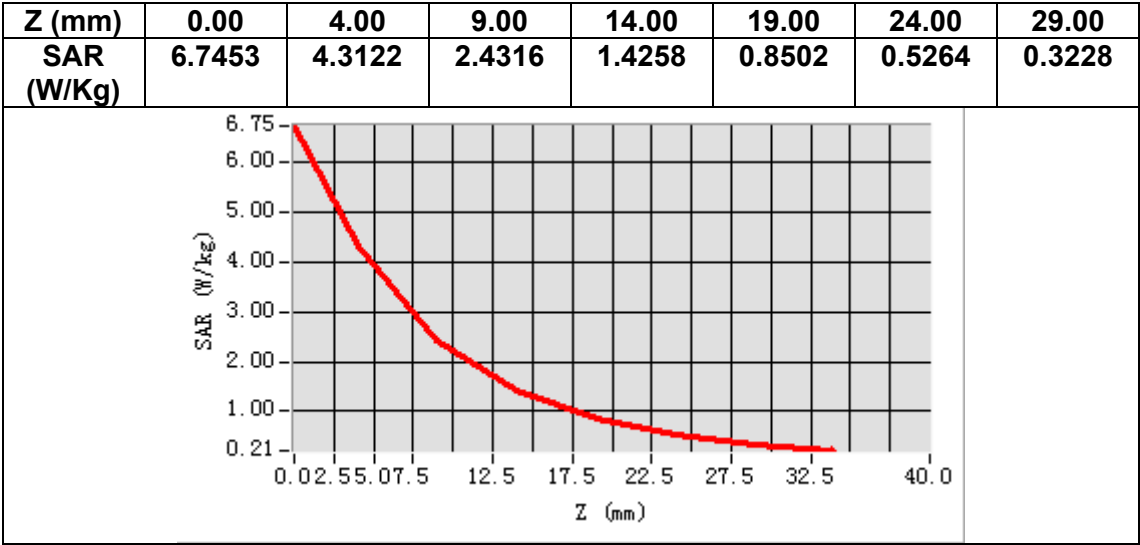

MEASUREMENT 3

Date of measurement: 8/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.873668
Relative permittivity (imaginary part)	13.744242
Conductivity (S/m)	1.450781
Variation (%)	-1.150000

SURFACE SAR

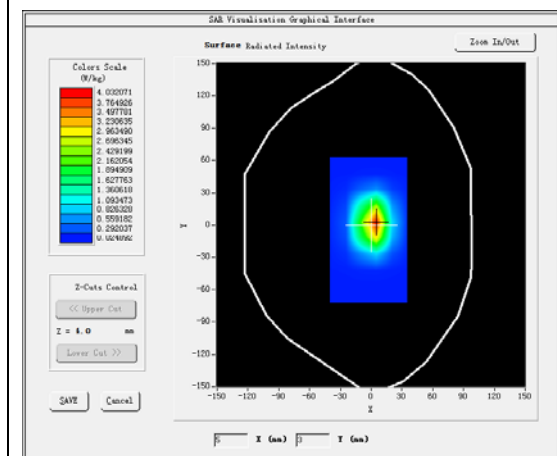


VOLUME SAR

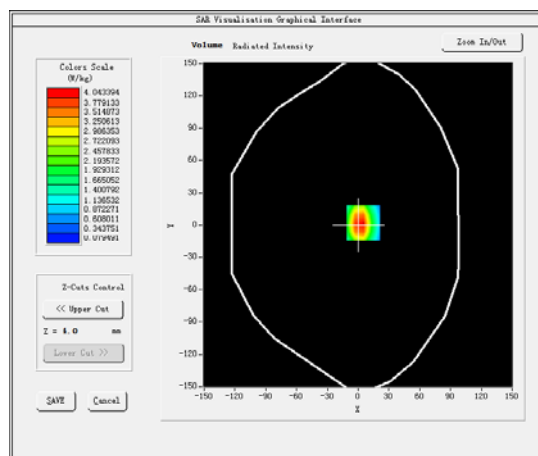


Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg


SAR 10g (W/Kg)	2.076070
SAR 1g (W/Kg)	4.030062

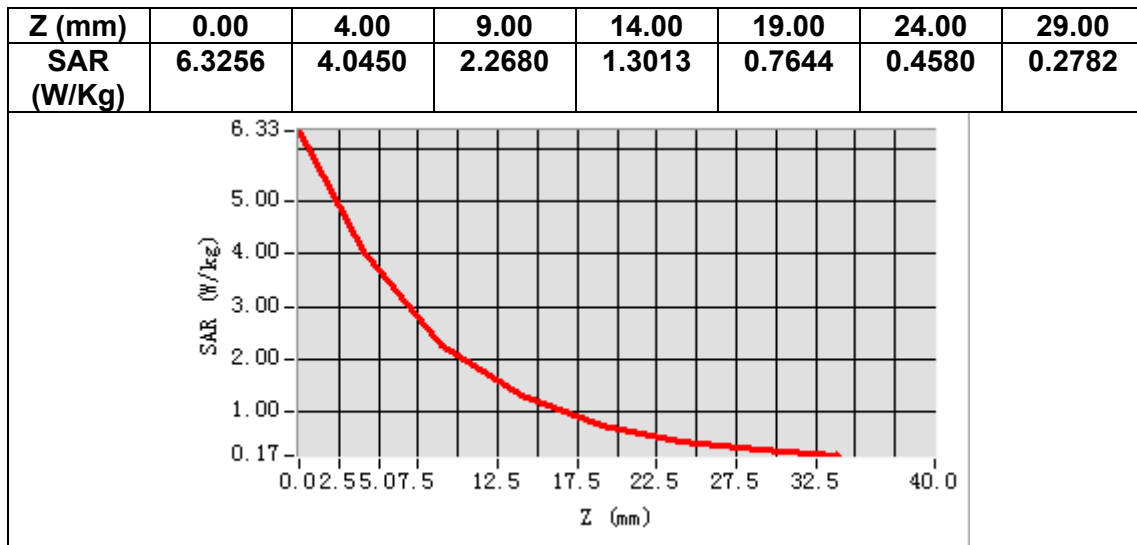

3D screen shot

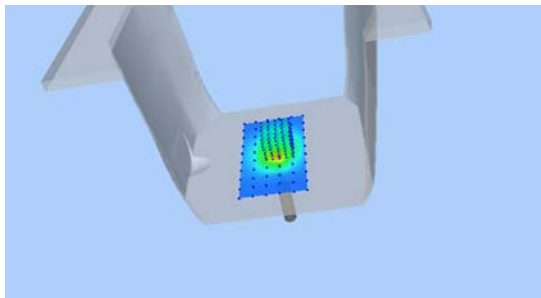

Hot spot position

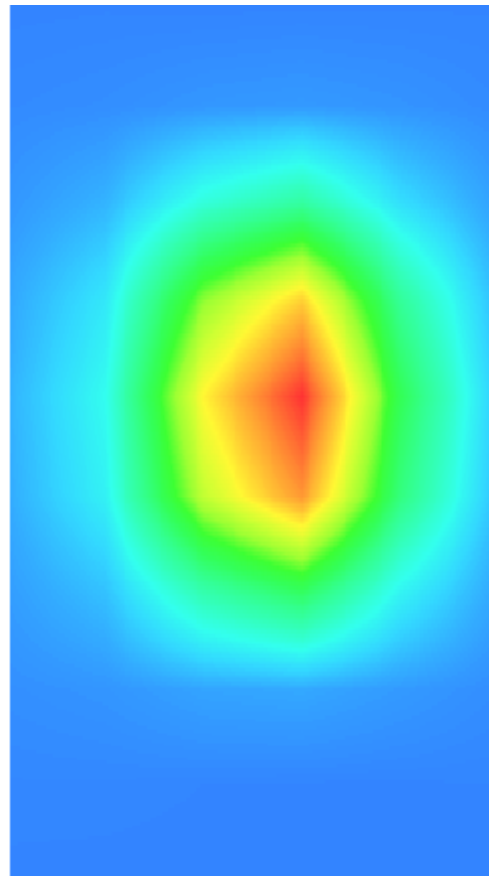

MEASUREMENT 4

Date of measurement: 5/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	37.691465
Relative permittivity (imaginary part)	12.968121
Conductivity (S/m)	1.765105
Variation (%)	2.740000

SURFACE SAR

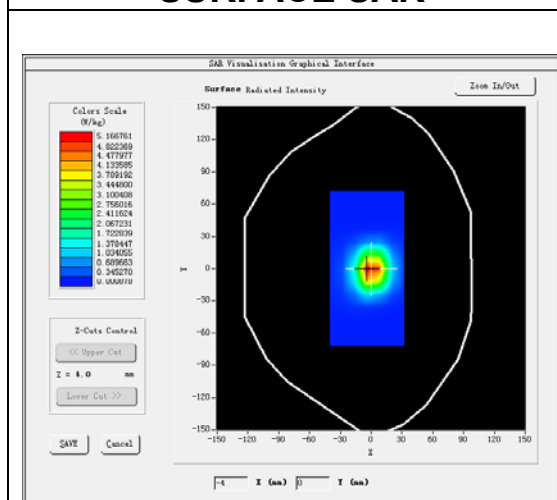



VOLUME SAR

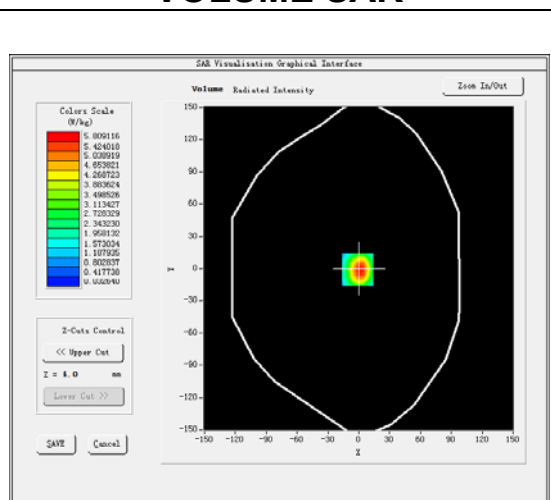

Maximum location: X=-1.00, Y=-1.00

SAR Peak: 9.73 W/kg

SAR 10g (W/Kg)	2.449150
SAR 1g (W/Kg)	4.848345

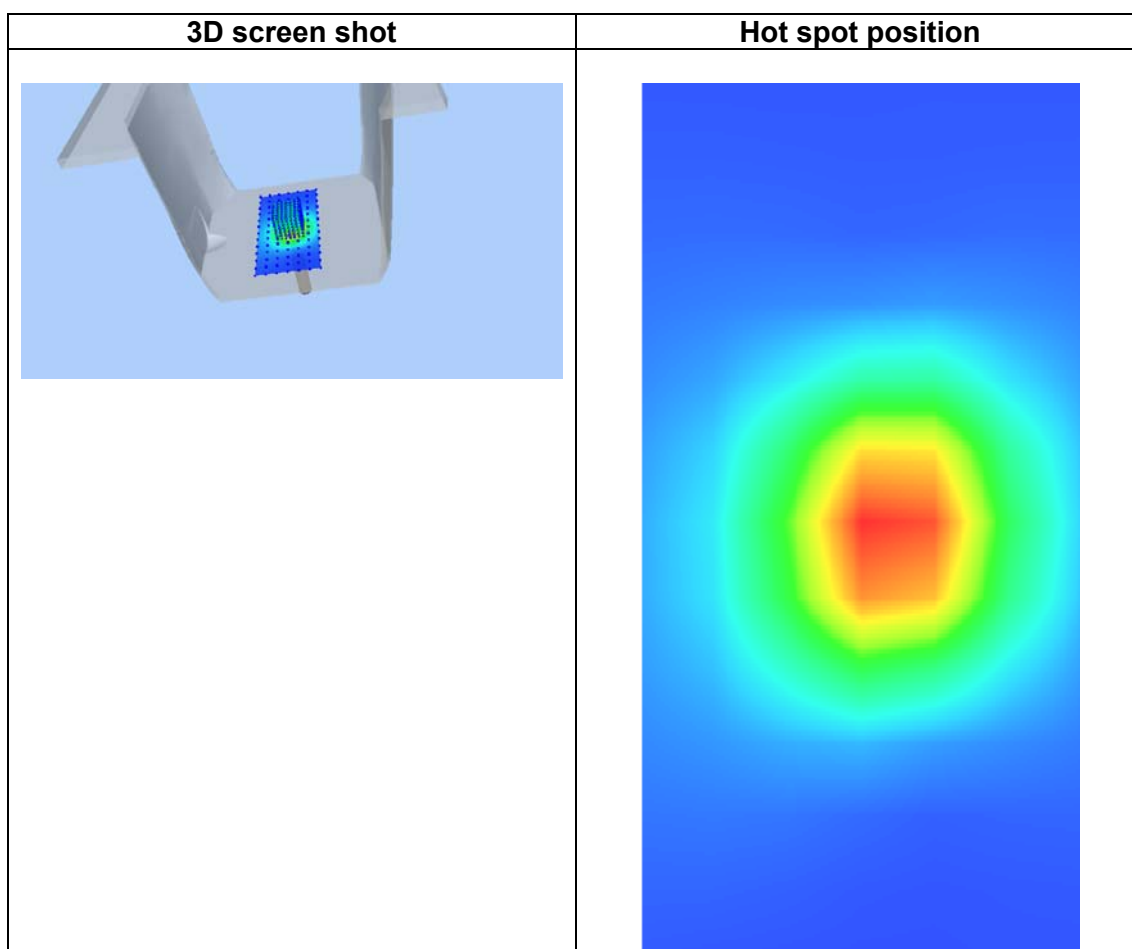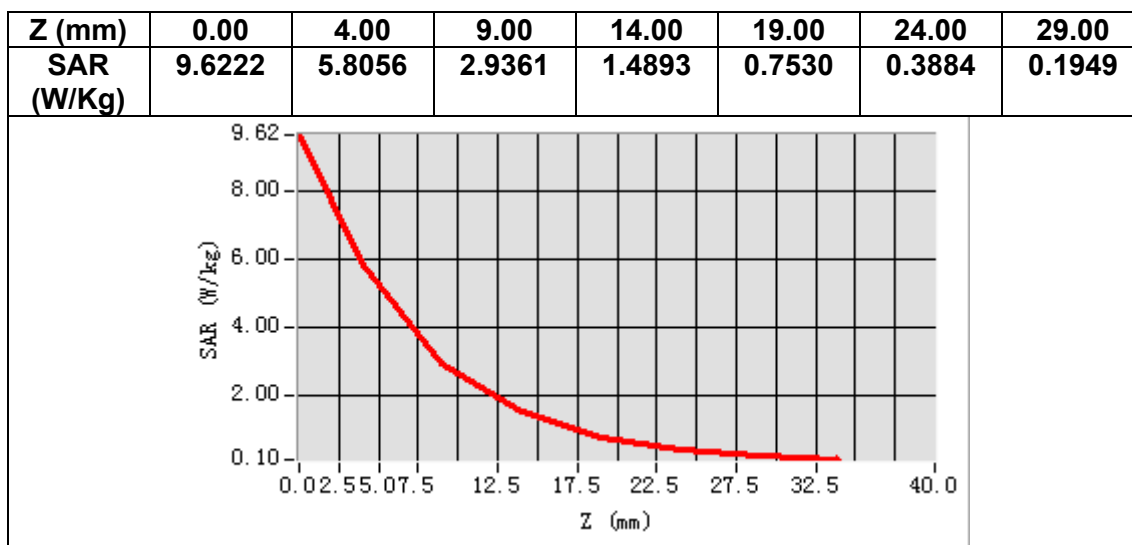

MEASUREMENT 5

Date of measurement: 6/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.878442
Relative permittivity (imaginary part)	13.731472
Conductivity (S/m)	1.983435
Variation (%)	-0.990000

SURFACE SAR

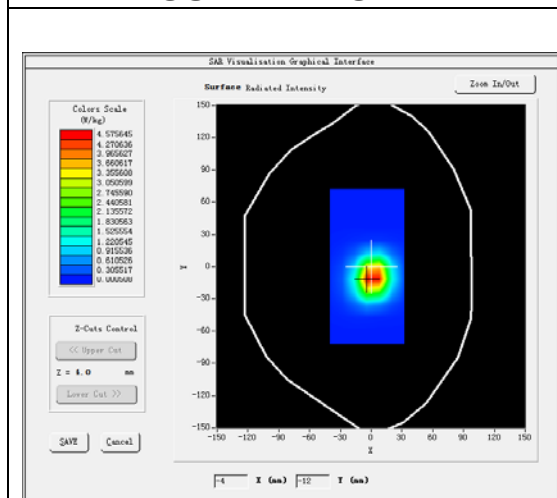



VOLUME SAR

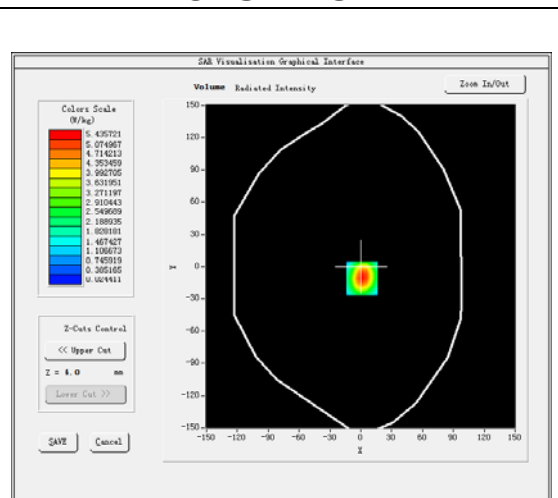

Maximum location: X=1.00, Y=-11.00

SAR Peak: 9.29 W/kg

SAR 10g (W/Kg)	2.261256
SAR 1g (W/Kg)	5.700161

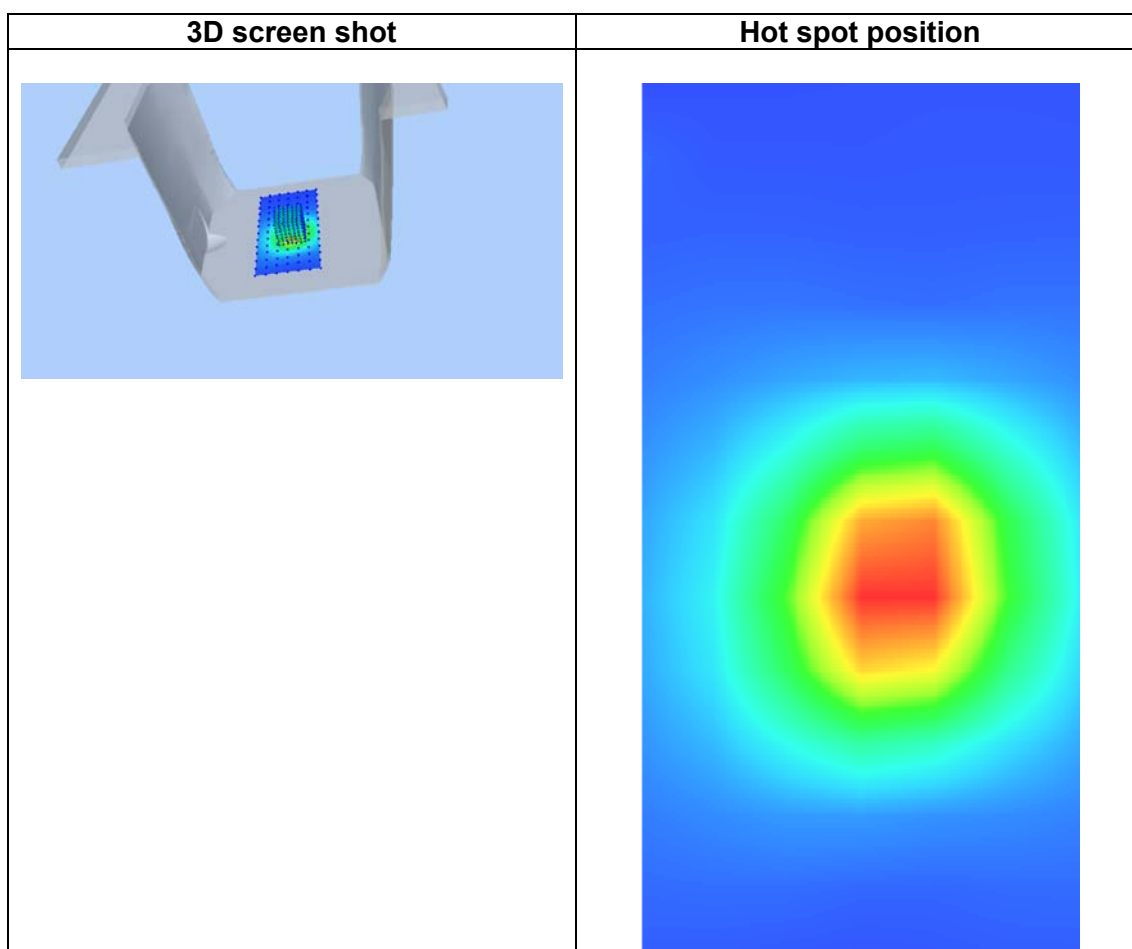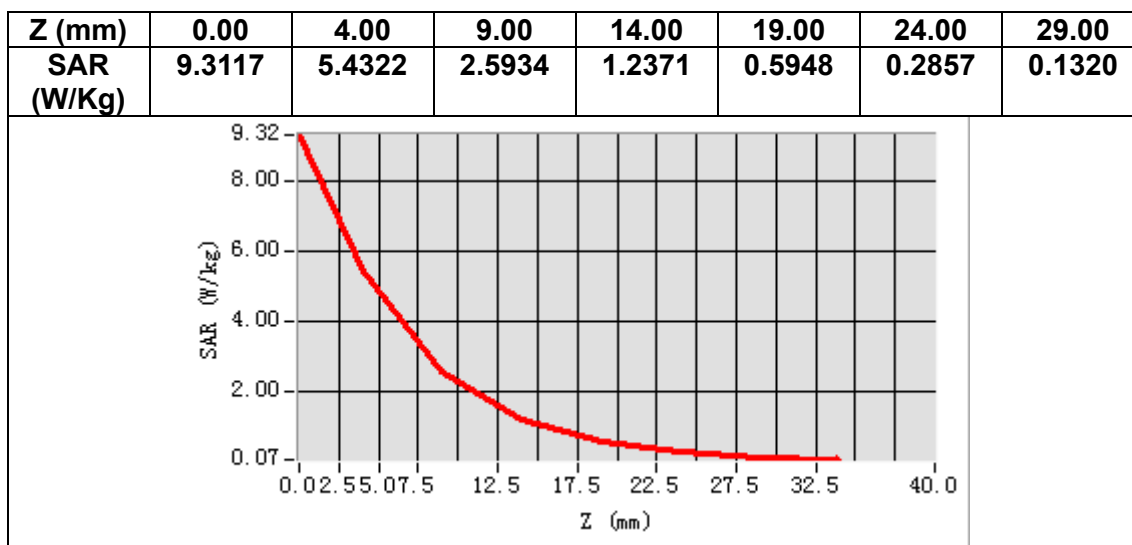

MEASUREMENT 6


Date of measurement: 10/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	34.578385
Relative permittivity (imaginary part)	15.678512
Conductivity (S/m)	4.529348
Variation (%)	3.250000

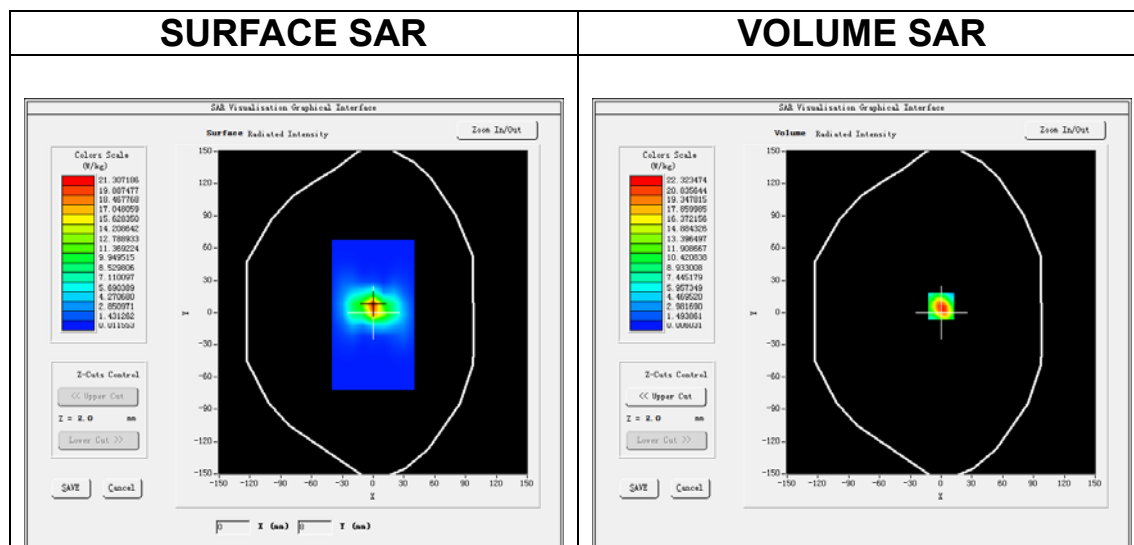


Maximum location: X=0.00, Y=6.00


SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.905311
SAR 1g (W/Kg)	14.667103


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	37.8 38	22.3 14	11.3 07	5.66 82	2.82 45	1.40 06	0.71 90	0.36 70	0.18 99	0.10 66	0.05 11	0.03 96

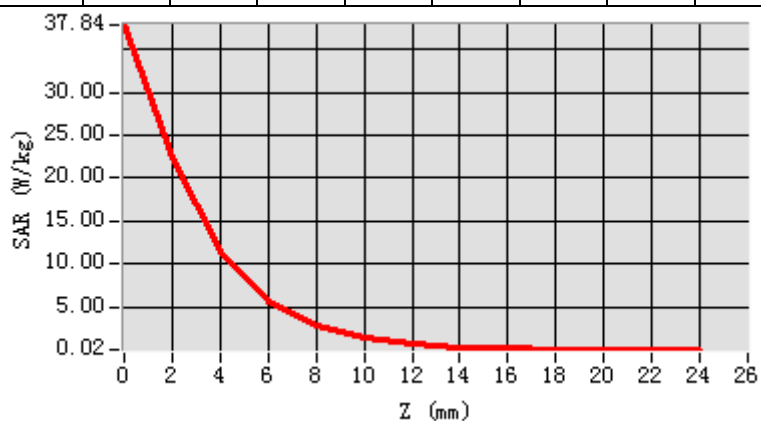

3D screen shot

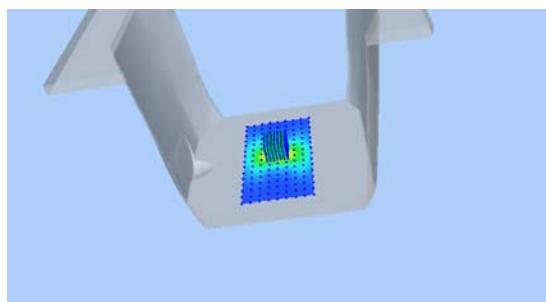

Hot spot position

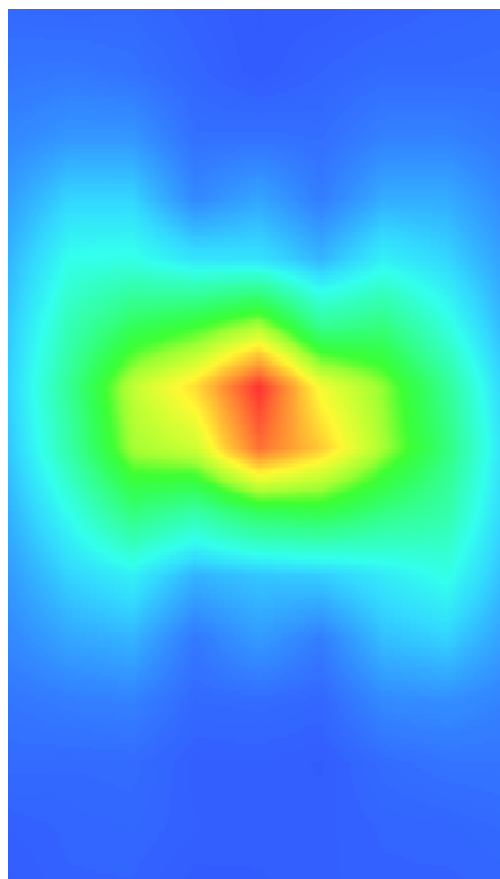

MEASUREMENT 7


Date of measurement: 11/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>

B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.009535
Relative permittivity (imaginary part)	16.065283
Conductivity (S/m)	5.176591
Variation (%)	3.210000

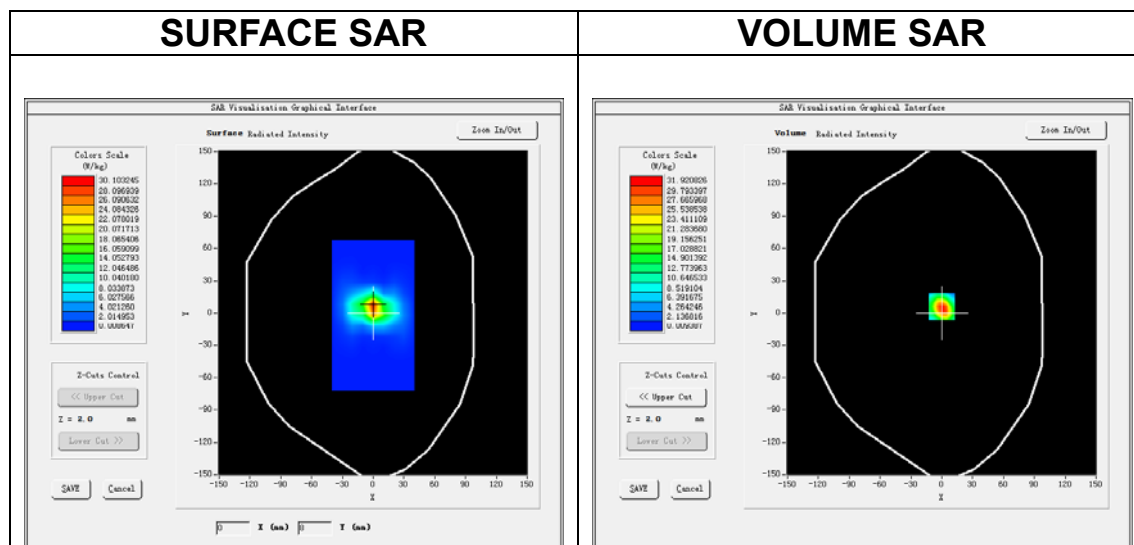


Maximum location: X=0.00, Y=6.00


SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	6.413184
SAR 1g (W/Kg)	18.255233


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	54.0 27	31.9 80	16.1 88	8.17 21	4.08 60	2.05 64	1.03 91	0.51 26	0.27 23	0.15 00	0.07 97	0.04 44

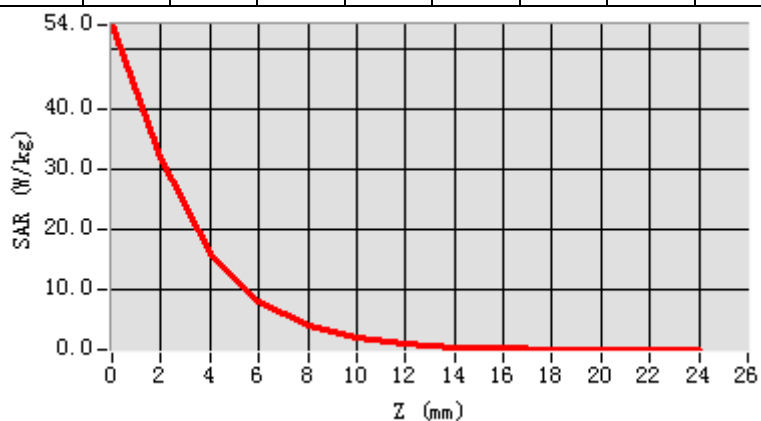

3D screen shot

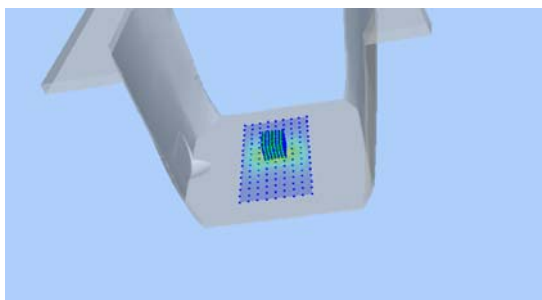

Hot spot position

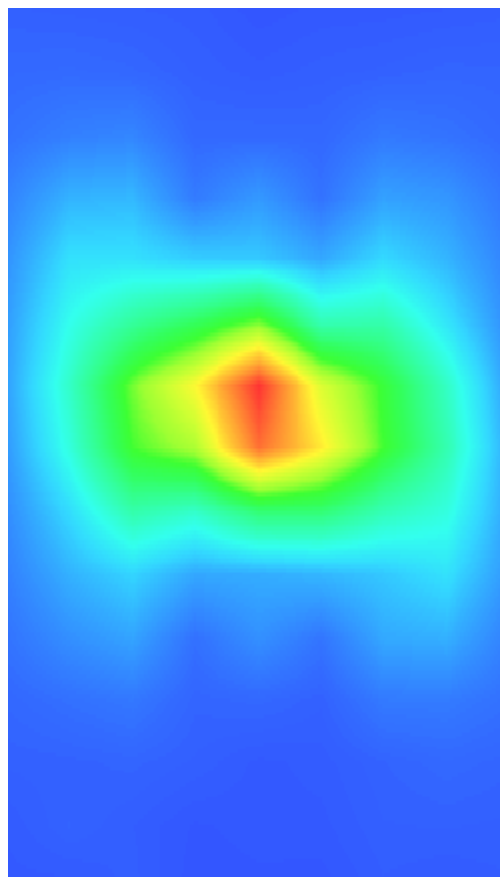

12. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 WLAN 5.2G Head
MEASUREMENT 2 WLAN 5.8G Head
MEASUREMENT 3 WLAN 2.4G Head
MEASUREMENT 4 LTE Band 2 Head
MEASUREMENT 5 LTE Band 4 Head
MEASUREMENT 6 LTE Band 5 Head
MEASUREMENT 7 LTE Band 7 Head
MEASUREMENT 8 LTE Band 41 Head
MEASUREMENT 9 LTE Band 66 Head

MEASUREMENT 1

Date of measurement: 10/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>


B. SAR Measurement Results

Frequency (MHz)	5230.000000
Relative permittivity (real part)	34.490342
Relative permittivity (imaginary part)	15.716192
Conductivity (S/m)	4.566427
Variation (%)	-4.560000

SURFACE SAR

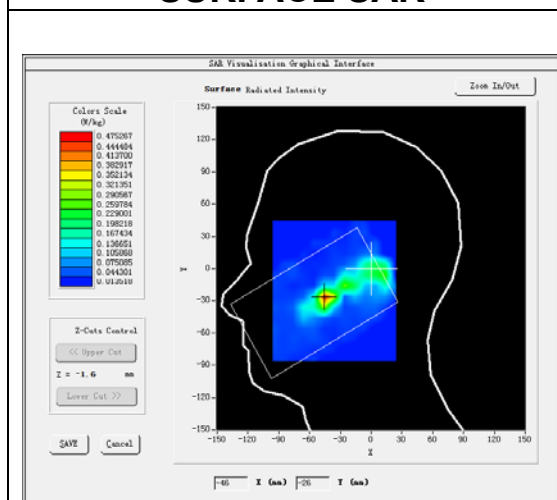

VOLUME SAR

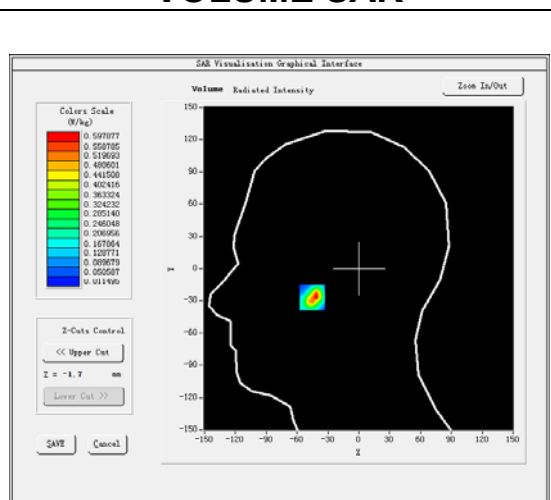


Maximum location: X=-45.00, Y=-27.00


SAR Peak: 1.79 W/kg

SAR 10g (W/Kg)	0.160279
SAR 1g (W/Kg)	0.535135


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	1.06 93	0.59 79	0.19 68	0.13 34	0.05 30	0.04 29	0.03 11	0.01 72	0.01 73	0.02 69	0.01 91	0.01 63

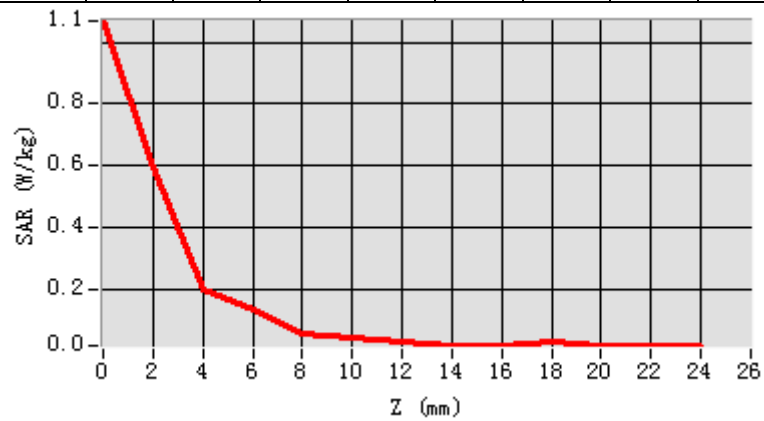

3D screen shot

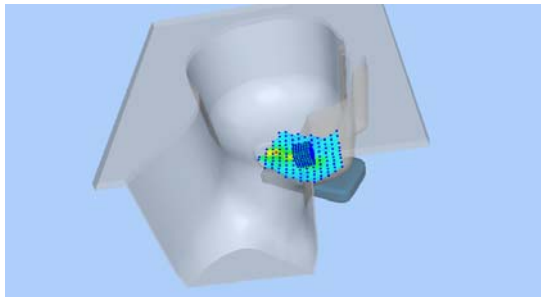

Hot spot position

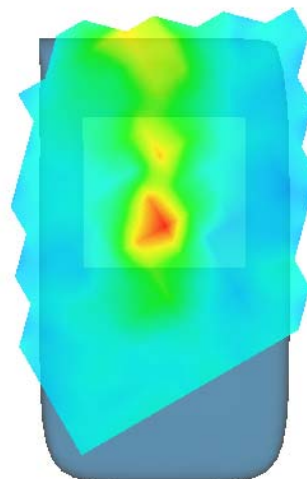

MEASUREMENT 2

Date of measurement: 11/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>


B. SAR Measurement Results

Frequency (MHz)	5795.000000
Relative permittivity (real part)	33.999743
Relative permittivity (imaginary part)	16.111959
Conductivity (S/m)	5.187156
Variation (%)	3.050000

SURFACE SAR

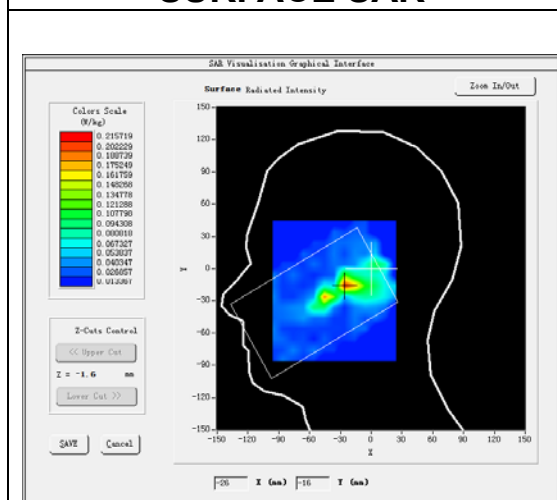



VOLUME SAR

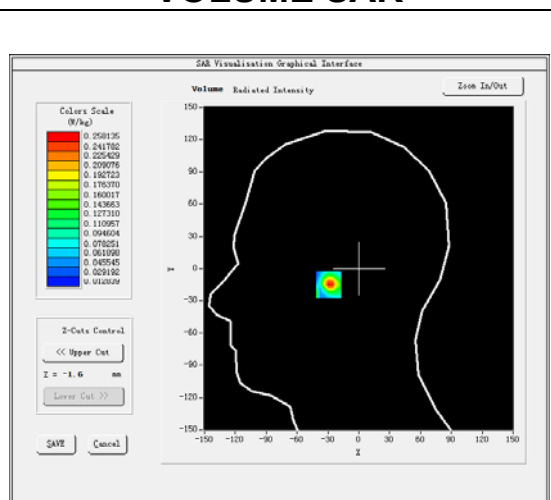

Maximum location: X=-24.00, Y=-15.00

SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.082111
SAR 1g (W/Kg)	0.250629

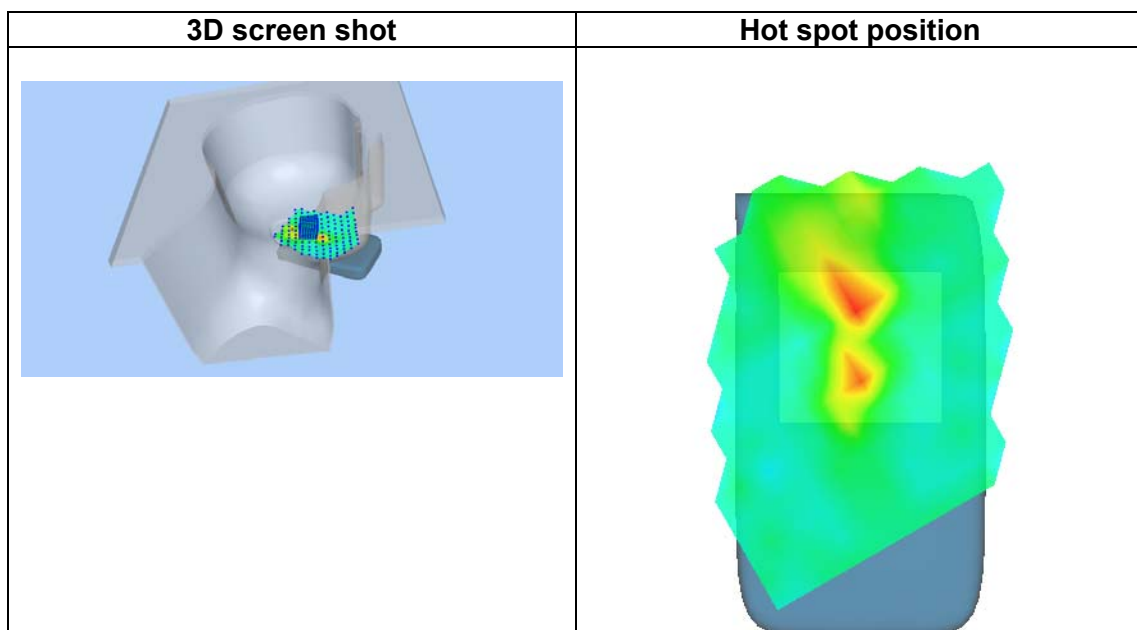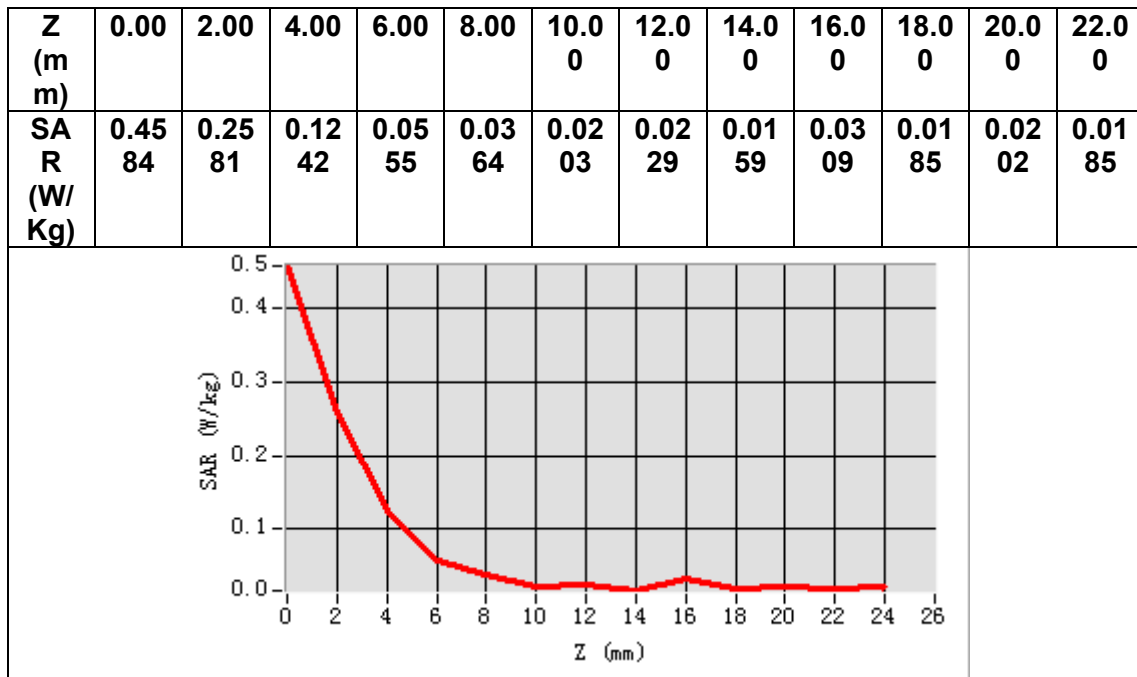

MEASUREMENT 3

Date of measurement: 5/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative permittivity (real part)	37.788165
Relative permittivity (imaginary part)	12.917321
Conductivity (S/m)	1.730921
Variation (%)	2.380000

SURFACE SAR

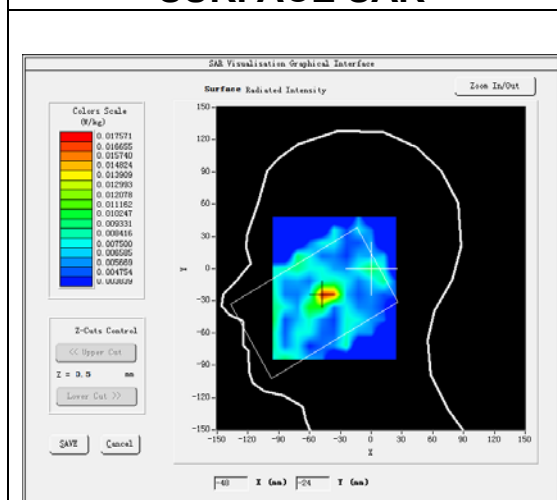



VOLUME SAR

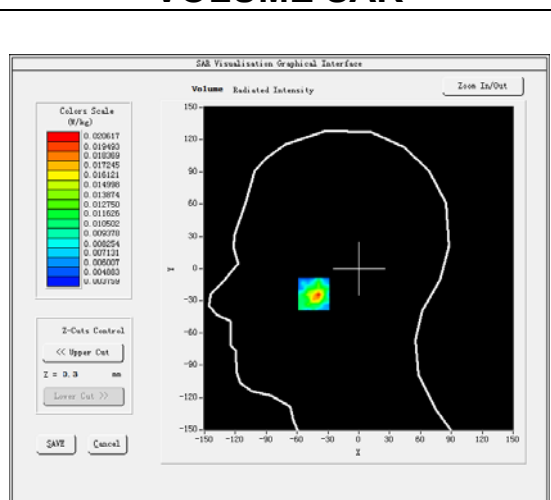

Maximum location: X=-44.00, Y=-24.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.009627
SAR 1g (W/Kg)	0.017152

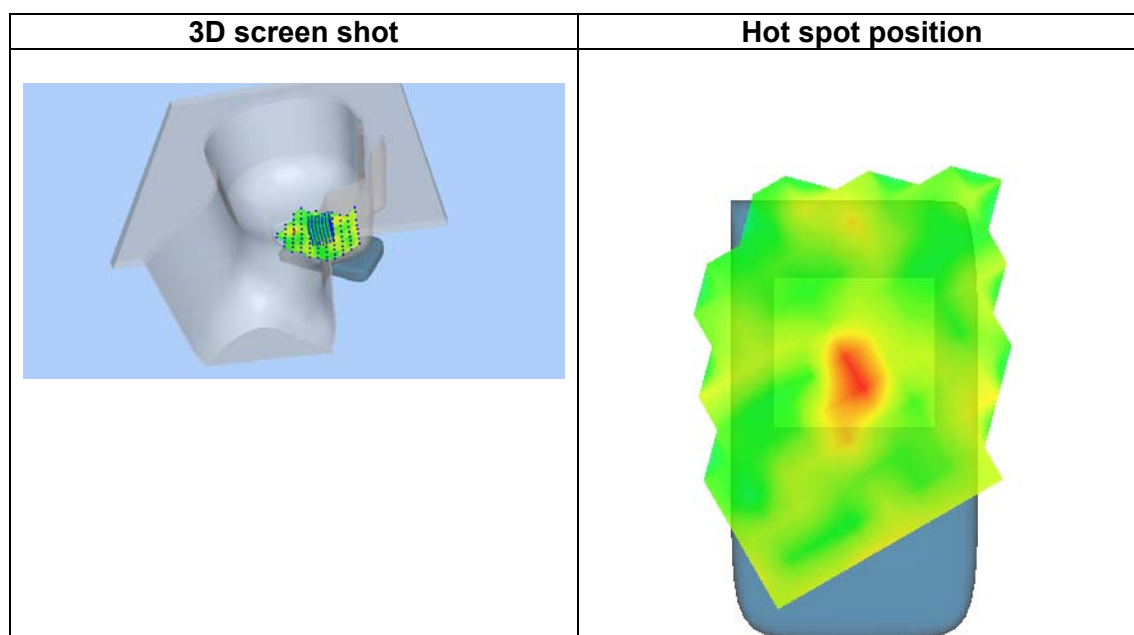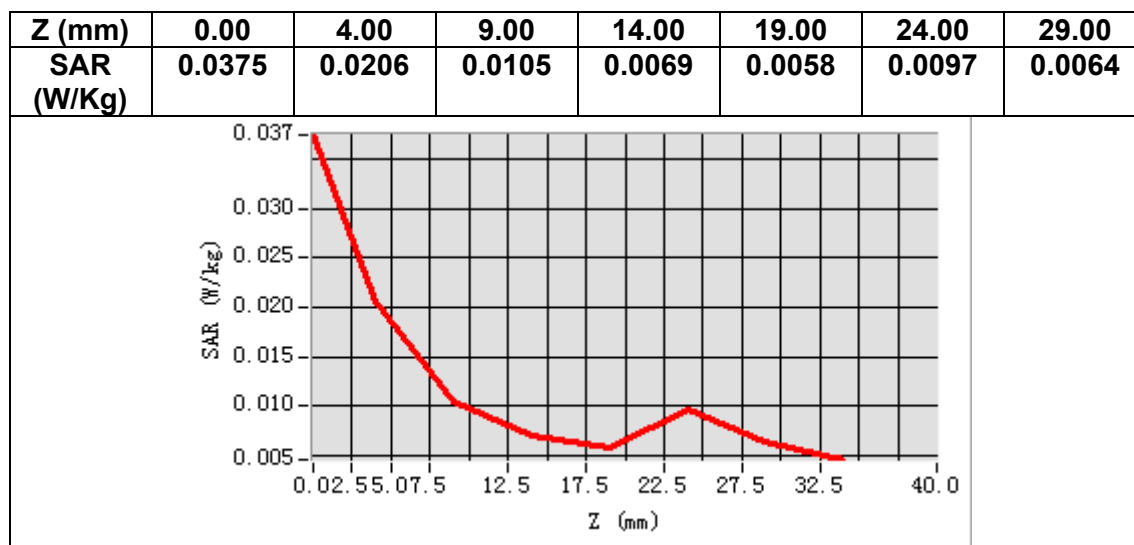

MEASUREMENT 4

Date of measurement: 8/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.948968
Relative permittivity (imaginary part)	13.792142
Conductivity (S/m)	1.440513
Variation (%)	1.500000

SURFACE SAR

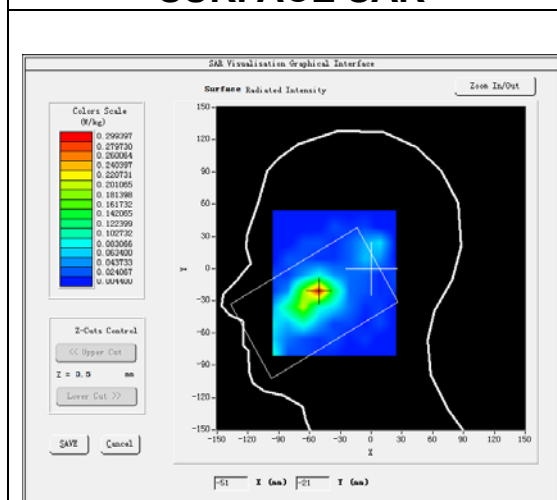



VOLUME SAR

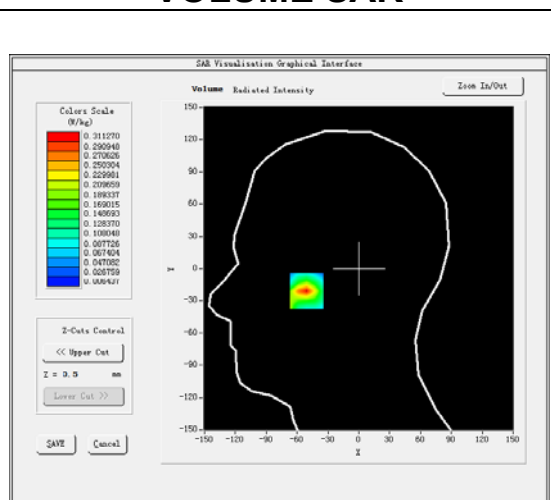

Maximum location: X=-51.00, Y=-21.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.146010
SAR 1g (W/Kg)	0.289311

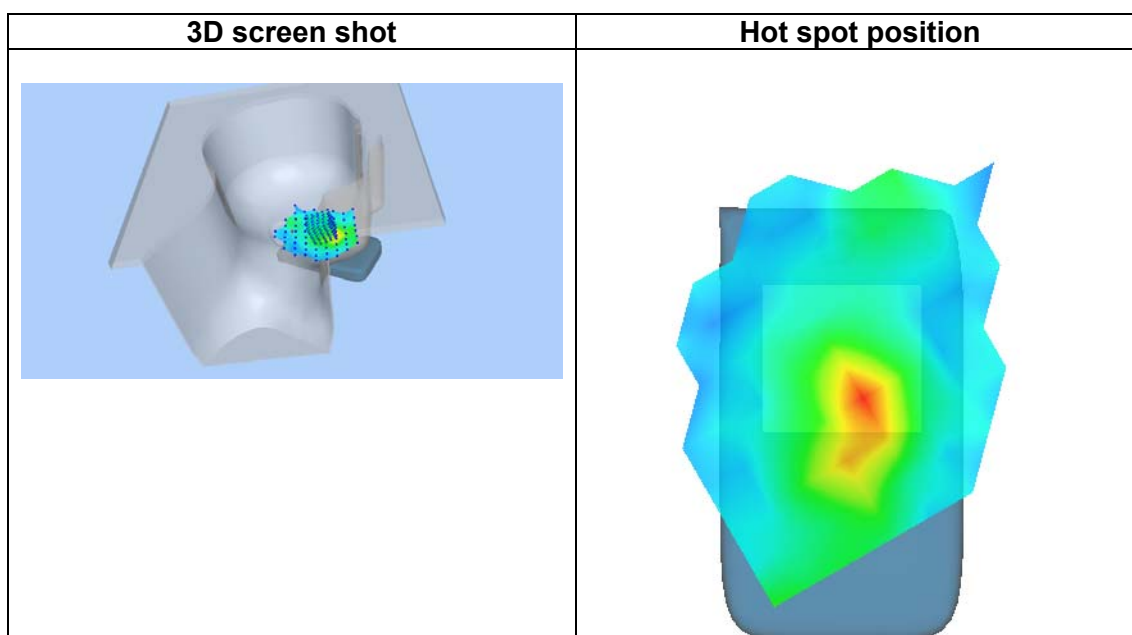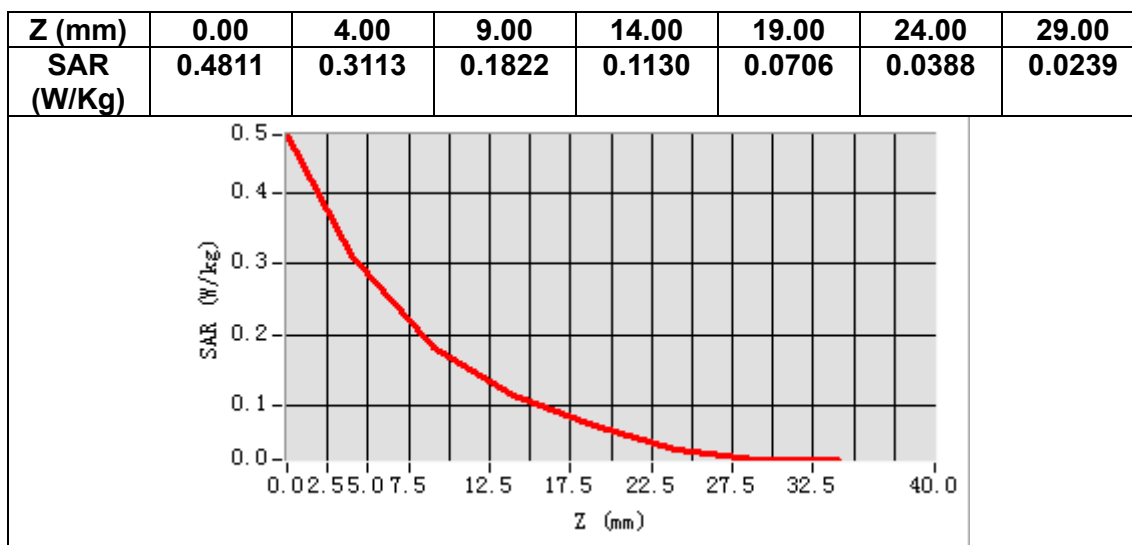

MEASUREMENT 5

Date of measurement: 9/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.397781
Relative permittivity (imaginary part)	13.684697
Conductivity (S/m)	1.317152
Variation (%)	-2.360000

SURFACE SAR

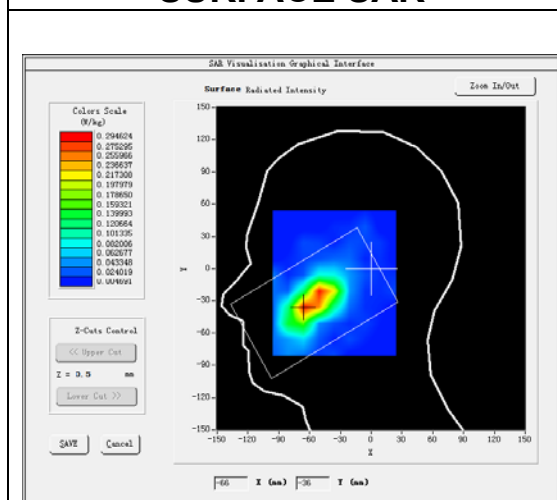



VOLUME SAR

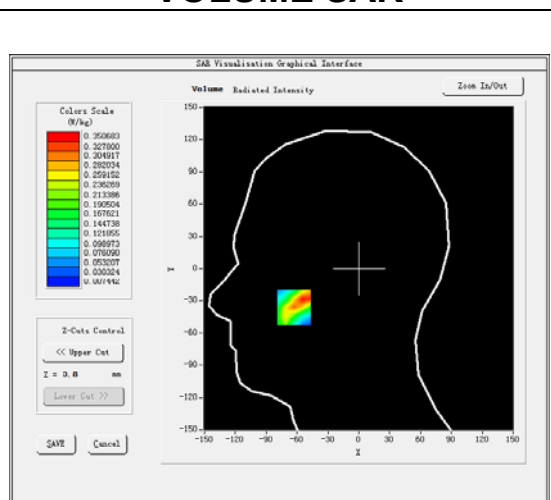

Maximum location: X=-63.00, Y=-36.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.178462
SAR 1g (W/Kg)	0.319651

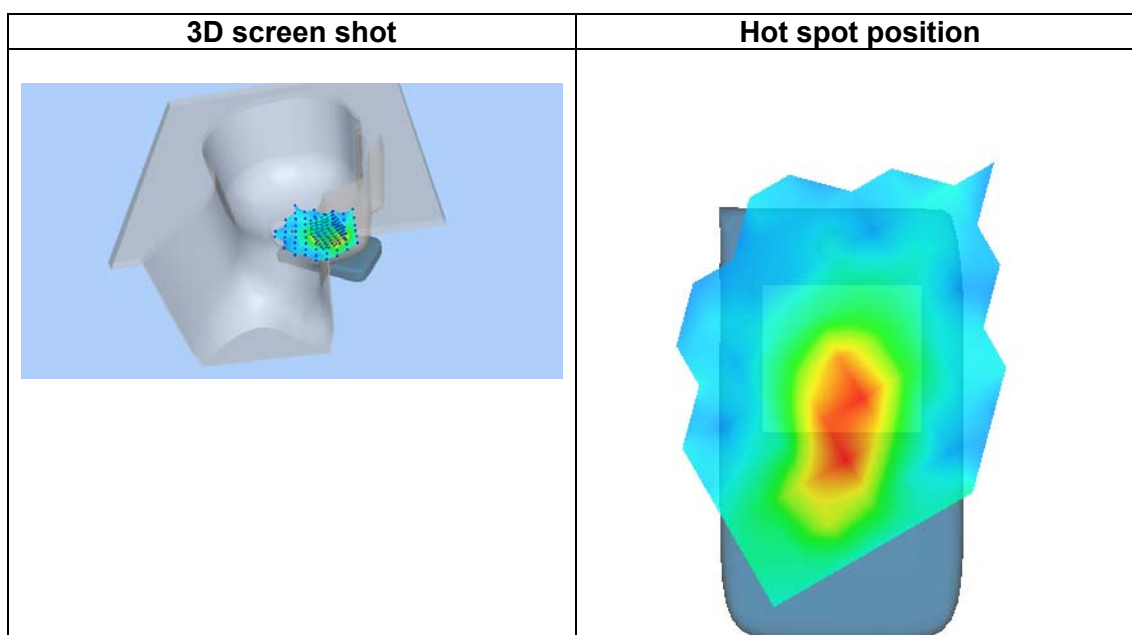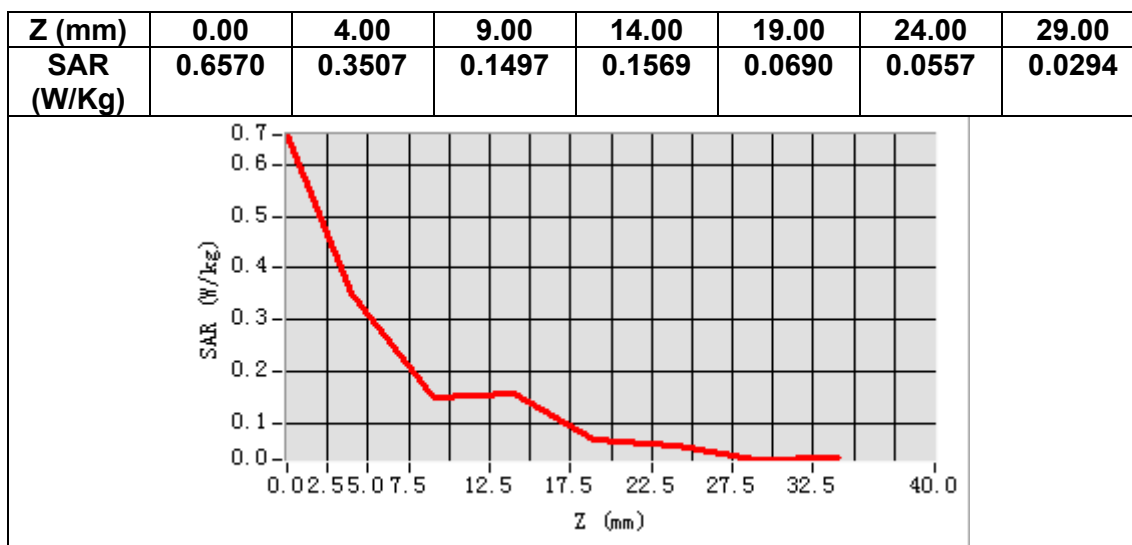

MEASUREMENT 6

Date of measurement: 7/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.524487
Relative permittivity (imaginary part)	19.558945
Conductivity (S/m)	0.908948
Variation (%)	-3.150000

SURFACE SAR

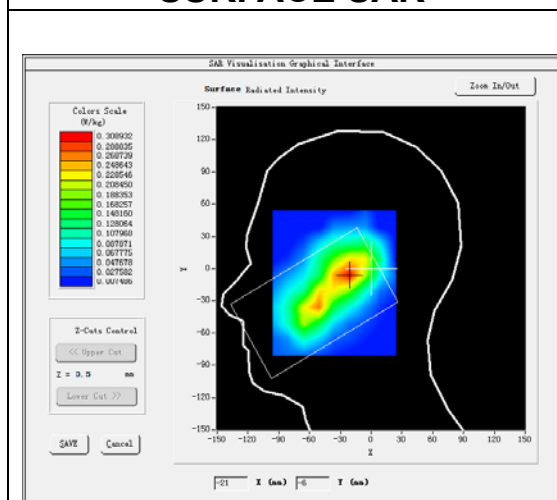



VOLUME SAR

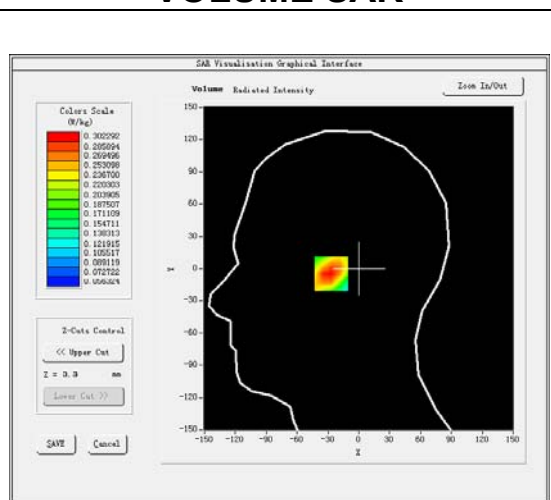

Maximum location: X=-22.00, Y=-5.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.206073
SAR 1g (W/Kg)	0.280310

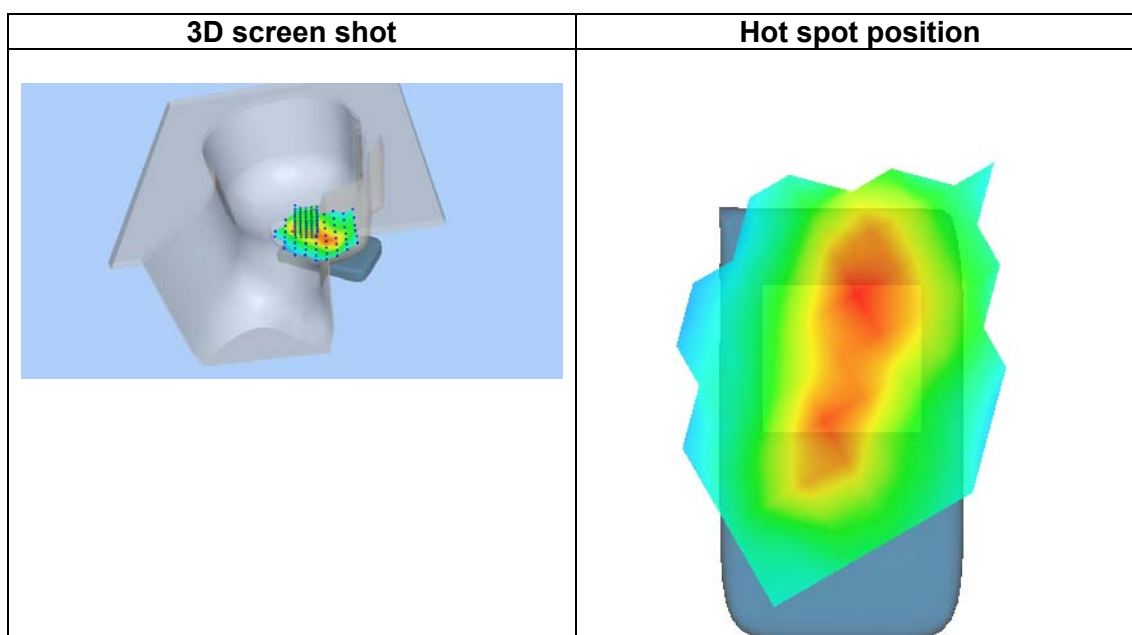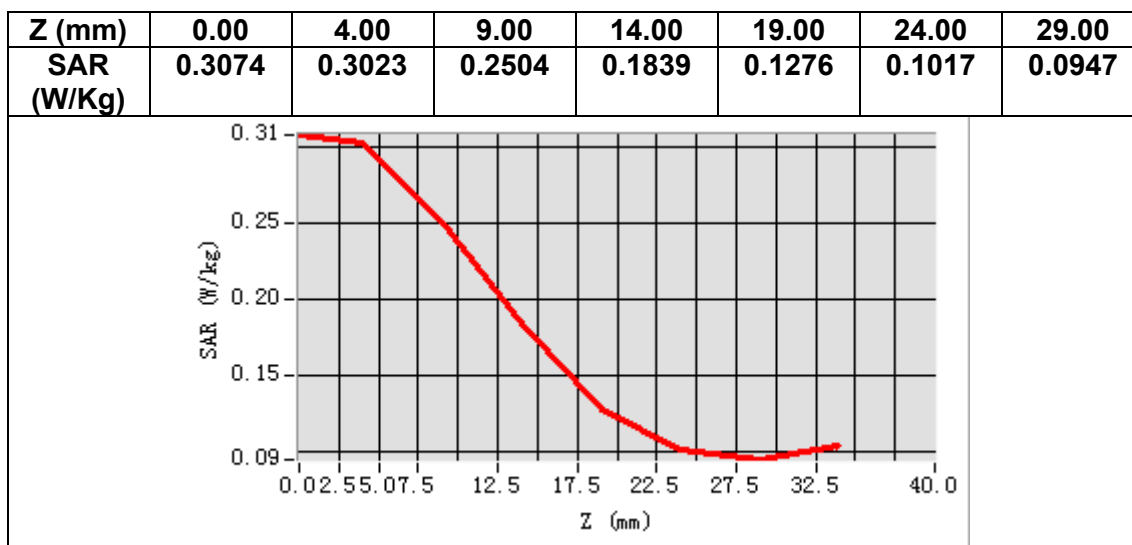

MEASUREMENT 7

Date of measurement: 6/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.213741
Relative permittivity (imaginary part)	13.599372
Conductivity (S/m)	1.915245
Variation (%)	-0.280000

SURFACE SAR

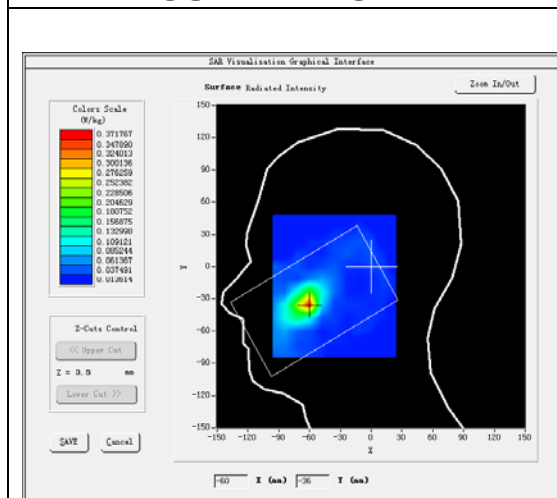



VOLUME SAR

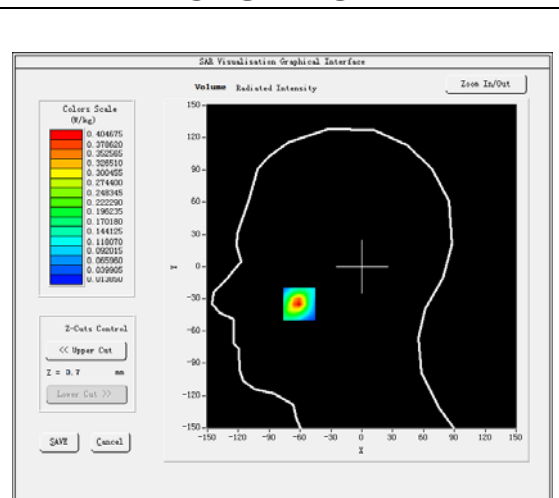

Maximum location: X=-61.00, Y=-35.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.155869
SAR 1g (W/Kg)	0.362686

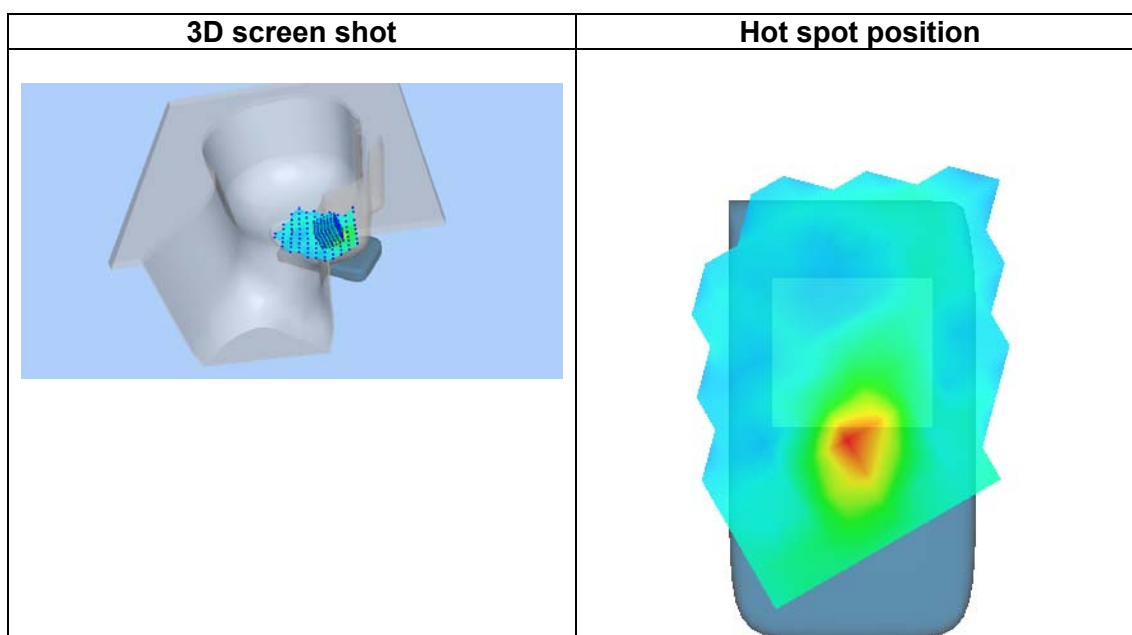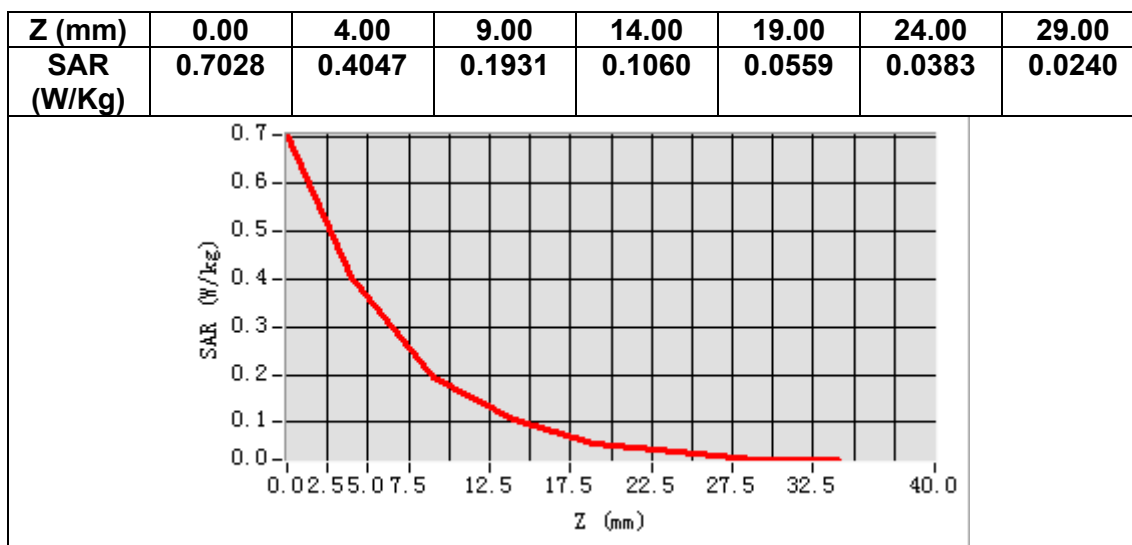

MEASUREMENT 8

Date of measurement: 6/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.845842
Relative permittivity (imaginary part)	13.813172
Conductivity (S/m)	1.991399
Variation (%)	1.360000

SURFACE SAR

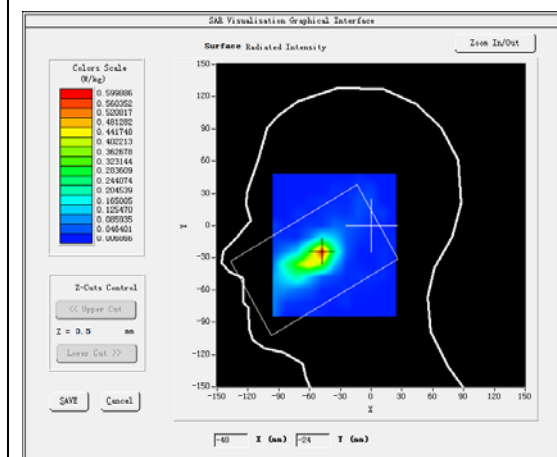



VOLUME SAR

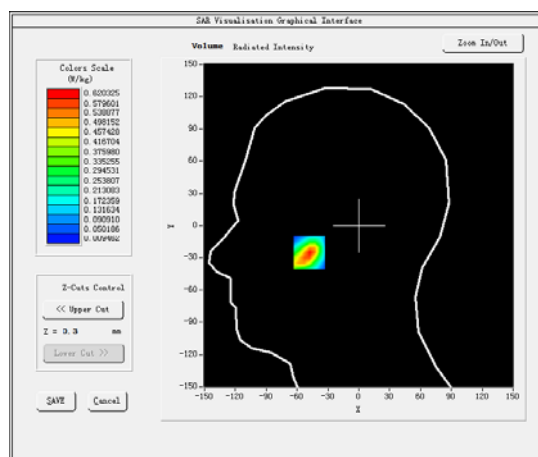

Maximum location: X=-48.00, Y=-25.00

SAR Peak: 1.05 W/kg

SAR 10g (W/Kg)	0.246291
SAR 1g (W/Kg)	0.553255

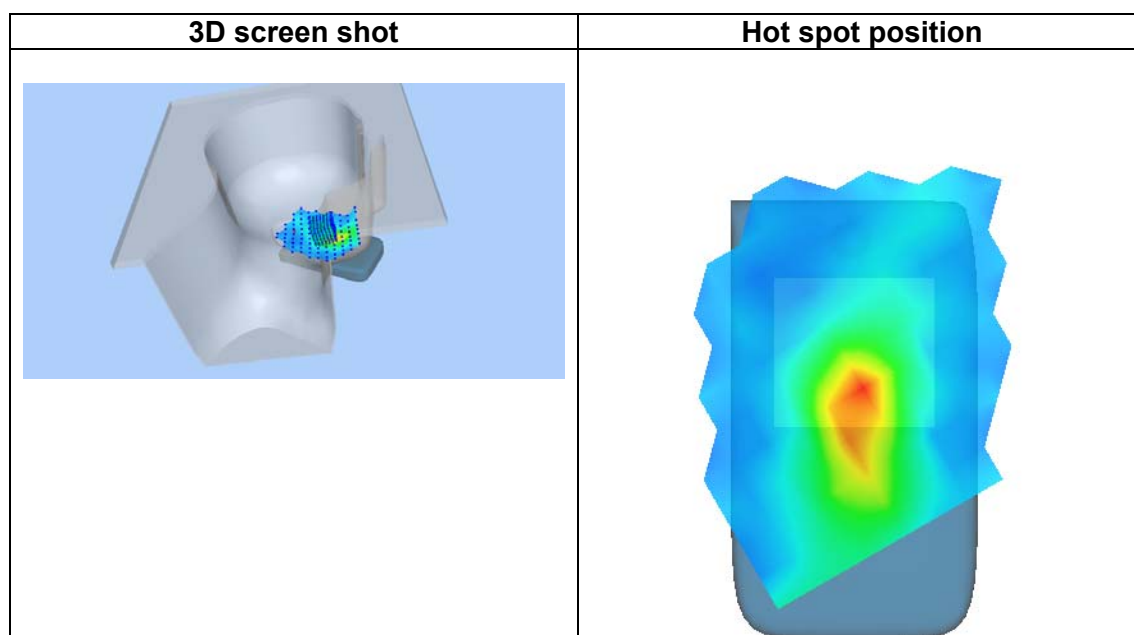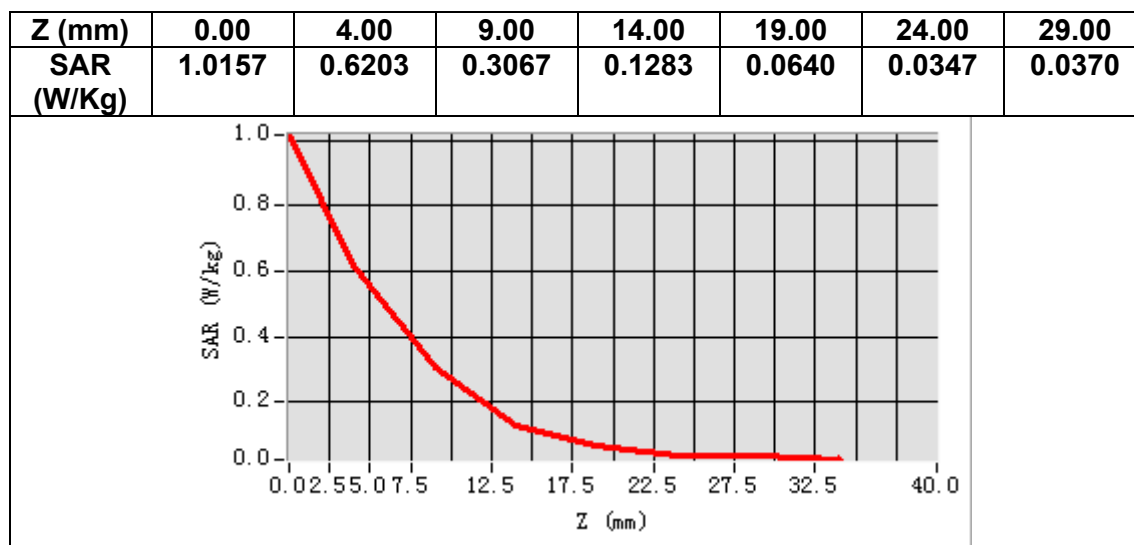

MEASUREMENT 9

Date of measurement: 9/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.325981
Relative permittivity (imaginary part)	13.682247
Conductivity (S/m)	1.326418
Variation (%)	0.120000

SURFACE SAR

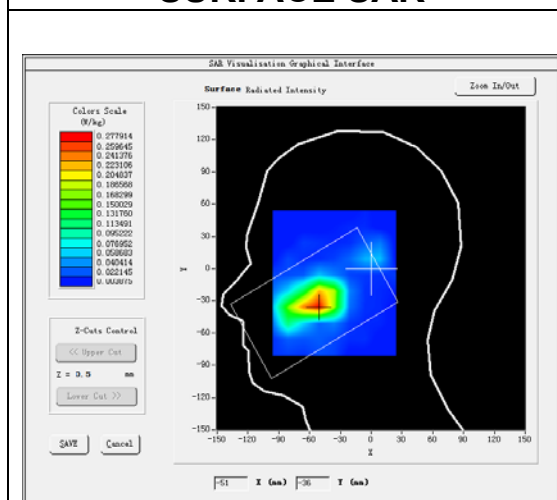



VOLUME SAR

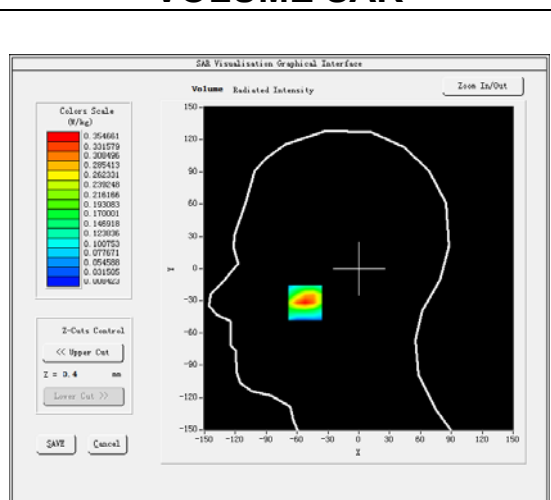

Maximum location: X=-52.00, Y=-32.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.176719
SAR 1g (W/Kg)	0.331586

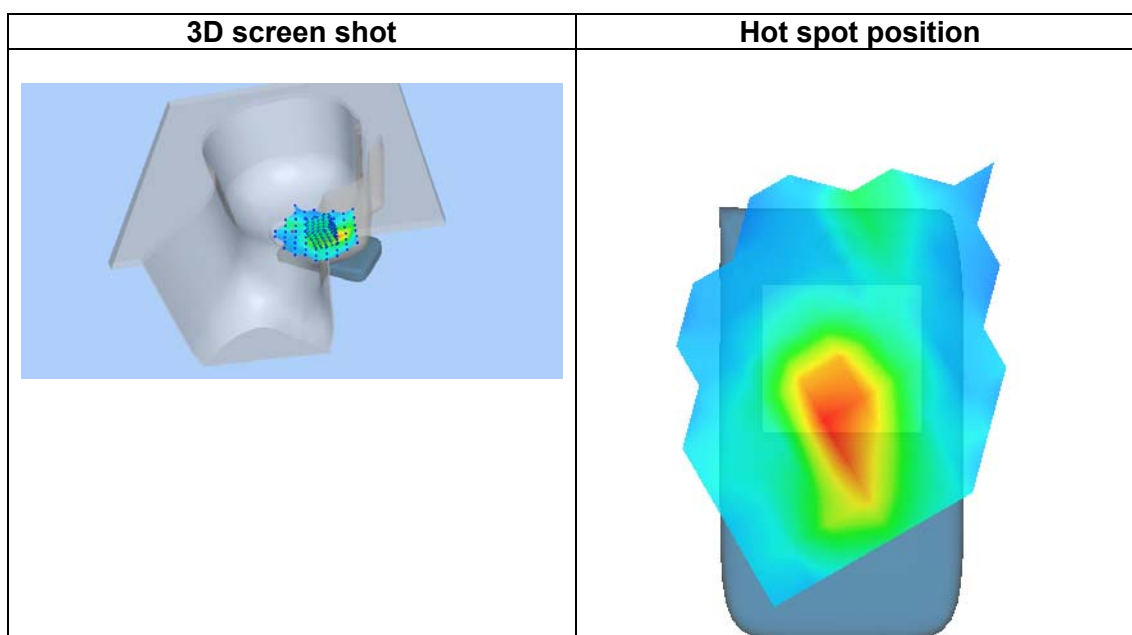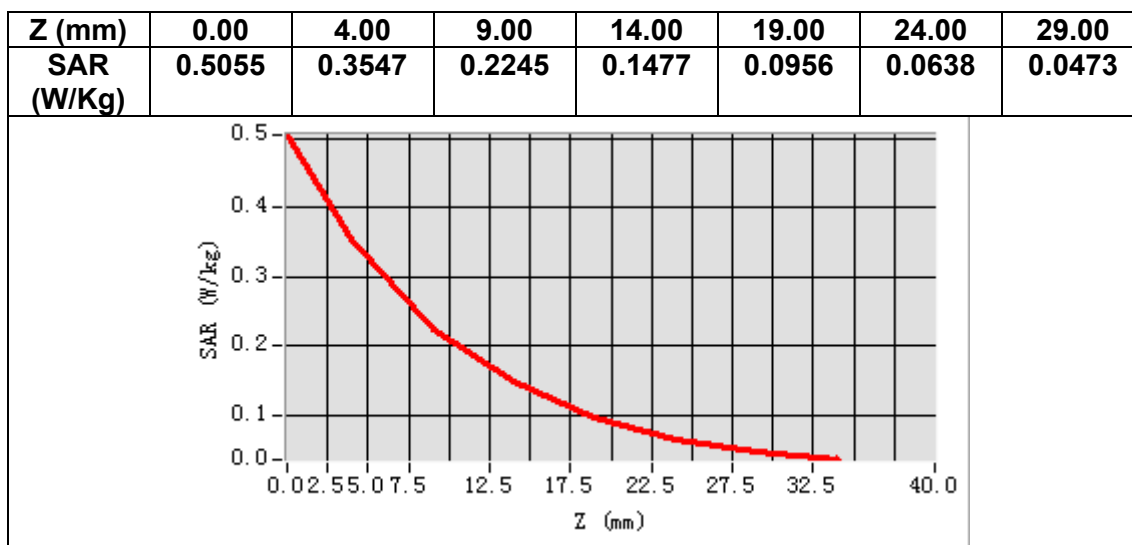

13. Appendix D. Calibration Certificate

Table of contents
E Field Probe - 3423-EPGO-426
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.261.11.23.BES.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 3423-EPGO-426

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 09/18/2023



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Cyrille ONNEE	Measurement Responsible	9/18/2023	
<i>Checked & approved by:</i>	Jérôme Luc	Technical Manager	9/18/2023	
<i>Authorized by:</i>	Yann Toutain	Laboratory Director	9/19/2023	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2023.09.19
09:08:14 +02'00'

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Name</i>	<i>Date</i>	<i>Modifications</i>
A	Cyrille ONNEE	9/18/2023	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Sensitivity	4
3.2	Linearity	5
3.3	Isotropy	5
3.4	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Results	6
5.1	Calibration in air	6
5.2	Calibration in liquid	7
6	Verification Results	8
7	List of Equipment	9



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	3423-EPGO-426
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.261 MΩ Dipole 2: R2=0.213 MΩ Dipole 3: R3=0.233 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta} - e^{-(d_{be} + d_{step})/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

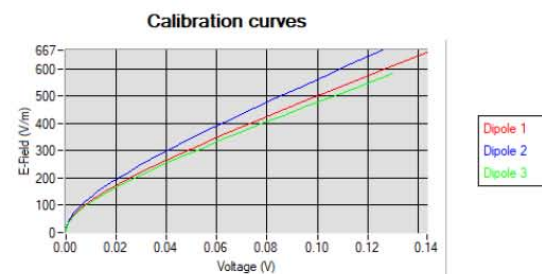

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

V_i =voltage readings on the 3 channels of the probe

DCP_i =diode compression point given below for the 3 channels of the probe

$Norm_i$ =dipole sensitivity given below for the 3 channels of the probe



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.78	0.62	0.85

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
105	108	107

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$\text{ConvF} = \frac{E_{\text{liquid}}^2}{E_{\text{air}}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{\text{liquid}}^2 = \frac{\rho \text{ SAR}}{\sigma}$$

where

σ =the conductivity of the liquid

ρ =the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$\text{SAR} = c \frac{dT}{dt}$$

where

c =the specific heat for the liquid

dT/dt =the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$\text{SAR} = \frac{4P_W}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

a =the larger cross-sectional of the waveguide

b =the smaller cross-sectional of the waveguide

δ =the skin depth for the liquid in the waveguide

P_W =the power delivered to the liquid





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.


Liquid	Frequency (MHz*)	ConvF
HL750	750	2.37
HL850	835	2.32
HL900	900	2.23
HL1800	1800	2.45
HL1900	1900	2.63
HL2000	2000	2.83
HL2300	2300	2.81
HL2450	2450	2.85
HL2600	2600	2.65
HL3300	3300	2.21
HL3500	3500	2.20
HL3700	3700	2.11
HL3900	3900	2.40
HL4200	4200	2.40
HL4600	4600	2.33
HL4900	4900	2.37
HL5200	5200	2.07
HL5400	5400	2.11
HL5600	5600	2.20
HL5800	5800	2.04

(*) Frequency validity is ± 50 MHz below 600 MHz, ± 100 MHz from 600 MHz to 6 GHz and ± 700 MHz above 6 GHz

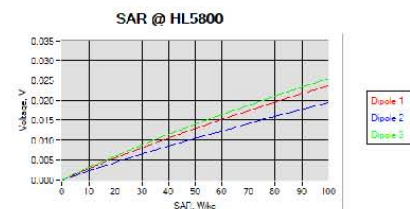


6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is ± 0.2 dB for linearity and ± 0.15 dB for axial isotropy.

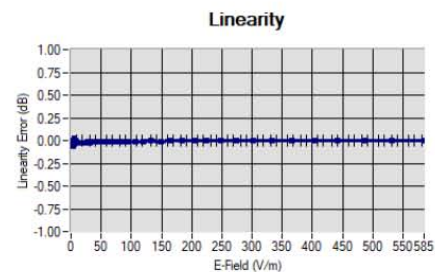

Linearity: $\pm 1.42\%$ (± 0.06 dB)



Isotropy: $\pm 0.21\%$ (± 0.01 dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
CALIPROBE Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer	Agilent 8753ES	MY40003210	10/2019	10/2023
Network Analyzer – Calibration kit	HP 85033D	3423A08186	06/2021	06/2027
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Fluoroptic Thermometer	LumaSense Luxtron 812	94264	09/2022	09/2025
Coaxial cell	MVG	SN 32/16 COAXCELL_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG2_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G600_1	Validated. No cal required.	Validated. No cal required.

Page: 9/10

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Waveguide	MVG	SN 32/16 WG4_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G900_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG6_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG8_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800B_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800H_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG10_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_3G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG12_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_5G000_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG14_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_7G000_1	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.24.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA**

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 03/15DIP0G835-347

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon

29280 PLOUZANE - FRANCE

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.