



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2018-07-06

Test Report

Report No.: CQASZ20250601449E-02
Applicant: Shenzhen Jinmeiyi Technology Co.,Ltd.
Address of Applicant: Floor 2, Building 1, Baoli Industrial Zone, Longgang District, Shenzhen, Guangdong, China
Equipment Under Test (EUT):
Product: Wireless carplay and android auto adapter
Model No.: CA-15, CA-16, CA-20, CA-13, CA-25, CA-26, CA-27, CA-28, CA-29, CA-30
Test Model No.: CA-19
Brand Name: N/A
FCC ID: 2BG4C-CA-19
Standards: 47 CFR Part 15, Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Date of Receipt: 2025-06-27
Date of Test: 2025-06-27 to 2025-07-08
Date of Issue: 2025-07-23
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above.

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250601449E-02	Rev.01	Initial report	2025-07-23

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013; KDB789033	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.207	ANSI C63.10-2013; KDB789033	N/A
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.407 (a)	ANSI C63.10-2013; KDB789033	PASS
Emission Bandwidth	47 CFR Part 15 Subpart C Section 15.407 (a)(e)	ANSI C63.10-2013; KDB789033	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	ANSI C63.10-2013; KDB789033	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.209 & 15.407(b)	ANSI C63.10-2013; KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	ANSI C63.10-2013; KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	ANSI C63.10-2013; KDB789033	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

Since the EUT is powered by Vehicle-mounted, this AC power line conducted emission test should be not applicable


3 Content

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENT	4
4 TEST REQUIREMENT	5
4.1 TEST SETUP	5
4.1.1 For Conducted test setup	5
4.1.2 For Radiated Emissions test setup	5
4.1.3 For Conducted Emissions test setup	6
4.2 TEST ENVIRONMENT	6
4.3 TEST CONDITION	7
5 GENERAL INFORMATION	9
5.1 CLIENT INFORMATION	9
5.2 GENERAL DESCRIPTION OF EUT	9
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	10
5.4 DESCRIPTION OF SUPPORT UNITS	11
5.5 TEST CONFIGURATION	11
5.6 TEST LOCATION	12
5.7 TEST FACILITY	12
5.8 DEVIATION FROM STANDARDS	12
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	12
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	12
5.11 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	12
6 EQUIPMENT LIST	13
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Emission Bandwidth	15
Appendix B): Maximum Conduct Output Power	20
Appendix C): Maximum Power Spectral Density	30
Appendix D): Band Edge Measurements	35
7.1.1 Test Result B1	37
7.1.2 Test Graphs B1	38
Appendix E): Frequency Stability	40
Appendix F): Antenna Requirement	42
Appendix G): Operation in the absence of information to the transmit	43
Appendix I): Restricted bands around fundamental frequency (Radiated Emission)	44
Appendix J): Radiated Spurious Emissions	46
8 PHOTOGRAPHS - EUT TEST SETUP	52
8.1 RADIATED SPURIOUS EMISSION	52
8.2 RF CONDUCTED MEASUREMENT	54
9 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	55

4 Test Requirement

4.1 Test setup

4.1.1 For Conducted test setup

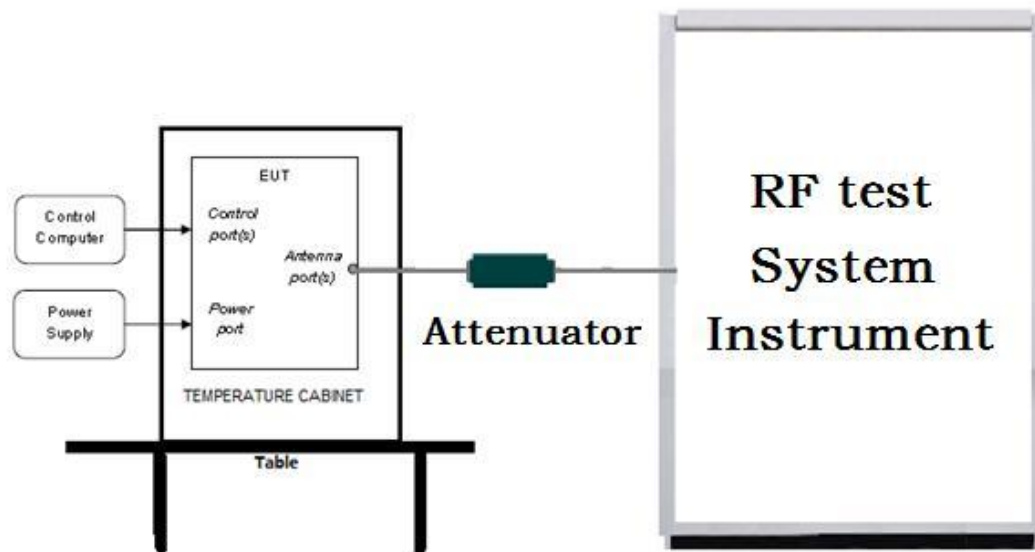

4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

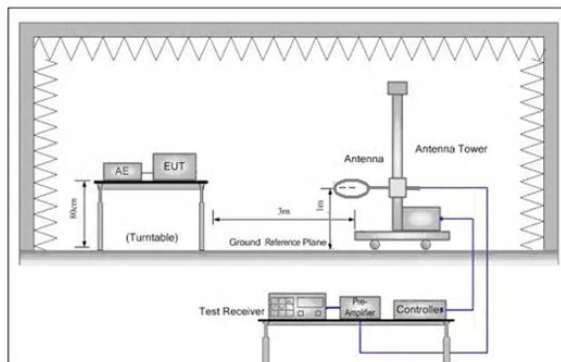


Figure 1. Below 30MHz

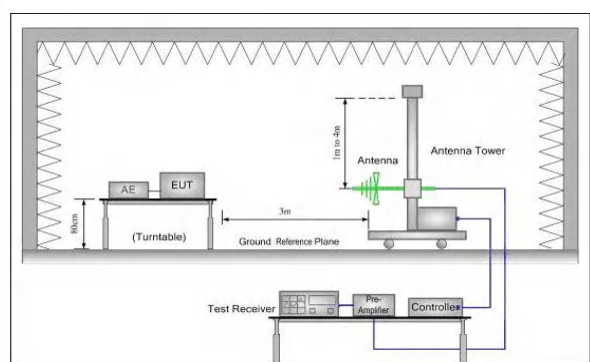


Figure 2. 30MHz to 1GHz


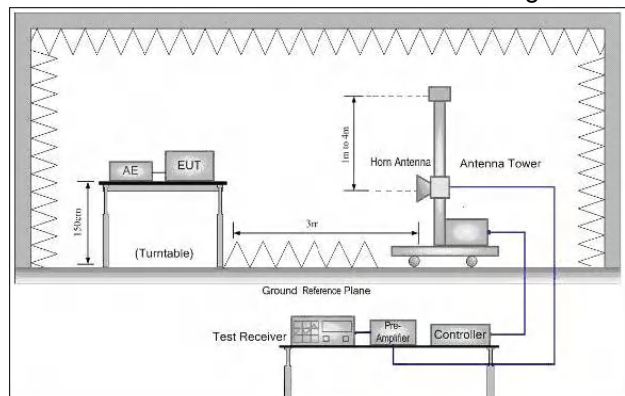


Figure 3. Above 1GHz

4.1.3 For Conducted Emissions test setup

Conducted Emissions setup

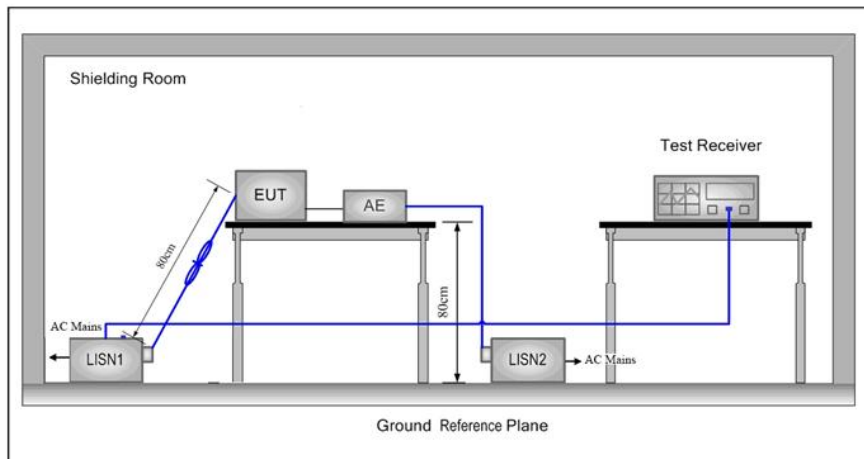

4.2 Test Environment

Operating Environment:		
Conducted Emissions:		
Temperature:	25.6 °C	
Humidity:	60 % RH	
Atmospheric Pressure:	1009 mbar	
Radiated Emissions:		
Temperature:	25.5 °C	
Humidity:	54 % RH	
Atmospheric Pressure:	1009mbar	
Radio conducted item test (RF Conducted test room):		
Temperature:	25.3 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1009 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	5
TL/VL	-30	4.5
TH/VL	50	4.5
TL/VH	-30	5.5
TH/VH	50	5.5

Remark:

1)The EUT just work in such extreme temperature of -30 °C to 50 °C and the extreme voltage of 4.5V to 5.5V, so here the EUT is tested in the temperature of -30 °C to 50 °C and the voltage of 4.5V to 5.5V.

2)VN: Normal Voltage; TN: Normal Temperature;


TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;

VL : Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz

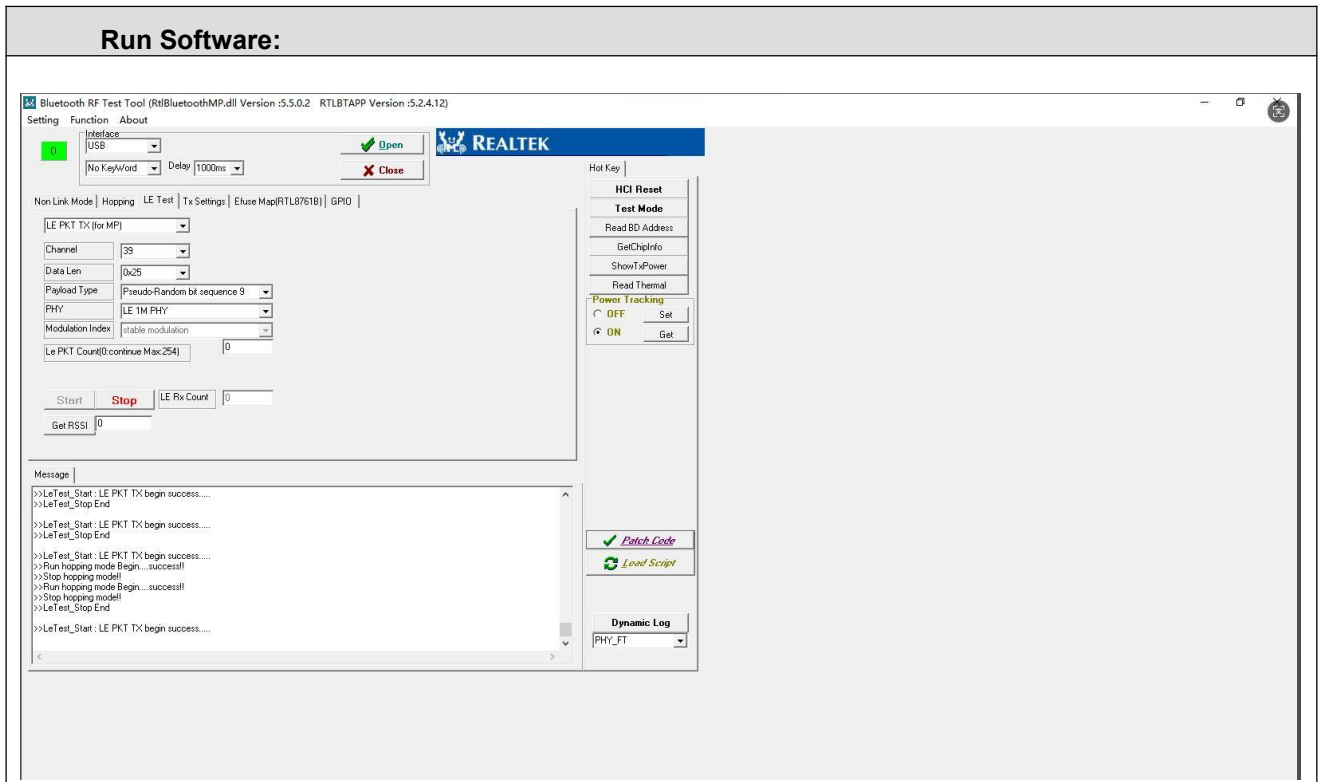

Test mode:

Pre-scan under all rate at lowest channel for Ant1

Through Pre-scan, 6Mbps is the worst case of 802.11a (20M); MCS0 is the worst case of 802.11ac (20M).

5 General Information

5.1 Client Information

Applicant:	Shenzhen Jinmeiyi Technology Co.,Ltd.
Address of Applicant:	Floor 2, Building 1, Baoli Industrial Zone, Longgang District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Jinmeiyi Technology Co.,Ltd.
Address of Manufacturer:	Floor 2, Building 1, Baoli Industrial Zone, Longgang District, Shenzhen, Guangdong, China
Factory:	Shenzhen Jinmeiyi Technology Co.,Ltd.
Address of Factory:	Floor 2, Building 1, Baoli Industrial Zone, Longgang District, Shenzhen, Guangdong, China

5.2 General Description of EUT

Product Name:	Wireless carplay and android auto adapter
Model No.:	CA-15, CA-16, CA-20, CA-13, CA-25, CA-26, CA-27, CA-28, CA-29, CA-30
Test Model No.:	CA-19
Trade Mark:	N/A
Software Version:	V1.0
Hardware Version:	V1.0
EUT Power Supply:	Power supply DC5V
EUT Supports Radios application:	U-NII-1: 5.15-5.25GHz
EUT Type:	Client devices
Simultaneous Transmission	☒ Simultaneous TX is supported and evaluated in this report. ☐ Simultaneous TX is not supported.

5.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/ac(20M): 5150MHz ~5250 MHz
Channel Numbers:	IEEE 802.11a/ac(20M): 5150MHz ~5250MHz/ 4 channel
Type of Modulation:	OFDM
Sample Type:	☒ Mobile ☐ Portable
Test Software of EUT:	RTLBTAPP
Antenna Type:	PCB antenna
Antenna gain:	0.6dBi
Cable loss:	1.0 dB

Model No.:CA-15,CA-16,CA-20,CA-13,CA-25,CA-26,CA-27,CA-28,CA-29,CA-30

The circuit design, layout, components used and internal wiring are all the same, except for the appearance difference

Operation Frequency each of channel


(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
Laptop	Apple	Macbook	/	CQA

5.5 Test configuration

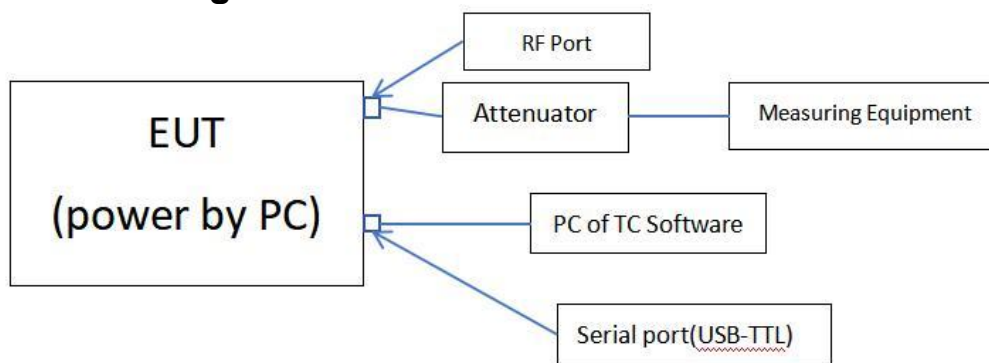

5.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.7 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	3×10^{-8}
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2024/9/2	2025/9/1
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2024/9/2	2025/9/1
Power meter	R&S	NRVD	CQA-029	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2	2025/9/1

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

7 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15E	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E

Appendix A): Emission Bandwidth

26dB Emission bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II C 1

6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)


Test Method: KDB 789033 D02 II C 2

Limit: ≥ 500 kHz

Test Procedure:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Setup Diagram

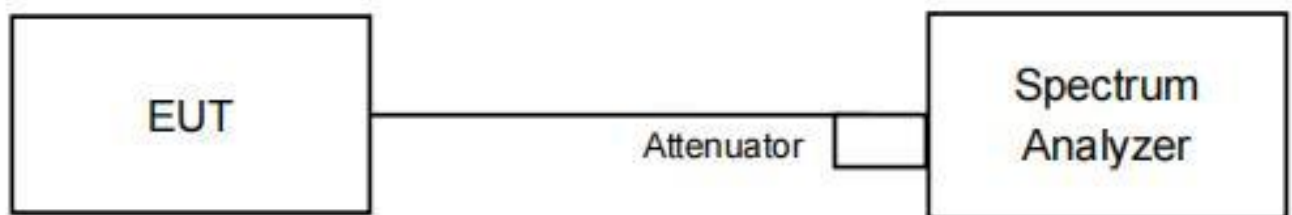


Result Table

TestMode	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	5180	20.44	5169.96	5190.40	---	---
	5200	20.32	5189.60	5209.92	---	---
	5240	19.92	5230.52	5250.44	---	---
11AC20SISO	5180	20.44	5170.00	5190.44	---	---
	5200	20.08	5189.88	5209.96	---	---
	5240	19.92	5230.40	5250.32	---	---


Test Graph

11A_Ant1_5180

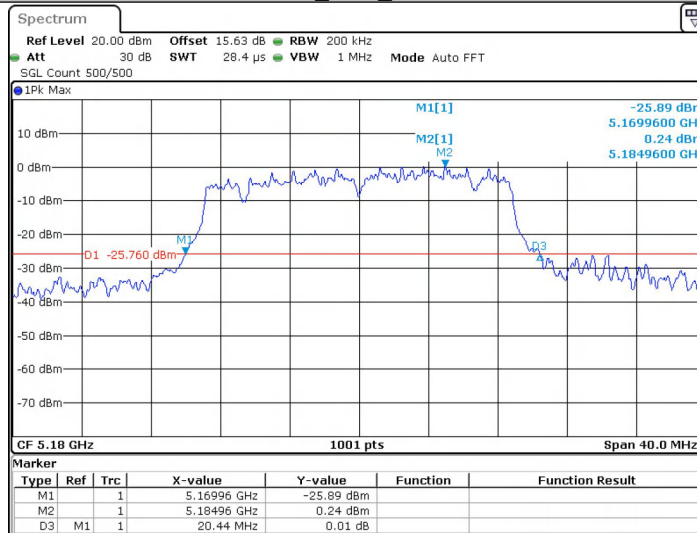

Date: 8 JUL 2025 15:52:47


11A_Ant1_5200

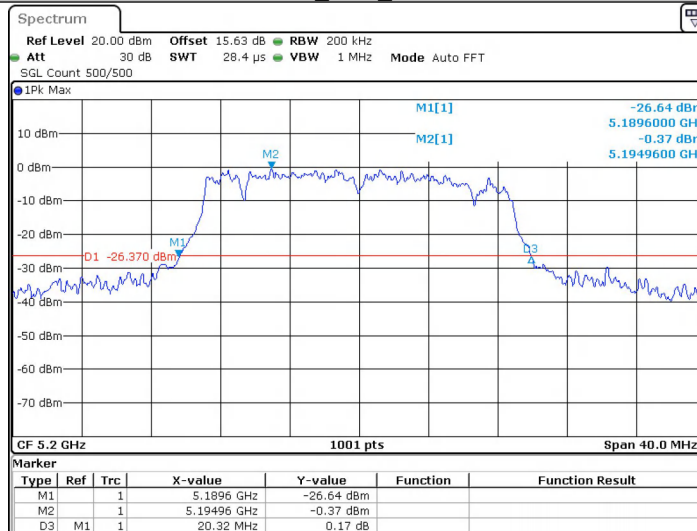

Date: 8 JUL 2025 15:55:22


11A_Ant1_5240



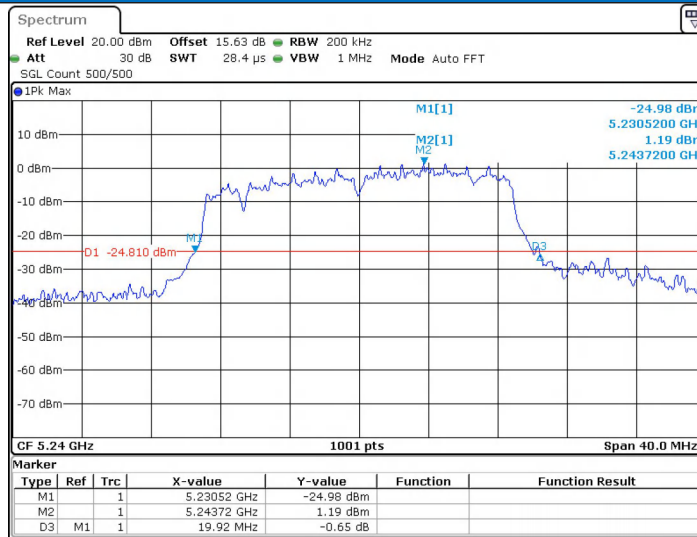


Date: 8 JUL 2025 15:56:37

11AC20SISO_Ant1_5180

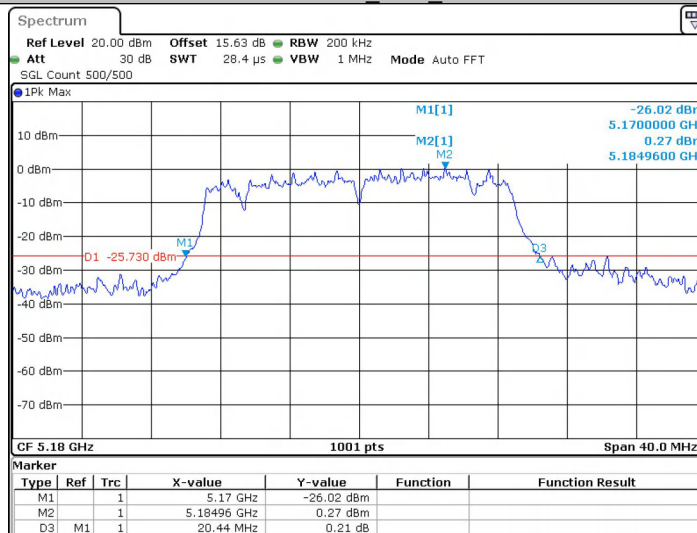


Date: 8 JUL 2025 15:58:27

11AC20SISO_Ant1_5200

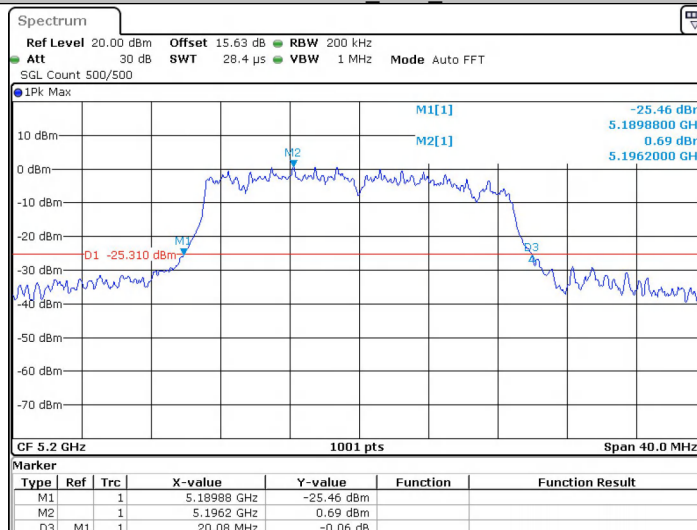

Date: 8 JUL 2025 16:01:02

11AC20SISO_Ant1_5240

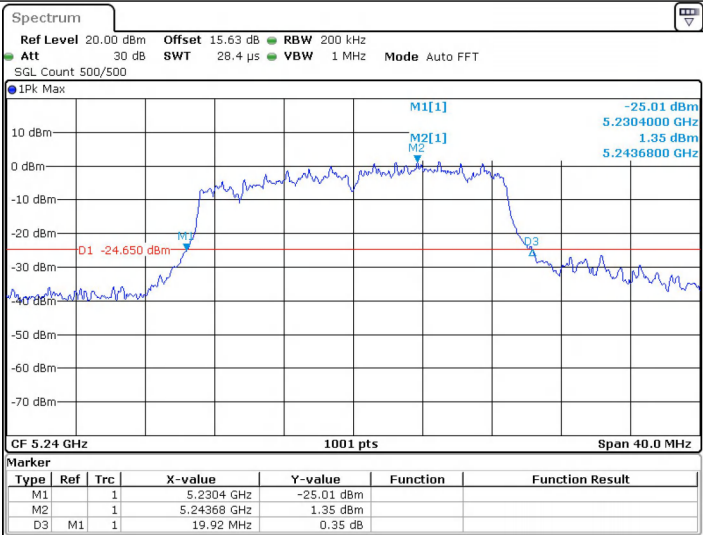

Date: 8 JUL 2025 16:02:20

Appendix B): Maximum Conduct Output Power

1.Duty Cycle (x)

Test Requirement KDB 789033 D02 II B 1

Test Method: KDB 789033 II B 1

Test Procedure:


Set RBW = 20MHz

Set VBW = 40MHz

Set detector = peak.

Set span =0Hz


Test Setup Diagram

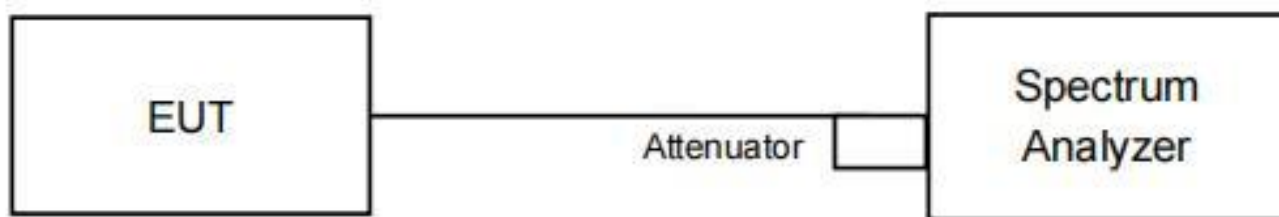

Measurement Data


Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
11A	0.23	0.73	31.51	5.02
11AC20	0.22	0.72	30.56	5.15

11A

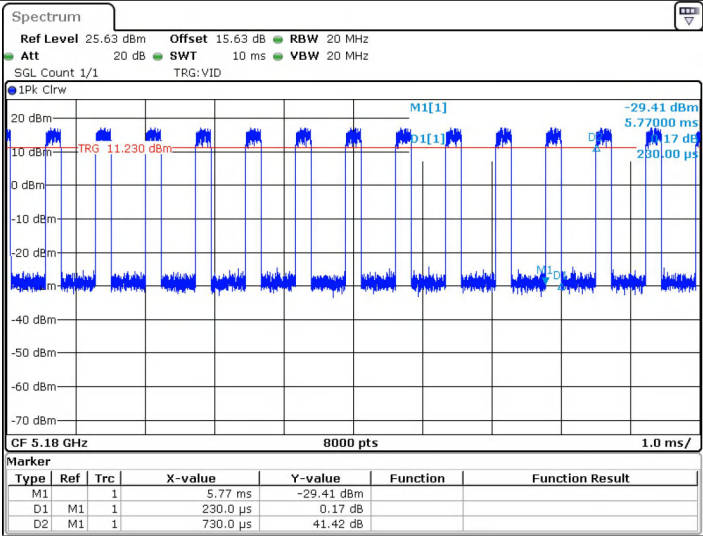

Date: 8 JUL 2025 16:22:55

11AC20

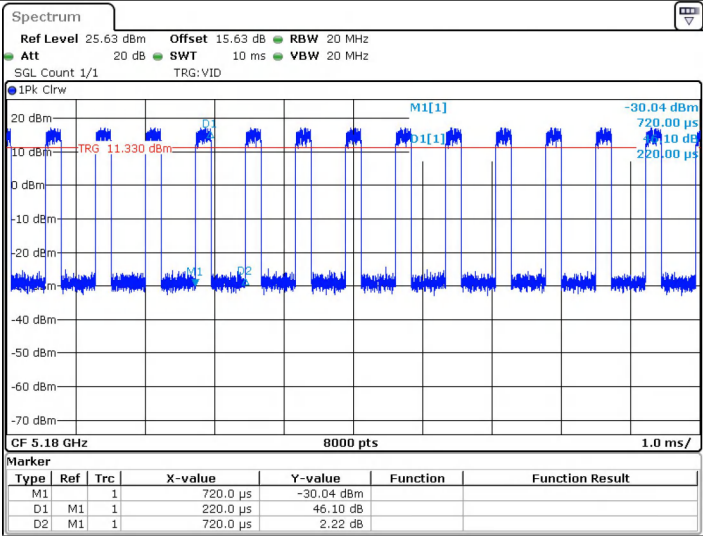

Date: 8 JUL 2025 16:24:52

2. Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:


Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Procedure:

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (1) Set RBW = 1 MHz.
- (2) Set VBW $\geq$ 3 MHz.
- (3) Detector = power average
- (4) Sweep time = auto.
- (5) Add duty cycle to the measured average power.


Test Setup Diagram

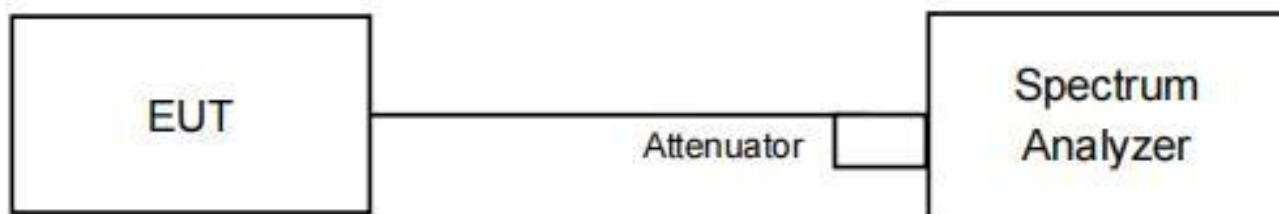

Measurement Data


Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	4.85	31.51	5.02	9.87	≤23.98	PASS
		5200	2.14	31.51	5.02	7.16	≤23.98	PASS
		5240	5.25	31.51	5.02	10.27	≤23.98	PASS
11AC20SISO	Ant1	5180	4.81	30.56	5.15	9.96	≤23.98	PASS
		5200	2.30	30.56	5.15	7.45	≤23.98	PASS
		5240	5.28	30.56	5.15	10.43	≤23.98	PASS

11A_Ant1_5180

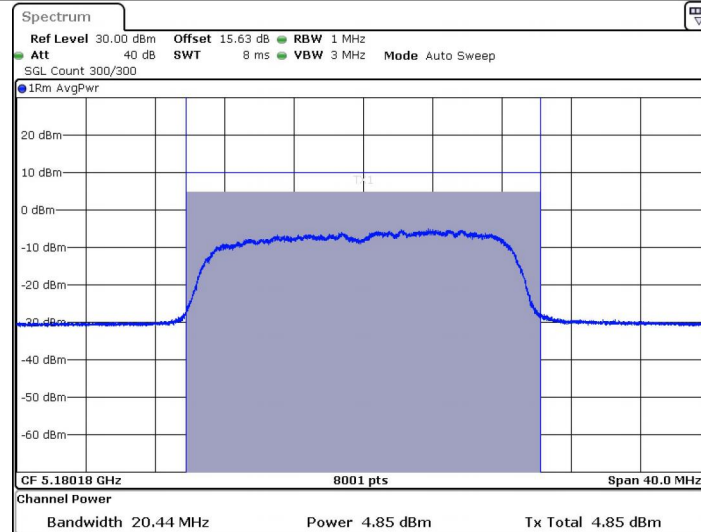


Date: 8 JUL 2025 15:53:15

11A_Ant1_5200

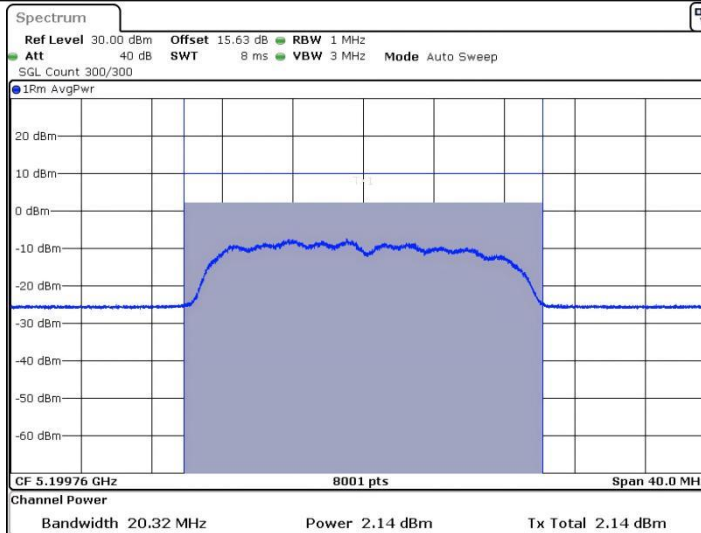


Date: 8 JUL 2025 16:43:35

11A_Ant1_5240

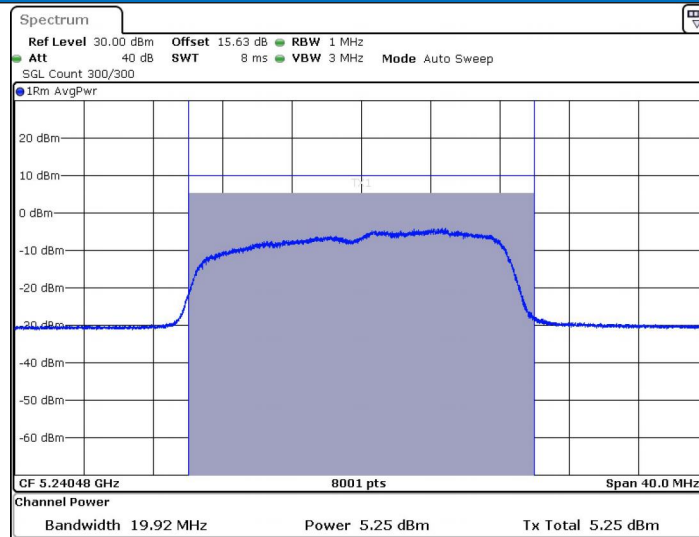


Date: 8 JUL 2025 15:57:05

11AC20SISO_Ant1_5180

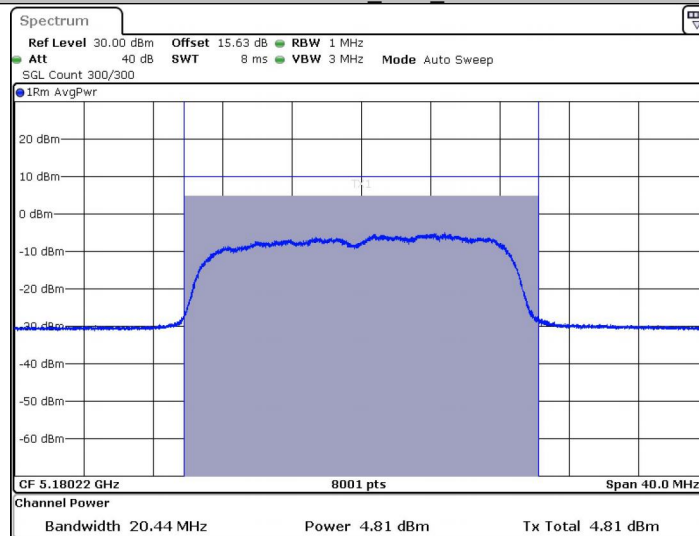


Date: 8 JUL 2025 15:58:54

11AC20SISO_Ant1_5200

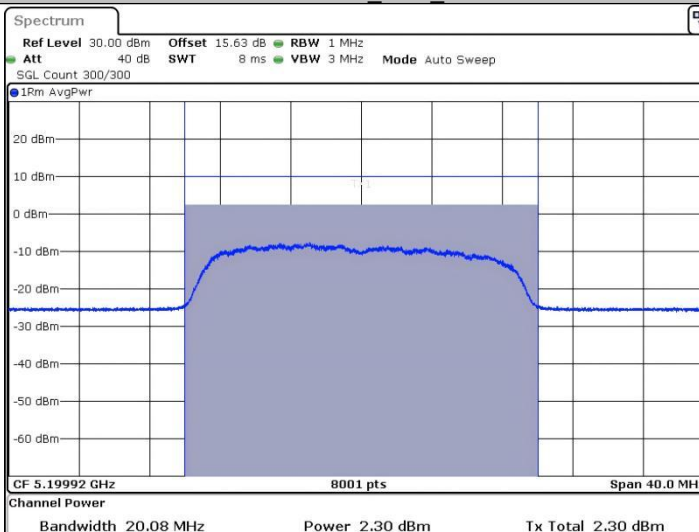

Date: 8 JUL 2025 18:45:14

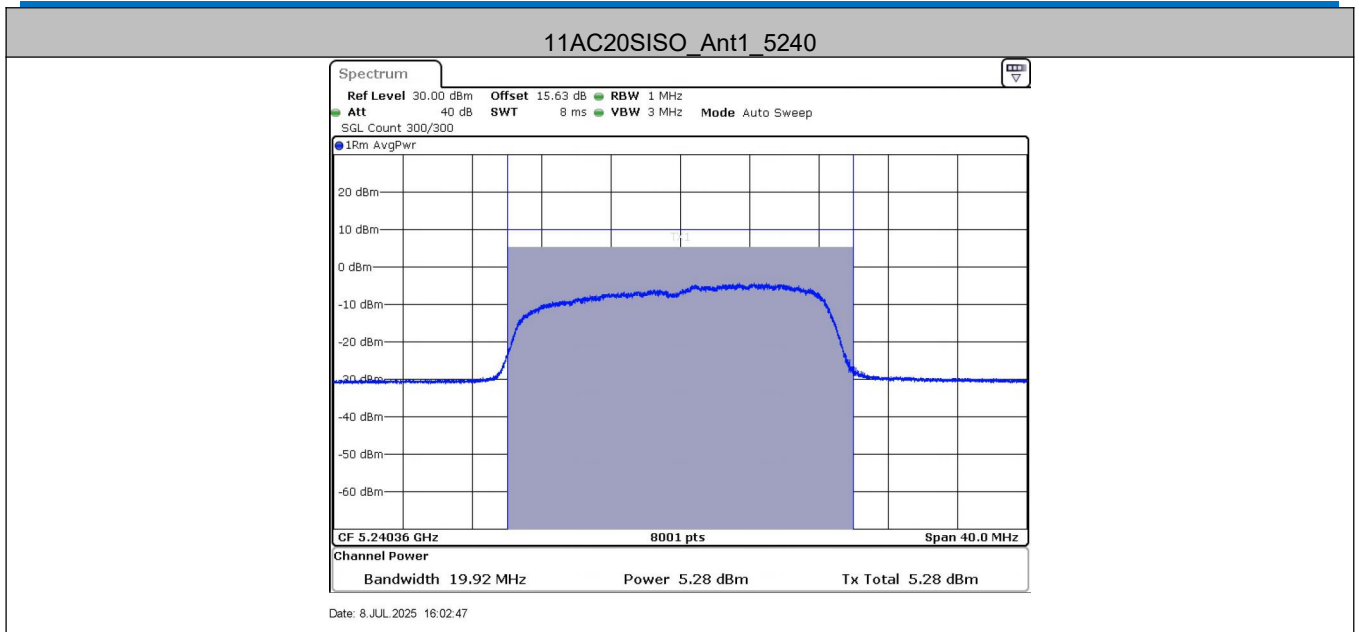

Remark:

$Av.Power = Meas.Level + 10 \log (1/duty \ cycle)$

$E.i.r.p = Av.Power + G$,

G = antenna gain in dBi.

Appendix C): Maximum Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II F

Test Procedure:

For 5150-5725MHz:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on operation frequency individually.
3. Set RBW = 1MHz.
4. Set the VBW $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold.


For 5725-5850MHz:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on operation frequency individually.
3. Set RBW = 500KHz.
4. Set the VBW $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold.

Limit:

Frequency band(MHz)	Limit
5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device
	$\leq 11\text{dBm}$ in 1MHz for client device
5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device
5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device
5725-5850	$\leq 30\text{dBm}$ in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

Test Setup Diagram

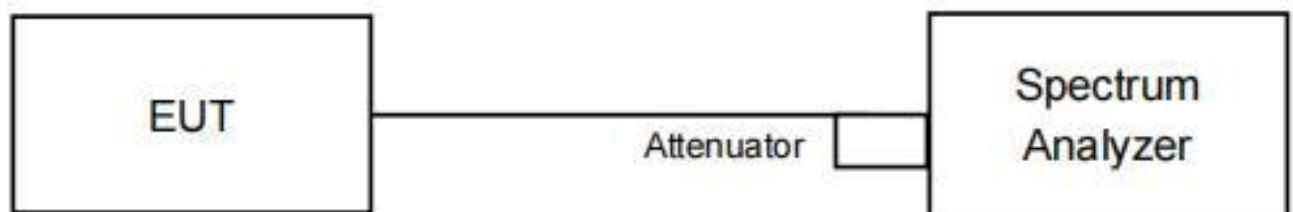


Result Table

TestMode	Freq(MHz)	Meas PSD [dBm/MHz]	DC Factor [dBm]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	5180	-5.00	5.02	0.02	≤11.00	PASS
	5200	-0.65	5.02	4.37	≤11.00	PASS
	5240	-4.83	5.02	0.19	≤11.00	PASS
11AC20SISO	5180	-5.87	5.15	-0.72	≤11.00	PASS
	5200	-0.09	5.02	5.06	≤11.00	PASS
	5240	-5.28	5.02	-0.13	≤11.00	PASS

Remark:


PSD = Meas PSD + Duty Cycle Factor

11A_Ant1_5180

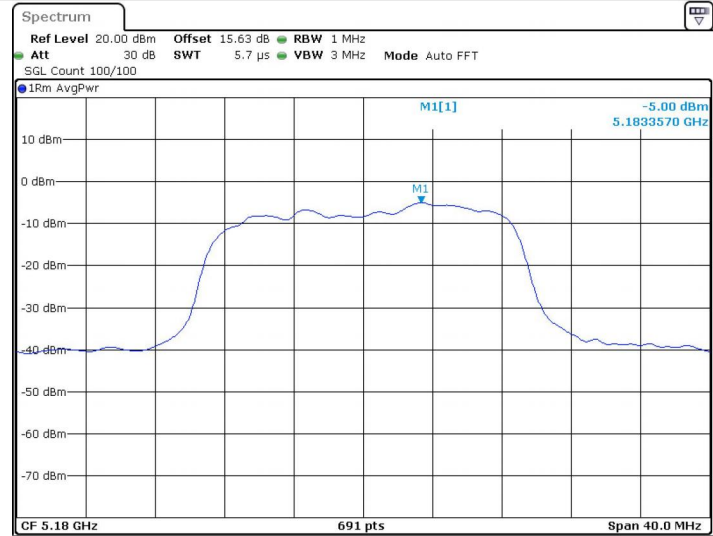


Date: 8 JUL 2025 15:53:21

11A_Ant1_5200

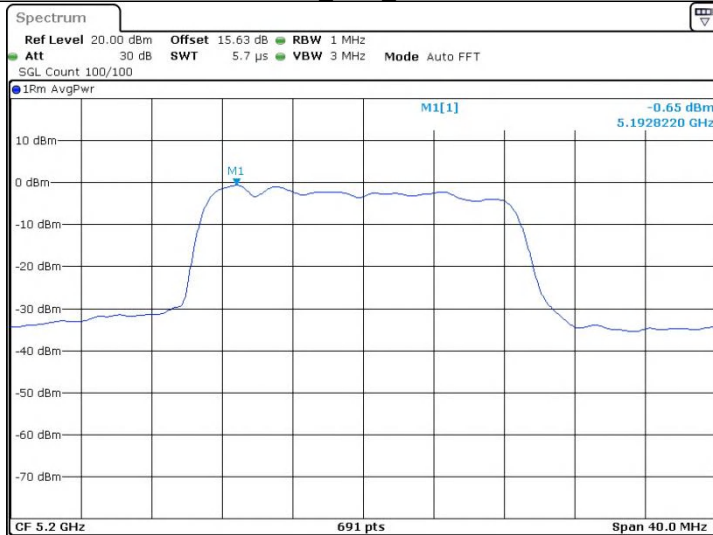


Date: 8 JUL 2025 15:55:55

11A_Ant1_5240

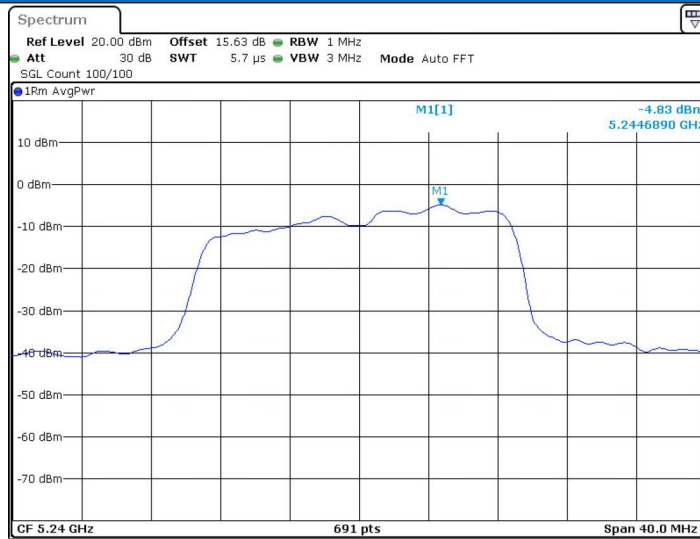


Date: 8 JUL 2025 15:57:10

11AC20SISO_Ant1_5180

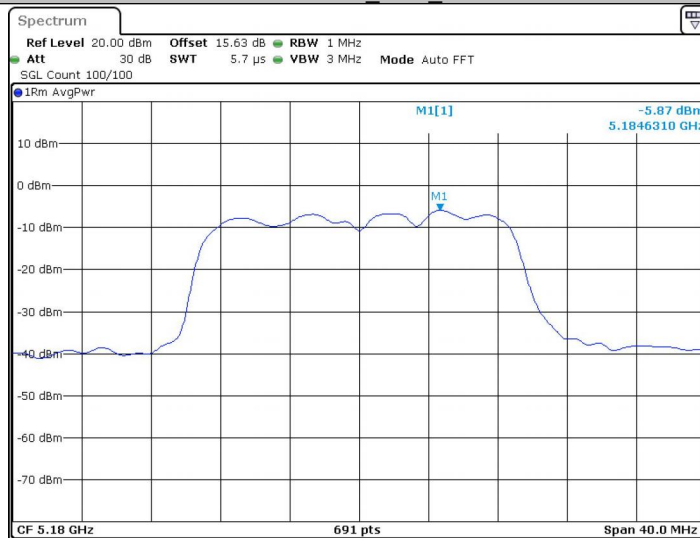


Date: 8 JUL 2025 15:59:00

11AC20SISO_Ant1_5200

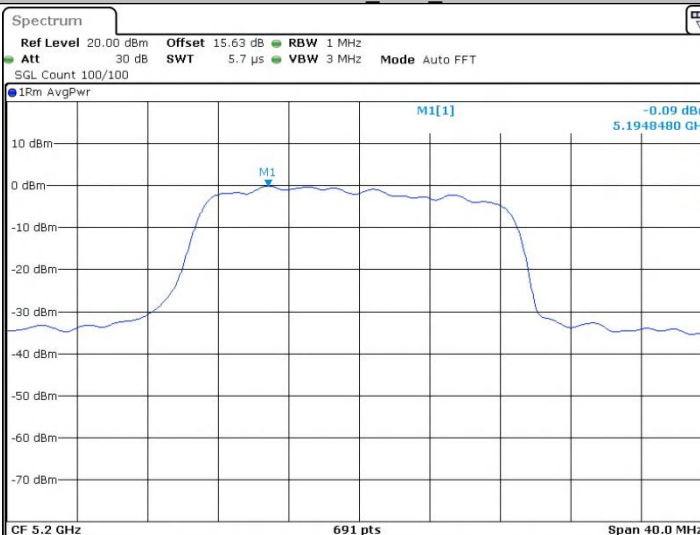

Date: 8 JUL 2025 16:01:36

11AC20SISO_Ant1_5240

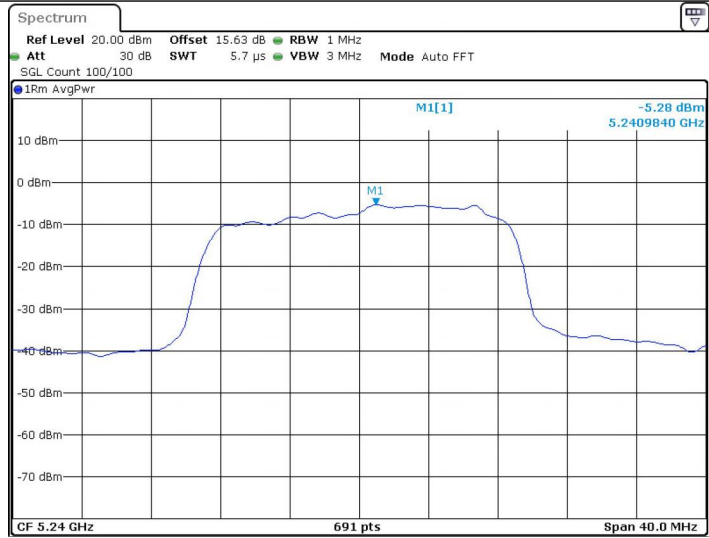

Date: 8 JUL 2025 16:02:53

Appendix D): Band Edge Measurements

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G


Test Procedure:

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

Limit:

For transmitters operating in the 5.15-5.25 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.25-5.35 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.47-5.725 GHz band:	All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.725-5.85 GHz band:	(i) All emissions shall be limited to a level of -27 dBm/MHz (68.2dBuV/m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz (105.2dBuV/m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz (110.8dBuV/m) at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz (122.2dBuV/m) at the band edge.


Test Setup Diagram

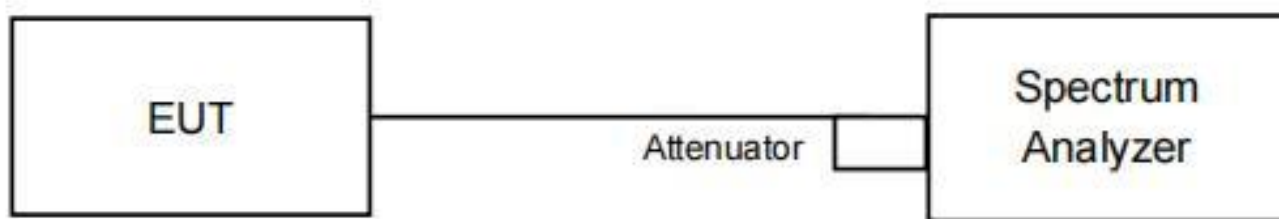


7.1.1 Test Result B1

TestMode	ChName	Freq(MHz)	Result[dBm]	Limit[dBm]	Verdict
11A	Low	5180	-36.77	≤ -27	PASS
	High	5240	-38.45	≤ -27	PASS
11AC20SISO	Low	5180	-36.67	≤ -27	PASS
	High	5240	-38.01	≤ -27	PASS


7.1.2 Test Graphs B1

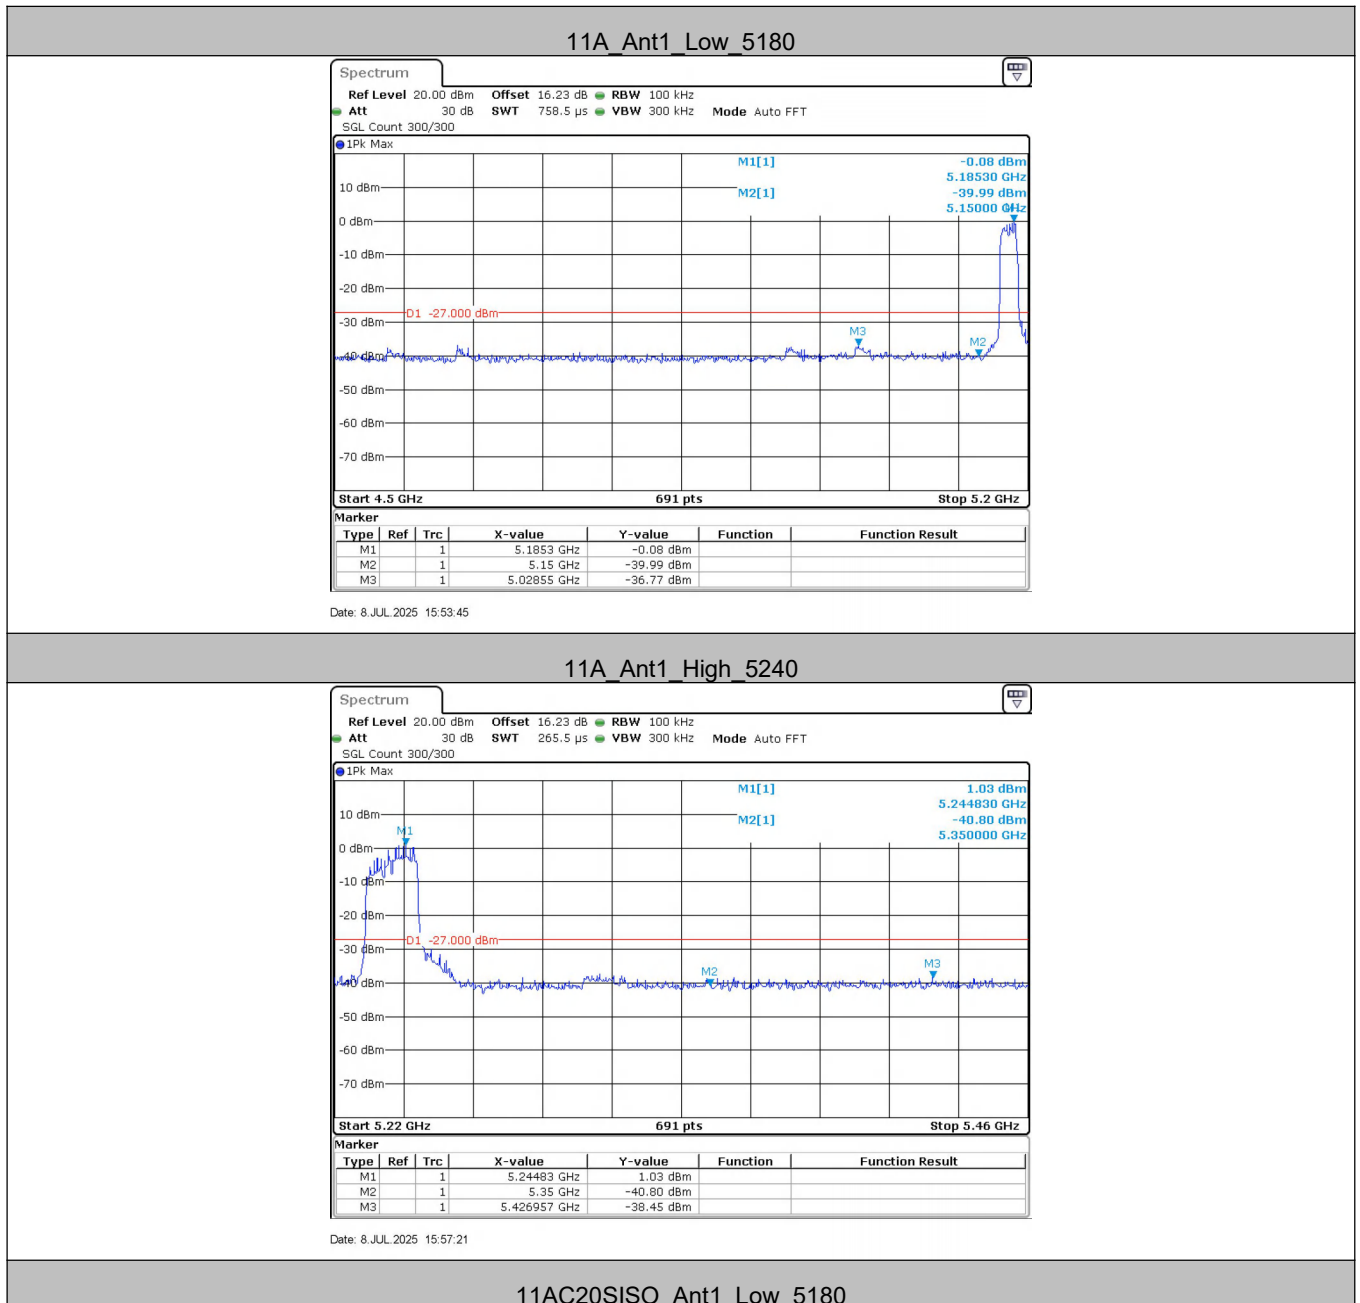

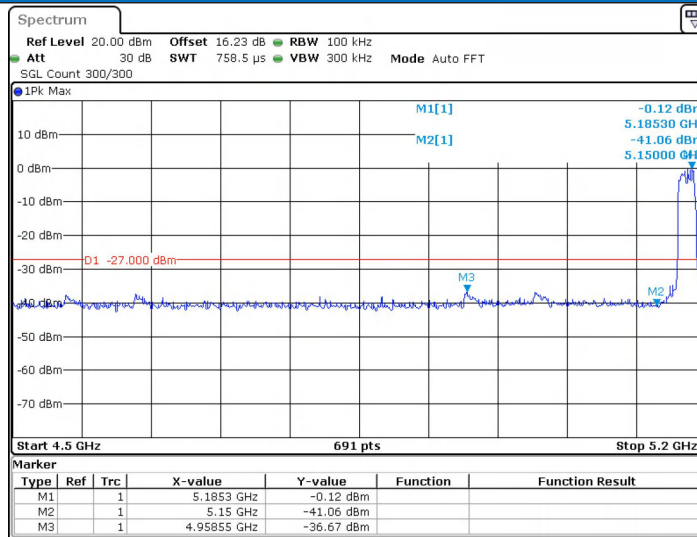

Date: 8 JUL 2025 15:59:24

11AC20SISO_Ant1_High_5240

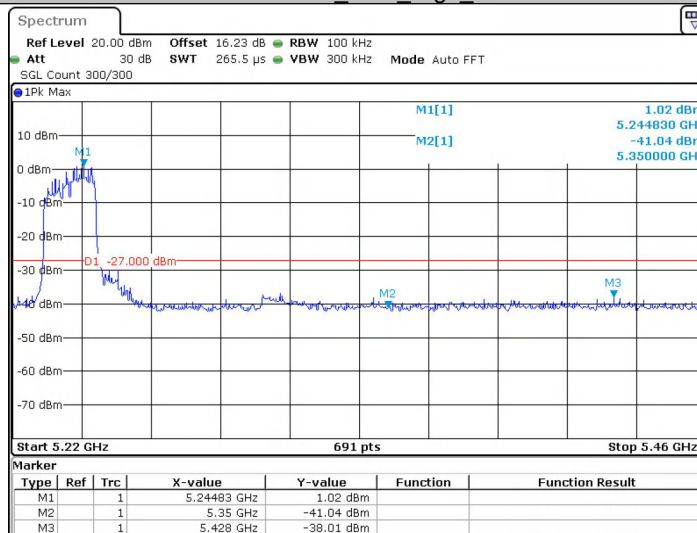

Date: 8 JUL 2025 16:03:04


Appendix E): Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Setup Diagram

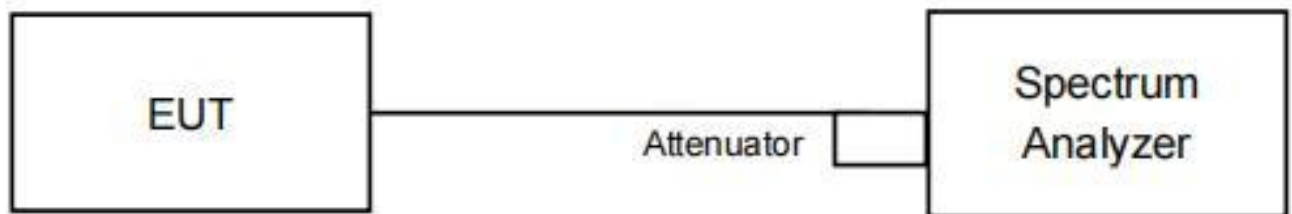

Measurement Data

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp	Voltage	Measured Frequency	Limit
(°C)		(MHz)	(MHz)
50	VN	5240.03	5150-5250
40		5240.02	5150-5250
30		5240.01	5150-5250
20		5240.02	5150-5250
10		5240.02	5150-5250
0		5240.01	5150-5250
-10		5240.02	5150-5250
-30		5240.03	5150-5250

Frequency Stability Versus Temp.			
Operating Frequency: 5180 MHz			
Temp.	Voltage	Measured Frequency	Limit
		(MHz)	(MHz)
TN	VL	5180.32	5150-5250
	VN	5180.14	5150-5250
	VH	5180.52	5150-5250

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

Appendix F): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.407(a)(1) (2) requirement:

The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is PCB antenna.

The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment

This is either permanently attachment or a unique coupling that satisfies the requirement.

Appendix G): Operation in the absence of information to the transmit**15.407(c) requirement:**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

Appendix I): Restricted bands around fundamental frequency (Radiated Emission)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3cm)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Worse case mode:		802.11a		Test channel:		36			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
5150.00	58.52	-3.63	54.89	74	-19.11	peak	H	1.5	124
5150.00	44.91	-3.63	41.28	54	-12.72	AVG	H	1.5	258
5150.00	60.18	-3.63	56.55	74	-17.45	peak	V	1.5	111
5150.00	46.30	-3.63	42.67	54	-11.33	AVG	V	1.5	74

Worse case mode:		802.11a		Test channel:		64			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
5350.00	58.28	-3.59	54.69	74	-19.31	peak	H	1.5	199
5350.00	44.62	-3.59	41.03	54	-12.97	AVG	H	1.5	336
5350.00	59.63	-3.59	56.04	74	-17.96	peak	V	1.5	198
5350.00	46.47	-3.59	42.88	54	-11.12	AVG	V	1.5	332

Worse case mode:		802.11ac(VHT20)		Test channel:		36			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
5150.00	58.31	-3.44	54.87	74	-19.13	peak	H	1.5	201
5150.00	44.30	-3.44	40.86	54	-13.14	AVG	H	1.5	207
5150.00	57.54	-3.44	54.10	74	-19.90	peak	V	1.5	229
5150.00	46.43	-3.44	42.99	54	-11.01	AVG	V	1.5	358

Worse case mode:		802.11ac(VHT20)		Test channel:		64			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
5350.00	59.01	-3.42	55.59	74	-18.41	peak	H	1.5	320
5350.00	44.01	-3.42	40.59	54	-13.41	AVG	H	1.5	83
5350.00	59.47	-3.42	56.05	74	-17.95	peak	V	1.5	42
5350.00	46.39	-3.42	42.97	54	-11.03	AVG	V	1.5	253

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor


Appendix J): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre) h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test result: PASS					

Test Data:


Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting (802.11a 36CH)	Vertical

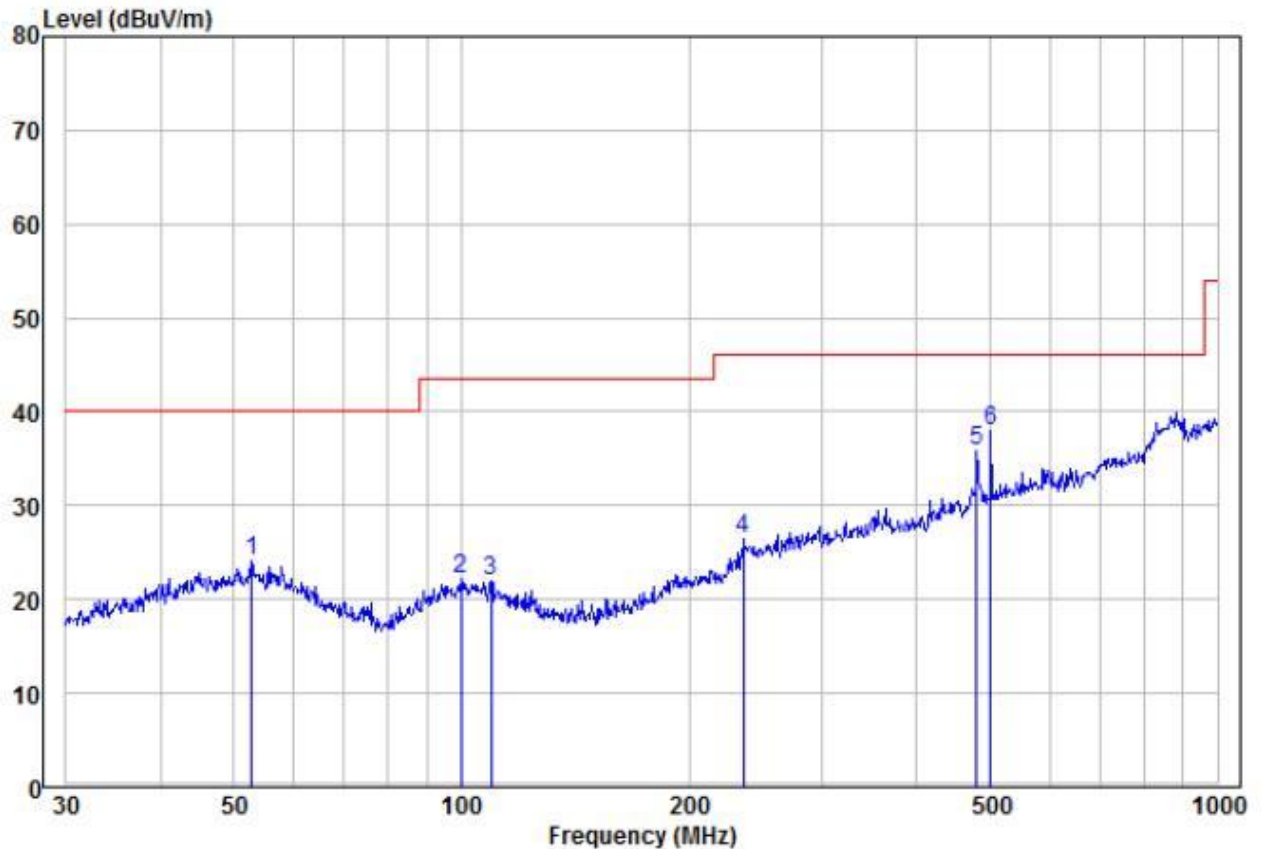

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	52.76	10.22	13.80	24.02	40.00	-15.98	Peak	VERTICAL	100	36
2	99.88	9.12	12.96	22.08	43.50	-21.42	Peak	VERTICAL	100	99
3	109.41	9.14	12.76	21.90	43.50	-21.60	Peak	VERTICAL	100	104
4	235.82	10.96	15.46	26.42	46.00	-19.58	Peak	VERTICAL	100	227
5	480.53	14.65	21.22	35.87	46.00	-10.13	Peak	VERTICAL	100	258
6 pp	501.18	16.23	21.84	38.07	46.00	-7.93	Peak	VERTICAL	100	341

Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

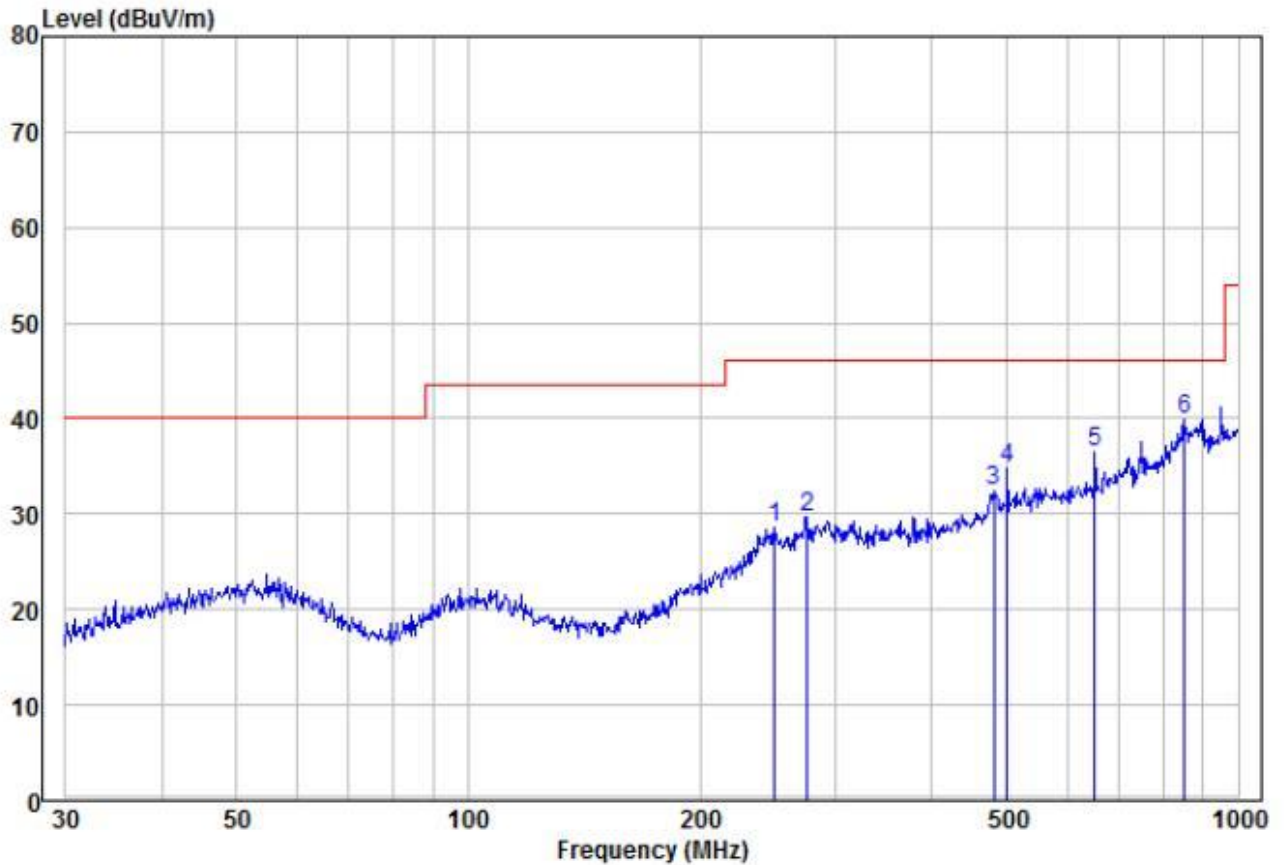

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	250.30	12.21	16.38	28.59	46.00	-17.41	Peak	HORIZONTAL	100	52
2	276.12	12.61	17.10	29.71	46.00	-16.29	Peak	HORIZONTAL	100	104
3	482.22	11.05	21.28	32.33	46.00	-13.67	Peak	HORIZONTAL	100	163
4	501.18	13.01	21.84	34.85	46.00	-11.15	Peak	HORIZONTAL	100	229
5	651.94	13.09	23.39	36.48	46.00	-9.52	Peak	HORIZONTAL	100	307
6 pp	851.04	10.87	29.07	39.94	46.00	-6.06	Peak	HORIZONTAL	100	311

Transmitter Emission above 1GHz

Test mode:	802.11a(6Mbps)			Test channel:		36 CH			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
10360	52.89	2.26	55.15	74	-18.85	peak	H	1.5	220
10360	36.57	2.26	38.83	54	-15.17	AVG	H	1.5	65
15540	51.02	3.75	54.77	74	-19.23	peak	H	1.5	44
15540	38.55	3.75	42.30	54	-11.70	AVG	H	1.5	137
10360	54.75	2.26	57.01	74	-16.99	peak	V	1.5	197
10360	39.33	2.26	41.59	54	-12.41	AVG	V	1.5	30
15540	51.78	3.75	55.53	74	-18.47	peak	V	1.5	137
15540	35.63	3.75	39.38	54	-14.62	AVG	V	1.5	68

Test mode:	802.11a(6Mbps)		Test channel:		36 CH			
Frequency	Emission Level	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV/m)	(dBm/m)	(dBm/m)	(dB)		H/V	(m)	(Degree)
10360	55.15	-40.01	-27	-13.01	peak	H	1.5	220
15540	54.77	-40.39	-27	-13.39	peak	H	1.5	44
10360	57.01	-38.15	-27	-11.15	peak	V	1.5	197
15540	55.53	-39.63	-27	-12.63	peak	V	1.5	137

Test mode:	802.11a(6Mbps)			Test channel:		40 CH			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
10400	52.81	2.28	55.09	74	-18.91	peak	H	1.5	338
10400	37.72	2.28	40.00	54	-14.00	AVG	H	1.5	294
15600	50.55	3.77	54.32	74	-19.68	peak	H	1.5	312
15600	38.08	3.77	41.85	54	-12.15	AVG	H	1.5	26
10400	55.13	2.28	57.41	74	-16.59	peak	V	1.5	224
10400	39.33	2.28	41.61	54	-12.39	AVG	V	1.5	34
15600	50.94	3.77	54.71	74	-19.29	peak	V	1.5	327
15600	35.31	3.77	39.08	54	-14.92	AVG	V	1.5	345

Test mode:	802.11a(6Mbps)		Test channel:		40 CH			
Frequency	Emission Level	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV/m)	(dBm/m)	(dBm/m)	(dB)		H/V	(m)	(Degree)
10400	55.09	-40.07	-27	-13.07	peak	H	1.5	338
15600	54.32	-40.84	-27	-13.84	peak	H	1.5	312
10400	57.41	-37.75	-27	-10.75	peak	V	1.5	224
15600	54.71	-40.45	-27	-13.45	peak	V	1.5	327

Test mode:	802.11a(6Mbps)			Test channel:		48 CH			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
10480	51.70	2.31	54.01	74	-19.99	peak	H	1.5	71
10480	37.25	2.31	39.56	54	-14.44	AVG	H	1.5	326
15720	49.17	3.79	52.96	74	-21.04	peak	H	1.5	81
15720	35.78	3.79	39.57	54	-14.43	AVG	H	1.5	216
10480	53.07	2.31	55.38	74	-18.62	peak	V	1.5	253
10480	36.67	2.31	38.98	54	-15.02	AVG	V	1.5	69
15720	49.18	3.79	52.97	74	-21.03	peak	V	1.5	277
15720	35.93	3.79	39.72	54	-14.28	AVG	V	1.5	249

Test mode:	802.11a(6Mbps)		Test channel:		48 CH			
Frequency	Emission Level	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV/m)	(dBm/m)	(dBm/m)	(dB)		H/V	(m)	(Degree)
10480	54.01	-41.15	-27	-14.15	peak	H	1.5	71
15720	52.96	-42.20	-27	-15.2	peak	H	1.5	81
10480	55.38	-39.78	-27	-12.78	peak	V	1.5	253
15720	52.97	-42.19	-27	-15.19	peak	V	1.5	277


Remark:

- 1) The 802.11a 6Mbps of rate is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 40GHz,The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

8 Photographs - EUT Test Setup

8.1 Radiated Spurious Emission

9kHz~30MHz:

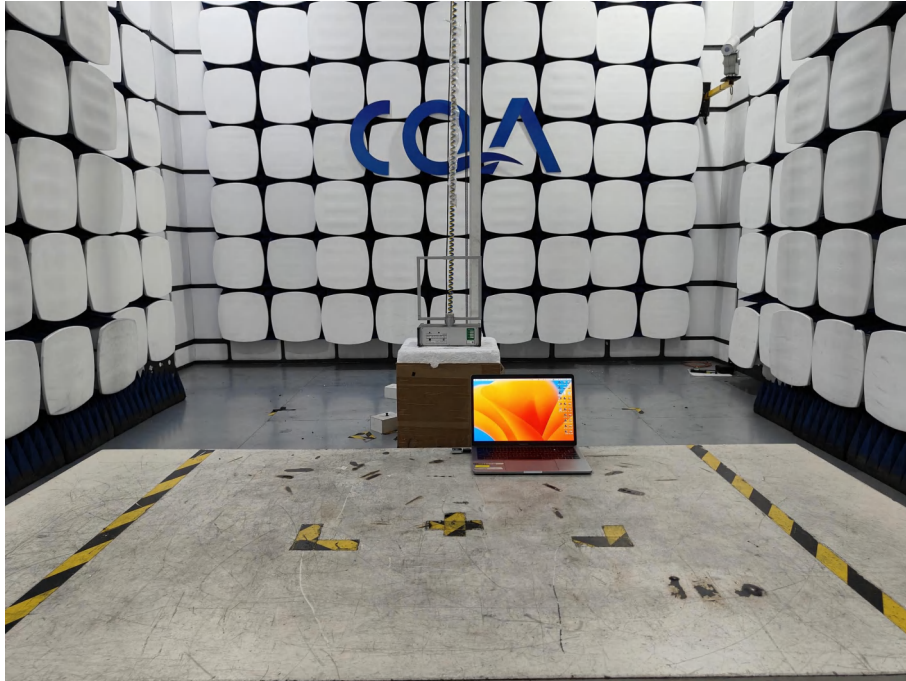

30MHz~1GHz:



Above 1GHz:



9 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20250601449E-01.

*** END OF REPORT ***