

# TEST REPORT

Applicant Name: EWAY CAR TECHNOLOGY LIMITED  
Address: FLAT/RM 1405B, 14/F, THE BELGIAN BANK BUILDING  
NOS.721-725, NATHAN ROAD MONGKOK KL, Hong Kong  
Report Number: 2501R49600E-RF-00  
FCC ID: 2BG4R-EWM5001

**Test Standard (s)**

FCC PART 15.247

**Sample Description**

Product Type: Wireless Monitor  
Model No.: EW-M5001  
Multiple Model(s) No.: N/A  
Trade Mark: N/A  
Date Received: 2025/03/21  
Issue Date: 2025/07/07

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**Allen. BaiAllen Bai  
RF Engineer**Approved By:**Nancy WangNancy Wang  
RF Supervisor

Note: The information marked<sup>#</sup> is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

**Bay Area Compliance Laboratories Corp. (Shenzhen)**

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018      Fax: +86-755-33320008      [www.baclcorp.com.cn](http://www.baclcorp.com.cn)

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EUT EXERCISE SOFTWARE .....	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC 1.1307 (B) &amp; §2.1091- MPE-BASED EXEMPTION .....</b>	<b>11</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.205, §15.209&amp;§15.247(D) – RADIATED EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP.....	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	14
TEST PROCEDURE .....	15
FACTOR & OVER LIMIT/MARGIN CALCULATION .....	15
TEST DATA .....	15
<b>FCC §15.247(A) (1) - CHANNEL SEPARATION TEST .....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST DATA .....	36
<b>FCC §15.247(A) (1) - 20DBEMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST DATA .....	38
<b>FCC §15.247(A) (1) (III) - QUANTITY OF HOPPING CHANNEL TEST.....</b>	<b>41</b>
APPLICABLE STANDARD .....	41
TEST PROCEDURE .....	41
TEST DATA .....	41

<b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>43</b>
APPLICABLE STANDARD .....	43
TEST PROCEDURE .....	43
TEST DATA .....	43
<b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>45</b>
APPLICABLE STANDARD .....	45
TEST PROCEDURE .....	45
TEST DATA .....	46
<b>FCC §15.247(D) - BAND EDGES TESTING.....</b>	<b>48</b>
APPLICABLE STANDARD .....	48
TEST PROCEDURE .....	48
TEST DATA .....	48
<b>EUT PHOTOGRAPHS.....</b>	<b>51</b>
<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>52</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501R49600E-RF-00	Original Report	2025/07/07

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Wireless Monitor
Tested Model	EW-M5001
Multiple Model(s)	N/A
Frequency Range	2410-2473MHz
Maximum conducted peak output power	18.94dBm
Modulation Technique	FHSS: GFSK
Antenna Specification <sup>#</sup>	2.47dBi (provided by the applicant)
Voltage Range	DC 5-24V
Sample serial number	306H-4 for RF Conducted Test 306H-3 for Radiated Emissions (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9 kHz~150 KHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel List<sup>#</sup>

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2410.0	11	2445.0
2	2413.5	12	2448.5
3	2417.0	13	2452.0
4	2420.5	14	2455.5
5	2424.0	15	2459.0
6	2427.5	16	2462.5
7	2431.0	17	2466.0
8	2434.5	18	2469.5
9	2438.0	19	2473.0
10	2441.5	/	/

Channel 1, 10, 19 was tested.

### EUT Exercise Software

“SecureCRTPortable.exe”<sup>#</sup> exercise software was used and the power level is Default<sup>#</sup>. The software and power level was provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
instek	DC Power Supply	GPS-3030DD	EM832096

**External I/O Cable**

Cable Description	Length (m)	From/Port	To
Unshielded detachable DC cable	8.0	EUT	DC Power Supply

**Block Diagram of Test Setup**

For Radiated Emissions:

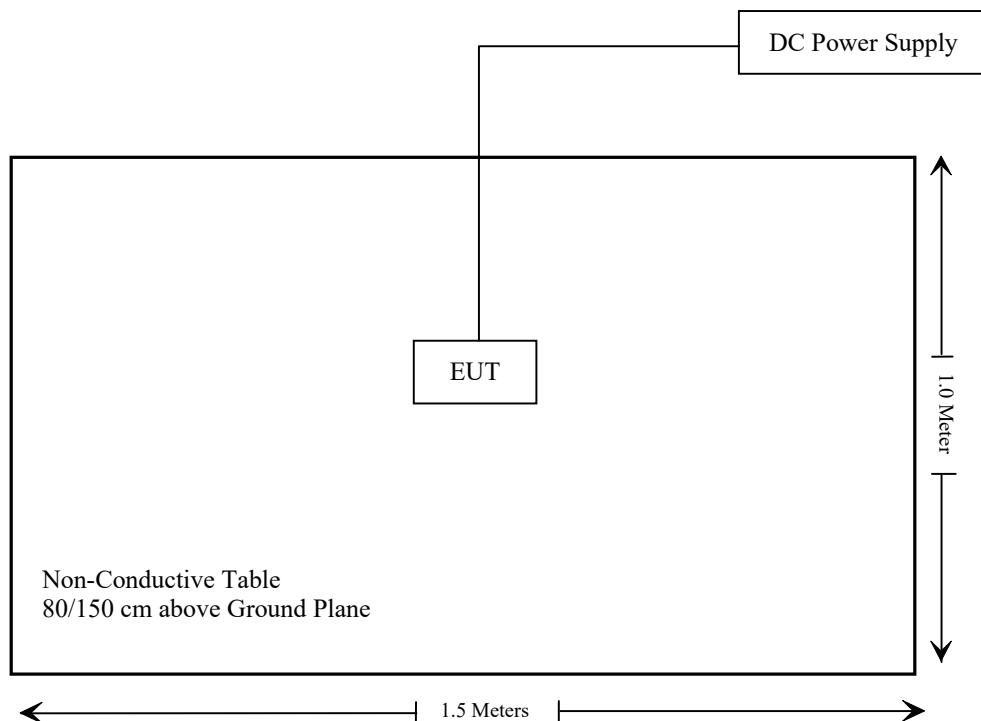

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Not Applicable: The EUT is a vehicle-mounted product, and cannot be directly connected to the public power network.

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310 N	186238	2025/04/29	2026/04/28
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2025/04/29	2026/04/28
Unknown	Cable	XH500C	J-10M-A	2025/04/29	2026/04/28
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/03/26	2026/03/25
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/04/29	2026/04/28
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>RF Conducted Test</b>					
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC 1.1307 (B) & §2.1091- MPE-BASED EXEMPTION

### Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power (ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2R^2$ .

R is the minimum separation distance in meters

f = frequency in MHz

### Result

Frequency (MHz)	Tune up conducted power <sup>#</sup> (dBm)	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBi)	(dBd)	(dBm)	(mW)		
2410-2473	19.0	2.47	0.32	19.32	85.51	0.2	768

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant**

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.



### **Antenna Connector Construction**


The EUT has one internal antenna arrangement which was permanently attached and the antenna gain<sup>#</sup> is 2.47dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result: Compliant**

**FCC §15.205, §15.209&§15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

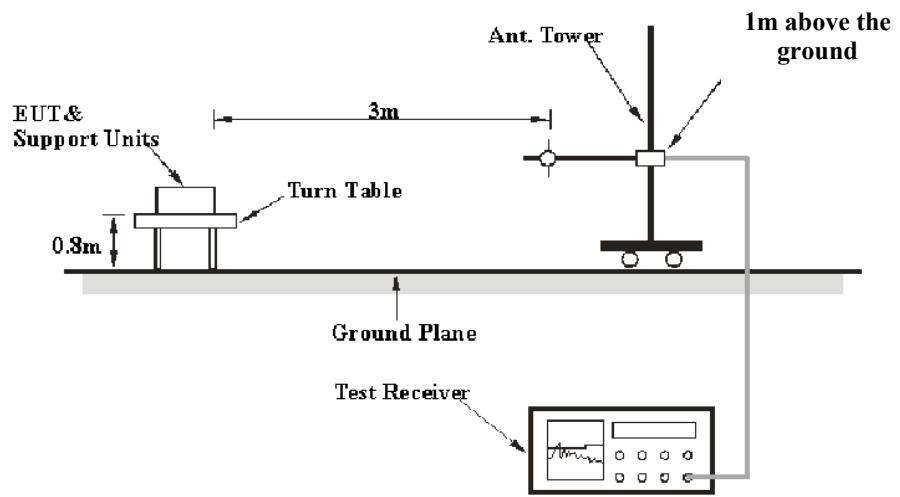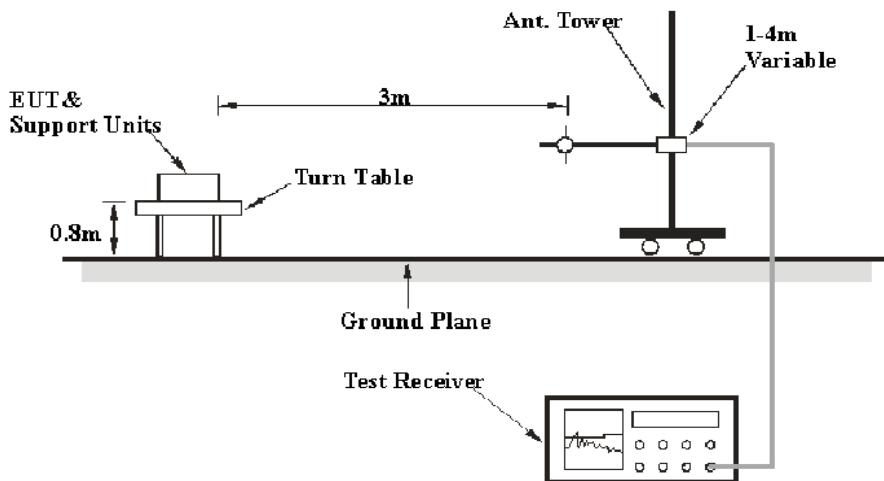**EUT Setup****9 kHz-30MHz:****30MHz-1GHz:**

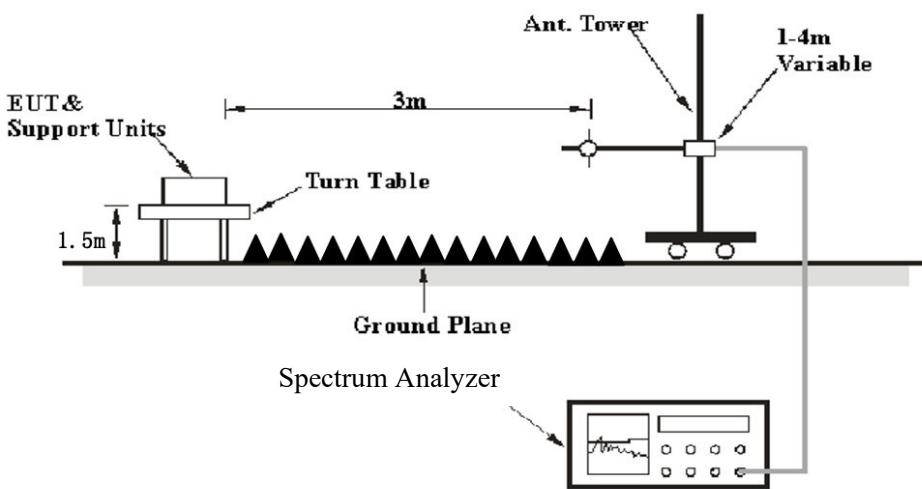**Above 1GHz:**

The radiated emission tests were performed in the 3meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak
Above 1 GHz	Harmonics				
	1MHz	3 MHz	/	PK	Peak
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)				
	Band Edge & Other Emissions				
	1MHz	3 MHz	/	PK	Peak
	1MHz	$\geq 10$ Hz	/	Average	Peak

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N1 \cdot L1 + N2 \cdot L2 + \dots + Nn-1 \cdot Ln-1 + Nn \cdot Ln$ , Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

## Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	21.6~24.7 °C
<b>Relative Humidity:</b>	47~52 %
<b>ATM Pressure:</b>	100.3~101.1 kPa

*The testing was performed by Anson Su on 2025-05-24 for below 1GHz and Visen Wu on 2025-05-20 for above 1GHz.*


*EUT operation mode: Transmitting*

*Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.*

**9 kHz-30MHz: (Maximum output power mode, Middle channel)**


Note: When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.

Parallel (worst case)

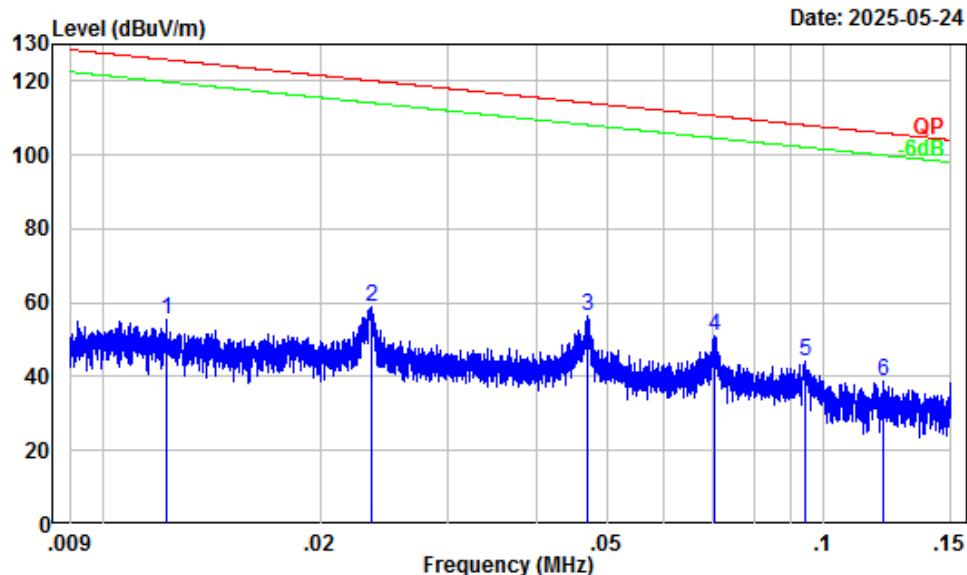

Site : Chamber A  
 Condition : 3m  
 Project Number : 2501R49600E-RF  
 Test Mode : Transmitting  
 Detector: Peak RBW/VBW: 0.3/1kHz  
 Tester : Anson Su

Freq	Factor	Read Level	Limit		Over Limit	Remark
			Level	Line		
1	0.012	31.88	23.43	55.31	125.85	-70.54 Peak
2	0.024	29.71	28.99	58.70	120.14	-61.44 Peak
3	0.047	26.71	29.62	56.33	114.15	-57.82 Peak
4	0.071	24.34	26.48	50.82	110.63	-59.81 Peak
5	0.094	22.40	21.89	44.29	108.12	-63.83 Peak
6	0.121	20.76	17.86	38.62	105.94	-67.32 Peak

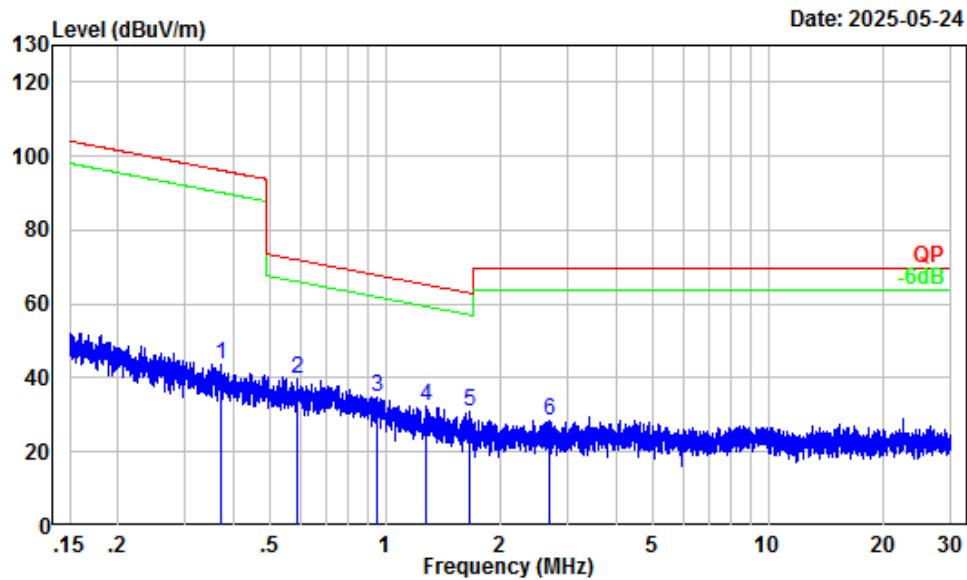


Site : Chamber A  
Condition : 3m  
Project Number : 2501R49600E-RF  
Test Mode : Transmitting  
Detector: Peak RBW/VBW: 10/30kHz  
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dB <sub>UV</sub>	dB <sub>UV</sub> /m		
1	0.373	8.81	35.08	43.89	96.17	-52.28	Peak
2	0.587	5.33	34.30	39.63	72.20	-32.57	Peak
3	0.951	1.57	33.36	34.93	67.92	-32.99	Peak
4	1.284	0.40	31.83	32.23	65.25	-33.02	Peak
5	1.657	-0.64	31.41	30.77	62.99	-32.22	Peak
6	2.680	-1.97	30.39	28.42	69.54	-41.12	Peak

**30MHz-1GHz: (Maximum output power mode, Middle channel)**


Note: When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.

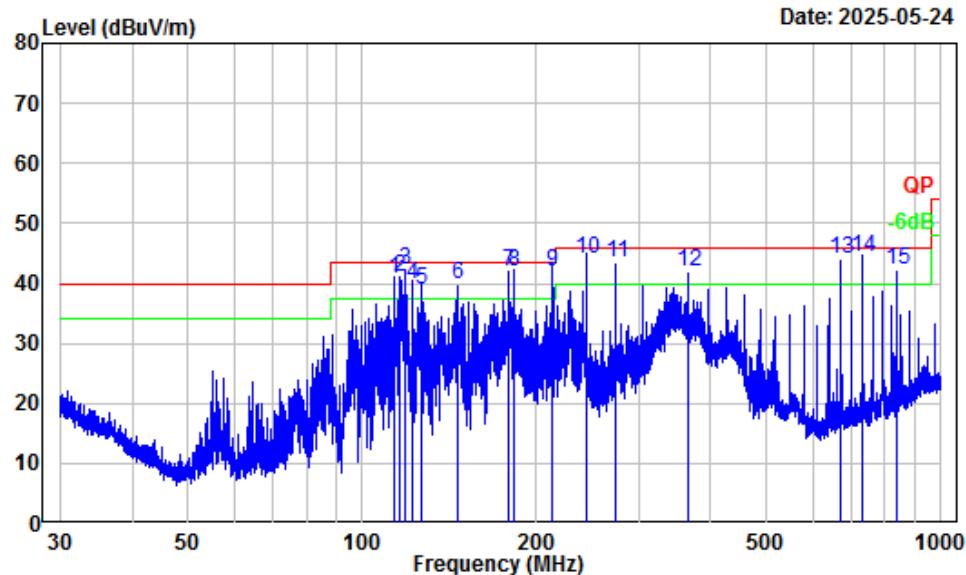**Horizontal**

Site : Chamber A  
 Condition : 3m Horizontal  
 Project Number : 2501R49600E-RF  
 Test Mode : Transmitting  
 Detector: Peak RBW/VBW: 100/300kHz  
 Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
		MHz	dB/m	dBuV	dBuV/m	dB
1	113.47	-12.45	53.30	40.85	43.50	-2.65 QP
2	116.03	-12.00	53.00	41.00	43.50	-2.50 QP
3	118.39	-11.63	53.80	42.17	43.50	-1.33 QP
4	121.98	-11.24	51.23	39.99	43.50	-3.51 QP
5	126.83	-11.12	50.01	38.89	43.50	-4.61 QP
6	146.44	-12.27	52.00	39.73	43.50	-3.77 QP
7	179.31	-13.65	55.50	41.85	43.50	-1.65 QP
8	182.96	-13.89	56.00	42.11	43.50	-1.39 QP
9	213.48	-14.15	56.00	41.85	43.50	-1.65 QP
10	243.91	-13.24	57.21	43.97	46.00	-2.03 QP
11	274.43	-11.41	55.01	43.60	46.00	-2.40 QP
12	365.86	-9.63	51.50	41.87	46.00	-4.13 QP
13	671.08	-3.84	48.00	44.16	46.00	-1.84 QP
14	731.92	-3.10	47.60	44.50	46.00	-1.50 QP
15	838.81	-1.83	44.00	42.17	46.00	-3.83 QP

## Vertical

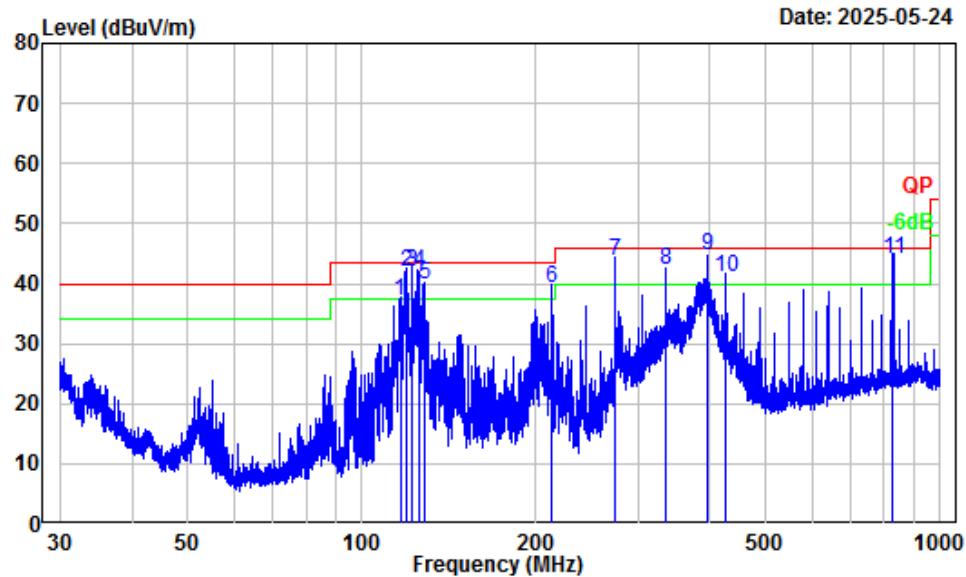

Site : Chamber A  
Condition : 3m Vertical  
Project Number : 2501R49600E-RF  
Test Mode : Transmitting  
Detector: Peak RBW/VBW: 100/300kHz  
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dB <sub>uV</sub>	dB <sub>uV/m</sub>	Line	
1	116.44	-11.91	49.00	37.09	43.50	-6.41	QP
2	119.65	-11.49	53.60	42.11	43.50	-1.39	QP
3	121.92	-11.25	53.20	41.95	43.50	-1.55	QP
4	125.39	-11.12	53.09	41.97	43.50	-1.53	QP
5	128.00	-11.12	50.90	39.78	43.50	-3.72	QP
6	213.39	-14.15	53.30	39.15	43.50	-4.35	QP
7	274.43	-11.41	55.11	43.70	46.00	-2.30	QP
8	335.45	-10.52	52.88	42.36	46.00	-3.64	QP
9	396.42	-8.58	53.20	44.62	46.00	-1.38	QP
10	426.90	-7.85	48.80	40.95	46.00	-5.05	QP
11	829.67	-1.94	46.01	44.07	46.00	-1.93	QP

**Above 1GHz:**

Frequency (MHz)	Reading (dB $\mu$ V)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel(2410MHz)							
4820.00	54.52	PK	H	-7.76	46.76	74	-27.24
4820.00	54.73	PK	V	-7.76	46.97	74	-27.03
Middle Channel(2441.5MHz)							
4883.00	53.72	PK	H	-7.58	46.14	74	-27.86
4883.00	54.09	PK	V	-7.58	46.51	74	-27.49
High Channel(2473MHz)							
4946.00	55.01	PK	H	-7.62	47.39	74	-26.61
4946.00	53.83	PK	V	-7.62	46.21	74	-27.79

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss - Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit


Other emissions which were more than 20dB below limit or on noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded

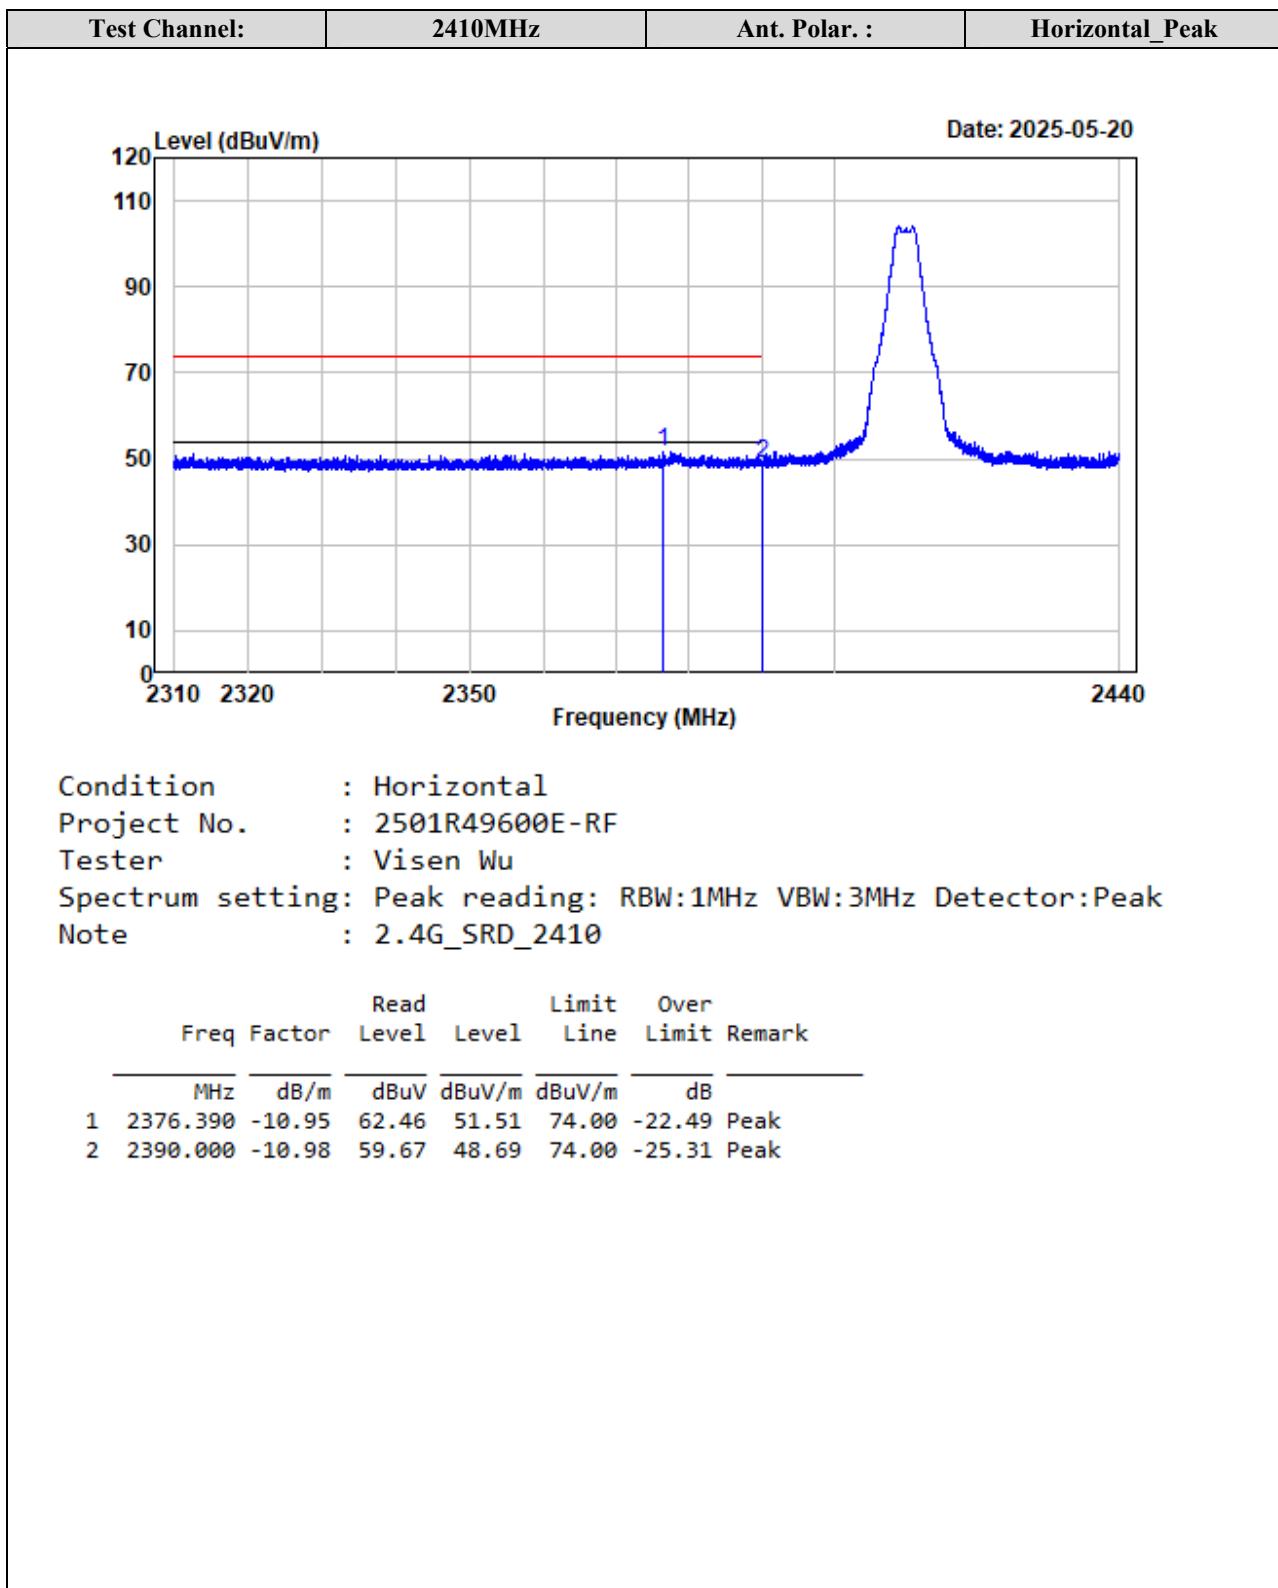
**Test plots for Band Edge Measurements (Radiated):**

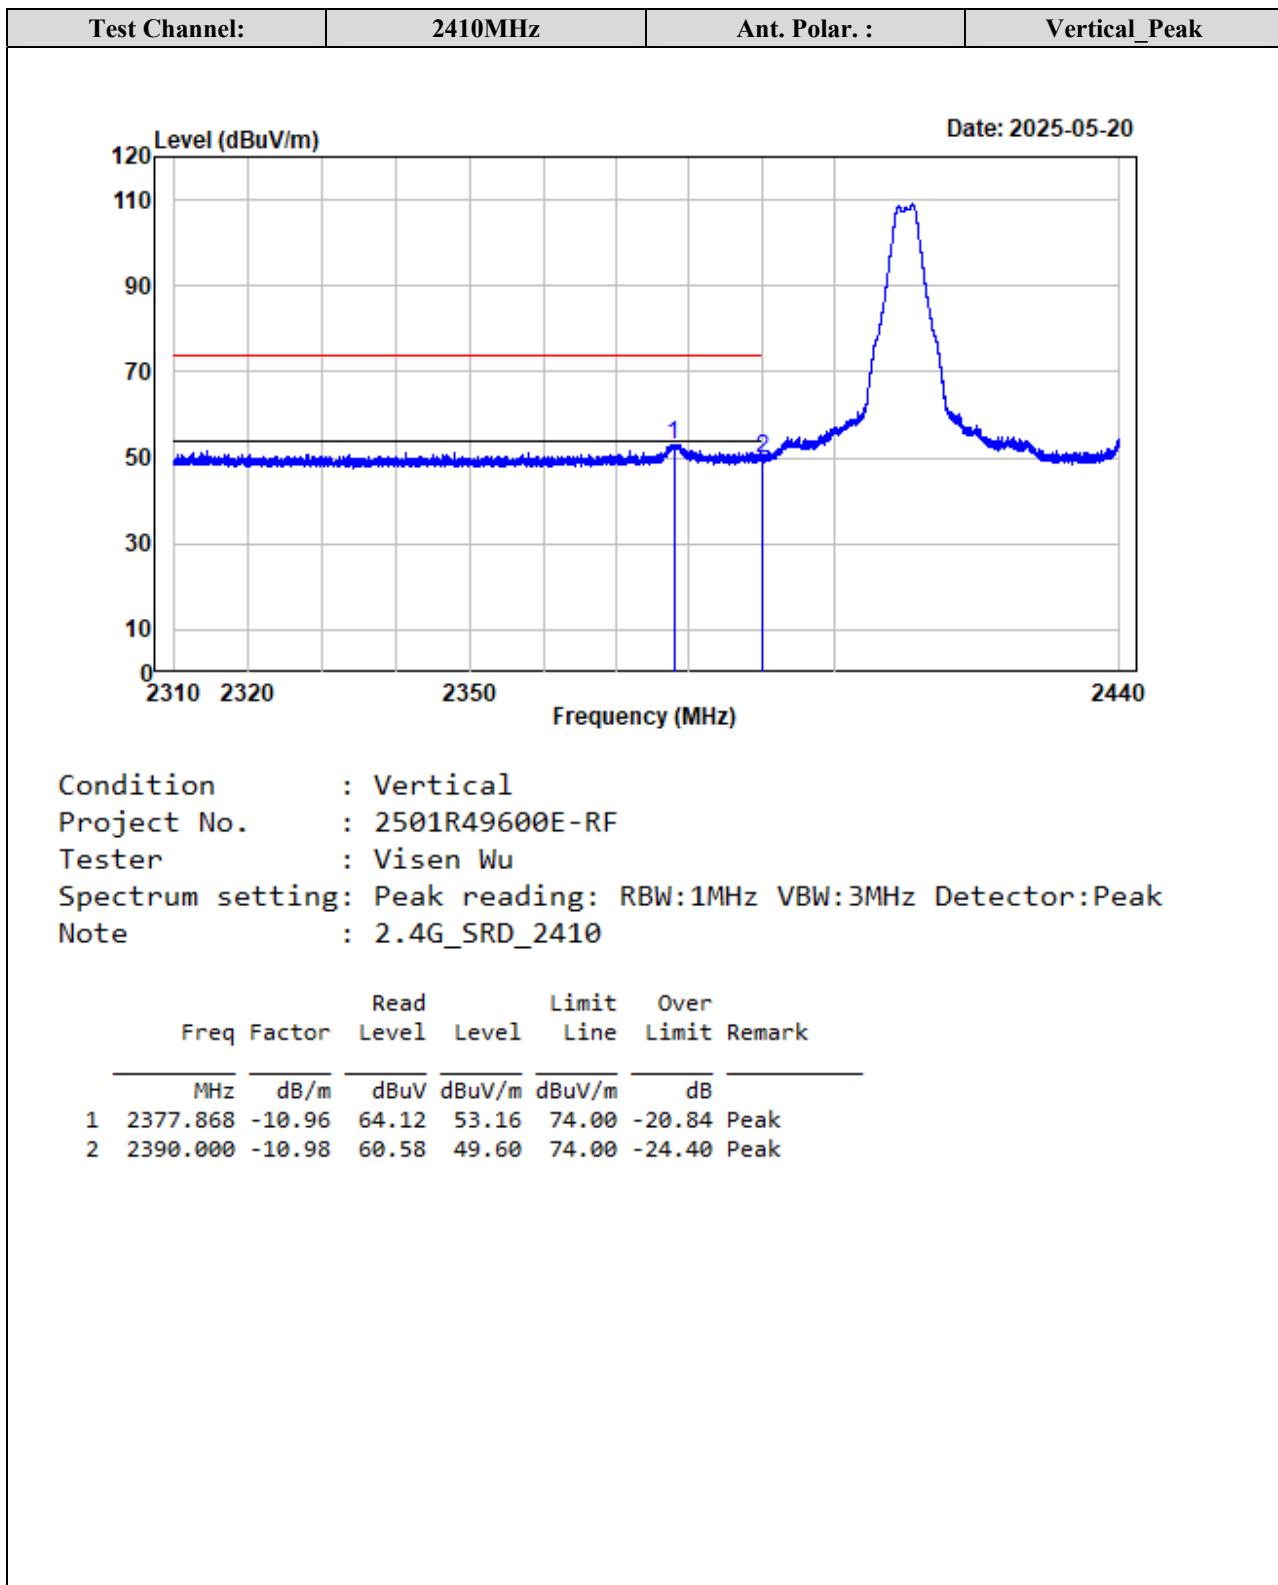


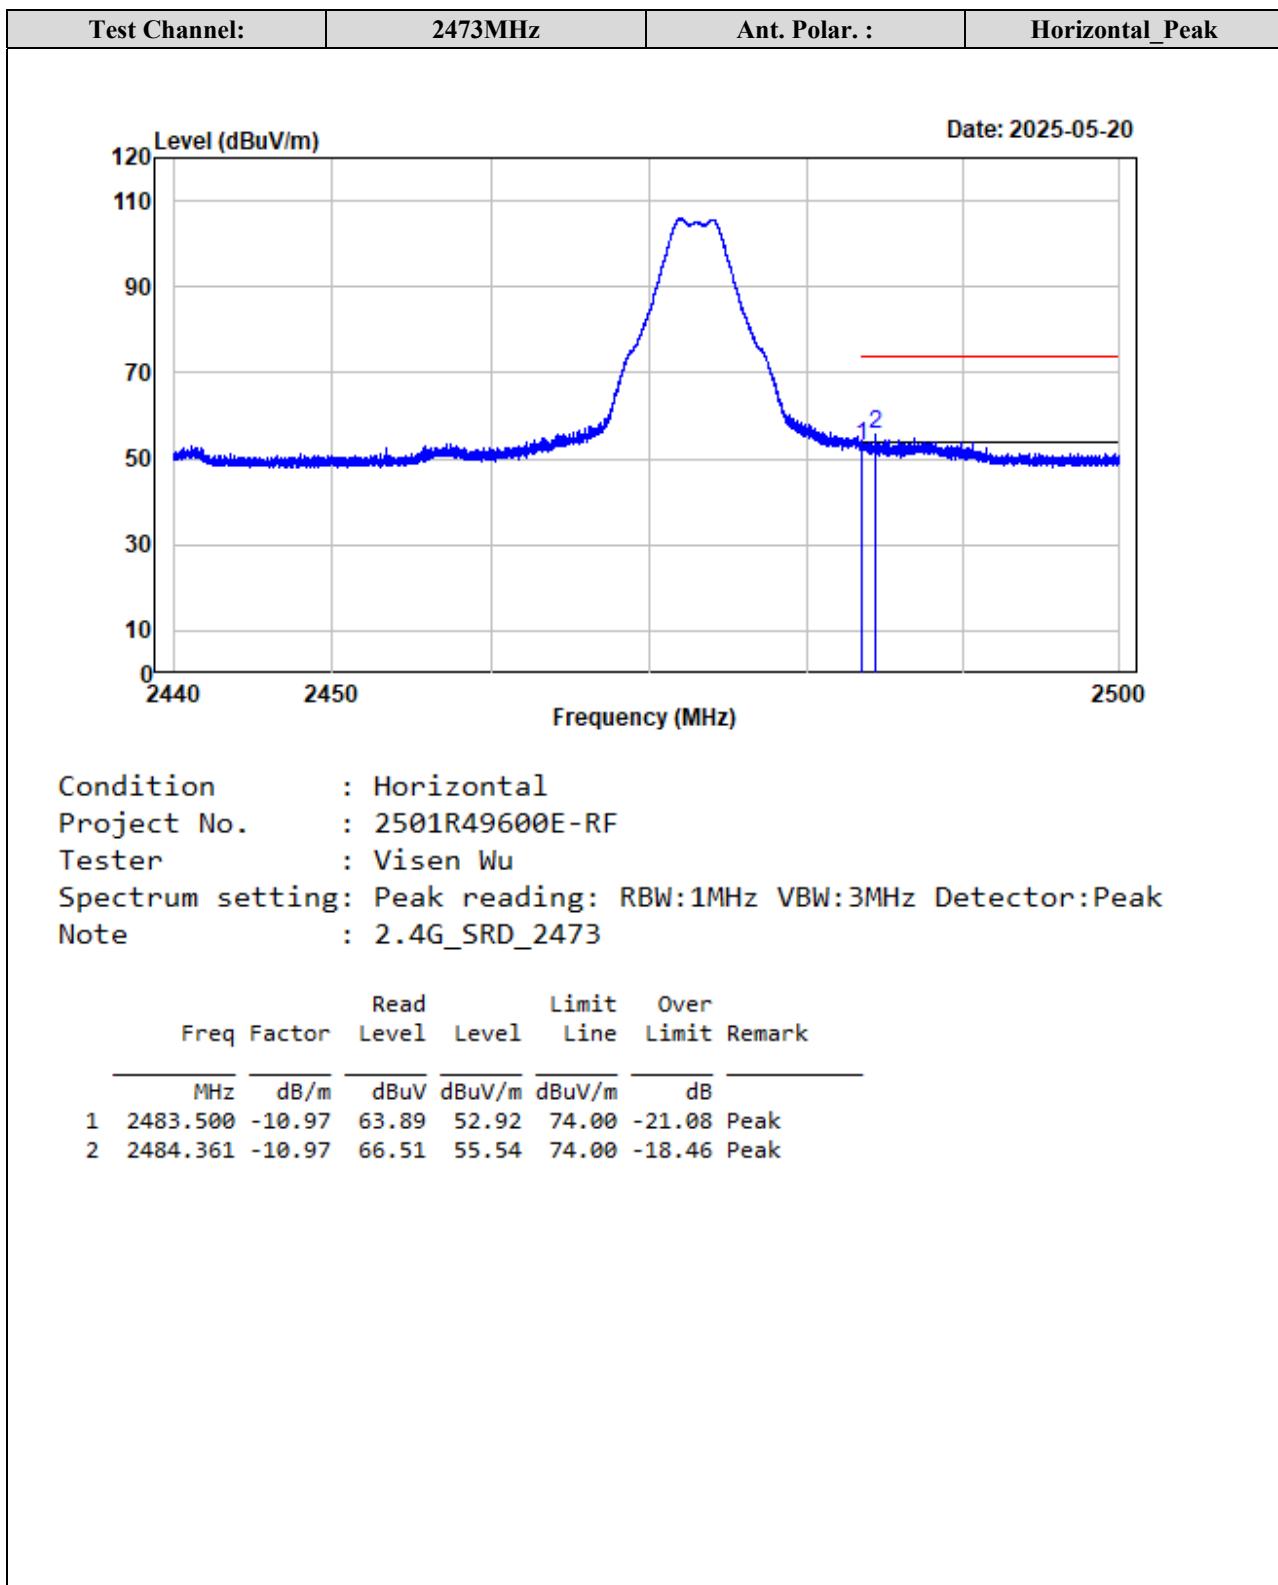


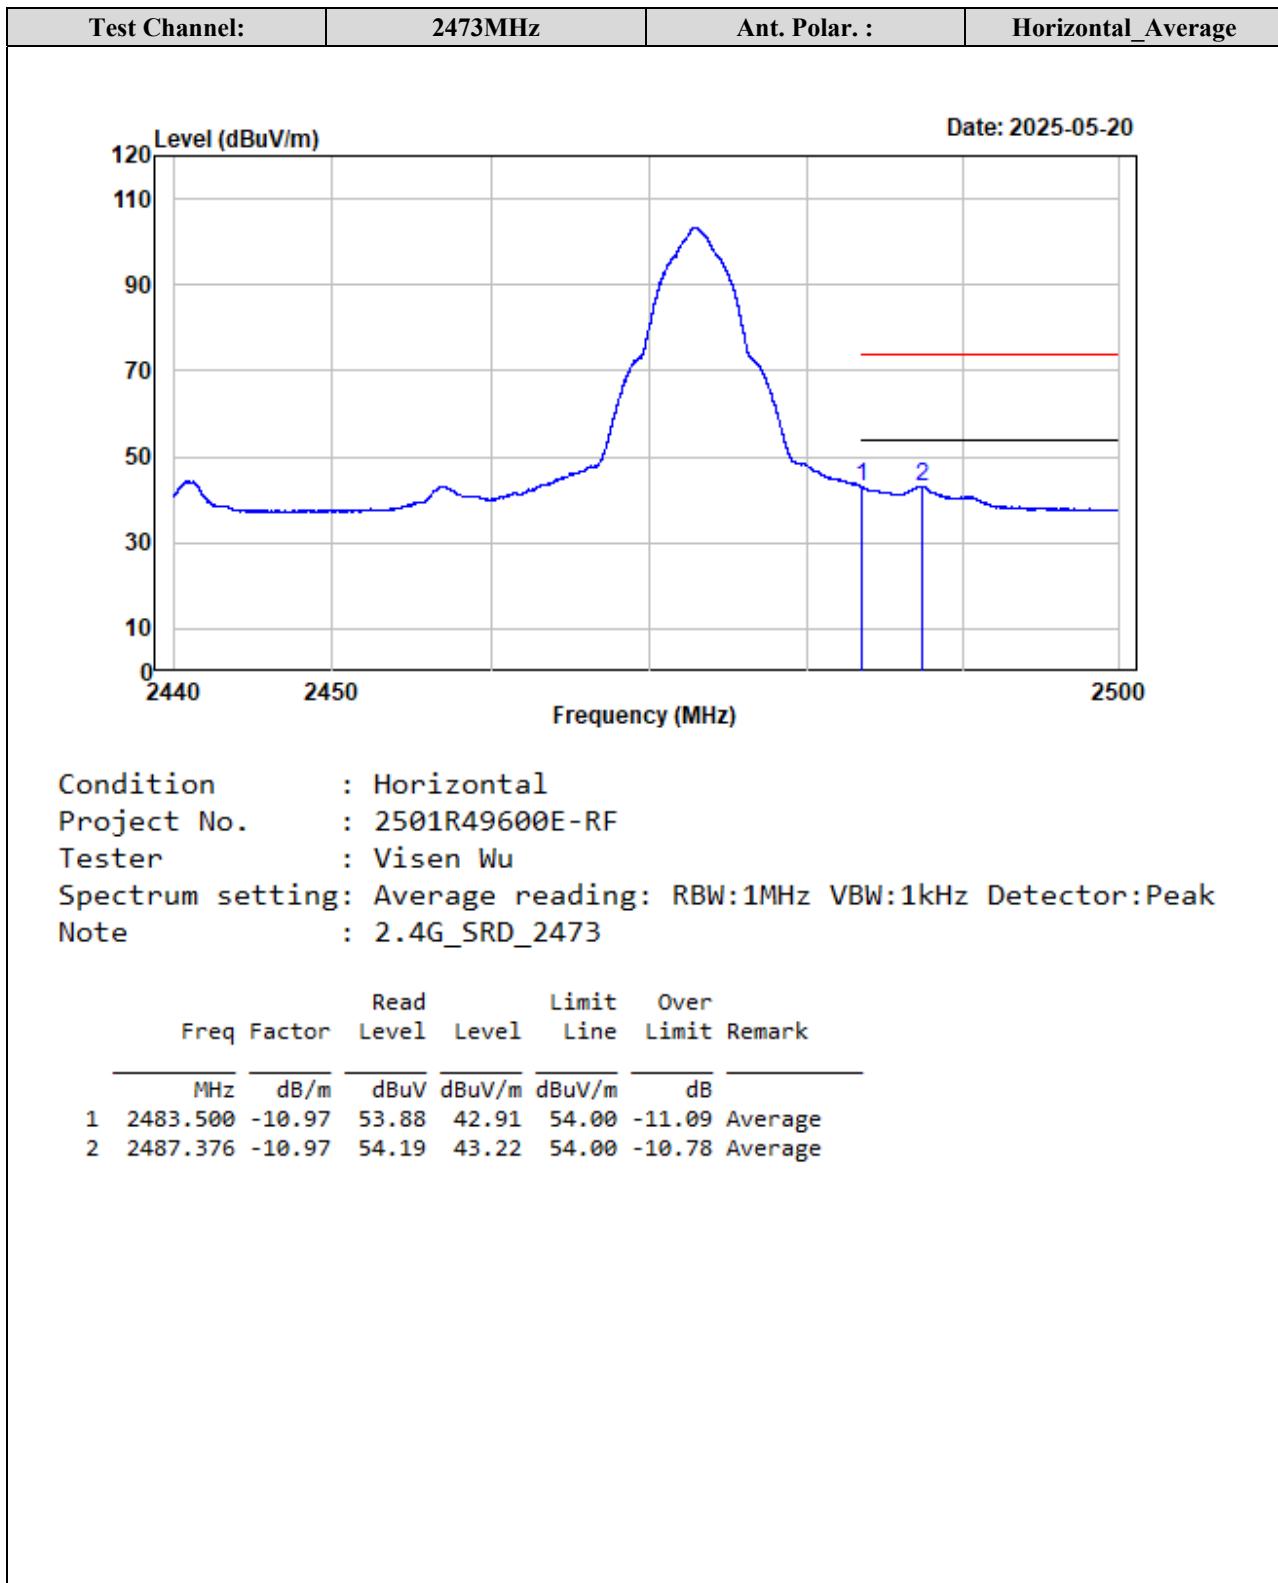


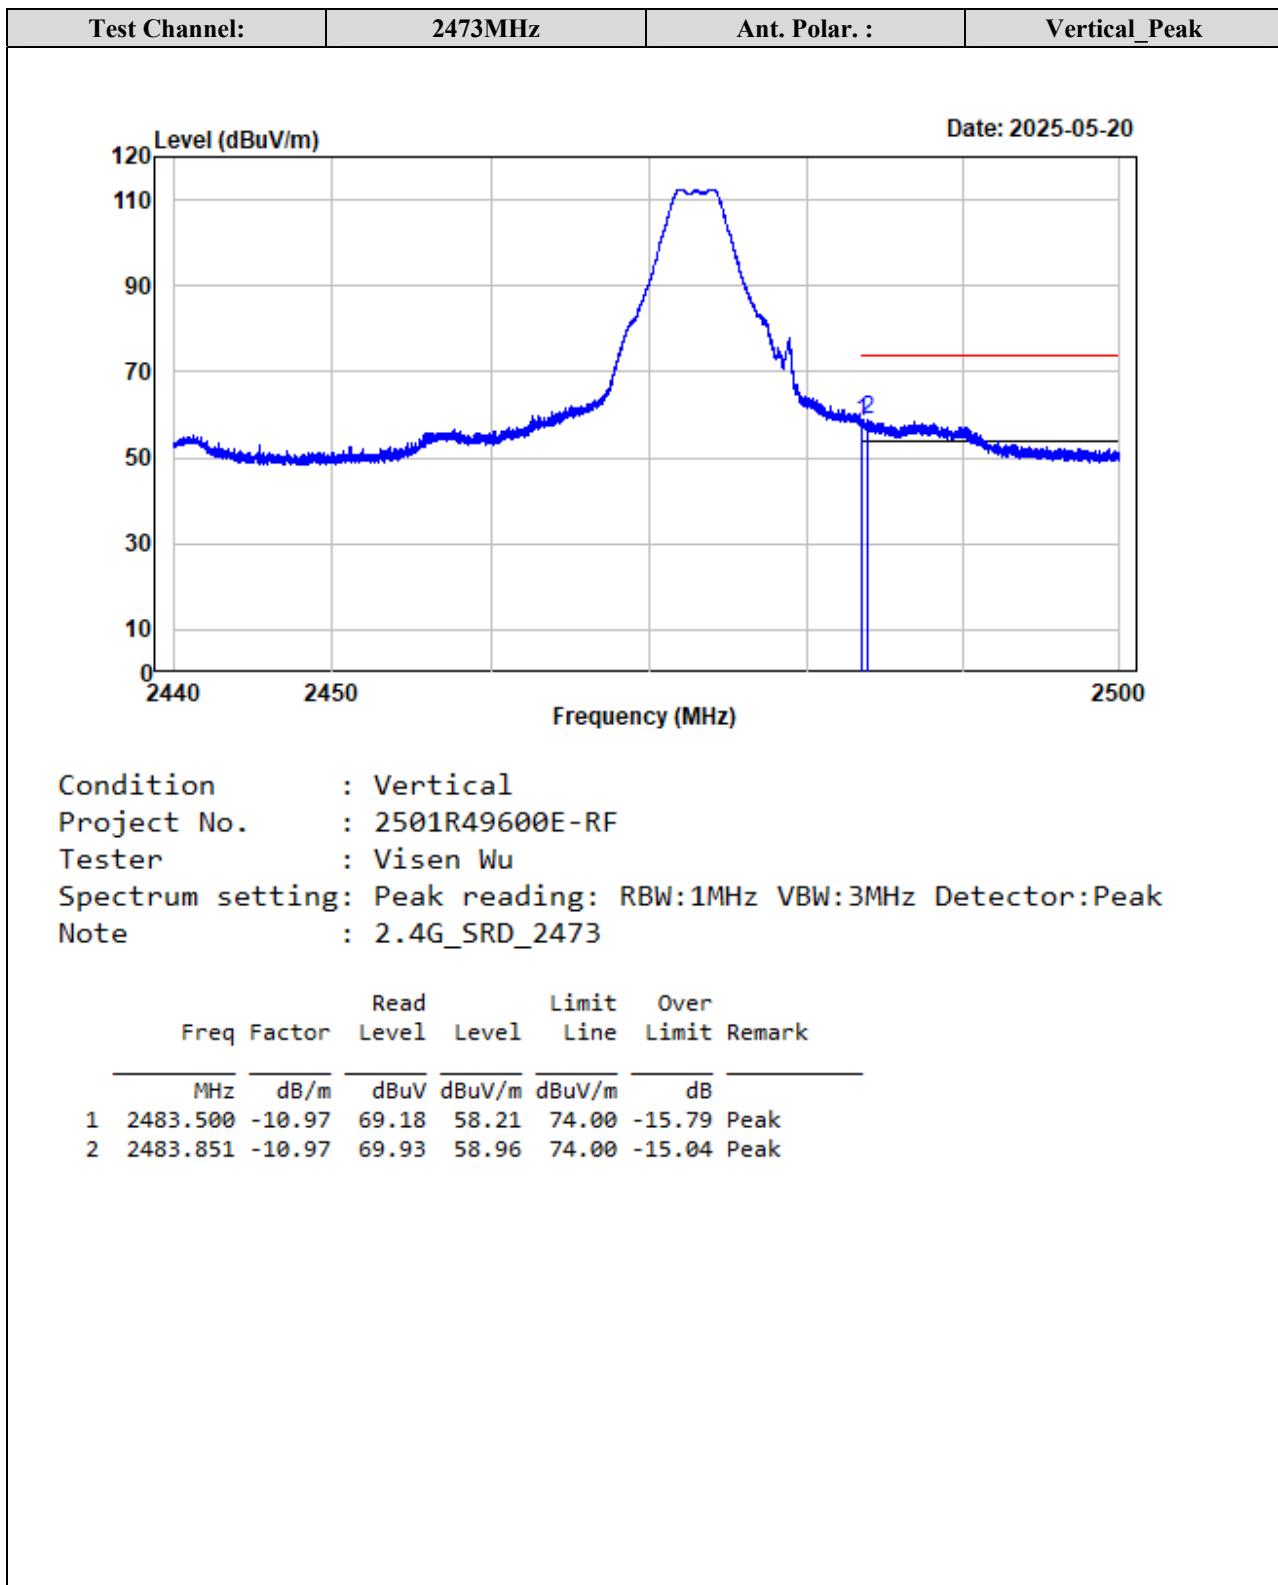


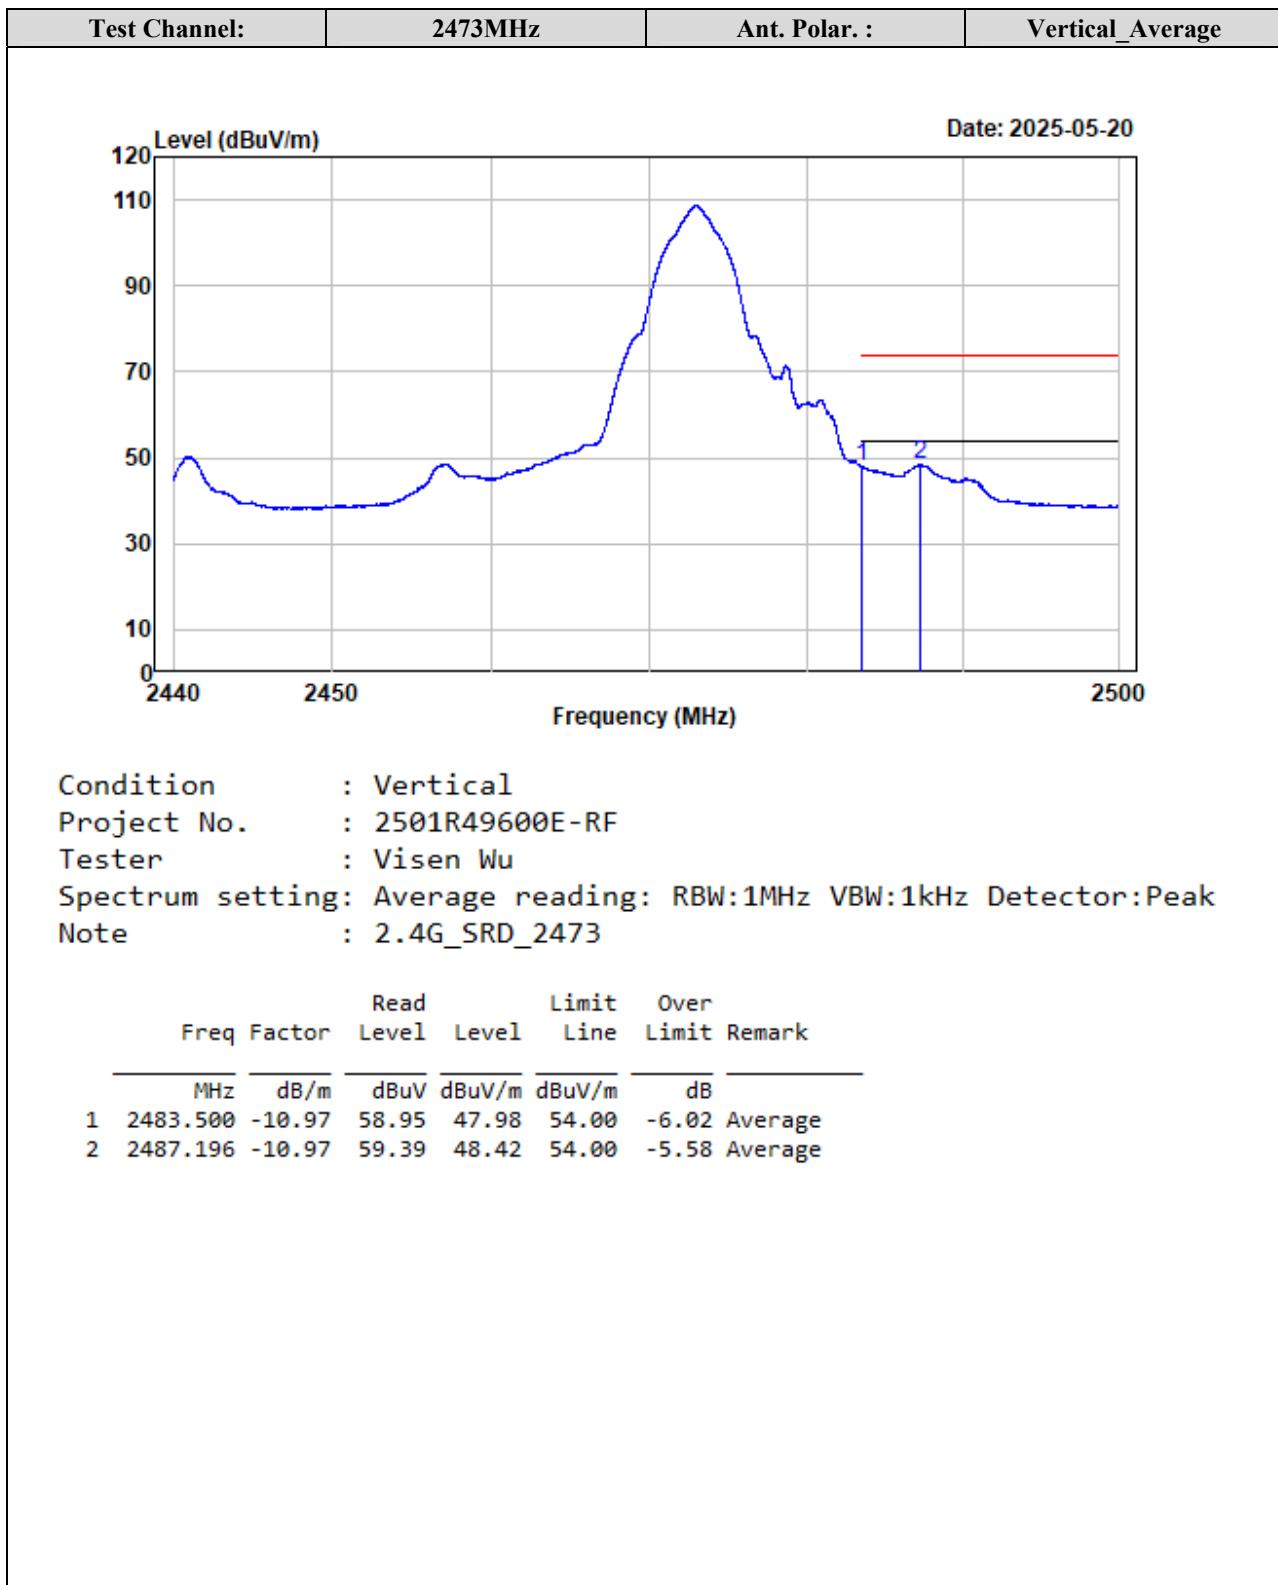


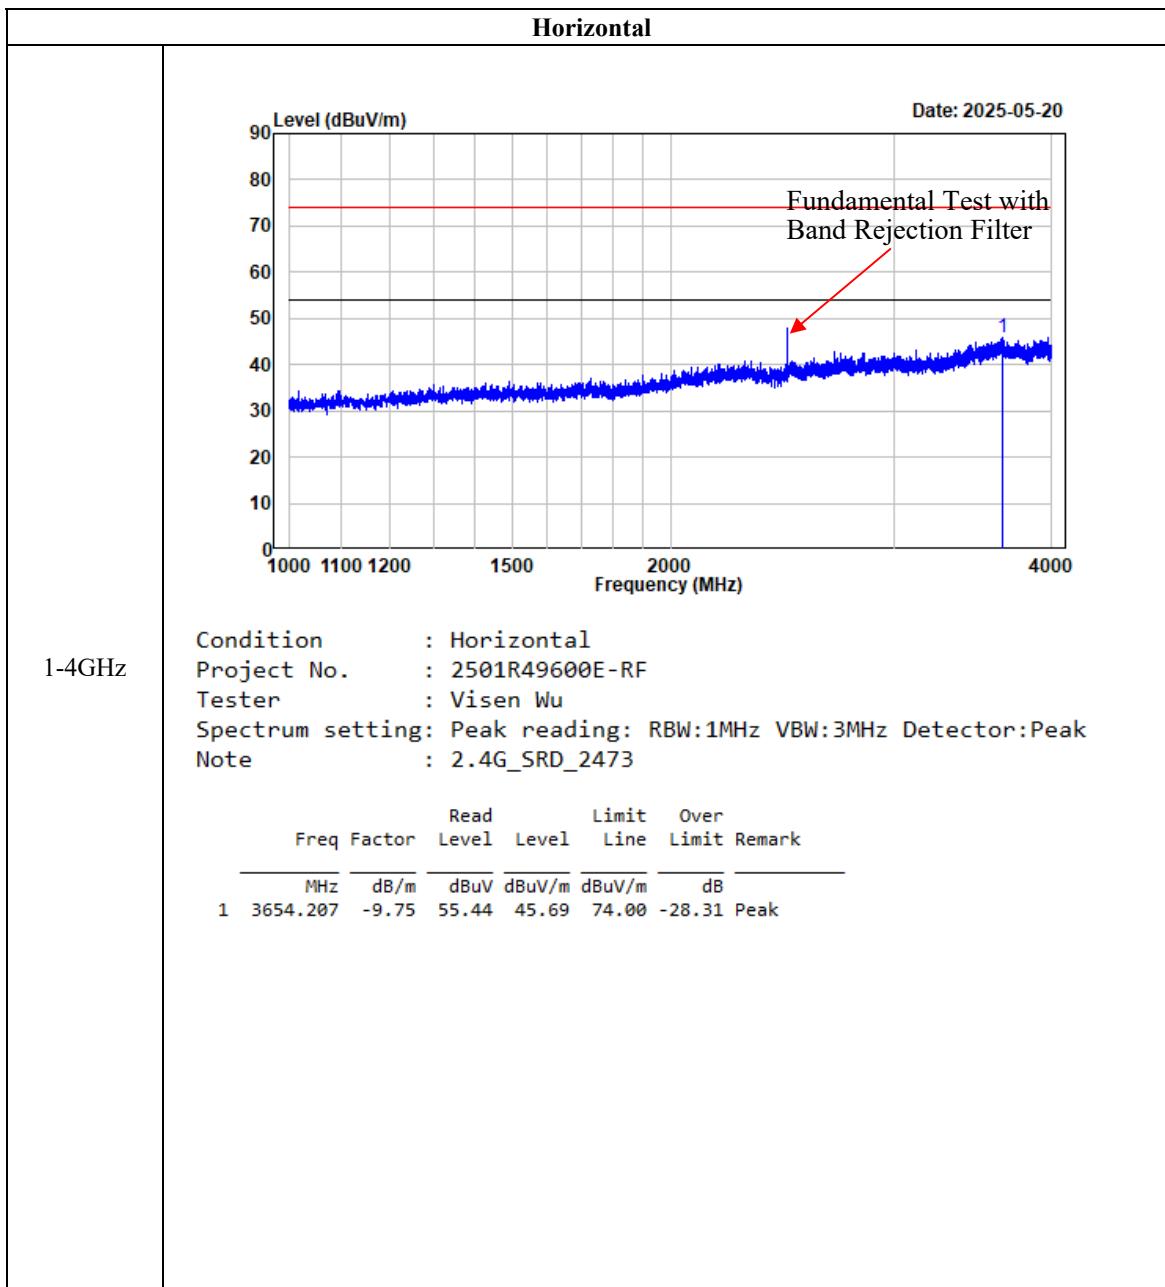
**Listed with the worst harmonic margin test plot:**

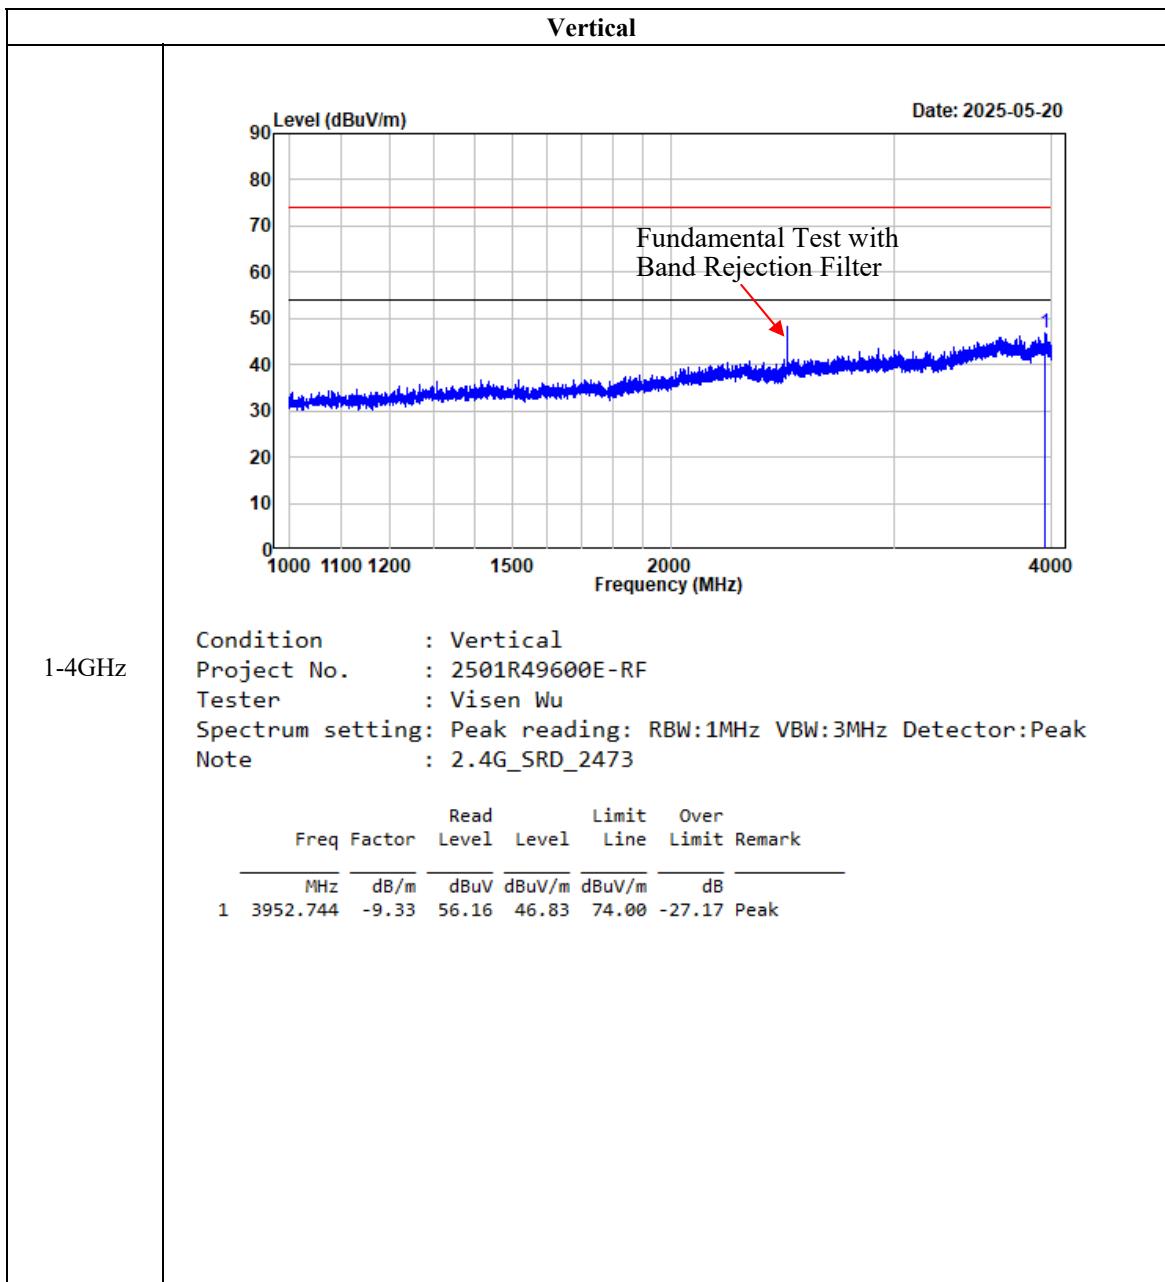


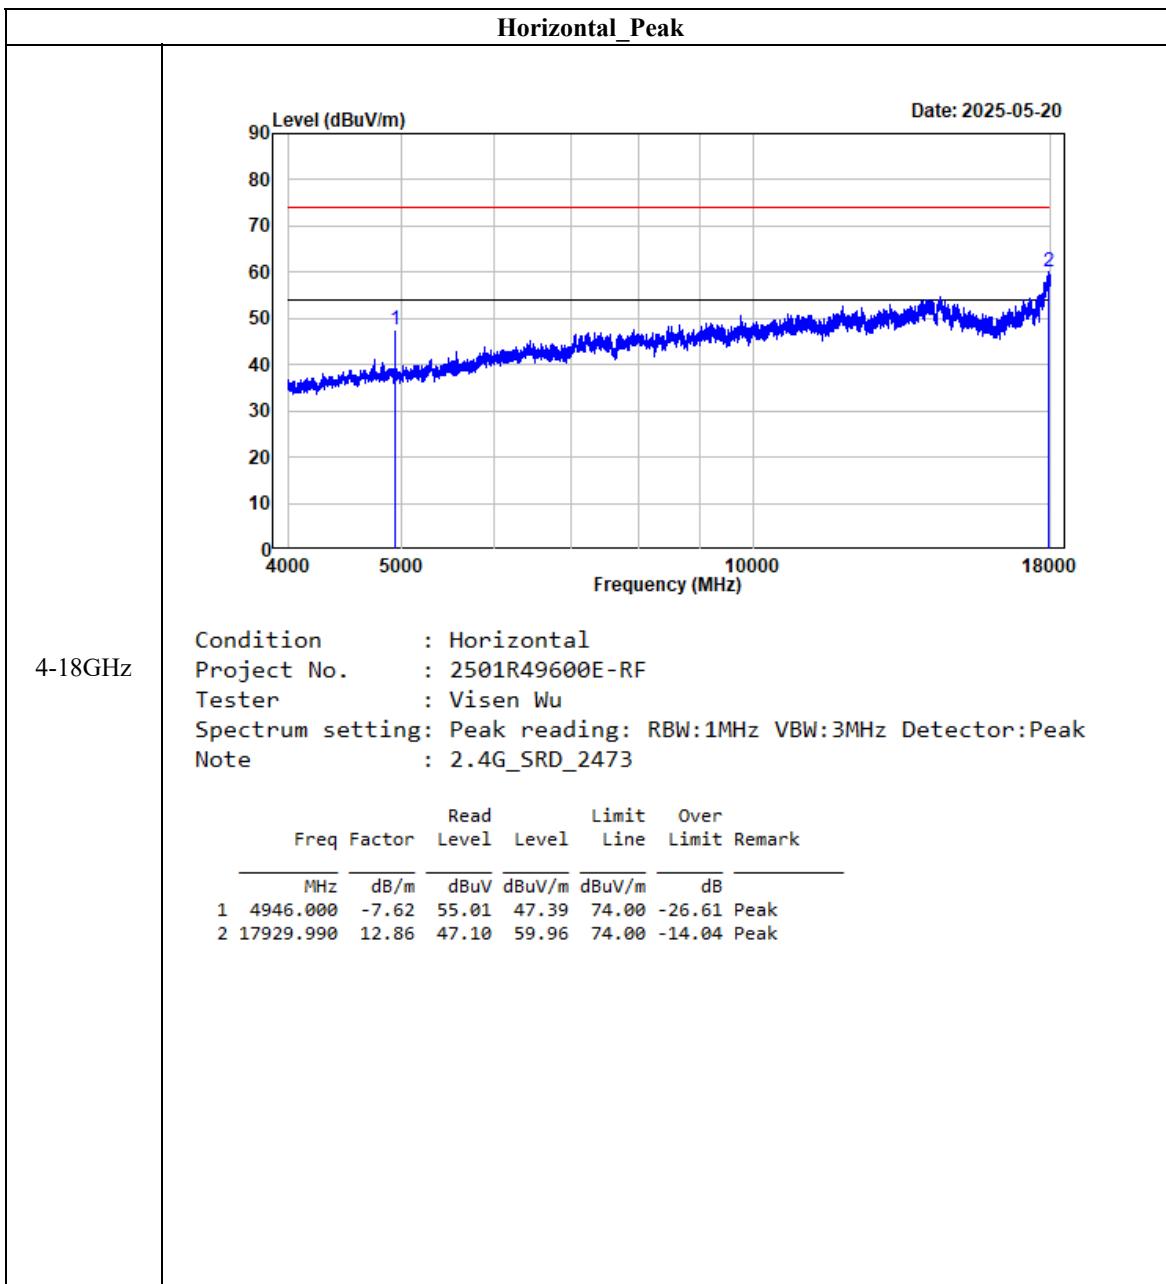


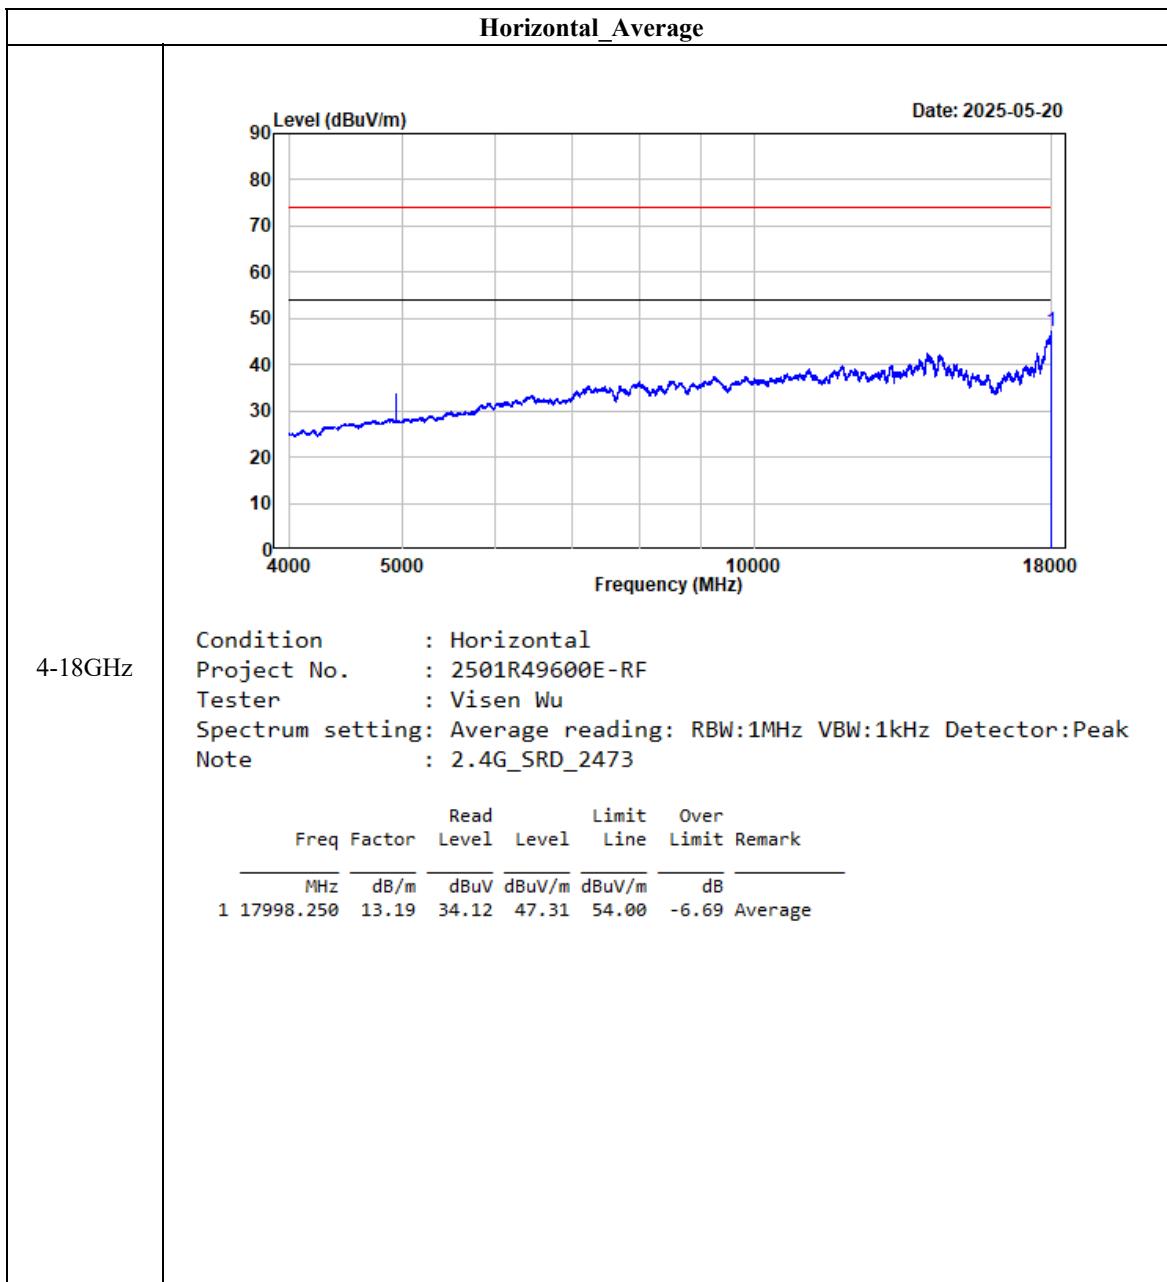

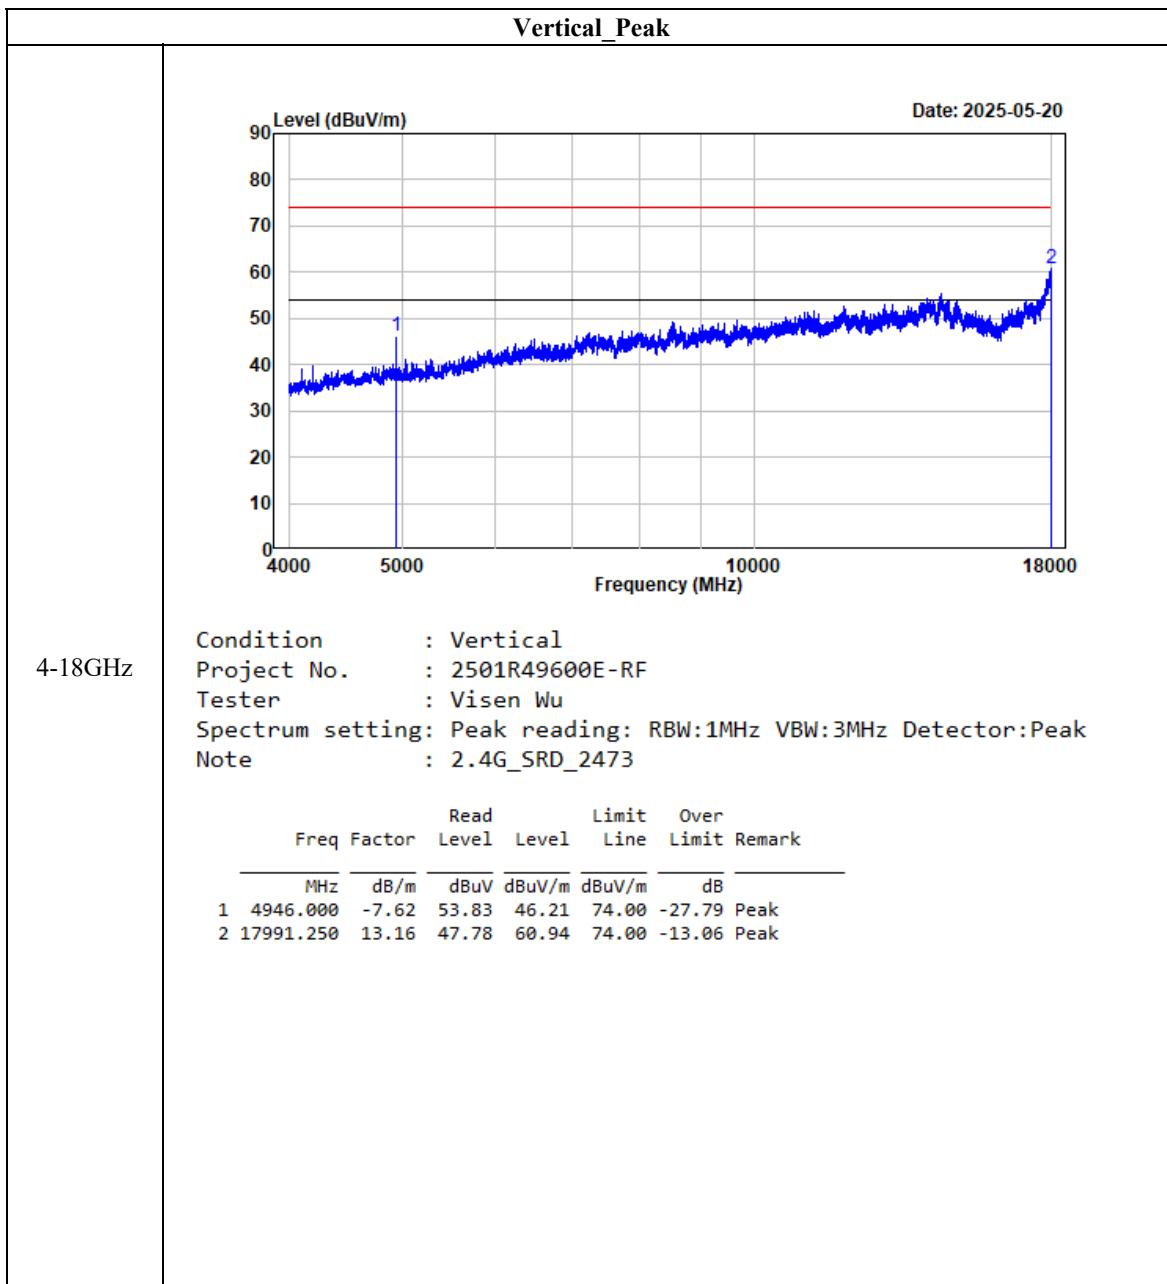

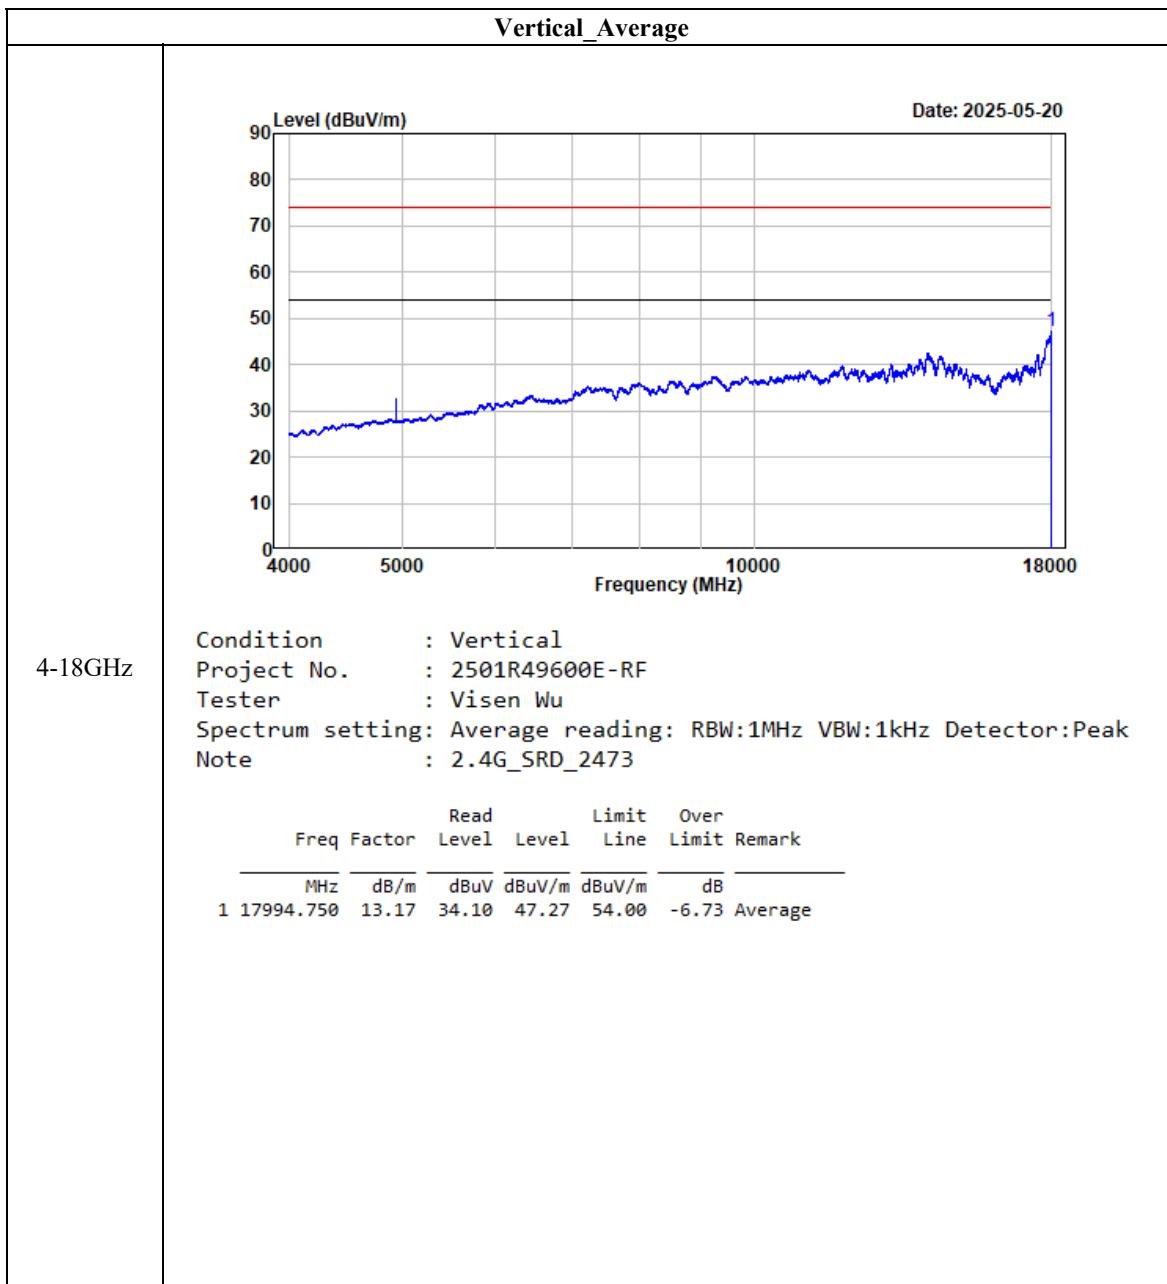

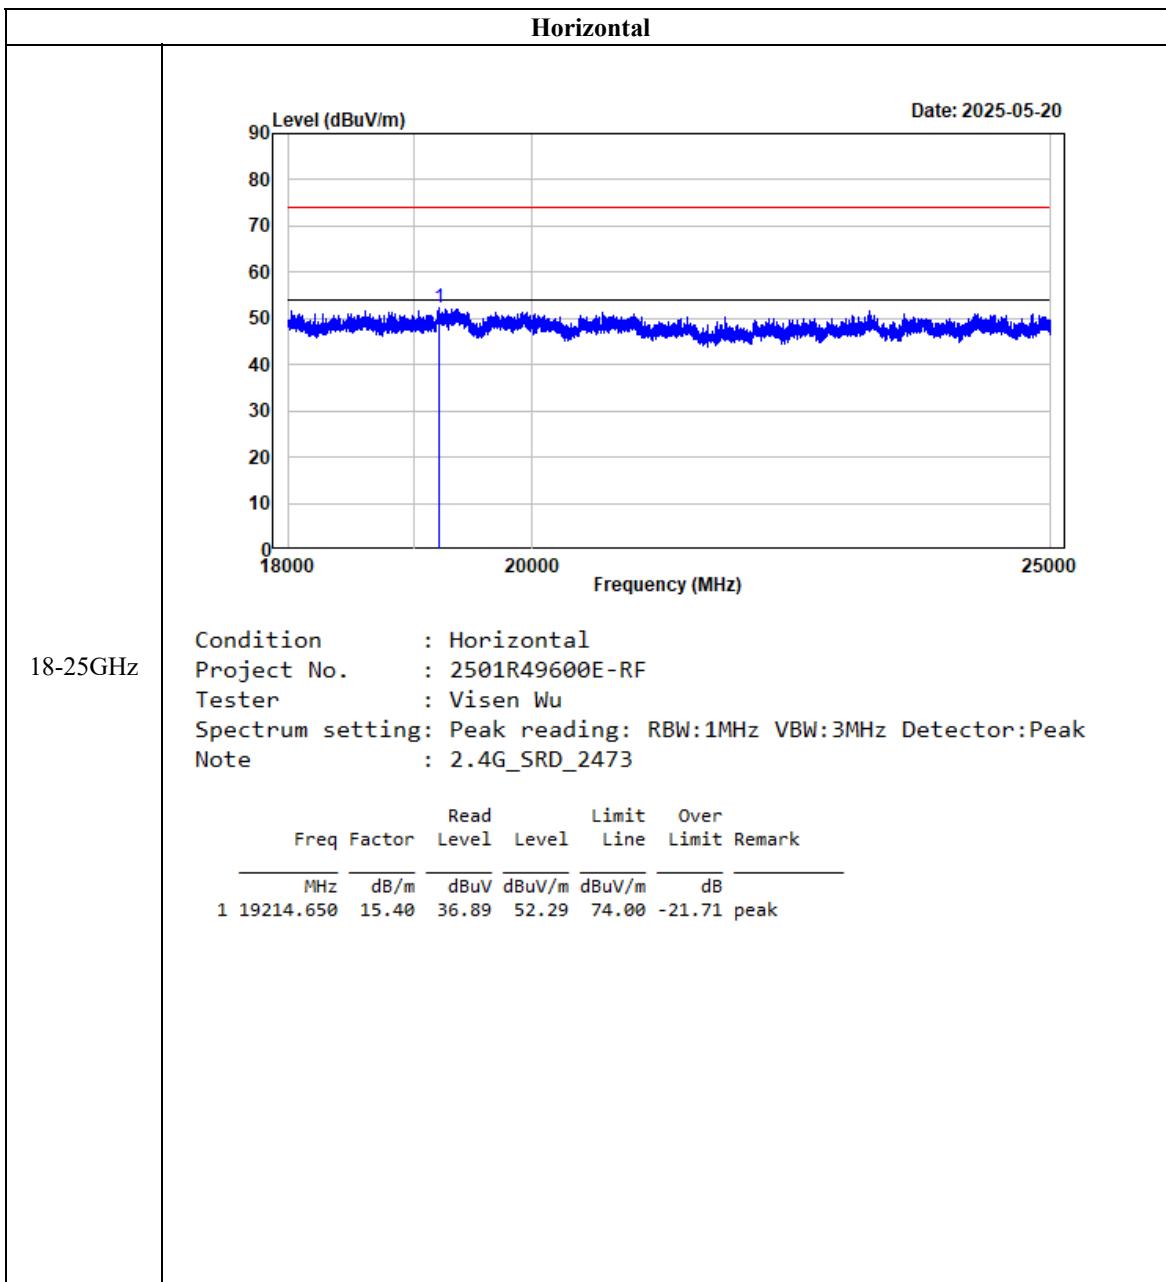

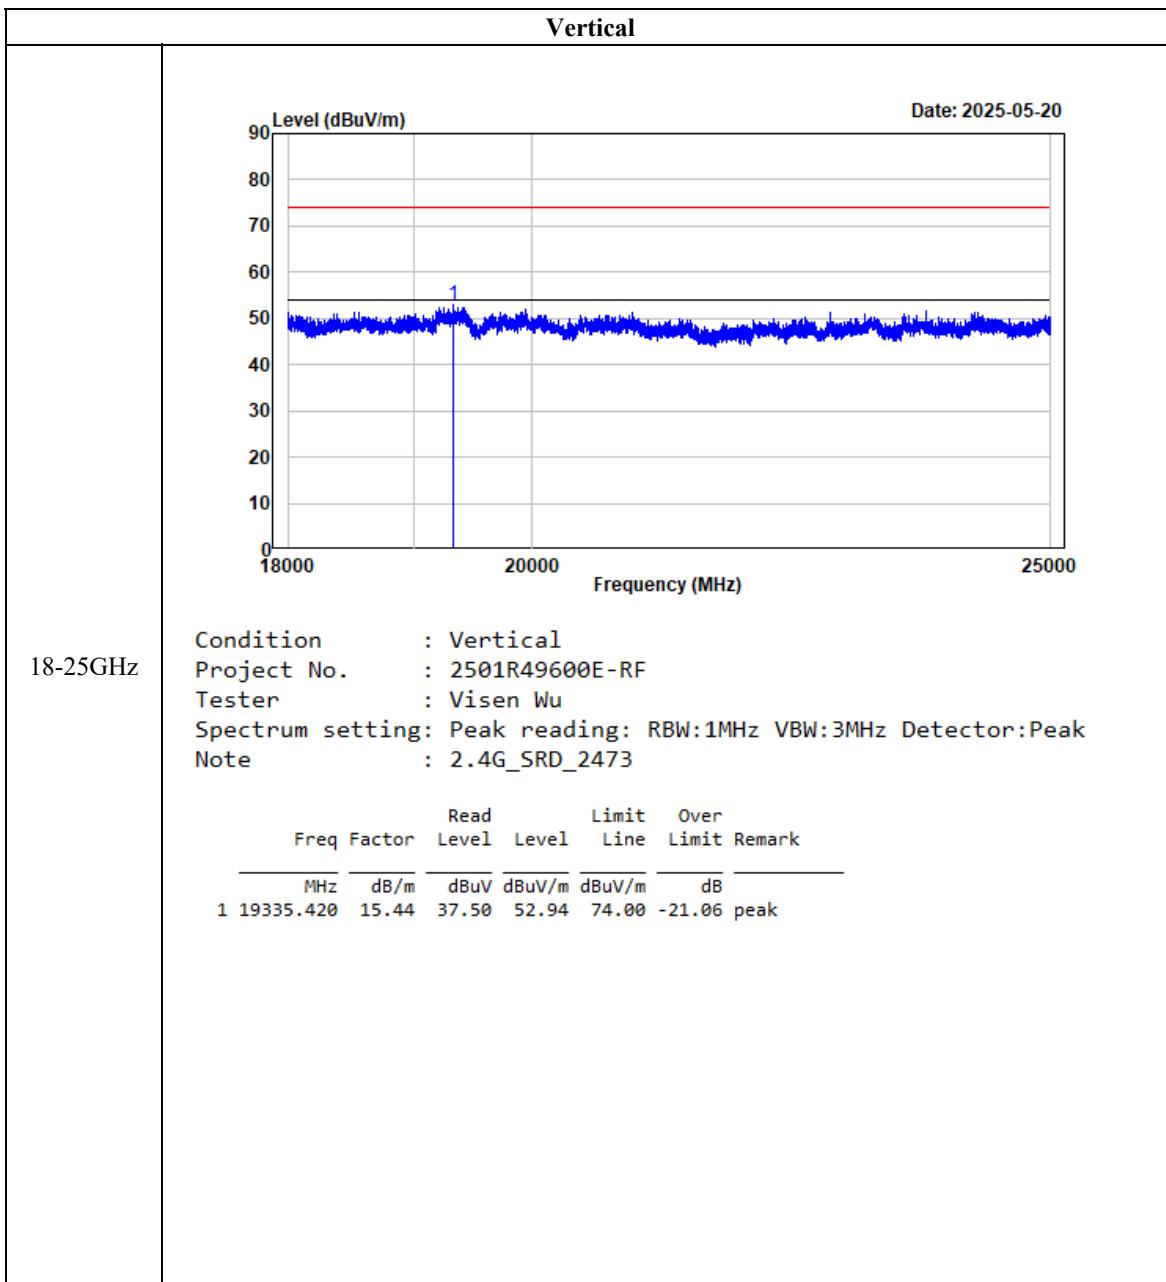

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined.



## Test Data

### Environmental Conditions

Temperature:	24.9 °C
Relative Humidity:	47 %
ATM Pressure:	101.2 kPa

The testing was performed by Ive Wang on 2025-05-21.


EUT operation mode: Transmitting

**Test Result: Compliant**

Test Channel	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Middle_Hop	2441.5	3.502	3.116

Note: The limit is 2/3\*20 dB bandwidth

Please refer to the below plots:

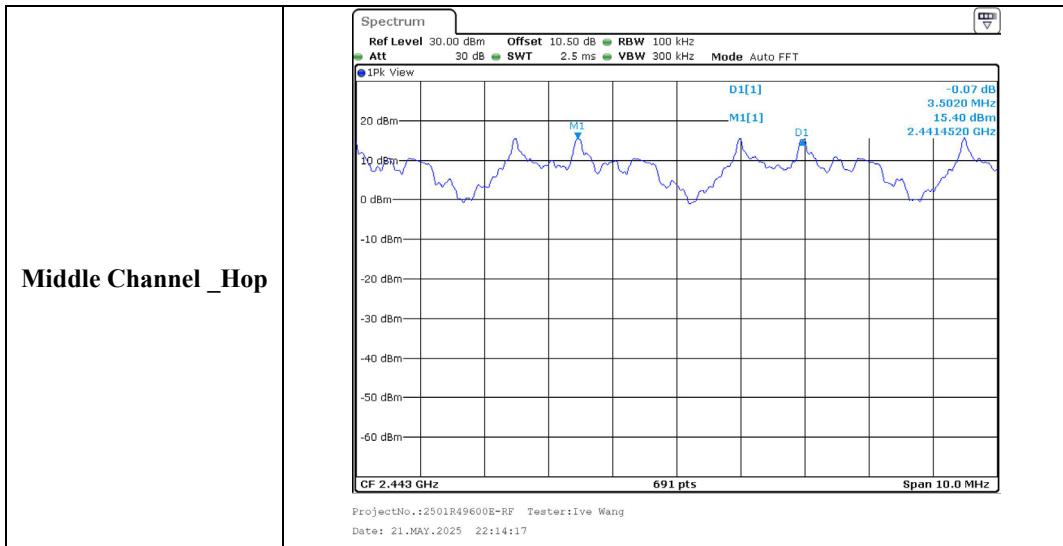

## FCC §15.247(a) (1) - 20dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard


Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an un-modulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using  $[(\text{reference value}) - \text{xx}]$ . Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an un-modulated carrier, then turn the EUT modulation on, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “- xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “- xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).



## Test Data

### Environmental Conditions

<b>Temperature:</b>	23.5°C
<b>Relative Humidity:</b>	41 %
<b>ATM Pressure:</b>	101.2 kPa


*The testing was performed by Ive Wang on 2025-06-06 and 2025-06-07.*


*EUT operation mode: Transmitting*

**Test Result: Compliant**

Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	20 dB Emission Bandwidth (MHz)
GFSK	Lowest	2410	4.110	4.645
	Middle	2441.5	4.096	4.674
	Highest	2473	4.139	4.631

Please refer to the below plots:

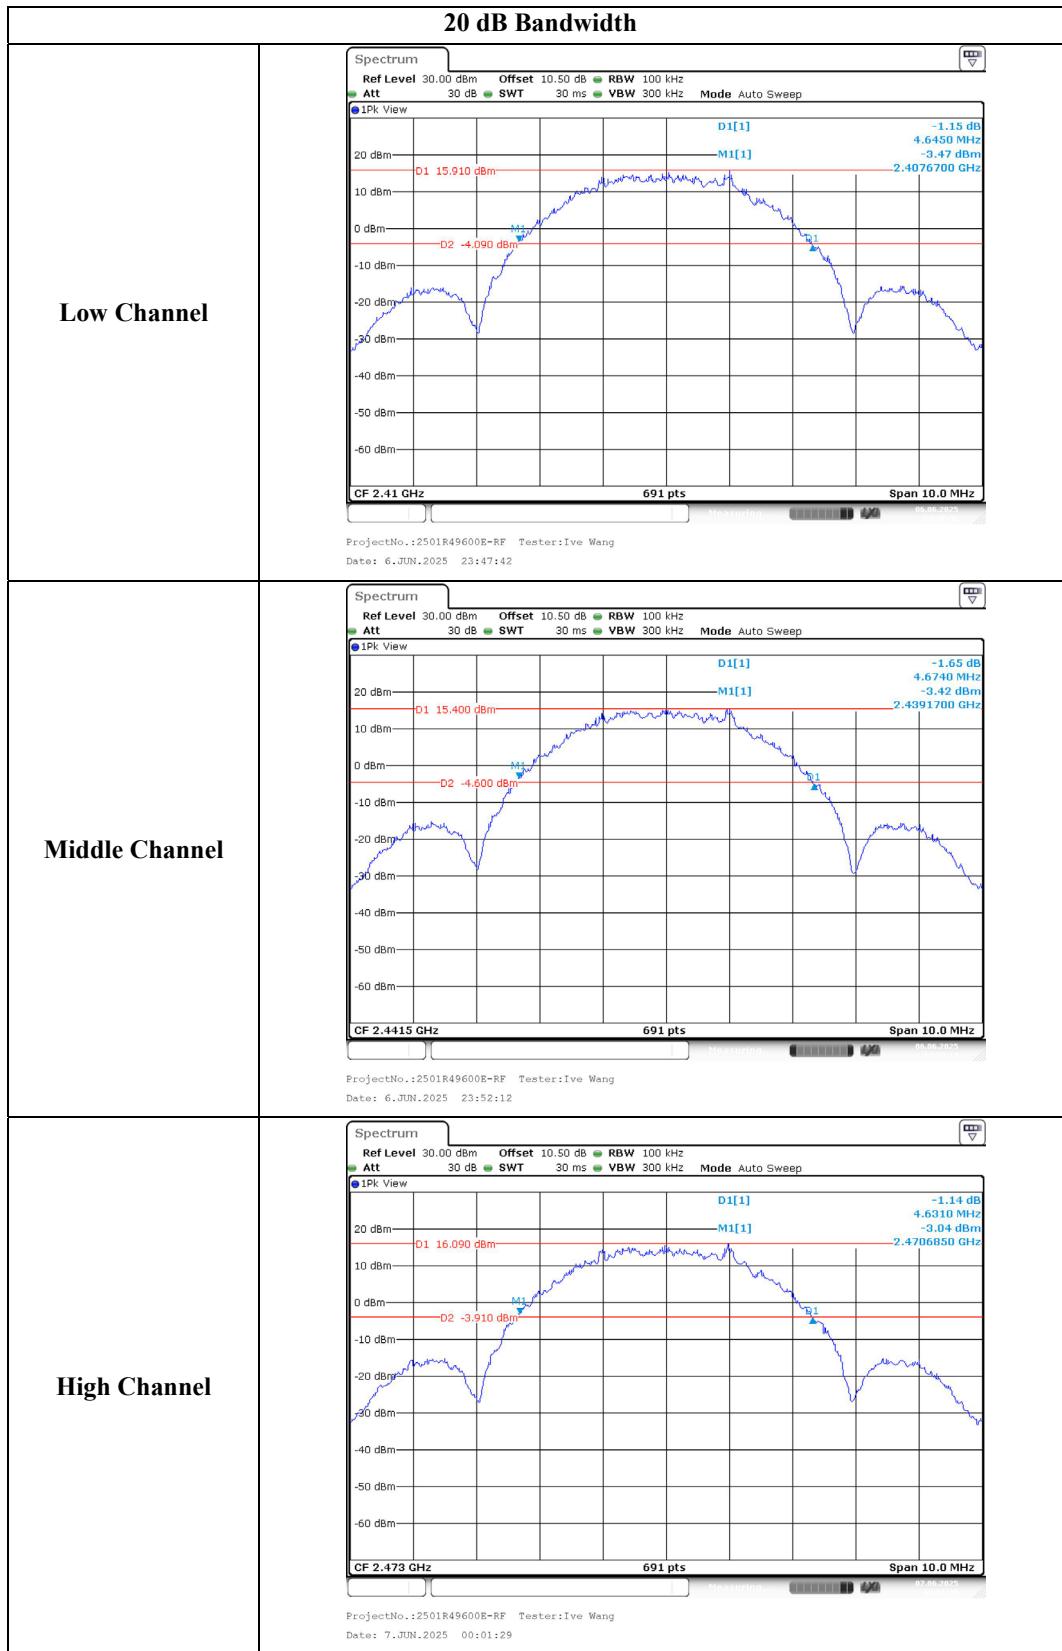

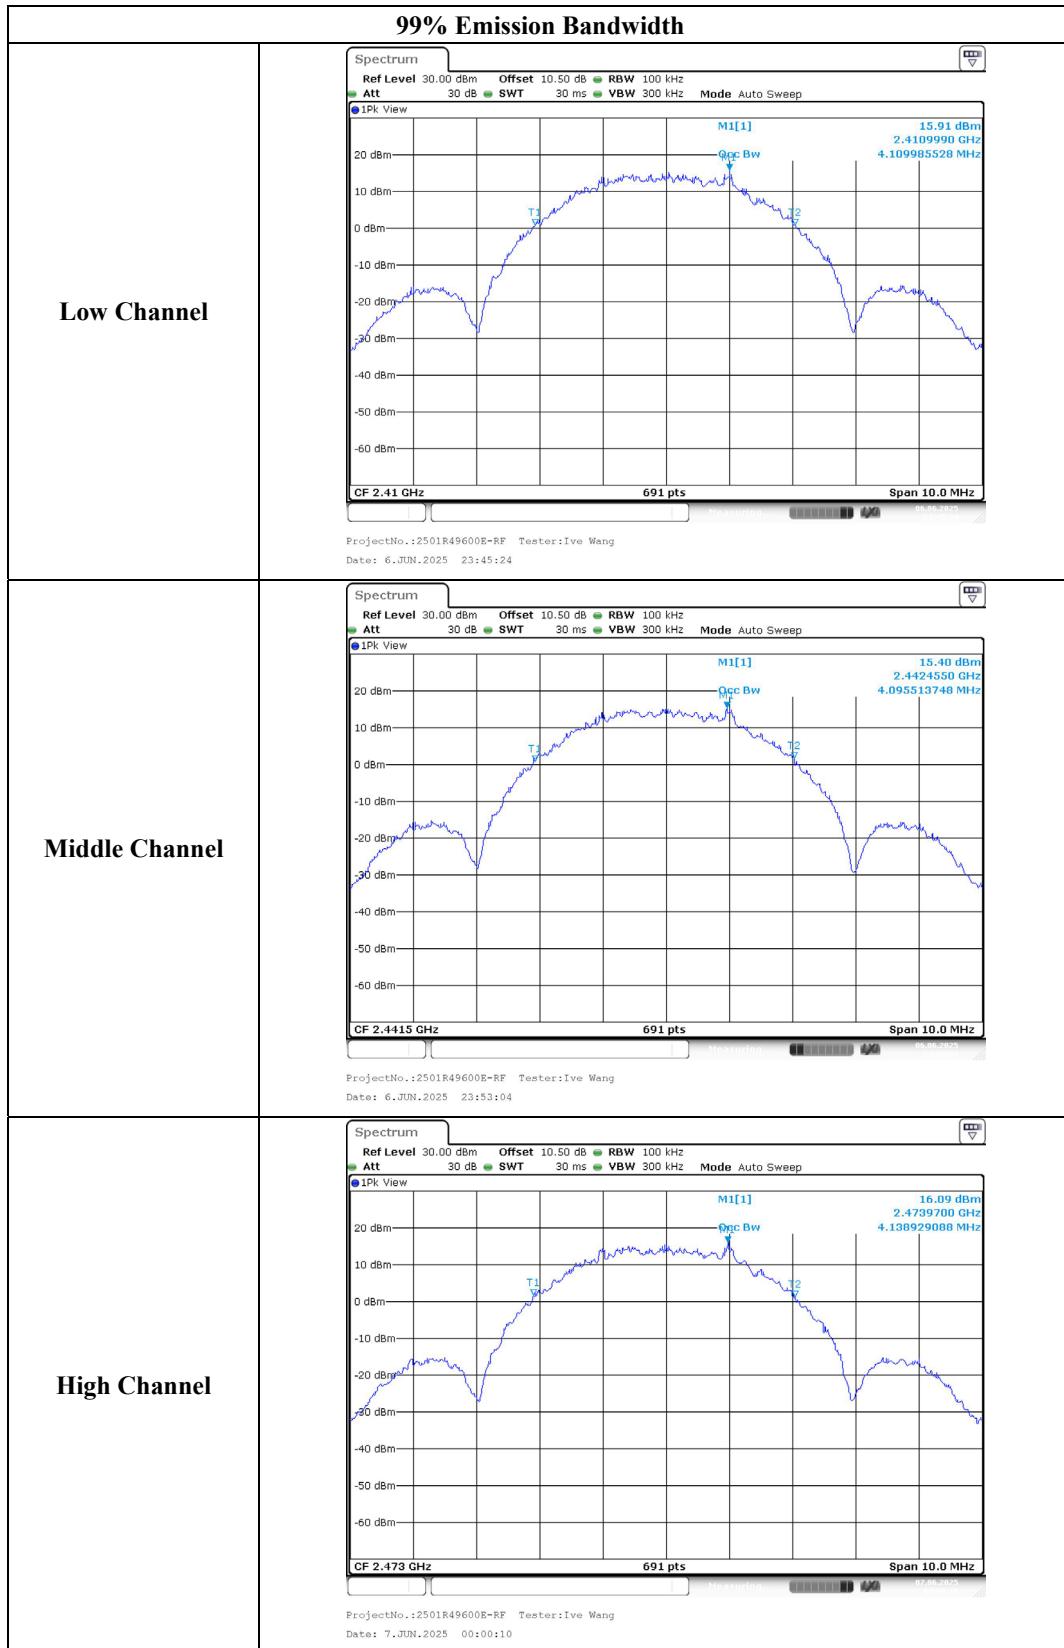

## **FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

Test Method: ANSI C63.10-2013 Clause 7.8.3

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.

It might prove necessary to break the span up into sub ranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels.



### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	24.9 °C
<b>Relative Humidity:</b>	47 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Iye Wang on 2025-05-21.*

*EUT operation mode: Transmitting*

***Test Result: Compliant***

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	2400-2483.5	19	≥15

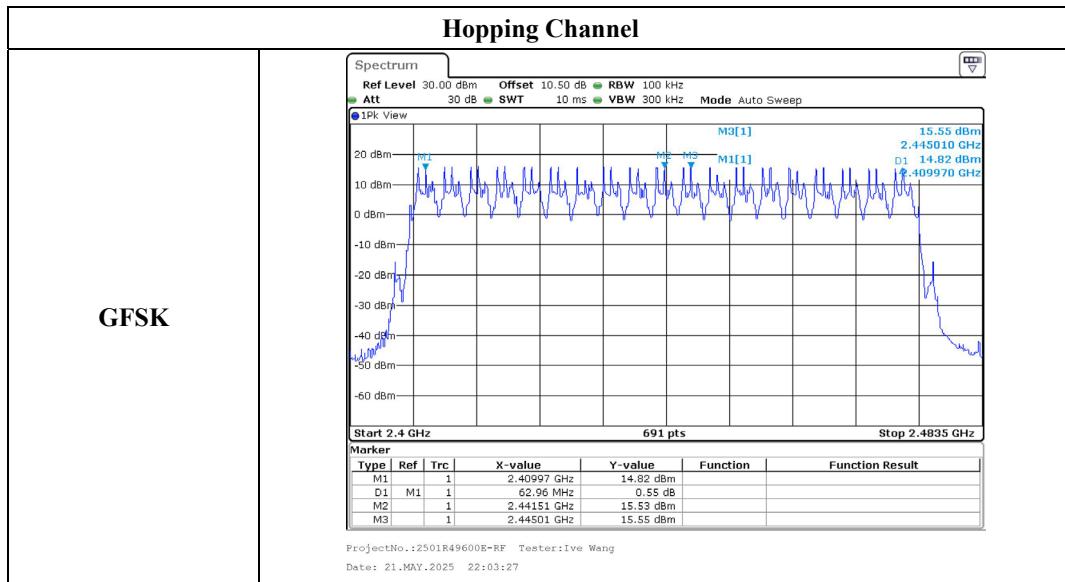

## FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


### Applicable Standard

Frequency hopping systems (FHSs) in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



### Test Data

#### Environmental Conditions

Temperature:	23.5~24.9 °C
Relative Humidity:	41~47 %
ATM Pressure:	101.2 kPa

*The testing was performed by Ive Wang from 2025-05-21 to 2025-06-06.*

*EUT operation mode: Transmitting*


**Test Result: Compliant**

Test Mode	Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers	Dwell Time (s)	Limit (s)
GFSK	2441.5	0.333	7.6	40	0.013	0.400

Note 1: Observation time= Hopping Channel Number $\times$  0.4

Note 2: Dwell Time = Pulse width \*Hopping Numbers

Note 2: Hopping Numbers= 10\* Hopping Numbers in 7.6s/10

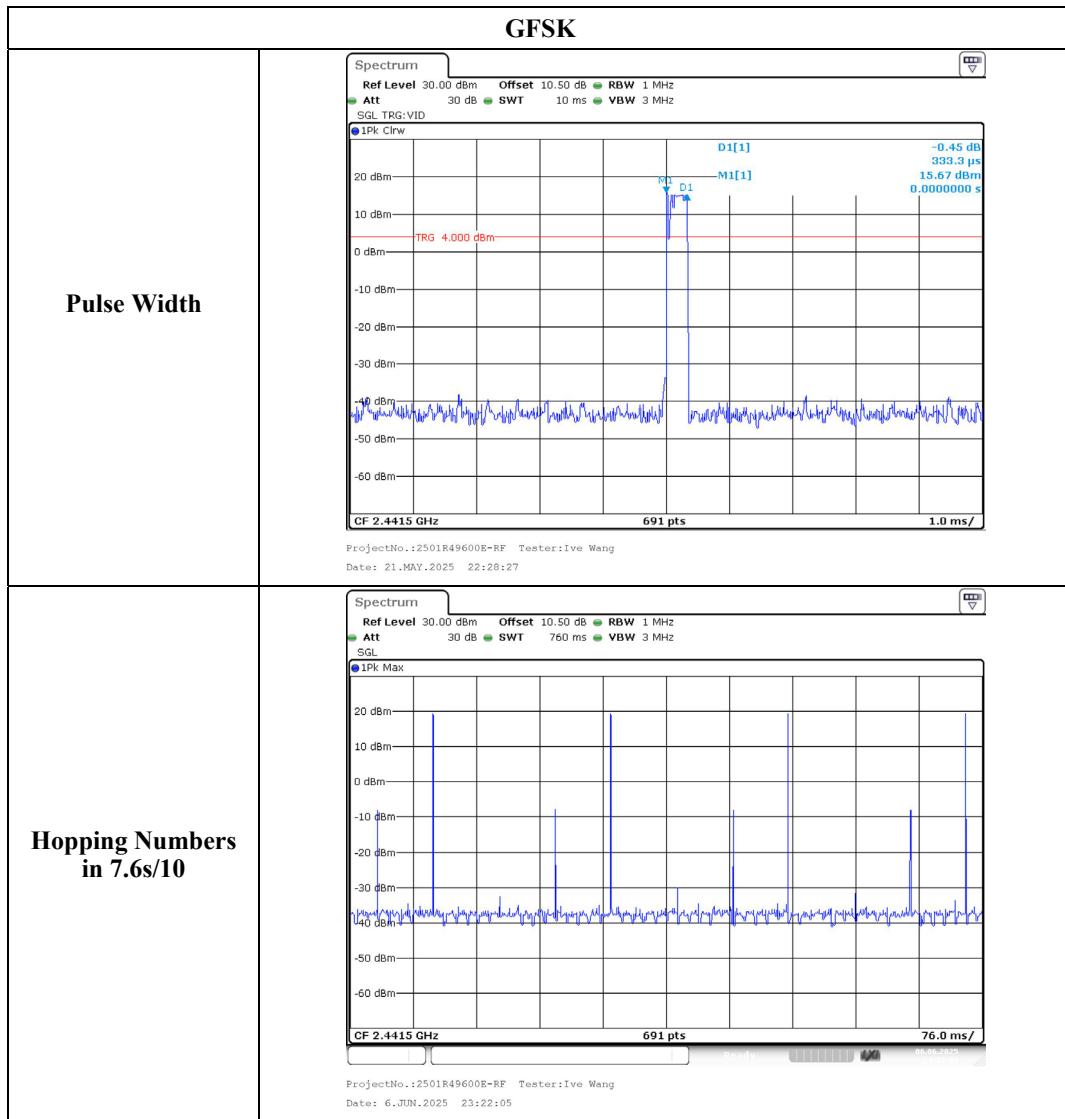

## **FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### **Test Procedure**

Test Method: ANSI C63.10-2013 Clause 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:


a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW  $\geq$  RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.



**Test Data****Environmental Conditions**


<b>Temperature:</b>	23.5 °C
<b>Relative Humidity:</b>	41 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Ive Wang on 2025-06-06 and 2025-06-07.*

*EUT operation mode: Transmitting*

**Test Result: Compliant**

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GFSK	Low	2410	18.87	21
	Middle	2441.5	18.94	21
	High	2473	18.85	21

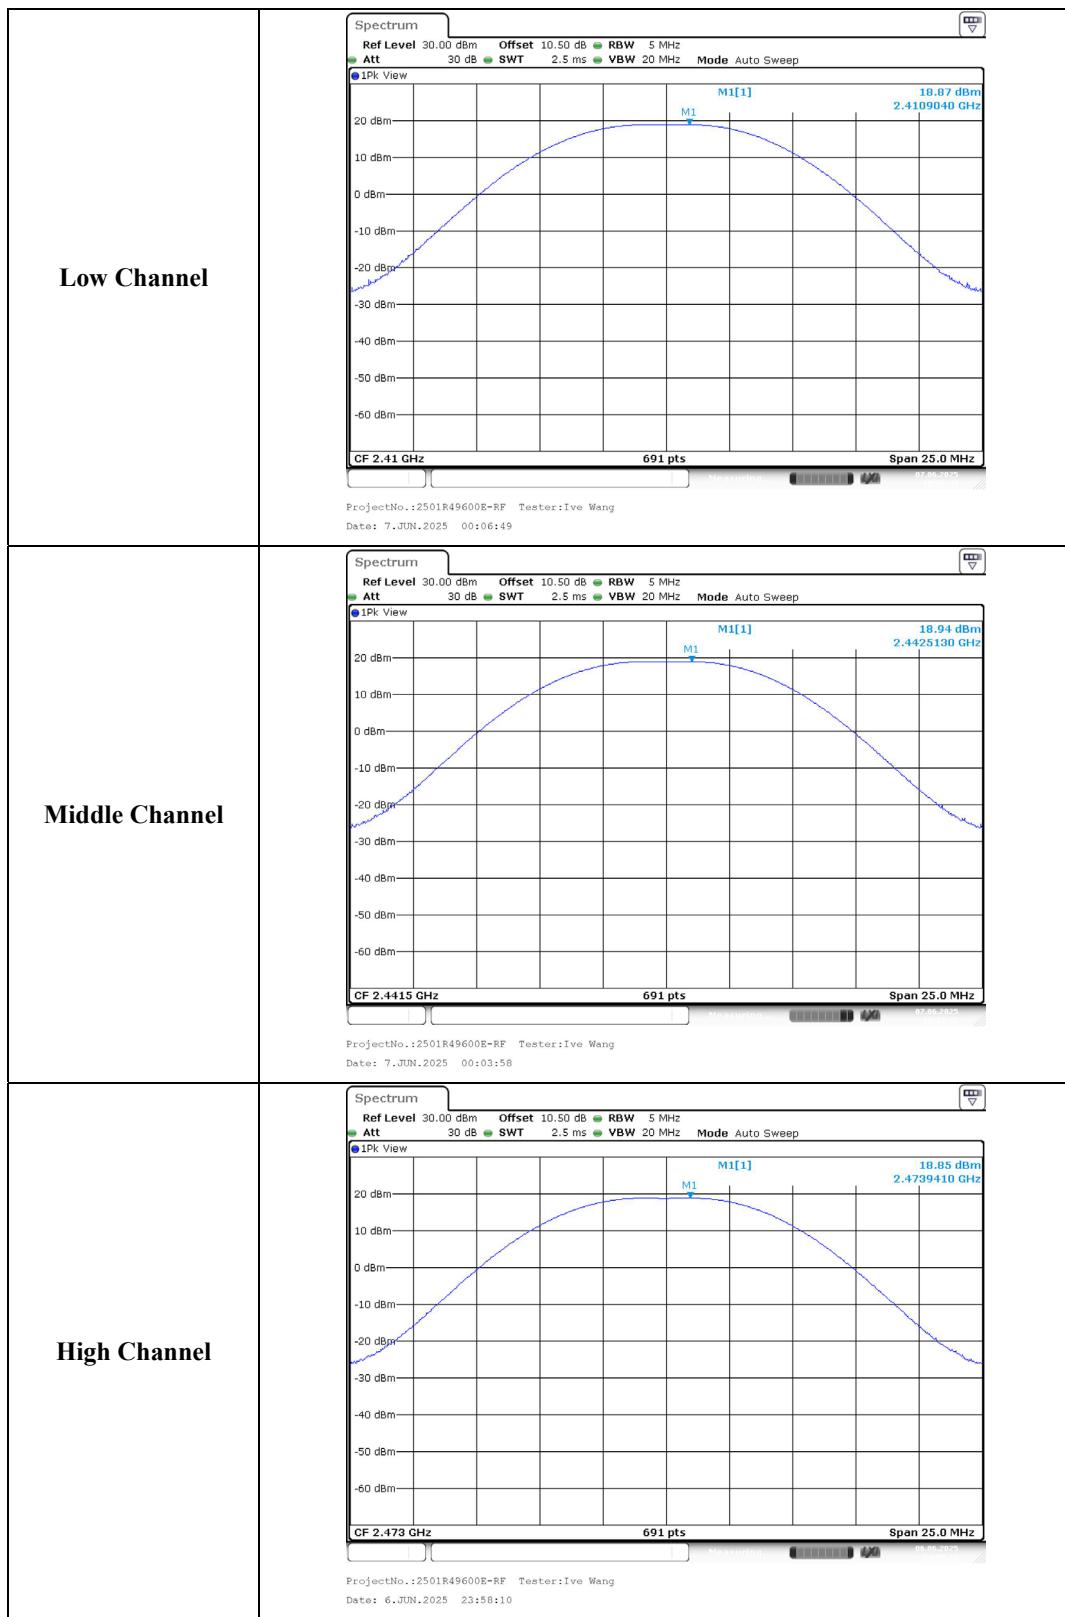

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard


According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data


#### Environmental Conditions


Temperature:	24.9 °C
Relative Humidity:	47 %
ATM Pressure:	101.2 kPa

*The testing was performed by Ive Wang on 2025-05-21.*

*EUT operation mode: Transmitting*

**Test Result: Compliant**

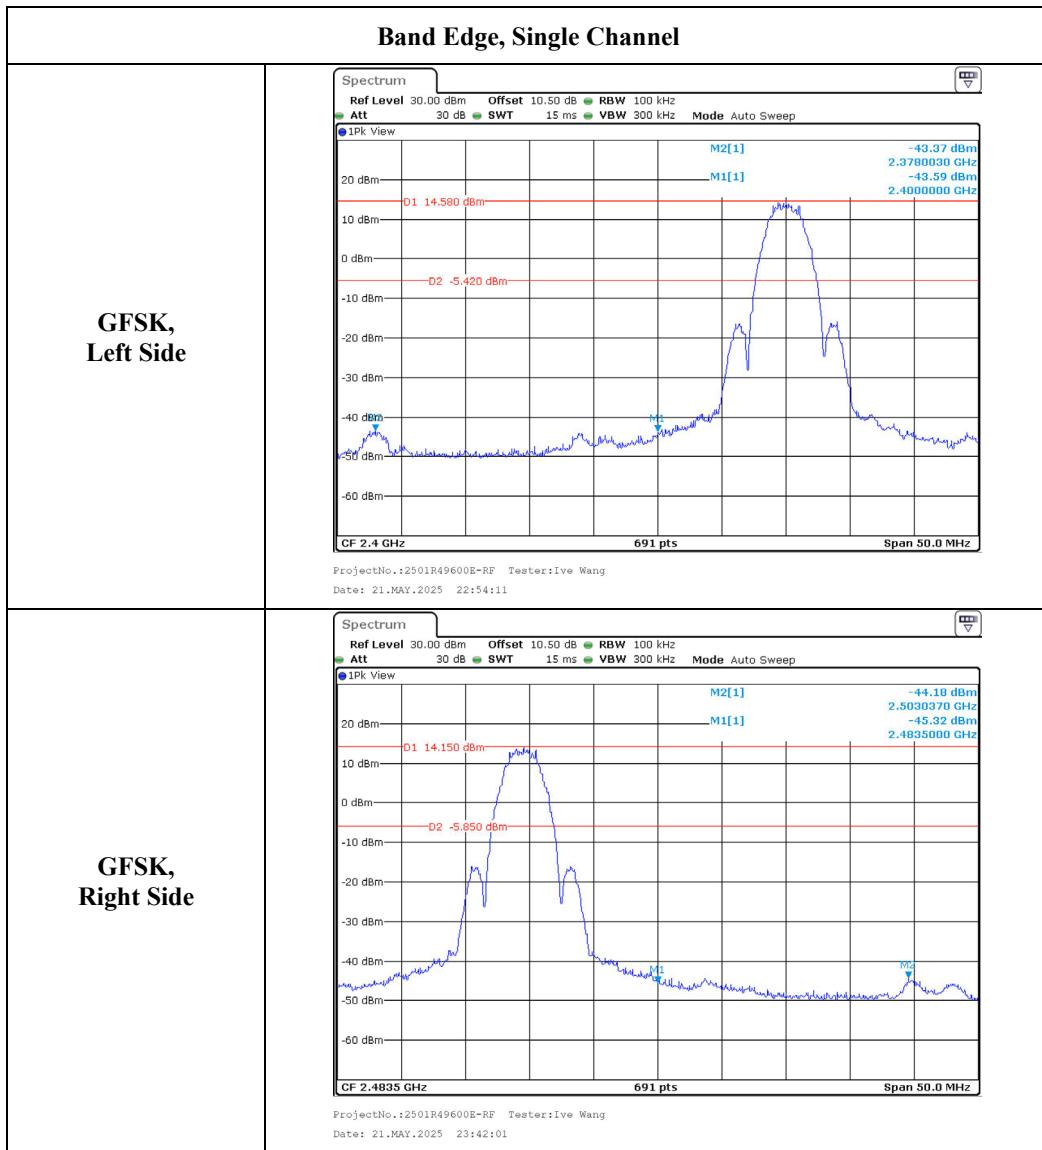

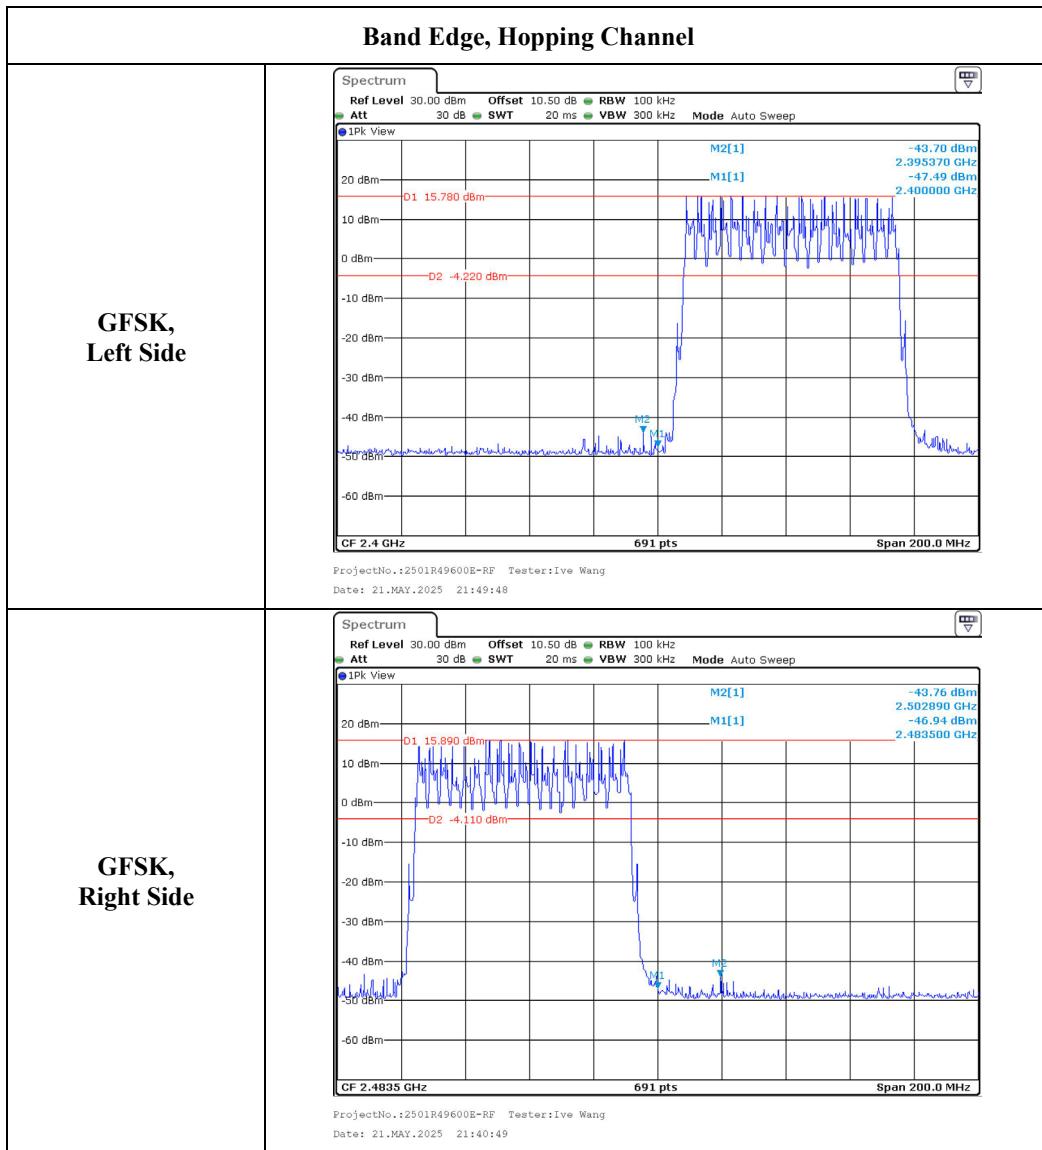

## **EUT PHOTOGRAPHS**

Please refer to the attachment 2501R49600E-RF External photo and 2501R49600E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2501R49600E-RF Test Setup photo.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***