

TEST REPORT

Test report no.: 1-8968-24-01-12_TR1-R01



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.cetecomadvanced.com>

e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

Rosenberger Hochfrequenztechnik GmbH & Co. KG

Hauptstraße 1

83413 Fridolfing / GERMANY

Phone:

Contact: Simon Huber

e-mail: simon.huber@rosenberger.de

Manufacturer

Rosenberger Hochfrequenztechnik GmbH & Co. KG

Hauptstraße 1

83413 Fridolfing / GERMANY

Test standard/s

FCC - Title 47 CFR Part 15
Subpart C, §15.255

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio
frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: RoProxCon Data
Model name: MI1C806-901-02
FCC ID: 2BG4VRPCD
Frequency: 57 – 64 GHz
Technology tested: RADAR Device
Antenna: Integrated
Power supply: PoE (120 V AC and 60 Hz)
Temperature range: -20°C to +55°C

)

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Thomas Vogler
Lab Manager
Radio Communications

Test performed:

Al-Amin Hossain
Lab Manager
Radio Communications

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Involved test locations	4
2.4	Test laboratories sub-contracted	4
2.5	Laboratory listings and recognitions	4
3	Test standard/s, references and accreditations	5
4	Reporting statements of conformity – decision rule	6
5	Test environment	7
6	Test item	7
6.1	General description	7
6.2	Additional information	8
7	Description of the test setup.....	9
7.1	Shielded semi anechoic chamber	10
7.2	Radiated field strength emissions 30 MHz – 1000 MHz	13
7.3	Shielded fully anechoic chamber (1 GHz to 18 GHz - FAC 2)	15
7.4	Radiated measurements > 18 GHz	17
7.5	Radiated measurements > 50/85 GHz	17
8	Sequence of testing.....	19
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	19
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	19
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	19
8.4	Sequence of testing radiated spurious above 18 GHz.....	20
8.5	Sequence of testing radiated spurious above 50 GHz with external mixers	20
9	Measurement uncertainty (Essen Lab location)	21
10	Far field consideration for measurements above 18 GHz	22
11	Summary of measurement results	24
12	Additional comments	25
13	Basic information of the DUT & selection of applicable rule parts	26
14	Measurement results	31
14.1	Occupied bandwidth & emission bandwidth & frequency stability	31
14.2	Radiated power (EIRP)	37
14.3	Peak transmitter conducted output power	43
14.4	Spurious emissions radiated.....	44
14.5	Conducted emissions < 30 MHz (AC power line).....	77
15	Glossary.....	80
16	Document history	81

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2024-12-20
Date of receipt of test item:	2025-03-28
Start of test:*	2025-05-06
End of test:*	2025-05-16
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Involved test locations

Saarbruecken lab		Essen lab	
☐	Untertuerkheimer Str. 6-10 66117 Saarbruecken Germany	☒	Im Teelbruch 116 45219 Essen Germany

2.4 Test laboratories sub-contracted

None

2.5 Laboratory listings and recognitions

	Saarbruecken	Essen
FCC	DE0002	DE0003

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices


Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2020	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
57-71 GHz (60 GHz) frequency band	V01	364244 D01 Meas 15.255 Radars v01: RADAR DEVICES CERTIFYING UNDER THE PROVISIONS OF §15.255

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong.

measured value, measurement uncertainty, verdict

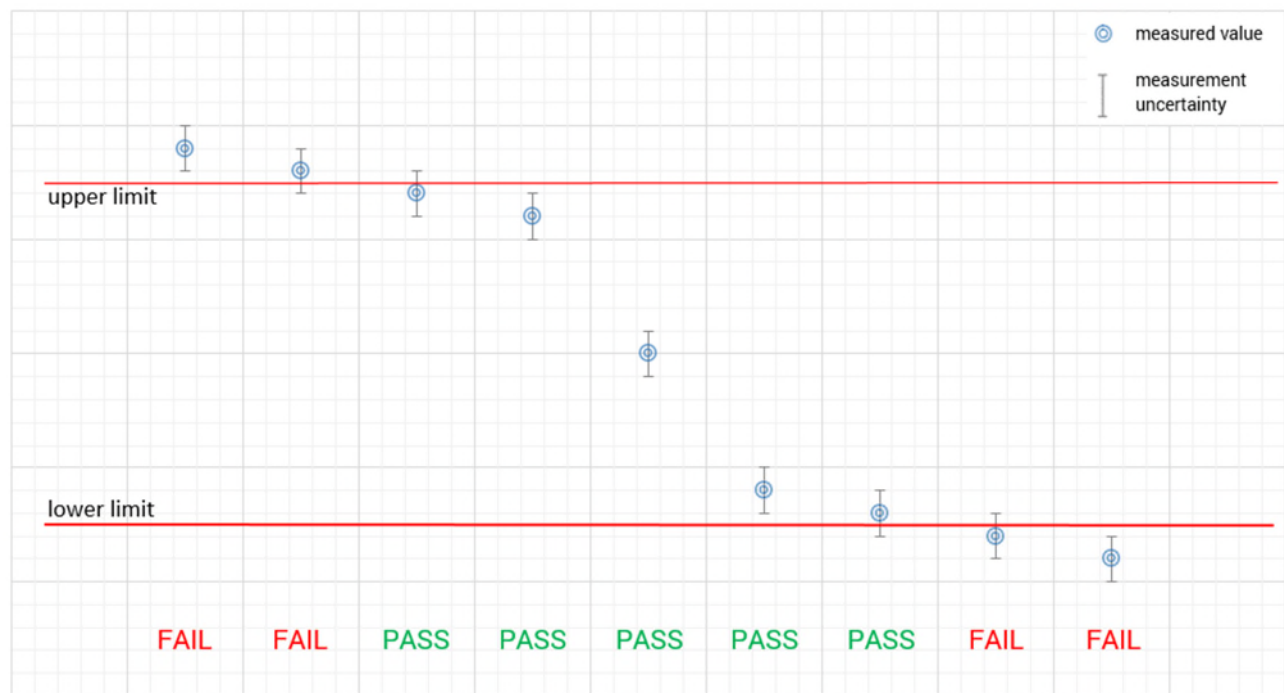

5 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+20°C during room temperature tests +50°C during high temperature tests -20°C during low temperature tests
Relative humidity content	:		49 %
Barometric pressure	:		990 hPa to 1010 hPa
Power supply	:	V_{nom} V_{max} V_{min}	120 V AC 138 V AC (115% of V_{nom}) 102 V AC (85% of V_{nom})

6 Test item

6.1 General description

Kind of test item EUT	:	RoProxCon Data
Model name EUT	:	MI1C806-901-02
HMN	:	(--)
PMN	:	RoProxCon Data
HVIN	:	MI1C806-901-02
FVIN	:	(--)
S/N serial number	:	CE 10 / Trackit number: 57.107
Power setting	:	--
Hardware status	:	200
Software status	:	1.0
Firmware status	:	(--)
Frequency band	:	57-71GHz
Type of radio transmission	:	modulated carrier
Use of frequency spectrum	:	
Type of modulation	:	2-ASK
Number of channels	:	1
Antenna	:	Integrated antenna See separate document about antenna gain. 4.3 dBi, see chapter 6.2 for referenced applicants document
Power supply	:	102 V AC to 138 V AC (according applicants information)
Temperature range	:	-20°C to +50°C (according applicants information)
Other items:	:	(--)

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-8968-24-01-12_TR1-A101-R01 (External photographs of EUT)
- To be provided by the applicant (Internal photographs of EUT)
- 1-8968-24-01-12_TR1-A103-R01 (Test set-up photographs)
- Note: The referenced photos show EUT delivered by the customer in this project, not necessarily the exact one used for the specific tests. EUT identification shown in the photos may differ.

Additional measurement reports:

- 1-8968-24-01-12_TR1-A201-R1

Additional declarations (manufacturer's declarations, declarations of conformity, etc.):

- None

Documents provided by the applicants:

Antenna datasheet: **"Specification_RoProxCon_Data_Antenna_V0100.pdf"**

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration


k/cal	calibration / calibrated	EK	limited calibration
Ne/cnn	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
Ev/chk	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vkl!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress
cpu	check prior usage		

7.1 Shielded semi anechoic chamber

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in sub-chapter "correction factors". The tests are performed in the semi-anechoic room recognized by the regulatory commission and absorbers placed between EUT and measurement antenna.

Schematic:

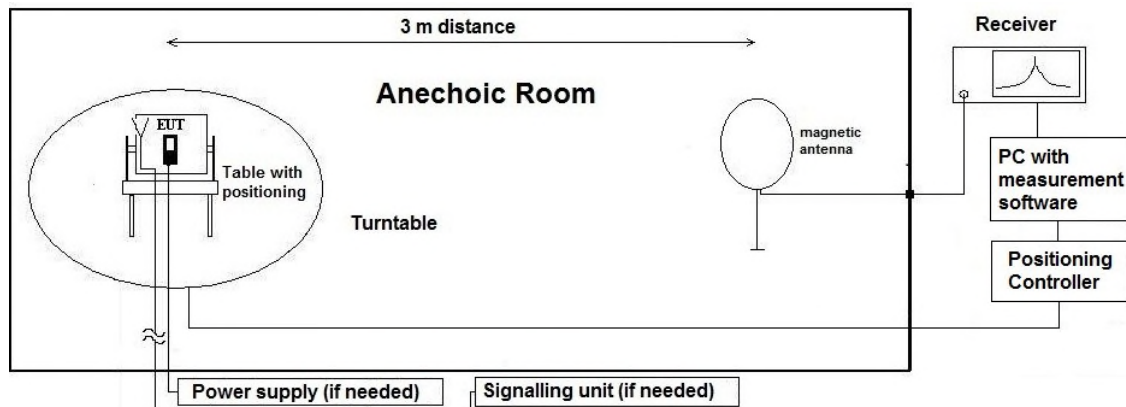

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 1 (defined usage position) or 2-orthogonal axis (not defined usage position for portable equipment).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

Sample calculation

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
19.83	18.9	-70.75	0.18	--	-51.67	-31.83	30 to 3 m correction used according ANSI C63.10-2020

Remark: This calculation is based on an example general value at 458 kHz, frequency not related to this project

Correction factors due to reduced meas. distance (f < 30 MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency Range	F [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2nd Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9	33333.33	5305.17	300	fullfilled	not fullfilled	-80.00
	10	30000.00	4774.65		fullfilled	not fullfilled	-80.00
	20	15000.00	2387.33		fullfilled	not fullfilled	-80.00
	30	10000.00	1591.55		fullfilled	not fullfilled	-80.00
	40	7500.00	1193.66		fullfilled	not fullfilled	-80.00
	50	6000.00	954.93		fullfilled	not fullfilled	-80.00
	60	5000.00	795.78		fullfilled	not fullfilled	-80.00
	70	4285.71	682.09		fullfilled	not fullfilled	-80.00
	80	3750.00	596.83		fullfilled	not fullfilled	-80.00
	90	3333.33	530.52		fullfilled	not fullfilled	-80.00
	100	3000.00	477.47		fullfilled	not fullfilled	-80.00
	125	2400.00	381.97		fullfilled	not fullfilled	-80.00
	200	1500.00	238.73		fullfilled	fullfilled	-78.02
	300	1000.00	159.16		fullfilled	fullfilled	-74.49
	400	750.00	119.37		fullfilled	fullfilled	-72.00
	490	612.24	97.44		fullfilled	fullfilled	-70.23
	500	600.00	95.49	30	fullfilled	not fullfilled	-40.00
	600	500.00	79.58		fullfilled	not fullfilled	-40.00
	700	428.57	68.21		fullfilled	not fullfilled	-40.00
	800	375.00	59.68		fullfilled	not fullfilled	-40.00
	900	333.33	53.05		fullfilled	not fullfilled	-40.00
MHz	1.00	300.00	47.75		fullfilled	not fullfilled	-40.00
	1.59	188.50	30.00		fullfilled	not fullfilled	-40.00
	2.00	150.00	23.87		fullfilled	fullfilled	-38.02
	3.00	100.00	15.92		fullfilled	fullfilled	-34.49
	4.00	75.00	11.94		fullfilled	fullfilled	-32.00
	5.00	60.00	9.55		fullfilled	fullfilled	-30.06
	6.00	50.00	7.96		fullfilled	fullfilled	-28.47
	7.00	42.86	6.82		fullfilled	fullfilled	-27.13
	8.00	37.50	5.97		fullfilled	fullfilled	-25.97
	9.00	33.33	5.31		fullfilled	fullfilled	-24.95
	10.00	30.00	4.77		fullfilled	fullfilled	-24.04
	10.60	28.30	4.50		fullfilled	fullfilled	-23.53
	11.00	27.27	4.34		fullfilled	fullfilled	-23.21
	12.00	25.00	3.98		fullfilled	fullfilled	-22.45
	13.56	22.12	3.52		fullfilled	fullfilled	-21.39
	15.00	20.00	3.18		fullfilled	fullfilled	-20.51
	15.92	18.85	3.00		fullfilled	fullfilled	-20.00
	17.00	17.65	2.81		not fullfilled	fullfilled	-20.00
	18.00	16.67	2.65		not fullfilled	fullfilled	-20.00
	20.00	15.00	2.39		not fullfilled	fullfilled	-20.00
	21.00	14.29	2.27		not fullfilled	fullfilled	-20.00
	23.00	13.04	2.08		not fullfilled	fullfilled	-20.00
	25.00	12.00	1.91		not fullfilled	fullfilled	-20.00

	27.00	11.11	1.77		not fulfilled	fulfilled	-20.00
	29.00	10.34	1.65		not fulfilled	fulfilled	-20.00
	30.00	10.00	1.59		not fulfilled	fulfilled	-20.00

Measurement Location

Test site	☐ SAC 1: #225911
	☒ SAC 3: #120901

Equipment table:


No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	20341	Digital Multimeter	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	–	cal	13.05.2024	13.05.2026
2	20482	Filter Matrix	Filter Matrix SAC3	cetecom advanced GmbH / Essen	without	–	cnn	-/-	-/-
3	20620	EMI Test Receiver	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	–	cal	08.05.2025	08.05.2026
4	20016	Line Impedance Simulating Network Op. 24-D	Line Impedance Simulating Network	Spitzenberger & Spies GmbH & Co. KG	B6366	–	cal	19.05.2025	19.05.2028
5	25038	Loop Antenna	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	–	cal	04.07.2022	04.07.2025

7.2 Radiated field strength emissions 30 MHz – 1000 MHz

Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant Semi-Anechoic Chamber (SAC) recognized by the regulatory commission. The measurement distance was set to 3 meters for frequencies up to 1 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz.

Schematic:

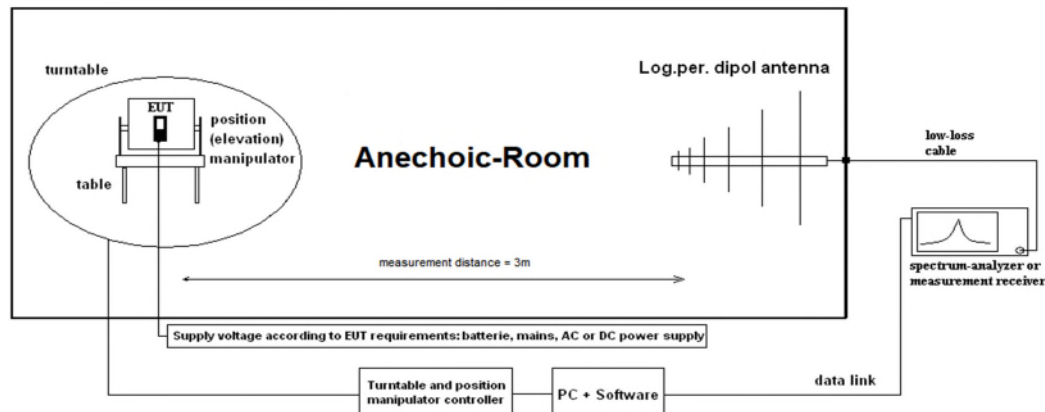

Measurement method/steps:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 2-orthogonal axis (or 3-axis) the emission spectrum and its characteristics were recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst case determined by an exploratory emission measurement. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are carried out to find the worst case of them. Also, the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 1 (defined usage position) or 2-orthogonal axis (not defined usage position for portable equipment). The measurement antenna height is varied between 1 m and 4 m for maximum search. The measurements are performed for horizontal and vertical measurement antenna polarization.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according the standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

Sample calculation

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
32.7	22.25	--	3.1	--	25.35	58.05	--

Remark: This calculation is based on an general example value at 800.4 MHz, not related to the concrete measurements within this project.

Measurement Location

Test site	☐ SAC 1: #225911
	☒ SAC 3: #120901


Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	Kind of Calibration	Last Calibration	Next Calibration
1	20341	Digital Multimeter	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	cal	13.05.2024	13.05.2026
2	20482	Filter Matrix	Filter Matrix SAC3	cetecom advanced GmbH / Essen	without	cnn	-/-	-/-
3	20574	Biconilog Hybrid Antenna	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	15.06.2022	15.06.2025
4	20620	EMI Test Receiver	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	08.05.2025	08.05.2026
5	20016	Line Impedance Simulating Network Op. 24-D	Line Impedance Simulating Network	Spitzenberger & Spies GmbH & Co. KG	B6366	cal	19.05.2025	19.05.2028

7.3 Shielded fully anechoic chamber (1 GHz to 18 GHz - FAC 2)

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. Typical distances are set to 3 meter for frequencies up to 15 GHz, 2 meter up to 18 GHz and 1m up to 50GHz. Otherwise specified in the diagram. Horn antennas are used for frequency range 1 GHz to 50 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna.

Schematic:

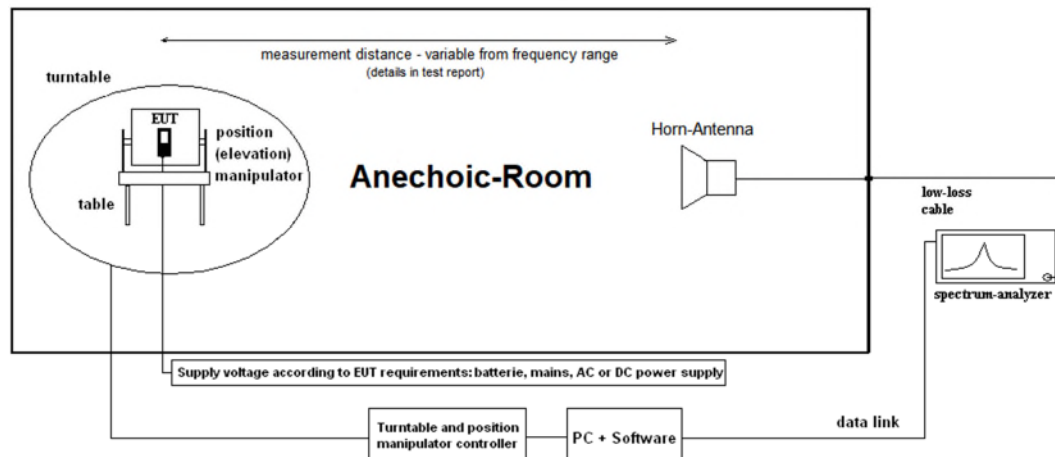

Measurement method/steps:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods*)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over one or two axis for defined EUT position and the measurement antenna height for EUT with large dimensions or three axis scan for portable/small equipment. This is performed for both measurement antenna polarization: horizontal and vertical.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula for EIRP measurements

$$P_{EIRP} = P_{MEAS} + C_L + FSL - G_A \quad (1)$$

P_{MEAS} = measured power at instrument

M = Margin

L_T = Limit

FSL = Free Space loss = Function(frequency, measurement distance)

$$M = L_T - P_{EIRP}$$

C_L = cable loss

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

Sample calculation


Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss + Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
29.37	41.20	--	24.28	16.92	46.3	CableLoss and PreAmp data in one data correction file

Remark: This calculation is based on an general example value at 10 GHz, not related to the concrete measurements within this project.


Equipment table (Essen Lab location): FAC2

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	Kind of Calibration	Last Calibration	Next Calibration
1	20133	Double-Ridged Waveguide Horn Antenna	Double-Ridged Waveguide Horn Antenna 3115 (Meas 1)	EMCO Elektronik GmbH / Gilching	9012-3629	cal	22.05.2023	22.05.2026
2	20016	Line Impedance Simulating Network Op. 24-D	Line Impedance Simulating Network	Spitzenberger & Spies GmbH & Co. KG	B6366	cal	19.05.2025	19.05.2028
3	20972	Signal- and Spectrum Analyzer	Signal- and Spectrum Analyzer FSW50	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101929	cal	19.03.2025	19.03.2026
4	20811	Horn Antenna	Horn Antenna ASY- SGH-124-SMA	Antenna Systems Solutions S.L / Santander	29F14182337	chk	20.10.2021	07.10.2025
5	20816	SGH Antenna	SGH Antenna SGH-26- WR10	Anteral S.L.	1144	cnn	-/-	-/-
6	20817	Waveguide Rectangular Horn Antenna	Waveguide Rectangular Horn Antenna SAR-2309-22- S2	ERAVANT / Torrance	13254-01	chk	16.10.2024	20.10.2026
7	20836	Amplifier	1-18 GHz Amplifier	Wright Technologies, Inc., Inc. / Roseville	0001	chk	18.10.2024	18.10.2026
8	20912	Low noise Amplifier Module 0.5-4GHz	Low noise Amplifier Module 0.5-4GHz	RF-Lambda Europe GmbH / Rüsselsheim	19041200083	cpu	18.10.2024	18.10.2025
9	20913	Phase Amplitude Stable Cable Assembly	Phase Amplitude Stable Cable Assembly DC-40GHz	RF-Lambda Europe GmbH	AC19040001	cnn	-/-	-/-
10	25457	DRG Horn Antenna	DRG Horn Antenna SAS-574	A.H. Systems, Inc. / Chatsworth	383	cal	28.03.2022	28.06.2025

7.4 Radiated measurements > 18 GHz

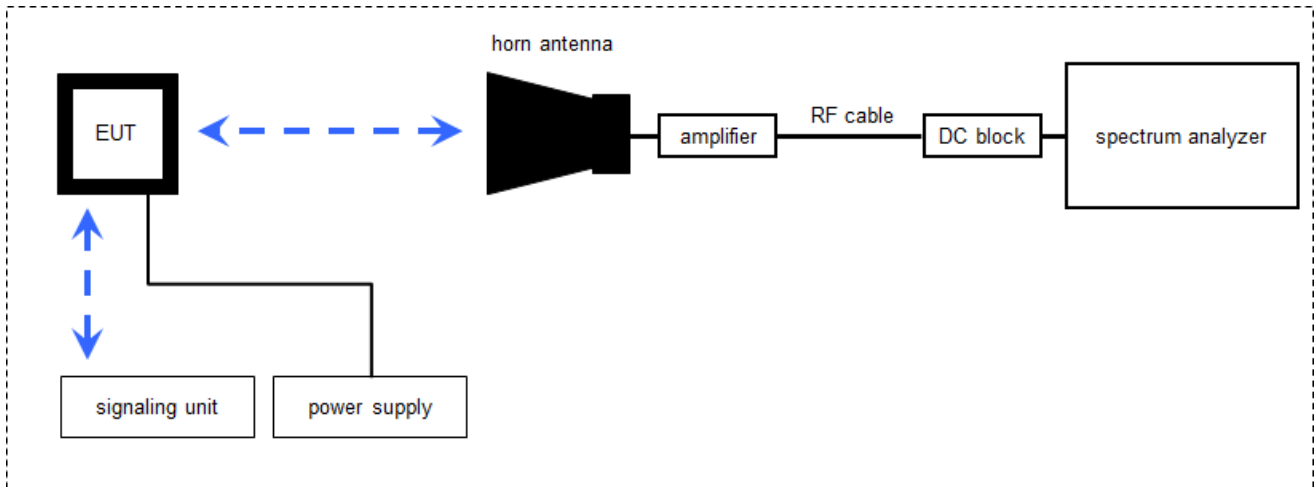

7.5 Radiated measurements > 50/85 GHz

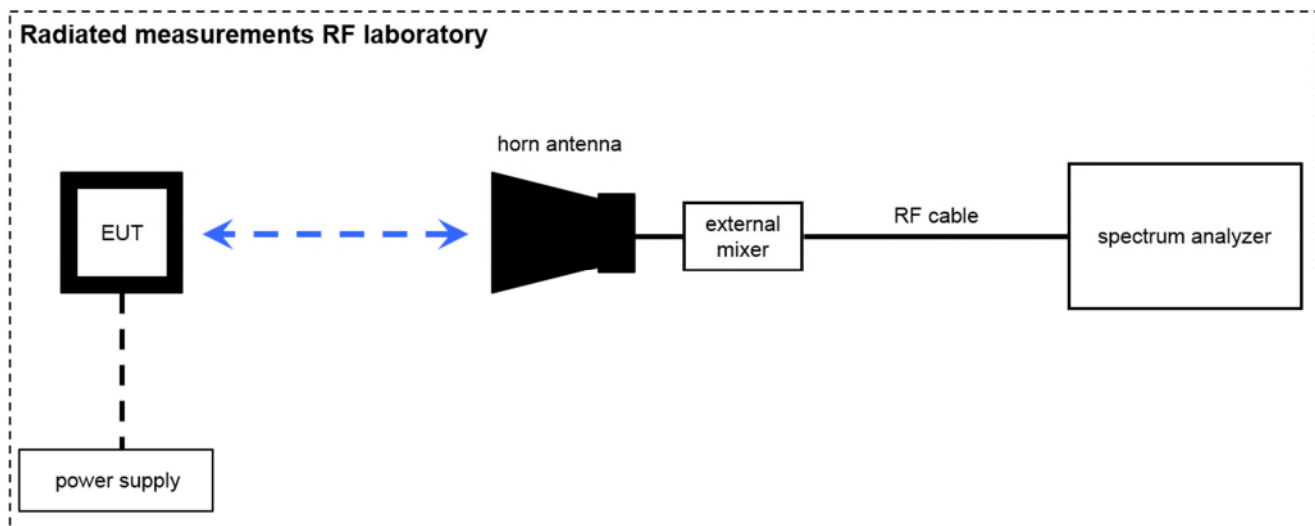

Measurement distance: horn antenna e.g. 75 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (} 6.79 \mu\text{V/m)}$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:

$$OP \text{ [dBm]} = -59.0 \text{ [dBm]} + 44.0 \text{ [dB]} - 20.0 \text{ [dBi]} + 5.0 \text{ [dB]} = -30 \text{ [dBm]} \text{ (} 1 \mu\text{W)}$$

Note: conversion loss of mixer is already included in analyser value.

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	Kind of Calibration	Last Calibration	Next Calibration
1	20133	Double-Ridged Waveguide Horn Antenna	Double-Ridged Waveguide Horn Antenna 3115 (Meas 1)	EMCO Elektronik GmbH / Gilching	9012-3629	cal	22.05.2023	22.05.2026
2	20354	DC - Power Supply 40A	DC - Power Supply 40A NGPE 40/40		448	cpu	05.03.2008	-/-
3	20412	Fully Anechoic Chamber	Fully Anechoic Chamber 2	ETS-Lindgren GmbH / Taufkirchen	without	chk	15.03.2024	28.06.2025
4	20729	Harmonic Mixer	FS-Z140	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101004	cal	16.06.2023	16.06.2026
5	20730	Harmonic Mixer	FS-Z110	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101468	cal	02.06.2023	02.06.2026
6	20731	Harmonic Mixer	FS-Z75	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101022	cal	08.06.2022	08.06.2025
7	20732	Signal- and Spectrum Analyzer	Signal- and Spectrum Analyzer FSW67	Rohde & Schwarz Messgerätebau GmbH / Memmingen	104023	cal	30.07.2024	30.07.2025
8	20733	Harmonic Mixer	Harmonic Mixer FS-Z220	RPG-Radiometer Physics GmbH / Meckenheim	101009	cal	24.05.2024	24.05.2027
9	20734	Harmonic Mixer	Harmonic Mixer FS-Z325	RPG-Radiometer Physics GmbH / Meckenheim	101005	cal	24.05.2024	24.05.2027
10	20765	Pickett-Potter Horn Antenna	Pickett-Potter Horn Antenna FH-PP 40-60	RPG-Radiometer Physics GmbH / Meckenheim	010001	chk	16.10.2024	16.10.2026
11	20767	Pickett-Potter Horn Antenna	Pickett-Potter Horn Antenna FH-PP 140-220	RPG-Radiometer Physics GmbH / Meckenheim	010011	chk	09.10.2024	09.10.2026
12	20811	Horn Antenna	Horn Antenna ASY-SGH-124-SMA	Antenna Systems Solutions S.L. / Santander	29F14182337	cal	08.10.2024	08.10.2027
13	20813	Pickett-Potter Horn Antenna	Pickett-Potter Horn Antenna FH-PP 075	RPG-Radiometer Physics GmbH / Meckenheim	10006	chk	16.10.2024	16.10.2026
14	20814	Pickett-Potter Horn Antenna	Pickett-Potter Horn Antenna FH-PP 140	RPG-Radiometer Physics GmbH / Meckenheim	10008	chk	09.10.2024	09.10.2026
15	20815	Pickett-Potter Horn Antenna	Pickett-Potter Horn Antenna FH-PP 110	RPG-Radiometer Physics GmbH / Meckenheim	10014	chk	22.03.2024	22.03.2026
16	20817	Waveguide Rectangular Horn Antenna	Waveguide Rectangular Horn Antenna SAR-2309-22-S2	ERAVANT / Torrance	13254-01	chk	16.10.2024	16.10.2026
17	20836	Amplifier	1-18 GHz Amplifier	Wright Technologies, Inc., Inc. / Roseville	0001	chk	18.10.2024	18.10.2026
18	20912	Low noise Amplifier Module 0.5-4GHz	Low noise Amplifier Module 0.5-4GHz	RF-Lambda Europe GmbH / Rüsselsheim	19041200083	cpu	18.10.2024	18.10.2025
19	20913	Phase Amplitude Stable Cable Assembly	Phase Amplitude Stable Cable Assembly DC-40GHz	RF-Lambda Europe GmbH	AC19040001	cnn	-/-	-/-
20	25457	DRG Horn Antenna	DRG Horn Antenna SAS-574	A.H. Systems, Inc. / Chatsworth	383	cal	28.03.2022	28.06.2025
21	20016	Line Impedance Simulating Network Op. 24-D	Line Impedance Simulating Network	Spizenberger & Spies GmbH & Co. KG	B6366	cal	19.05.2025	19.05.2028

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

Note: Check Chapter 7.1

Premeasurement*

Note: Check Chapter 7.1

Final measurement

Note: Check Chapter 7.1

*)Note: The sequence will be repeated two times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

Note: Check Chapter 7.2

Premeasurement

Note: Check Chapter 7.2

Final measurement

Note: Check Chapter 7.2

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

Note: Check Chapter 7.3

Premeasurement

Note: Check Chapter 7.3

Final measurement

Note: Check Chapter 7.3

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 1.5m/1 m).
- The EUT is set into operation.

Pre-measurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.10).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8.5 Sequence of testing radiated spurious above 50 GHz with external mixers

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate for far-field measurement conditions (e.g. 0.25 m). See details on diagrams.
- The EUT is set into operation.

Pre-measurement

- The test antenna with external mixer is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.
- Caution is taken to reduce the possible overloading of the external mixer.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.10).
- As external mixers may generate false images care is taken to ensure that any emission measured by the spectrum analyzer does indeed originate in the EUT. Signal identification feature of spectrum analyzer is used to eliminate false mixer images (i.e., it is not the fundamental emission or a harmonic falling precisely at the measured frequency).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the pre-measurement and the limit is stored.

9 Measurement uncertainty (Essen Lab location)

Issue No.	Measurement type	References	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
			Start [MHz]	Stop [MHz]		
1	Magnetic field strength	EN/FCC/ISED/JP	0,009	30	4,86	Magnetic loop antenna, Pre-amp on
2	RF-Output power (eirp) Unwanted emissions (eirp) [dB]	EN,FCC/ISED, JP	30	100	4,57	without Pre-Amp
			30	100	4,91	with PreAmp
			100	1000	4,02	without Pre-Amp
			100	1000	4,26	with PreAmp
			1000	18000	4,36	without Pre-Amp
			1000	18000	5,23	with PreAmp
			18000	33000	4,92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-mixer set-up)
			33000	50000	4,17	Set-up for Q-Band (WR-22), non-mixer set-up
			40000	60000	4,09	Set-up U-Band (WR-19), non-mixer set-up
			50000	75000	4,06	External Mixer set-up V-Band (WR-15)
			75000	110000	4,17	External Mixer set-up W-Band (WR-6)
			90000	140000	5,49	External Mixer set-up F-Band (WR-8)
			140000	225000	6,22	External Mixer set-up G-Band (WR-5)
			225000	325000	7,04	External Mixer set-up (WR-3)
			325000	500000	8,84	External Mixer set-up (WR-2.2)
3	Radiated Blocking [dB]	EN	1000	18000	2,85	Typical set-up with microwave generator and antenna, value for 7GHz calculated
			18000	33000	4,66	Typical set-up with microwave generator and antenna
			33000	50000	3,48	WR-22 set-up
			50000	75000	3,73	WR-15 set-up
			75000	110000	4,26	WR-6 set-up
4	Frequency Error UWB/FMCW [kHz]	EN, FCC, JP, ISED	116000	123000	279,87	Calculated for 123GHz carrier (FMCW)
	Frequency error [Hz]		40000	77000	276,19	calculated for 77 GHz (FMCW) carrier
			6000	7000	33,92	calculated for 6.5GHz UWB Ch.5
			11	14	20,76	calculated for 13.56MHz carrier
6	Conducted emissions AC-mains	EN/FCC/ISED	0,009	30	3,57	general EMI-measurements on AC/DC ports

10 Far field consideration for measurements above 18 GHz

Far field distance calculation:

$$D_{ff} = 2 \times D^2 / \lambda$$

with

D_{ff} Far field distance

D Antenna dimension

λ wavelength

Spurious emission measurements:

Spurious emission measurements: OOB and Spurious area					
Antenna frequency range in GHz	Highest measured frequency in GHz	D in m	λ in m	D_{ff} in m	D_{MEAS} in m
f_{START}					
f_{STOP}					
18 40	40	0,045	0,0075	0,54	1,0
U-BAND					
40 50	50	0,0384	0,006	0,49	1,5
V-BAND					
50 67	67	0,03072	0,004477612	0,42	0,5
67 75	75	0,03072	0,004	0,47	0,5
W-BAND					
75 90	90	0,020757	0,003333333	0,26	1,0
90 110	110	0,020757	0,002727273	0,32	1,0
F-BAND					
110 120	120	0,016696	0,0025	0,22	0,5
120 130	130	0,016696	0,002307692	0,25	0,5
130 140	140	0,016696	0,002142857	0,25	0,5
G-BAND					
140 160	160	0,01066	0,001875	0,12	0,5
160 180	180	0,01066	0,001666667	0,14	0,5
180 200	200	0,01066	0,0015	0,15	0,5

In-Band measurements:

IN-BAND measurements. OBW, Power					
Antenna frequency range in GHz	Highest measured frequency in GHz	D in m	λ in m	D_{ff} in m	D_{MEAS} in m
f_{START}					
f_{STOP}					
V-BAND					
57	64	0,03072	0,0046875	0,40	0,5
64					

11 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC 47 CFR Part 15 (dated 2023-08-23)	see below	2025-06-27	-/-

Test specification clause	Test case	Temperature conditions	Power supply	Pass	Fail	NA	NP	Remark
47 CFR 15.215(b) & (c), 47 CFR 15.255(f)	Occupied bandwidth & Frequency stability	Nominal Extreme	Nominal Extreme	☒	☐	☐	☐	complies
47 CFR 15.255(b)(3) & (c)	Radiated power (EIRP)	Nominal	Nominal	☒	☐	☐	☐	complies
47 CFR 15.255(c)(2) 47 CFR 15.255(e)	Peak transmitter conducted output power	Nominal	Nominal	☒	☐	☐	☐	complies
47 CFR 15.255(b)(3), 47 CFR 15.255(c)	Time domain requirements	Nominal	Nominal	☐	☐	☒	☐	--
47 CFR 15.255(d)	Spurious emissions radiated	Nominal	Nominal	☒	☐	☐	☐	complies
47 CFR 15.207	Conducted emissions < 30 MHz (AC power line)	Nominal	Nominal	☒	☐	☐	☐	complies

Note: NA = Not applicable; NP = Not performed

12 Additional comments

Reference documents:

- None (or e.g. Document incl. antenna gain information in terms of data sheets and/or test reports (from customer))

Special test descriptions:

- None

Configuration descriptions:

- None

Test devices (EUT):**EUT setup-1:** EUT power supply with POE.

- EUT1: The normal operation mode (intended use) is used.
- This EUT is used for all Radio test.

Associated equipment (AE):

- AE1: PoE Injector.
- AE2: LAN cable.
- AE3: AC/DC Adapter
- AE4: DC power cable

Note-1: For more information regarding AE, see Annex 1-8968-24-01-12_TR1-A101-R01.

Note-2: For more information regarding EUT setups, see Annex 1-8968-24-01-12_TR1-A103-R01.

Normal operation modes (NM):

EUT Setup	EUT + AE	Description
Setup-1	EUT1 + AE1 + AE2 + AE3	➤ Once EUT is connected to AC mains, it starts working. ➤ This setup is used for all radio test
Setup-2	EUT1 + AE4	➤ Once EUT is connected to 24 V DC power supply, it starts working. ➤ This setup is used for peak power measurement to verify worst case scenario.

Additional test modes: ☒ No test modes available

☐ Special test modes/special software (see description below)

Description of special test modes as declared by customer:

- None

Details on test mode settings:

According to the customer's instructions, the following steps and commands were used to configure the test modes:

- None

Software provided by the manufacturer:

- None

13 Basic information of the DUT & selection of applicable rule parts

Basic information of the DUT:

General: see chapter "X Test item"

Operation condition: ☐ Operation on aircraft (47 CFR 15.255(b) / RSS-210 J.2)

☐ Unmanned aircraft (47 CFR 15.255(b)(3)) / Unmanned air vehicles (UAVs) (RSS-210 J.2)

☐ Not unmanned aircraft

☒ No operation on aircraft

Note: Operation under the provisions of this section is not permitted for equipment used on satellites (47 CFR 15.255(a)).

Kind of DUT: ☒ Devices other than field disturbance sensors and other than fixed point-to-point transmitters located outdoors

☐ Fixed point-to-point transmitters located outdoors

☐ Field disturbance sensors/radars

☐ Pulsed field disturbance sensors/radars

☐ Other than pulsed field disturbance sensors/radars

Frequency band: ☐ Operating within band 59.3 – 71.0 GHz (47 CFR 15.255(b)(2)(iii)) (RSS-210 J.2(b)(iv))

☐ Operating within band 60 – 64 GHz (47 CFR 15.255(b)(3)) (RSS-210 J.2(d)(i))

☒ Operating within band 57 – 71 GHz (47 CFR 15.255(c)(1))

☐ Operating within band 57.0 – 59.4 GHz (47 CFR 15.255(c)(2)(i)) (RSS-210 J.3.2(b)(i))

☐ Operating within band 57.0 – 61.56 GHz (47 CFR 15.255(c)(2)(ii)) (RSS-210 J.3.2(b)(ii))

☐ Operating within band 57 – 64 GHz (47 CFR 15.255(c)(2)(iii) / (c)(3)) (RSS-210 J.3.2(b)(iii) / J.3.2(c))

☐ Operating within band 61.0 – 61.5 GHz (47 CFR 15.255(c)(2)(v)) (RSS-210 J.3.2(a))

Note: See results in chapter 14.1

Selection of applicable rule parts:

Applicable rule parts and limits depend on the basic information of the DUT (see chapter 13).
The comparison of the basic information of the DUT with the rule parts lead to the following conclusions:

Rule Part	Applicable?	
	Yes	No
47 CFR 15.255:		
(a) General: Operation under the provisions of this section is not permitted for equipment used on satellites .	☒	
(b) Operation on aircraft: Operation on aircraft is permitted under the following conditions:	☐	☒
(1) When the aircraft is on the ground.	☐	☐
(2) While airborne, only in closed exclusive on-board communication networks within the aircraft, with the following exceptions:	☐	☐
(i) Equipment shall not be used in wireless avionics intra-communication (WAIC) applications where external structural sensors or external cameras are mounted on the outside of the aircraft structure.	☐	☐
(ii) Except as permitted in paragraph (b)(3) of this section, equipment shall not be used on aircraft where there is little attenuation of RF signals by the body/fuselage of the aircraft.	☐	☐
(iii) Field disturbance sensor/radar devices may only operate in the frequency band 59.3–71.0 GHz while installed in passengers' personal portable electronic equipment (e.g., smartphones, tablets) and shall comply with paragraph (b)(2)(i) of this section, and relevant requirements of paragraphs (c)(2) through (c)(4) of this section.	☐	☐
(3) Field disturbance sensors/radar devices deployed on unmanned aircraft may operate within the frequency band 60–64 GHz , provided that the transmitter not exceed 20 dBm peak EIRP. The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds. Operation shall be limited to a maximum of 121.92 meters (400 feet) above ground level.	☐	☐
(c) Radiated power limits: Within the 57–71 GHz band , emission levels shall not exceed the following equivalent isotropically radiated power (EIRP):	☒	
(1) Devices other than field disturbance sensors shall comply with one of the following power limits, as measured during the transmit interval:	☒	☐
(i) The average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm; or	☒	☐
(ii) For fixed point-to-point transmitters located outdoors , the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.	☐	☐
(A) The provisions in this paragraph (c) for reducing transmit power based on antenna gain shall not require that the power levels be reduced below the limits specified in paragraph (c)(1)(i) of this section.	☐	☐
(B) The provisions of § 15.204(c)(2) and (4) that permit the use of different antennas of the same type and of equal or less directional gain do not apply to intentional radiator systems operating under this provision. In lieu thereof, intentional radiator systems shall be certified using the specific antenna(s) with which the system will be marketed and operated. Compliance testing shall be performed using the highest gain and the lowest gain antennas for which certification is sought and with the intentional radiator operated at its maximum available output power level. The responsible party, as defined in § 2.909 of this chapter, shall supply a list of acceptable antennas with the application for certification.	☐	☐

(2) Field disturbance sensors/radars shall not exceed -10 dBm peak conducted output power and 10 dBm peak EIRP except that field disturbance sensors/radars that limit their operation to all or part of the specified frequency band may operate without being subject to a transmitter conducted output power limit if they operate in compliance with paragraph (b)(3) of this section or with one or more of the provisions below:	☐	☒
(i) 57.0–59.4 GHz: the peak EIRP level shall not exceed 20 dBm for indoor operation or 30 dBm for outdoor operation ;	☐	☐
(ii) 57.0–61.56 GHz: the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;	☐	☐
(iii) 57.0–64.0 GHz:	☐	☐
(A) The peak EIRP shall not exceed 14 dBm, and the sum of continuous transmitter off-times of at least two milliseconds shall equal at least 25.5 milliseconds within any contiguous interval of 33 milliseconds, except as specific in paragraph (c)(2)(iii)(B) of this section;	☐	☐
(B) The peak EIRP shall not exceed 20 dBm, and the sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds when operated outdoors:	☐	☐
(1) As part of a temporary or permanently fixed application ; or	☐	☐
(2) When being used in vehicular applications to perform specific tasks of moving something or someone, except for in-cabin applications ;	☐	☐
(iv) A field disturbance sensor may operate in any of the modes in the above sub-sections so long as the device operates in only one mode at any time and does so for at least 33 milliseconds before switching to another mode.	☐	☐
(v) 61.0–61.5 GHz: For field disturbance sensors/radars that occupy 500 MHz bandwidth or less that are contained wholly within the frequency band 61.0–61.5 GHz , the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission outside of the 61.0–61.5 GHz band , measured during the transmit interval, but still within the 57–71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.	☐	☐
(3) For pulsed field disturbance sensors/radars operating in the 57–64 GHz band that have a maximum pulse duration of 6 ns, the average EIRP shall not exceed 13 dBm and the transmit duty cycle shall not exceed 10% during any 0.3 μ s time window. In addition, the average integrated EIRP within the frequency band 61.5–64.0 GHz shall not exceed 5 dBm in any 0.3 μ s time window. Peak emissions shall not exceed 20 dB above the maximum permitted average emission limit applicable to the equipment under test. The radar bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna	☐	☒
(4) The provisions in § 15.35(b) and (c) that require emissions to be averaged over a 100 millisecond period and that limits the peak power to 20 dB above the average limit do not apply to devices operating under paragraphs (c)(2) and (3) of this section.	☐	☐
(d) Limits on spurious emissions:	☒	
(1) The power density of any emissions outside the 57–71 GHz band shall consist solely of spurious emissions.	☒	
(2) Radiated emissions below 40 GHz shall not exceed the general limits in § 15.209.	☒	
(3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm ² at a distance of 3 meters.	☒	
(4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.	☒	
(e) Limits on transmitter conducted output power.	☒	☐

(1) Except as specified in paragraph (e)(2) of this section, the peak transmitter conducted output power of devices other than field disturbance sensors/radars shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.	☐	☒
(2) Devices other than field disturbance sensors/radars with an emission bandwidth of less than 100 megahertz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 megahertz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kilohertz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).	☒	☐
(f) Frequency stability: Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.	☒	
(g) Radio frequency radiation exposure: Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.	☒	
(h) Group installation: Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.	☐	
(i) Compliance measurement: Measurement procedures that have been found to be acceptable to the Commission in accordance with § 2.947 of this chapter may be used to demonstrate compliance.	☒	
(1) For purposes of demonstrating compliance with this section, corrections to the transmitter conducted output power may be made due to the antenna and circuit loss.	☒	
(2) Compliance measurements of frequency-agile field disturbance sensors/radars shall be performed with any related frequency sweep, step, or hop function activated.	☐	☒
47 CFR 15.215		
(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission , or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.	☒	

47 CFR 15.209	☒	
47 CFR 15.207		
(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the table of this paragraph (see chapter 14.5), as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.	☒	
(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.	☐	☒

14 Measurement results

14.1 Occupied bandwidth & emission bandwidth & frequency stability

Description:

Measurement of the bandwidth and the frequency stability of the wanted signal (fundamental emission) under temperature and supply voltage variations.

Limits and provisions:

Selection of applicable rule parts: see 13

Bandwidth & Applicable limits of designated frequency band			
Applicable	Rule part	Method of bandwidth measurement	Limit of designated frequency band
☐	15.255(b)(2)(iii) RSS-210 J.3.2(b)(iv)	20 dB bandwidth or 99% bandwidth 99% bandwidth	59.3 - 71.0 GHz
☐	15.255(b)(3) RSS-210 J.2(d)(i)	20 dB bandwidth or 99% bandwidth 99% bandwidth	60 - 64 GHz
☒	15.255(c)(1)(i)	20 dB bandwidth or 99% bandwidth 99% bandwidth	57 - 71 GHz
☐	15.255(c)(1)(ii) RSS-210 J.3.3(b)	20 dB bandwidth or 99% bandwidth 99% bandwidth	57 - 71 GHz
☐	15.255(c)(2) RSS-210 J.3.2	20 dB bandwidth or 99% bandwidth 99% bandwidth	57 - 71 GHz
☐	15.255(c)(2)(i) RSS-210 J.3.2(b)(i)	20 dB bandwidth or 99% bandwidth 99% bandwidth	57.0 - 59.4 GHz
☐	15.255(c)(2)(ii) RSS-210 J.3.2(b)(ii)	20 dB bandwidth or 99% bandwidth 99% bandwidth	57.0 - 61.56 GHz
☐	15.255(c)(2)(iii) RSS-210 J.3.2(b)(iii)	20 dB bandwidth or 99% bandwidth 99% bandwidth	57.0 - 64.0 GHz
☐	15.255(c)(2)(v) RSS-210 J.3.2(a)	20 dB bandwidth or 99% bandwidth 99% bandwidth	61.0 - 61.5 GHz
☐	15.255(c)(3) RSS-210 J.3.2(c)	10 dB bandwidth	57 - 64 GHz
☒	15.255(e)(2)	6 dB emission bandwidth (EBW _{6dB})	None (required for calculation in chapter 14.3)

Note:

- Definition of 6dB emission bandwidth (15.255(e)(2)): the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kilohertz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).

Measurement: 6 dB bandwidth

Measurement parameter	
Detector:	Pos-Peak
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Trace-Mode:	Max Hold

Measurement: 20 dB bandwidth

Measurement parameter	
Detector:	Pos-Peak
Resolution bandwidth:	50 MHz
Video bandwidth:	80 MHz
Trace-Mode:	Max Hold

Measurement: 99% bandwidth

Measurement parameter	
Detector:	Pos-Peak
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max Hold

Measurement procedures:

- Bandwidth: ANSI C63.10-2020 6.9 / 9.3 / 9.4
- Frequency stability: ANSI C63.10-2020 6.8 / 9.5

Measurement results:**6 dB emission bandwidth at normal conditions:**

EUT	Mode	Test condition	f _L [GHz]	f _H [GHz]	Bandwidth [MHz]
1	NM1	T _{nom} / V _{nom}	60.643335	60.644675	1.34

Note: Check below Diagram TID006-01

20 dB bandwidth at normal conditions:

EUT	Mode	Test condition	f _L [GHz]	f _H [GHz]	Bandwidth [GHz]
1	NM1	T _{nom} / V _{nom}	59.7641	61.5239	1.7598

Note: Check below Diagram TID005-02


99% bandwidth at normal conditions:

EUT	Mode	Test condition	f _L [GHz]	f _H [GHz]	Bandwidth [GHz]
1	NM1	T _{nom} / V _{nom}	58.143489	63.917517	5.7740

Note: Check below Diagram TID004-01

6 dB emission bandwidth at normal conditions:


TID006-01_1-8968-24-1-12_6_dB_EBW_RBW_100_kHz

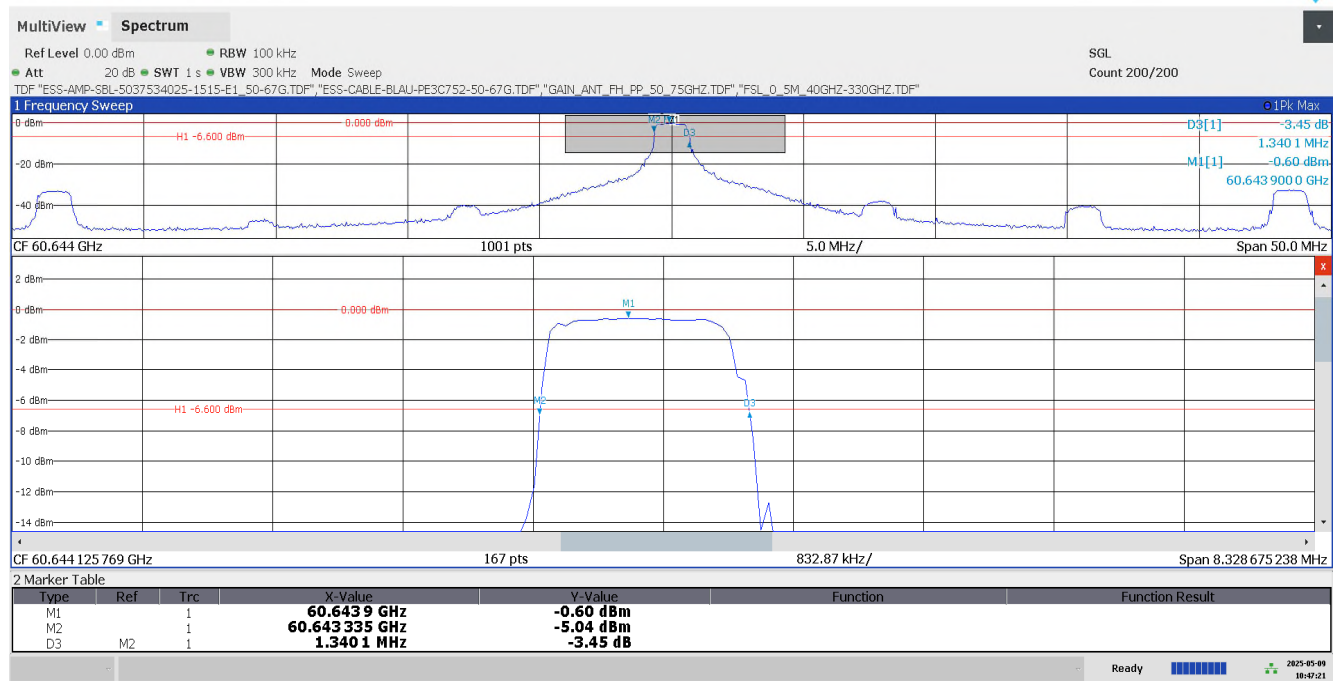

10:47:21 AM 05/09/2025


20 dB bandwidth at normal conditions:

TID005-02_1-8968-24-1-12_20_dB_OBW_RBW_50_MHz

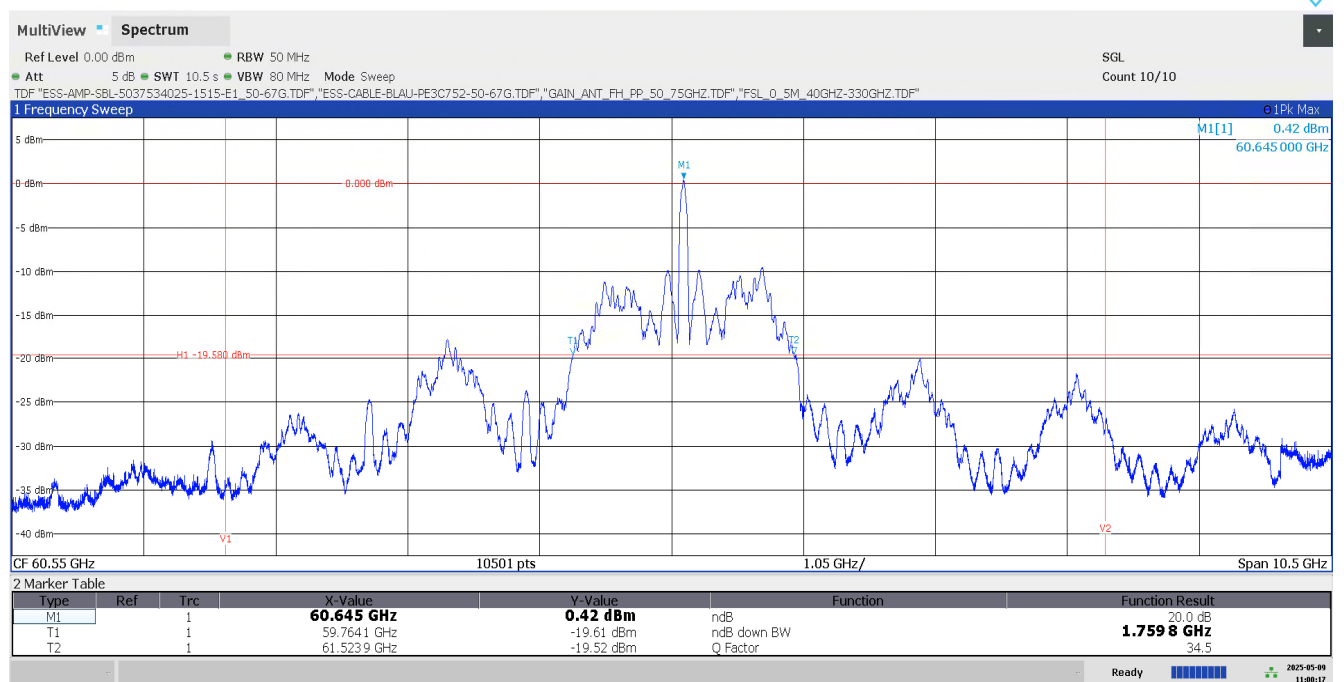


11:00:17 AM 05/09/2025

99% bandwidth at normal conditions:
TID004-01_1-8968_24-1-12_99%OBW_RBW_1_MHz

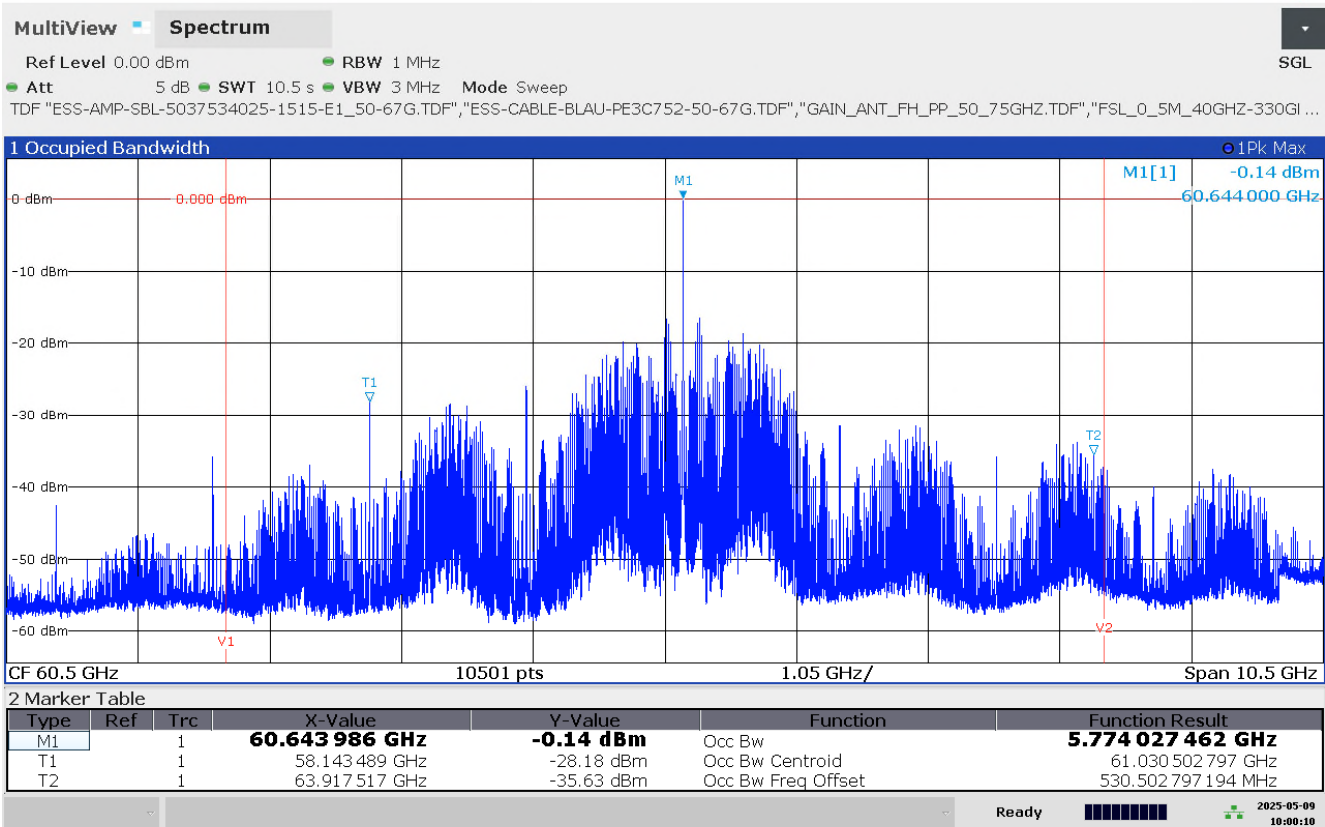


10:00:10 AM 05/09/2025

TID004-03_1-8968_24-1-12_99%OBW_RBW_1_MHz_Tnom_Vmin

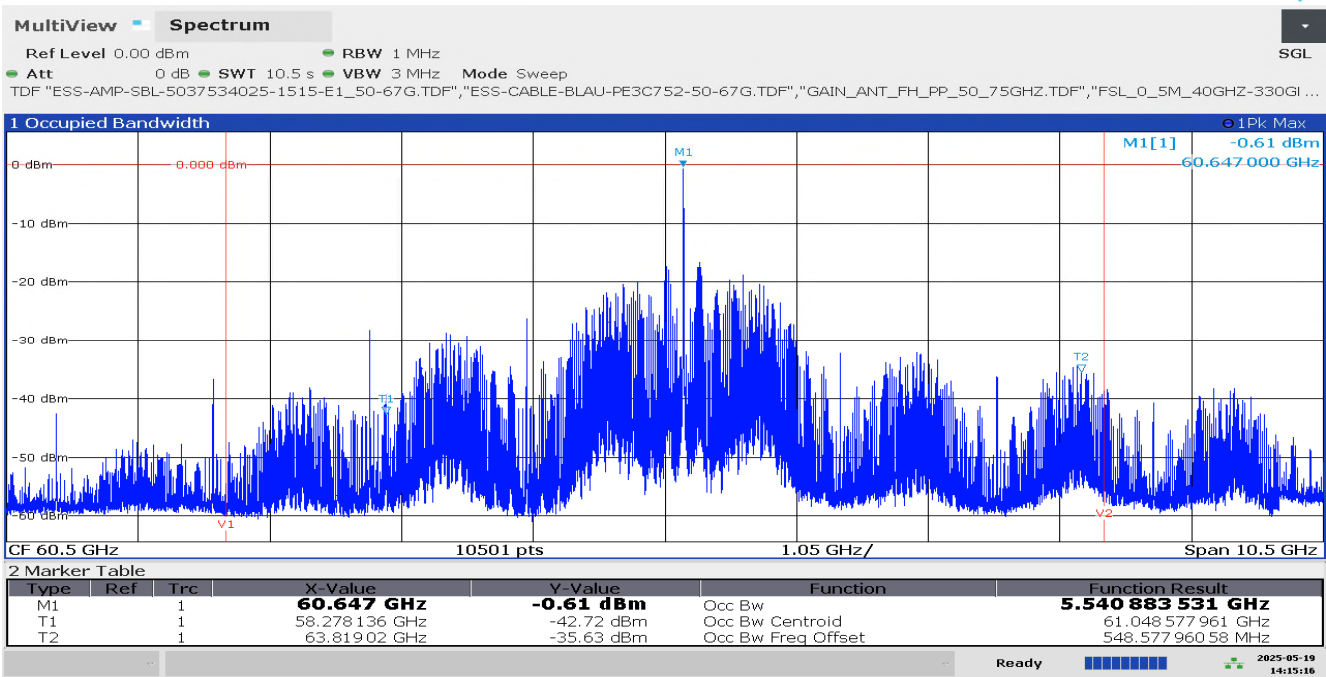

02:13:17 PM 05/19/2025

TID004-04_1-8968_24-1-12_99%OBW_RBW_1_MHz_Tnom_Vmax

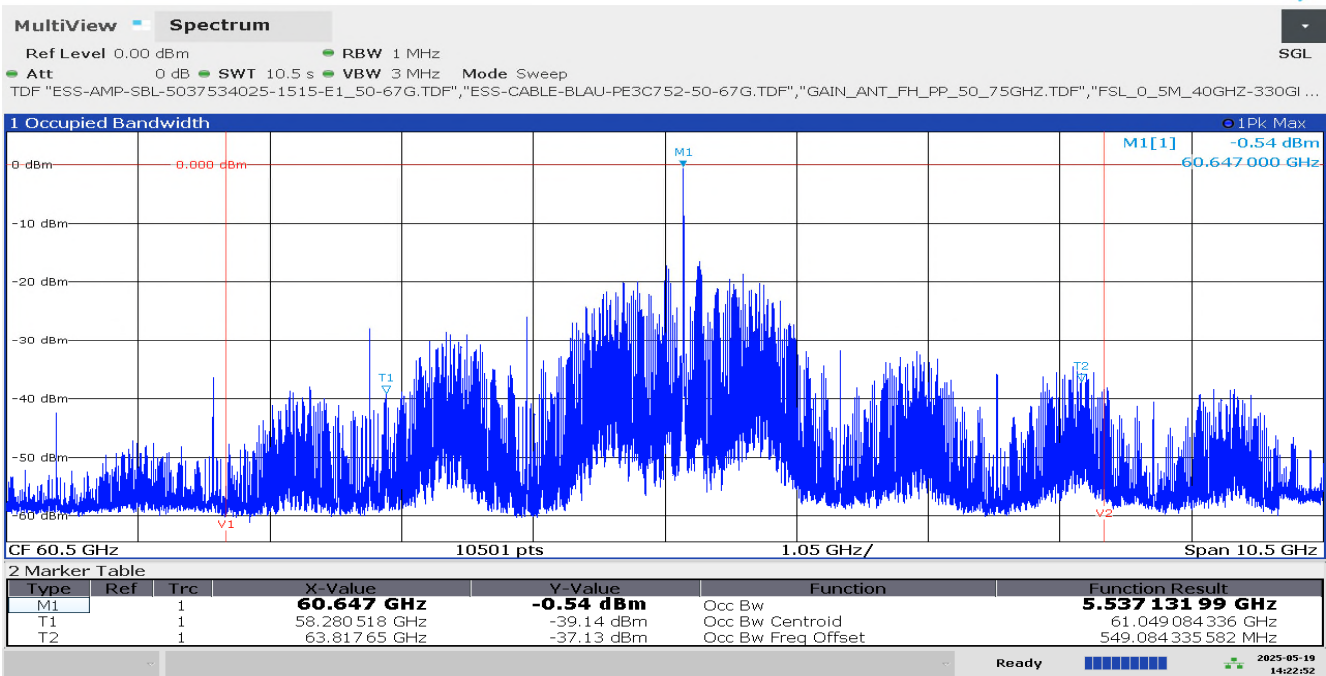

02:22:53 PM 05/19/2025

Frequency stability (15.255(f)):

Mode for frequency stability tests: 1 (Mode with the widest bandwidth, ANSI C63.10-2020 5.6.2.2)

Bandwidth measurement for frequency stability tests: **99% bandwidth**

Test condition	Frequency f_L [MHz]	Frequency f_H [MHz]	Bandwidth [MHz]
T_{min} : -20 °C / V_{nom}	58496.819	63771.486	5274.667
-10 °C / V_{nom}	58419.841	63787.106	5367.265
0 °C / V_{nom}	58280.619	63787.419	5506.801
10 °C / V_{nom}	58148.514	63817.776	5669.262
T_{nom} : 20 °C / V_{nom}	58146.896	63850.213	5703.317
30 °C / V_{nom}	58146.875	63813.918	5667.044
40 °C / V_{nom}	58143.795	63817.054	5673.259
T_{max} : 50 °C / V_{nom}	58138.729	63851.870	5713.141

Note:

- Detailed measurement results: see measurement report 1-8968-24-01-12_TR1-A201-R1

Verdict: Compliant

Test condition	Frequency f_L [MHz]	Frequency f_H [MHz]	Bandwidth [MHz]
20 °C / V_{min}	5827.814	63819.020	5540.883
20 °C / V_{max}	5828.052	6381.765	5537.132

Note:

- Detailed measurement results: see TID004-03 and TID004-04 in this report.

Verdict: Compliant

14.2 Radiated power (EIRP)

Description:

Measurement of the maximum radiated E.I.R.P. of the wanted signal.

Limits and provisions:

Selection of applicable rule parts: see 13

Applicable limits of radiated power (EIRP)			
Applicable	Rule part	Limit average EIRP	Limit peak EIRP
☐	15.255(b)(3) RSS-210 J.3.2(a)	none	20 dBm
☒	15.255(c)(1)(i)	40 dBm (see note 1)	43 dBm
☐	15.255(c)(1)(ii) RSS-210 J.3.3(b)	Calculation depending on EUT antenna gain (see note 1, 2.1 & 2.3)	Depending on EUT antenna gain (see note 1, 2.2 & 2.3)
☐	15.255(c)(2) RSS-210 J.3.2	none	10 dBm
☐	15.255(c)(2)(i) RSS-210 J.3.2(b)(i)	none	20 dBm (indoor) 30 dBm (outdoor)
☐	15.255(c)(2)(ii) RSS-210 J.3.2(b)(ii)	none	3 dBm (general) 20 dBm (+ off-time requirement)
☐	15.255(c)(2)(iii)(A) RSS-210 J.3.2(b)(iii)(1)	none	14 dBm (+ off-time requirement)
☐	15.255(c)(2)(iii)(B) RSS-210 J.3.2(b)(iii)(2)	none	20 dBm (+ off-time requirement)
☐	15.255(c)(2)(v) RSS-210 J.3.2(a)	40 dBm (within 61-61.5 GHz) (see note 1)	43 dBm (within 61.0-61.5 GHz)
		10 dBm (outside 61-61.5 GHz, but within 57-71GHz) (see note 1)	13 dBm (outside 61-61.5 GHz, but within 57-71GHz)
☐	15.255(c)(3) RSS-210 J.3.2(c)	13 dBm (average EIRP during any 0.3 μ s time window) (+ time domain requirement) 5 dBm (average integrated EIRP within 61.5–64.0 GHz in any 0.3 μ s time window)	applicable average limit + 20 dB

Note:

1. Measured during the transmit interval
2. Calculation depending on EUT antenna gain:
 - 2.1. The average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.
 - 2.2. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.
 - 2.3. Reducing the transmit power based on the antenna gain shall not require that the power levels be reduced below the limits specified in 15.255(c)(1)(i).

Measurement:Spectrum analyzer:

Measurement parameter	
Detector:	Pos-Peak for peak power / RMS for average power
Resolution bandwidth:	50 MHz Peak / 1MHz for average power
Video bandwidth:	80 MHz Peak / 3MHz
Trace-Mode:	Max Hold

Measurement procedures:

- Fundamental emission using a spectrum analyzer: ANSI C63.10-2020 9.8

Measurement results:


Parameter		Measurement result	Limit [dBm]
		EUT Setup / Mode	
		1 / NM1	
Peak EIRP ($P_{\text{Peak,EIRP}}$)	[dBm]	0.62	43
Average EIRP during whole cycle time ($P_{\text{avgCT,EIRP}}$)	[dBm]	2.04	40

Note:

- Test conditions: T_{nom} / V_{nom}
- Detailed measurement results: see this measurement diagrams below.
- Diagrams TID003-04 (peak) and TID007-01 (avg) for maximum determined values among 2 investigated polarization of measurement antenna.

Verdict: Compliant


EUT emission, Duty cycle

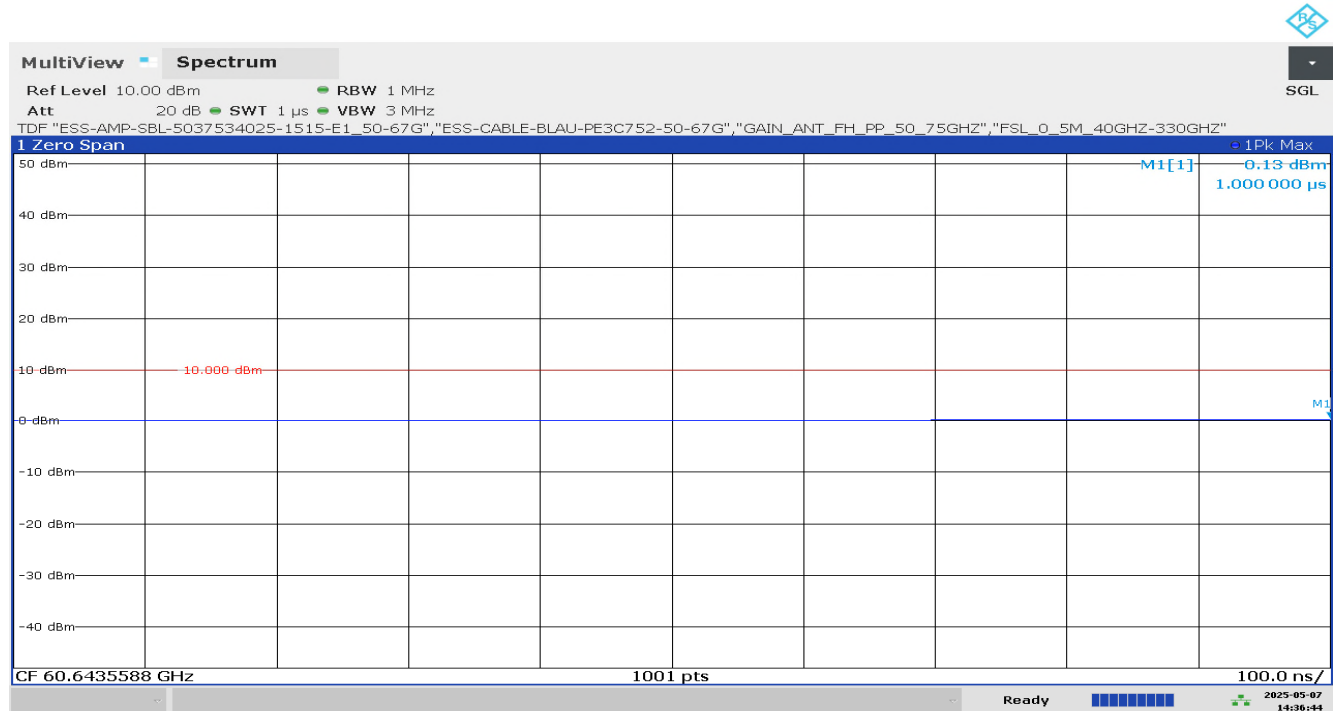TID002-01_1-8968-24-1-12_Cycle Time (of wanted signal)_DC_100%_swt_1 μ s

Note: EUT Duty Cycle 100 %.

For measurement simplicity, signal repetition time / cycle time has been taken 1 ms

TID002-02_1-8968-24-1-12_Cycle Time (of wanted signal)_DC_100%_swt_1ms

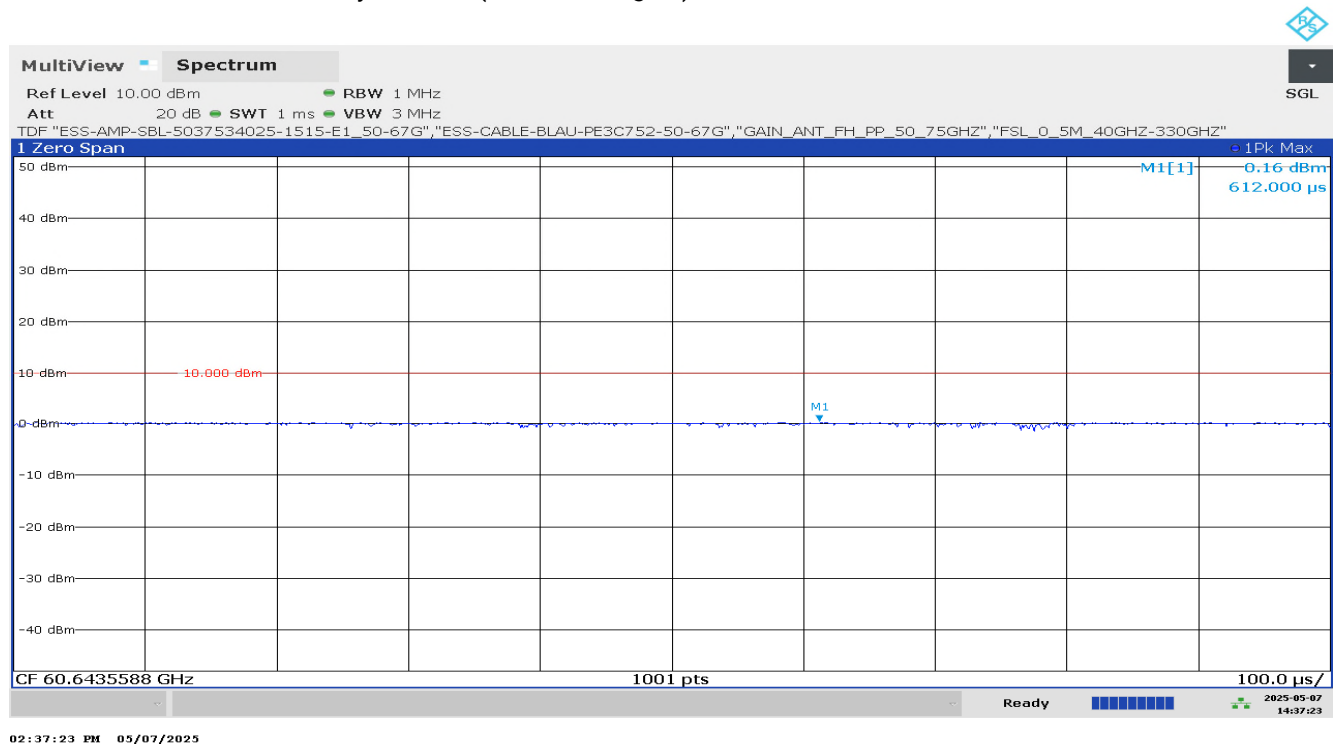


Note: EUT Duty Cycle 100 %.

For measurement simplicity, signal repetition time / cycle time has been taken 1 ms

Spectrum analyzer: Measurement results**Peak EIRP (EUT Setup-1)**

TID003-04_1-8968_24-1-12_Peak Power_RBW_50_MHz_0.62_dBm_POE

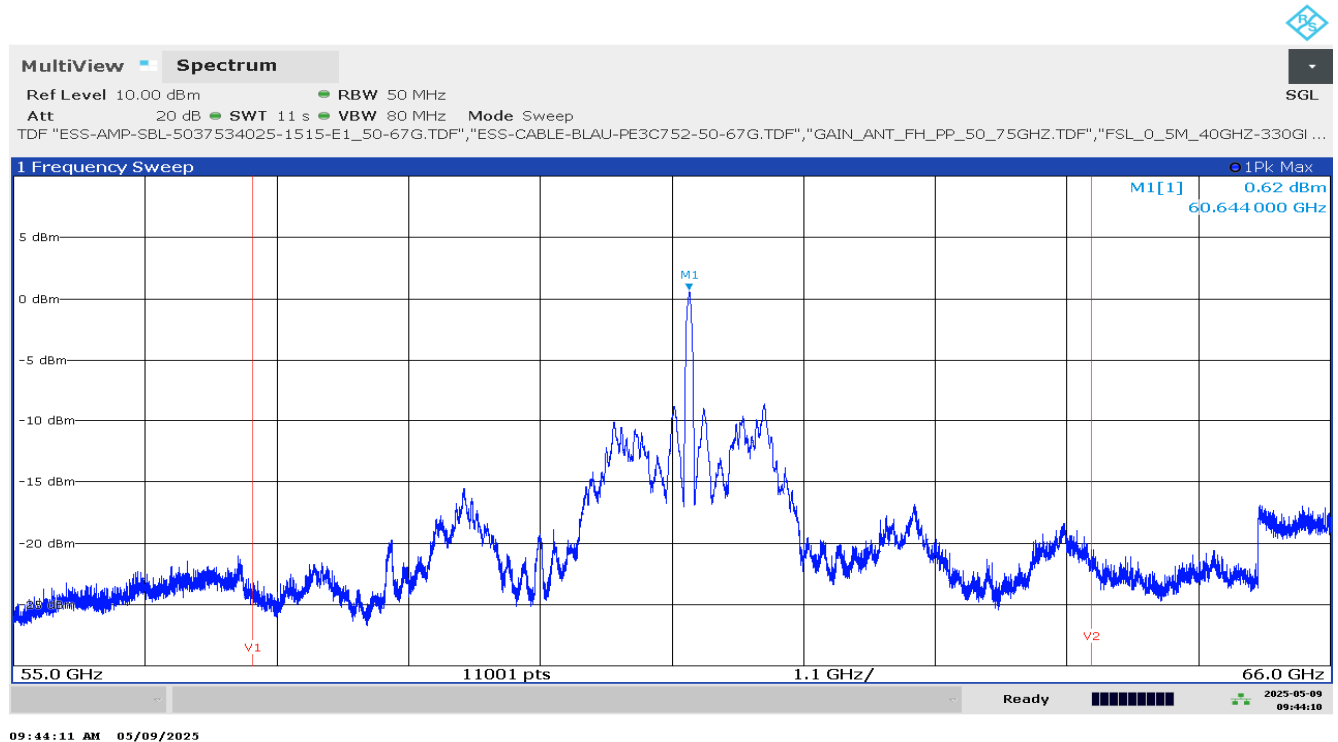


09:44:11 AM 05/09/2025


Note: RBW 50 MHz has been taken to get stable peak power and to avoid desensitization effect.

Peak EIRP (EUT Setup-2)

TID003-05_1-8968_24-1-12_Peak Power_RBW_50_MHz_0.47_dBm_24_V_DC

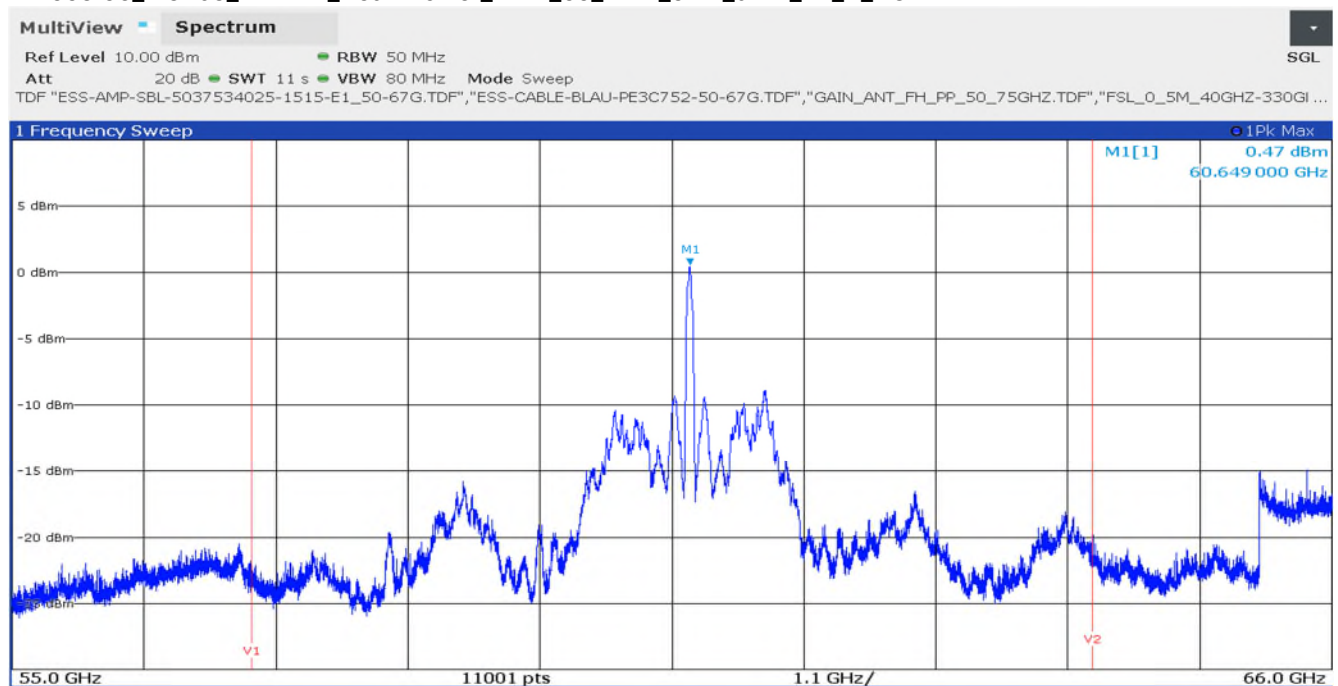


TID003-01_1-8968-24-1-12_Check for desensitization_RBW_1_MHz

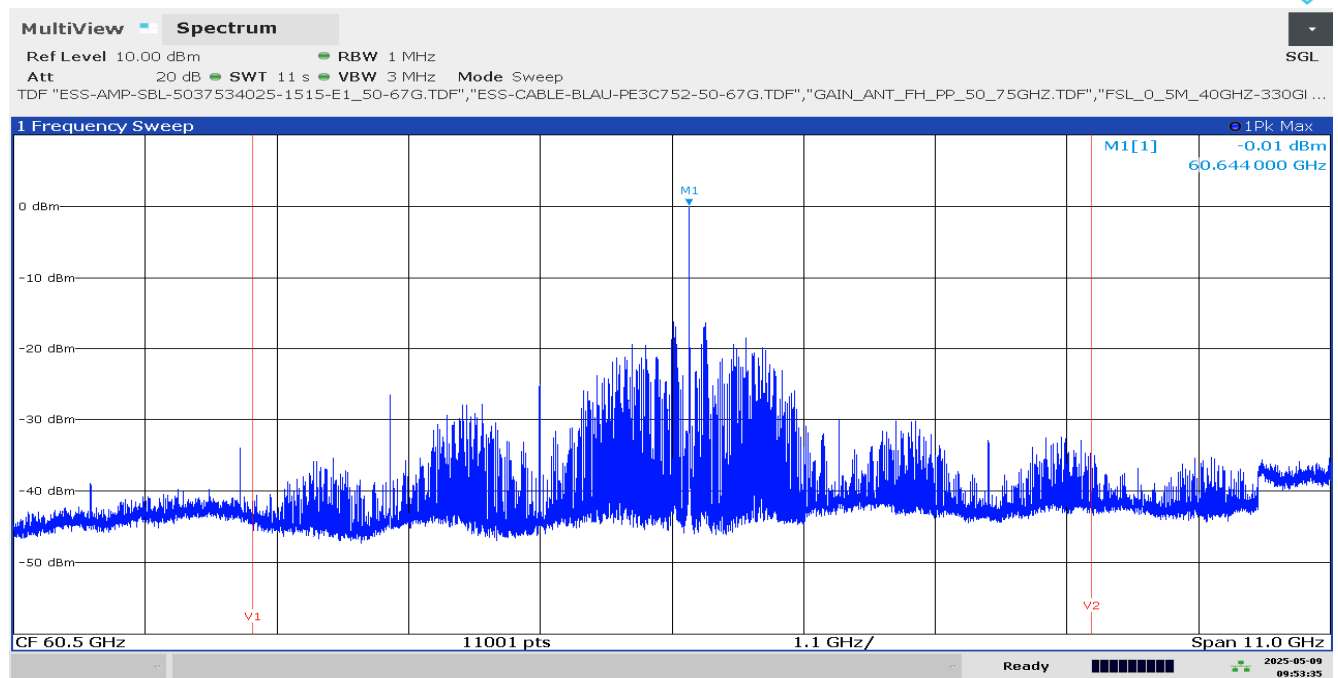

09:53:35 AM 05/09/2025

Note: Different RBW used to get stable peak power / verify desensitization effect.
This plot is only for information not for assessment.

TID003-02_1-8968-24-1-12_Check for desensitization_RBW_30_MHz

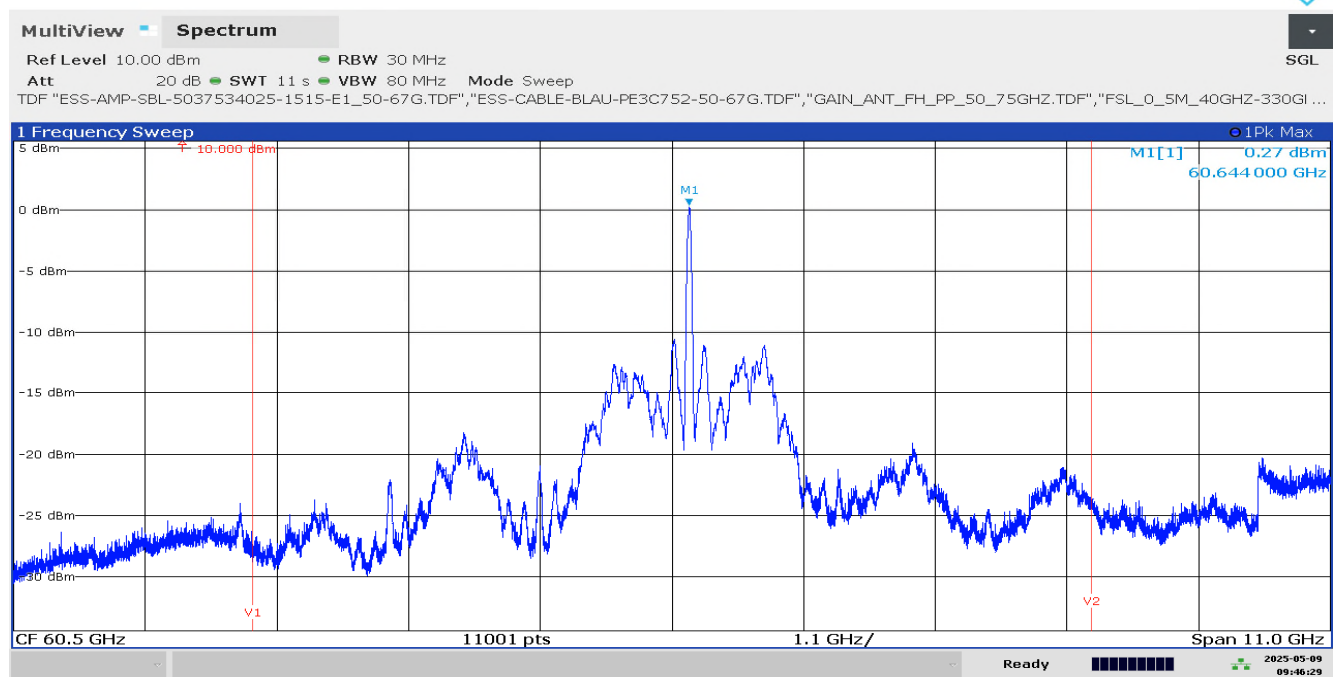


09:46:29 AM 05/09/2025

Note: Different RBW used to get stable peak power / verify desensitization effect.
This plot is only for information not for assessment.

15.255(c)(1)(i):

Average EIRP (relative) during whole cycle time within 57-64 GHz,
TID007-01_1-8968_24-1-12_Channel_Power_span_10_GHz

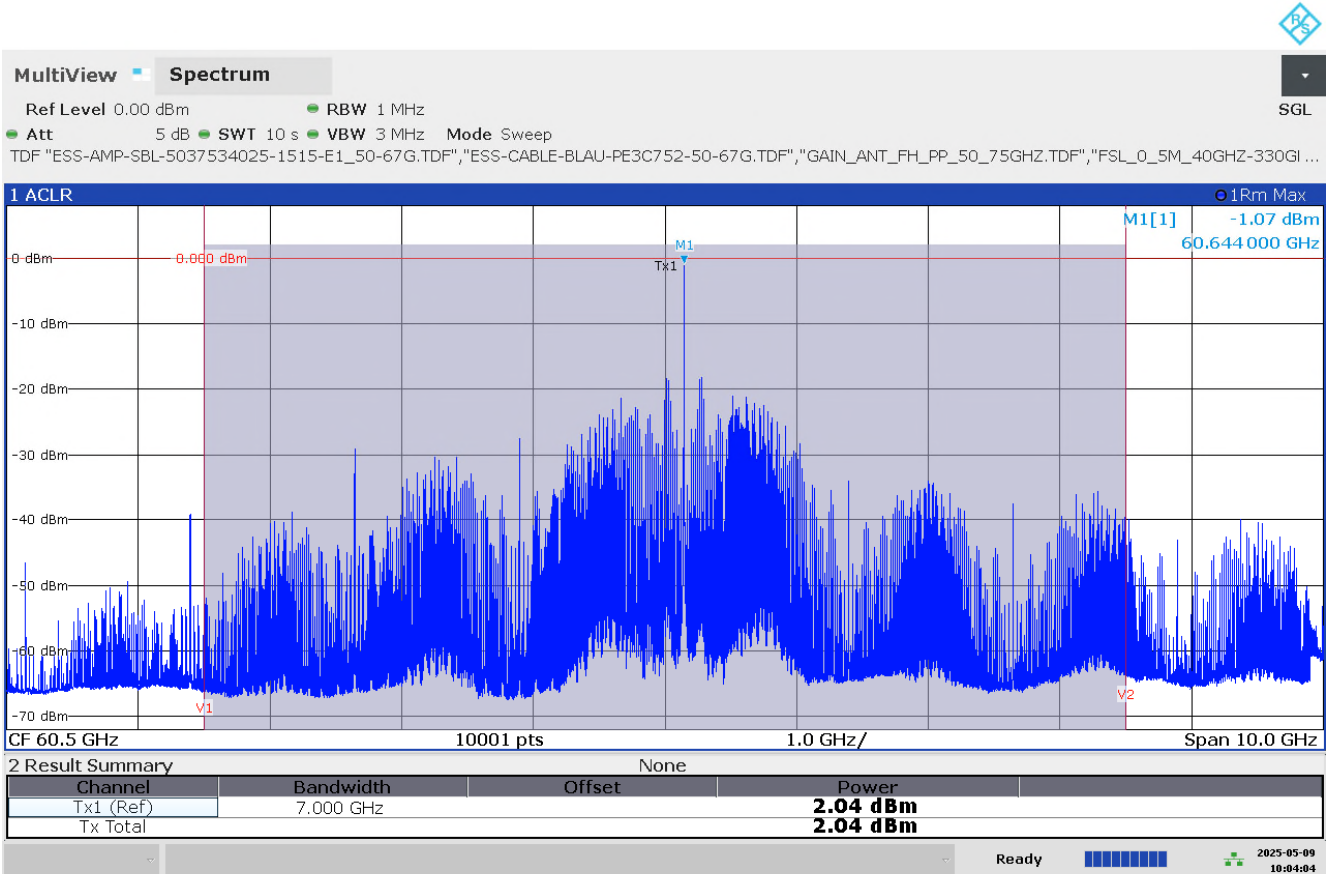

10:04:04 AM 05/09/2025

Note: Total channel power 2.04 dBm.

14.3 Peak transmitter conducted output power

Description:

Measurement or calculation of the transmitter conducted output power.

Limits and provisions:

Selection of applicable rule parts: see 13

Applicable limits of peak transmitter conducted output power		
Applicable	Rule part	Limit peak transmitter conducted output power
☐	15.255(c)(2) RSS-210 J.3.2	-10 dBm
☐	15.255(e)(1) RSS-210 J.3.3(c)	500 mW
☒	15.255(e)(2)	500 mW * (EBW _{6dB} /100 MHz)
☐	other	none

Note:

- EBW_{6dB} (6 dB emission bandwidth): see chapter 14.1

Results:

EUT	Mode	Test condition	Peak E.I.R.P.	Gain of EUT antenna G _{EUT}	Peak transmitter conducted output power	Limit Peak transmitter conducted output power
1	NM1	T _{nom} / V _{nom}	0.62 dBm	4.3 dBi	-3.68 dBm	6.7 mW (8.62 dBm)

Note:

- Peak transmitter conducted output power = Peak E.I.R.P – Gain of EUT antenna G_{EUT}
- Peak EIRP: see chapter 14.2 (Diagram TID003-04)
- Gain of EUT antenna:
 - Declaration by customer: 4.3 dBi
(see document mentioned in chapter 6.2)
 - Result: The antenna gain of G_{EUT} = 4.3 dBi as declared by the customer is used for the further calculations since it results in the worst-case assessment of the calculated peak transmitter conducted output power.

Verdict: Compliant

14.4 Spurious emissions radiated

Description:

Measurement of the radiated spurious emissions.

Limits and provisions:

Selection of applicable rule parts: see 13

47CFR Part 15.209(a)		
Frequency (MHz)	Field strength (microvolts/meter) Magnetic field strength (H-Field) (μ A/m)	Measurement distance (meters)
0.009 – 0.490	2400/F(kHz) 6.37/F (F in kHz)	300
0.490 – 1.705	24000/F(kHz) 63.7/F (F in kHz)	30
1.705 – 30.0	30 0.08	30
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3
47 CFR 15.255(d)		
Frequency (GHz)	Power density [pW/cm ²]	Equivalent isotropically radiated power: EIRP [dBm]
Below 40	See §15.209	-/-
40 - 200	90 @ distance of 3 m	-10
The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.		
The levels of the spurious emissions shall not exceed the level of the fundamental emission.		
47 CFR 15.255(i)(2)		
Compliance measurements of frequency-agile field disturbance sensors/radars shall be performed with any related frequency sweep, step, or hop function activated.		
47 CFR 15.33(a)(3)		
If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.		

Limit conversion (ANSI C63.10-2020 9.2.3):

$$\text{EIRP[dBm]} = 10 \times \log(4 \times \pi \times d^2 \times 1000 \times \text{PD[W/m}^2])$$

- Power density at the distance specified by the limit: PD [W/m²]
- Equivalent isotropically radiated power: EIRP [dBm]
- Distance at which the power density limit is specified: d [m]

According to this formula, an emission limit of PD = 90 pW/cm² at a distance of d = 3 m corresponds to an equivalent isotropically radiated power of EIRP = -10 dBm.

Measurement:

Measurement parameter	
Detector:	Quasi Peak / Pos-Peak / RMS
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 300 kHz F > 1 GHz: 3 MHz
Trace-Mode:	Max Hold

Measurement results:

Plot	Frequency	Detector	Bandwidth [MHz]	Level	Limit	Margin [dB]
TID030a EUT laying	9 kHz – 30 MHz	-/-	-/-	No critical level found, only noise level of spectrum analyzer	-/-	-/-
TID030b EUT standing	9 kHz – 30 MHz	-/-	-/-	No critical level found, only noise level of spectrum analyzer	-/-	-/-
TID031a EUT laying	30 MHz – 1 GHz	-/-	-/-	No critical level found, only noise level of spectrum analyzer	-/-	-/-
TID031b EUT standing	30 MHz – 1 GHz	-/-	-/-	No critical level found, only noise level of spectrum analyzer	-/-	-/-
TID032	1 – 12.4 GHz	Peak Avg	1	58.89 dB μ V 47.26 dB μ V	74 dB μ V 54 dB μ V	15.11 6.74
TID033 AntV	12.4 – 18 GHz	Peak Avg	1	No critical level found, only noise level of spectrum analyzer	74 dB μ V 54 dB μ V	-/-
TID034 AntH	12.4 – 18 GHz	Peak Avg	1	No critical level found, only noise level of spectrum analyzer	74 dB μ V 54 dB μ V	-/-
TID035-01 AntH	18 – 30 GHz	Peak Avg	1	Maximum emission found at 20.215 GHz	Check plot TID035-03	-/-
TID035-02	@20.215 GHz	Peak Avg	1	Maximum peak search / worst case position search	-/-	-/-
TID035-03	@20.215 GHz with zero span	Peak Avg	1	54.42 dB μ V 46.82 dB μ V	74 dB μ V 54 dB μ V	19.58 7.18
TID036-01 AntV	18 – 30 GHz	Peak Avg	1	Maximum emission found at 20.215 GHz	Check plot TID036-03	-/-
TID036-02	@20.215 GHz	Peak Avg	1	Maximum peak search / worst case position search	-/-	-/-
TID036-03	@20.215 GHz with zero span	Peak Avg	1	55.26 dB μ V 49.80 dB μ V	74 dB μ V 54 dB μ V	18.74 4.2

TID037-01 AntH	30 – 40 GHz	Peak Avg	1	No critical level found, only noise level of spectrum analyzer	-/-	-/-
TID038-01 AntV	30 – 40 GHz	Peak Avg	1	No critical level found, only noise level of spectrum analyzer	-/-	-/-
TID010	40 – 50 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID011	40 – 50 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-/-	-/-
TID012a AntH	50 – 57 GHz 57 – 67 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm 40 dBm	-/-
TID012b AntV	50 – 57 GHz 57 – 67 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm 40 dBm	-/-
TID013a AntH	67 – 71 GHz 71 – 75 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	40 dBm -10 dBm	-/-
TID013a-01	72.51 GHz	RMS	1	Image signal	-10 dBm	-/-
TID013b AntH	67 – 71 GHz 71 – 75 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	40 dBm -10 dBm	-/-
TID013b-01	72.51 GHz	RMS	1	Image signal	-10 dBm	-/-
TID014 AntH	75 – 90 GHz	RMS	1	No critical emission found, only image signal	-10 dBm	-/-
TID14-01	81.297 GHz	RMS	1	Image signal	-10 dBm	-/-

TID015 AntV	75 – 90 GHz	RMS	1	No critical emission found, only image signal	-10 dBm	-/-
TID015-01	79.92 GHz	RMS	1	Image signal	-10 dBm	-/-
TID015-02	86.23 GHz	RMS	1	Image signal	-10 dBm	-/-
TID016 AntH	90 – 110 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID017 AntV	90 – 110 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID018 AntH	110 – 120 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID019 AntV	110 – 120 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID020 AntH	120 – 130 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID021 AntV	120 – 130 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID022 AntH	130 – 140 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID023 AntV	130 – 140 GHz	RMS	1	Noise level is more than 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID024 AntH	140 – 160 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID027 AntV	140 – 160 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-

TID025 AntH	160 – 180 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID028 AntV	160 – 180 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID026 AntH	180 – 200 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
TID029 AntV	180 – 200 GHz	RMS	1	Noise level is around 20 dB from limit line, no critical emission found	-10 dBm	-/-
Please refer to the following plots for more information on the level of spurious emissions						

Verdict: Compliant


9 kHz – 30 MHz,

TID030a_1-8968_24-1-12_SER 9 kHz - 30 MHz_EUT_laying

Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.60.20
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Test Standard:	FCC 15.205 § 15.209
Operator:	AHo
Operating Mode:	Data transmission through 60 GHz
Power during tests:	120 VAC, 60 Hz
Environmental Conditions:	Humidity: 54 % rH; Temperature: 23 °C
EUT Setup:	1
Verdict:	Passed

Full Spectrum

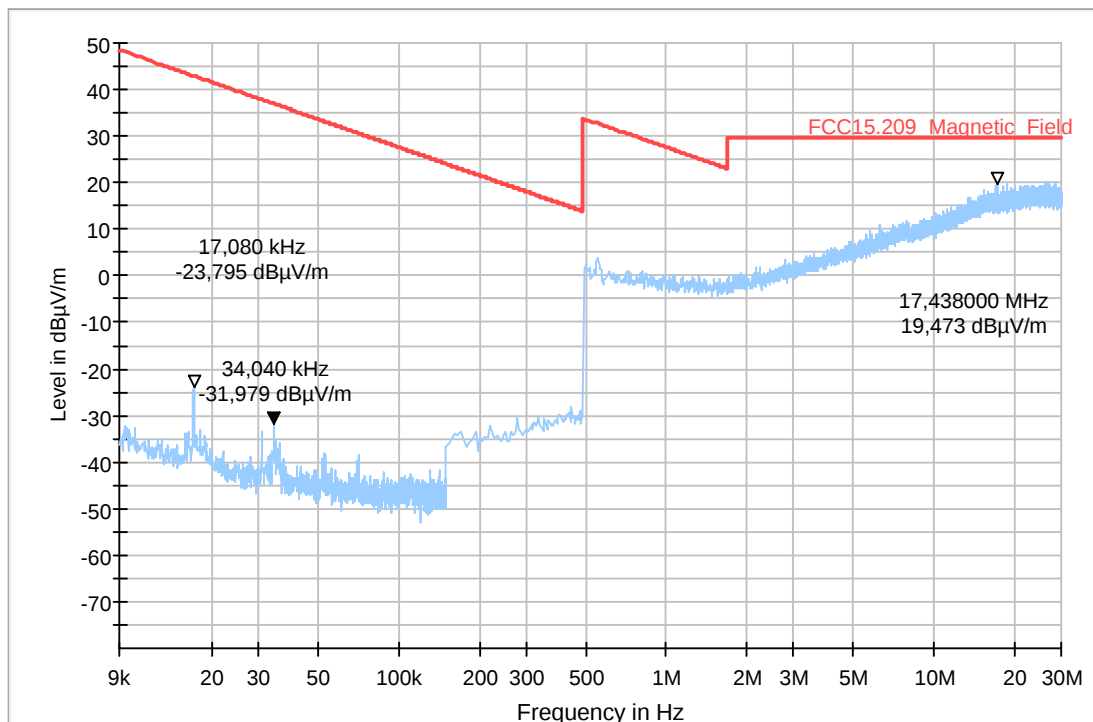


TID030b_1-8968_24-1-12_SER 9 kHz - 30 MHz_EUT_standing

Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.60.20
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Test Standard:	FCC 15.205 § 15.209
Operator:	AHo
Operating Mode:	Data transmission through 60 GHz
Power during tests:	120 VAC, 60 Hz
Environmental Conditions:	Humidity: 54 % rH; Temperature: 23 °C
EUT Setup:	1
Verdict:	Passed

Full Spectrum

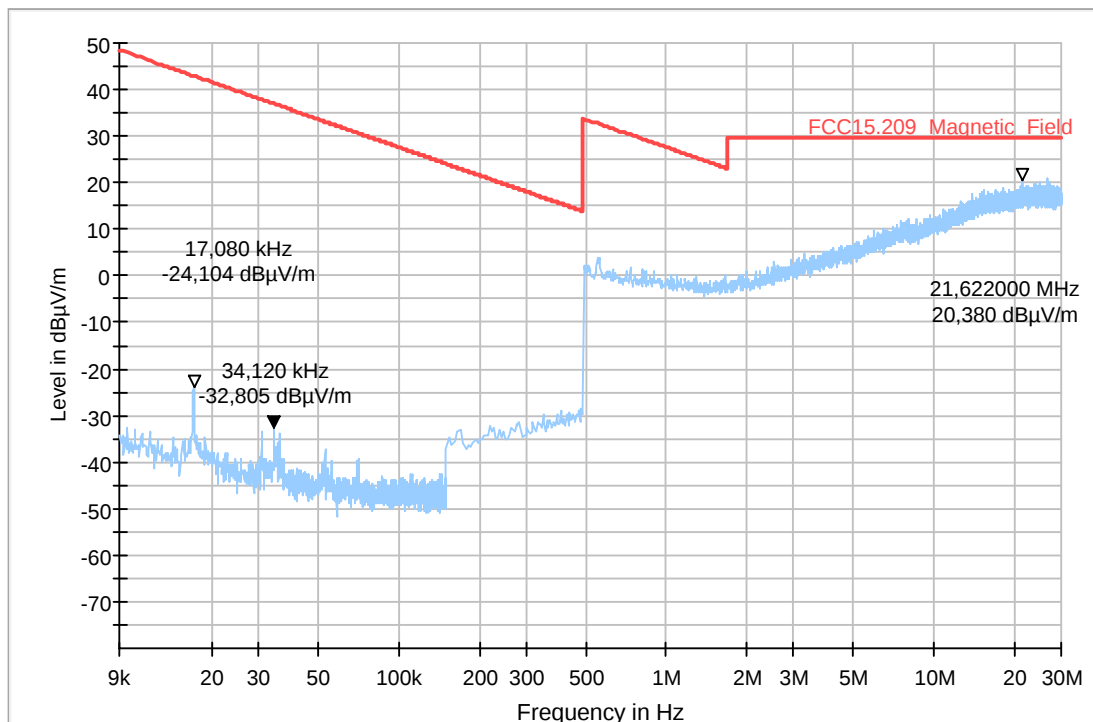


30 MHz – 1 GHz,

TID031a_1-8968_24-1-12_SER 30 MHz - 1 GHz_EUT_laying

Common Information


Test Description:	Radiated field strength emission in 3m distance
Test Site:	cetecom advanced GmbH (Essen)
Test Standard:	FCC 15.205&15.209
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity: 54 % rH; Temperature: 23 °C
Operator Name:	Aho
EUT:	CE10
Operating Mode:	Data transmission through 60 GHz
Power supply:	120 VAC, 60Hz
Comment:	Emission at 725.76 MHz, 850.12 MHz, 796.96 MHz, 934.72 MHz are from outside the chamber, not related to assessment
Verdict:	Passed

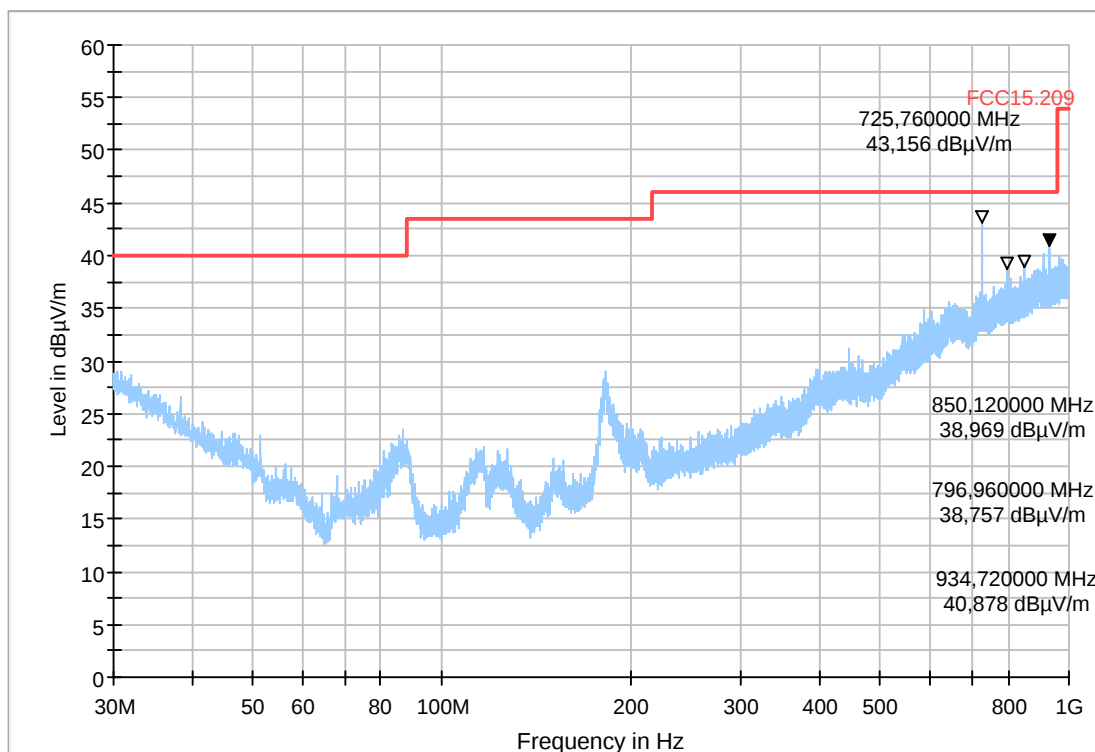

TID031b_1-8968_24-1-12_SER 30 MHz - 1 GHz_EUT_standing

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	cetecom advanced GmbH (Essen)
Test Standard:	FCC 15.205&15.209
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity: 54 % rH; Temperature: 23 °C
Operator Name:	Aho
EUT:	CE10
Operating Mode:	Data transmission through 60 GHz
Power supply:	120 VAC, 60Hz
Comment:	Emission at 796.60 MHz, 934.80 MHz are from outside the chamber, not related to assessment
Verdict:	Passed

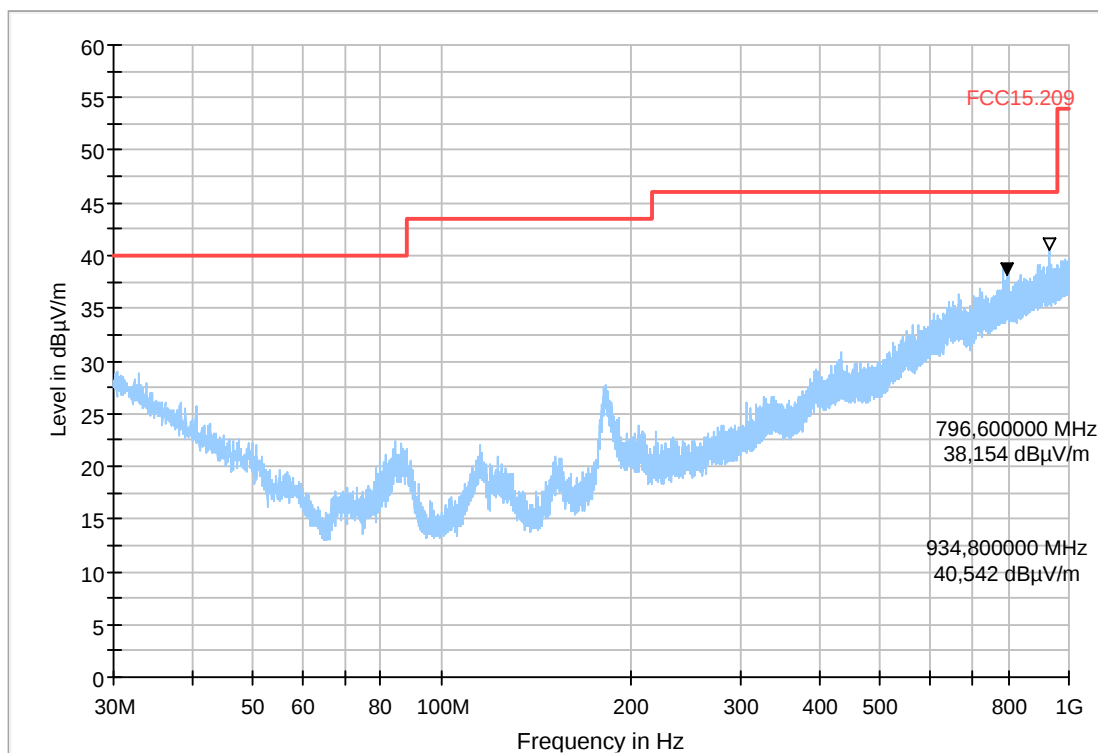


1GHz – 12.4 GHz,
TID032_1-8968-24-1-12_SER_1_12.4_GHz

Common Information

Test Description:	Radiated Field Strength Emission@3m distance
Test Site Location:	cetecom advanced Essen
Test Site:	Fully Anechoic Room (FAR2)
Test Standard:	FCC 15.209
Operating Mode:	Data Transmission through 60 GHz
Environmental Conditions:	Humidity: 45%rH; Temperature: 22.4°C
SW-Version:	EMC32 V10.60.20
Operator:	Aho
Set-up:	1
Verdict:	Passed

Full Spectrum

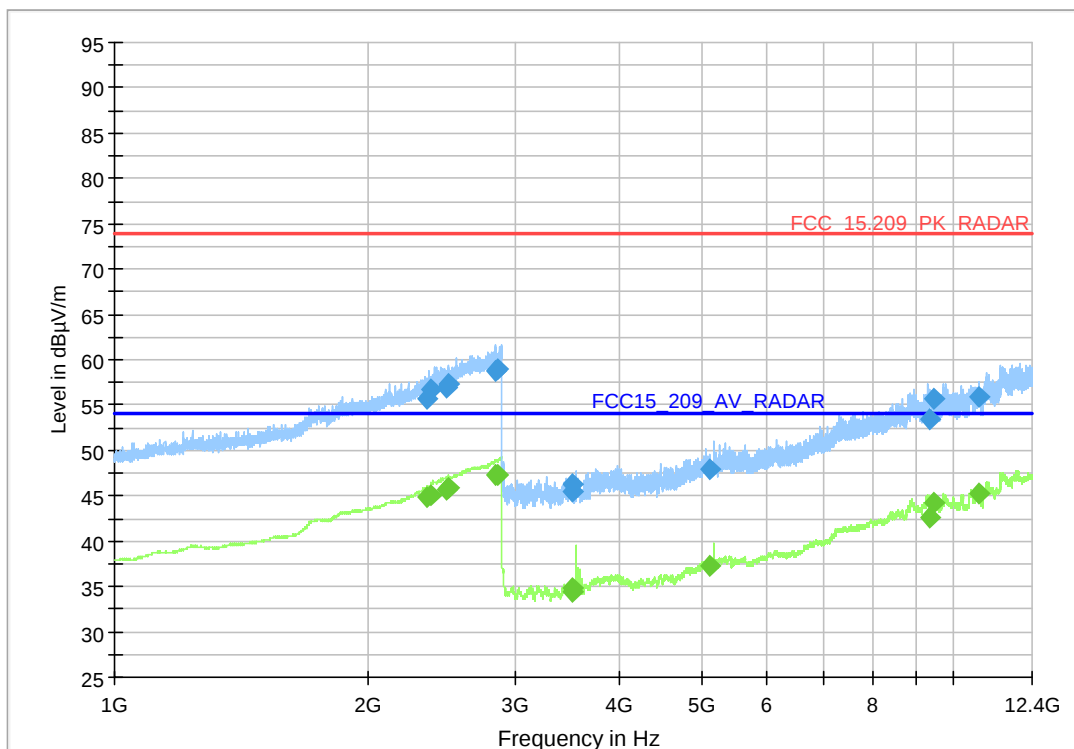

Final_Result_PK+

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azi mut (°)	Elevat ion (°)	Corr. (dB/m)
2359.716	55.69	74.0	18.31	1000.000	155.0	H	270.0	0.0	33.1
2386.603	56.64	74.0	17.36	1000.000	155.0	H	159.0	0.0	33.3
2484.756	56.90	74.0	17.10	1000.000	155.0	V	184.0	90.0	33.5
2499.353	57.28	74.0	16.72	1000.000	155.0	H	230.0	0.0	33.6
2850.771	58.67	74.0	15.33	1000.000	155.0	H	148.0	0.0	34.6
2862.168	58.89	74.0	15.11	1000.000	155.0	V	230.0	90.0	34.5
3504.931	46.38	74	27.62	1000.000	155.0	H	70.0	0.0	-4.5
3517.485	45.49	74	28.51	1000.000	155.0	H	37.0	0.0	-4.4
5131.390	47.88	74.0	26.12	1000.000	155.0	V	99.0	90.0	0.8
9357.193	53.51	74.0	20.49	1000.000	155.0	H	259.0	0.0	9.1
9444.673	55.61	74.0	18.39	1000.000	155.0	H	223.0	0.0	9.2
10747.12	55.81	74.0	18.19	1000.000	155.0	V	220.0	0.0	8.9
3750		0					0		

(continuation of the "Final_Result_PK+" table from column 12 ...)

Frequency (MHz)	Pream	Trd	Raw	Comment
2359.716	0.0	28.5	22.6	1:44:45 PM - 09-
2386.603	0.0	28.7	23.3	1:41:57 PM - 09-
2484.756	0.0	28.7	23.4	1:46:21 PM - 09-
2499.353	0.0	28.7	23.7	2:56:23 PM - 09-
2850.771	0.0	29.4	24.1	1:40:46 PM - 09-
2862.168	0.0	29.4	24.4	1:47:28 PM - 09-
3504.931	0.0	31.3	50.8	2:59:22 PM - 09-
3517.485	0.0	31.3	49.9	2:58:08 PM - 09-
5131.390	0.0	33.7	47.1	3:01:01 PM - 09-
9357.193	0.0	37.6	44.4	3:02:56 PM - 09-
9444.673	0.0	37.6	46.4	3:04:24 PM - 09-
10747.12	0.0	38.1	46.9	3:06:02 PM - 09-
3750				May-25

Final_Result_RMS

Frequency (MHz)	RMS (dBμV/√Hz)	Limit (dBμV/√Hz)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azi mut (°)	Elevat ion (deg)	Corr. (dB/√Hz)
2359.716	44.83	54.0	9.17	1000.000	155.0	H	270.	0.0	33.1
2386.603	45.12	54.0	8.88	1000.000	155.0	H	159.	0.0	33.3
2484.756	45.71	54.0	8.29	1000.000	155.0	V	184.	90.0	33.5
2499.353	45.93	54.0	8.07	1000.000	155.0	H	210.	0.0	33.6
2850.771	47.26	54.0	6.74	1000.000	155.0	H	148.	0.0	34.6
2862.168	47.25	54.0	6.75	1000.000	155.0	V	230.	90.0	34.5
3504.931	34.73	54	19.27	1000.000	155.0	H	70.0	0.0	-4.5
3517.485	34.51	54	19.49	1000.000	155.0	H	37.0	0.0	-4.4
5131.390	37.28	54.0	16.72	1000.000	155.0	V	99.0	90.0	0.8
9357.193	42.68	54.0	11.32	1000.000	155.0	H	259.	0.0	9.1
9444.673	44.18	54.0	9.82	1000.000	155.0	H	223.	0.0	9.2
10747.12	45.19	54.0	8.81	1000.000	155.0	V	220.	0.0	8.9
3750		0					0		

(continuation of the "Final_Result_RMS" table from column 12 ...)

Frequency (MHz)	Pream	Trd	Raw	Comment
2359.716	0.0	28.5	11.7	1:44:45 PM - 09-
2386.603	0.0	28.7	11.8	1:41:57 PM - 09-
2484.756	0.0	28.7	12.3	1:46:21 PM - 09-
2499.353	0.0	28.7	12.3	1:43:19 PM - 09-
2850.771	0.0	29.4	12.7	1:40:46 PM - 09-
2862.168	0.0	29.4	12.8	1:47:29 PM - 09-
3504.931	0.0	31.3	39.2	2:59:23 PM - 09-
3517.485	0.0	31.3	39.0	2:58:09 PM - 09-
5131.390	0.0	33.7	36.5	3:01:01 PM - 09-
9357.193	0.0	37.6	33.6	3:02:57 PM - 09-
9444.673	0.0	37.6	34.9	3:04:25 PM - 09-
10747.12	0.0	38.1	36.3	3:06:02 PM - 09-
3750				May-25


12.4 GHz – 18 GHz

TID033_1-8968-24-1-12_SER_12.4_to_18_GHz_AntV

Common Information

Test Description:	Radiated Field Strength Emission@3m distance
Test Site Location:	cetecom advanced Essen
Test Site:	Fully Anechoic Room (FAR2)
Test Standard:	FCC 15.209
Operating Mode:	Data Transmission through 60 GHz
Environmental Conditions:	Humidity: 45%rH; Temperature: 22.4°C
SW-Version:	EMC32 V10.60.20
Operator:	Aho
Set-up:	1
Verdict:	Passed

Full Spectrum

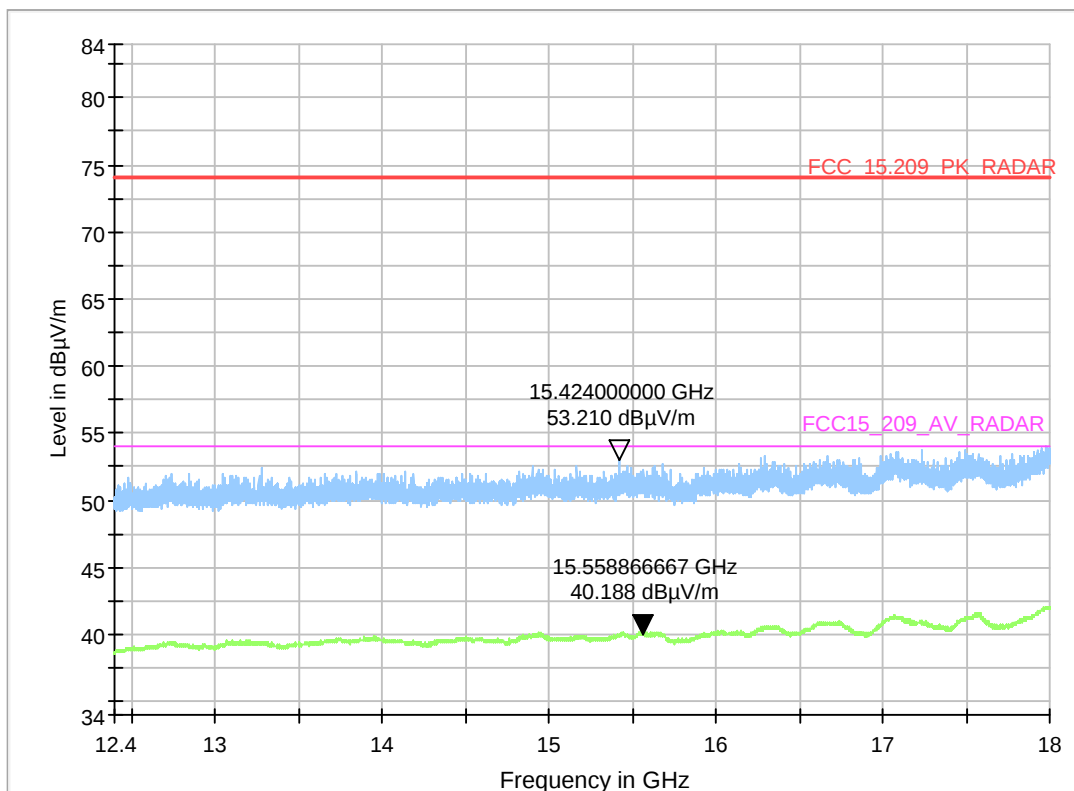


TID034_1-8968-24-1-12_SER_12.4_to_18_GHz_AntH


Common Information

Test Description:	Radiated Field Strength Emission@3m distance
Test Site Location:	cetecom advanced Essen
Test Site:	Fully Anechoic Room (FAR2)
Test Standard:	FCC 15.209
Operating Mode:	Data Transmission through 60 GHz
Environmental Conditions:	Humidity: 45%rH; Temperature: 22.4°C
SW-Version:	EMC32 V10.60.20
Operator:	Aho
Set-up:	1
Verdict:	Passed

Full Spectrum

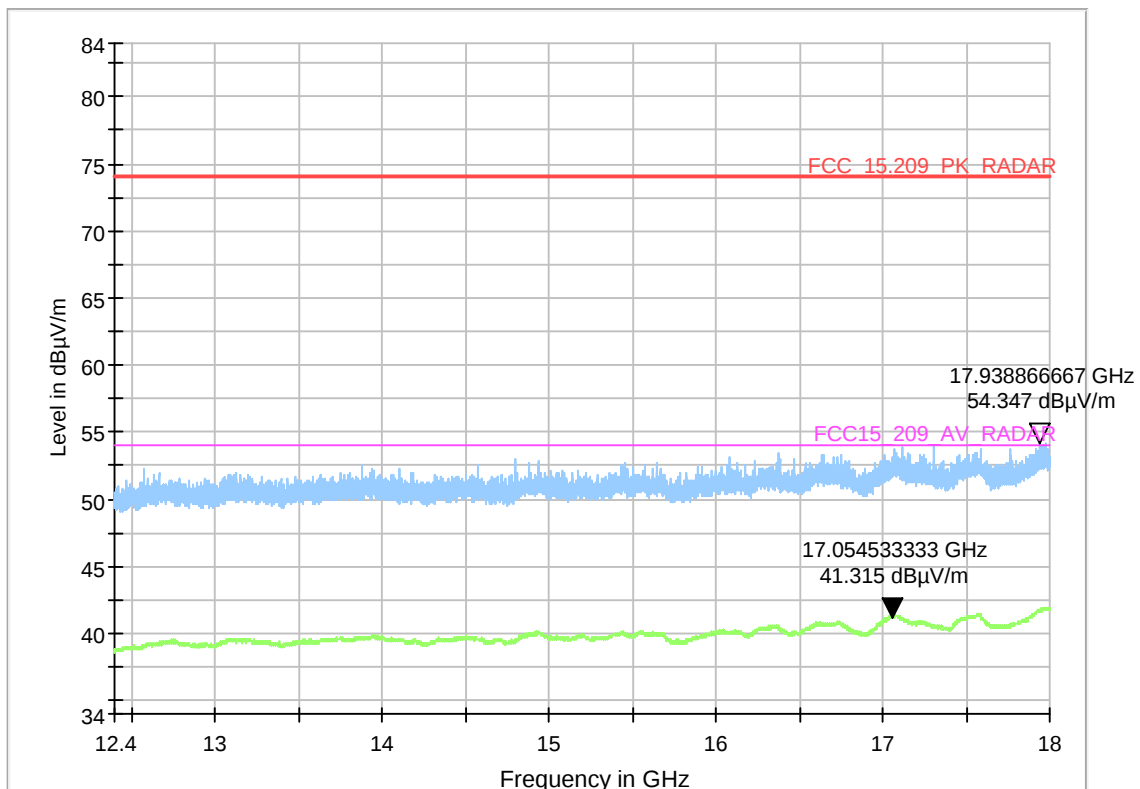


18 GHz – 30 GHz,
TID035-01_1-8968_24-1-12_SER 18 GHz - 30 GHz_AntH_TT30_TD00

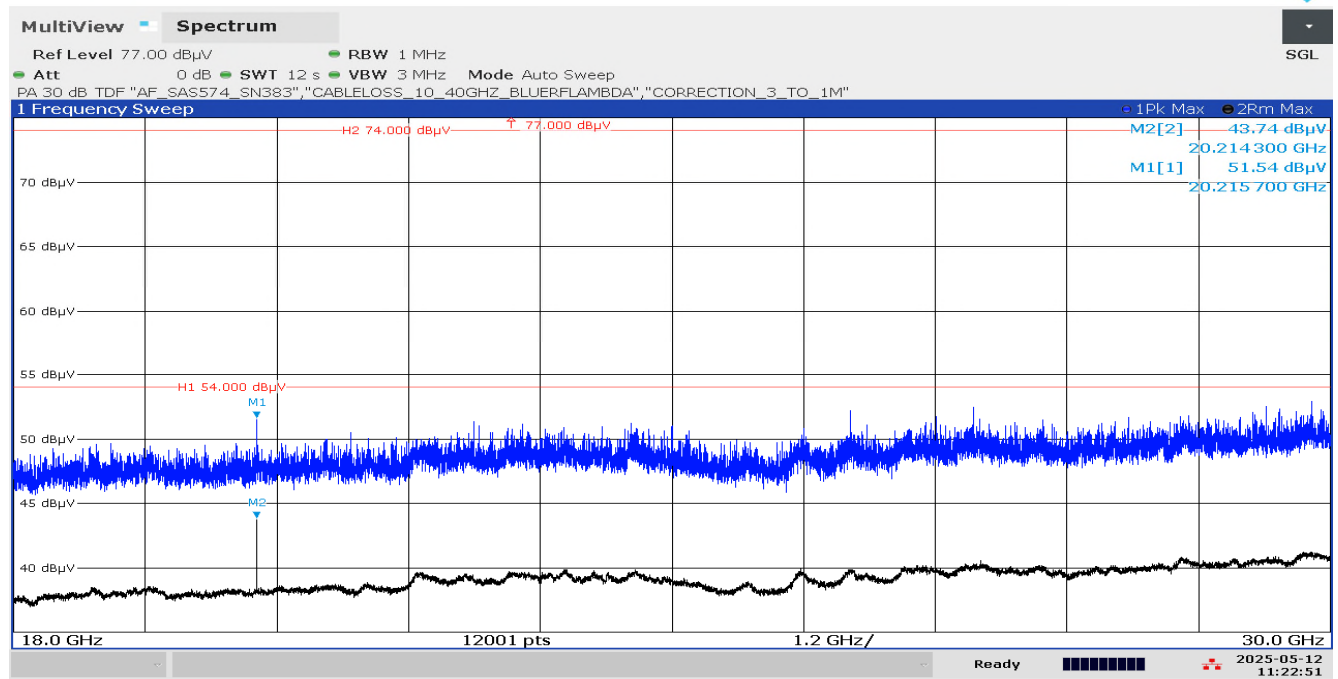


11:22:51 05/12/2025

TID035-02_1-8968_24-1-12_SER 22.21 GHz_AntH_TT32_TD00_peak_search

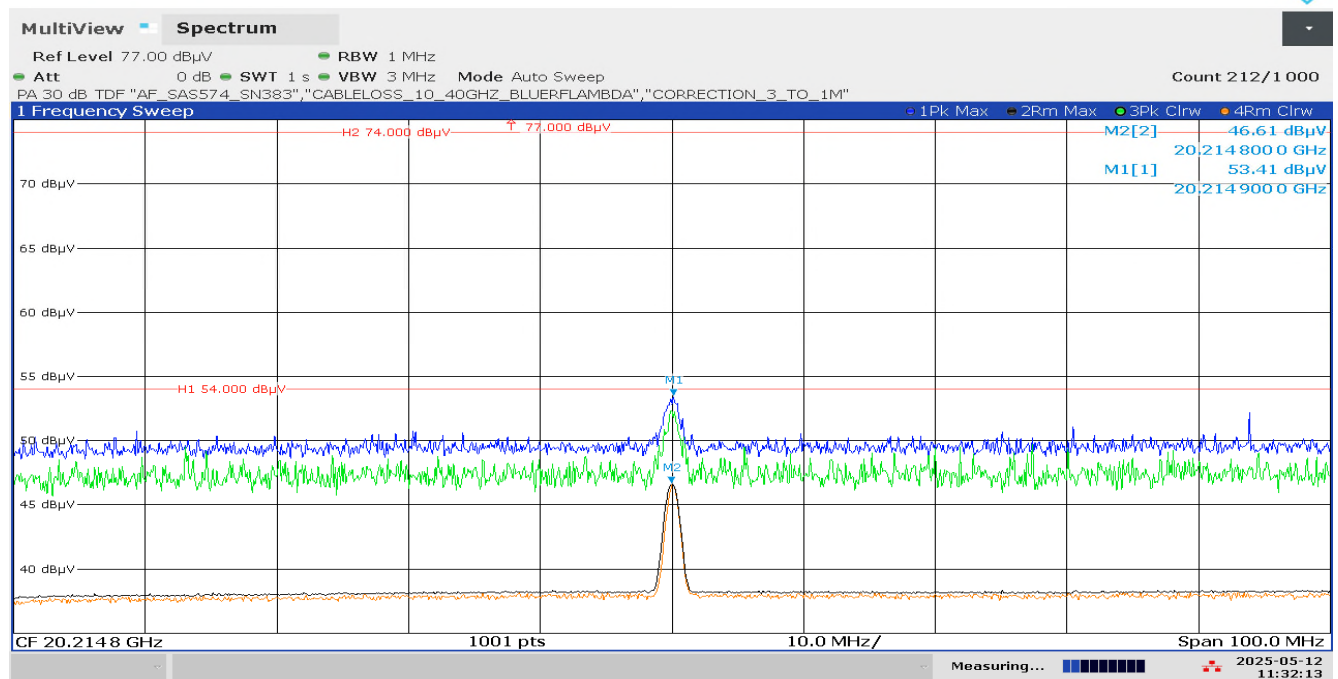


11:32:13 05/12/2025


TID035-03_1-8968_24-1-12_SER 22.21 GHz_AntH_TT32_TD00_final_zero_span

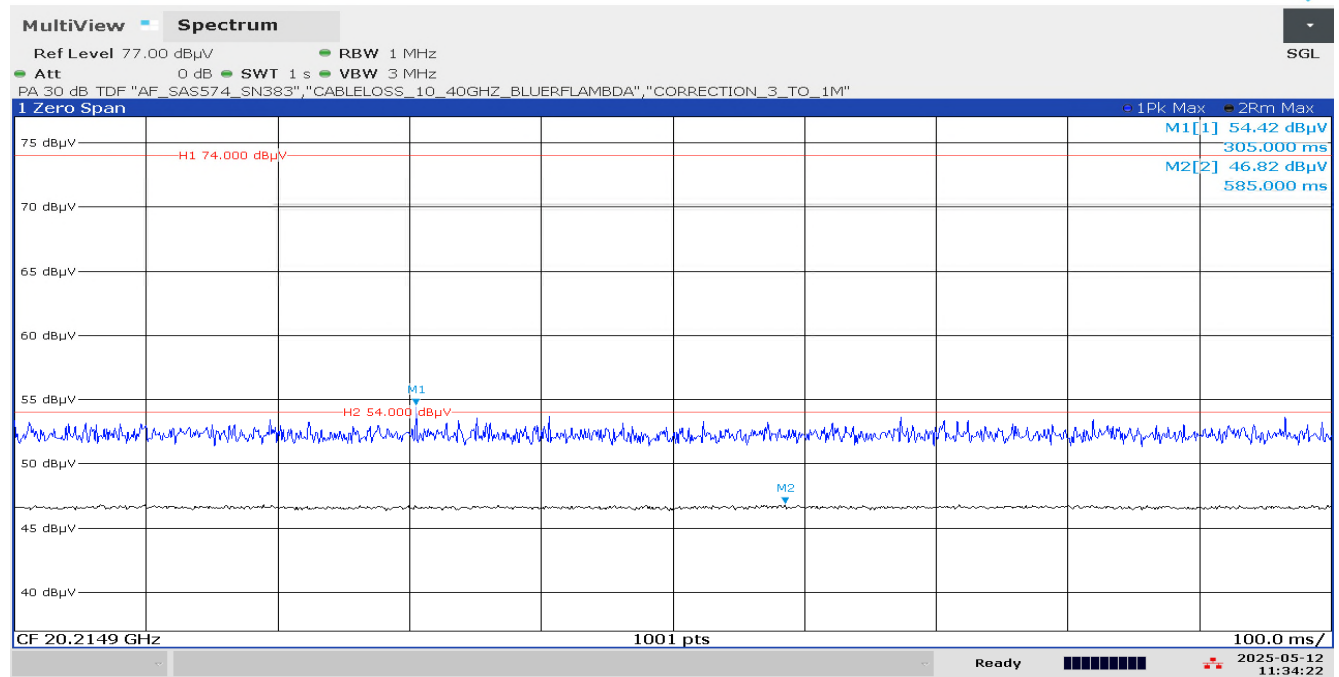


TID036-01_1-8968_24-1-12_SER 18 GHz - 30 GHz_AntV_TT00_TD00

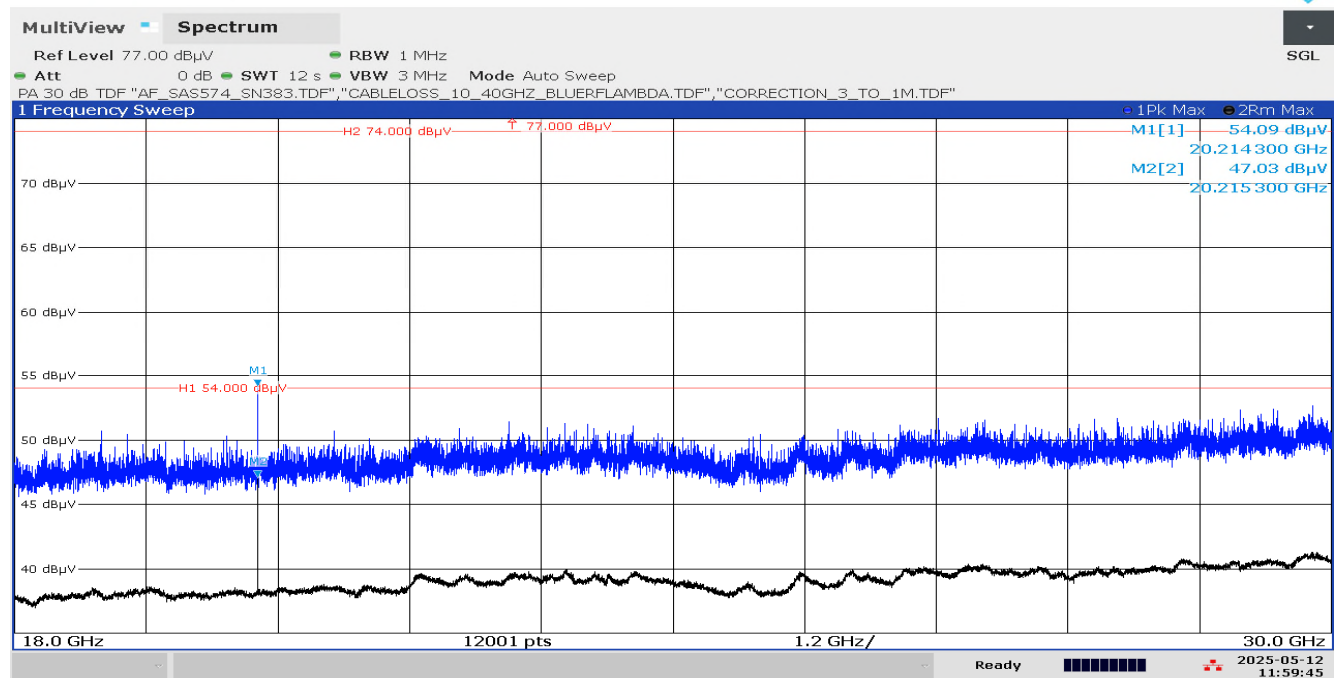


TID036-02_1-8968_24-1-12_SER 22.21 GHz_AntV_TT00_TD00_max_peak_search

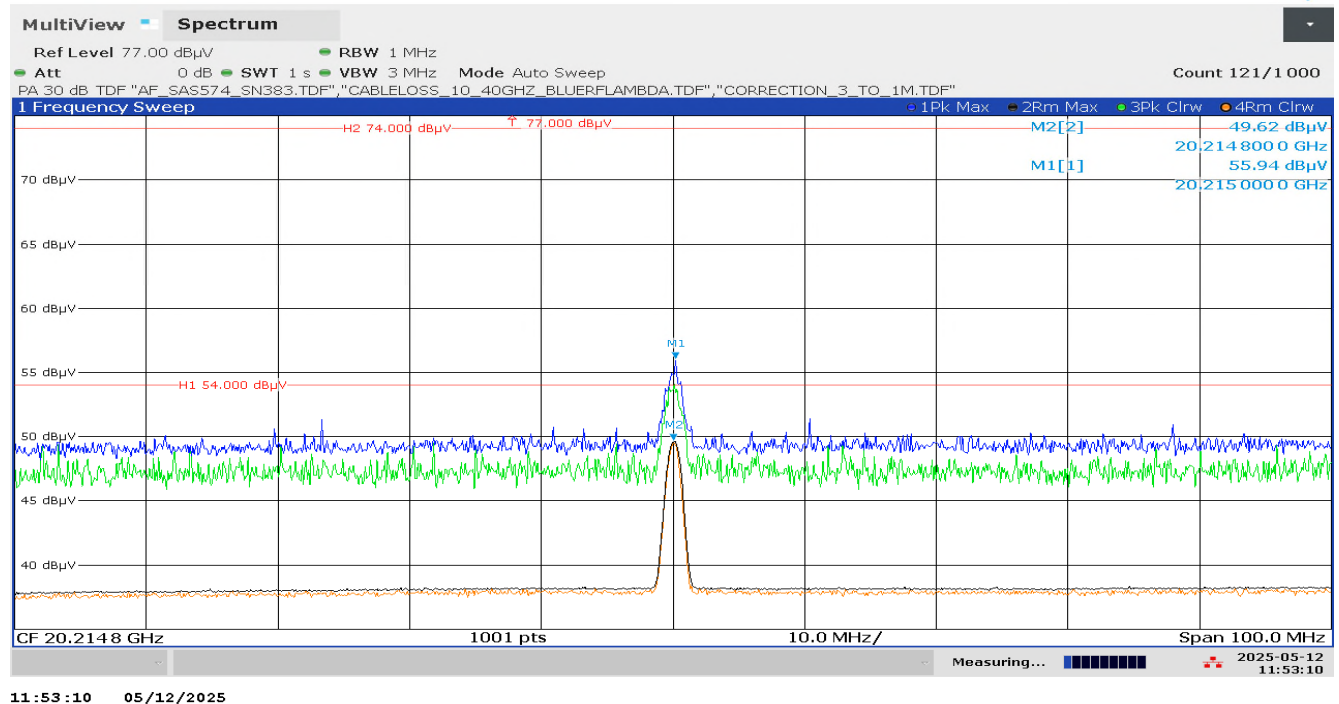

TID036-03_1-8968_24-1-12_SER 22.21 GHz_AntV_TT00_TD00_final_zero_span

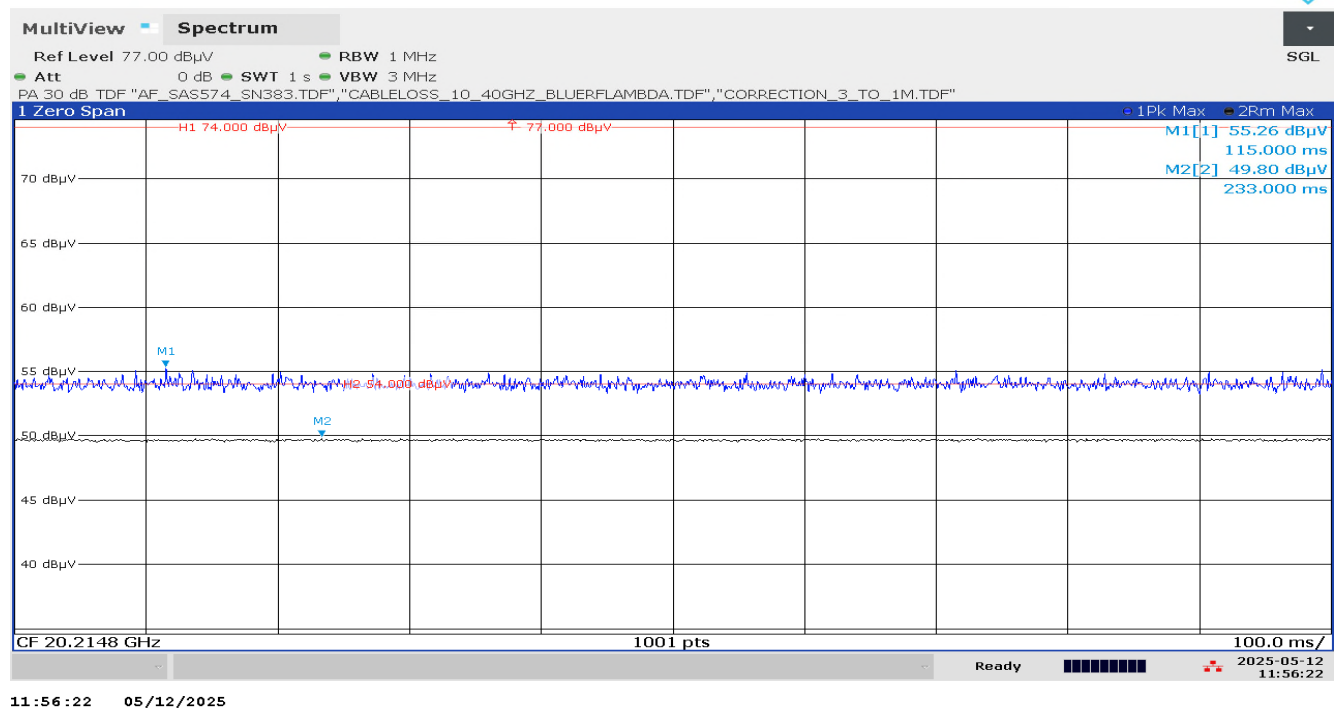


30 GHz – 40 GHz,
TID037-01_1-8968_24-1-12_SER 30 GHz - 40 GHz_AntH

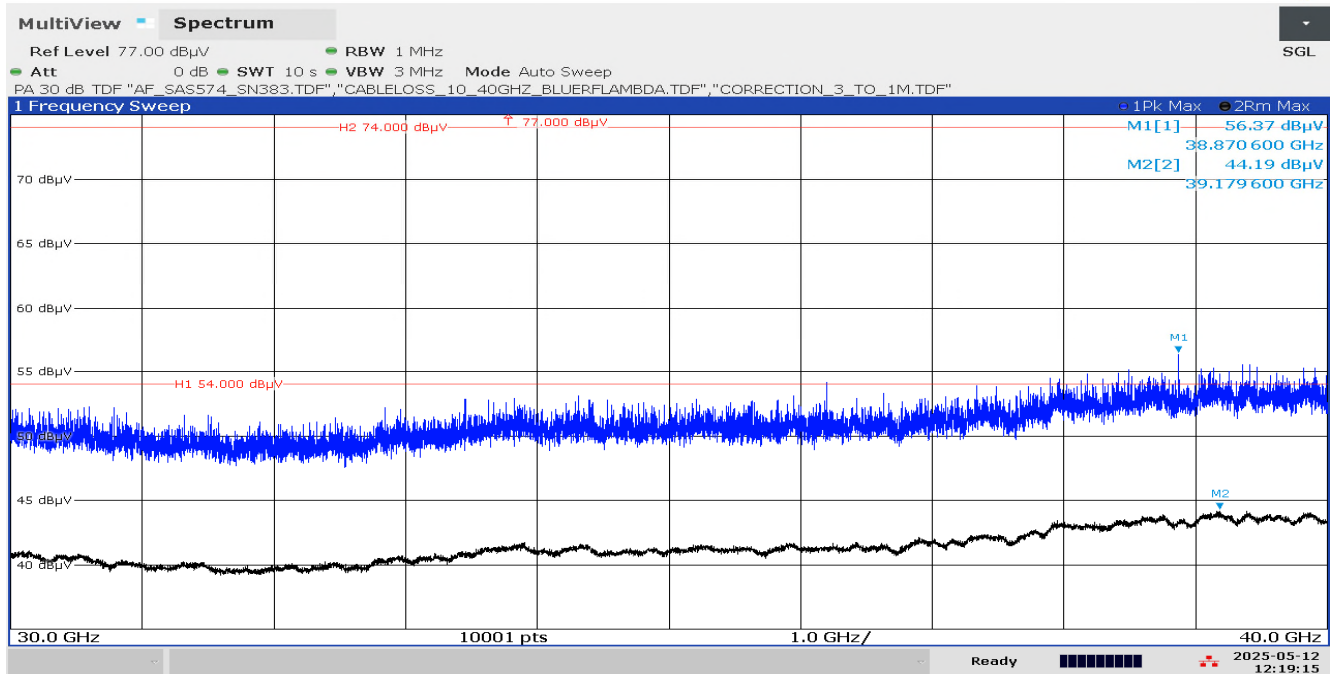


12:19:15 05/12/2025

TID038-01_1-8968_24-1-12_SER 30 GHz - 40 GHz_AntV

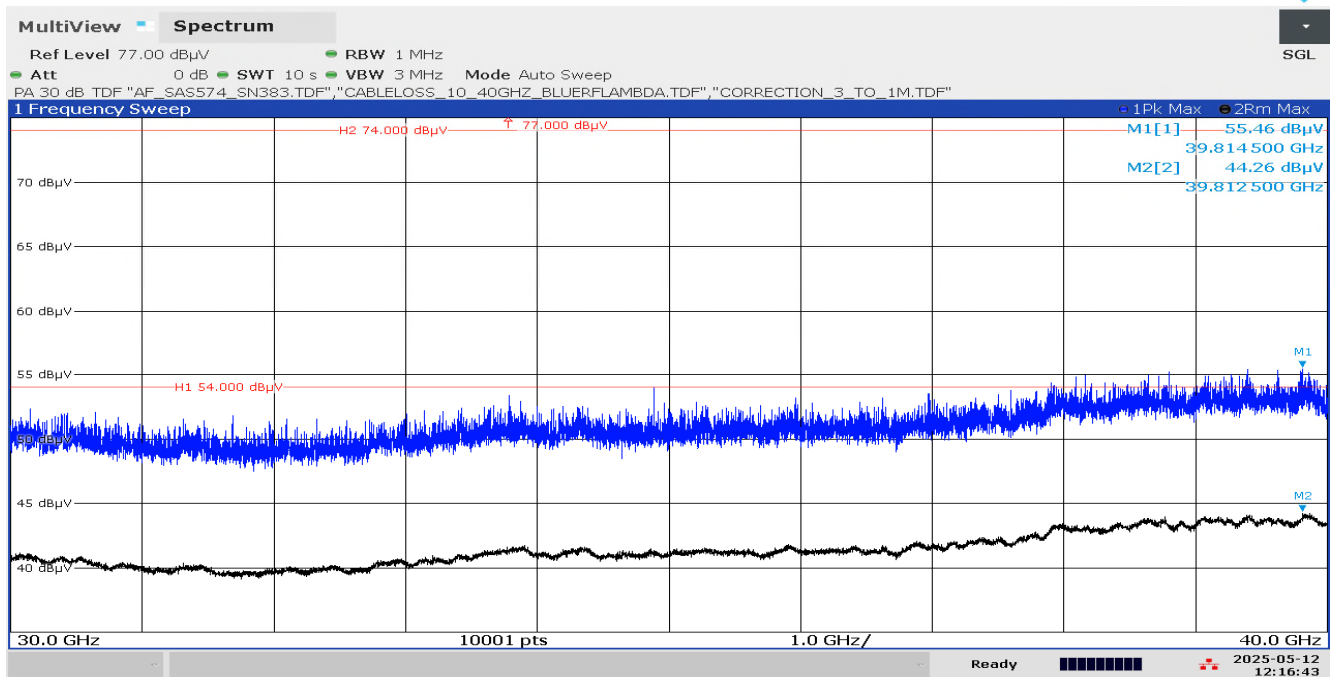


12:16:43 05/12/2025

40 GHz – 50 GHz,
TID010_1-8968-24-1-12_SER 40 GHz - 50 GHz_AntH

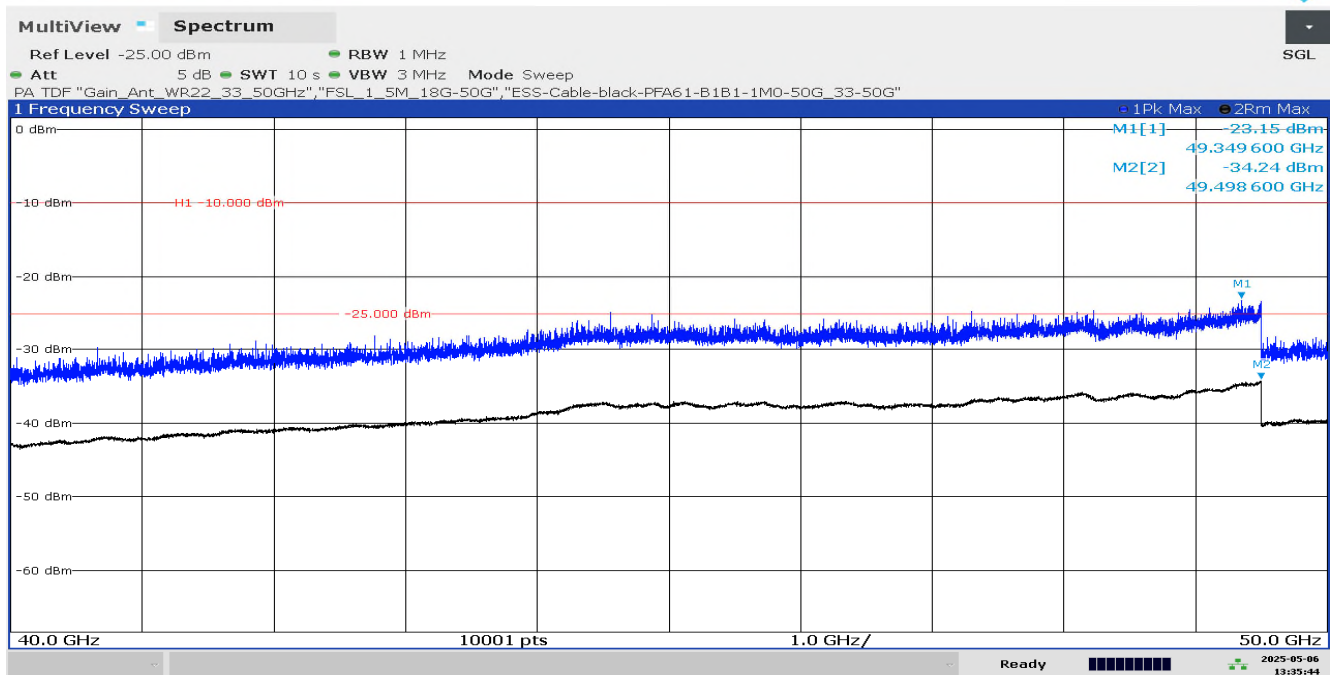


01:39:44 PM 05/06/2025

TID011_1-8968-24-1-12_SER 40 GHz - 50 GHz_AntV

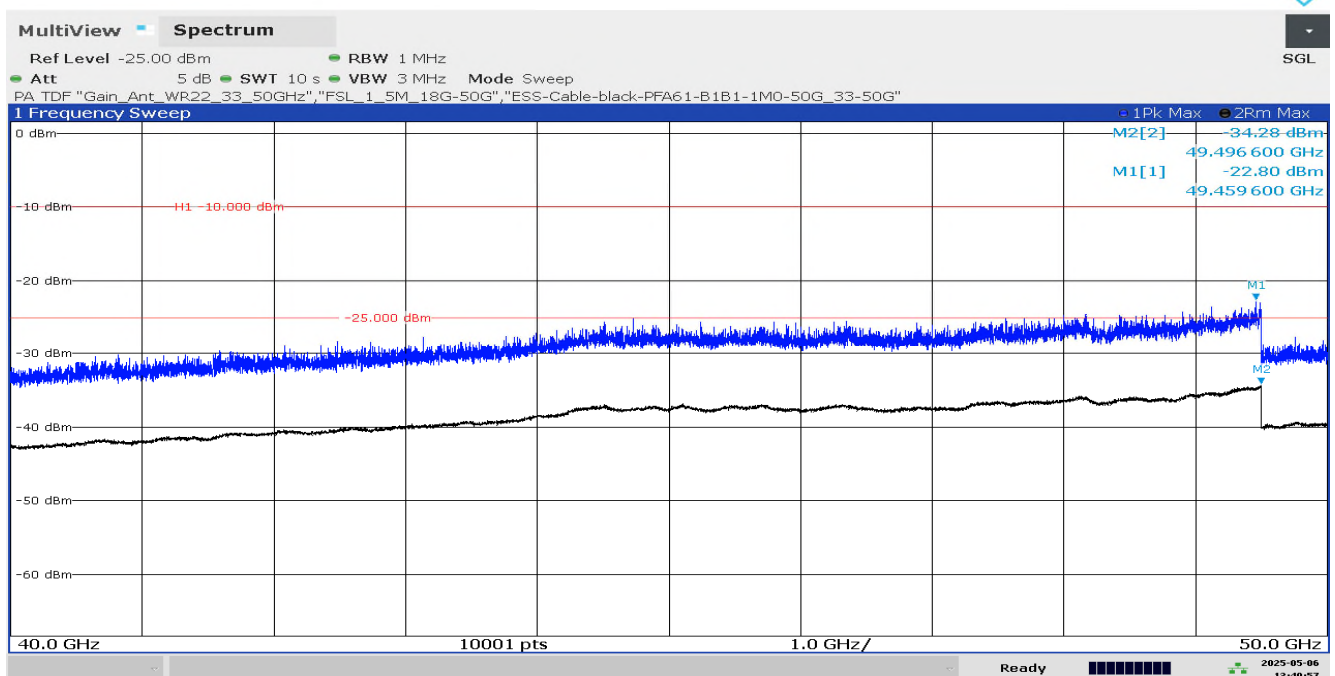


01:40:57 PM 05/06/2025

50 GHz – 67 GHz,
TID012a_1-8968-24-1-12_SER 50 GHz - 67 GHz_AntH

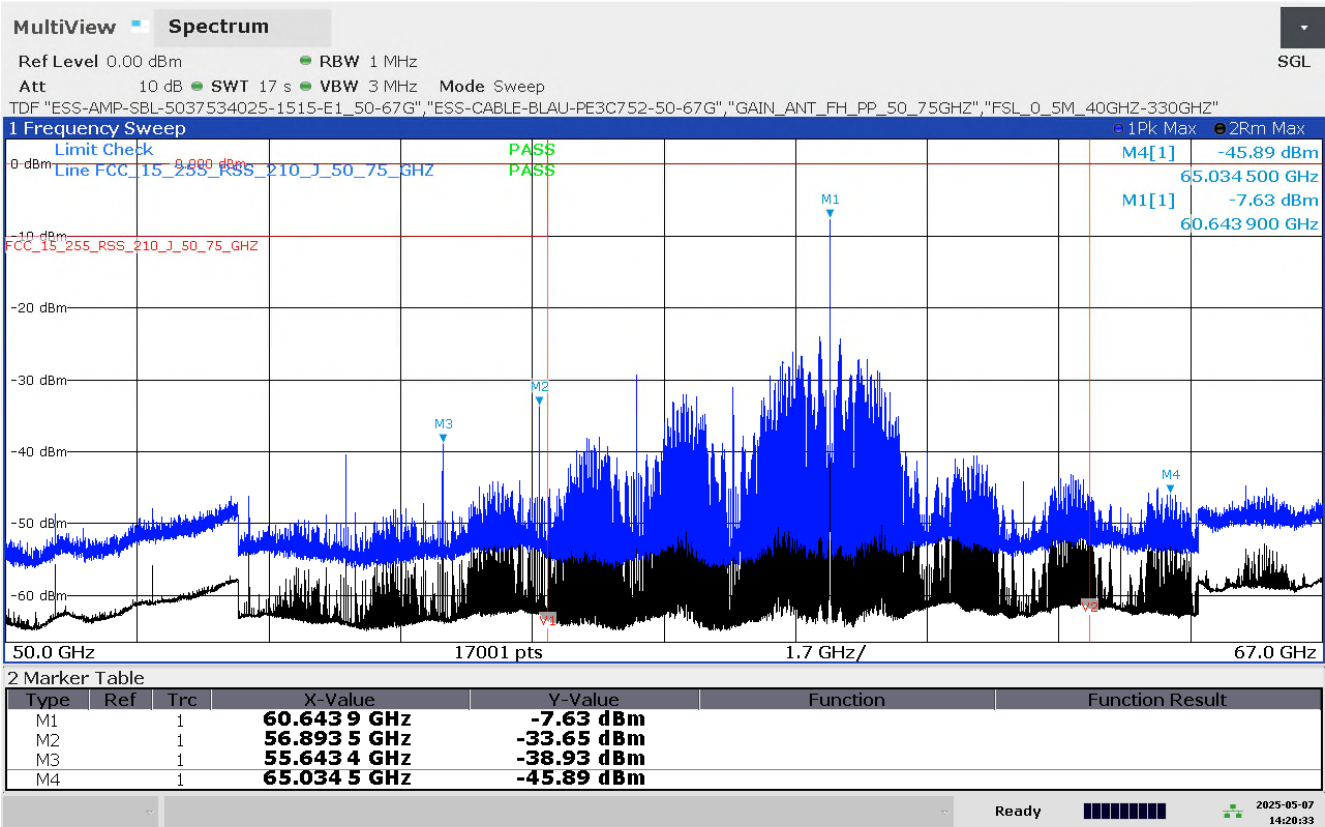


02:20:33 PM 05/07/2025

TID012b_1-8968-24-1-12_SER 50 GHz - 67 GHz_AntV

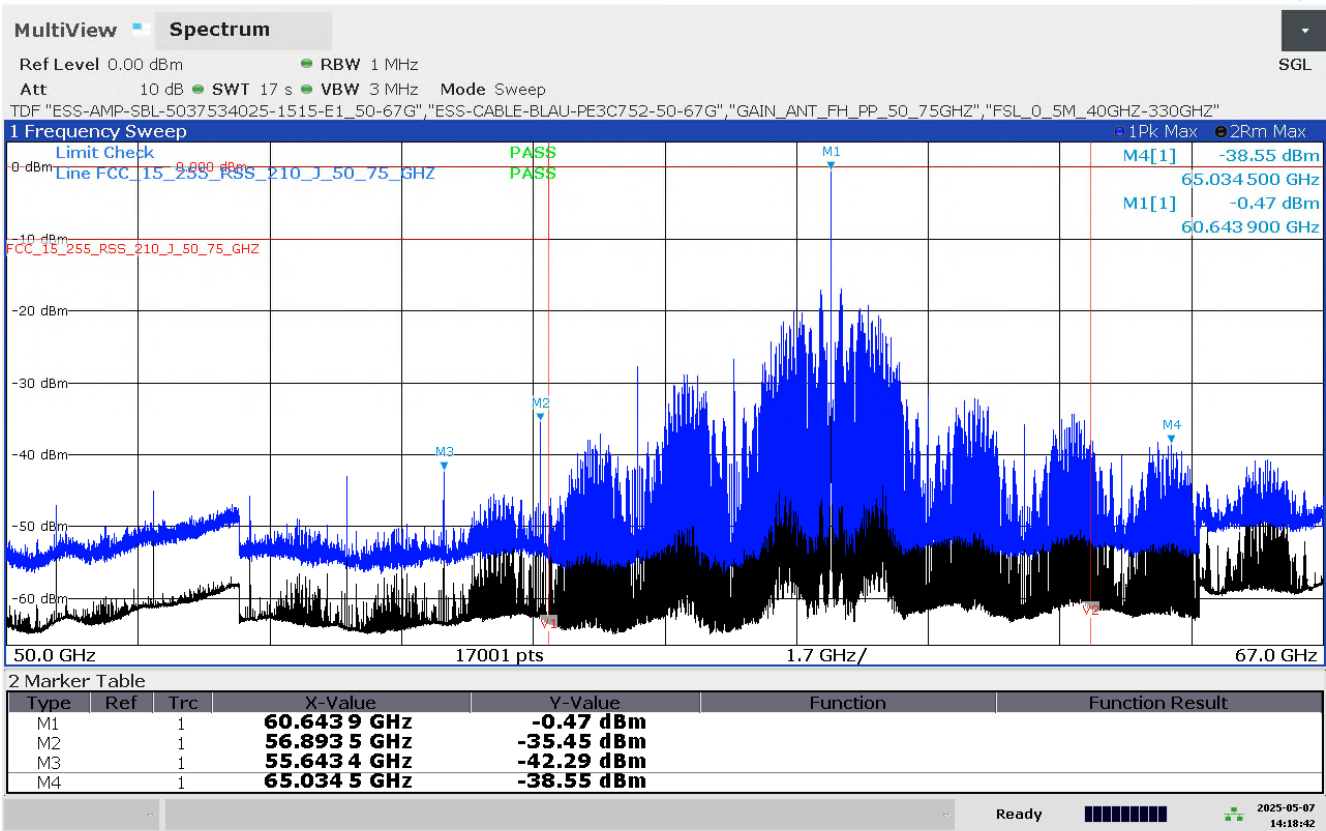


02:18:42 PM 05/07/2025


67 GHz – 75 GHz,
TID013a_1-8968-24-1-12_SER 67 GHz - 75 GHz_AntH

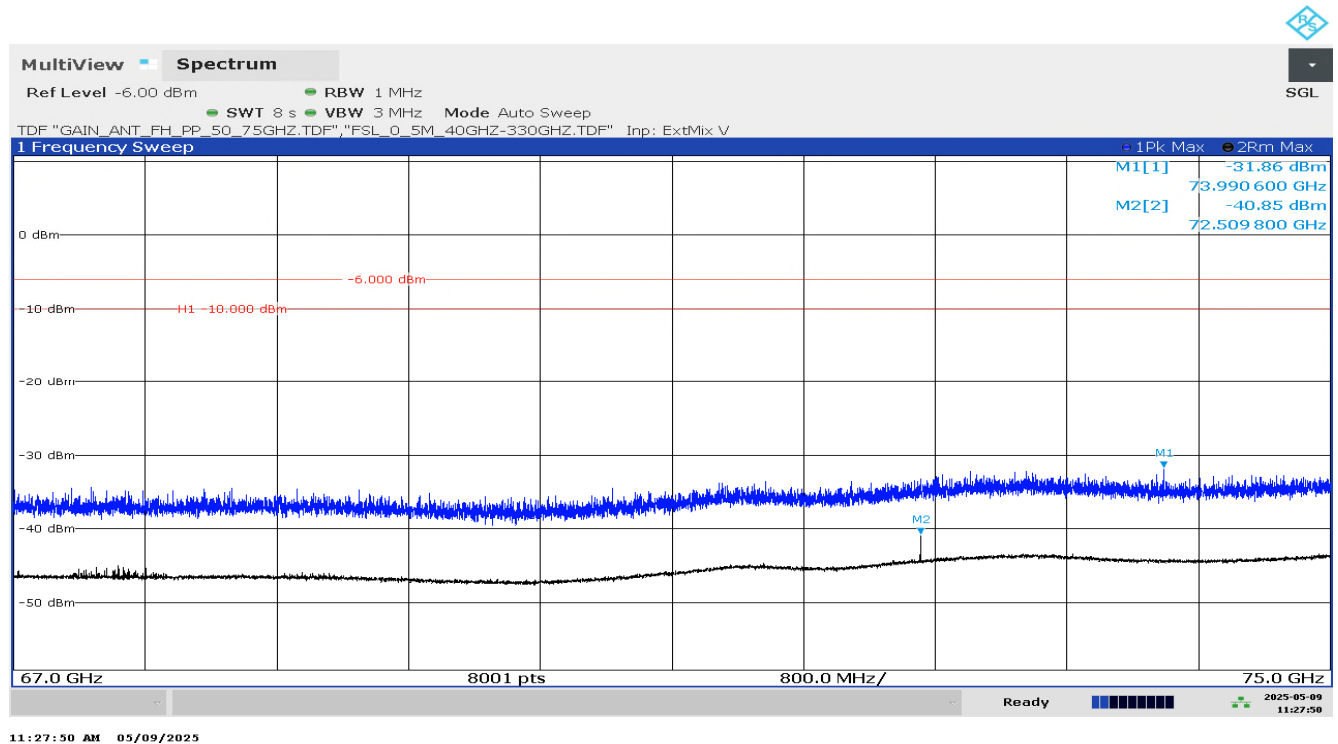


TID013a-01_1-8968-24-1-12_SER 72.51 GHz_AntH_image_signal

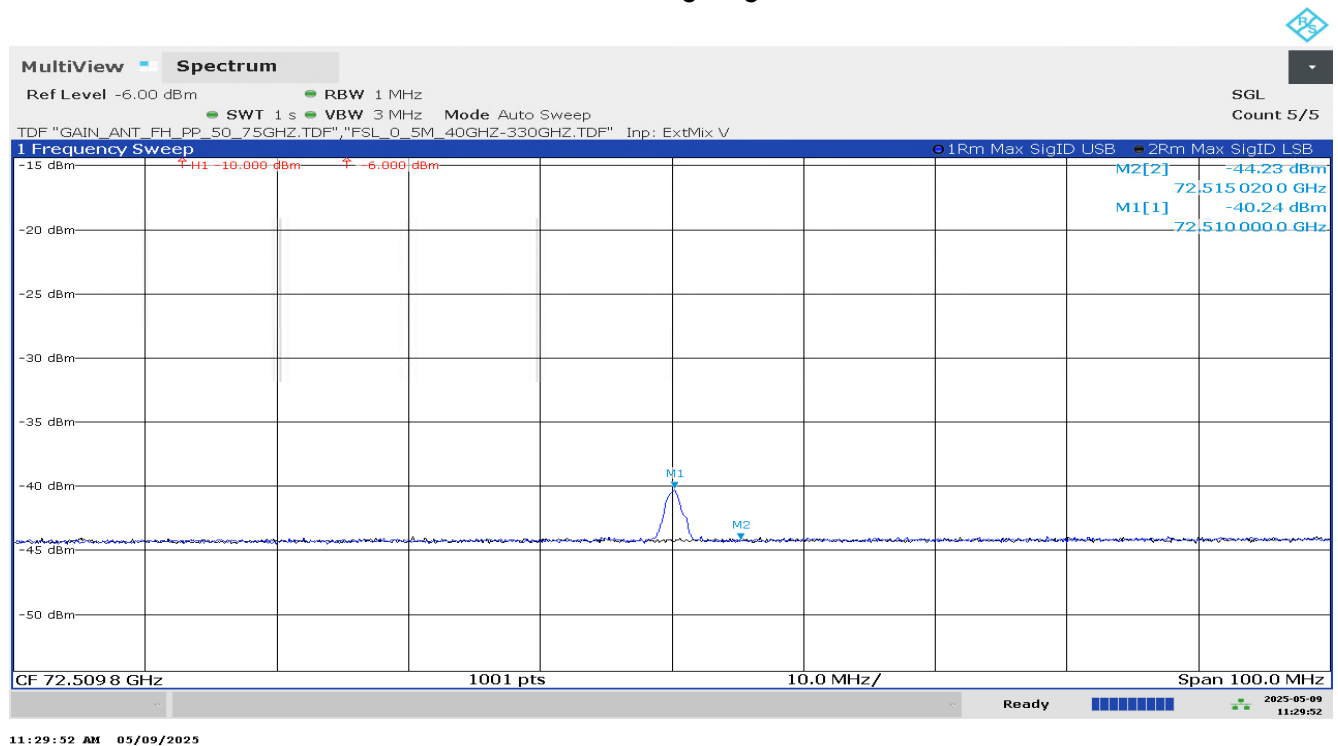


TID013b_1-8968_24-1-12_SER 67 GHz - 75 GHz_AntV

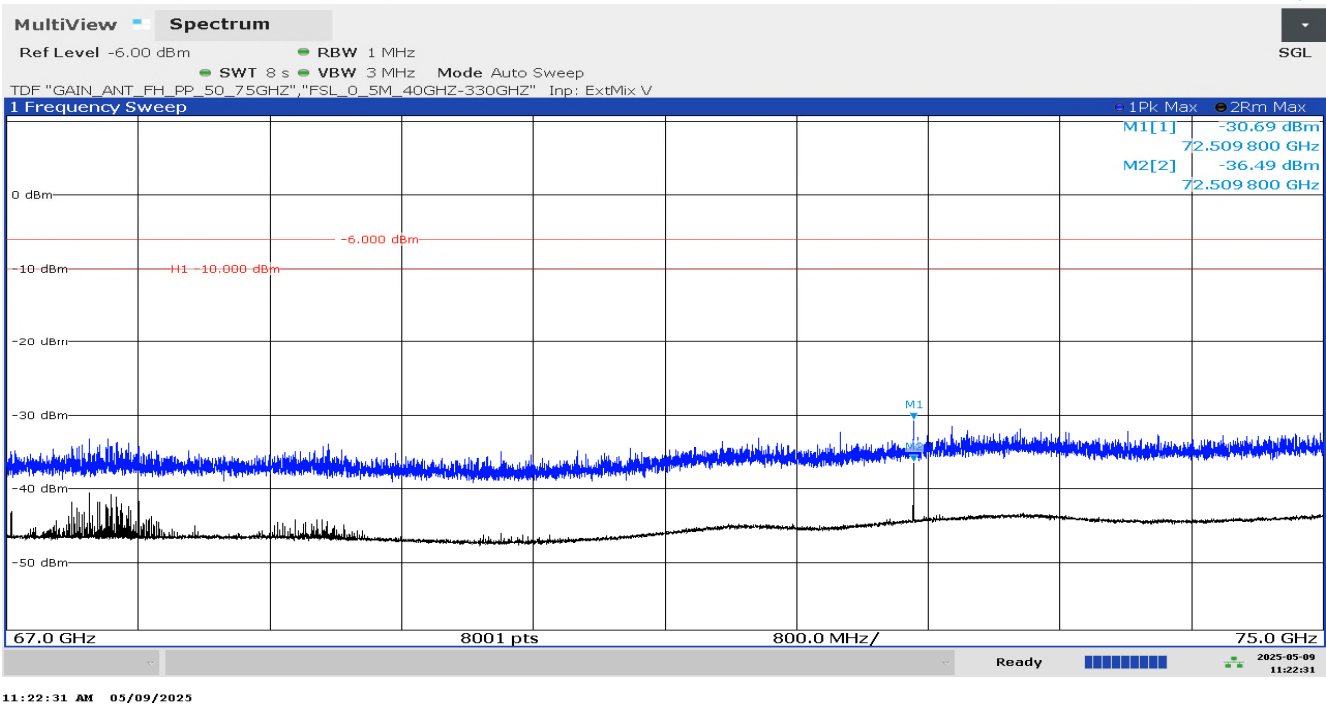

TID013b-01_1-8968_24-1-12_SER 72.51 GHz_AntV_image_signal

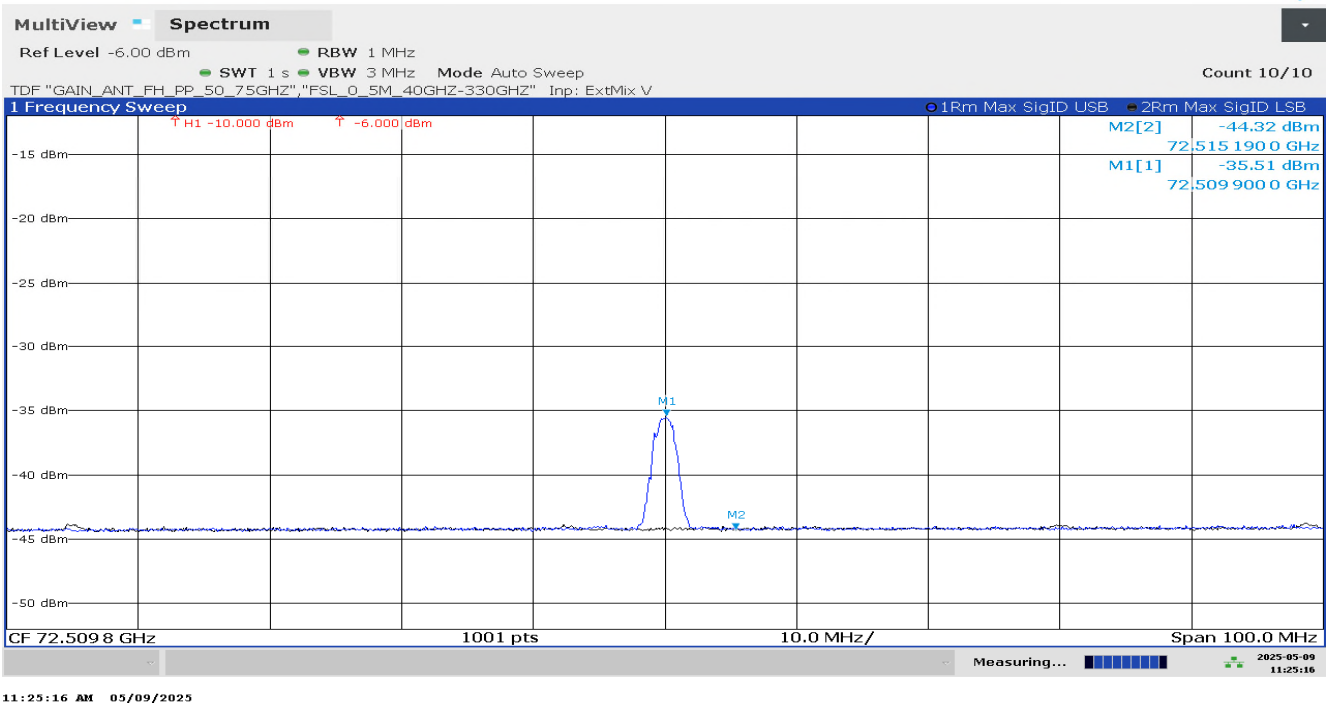


75 GHz – 90 GHz,
TID014_1-8968_24-1-12_SER 75 GHz - 90 GHz_AntH

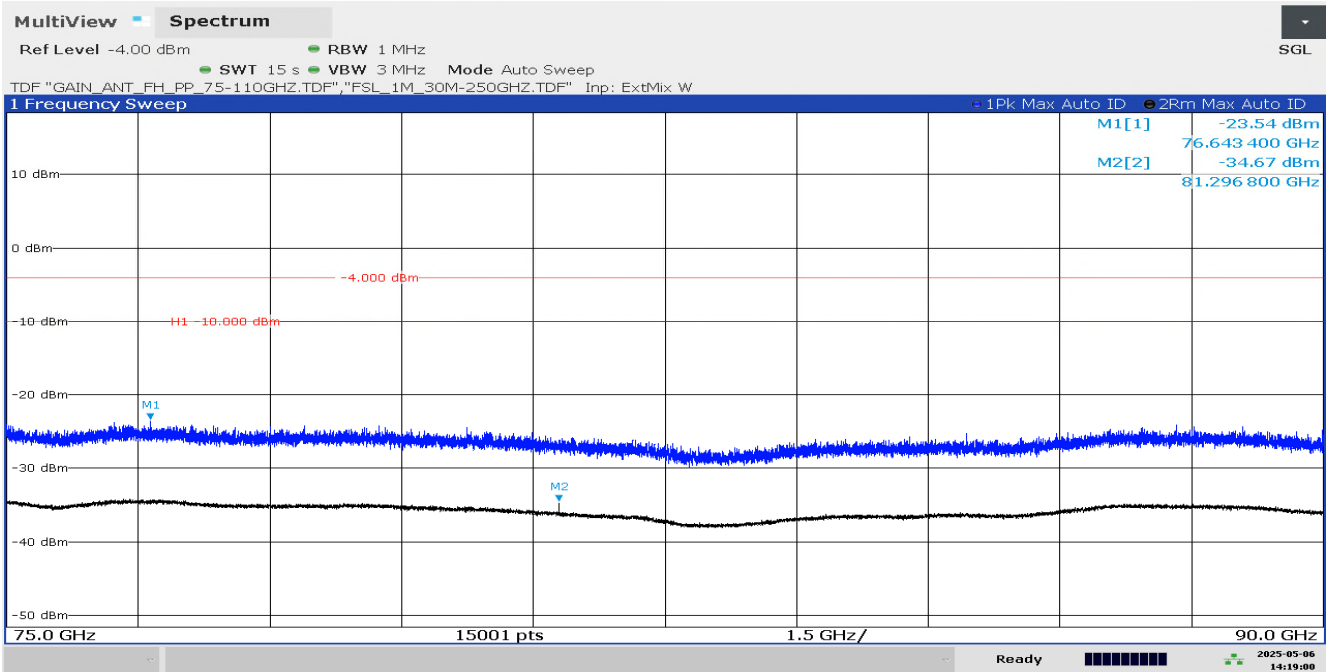


02:19:00 PM 05/06/2025

TID014-01_1-8968_24-1-12_SER 79.92 GHz_image_signal

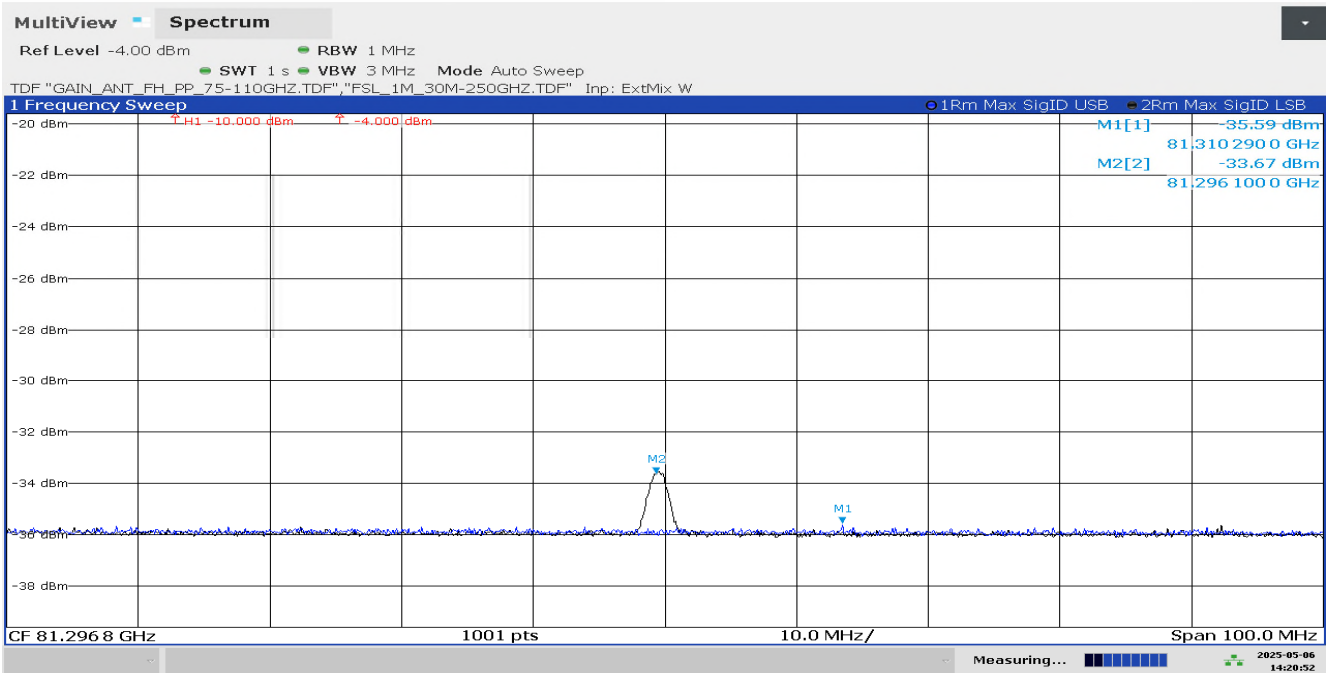


02:20:53 PM 05/06/2025

TID015_1-8968_24-1-12_SER 75 GHz - 90 GHz_AntV

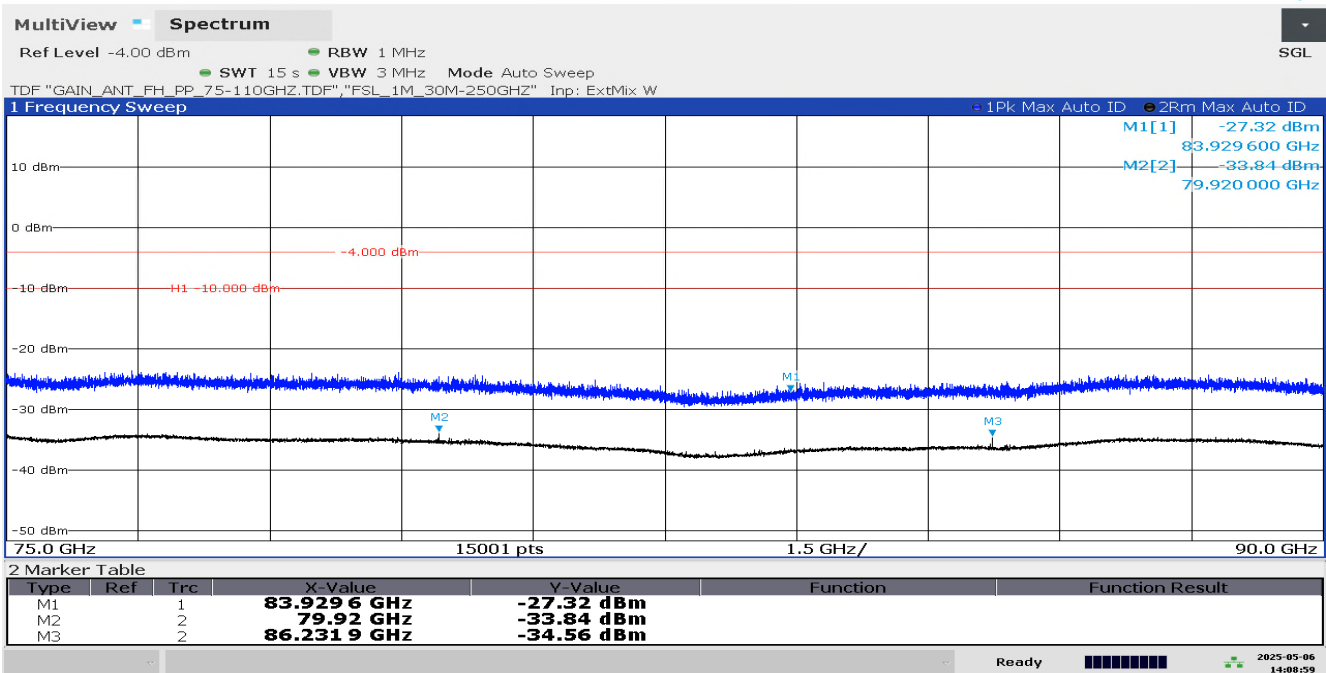


02:09:00 PM 05/06/2025

TID015-01_1-8968_24-1-12_SER 79.92 GHz_image_signal

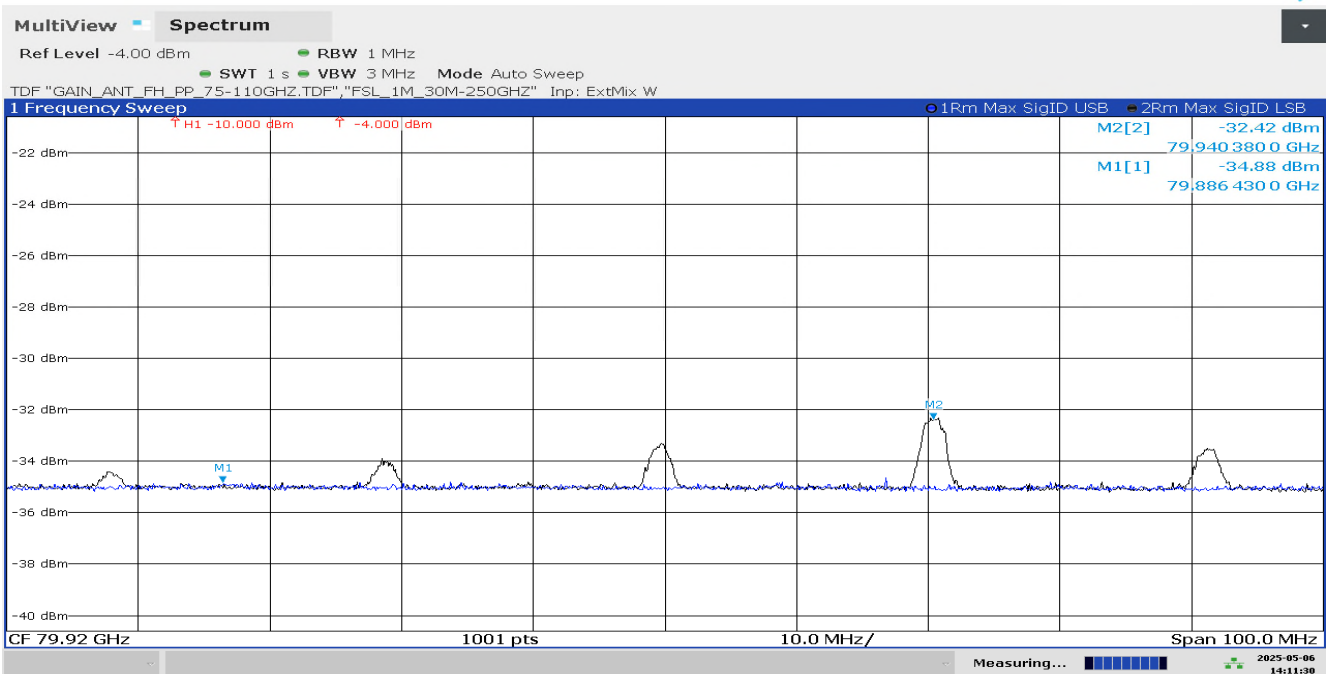


02:11:30 PM 05/06/2025

TID015-02_1-8968_24-1-12_SER 86.23 GHz_image_signal

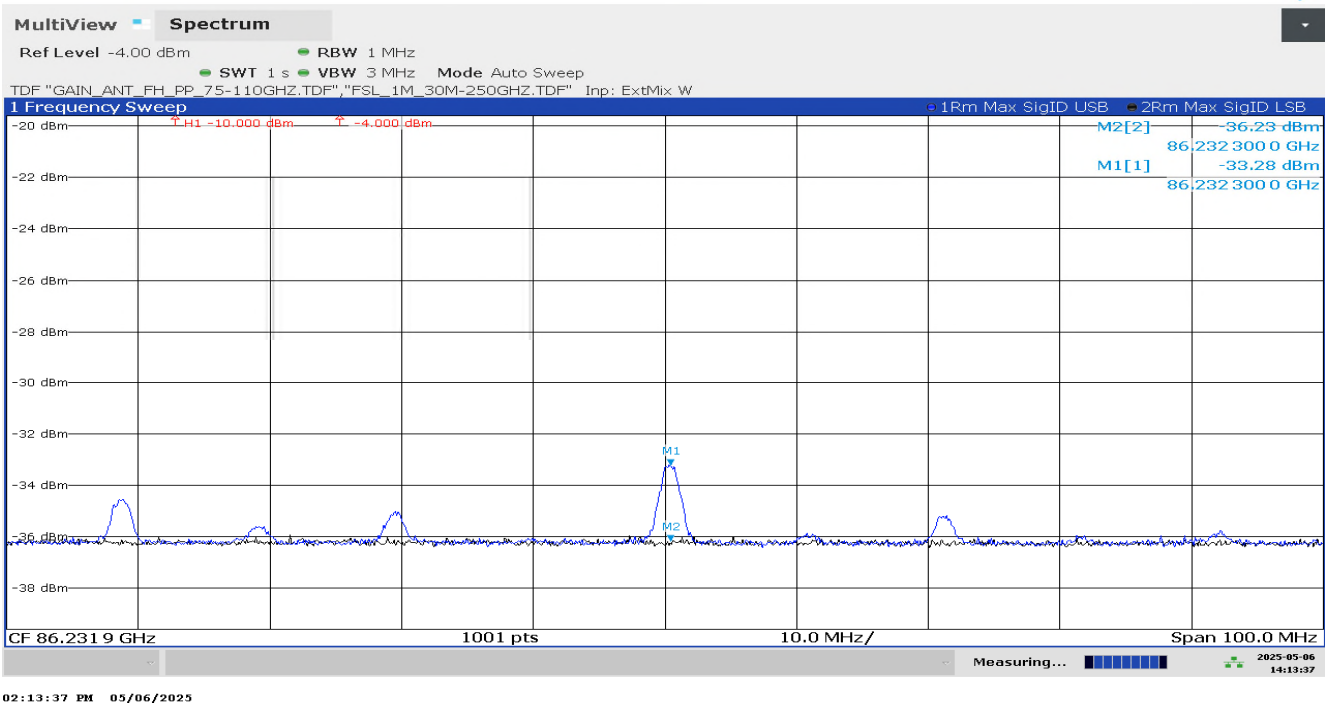


90 GHz – 110 GHz,
TID016_1-8968-24-1-12_SER 90 GHz - 110 GHz_AntH

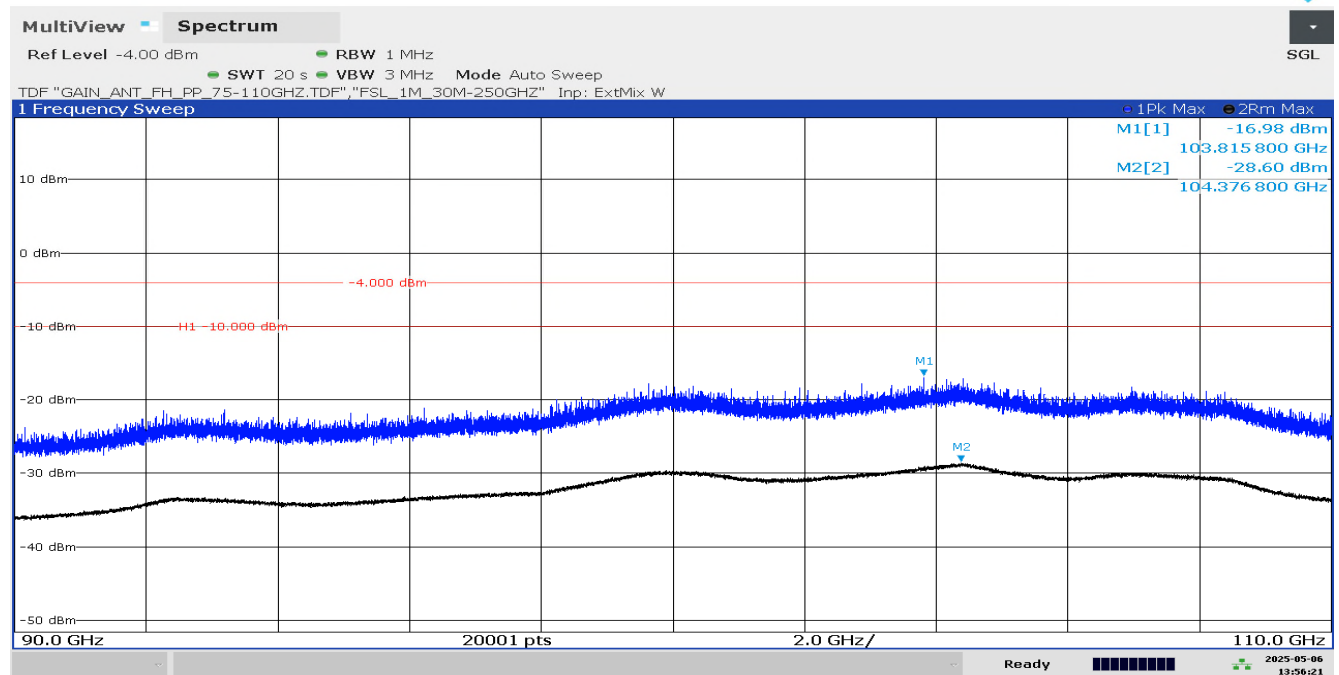


01:56:21 PM 05/06/2025

TID017_1-8968-24-1-12_SER 90 GHz - 110 GHz_AntV

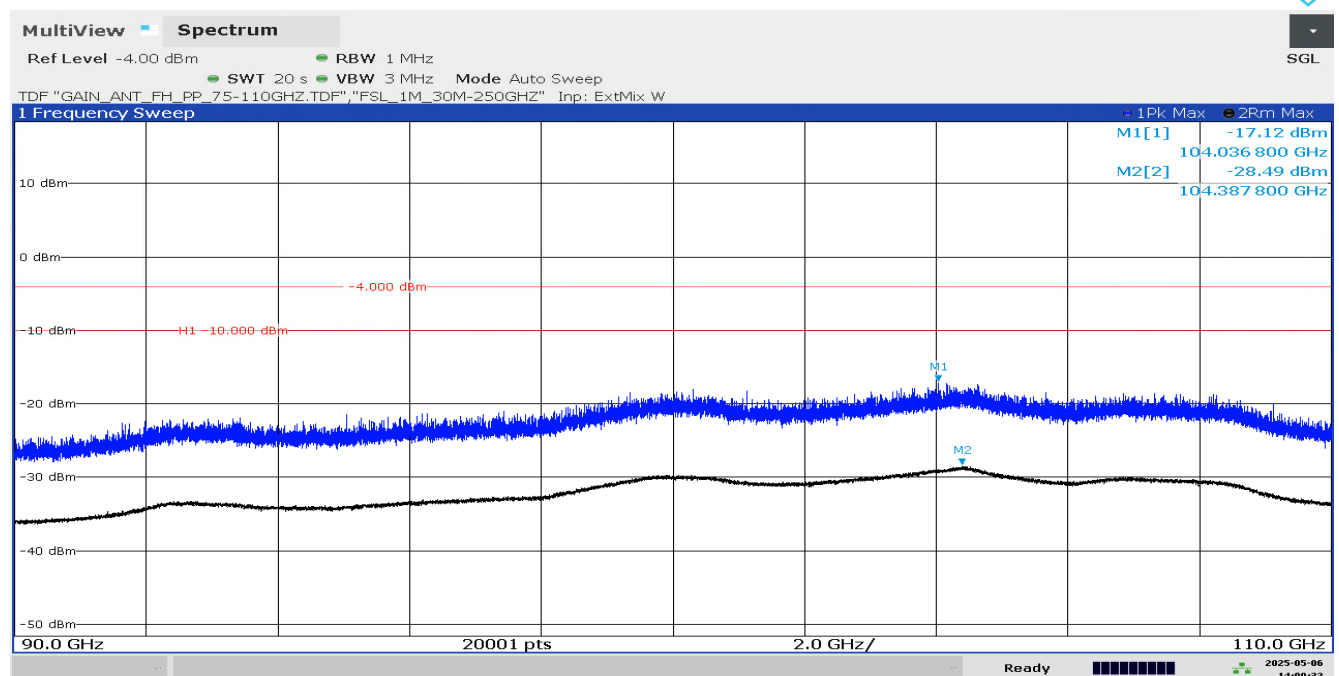


02:00:33 PM 05/06/2025

110 GHz – 120 GHz,
TID018_1-8968_24-1-12_SER 110 GHz - 120 GHz_AntH

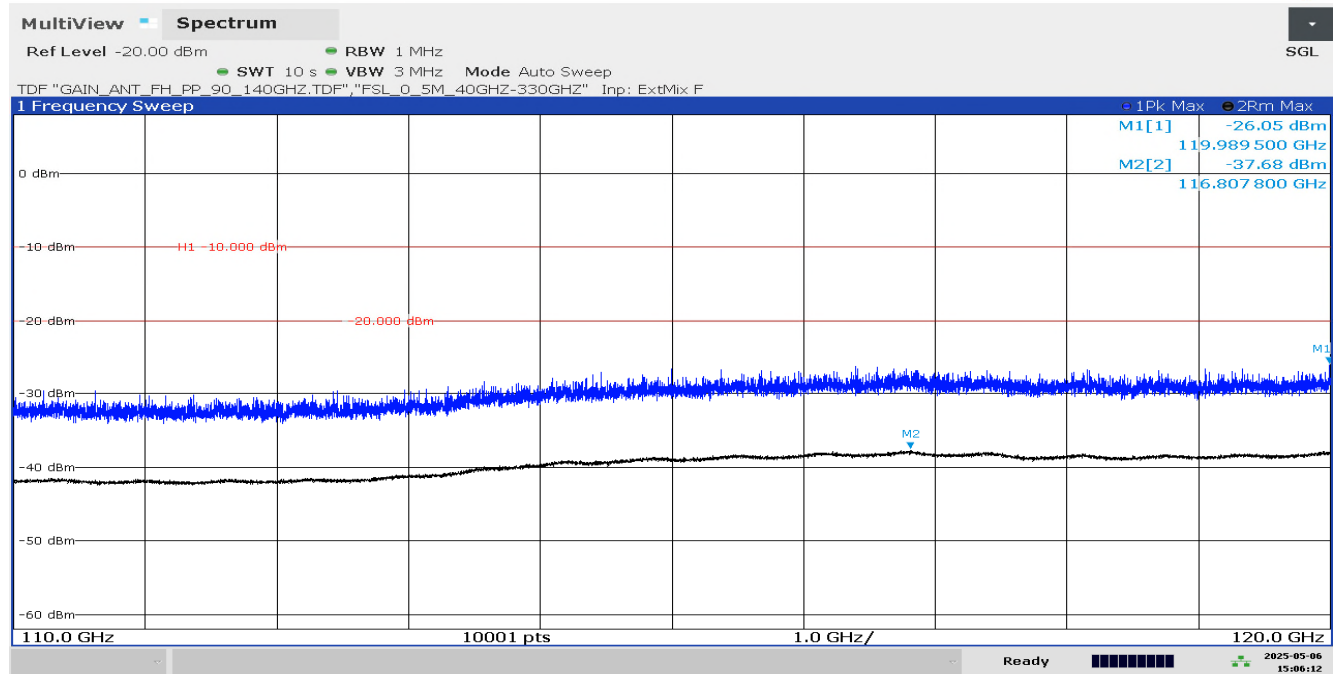


03:06:12 PM 05/06/2025

TID019_1-8968_24-1-12_SER 110 GHz - 120 GHz_AntV

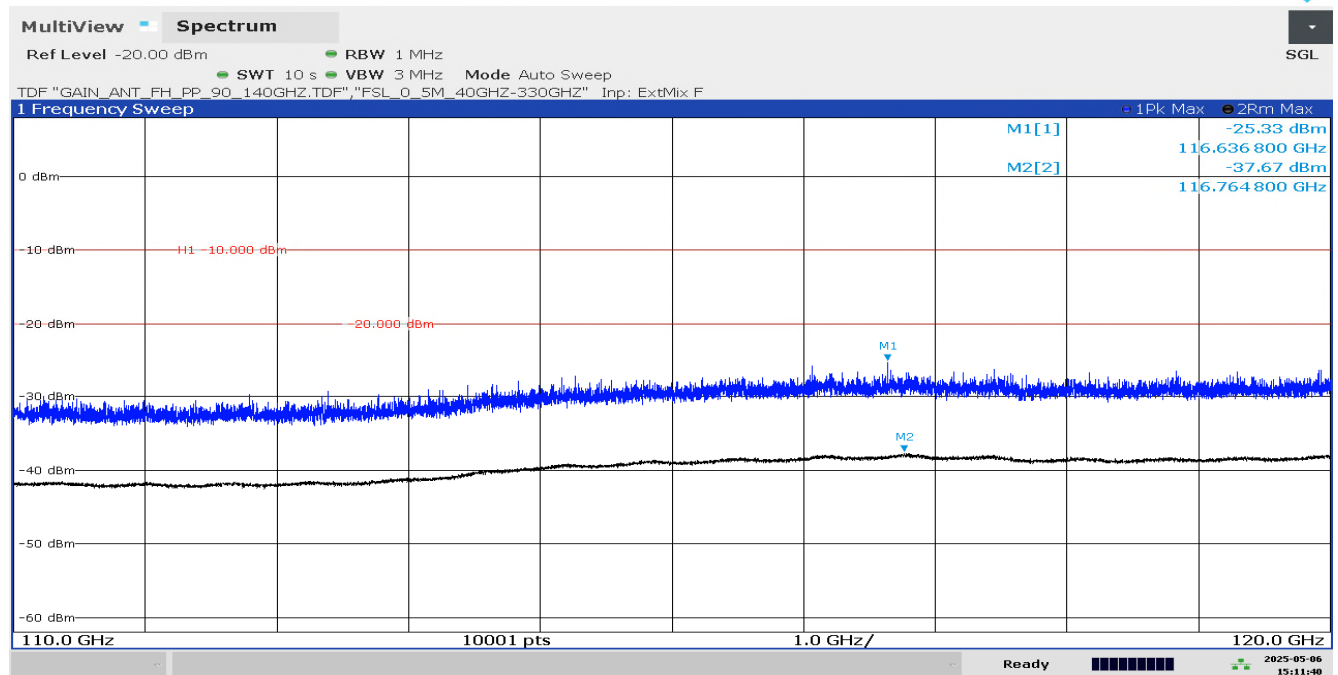


03:11:40 PM 05/06/2025


120 GHz – 130 GHz,
TID020_1-8968_24-1-12_SER 120 GHz - 130 GHz_AntH

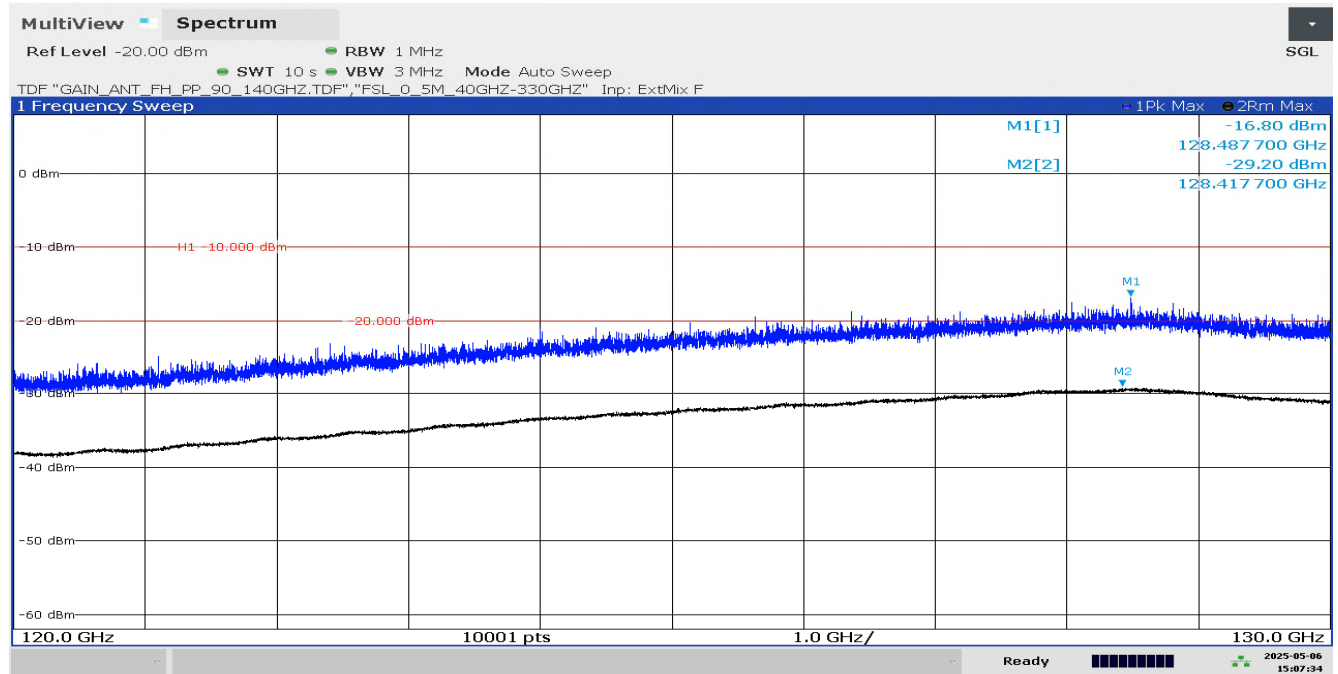


TID021_1-8968_24-1-12_SER 120 GHz - 130 GHz_AntV

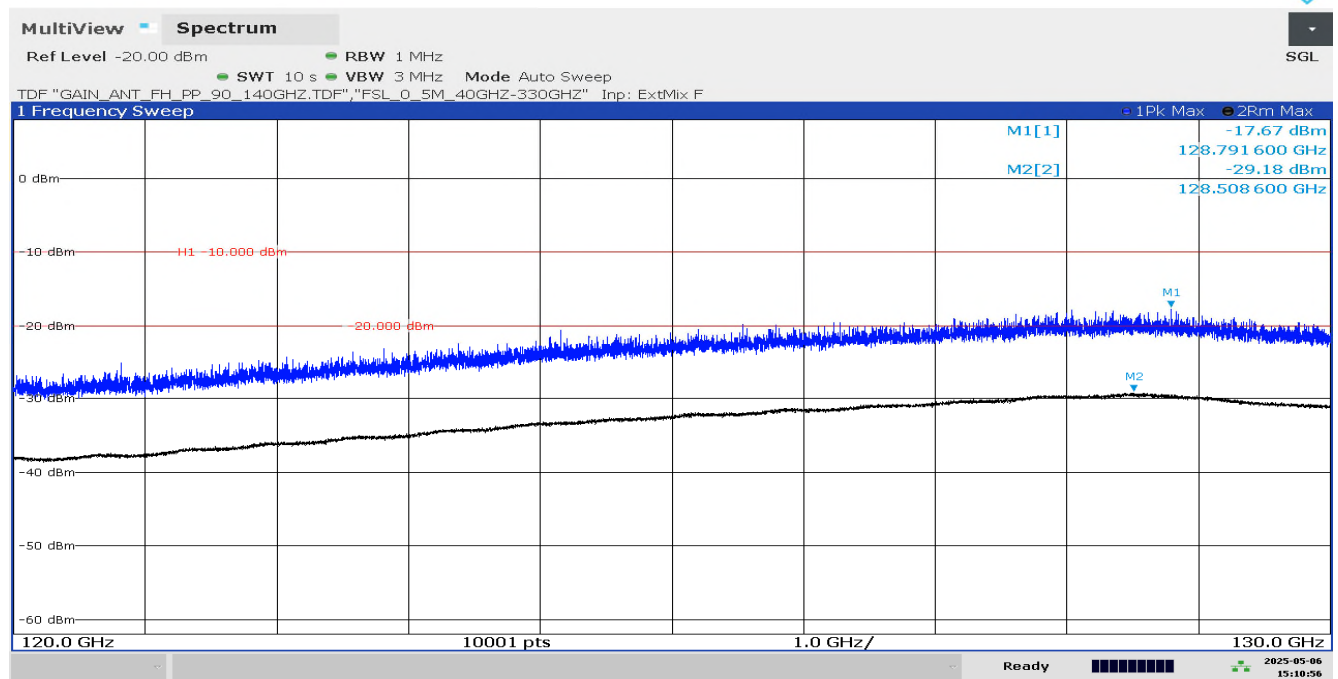


130 GHz – 140 GHz,
TID022_1-8968_24-1-12_SER 130 GHz - 140 GHz_AntH

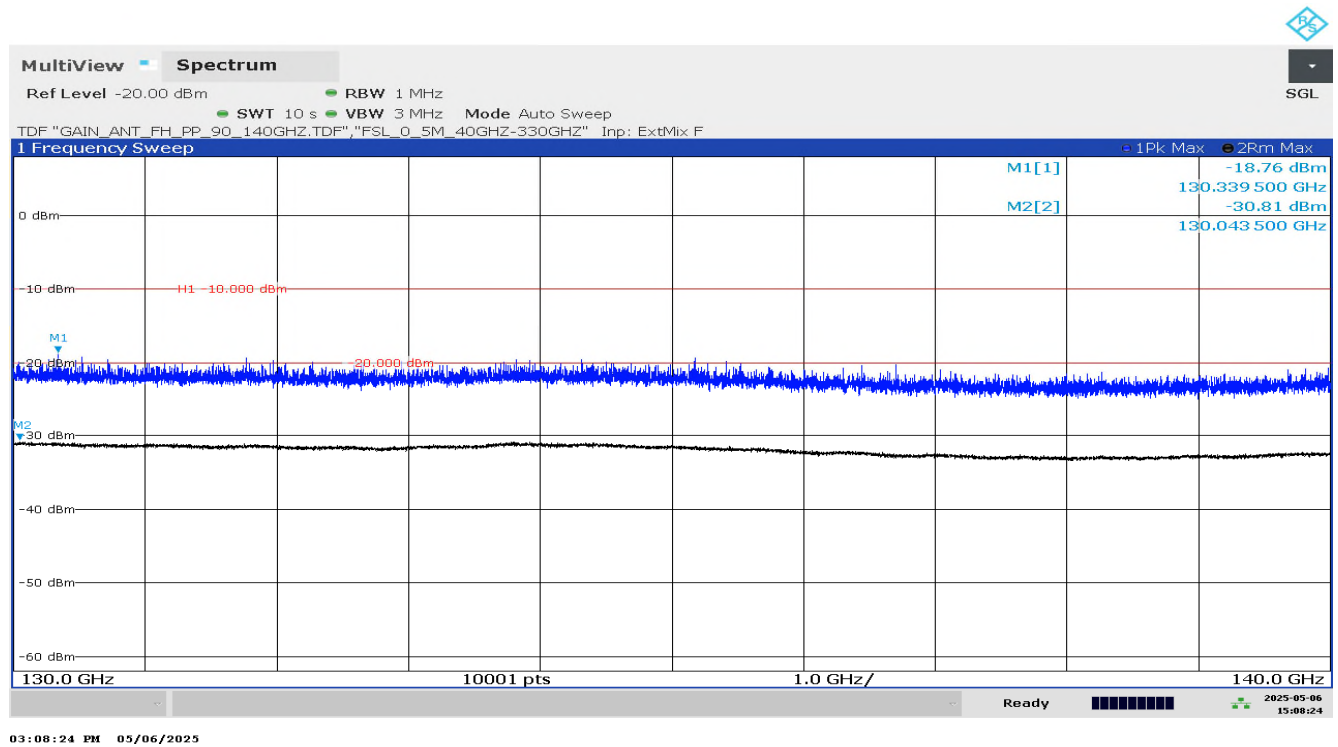

TID023_1-8968_24-1-12_SER 130 GHz - 140 GHz_AntV

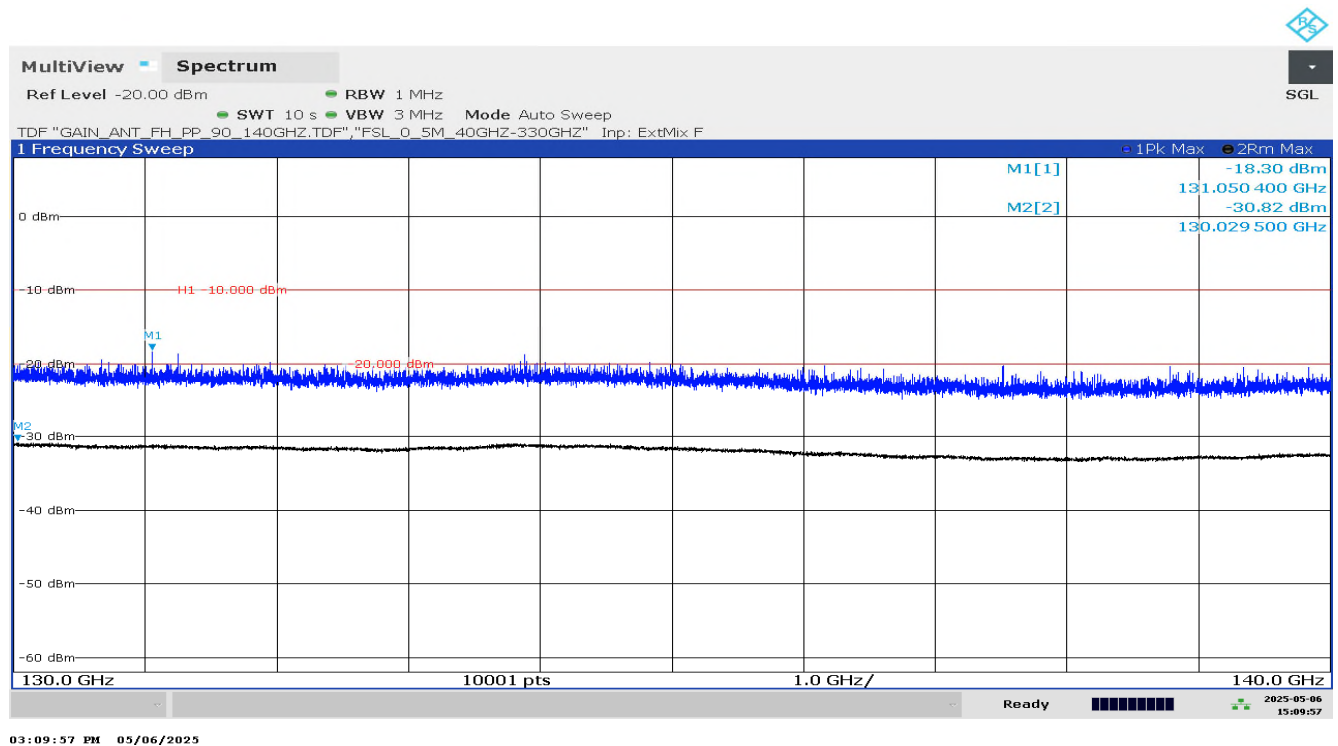


140 GHz – 160 GHz,
TID024_1-8968_24-1-12_SER 140 GHz - 160 GHz_AntH

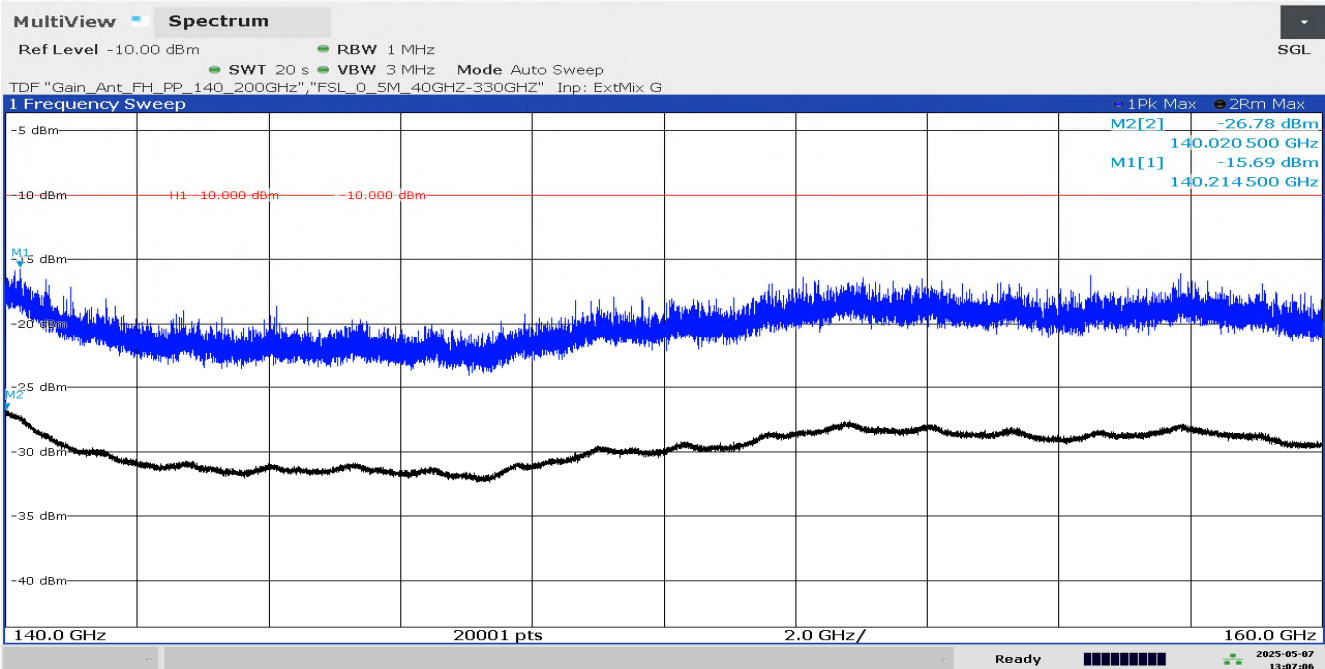


01:07:06 PM 05/07/2025

TID027_1-8968_24-1-12_SER 140 GHz - 160 GHz_AntV

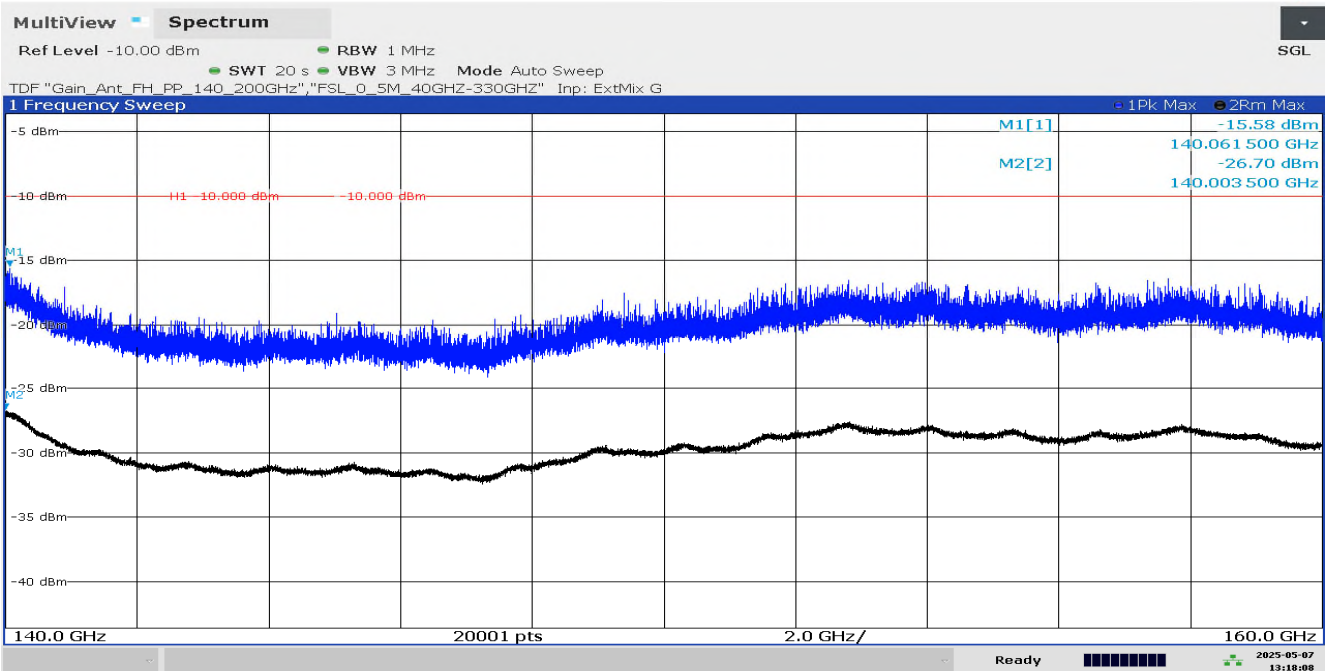


01:18:09 PM 05/07/2025


160 GHz – 180 GHz,
TID025_1-8968_24-1-12_SER 160 GHz - 180 GHz_AntH

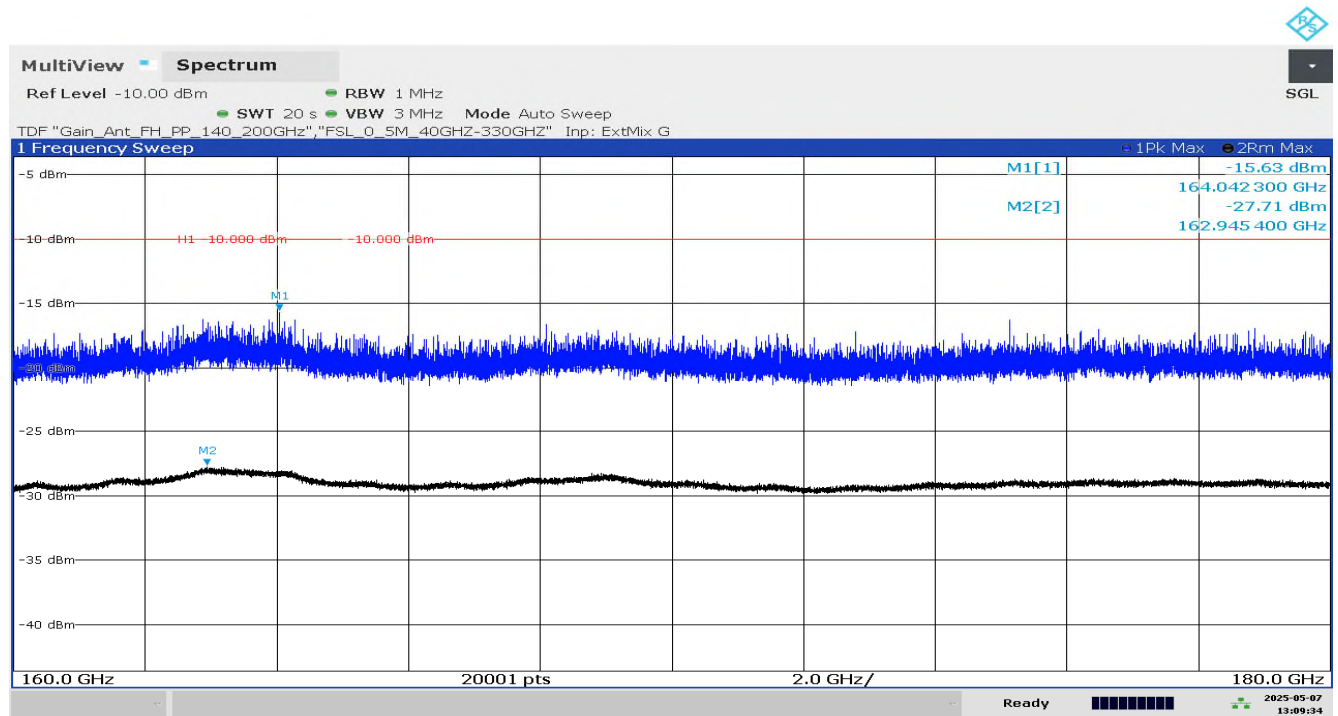


TID028_1-8968_24-1-12_SER 160 GHz - 180 GHz_AntV

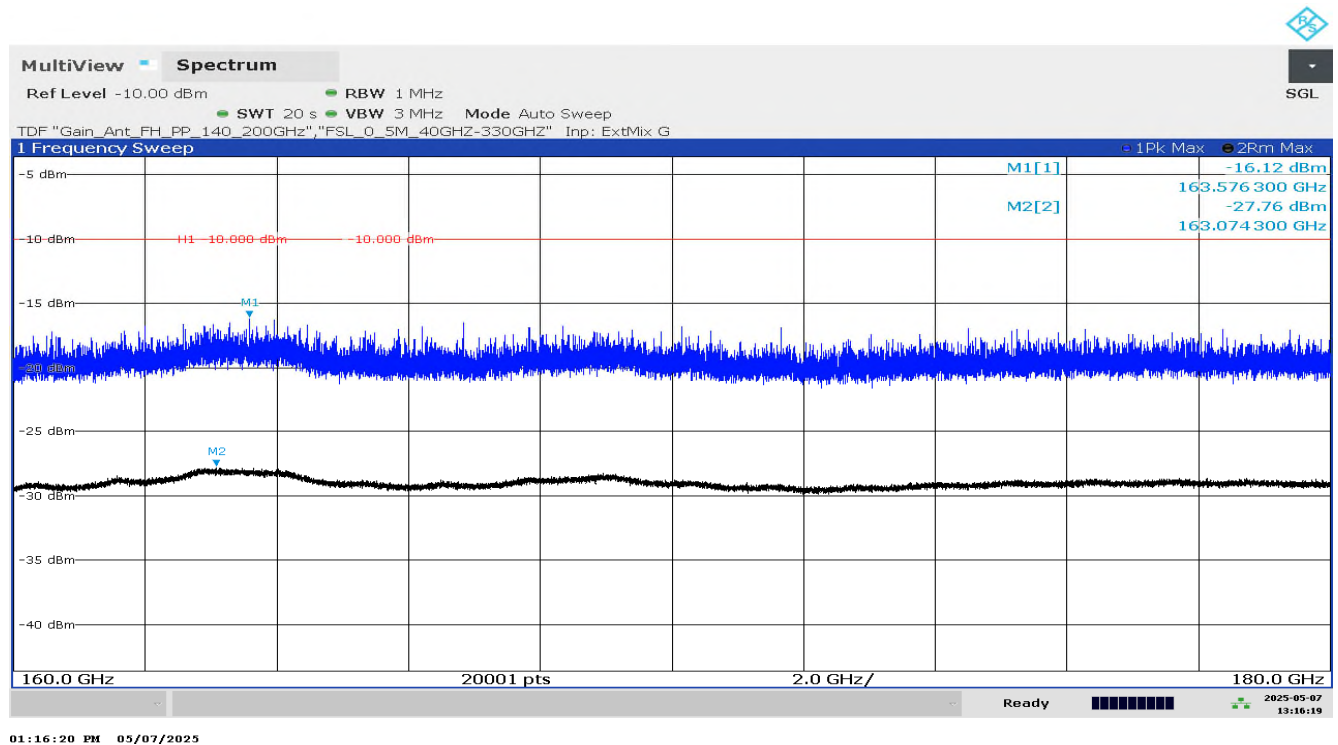

180 GHz – 200 GHz,
TID026_1-8968_24-1-12_SER 180 GHz - 200 GHz_AntH

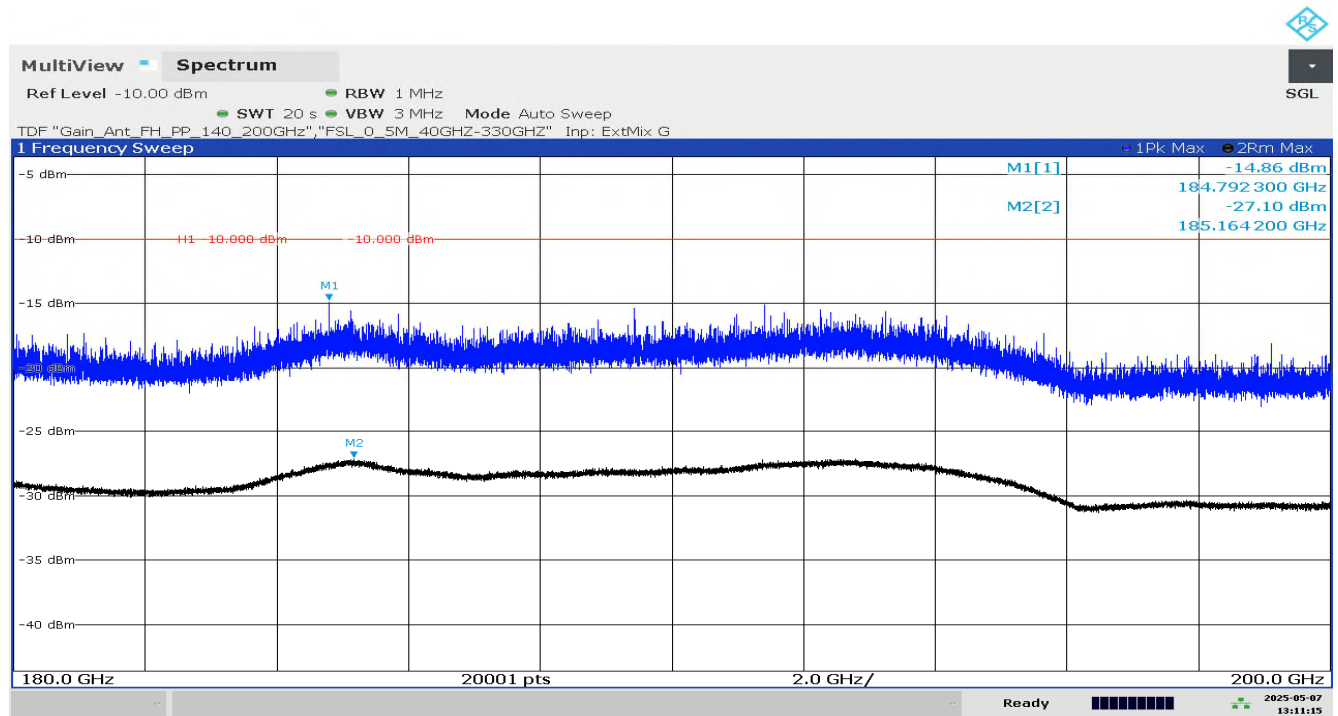

TID029_1-8968_24-1-12_SER 180 GHz - 200 GHz_AntV

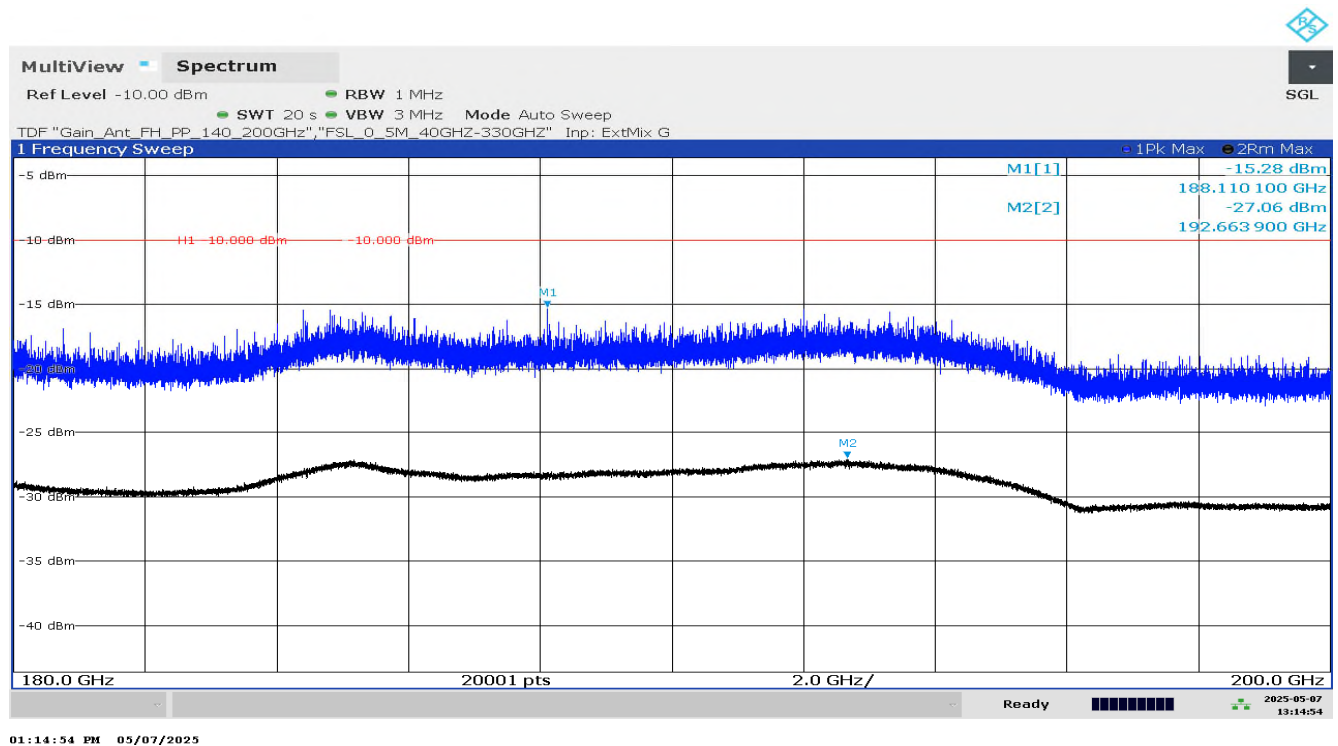

14.5 Conducted emissions < 30 MHz (AC power line)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Limits and provisions:

Selection of applicable rule parts: see 13

47 CFR 15.207(a)		
Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

Measurement:

Parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	150 kHz to 30 MHz
Trace-Mode:	Max Hold

Measurement results:


Phase line / Neutral line

TID041_1-8968_24-1-12_AC conducted

Common Information

Test Description:	Conducted Voltage Measurement Class B
Test Site Location:	Conducted Emission, cetecom advanced GmbH Essen
Test Software:	R&S EMC32 v9.15
Test Standard:	FCC 15.107, FCC 15.207
Operating Mode:	Data Transmission through 60 GHz
Measured on line:	N/L1
Diagram details:	Shows the peak values as a sum of measured ports in maxhold
Environmental Conditions:	Humidity: 50.2%rH; Temperature: 20.4°C
Operator:	Aho
EUT Setup:	1
Verdict:	Passed

Full Spectrum

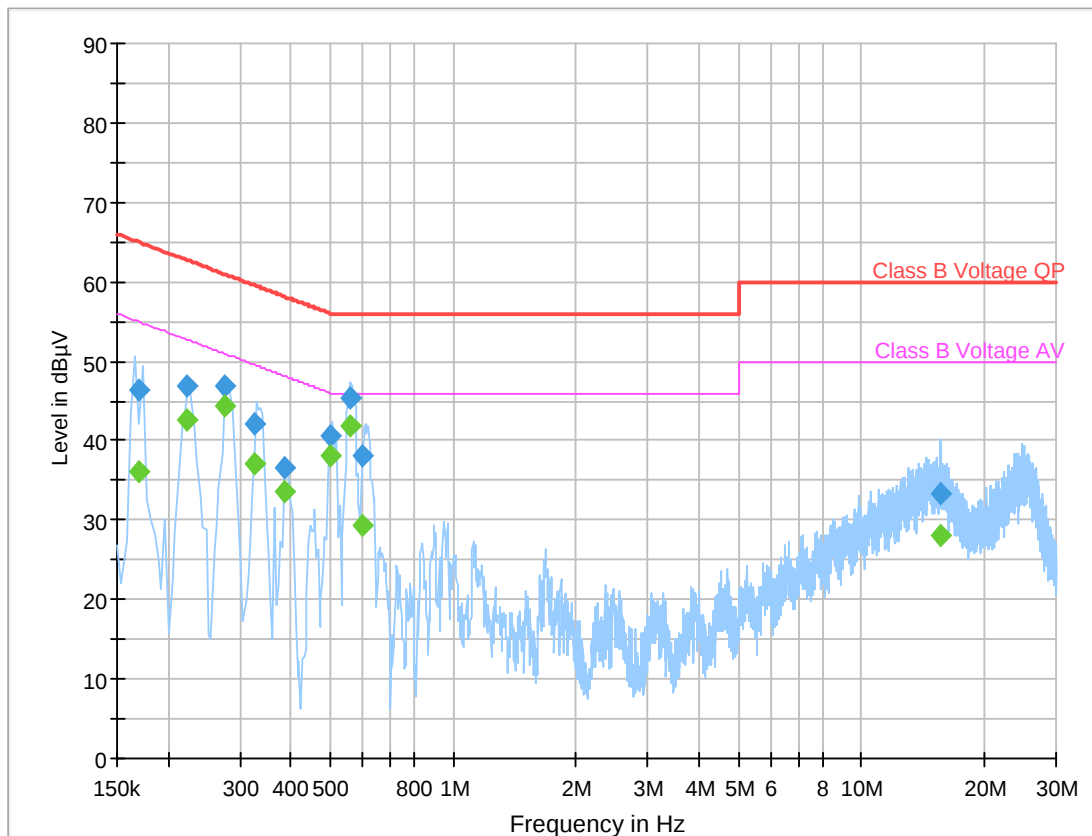

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.170000	---	36.13	54.96	18.83	1000.0	9.000	L1	GND	0.1
0.170000	46.29	---	64.96	18.67	1000.0	9.000	L1	GND	0.1
0.221719	---	42.50	52.75	10.25	1000.0	9.000	N	GND	0.2
0.221719	46.88	---	62.75	15.87	1000.0	9.000	N	GND	0.2
0.276406	---	44.26	50.92	6.66	1000.0	9.000	N	GND	0.2
0.276406	46.79	---	60.92	14.13	1000.0	9.000	N	GND	0.2
0.327188	---	37.17	49.52	12.35	1000.0	9.000	N	GND	0.2
0.327188	42.05	---	59.52	17.47	1000.0	9.000	N	GND	0.2
0.385781	---	33.52	48.15	14.63	1000.0	9.000	N	GND	0.2
0.385781	36.60	---	58.15	21.55	1000.0	9.000	N	GND	0.2
0.497969	---	38.21	46.03	7.82	1000.0	9.000	N	GND	0.2
0.497969	40.61	---	56.03	15.42	1000.0	9.000	N	GND	0.2
0.557656	---	41.96	46.00	4.04	1000.0	9.000	N	GND	0.2
0.557656	45.39	---	56.00	10.61	1000.0	9.000	N	GND	0.2
0.598438	---	29.32	46.00	16.68	1000.0	9.000	N	GND	0.2
0.598438	38.08	---	56.00	17.92	1000.0	9.000	N	GND	0.2
15.621250	---	28.04	50.00	21.96	1000.0	9.000	N	GND	0.9
15.621250	33.24	---	60.00	26.76	1000.0	9.000	N	GND	0.9

Verdict: Compliant

15 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

16 Document history

Version	Applied changes	Date of release
-/-	Initial release	2025-06-27

END OF TEST REPORT